

FCC Test Report

Report No.: RFBCBS-WTW-P23110287

FCC ID: K7SWIA008

Test Model: WIA008

Received Date: Nov. 10, 2023

Test Date: Nov. 21 ~ Dec. 06, 2023

Issued Date: Jan. 02, 2024

Applicant: Belkin International, Inc.

Address: 555 S. Aviation Blvd., Suite 180, El Segundo, CA 90245, USA

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kwei Shan Dist., Taoyuan City
33383, TAIWAN

FCC Registration / 788550 / TW0003
Designation Number:



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	7
3.2.1 Test Mode Applicability and Tested Channel Detail	8
3.3 Description of Support Units	10
3.3.1 Configuration of System under Test	10
3.4 General Description of Applied Standards	11
4 Test Types and Results	12
4.1 Radiated Emission and Bandedge Measurement	12
4.1.1 Limits of Radiated Emission and Bandedge Measurement	12
4.1.2 Test Instruments	13
4.1.3 Test Procedures	14
4.1.4 Deviation from Test Standard	14
4.1.5 Test Set Up	15
4.1.6 EUT Operating Conditions	15
4.1.7 Test Results	16
4.2 Conducted Emission Measurement	36
4.2.1 Limits of Conducted Emission Measurement	36
4.2.2 Test Instruments	36
4.2.3 Test Procedures	37
4.2.4 Deviation from Test Standard	37
4.2.5 Test Setup	37
4.2.6 EUT Operating Conditions	37
4.2.7 Test Results	38
4.3 20dB Bandwidth Measurement	46
4.3.1 Test SetUp	46
4.3.2 Test Instruments	46
4.3.3 Test Procedure	46
4.3.4 Deviation from Test Standard	46
4.3.5 EUT Operating Conditions	46
4.3.6 Test Results	47
5 Pictures of Test Arrangements	50
Appendix – Information of the Testing Laboratories	51

Release Control Record

Issue No.	Description	Date Issued
RFBCBS-WTW-P23110287	Original release	Jan. 02, 2024

1 Certificate of Conformity

Product: BoostCharge Pro Convertible Magnetic Charging Stand

Brand: belkin

Test Model: WIA008

Sample Status: Engineering sample

Applicant: Belkin International, Inc.

Test Date: Nov. 21 ~ Dec. 06, 2023

Standards: 47 CFR FCC Part 15, Subpart C (Section 15.209)
ANSI C63.10-2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

Prepared by : Polly Chien , **Date:** Jan. 02, 2024
Polly Chien / Specialist

Approved by : Jeremy Lin , **Date:** Jan. 02, 2024
Jeremy Lin / Project Engineer

2 Summary of Test Results

47 CFR FCC Part 15, Subpart C (Section 15.209)			
FCC Clause	Test Item	Result	Remarks
15.207	AC Power Conducted Emission	Pass	Meet the requirement of limit. Minimum passing margin is -3.94dB at 0.36200MHz.
15.209	Radiated Emission Test	Pass	Meet the requirement of limit. Minimum passing margin is -7.4dB at 30.97MHz

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	2.79 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	2.44 dB
	30MHz ~ 200MHz	2.93 dB
	200MHz ~ 1000MHz	2.95 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	BoostCharge Pro Convertible Magnetic Charging Stand
Brand	belkin
Test Model	WIA008
Sample Status	Engineering sample
Power Supply Rating	5 or 3.3-5.9 or 3.3-11.0 or 9 or 12 Vdc (adapter)
Modulation Type	FSK
Operating Frequency	127.7kHz for iPhone (8-11 series) 360.0kHz for iPhone (12 series up)
Antenna Type	Coil antenna
Field Strength	127.7kHz: -26.2dBuV/m (PK) (300m) -35.7dBuV/m (AV) (300m) 360.0kHz: -24.0dBuV/m (PK) (300m) -29.3dBuV/m (AV) (300m)
Accessory Device	Refer to Note as below
Data Cable Supplied	Refer to Note as below
Maximum Power Output for Qi2 charging coil	15W
Dimension for iPhone charging coil	1195mm ² (Diameter=39mm)

Note:

1. The EUT contains following accessory devices.

Item	Brand	Model	Description
Adapter (Option)	belkin	A829-120167C-US1	I/P: 100-240Vac, 50/60Hz, 0.5A O/P: 5Vdc, 3.0A; 9Vdc, 2.23A; 12Vdc, 1.67A; 3.3-5.9Vdc, 3.0A, 17.7W MAX; 3.3-11.0Vdc, 2.2A, 20.0W MAX
Type C to Type C USB Cable	CE-Link	UTC-C-5FT-BK-01/ UTC-C-5FT-WH-01	1.5m shielding cable

2. The EUT has two exterior colors: black and white.

3. Due to radiated measurements are made and the antenna gain is already accounted for this device, so provide an antenna datasheet and/or antenna measurement report is not required. The antenna dimensions and pictures (include antenna wire length if have) are stated in EUT photo exhibit.

4. Only radiated measurements are used to show compliance with FCC limits for fundamental and spurious emissions.

3.2 Description of Test Modes

2 Frequency tested to this EUT.

Test Frequency
127.7kHz
360.0kHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT configure mode	Applicable to			Description
	RE<1G	PLC	BW	
A	√	√	√	Charging Mode (EUT with RX Load) - 360.0kHz
B	√	√	√	Charging Mode (EUT with iPhone 11) – 127.7kHz
C	√	√	√	Charging Mode (EUT with iPhone 15) – 360.0kHz
D	√	√	-	Standby Mode

Where **RE<1G**: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

BW: 20dB Bandwidth

- Note:
1. The charging mode has been pre-tested in three modes: 10%, 50% and 90%. After verification, 10% was chosen for final test and presented in the test report.
 2. EUT can be used in the following ways: Standing w/ Charging Pad_Vertical & Horizontal. Pre-scan these ways and find the worst case as a representative test condition. The horizontal was the worst case for final test and presented in the test report.

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Tested Frequency
A	360.0kHz
B	127.7kHz
C	360.0kHz
D	-

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Tested Frequency
A	360.0kHz
B	127.7kHz
C	360.0kHz
D	-

20dB Bandwidth Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

EUT Configure Mode	Tested Frequency
A	360.0kHz
B	127.7kHz
C	360.0kHz

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested by
RE<1G	22 deg. C, 67% RH	120Vac, 60Hz	Tim Chen
PLC	25 deg. C, 75% RH	120Vac, 60Hz	Rex Wang
BW	22 deg. C, 66% RH	120Vac, 60Hz	Vincent Chen

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Adapter	belkin	A829-120167C-US1	NA	NA	Provided by manufacturer
B.	RX Load	Nuvolta	NA	NA	NA	360kHz Provided by manufacturer
C.	iPhone 11	APPLE	A2215	NA	BCG-E3309A	127.7kHz Provided by manufacturer
D.	iPhone 15	APPLE	A3102	NA	BCG-E4031A	360kHz Provided by manufacturer

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	Type C to Type C USB Cable	1	1.5	Y	0	Accessory of EUT

3.3.1 Configuration of System under Test

Charging Mode:

Test Mode A

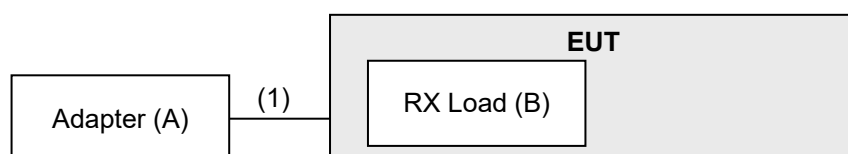

Test Mode B



Test Mode C



Standby Mode:
Test Mode D



3.4 General Description of Applied Standards

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.209)

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

FOR FREQUENCY BELOW 30MHz

Frequency (MHz)	Field Strength (dBuV/m)		Measurement Distance (meters)
	uV/m	dBuV/m	
0.009 – 0.490	2400 / F (kHz)	48.52-13.80	300
0.490 – 1.705	24000 / F (kHz)	33.80-22.97	30
1.705 – 30.0	30	29.54	30

FOR FREQUENCY BETWEEN 30-1000MHz

Frequency (MHz)	Field Strength	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver KEYSIGHT	N9038A	MY55420137	May 03, 2023	May 02, 2024
Signal Analyzer Agilent	N9010A	MY52220207	Jan. 03, 2023	Jan. 02, 2024
Loop Antenna TESEQ	HLA 6121	45745	Aug. 08, 2023	Aug. 07, 2024
Pre-amplifier EMCI	EMC001340	980201	Sep. 27, 2023	Sep. 26, 2024
RF Coaxial Cable EMCI	5D-NM-BM	140903+140902	Jan. 07, 2023	Jan. 06, 2024
Pre-Amplifier EMCI	EMC 330H	980112	Sep. 27, 2023	Sep. 26, 2024
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-472	Oct. 16, 2023	Oct. 15, 2024
RF Coaxial Cable WOKEN	8D-FB	Cable-Ch10-01	Sep. 14, 2023	Sep. 13, 2024
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	NA	NA	NA
Antenna Tower Max-Full	MFA-440H	AT93021705	NA	NA
Turn Table Max-Full	MFT-201SS	NA	NA	NA
Antenna Tower & Turn Table Controller Max-Full	MF-7802	NA	NA	NA
Boresight antenna tower fixture BV	BAF-02	7	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HY - 966 chamber 5.

4.1.3 Test Procedures

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and Ground-Parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode, except for the frequency band (9kHz-90kHz, 110kHz-490kHz) set to average detect function and peak detect function.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 200 Hz at frequency below 150 kHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9 kHz or 10 kHz at frequency 150 kHz to 30MHz.
3. All modes of operation were investigated and the worst-case emissions are reported.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Set Up

For Radiated emission below 30MHz

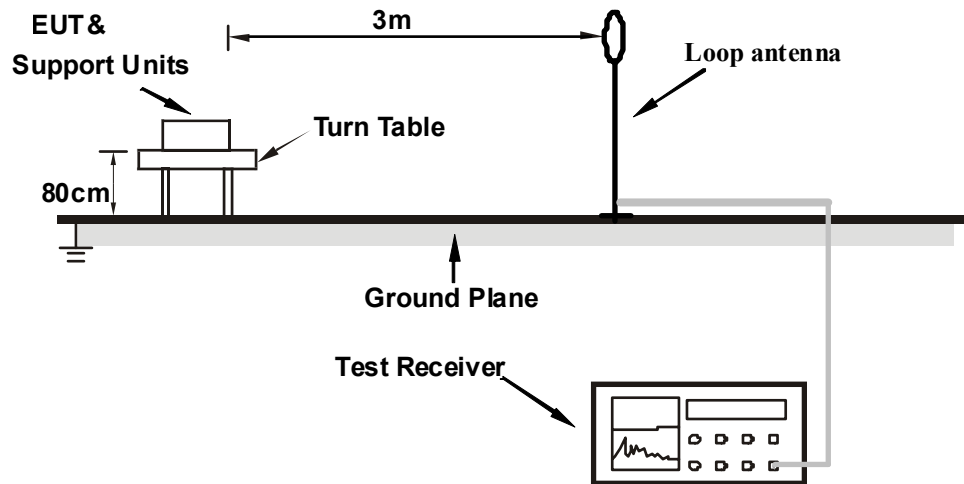

For Radiated emission 30MHz to 1GHz

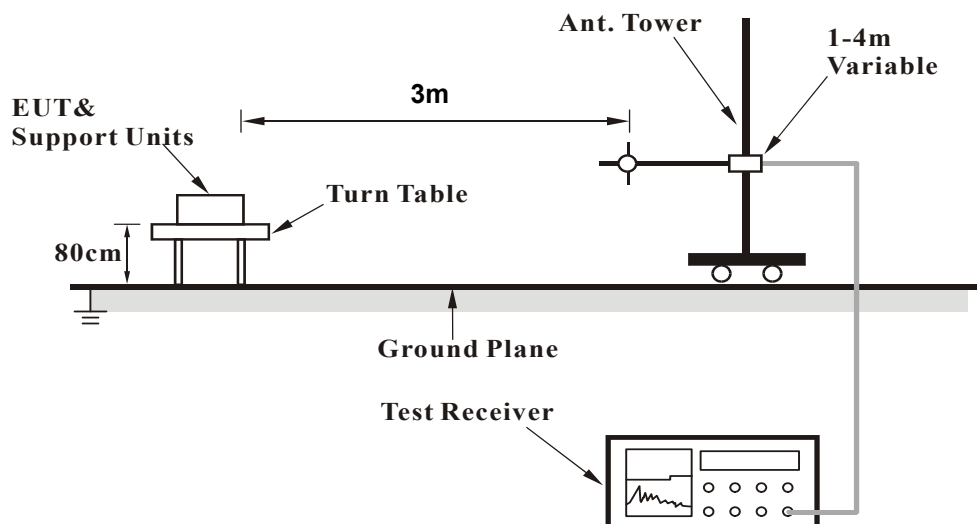

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Conditions

Charging Mode:

- The EUT powered by adapter.
- Put the iPhone or RX Load on the EUT (wireless charging) during the test.

Standby Mode:

- The EUT powered by adapter.

4.1.7 Test Results

Below 30MHz Data:


Charging Mode

Test Frequency	360.0kHz	Detector Function	Peak (PK)
Frequency Range	9 kHz ~ 30 MHz		Average (AV) Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity : Parallel								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.3600	-24.0 PK	36.5	-60.5	1.00	134	36.2	-60.2
2	*0.3600	-29.3 AV	16.5	-45.8	1.00	134	30.9	-60.2
3	0.7200	-3.1 QP	30.5	-33.6	1.00	217	17.1	-20.2
4	5.4182	-8.2 QP	29.5	-37.7	1.00	339	11.4	-19.6
5	10.6414	-7.4 QP	29.5	-36.9	1.00	2	11.1	-18.5
6	18.9042	-7.2 QP	29.5	-36.7	1.00	148	10.6	-17.8
7	24.2751	-8.2 QP	29.5	-37.7	1.00	39	9.9	-18.1
8	27.3736	-3.9 QP	29.5	-33.4	1.00	214	13.9	-17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor(dB) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ * ”: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. The test distance for below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300meters. (Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$)
The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

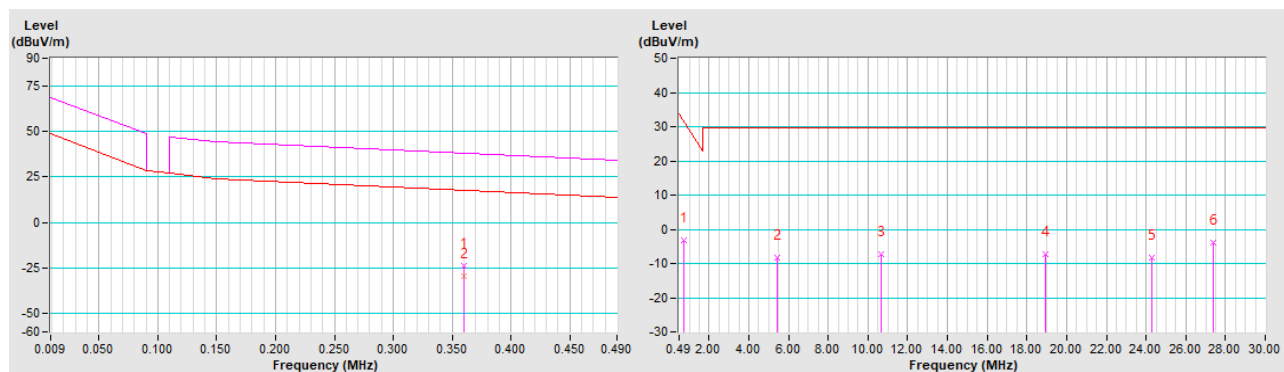


Test Frequency	360.0kHz	Detector Function	Peak (PK)
Frequency Range	9 kHz ~ 30 MHz		Average (AV)
			Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity : Perpendicular								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.3600	-25.9 PK	36.5	-62.4	1.00	304	34.3	-60.2
2	*0.3600	-33.1 AV	16.5	-49.6	1.00	304	27.1	-60.2
3	0.7200	-1.8 QP	30.5	-32.3	1.00	283	18.4	-20.2
4	2.2901	-9.7 QP	29.5	-39.2	1.00	8	10.7	-20.4
5	6.5691	-7.7 QP	29.5	-37.2	1.00	306	11.1	-18.8
6	14.1531	-7.6 QP	29.5	-37.1	1.00	68	11.1	-18.7
7	20.7634	-7.3 QP	29.5	-36.8	1.00	205	10.8	-18.1
8	28.0818	-4.1 QP	29.5	-33.6	1.00	199	13.8	-17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor(dB) + Cable Factor(dB) - Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ * ”: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. The test distance for below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300meters. (Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$)
The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

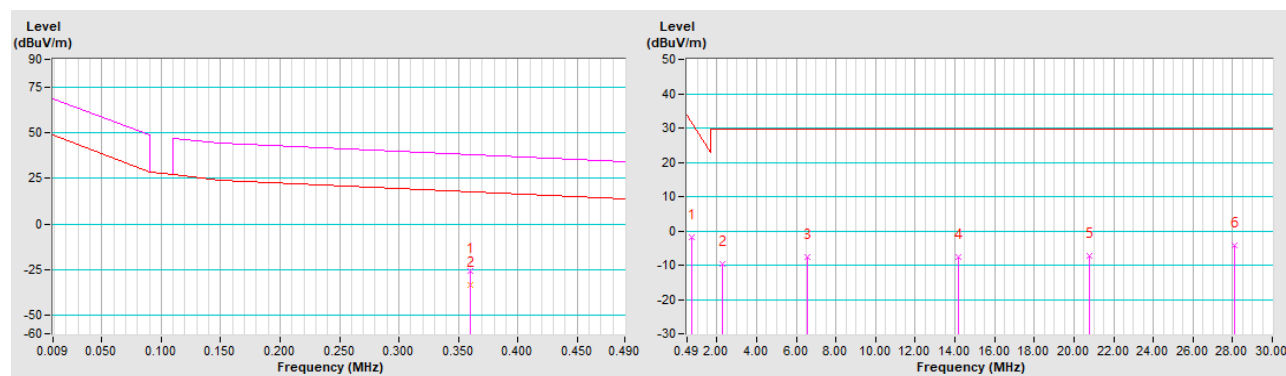


Test Frequency	360.0kHz	Detector Function	Peak (PK)
Frequency Range	9 kHz ~ 30 MHz		Average (AV) Quasi-Peak (QP)
Test Mode	A		

Antenna Polarity : Ground-parallel								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.3600	-26.2 PK	36.5	-62.7	1.00	167	34.0	-60.2
2	*0.3600	-33.7 AV	16.5	-50.2	1.00	167	26.5	-60.2
3	0.7200	-3.5 QP	30.5	-34.0	1.00	217	16.7	-20.2
4	7.8085	-6.5 QP	29.5	-36.0	1.00	225	12.4	-18.9
5	10.8185	-5.0 QP	29.5	-34.5	1.00	141	13.4	-18.4
6	20.2617	-6.8 QP	29.5	-36.3	1.00	2	11.2	-18.0
7	27.3736	-4.3 QP	29.5	-33.8	1.00	215	13.5	-17.8
8	28.7901	-6.2 QP	29.5	-35.7	1.00	215	11.7	-17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor(dB) + Cable Factor(dB) - Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. The test distance for below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300meters. (Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$)
The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

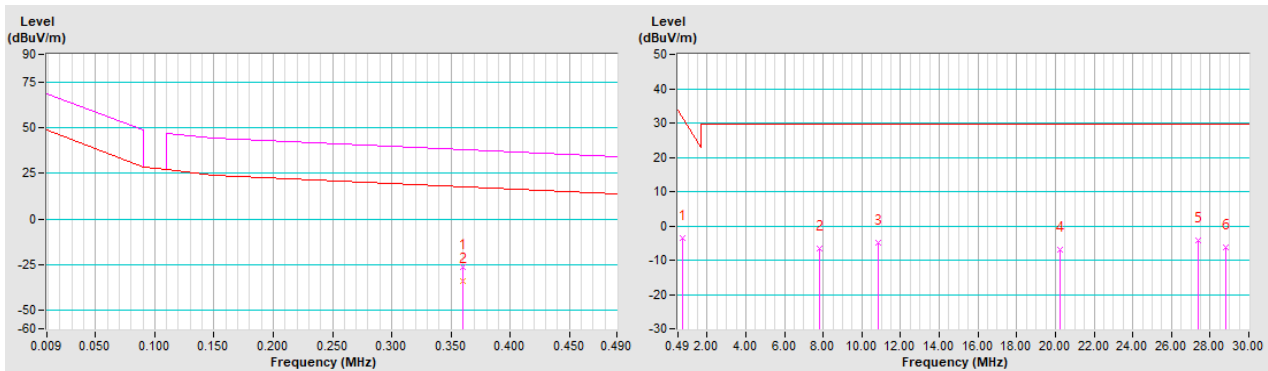


Test Frequency	127.7kHz	Detector Function	Peak (PK)
Frequency Range	9 kHz ~ 30 MHz		Average (AV) Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity : Parallel								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.1277	-26.2 PK	45.5	-71.7	1.00	67	34.4	-60.6
2	*0.1277	-35.7 AV	25.5	-61.2	1.00	67	24.9	-60.6
3	0.2554	-30.1 PK	39.5	-69.6	1.00	124	30.1	-60.2
4	0.2554	-39.3 AV	19.5	-58.8	1.00	124	20.9	-60.2
5	2.5852	-9.3 QP	29.5	-38.8	1.00	22	11.2	-20.5
6	8.0446	-8.3 QP	29.5	-37.8	1.00	2	10.6	-18.9
7	18.7567	-7.3 QP	29.5	-36.8	1.00	266	10.5	-17.8
8	22.9471	-7.9 QP	29.5	-37.4	1.00	291	10.7	-18.6
9	27.3736	-4.9 QP	29.5	-34.4	1.00	200	12.9	-17.8
10	29.5278	-6.7 QP	29.5	-36.2	1.00	227	11.3	-18.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor(dB) + Cable Factor(dB) - Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. The test distance for below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300meters. (Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$)
The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

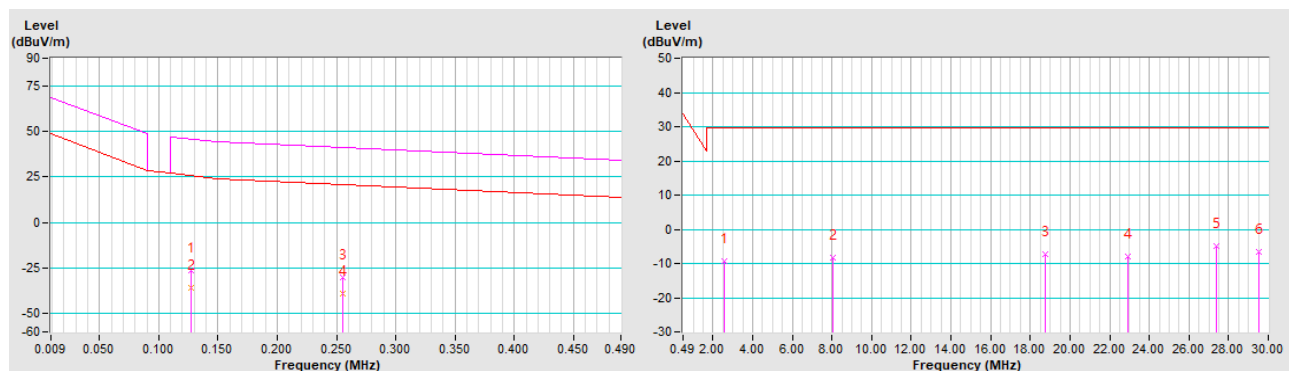


Test Frequency	127.7kHz	Detector Function	Peak (PK)
Frequency Range	9 kHz ~ 30 MHz		Average (AV)
			Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity : Perpendicular								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.1277	-27.1 PK	45.5	-72.6	1.00	24	33.5	-60.6
2	*0.1277	-37.8 AV	25.5	-63.3	1.00	24	22.8	-60.6
3	0.2554	-30.4 PK	39.5	-69.9	1.00	67	29.8	-60.2
4	0.2554	-40.9 AV	19.5	-60.4	1.00	67	19.3	-60.2
5	3.0869	-10.0 QP	29.5	-39.5	1.00	249	10.5	-20.5
6	7.0707	-7.5 QP	29.5	-37.0	1.00	167	11.3	-18.8
7	13.0318	-7.9 QP	29.5	-37.4	1.00	114	10.6	-18.5
8	16.7500	-7.1 QP	29.5	-36.6	1.00	234	11.0	-18.1
9	23.2717	-8.1 QP	29.5	-37.6	1.00	2	10.4	-18.5
10	27.1080	-7.1 QP	29.5	-36.6	1.00	2	10.7	-17.8

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor(dB) + Cable Factor(dB) - Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. The test distance for below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300meters. (Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$)
The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

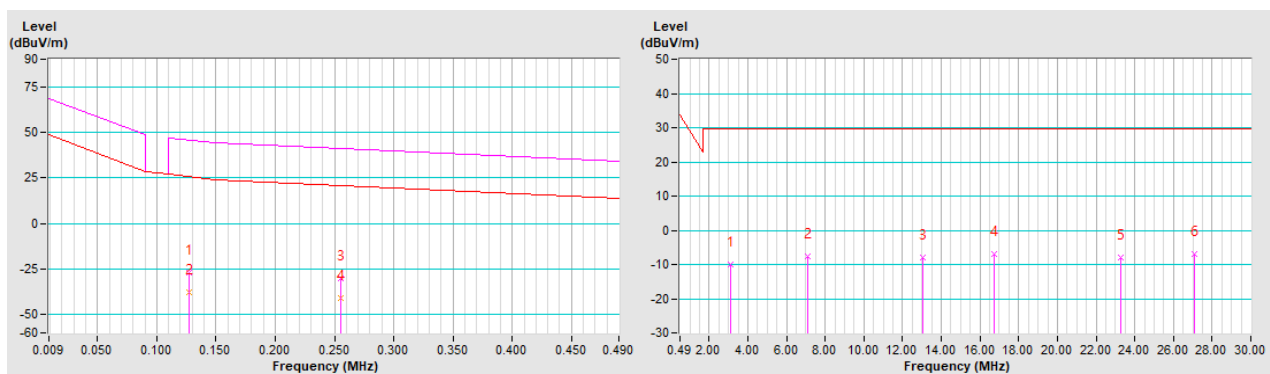


Test Frequency	127.7kHz	Detector Function	Peak (PK)
Frequency Range	9 kHz ~ 30 MHz		Average (AV)
			Quasi-Peak (QP)
Test Mode	B		

Antenna Polarity : Ground-parallel								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.1277	-27.5 PK	45.5	-73.0	1.00	237	33.1	-60.6
2	*0.1277	-38.2 AV	25.5	-63.7	1.00	237	22.4	-60.6
3	0.2554	-30.8 PK	39.5	-70.3	1.00	217	29.4	-60.2
4	0.2554	-41.4 AV	19.5	-60.9	1.00	217	18.8	-60.2
5	2.3491	-9.0 QP	29.5	-38.5	1.00	79	11.4	-20.4
6	6.9822	-8.6 QP	29.5	-38.1	1.00	306	10.2	-18.8
7	12.1464	-5.9 QP	29.5	-35.4	1.00	271	12.4	-18.3
8	19.9961	-7.2 QP	29.5	-36.7	1.00	91	10.7	-17.9
9	26.5768	-7.3 QP	29.5	-36.8	1.00	55	10.6	-17.9
10	28.7901	-7.7 QP	29.5	-37.2	1.00	227	10.2	-17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor(dB) + Cable Factor(dB) - Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. The test distance for below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300meters. (Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$)
The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

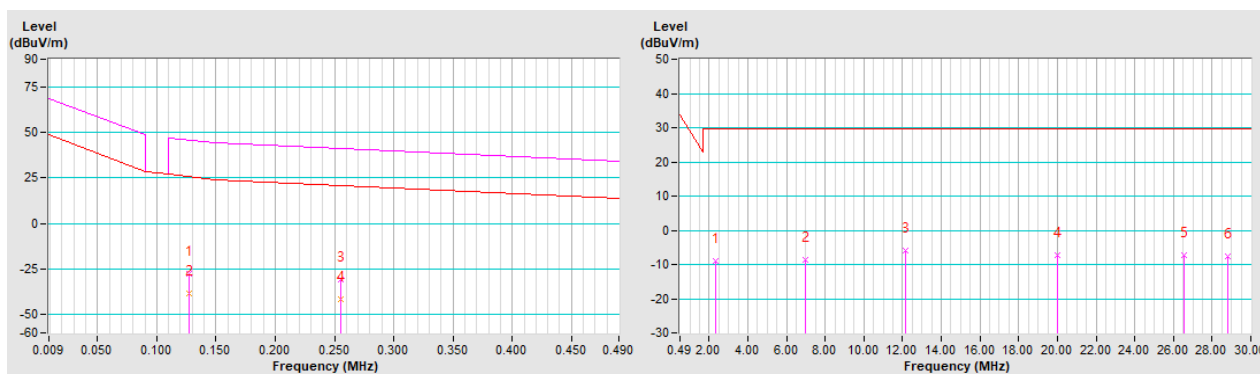


Test Frequency	360.0kHz	Detector Function	Peak (PK)
Frequency Range	9 kHz ~ 30 MHz		Average (AV) Quasi-Peak (QP)
Test Mode	C		

Antenna Polarity : Parallel								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.3600	-27.0 PK	36.5	-63.5	1.00	46	33.2	-60.2
2	*0.3600	-36.3 AV	16.5	-52.8	1.00	46	23.9	-60.2
3	0.7200	-4.0 QP	30.5	-34.5	1.00	3	16.2	-20.2
4	6.1264	-8.6 QP	29.5	-38.1	1.00	78	10.2	-18.8
5	13.9170	-8.1 QP	29.5	-37.6	1.00	144	10.6	-18.7
6	16.9566	-7.2 QP	29.5	-36.7	1.00	291	10.8	-18.0
7	22.1798	-7.6 QP	29.5	-37.1	1.00	123	10.7	-18.3
8	27.7277	-8.2 QP	29.5	-37.7	1.00	272	9.7	-17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor(dB) + Cable Factor(dB) - Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. The test distance for below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300meters. (Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$)
The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

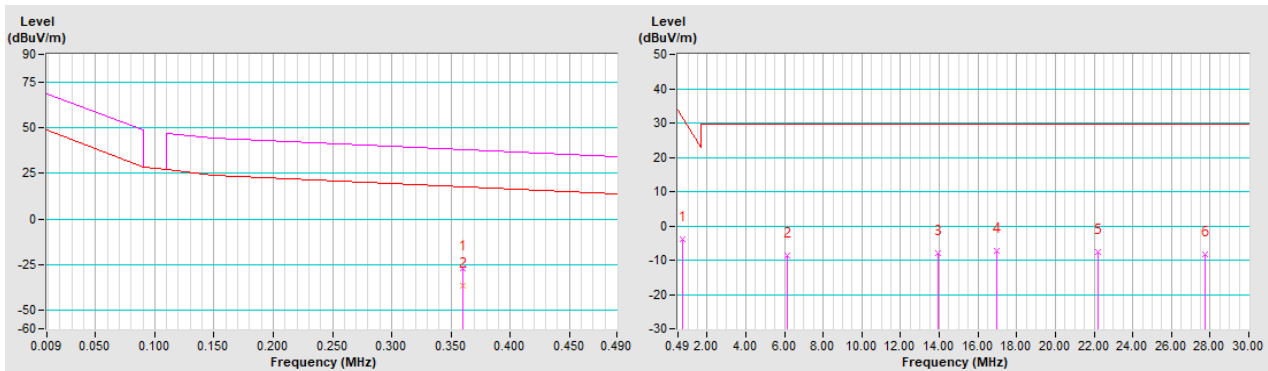


Test Frequency	360.0kHz	Detector Function	Peak (PK)
Frequency Range	9 kHz ~ 30 MHz		Average (AV) Quasi-Peak (QP)
Test Mode	C		

Antenna Polarity : Perpendicular								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.3600	-27.2 PK	36.5	-63.7	1.00	107	33.0	-60.2
2	*0.3600	-36.5 AV	16.5	-53.0	1.00	107	23.7	-60.2
3	0.7200	-3.2 QP	30.5	-33.7	1.00	10	17.0	-20.2
4	5.2706	-9.0 QP	29.5	-38.5	1.00	336	10.7	-19.7
5	11.9989	-7.6 QP	29.5	-37.1	1.00	128	10.7	-18.3
6	19.1993	-6.2 QP	29.5	-35.7	1.00	323	11.6	-17.8
7	26.2227	-8.5 QP	29.5	-38.0	1.00	344	9.5	-18.0
8	29.4688	-7.6 QP	29.5	-37.1	1.00	226	10.4	-18.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor(dB) + Cable Factor(dB) - Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. The test distance for below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300meters. (Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$)
The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

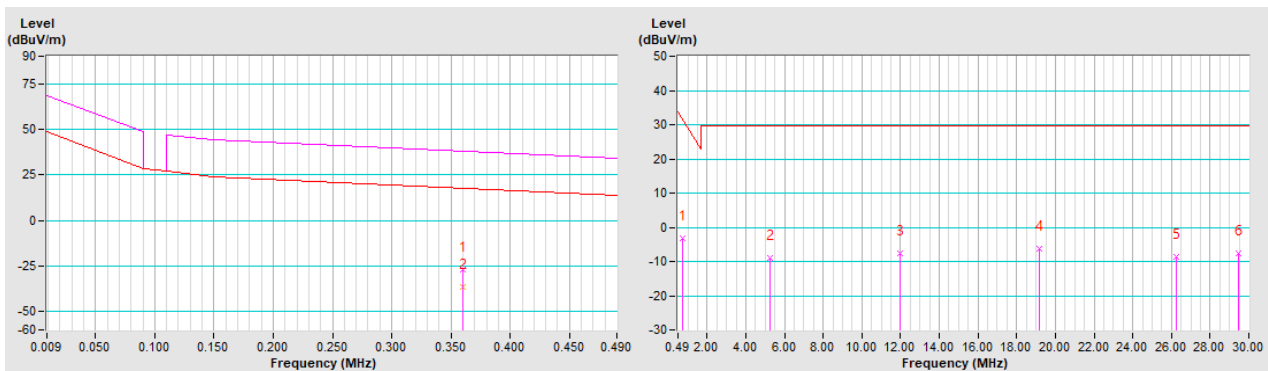


Test Frequency	360.0kHz	Detector Function	Peak (PK)
Frequency Range	9 kHz ~ 30 MHz		Average (AV) Quasi-Peak (QP)
Test Mode	C		

Antenna Polarity : Ground-parallel								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*0.3600	-27.2 PK	36.5	-63.7	1.00	241	33.0	-60.2
2	*0.3600	-36.9 AV	16.5	-53.4	1.00	241	23.3	-60.2
3	0.7200	0.7 QP	30.5	-29.8	1.00	2	20.9	-20.2
4	3.7066	-8.4 QP	29.5	-37.9	1.00	220	11.9	-20.3
5	9.5496	-7.0 QP	29.5	-36.5	1.00	25	11.7	-18.7
6	16.7205	-6.9 QP	29.5	-36.4	1.00	204	11.2	-18.1
7	25.0423	-6.0 QP	29.5	-35.5	1.00	299	11.4	-17.4
8	29.0557	-6.5 QP	29.5	-36.0	1.00	217	11.4	-17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor(dB) + Cable Factor(dB) - Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. “ * “: Fundamental frequency.
6. Loop antenna was used for all radiated emission below 30MHz.
7. The test distance for below 0.49MHz is 3m, extrapolate the measured field strength to a distance of 300meters. (Distance factor@3m = $40 \cdot \log(3/300) = -80\text{dB}$)
The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

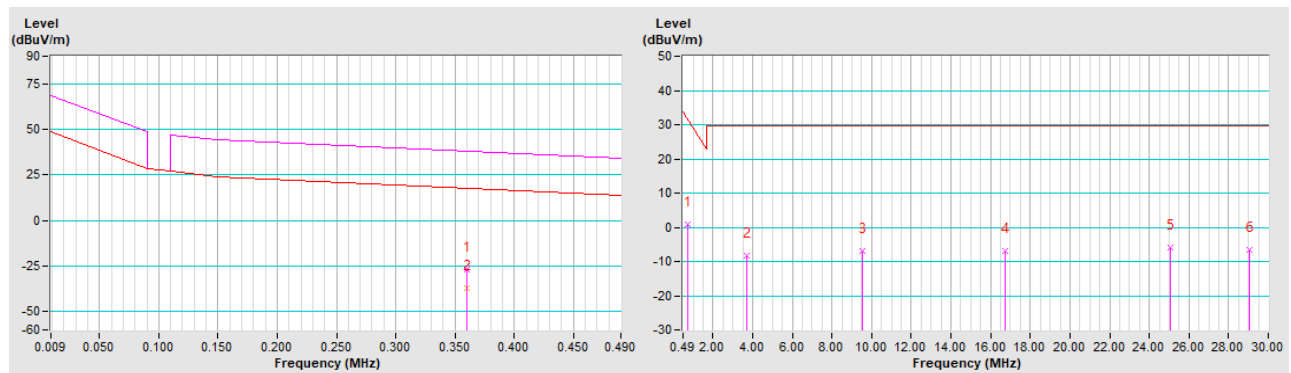


Standby Mode

Test Frequency	-	Detector Function	Quasi-Peak (QP)
Frequency Range	9 kHz ~ 30 MHz		
Test Mode	D		

Antenna Polarity : Parallel								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3.3980	-8.3 QP	29.5	-37.8	1.00	18	12.1	-20.4
2	6.7570	-7.9 QP	29.5	-37.4	1.00	269	10.9	-18.8
3	11.5855	-6.7 QP	29.5	-36.2	1.00	176	11.6	-18.3
4	19.1433	-7.8 QP	29.5	-37.3	1.00	170	10.0	-17.8
5	26.6410	-5.9 QP	29.5	-35.4	1.00	220	12.0	-17.9
6	29.1603	-7.9 QP	29.5	-37.4	1.00	219	10.0	-17.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor (dB) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. Loop antenna was used for all radiated emission below 30MHz.
6. The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

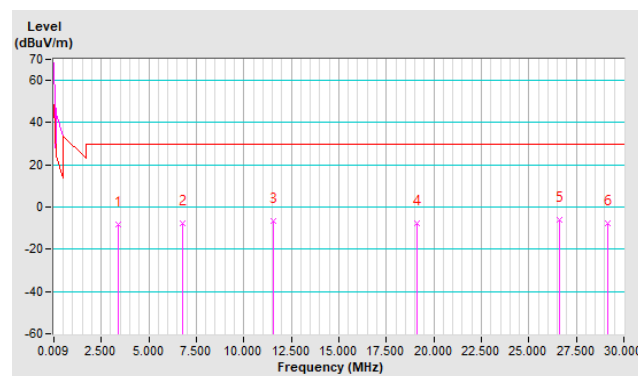


Test Frequency	-	Detector Function	Quasi-Peak (QP)
Frequency Range	9 kHz ~ 30 MHz		
Test Mode	D		

Antenna Polarity : Perpendicular								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.9481	-8.5 QP	29.5	-38.0	1.00	19	12.0	-20.5
2	9.6961	-6.7 QP	29.5	-36.2	1.00	55	12.0	-18.7
3	14.8545	-7.9 QP	29.5	-37.4	1.00	60	10.7	-18.6
4	20.4929	-7.8 QP	29.5	-37.3	1.00	300	10.2	-18.0
5	26.1012	-7.4 QP	29.5	-36.9	1.00	247	10.6	-18.0
6	29.5201	-5.8 QP	29.5	-35.3	1.00	192	12.2	-18.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor (dB) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. Loop antenna was used for all radiated emission below 30MHz.
6. The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

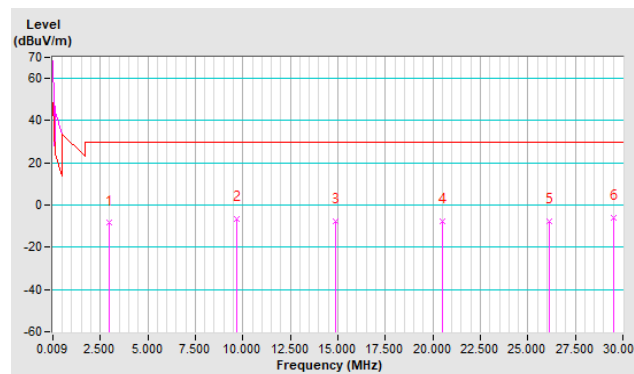


Test Frequency	-	Detector Function	Quasi-Peak (QP)
Frequency Range	9 kHz ~ 30 MHz		
Test Mode	D		

Antenna Polarity : Ground-parallel								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2.6482	-9.6 QP	29.5	-39.1	1.00	74	10.9	-20.5
2	7.1169	-7.7 QP	29.5	-37.2	1.00	304	11.1	-18.8
3	14.5846	-7.3 QP	29.5	-36.8	1.00	121	11.3	-18.6
4	20.7928	-8.1 QP	29.5	-37.6	1.00	173	10.0	-18.1
5	26.6410	-5.5 QP	29.5	-35.0	1.00	166	12.4	-17.9
6	29.3702	-8.7 QP	29.5	-38.2	1.00	77	9.3	-18.0

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Distance Factor (dB) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value.
5. Loop antenna was used for all radiated emission below 30MHz.
6. The test distance for 0.49 ~ 30MHz is 3m, extrapolate the measured field strength to a distance of 30 meters. (Distance factor@3m = $40 \cdot \log(3/30) = -40\text{dB}$)

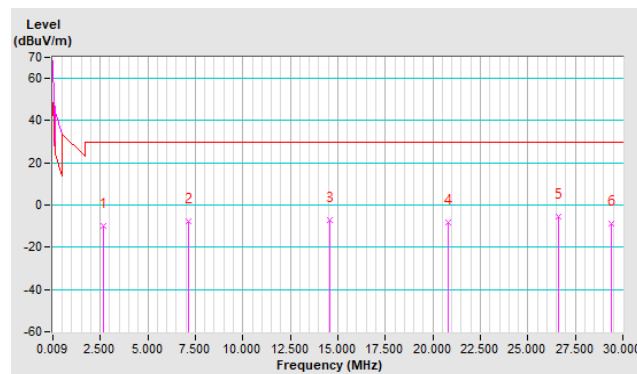

Below 1GHz Data:


Charging Mode

Test Frequency	360.0kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	A		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	27.5 QP	40.0	-12.5	1.34 H	58	40.1	-12.6
2	112.46	29.1 QP	43.5	-14.4	1.96 H	262	44.4	-15.3
3	169.69	31.7 QP	43.5	-11.8	1.88 H	96	44.9	-13.2
4	318.12	27.3 QP	46.0	-18.7	1.62 H	170	38.7	-11.4
5	679.00	26.7 QP	46.0	-19.3	1.07 H	262	30.3	-3.6
6	862.35	30.1 QP	46.0	-15.9	1.32 H	262	31.0	-0.9

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

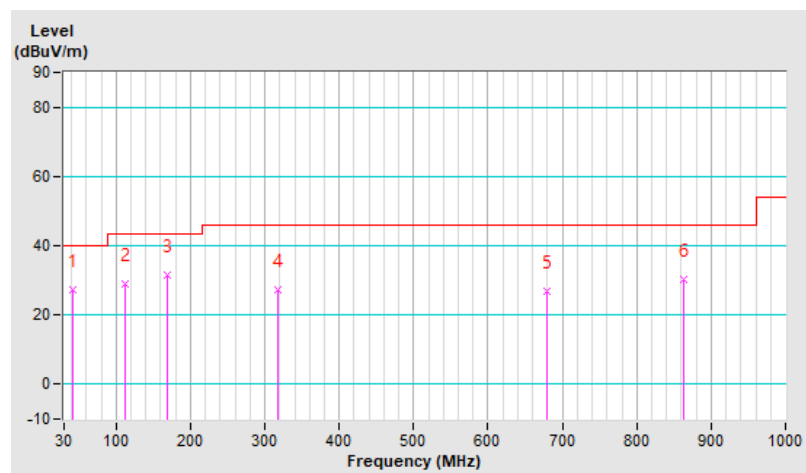


Test Frequency	360.0kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	A		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.97	32.6 QP	40.0	-7.4	1.36 V	46	46.2	-13.6
2	169.69	29.0 QP	43.5	-14.5	1.50 V	198	42.2	-13.2
3	320.06	27.8 QP	46.0	-18.2	1.75 V	177	39.2	-11.4
4	614.97	26.0 QP	46.0	-20.0	1.88 V	22	30.7	-4.7
5	776.01	29.5 QP	46.0	-16.5	1.92 V	165	30.5	-1.0
6	941.89	30.3 QP	46.0	-15.7	1.33 V	3	30.6	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

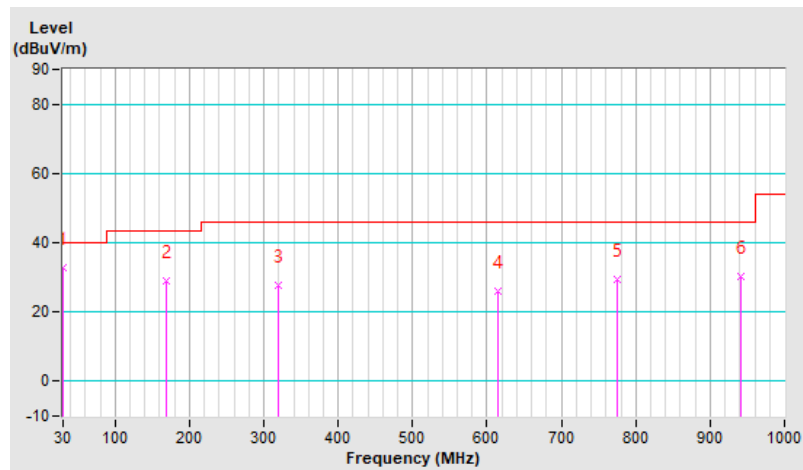


Test Frequency	127.7kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	B		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	77.53	29.6 QP	40.0	-10.4	1.33 H	2	46.4	-16.8
2	168.72	28.8 QP	43.5	-14.7	1.65 H	126	41.9	-13.1
3	406.40	22.8 QP	46.0	-23.2	1.72 H	5	32.3	-9.5
4	689.67	26.7 QP	46.0	-19.3	1.01 H	118	30.2	-3.5
5	841.97	29.5 QP	46.0	-16.5	1.92 H	103	30.5	-1.0
6	942.86	31.2 QP	46.0	-14.8	1.85 H	106	31.5	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

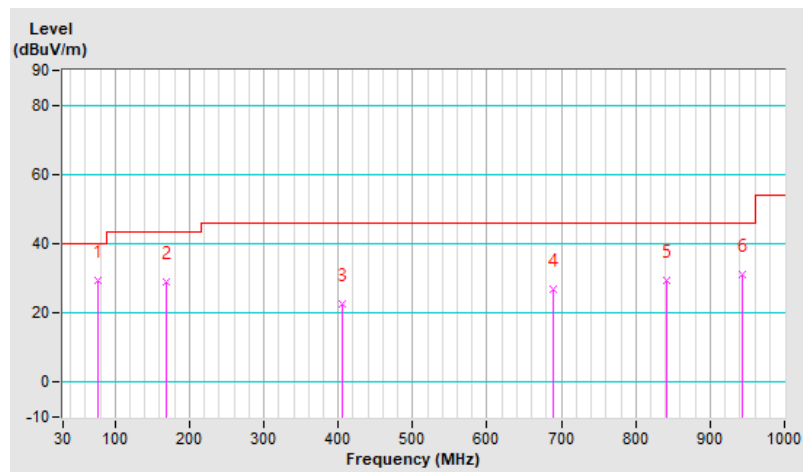


Test Frequency	127.7kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	B		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	53.28	31.1 QP	40.0	-8.9	1.00 V	17	43.6	-12.5
2	121.19	30.8 QP	43.5	-12.7	1.22 V	195	45.2	-14.4
3	412.22	22.1 QP	46.0	-23.9	1.86 V	110	31.5	-9.4
4	658.62	26.7 QP	46.0	-19.3	1.74 V	347	30.7	-4.0
5	791.53	29.5 QP	46.0	-16.5	1.99 V	205	30.5	-1.0
6	928.31	30.6 QP	46.0	-15.4	1.03 V	327	31.0	-0.4

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

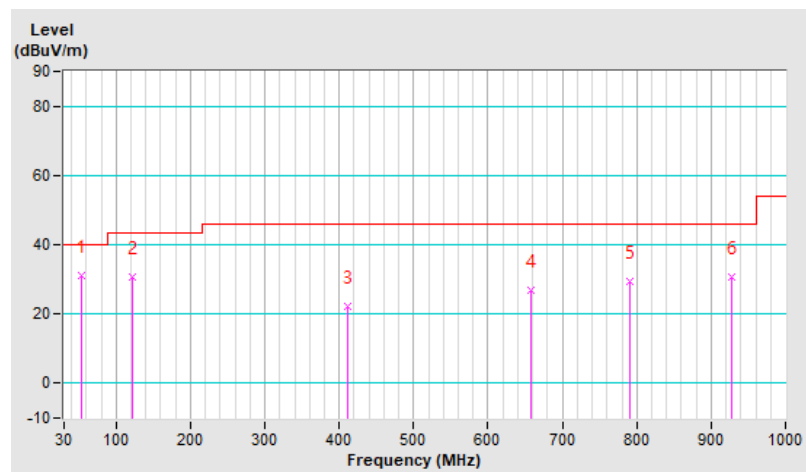


Test Frequency	360.0kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	C		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.64	27.7 QP	40.0	-12.3	1.50 H	192	40.3	-12.6
2	123.13	29.8 QP	43.5	-13.7	1.42 H	290	44.1	-14.3
3	222.08	25.5 QP	46.0	-20.5	1.87 H	108	41.5	-16.0
4	541.24	24.1 QP	46.0	-21.9	1.56 H	151	30.2	-6.1
5	791.53	29.2 QP	46.0	-16.8	1.31 H	244	30.2	-1.0
6	903.09	29.6 QP	46.0	-16.4	1.11 H	8	30.3	-0.7

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

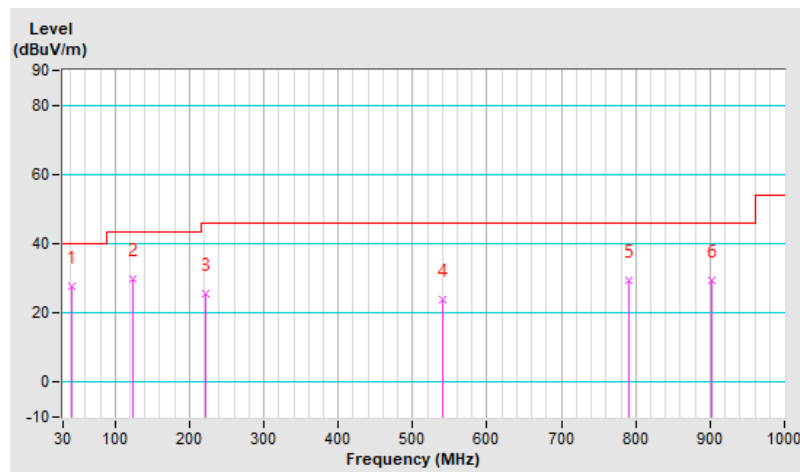


Test Frequency	360.0kHz	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	C		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.97	29.9 QP	40.0	-10.1	1.37 V	2	43.5	-13.6
2	123.13	29.2 QP	43.5	-14.3	1.26 V	189	43.5	-14.3
3	313.27	22.9 QP	46.0	-23.1	1.72 V	181	34.4	-11.5
4	591.69	26.0 QP	46.0	-20.0	1.94 V	246	31.3	-5.3
5	823.54	29.5 QP	46.0	-16.5	2.03 V	266	30.4	-0.9
6	938.98	29.9 QP	46.0	-16.1	1.02 V	54	30.2	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

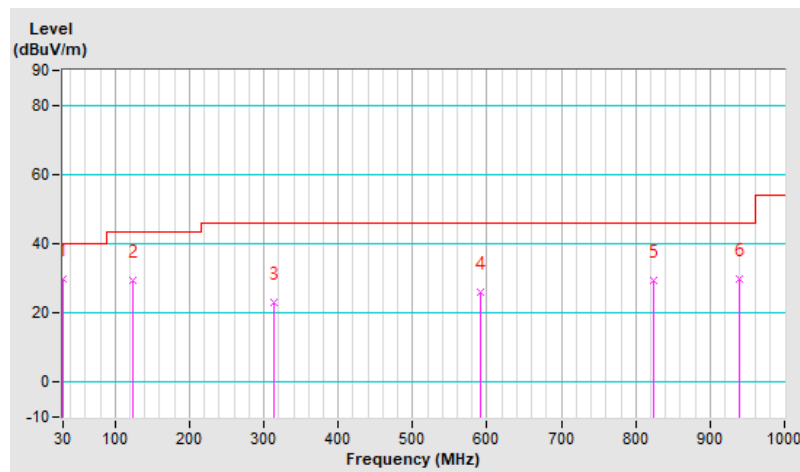


Standby Mode

Test Frequency	-	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	D		

Antenna Polarity & Test Distance: Horizontal At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	77.53	29.5 QP	40.0	-10.5	1.00 H	57	46.3	-16.8
2	171.63	28.2 QP	43.5	-15.3	2.16 H	108	41.4	-13.2
3	416.10	21.9 QP	46.0	-24.1	1.85 H	200	31.1	-9.2
4	647.95	26.8 QP	46.0	-19.2	1.67 H	9	30.9	-4.1
5	873.02	30.5 QP	46.0	-15.5	2.01 H	254	31.3	-0.8
6	943.83	31.6 QP	46.0	-14.4	1.93 H	198	31.9	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

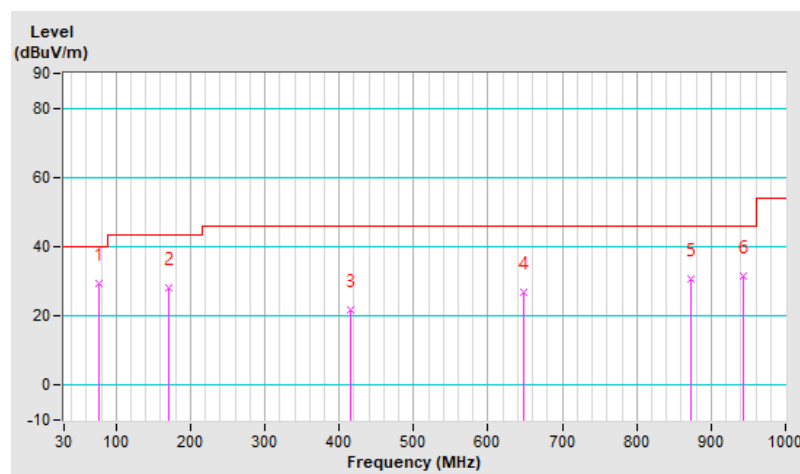


Test Frequency	-	Detector Function	Quasi-Peak (QP)
Frequency Range	30MHz ~ 1GHz		
Test Mode	D		

Antenna Polarity & Test Distance: Vertical At 3m								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	74.62	25.3 QP	40.0	-14.7	1.00 V	330	41.1	-15.8
2	222.08	21.7 QP	46.0	-24.3	1.33 V	40	37.7	-16.0
3	413.19	22.0 QP	46.0	-24.0	1.76 V	116	31.3	-9.3
4	590.72	25.9 QP	46.0	-20.1	1.98 V	144	31.3	-5.4
5	833.24	29.9 QP	46.0	-16.1	1.46 V	321	30.8	-0.9
6	938.98	30.6 QP	46.0	-15.4	1.38 V	358	30.9	-0.3

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB).
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

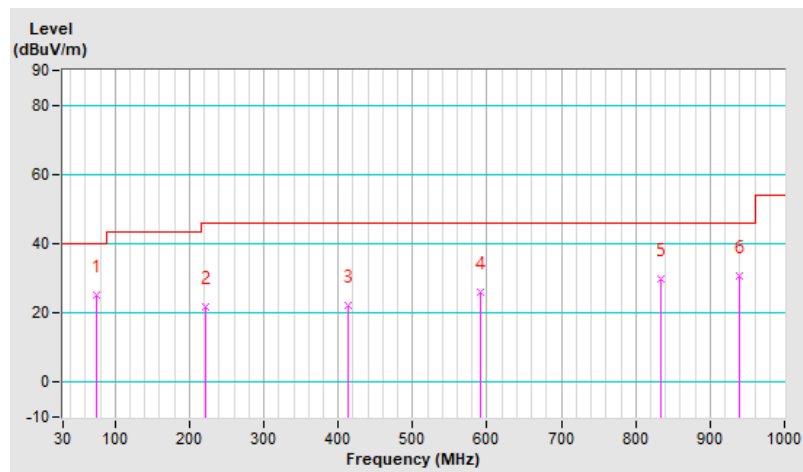

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due
Test Receiver R&S	ESR3	102783	Dec. 21, 2022	Dec. 20, 2023
RF Coaxial Cable WORKEN	5D-FB	Cable-cond2-01	Sep. 02, 2023	Sep. 01, 2024
LISN R&S	ESH2-Z5	100100	Mar. 07, 2023	Mar. 06, 2024
LISN R&S	ESH3-Z5	100116	Feb. 15, 2023	Feb. 14, 2024
Software BV ADT	BVADT_Conc_ V7.3.7.4	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The test was performed in HY - Conduction 2.

3. The VCCI Site Registration No. is C-12047.

4.2.3 Test Procedures


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

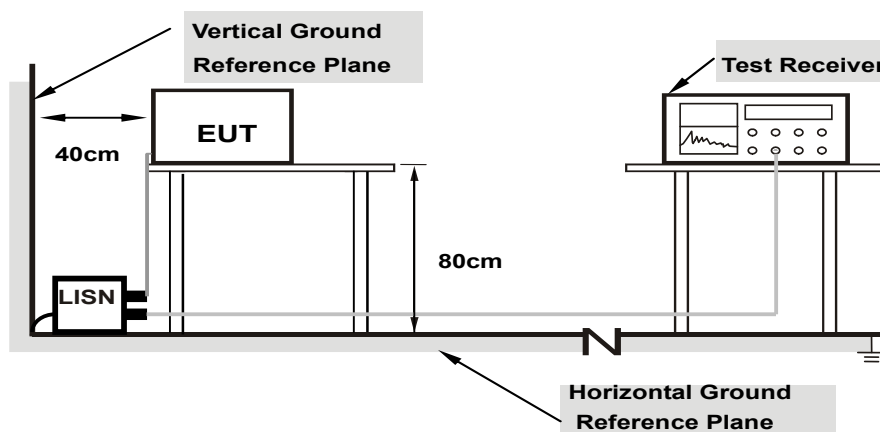

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Conditions

Same as 4.1.6.

4.2.7 Test Results


Charging Mode

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.36200	10.47	16.58	0.44	27.05	10.91	58.68	48.68	-31.63	-37.77
2	1.08198	10.54	24.61	2.14	35.15	12.68	56.00	46.00	-20.85	-33.32
3	4.31800	10.66	20.84	1.99	31.50	12.65	56.00	46.00	-24.50	-33.35
4	6.11800	10.68	23.25	0.52	33.93	11.20	60.00	50.00	-26.07	-38.80
5	7.57000	10.70	22.27	0.18	32.97	10.88	60.00	50.00	-27.03	-39.12
6	14.03800	10.82	22.23	1.97	33.05	12.79	60.00	50.00	-26.95	-37.21

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

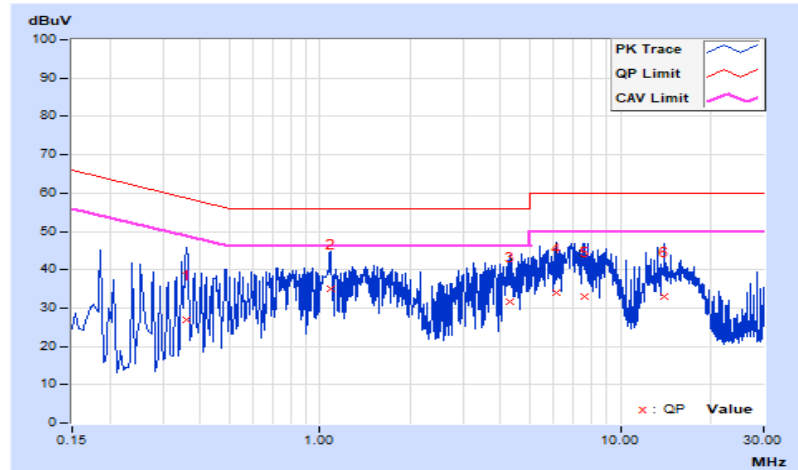


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	A		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.36200	10.51	35.24	34.23	45.75	44.74	58.68	48.68	-12.93	-3.94
2	1.08198	10.56	33.78	28.30	44.34	38.86	56.00	46.00	-11.66	-7.14
3	3.59800	10.70	33.64	27.97	44.34	38.67	56.00	46.00	-11.66	-7.33
4	3.95800	10.73	33.84	28.16	44.57	38.89	56.00	46.00	-11.43	-7.11
5	7.19800	10.79	35.76	29.35	46.55	40.14	60.00	50.00	-13.45	-9.86
6	9.35800	10.84	33.44	27.05	44.28	37.89	60.00	50.00	-15.72	-12.11

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

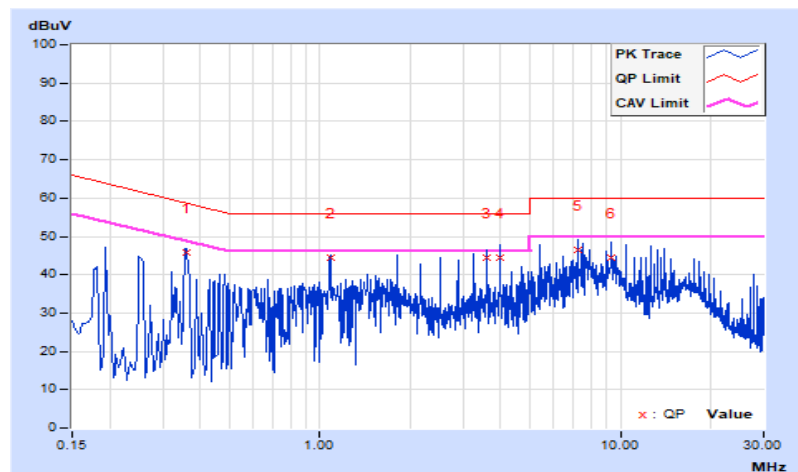


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17800	10.39	33.39	16.38	43.78	26.77	64.58	54.58	-20.80	-27.81
2	0.22200	10.41	26.71	2.84	37.12	13.25	62.74	52.74	-25.62	-39.49
3	0.24600	10.42	26.89	5.17	37.31	15.59	61.89	51.89	-24.58	-36.30
4	0.35400	10.47	25.52	5.92	35.99	16.39	58.87	48.87	-22.88	-32.48
5	7.01400	10.70	23.69	11.65	34.39	22.35	60.00	50.00	-25.61	-27.65
6	25.05800	10.79	26.40	22.04	37.19	32.83	60.00	50.00	-22.81	-17.17

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

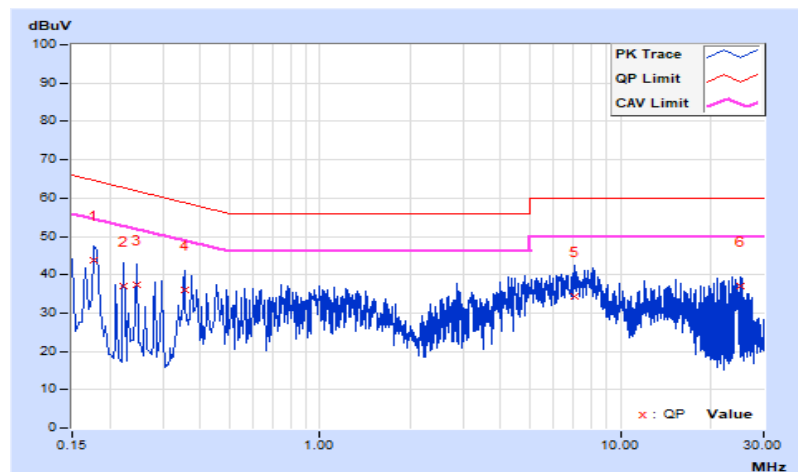


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	B		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16190	10.41	32.71	11.97	43.12	22.38	65.37	55.37	-22.25	-32.99
2	0.89400	10.55	20.95	14.50	31.50	25.05	56.00	46.00	-24.50	-20.95
3	1.40600	10.57	22.21	15.10	32.78	25.67	56.00	46.00	-23.22	-20.33
4	1.91800	10.58	31.73	26.59	42.31	37.17	56.00	46.00	-13.69	-8.83
5	4.98600	10.75	24.32	16.90	35.07	27.65	56.00	46.00	-20.93	-18.35
6	6.77400	10.79	27.83	20.91	38.62	31.70	60.00	50.00	-21.38	-18.30

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

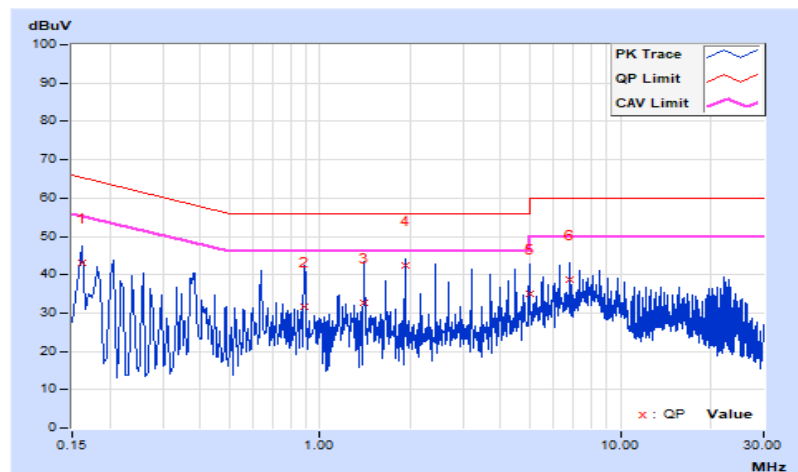


Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.19800	10.40	26.00	5.72	36.40	16.12	63.69	53.69	-27.29	-37.57
2	0.35800	10.47	27.56	24.34	38.03	34.81	58.77	48.77	-20.74	-13.96
3	3.59800	10.64	25.23	20.72	35.87	31.36	56.00	46.00	-20.13	-14.64
4	5.03800	10.67	26.71	21.19	37.38	31.86	60.00	50.00	-22.62	-18.14
5	16.56200	10.87	25.97	22.75	36.84	33.62	60.00	50.00	-23.16	-16.38
6	28.07800	10.74	29.28	24.65	40.02	35.39	60.00	50.00	-19.98	-14.61

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

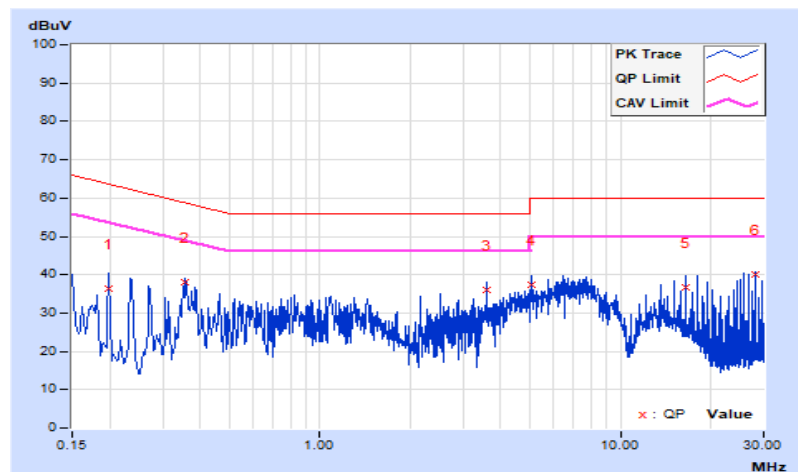


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	C		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16190	10.41	29.76	12.25	40.17	22.66	65.37	55.37	-25.20	-32.71
2	0.36200	10.51	33.00	27.49	43.51	38.00	58.68	48.68	-15.17	-10.68
3	4.32200	10.74	29.45	23.90	40.19	34.64	56.00	46.00	-15.81	-11.36
4	7.20200	10.79	26.64	20.24	37.43	31.03	60.00	50.00	-22.57	-18.97
5	16.56200	11.04	29.97	26.57	41.01	37.61	60.00	50.00	-18.99	-12.39
6	25.91800	10.96	30.65	27.12	41.61	38.08	60.00	50.00	-18.39	-11.92

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

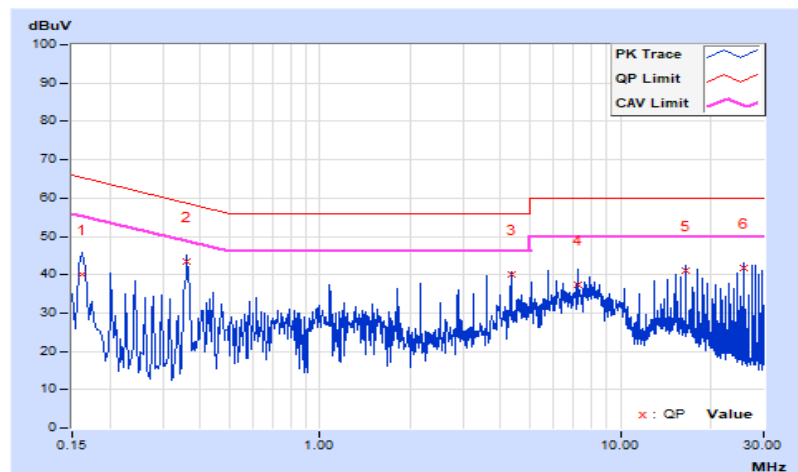


Standby Mode

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D		

No	Freq.	Corr. Factor	Reading Value		Emission Level		Limit		Margin	
	[MHz]		[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.37	22.63	10.22	33.00	20.59	66.00	56.00	-33.00	-35.41
2	0.17384	10.38	23.32	16.42	33.70	26.80	64.77	54.77	-31.07	-27.97
3	0.21800	10.41	16.80	1.11	27.21	11.52	62.89	52.89	-35.68	-41.37
4	0.31800	10.45	13.01	3.71	23.46	14.16	59.76	49.76	-36.30	-35.60
5	2.53800	10.58	6.83	2.68	17.41	13.26	56.00	46.00	-38.59	-32.74
6	6.51800	10.69	12.39	0.27	23.08	10.96	60.00	50.00	-36.92	-39.04

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

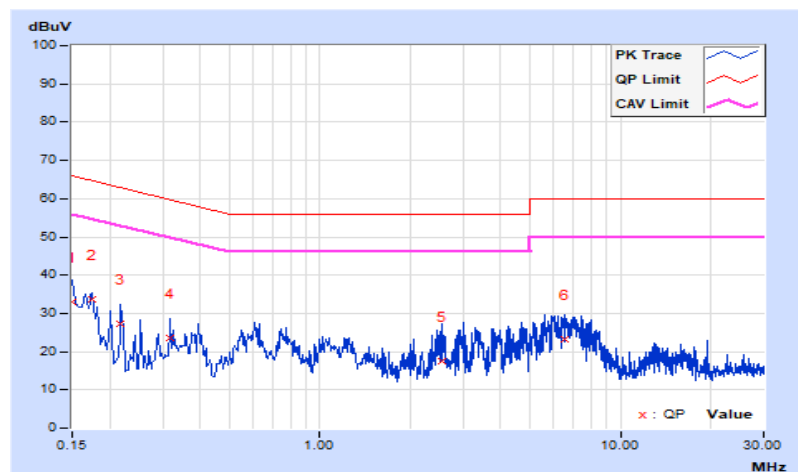


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
Test Mode	D		

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.17384	10.42	21.63	16.88	32.05	27.30	64.77	54.77	-32.72	-27.47
2	0.19400	10.44	17.85	1.53	28.29	11.97	63.86	53.86	-35.57	-41.89
3	0.35000	10.51	12.65	2.42	23.16	12.93	58.96	48.96	-35.80	-36.03
4	0.61000	10.54	8.63	3.36	19.17	13.90	56.00	46.00	-36.83	-32.10
5	6.03000	10.77	10.86	0.60	21.63	11.37	60.00	50.00	-38.37	-38.63
6	21.99000	11.07	9.33	0.47	20.40	11.54	60.00	50.00	-39.60	-38.46


Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value.

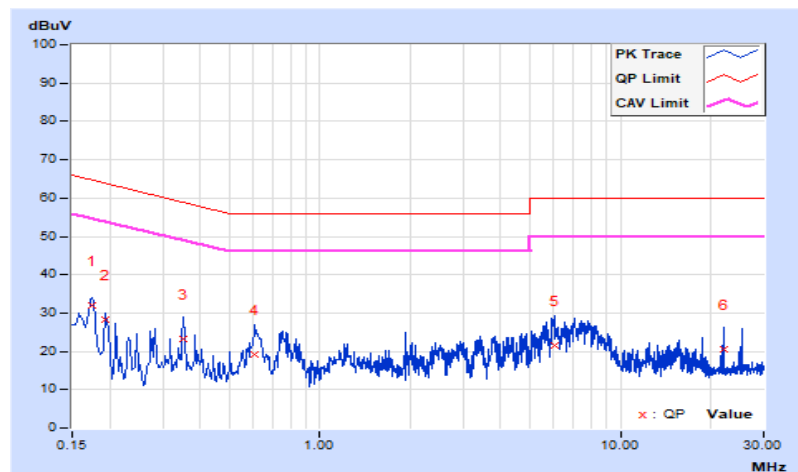

4.3 20dB Bandwidth Measurement

4.3.1 Test SetUp

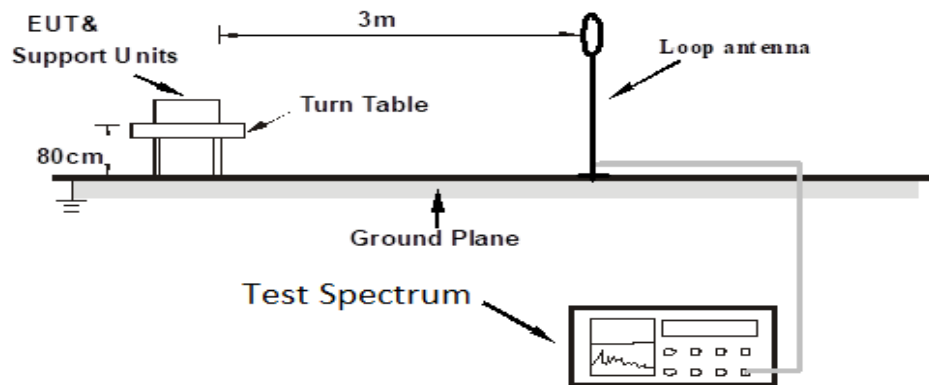

4.3.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.3 Test Procedure

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter Semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation. Then the Loop antenna was rotated 360 degrees to determine the position of the highest radiation.
- The antenna is a broadband loop antenna, which is fixed of a 1m height above the ground, and set away from 3m to the EUT to find the disturbance reading on each frequency.
- The test-spectrum system was set to peak detect function and specified bandwidth.

4.3.4 Deviation from Test Standard

No deviation.


4.3.5 EUT Operating Conditions

The software provided by client to enable the EUT under transmission condition continuously.

4.3.6 Test Results

Test Mode A


Frequency (kHz)	20dB Bandwidth (Hz)	Pass / Fail
360.0	253	Pass

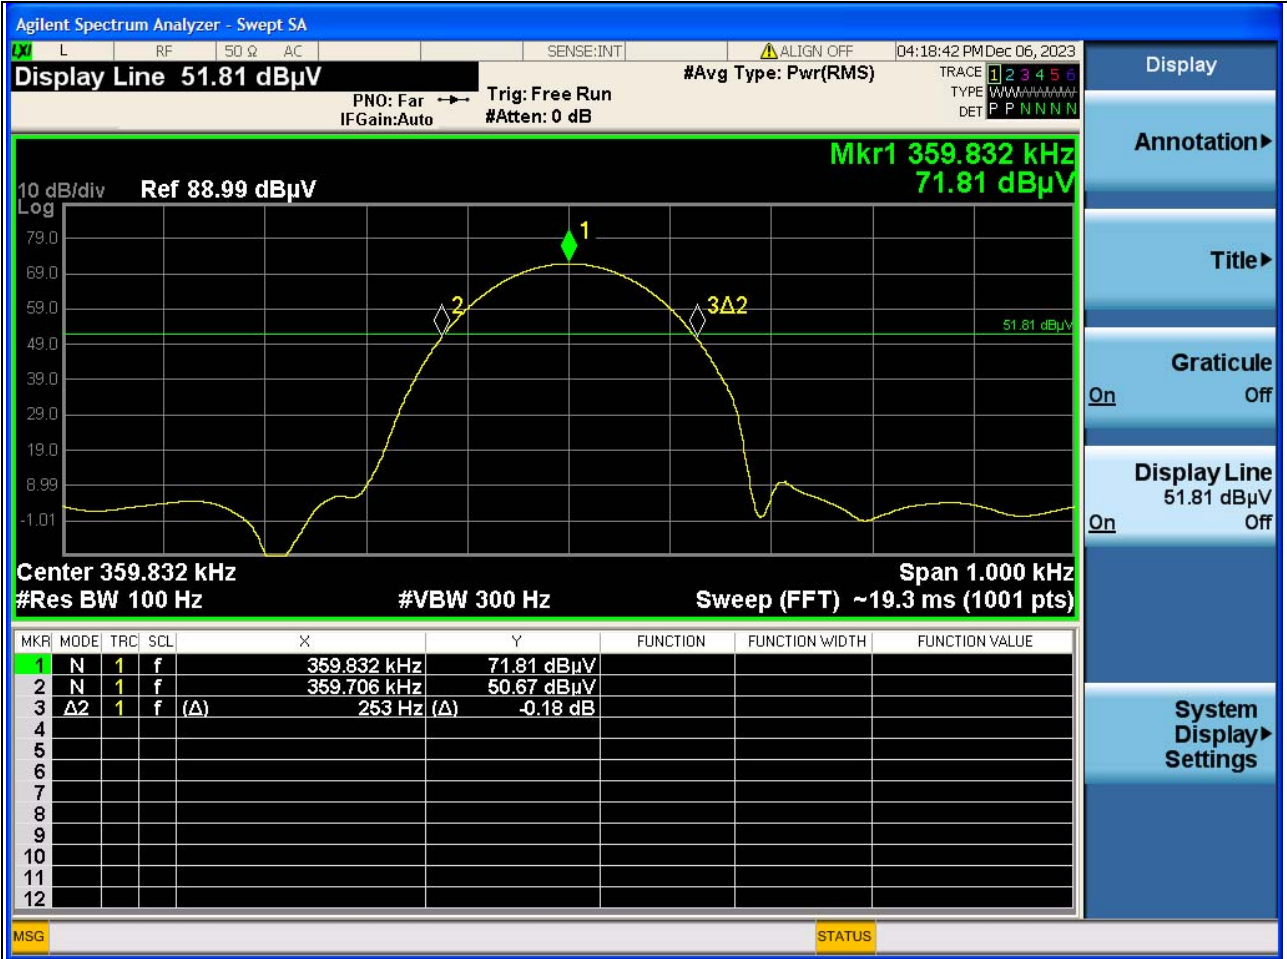

Note: The signal look like CW signal, so RBW can't be match 1~5 % OBW.

Test Mode B


Frequency (kHz)	20dB Bandwidth (Hz)	Pass / Fail
127.7	252	Pass

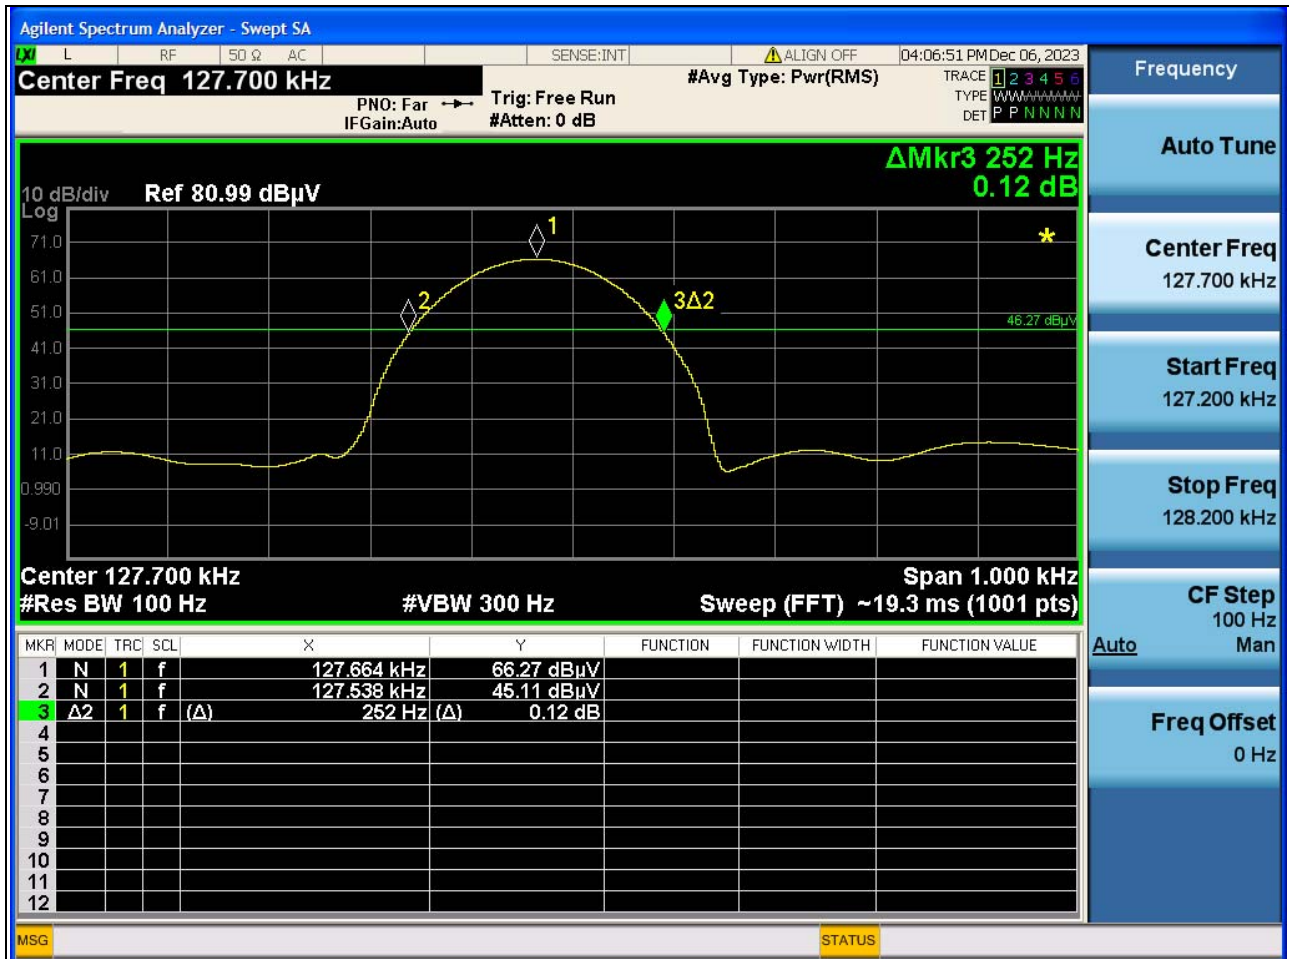

Note: The signal look like CW signal, so RBW can't be match 1~5 % OBW.

Test Mode C

Frequency (kHz)	20dB Bandwidth (Hz)	Pass / Fail
360.0	253	Pass

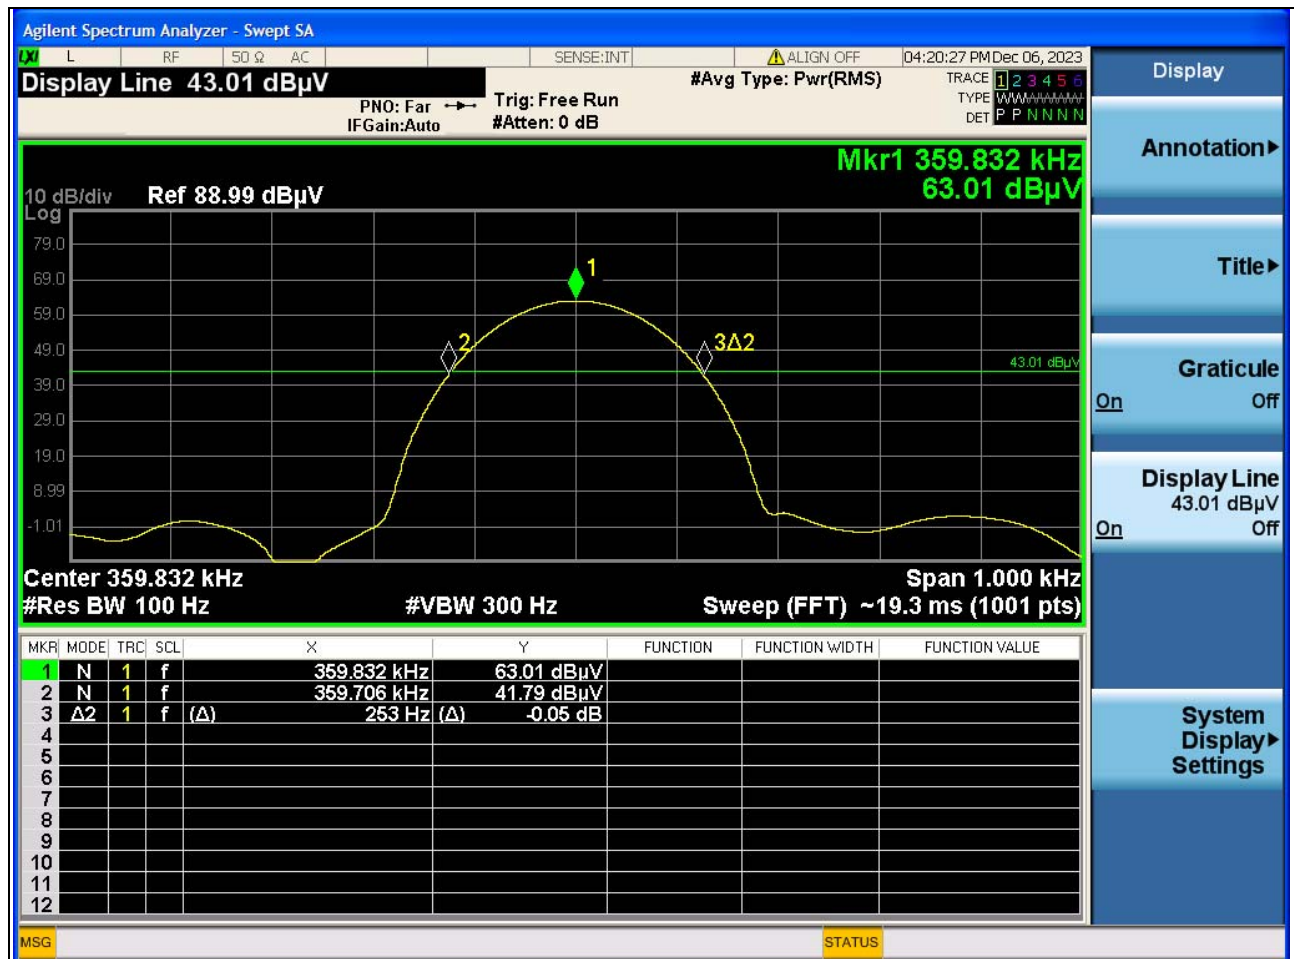

Note: The signal look like CW signal, so RBW can't be match 1~5 % OBW.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---