


Products specification

Quick Reference Data

	Antenna module on the system board	
Frequency Range	2400 ~ 2500 MHz	
Ant. Port Input Pwr. (dBm)	0 (Typ. BT class 2 output power)	
Tot. Rad. Pwr. (dBm)	-1.2 (Input pwr - loss pwr)	
Peak EIRP (dBm)	1.2	
Directivity (dBi)	1 (all direction antenna)	
Efficiency (dB)	60.2 %	
Gain (dBi)	1.2 (Avg Gain XY-plane)	
Maximum Power (dBm)	1.7 (XY-plane)	
Minimum Power (dBm)	-4 (XY-plane)	
Avg. Power (dBm)	-0.5 (XY-plane)	
Input Impedance (ohm)	50	
Polarization Type	Vertical & Horizontal	
V.S.W . R	< 1.4	

All the technical data and information contained herein are subject to change without prior notice

Antenna Layout & module on the system board

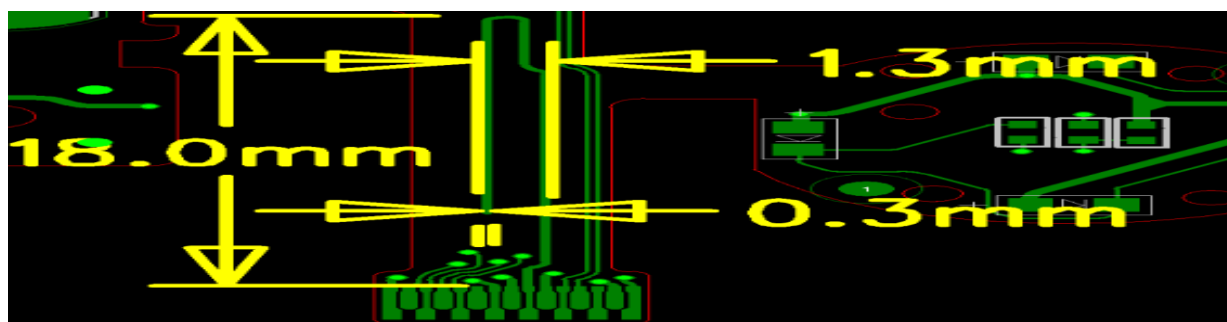


Antenna Gain


Gain Table

Unit in dBi @ 2.44 GHz	XY-plane		XZ-plane		YZ-plane		Efficiency
	Peak	Avg.	Peak	Avg.	Peak	Avg.	
Module Board	1.2	-0.5	1.0	-3.6	1.1	-3.0	60.2 %


ReturnLoss

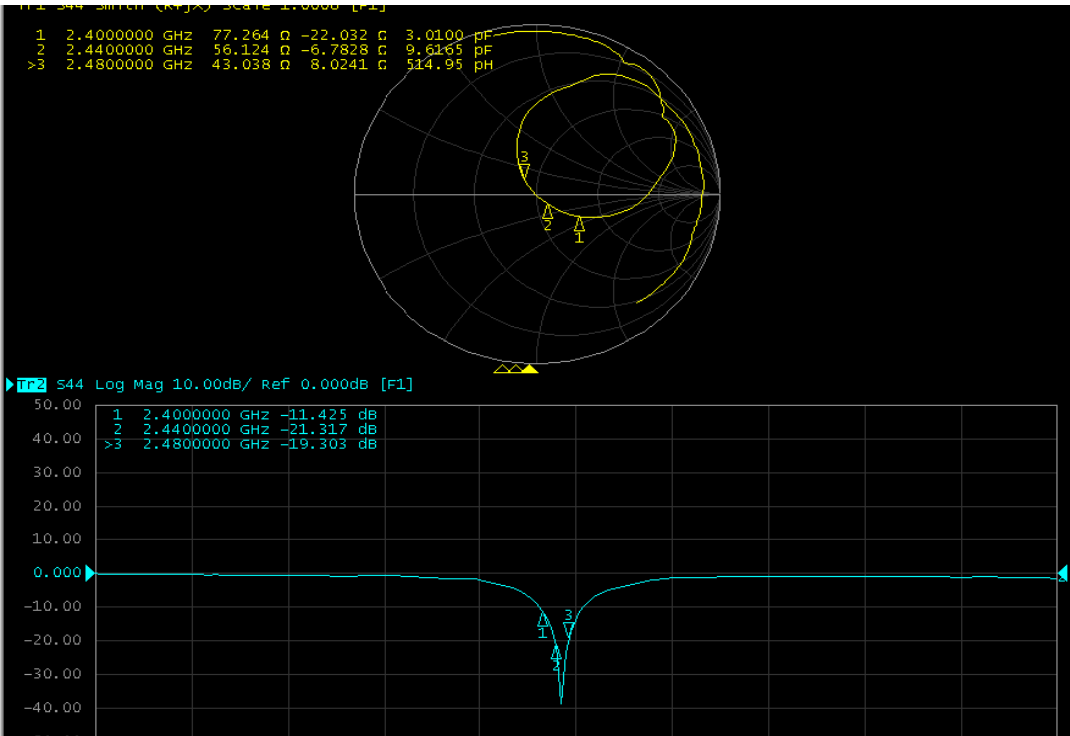


The Environment of Antenna Radiation Pattern

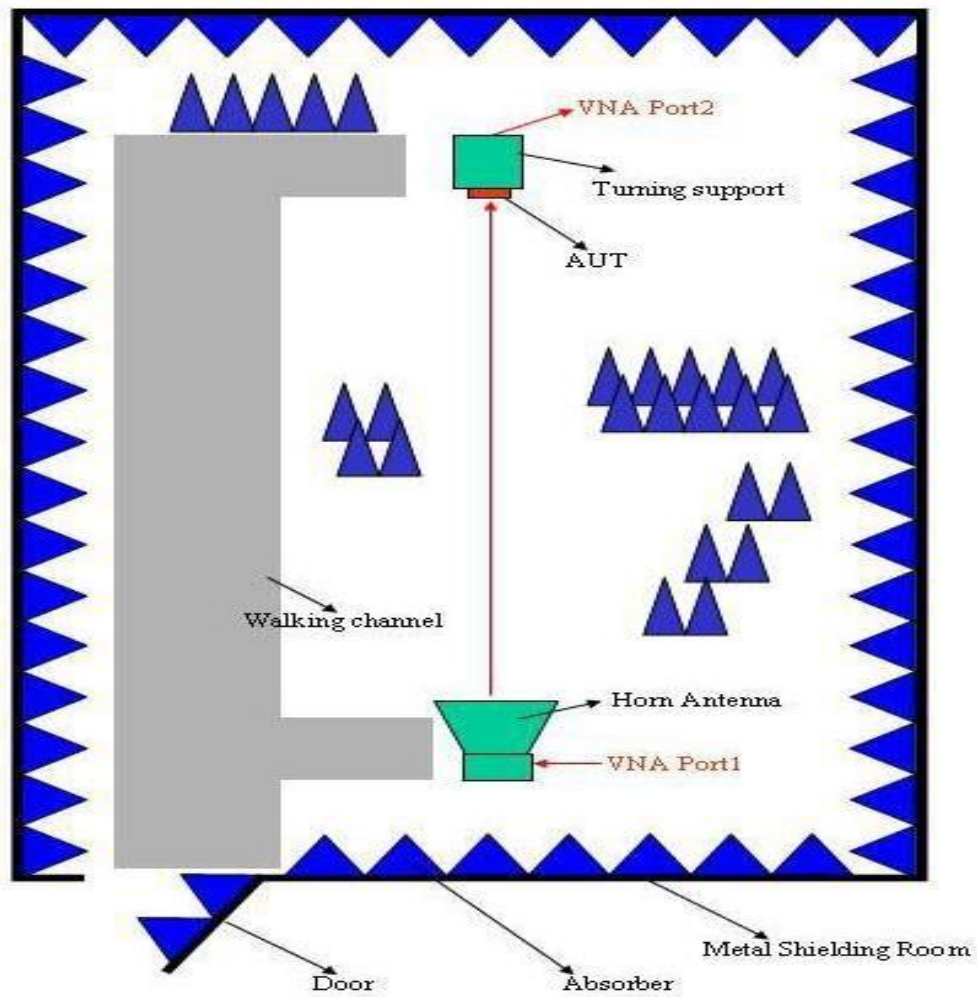

XY-plane

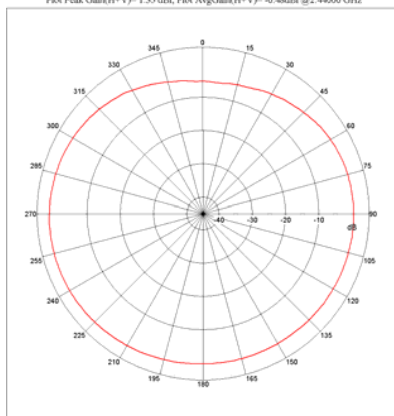

Far-field Power Distribution(H+V) on X-Z Plane
Plot Peak Gain(H+V)= 1.68 dBi; Plot AvgGain(H+V)=-3.83dBi @2.44000 GHz

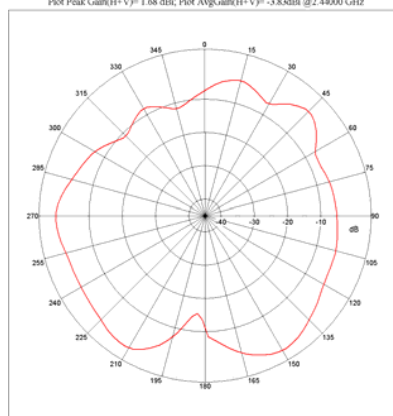

Far-field Power Distribution(H+V) on Y-Z Plane
Plot Peak Gain(H+V)= 1.11 dBi; Plot AvgGain(H+V)= -2.99dBi @2.44000 GHz

