



FCC Part 15E Test Report

FCC ID: 2BBO6-Z08

Applicant: XiXi Technology (Shenzhen) CO.,Ltd

Address: 5 / F, Building 2, Watsi Science Park, Datang Road, Guanlan, Longhua District, Shenzhen

Manufacturer: XiXi Technology (Shenzhen) CO.,Ltd

Address: 5 / F, Building 2, Watsi Science Park, Datang Road, Guanlan, Longhua District, Shenzhen

EUT: repeater

Trade Mark: N/A

Model Number: Z08
Z09

Date of Receipt: Mar. 11, 2024

Test Date: Mar. 11, 2024 – Mar. 18, 2024

Date of Report: Mar. 18, 2024

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

Applicable Standards: FCC PART 15 E 15.407
ANSI C63.10:2013

Test Result: Pass

Report Number: DL-20240218019E

Prepared (Test Engineer): Alisa Song

Reviewer (Supervisor): Jack Bu

Approved (Manager): Jade Yang



This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.



Table of Contents	Page
1 . SUMMARY OF TEST RESULTS	5
1.1 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	6
2.1 GENERAL DESCRIPTION OF EUT	6
2.2 DESCRIPTION OF TEST MODES	7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)	8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING	8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS	9
3 . EMC EMISSION TEST	10
3.1 CONDUCTED EMISSION MEASUREMENT	10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS	10
3.1.2 TEST PROCEDURE	10
3.1.3 DEVIATION FROM TEST STANDARD	10
3.1.4 TEST SETUP	11
3.1.5 EUT OPERATING CONDITIONS	11
3.1.6 TEST RESULTS	11
3.2 RADIATED EMISSION MEASUREMENT	14
3.2.1 RADIATED EMISSION LIMITS	14
3.2.2 TEST PROCEDURE	15
3.2.3 DEVIATION FROM TEST STANDARD	15
3.2.4 TEST SETUP	15
3.2.5 EUT OPERATING CONDITIONS	16
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ)	17
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ)	18
3.2.8 TEST RESULTS (1GHZ~40GHZ)	20
3.3 RADIATED BAND EMISSION MEASUREMENT	25
3.3.1 TEST REQUIREMENT:	25
3.3.2 TEST PROCEDURE	25
3.3.3 DEVIATION FROM TEST STANDARD	25
3.3.4 TEST SETUP	25
3.3.5 EUT OPERATING CONDITIONS	25
4 . PEAK OUTPUT POWER	28
4.1 APPLIED PROCEDURES / LIMIT	28
4.1.1 TEST PROCEDURE	28
4.1.2 DEVIATION FROM STANDARD	28
4.1.3 TEST SETUP	28



Table of Contents	Page
4.1.4 EUT OPERATION CONDITIONS	28
4.1.5 TEST RESULTS	29
5 . POWER SPECTRAL DENSITY TEST	37
5.1 APPLIED PROCEDURES / LIMIT	37
5.1.1 TEST PROCEDURE	37
5.1.2 DEVIATION FROM STANDARD	37
5.1.3 TEST SETUP	37
5.1.4 EUT OPERATION CONDITIONS	37
5.1.5 TEST RESULTS	38
6 . 6DB BANDWIDTH TEST	46
6.1 APPLIED PROCEDURES / LIMIT	46
6.1.1 TEST PROCEDURE	46
6.1.2 DEVIATION FROM STANDARD	46
6.1.3 TEST SETUP	46
6.1.4 EUT OPERATION CONDITIONS	46
6.1.5 TEST RESULTS	47
7 . DUTY CYCLE TEST SIGNAL	54
7.1 APPLIED PROCEDURES / LIMIT	54
7.1.1 TEST PROCEDURE	54
7.1.2 DEVIATION FROM STANDARD	54
7.1.3 TEST SETUP	54
7.1.4 EUT OPERATION CONDITIONS	54
7.1.5 TEST RESULTS	55
8 . FREQUENCY STABILITY	58
8.1 APPLIED PROCEDURES / LIMIT	58
8.1.1 TEST PROCEDURE	58
8.1.2 DEVIATION FROM STANDARD	58
8.1.3 TEST SETUP	58
8.1.4 EUT OPERATION CONDITIONS	58
8.1.5 TEST RESULTS	59
9 . TRANSMISSION IN THE ABSENCE OF DATA	61
9.1 STANDARD REQUIREMENT	61
9.2 TEST RESULT	61
10 . ANTENNA REQUIREMENT	61
10.1 STANDARD REQUIREMENT	61
10.2 EUT ANTENNA	61
11 . TEST SEUUP PHOTO	61



Table of Contents	Page
12 . EUT PHOTO	61



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.407(b), 15.209	Radiated Spurious Emission	PASS	
15.407 (b)	Band Edge Emission	PASS	
15.407 (a)	Averaging Output Power	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.403(i) 15.407(e)	6dB bandwidth	PASS	
15.407(g)	Frequency Stability	PASS	
15.407(c)	Transmission in case of Absence of Information	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) Test Facility: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Building C, Shuanghuan, No.8, Baoqing Road, Baolong Industrial Zone, Baolong Street, Longgang District, Shenzhen, Guangdong, China

FCC Test Firm Registration Number: 854456

Designation Number: CN1307

IC Registered No.: 27485

CAB ID.: CN0118

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	$\pm 2.56\text{dB}$
2	RF power,conducted	$\pm 0.42\text{dB}$
3	Spurious emissions,conducted	$\pm 2.76\text{dB}$
4	All emissions,radiated(<1G)	$\pm 3.65\text{dB}$
5	All emissions,radiated(>1G)	$\pm 4.89\text{dB}$
6	Temperature	$\pm 0.5^{\circ}\text{C}$
7	Humidity	$\pm 2\%$
8	6dB Bandwidth	$\pm 0.2\text{MHz}$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	repeater
Trademark	N/A
Model No.:	Z08 Z09
Model Difference	The product's different for model number and appearance color.
Operation Frequency:	5745-5825MHz(802.11a/n/ac(HT20)) 5755-5795MHz(802.11n/ac(HT40)) 5775MHz (802.11ac(HT80))
Channel numbers:	See channel list
Channel separation:	20MHz/40MHz/80MHz
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Rate of Transmitter	802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps 802.11n: Up to 500Mbps
Antenna Type:	External antenna
Antenna gain:	2.72dBi
Power Supply:	100-240V~ 50/60Hz
Note:	The MIMO mode only support external External antenna3 and External antenna4 the 802.11n/ac mode, the Directional Gain=2.72dBi+10log(2)=5.72dBi.

Note:

- 1.For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
- 2.The EUT's all information provided by client.



2. Channel List

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	/	/

2.1.1 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Description		
Pretest Mode	Channel	Band 4
Mode 1	802.11a/n/acHT20	CH149, CH157, CH165
Mode 2	802.11n/acHT40	CH151, CH159
Mode 3	802.11acHT80	CH155
Mode 4	Link Mode	
Mode 5	MIMO Mode	


For Radiated Emission		
Pretest Mode	Channel	Band 4
Mode 1	802.11a/n/acHT20	CH149, CH157, CH165
Mode 2	802.11n/acHT40	CH151, CH159
Mode 3	802.11acHT80	CH155
Mode 4	Link Mode	
Mode 5	MIMO Mode	

Note: 1. The measurements are performed at the highest, middle, lowest available channels.
2. During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.




2.2 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Conducted Spurious Emission Test



2.3 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	repeater	Z10	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.4 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: MTK			
Mode	802.11a	802.11n HT20	802.11n HT40	802.11ac HT20/HT40/HT80
Data Rate	6Mbps	MSC0	MSC0	MSC0
Power Setting of Software	60	60	66	66

**2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS****Radiation test, Band-edge test and 6db bandwidth test equipment**

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Nov. 04, 2023	Nov. 03, 2024
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Nov. 04, 2023	Nov. 03, 2024
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Nov. 04, 2023	Nov. 03, 2024
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Nov. 04, 2023	Nov. 03, 2024
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Nov. 04, 2023	Nov. 03, 2024
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Nov. 04, 2023	Nov. 03, 2024
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Nov. 04, 2023	Nov. 03, 2024
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Nov. 04, 2023	Nov. 03, 2024
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Nov. 04, 2023	Nov. 03, 2024
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Nov. 04, 2023	Nov. 03, 2024
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Nov. 04, 2023	Nov. 03, 2024
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Nov. 04, 2023	Nov. 03, 2024
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Nov. 04, 2023	Nov. 03, 2024
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Nov. 04, 2023	Nov. 03, 2024
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Nov. 04, 2023	Nov. 03, 2024
16	D.C. Power Supply	LongWei	PS-305D	010964729	Nov. 04, 2023	Nov. 03, 2024

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	ChengYu	843 Room	843	Sep. 20, 2022	Sep. 19, 2025
2	EMI Receiver	R&S	ESR	101421	Nov. 04, 2023	Nov. 03, 2024
3	LISN	R&S	ENV216	102417	Nov. 04, 2023	Nov. 03, 2024
4	843 Cable 1#	ChengYu	CE Cable	001	Nov. 04, 2023	Nov. 03, 2024

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMCC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMCC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

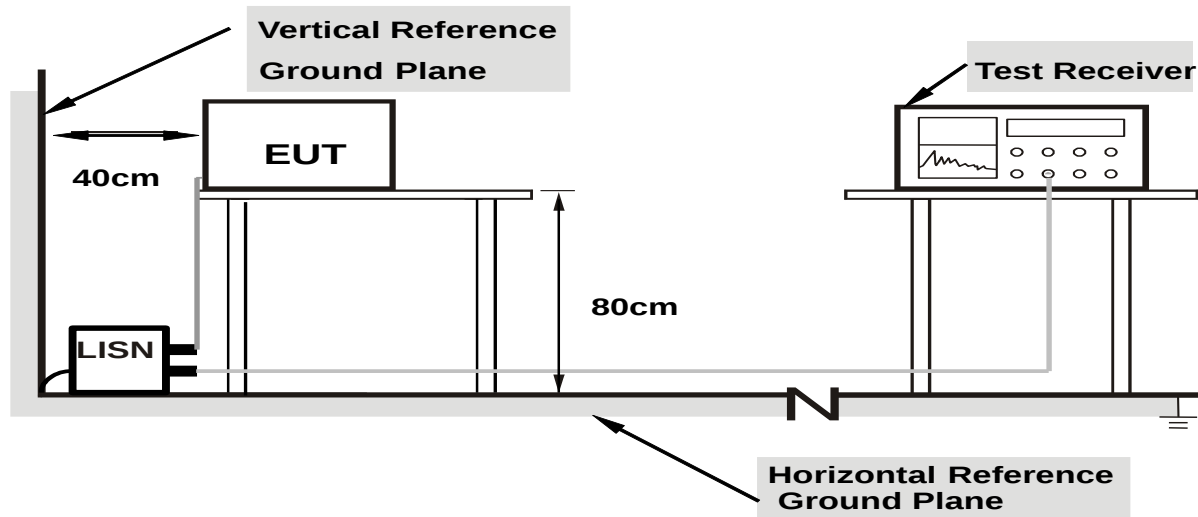

- Note:**
- 1.Support units were connected to second LISN.
 - 2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS


The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

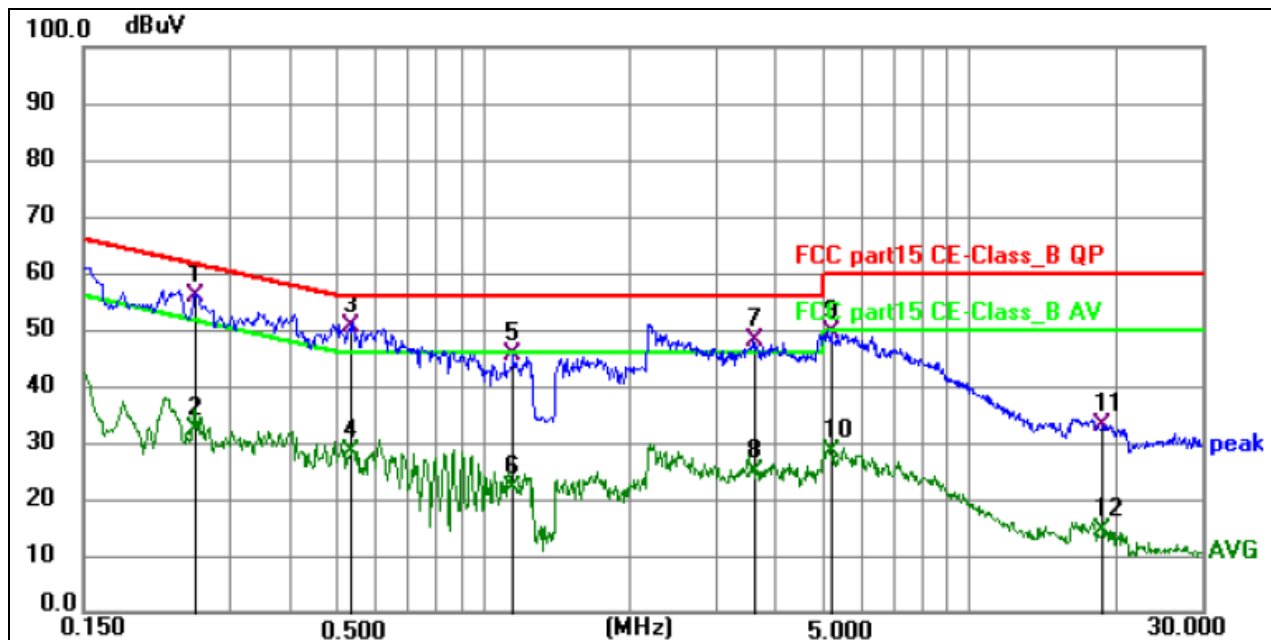


Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.2560	46.76	9.01	55.77	61.56	-5.79	QP	P	
2	0.2560	23.43	9.01	32.44	51.56	-19.12	AVG	P	
3 *	0.5370	41.18	9.40	50.58	56.00	-5.42	QP	P	
4	0.5370	18.83	9.40	28.23	46.00	-17.77	AVG	P	
5	1.1490	35.89	9.52	45.41	56.00	-10.59	QP	P	
6	1.1490	12.35	9.52	21.87	46.00	-24.13	AVG	P	
7	3.6105	37.94	10.01	47.95	56.00	-8.05	QP	P	
8	3.6105	14.90	10.01	24.91	46.00	-21.09	AVG	P	
9	5.1720	39.32	10.09	49.41	60.00	-10.59	QP	P	
10	5.1720	18.32	10.09	28.41	50.00	-21.59	AVG	P	
11	18.8111	22.57	10.41	32.98	60.00	-27.02	QP	P	
12	18.8111	4.16	10.41	14.57	50.00	-35.43	AVG	P	



Temperature:	25 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 4

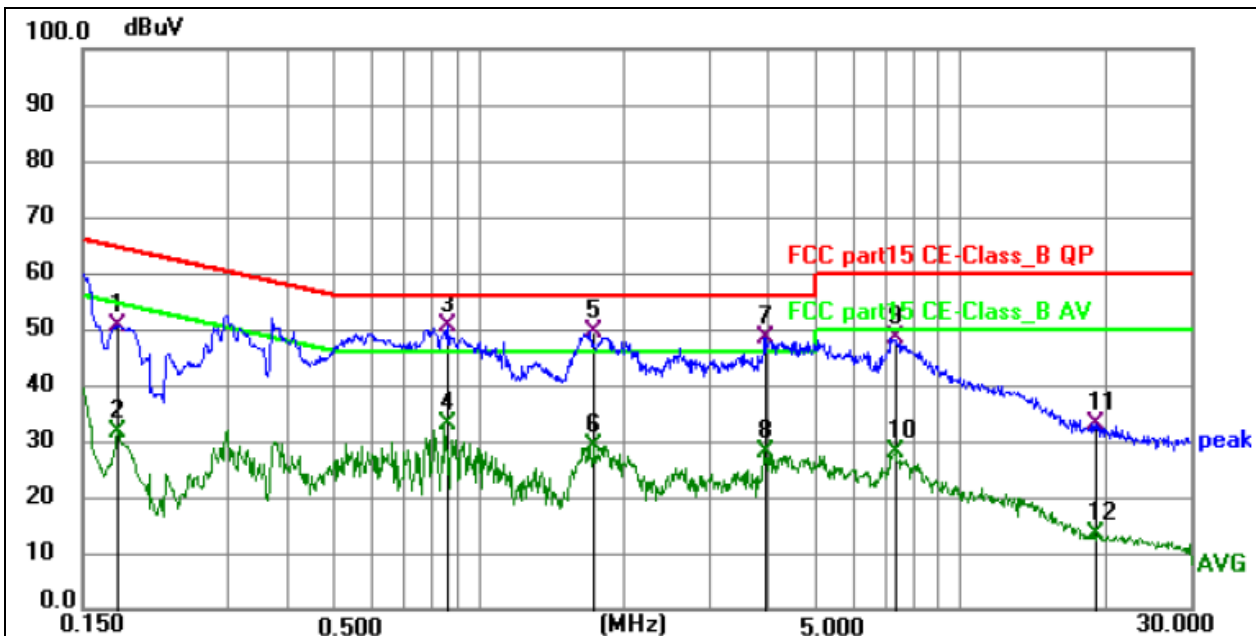

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1770	40.63	9.99	50.62	64.63	-14.01	QP	P	
2	0.1770	21.67	9.99	31.66	54.63	-22.97	AVG	P	
3 *	0.8655	41.17	9.36	50.53	56.00	-5.47	QP	P	
4	0.8655	23.73	9.36	33.09	46.00	-12.91	AVG	P	
5	1.7430	39.55	9.80	49.35	56.00	-6.65	QP	P	
6	1.7430	19.24	9.80	29.04	46.00	-16.96	AVG	P	
7	3.9253	38.57	9.84	48.41	56.00	-7.59	QP	P	
8	3.9253	18.29	9.84	28.13	46.00	-17.87	AVG	P	
9	7.2915	38.44	10.01	48.45	60.00	-11.55	QP	P	
10	7.2915	18.01	10.01	28.02	50.00	-21.98	AVG	P	
11	19.0903	22.73	10.36	33.09	60.00	-26.91	QP	P	
12	19.0903	2.98	10.36	13.34	50.00	-36.66	AVG	P	



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

- The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre(Above 18GHz the distance is 1 meter and table is 1.5 metre).
- Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

3.2.3 DEVIATION FROM TEST STANDARD


No deviation

3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

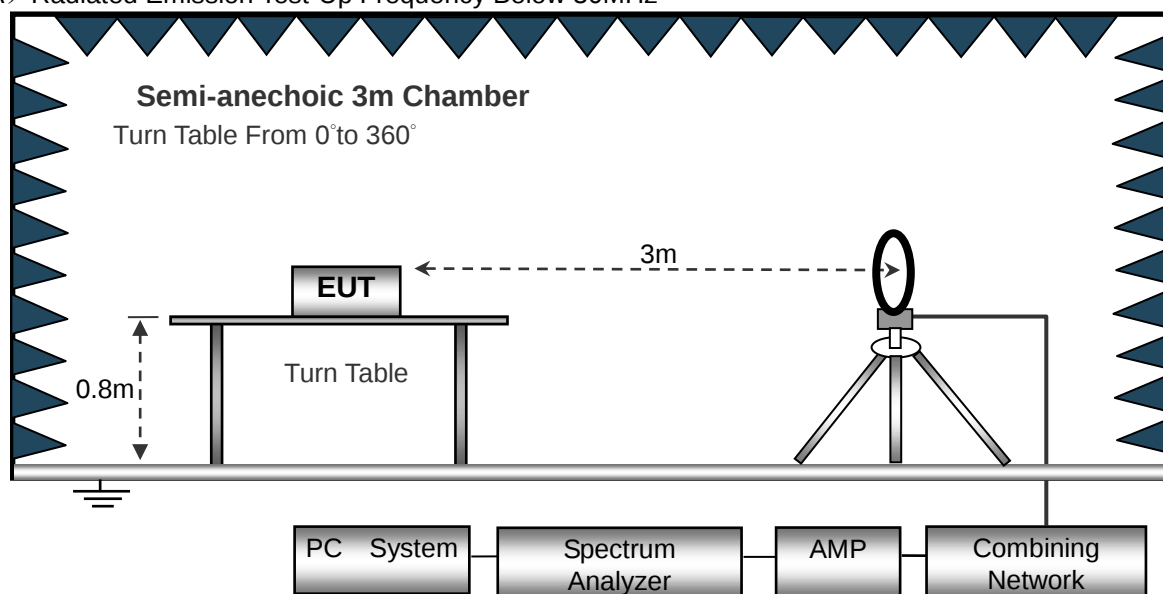

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

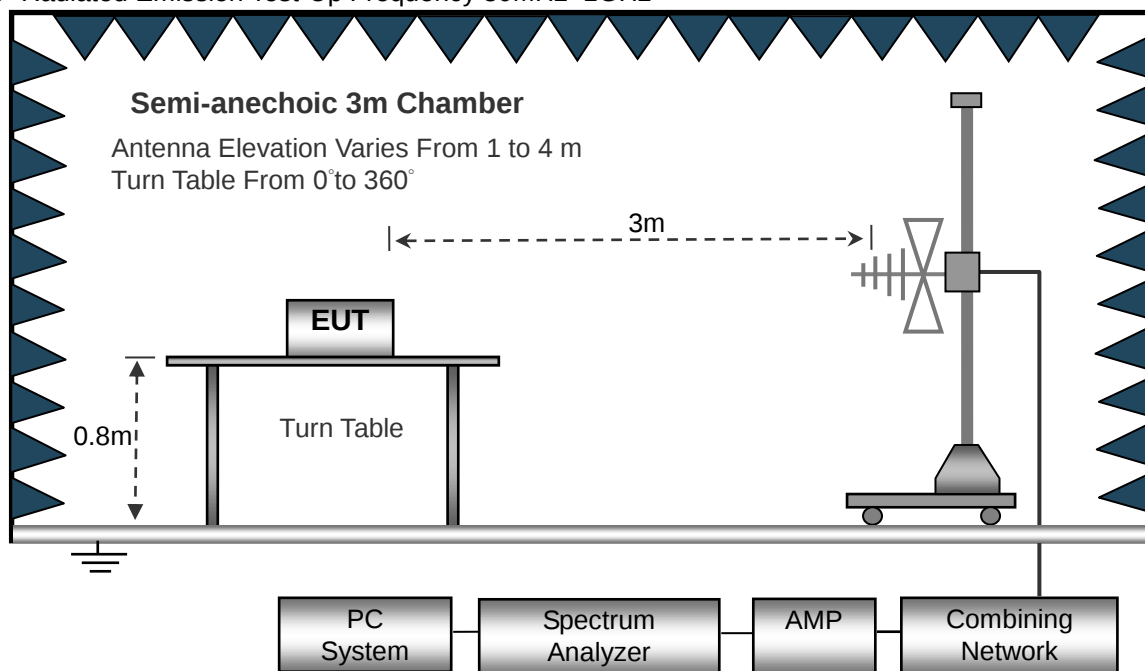

(C) Radiated Emission Test-Up Frequency Above 1GHz

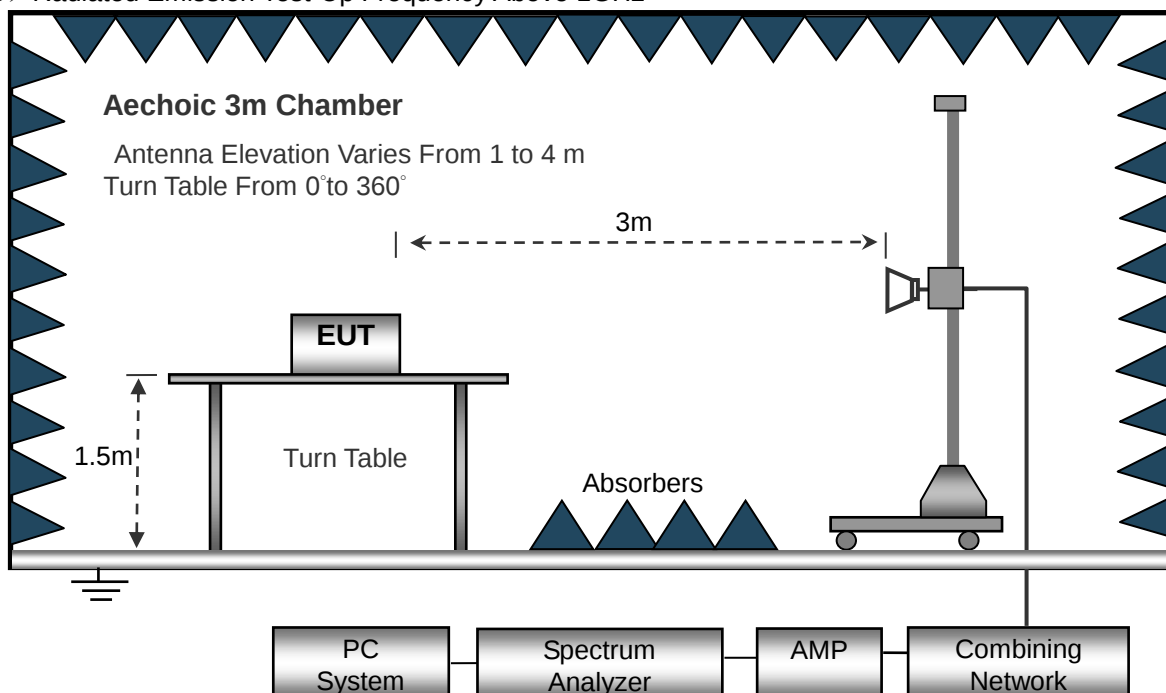

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

**3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)**

Temperature:	20℃	Relative Humidity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 5	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

**3.2.7 TEST RESULTS (Between 30MHz – 1GHz)**

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz		
Test Mode :	Mode 5		



No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Margin	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dB	dB	
1		38.3462	25.44	-14.20	11.24	40.00	-28.76	QP
2		86.8068	26.32	-17.17	9.15	40.00	-30.85	QP
3		173.8135	31.12	-16.31	14.81	43.50	-28.69	QP
4		313.2760	45.01	-11.20	33.81	46.00	-12.19	QP
5	*	533.8321	47.93	-7.05	40.88	46.00	-5.12	QP
6		649.6597	41.20	-5.01	36.19	46.00	-9.81	QP


Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
test voltage :	AC 120V/60Hz		
Test Mode :	Mode 5		

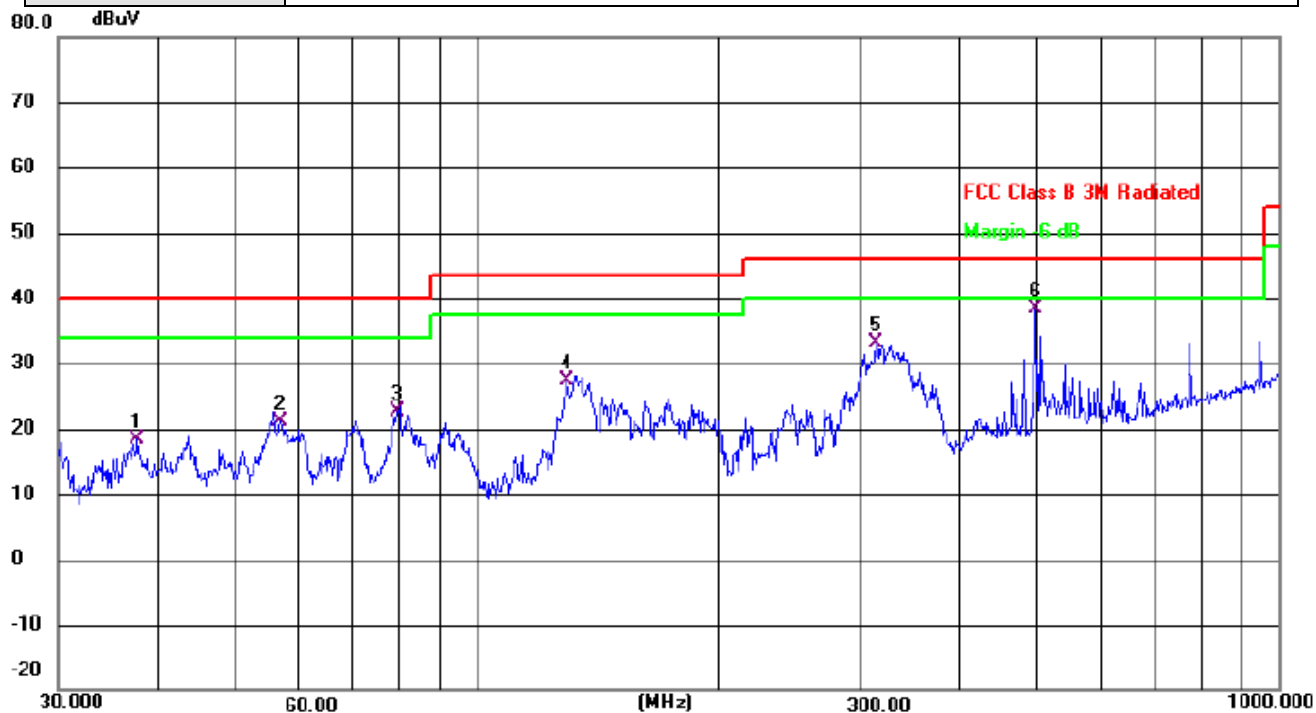

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dB	Margin dB	Detector
1		37.6797	32.75	-14.34	18.41	40.00	-21.59	QP
2		56.7917	34.09	-12.86	21.23	40.00	-18.77	QP
3		79.5209	39.98	-17.44	22.54	40.00	-17.46	QP
4		129.4677	44.33	-16.92	27.41	43.50	-16.09	QP
5		315.4806	44.20	-11.17	33.03	46.00	-12.97	QP
6	*	495.9344	46.10	-7.64	38.46	46.00	-7.54	QP

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;



3.2.8 TEST RESULTS (1ghz~40ghZ)

802.11a band 4

We test all antenna's data, the data only show the antenna3 worst mode4.

Polar (H/V)	Frequency (MHz)	Meter Reading (dBUV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBUV/m)	Limits (dBUV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	11490	54.29	49.05	15.3	37.39	57.93	74	-16.07	PK
V	11490	41.52	49.05	15.3	37.39	45.16	54	-8.84	AV
V	17235	55.31	49.16	15.27	40.45	61.87	68.2	-6.33	PK
V	17235	40.88	49.16	15.27	40.45	47.44	54	-6.56	AV
H	11490	52.32	49.05	15.3	37.39	55.96	74	-18.04	PK
H	11490	42.49	49.05	15.3	37.39	46.13	54	-7.87	AV
H	17235	51.35	49.16	15.27	40.45	57.91	68.2	-10.29	PK
H	17235	40.83	49.16	15.27	40.45	47.39	54	-6.61	AV
operation frequency:5785									
V	11570	51.34	49.09	15.34	37.42	55.01	74	-18.99	PK
V	11570	41.18	49.09	15.34	37.42	44.85	54	-9.15	AV
V	17355	50.66	49.18	15.29	40.47	57.24	68.2	-10.96	PK
V	17355	40.85	49.18	15.29	40.47	47.43	54	-6.57	AV
H	11570	50.85	49.09	15.34	37.42	54.52	74	-19.48	PK
H	11570	42.03	49.09	15.34	37.42	45.7	54	-8.30	AV
H	17355	48.78	49.18	15.29	40.47	55.36	68.2	-12.84	PK
H	17355	40.54	49.18	15.29	40.47	47.12	54	-6.88	AV
operation frequency:5825									
V	11650	52.43	49.11	15.37	37.46	56.15	74	-17.85	PK
V	11650	41.38	49.11	15.37	37.46	45.1	54	-8.90	AV
V	17475	49.22	49.21	15.34	40.51	55.86	68.2	-12.34	PK
V	17475	40.96	49.21	15.34	40.51	47.6	54	-6.40	AV
H	11650	57.95	49.11	15.37	31.31	55.52	74	-18.48	PK
H	11650	48.52	49.11	15.37	31.31	46.09	54	-7.91	AV
H	17475	49.33	49.21	15.34	40.51	55.97	68.2	-12.23	PK
H	17475	40.89	49.21	15.34	40.51	47.53	54	-6.47	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT20

We test all antenna's data, the data only show the mode 5 worst mode.

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5745									
V	11490	49.24	49.05	15.3	37.39	52.88	74	-21.12	PK
V	11490	42.86	49.05	15.3	37.39	46.5	54	-7.50	AV
V	17235	48.88	49.16	15.27	40.45	55.44	68.2	-12.76	PK
V	17235	40.23	49.16	15.27	40.45	46.79	54	-7.21	AV
H	11490	49.48	49.05	15.3	37.39	53.12	74	-20.88	PK
H	11490	41.12	49.05	15.3	37.39	44.76	54	-9.24	AV
H	17235	48.46	49.16	15.27	40.45	55.02	68.2	-13.18	PK
H	17235	40.48	49.16	15.27	40.45	47.04	54	-6.96	AV
operation frequency:5785									
V	11570	52.65	49.09	15.34	37.42	56.32	74	-17.68	PK
V	11570	42.26	49.09	15.34	37.42	45.93	54	-8.07	AV
V	17355	49.97	49.18	15.29	40.47	56.55	68.2	-11.65	PK
V	17355	40.55	49.18	15.29	40.47	47.13	54	-6.87	AV
H	11570	49.33	49.09	15.34	37.42	53	74	-21.00	PK
H	11570	43.52	49.09	15.34	37.42	47.19	54	-6.81	AV
H	17355	49.76	49.18	15.29	40.47	56.34	68.2	-11.86	PK
H	17355	40.77	49.18	15.29	40.47	47.35	54	-6.65	AV
operation frequency:5825									
V	11650	51.33	49.11	15.37	37.46	55.05	74	-18.95	PK
V	11650	41.52	49.11	15.37	37.46	45.24	54	-8.76	AV
V	17475	48.46	49.21	15.34	40.51	55.1	68.2	-13.10	PK
V	17475	40.68	49.21	15.34	40.51	47.32	54	-6.68	AV
H	11650	57.72	49.11	15.37	31.31	55.29	74	-18.71	PK
H	11650	44.33	49.11	15.37	31.31	41.9	54	-12.10	AV
H	17475	49.24	49.21	15.34	40.51	55.88	68.2	-12.32	PK
H	17475	40.85	49.21	15.34	40.51	47.49	54	-6.51	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11n HT40

We test all antenna's data, the data only show the mode 5 worst mode.

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5755									
V	11510	49.63	49.07	15.33	37.41	53.3	74	-20.70	PK
V	11510	41.54	49.07	15.33	37.41	45.21	54	-8.79	AV
V	17265	49.69	49.17	15.28	40.46	56.26	68.2	-11.94	PK
V	17265	40.28	49.17	15.28	40.46	46.85	54	-7.15	AV
H	11510	48.74	49.07	15.33	37.41	52.41	74	-21.59	PK
H	11510	41.12	49.07	15.33	37.41	44.79	54	-9.21	AV
H	17265	49.89	49.17	15.28	40.46	56.46	68.2	-11.74	PK
H	17265	40.44	49.17	15.28	40.46	47.01	54	-6.99	AV
operation frequency:5795									
V	11590	49.63	49.11	15.37	37.46	53.35	74	-20.65	PK
V	11590	41.85	49.11	15.37	37.46	45.57	54	-8.43	AV
V	17385	48.46	49.21	15.34	40.51	55.1	68.2	-13.10	PK
V	17385	40.27	49.21	15.34	40.51	46.91	54	-7.09	AV
H	11590	57.56	49.11	15.37	31.31	55.13	74	-18.87	PK
H	11590	44.35	49.11	15.37	31.31	41.92	54	-12.08	AV
H	17385	48.83	49.21	15.34	40.51	55.47	68.2	-12.73	PK
H	17385	40.39	49.21	15.34	40.51	47.03	54	-6.97	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



802.11ac HT20

We test all antenna's data, the data only show the mode 5 worst mode.

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre- amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	11490	49.45	49.05	15.3	37.39	53.09	74	-20.91	PK
V	11490	42.49	49.05	15.3	37.39	46.13	54	-7.87	AV
V	17235	48.34	49.16	15.27	40.45	54.9	68.2	-13.30	PK
V	17235	40.68	49.16	15.27	40.45	47.24	54	-6.76	AV
H	11490	48.26	49.05	15.3	37.39	51.9	74	-22.10	PK
H	11490	41.63	49.05	15.3	37.39	45.27	54	-8.73	AV
H	17235	48.21	49.16	15.27	40.45	54.77	68.2	-13.43	PK
H	17235	40.48	49.16	15.27	40.45	47.04	54	-6.96	AV
operation frequency:5785									
V	11570	48.46	49.09	15.34	37.42	52.13	74	-21.87	PK
V	11570	41.15	49.09	15.34	37.42	44.82	54	-9.18	AV
V	17355	49.23	49.18	15.29	40.47	55.81	68.2	-12.39	PK
V	17355	40.48	49.18	15.29	40.47	47.06	54	-6.94	AV
H	11570	49.25	49.09	15.34	37.42	52.92	74	-21.08	PK
H	11570	43.43	49.09	15.34	37.42	47.1	54	-6.90	AV
H	17355	49.38	49.18	15.29	40.47	55.96	68.2	-12.24	PK
H	17355	40.44	49.18	15.29	40.47	47.02	54	-6.98	AV
operation frequency:5825									
V	11650	49.16	49.11	15.37	37.46	52.88	74	-21.12	PK
V	11650	41.68	49.11	15.37	37.46	45.4	54	-8.60	AV
V	17475	48.15	49.21	15.34	40.51	54.79	68.2	-13.41	PK
V	17475	40.22	49.21	15.34	40.51	46.86	54	-7.14	AV
H	11650	57.29	49.11	15.37	31.31	54.86	74	-19.14	PK
H	11650	44.27	49.11	15.37	31.31	41.84	54	-12.16	AV
H	17475	48.35	49.21	15.34	40.51	54.99	68.2	-13.21	PK
H	17475	40.56	49.21	15.34	40.51	47.2	54	-6.80	AV
Remark: 1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier, Margin= Emission Level - Limit 2. If peak below the average limit, the average emission was no test. 3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.									



802.11ac HT40

We test all antenna's data, the data only show the mode 5 worst mode.

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5755									
V	11510	49.88	49.07	15.33	37.41	53.55	74	-20.45	PK
V	11510	42.84	49.07	15.33	37.41	46.51	54	-7.49	AV
V	17265	48.62	49.17	15.28	40.46	55.19	68.2	-13.01	PK
V	17265	41.46	49.17	15.28	40.46	48.03	54	-5.97	AV
H	11510	48.47	49.07	15.33	37.41	52.14	74	-21.86	PK
H	11510	42.36	49.07	15.33	37.41	46.03	54	-7.97	AV
H	17265	48.85	49.17	15.28	40.46	55.42	68.2	-12.78	PK
H	17265	40.29	49.17	15.28	40.46	46.86	54	-7.14	AV
operation frequency:5795									
V	11590	49.48	49.11	15.37	37.46	53.2	74	-20.80	PK
V	11590	41.33	49.11	15.37	37.46	45.05	54	-8.95	AV
V	17385	48.17	49.21	15.34	40.51	54.81	68.2	-13.39	PK
V	17385	40.85	49.21	15.34	40.51	47.49	54	-6.51	AV
H	11590	57.26	49.11	15.37	31.31	54.83	74	-19.17	PK
H	11590	44.78	49.11	15.37	31.31	42.35	54	-11.65	AV
H	17385	48.44	49.21	15.34	40.51	55.08	68.2	-13.12	PK
H	17385	40.63	49.21	15.34	40.51	47.27	54	-6.73	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

We test all antenna's data, the data only show the mode 5 worst mode.

Polar (H/V)	Frequency	Meter Reading	Pre- amplifier	Cable Loss	Antenna Factor	Emission Level	Limits	Margin	Detector Type
	(MHz)	(dBuV)	(dB)	(dB)	(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	
operation frequency:5775									
V	11550	48.38	49.07	15.33	37.41	52.05	74	-21.95	PK
V	11550	42.21	49.07	15.33	37.41	45.88	54	-8.12	AV
V	17325	49.69	49.17	15.28	40.46	56.26	68.2	-11.94	PK
V	17325	40.51	49.17	15.28	40.46	47.08	54	-6.92	AV
H	11550	48.36	49.07	15.33	37.41	52.03	74	-21.97	PK
H	11550	41.32	49.07	15.33	37.41	44.99	54	-9.01	AV
H	17325	48.98	49.17	15.28	40.46	55.55	68.2	-12.65	PK
H	17325	40.63	49.17	15.28	40.46	47.2	54	-6.80	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.



3.3 CONDUCTED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.407

(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	5150MHz	5725MHz
Stop Frequency	5250MHz	5850MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average	

3.3.2 TEST PROCEDURE

Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP



3.3.5 EUT OPERATING CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULT


The antenna gain is compensated in the test data.



We test all antenna's data, the data only show the antenna3 worst mode.

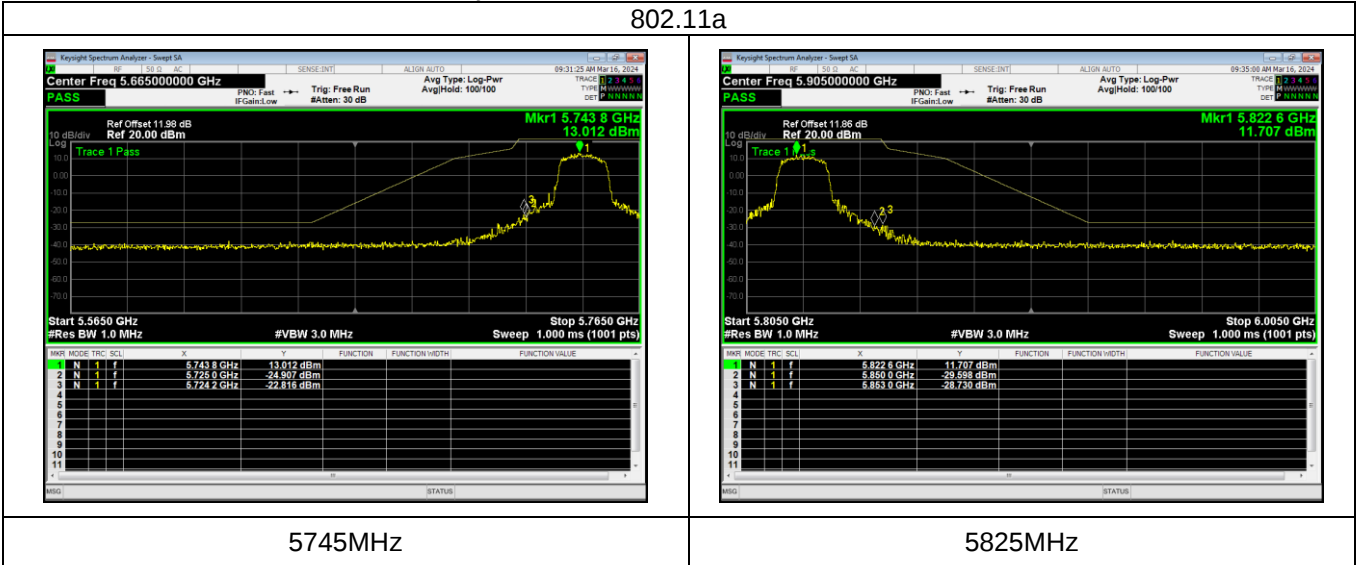


We test all antenna's data, the data only show the mode 5(antenna3) worst mode.

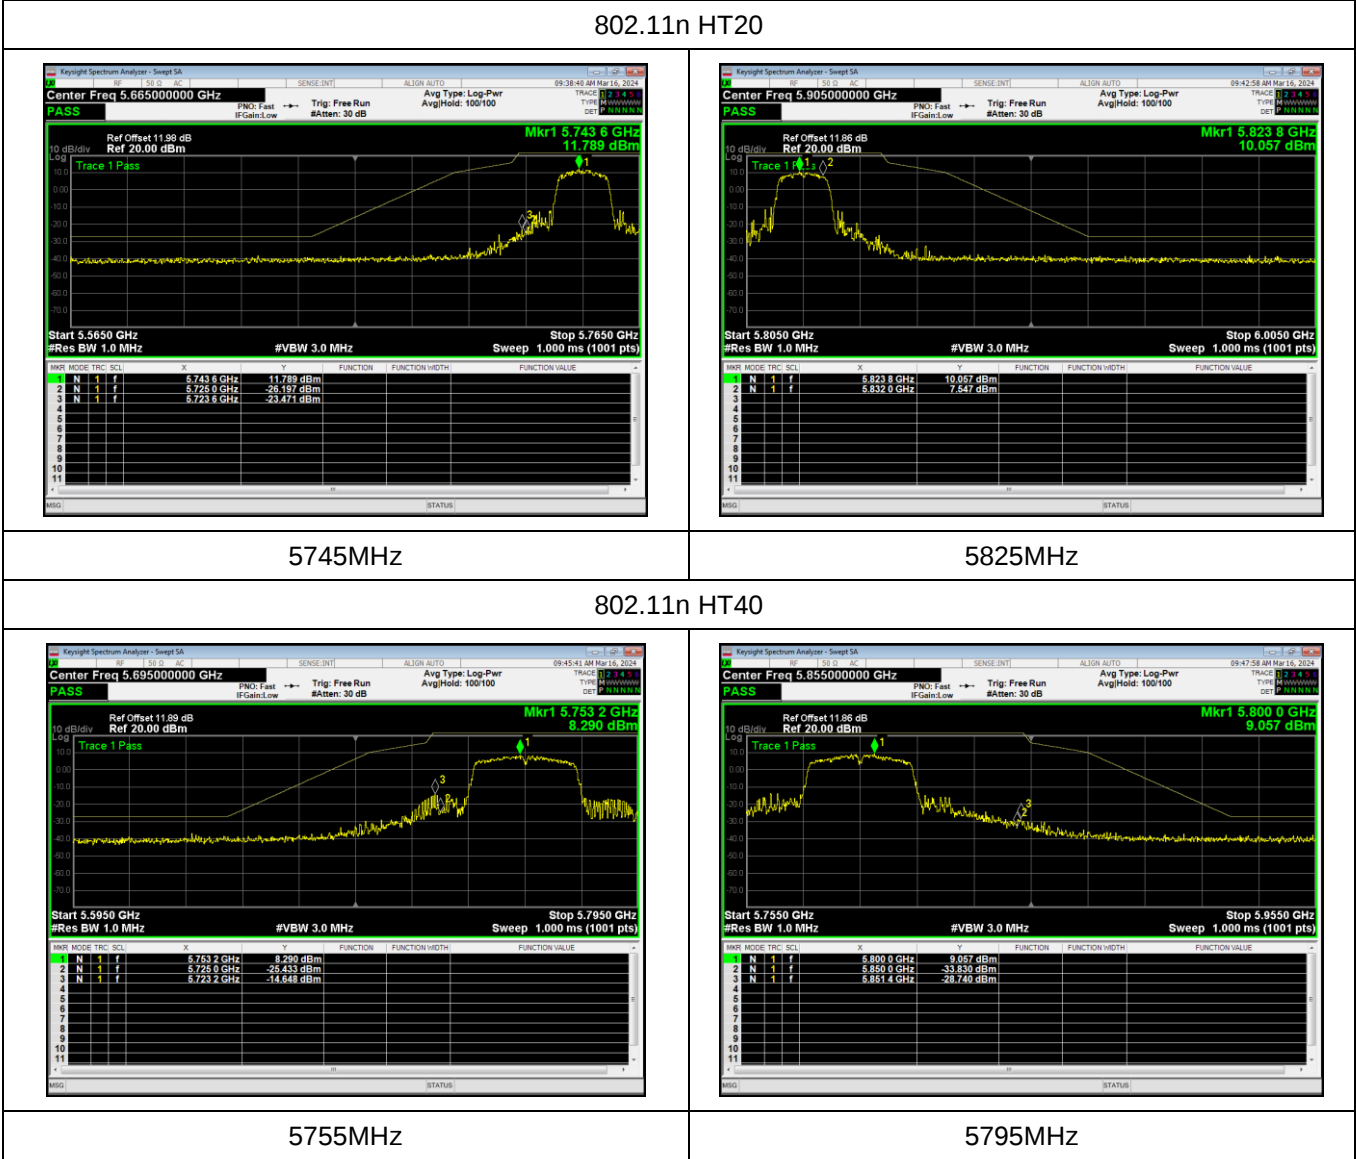



We test all antenna's data, the data only show the mode 5(antenna3) worst mode.


802.11ac HT20

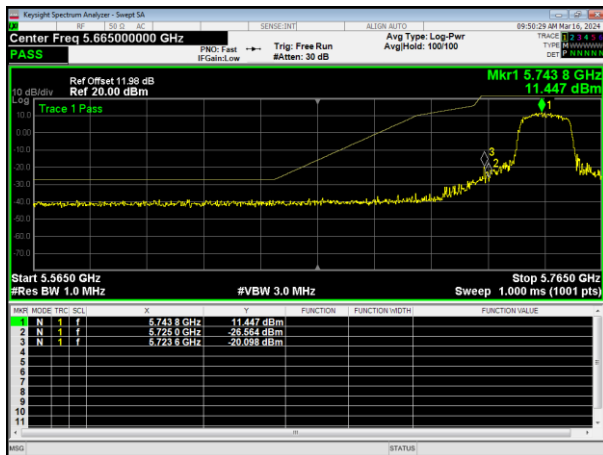

5745MHz

5825MHz


802.11ac HT40

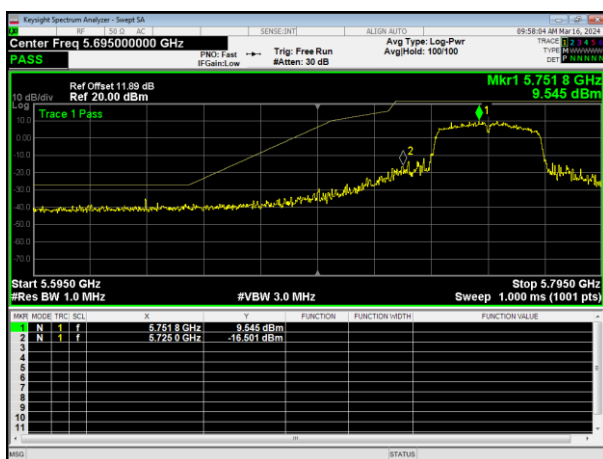

5755MHz

5795MHz

802.11ac HT80

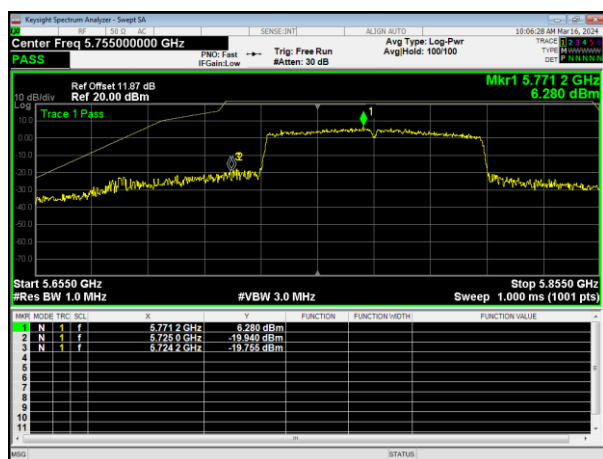

5775MHz

Note: The test result of ANT3 & ANT4 are all attenuated 3dB below the limit. So the MIMO mode is passed.



4. AVERAGING OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

4.1.1 TEST PROCEDURE

- a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW > the 20 dB bandwidth of the emission being measured
Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
VBW $\geq$ RBW
Sweep = auto
Detector function = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
Trace = max hold

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP



4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**4.1.5 TEST RESULTS**

Temperature:	25 °C	Relative Humidity:	60%
Pressure:	1012 hPa	Test Voltage :	AC 120V/60Hz

Antenna3

Mode	Test Channel	Averaging Output Power (dBm)	Duty factor (dB)	Total Output Power(dB)	LIMIT (dBm)
802.11a	Low	11.097	0.87	11.967	30
	Middle	10.304	0.87	11.174	30
	High	9.634	0.87	10.504	30
802.11n HT20	Low	11.047	0.13	11.177	30
	Middle	10.102	0.13	10.232	30
	High	10.109	0.13	10.239	30
802.11n HT40	Low	10.53	0.26	10.79	30
	High	10.959	0.26	11.219	30
802.11ac HT20	Low	11.112	0.13	11.242	30
	Middle	11.011	0.13	11.141	30
	High	10.494	0.13	10.624	30
802.11ac HT40	Low	11.227	0.47	11.697	30
	High	10.795	0.47	11.265	30
802.11ac HT80	/	10.739	0.83	11.569	30

Antenna4

Mode	Test Channel	Averaging Output Power (dBm)	Duty factor (dB)	Total Output Power(dB)	LIMIT (dBm)
802.11a	Low	11.215	0.87	12.085	30
	Middle	10.309	0.87	11.179	30
	High	10.794	0.87	11.664	30
802.11n HT20	Low	11.127	0.16	11.287	30
	Middle	11.099	0.16	11.259	30
	High	10.662	0.16	10.822	30
802.11n HT40	Low	10.507	0.32	10.827	30
	High	11.042	0.32	11.362	30
802.11ac HT20	Low	11.006	0.31	11.316	30
	Middle	10.454	0.31	10.764	30
	High	9.985	0.31	10.295	30
802.11ac HT40	Low	10.443	0.26	10.703	30
	High	10.42	0.26	10.68	30
802.11ac HT80	/	11.055	0.5	11.555	30




For MIMO

Mode	Test Channel	Antenna	Total Output Power(dB)	Limit (dBm)	Result
802.11n20	Low	Antenna3+ Antenna4	14.24	30.00	PASS
	Middle		13.79	30.00	PASS
	High		13.55	30.00	PASS
802.11n40	Low		13.82	30.00	PASS
	High		14.30	30.00	PASS
802.11ac HT20	Low		14.29	30.00	PASS
	Middle		13.97	30.00	PASS
	High		13.47	30.00	PASS
802.11ac HT40	Low		14.24	30.00	PASS
	High		13.99	30.00	PASS
802.11ac HT80	/		14.57	30.00	PASS




Antenna3


802.11a

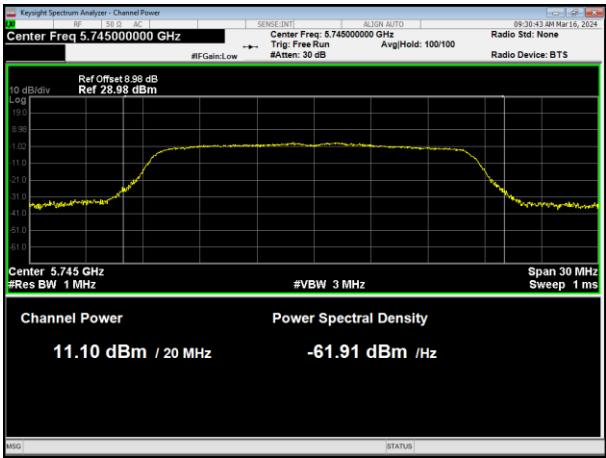


802.11n HT20

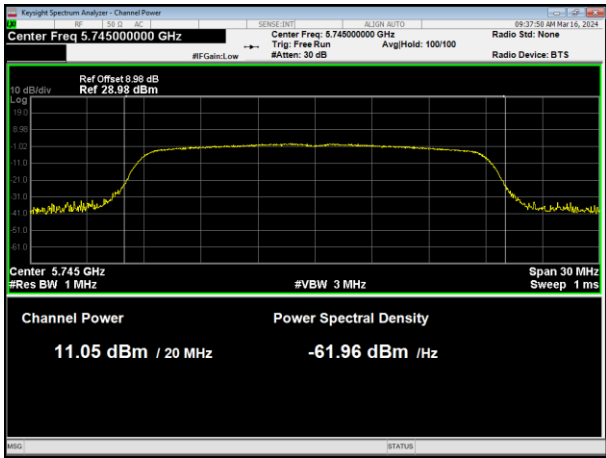


5745MHz

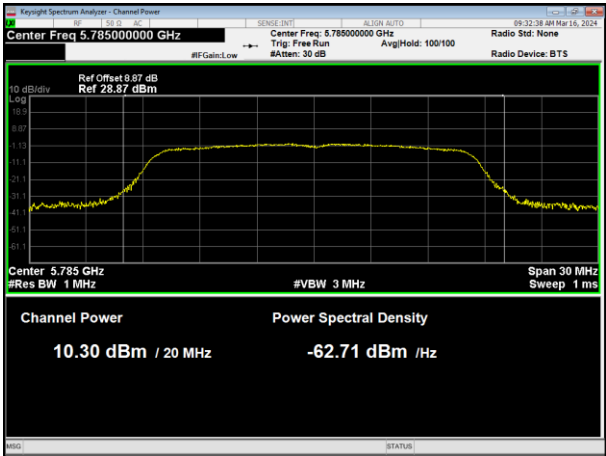


5745MHz

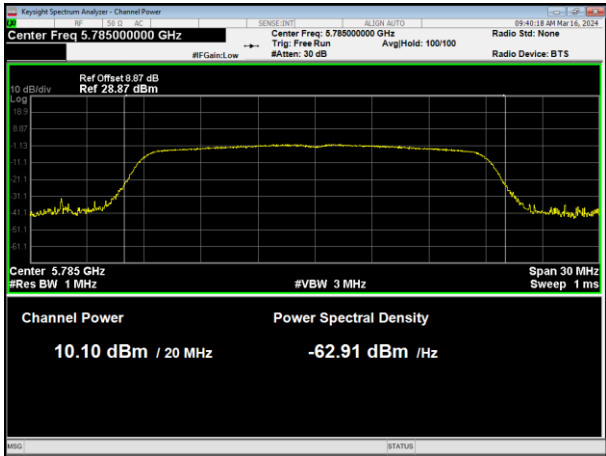

5785MHz

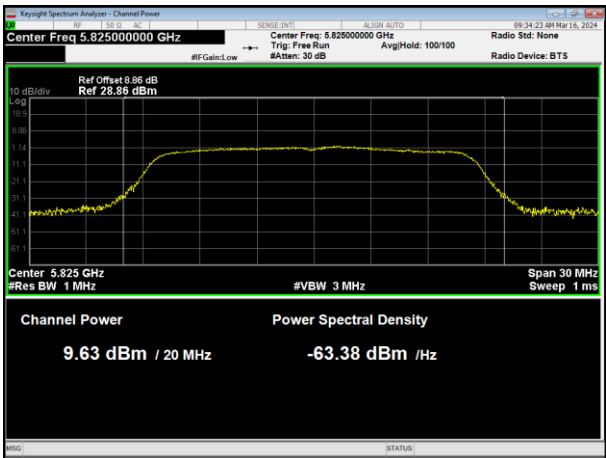






5785MHz

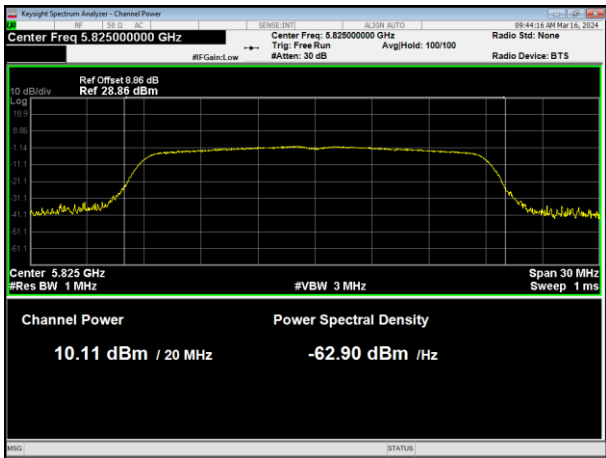

5825MHz


5825MHz

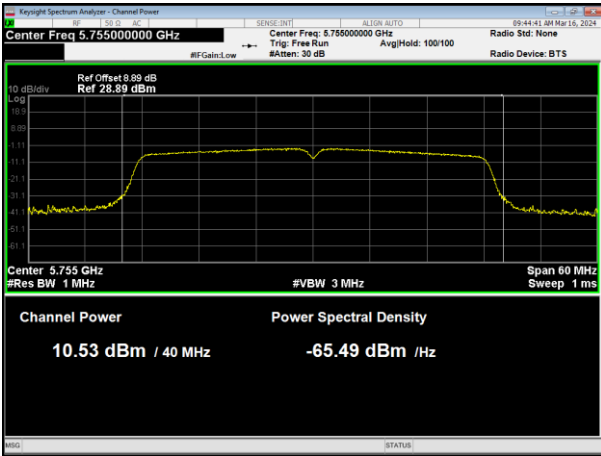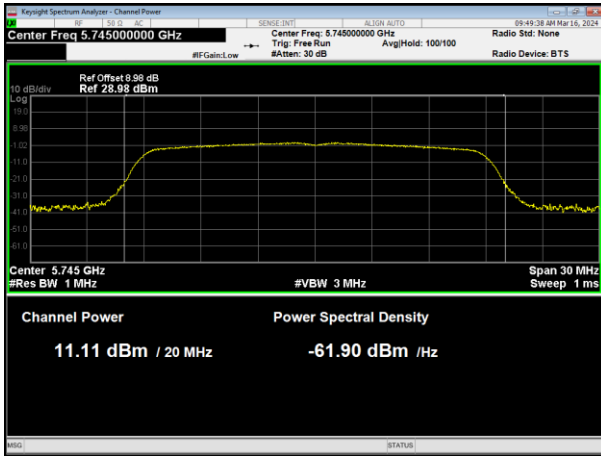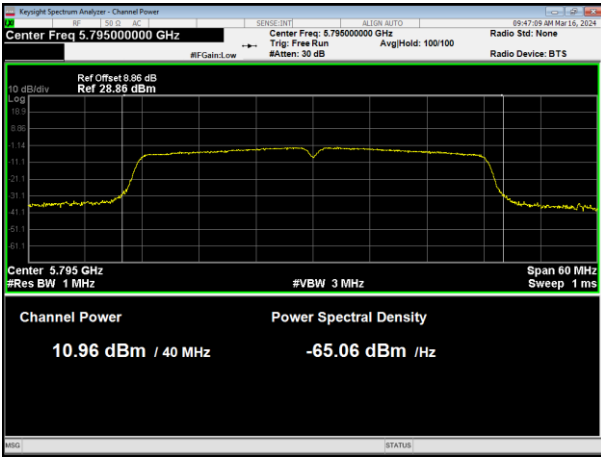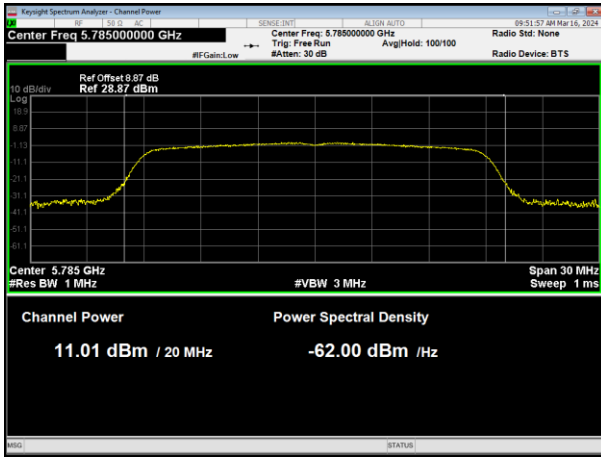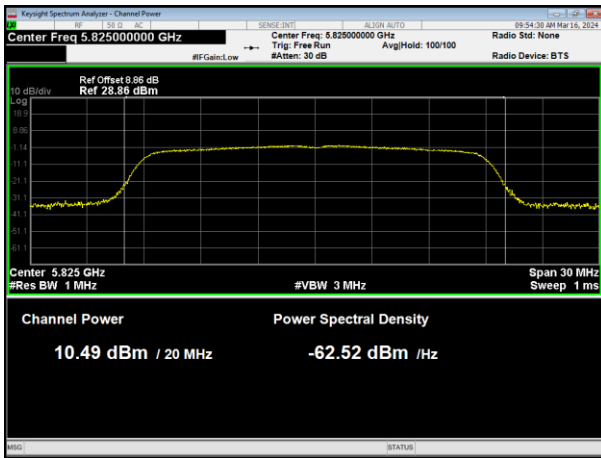


802.11n HT40 	802.11ac HT20 
5755MHz 	5745MHz 
5795MHz 	5785MHz 
	5825MHz




802.11ac HT40

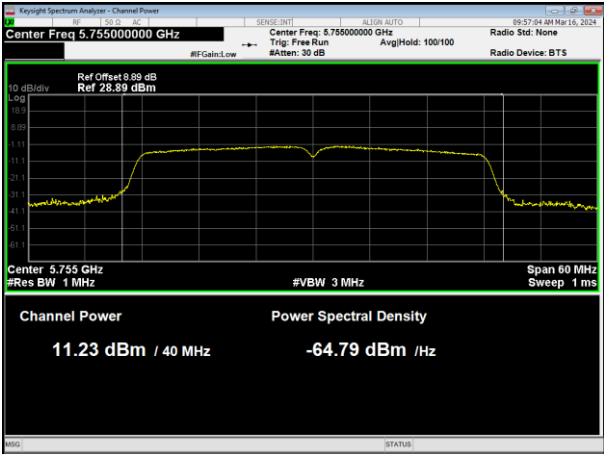

802.11ac HT80

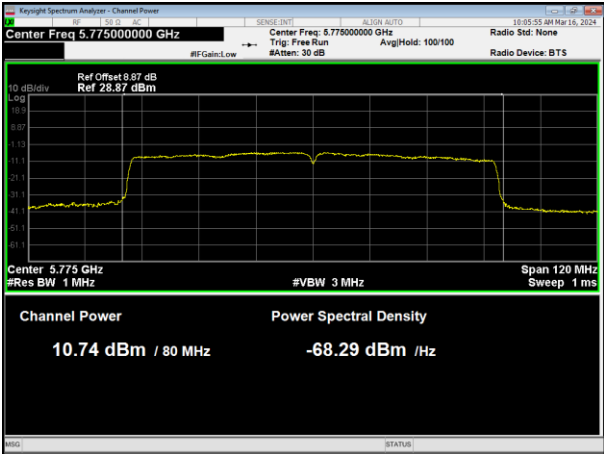

5755MHz

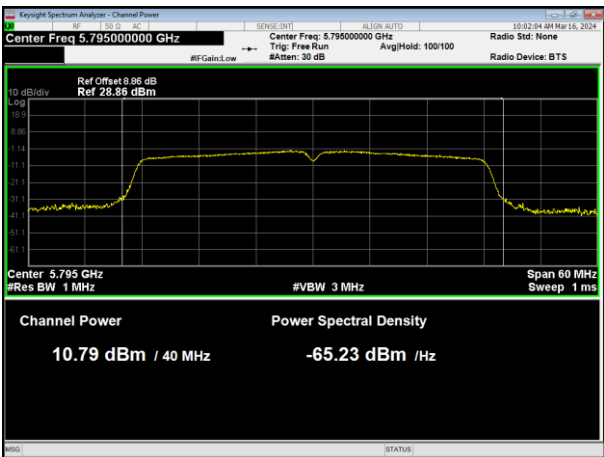


5775MHz

5795MHz




Antenna4


802.11a

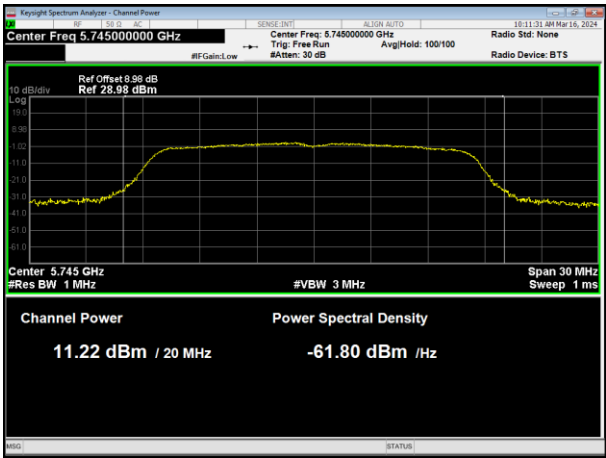


802.11n HT20

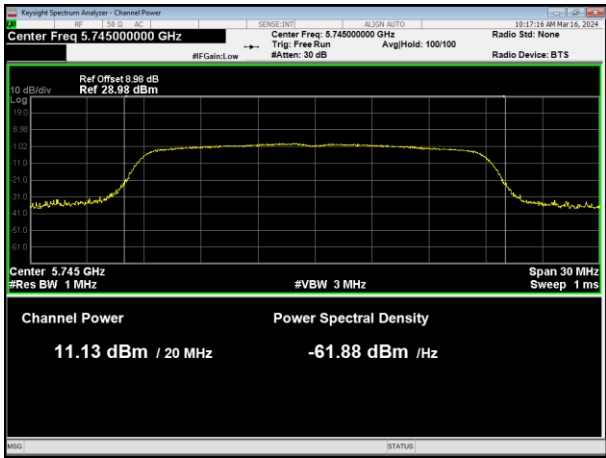


5745MHz

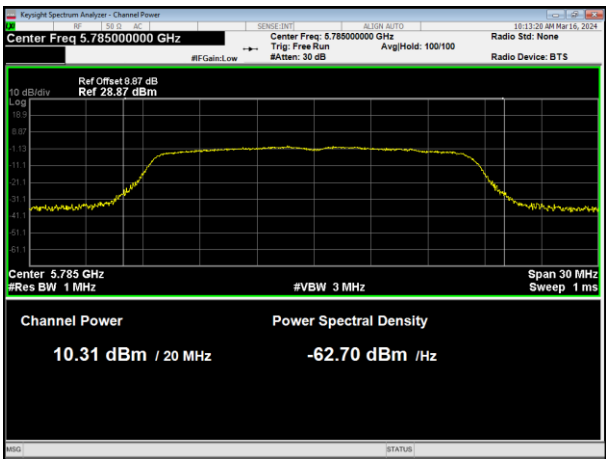


5745MHz

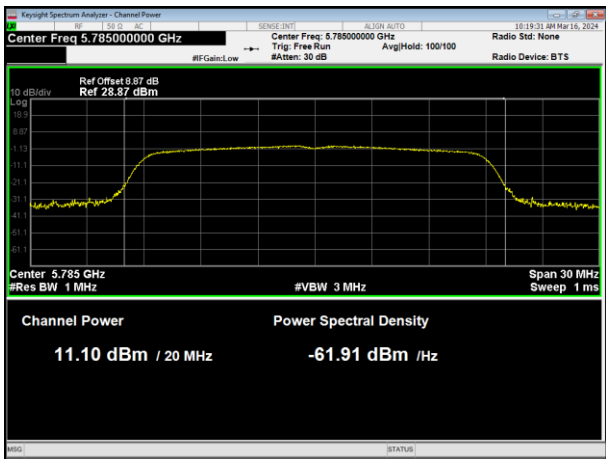

5785MHz

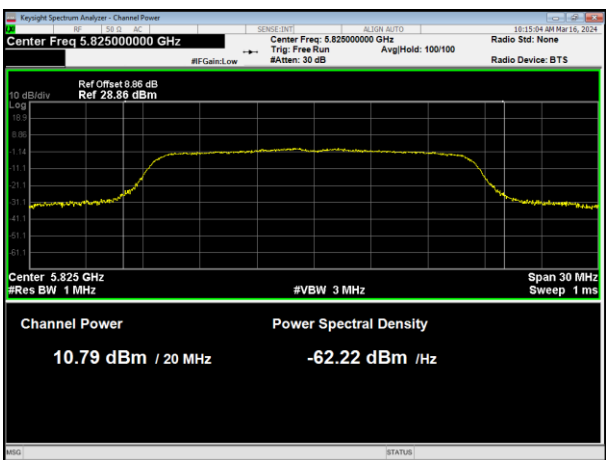

5785MHz

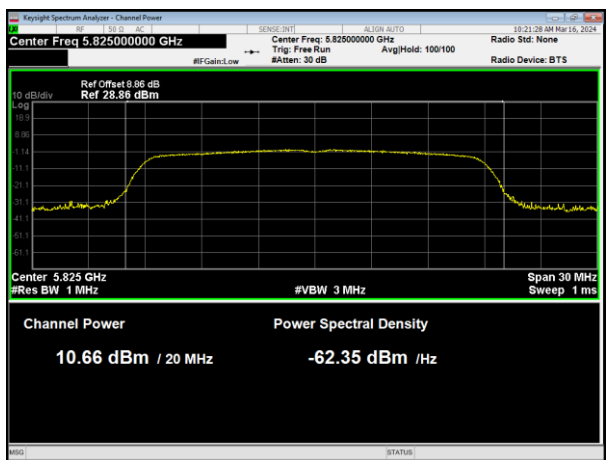


5825MHz


5825MHz




802.11n HT40

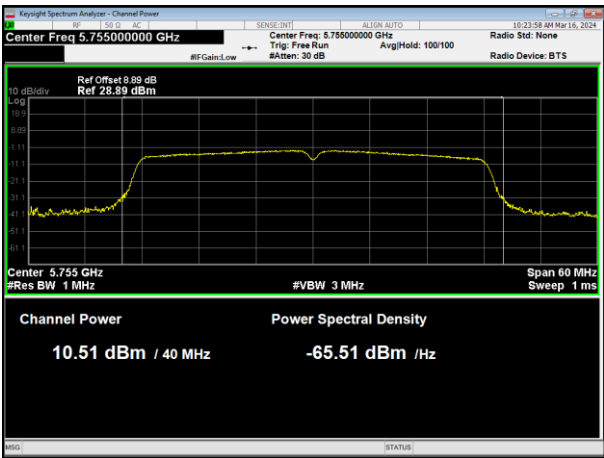


802.11ac HT20

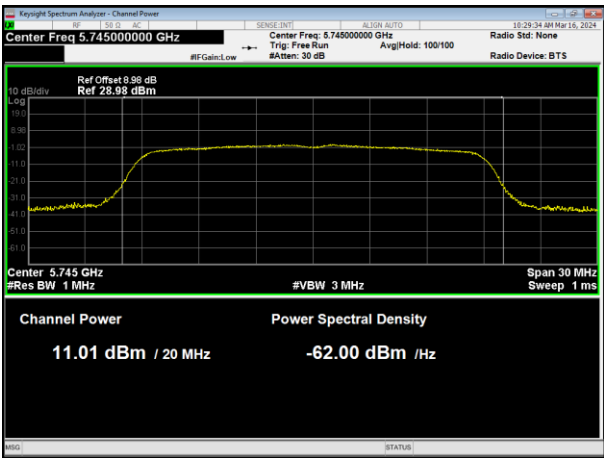

5755MHz

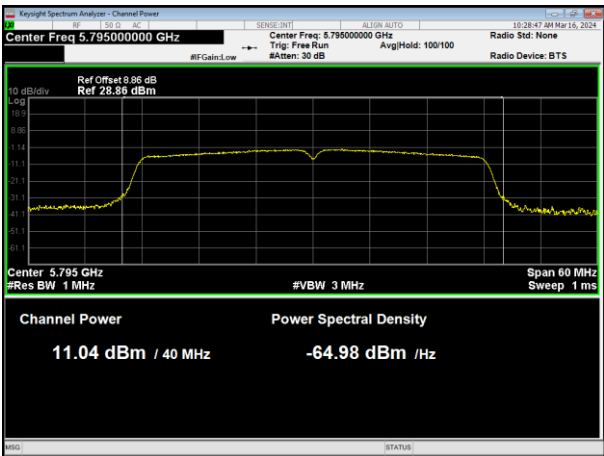


5745MHz

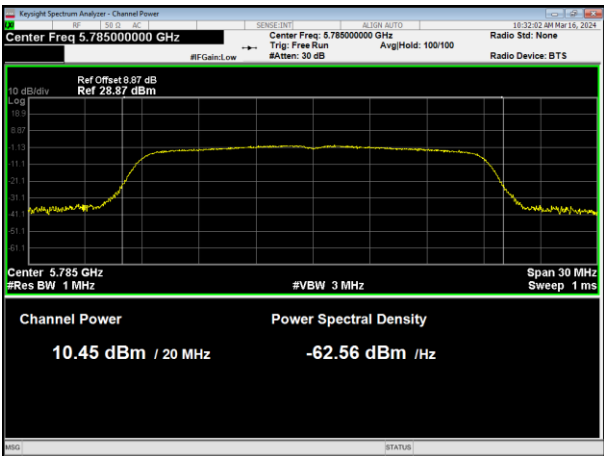

5795MHz




5785MHz

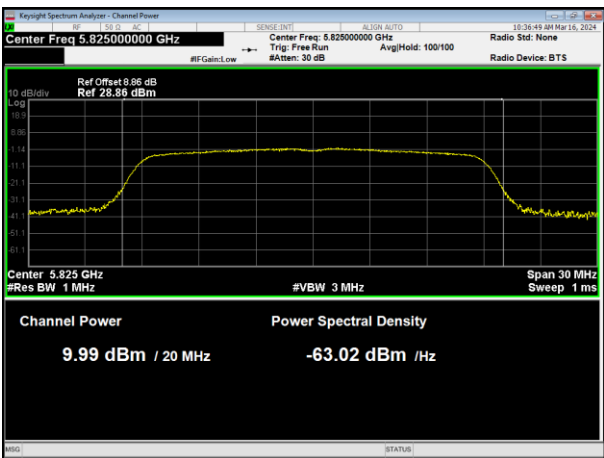


5825MHz




802.11ac HT40

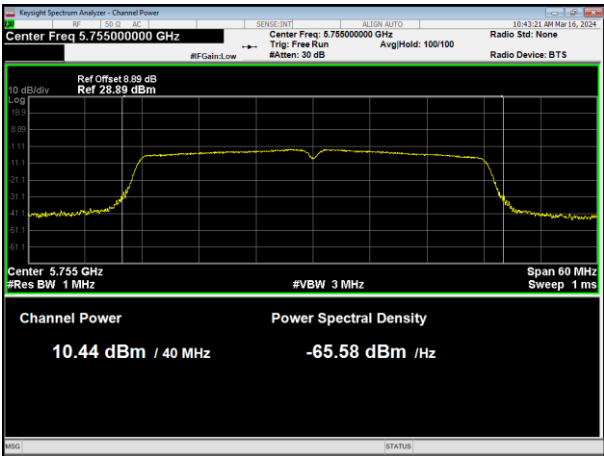

802.11ac HT80

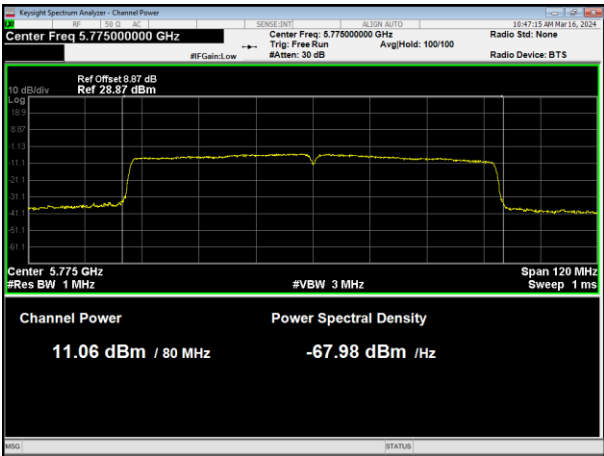

5755MHz

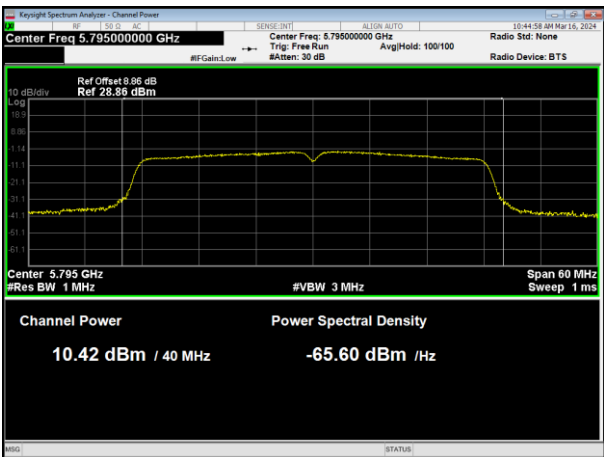

5775MHz

5795MHz



5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW $\geq$ 1MHz for band 1 RBW $\geq$ 510KHz for band 4
VB	VBW $\geq$ 3RBW
Detector	RMS (i.e., power averaging).
Trace	Max Hold
Sweep Time	Auto


5.1.1 TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows FCC KDB 789033 D02.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
4. For U-NII1, U-NII-2A, U-NII-2C Band:
Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
For U-NII-3 Band:
Set RBW=510 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
5. Use the cursor on spectrum to peak search the highest level of trace
6. Record the max. reading and add 10 log(1/duty cycle).
we test all antennas, the antenna 1 was worst mode and the data recording in the report.
7. Duty factor Reference is made to the test results in Section 7.1.5.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

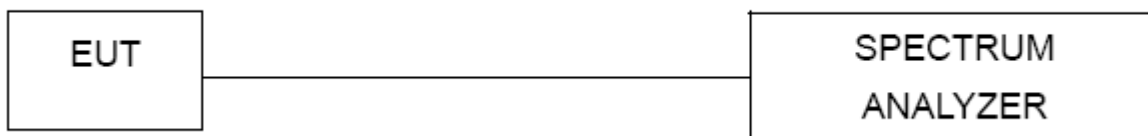

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

**5.1.5 TEST RESULTS****Antenna3**

	Mode	Test Channel	Reading Level (dBm)	Duty factor (dB)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
Band4	802.11a	Low	-1.257	0.87	-0.387	30.00	PASS
		Middle	-2.241	0.87	-1.371	30.00	PASS
		High	-2.533	0.87	-1.663	30.00	PASS
	802.11n20	Low	-1.913	0.13	-1.783	30.00	PASS
		Middle	-2.752	0.13	-2.622	30.00	PASS
		High	-3.052	0.13	-2.922	30.00	PASS
	802.11n40	Low	-5.298	0.26	-5.038	30.00	PASS
		High	-4.741	0.26	-4.481	30.00	PASS
	802.11ac20	Low	-1.561	0.13	-1.431	30.00	PASS
		Middle	-1.862	0.13	-1.732	30.00	PASS
		High	-2.286	0.13	-2.156	30.00	PASS
	802.11ac40	Low	-4.54	0.47	-4.07	30.00	PASS
		High	-4.978	0.47	-4.508	30.00	PASS
	802.11ac80	/	-7.915	0.83	-7.085	30.00	PASS

Antenna4

	Mode	Test Channel	Reading Level (dBm)	Duty factor (dB)	PSD (dBm/500kHz)	Limit (dBm/500kHz)	Result
Band4	802.11a	Low	-1.121	0.87	-0.251	30.00	PASS
		Middle	-1.829	0.87	-0.959	30.00	PASS
		High	-1.547	0.87	-0.677	30.00	PASS
	802.11n20	Low	-1.22	0.16	-1.06	30.00	PASS
		Middle	-1.617	0.16	-1.457	30.00	PASS
		High	-2.157	0.16	-1.997	30.00	PASS
	802.11n40	Low	-5.443	0.32	-5.123	30.00	PASS
		High	-3.607	0.32	-3.287	30.00	PASS
	802.11ac20	Low	-1.713	0.31	-1.403	30.00	PASS
		Middle	-2.269	0.31	-1.959	30.00	PASS
		High	-2.547	0.31	-2.237	30.00	PASS
	802.11ac40	Low	-5.233	0.26	-4.973	30.00	PASS
		High	-5.177	0.26	-4.917	30.00	PASS
	802.11ac80	/	-7.837	0.5	-7.337	30.00	PASS




For MIMO

Mode	Test Channel	Antenna	PSD (dBm/ 500kHz)	Limit (dBm/ 500kHz)	Result
802.11n20	Low	Antenna3+ Antenna4	1.60	30.00	PASS
	Middle		1.01	30.00	PASS
	High		0.58	30.00	PASS
802.11n40	Low		-2.07	30.00	PASS
	High		-0.83	30.00	PASS
802.11ac20	Low		1.59	30.00	PASS
	Middle		1.17	30.00	PASS
	High		0.81	30.00	PASS
802.11ac40	Low		-1.49	30.00	PASS
	High		-1.70	30.00	PASS
802.11ac80	/		-4.20	30.00	PASS




Antenna3

802.11a

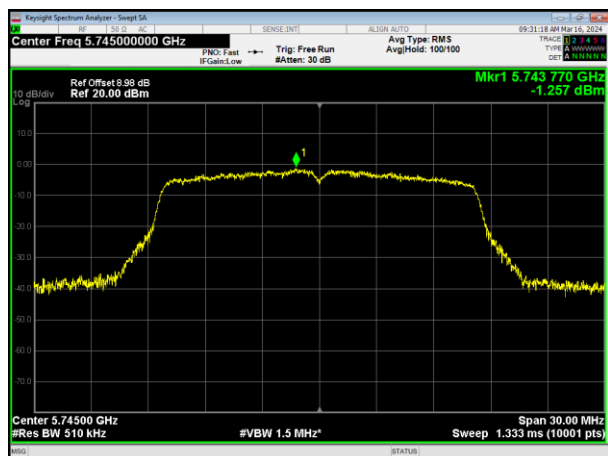


802.11n HT20

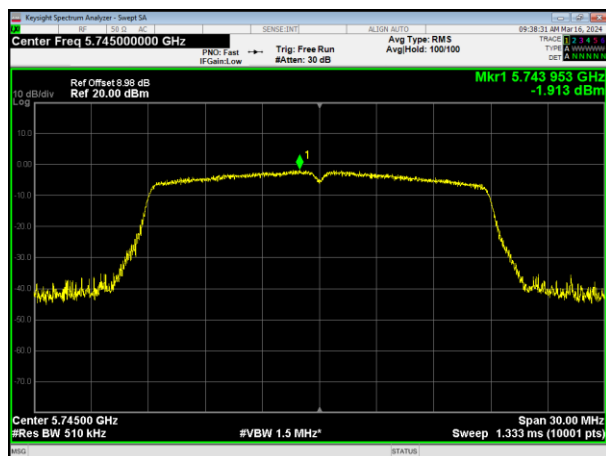


5745MHz




5745MHz

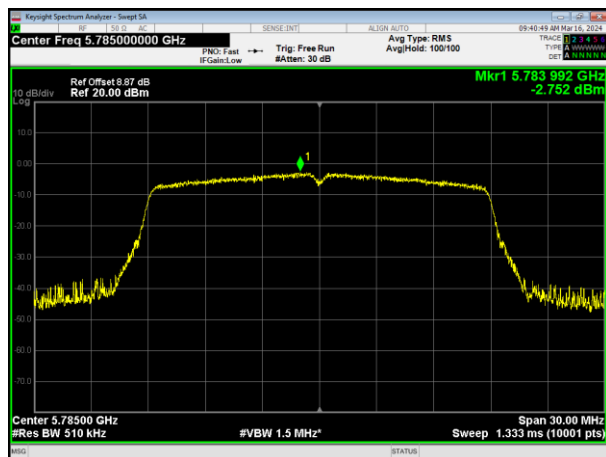

5785MHz

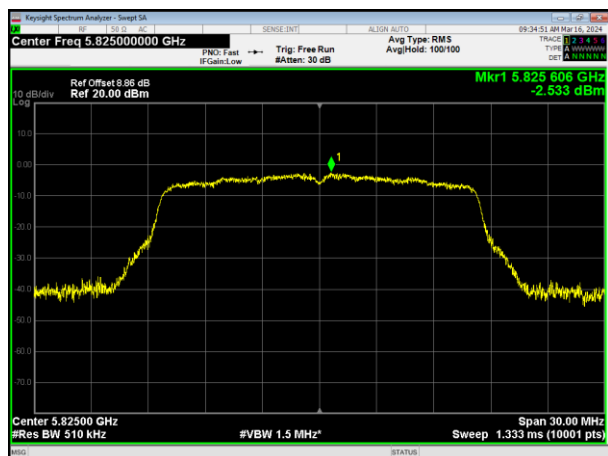

5785MHz

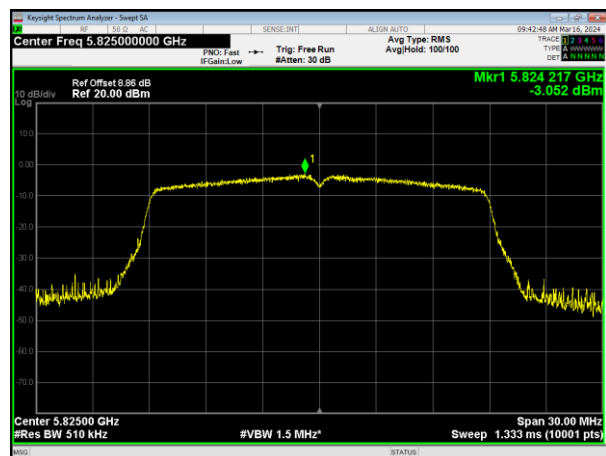

5825MHz


5825MHz




802.11n HT40




802.11ac HT20

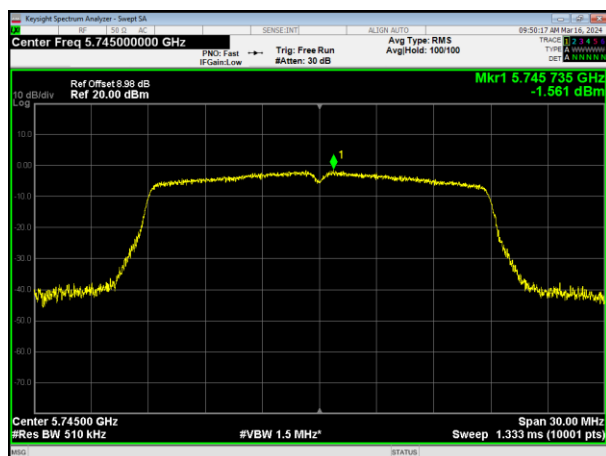


5755MHz

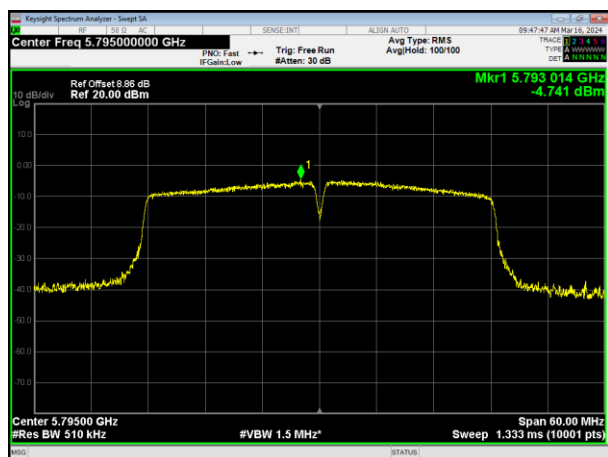

5745MHz

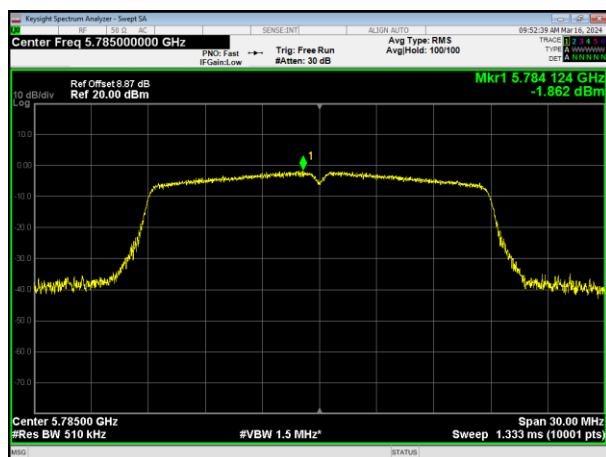

5795MHz

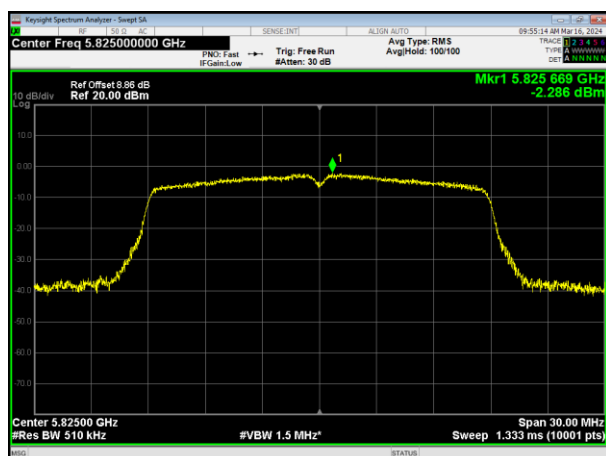

5785MHz

5825MHz




802.11ac HT40	802.11ac HT80
5755MHz	5775MHz
5795MHz	




Antenna4


802.11a

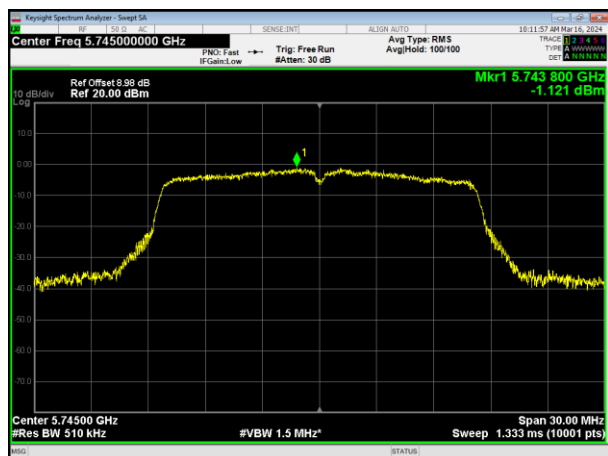

802.11n HT20

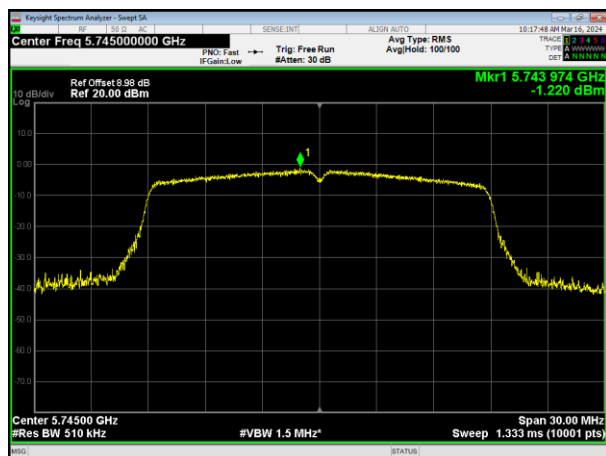


5745MHz

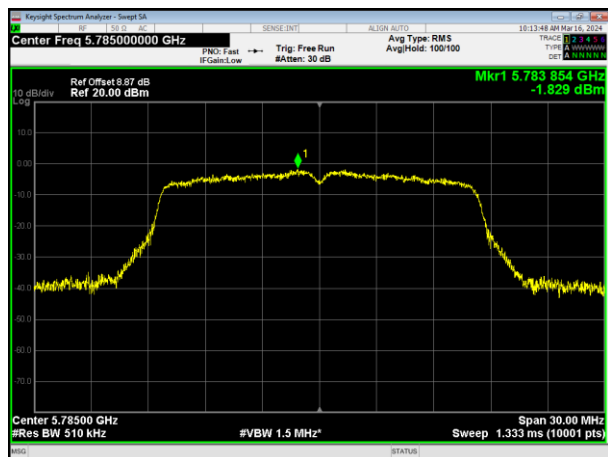


5745MHz



5785MHz

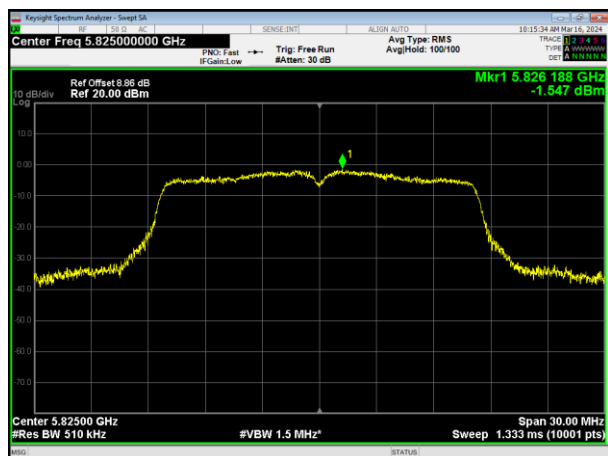

5785MHz

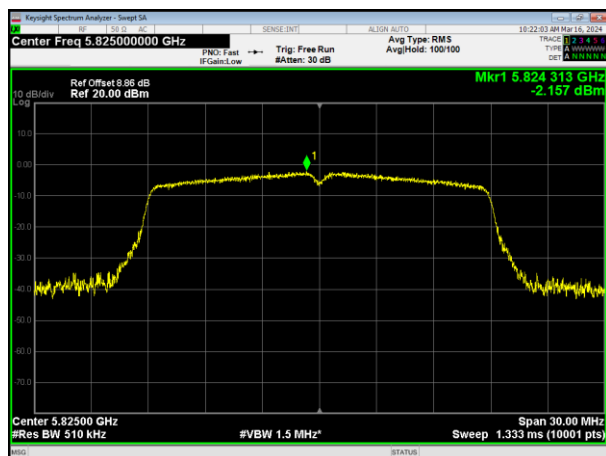


5825MHz


5825MHz




802.11n HT40

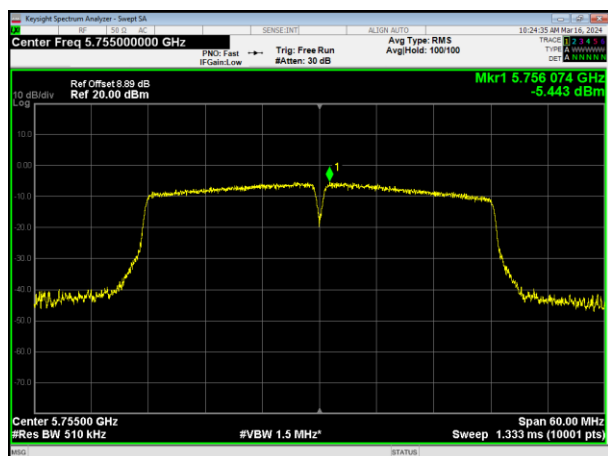


802.11ac HT20

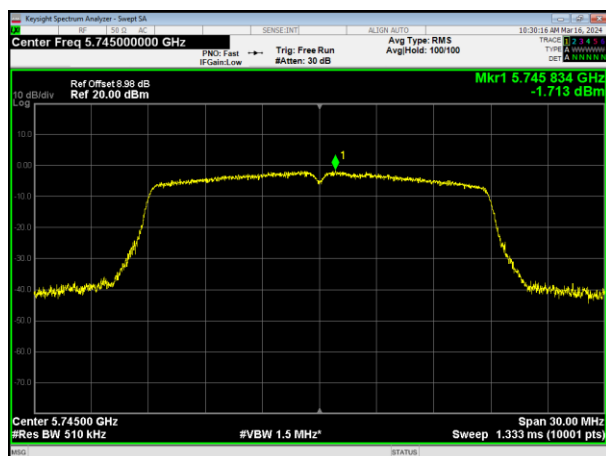


5755MHz

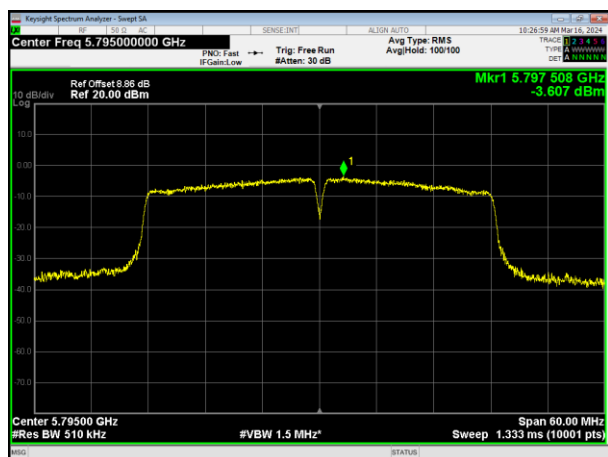

5745MHz

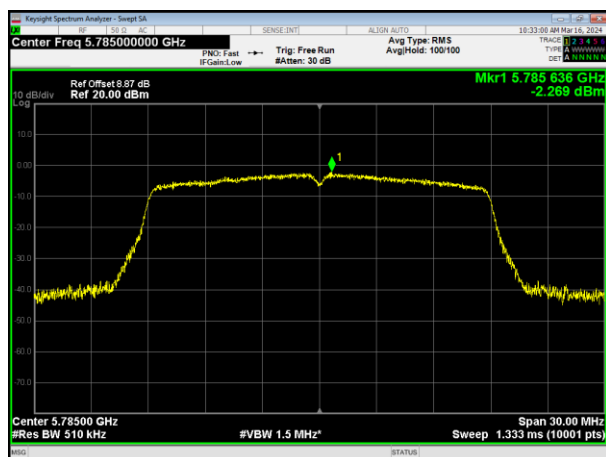


5795MHz

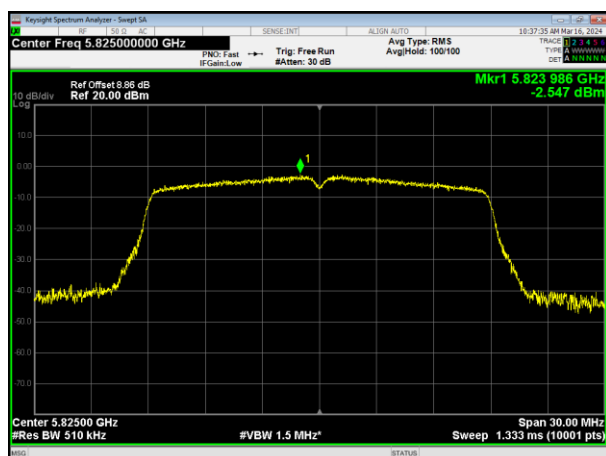

5785MHz

5825MHz

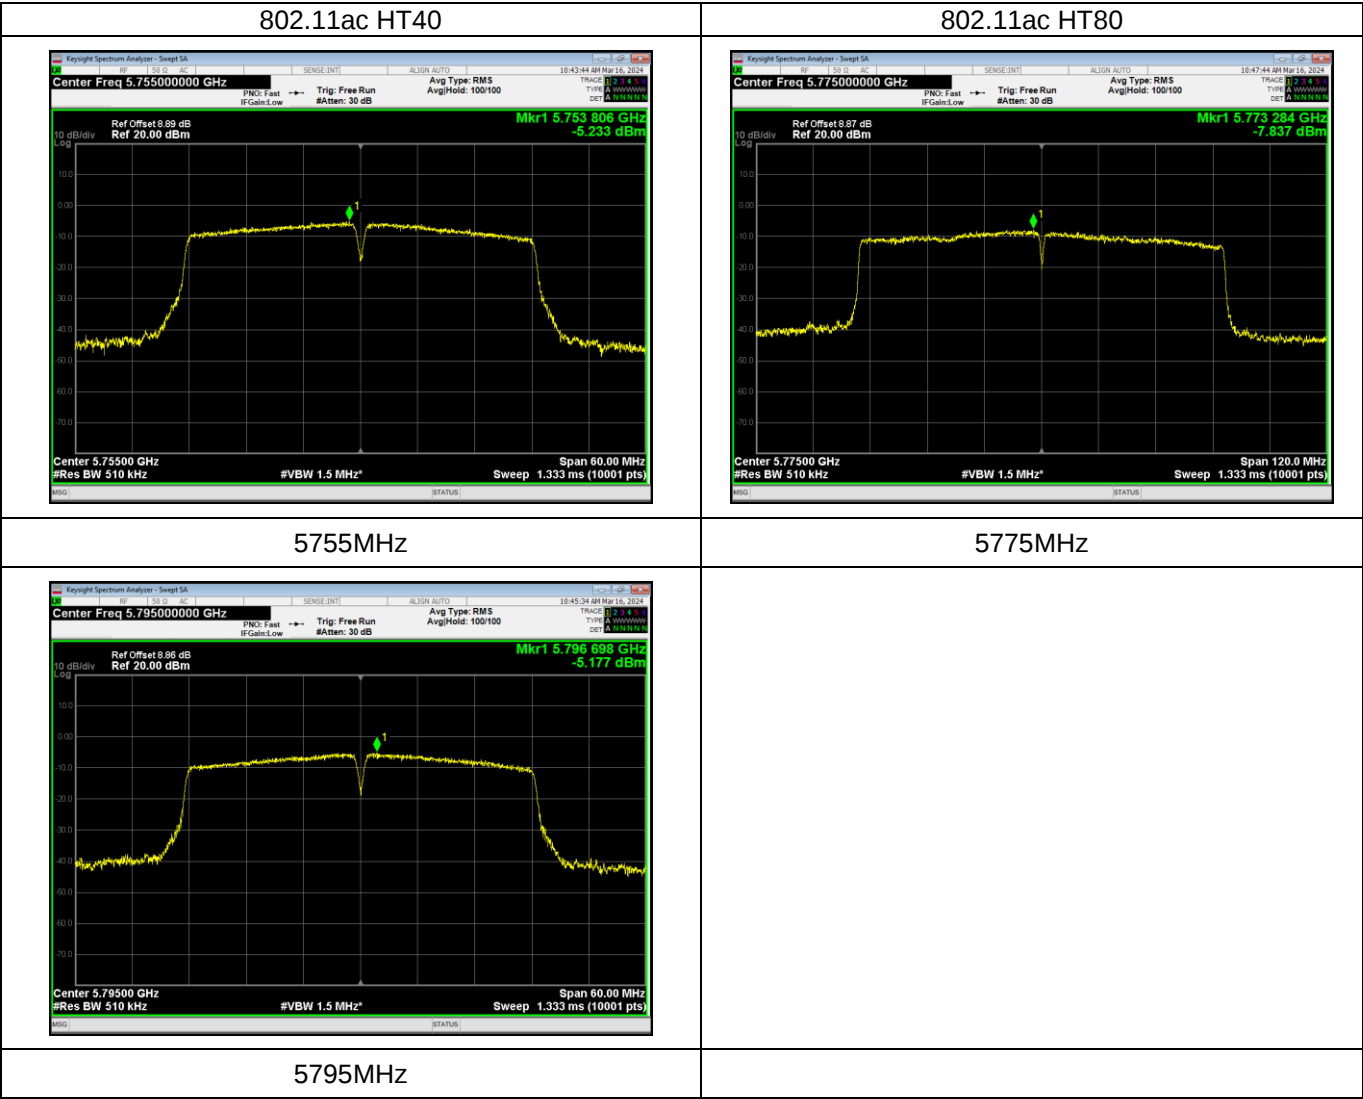



6. 6DB BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.

The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

6.1.1 TEST PROCEDURE

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	30MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP



6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.









6.1.5 TEST RESULTS

		Test Channel	6dB Bandwidth (MHz)		6dB Bandwidth Limit (MHz)	Result
			Antenna3	Antenna4		
Band 4	802.11a	Low	15.404	16.001	>0.5	Pass
		Middle	15.899	16.34	>0.5	Pass
		High	15.628	16.005	>0.5	Pass
	802.11n HT20	Low	16.504	15.047	>0.5	Pass
		Middle	15.083	15.031	>0.5	Pass
		High	15.273	17.32	>0.5	Pass
	802.11n HT40	Low	35.048	35.029	>0.5	Pass
		High	33.865	35.073	>0.5	Pass
	802.11ac HT20	Low	16.296	16.011	>0.5	Pass
		Middle	15.394	15.064	>0.5	Pass
		High	15.07	16.942	>0.5	Pass
	802.11ac HT40	Low	35.096	35.064	>0.5	Pass
		High	33.821	35.106	>0.5	Pass
	802.11ac HT80	/	75.093	75.123	>0.5	Pass




Antenna3

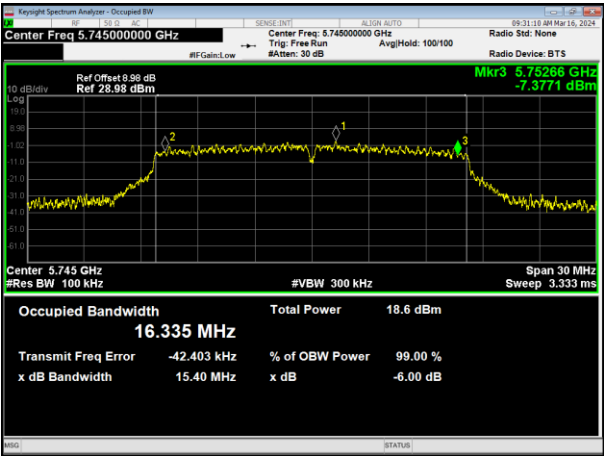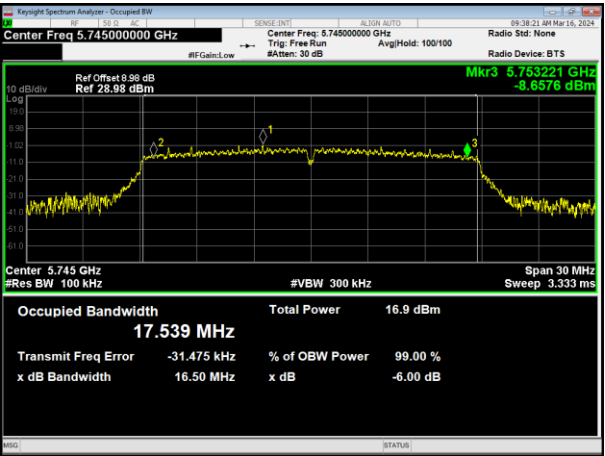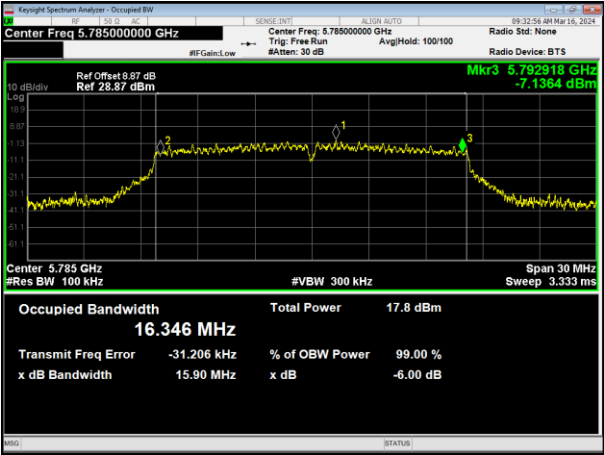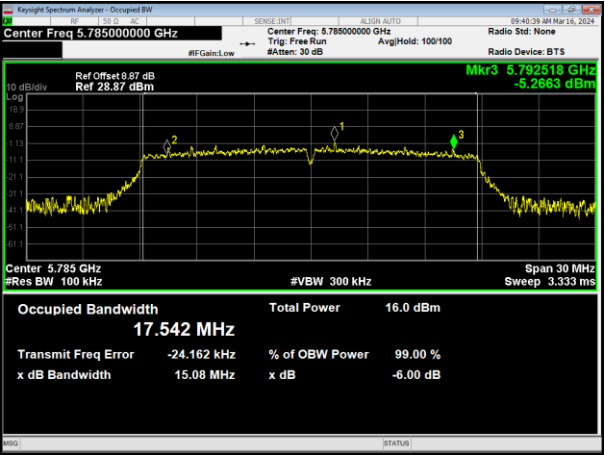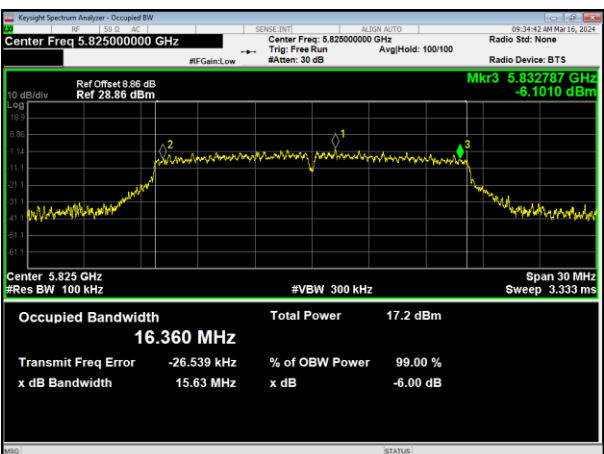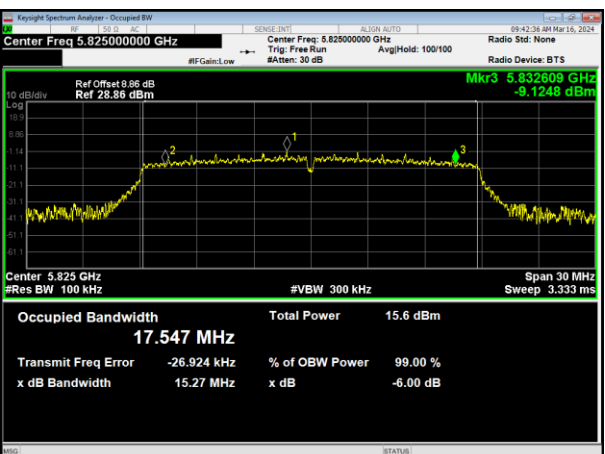
802.11a  Center Freq 5.745000000 GHz Center Freq: 5.745000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 9.98 dB Ref 28.98 dBm Mkr3 5.75266 GHz -7.3771 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td></tr><tr><td>16.335 MHz</td><td>18.6 dBm</td></tr><tr><td>Transmit Freq Error</td><td>% of OBW Power</td></tr><tr><td>-42.403 kHz</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>x dB</td></tr><tr><td>15.40 MHz</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	Total Power	16.335 MHz	18.6 dBm	Transmit Freq Error	% of OBW Power	-42.403 kHz	99.00 %	x dB Bandwidth	x dB	15.40 MHz	-6.00 dB	802.11n HT20  Center Freq 5.745000000 GHz Center Freq: 5.745000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 9.98 dB Ref 28.98 dBm Mkr3 5.753221 GHz -8.6576 dBm Center 5.745 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td></tr><tr><td>17.539 MHz</td><td>16.9 dBm</td></tr><tr><td>Transmit Freq Error</td><td>% of OBW Power</td></tr><tr><td>-31.475 kHz</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>x dB</td></tr><tr><td>16.50 MHz</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	Total Power	17.539 MHz	16.9 dBm	Transmit Freq Error	% of OBW Power	-31.475 kHz	99.00 %	x dB Bandwidth	x dB	16.50 MHz	-6.00 dB
Occupied Bandwidth	Total Power																								
16.335 MHz	18.6 dBm																								
Transmit Freq Error	% of OBW Power																								
-42.403 kHz	99.00 %																								
x dB Bandwidth	x dB																								
15.40 MHz	-6.00 dB																								
Occupied Bandwidth	Total Power																								
17.539 MHz	16.9 dBm																								
Transmit Freq Error	% of OBW Power																								
-31.475 kHz	99.00 %																								
x dB Bandwidth	x dB																								
16.50 MHz	-6.00 dB																								
5745MHz  Center Freq 5.785000000 GHz Center Freq: 5.785000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 9.87 dB Ref 28.87 dBm Mkr3 5.792918 GHz -7.1364 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td></tr><tr><td>16.346 MHz</td><td>17.8 dBm</td></tr><tr><td>Transmit Freq Error</td><td>% of OBW Power</td></tr><tr><td>-31.206 kHz</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>x dB</td></tr><tr><td>15.90 MHz</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	Total Power	16.346 MHz	17.8 dBm	Transmit Freq Error	% of OBW Power	-31.206 kHz	99.00 %	x dB Bandwidth	x dB	15.90 MHz	-6.00 dB	5745MHz  Center Freq 5.785000000 GHz Center Freq: 5.785000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 9.87 dB Ref 28.87 dBm Mkr3 5.792518 GHz -5.2663 dBm Center 5.785 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td></tr><tr><td>17.542 MHz</td><td>16.0 dBm</td></tr><tr><td>Transmit Freq Error</td><td>% of OBW Power</td></tr><tr><td>-24.162 kHz</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>x dB</td></tr><tr><td>15.08 MHz</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	Total Power	17.542 MHz	16.0 dBm	Transmit Freq Error	% of OBW Power	-24.162 kHz	99.00 %	x dB Bandwidth	x dB	15.08 MHz	-6.00 dB
Occupied Bandwidth	Total Power																								
16.346 MHz	17.8 dBm																								
Transmit Freq Error	% of OBW Power																								
-31.206 kHz	99.00 %																								
x dB Bandwidth	x dB																								
15.90 MHz	-6.00 dB																								
Occupied Bandwidth	Total Power																								
17.542 MHz	16.0 dBm																								
Transmit Freq Error	% of OBW Power																								
-24.162 kHz	99.00 %																								
x dB Bandwidth	x dB																								
15.08 MHz	-6.00 dB																								
5785MHz  Center Freq 5.825000000 GHz Center Freq: 5.825000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 9.86 dB Ref 28.86 dBm Mkr3 5.832787 GHz -6.1010 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td></tr><tr><td>16.360 MHz</td><td>17.2 dBm</td></tr><tr><td>Transmit Freq Error</td><td>% of OBW Power</td></tr><tr><td>-26.539 kHz</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>x dB</td></tr><tr><td>15.63 MHz</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	Total Power	16.360 MHz	17.2 dBm	Transmit Freq Error	% of OBW Power	-26.539 kHz	99.00 %	x dB Bandwidth	x dB	15.63 MHz	-6.00 dB	5785MHz  Center Freq 5.825000000 GHz Center Freq: 5.825000000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS Ref Offset 9.86 dB Ref 28.86 dBm Mkr3 5.832609 GHz -9.1249 dBm Center 5.825 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 3.333 ms <table><tr><td>Occupied Bandwidth</td><td>Total Power</td></tr><tr><td>17.547 MHz</td><td>15.6 dBm</td></tr><tr><td>Transmit Freq Error</td><td>% of OBW Power</td></tr><tr><td>-26.924 kHz</td><td>99.00 %</td></tr><tr><td>x dB Bandwidth</td><td>x dB</td></tr><tr><td>15.27 MHz</td><td>-6.00 dB</td></tr></table>	Occupied Bandwidth	Total Power	17.547 MHz	15.6 dBm	Transmit Freq Error	% of OBW Power	-26.924 kHz	99.00 %	x dB Bandwidth	x dB	15.27 MHz	-6.00 dB
Occupied Bandwidth	Total Power																								
16.360 MHz	17.2 dBm																								
Transmit Freq Error	% of OBW Power																								
-26.539 kHz	99.00 %																								
x dB Bandwidth	x dB																								
15.63 MHz	-6.00 dB																								
Occupied Bandwidth	Total Power																								
17.547 MHz	15.6 dBm																								
Transmit Freq Error	% of OBW Power																								
-26.924 kHz	99.00 %																								
x dB Bandwidth	x dB																								
15.27 MHz	-6.00 dB																								
5825MHz	5825MHz																								




802.11n HT40

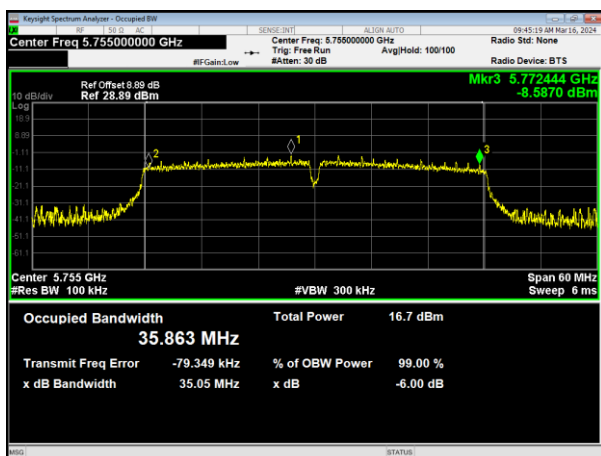


802.11ac HT20

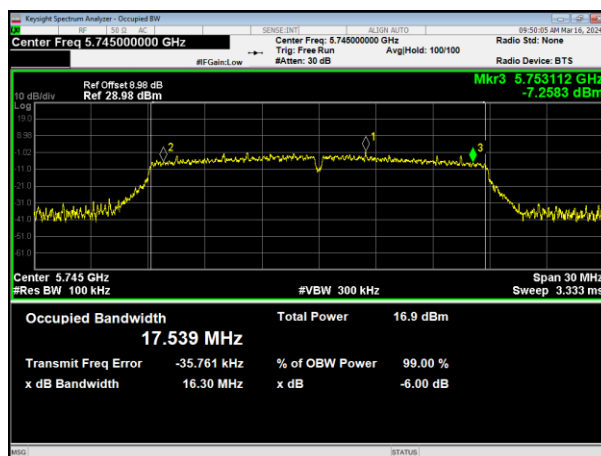

5755MHz

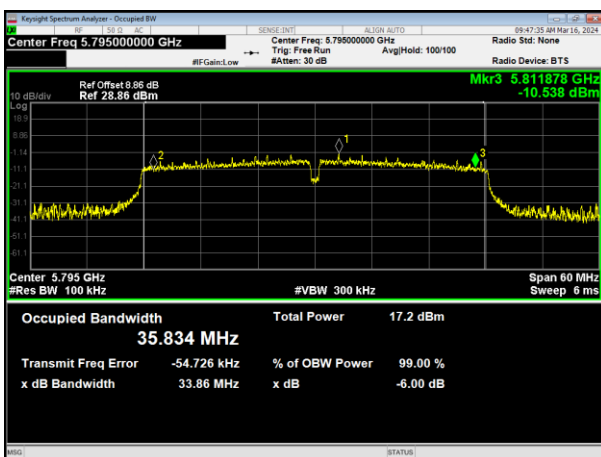


5745MHz

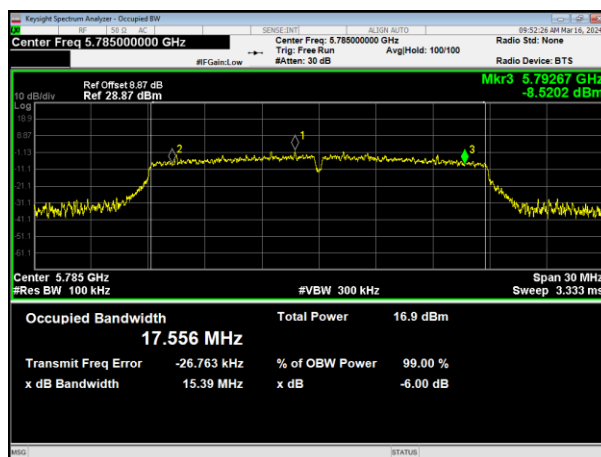

5795MHz



5785MHz

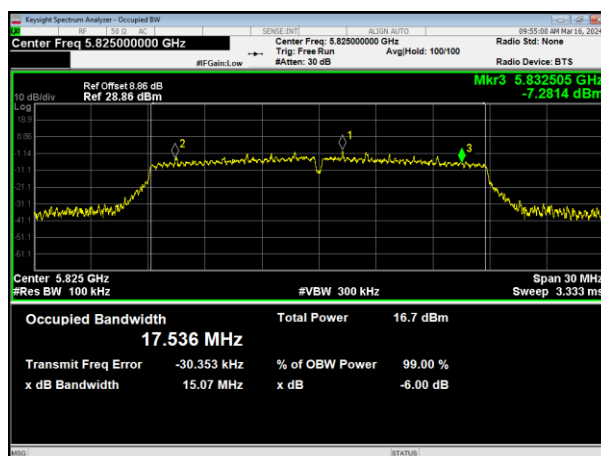

5825MHz

