

YL43455

IEEE 802.11a/b/g/n/ac Wireless LAN, Bluetooth and FM receiver Combo Stamp Module

1. General Description

The YL43455 IEEE 802.11 a/b/g/n/ac SDIO Wi-Fi with Bluetooth and FM receiver combo stamp module is a highly integrated wireless local area network (WLAN) solution to let users enjoy the digital content through the latest wireless technology without using the extra cables and cords. It combines with Bluetooth and provides a complete 2.4GHz Bluetooth system which is fully compliant to Bluetooth and SDIO v3.0 that supports EDR of 2Mbps and 3Mbps for data and audio communications. It enables a high performance, cost effective, low power, compact solution that easily fits onto the SDIO and UART stamp module.

Compliant with the IEEE 802.11a/b/g/n/ac standard, YL43455 uses Direct Sequence Spread Spectrum (DSSS), Orthogonal Frequency Division Multiplexing (OFDM), BPSK, QPSK, CCK and QAM baseband modulation technologies.

A high level of integration and full implementation of the power management functions specified in the IEEE 802.11 standard minimize system power requirements by using YL43455.

YL43455 module adopts BCM43455 single chip solution. The module design is based on the BCM43455 solution.

2. Key Features

1. High speed wireless connection up to 433.3Mbps for Wi-Fi
2. 1(Transmit) ×1(Receive) Wi-Fi and Bluetooth
3. Low power consumption and high performance
4. Enhanced wireless security
5. Fully qualified Bluetooth
6. Enhanced Data Rate(EDR) compliant for both 2Mbps and 3Mbps supported

3. Specifications Table

Model Name	YL43455
Description	Wireless LAN &Bluetooth Stamp Module
WLAN Standard	IEEE 802.11 a/b/g/n/ac

Bluetooth Standard	Bluetooth 2.1+Enhanced Data Rate (EDR)+ BLE(1M)
Major Chipset	BCM43455
Host Interface	Wi-Fi : SDIO, BT :UART
Dimensions	12mm * 12mm * 2.0mm
Operating Conditions	
Voltage	power supply for host:3.3V
Temperature	-40°C~85°C
Storage temperature	-45°C~135°C
Electrical Specifications	
Frequency Range	WLAN: 2.4 GHz ISM Bands 2.412-2.462 GHz 5G:5.150~5.250GHz, 5.250~5.350GHz, 5.47~5.725GHz 5.725~5.85GHz Bluetooth: 2402~2480MHz
Modulation	DSSS, OFDM, DBPSK, DQPSK, CCK, 16-QAM, 64-QAM,256-QAM for WLAN GFSK (1Mbps), $\pi/4$ DQPSK (2Mbps) and 8DPSK (3Mbps) for Bluetooth
Output Power	WLAN: 2412-2462MHz: 15.55dBm 5150-5250MHz: 14.12dBm 5250-5350MHz: 14.38dBm 5470-5725MHz: 12.04dBm 5725-5850MHz: 13.37dBm BT: 2402-2480MHz: 7.74dBm
Data Rates	WLAN 802.11b: 1, 2, 5.5, 11Mbps 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54Mbps 802.11n: up to 75Mbps-single 802.11n: up to 150Mbps 802.11ac:up to 96Mbps (20MHz channel) 802.11ac:up to 200Mbps (40MHz channel) 802.11ac:up to 433Mbps (80MHz channel) Bluetooth Bluetooth 2.1+EDR data rates of 1,2, and 3Mbps
Security	◆ WAPI ◆ WEP 64-bit and 128-bit encryption with H/W TKIP processing ◆ WPA/WPA2(Wi-Fi Protected Access) ◆ WMM/WMM-SA/WMM-PS (U-APSD) ◆ AES-CCMP hardware implementation as part of 802.11i security

	standard
Operating System Compatibility	TBD

4. Electrical Characteristics

4.1 Absolute Maximum Ratings

Symbol	Parameter	Maximum	Unit
VBAT	3.3V power supply voltage	5.25	V
VDDIO	Voltage supply for GPIO	3.9	V
RF _{in}	Maximum RF input (reference to 50 Ω)	TBD	dBm

4.2 Recommended Operating Conditions


Symbol	Parameter	Rating	Unit
VDD	3.3V power supply voltage	3.2~4.8	V
VDDIO	Voltage supply for GPIO	1.62~3.63	V

4.3 GPIO DC Characteristics

Symbol	Parameter	Minimum	Typical	Maximum	Unit
V _{IH}	Input high voltage	0.65×VDDIO	--	VIO+0.3	V
V _{IL}	Input low voltage	--	--	0.35×VIO	V
V _{OH}	Output high voltage	VIO-0.45	--	VIO	V
V _{OL}	Output low voltage	0	--	0.45	V

5. Pin Definition

Pin Description

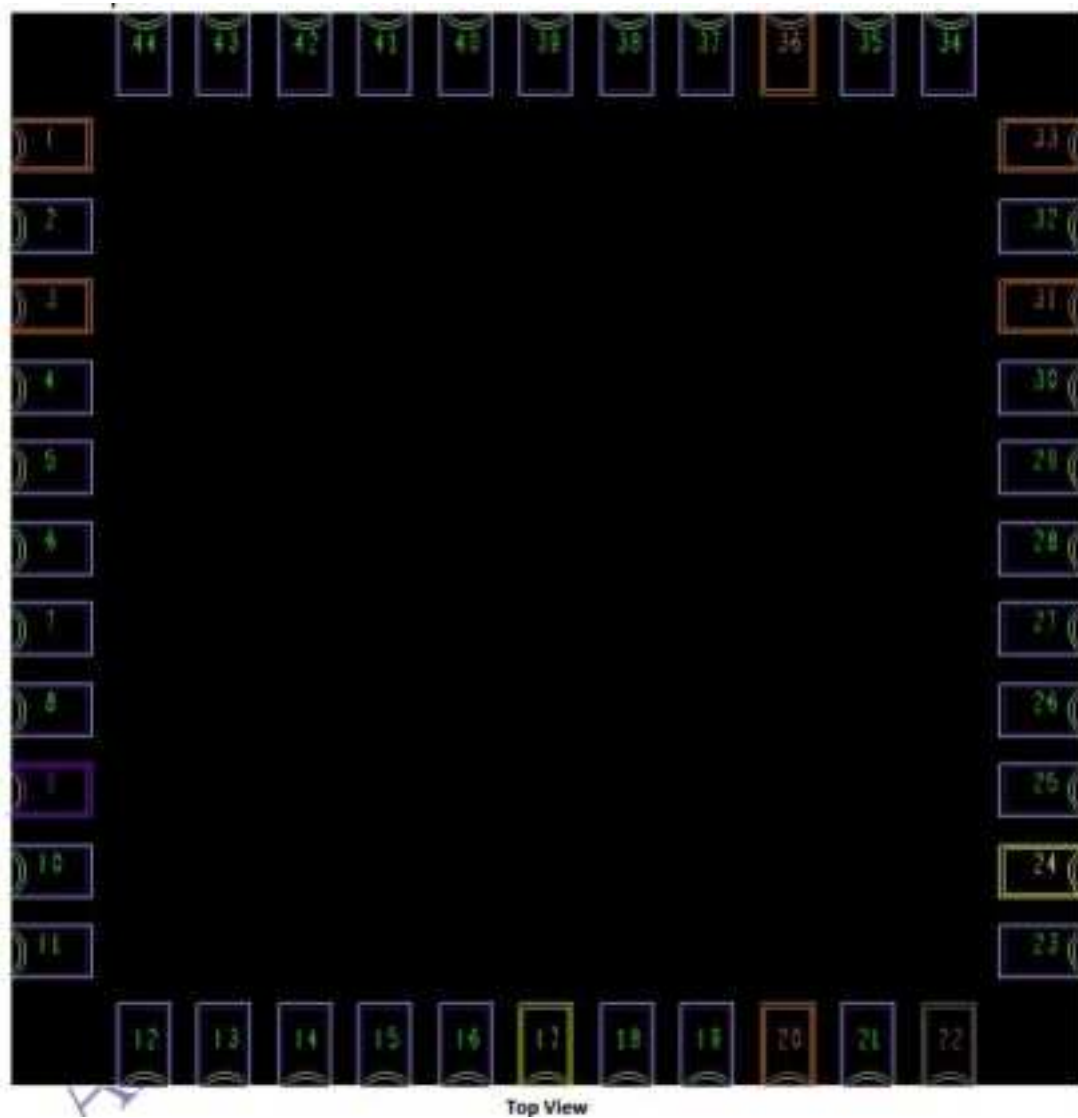

Pin No.	Definition	Basic Description Type	Type
1	GND	GROUND	GND
2	WL_BT_ANT	Wi-Fi/BT RF signal	I/O
3	GND	GROUND	GND
4	NC	Floating Pin, No connect to anything.	Floating
5	NC	Floating Pin, No connect to anything.	Floating
6	Host_Wakeup_BT/GPIO34	Host wakeup BT device	IN
7	BT_wakeup_Host	BT Device wakeup Host	I/O
8	TMS	Reserve for EJTAG	I/O
9	VDD	DC power supply +3.3V input	VCC
10	NC	Floating Pin, No connect to anything.	Floating
11	NC	Floating Pin, No connect to anything.	Floating
12	WL_EN	GPIO pin to on/off the Wi-Fi function by software. Active high. Reserve pull high	IN

		100K resistor and shunt 100pF capacitor to GND on platform.	
13	WL_wakeup_Host/GPIO35	WLAN device wakeup host	OUT
14	SDIO_DATA2	SDIO Data Line 2	I/O
15	SDIO_DATA3	SDIO Data Line 3	I/O
16	SDIO_CMD	SDIO Command Input	I/O
17	SDIO_CLK	SDIO Clock Input	IN
18	SDIO_DATA0	SDIO Data Line 0	I/O
19	SDIO_DATA1	SDIO Data Line 1	I/O
20	GND	GROUND	GND
21	CLK_REQ/GPIO11	Clock request output	DO
22	VDDIO	1.8V-3.3V VDDIO supply for WLAN and BT	VCC
23	NC	Floating Pin, No connect to anything.	Floating
24	LPO	External low-power 32.768KHz clock input.	IN
25	PCM_OUT	PCM synchronous data output, connected to PCM_IN on the host.	OUT
26	PCM_CLK	PCM Clock	I/O
27	PCM_IN	PCM synchronous data input, connected to PCM_OUT on the host.	IN
28	PCM_SYNC	PCM synchronous data SYNC	I/O
29	TDI	Reserve for EJTAG	IN
30	TDO	Reserve for EJTAG	OUT
31	GND	GROUND	GND
32	TCK	Reserve for EJTAG	GND
33	GND	GROUND	GND
34	BT_EN	GPIO pin to on/off the BT function by software. Active high. Reserve pull high 100K resistor and shunt 100pF capacitor to GND on host.	IN
35	NC	Floating Pin, No connect to anything.	Floating
36	GND	GROUND	GND
37	NC	Floating Pin, No connect to anything.	Floating
38	NC	Floating Pin, No connect to anything.	Floating
39	Debug_UART_TXD	TXD for Wi-Fi Uart_debug only, connected to RXD of the host.	OUT
40	Debug_UART_RXD	RXD for Wi-Fi Uart_debug only, connected to TXD of the host.	IN
41	UART_RTS	UART Ready To Send, connected to CTS on the host.	OUT
42	UART_TXD	UART Transmit Data, connected to RXD on	OUT

FCC WARNING:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC RF EXPOSURE STATEMENT:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

This equipment should be installed and operated with minimum distance 20cm between the radiator& your body.

**Integration instructions for host product manufacturers according to KDB
996369
D03 OEM
Manual v01**

2.2 List of applicable FCC rules

CFR 47 FCC PART 15 SUBPART C/E has been investigated. It is applicable to the modular.

2.3 Specific operational use conditions

This module is stand-alone modular. If the end product will involve the Multiple simultaneously transmitting condition or different operational conditions for a stand-alone modular transmitter in a host, host manufacturer have to consult with module manufacturer for the installation method in end system.

2.4 Limited module procedures

Not applicable

2.5 Trace antenna designs

Not applicable

2.6 RF exposure considerations

To maintain compliance with FCC's RF Exposure guidelines, this equipment should be installed and operated with minimum distance of 20cm from your body.

2.7 Antennas

This radio transmitter FCC ID: T2C-YL43455 has been approved by Federal Communications Commission to operate with the antenna types listed below, with the maximum permissible gain indicated. Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Antenna type	Maximum Antenna gain
PCB Antenna	3dBi

2.8 Label and compliance information

The final end product must be labeled in a visible area with the following
" Contains FCCID: T2C-YL43455"

2.9 Information on test modes and additional testing requirements

Host manufacturer is strongly recommended to confirm compliance with FCC requirements for the transmitter when the module is installed in the host.

2.10 Additional testing, Part 15 Subpart B disclaimer

Host manufacturer is responsible for compliance of the host system with module installed

with all other applicable requirements for the system such as Part 15 B

ISED STATEMENT:

Operation of 5150-5250 MHz is restricted to indoor use only.

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science, and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference, and
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le fonctionnement de 5150-5250 MHz est limité à une utilisation en intérieur uniquement.

Le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

The device complies with RF exposure guidelines, users can obtain Canadian information on RF exposure and compliance.

The equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Le présent appareil est conforme. Après examen de ce matériel aux conformités ou aux limites d'intensité de champ RF, les utilisateurs peuvent sur l'exposition aux radiofréquences et la conformité and compliance d'acquiescer les informations correspondantes.

La distance minimale du corps à utiliser le dispositif est de 20cm.

This Class B digital apparatus complies with Canadian ICES-003."

Cet appareil numérique de classe B est conforme à la norme nmb-003 du Canada.

This device is intended only for OEM integrators under the following condition: The transmitter module may not be co-located with any other transmitter or antenna. As long as the condition above is met, further transmitter test will not be required. However, the OEM integrator is still responsible for testing their end-product for any additional compliance requirements required with this module installed.

Cet appareil est conçu uniquement pour les intégrateurs OEM dans les conditions suivantes:

Le module émetteur peut ne pas être coïmplanté avec un autre émetteur ou antenne. Tant que les 1 condition ci-dessus sont remplies, des essais supplémentaires sur l'émetteur ne seront pas nécessaires. Toutefois, l'intégrateur OEM est toujours responsable des essais sur son produit final pour toutes exigences de conformité supplémentaires requis pour ce module installé.

Important Note:

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the Canada authorization is no longer considered valid and the ISED cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate Canada authorization.

Any company of the host device which install this modular with limit modular approval should perform the test of radiated emission and spurious emission according to RSS-247 and RSSGen requirement, only if the test result comply with RSS-247 and RSS-Gen requirement, then the host can be sold legally.

Note Importante:

Dans le cas où ces conditions ne peuvent être satisfaites (par exemple pour certaines configurations d'ordinateur portable ou de certaines co-localisation avec un autre émetteur), l'autorisation du Canada n'est plus considéré comme valide et l'ISED ne peut pas être utilisé sur le produit final. Dans ces circonstances, l'intégrateur OEM sera chargé de réévaluer le produit final (y compris l'émetteur) et l'obtention d'une autorisation distincte au Canada. toute entreprise de l'hôte qui installent ce dispositif modulaire avec limite approbation devrait effectuer l'essai des modules et des rayonnements non essentiels des émissions rayonnées selon rss-247 et le cnr - gen, seulement si le résultat d'essai conforme rss-247 et le cnr - gen, puis l'hôte peut être vendu légalement.

End Product Labeling

The final end product must be labeled in a visible area with the following:
Contains IC: 10741A-YL43455.

Plaque signalétique du produit final

Le produit final doit être étiqueté dans un endroit visible avec l'inscription suivante:
Contient des IC: 10741A-YL43455.

Manual Information to the End User

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module.
The end user manual shall include all required regulatory information/warning as show in this manual.

Manuel d'information à l'utilisateur final

L'intégrateur OEM doit être conscient de ne pas fournir des informations à l'utilisateur final quant à la façon d'installer ou de supprimer ce module RF dans le manuel de l'utilisateur du produit final qui intègre ce module.

Le manuel de l'utilisateur final doit inclure toutes les informations réglementaires requises et avertissements comme indiqué dans ce manuel.

This radio transmitter [10741A-YL43455] has been approved by Innovation, Science and Economic Development Canada to operate with the antenna types listed below, It has an antenna with the maximum antenna gain is 3dBi.

Antenna type	Maximum Antenna gain
PCB Antenna	3dBi

Antenna types not included in this list that have a gain greater than the maximum gain indicated for any type listed are strictly prohibited for use with this device.

Cet émetteur radio [10741A-YL43455] a été approuvé par Innovation, Sciences et Développement économique Canada pour fonctionner avec les types d'antenne énumérés ci-dessous,

Il dispose d'une antenne avec une prise le gain maximum d'antenne est de 3 dBi.

Antenna type	Maximum Antenna gain
PCB Antenna	3dBi

Les types d'antennes non inclus dans cette liste qui ont un gain supérieur au gain maximum indiqué pour tout type répertorié sont strictement interdits pour l'utilisation avec cet appareil.