



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



DATE: 16 April 2019

I.T.L. (PRODUCT TESTING) LTD.

FCC Radio Test Report

for

Augmedics Ltd.

Equipment under test:

Radio Module

Jeston TX2 assembly PN YELC0050

Tested by:

M. Zohar

Approved by:

D. Shidlowsky

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd.

This report relates only to items tested.



ISRAEL TESTING LABORATORIES
Global Certifications You Can Trust



Measurement/Technical Report for Augmedics Ltd. Radio Module

Jeston TX2 assembly PN YELC0050

FCC ID: 2AR20-VOB-P3310

This report concerns:

Original Grant:

Class I Change:

Class II Change: X

Equipment type:
Transmitter

FCC: DTS Part 15 Digital Transmission System

Limits used:

47CFR15 Section 15.247

Measurement procedures used are FCC Public Notice DA-00-705 and
ANSI C63.10: 2013.

Application for Certification
prepared by:

R. Pinchuck
ITL (Product Testing) Ltd.
1 Bat Sheva Street
Lod 7116002
Israel
e-mail Rpinchuck@itlglobal.org

Applicant for this device:
(different from "prepared by")

Stuart Wolf
1 Htzmicha St
Yokneam, Israel 20692
Tel: +972-54-999-7738
Email: stuart@augmedics.com



TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	Administrative Information	4
1.2	List of Accreditations	5
1.3	Product Description	6
1.4	Test Methodology	6
1.5	Test Facility	6
1.6	Measurement Uncertainty	6
2.	SYSTEM TEST CONFIGURATION	7
2.1	Justification	7
2.2	EUT Exercise Software	7
2.3	Special Accessories	7
2.4	Equipment Modifications	7
2.5	Configuration of Tested System	7
3.	CONDUCTED & RADIATED MEASUREMENT TEST SET-UP PHOTOS	8
4.	OCCUPIED BANDWIDTH	10
4.1	Test Specification	10
4.2	Test Procedure	10
4.3	Test Limit	10
4.4	Test Results	10
4.5	Test Equipment Used, Occupied Bandwidth	10
5.	PEAK OUTPUT POWER	11
5.1	Test Specification	11
5.2	Test Procedure	11
5.3	Test Limit	11
5.4	Test Results	11
5.5	Test Equipment Used, Radiated Maximum Power Output	11
6.	SPURIOUS RADIATED EMISSIONS	12
6.1	Test Specification	12
6.2	Test Procedure	12
6.3	Test Limit	13
6.4	Test Results	13
6.5	Test Equipment Used, Spurious Radiated Emissions	15
7.	APPENDIX A - CORRECTION FACTORS	16
7.1	Correction factors for RF OATS Cable 35m ITL #1879	16
7.2	Correction factor for RF CABLE for Semi Anechoic Chamber	17
7.3	Correction factors for Active Loop Antenna	18
7.4	Correction factors for biconical antenna – ITL # 1356	19
7.5	Correction factors for log periodic antenna – ITL # 1349	20
7.6	Correction factors for Double –Ridged Waveguide Horn ANTENNA	21
7.7	Correction factors for Horn Antenna	22



1. General Information

1.1 Administrative Information

Manufacturer:	Augmedics Ltd.
Manufacturer's Address:	1 Htzmicha St. Yokneam, 20692, Israel Tel: +972-54-999-7738
Manufacturer's Representative:	Stuart Wolf
Equipment Under Test (E.U.T):	Radio Module
Equipment Model No.:	Jeston TX2 assembly PN YELC0050
Equipment Serial No.:	Not designated
Date of Receipt of E.U.T:	26.12.2018
Start of Test:	26.12.2018
End of Test:	07.01.2019
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 7120101
Test Specifications:	47CFR15 Section 15.247



1.2 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Federal Communications Commission (FCC) (U.S.A.), FCC Designation No. IL1005.
3. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
4. Industry Canada (Canada), IC File No.: 46405-4025; Site Nos. IC 4025A-1, IC 4025A-2.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.



1.3 Product Description

Radio module

1.4 Test Methodology

Radiated testing was performed according to the procedures in FCC Public Notice DA 00-705 and ANSI C63.10: 2013. Radiated testing was performed at an antenna to EUT distance of 3 meters.

1.5 Test Facility

Emissions tests were performed at I.T.L.'s testing facility in Lod, Israel. I.T.L.'s EMC Laboratory is accredited by A2LA, certificate No. 1152.01 and its FCC Designation Number is IL1005.

1.6 Measurement Uncertainty

Conducted Emission

Conducted Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
0.15 – 30 MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 3.6 dB

Radiated Emission

Radiated Emission (CISPR 11, EN 55011, CISPR 22, EN 55022, ANSI C63.4)
for open site:

30-1000MHz:

Expanded Uncertainty (95% Confidence, K=2):

± 4.96 dB

1 GHz to 6 GHz

Expanded Uncertainty (95% Confidence, K=2):

± 5.19 dB

>6 GHz

Expanded Uncertainty (95% Confidence, K=2):

± 5.51 dB

2. System Test Configuration

2.1 Justification

1. An FCC ID Change Grant was issued to Augmedics LTD for the E.U.T. on 03/11/2019 under FCC ID: 2AR2O-VOB-P3310.
2. Augmedics LTD will be inserting the certified module in the headset of its own product the “xvision-spine (XVS) system” and requests the following C2PC changes.
3. The device will be body worn with a 4cm separation distance of the antenna from the user.
4. Additionally, only the DTS – Wifi/g protocol of the module will be operational. Via software the following transmissions will be non-operational: DTS – BLE, DSS and NII.
5. The following C2PC testing has been performed: Occupied Bandwidth, Peak Output Power and Spurious Radiated Emissions.
6. The E.U.T. met the requirements of a C2PC.
7. The E.U.T was tested using the IEEE 802.11/g standard protocol (2.4GHz band, 20MHz BW, SISO) and was transmitting at the low channel (2412MHz), the mid channel (2437MHz) and the high channel (2462MHz).
8. Conducted emission method performed while connected to a spectrum analyzer via a 40dB attenuator.

2.2 EUT Exercise Software

No special exercise software was used.

2.3 Special Accessories

No special accessories were needed in order to achieve compliance.

2.4 Equipment Modifications

No modifications were needed in order to achieve compliance.

2.5 Configuration of Tested System

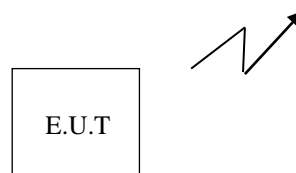


Figure 1. Configuration of Tested System, Radiated

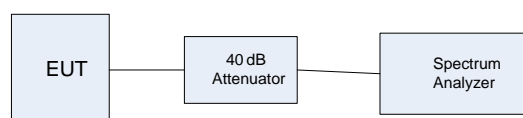


Figure 2. Configuration of Tested System, Conducted

3. Conducted & Radiated Measurement Test Set-Up Photos

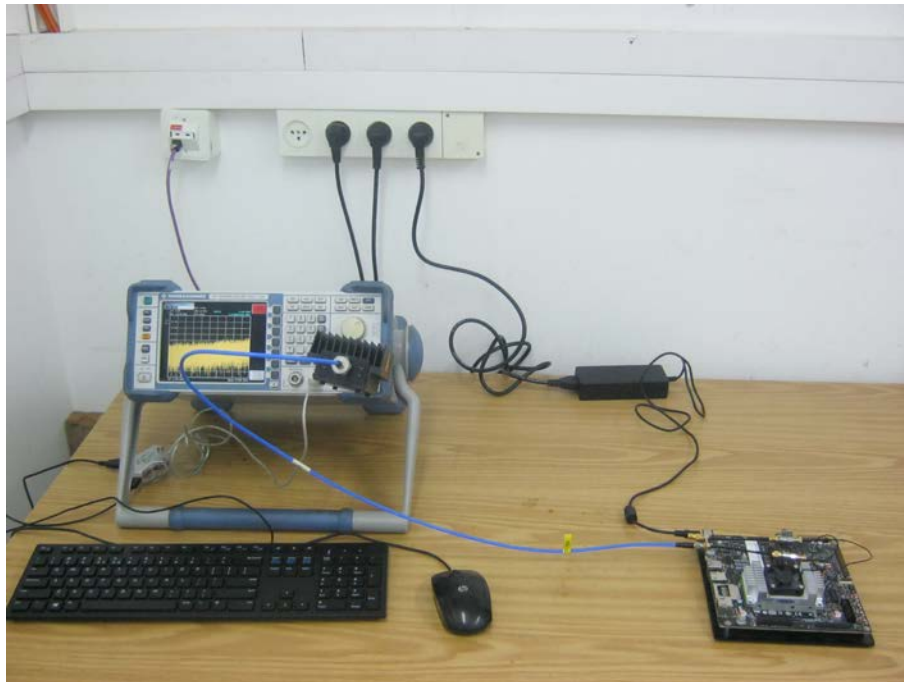


Figure 3. Conducted Test Set Up

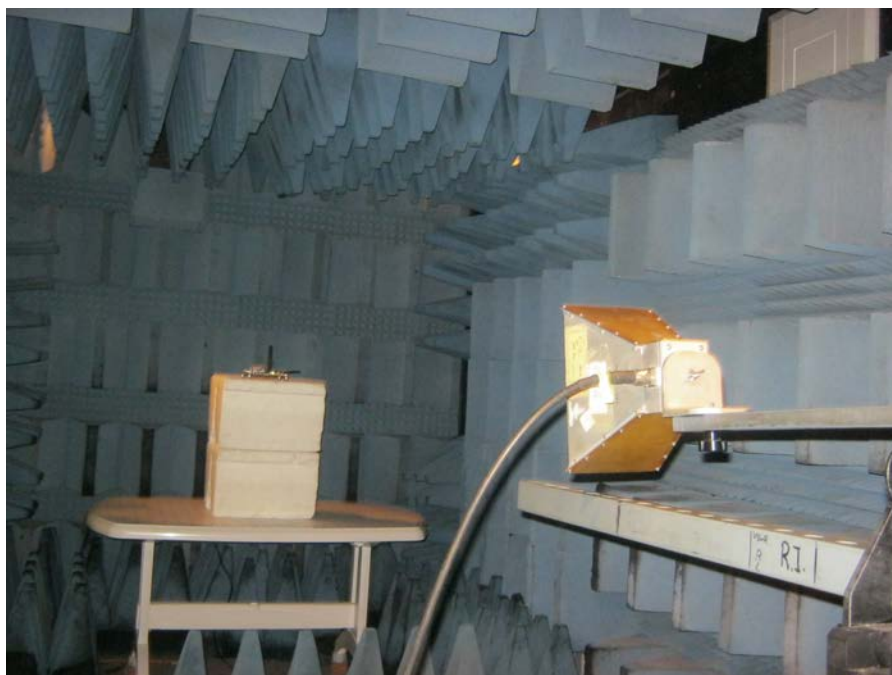


Figure 4. Radiated Emission Test Setup



Figure 5. Radiated Emission Test Setup



4. Occupied Bandwidth

4.1 Test Specification

F.C.C. Part 15, Subpart C, Section 2.1048

4.2 Test Procedure

(Temperature (22°C)/ Humidity (48%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report. The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable. The spectrum analyzer was set to the following parameters:

Span = ~ 1.5 to 5 times the OBW

RBW was between 1% to 5% of the OBW.

Detector Function: Peak, Trace: Maximum Hold.

4.3 Test Limit

N/A

4.4 Test Results

Technique	Operation Frequency	Bandwidth Reading
(b/g/n)	(MHz)	(MHz)
g	2412.0	16.8
	2437.0	17.0
	2462.0	17.0

Figure 6 Test Results

JUDGEMENT: Passed

4.5 Test Equipment Used, Occupied Bandwidth

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
40dB Attenuator	Weinschel	WA 39-40-33	A1323	December 24, 2018	December 31, 2019
Spectrum Analyzer	Rohde & Schwarz	FSL6	100194	February 19, 2018	February 19, 2019
RF Cable	Huber Suner	Sucofelex	27502/4PEA	December 24, 2018	December 31, 2019

Figure 7 Test Equipment Used

5. Peak Output Power

5.1 Test Specification

F.C.C. Part 15, Subpart C, Section 15.247(b)(1)

5.2 Test Procedure

(Temperature (22°C)/ Humidity (48%RH))

The E.U.T operation mode and test set-up are as described in Section 2 of this report. The E.U.T. antenna terminal was connected to the Spectrum Analyzer through an external attenuator and an appropriate coaxial cable.

5.3 Test Limit

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. (The limits above applies to antenna gain until 6dBi).

5.4 Test Results

JUDGEMENT: Passed by 973.7 mW

Modulation	Operation Frequency	Power	Power	Limit	Margin
(b/g/n)	(MHz)	(dBm)	(mW)	(mW)	(mW)
g	2412.0	13.4	21.88	1000.0	-978.12
	2437.0	14.2	26.30	1000.0	-973.70
	2462.0	12.3	16.98	1000.0	-983.02

Figure 8 Radiated Power Output Test Results

5.5 Test Equipment Used, Radiated Maximum Power Output

Instrument	Manufacturer	Model	Serial No.	Last Calibration Date	Next Calibration Due
40dB Attenuator	Weinschel	WA 39-40-33	A1323	December 24, 2018	December 31, 2019
Spectrum Analyzer	Rohde & Schwarz	FSL6	100194	February 19, 2018	February 19, 2019
RF Cable	Huber Suner	Sucofelex	27502/4 PEA	December 24, 2018	December 31, 2019

Figure 9 Test Equipment Used



6. Spurious Radiated Emissions

6.1 Test Specification

FCC, Part 15, Subpart C, Sections 247(d), 15.205, 15.209

6.2 Test Procedure

(Temperature (19°C)/ Humidity (57%RH))

For measurements between 0.009MHz-30MHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 0.009MHz-30MHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

For measurements between 30.0MHz-1.0GHz:

A preliminary measurement to characterize the E.U.T was performed inside the shielded room at a distance of 3 meters, using peak detection mode and broadband antennas. The preliminary measurements produced a list of the highest emissions. The E.U.T was then transferred to the open site, and placed on a remote-controlled turntable. The E.U.T was placed on a non-metallic table, 0.8 meters above the ground. The frequency range 30.0MHz -1.0GHz was scanned and the list of the highest emissions was verified and updated accordingly. The readings were maximized by adjusting the antenna height between 1-4 meters, the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

For measurements between 1.0GHz-25.0GHz:

The E.U.T was tested inside the shielded room at a distance of 3 meters and the E.U.T was placed on a non-metallic table, 1.5 meters above the ground. The frequency range 1.0GHz -25.0GHz was scanned. The readings were maximized by the turntable azimuth between 0-360°, and the antenna polarization. The emissions were measured at a distance of 3 meters.

The levels of the emissions within the frequency ranges of the restricted bands (Section 15.205 of FCC Part 15) were compared to the limits of the table in Section 15.209 (a), General Requirements.

6.3 Test Limit

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)	Field strength* (dBμV/m)	Field strength* (dBμV/m)@3m
0.009-0.490	2400/F(kHz)	300	48.5-13.8	128.5-73.8
0.490-1.705	24000/F(kHz)	30	33.8-23.0	73.8-63.0
1.705-30.0	30	30	29.5	69.5
30-88	100	3	40.0	40.0
88-216	150	3	43.5	43.5
216-960	200	3	46.0	46.0
Above 960	500	3	54.0	54.0

*The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector. For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

6.4 Test Results

JUDGEMENT: Passed

The EUT met the requirements of the F.C.C. Part 15, Subpart C 209 specification.

For additional information see *Figure 10*.



Spurious Radiated Emission

Specification: FCC, Part 15, Subpart C Sections 15.209, 15.205, 15.247(d)

Antenna Polarization: Horizontal/Vertical
Protocol type: 'g'

Frequency range: 9 kHz to 25.0 GHz
Detectors: Peak/AVG

Operation Frequency	Freq.	Pol	Peak Reading	Peak Limit	Peak Margin
(MHz)	(MHz)	(H/V)	(dBμV/m)	(dBμV/m)	(dB)
2412.0	2428.0	V	45.3	74.0	-28.7
	2428.0	H	37.1	74.0	-36.9
2437.0	4874.0	V	49.5	74.0	-24.5
	4874.0	H	40.8	74.0	-33.2
2462.0	4924.0	V	44.8	74.0	-29.2
	4924.0	H	44.1	74.0	-29.9

Operation Frequency	Freq.	Pol	Avg. Reading	Avg. Limit	Avg. Margin
(MHz)	(MHz)	(H/V)	(dBμV/m)	(dBμV/m)	(dB)
2412.0	4824.0	V	38.6	54.0	-15.4
	4824.0	H	33.0	54.0	-21.0
2437.0	4874.0	V	42.9	54.0	-11.1
	4874.0	H	37.8	54.0	-16.2
2462.0	4924.0	V	37.2	54.0	-16.8
	4924.0	H	37.3	54.0	-16.7

Figure 10. Radiated Emission Results

Margin refers to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

“Peak Amp” includes correction factor.

* “Correction Factor” = Antenna Factor + Cable Loss- Low Noise Amplifier Gain



6.5 Test Equipment Used, Spurious Radiated Emissions

Instrument	Manufacturer	Model	Serial Number	Last Calibration Date	Next Calibration Due
EMI Receiver	R&S	ESCI7	100724	February 19, 2018	February 19, 2019
Spectrum Analyzer	HP	8592L	3826A01204	February 19, 2018	February 19, 2019
EMI Receiver	HP	8542E	3906A00276	February 19, 2018	February 19, 2019
RF Filter section	HP	85420E	3705A00248	February 19, 2018	February 19, 2019
Horn Antenna	ETS	3115	29845	May 31, 2018	May 31, 2021
Log Periodic Antenna	EMCO	3146	9505-4081	May 31, 2018	May 31, 2019
Biconical Log Antenna	EMCO	3110B	9912-3337	May 15, 2017	May 15, 2019
Active Loop Antenna	EMCO	6502	9506-2950	October 19, 2017	October 19, 2019
Horn Antenna	ARA	SWH-28	1007	December 13, 2017	December 31, 2020
Low Noise Amplifier	DBS MICROWAVE	LNA-DBS-0411N313	013	December 24, 2018	December 31, 2019
Low Noise Amplifier	Sophia Wireless	LNA 28-B	232	December 24, 2018	December 31, 2019
RF Cable	Commscope ORS	0623 WBC-400	G020132-	December 24, 2018	December 31, 2019
RF Cable	Huber Suner	Sucofelex	27502/4PEA	December 24, 2018	December 31, 2019
Semi Anechoic Civil Chamber	ETS	S81	SL 11643	NCR	NCR
Antenna Mast	ETS	2070-2	9608-1497	NCR	NCR
Turntable	ETS	2087	-	NCR	NCR
Mast & Table Controller	ETS/EMCO	2090	9608-1456	NCR	NCR

Figure 11 Test Equipment Used



7. APPENDIX A - CORRECTION FACTORS

7.1 Correction factors for

RF OATS Cable 35m ITL #1879

Frequency (MHz)	Cable loss (dB)
30.0	1.1
50.0	1.1
100.0	1.7
150.0	2.1
200.0	2.5
250.0	2.7
300.0	2.9
350.0	3.1
400.0	3.5
450.0	3.7
500.0	3.9
550.0	4.0
600.0	4.2
650.0	4.4
700.0	4.9
750.0	5.0
800.0	5.0
850.0	4.9
900.0	5.0
950.0	5.1
1000.0	5.4



7.2 Correction factor for RF CABLE for Semi Anechoic Chamber

ITL # 1841

FREQ (MHz)	LOSS (dB)
1000.0	1.5
2000.0	2.1
3000.0	2.7
4000.0	3.1
5000.0	3.5
6000.0	4.1
7000.0	4.6
8000.0	4.9
9000.0	5.7
10000.0	5.7
11000.0	6.1
12000.0	6.1
13000.0	6.2
14000.0	6.7
15000.0	7.4
16000.0	7.5
17000.0	7.9
18000.0	8.1
19000.0	8.8
20000.0	9.1

NOTES:

1. The cable is manufactured by Commscope
2. The cable type is 0623 WBC-400, serial # G020132 and 10m long



7.3 Correction factors for Active Loop Antenna

Model 6502 S/N 9506-2950

ITL # 1075:

f(MHz)	MAF(dBs/m)	AF(dB/m)
0.01	-33.1	18.4
0.02	-37.2	14.3
0.03	-38.2	13.3
0.05	-39.8	11.7
0.1	-40.1	11.4
0.2	-40.3	11.2
0.3	-40.3	11.2
0.5	-40.3	11.2
0.7	-40.3	11.2
1	-40.1	11.4
2	-40	11.5
3	-40	11.5
4	-40.1	11.4
5	-40.2	11.3
6	-40.4	11.1
7	-40.4	11.1
8	-40.4	11.1
9	-40.5	11
10	-40.5	11
20	-41.5	10
30	-43.5	8



7.4 Correction factors for biconical antenna – ITL # 1356

Model: EMCO 3110B

Serial No.:9912-3337

Frequency	ITL 1356 AF
[MHz]	[dB/m]
30	13.00
35	10.89
40	10.59
45	10.63
50	10.12
60	9.26
70	7.74
80	6.63
90	8.23
100	11.12
120	13.16
140	13.07
160	14.80
180	16.95
200	17.17



7.5 Correction factors for log periodic antenna – ITL # 1349

Model: EMCO 3146

Serial No.:9505-4081

Frequency	ITL 1349 AF
[MHz]	[dB/m]
200	11.58
250	12.04
300	14.76
400	15.55
500	17.85
600	18.66
700	20.87
800	21.15
900	22.32
1000	24.22



**7.6 Correction factors for Double –Ridged Waveguide
Horn ANTENNA**

Model: 3115
Serial number:29845
3 meter range; ITL # 1352

FREQUENCY	AFE	FREQUENCY	AFE
(GHz)	(dB/m)	(GHz)	(dB/m)
0.75	25	9.5	38
1.0	23.5	10.0	38.5
1.5	26.0	10.5	38.5
2.0	29.0	11.0	38.5
2.5	27.5	11.5	38.5
3.0	30.0	12.0	38.0
3.5	31.5	12.5	38.5
4.0	32.5	13.0	40.0
4.5	32.5	13.5	41.0
5.0	33.0	14.0	40.0
5.5	35.0	14.5	39.0
6.0	36.5	15.0	38.0
6.5	36.5	15.5	37.5
7.0	37.5	16.0	37.5
7.5	37.5	16.5	39.0
8.0	37.5	17.0	40.0
8.5	38.0	17.5	42.0
9.0	37.5	18.0	42.5



7.7 Correction factors for

Horn Antenna

**Model: SWH-28
at 3 meter range.
ITL #:1353**

CALIBRATION DATA

3 m distance

Frequency, MHz	Measured antenna factor, dB/m ¹⁾
18000	32.4
18500	32.0
19000	32.3
19500	32.4
20000	32.3
20500	32.8
21000	32.8
21500	32.7
22000	33.1
22500	33.0
23000	33.1
23500	33.8
24000	33.5
24500	33.5
25000	33.8
25500	33.9
26000	34.2
26500	34.7

¹⁾ The antenna factor shall be added to receiver reading in dB μ V to obtain field strength in dB μ V/m.