

FCC Part 15 EMI TEST REPORT of

E.U.T. : Wireless Tour Guide System
FCC ID. : 2ADLG-TG201T
Model No. : TG-201T , TG-200T

for

APPLICANT : LINKX ELECTRONICS CO., LTD
ADDRESS : 4F-1, No.332 Ming-Chen 2nd Road, Tsou-In
Dist., Kaohsiung Taiwan.

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34. LIN 5. DINGFU VIL., LINKOU DIST.,
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel : (02)26023052 Fax : (02)26010910

<http://www.etc.org.tw> ; e-mail: emc@etc.org.tw

Report Number : 17-08-RBF-021-01

TEST REPORT CERTIFICATION

Applicant : LINKX ELECTRONICS CO., LTD
4F-1, No.332 Ming-Chen 2nd Road, Tsou-In Dist., Kaohsiung Taiwan.

Manufacturer : LINKX ELECTRONICS CO., LTD
4F-1, No.332 Ming-Chen 2nd Road, Tsou-In Dist., Kaohsiung Taiwan.

Description of EUT

- a) Type of EUT : Wireless Tour Guide System
- b) Trade Name : Linkx
- c) Model No. : TG-201T , TG-200T
- d) Power Supply : DC3.7V /600mAh

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.10-2013, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.

2. The testing report shall not be reproduced expect in full, without the written approval of ETC

Summary of Tests

Test	Results
Radiated Emission	Pass
Conducted Emission	Pass
Emission Bandwidth	Pass
Output Power	Pass
100 kHz Bandwidth of Band Edges	Pass
Power Density	Pass
Out-of-Band Conducted Emission	Pass
Duty Cycle	N.A.

Date Test Item Received : Aug. 18, 2017

Date Test Campaign Completed : Oct. 18, 2017

Date of Issue : Nov. 27, 2017

Test Engineer : Brian Huang
(Brian Huang, Engineer)

Approve & Authorized Signer : S. S. Liou
S. S. Liou, Section Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN



Table of Contents	Page
1 GENERAL INFORMATION.....	1
1.1 Product Description.....	1
1.2 Characteristics of Device	1
1.3 Test Methodology	1
1.4 Test Facility.....	1
2 PROVISIONS APPLICABLE.....	2
2.1 Definition	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement.....	5
2.5 User Information	6
3. SYSTEM TEST CONFIGURATION.....	7
3.1 Justification	7
3.2 Devices for Tested System.....	7
4 RADIATED EMISSION MEASUREMENT	8
4.1 Applicable Standard.....	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument	10
4.4 Radiated Emission Data	11
4.5 Field Strength Calculation	31
4.6 Photos of Radiation Measuring Setup.....	32
5 CONDUCTED EMISSION MEASUREMENT	36
5.1 Standard Applicable	36
5.2 Measurement Procedure.....	36
5.3 Conducted Emission Data	37
5.4 Result Data Calculation	41
5.5 Conducted Measurement Equipment	41
5.6 Photos of Conduction Measuring Setup.....	42
6 ANTENNA REQUIREMENT	43
6.1 Standard Applicable	43
6.2 Antenna Construction and Directional Gain.....	43
7 EMISSION BANDWIDTH MEASUREMENT	44
7.1 Standard Applicable	44
7.2 Measurement Procedure.....	44

7.3 Measurement Equipment	44
7.4 Measurement Data	45
8 OUTPUT POWER MEASUREMENT	52
8.1 Standard Applicable	52
8.2 Measurement Procedure.....	52
8.3 Measurement Equipment	52
8.4 Measurement Data	53
9.1 Standard Applicable	54
9.2 Measurement Procedure.....	54
9.3 Measurement Equipment	54
9.4 Measurement Data	55
10 POWER DENSITY MEASUREMENT	58
10.1 Standard Applicable	58
10.2 Measurement Procedure.....	58
10.3 Measurement Equipment	58
10.4 Measurement Data	59
11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT	66
11.1 Standard Applicable	66
11.2 Measurement Procedure.....	66
11.3 Measurement Equipment	66
11.4 Measurement Data	67
12. DUTY CYCLE	74
12.1 Standard Applicable	74
12.2 Measurement Equipment	74
12.3 Measurement Data	74

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Wireless Tour Guide System
- b) Trade Name : Linkx
- c) Model No. : TG-201T , TG-200T
- d) Power Supply : DC 3.7V /600mAh
- e) Difference Description : The difference between the serial model product and the original sample is only the model name and the function.
TG-201T has two-way communication function.
TG-200T has no two-way communication function.

1.2 Characteristics of Device

The product is the transmitter of a Wireless Tour Guide System.

Working Frequency: 902~928MHz

Power Supply: DC3.7V /600mAh Li-Polymer rechargeable battery

Charging connector: micro-USB

TG-201T has two-way communication function.

TG-200T has no two-way communication function.

1.3 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.10-2013. Other required measurements were illustrated in separate sections of this test report for details. For RF test the measurement procedure was referred to FCC KDB 558074 D01 DTS Meas Guidance v03r05.

Software	Version	Note
e3	Version 6.100618b	Radiated Emission Test
e3	Version 6.100421	Conducted Emission Test

1.4 Test Facility

Location of the Test site: No.34, Lin 5, Dingfu Vil., Linkou Dist., New Taipei City, Taiwan 24442, R.O.C.

Designation Number: TW2628.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Bandwidth Requirement

For direct sequence system, according to 15.247(a)(2), the minimum 6dB bandwidth shall be at least 500 kHz.

(5) Output Power Requirement

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(6) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

(7) Power Density Requirement

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3. SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the cables connected to EUT to maximize the emission from EUT.

For conducted and radiated spurious emissions, whichever RF channel is operated, the digital circuits function identically. As the reason, measurement of radiated emissions from digital circuits is only performed with channel 1 by transmitting mode.

3.2 Devices for Tested System

Device	Manufacture	Model	Cable Description
Wireless Tour Guide System *	LINKX ELECTRONICS CO., LTD	TG-201T , TG-200T	1.0m Unshielded USB Cable
Ear Phone	---	---	1.5m Unshielded Cable

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

4.2 Measurement Procedure

A. Preliminary Measurement For Portable Devices

For portable devices, the following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

B. Final Measurement

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.

5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables (if any) associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


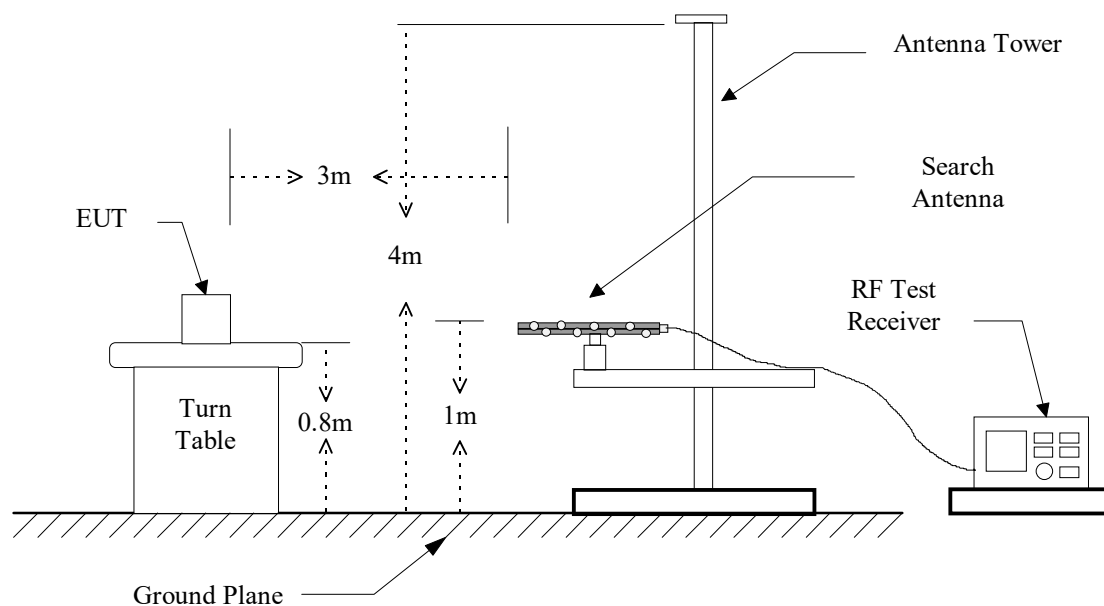


Figure 2 : Frequencies measured above 1 GHz configuration

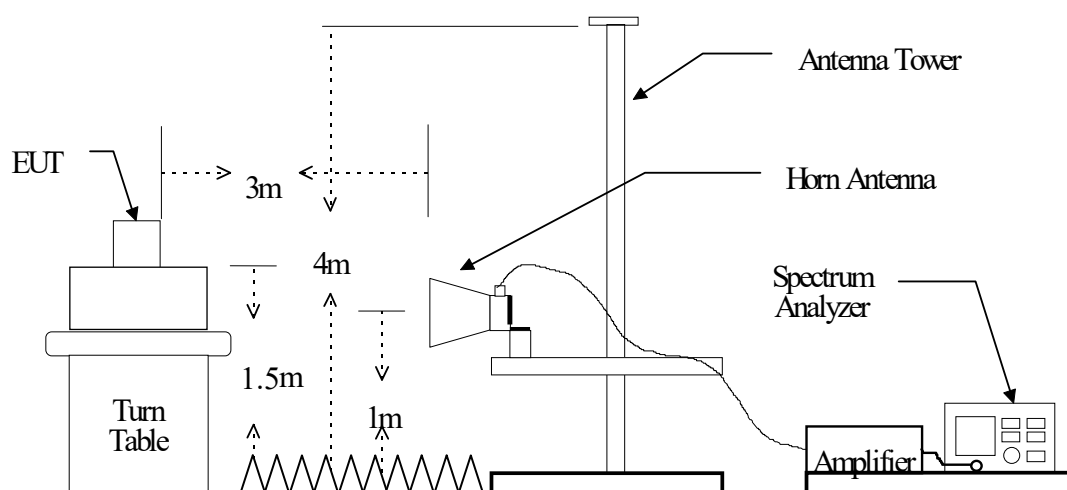

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESU 40	2016/11/10	2017/11/09
Bi-Log Antenna	ETC	MCTD 2786	2017/07/12	2018/07/11
Horn Antenna	EMCO	3115	2017/10/11	2018/10/10
Horn Antenna	EMCO	3116	2017/10/04	2018/10/03
Amplifier	HP	8447D	2016/12/28	2017/12/27
Amplifier	HP	83051A	2017/08/25	2018/08/24
LOOP Antenna	EMCO	6512	2017/10/13	2018/10/12

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz or $\geq 1/T$ (Note 1)

Note 1:


VBW = 10 Hz, when the duty cycle is no less than 98%.

VBW $\geq 1/T$, when duty cycle is less than 98% where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.4 Radiated Emission Data

4.4.1 RF Portion

A. TG-201T

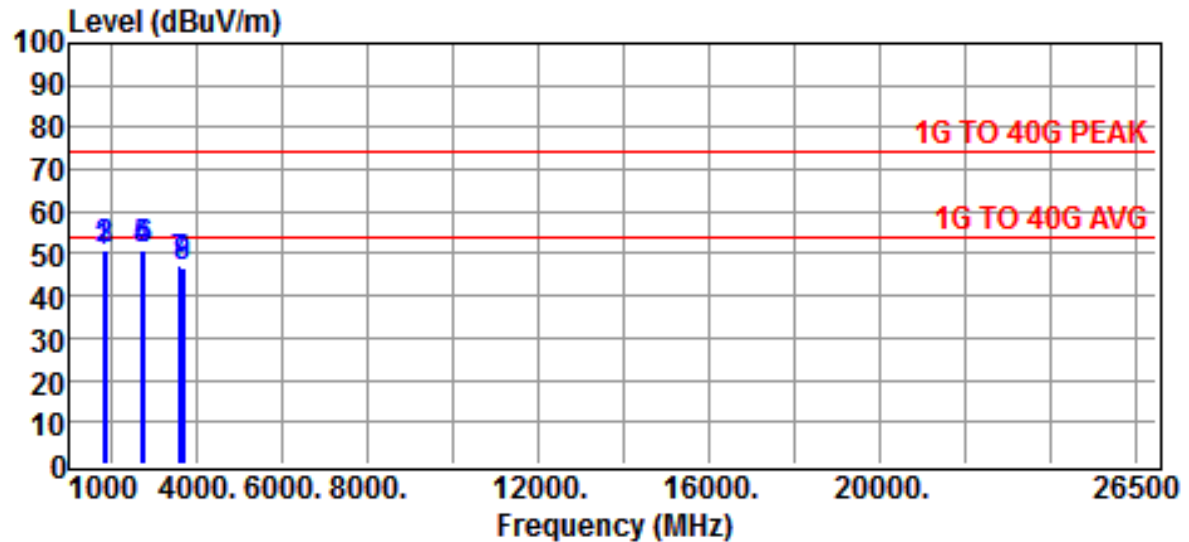


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:Wireless Tour Guide System	Model	:TG-201T
Power Rating	:BATTERY 3.7V	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	: TX -LO 903 - MI 915 - HI 927MHz		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1806.0000	58.19	-7.89	50.30	54.00	-3.70	Peak
1830.0000	58.51	-7.67	50.84	54.00	-3.16	Peak
1854.0000	58.67	-7.58	51.09	54.00	-2.91	Peak
2709.0000	55.62	-4.59	51.03	54.00	-2.97	Peak
2745.0000	55.17	-4.46	50.71	54.00	-3.29	Peak
2781.0000	54.94	-4.32	50.62	54.00	-3.38	Peak
3612.0000	48.77	-1.45	47.32	54.00	-6.68	Peak
3660.0000	48.24	-1.32	46.92	54.00	-7.08	Peak
3708.0000	47.78	-1.12	46.66	54.00	-7.34	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

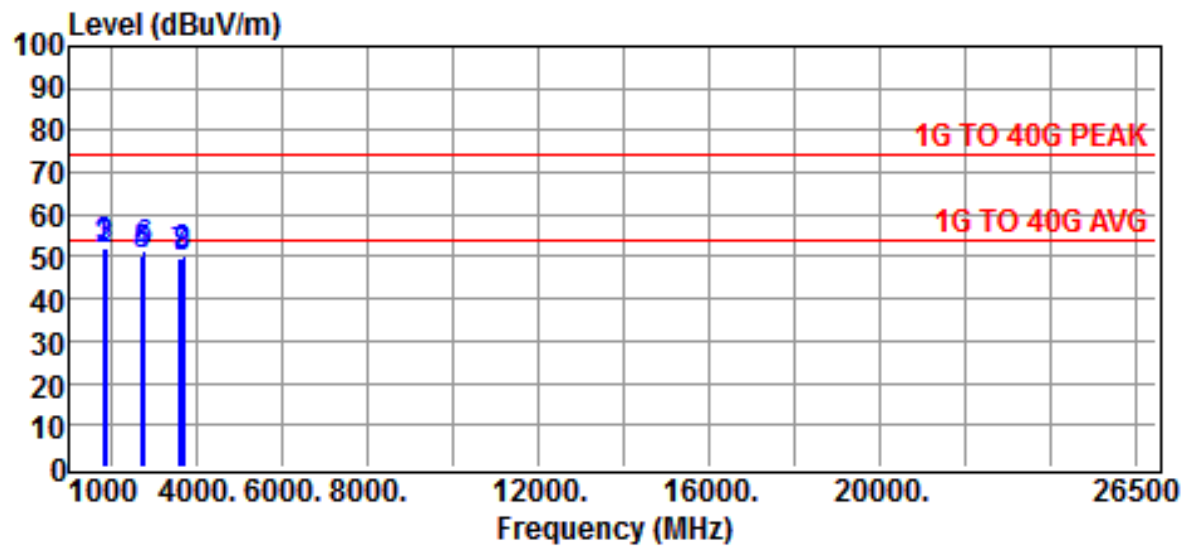


Site :CHAMBER #2 Date :2017-10-26
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT :Wireless Tour Guide System Model :TG-201T
 Power Rating :BATTERY 3.7V Temp. :24 °C
 Engineer : Brian Huang Humi. :53 %
 Test Mode : TX -LO 903 - MI 915 - HI 927MHz
 Test Mode : EUT stands vertically (worst case)

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1806.0000	59.91	-7.89	52.02	54.00	-1.98	Peak
1830.0000	59.31	-7.67	51.64	54.00	-2.36	Peak
1854.0000	59.94	-7.58	52.36	54.00	-1.64	Peak
2709.0000	54.63	-4.59	50.04	54.00	-3.96	Peak
2745.0000	54.53	-4.46	50.07	54.00	-3.93	Peak
2781.0000	55.73	-4.32	51.41	54.00	-2.59	Peak
3612.0000	51.10	-1.45	49.65	54.00	-4.35	Peak
3660.0000	51.17	-1.32	49.85	54.00	-4.15	Peak
3708.0000	51.14	-1.12	50.02	54.00	-3.98	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

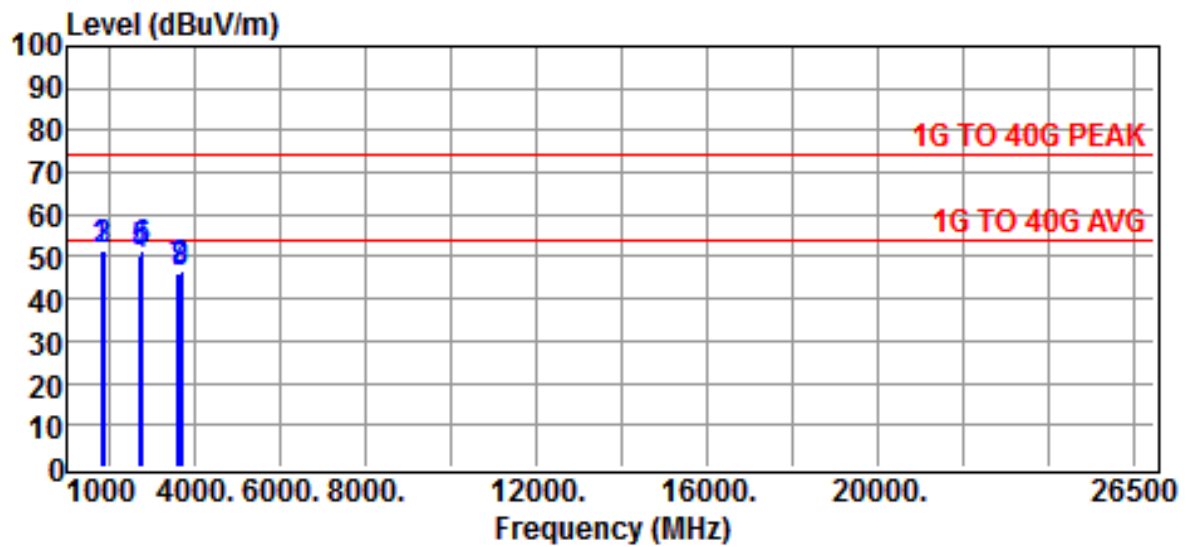
B. TG-200T

Site : CHAMBER #2 Date : 2017-10-26
 Limit : 1G TO 40G PEAK Ant. Pol. : HORIZONTAL
 EUT : Wireless Tour Guide System Model : TG-200T
 Power Rating : BATTERY 3.7V Temp. : 24 °C
 Engineer : Brian Huang Humi. : 53 %
 Test Mode : TX -LO 903 - MI 915 - HI 927MHz
 Test Mode : EUT stands vertically (worst case)

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1806.0000	59.22	-7.89	51.33	54.00	-2.67	Peak
1830.0000	59.08	-7.67	51.41	54.00	-2.59	Peak
1854.0000	59.21	-7.58	51.63	54.00	-2.37	Peak
2709.0000	54.90	-4.59	50.31	54.00	-3.69	Peak
2745.0000	55.48	-4.46	51.02	54.00	-2.98	Peak
2781.0000	55.73	-4.32	51.41	54.00	-2.59	Peak
3612.0000	47.77	-1.45	46.32	54.00	-7.68	Peak
3660.0000	47.24	-1.32	45.92	54.00	-8.08	Peak
3708.0000	47.97	-1.12	46.85	54.00	-7.15	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value = Limit - Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

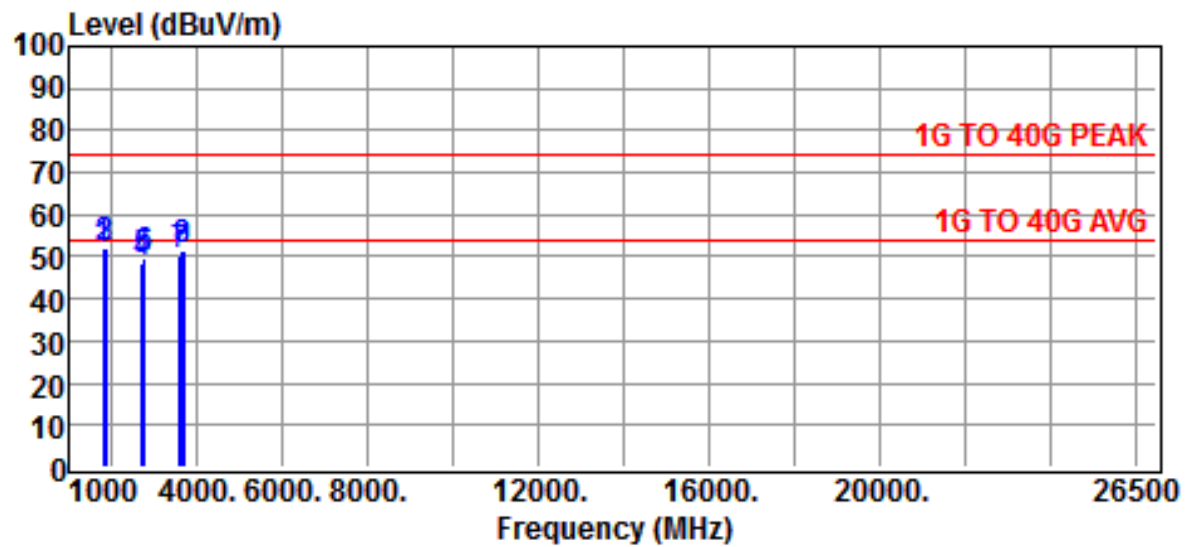

Site : CHAMBER #2 Date : 2017-10-26
 Limit : 1G TO 40G PEAK Ant. Pol. : VERTICAL
 EUT : Wireless Tour Guide System Model : TG-200T
 Power Rating : BATTERY 3.7V Temp. : 24 °C
 Engineer : Brian Huang Humi. : 53 %
 Test Mode : TX -LO 903 - MI 915 - HI 927MHz
 Test Mode : EUT stands vertically (worst case)


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1806.0000	59.25	-7.89	51.36	54.00	-2.64	Peak
1830.0000	59.62	-7.67	51.95	54.00	-2.05	Peak
1854.0000	59.60	-7.58	52.02	54.00	-1.98	Peak
2709.0000	53.24	-4.59	48.65	54.00	-5.35	Peak
2745.0000	53.78	-4.46	49.32	54.00	-4.68	Peak
2781.0000	53.95	-4.32	49.63	54.00	-4.37	Peak
3612.0000	51.78	-1.45	50.33	54.00	-3.67	Peak
3660.0000	52.64	-1.32	51.32	54.00	-2.68	Peak
3708.0000	52.58	-1.12	51.46	54.00	-2.54	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The margin value = Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

4.4.2 Other Emission

a) Emission frequencies below 1 GHz

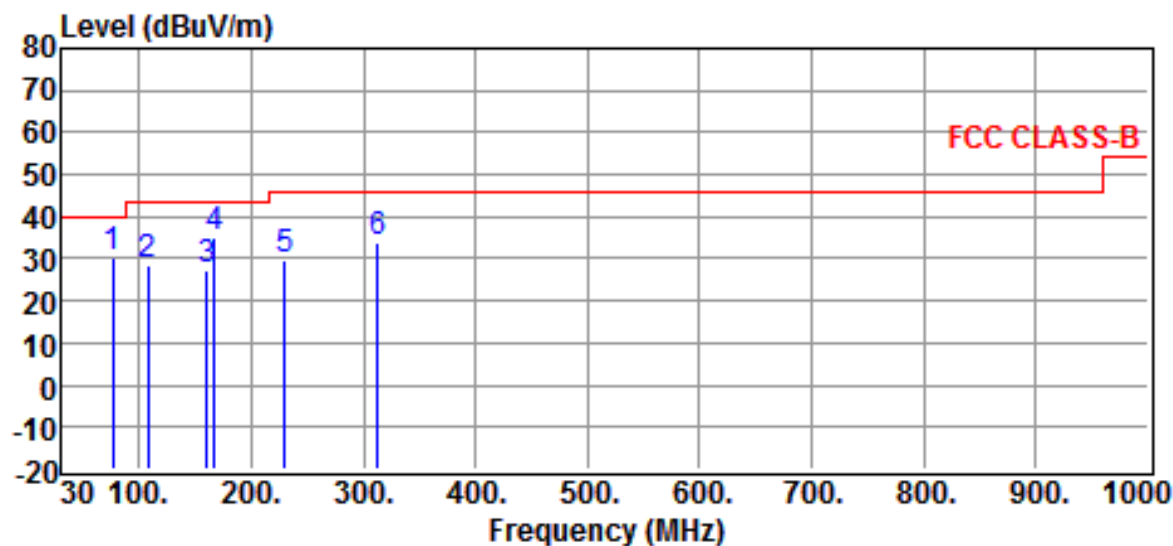


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	:Wireless Tour Guide System	Model	:TG-201T
Power Rating	:DC 5V From NB	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:Charge Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
76.5600	43.48	-13.11	30.37	40.00	-9.63	QP
107.6000	37.44	-8.97	28.47	43.50	-15.03	QP
159.9800	35.22	-7.82	27.40	43.50	-16.10	QP
167.7400	43.29	-8.12	35.17	43.50	-8.33	QP
229.8200	36.56	-7.01	29.55	46.00	-16.45	QP
313.2400	36.53	-2.73	33.80	46.00	-12.20	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result

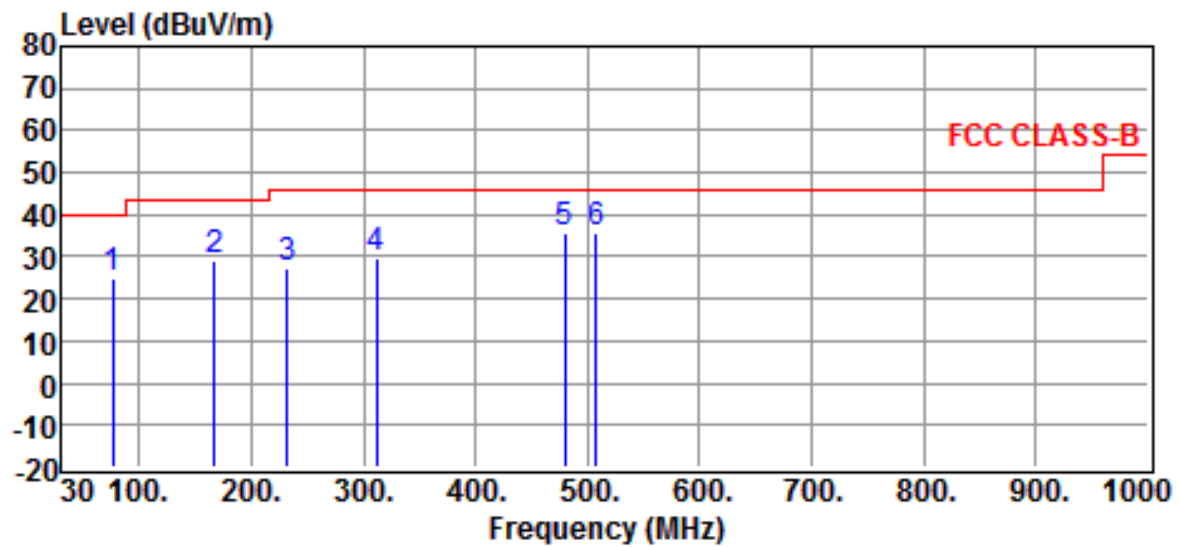


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	:Wireless Tour Guide System	Model	:TG-201T
Power Rating	:DC 5V From NB	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:Charge Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
76.5600	38.10	-13.11	24.99	40.00	-15.01	QP
167.7400	37.15	-8.12	29.03	43.50	-14.47	QP
231.7600	34.36	-6.93	27.43	46.00	-18.57	QP
311.3000	32.57	-2.77	29.80	46.00	-16.20	QP
480.0800	35.93	0.04	35.97	46.00	-10.03	QP
507.2400	35.64	0.30	35.94	46.00	-10.06	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit - Result

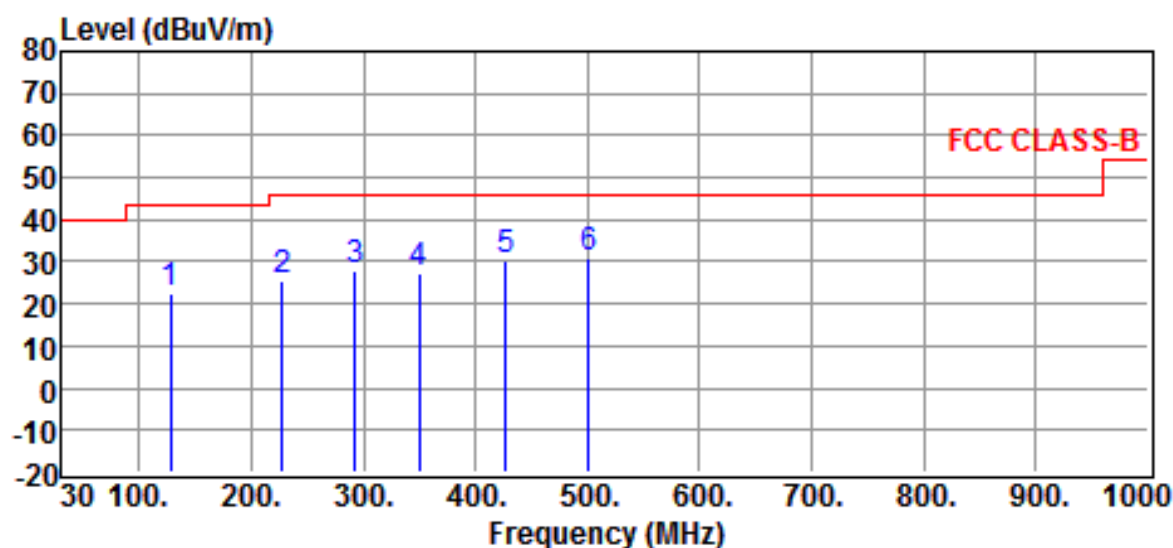

Site : CHAMBER #2

Date : 2017-10-26

Limit : FCC CLASS-B

Ant. Pol. : HORIZONTAL

EUT : Wireless Tour Guide System

Model : TG-201T

Power Rating : BATTERY 3.7V

Temp. : 24 °C

Engineer : Brian Huang

Humi. : 52 %

Test Mode : Operation Mode

Test Mode : EUT stands vertically (worst case)


Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
127.9700	30.29	-7.58	22.71	43.50	-20.79	QP
227.8800	32.34	-7.03	25.31	46.00	-20.69	QP
292.8700	31.01	-3.32	27.69	46.00	-18.31	QP
350.1000	29.83	-2.28	27.55	46.00	-18.45	QP
426.7300	30.96	-0.47	30.49	46.00	-15.51	QP
501.4200	30.69	0.22	30.91	46.00	-15.09	QP

Note :

1. Result = Reading + Corrected Factor

2. Corrected Factor = Antenna Factor + Cable Loss

3. The margin value = Limit – Result

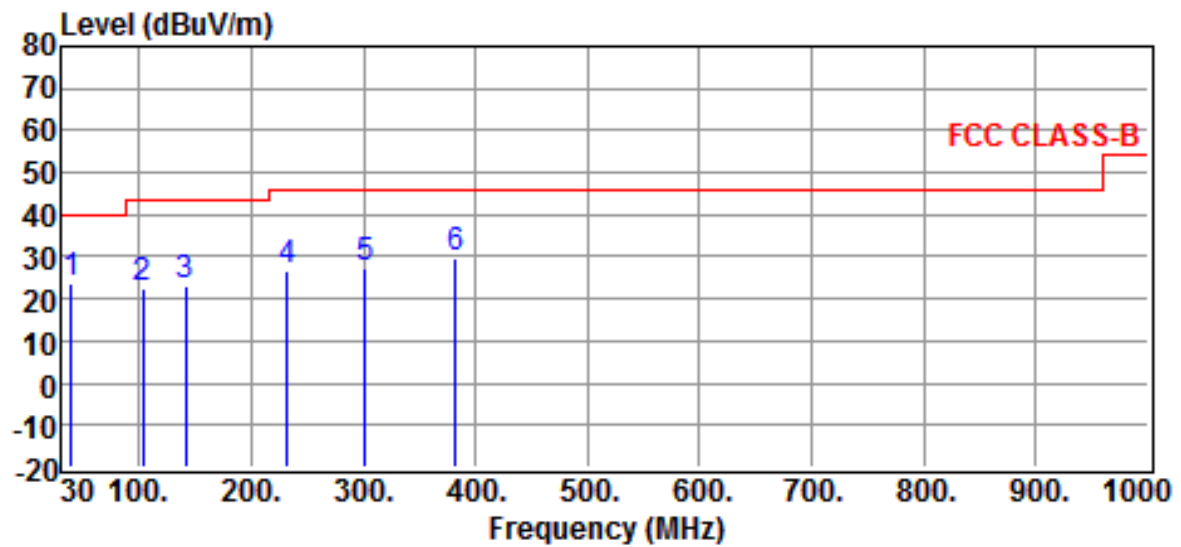


Site : CHAMBER #2 Date : 2017-10-26
 Limit : FCC CLASS-B Ant. Pol. : VERTICAL
 EUT : Wireless Tour Guide System Model : TG-201T
 Power Rating : BATTERY 3.7V Temp. : 24 °C
 Engineer : Brian Huang Humi. : 52 %
 Test Mode : Operation Mode
 Test Mode : EUT stands vertically (worst case)

Freq	Reading	Correction	Result	Limits	Over limit	Detector
MHz	dBuV	Factor	dBuV/m	dBuV/m	dB	
39.7000	29.43	-6.00	23.43	40.00	-16.57	QP
103.7200	31.75	-9.34	22.41	43.50	-21.09	QP
141.5500	30.28	-7.27	23.01	43.50	-20.49	QP
231.7600	33.76	-6.93	26.83	46.00	-19.17	QP
301.6000	30.21	-2.88	27.33	46.00	-18.67	QP
382.1100	30.73	-1.29	29.44	46.00	-16.56	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value = Limit – Result

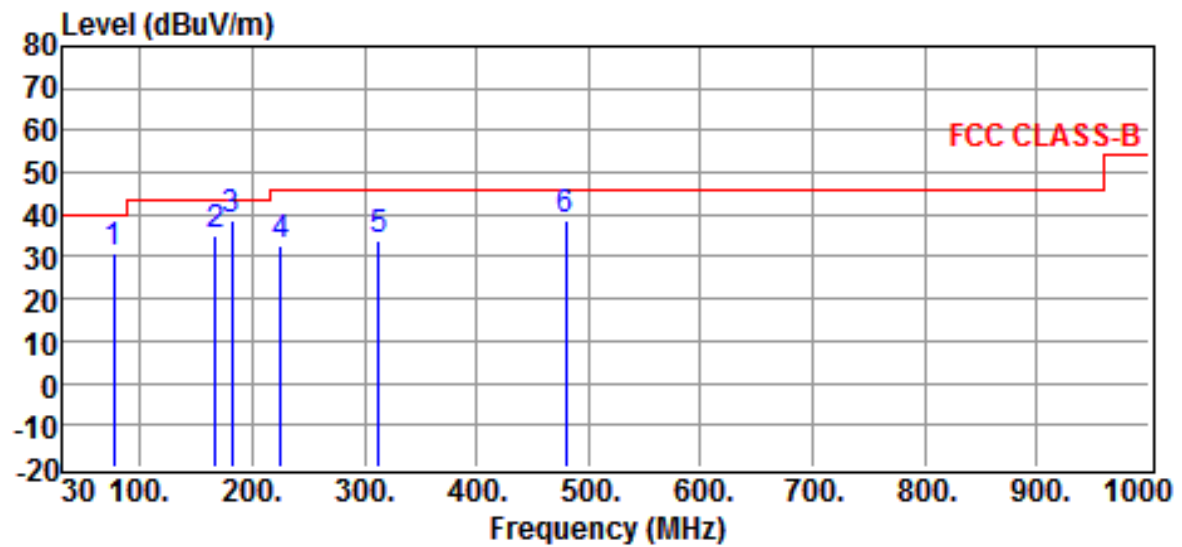


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	:Wireless Tour Guide System	Model	:TG-200T
Power Rating	:DC 5V From NB	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:Charge Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
76.5600	43.98	-13.11	30.87	40.00	-9.13	QP
167.7400	43.29	-8.12	35.17	43.50	-8.33	QP
181.3200	47.72	-9.03	38.69	43.50	-4.81	QP
225.9400	39.68	-7.04	32.64	46.00	-13.36	QP
313.2400	36.53	-2.73	33.80	46.00	-12.20	QP
480.0800	38.76	0.04	38.80	46.00	-7.20	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

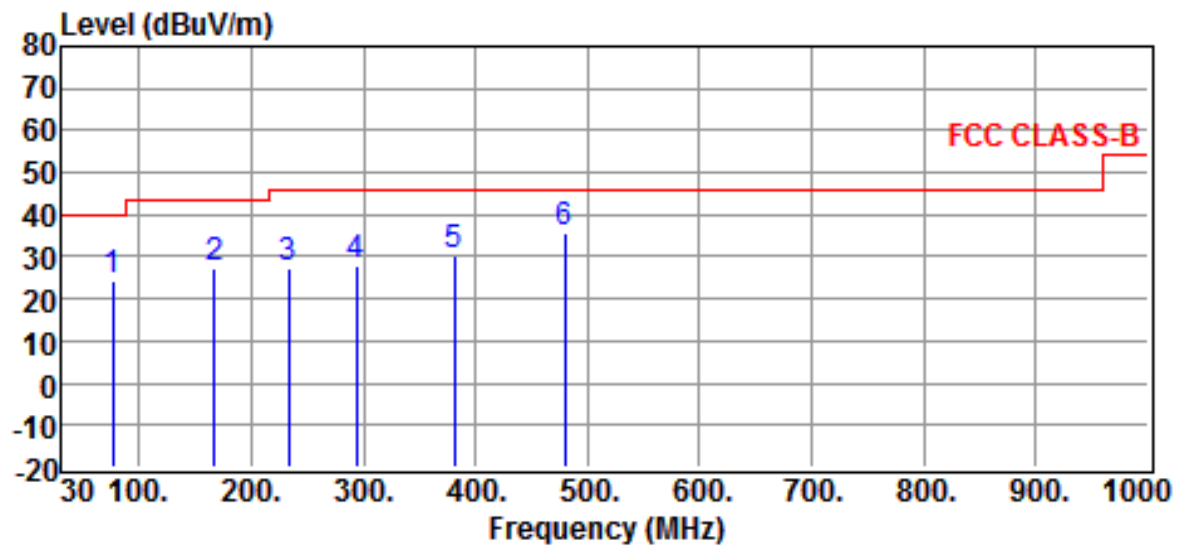


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	:Wireless Tour Guide System	Model	:TG-200T
Power Rating	:DC 5V From NB	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:Charge Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
76.5600	37.60	-13.11	24.49	40.00	-15.51	QP
167.7400	35.56	-8.12	27.44	43.50	-16.06	QP
233.7000	33.92	-6.85	27.07	46.00	-18.93	QP
293.8400	31.41	-3.26	28.15	46.00	-17.85	QP
381.1400	31.55	-1.33	30.22	46.00	-15.78	QP
480.0800	35.93	0.04	35.97	46.00	-10.03	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

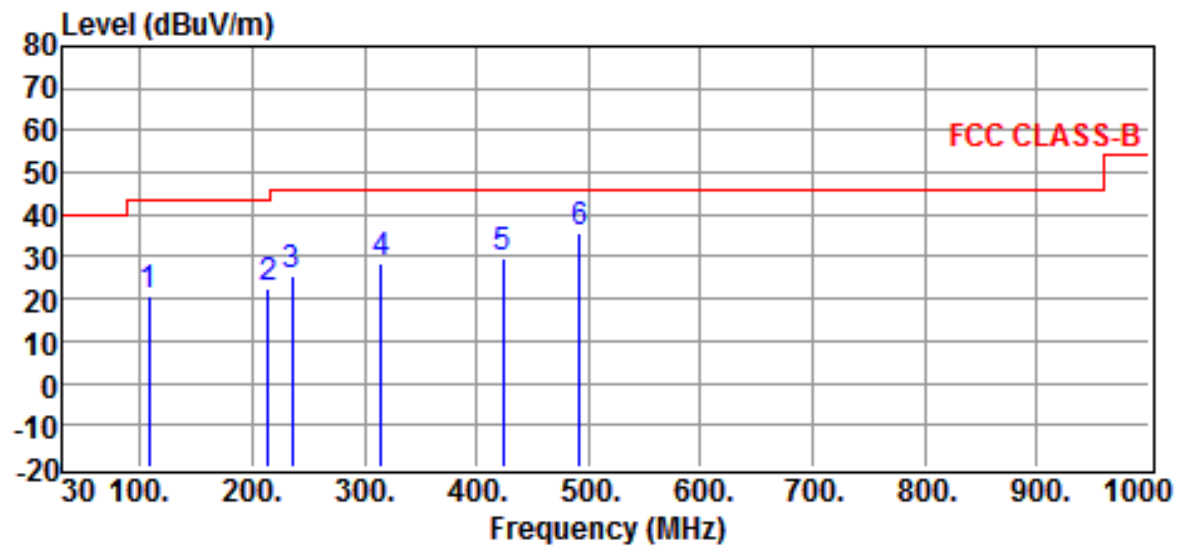


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:FCC CLASS-B	Ant. Pol.	:HORIZONTAL
EUT	:Wireless Tour Guide System	Model	:TG-200T
Power Rating	:BATTERY 3.7V	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:Operation Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq	Reading	Correction	Result	Limits	Over limit	Detector
MHz	dBuV	Factor	dBuV/m	dBuV/m	dB	
107.6000	29.61	-8.97	20.64	43.50	-22.86	QP
214.3000	29.49	-6.78	22.71	43.50	-20.79	QP
235.6400	32.53	-6.78	25.75	46.00	-20.25	QP
315.1800	30.94	-2.70	28.24	46.00	-17.76	QP
423.8200	30.29	-0.50	29.79	46.00	-16.21	QP
491.7200	35.28	0.13	35.41	46.00	-10.59	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

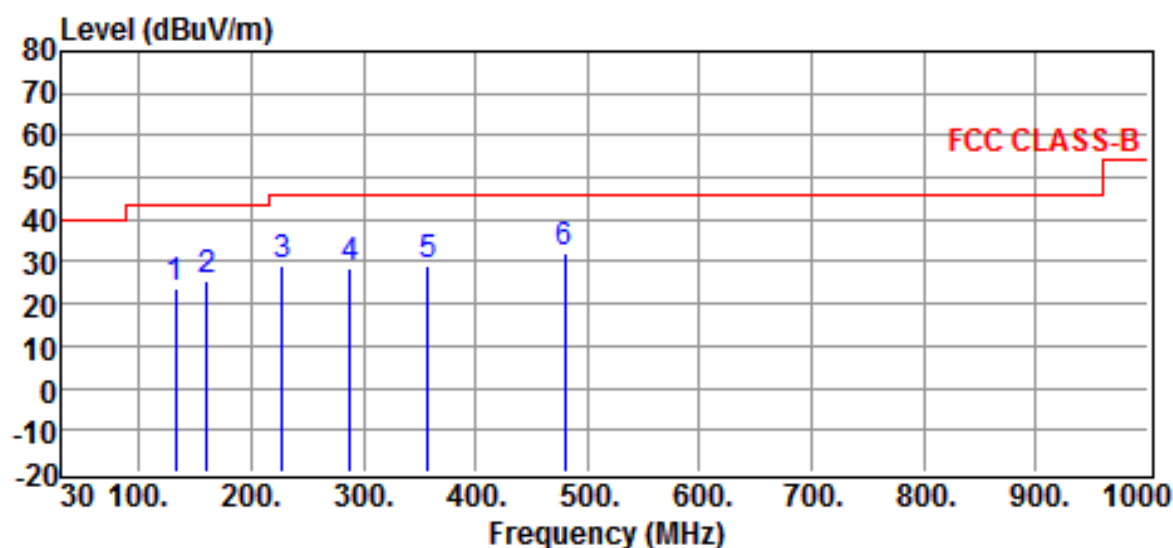


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:FCC CLASS-B	Ant. Pol.	:VERTICAL
EUT	:Wireless Tour Guide System	Model	:TG-200T
Power Rating	:BATTERY 3.7V	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:52 %
Test Mode	:Operation Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
132.8200	31.36	-7.40	23.96	43.50	-19.54	QP
159.9800	33.08	-7.82	25.26	43.50	-18.24	QP
227.8800	36.26	-7.03	29.23	46.00	-16.77	QP
288.0200	32.04	-3.62	28.42	46.00	-17.58	QP
357.8600	31.39	-2.04	29.35	46.00	-16.65	QP
480.0800	32.34	0.04	32.38	46.00	-13.62	QP

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result

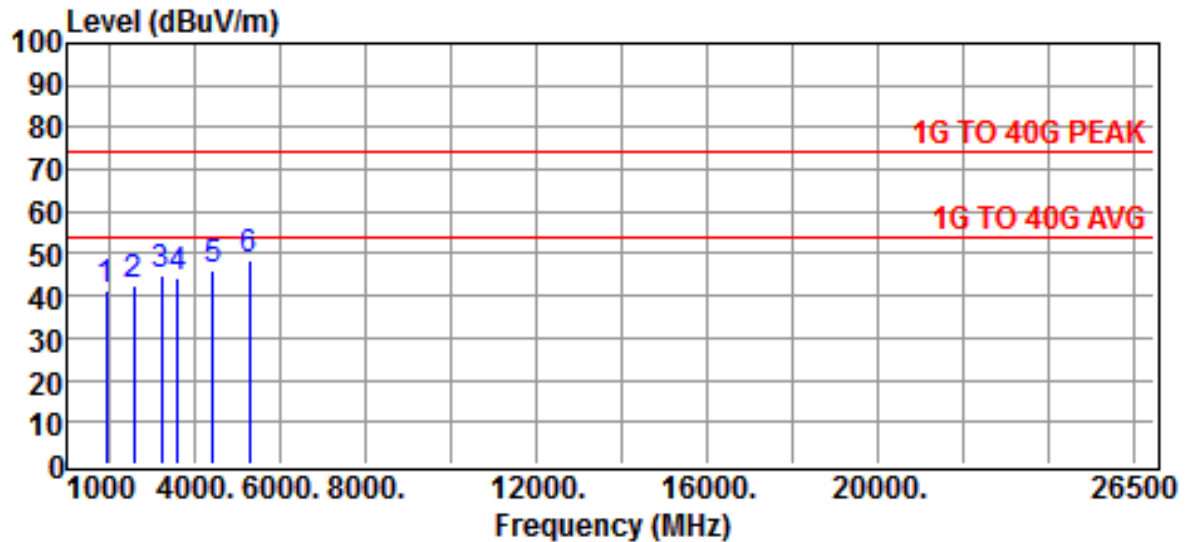
b) Emission frequencies Above 1GHz

Site	:CHAMBER #2	Date	:2017-10-26
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:Wireless Tour Guide System	Model	:TG-201T
Power Rating	:DC 5V From NB	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Charge Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1920.0000	48.30	-7.14	41.16	54.00	-12.84	Peak
2575.0000	47.74	-5.11	42.63	54.00	-11.37	Peak
3225.0000	47.75	-2.77	44.98	54.00	-9.02	Peak
3610.0000	46.05	-1.45	44.60	54.00	-9.40	Peak
4420.0000	45.91	0.14	46.05	54.00	-7.95	Peak
5270.0000	46.13	2.34	48.47	54.00	-5.53	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

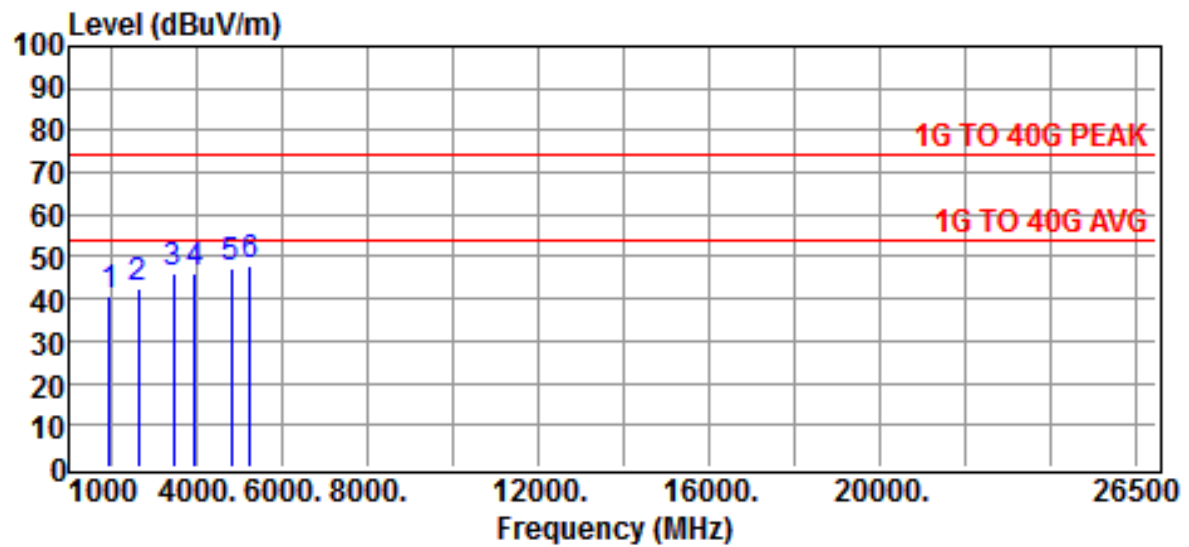


Site : CHAMBER #2 Date : 2017-10-26
 Limit : 1G TO 40G PEAK Ant. Pol. : VERTICAL
 EUT : Wireless Tour Guide System Model : TG-201T
 Power Rating : DC 5V From NB Temp. : 24 °C
 Engineer : Brian Huang Humi. : 53 %
 Test Mode : Charge Mode
 Test Mode : EUT stands vertically (worst case)

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1945.0000	47.79	-6.92	40.87	54.00	-13.13	Peak
2620.0000	47.55	-4.98	42.57	54.00	-11.43	Peak
3450.0000	48.19	-2.06	46.13	54.00	-7.87	Peak
3970.0000	46.48	-0.10	46.38	54.00	-7.62	Peak
4825.0000	46.14	1.24	47.38	54.00	-6.62	Peak
5250.0000	45.84	2.32	48.16	54.00	-5.84	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value = Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

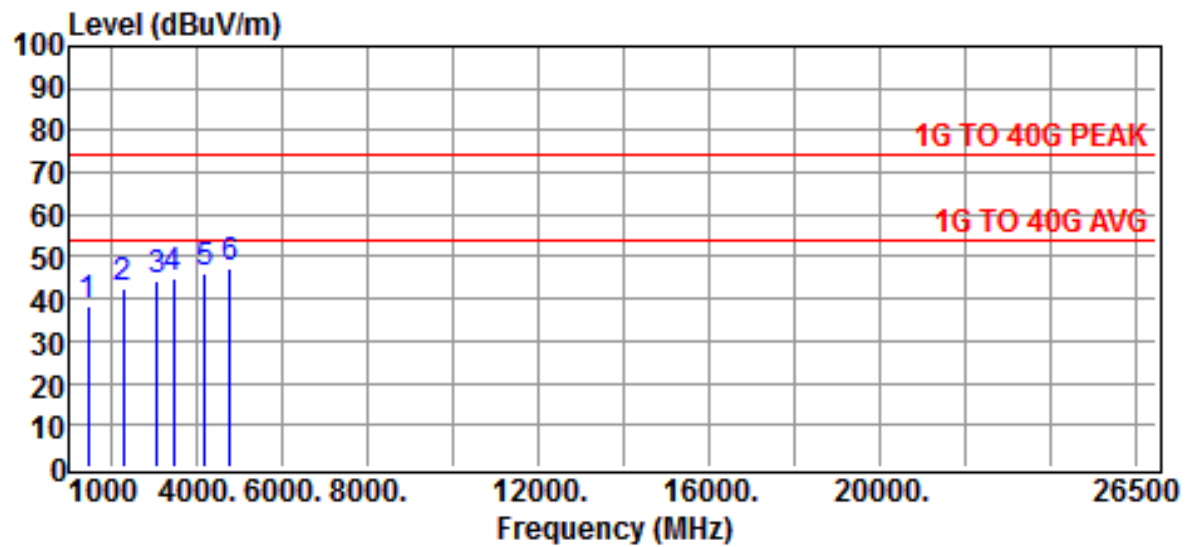


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:Wireless Tour Guide System	Model	:TG-201T
Power Rating	:BATTERY 3.7V	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Operation Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1450.0000	48.57	-10.04	38.53	54.00	-15.47	Peak
2280.0000	48.29	-5.96	42.33	54.00	-11.67	Peak
3070.0000	47.61	-3.26	44.35	54.00	-9.65	Peak
3450.0000	46.88	-2.06	44.82	54.00	-9.18	Peak
4195.0000	46.17	0.05	46.22	54.00	-7.78	Peak
4780.0000	46.15	1.08	47.23	54.00	-6.77	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

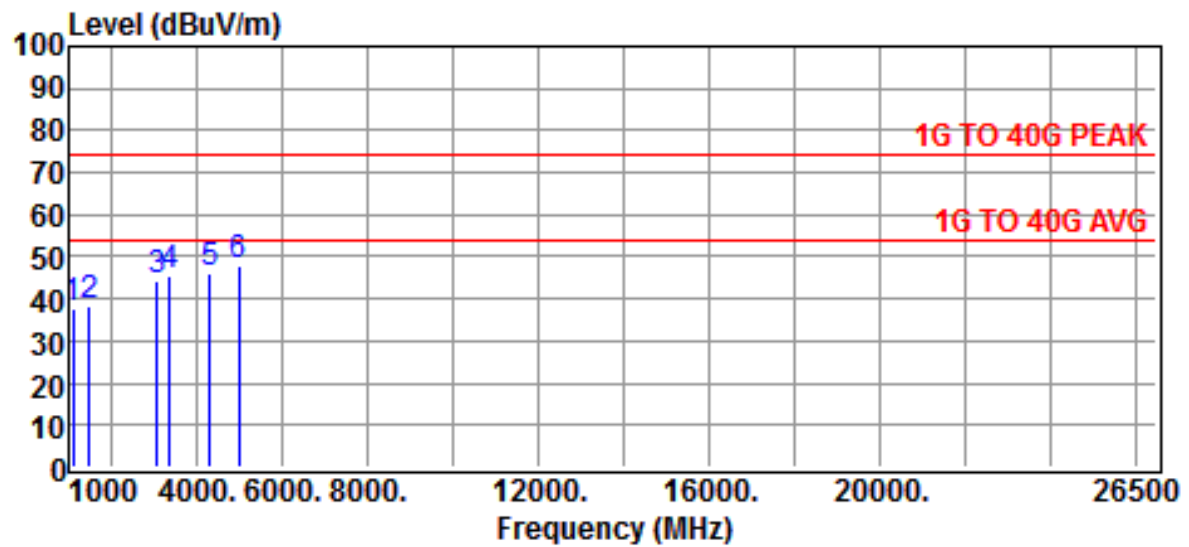


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:Wireless Tour Guide System	Model	:TG-201T
Power Rating	:BATTERY 3.7V	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Operation Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1110.0000	48.97	-11.11	37.86	54.00	-16.14	Peak
1495.0000	48.43	-9.94	38.49	54.00	-15.51	Peak
3070.0000	47.61	-3.26	44.35	54.00	-9.65	Peak
3385.0000	47.58	-2.27	45.31	54.00	-8.69	Peak
4305.0000	45.71	0.11	45.82	54.00	-8.18	Peak
4980.0000	46.16	1.74	47.90	54.00	-6.10	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

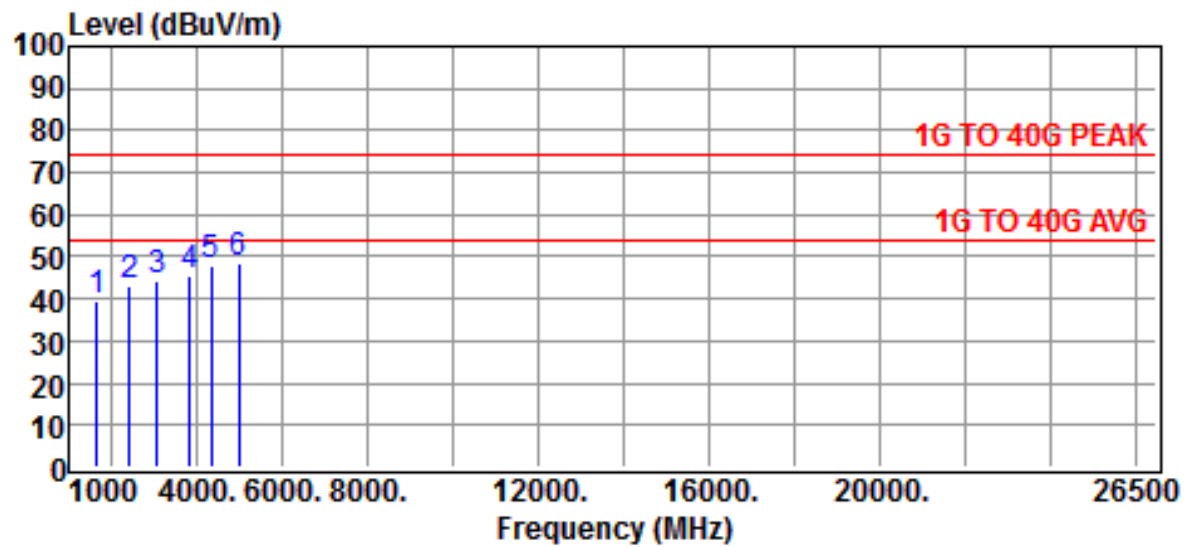


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:Wireless Tour Guide System	Model	:TG-200T
Power Rating	:DC 5V From NB	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Charge Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1650.0000	48.54	-8.91	39.63	54.00	-14.37	Peak
2415.0000	48.58	-5.63	42.95	54.00	-11.05	Peak
3070.0000	47.79	-3.26	44.53	54.00	-9.47	Peak
3835.0000	46.41	-0.61	45.80	54.00	-8.20	Peak
4350.0000	47.72	0.12	47.84	54.00	-6.16	Peak
4980.0000	46.64	1.74	48.38	54.00	-5.62	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

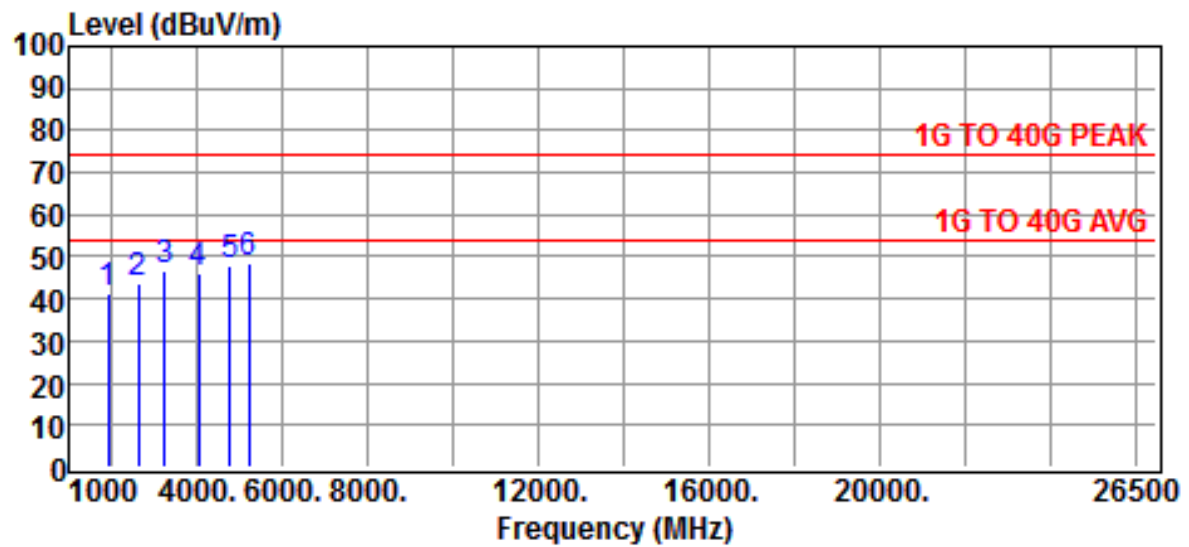


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:Wireless Tour Guide System	Model	:TG-200T
Power Rating	:DC 5V From NB	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Charge Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1920.0000	48.36	-7.14	41.22	54.00	-12.78	Peak
2640.0000	48.42	-4.90	43.52	54.00	-10.48	Peak
3250.0000	49.43	-2.72	46.71	54.00	-7.29	Peak
4035.0000	45.88	-0.01	45.87	54.00	-8.13	Peak
4780.0000	46.54	1.08	47.62	54.00	-6.38	Peak
5230.0000	46.02	2.29	48.31	54.00	-5.69	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

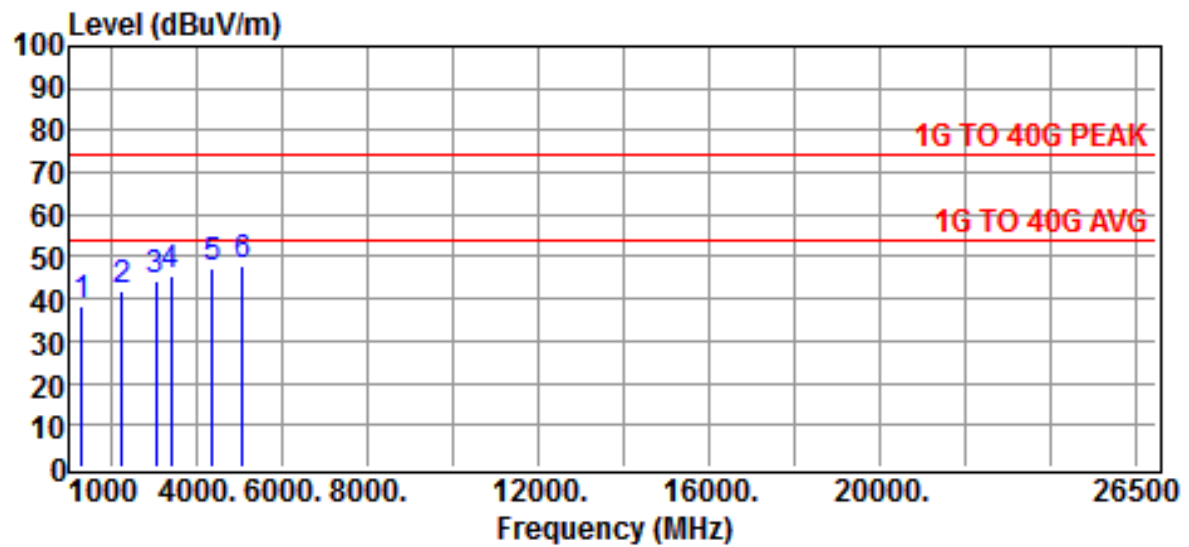


Site	:CHAMBER #2	Date	:2017-10-26
Limit	:1G TO 40G PEAK	Ant. Pol.	:HORIZONTAL
EUT	:Wireless Tour Guide System	Model	:TG-200T
Power Rating	:BATTERY 3.7V	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Operation Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1315.0000	48.74	-10.48	38.26	54.00	-15.74	Peak
2260.0000	48.06	-5.99	42.07	54.00	-11.93	Peak
3045.0000	47.75	-3.36	44.39	54.00	-9.61	Peak
3405.0000	48.04	-2.23	45.81	54.00	-8.19	Peak
4375.0000	47.00	0.13	47.13	54.00	-6.87	Peak
5070.0000	45.93	1.94	47.87	54.00	-6.13	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

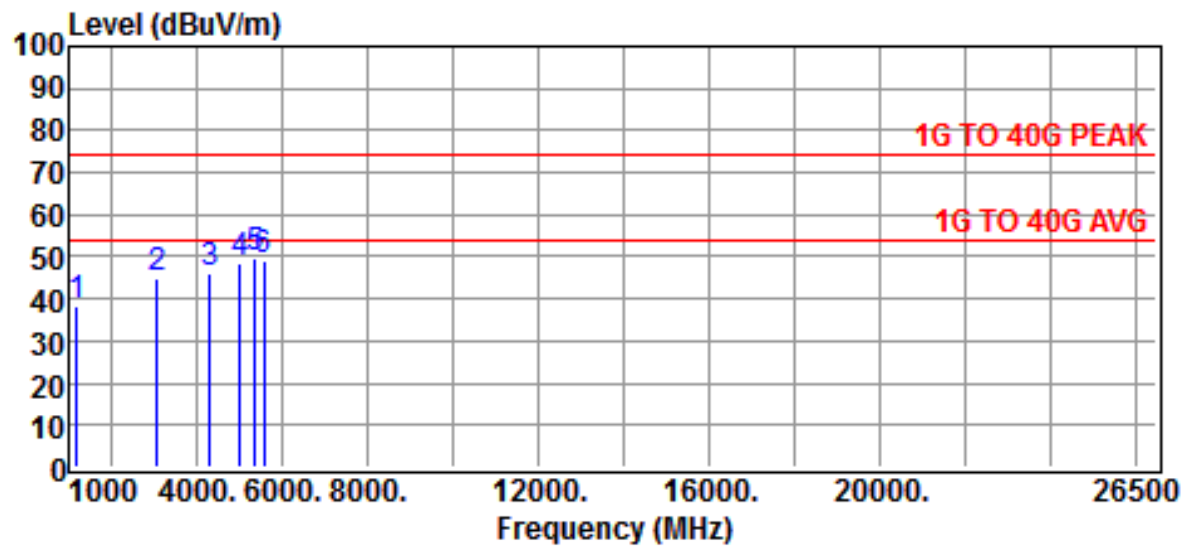

Site	:CHAMBER #2	Date	:2017-10-26
Limit	:1G TO 40G PEAK	Ant. Pol.	:VERTICAL
EUT	:Wireless Tour Guide System	Model	:TG-200T
Power Rating	:BATTERY 3.7V	Temp.	:24 °C
Engineer	: Brian Huang	Humi.	:53 %
Test Mode	:Operation Mode		
Test Mode	: EUT stands vertically (worst case)		

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits (AVG) dBuV/m	Over limit dB	Detector
1200.0000	49.40	-10.81	38.59	54.00	-15.41	Peak
3090.0000	48.15	-3.20	44.95	54.00	-9.05	Peak
4305.0000	46.16	0.11	46.27	54.00	-7.73	Peak
5005.0000	46.81	1.83	48.64	54.00	-5.36	Peak
5360.0000	46.90	2.53	49.43	54.00	-4.57	Peak
5565.0000	46.12	2.92	49.04	54.00	-4.96	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss
3. The margin value=Limit – Result
4. Peak measurements are compared to the average limit - as peak measurements are below the average limit, they also comply with the peak limit.

c) Emission frequencies below 30MHz (9kHz - 30MHz)

According to exploratory test no any obvious emissions were detected from 9 kHz to 30MHz. All emissions were greater than 20 dB below the limit. Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open are test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss(if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where

Corrected Factor = Antenna FACTOR + Cable Loss + High Pass Filter Loss - Amplifier Gain


4.6 Photos of Radiation Measuring Setup

(Below 1GHz)

Charge Mode



Operation Mode

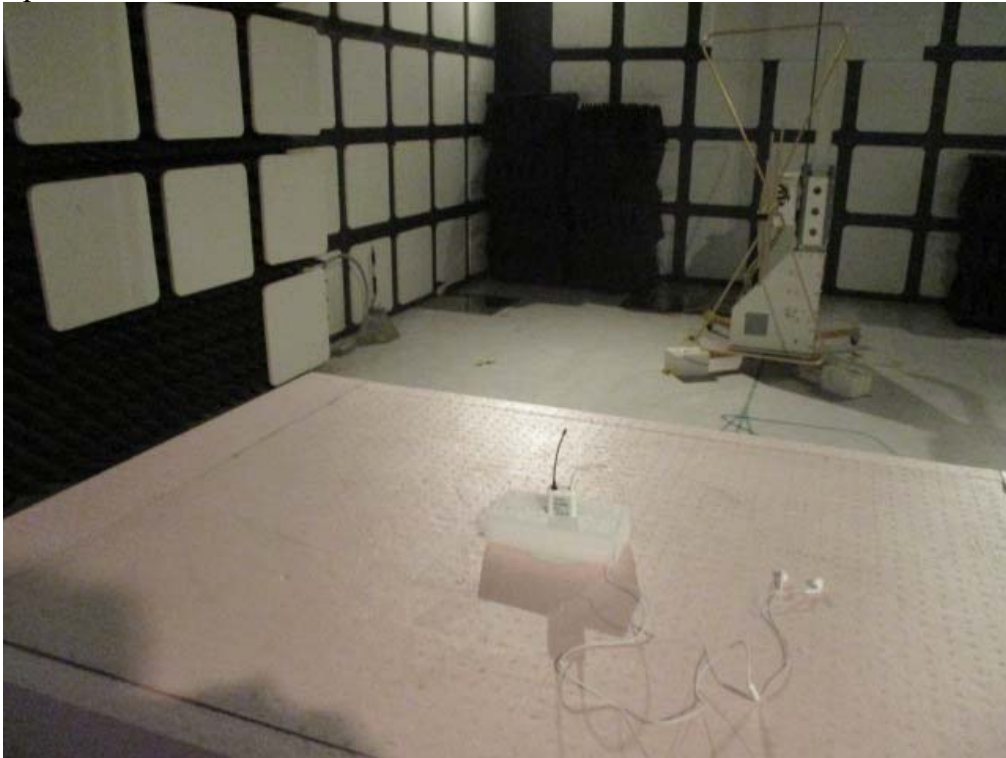


(Above 1GHz)

Charge Mode



Operation Mode

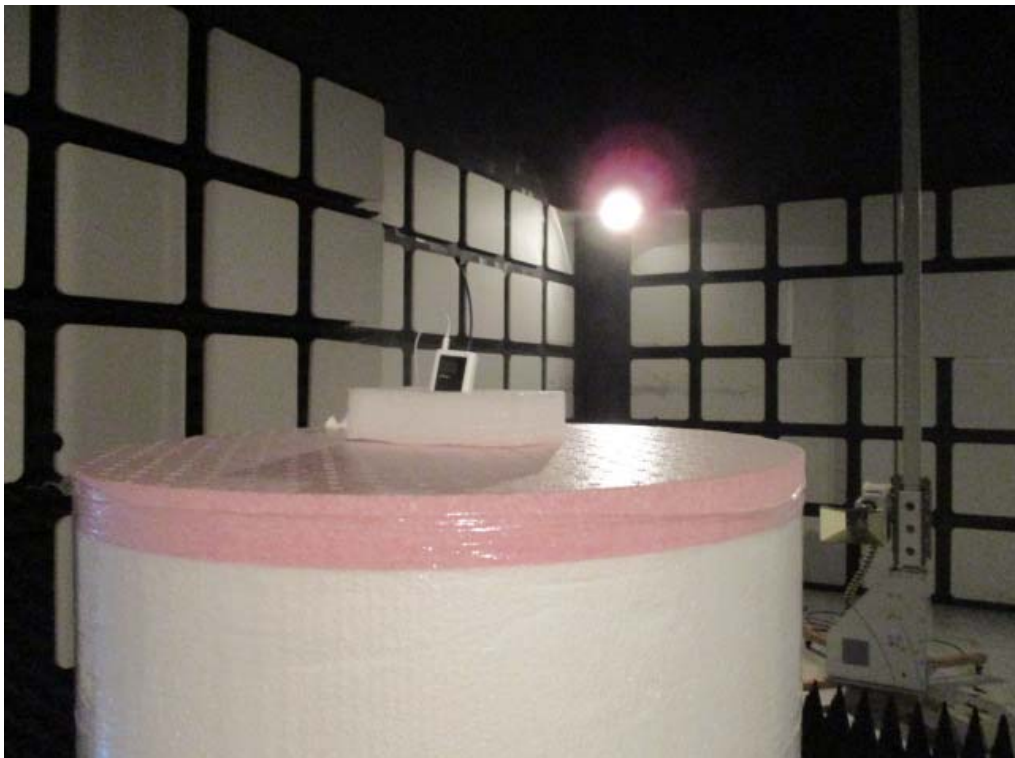

5 CONDUCTED EMISSION MEASUREMENT


5.1 Standard Applicable

For unintentional and intentional device, Line Conducted Emission Limits are in accordance to § 15.107(a) and § 15.207(a) respectively. Both Limits are identical specification.


5.2 Measurement Procedure

1. Setup the configuration per figure 3.
2. A preliminary scan with a spectrum monitor is performed to identify the frequency of emission that has the highest amplitude relative to the limit by operating the EUT in selected modes of operation, typical cable positions, and with a typical system configuration.
3. Record the 6 or 8 highest emissions relative to the limit.
4. Measure each frequency obtained from step 3 by a test receiver set on quasi peak detector function, and then record the accuracy frequency and emission level. If all emissions measured in the specified band are attenuated more than 20 dB from the limit, this step would be ignored, and the peak detector function would be used.
5. Confirm the highest three emissions with variation of the EUT cable configuration and record the final data.
6. Repeat all above procedures on measuring each operation mode of EUT.

Figure 3 : Conducted emissions measurement configuration

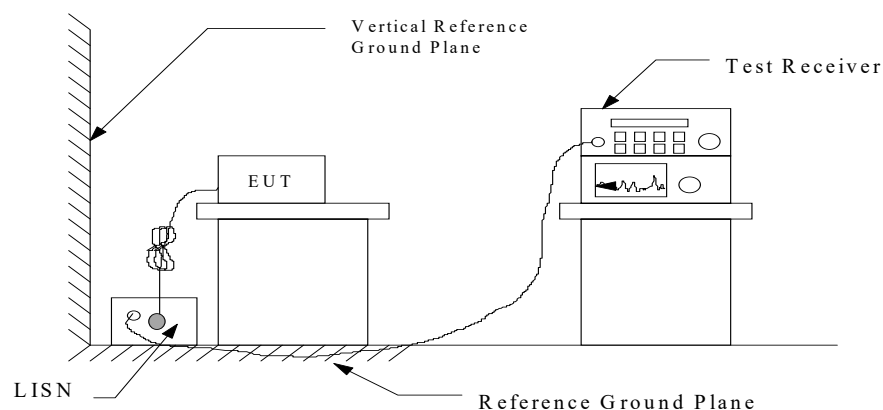

5.3 Conducted Emission Data

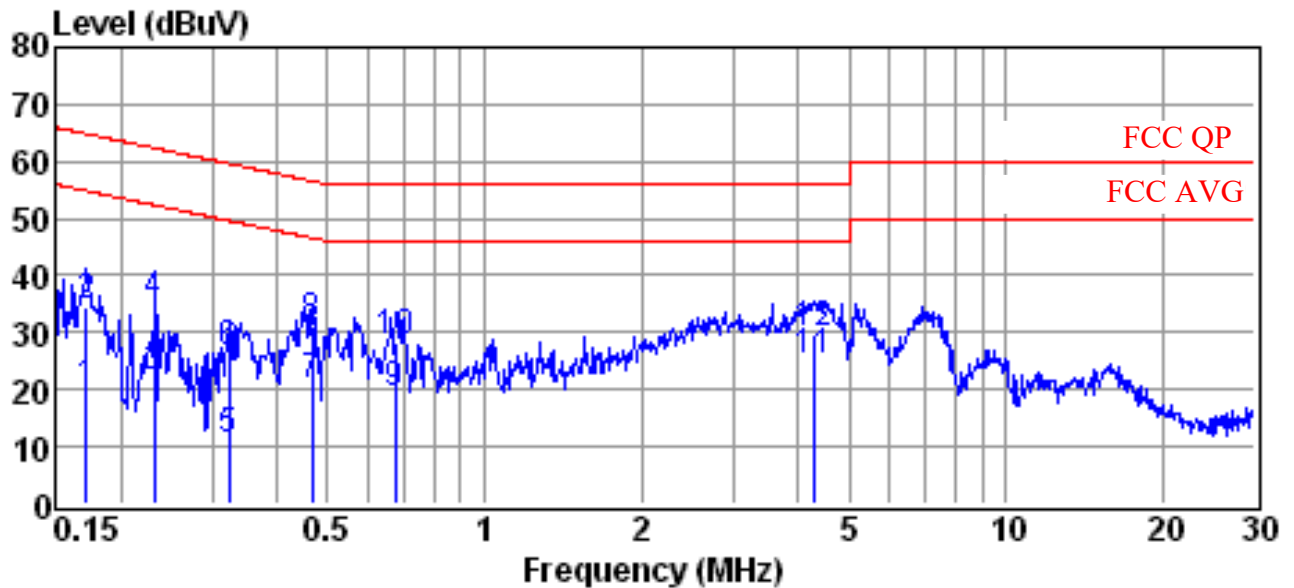

Site : conducted #1

Date : 08-22-2017

Condition : FCC

LISN : NEUTRAL

Tem / Hum : 26 °C / 50%

Test Mode : Charging Mode

EUT : Wireless Tour Guide System


Power Rating : Power from PC(DC5V) TG-201T

Freq (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV)	Limit Line (dBUV)	Over Limit (dB)	Remark
0.1722	9.37	10.16	19.53	54.86	-35.33	Average
0.1722	24.40	10.16	34.56	64.86	-30.30	QP
0.2329	11.87	10.17	22.04	52.35	-30.31	Average
0.2329	24.87	10.17	35.04	62.35	-27.31	QP
0.3234	0.81	10.18	10.99	49.62	-38.63	Average
0.3234	15.98	10.18	26.16	59.62	-33.46	QP
0.4661	10.36	10.19	20.55	46.58	-26.03	Average
0.4661	20.91	10.19	31.10	56.58	-25.48	QP
0.6754	8.90	10.20	19.10	46.00	-26.90	Average
0.6754	17.92	10.20	28.12	56.00	-27.88	QP
4.2690	14.35	10.36	24.71	46.00	-21.29	Average
4.2690	19.50	10.36	29.86	56.00	-26.14	QP

Note :

1. Result = Reading + Factor

2. Factor = LISN Factor + Cable Loss

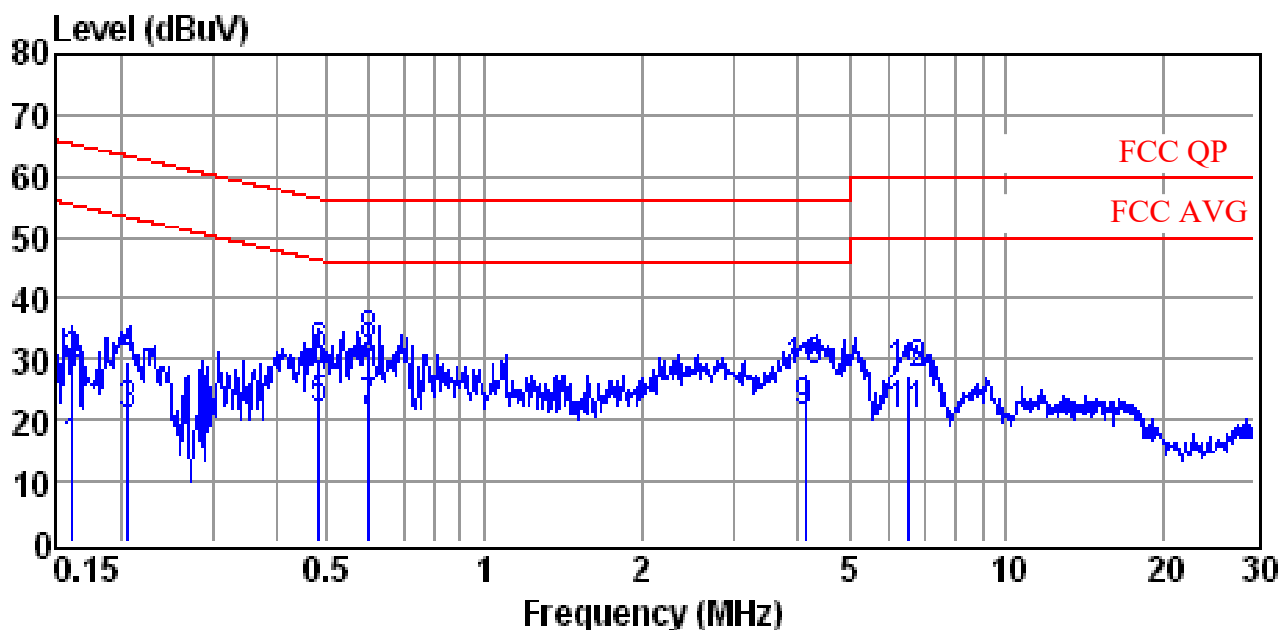

Site : conducted #1

Date : 08-22-2017

Condition : FCC

LISN : LINE

Tem / Hum : 26 °C / 50%

Test Mode : Charging Mode

EUT : Wireless Tour Guide System


Power Rating : Power from PC(DC5V) TG-201T

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1624	4.49	10.18	14.67	55.34	-40.67	Average
0.1624	18.44	10.18	28.62	65.34	-36.72	QP
0.2072	10.40	10.18	20.58	53.32	-32.74	Average
0.2072	19.71	10.18	29.89	63.32	-33.43	QP
0.4812	11.30	10.19	21.49	46.32	-24.83	Average
0.4812	19.97	10.19	30.16	56.32	-26.16	QP
0.6011	10.99	10.19	21.18	46.00	-24.82	Average
0.6011	21.79	10.19	31.98	56.00	-24.02	QP
4.1140	10.69	10.37	21.06	46.00	-24.94	Average
4.1140	17.57	10.37	27.94	56.00	-28.06	QP
6.5230	10.19	10.51	20.70	50.00	-29.30	Average
6.5230	16.79	10.51	27.30	60.00	-32.70	QP

Note :

1. Result = Reading + Factor

2. Factor = LISN Factor + Cable Loss

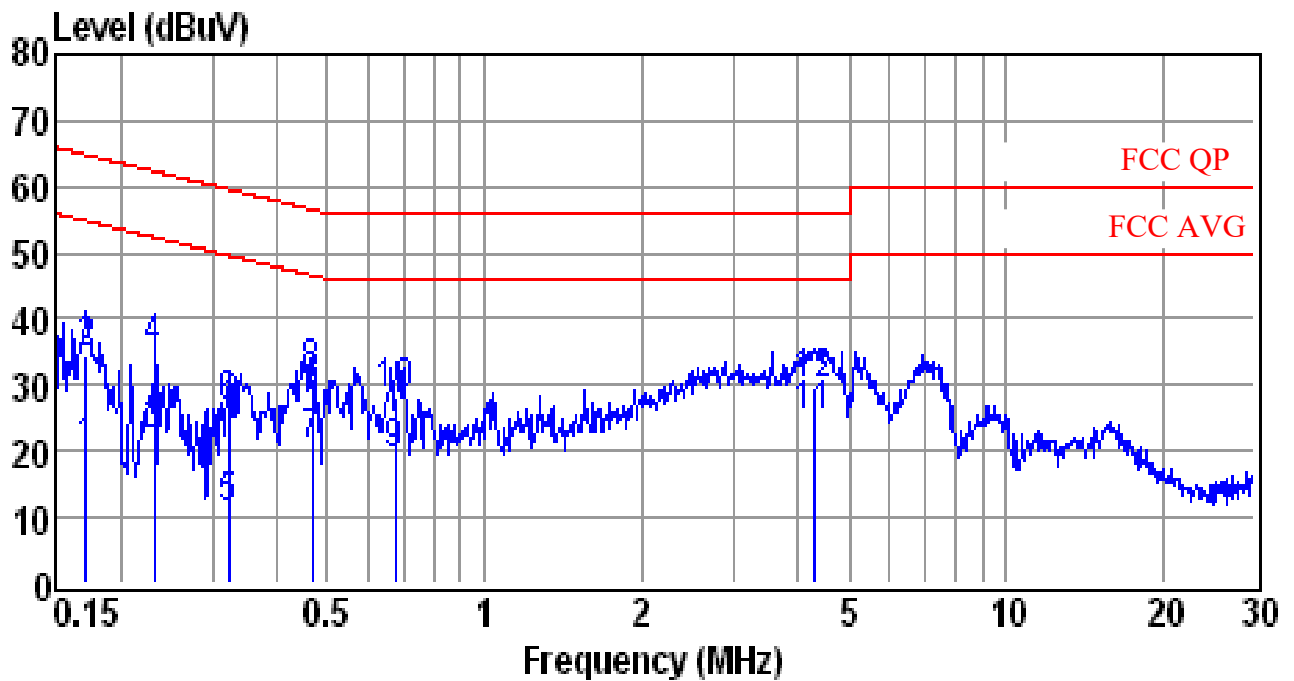

Site : conducted #1

Date : 08-22-2017

Condition : FCC

LISN : NEUTRAL

Tem / Hum : 26 °C / 50%

Test Mode : Charging Mode

EUT : Wireless Tour Guide System


Power Rating : Power from PC(DC5V) TG-200T

Freq (MHz)	Reading (dBUV)	Factor (dB)	Emission Level (dBUV)	Limit Line (dBUV)	Over Limit (dB)	Remark
0.1722	9.38	10.16	19.54	54.86	-35.32	Average
0.1722	24.40	10.16	34.56	64.86	-30.30	QP
0.2329	11.87	10.17	22.04	52.35	-30.31	Average
0.2329	24.86	10.17	35.03	62.35	-27.32	QP
0.3234	0.81	10.18	10.99	49.62	-38.63	Average
0.3234	15.98	10.18	26.16	59.62	-33.46	QP
0.4661	10.37	10.19	20.56	46.58	-26.02	Average
0.4661	20.91	10.19	31.10	56.58	-25.48	QP
0.6754	8.90	10.20	19.10	46.00	-26.90	Average
0.6754	17.92	10.20	28.12	56.00	-27.88	QP
4.2690	14.35	10.36	24.71	46.00	-21.29	Average
4.2690	19.50	10.36	29.86	56.00	-26.14	QP

Note :

1. Result = Reading + Factor

2. Factor = LISN Factor + Cable Loss

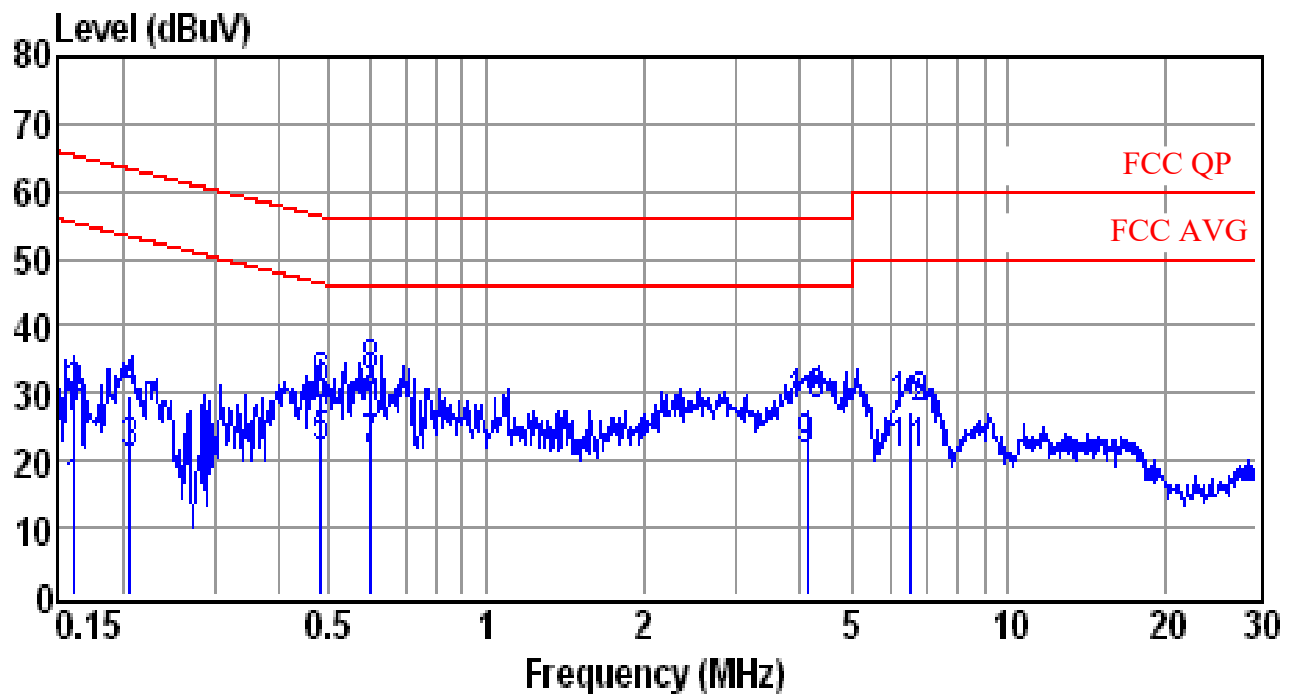

Site : conducted #1

Date : 08-22-2017

Condition : FCC

LISN : LINE

Tem / Hum : 26 °C / 50%

Test Mode : Charging Mode

EUT : Wireless Tour Guide System

Power Rating: Power from PC(DC5V) TG-200T

Freq (MHz)	Reading (dBuV)	Factor (dB)	Emission Level (dBuV)	Limit Line (dBuV)	Over Limit (dB)	Remark
0.1624	4.48	10.18	14.66	55.34	-40.68	Average
0.1624	18.44	10.18	28.62	65.34	-36.72	QP
0.2072	10.41	10.18	20.59	53.32	-32.73	Average
0.2072	19.71	10.18	29.89	63.32	-33.43	QP
0.4812	11.30	10.19	21.49	46.32	-24.83	Average
0.4812	19.96	10.19	30.15	56.32	-26.17	QP
0.6011	10.99	10.19	21.18	46.00	-24.82	Average
0.6011	21.79	10.19	31.98	56.00	-24.02	QP
4.1140	10.68	10.37	21.05	46.00	-24.95	Average
4.1140	17.57	10.37	27.94	56.00	-28.06	QP
6.5230	10.19	10.51	20.70	50.00	-29.30	Average
6.5230	16.79	10.51	27.30	60.00	-32.70	QP

Note :

1. Result = Reading + Factor

2. Factor = LISN Factor + Cable Loss

5.4 Result Data Calculation

The result data is calculated by adding the LISN Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$\text{RESULT} = \text{READING} + \text{LISN FACTOR}$$

Assume a receiver reading of 22.5 dB μ V is obtained, and LISN Factor is 0.1 dB, then the total of disturbance voltage is 22.6 dB μ V.

$$\text{RESULT} = 22.5 + 0.1 = 22.6 \text{ dB } \mu \text{ V}$$

$$\begin{aligned} \text{Level in } \mu \text{ V} &= \text{Common Antilogarithm}[(22.6 \text{ dB } \mu \text{ V})/20] \\ &= 13.48 \mu \text{ V} \end{aligned}$$

5.5 Conducted Measurement Equipment

The following test equipment are used during the conducted test .

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
EMI Test Receiver	Rohde & Schwarz	ESCI	2017/09/19	2018/09/18
LISN	Rohde & Schwarz	ESH2-Z5	2017/04/01	2018/03/31

5.6 Photos of Conduction Measuring Setup



6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to §15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

6.2 Antenna Construction and Directional Gain

The antenna is device is permanently integrated on the PCB. No consideration of replacement. Please refer to the construction Photo for details.

7 EMISSION BANDWIDTH MEASUREMENT


7.1 Standard Applicable

According to 15.247(a)(2), for direct sequence system, the minimum 6dB bandwidth shall be at least 500 kHz.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value. The settings of spectrum analyzer is as followings.
 - 1) Set RBW = 100 kHz.
 - 2) Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
 - 3) Detector = Peak.
 - 4) Trace mode = max hold.
 - 5) Sweep = auto couple.
 - 6) Allow the trace to stabilize.
 - 7) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.
3. Repeat above procedures until all frequencies measured were complete.

Figure 4: Emission bandwidth measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/10/02	2018/10/01
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

7.4 Measurement Data

Test Date : Oct. 18, 2017 Temperature : 23 °C Humidity : 55 %

A. TG-201T

- a) Channel Low: 6 dB Emission Bandwidth is 580 kHz
- b) Channel Mid: 6 dB Emission Bandwidth is 600 kHz
- c) Channel High: 6 dB Emission Bandwidth is 580 kHz

B. TG-200T

- a) Channel Low: 6 dB Emission Bandwidth is 580 kHz
- b) Channel Mid: 6 dB Emission Bandwidth is 580 kHz
- c) Channel High: 6 dB Emission Bandwidth is 580 kHz

Note : The expanded uncertainty: $\text{frequency} \times 1.65 \times 10^{-6}$ ($1 \text{ GHz} < f \leq 18 \text{ GHz}$).

TG-201T / Channel Low




```
* RBW 100 kHz      Marker 1 [T1 ]
VBW 300 kHz              2.42 dBm
SWT 2.5 ms             903.000000000 MHz
```

Ref 20 dBm

Att 50 dB

SWT 2.5 ms

903.0000000000 MHz

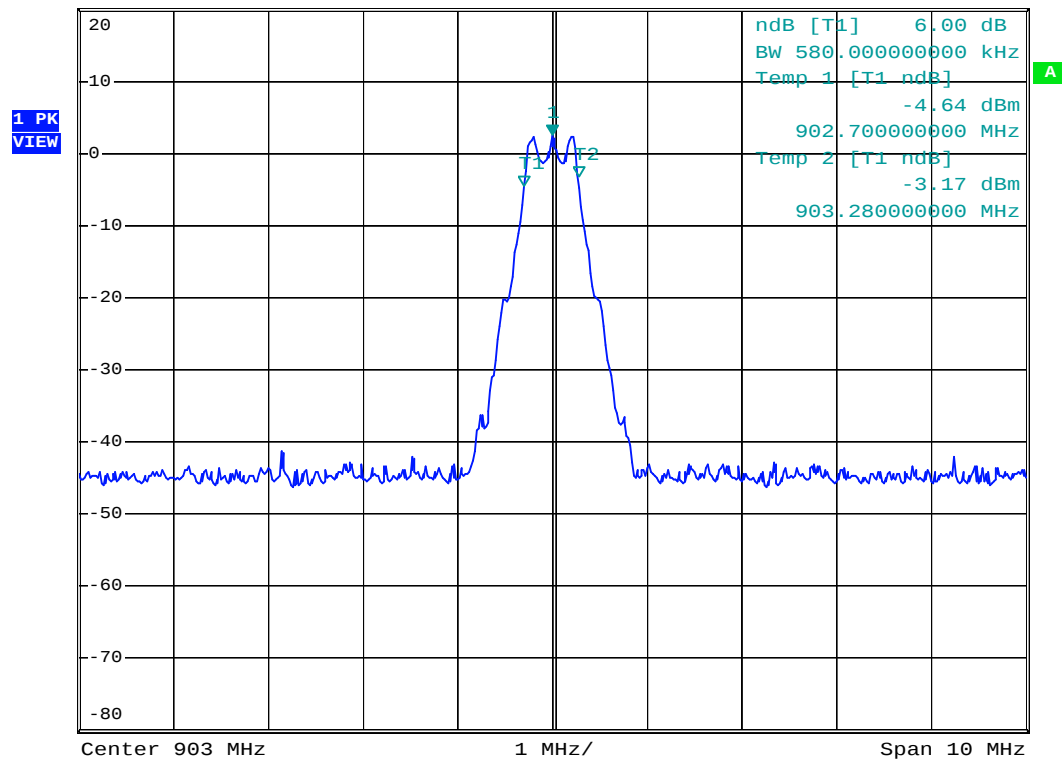

TG-201T / Channel Mid


```
* RBW 100 kHz      Marker 1 [T1 ]
VBW 300 kHz              3.32 dBm
SWT 2.5 ms             915.0000000000 MHz
```

Ref 20 dBm


Att 50 dB

SWT 2.5 ms

915.000000000 MHz

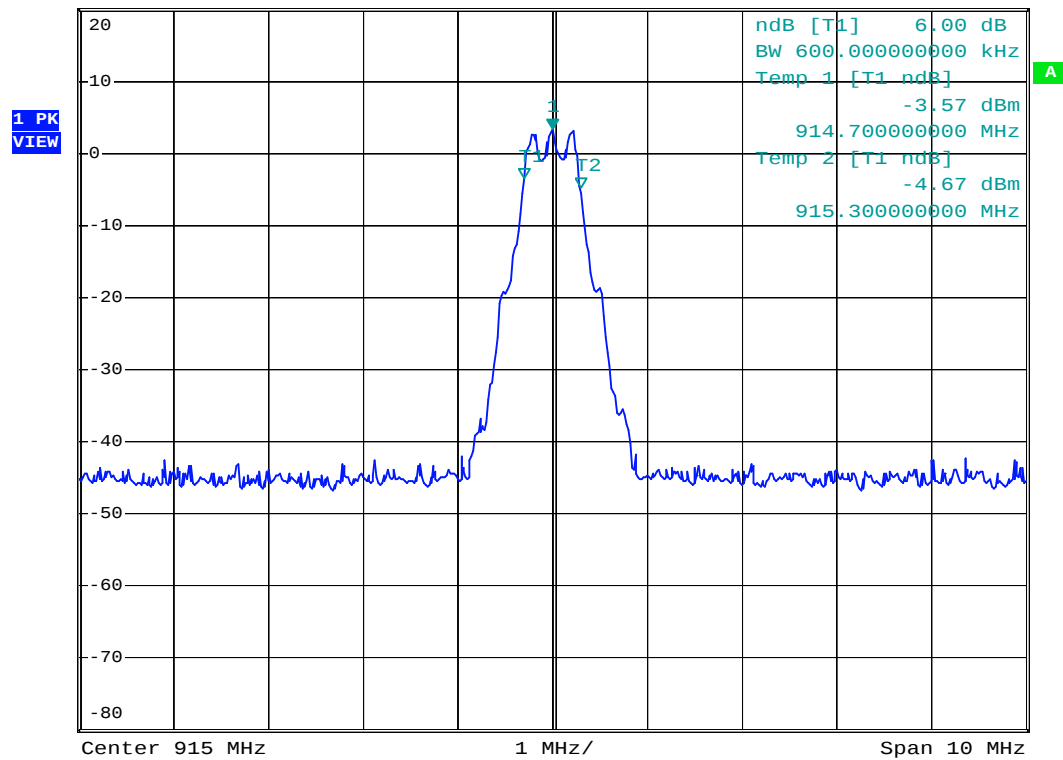


TG-201T / Channel High

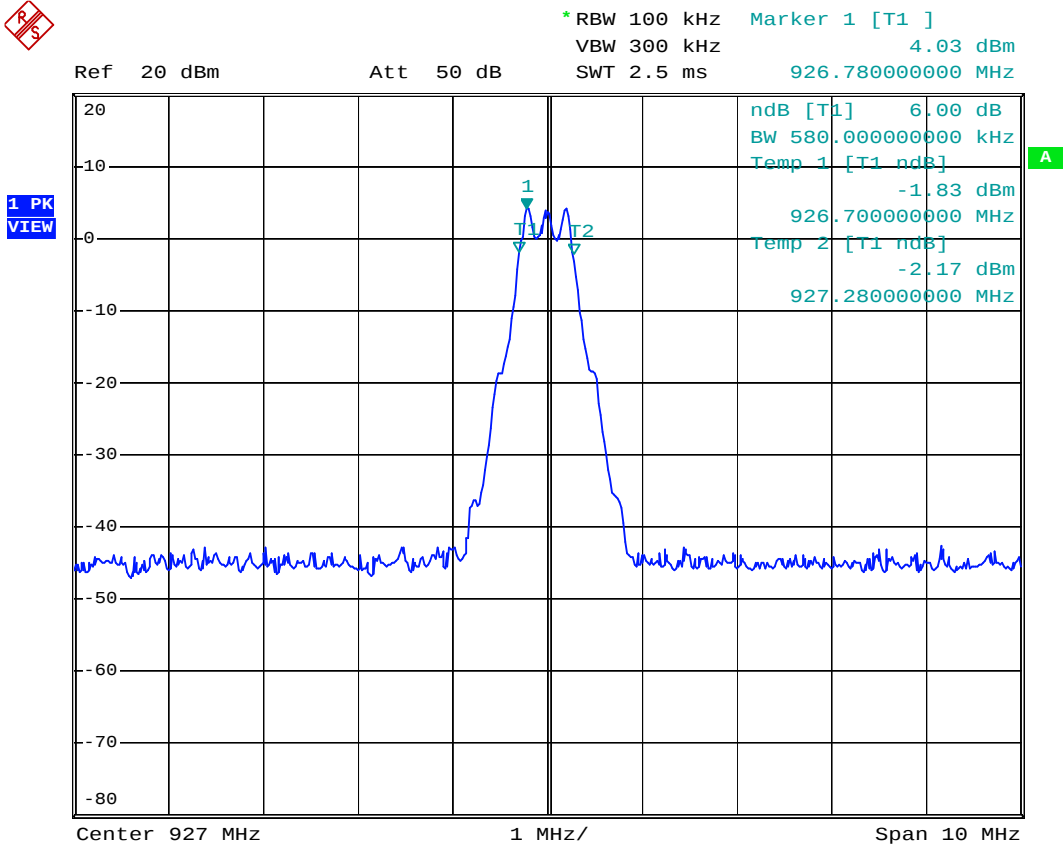


TG-200T / Channel Low



1 PK
VIEW

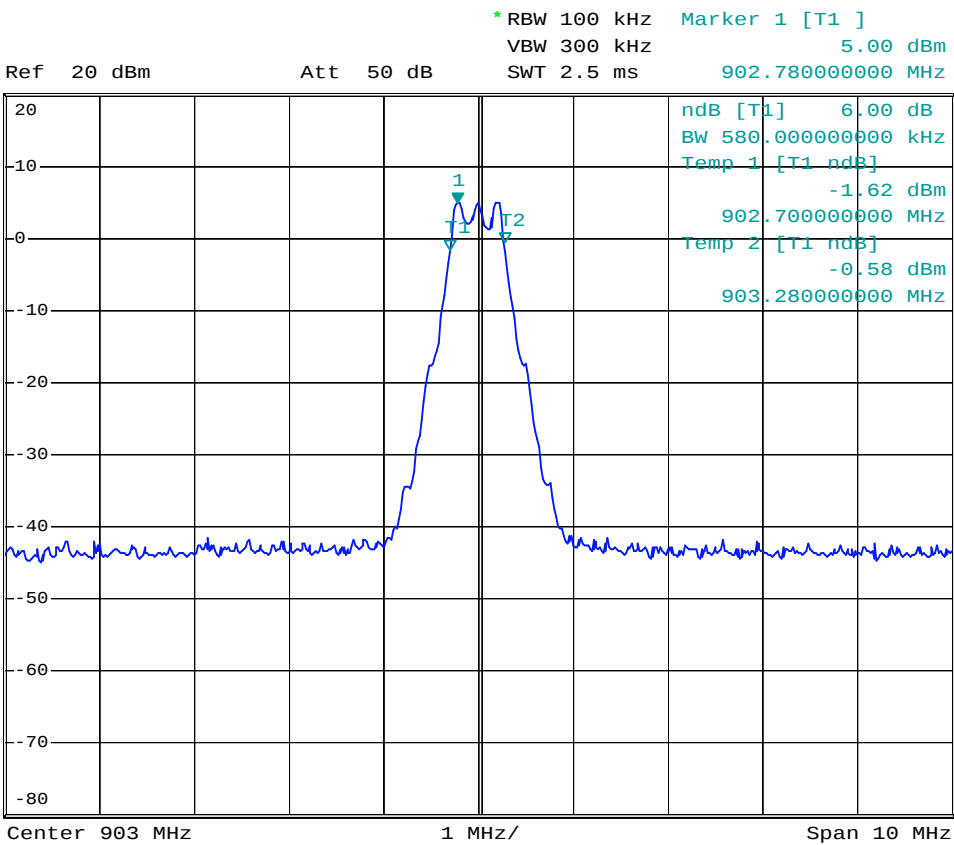


TG-200T / Channel Mid

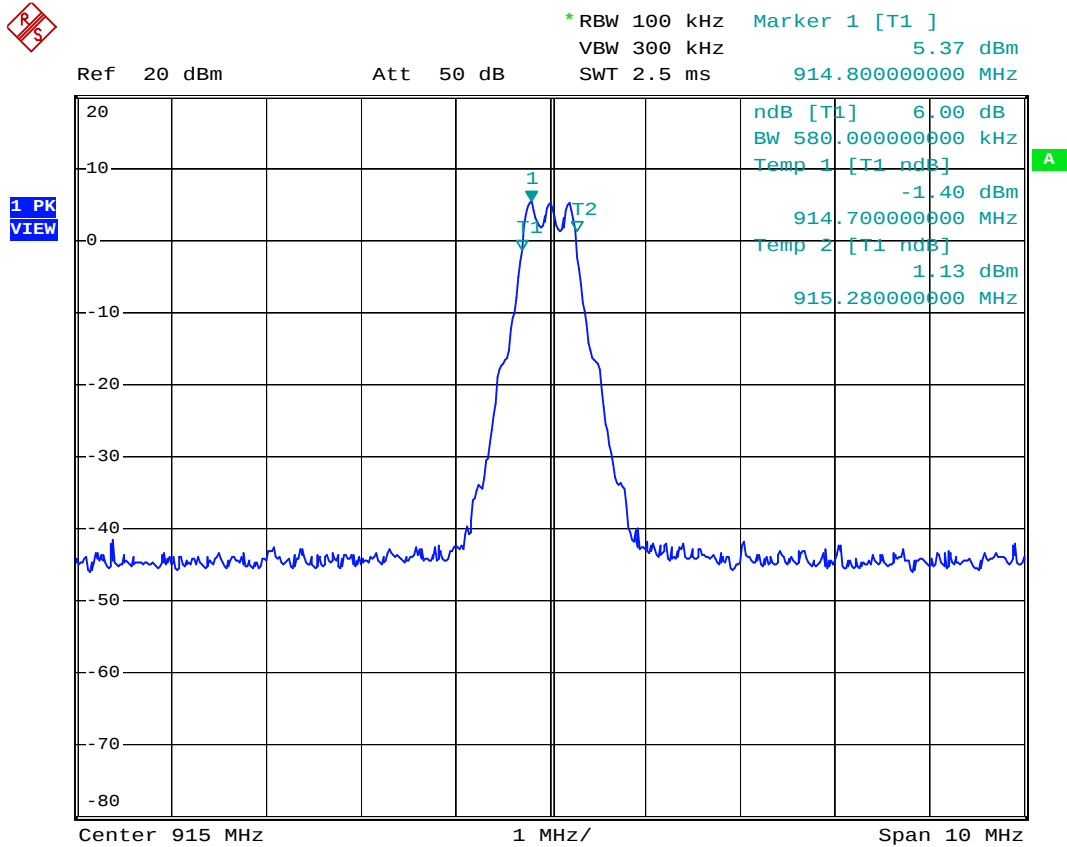

TG-200T / Channel High



1 PK
VIEW

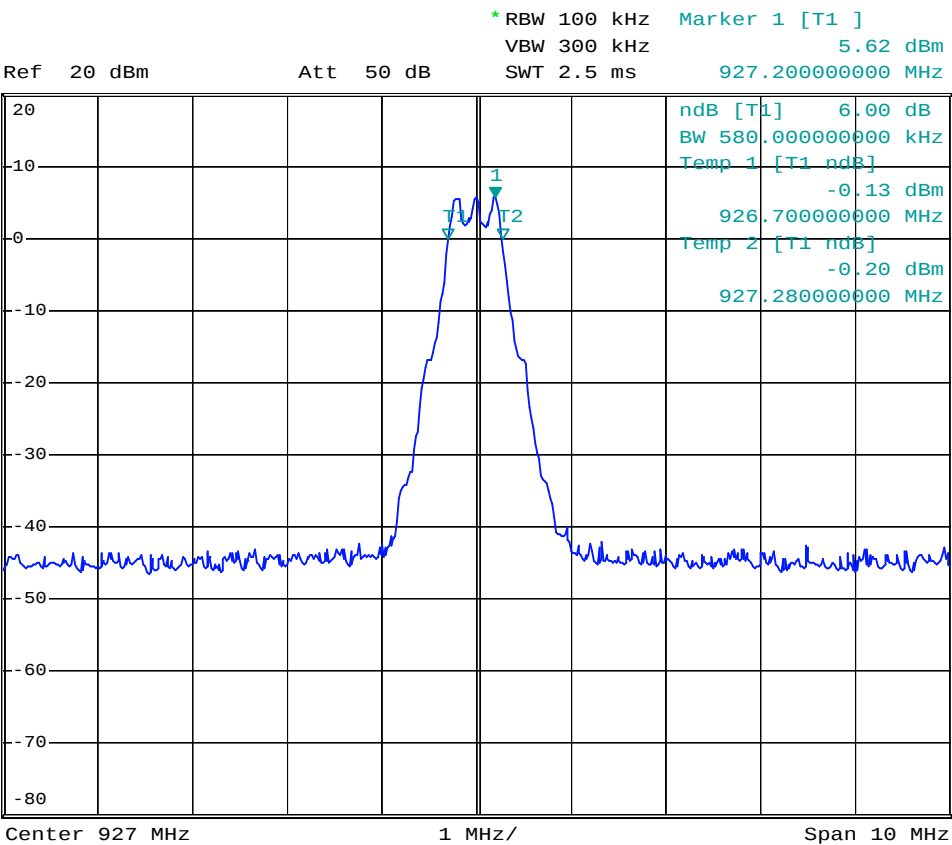

8 OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For direct sequence system, according to 15.247(b), the maximum peak output power of the transmitter shall not exceed 1 Watt. If transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


8.2 Measurement Procedure

Measurement Procedure:

9.1.2 PKPM1 Peak power meter method

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable.
3. Record the readings on the instrument and add a compensat factor of the attenuator.
4. Repeat above procedures until all frequencies measured were complete.

Figure 5: Output power and measurement configuration.



8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
POWER METER +SENSOR	ANRITSU	ML2487A +MA2491A	2017/05/11	2018/05/10
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

8.4 Measurement Data

Test Date : Oct. 18, 2017 Temperature : 23 °C Humidity : 55 %

A. TG-201T

Output Peak Power		dBm	mW
Operation	Channel Low:903MHz	4.10	2.570
	Channel Mid:915MHz	4.50	2.818
	Channel High:927MHz	5.00	3.162

B. TG-200T

Output Peak Power		dBm	mW
Operation	Channel Low:903MHz	7.26	5.321
	Channel Mid:915MHz	6.38	4.345
	Channel High:927MHz	6.50	4.467

Note : The expanded uncertainty: 2dB.

9 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

9.1 Standard Applicable

According to 15.247(c), if any 100 kHz bandwidth outside these frequency bands, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be either at least 20 dB below that in any 100 kHz bandwidth within the band that contains the highest level of the desired power or shall not exceed the general levels specified in §15.209(a), whichever results in the lesser attenuation.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set both RBW of spectrum analyzer to 100kHz and VBW greater than RBW with a convenient frequency span including 100kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/10/02	2018/10/01
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

9.4 Measurement Data

Test Date : Oct. 18, 2017 Temperature : 23 °C Humidity : 55 %

A. TG-201T



- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

B. TG-200T



- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.

TG-201T

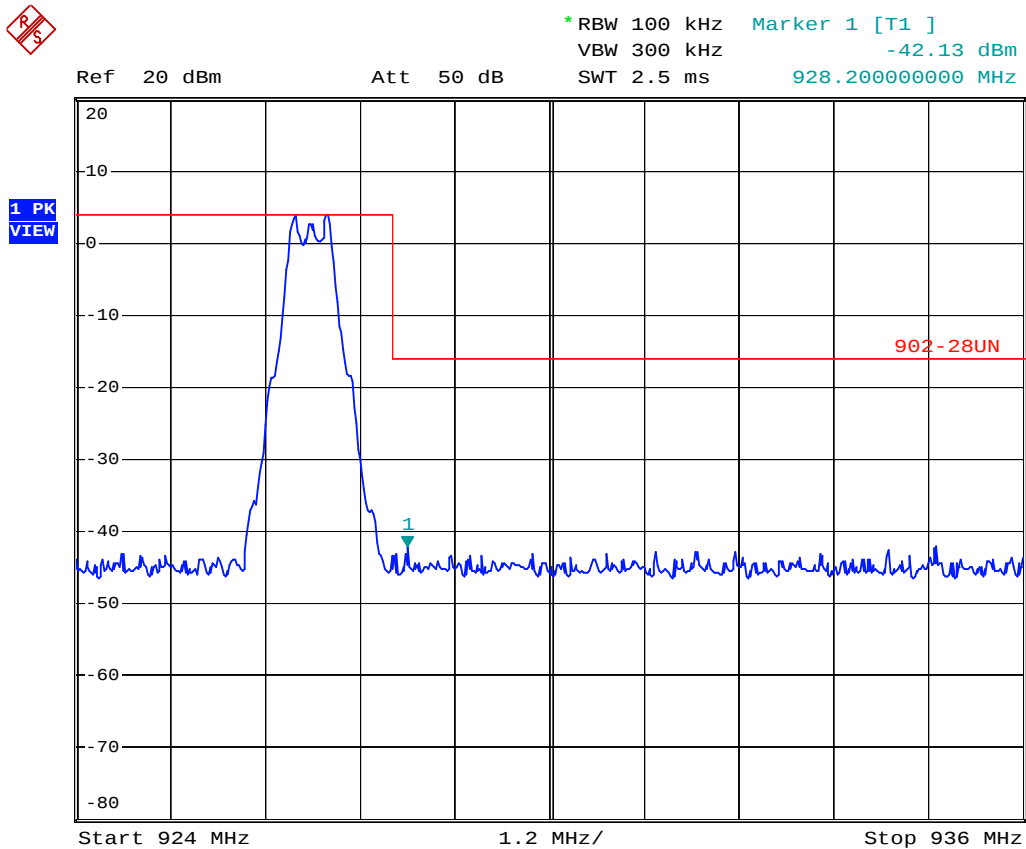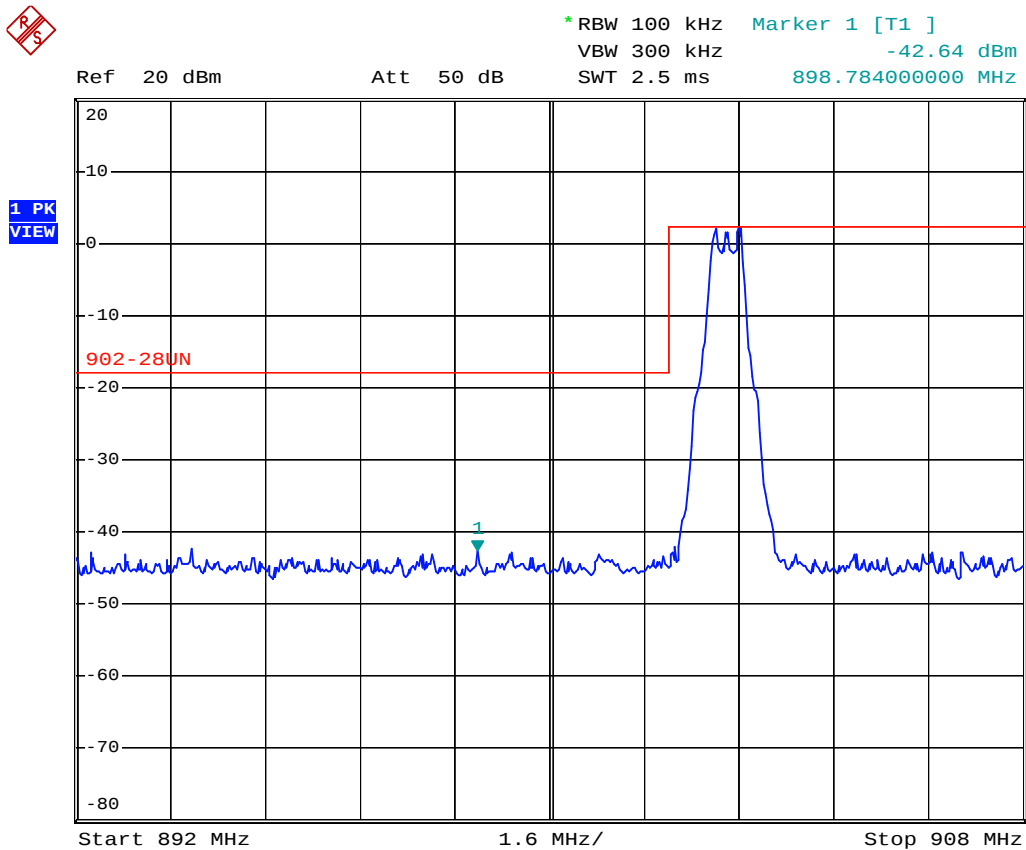

TG-200T

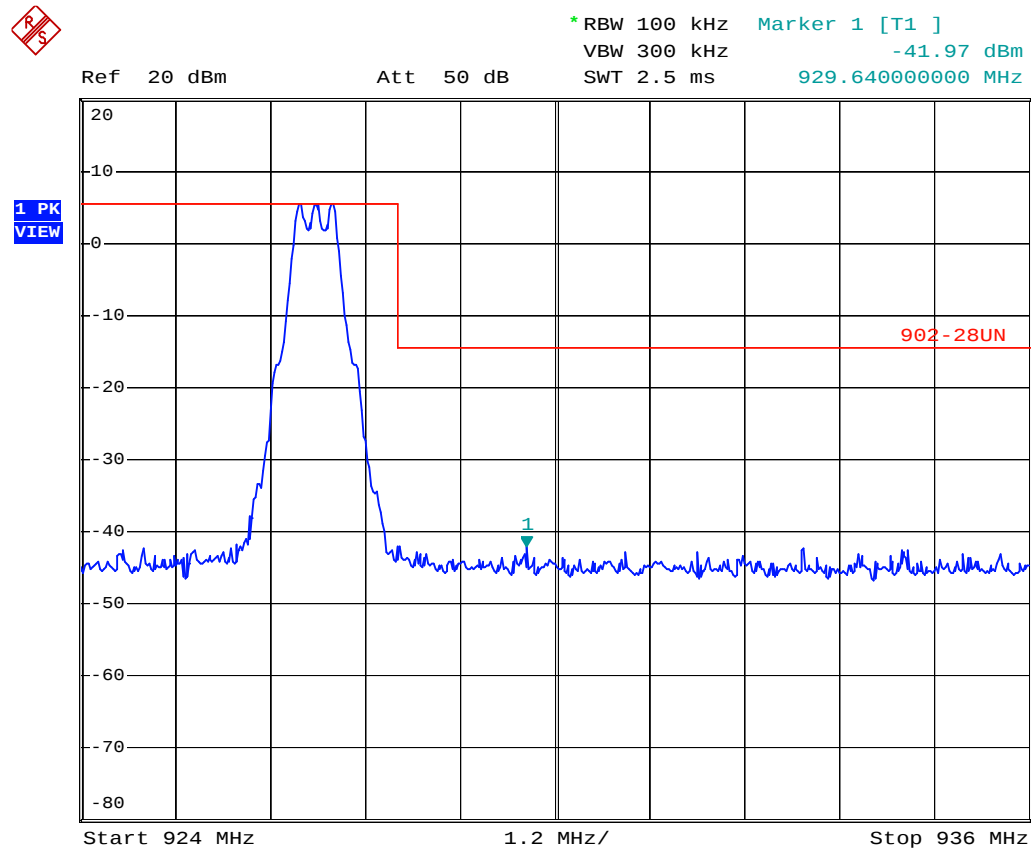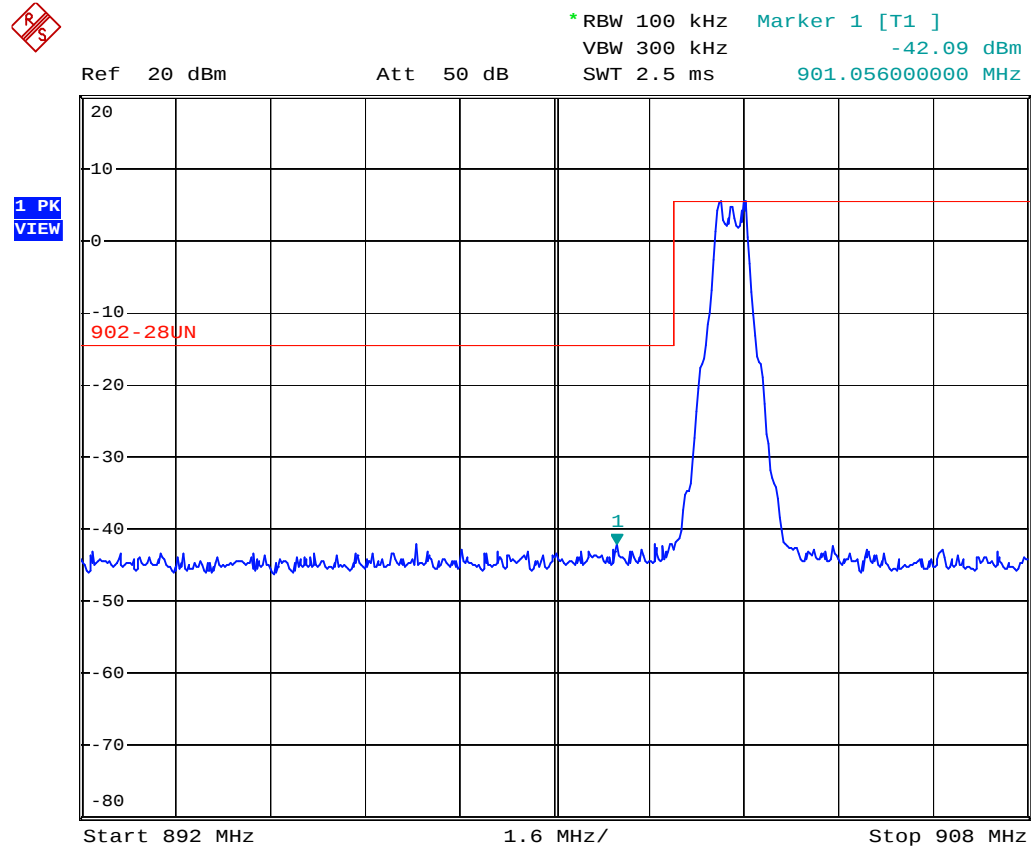

10 POWER DENSITY MEASUREMENT

10.1 Standard Applicable

According to 15.247(d), for direct sequence systems, the transmitted power density averaged over any 1 second interval shall not be greater than 8 dBm in any 3 kHz bandwidth within these bands.

10.2 Measurement Procedure

Measurement Method: PKPSD

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 5 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set analyzer center frequency to DTS channel center frequency.
4. Set the span to 1.5 times the DTS bandwidth.
5. Set the RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
6. Set the VBW $\geq 3 \times \text{RBW}$.
7. Detector = peak.
8. Sweep time = auto couple.
9. Trace mode = max hold.
10. Allow trace to fully stabilize.
11. Use the peak marker function to determine the maximum amplitude level within the RBW.
12. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
13. Repeat above procedures until all measured frequencies were complete.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/10/02	2018/10/01
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

10.4 Measurement Data

Test Date : Oct. 18, 2017 Temperature : 23 °C Humidity : 55 %

A. TG-201T


- a) Channel Low: Maximun PSD is -7.41 dBm
- b) Channel Mid: Maximun PSD is -7.90 dBm
- c) Channel High: Maximun PSD is -5.99 dBm

B. TG-200T


- a) Channel Low: Maximun PSD is -4.60 dBm
- b) Channel Mid: Maximun PSD is -5.25 dBm
- c) Channel High: Maximun PSD is -5.20 dBm

Note : The expanded uncertainty: 2dB.


TG-201T / Channel Low

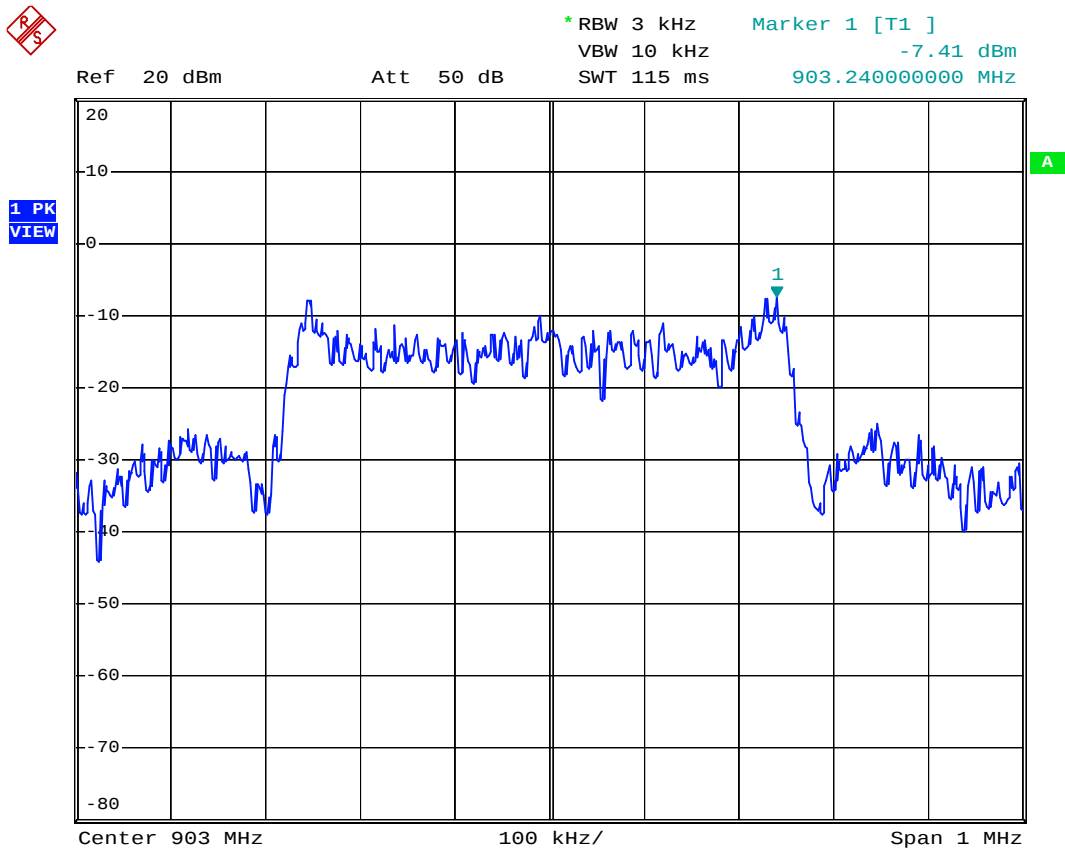


TG-201T / Channel Mid

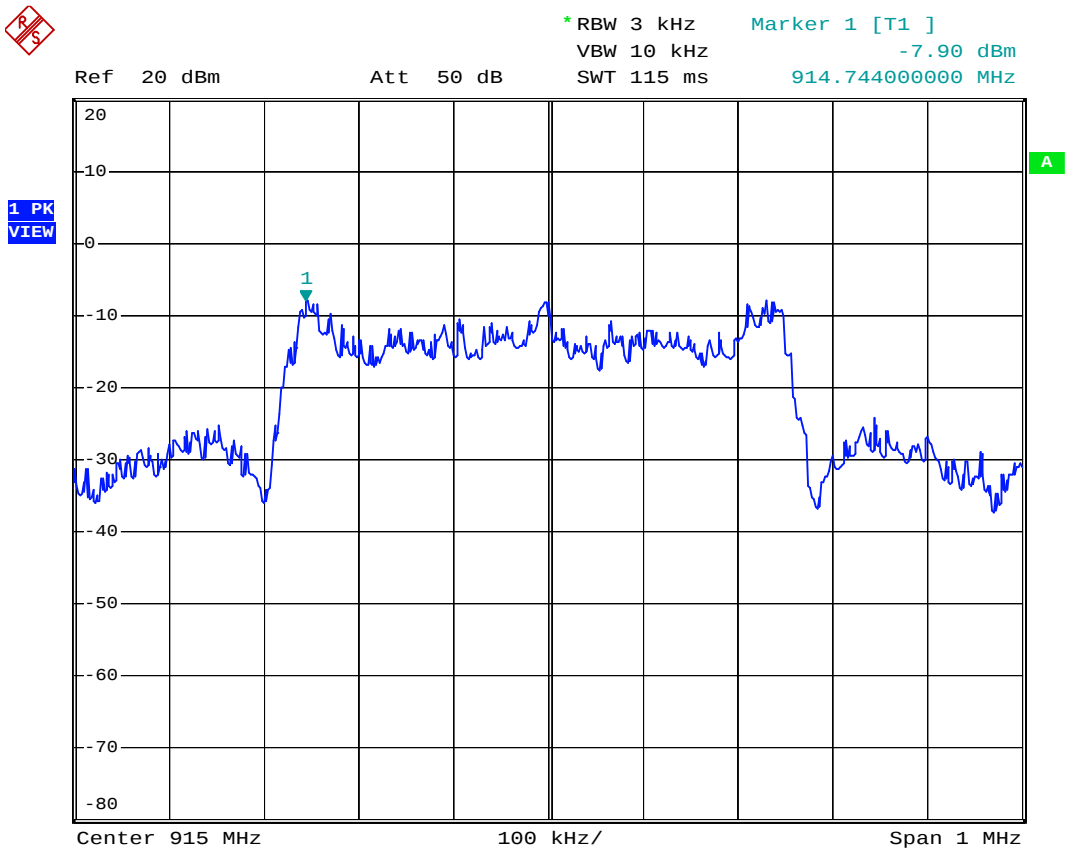


TG-201T / Channel High

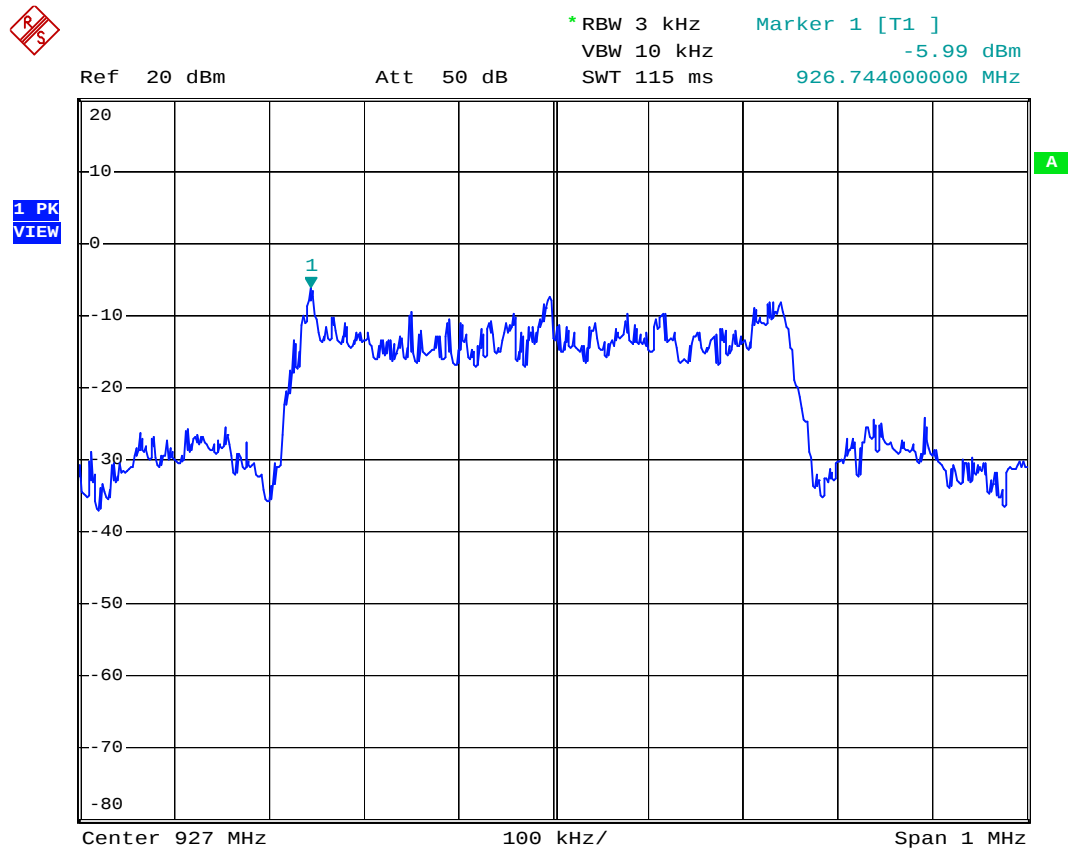


TG-200T / Channel Low

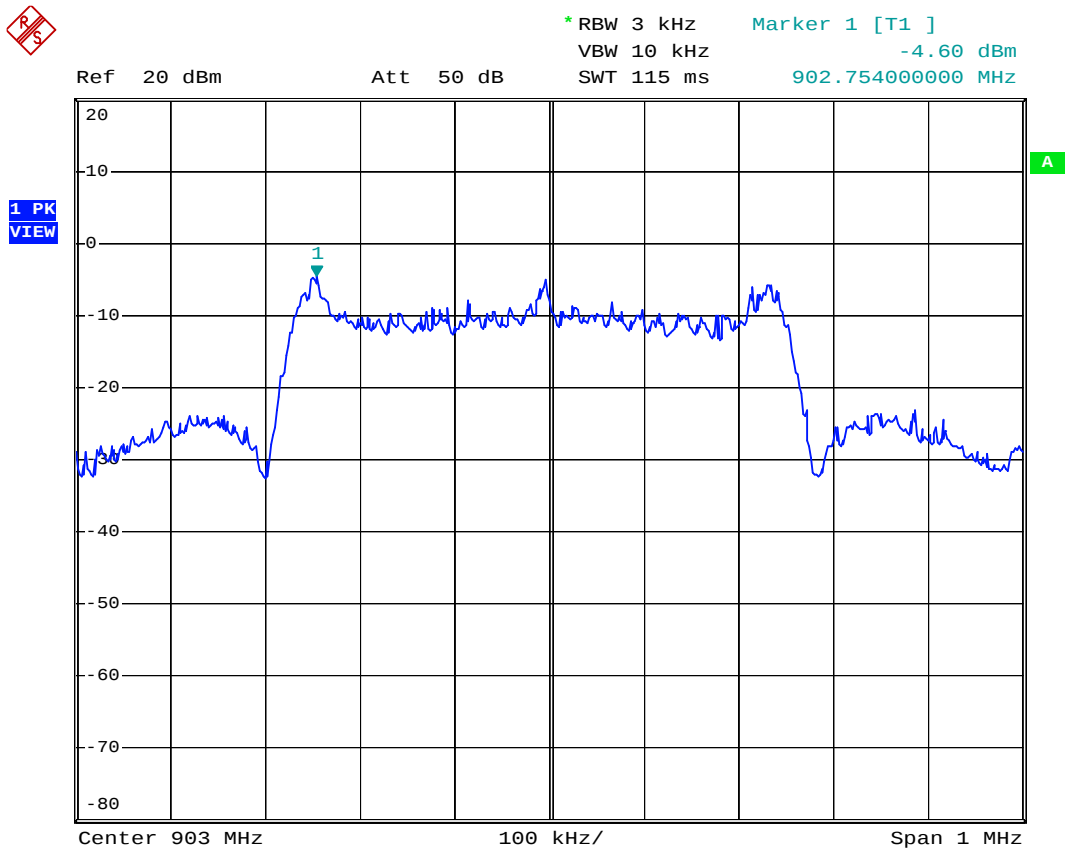

TG-200T / Channel Mid

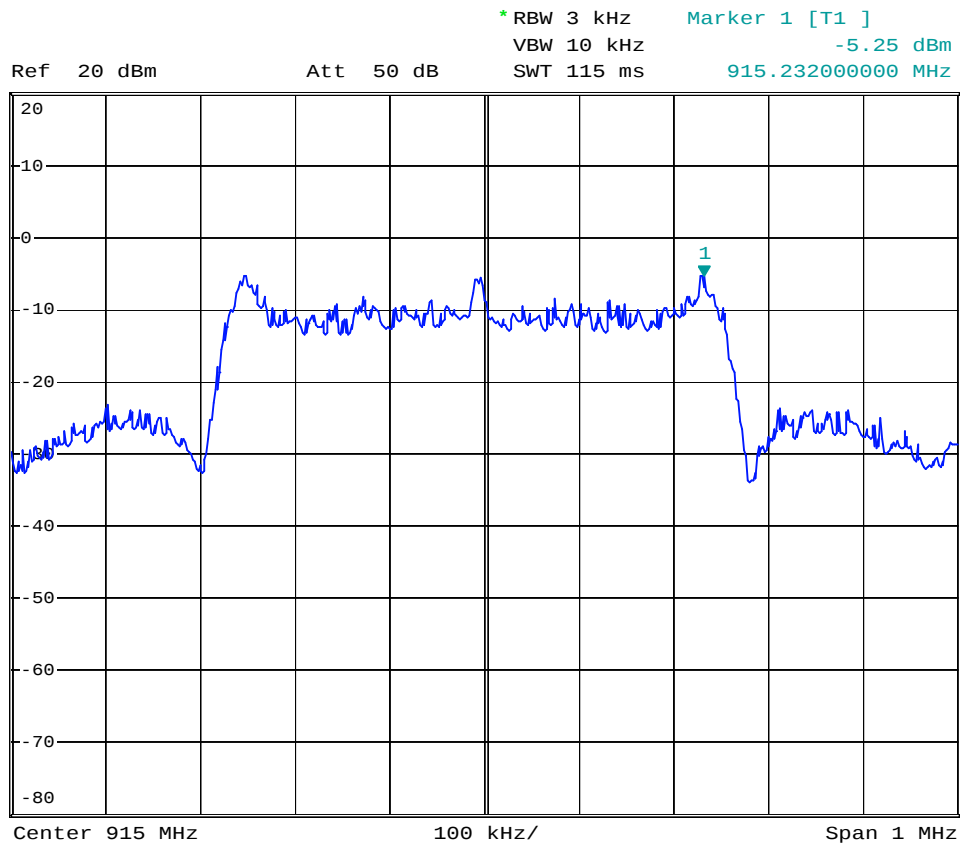1 PK
VIEW

TG-200T / Channel High

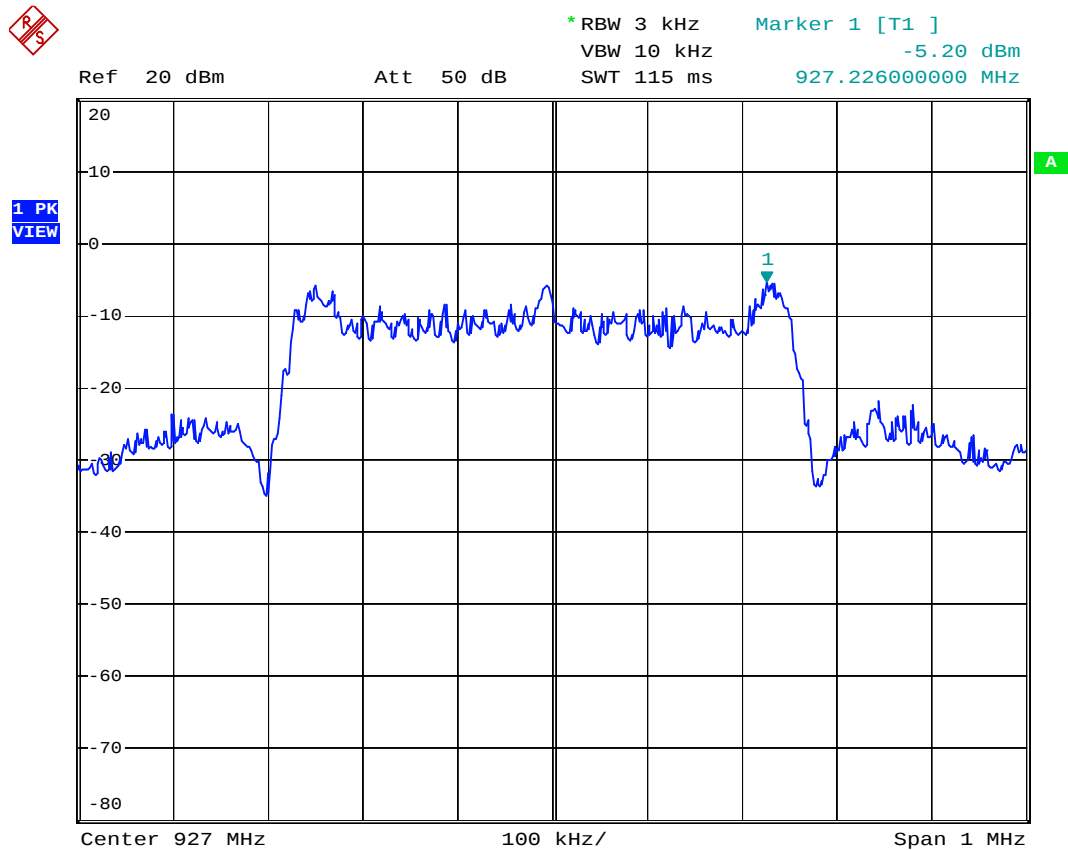

11. OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

11.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.

3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold.

4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/10/02	2018/10/01
Attenuator	MINI-CIRCUITS	BW-S10W2+	2017/10/06	2018/10/05

11.4 Measurement Data

Test Date : Oct. 18, 2017 Temperature : 23 °C Humidity : 55 %

A. TG-201T

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

B. TG-200T

Mode: Channel Low, Mid, High

30 MHz to 26.5 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

Note : The expanded uncertainty: 2dB.

TG-201T / Channel Low



* RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -36.94 dBm
SWT 900 ms 3.142000000 GHz


Ref 20 dBm

Att 50 dB

SWT 900 ms

3.142000000 GHz

1 PK
VIEW

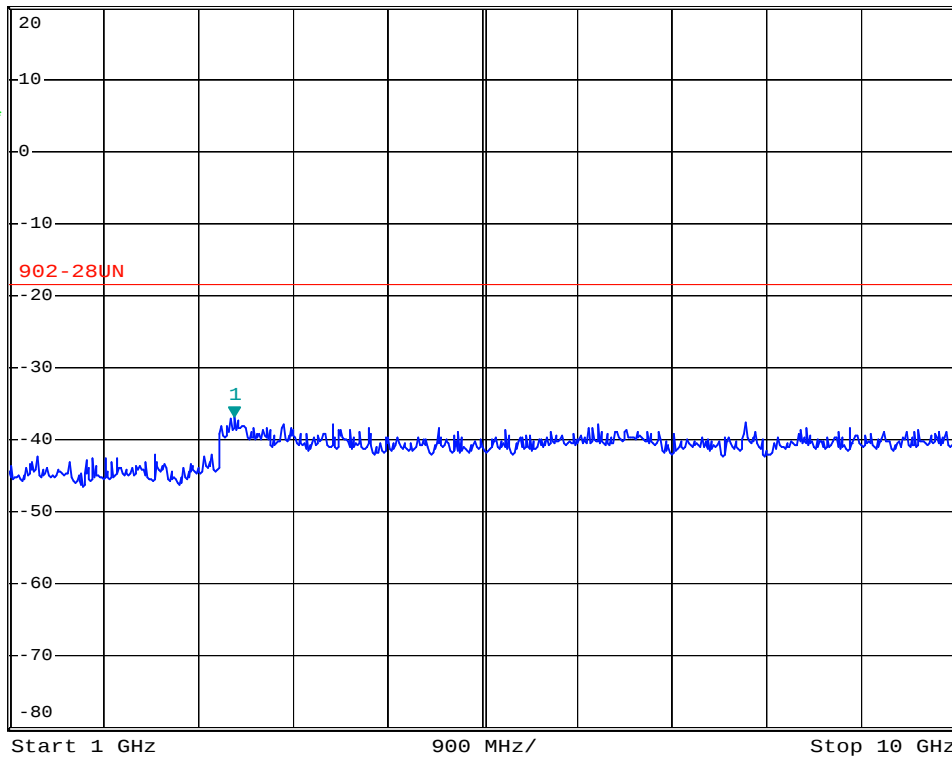

* RBW 100 kHz Marker 2 [T1]
VBW 300 kHz -41.83 dBm
SWT 100 ms 743.920000000 MHz


Ref 20 dBm

Att 50 dB

SWT 100 ms

743.920000000 MHz

1 PK
VIEW

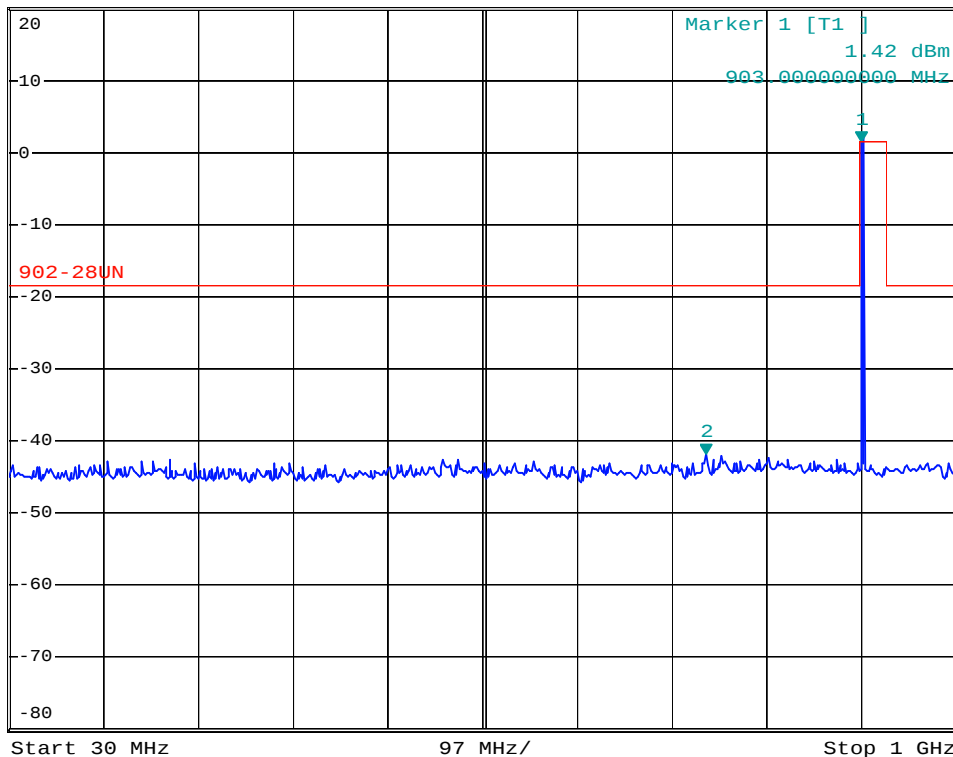


TG-201T / Channel Mid

1 PK
VIEW


*RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -36.62 dBm
SWT 900 ms 3.070000000 GHz

Ref 20 dBm Att 50 dB

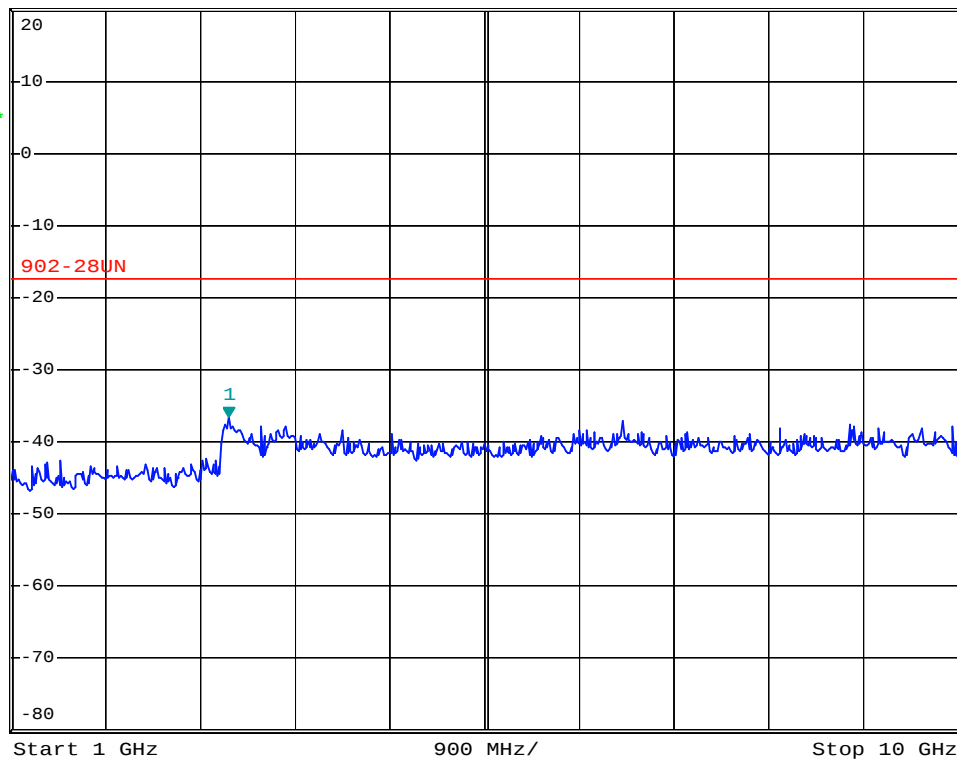1 PK
VIEW

*RBW 100 kHz Marker 2 [T1]
VBW 300 kHz -41.81 dBm
SWT 100 ms 835.100000000 MHz


Ref 20 dBm Att 50 dB

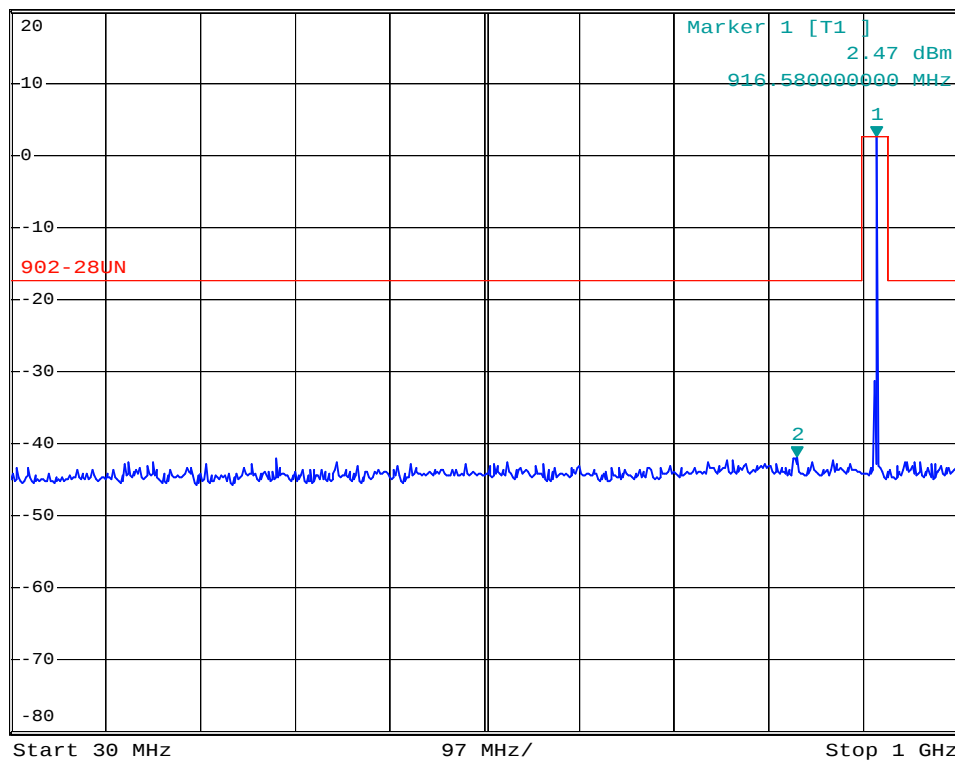


TG-201T / Channel High



Ref 20 dBm Att 50 dB *RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -37.02 dBm
SWT 900 ms 3.106000000 GHz

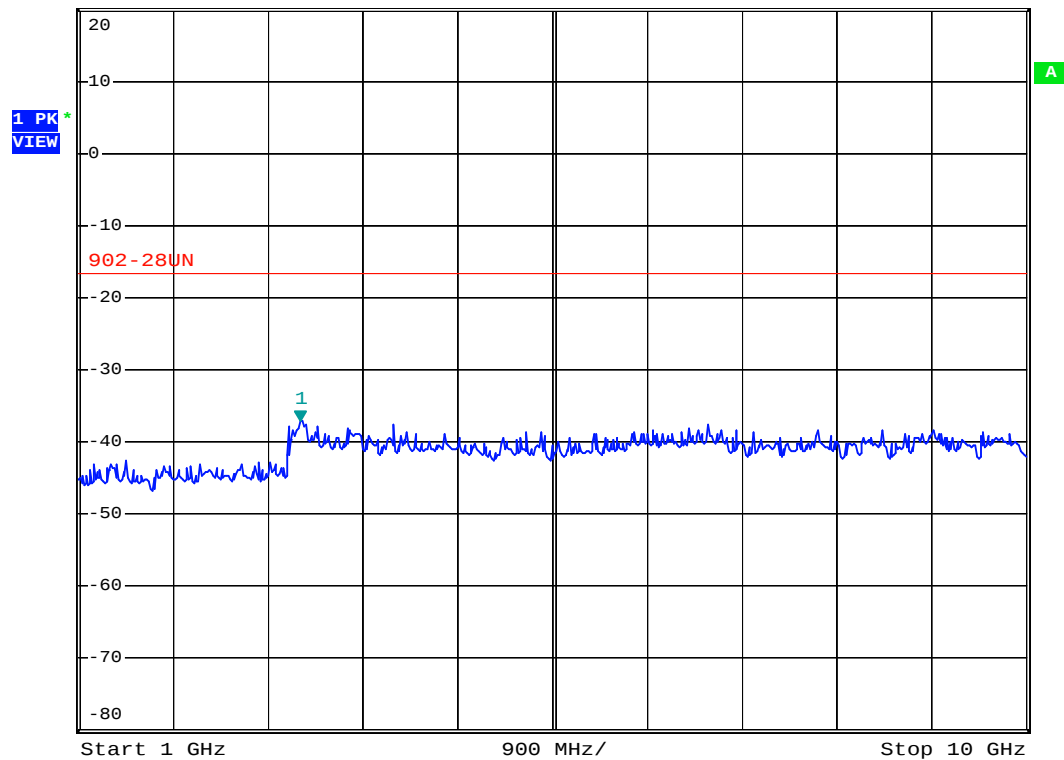


Ref 20 dBm Att 50 dB *RBW 100 kHz Marker 2 [T1]
VBW 300 kHz -41.86 dBm
SWT 100 ms 761.380000000 MHz

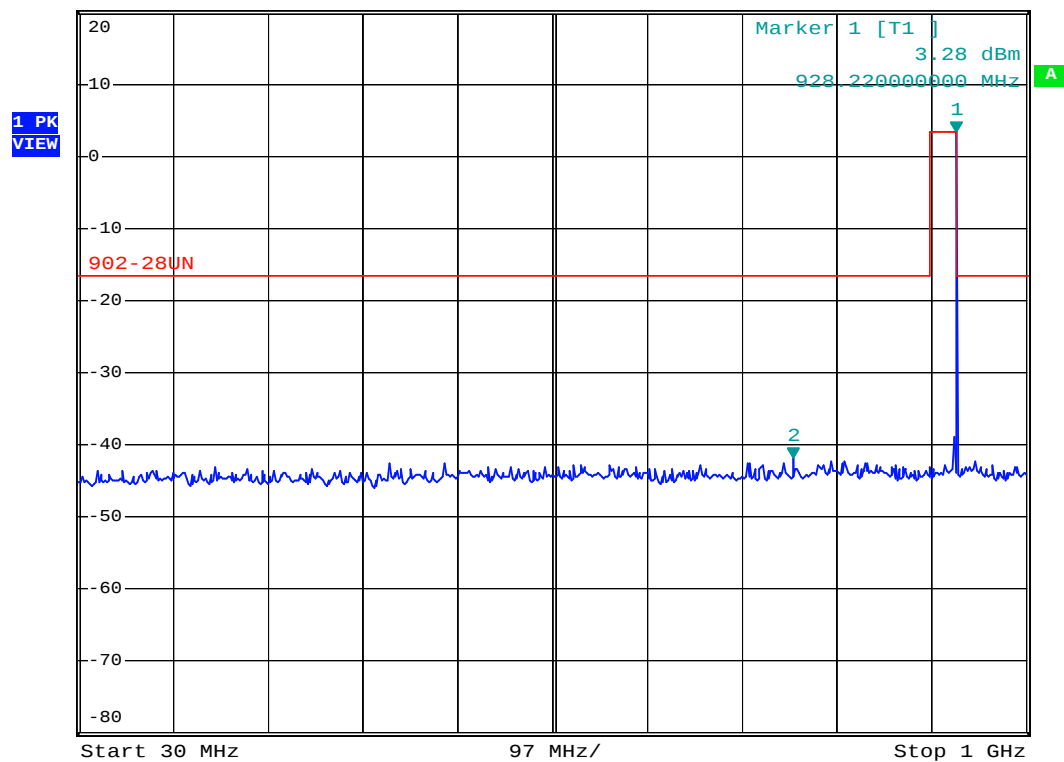


TG-200T / Channel Low





Ref 20 dBm Att 50 dB *RBW 100 kHz Marker 1 [T1]
VBW 300 kHz -36.83 dBm
SWT 900 ms 3.178000000 GHz

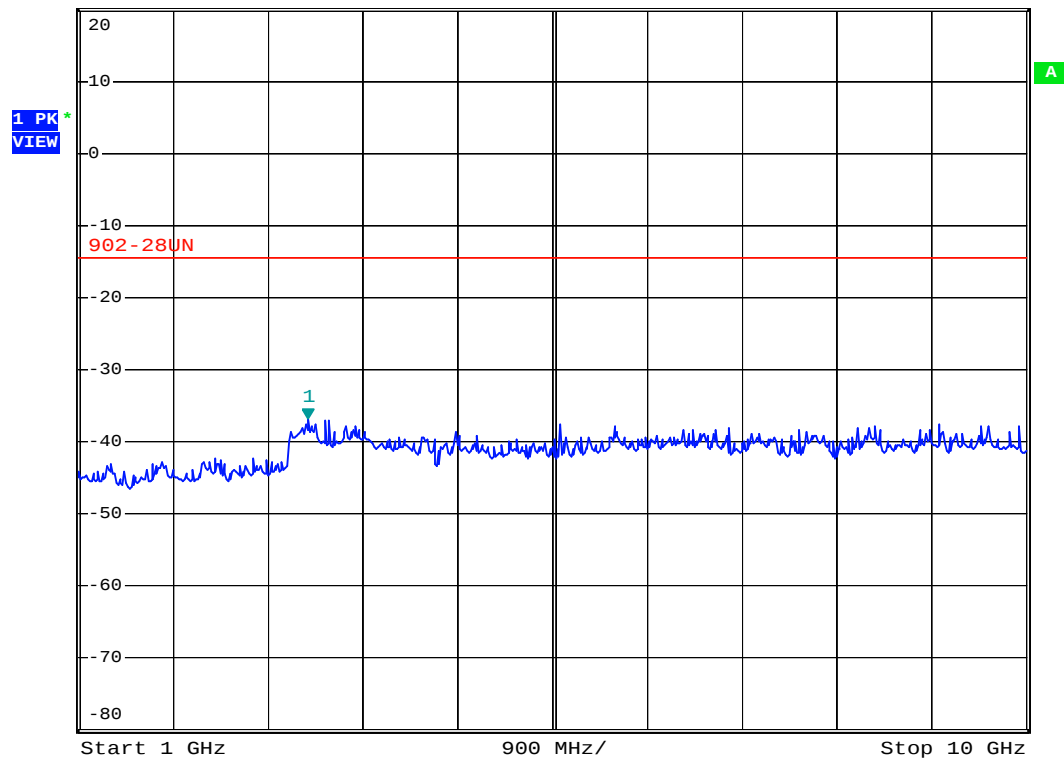



Ref 20 dBm Att 50 dB *RBW 100 kHz Marker 2 [T1]
VBW 300 kHz -42.20 dBm
SWT 100 ms 487.840000000 MHz

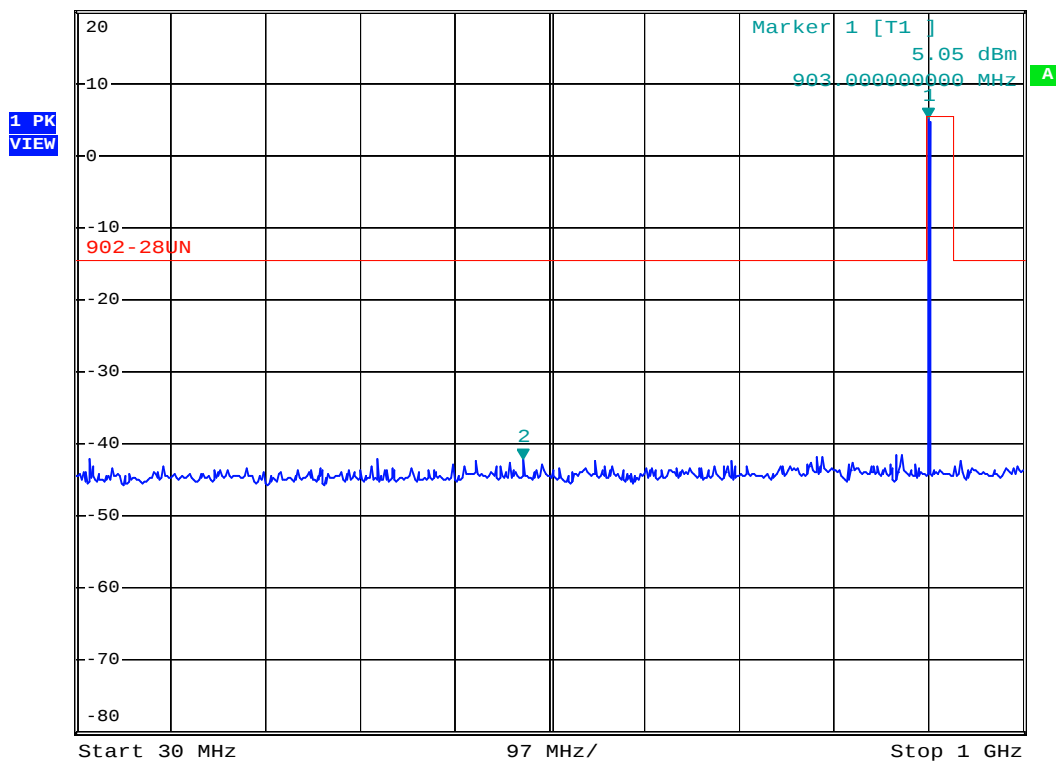

TG-200T / Channel Mid

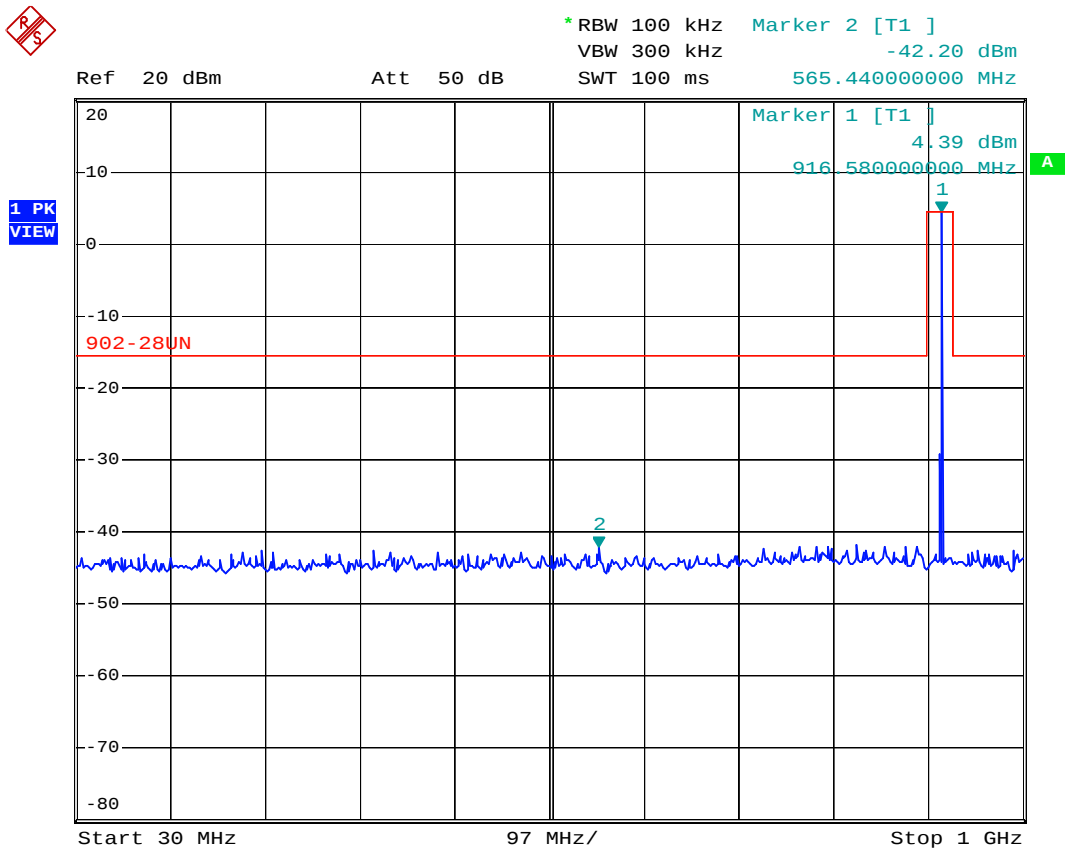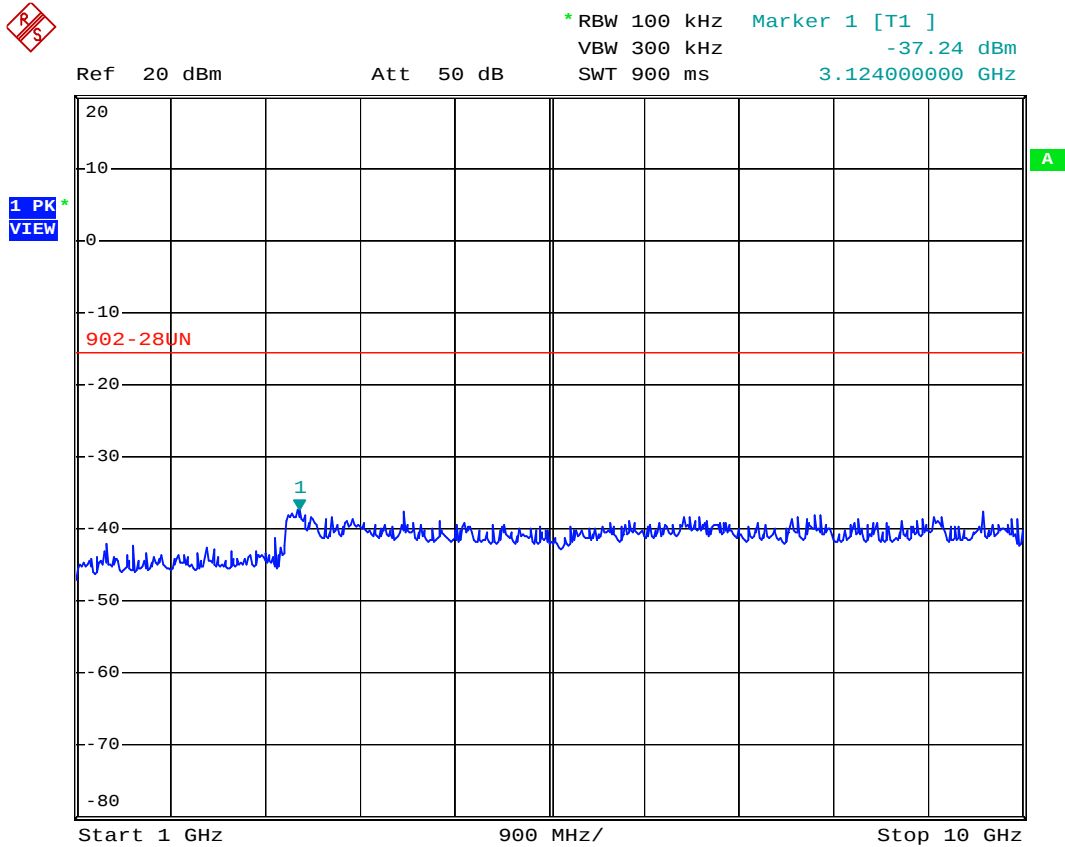

TG-200T / Channel High

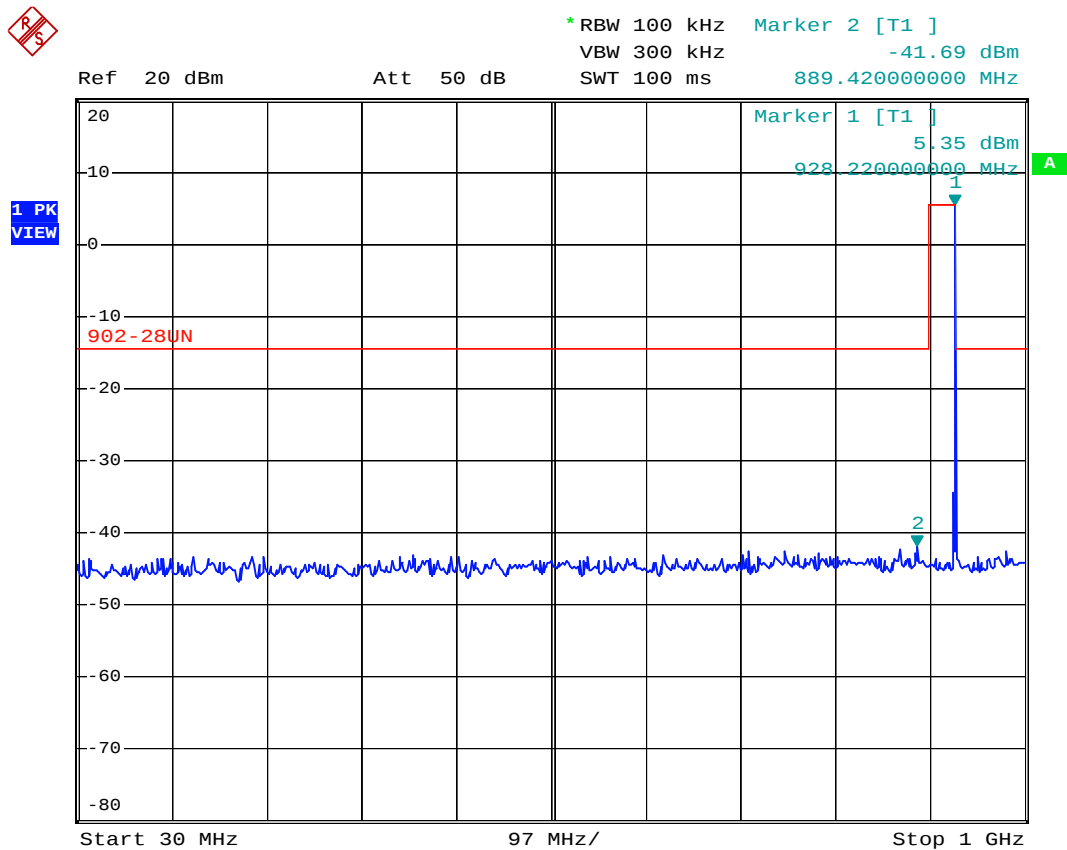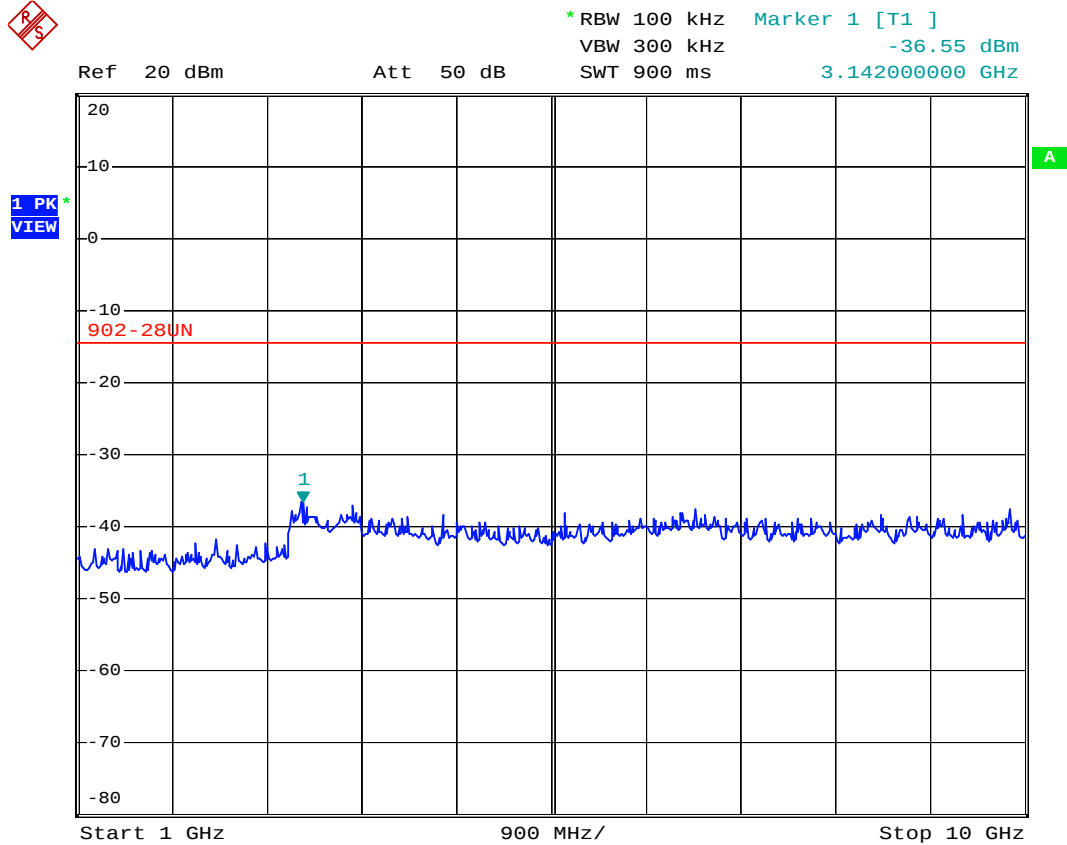

12. DUTY CYCLE

12.1 Standard Applicable

None. Reference only.

12.2 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2017/10/02	2018/10/01

12.3 Measurement Data

Test Date : Oct. 18, 2017 Temperature : 23 °C Humidity : 55 %

Duty Cycle Calculation

Mode	Period (ms)	Transmission duration (T) (ms)	Duty Cycle (%)	1/T (kHz)	VBW setting (kHz)
Tx	7.7	1.7	22.07	0.588	1

Note:

1. When the duty cycle is less than 98%, for the average measurement of the radiated emission test, the VBW setting is $>1/T$ where the T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

Refer to the following page for data plots..

