



# FCC Test Report

Test Report

On Behalf of

ShenZhen Zhongyi Technology CO., Ltd.

For

FSC Bamboo 5000mAh Dual Port Power Bank with Wireless Charger

Model No.: EPB-FS23, M2012Q-A

FCC ID: 2A9Q9-M2012Q-A

**Prepared For:** ShenZhen Zhongyi Technology CO., Ltd.  
Room 401, No.4 Road One, Shangxue Science and Technology City, Xinxue  
Community, Bantian Street, Longgang District, Shenzhen, China

**Prepared By:** Shenzhen HUAKE Testing Technology Co., Ltd.  
1-2/F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping,  
Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

**Date of Test:** Aug. 28, 2023 ~ Sept. 12, 2023

**Date of Report:** Sept. 12, 2023

**Report Number:** HK2308283973-2E



## Test Result Certification

**Applicant's Name**..... : ShenZhen Zhongyi Technology CO., Ltd.  
Room 401, No.4 Road One, Shangxue Science and Technology  
**Address**..... : City, Xinxue Community, Bantian Street, Longgang District,  
Shenzhen, China  
**Manufacture's Name**..... : ShenZhen Zhongyi Technology CO., Ltd.  
Room 401, No.4 Road One, Shangxue Science and Technology  
**Address**..... : City, Xinxue Community, Bantian Street, Longgang District,  
Shenzhen, China

### Product Description

**Trade Mark** ..... : N/A  
**Product Name**..... : FSC Bamboo 5000mAh Dual Port Power Bank with Wireless  
Charger  
**Model and/or Type Reference**: EPB-FS23, M2012Q-A

**Standards** ..... : FCC CFR 47 PART 18, KDB 680106 D01

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test**..... :

**Date (s) of Performance of Tests** ..... : **Aug. 28, 2023 ~ Sept. 12, 2023**

**Date of Issue**..... : **Sept. 12, 2023**

**Test Result**..... : **Pass**

**Testing Engineer** :

(Gary Qian)

**Technical Manager** :

(Eden Hu)

**Authorized Signatory** :

(Jason Zhou)



Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
2. Frequency Band: 112-205KHz

| Channel List |                 |         |                 |         |                 |         |                 |
|--------------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| Channel      | Frequency (KHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
| 01           | 129             |         |                 |         |                 |         |                 |
|              |                 |         |                 |         |                 |         |                 |
|              |                 |         |                 |         |                 |         |                 |
|              |                 |         |                 |         |                 |         |                 |

The EUT antenna is Coil Antenna. No antenna other than that furnished by the responsible party shall be used with the device.

## 2. Summary of Test Results

### 2.1. Test procedures according to the technical standards:

FCC KDB 680106 D01 RF Exposure Wireless Charging Apps v03r01

| FCC CFR 47                                                 |                                   |          |        |
|------------------------------------------------------------|-----------------------------------|----------|--------|
| Standard Section                                           | Test Item                         | Judgment | Remark |
| FCC CFR 47 part1,<br>1.1310 KDB 680106<br>D01v03r01 (3)(3) | Magnetic Field Strength (H) (A/m) | PASS     |        |

### 2.2. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

| No. | Item                                      | Uncertainty             |
|-----|-------------------------------------------|-------------------------|
| 1   | All Emissions, Radiated(<30M)(9KHz-30MHz) | $\pm 3.90\text{dB}$     |
| 2   | Temperature                               | $\pm 0.5^\circ\text{C}$ |
| 3   | Humidity                                  | $\pm 2\%$               |



## 2.3. Test Instruments

| Description                          | Brand | Model No. | S/N        | Calibrated Date | Calibrated Until |
|--------------------------------------|-------|-----------|------------|-----------------|------------------|
| Electric and Magnetic Field Analyzer | narda | EHP-200AC | 180ZX11028 | Feb. 17, 2023   | Feb. 16, 2024    |

NOTE: 1. the calibration interval of the above test instruments is 12 months.

## 2.4. Test Mode

| Test Item      | Test mode | Description                                               |
|----------------|-----------|-----------------------------------------------------------|
| MPE test cases | Mode 1    | AC/DC Adapter+ EUT + Mobile Phone (Battery Status: <1%)   |
|                | Mode 2    | AC/DC Adapter+ EUT + Mobile Phone (Battery Status: <50%)  |
|                | Mode 3    | AC/DC Adapter+ EUT + Mobile Phone (Battery Status: <100%) |
|                | Mode 4    | EUT + Mobile Phone (Battery Status: <1%)                  |
|                | Mode 5    | EUT + Mobile Phone (Battery Status: <50%)                 |
|                | Mode 6    | EUT + Mobile Phone (Battery Status: <100%)                |

Note:

1. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
2. The Mobile Phone provided by Lab.
3. According to the manufacturer's design principle, the wireless charging power will reach its maximum when the client device's battery level is between 1% and 10%.



## 3. Maximum Permissible Exposure

## Limit of Maximum Permissible Exposure

| Limits for Occupational / Controlled Exposure         |                                   |                                   |                                          |                                                                   |
|-------------------------------------------------------|-----------------------------------|-----------------------------------|------------------------------------------|-------------------------------------------------------------------|
| Frequency Range (MHz)                                 | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes) |
| 0.3-3.0                                               | 614                               | 1.63                              | (100)*                                   | 6                                                                 |
| 3.0-30                                                | 1842 / f                          | 4.89 / f                          | (900 / f)*                               | 6                                                                 |
| 30-300                                                | 61.4                              | 0.163                             | 1.0                                      | 6                                                                 |
| 300-1500                                              |                                   |                                   | F/300                                    | 6                                                                 |
| 1500-100,000                                          |                                   |                                   | 5                                        | 6                                                                 |
| Limits for General Population / Uncontrolled Exposure |                                   |                                   |                                          |                                                                   |
| Frequency Range (MHz)                                 | Electric Field Strength (E) (V/m) | Magnetic Field Strength (H) (A/m) | Power Density (S) (mW/ cm <sup>2</sup> ) | Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes) |
| 0.3-1.34                                              | 614                               | 1.63                              | (100)*                                   | 30                                                                |
| 1.34-30                                               | 824/f                             | 2.19/f                            | (180 / f)*                               | 30                                                                |
| 30-300                                                | 27.5                              | 0.073                             | 0.2                                      | 30                                                                |
| 300-1500                                              |                                   |                                   | F/1500                                   | 30                                                                |
| 1500-100,000                                          |                                   |                                   | 1                                        | 30                                                                |

Note 1: f = frequency in MHz; \*Plane-wave equivalent power density.

Note 2: For the applicable limit, see FCC 1.1310, 680106 D01 RF Exposure Wireless Charging Apps v03.

Note 3: Emissions between 100 kHz to 300 kHz should be assessed versus the limits at 300 kHz in Table 1 of Section 1.1310: 614 V/m and 1.63A/m. A KDB inquiry is required to determine the applicable exposure limits below 100 kHz.




#### 4. Test Procedure


a. For devices designed for typical desktop applications, such as wireless charging pads, RF exposure evaluation should be conducted assuming a user separation distance of (AC Mode: H-field & E- field strengths for all sides is 15cm, H-field strengths of top side is 20cm) and (DC Mode: H-field & E- field strengths for all sides is 0cm, H-field strengths of top side is 0cm)  
E and H field strength measurements or numerical modeling may be used to demonstrate compliance. Measurements should be made from all sides and the top of the primary/client pair, with the 15 cm measured from the center of the probe(s) to the edge of the device.

##### 4.1 Test Setup

AC Mode:

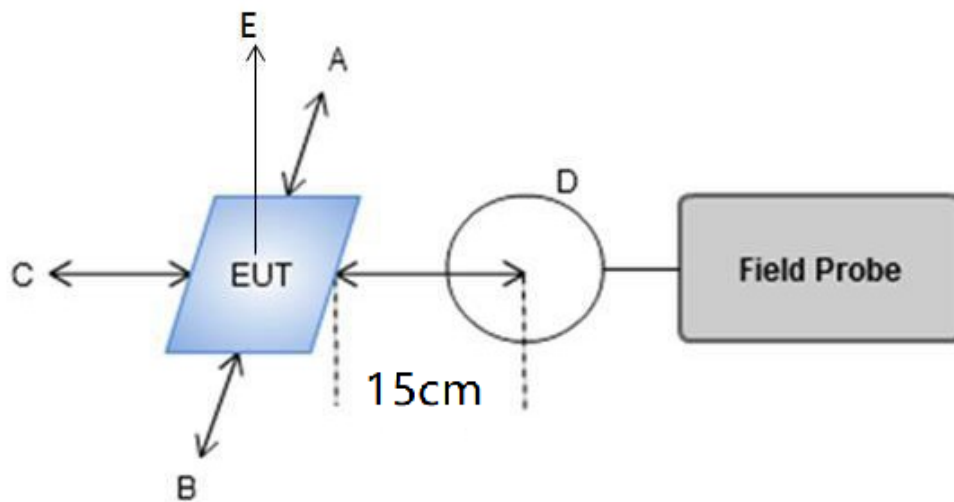

DC Mode:

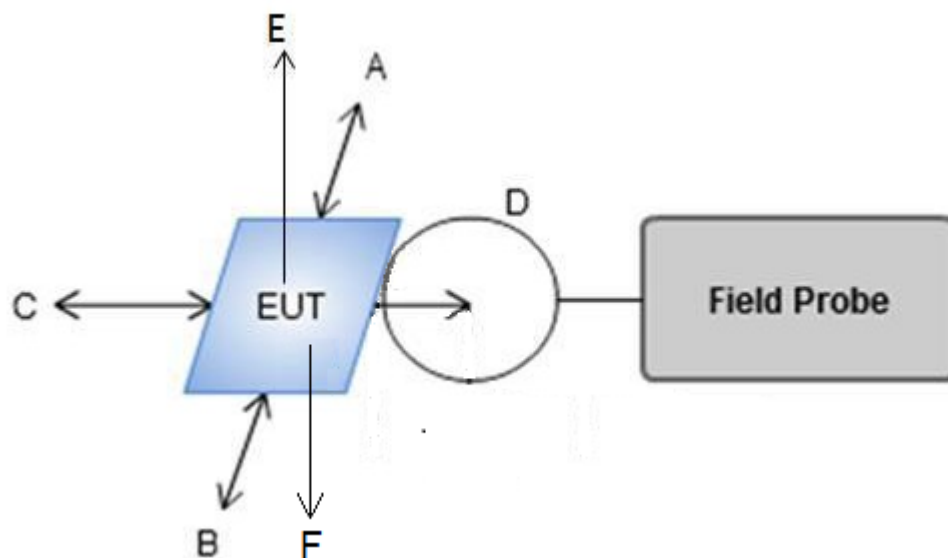

##### 4.2 Result of Maximum Permissible Exposure

The results shown in this test report refer only to the sample(s) tested unless otherwise stated and the sample(s) are retained for 30 days only. The document is issued by HUAK, this document cannot be reproduced except in full with our prior written permission. The more details and the authenticity of the report will be confirmed at <http://www.cer-mark.com>.

TEL : +86-755 2302 9901 FAX : +86-755 2302 9901 E-mail : [service@cer-mark.com](mailto:service@cer-mark.com)

Add: 1-2F., Building B2, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China



AC Mode:

For Full load:

H-Field Strength at 15 cm (E top side: 20cm) from the edges surrounding the EUT (A/m)

| Field strength | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits (A/m) |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|
| A/m            | 0.1059          | 0.1056          | 0.1008          | 0.1123          | 0.1104          | 1.63         |

For Half Load mode:

H-Field Strength at 15 cm (E top side: 20cm) from the edges surrounding the EUT (A/m)

| Field strength | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits (A/m) |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|
| A/m            | 0.0785          | 0.0942          | 0.1003          | 0.0817          | 0.1007          | 1.63         |

For No load mode:

H-Field Strength at 15 cm (E top side: 20cm) from the edges surrounding the EUT (A/m)

| Field strength | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Limits (A/m) |
|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|
| A/m            | 0.0932          | 0.0844          | 0.0912          | 0.0768          | 0.0641          | 1.63         |



DC Mode:

For Full load mode:

H-Field Strength at 0-20 cm from the edges surrounding the EUT (A/m)

| Measuring distance (cm) | Field strength | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limits (A/m) |
|-------------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|
| 0                       | A/m            | 0.507           | 0.560           | 0.528           | 0.506           | 0.535           | 0.590           | 1.63         |
| 2                       | A/m            | 0.460           | 0.429           | 0.484           | 0.446           | 0.286           | 0.425           | 1.63         |
| 4                       | A/m            | 0.327           | 0.394           | 0.535           | 0.373           | 0.302           | 0.365           | 1.63         |
| 6                       | A/m            | 0.376           | 0.543           | 0.327           | 0.517           | 0.456           | 0.451           | 1.63         |
| 8                       | A/m            | 0.424           | 0.413           | 0.376           | 0.477           | 0.368           | 0.380           | 1.63         |
| 10                      | A/m            | 0.427           | 0.321           | 0.242           | 0.372           | 0.427           | 0.451           | 1.63         |
| 12                      | A/m            | 0.486           | 0.334           | 0.498           | 0.336           | 0.512           | 0.476           | 1.63         |
| 14                      | A/m            | 0.386           | 0.548           | 0.502           | 0.404           | 0.416           | 0.318           | 1.63         |
| 16                      | A/m            | 0.318           | 0.347           | 0.476           | 0.443           | 0.395           | 0.439           | 1.63         |
| 18                      | A/m            | 0.403           | 0.376           | 0.293           | 0.347           | 0.468           | 0.286           | 1.63         |
| 20                      | A/m            | 0.274           | 0.284           | 0.354           | 0.215           | 0.209           | 0.210           | 1.63         |

For Half Load mode:

H-Field Strength at 0-20 cm from the edges surrounding the EUT (A/m)

| Measuring distance (cm) | Field strength | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limits (A/m) |
|-------------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|
| 0                       | A/m            | 0.534           | 0.447           | 0.527           | 0.493           | 0.537           | 0.546           | 1.63         |
| 2                       | A/m            | 0.506           | 0.386           | 0.465           | 0.513           | 0.402           | 0.338           | 1.63         |
| 4                       | A/m            | 0.356           | 0.476           | 0.267           | 0.251           | 0.390           | 0.492           | 1.63         |
| 6                       | A/m            | 0.435           | 0.354           | 0.403           | 0.448           | 0.502           | 0.388           | 1.63         |
| 8                       | A/m            | 0.463           | 0.390           | 0.341           | 0.310           | 0.430           | 0.219           | 1.63         |
| 10                      | A/m            | 0.374           | 0.417           | 0.397           | 0.238           | 0.367           | 0.424           | 1.63         |
| 12                      | A/m            | 0.407           | 0.483           | 0.425           | 0.370           | 0.433           | 0.452           | 1.63         |
| 14                      | A/m            | 0.386           | 0.316           | 0.365           | 0.223           | 0.264           | 0.330           | 1.63         |
| 16                      | A/m            | 0.462           | 0.331           | 0.451           | 0.486           | 0.426           | 0.427           | 1.63         |
| 18                      | A/m            | 0.232           | 0.254           | 0.334           | 0.208           | 0.325           | 0.342           | 1.63         |
| 20                      | A/m            | 0.212           | 0.265           | 0.230           | 0.248           | 0.201           | 0.176           | 1.63         |



For No load mode:

H-Field Strength at 0-20 cm from the edges surrounding the EUT (A/m)

| Measuring distance (cm) | Field strength | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limits (A/m) |
|-------------------------|----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|
| 0                       | A/m            | 0.552           | 0.417           | 0.432           | 0.491           | 0.530           | 0.543           | 1.63         |
| 2                       | A/m            | 0.427           | 0.341           | 0.374           | 0.405           | 0.433           | 0.371           | 1.63         |
| 4                       | A/m            | 0.342           | 0.464           | 0.299           | 0.388           | 0.352           | 0.456           | 1.63         |
| 6                       | A/m            | 0.422           | 0.262           | 0.335           | 0.295           | 0.436           | 0.291           | 1.63         |
| 8                       | A/m            | 0.290           | 0.377           | 0.338           | 0.467           | 0.239           | 0.294           | 1.63         |
| 10                      | A/m            | 0.312           | 0.322           | 0.289           | 0.379           | 0.292           | 0.324           | 1.63         |
| 12                      | A/m            | 0.381           | 0.291           | 0.415           | 0.368           | 0.366           | 0.232           | 1.63         |
| 14                      | A/m            | 0.307           | 0.369           | 0.316           | 0.252           | 0.187           | 0.416           | 1.63         |
| 16                      | A/m            | 0.297           | 0.301           | 0.227           | 0.346           | 0.200           | 0.246           | 1.63         |
| 18                      | A/m            | 0.268           | 0.219           | 0.320           | 0.283           | 0.260           | 0.244           | 1.63         |
| 20                      | A/m            | 0.168           | 0.212           | 0.223           | 0.143           | 0.206           | 0.197           | 1.63         |



Remark: According KDB 680106 D01 RF Exposure Wireless Charging App v03r01, section 5, b). The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit. The E- field evaluation conducted assuming a user separation distance of 15 cm according to the KDB 680106 D01 RF Exposure Wireless Charging App v03 section 3, c).

Result: The device comply with the RF exposure requirement according to 680106 D01 v03r01, section 5, b):

(1) Power transfer frequency is less than 1 MHz.

- The device operate in the frequency range for 112KHz~ 205KHz

(2) Output power from each primary coil is less than or equal to 15 watts.

- The maximum output power is 5W

(3) The system consists of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.

-- The transfer system is a charging system with only one main coil.

(4) Client device is placed directly in contact with the transmitter.

-The EUT is placed directly in contact with the transmitter

(5) Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).

- Yes, mobile device only.

(6) The aggregate H-field strengths anywhere at or beyond 15 cm surrounding the device, and 20 cm away from the surface from all coils that by design can simultaneously transmit, and while those coils are simultaneously energized, are demonstrated to be less than 50% of the applicable MPE limit.


- The EUT meet the conditions.




Photograph of Test

AC Mode:

A

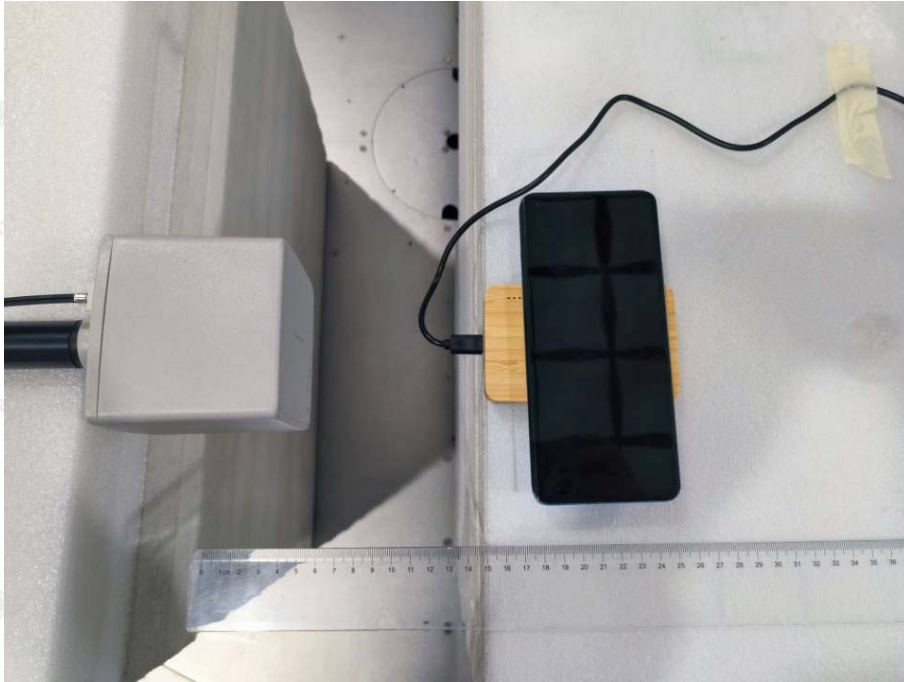


B

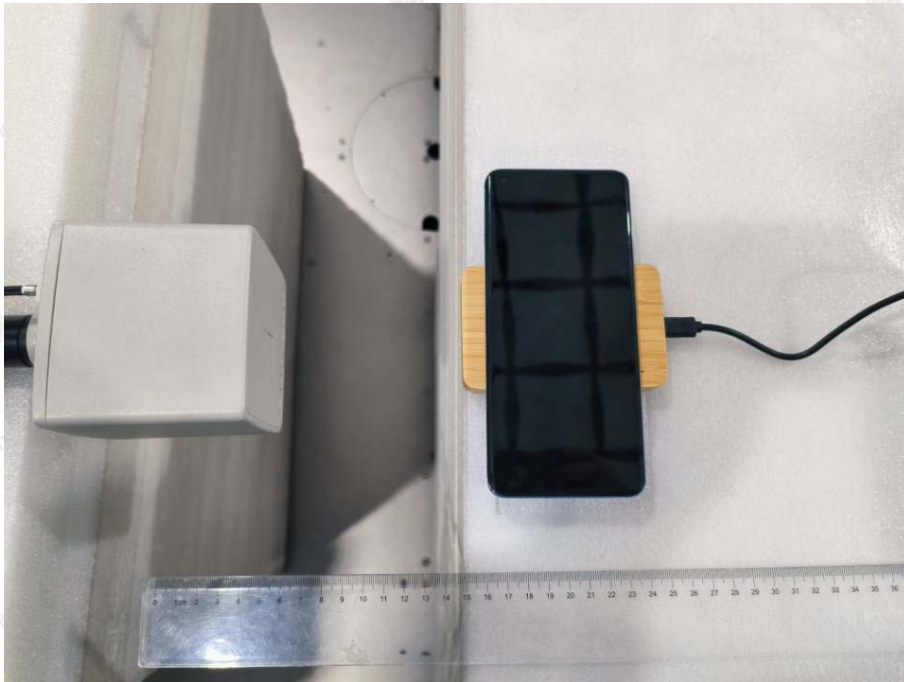




C

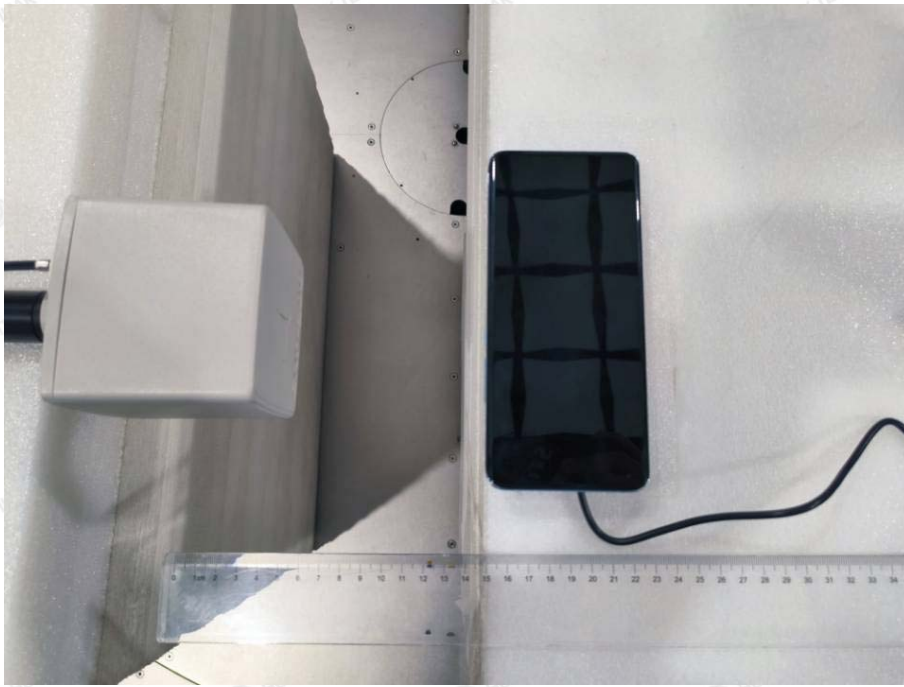


D

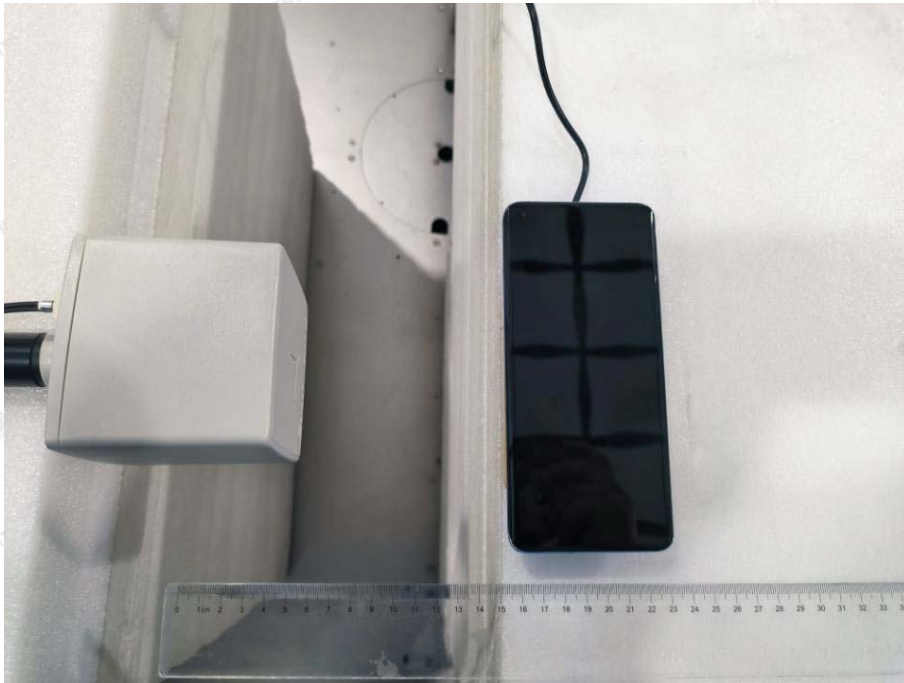




E

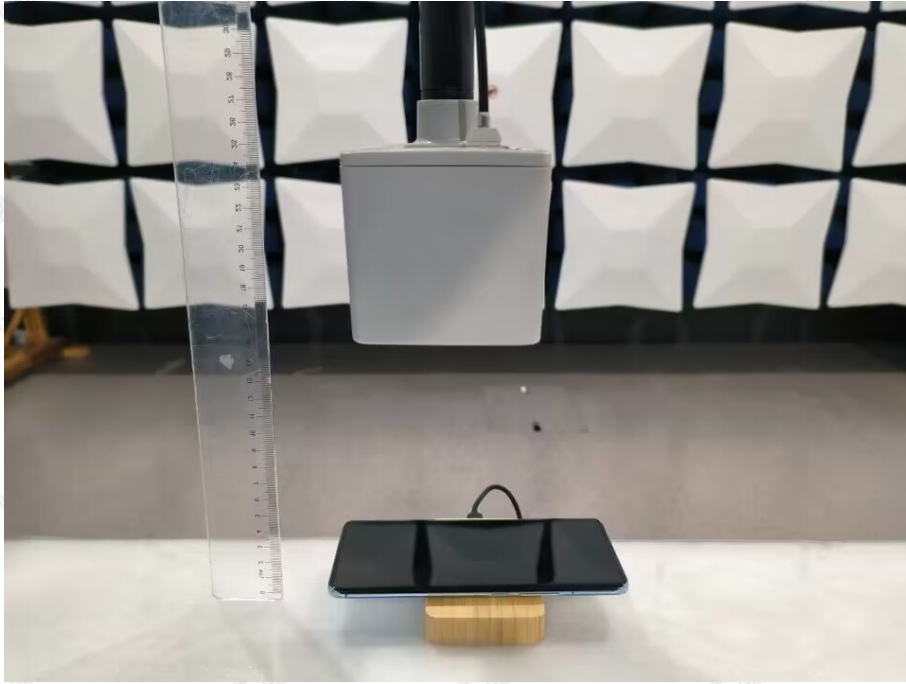


DC Mode:

A



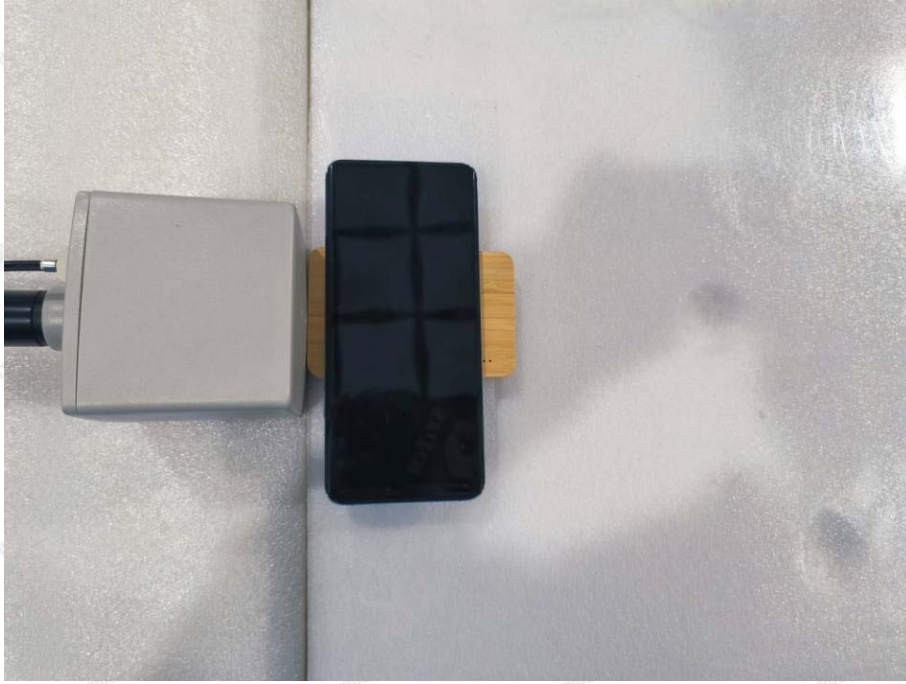

C

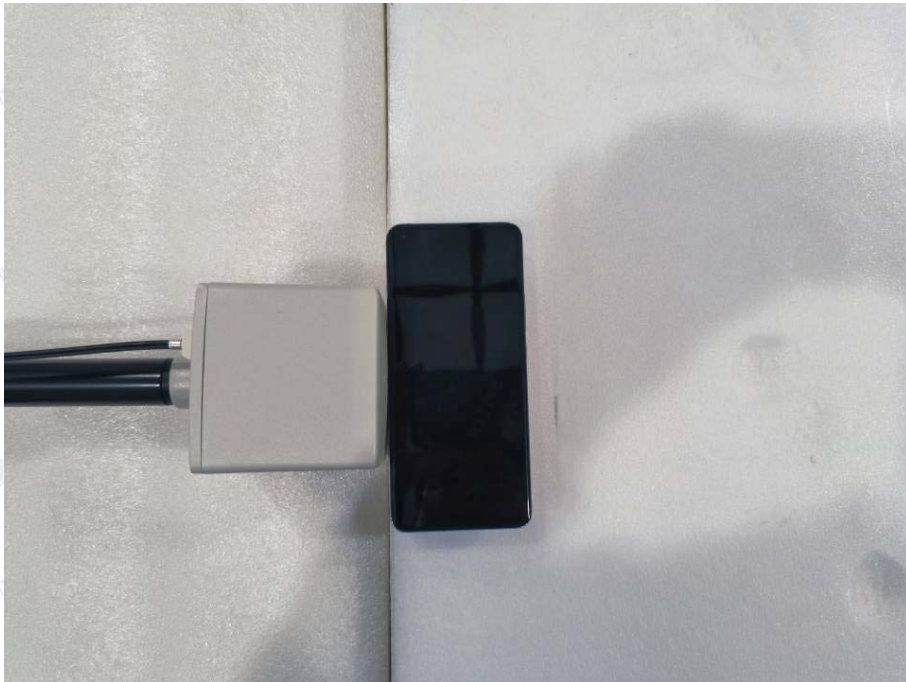



E





F



※※※※※THE END※※※※※

