


Site: AC2	Time: 2020/02/23 - 15:07
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT20 at channel 5500 MHz	

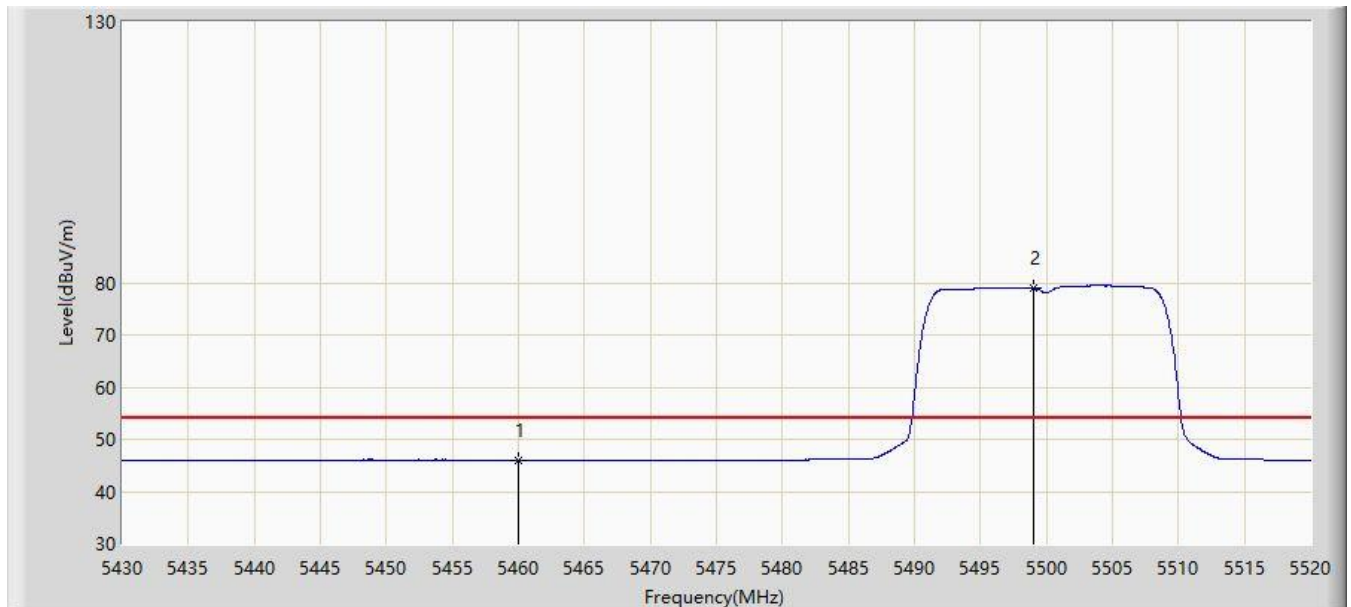


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	46.007	41.567	-7.993	54.000	4.440	AV
2	*	5499.075	78.980	74.495	N/A	N/A	4.485	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/23 - 15:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT20 at channel 5700 MHz	

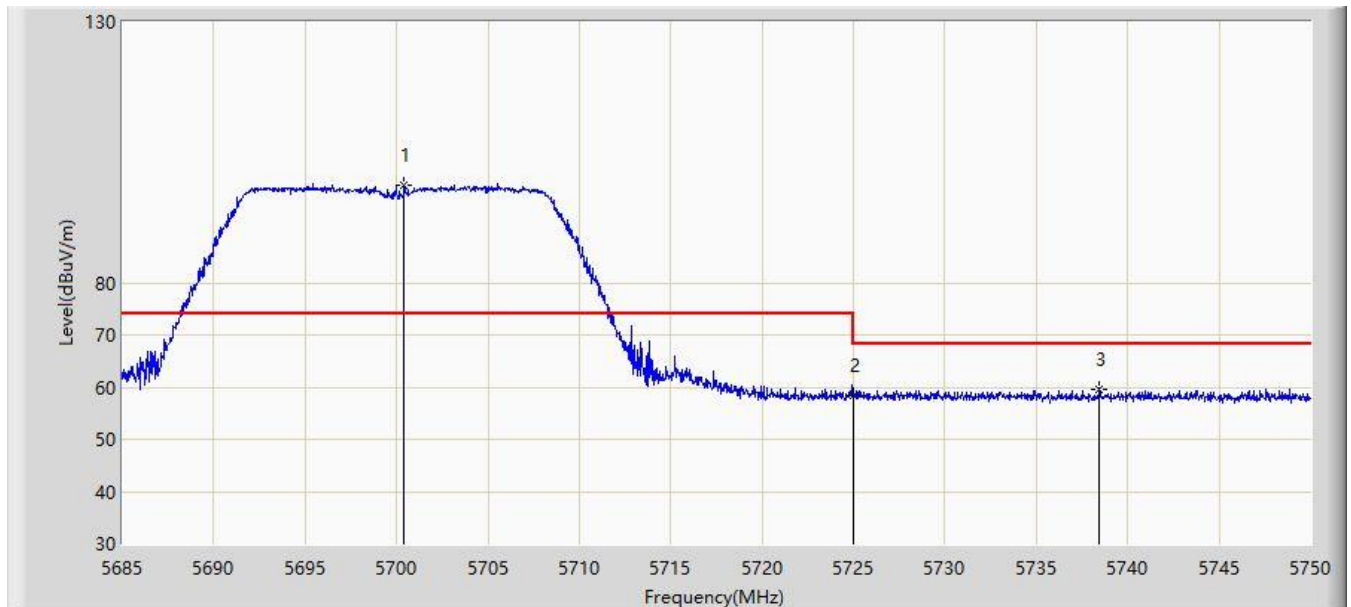


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5700.405	98.793	93.468	N/A	N/A	5.325	PK
2		5725.000	58.385	52.907	-9.815	68.200	5.478	PK
3		5738.462	59.709	54.165	-8.491	68.200	5.544	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/23 - 15:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT20 at channel 5700 MHz	

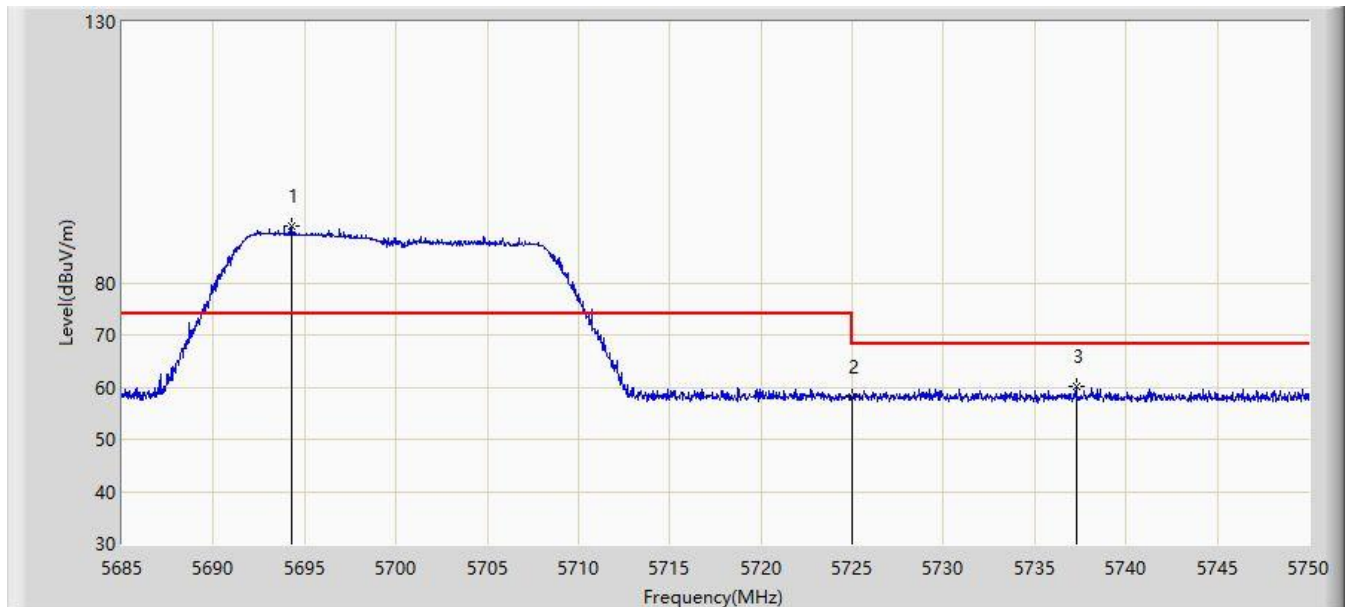


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5694.295	90.758	85.533	N/A	N/A	5.224	PK
2		5725.000	58.025	52.547	-10.175	68.200	5.478	PK
3		5737.260	60.039	54.501	-8.161	68.200	5.538	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/23 - 15:10
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT20 at channel 5745 MHz	

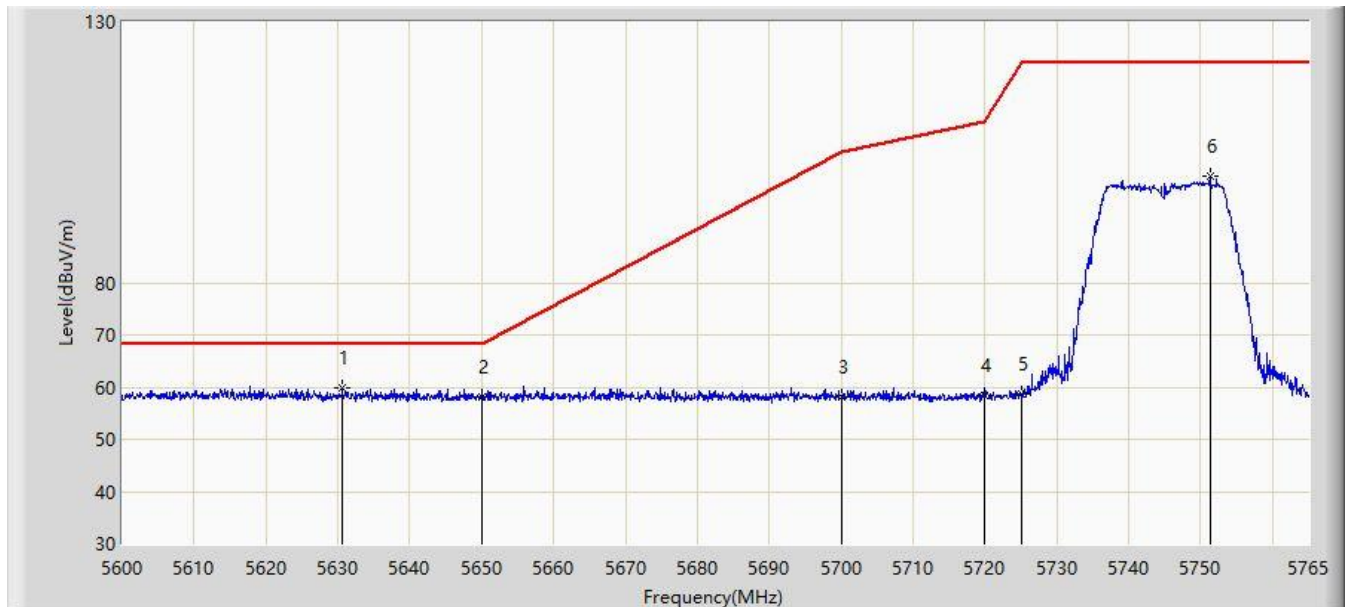


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5630.607	59.713	54.519	-8.487	68.200	5.194	PK
2		5650.000	58.046	52.710	-10.154	68.200	5.336	PK
3		5700.000	58.217	52.899	-46.983	105.200	5.318	PK
4		5720.000	58.543	53.069	-52.257	110.800	5.474	PK
5		5725.000	58.594	53.116	-63.606	122.200	5.478	PK
6		5751.305	100.295	94.564	N/A	N/A	5.732	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/23 - 15:17
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT20 at channel 5745 MHz	

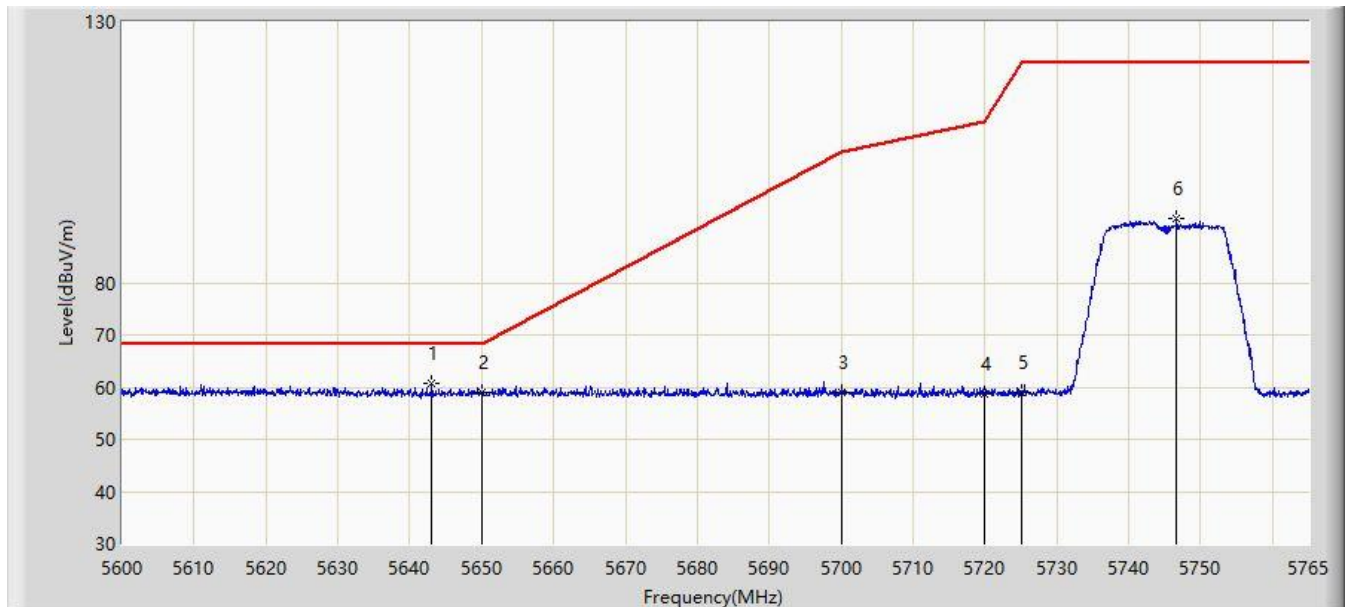


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5643.065	60.634	55.411	-7.566	68.200	5.223	PK
2		5650.000	58.894	53.558	-9.306	68.200	5.336	PK
3		5700.000	58.930	53.612	-46.270	105.200	5.318	PK
4		5720.000	58.799	53.325	-52.001	110.800	5.474	PK
5		5725.000	58.945	53.467	-63.255	122.200	5.478	PK
6		5746.685	92.443	86.803	N/A	N/A	5.640	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/23 - 15:27
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT20 at channel 5825 MHz	

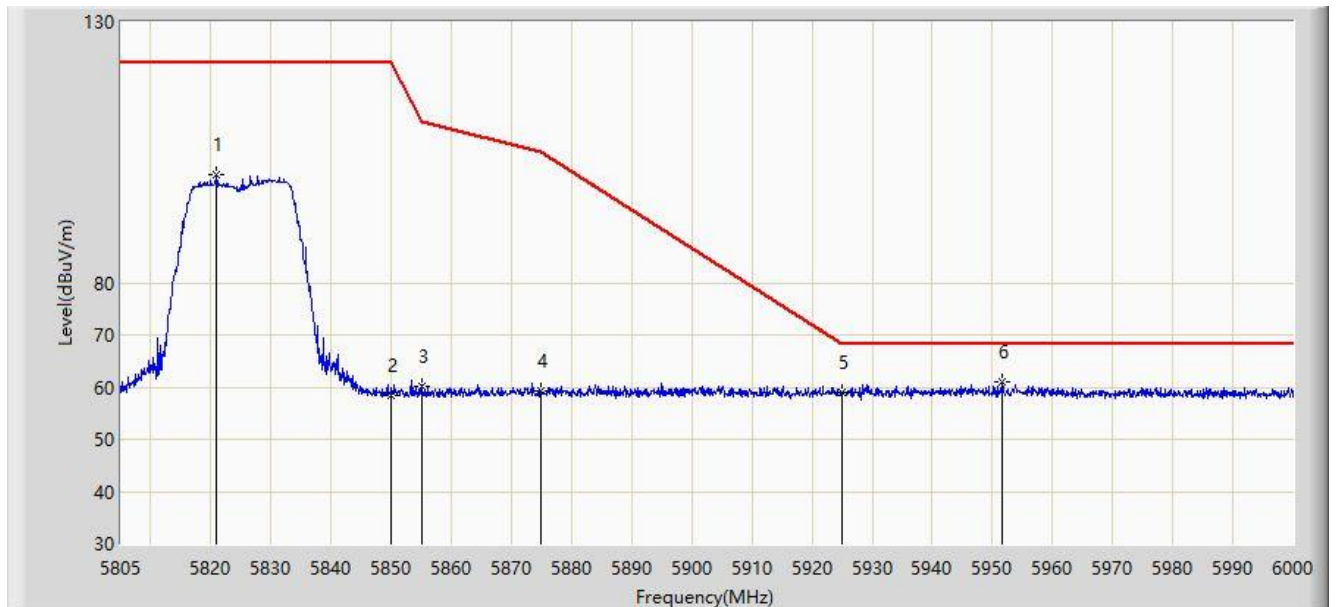


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5820.893	100.646	94.844	N/A	N/A	5.801	PK
2		5850.000	58.482	52.513	-63.718	122.200	5.968	PK
3		5855.000	60.075	54.100	-50.725	110.800	5.975	PK
4		5875.000	59.320	53.307	-45.880	105.200	6.013	PK
5		5925.000	59.026	52.891	-9.174	68.200	6.136	PK
6	*	5951.542	60.877	54.836	-7.323	68.200	6.041	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/23 - 15:29
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT20 at channel 5825 MHz	

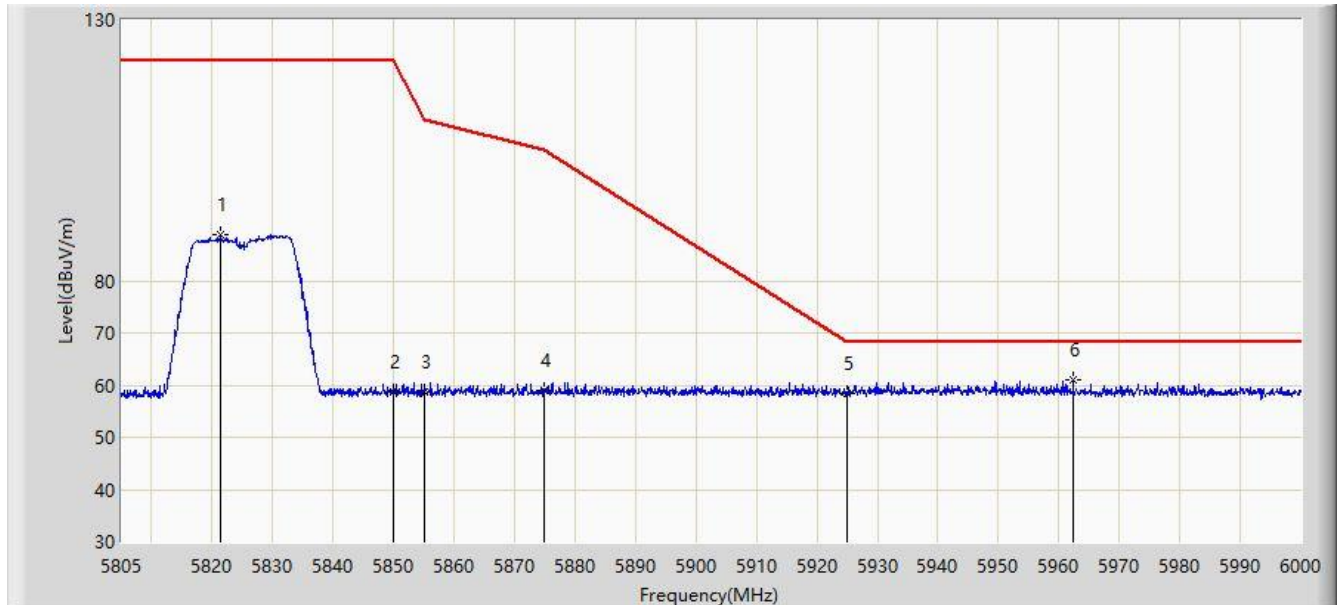


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5821.478	88.799	83.002	N/A	N/A	5.797	PK
2		5850.000	58.603	52.634	-63.597	122.200	5.968	PK
3		5855.000	58.793	52.818	-52.007	110.800	5.975	PK
4		5875.000	59.128	53.115	-46.072	105.200	6.013	PK
5		5925.000	58.429	52.294	-9.771	68.200	6.136	PK
6	*	5962.365	61.116	55.134	-7.084	68.200	5.981	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/23 - 15:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5190 MHz	

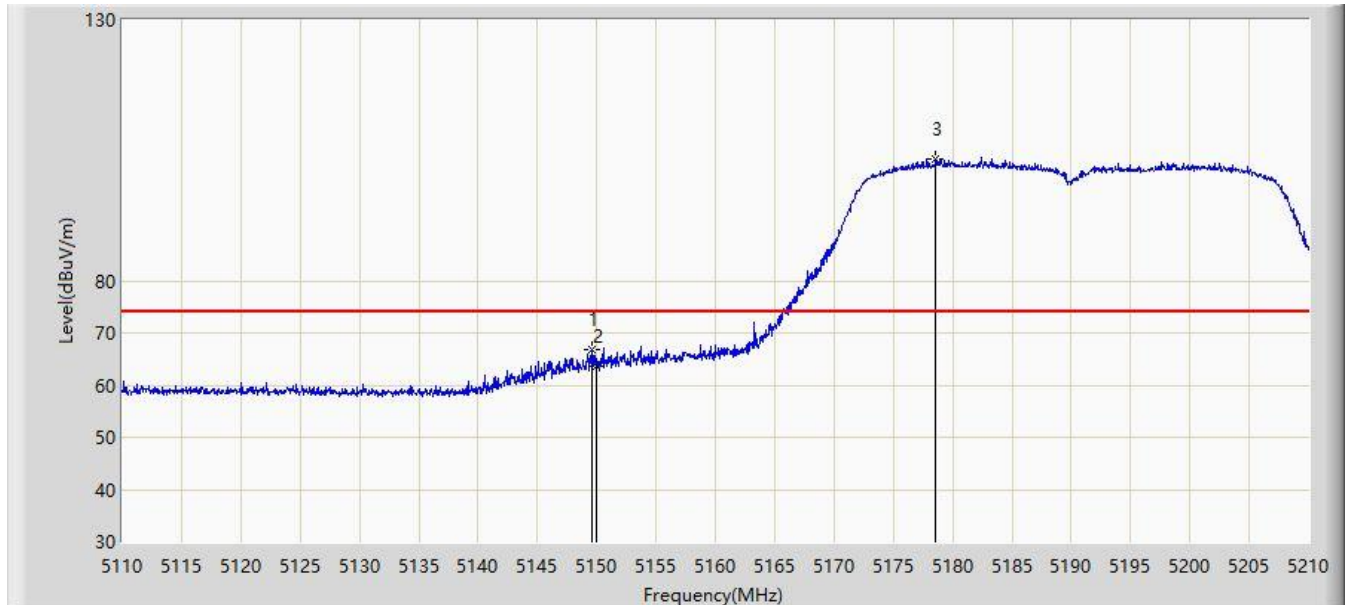


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5149.650	66.899	62.461	-7.101	74.000	4.438	PK
2		5150.000	63.500	59.058	-10.500	74.000	4.442	PK
3	*	5178.600	103.426	98.929	N/A	N/A	4.497	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5190 MHz	

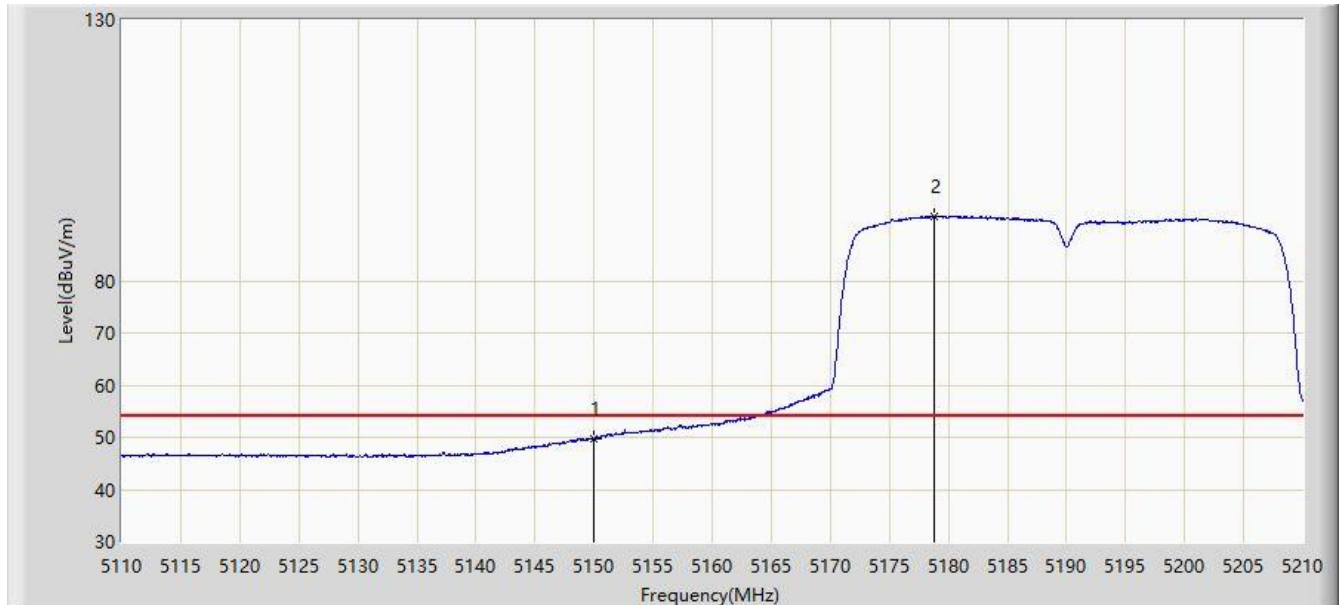


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	49.806	45.364	-4.194	54.000	4.442	AV
2	*	5178.750	92.326	87.830	N/A	N/A	4.496	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5190 MHz	

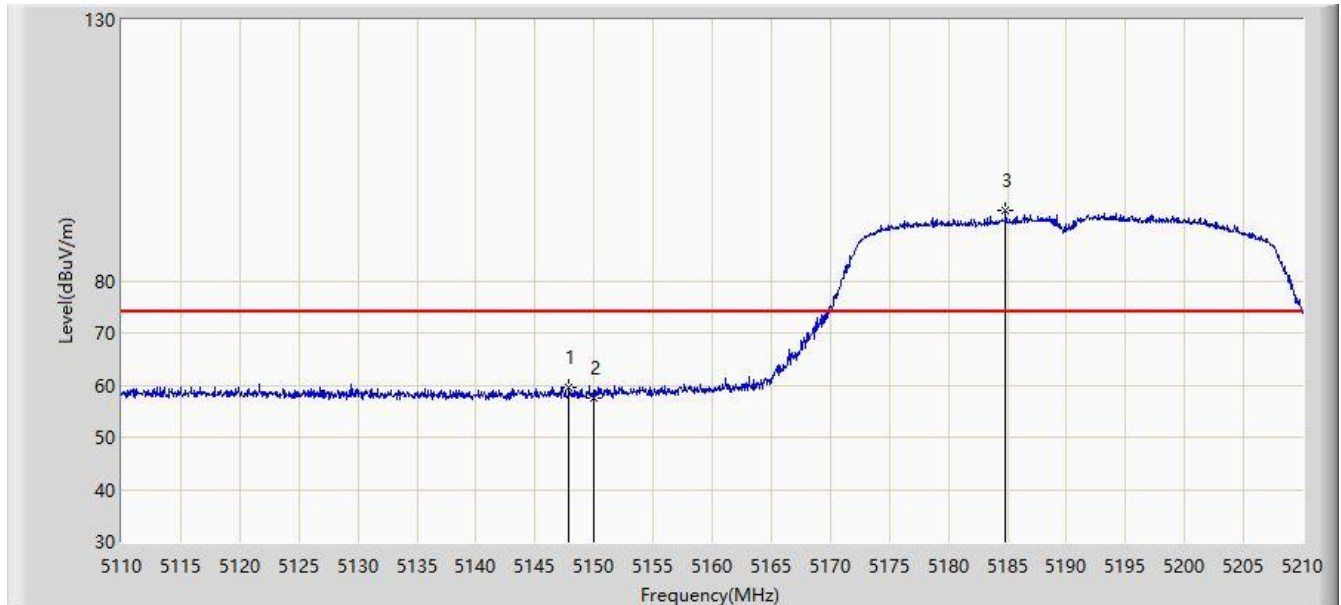


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5147.900	59.704	55.284	-14.296	74.000	4.419	PK
2		5150.000	57.470	53.028	-16.530	74.000	4.442	PK
3	*	5184.850	93.390	88.956	N/A	N/A	4.435	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5190 MHz	

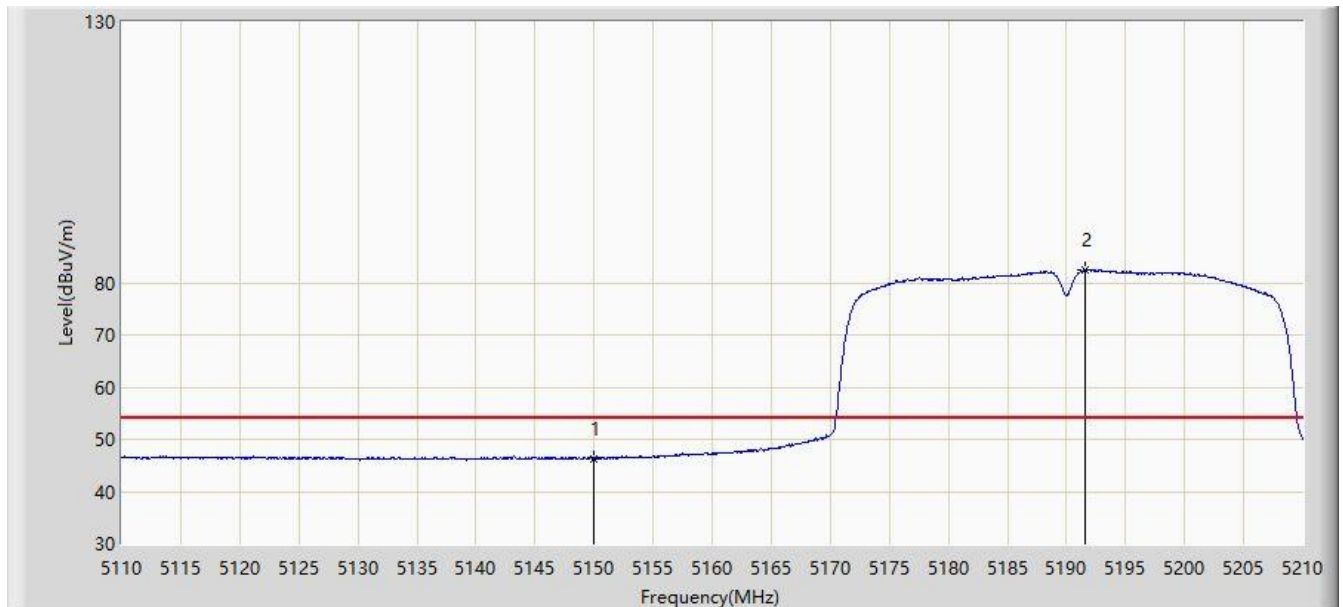


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	46.306	41.864	-7.694	54.000	4.442	AV
2	*	5191.600	82.397	78.042	N/A	N/A	4.355	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5310 MHz	

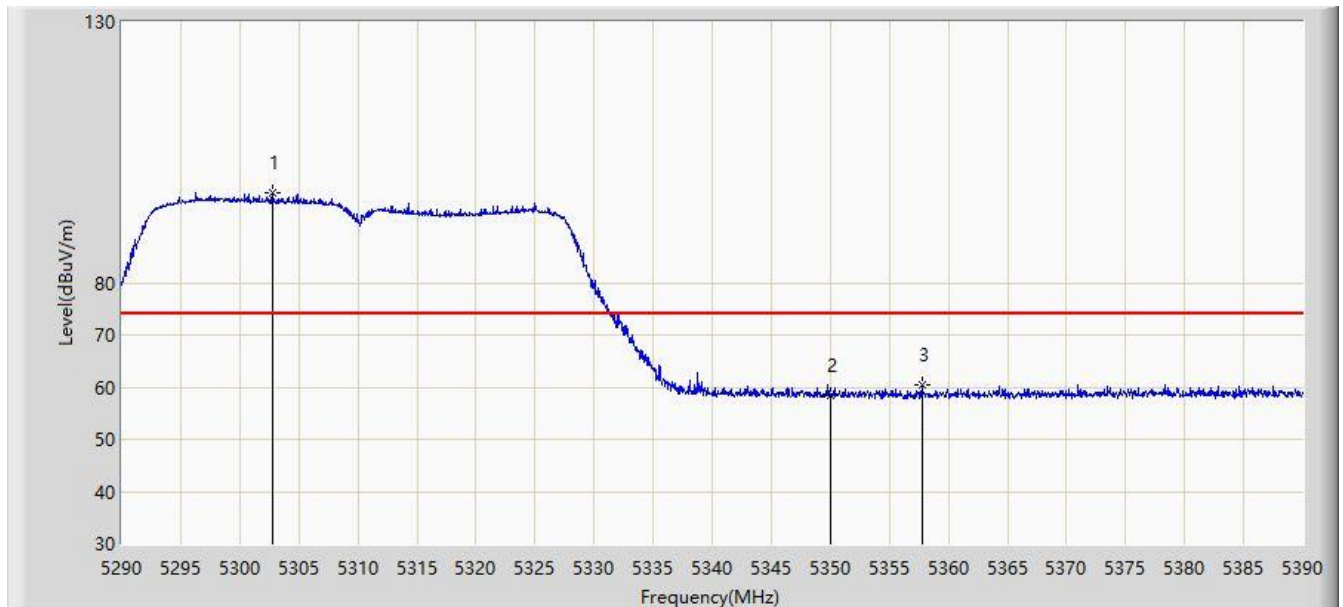


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5302.750	97.298	92.911	N/A	N/A	4.387	PK
2		5350.000	58.352	54.175	-15.648	74.000	4.177	PK
3		5357.750	60.298	56.089	-13.702	74.000	4.210	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:45
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5310 MHz	

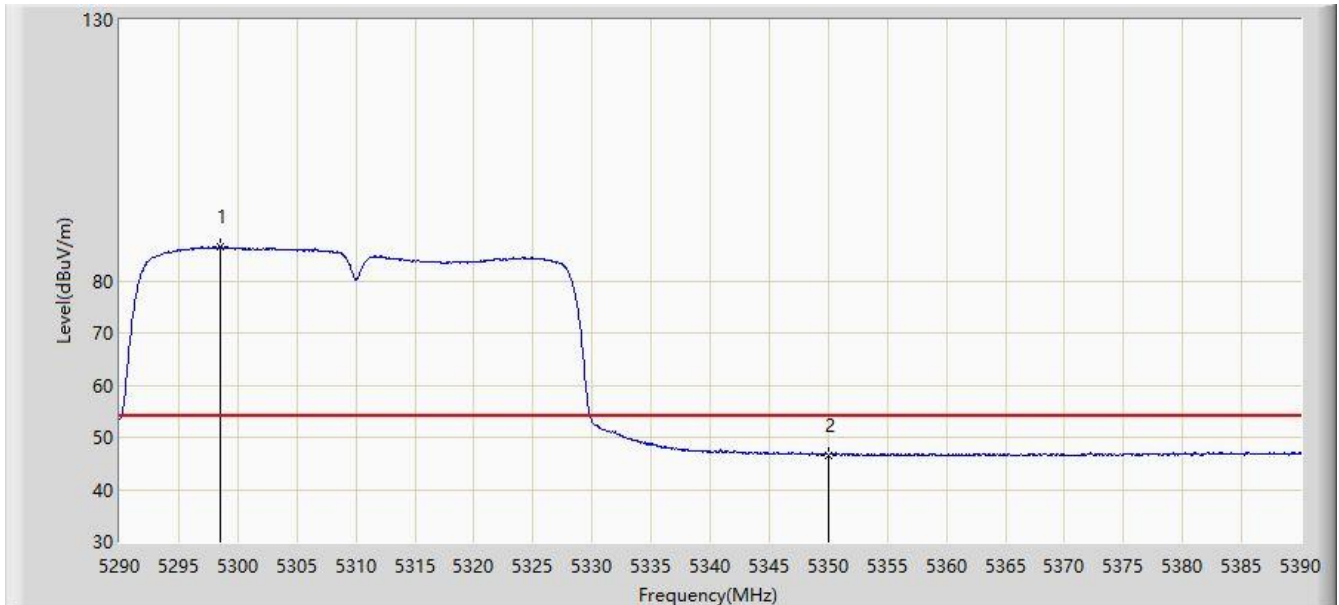


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5298.500	86.380	81.971	N/A	N/A	4.409	AV
2		5350.000	46.602	42.425	-7.398	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5310 MHz	

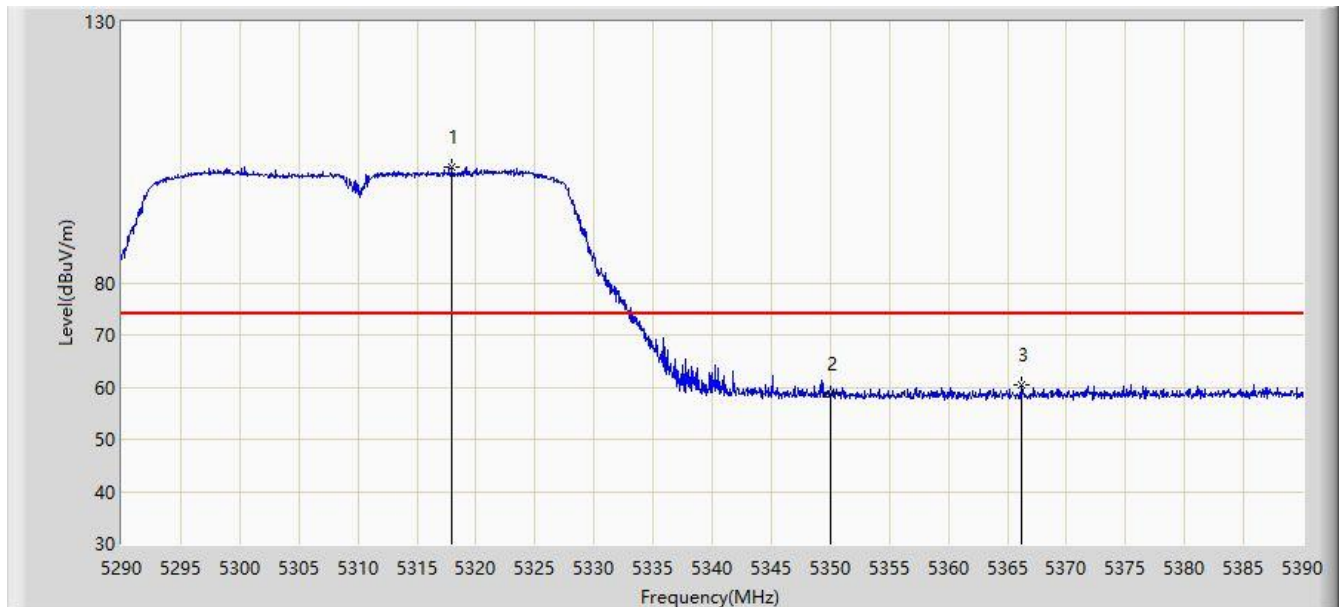


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5317.950	102.218	98.145	N/A	N/A	4.073	PK
2		5350.000	58.705	54.528	-15.295	74.000	4.177	PK
3		5366.250	60.511	56.275	-13.489	74.000	4.237	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:51
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5310 MHz	

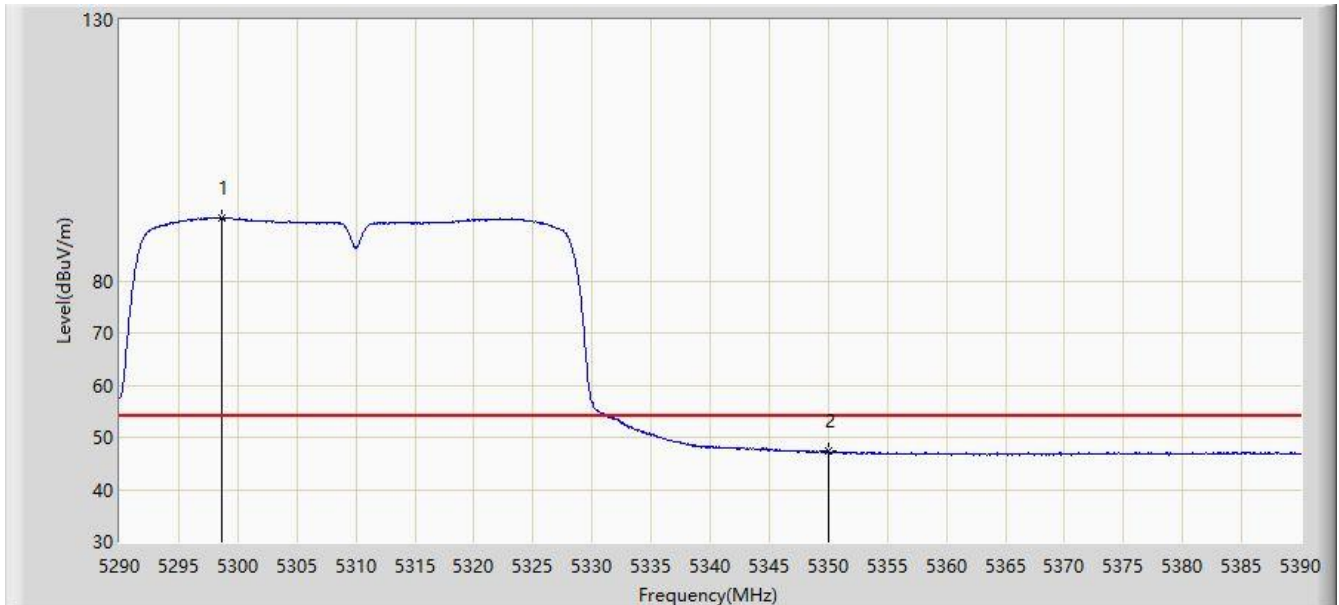


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5298.650	91.999	87.589	N/A	N/A	4.410	AV
2		5350.000	47.296	43.119	-6.704	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5510 MHz	

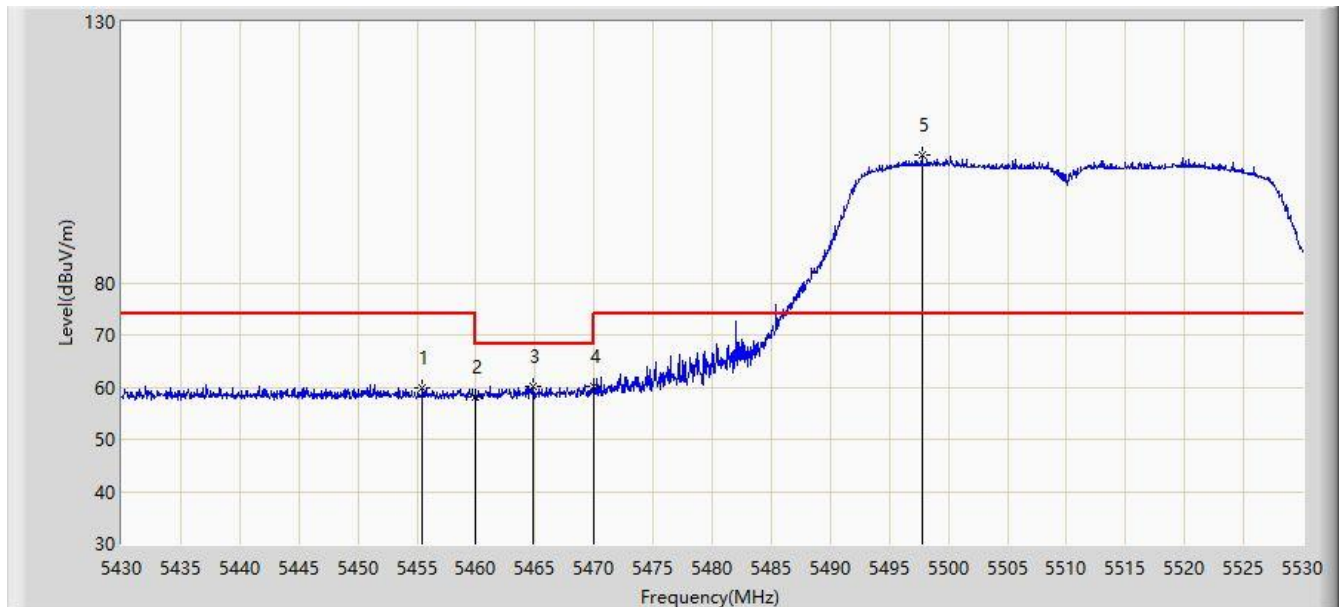


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5455.450	59.989	55.556	-14.011	74.000	4.433	PK
2		5460.000	58.249	53.809	-15.751	74.000	4.440	PK
3		5464.800	60.093	55.646	-8.107	68.200	4.448	PK
4		5470.000	60.240	55.784	-7.960	68.200	4.455	PK
5	*	5497.750	104.491	99.994	N/A	N/A	4.496	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5510 MHz	

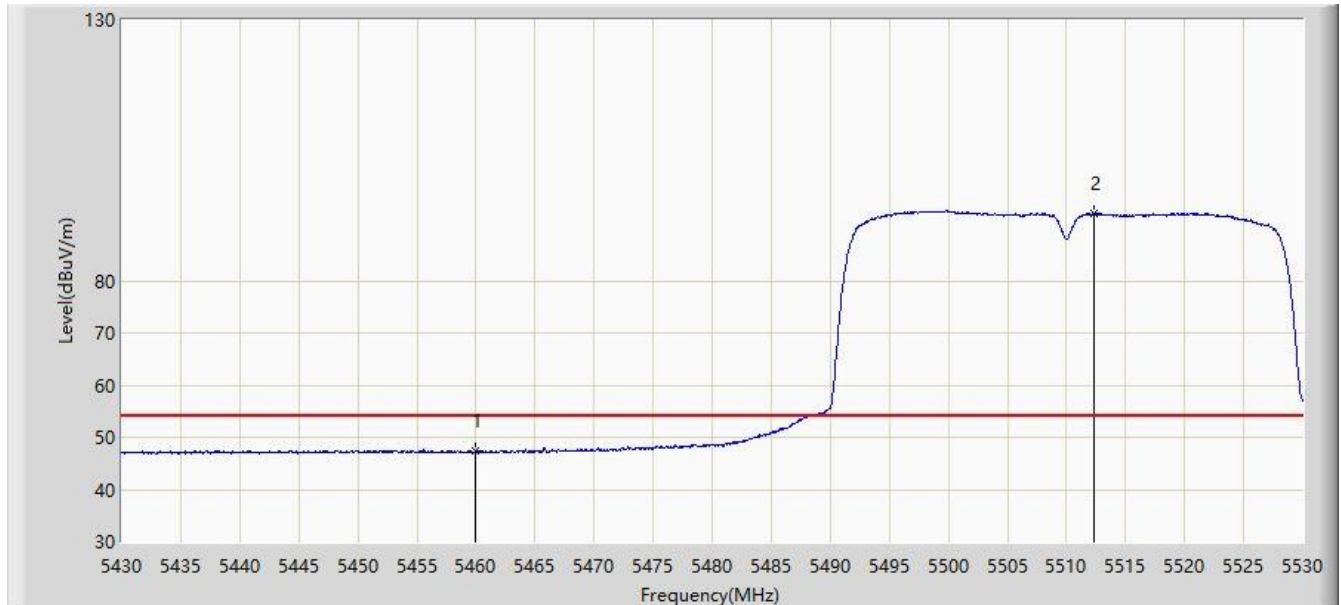


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.250	42.810	-6.750	54.000	4.440	AV
2	*	5512.300	92.911	88.302	N/A	N/A	4.609	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 11:54
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5510 MHz	

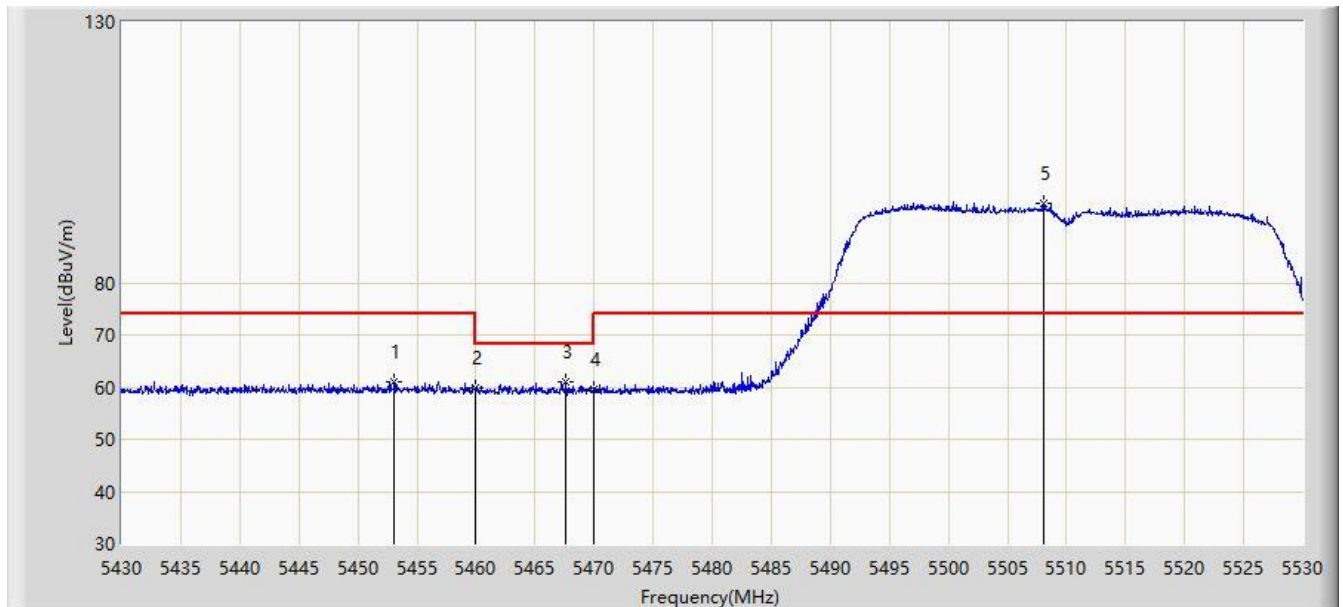


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5453.050	60.966	56.520	-13.034	74.000	4.446	PK
2		5460.000	59.777	55.337	-14.223	74.000	4.440	PK
3		5467.650	60.987	56.535	-7.213	68.200	4.452	PK
4		5470.000	59.710	55.254	-8.490	68.200	4.455	PK
5	*	5508.100	95.093	90.586	N/A	N/A	4.507	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 12:00
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5510 MHz	

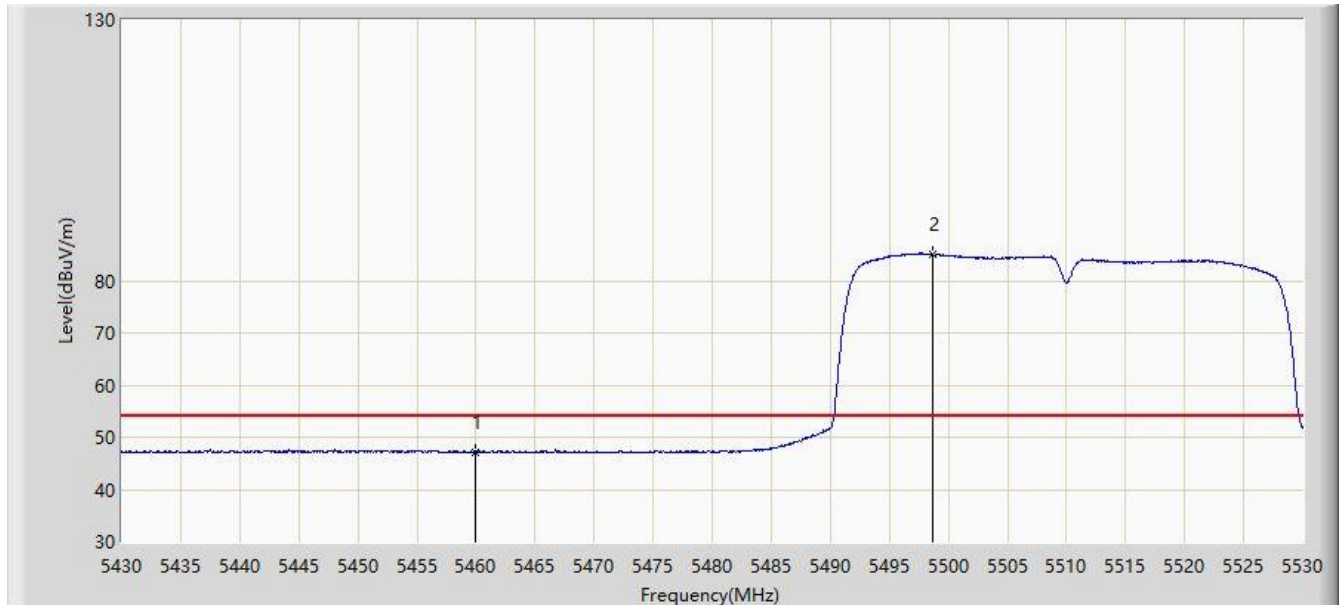


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.180	42.740	-6.820	54.000	4.440	AV
2	*	5498.650	85.144	80.655	N/A	N/A	4.489	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:16
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5670 MHz	

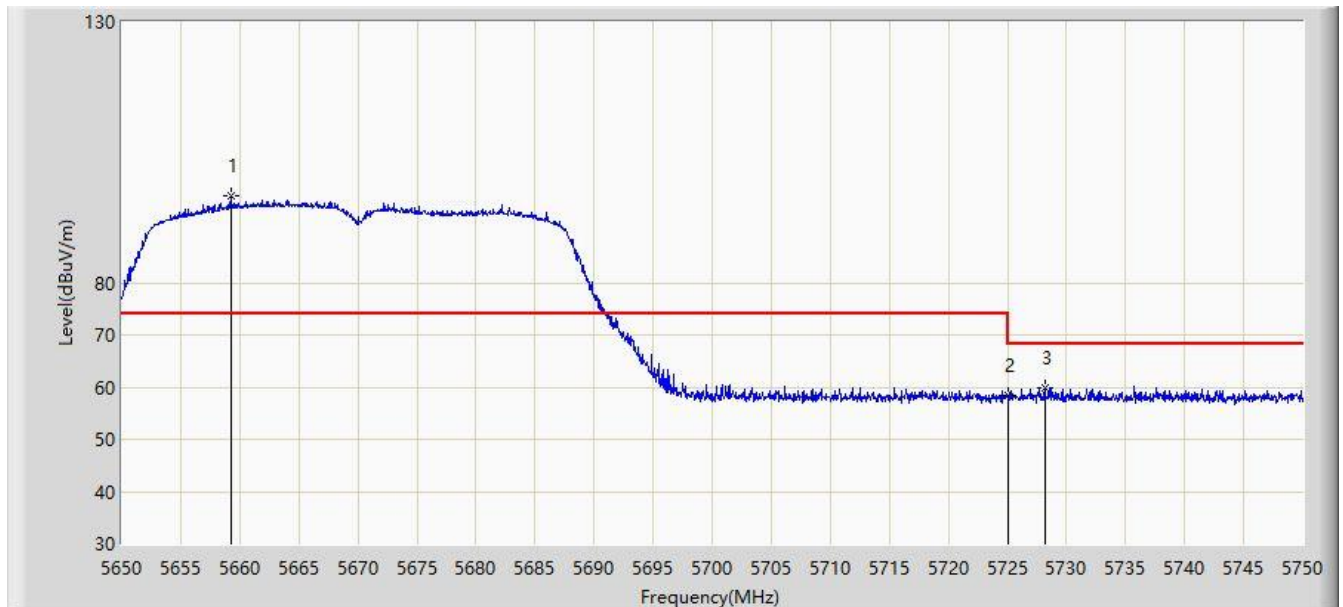


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5659.250	96.760	91.297	N/A	N/A	5.464	PK
2		5725.000	58.357	52.879	-9.843	68.200	5.478	PK
3		5728.150	59.716	54.226	-8.484	68.200	5.491	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5670 MHz	

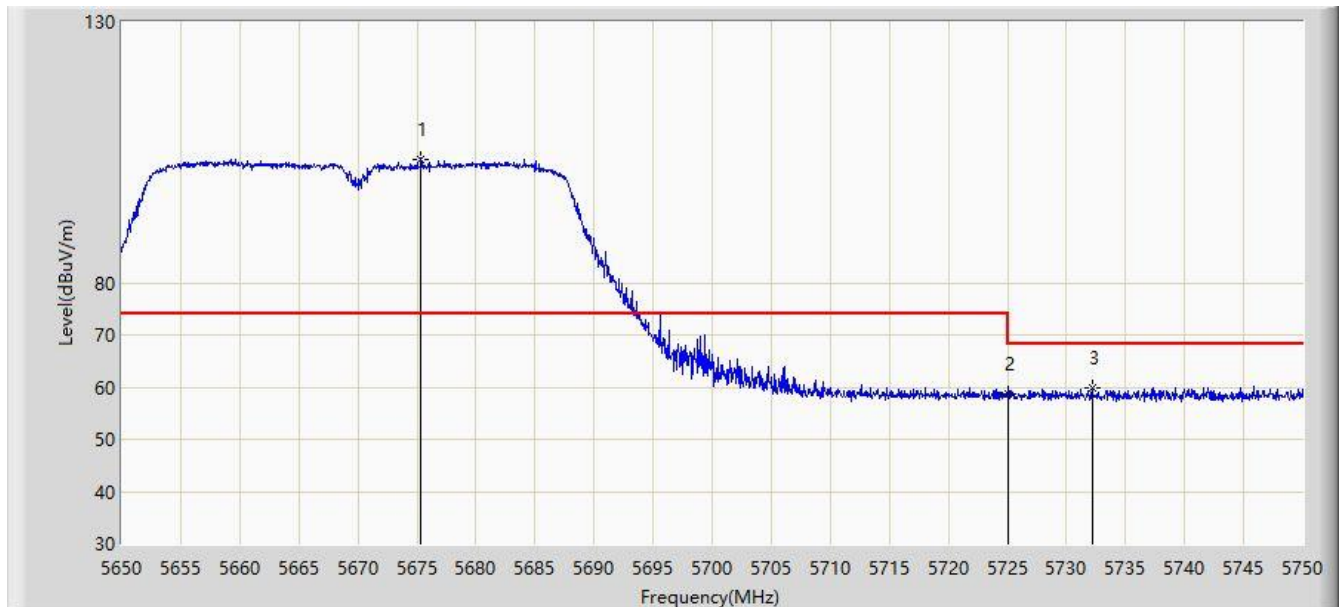


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5675.350	103.768	98.350	N/A	N/A	5.417	PK
2		5725.000	58.614	53.136	-9.586	68.200	5.478	PK
3		5732.150	59.952	54.441	-8.248	68.200	5.510	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:18
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5755 MHz	

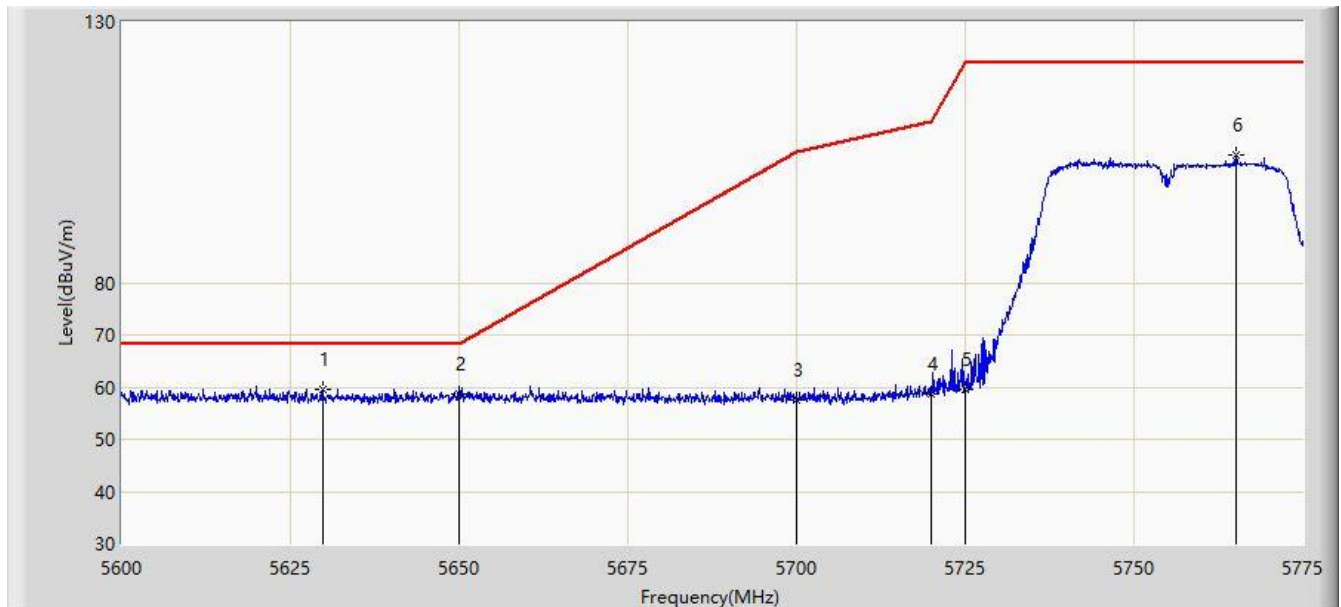


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5629.837	59.547	54.352	-8.653	68.200	5.195	PK
2		5650.000	58.601	53.265	-9.599	68.200	5.336	PK
3		5700.000	57.440	52.122	-47.760	105.200	5.318	PK
4		5720.000	58.644	53.170	-52.156	110.800	5.474	PK
5		5725.000	59.596	54.118	-62.604	122.200	5.478	PK
6		5765.025	104.467	98.621	N/A	N/A	5.846	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:19
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5755 MHz	

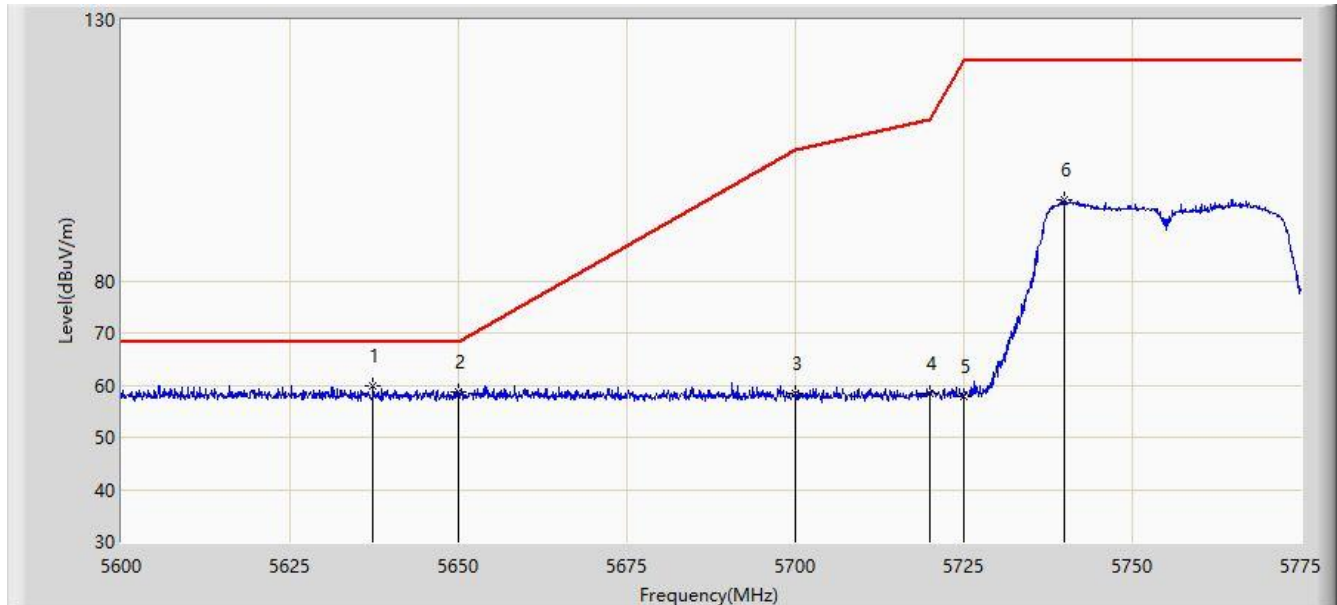


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5637.362	59.740	54.549	-8.460	68.200	5.191	PK
2		5650.000	58.626	53.290	-9.574	68.200	5.336	PK
3		5700.000	58.455	53.137	-46.745	105.200	5.318	PK
4		5720.000	58.302	52.828	-52.498	110.800	5.474	PK
5		5725.000	57.879	52.401	-64.321	122.200	5.478	PK
6		5739.825	95.517	89.966	N/A	N/A	5.551	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:22
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5795 MHz	

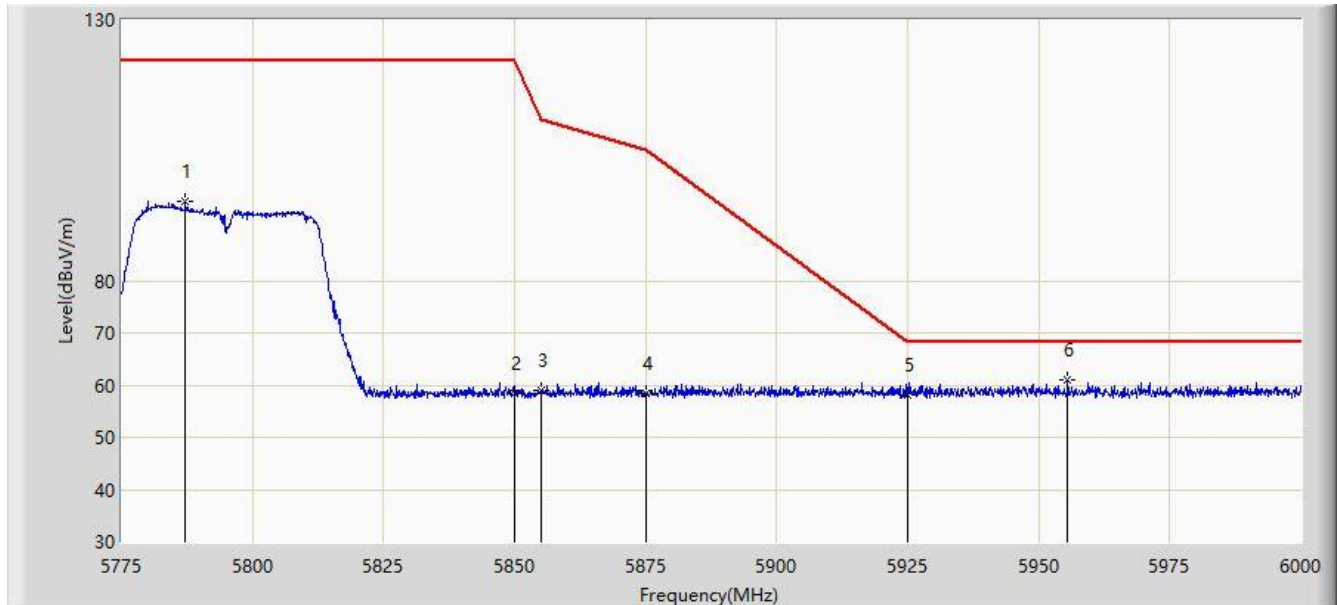


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5787.263	95.168	89.375	N/A	N/A	5.793	PK
2		5850.000	58.301	52.332	-63.899	122.200	5.968	PK
3		5855.000	59.001	53.026	-51.799	110.800	5.975	PK
4		5875.000	58.358	52.345	-46.842	105.200	6.013	PK
5		5925.000	58.121	51.986	-10.079	68.200	6.136	PK
6	*	5955.562	60.972	54.953	-7.228	68.200	6.019	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:24
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11n-HT40 at channel 5795 MHz	

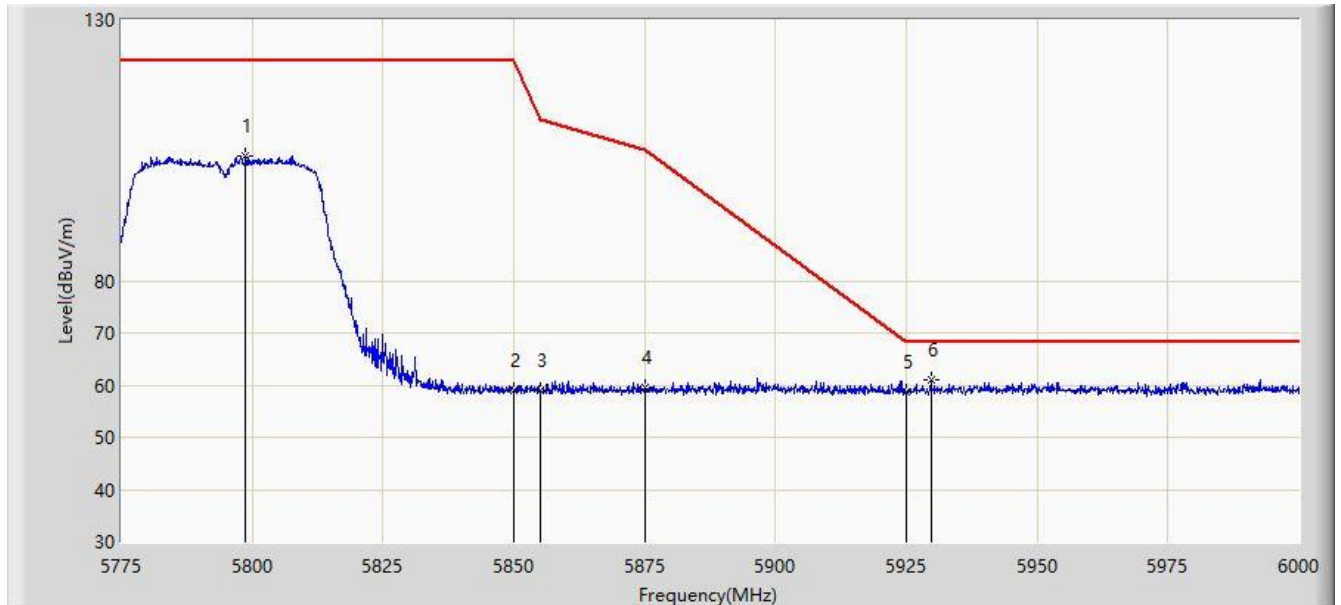


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5798.737	104.047	98.191	N/A	N/A	5.856	PK
2		5850.000	58.924	52.955	-63.276	122.200	5.968	PK
3		5855.000	58.854	52.879	-51.946	110.800	5.975	PK
4		5875.000	59.428	53.415	-45.772	105.200	6.013	PK
5		5925.000	58.626	52.491	-9.574	68.200	6.136	PK
6	*	5929.687	61.131	54.974	-7.069	68.200	6.156	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180 MHz	

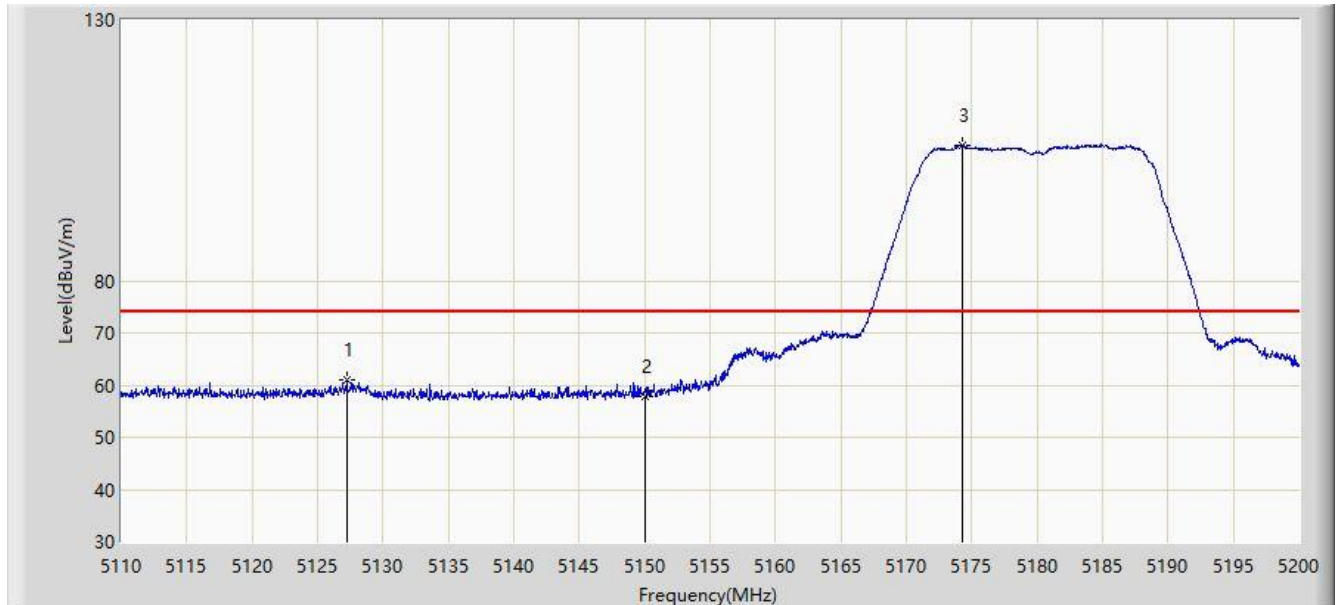


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5127.235	60.969	56.524	-13.031	74.000	4.444	PK
2		5150.000	57.826	53.384	-16.174	74.000	4.442	PK
3	*	5174.260	106.008	101.474	N/A	N/A	4.534	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180 MHz	

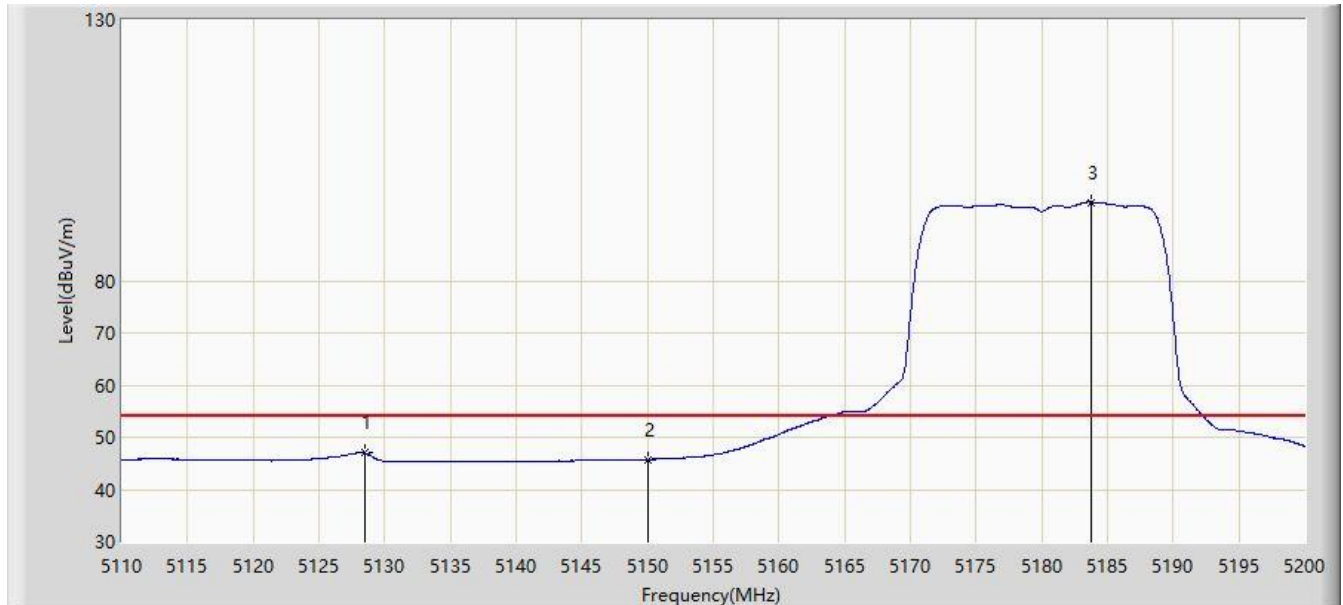


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5128.450	47.010	42.572	-6.990	54.000	4.438	AV
2		5150.000	45.789	41.347	-8.211	54.000	4.442	AV
3	*	5183.710	95.068	90.620	N/A	N/A	4.447	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180 MHz	

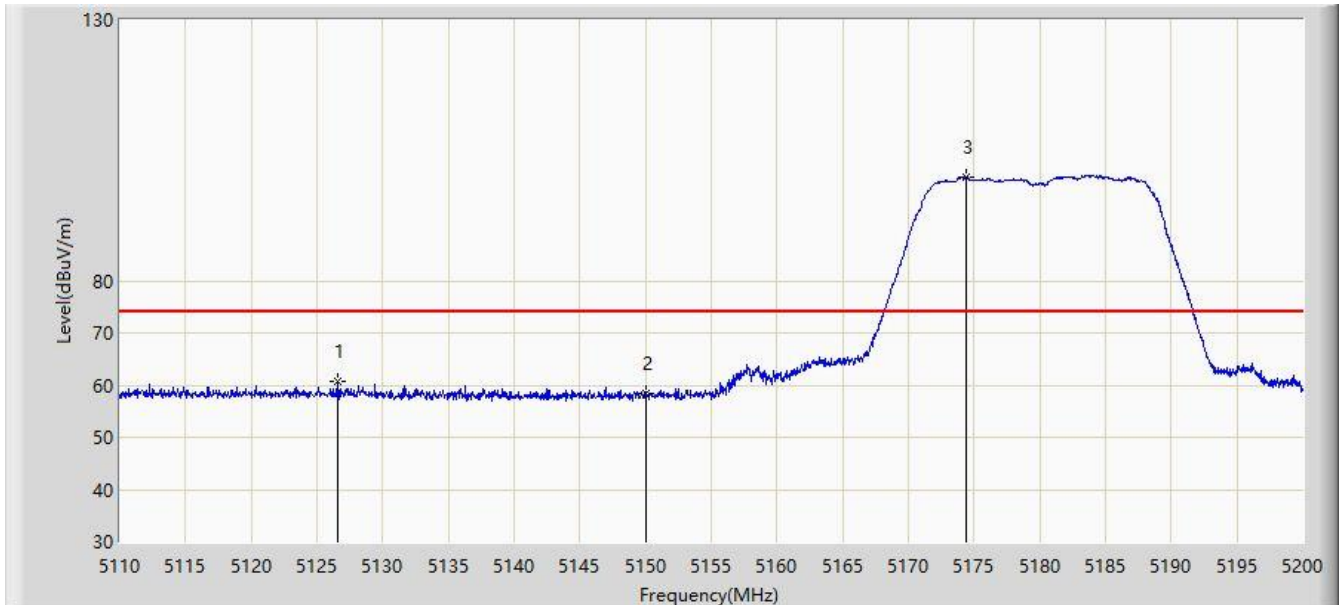


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5126.560	60.813	56.364	-13.187	74.000	4.449	PK
2		5150.000	58.392	53.950	-15.608	74.000	4.442	PK
3	*	5174.350	99.863	95.330	N/A	N/A	4.532	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5180 MHz	

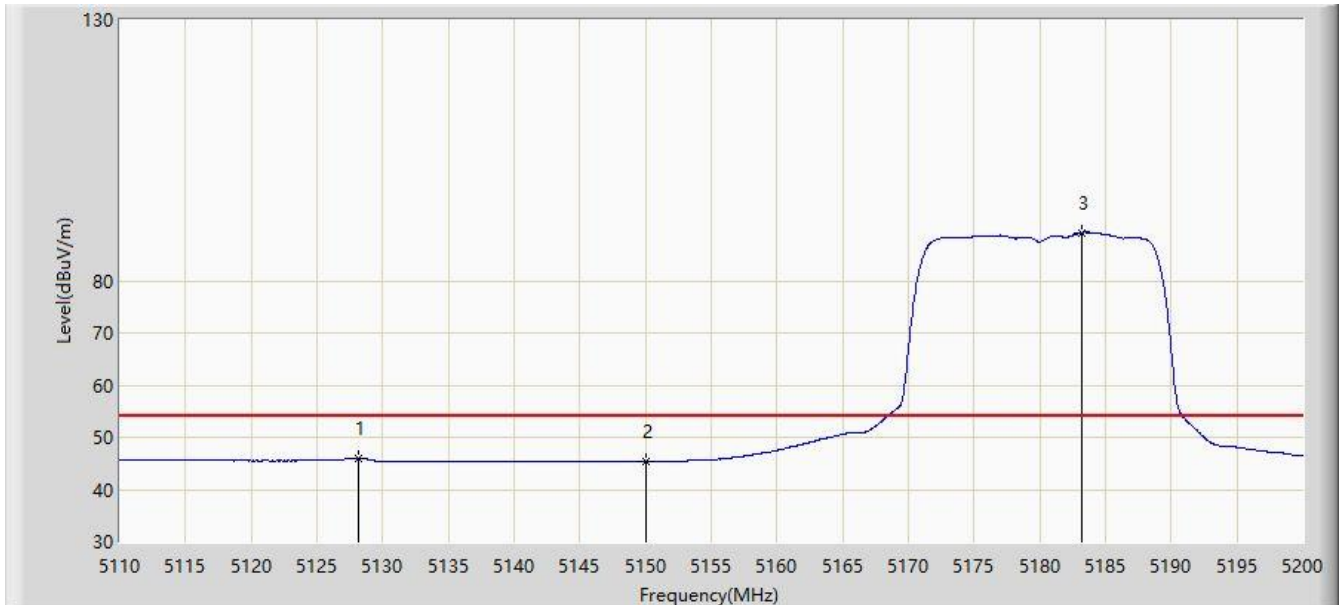


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5128.135	45.986	41.547	-8.014	54.000	4.440	AV
2		5150.000	45.404	40.962	-8.596	54.000	4.442	AV
3	*	5183.170	89.212	84.758	N/A	N/A	4.454	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:34
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320 MHz	

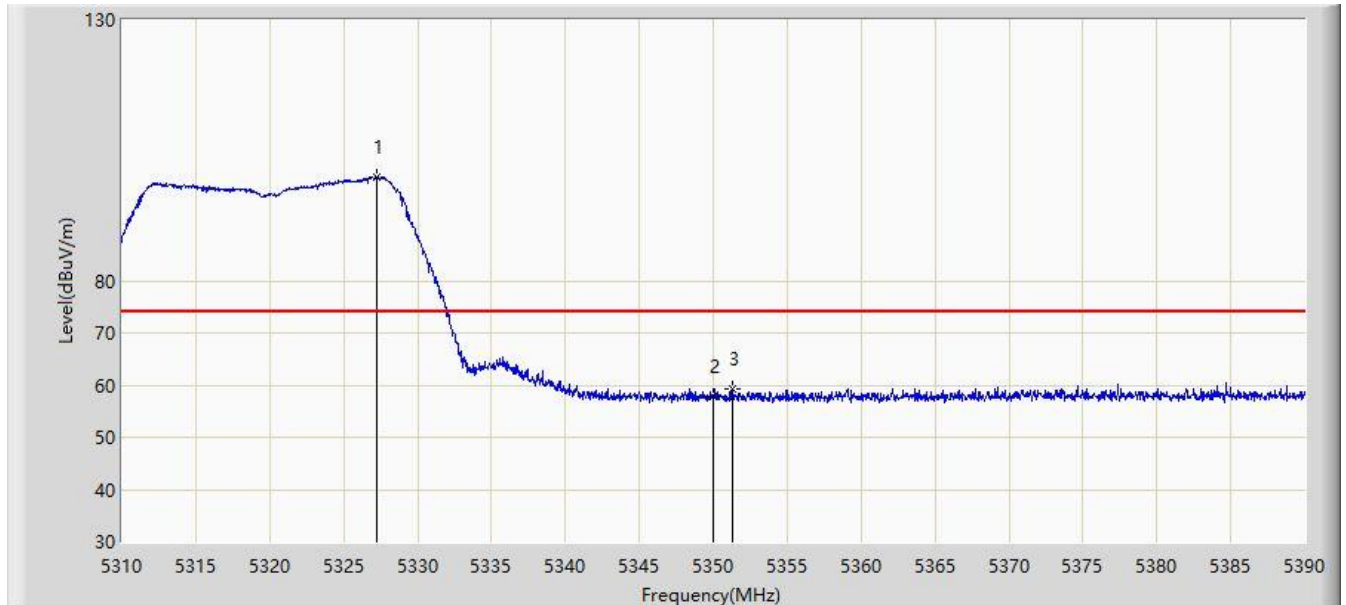


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5327.280	99.766	95.693	N/A	N/A	4.074	PK
2		5350.000	57.821	53.644	-16.179	74.000	4.177	PK
3		5351.320	59.388	55.202	-14.612	74.000	4.186	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320 MHz	

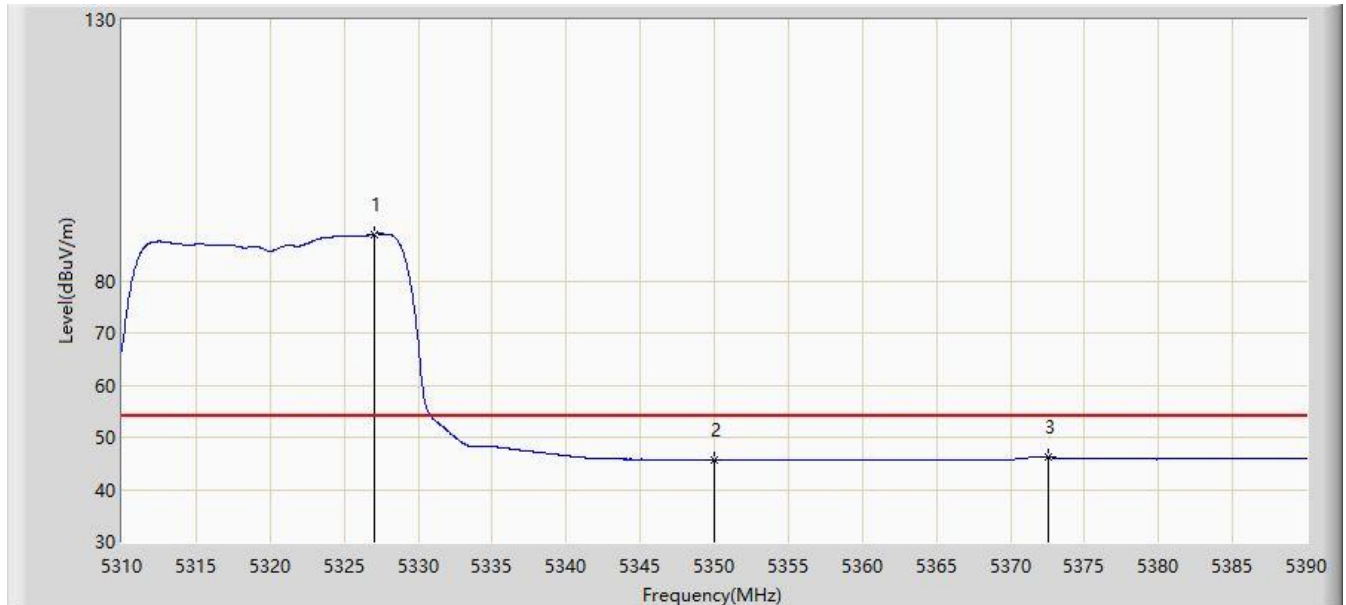


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5327.000	88.914	84.841	N/A	N/A	4.073	AV
2		5350.000	45.698	41.521	-8.302	54.000	4.177	AV
3		5372.520	46.128	41.807	-7.872	54.000	4.321	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320 MHz	

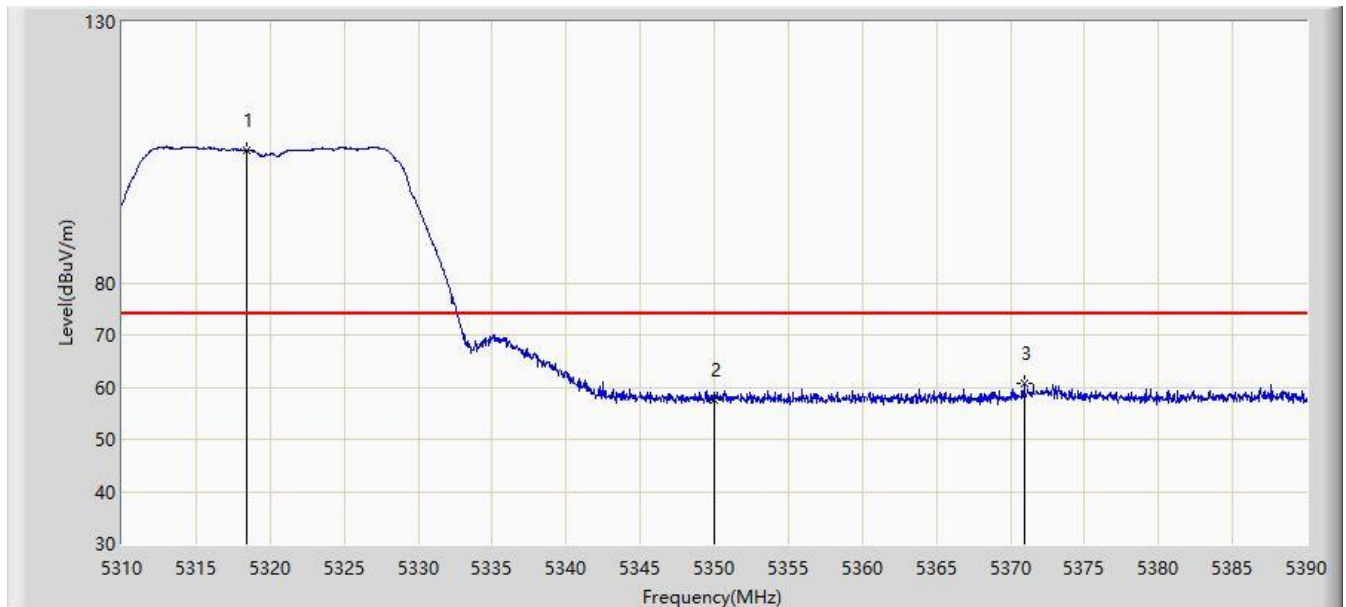


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5318.400	105.443	101.371	N/A	N/A	4.072	PK
2		5350.000	57.452	53.275	-16.548	74.000	4.177	PK
3		5370.920	60.844	56.558	-13.156	74.000	4.286	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:37
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5320 MHz	

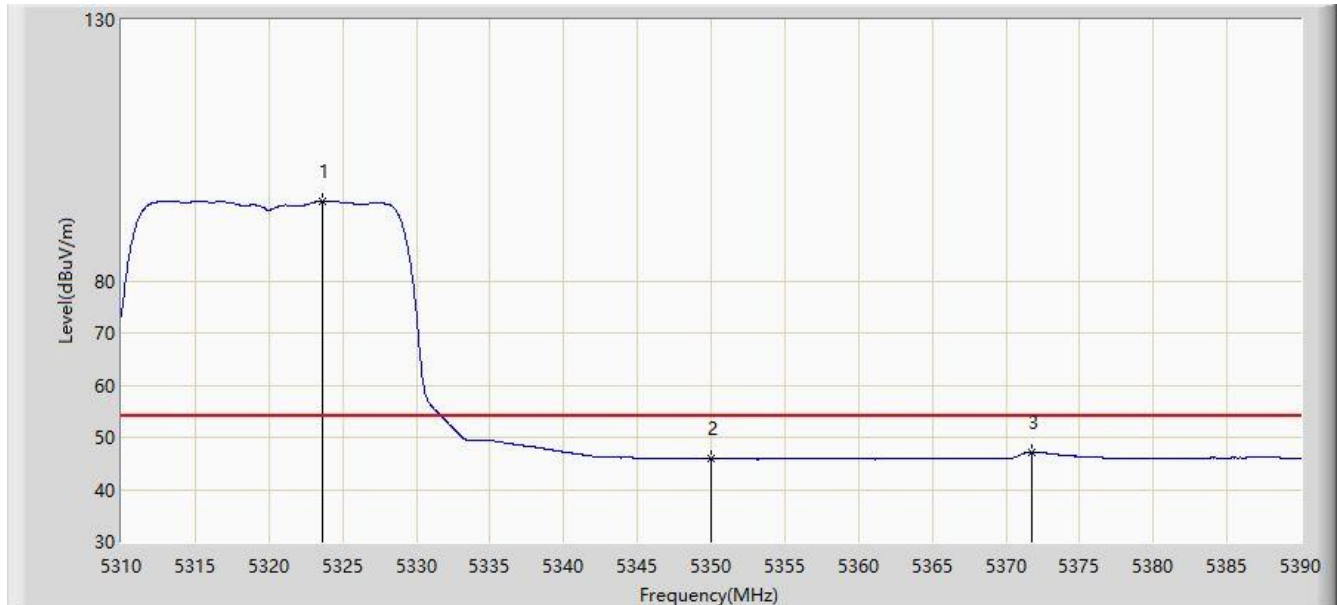


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5323.640	95.188	91.115	N/A	N/A	4.073	AV
2		5350.000	45.907	41.730	-8.093	54.000	4.177	AV
3		5371.760	47.238	42.933	-6.762	54.000	4.305	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500 MHz	

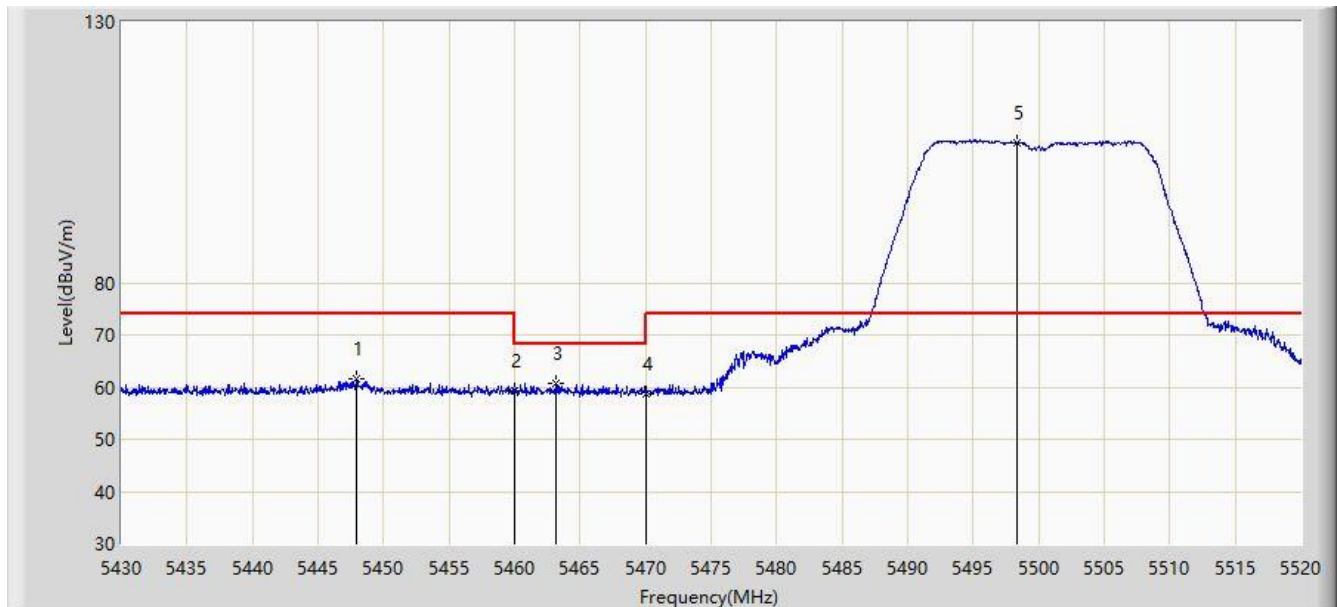


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5447.955	61.470	56.941	-12.530	74.000	4.530	PK
2		5460.000	59.408	54.968	-14.592	74.000	4.440	PK
3		5463.210	60.599	56.154	-7.601	68.200	4.445	PK
4		5470.000	58.693	54.237	-9.507	68.200	4.455	PK
5	*	5498.400	106.885	102.394	N/A	N/A	4.491	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500 MHz	

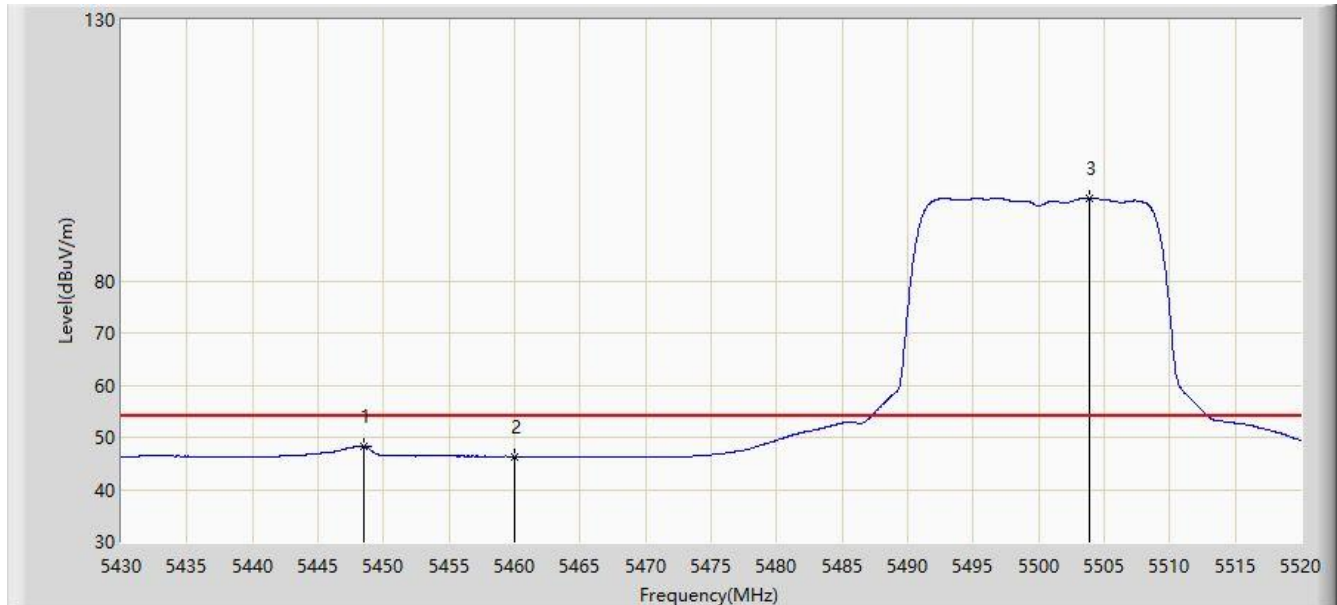


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5448.450	48.262	43.741	-5.738	54.000	4.521	AV
2		5460.000	46.363	41.923	-7.637	54.000	4.440	AV
3	*	5503.845	95.763	91.321	N/A	N/A	4.442	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500 MHz	

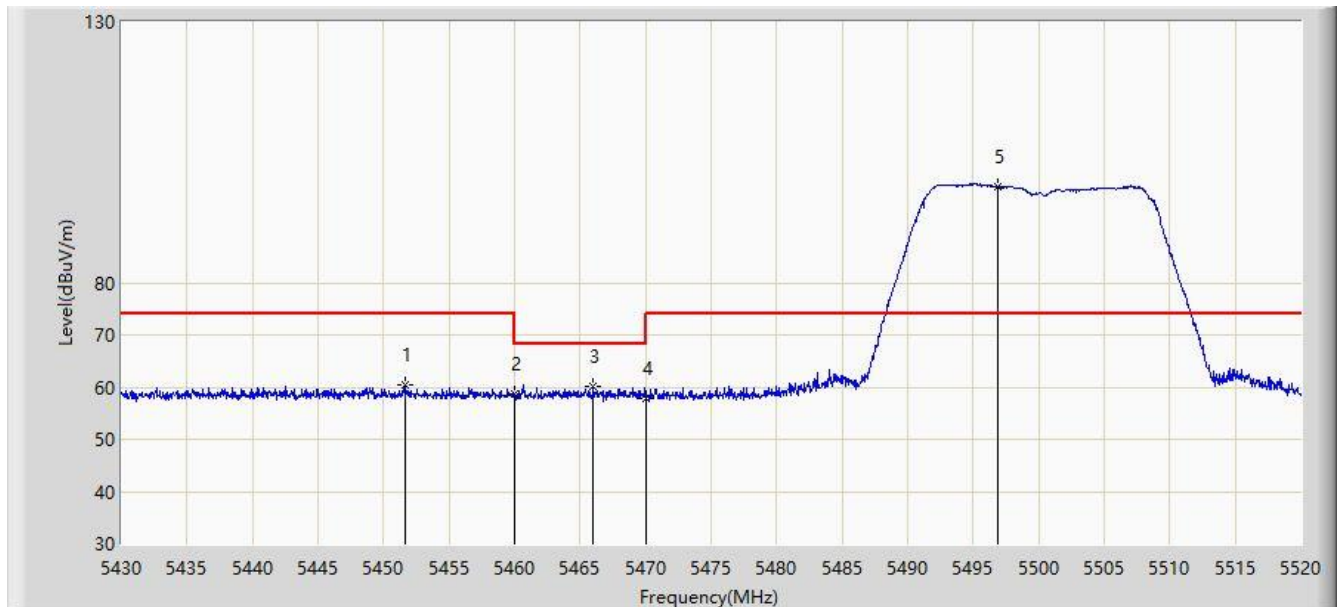


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5451.690	60.307	55.839	-13.693	74.000	4.469	PK
2		5460.000	58.564	54.124	-15.436	74.000	4.440	PK
3		5466.000	60.179	55.730	-8.021	68.200	4.449	PK
4		5470.000	57.845	53.389	-10.355	68.200	4.455	PK
5	*	5496.870	98.479	93.974	N/A	N/A	4.505	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:43
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5500 MHz	

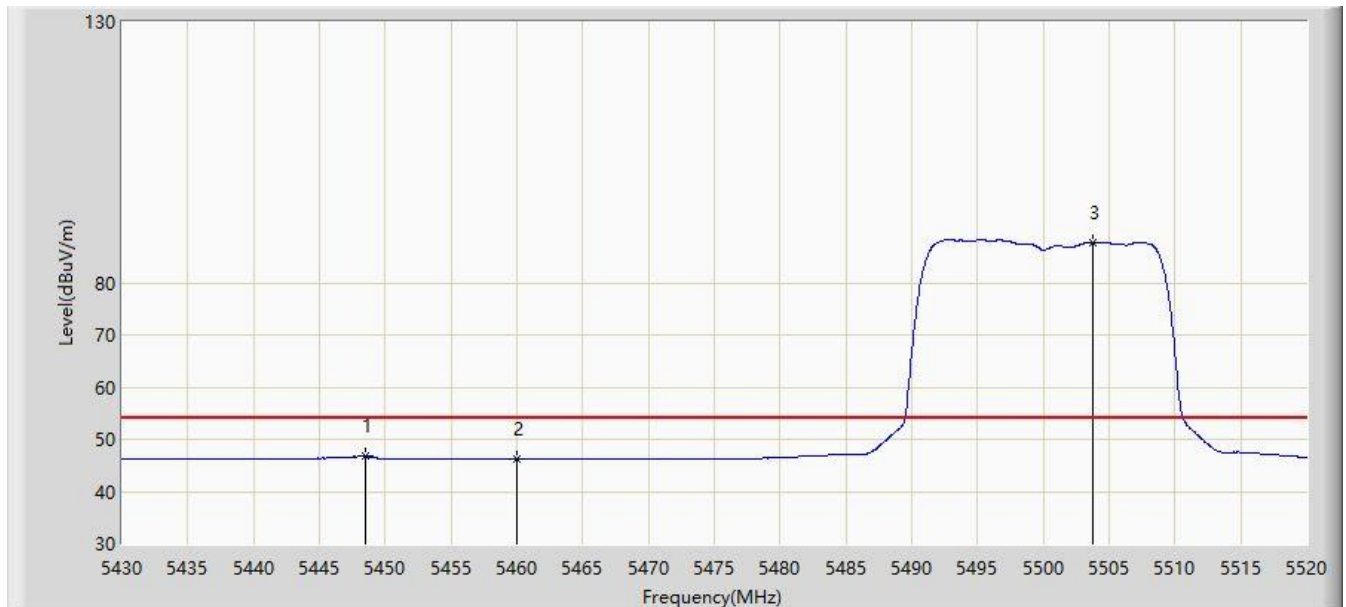


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5448.450	46.699	42.178	-7.301	54.000	4.521	AV
2		5460.000	46.249	41.809	-7.751	54.000	4.440	AV
3	*	5503.710	87.679	83.236	N/A	N/A	4.442	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:44
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700 MHz	

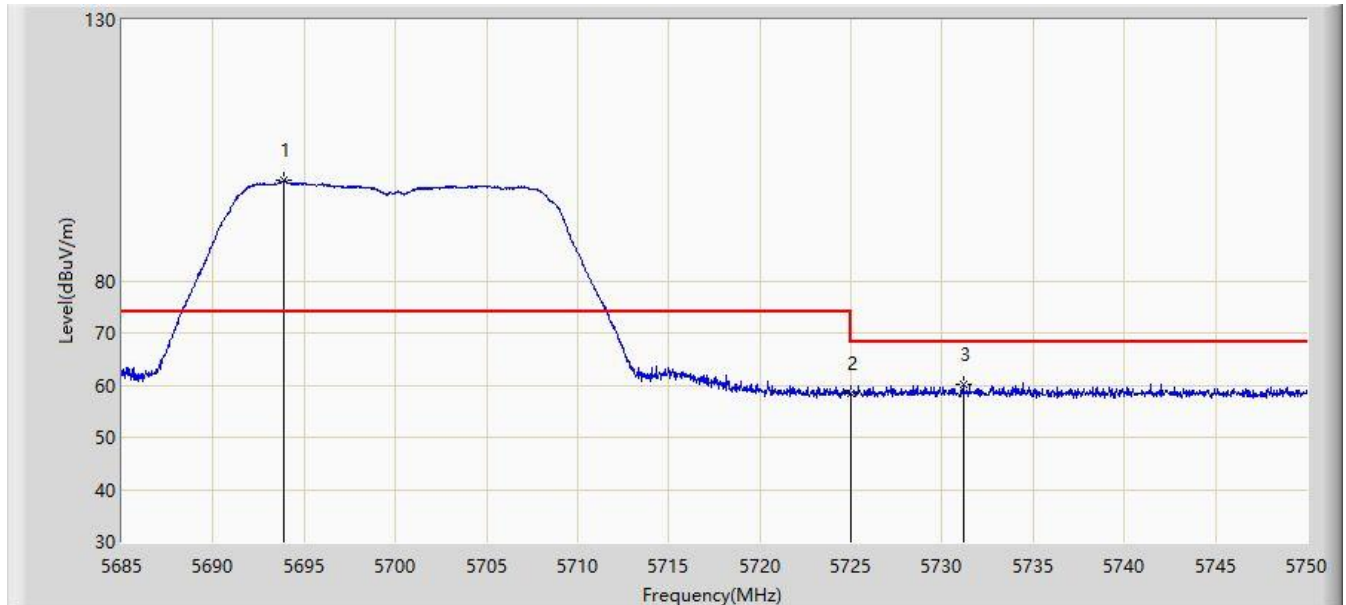


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.905	99.163	93.945	N/A	N/A	5.218	PK
2		5725.000	58.506	53.028	-9.694	68.200	5.478	PK
3		5731.183	60.276	54.770	-7.924	68.200	5.507	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:46
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5700 MHz	

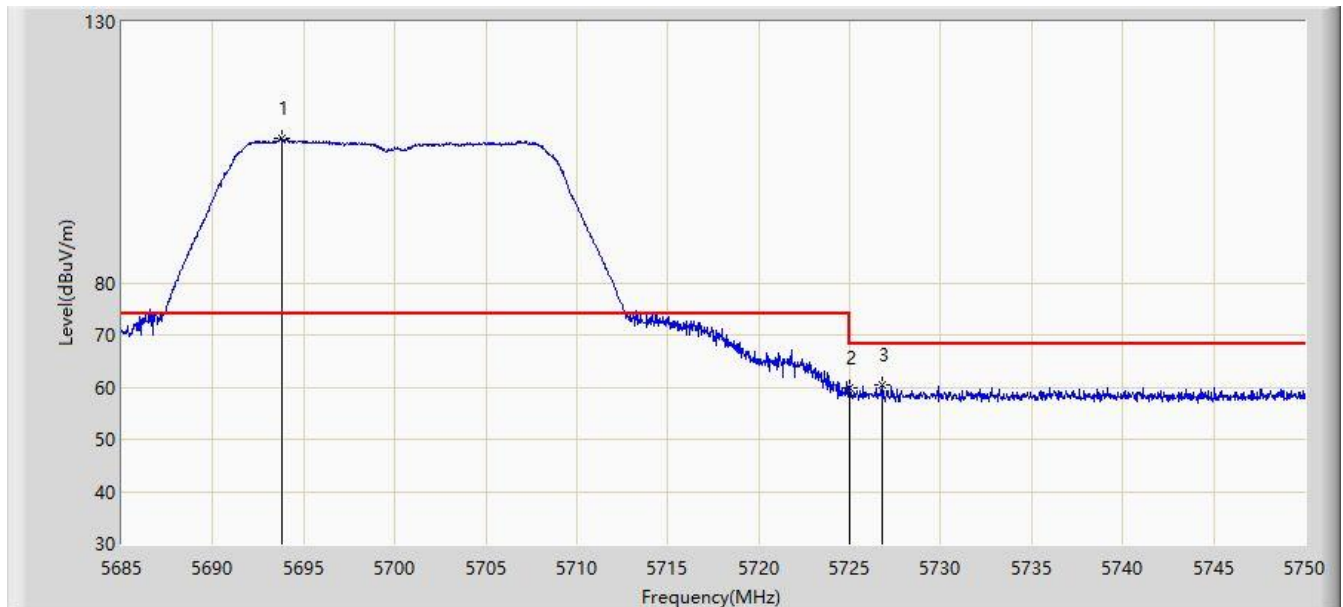


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5693.775	107.622	102.406	N/A	N/A	5.216	PK
2		5725.000	59.780	54.302	-8.420	68.200	5.478	PK
3		5726.763	60.359	54.876	-7.841	68.200	5.484	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:47
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745 MHz	

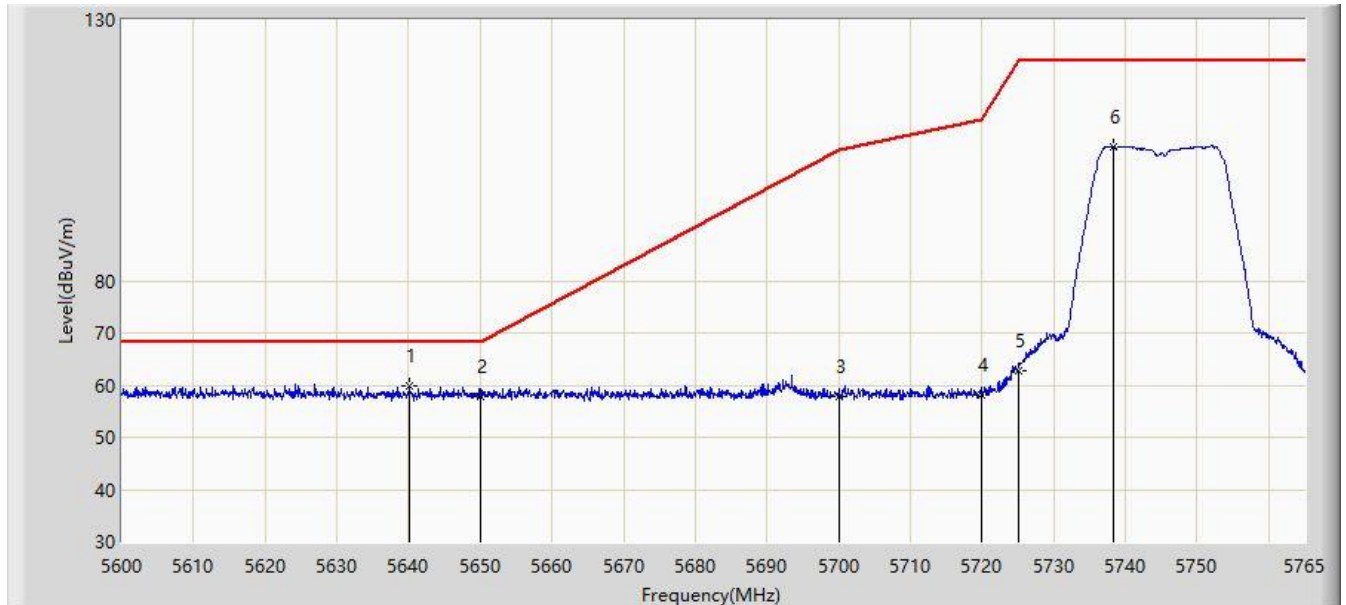


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5640.095	59.975	54.785	-8.225	68.200	5.190	PK
2		5650.000	57.967	52.631	-10.233	68.200	5.336	PK
3		5700.000	57.872	52.554	-47.328	105.200	5.318	PK
4		5720.000	58.004	52.530	-52.796	110.800	5.474	PK
5		5725.000	62.700	57.222	-59.500	122.200	5.478	PK
6		5738.270	105.631	100.088	N/A	N/A	5.544	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:49
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5745 MHz	

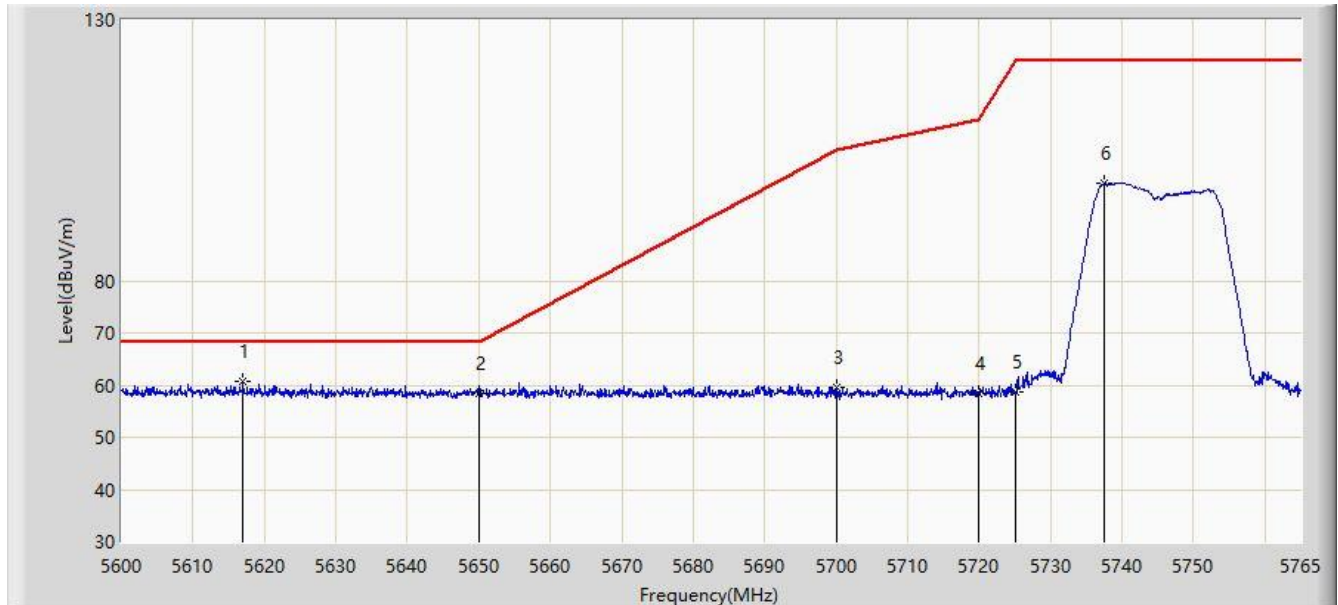


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5616.995	60.795	55.707	-7.405	68.200	5.088	PK
2		5650.000	58.437	53.101	-9.763	68.200	5.336	PK
3		5700.000	59.553	54.235	-45.647	105.200	5.318	PK
4		5720.000	58.444	52.970	-52.356	110.800	5.474	PK
5		5725.000	58.696	53.218	-63.504	122.200	5.478	PK
6		5737.527	98.797	93.258	N/A	N/A	5.539	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:50
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825 MHz	

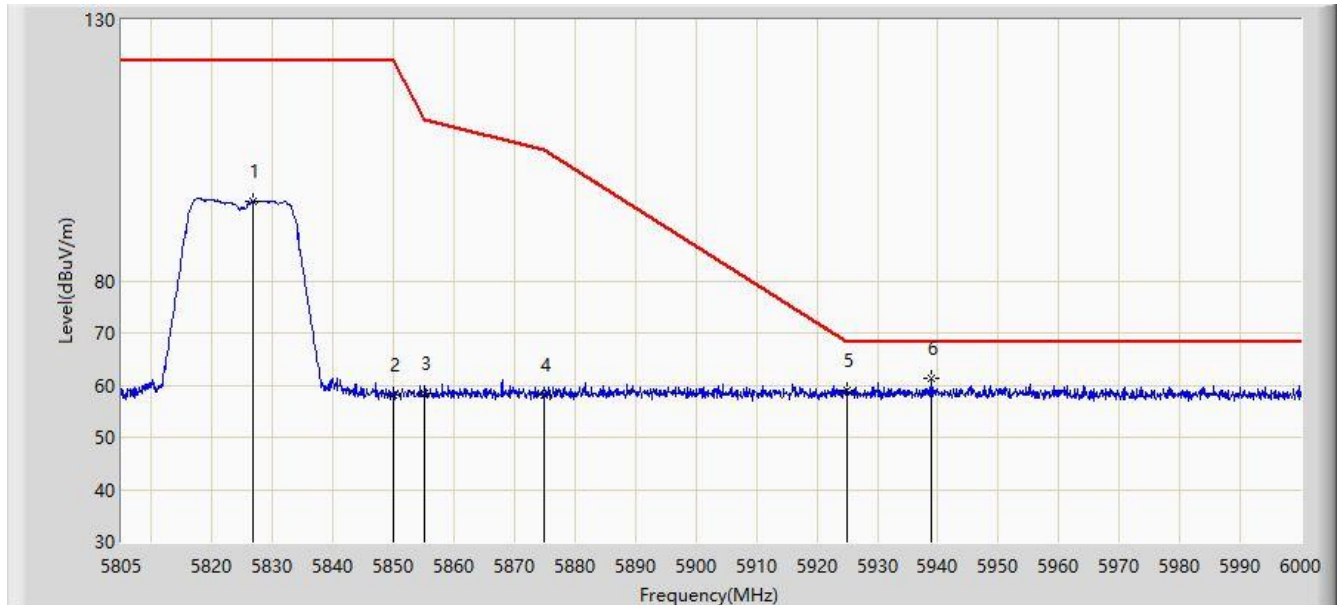


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5826.743	95.165	89.412	N/A	N/A	5.754	PK
2		5850.000	58.105	52.136	-64.095	122.200	5.968	PK
3		5855.000	58.394	52.419	-52.406	110.800	5.975	PK
4		5875.000	58.162	52.149	-47.038	105.200	6.013	PK
5		5925.000	59.101	52.966	-9.099	68.200	6.136	PK
6	*	5938.965	61.168	55.058	-7.032	68.200	6.109	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:51
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT20 at channel 5825 MHz	

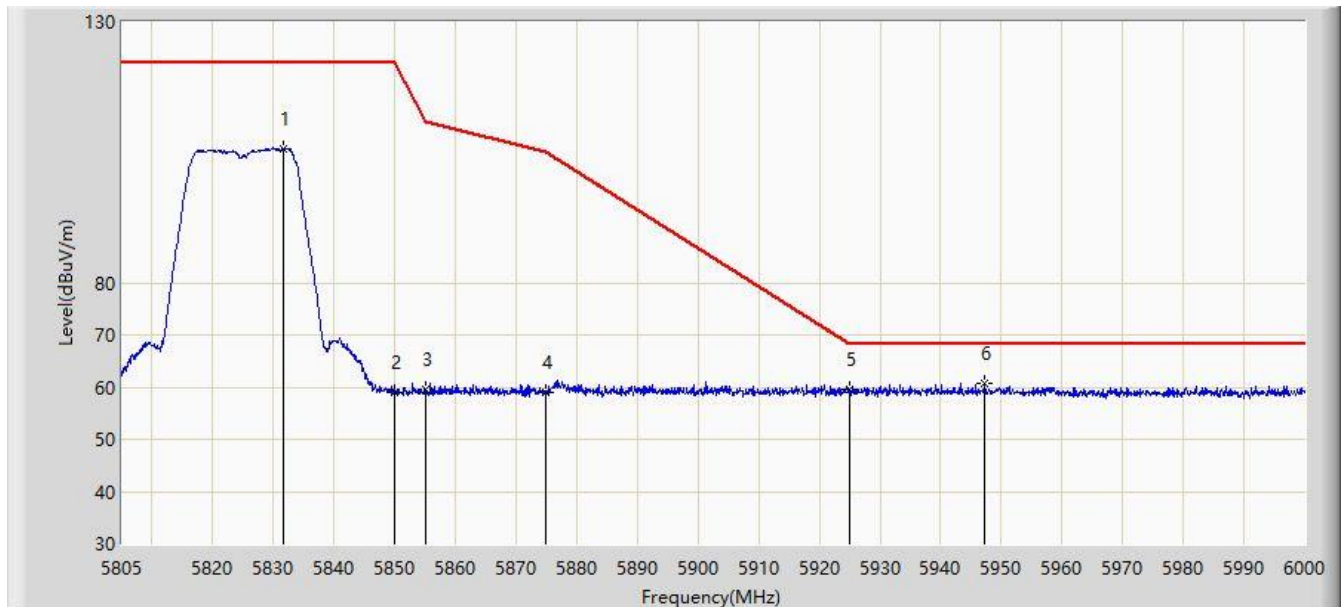


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5831.715	105.645	99.854	N/A	N/A	5.791	PK
2		5850.000	59.115	53.146	-63.085	122.200	5.968	PK
3		5855.000	59.701	53.726	-51.099	110.800	5.975	PK
4		5875.000	58.968	52.955	-46.232	105.200	6.013	PK
5		5925.000	59.554	53.419	-8.646	68.200	6.136	PK
6	*	5947.252	60.597	54.532	-7.603	68.200	6.065	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:53
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190 MHz	

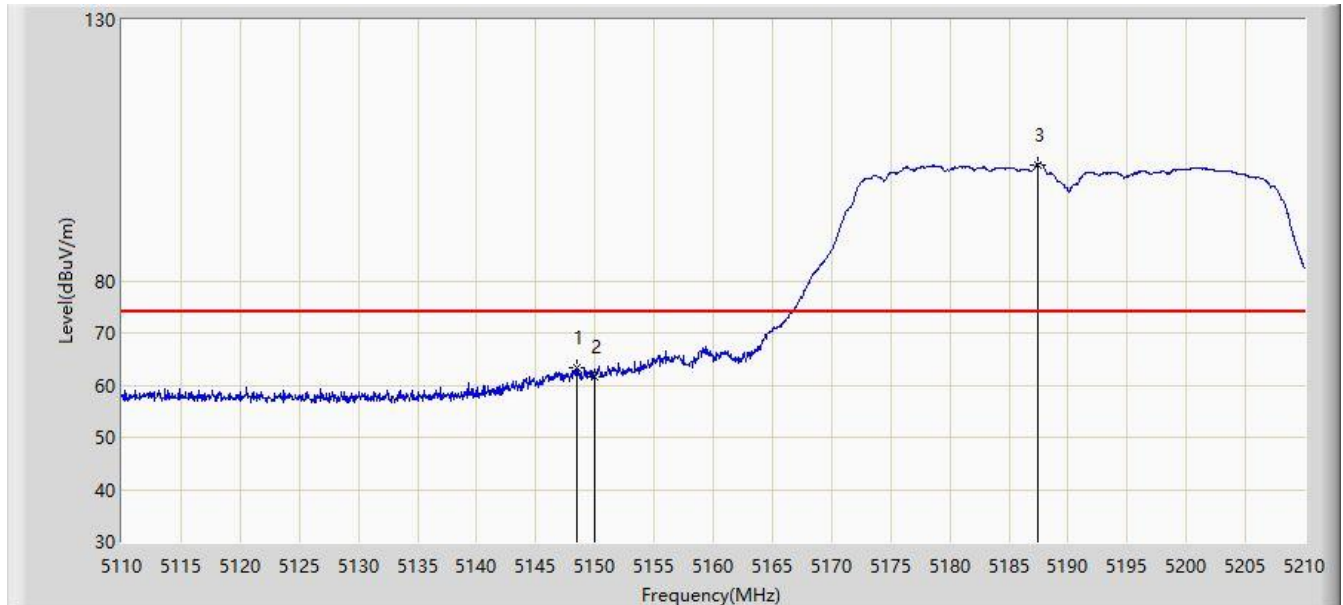


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5148.450	63.196	58.771	-10.804	74.000	4.424	PK
2		5150.000	61.483	57.041	-12.517	74.000	4.442	PK
3	*	5187.400	102.283	97.878	N/A	N/A	4.405	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:55
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190 MHz	

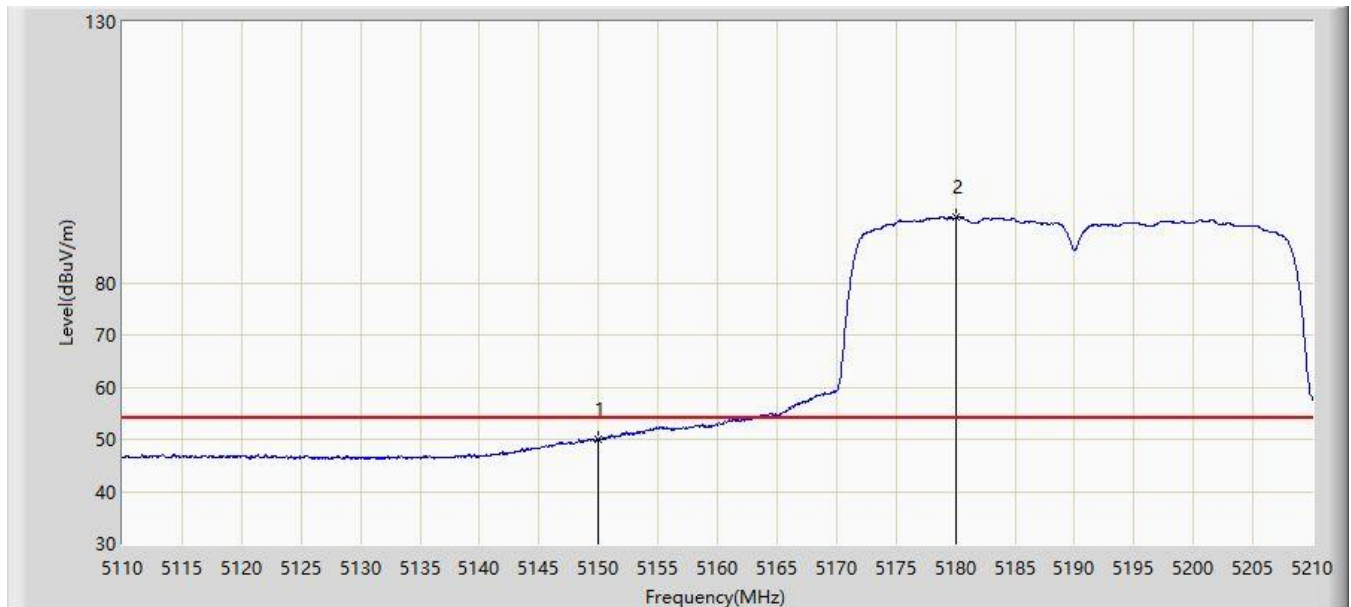


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	49.874	45.432	-4.126	54.000	4.442	AV
2	*	5180.100	92.569	88.085	N/A	N/A	4.484	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:56
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190 MHz	

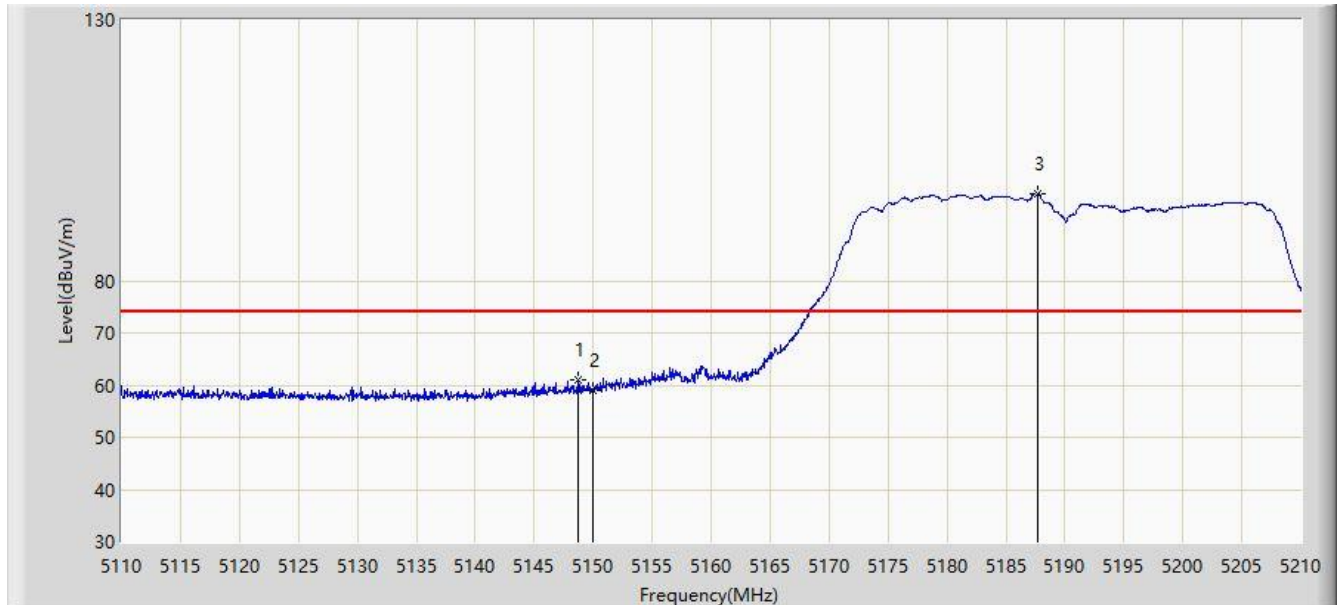


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5148.700	61.084	56.656	-12.916	74.000	4.428	PK
2		5150.000	59.112	54.670	-14.888	74.000	4.442	PK
3	*	5187.700	96.792	92.391	N/A	N/A	4.402	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:57
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5190 MHz	

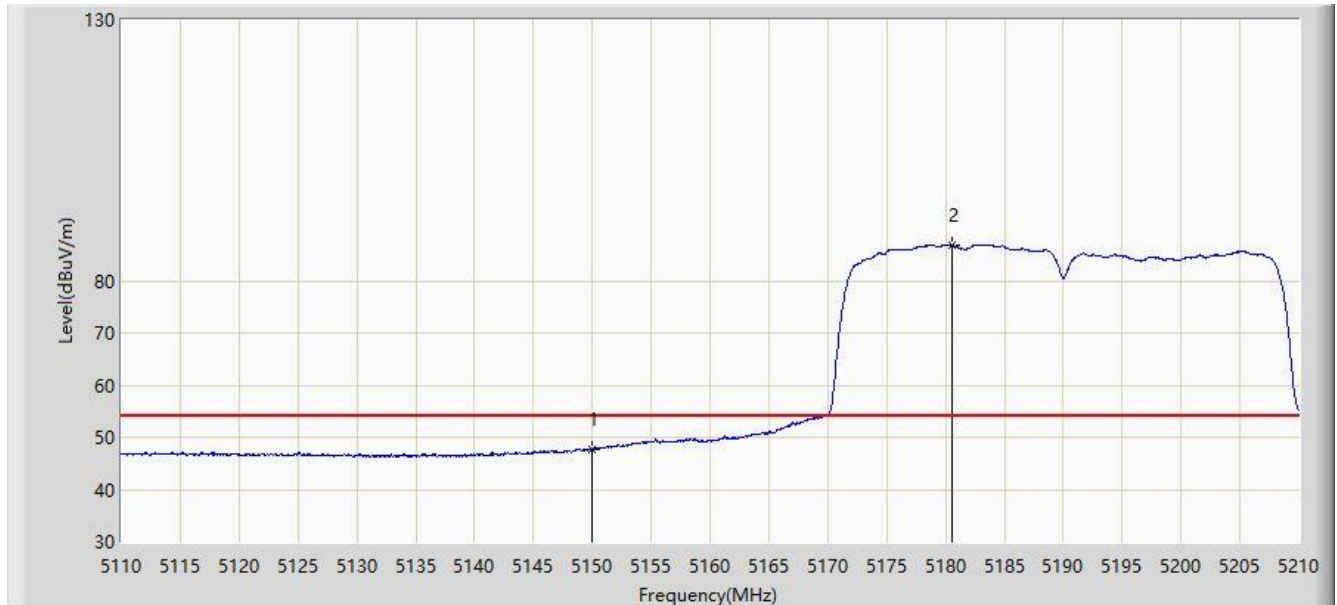


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	47.763	43.321	-6.237	54.000	4.442	AV
2	*	5180.550	86.752	82.272	N/A	N/A	4.480	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 13:59
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310 MHz	

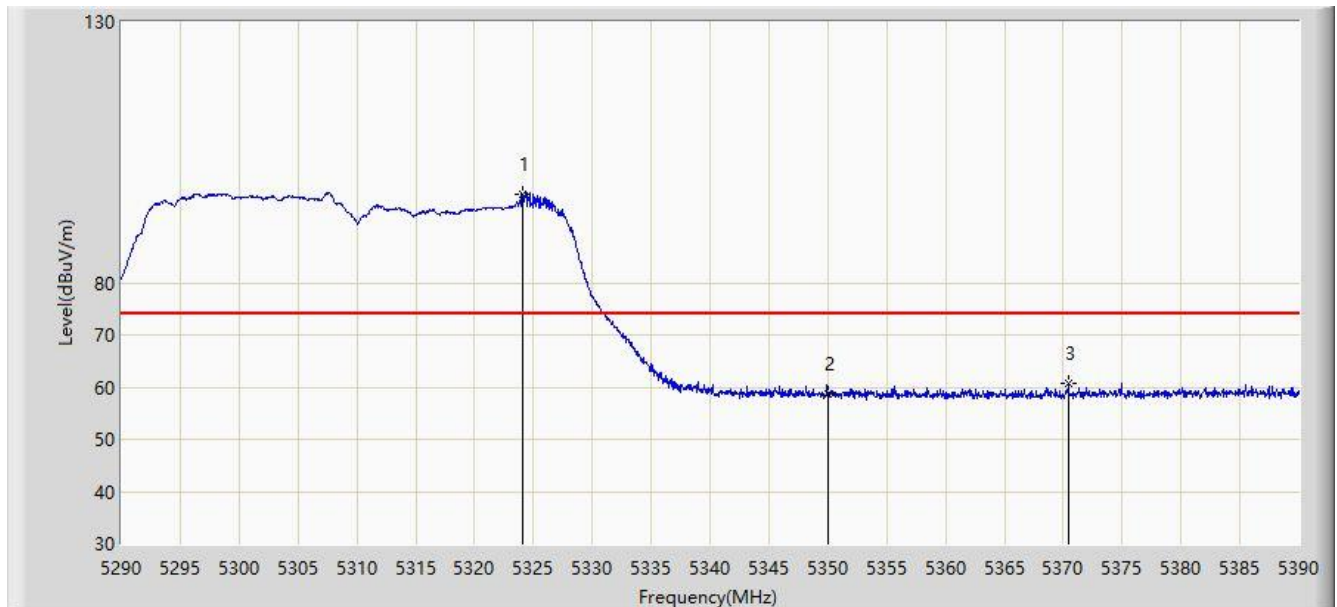


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5324.100	97.006	92.933	N/A	N/A	4.073	PK
2		5350.000	58.766	54.589	-15.234	74.000	4.177	PK
3		5370.450	60.592	56.316	-13.408	74.000	4.277	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:01
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310 MHz	

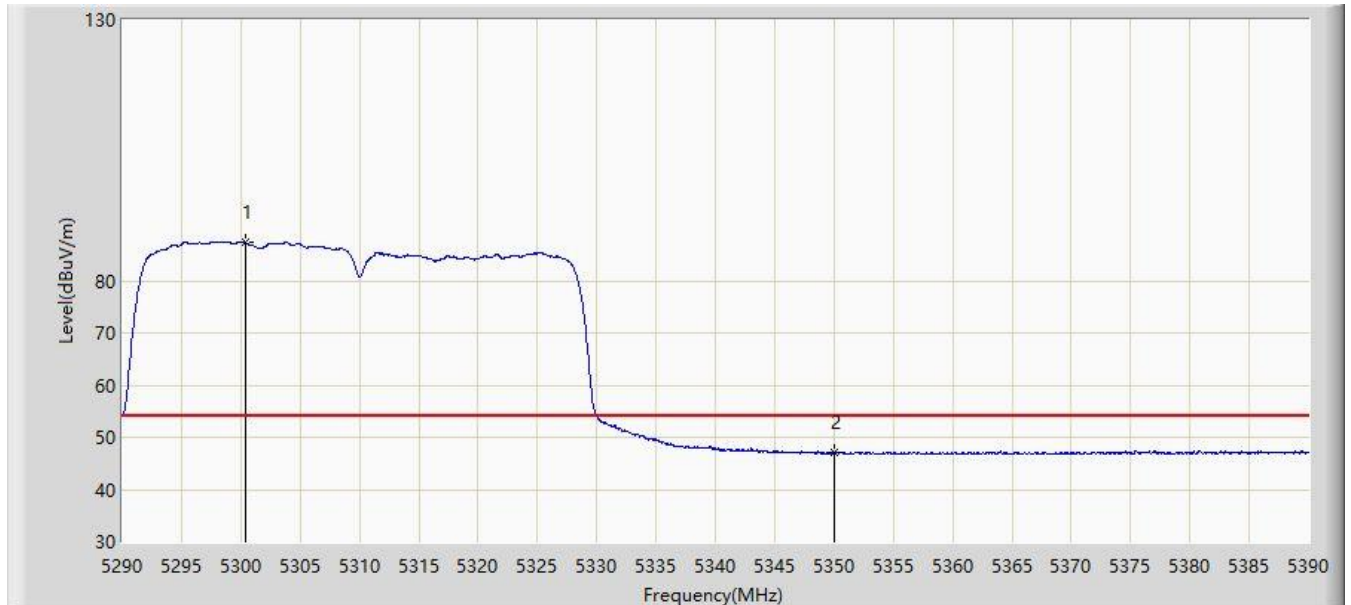


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5300.350	87.318	82.899	N/A	N/A	4.420	AV
2		5350.000	47.008	42.831	-6.992	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:02
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310 MHz	

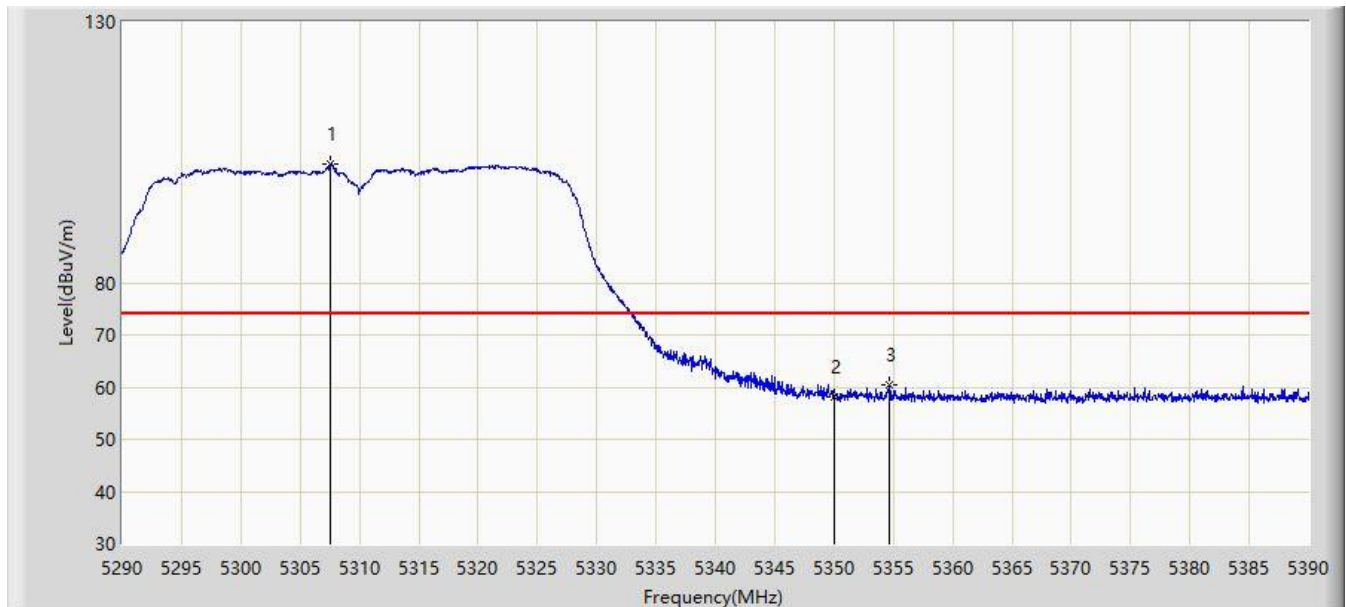


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5307.550	102.616	98.328	N/A	N/A	4.288	PK
2		5350.000	58.009	53.832	-15.991	74.000	4.177	PK
3		5354.600	60.509	56.310	-13.491	74.000	4.199	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5310 MHz	

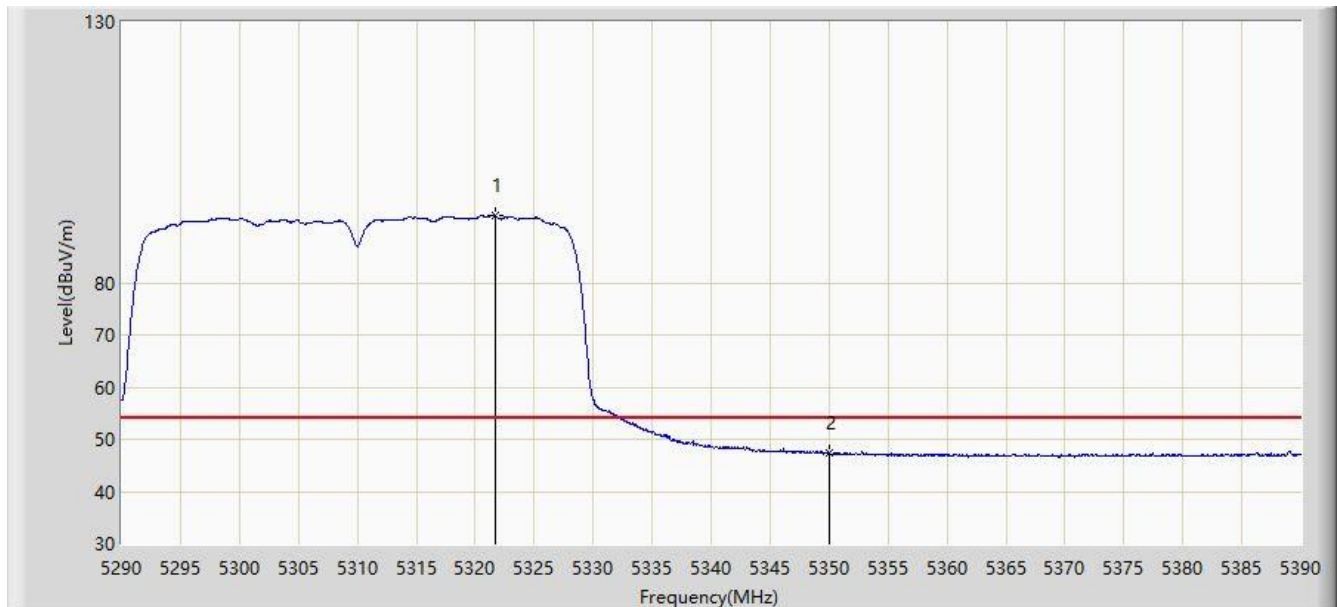


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5321.650	93.002	88.930	N/A	N/A	4.072	AV
2		5350.000	47.278	43.101	-6.722	54.000	4.177	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:03
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510 MHz	

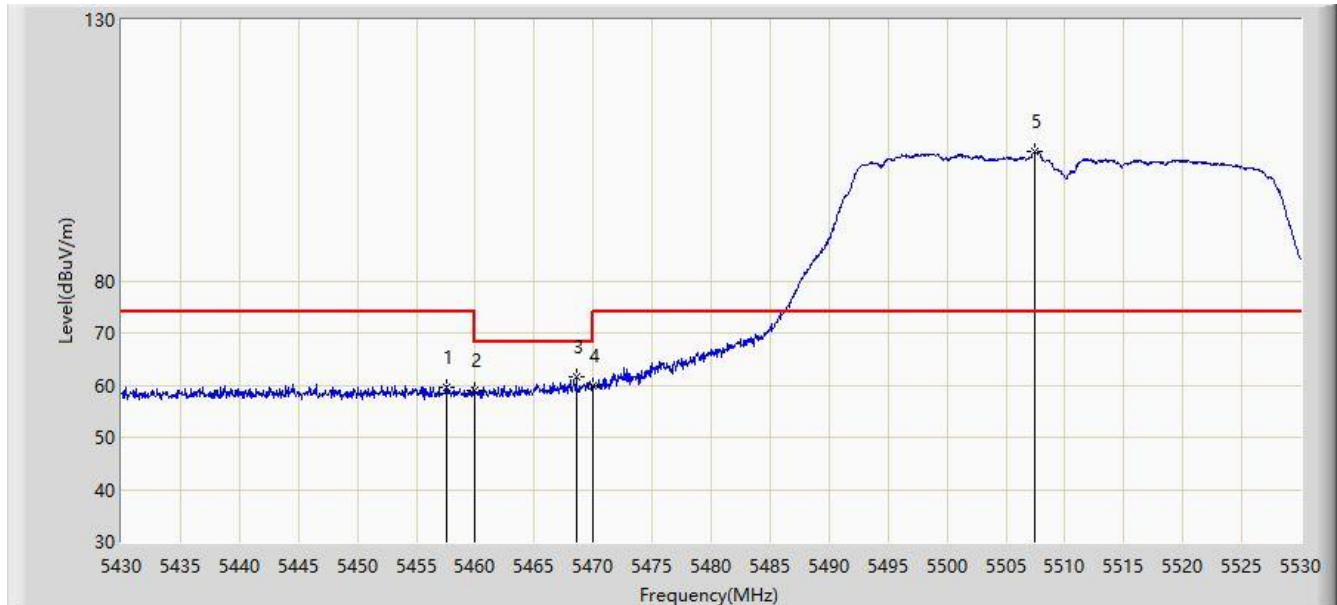


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5457.550	59.710	55.274	-14.290	74.000	4.436	PK
2		5460.000	58.912	54.472	-15.088	74.000	4.440	PK
3		5468.550	61.531	57.078	-6.669	68.200	4.453	PK
4		5470.000	59.840	55.384	-8.360	68.200	4.455	PK
5	*	5507.400	104.707	100.218	N/A	N/A	4.489	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510 MHz	

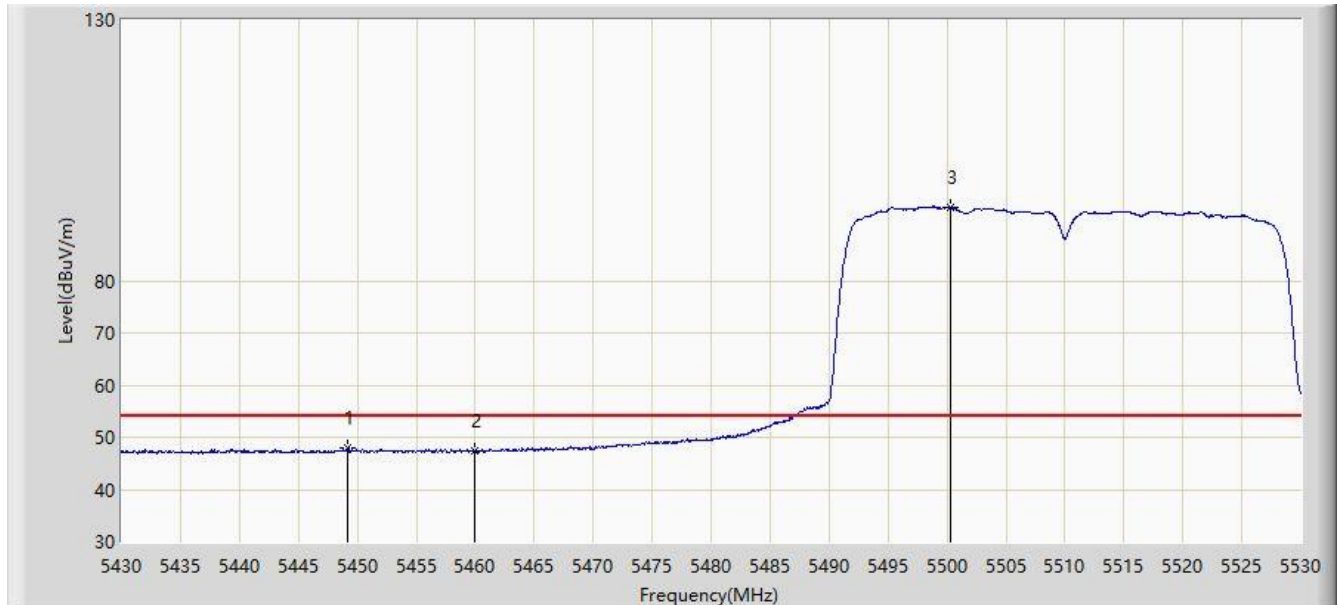


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5449.200	47.985	43.476	-6.015	54.000	4.509	AV
2		5460.000	47.395	42.955	-6.605	54.000	4.440	AV
3	*	5500.250	94.140	89.666	N/A	N/A	4.474	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:05
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510 MHz	

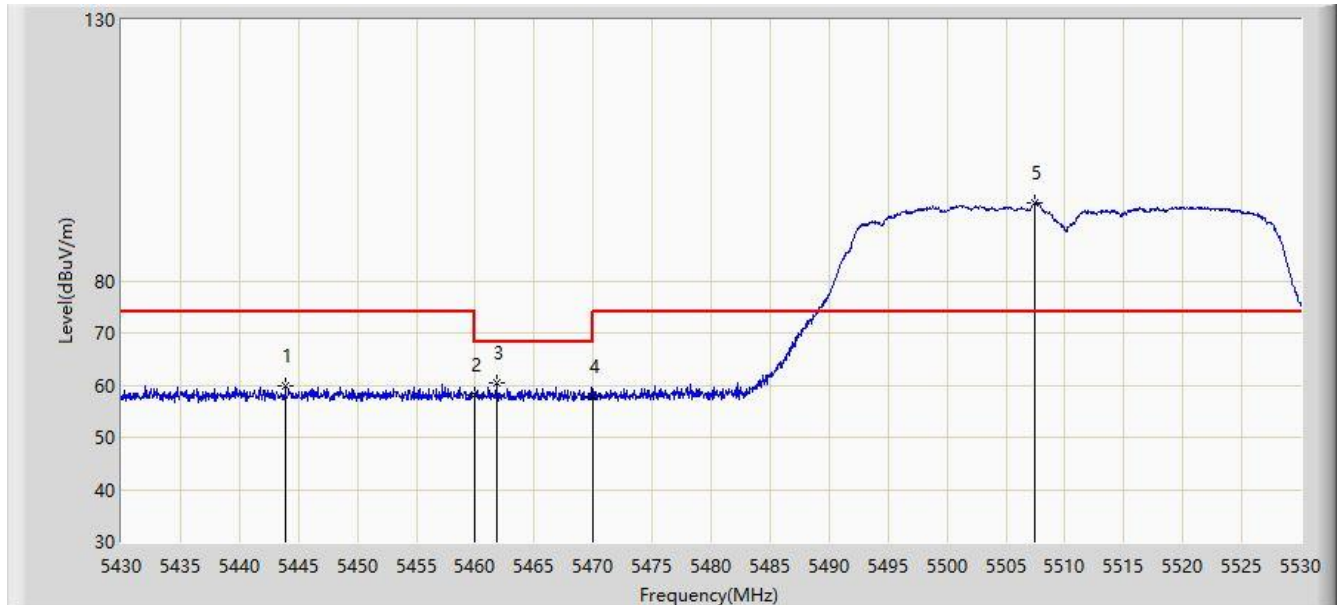


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5443.900	59.804	55.208	-14.196	74.000	4.595	PK
2		5460.000	58.253	53.813	-15.747	74.000	4.440	PK
3		5461.800	60.416	55.973	-7.784	68.200	4.442	PK
4		5470.000	57.840	53.384	-10.360	68.200	4.455	PK
5	*	5507.450	94.829	90.338	N/A	N/A	4.491	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:06
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5510 MHz	

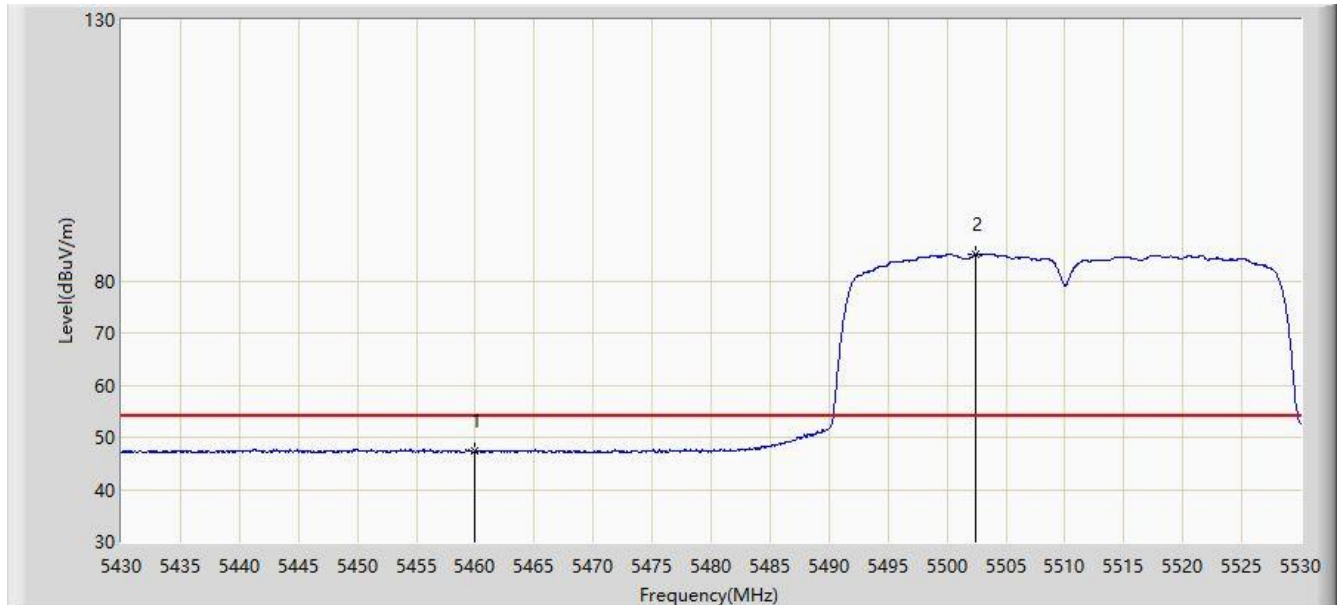


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.284	42.844	-6.716	54.000	4.440	AV
2	*	5502.400	84.968	80.513	N/A	N/A	4.455	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:09
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670 MHz	

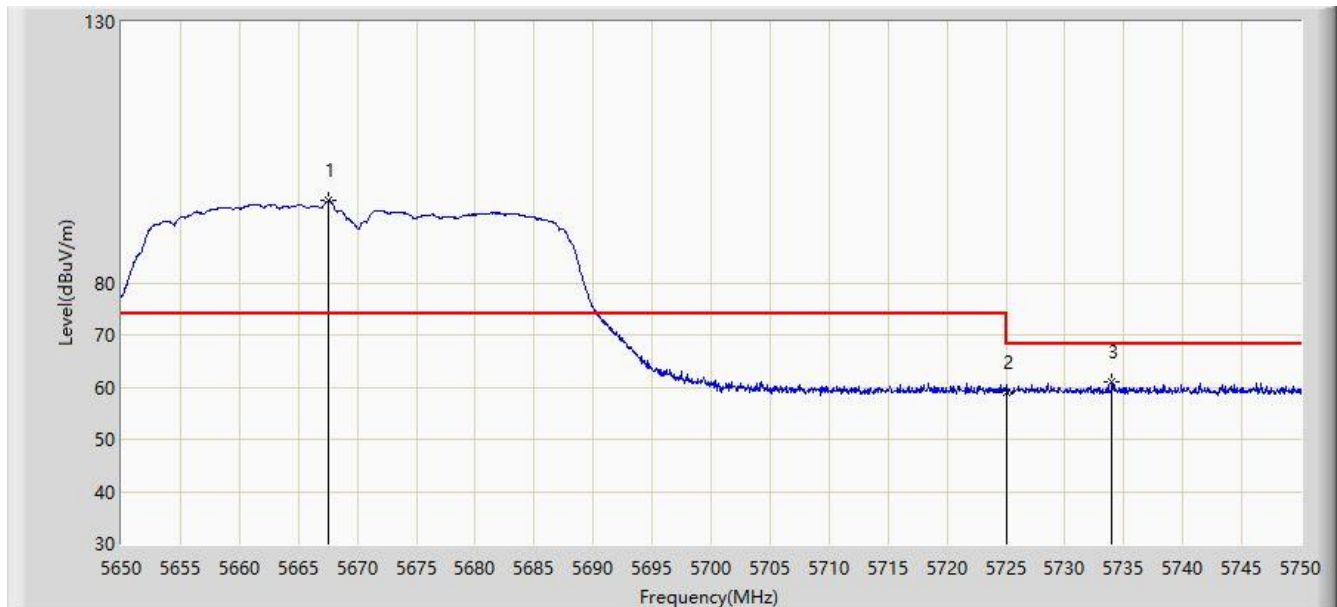


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5667.550	95.709	90.267	N/A	N/A	5.442	PK
2		5725.000	58.972	53.494	-9.228	68.200	5.478	PK
3		5734.000	60.977	55.456	-7.223	68.200	5.521	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:17
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5670 MHz	

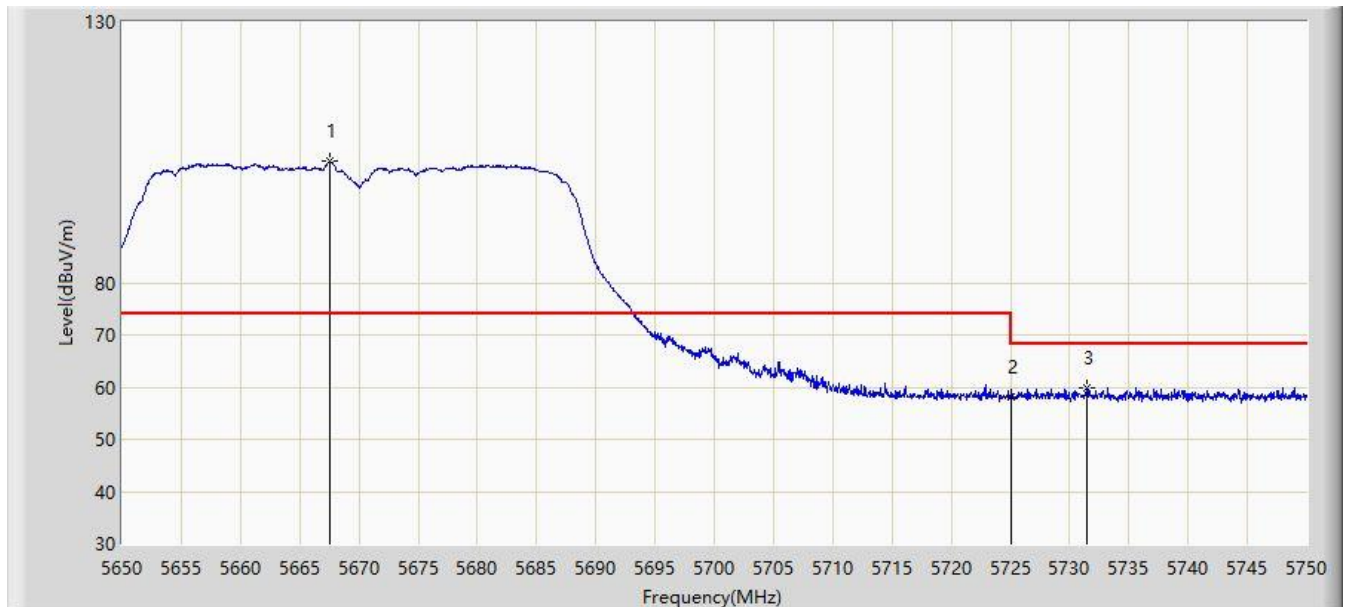


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5667.500	103.265	97.823	N/A	N/A	5.442	PK
2		5725.000	58.121	52.643	-10.079	68.200	5.478	PK
3		5731.400	59.772	54.265	-8.428	68.200	5.507	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:22
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755 MHz	

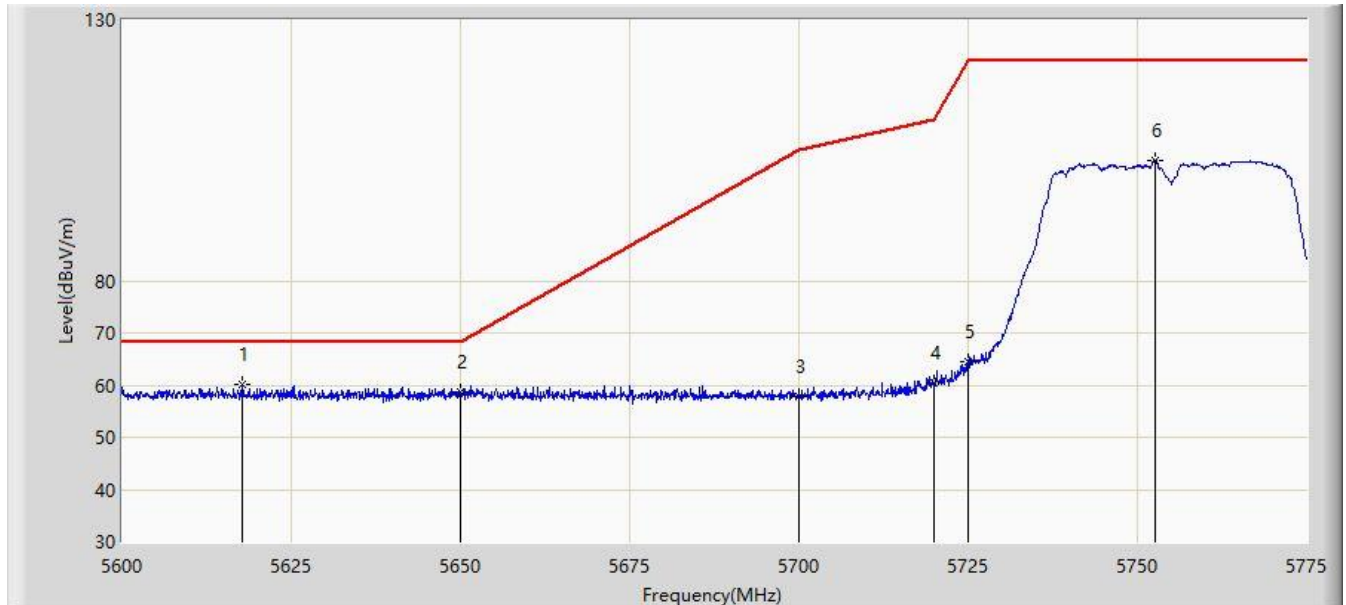


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5617.850	60.270	55.168	-7.930	68.200	5.101	PK
2		5650.000	58.628	53.292	-9.572	68.200	5.336	PK
3		5700.000	57.729	52.411	-47.471	105.200	5.318	PK
4		5720.000	60.510	55.036	-50.290	110.800	5.474	PK
5		5725.000	64.375	58.897	-57.825	122.200	5.478	PK
6		5752.600	103.146	97.389	N/A	N/A	5.757	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:23
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5755 MHz	

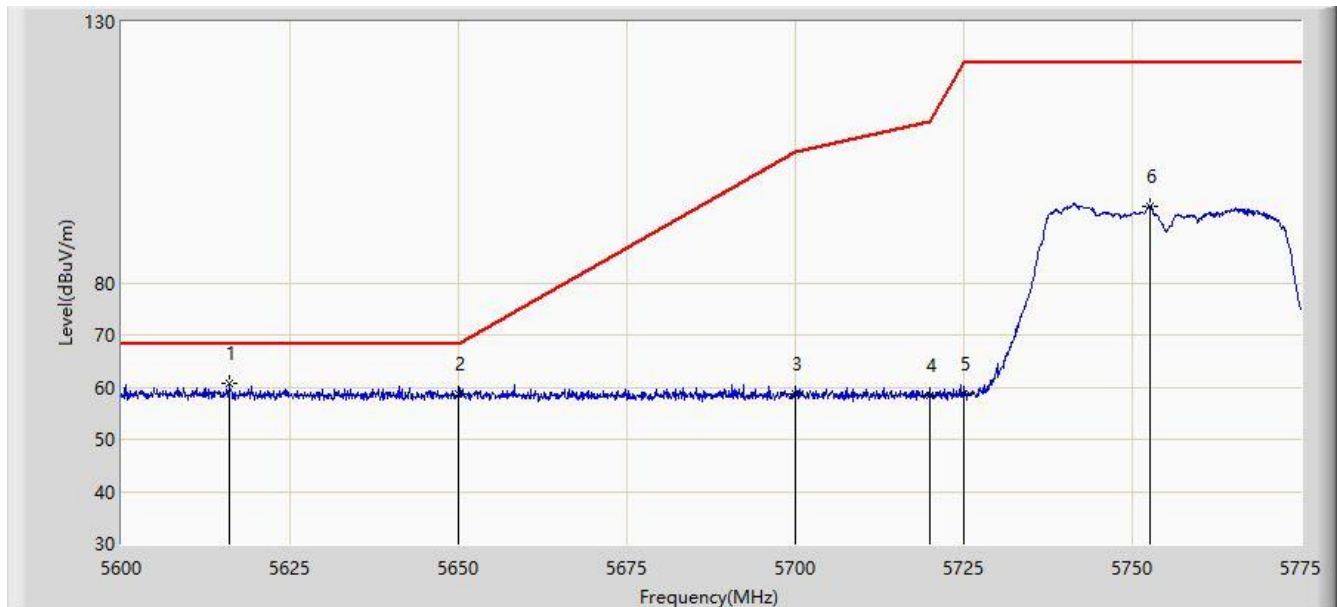


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5615.925	60.691	55.619	-7.509	68.200	5.072	PK
2		5650.000	58.813	53.477	-9.387	68.200	5.336	PK
3		5700.000	58.706	53.388	-46.494	105.200	5.318	PK
4		5720.000	58.475	53.001	-52.325	110.800	5.474	PK
5		5725.000	58.647	53.169	-63.553	122.200	5.478	PK
6		5752.600	94.763	89.006	N/A	N/A	5.757	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:25
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795 MHz	

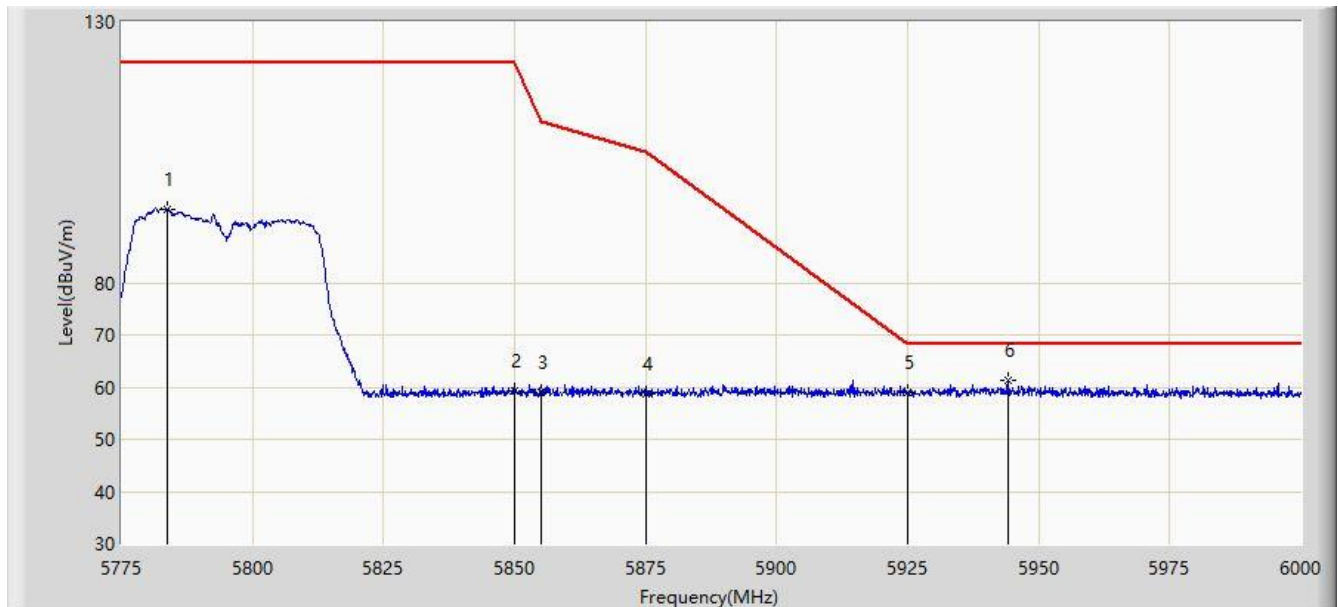


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5783.663	94.148	88.383	N/A	N/A	5.764	PK
2		5850.000	59.297	53.328	-62.903	122.200	5.968	PK
3		5855.000	59.020	53.045	-51.780	110.800	5.975	PK
4		5875.000	58.611	52.598	-46.589	105.200	6.013	PK
5		5925.000	58.988	52.853	-9.212	68.200	6.136	PK
6	*	5944.087	61.293	55.211	-6.907	68.200	6.082	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:26
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT40 at channel 5795 MHz	

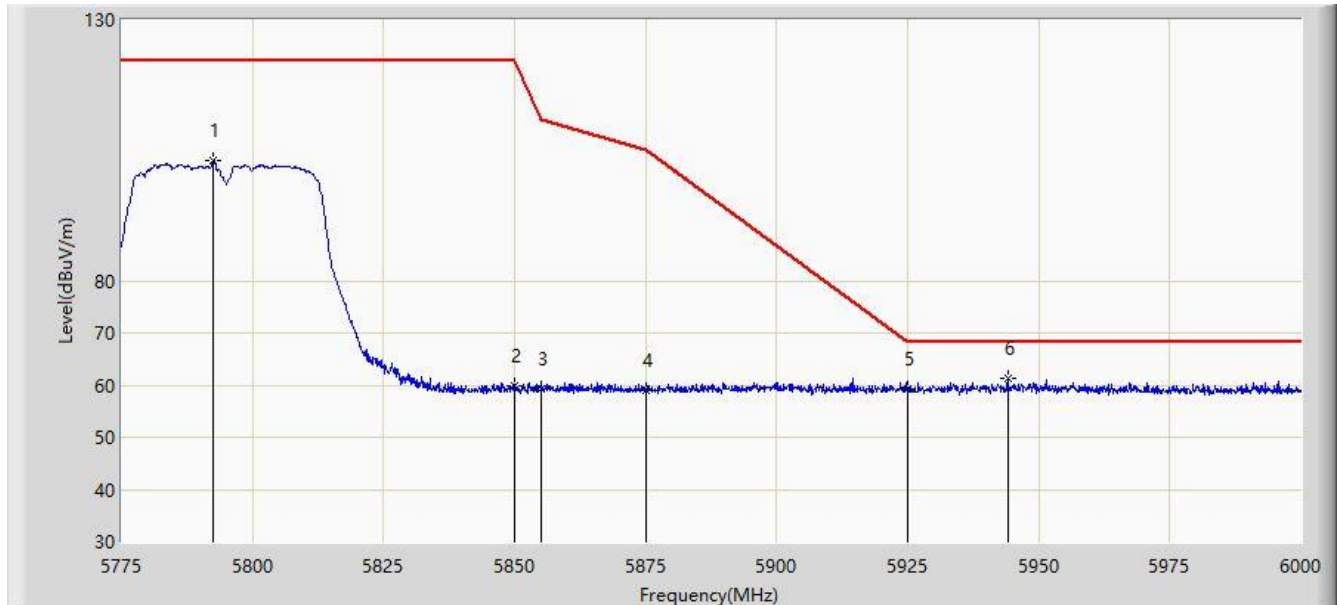


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5792.437	102.943	97.109	N/A	N/A	5.834	PK
2		5850.000	59.734	53.765	-62.466	122.200	5.968	PK
3		5855.000	59.133	53.158	-51.667	110.800	5.975	PK
4		5875.000	58.883	52.870	-46.317	105.200	6.013	PK
5		5925.000	59.280	53.145	-8.920	68.200	6.136	PK
6	*	5944.087	61.293	55.211	-6.907	68.200	6.082	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:27
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210 MHz	

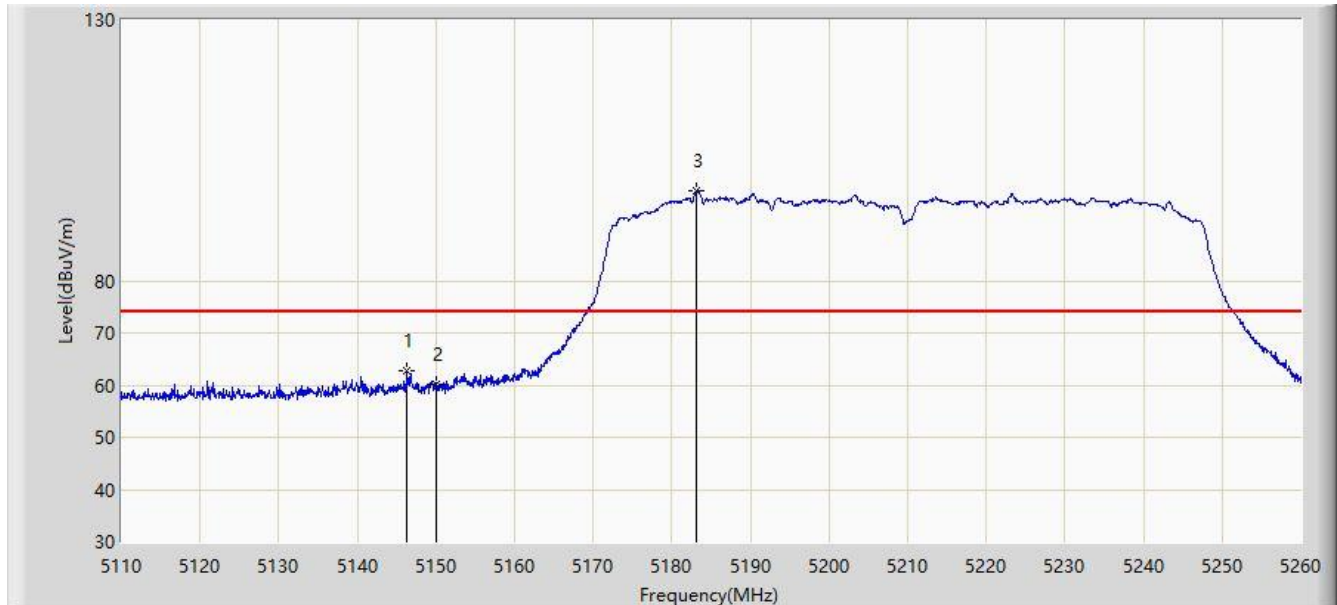


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5146.300	62.665	58.245	-11.335	74.000	4.420	PK
2		5150.000	60.156	55.714	-13.844	74.000	4.442	PK
3	*	5183.200	97.302	92.848	N/A	N/A	4.454	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:30
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210 MHz	

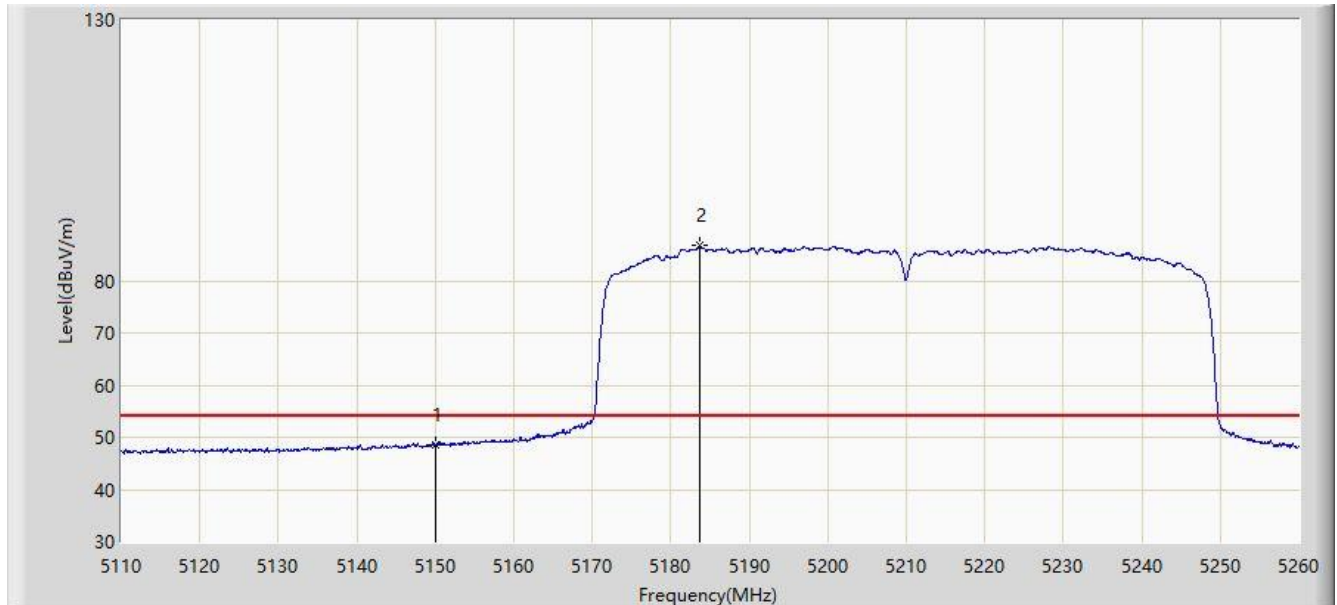


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5150.000	48.656	44.214	-5.344	54.000	4.442	AV
2	*	5183.650	86.708	82.260	N/A	N/A	4.449	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:31
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210 MHz	

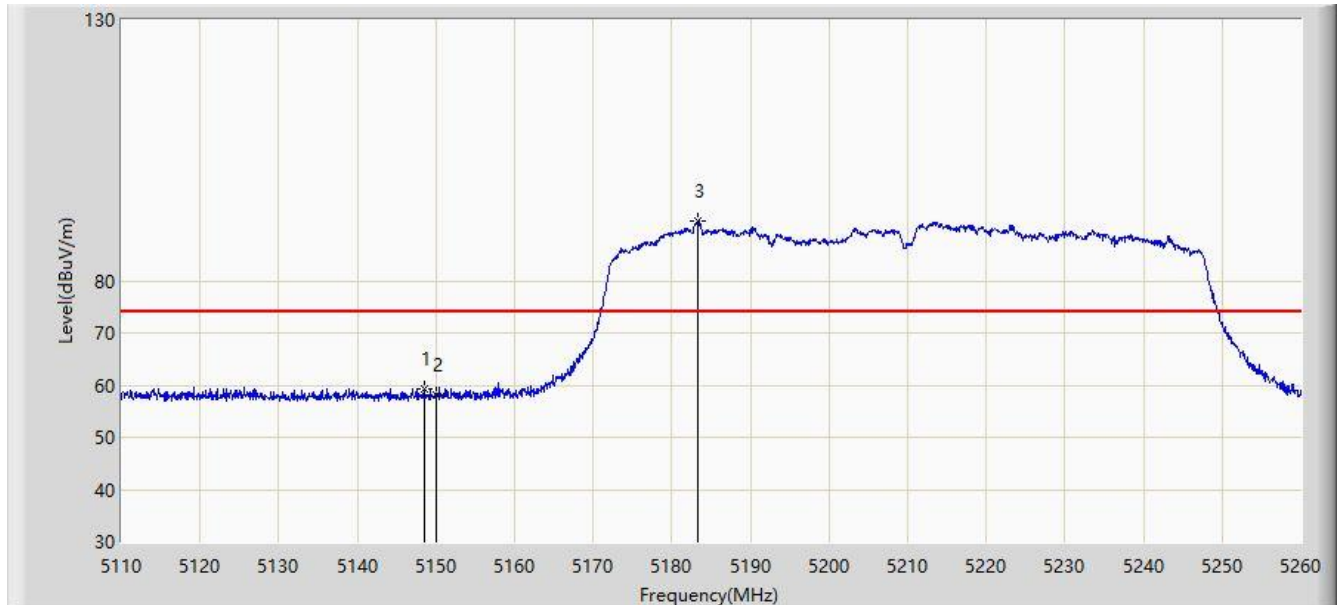


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5148.625	59.375	54.948	-14.625	74.000	4.427	PK
2		5150.000	58.154	53.712	-15.846	74.000	4.442	PK
3	*	5183.350	91.519	87.067	N/A	N/A	4.452	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:32
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5210 MHz	

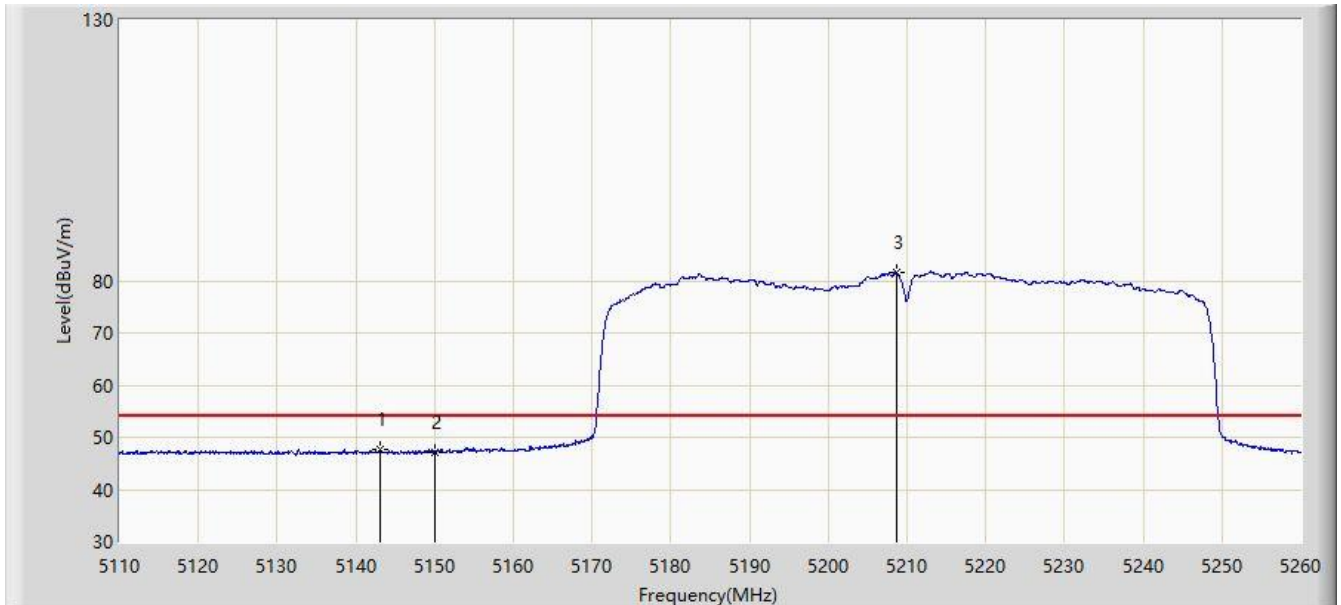


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5143.000	47.800	43.380	-6.200	54.000	4.421	AV
2		5150.000	47.230	42.788	-6.770	54.000	4.442	AV
3	*	5208.625	81.486	77.279	N/A	N/A	4.207	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:33
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290 MHz	

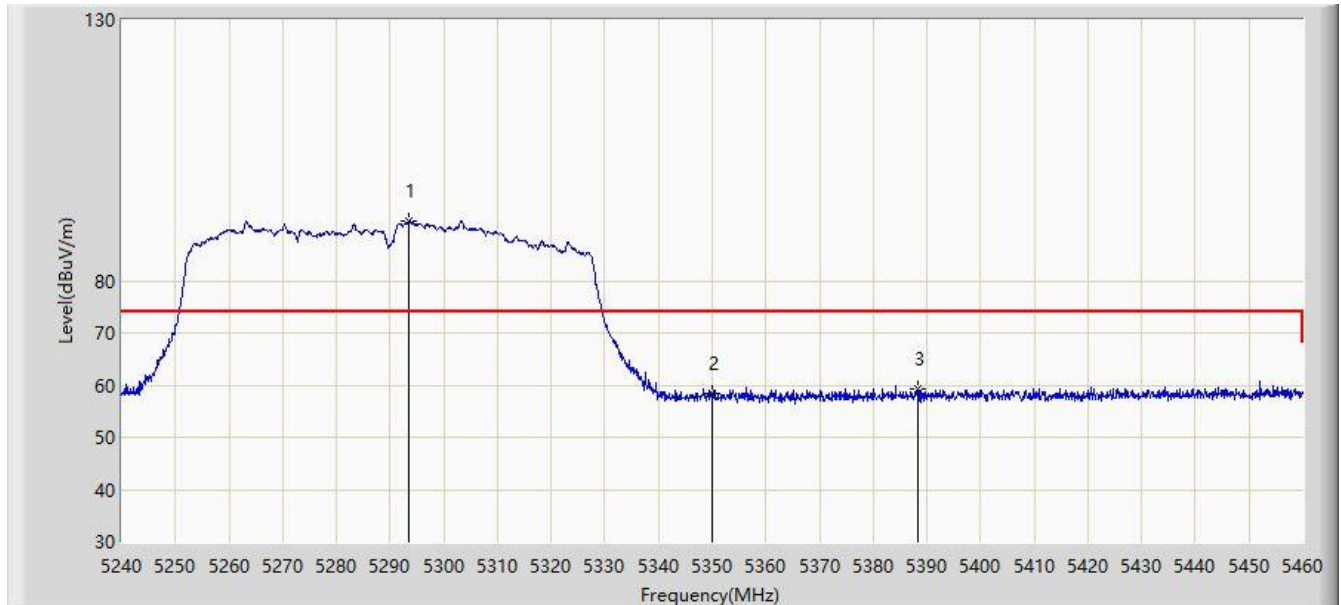


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5293.460	91.464	87.083	N/A	N/A	4.381	PK
2		5350.000	58.272	54.095	-15.728	74.000	4.177	PK
3		5388.390	59.364	54.745	-14.636	74.000	4.620	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:35
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290 MHz	

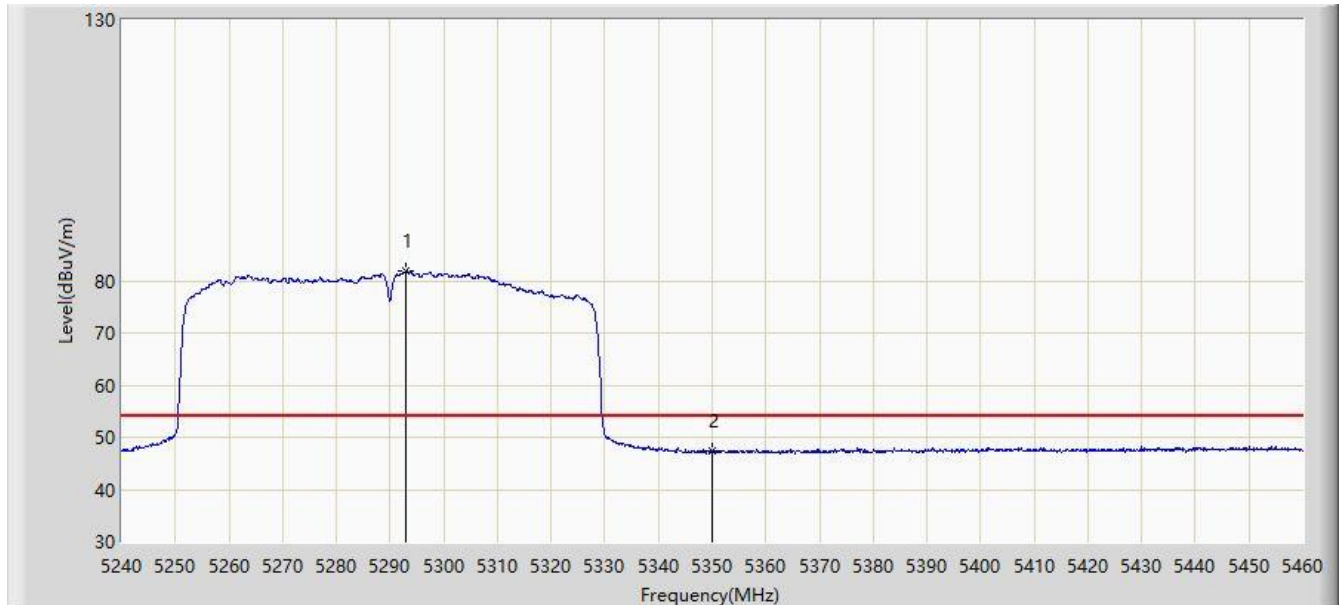


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5292.910	81.823	77.445	N/A	N/A	4.378	AV
2		5350.000	47.438	43.261	-6.562	54.000	4.177	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290 MHz	

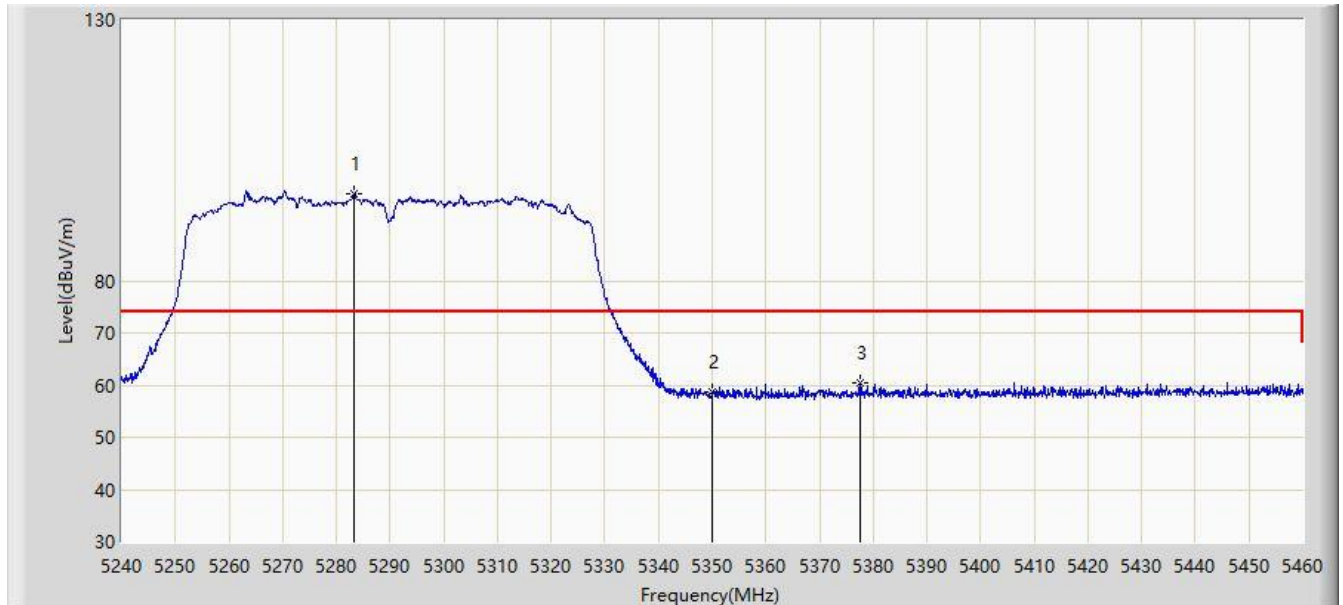


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5283.340	96.744	92.421	N/A	N/A	4.323	PK
2		5350.000	58.685	54.508	-15.315	74.000	4.177	PK
3		5377.500	60.322	55.894	-13.678	74.000	4.428	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:36
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290 MHz	

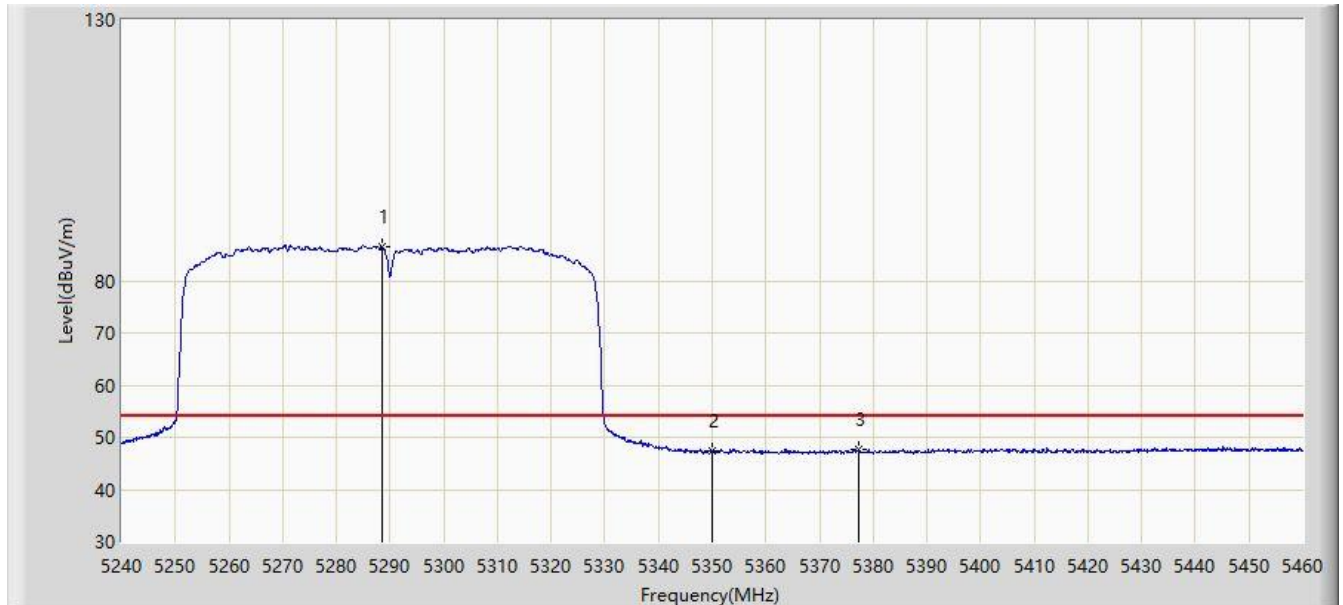


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5288.510	86.599	82.246	N/A	N/A	4.353	AV
2		5350.000	47.368	43.191	-6.632	54.000	4.177	AV
3		5377.170	47.759	43.338	-6.241	54.000	4.420	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:38
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530 MHz	

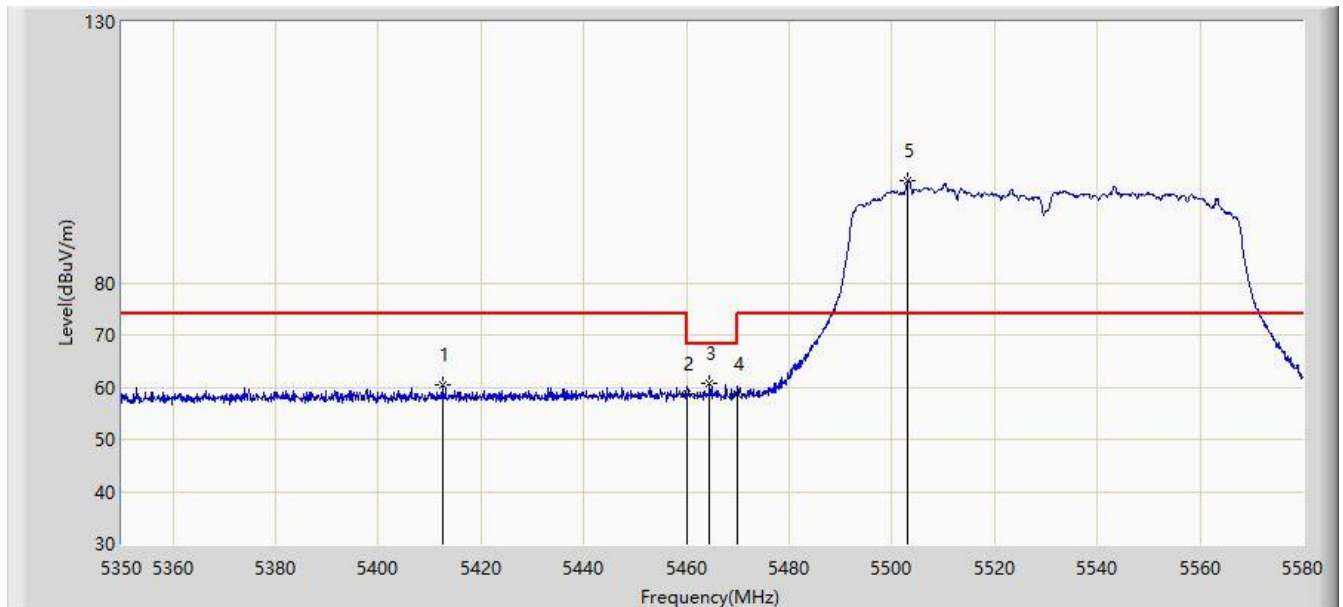


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5412.445	60.331	55.675	-13.669	74.000	4.656	PK
2		5460.000	58.663	54.223	-15.337	74.000	4.440	PK
3		5464.425	60.767	56.320	-7.433	68.200	4.447	PK
4		5470.000	58.647	54.191	-9.553	68.200	4.455	PK
5	*	5503.180	99.521	95.073	N/A	N/A	4.448	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530 MHz	

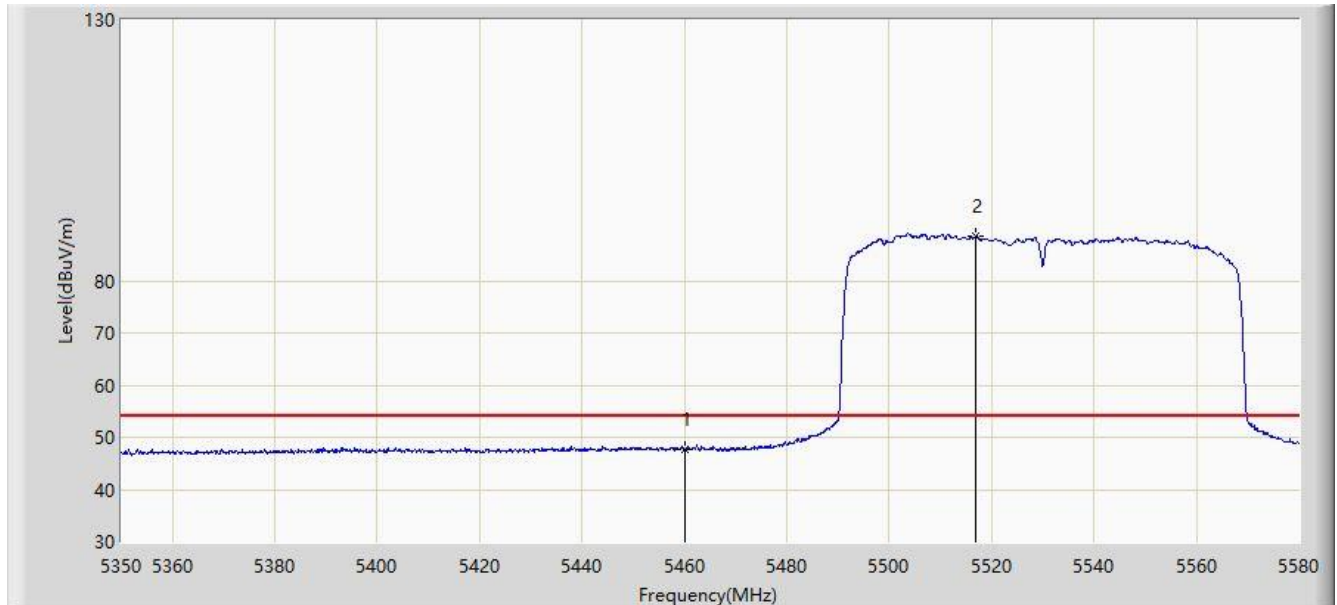


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5460.000	47.626	43.186	-6.374	54.000	4.440	AV
2	*	5516.980	88.543	83.821	N/A	N/A	4.723	AV

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:39
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530 MHz	

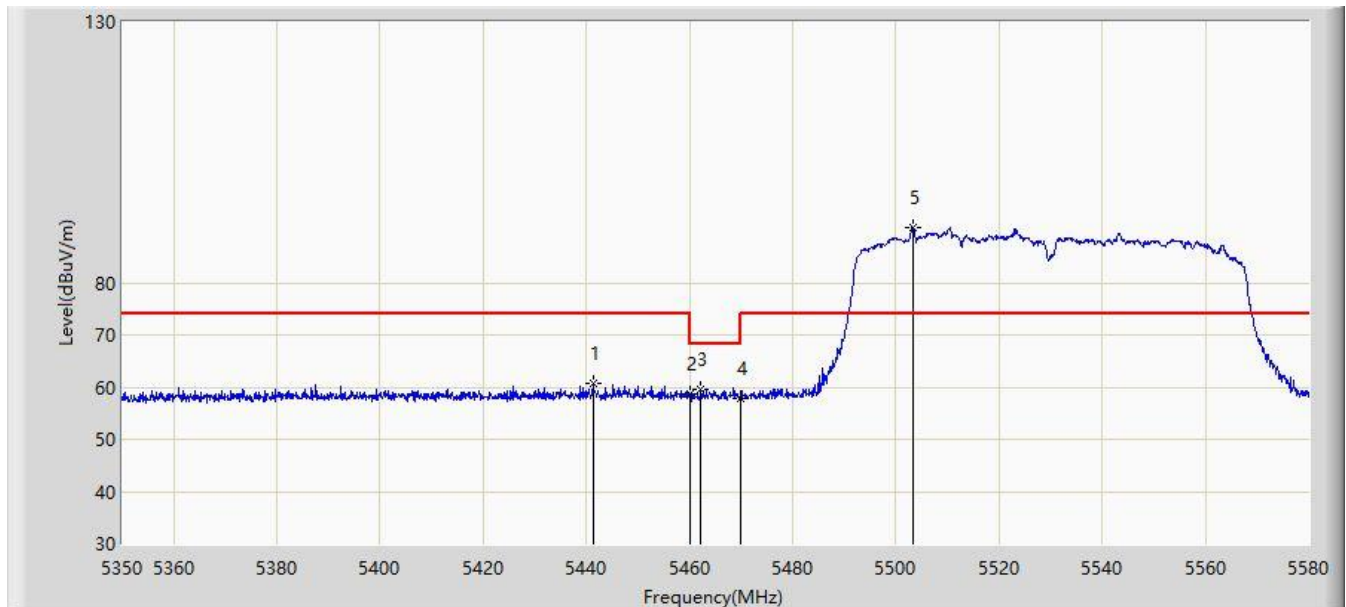


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5441.310	60.754	56.116	-13.246	74.000	4.638	PK
2		5460.000	58.778	54.338	-15.222	74.000	4.440	PK
3		5462.240	59.621	55.178	-8.579	68.200	4.443	PK
4		5470.000	57.889	53.433	-10.311	68.200	4.455	PK
5	*	5503.295	90.462	86.015	N/A	N/A	4.447	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:40
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530 MHz	

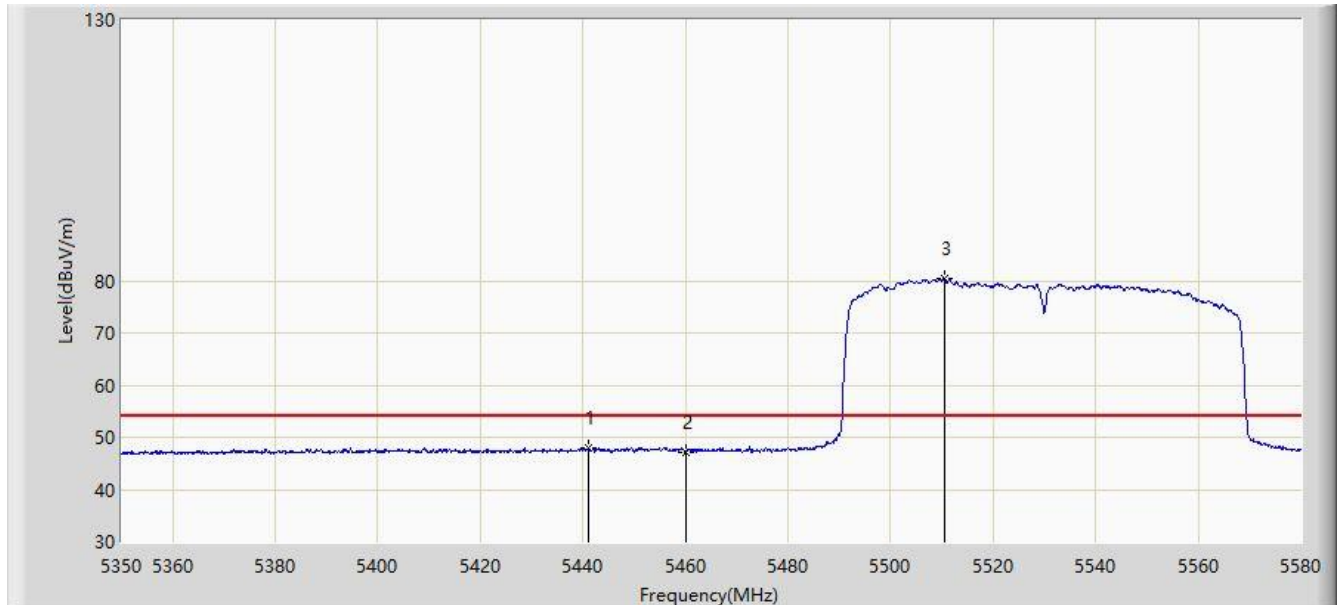


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5440.965	47.859	43.215	-6.141	54.000	4.644	AV
2		5460.000	47.223	42.783	-6.777	54.000	4.440	AV
3	*	5510.540	80.304	75.738	N/A	N/A	4.566	AV

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:41
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610 MHz	

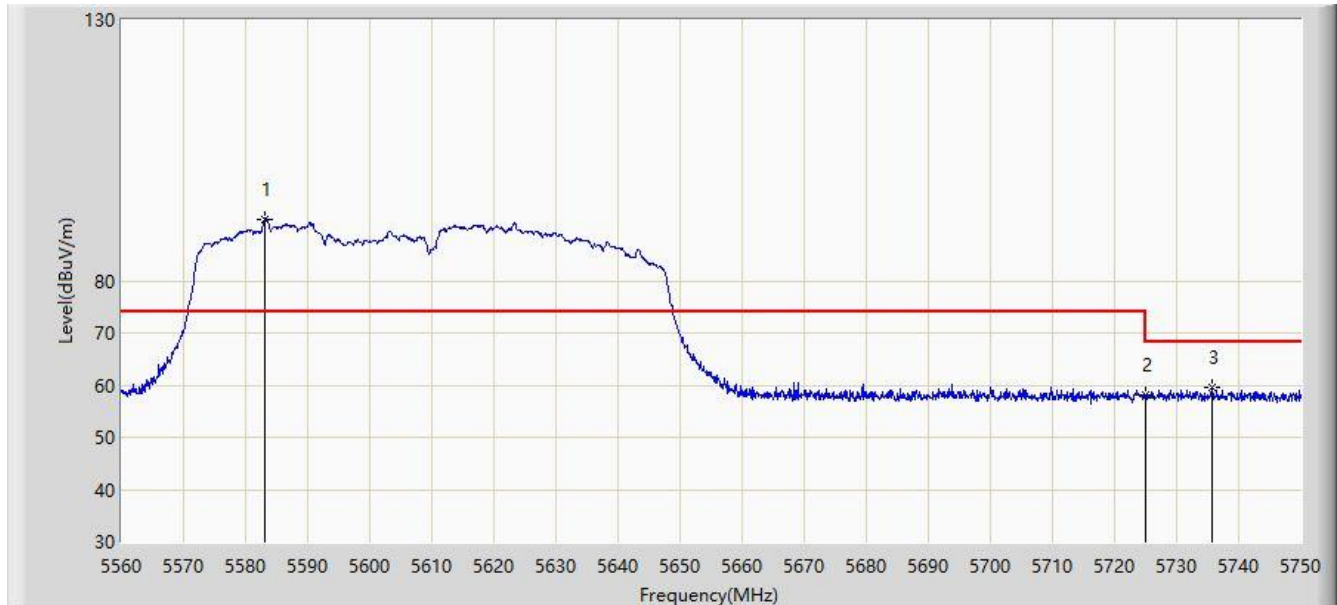


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5583.085	91.767	87.000	N/A	N/A	4.767	PK
2		5725.000	58.070	52.592	-10.130	68.200	5.478	PK
3		5735.750	59.662	54.132	-8.538	68.200	5.530	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:42
Limit: FCC_Part15.209_RE(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610 MHz	

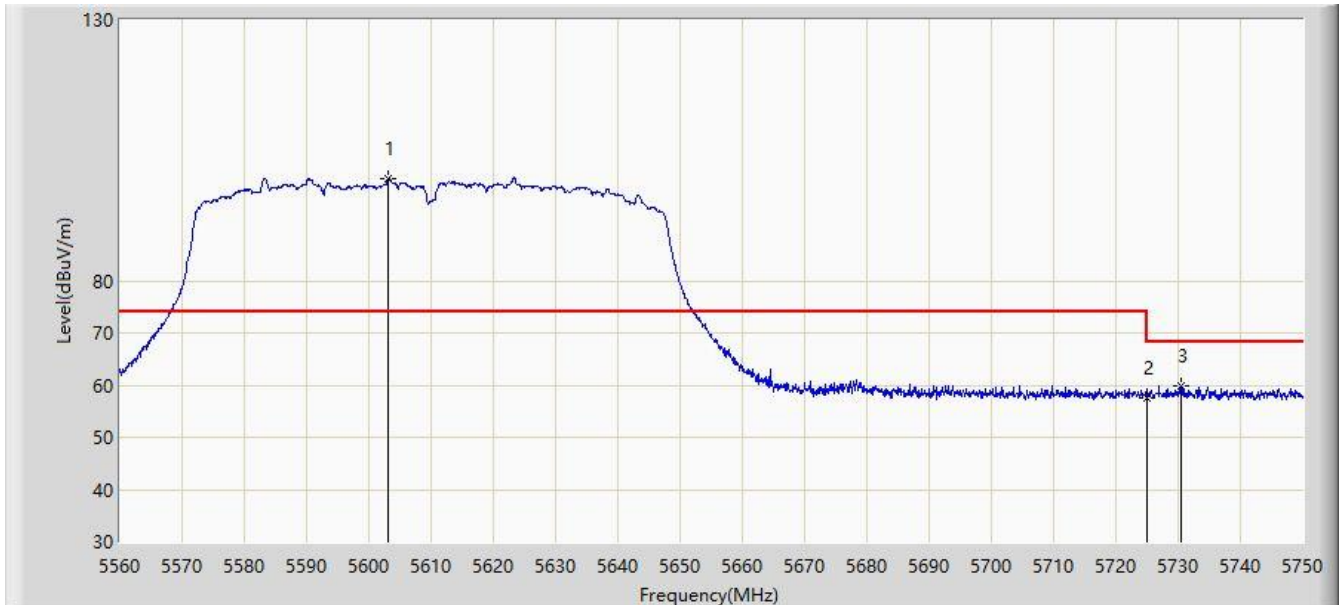


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1	*	5603.035	99.522	94.633	N/A	N/A	4.889	PK
2		5725.000	57.620	52.142	-10.580	68.200	5.478	PK
3		5730.430	59.808	54.306	-8.392	68.200	5.502	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:43
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Horizontal
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775 MHz	

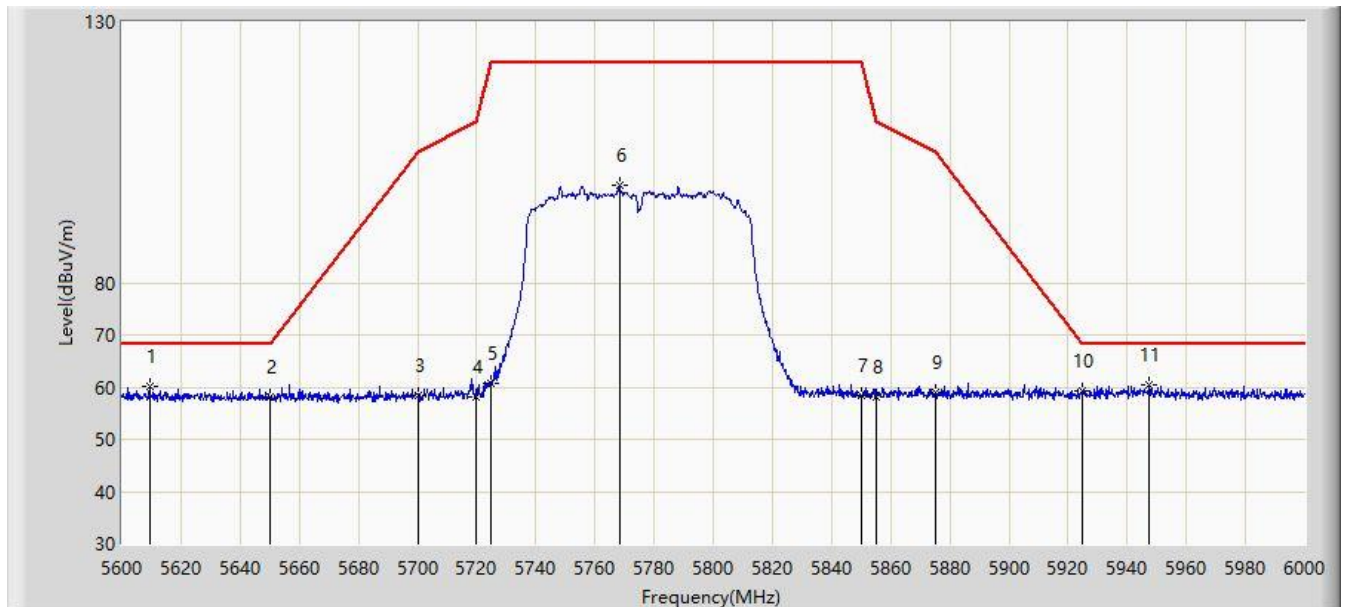


No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5609.400	60.252	55.282	-7.948	68.200	4.971	PK
2		5650.000	58.243	52.907	-9.957	68.200	5.336	PK
3		5700.000	58.528	53.210	-46.672	105.200	5.318	PK
4		5720.000	58.234	52.760	-52.566	110.800	5.474	PK
5		5725.000	60.801	55.323	-61.399	122.200	5.478	PK
6		5768.200	98.612	92.801	N/A	N/A	5.810	PK
7		5850.000	58.269	52.300	-63.931	122.200	5.968	PK
8		5855.000	58.133	52.158	-52.667	110.800	5.975	PK
9		5875.000	59.018	53.005	-46.182	105.200	6.013	PK
10		5925.000	59.141	53.006	-9.059	68.200	6.136	PK
11	*	5947.600	60.323	54.260	-7.877	68.200	6.063	PK

Note: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: AC2	Time: 2020/02/24 - 14:45
Limit: FCC_Part15.407_Band Edge(3m)	Engineer: Kyrie Xie
Probe: AC2_BBHA9120D_1-18GHz	Polarity: Vertical
EUT: Mobile Computer	Power: Power by PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775 MHz	

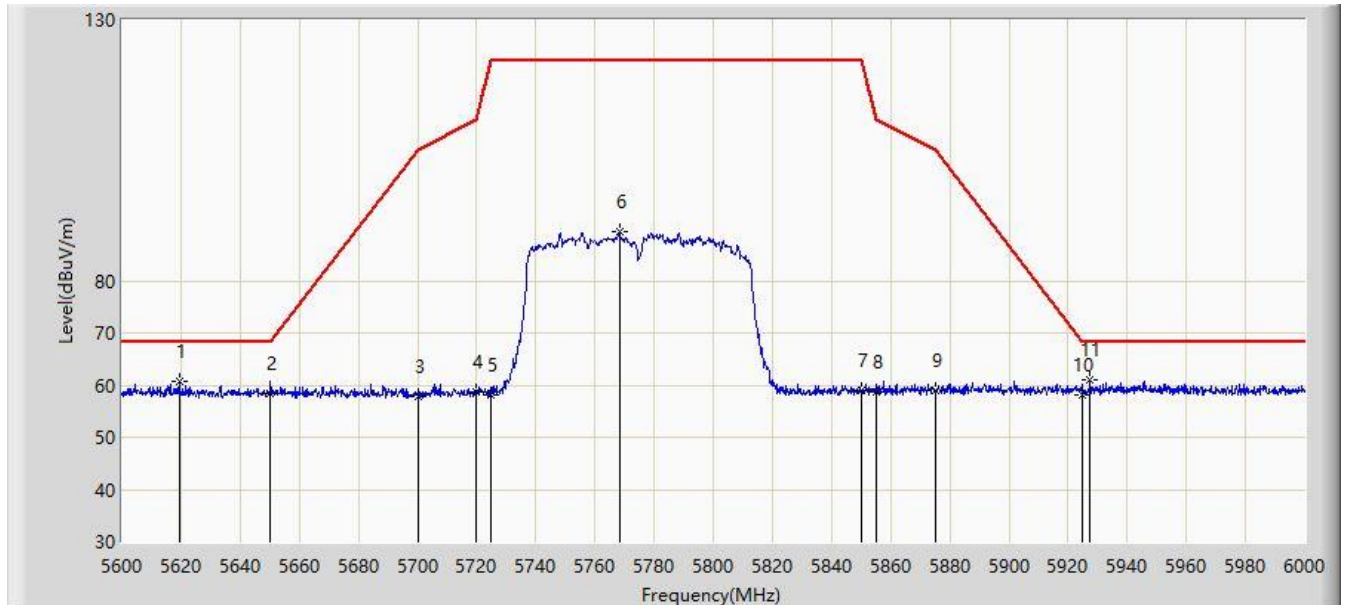

No	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB)	Type
1		5619.400	60.789	55.663	-7.411	68.200	5.126	PK
2		5650.000	58.458	53.122	-9.742	68.200	5.336	PK
3		5700.000	57.822	52.504	-47.378	105.200	5.318	PK
4		5720.000	58.581	53.107	-52.219	110.800	5.474	PK
5		5725.000	58.178	52.700	-64.022	122.200	5.478	PK
6		5768.400	89.330	83.522	N/A	N/A	5.809	PK
7		5850.000	59.077	53.108	-63.123	122.200	5.968	PK
8		5855.000	58.605	52.630	-52.195	110.800	5.975	PK
9		5875.000	58.875	52.862	-46.325	105.200	6.013	PK
10		5925.000	58.137	52.002	-10.063	68.200	6.136	PK
11	*	5927.400	61.075	54.929	-7.125	68.200	6.147	PK

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

7.10. AC Conducted Emissions Measurement


7.10.1. TestLimit

FCC Part 15 Subpart C Paragraph 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	Average (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2. Test Setup

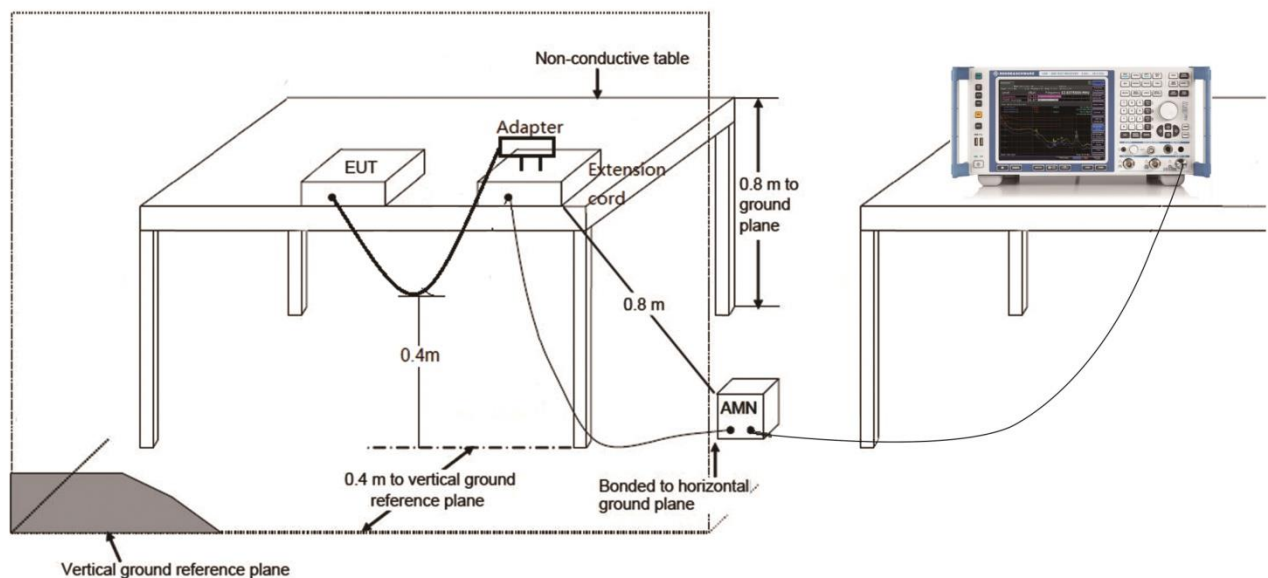

7.10.3.Test Result

Site: SR2	Time: 2020/02/26 - 10:02
Limit: FCC_Part15.207_CE_AC Power	Engineer: Andy Zhu
Probe: ENV216_101683_Filter On	Polarity: Line
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

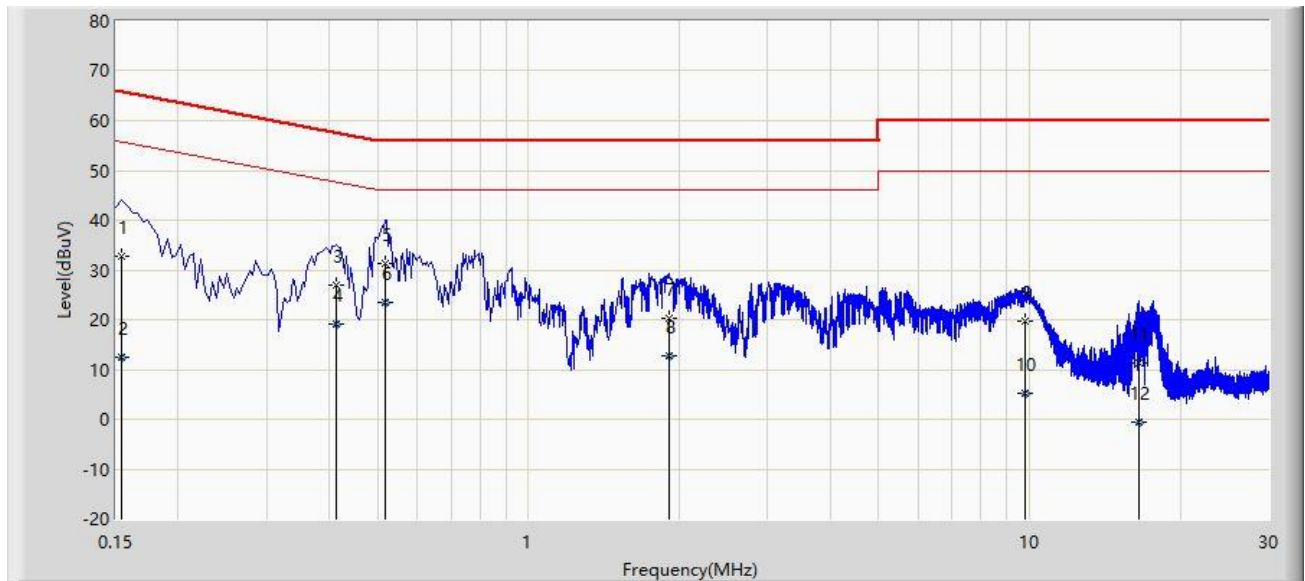


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.154	32.662	21.958	-33.120	65.781	10.704	QP
2			0.154	12.467	1.763	-43.314	55.781	10.704	AV
3			0.414	26.904	16.797	-30.663	57.568	10.107	QP
4			0.414	19.157	9.050	-28.410	47.568	10.107	AV
5			0.518	31.399	21.228	-24.601	56.000	10.171	QP
6			0.518	23.574	13.403	-22.426	46.000	10.171	AV
7			1.914	20.403	10.473	-35.597	56.000	9.930	QP
8			1.914	12.727	2.797	-33.273	46.000	9.930	AV
9		*	9.818	19.596	9.650	-40.404	60.000	9.946	QP
10			9.818	5.299	-4.647	-44.701	50.000	9.946	AV
11			16.530	11.367	1.318	-48.633	60.000	10.049	QP
12			16.530	-0.485	-10.533	-50.485	50.000	10.049	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Site: SR2	Time: 2020/02/26 - 10:15
Limit: FCC_Part15.207_CE_AC Power	Engineer: Andy Zhu
Probe: ENV216_101683_Filter On	Polarity: Neutral
EUT: Mobile Computer	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11a at Channel 5180MHz	

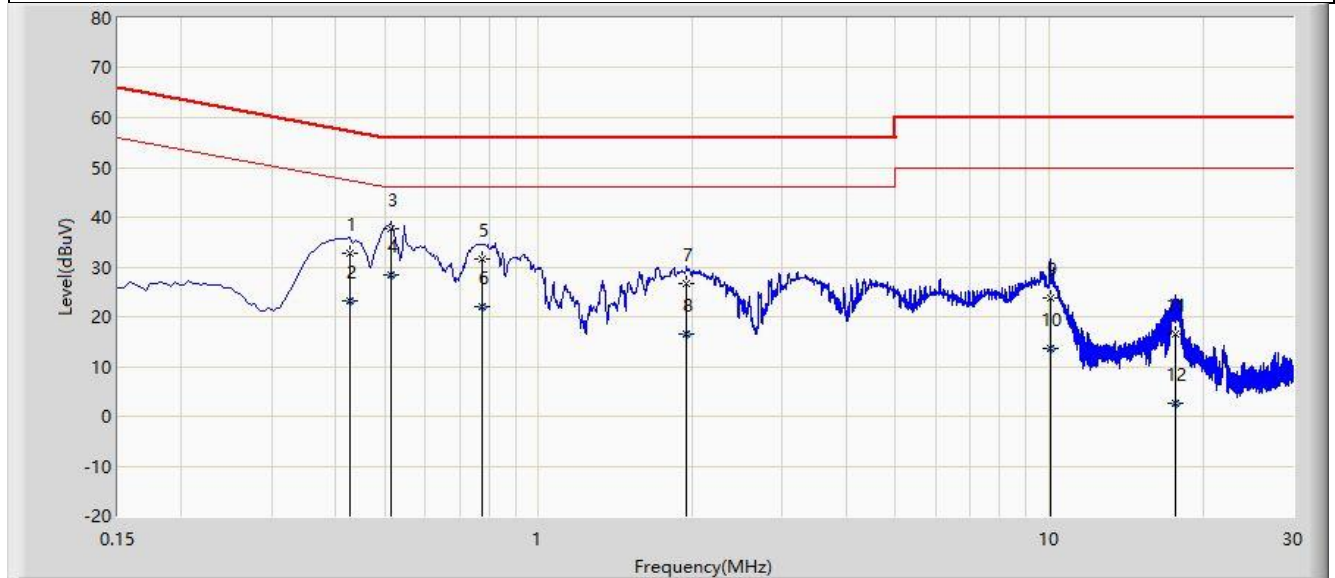

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV)	Factor (dB)	Type
1			0.426	32.712	22.571	-24.618	57.330	10.141	QP
2			0.426	23.318	13.177	-24.012	47.330	10.141	AV
3			0.514	37.738	27.539	-18.262	56.000	10.200	QP
4			0.514	28.453	18.254	-17.547	46.000	10.200	AV
5			0.774	31.699	21.627	-24.301	56.000	10.071	QP
6			0.774	22.044	11.972	-23.956	46.000	10.071	AV
7		*	1.946	26.597	16.649	-29.403	56.000	9.948	QP
8			1.946	16.536	6.587	-29.464	46.000	9.948	AV
9			10.074	23.669	13.689	-36.331	60.000	9.981	QP
10			10.074	13.741	3.761	-36.259	50.000	9.981	AV
11			17.702	16.393	6.299	-43.607	60.000	10.094	QP
12			17.702	2.654	-7.440	-47.346	50.000	10.094	AV

Note: Measure Level (dBμV) = Reading Level (dBμV) + Factor (dB)

Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

8. CONCLUSION

The data collected relate only the item(s) tested and show that the **Mobile Computer** is in compliance with Part 15E of the FCC rules & ISED rules.

_____ The End _____

Appendix A - Test Setup Photograph

Refer to “2001RSU045-UT” file.

Appendix B-EUT Photograph

Refer to "2001RSU045-UE" file.