




|                                           |                     |                                    |            |
|-------------------------------------------|---------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM    | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/8/2006 9:23:19 AM | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | temp.txt            | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C              | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500           | <b>Relative Permittivity:</b>      | 42.18      |
| <b>Relative Humidity:</b>                 | 30%                 | <b>Conductivity:</b>               | 0.893      |
| <b>Phantom S/No:</b>                      | Head04_37.csv       | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                  | <b>Max SAR Y-axis Location:</b>    | -13.00 mm  |
| <b>DUT Position:</b>                      | left touch          | <b>Max SAR Z-axis Location:</b>    | -102.00 mm |
| <b>Antenna Configuration:</b>             | integral            | <b>Max E Field:</b>                | 24.13 V/m  |
| <b>Test Frequency:</b>                    | 836.6MHz            | <b>SAR 1g:</b>                     | 0.398 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668  | <b>SAR 10g:</b>                    | 0.267 W/kg |
| <b>Conversion Factors:</b>                | .273 / .273 / .273  | <b>SAR Start:</b>                  | 0.183 W/kg |
| <b>Type of Modulation:</b>                |                     | <b>SAR End:</b>                    | 0.187 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                     | <b>SAR Drift during Scan:</b>      | 2.23 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20        | <b>Probe battery last changed:</b> | 5/24/2006  |
| <b>Input Power Level:</b>                 | max                 | <b>Extrapolation:</b>              | poly4      |

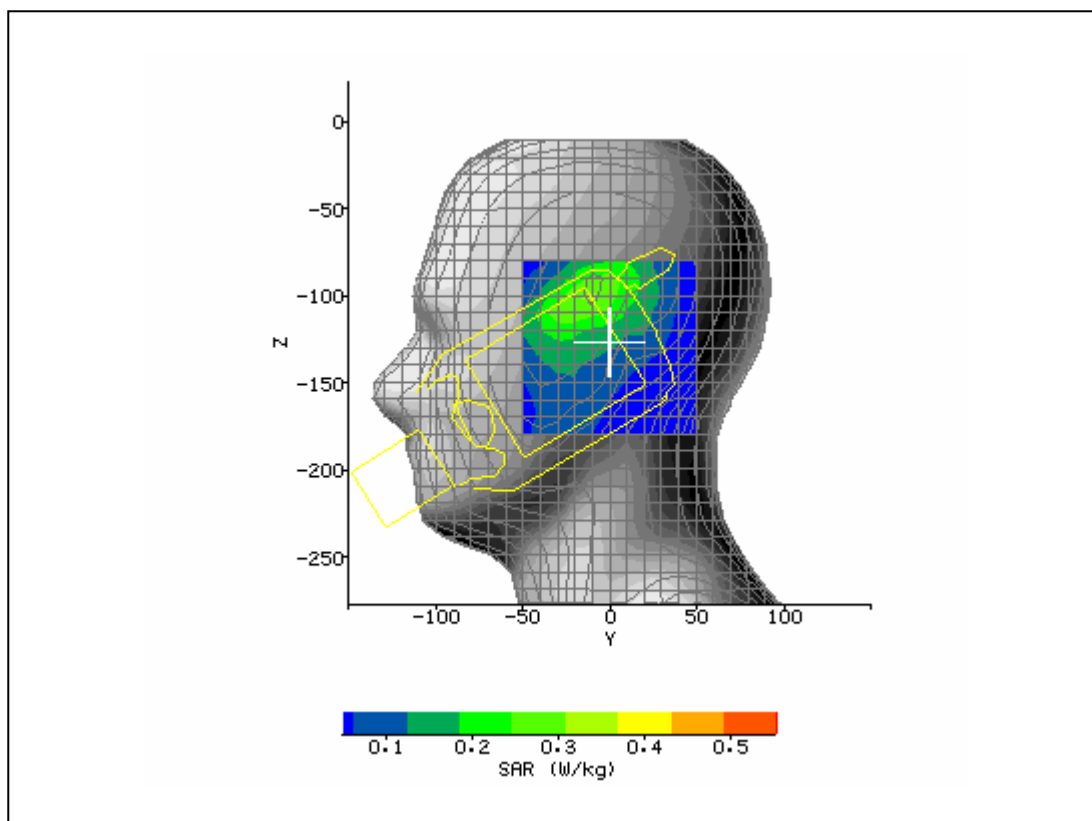


|                                           |                     |                                    |            |
|-------------------------------------------|---------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM    | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/8/2006 9:45:52 AM | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | lefttch190.txt      | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C              | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500           | <b>Relative Permittivity:</b>      | 42.18      |
| <b>Relative Humidity:</b>                 | 30%                 | <b>Conductivity:</b>               | 0.893      |
| <b>Phantom S/No:</b>                      | Head04_37.csv       | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                  | <b>Max SAR Y-axis Location:</b>    | -3.00 mm   |
| <b>DUT Position:</b>                      | left tilt           | <b>Max SAR Z-axis Location:</b>    | -101.00 mm |
| <b>Antenna Configuration:</b>             | integral            | <b>Max E Field:</b>                | 31.26 V/m  |
| <b>Test Frequency:</b>                    | 836.6MHz            | <b>SAR 1g:</b>                     | 0.748 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668  | <b>SAR 10g:</b>                    | 0.477 W/kg |
| <b>Conversion Factors:</b>                | .273 / .273 / .273  | <b>SAR Start:</b>                  | 0.340 W/kg |
| <b>Type of Modulation:</b>                |                     | <b>SAR End:</b>                    | 0.333 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                     | <b>SAR Drift during Scan:</b>      | -2.14 %    |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20        | <b>Probe battery last changed:</b> | 5/24/2006  |
| <b>Input Power Level:</b>                 | max                 | <b>Extrapolation:</b>              | poly4      |

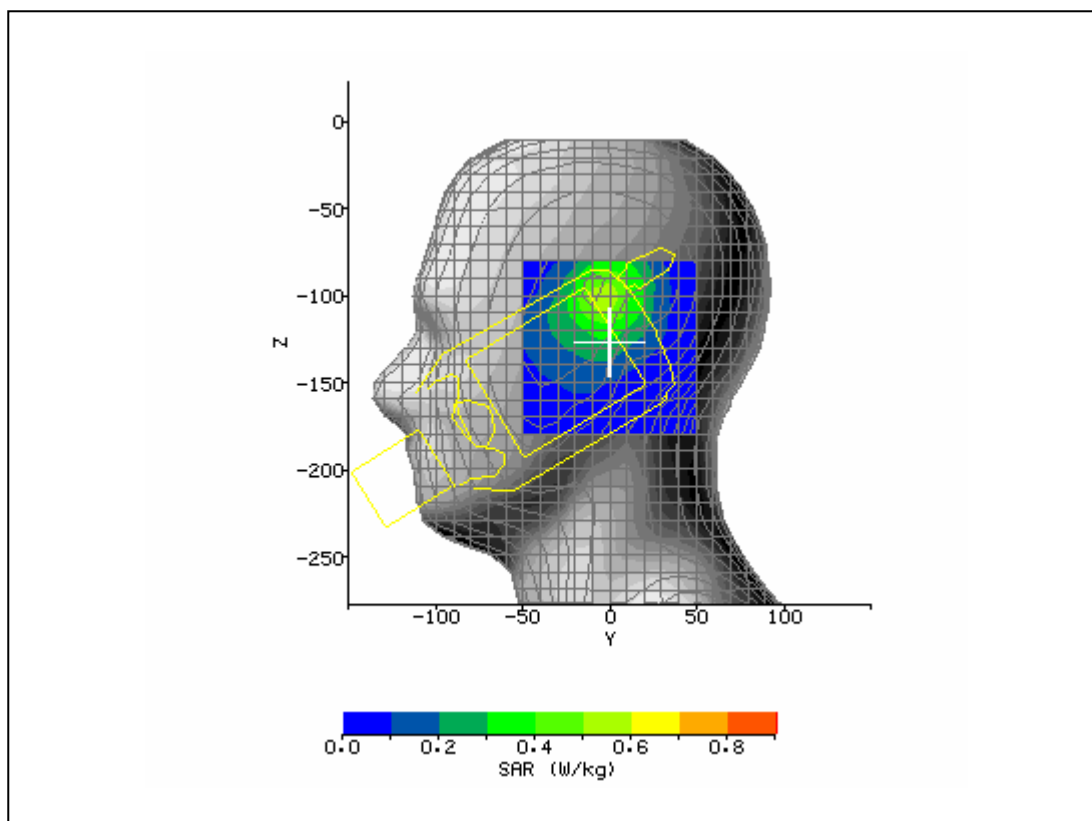


|                                           |                      |                                    |            |
|-------------------------------------------|----------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM     | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/8/2006 10:45:50 AM | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | righttch190.txt      | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C               | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500            | <b>Relative Permittivity:</b>      | 42.18      |
| <b>Relative Humidity:</b>                 | 30%                  | <b>Conductivity:</b>               | 0.893      |
| <b>Phantom S/No:</b>                      | Head04_37.csv        | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 180°                 | <b>Max SAR Y-axis Location:</b>    | 5.00 mm    |
| <b>DUT Position:</b>                      | right touch          | <b>Max SAR Z-axis Location:</b>    | -115.00 mm |
| <b>Antenna Configuration:</b>             | integral             | <b>Max E Field:</b>                | 19.81 V/m  |
| <b>Test Frequency:</b>                    | 836.6MHz             | <b>SAR 1g:</b>                     | 0.314 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668   | <b>SAR 10g:</b>                    | 0.220 W/kg |
| <b>Conversion Factors:</b>                | .273 / .273 / .273   | <b>SAR Start:</b>                  | 0.168 W/kg |
| <b>Type of Modulation:</b>                |                      | <b>SAR End:</b>                    | 0.174 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                      | <b>SAR Drift during Scan:</b>      | 3.83 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20         | <b>Probe battery last changed:</b> | 5/24/2006  |
| <b>Input Power Level:</b>                 | max                  | <b>Extrapolation:</b>              | poly4      |

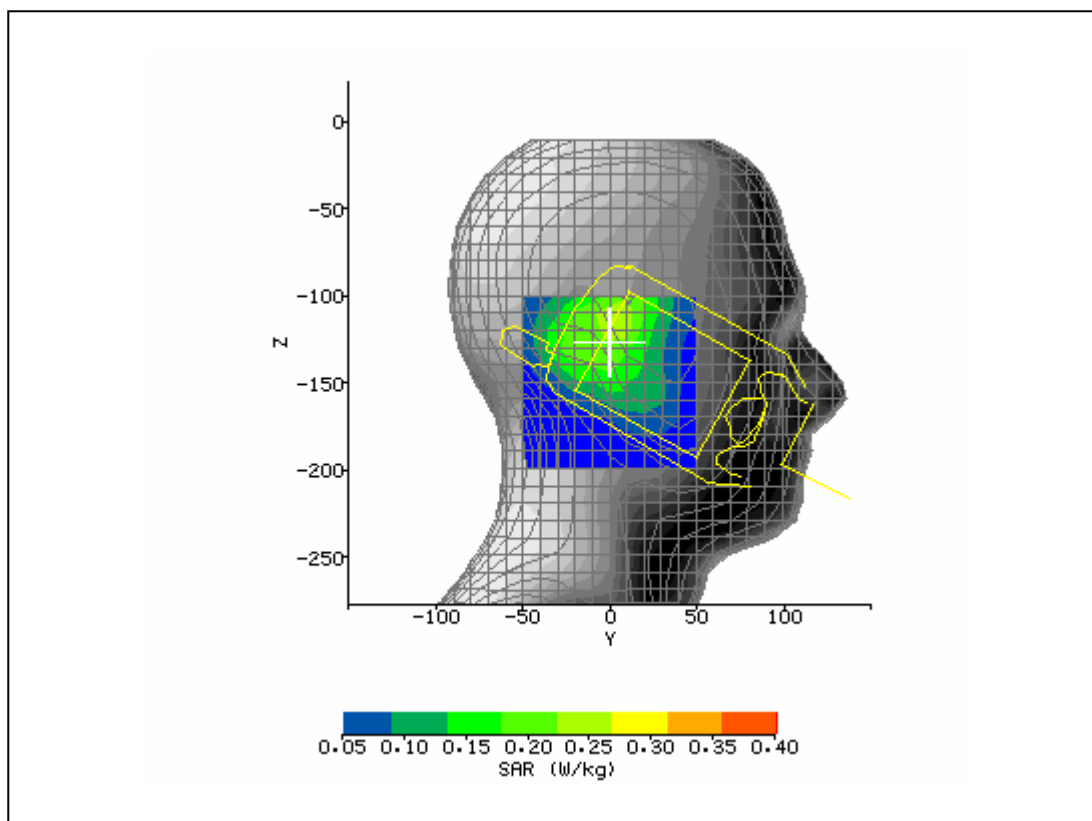


|                                           |                      |                                    |            |
|-------------------------------------------|----------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM     | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/8/2006 11:20:28 AM | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | righttlt190.txt      | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C               | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500            | <b>Relative Permittivity:</b>      | 42.18      |
| <b>Relative Humidity:</b>                 | 30%                  | <b>Conductivity:</b>               | 0.893      |
| <b>Phantom S/No:</b>                      | Head04_37.csv        | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 180°                 | <b>Max SAR Y-axis Location:</b>    | -9.00 mm   |
| <b>DUT Position:</b>                      | right tilt           | <b>Max SAR Z-axis Location:</b>    | -123.00 mm |
| <b>Antenna Configuration:</b>             | integral             | <b>Max E Field:</b>                | 24.21 V/m  |
| <b>Test Frequency:</b>                    | 836.6MHz             | <b>SAR 1g:</b>                     | 0.459 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668   | <b>SAR 10g:</b>                    | 0.330 W/kg |
| <b>Conversion Factors:</b>                | .273 / .273 / .273   | <b>SAR Start:</b>                  | 0.258 W/kg |
| <b>Type of Modulation:</b>                |                      | <b>SAR End:</b>                    | 0.259 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                      | <b>SAR Drift during Scan:</b>      | 0.27 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20         | <b>Probe battery last changed:</b> | 5/24/2006  |
| <b>Input Power Level:</b>                 | max                  | <b>Extrapolation:</b>              | poly4      |

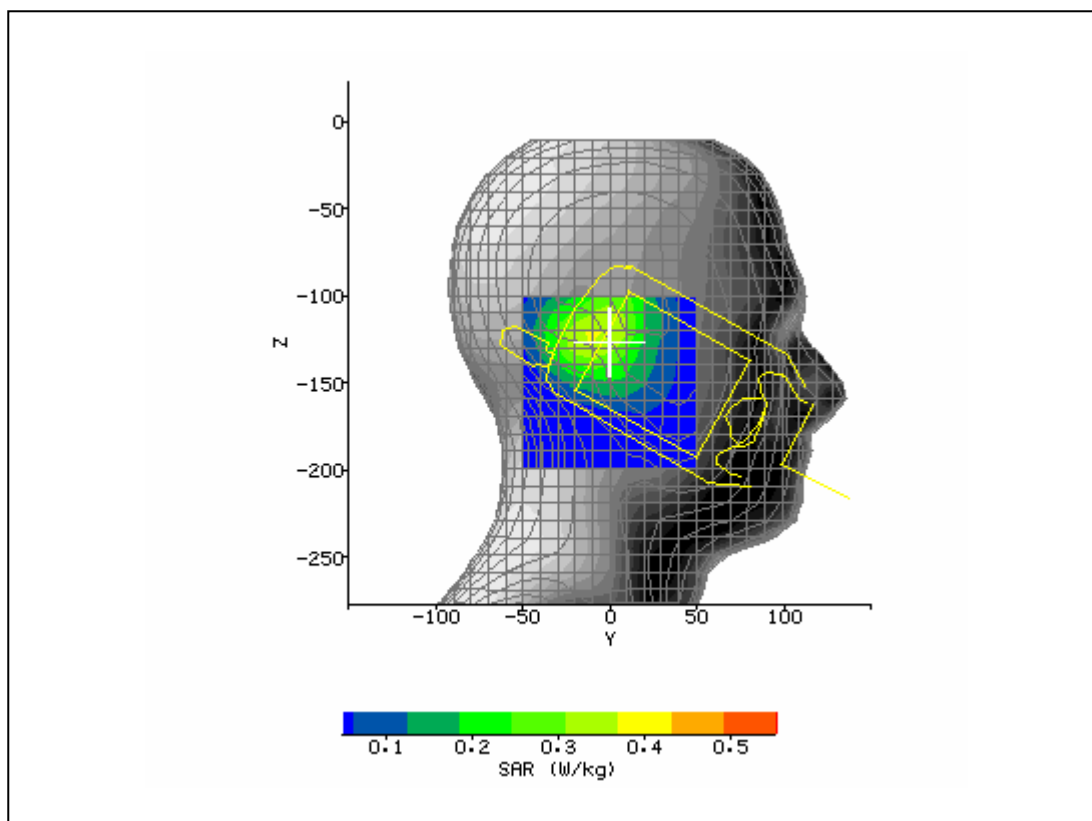


|                                           |                      |                                    |            |
|-------------------------------------------|----------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM     | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/8/2006 12:13:07 PM | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | righttlt190.txt      | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C               | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500            | <b>Relative Permittivity:</b>      | 42.28      |
| <b>Relative Humidity:</b>                 | 30%                  | <b>Conductivity:</b>               | 0.889      |
| <b>Phantom S/No:</b>                      | Head04_37.csv        | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                   | <b>Max SAR Y-axis Location:</b>    | -1.00 mm   |
| <b>DUT Position:</b>                      | left tilt            | <b>Max SAR Z-axis Location:</b>    | -102.00 mm |
| <b>Antenna Configuration:</b>             | integral             | <b>Max E Field:</b>                | 27.62 V/m  |
| <b>Test Frequency:</b>                    | 824.2MHz             | <b>SAR 1g:</b>                     | 0.587 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668   | <b>SAR 10g:</b>                    | 0.365 W/kg |
| <b>Conversion Factors:</b>                | .273 / .273 / .273   | <b>SAR Start:</b>                  | 0.256 W/kg |
| <b>Type of Modulation:</b>                |                      | <b>SAR End:</b>                    | 0.265 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                      | <b>SAR Drift during Scan:</b>      | 3.80 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20         | <b>Probe battery last changed:</b> | 5/24/2006  |
| <b>Input Power Level:</b>                 | max                  | <b>Extrapolation:</b>              | poly4      |

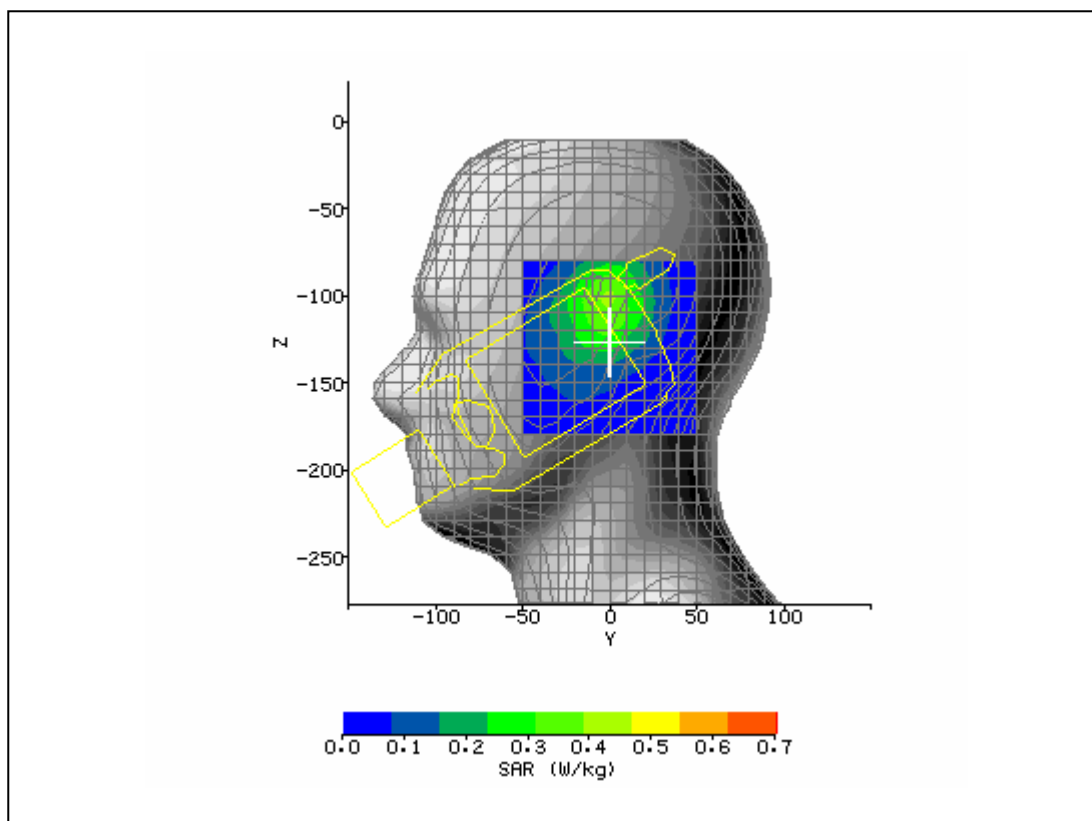


|                                           |                      |                                    |            |
|-------------------------------------------|----------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM     | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/8/2006 12:48:35 PM | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | lefttilt128.txt      | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C               | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500            | <b>Relative Permittivity:</b>      | 42.09      |
| <b>Relative Humidity:</b>                 | 30%                  | <b>Conductivity:</b>               | 0.896      |
| <b>Phantom S/No:</b>                      | Head04_37.csv        | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                   | <b>Max SAR Y-axis Location:</b>    | -3.00 mm   |
| <b>DUT Position:</b>                      | left tilt            | <b>Max SAR Z-axis Location:</b>    | -106.00 mm |
| <b>Antenna Configuration:</b>             | integral             | <b>Max E Field:</b>                | 34.13 V/m  |
| <b>Test Frequency:</b>                    | 848.8MHz             | <b>SAR 1g:</b>                     | 0.851 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668   | <b>SAR 10g:</b>                    | 0.539 W/kg |
| <b>Conversion Factors:</b>                | .273 / .273 / .273   | <b>SAR Start:</b>                  | 0.389 W/kg |
| <b>Type of Modulation:</b>                |                      | <b>SAR End:</b>                    | 0.394 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                      | <b>SAR Drift during Scan:</b>      | 1.22 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20         | <b>Probe battery last changed:</b> | 5/24/2006  |
| <b>Input Power Level:</b>                 | max                  | <b>Extrapolation:</b>              | poly4      |

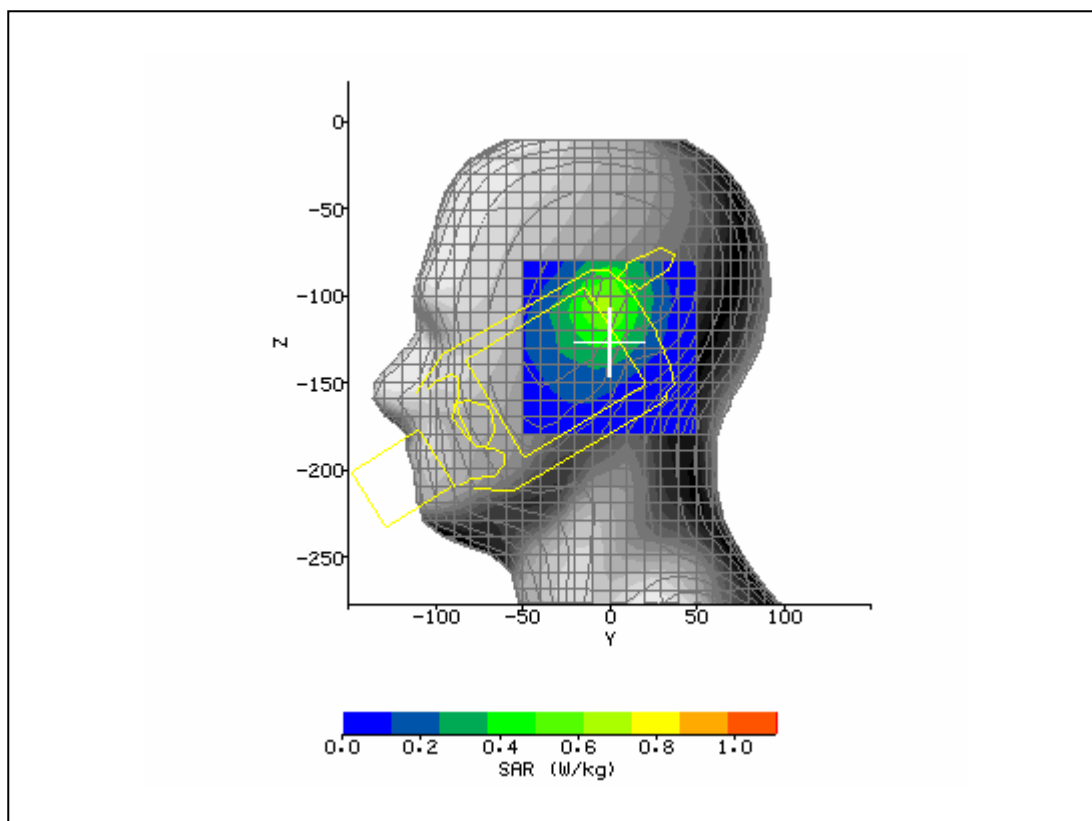

|                                           |                           |                                    |            |
|-------------------------------------------|---------------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM          | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/23/2006 9:10:22 AM      | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | temp.txt                  | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C                    | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500                 | <b>Relative Permittivity:</b>      | 56.11      |
| <b>Relative Humidity:</b>                 | 30%                       | <b>Conductivity:</b>               | 0.984      |
| <b>Phantom S/No:</b>                      | HeadBox1.csv              | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                        | <b>Max SAR X-axis Location:</b>    | -6.00 mm   |
| <b>DUT Position:</b>                      | body back against phantom | <b>Max SAR Y-axis Location:</b>    | -10.00 mm  |
| <b>Antenna Configuration:</b>             | integral                  | <b>Max E Field:</b>                | 28.54 V/m  |
| <b>Test Frequency:</b>                    | 836.6MHz                  | <b>SAR 1g:</b>                     | 0.951 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668        | <b>SAR 10g:</b>                    | 0.630 W/kg |
| <b>Conversion Factors:</b>                | .384 / .384 / .384        | <b>SAR Start:</b>                  | 0.223 W/kg |
| <b>Type of Modulation:</b>                |                           | <b>SAR End:</b>                    | 0.230 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                           | <b>SAR Drift during Scan:</b>      | 3.35 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20              | <b>Probe battery last changed:</b> | 6/14/06    |
| <b>Input Power Level:</b>                 | 2 timeslots               | <b>Extrapolation:</b>              | poly4      |

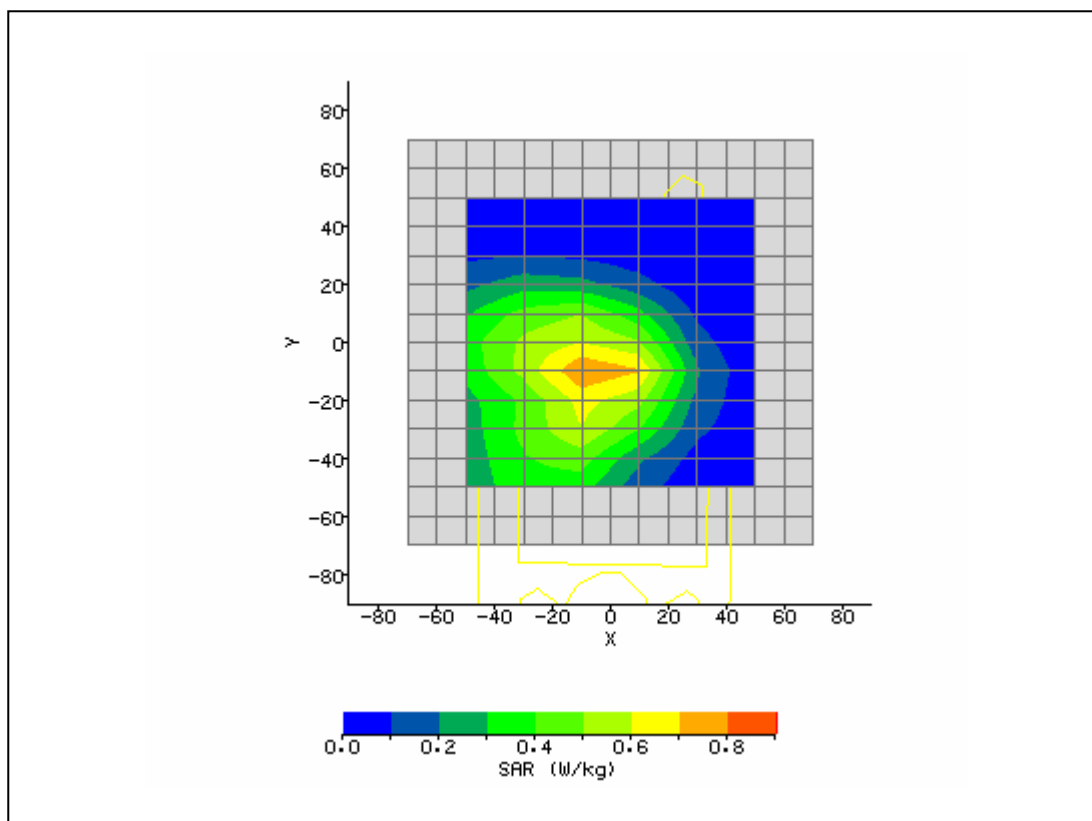


|                                           |                           |                                    |            |
|-------------------------------------------|---------------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM          | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/23/2006 8:49:11 AM      | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | temp.txt                  | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C                    | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500                 | <b>Relative Permittivity:</b>      | 56.55      |
| <b>Relative Humidity:</b>                 | 30%                       | <b>Conductivity:</b>               | 0.981      |
| <b>Phantom S/No:</b>                      | HeadBox1.csv              | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                        | <b>Max SAR X-axis Location:</b>    | -6.00 mm   |
| <b>DUT Position:</b>                      | body back against phantom | <b>Max SAR Y-axis Location:</b>    | -10.00 mm  |
| <b>Antenna Configuration:</b>             | integral                  | <b>Max E Field:</b>                | 28.71 V/m  |
| <b>Test Frequency:</b>                    | 824.2 MHz                 | <b>SAR 1g:</b>                     | 0.960 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668        | <b>SAR 10g:</b>                    | 0.632 W/kg |
| <b>Conversion Factors:</b>                | .384 / .384 / .384        | <b>SAR Start:</b>                  | 0.229 W/kg |
| <b>Type of Modulation:</b>                |                           | <b>SAR End:</b>                    | 0.230 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                           | <b>SAR Drift during Scan:</b>      | 0.62 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20              | <b>Probe battery last changed:</b> | 6/14/06    |
| <b>Input Power Level:</b>                 | 2 timeslots TX            | <b>Extrapolation:</b>              | poly4      |

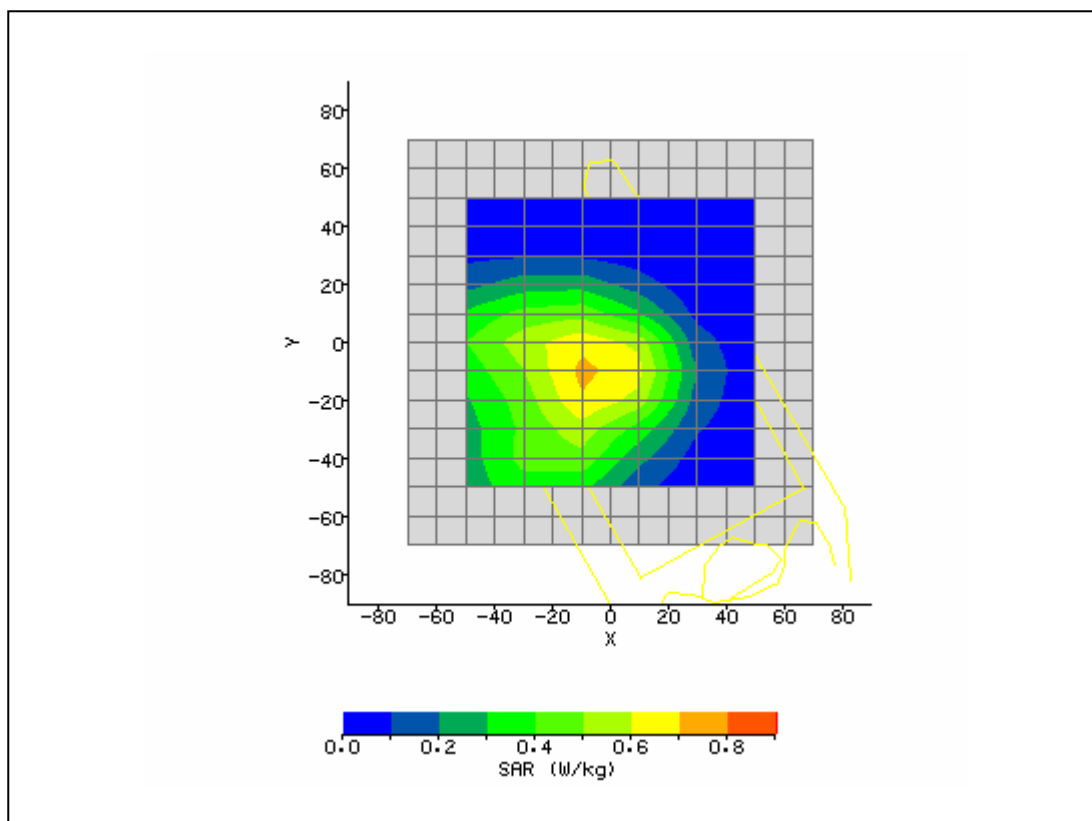





|                                           |                           |                                    |            |
|-------------------------------------------|---------------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM          | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/23/2006 9:28:03 AM      | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | bod190.txt                | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C                    | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500                 | <b>Relative Permittivity:</b>      | 55.90      |
| <b>Relative Humidity:</b>                 | 30%                       | <b>Conductivity:</b>               | 0.989      |
| <b>Phantom S/No:</b>                      | HeadBox1.csv              | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                        | <b>Max SAR X-axis Location:</b>    | -6.00 mm   |
| <b>DUT Position:</b>                      | body back against phantom | <b>Max SAR Y-axis Location:</b>    | -10.00 mm  |
| <b>Antenna Configuration:</b>             | integral                  | <b>Max E Field:</b>                | 29.80 V/m  |
| <b>Test Frequency:</b>                    | 848.8MHz                  | <b>SAR 1g:</b>                     | 1.083 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668        | <b>SAR 10g:</b>                    | 0.726 W/kg |
| <b>Conversion Factors:</b>                | .384 / .384 / .384        | <b>SAR Start:</b>                  | 0.252 W/kg |
| <b>Type of Modulation:</b>                |                           | <b>SAR End:</b>                    | 0.249 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                           | <b>SAR Drift during Scan:</b>      | -1.19 %    |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20              | <b>Probe battery last changed:</b> | 6/14/06    |
| <b>Input Power Level:</b>                 | 2 timeslots               | <b>Extrapolation:</b>              | poly4      |

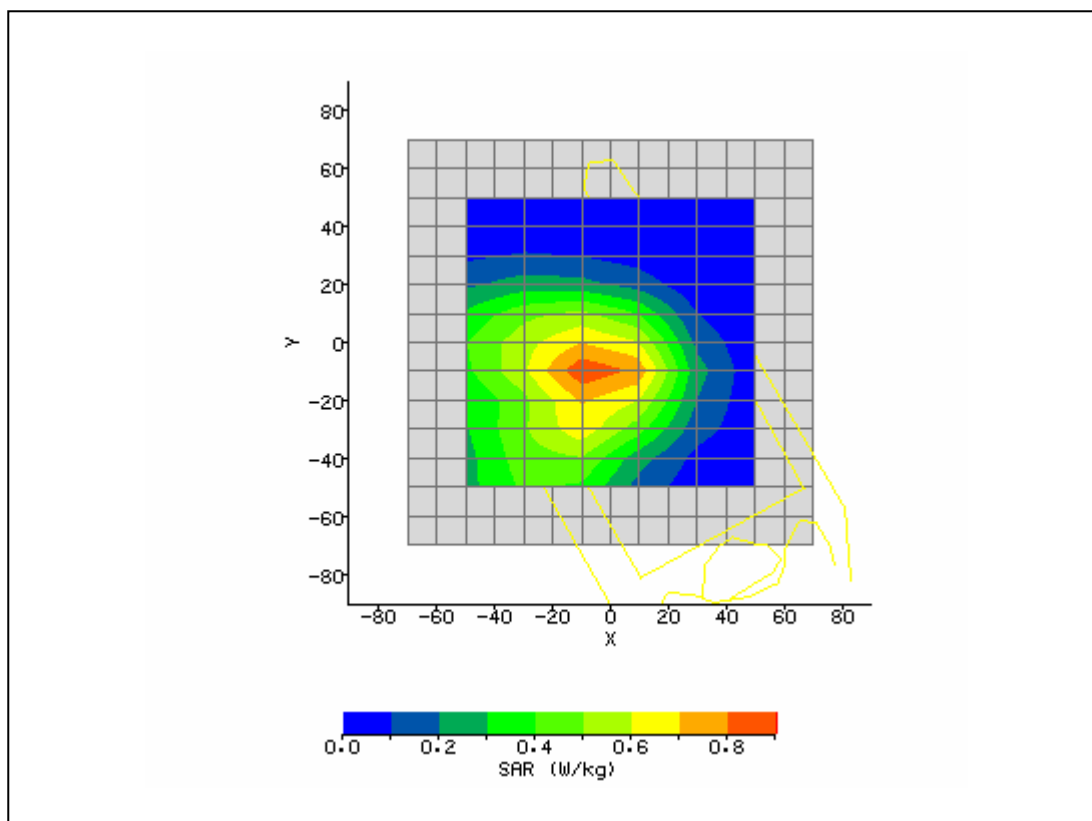


|                                    |                      |                             |            |
|------------------------------------|----------------------|-----------------------------|------------|
| System / software:                 | SARA2 / 2.40 VPM     | Input Power Drift:          |            |
| Date / Time:                       | 6/2/2006 11:23:01 AM | DUT Battery Model/No:       |            |
| Filename:                          | temp.txt             | Probe Serial Number:        | M0016      |
| Ambient Temperature:               | 22.8°C               | Liquid Simulant:            | 1900       |
| Device Under Test:                 | HHP D9500            | Relative Permittivity:      | 39.49      |
| Relative Humidity:                 | 30%                  | Conductivity:               | 1.398      |
| Phantom S/No:                      | Head04_37.csv        | Liquid Temperature:         | 22.0°C     |
| Phantom Rotation:                  | 0°                   | Max SAR Y-axis Location:    | -9.00 mm   |
| DUT Position:                      | left touch           | Max SAR Z-axis Location:    | -97.90 mm  |
| Antenna Configuration:             | integral             | Max E Field:                | 19.23 V/m  |
| Test Frequency:                    | 1880MHz              | SAR 1g:                     | 0.415 W/kg |
| Air Factors:                       | 2390 / 2143 / 2668   | SAR 10g:                    | 0.238 W/kg |
| Conversion Factors:                | .418 / .418 / .418   | SAR Start:                  | 0.144 W/kg |
| Type of Modulation:                |                      | SAR End:                    | 0.149 W/kg |
| Modn. Duty Cycle:                  |                      | SAR Drift during Scan:      | 3.40 %     |
| Diode Compression Factors (V*200): | 20 / 20 / 20         | Probe battery last changed: | 5/24/2006  |
| Input Power Level:                 | max                  | Extrapolation:              | poly4      |

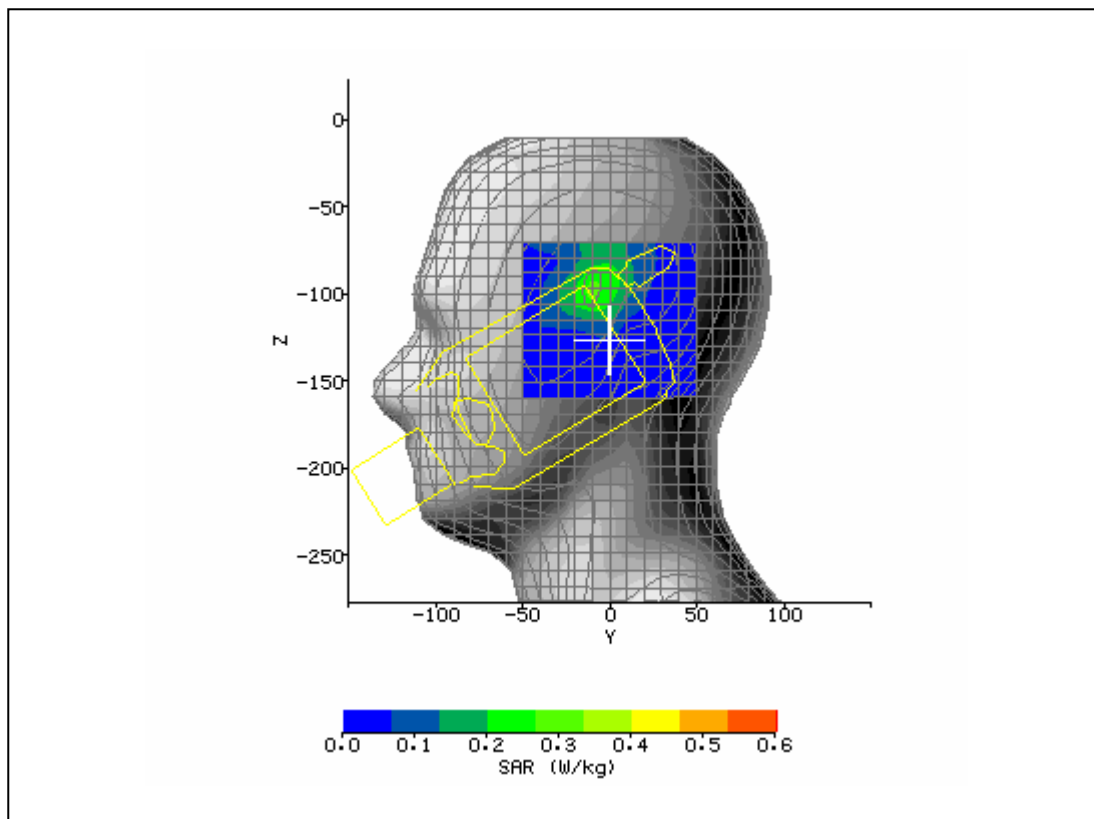


|                                           |                     |                                    |            |
|-------------------------------------------|---------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM    | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/2/2006 2:11:12 PM | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | lefttch661.txt      | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C              | <b>Liquid Simulant:</b>            | 1900       |
| <b>Device Under Test:</b>                 | HHP D9500           | <b>Relative Permittivity:</b>      | 39.49      |
| <b>Relative Humidity:</b>                 | 30%                 | <b>Conductivity:</b>               | 1.398      |
| <b>Phantom S/No:</b>                      | Head04_37.csv       | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                  | <b>Max SAR Y-axis Location:</b>    | -4.00 mm   |
| <b>DUT Position:</b>                      | left tilt           | <b>Max SAR Z-axis Location:</b>    | -96.10 mm  |
| <b>Antenna Configuration:</b>             | integral            | <b>Max E Field:</b>                | 20.07 V/m  |
| <b>Test Frequency:</b>                    | 1880MHz             | <b>SAR 1g:</b>                     | 0.494 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668  | <b>SAR 10g:</b>                    | 0.277 W/kg |
| <b>Conversion Factors:</b>                | .418 / .418 / .418  | <b>SAR Start:</b>                  | 0.181 W/kg |
| <b>Type of Modulation:</b>                |                     | <b>SAR End:</b>                    | 0.187 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                     | <b>SAR Drift during Scan:</b>      | 3.39 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20        | <b>Probe battery last changed:</b> | 5/24/2006  |
| <b>Input Power Level:</b>                 | max                 | <b>Extrapolation:</b>              | poly4      |

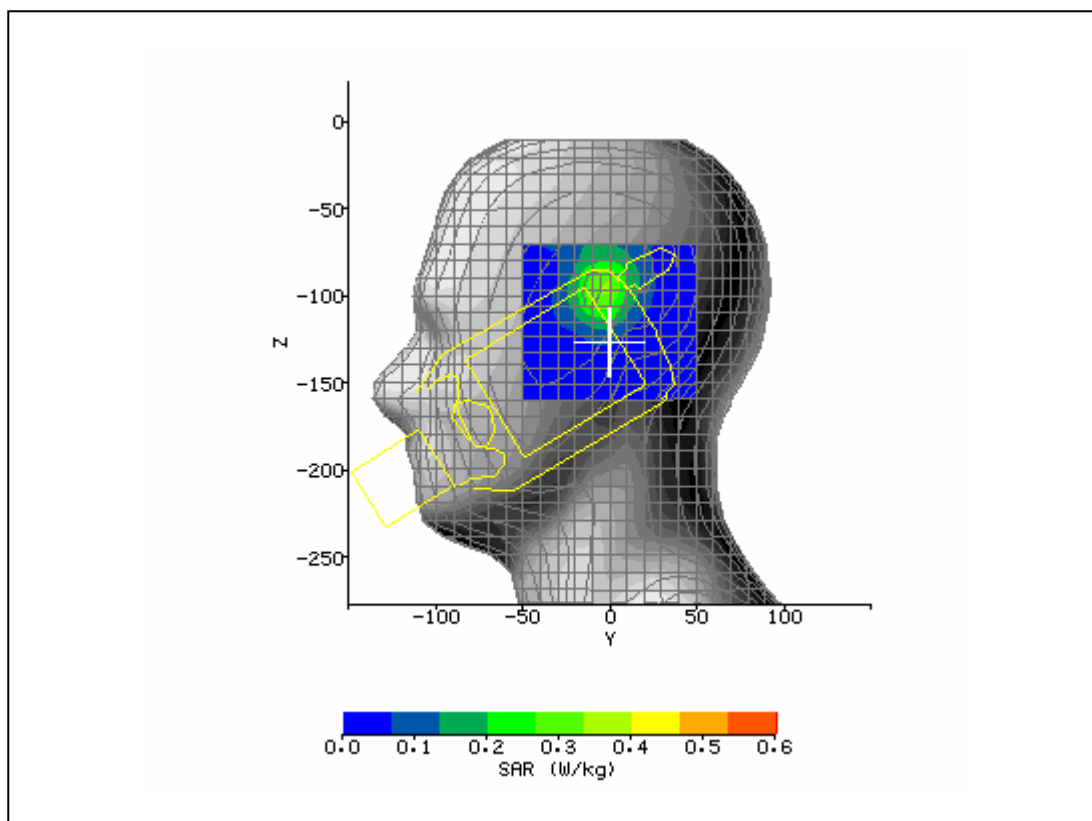


|                                           |                     |                                    |            |
|-------------------------------------------|---------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM    | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/2/2006 2:49:13 PM | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | lefttlt661.txt      | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C              | <b>Liquid Simulant:</b>            | 1900       |
| <b>Device Under Test:</b>                 | HHP D9500           | <b>Relative Permittivity:</b>      | 39.49      |
| <b>Relative Humidity:</b>                 | 30%                 | <b>Conductivity:</b>               | 1.398      |
| <b>Phantom S/No:</b>                      | Head04_37.csv       | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 180°                | <b>Max SAR Y-axis Location:</b>    | 2.00 mm    |
| <b>DUT Position:</b>                      | right touch         | <b>Max SAR Z-axis Location:</b>    | -129.00 mm |
| <b>Antenna Configuration:</b>             | integral            | <b>Max E Field:</b>                | 10.24 V/m  |
| <b>Test Frequency:</b>                    | 1880MHz             | <b>SAR 1g:</b>                     | 0.124 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668  | <b>SAR 10g:</b>                    | 0.081 W/kg |
| <b>Conversion Factors:</b>                | .418 / .418 / .418  | <b>SAR Start:</b>                  | 0.053 W/kg |
| <b>Type of Modulation:</b>                |                     | <b>SAR End:</b>                    | 0.054 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                     | <b>SAR Drift during Scan:</b>      | 1.89 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20        | <b>Probe battery last changed:</b> | 5/24/2006  |
| <b>Input Power Level:</b>                 | max                 | <b>Extrapolation:</b>              | poly4      |

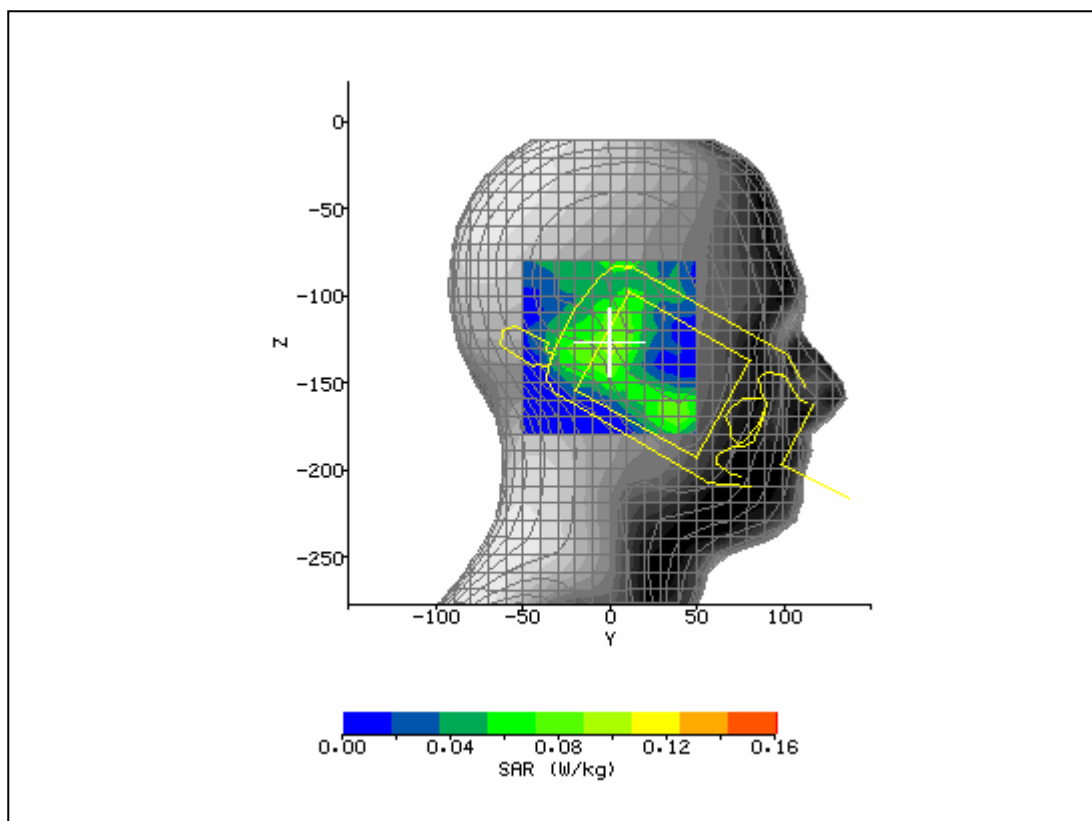


|                                           |                     |                                    |            |
|-------------------------------------------|---------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM    | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/2/2006 3:09:08 PM | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | righttch661.txt     | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C              | <b>Liquid Simulant:</b>            | 1900       |
| <b>Device Under Test:</b>                 | HHP D9500           | <b>Relative Permittivity:</b>      | 39.49      |
| <b>Relative Humidity:</b>                 | 30%                 | <b>Conductivity:</b>               | 1.398      |
| <b>Phantom S/No:</b>                      | Head04_37.csv       | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 180°                | <b>Max SAR Y-axis Location:</b>    | -6.00 mm   |
| <b>DUT Position:</b>                      | right tilt          | <b>Max SAR Z-axis Location:</b>    | -123.00 mm |
| <b>Antenna Configuration:</b>             | integral            | <b>Max E Field:</b>                | 13.87 V/m  |
| <b>Test Frequency:</b>                    | 1880MHz             | <b>SAR 1g:</b>                     | 0.231 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668  | <b>SAR 10g:</b>                    | 0.150 W/kg |
| <b>Conversion Factors:</b>                | .418 / .418 / .418  | <b>SAR Start:</b>                  | 0.108 W/kg |
| <b>Type of Modulation:</b>                |                     | <b>SAR End:</b>                    | 0.113 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                     | <b>SAR Drift during Scan:</b>      | 4.71 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20        | <b>Probe battery last changed:</b> | 5/24/2006  |
| <b>Input Power Level:</b>                 | max                 | <b>Extrapolation:</b>              | poly4      |

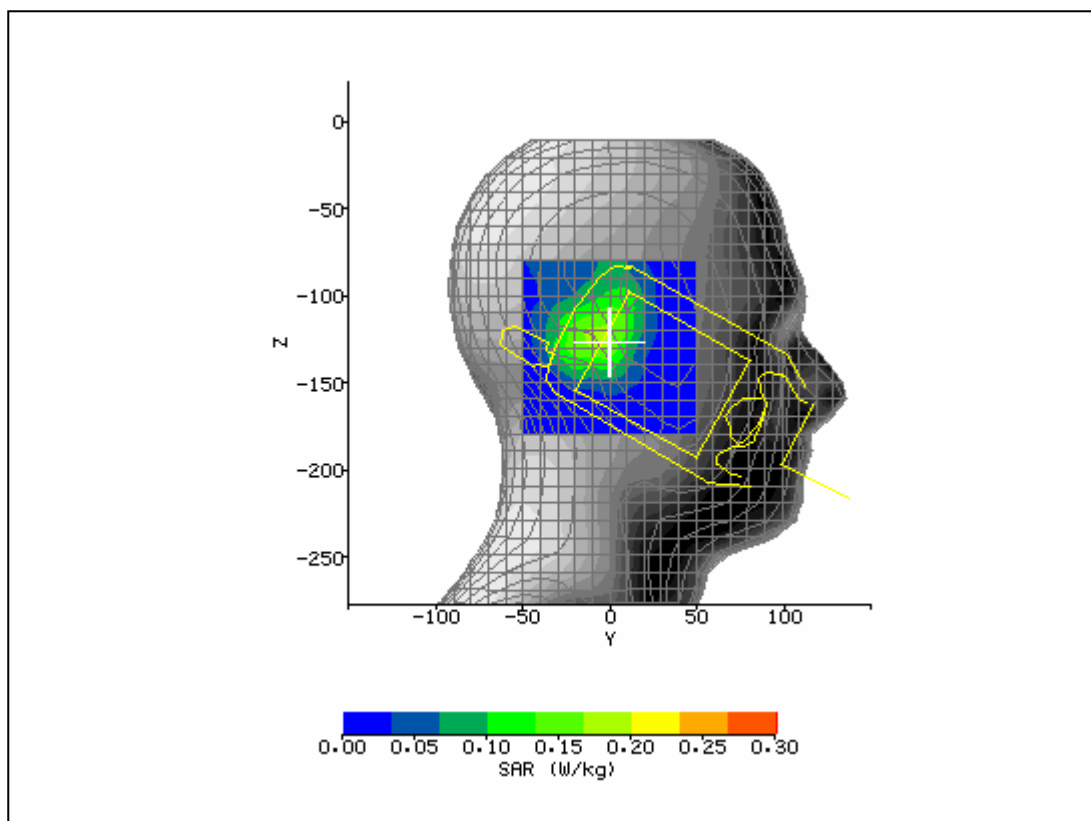


|                                    |                     |                             |            |
|------------------------------------|---------------------|-----------------------------|------------|
| System / software:                 | SARA2 / 2.40 VPM    | Input Power Drift:          |            |
| Date / Time:                       | 6/2/2006 3:44:05 PM | DUT Battery Model/No:       |            |
| Filename:                          | lefttilt512.txt     | Probe Serial Number:        | M0016      |
| Ambient Temperature:               | 22.8°C              | Liquid Simulant:            | 1900       |
| Device Under Test:                 | HHP D9500           | Relative Permittivity:      | 39.62      |
| Relative Humidity:                 | 30%                 | Conductivity:               | 1.389      |
| Phantom S/No:                      | Head04_37.csv       | Liquid Temperature:         | 22.0°C     |
| Phantom Rotation:                  | 0°                  | Max SAR Y-axis Location:    | -6.90 mm   |
| DUT Position:                      | left tilt           | Max SAR Z-axis Location:    | -93.70 mm  |
| Antenna Configuration:             | integral            | Max E Field:                | 23.08 V/m  |
| Test Frequency:                    | 1850.2MHz           | SAR 1g:                     | 0.577 W/kg |
| Air Factors:                       | 2390 / 2143 / 2668  | SAR 10g:                    | 0.324 W/kg |
| Conversion Factors:                | .418 / .418 / .418  | SAR Start:                  | 0.201 W/kg |
| Type of Modulation:                |                     | SAR End:                    | 0.202 W/kg |
| Modn. Duty Cycle:                  |                     | SAR Drift during Scan:      | 0.50 %     |
| Diode Compression Factors (V*200): | 20 / 20 / 20        | Probe battery last changed: | 5/24/2006  |
| Input Power Level:                 | max                 | Extrapolation:              | poly4      |

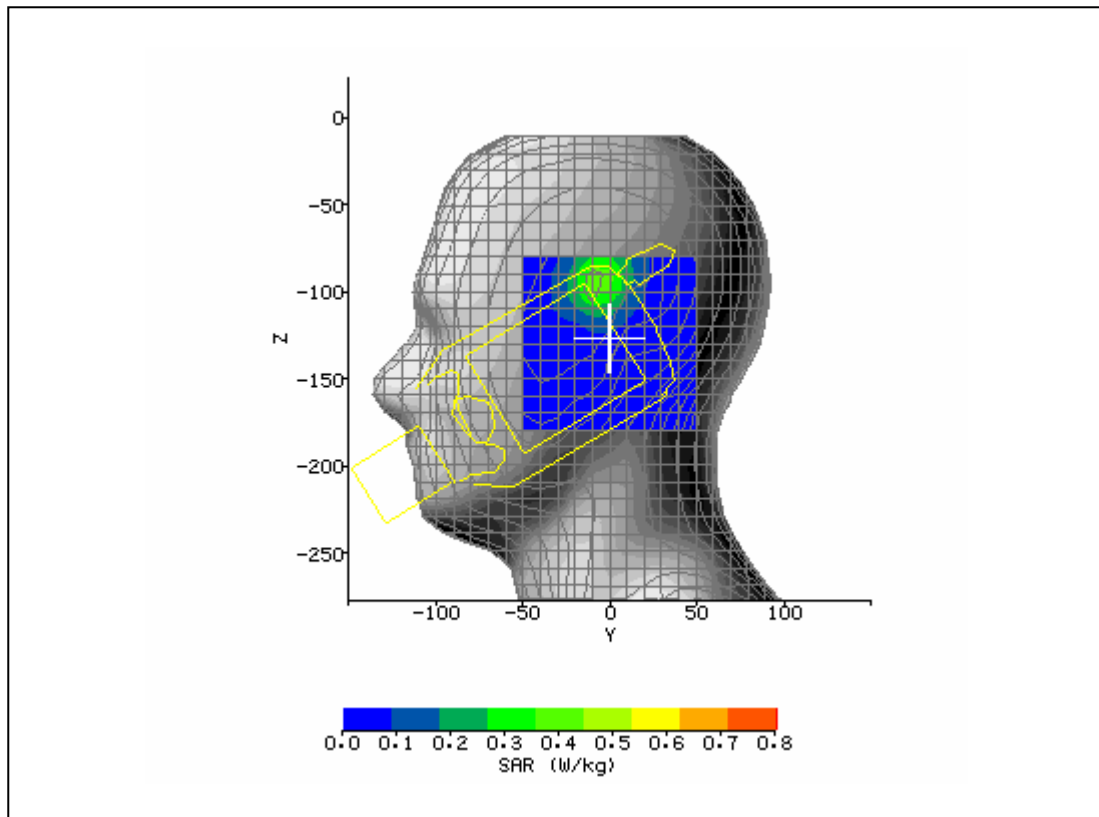

|                                    |                     |                             |            |
|------------------------------------|---------------------|-----------------------------|------------|
| System / software:                 | SARA2 / 2.40 VPM    | Input Power Drift:          |            |
| Date / Time:                       | 6/2/2006 4:05:39 PM | DUT Battery Model/No:       |            |
| Filename:                          | lefttilt512.txt     | Probe Serial Number:        | M0016      |
| Ambient Temperature:               | 22.8°C              | Liquid Simulant:            | 1900       |
| Device Under Test:                 | HHP D9500           | Relative Permittivity:      | 39.42      |
| Relative Humidity:                 | 30%                 | Conductivity:               | 1.423      |
| Phantom S/No:                      | Head04_37.csv       | Liquid Temperature:         | 22.0°C     |
| Phantom Rotation:                  | 0°                  | Max SAR Y-axis Location:    | -7.00 mm   |
| DUT Position:                      | left tilt           | Max SAR Z-axis Location:    | -94.00 mm  |
| Antenna Configuration:             | integral            | Max E Field:                | 21.68 V/m  |
| Test Frequency:                    | 1909.8MHz           | SAR 1g:                     | 0.512 W/kg |
| Air Factors:                       | 2390 / 2143 / 2668  | SAR 10g:                    | 0.284 W/kg |
| Conversion Factors:                | .418 / .418 / .418  | SAR Start:                  | 0.173 W/kg |
| Type of Modulation:                |                     | SAR End:                    | 0.176 W/kg |
| Modn. Duty Cycle:                  |                     | SAR Drift during Scan:      | 2.23 %     |
| Diode Compression Factors (V*200): | 20 / 20 / 20        | Probe battery last changed: | 5/24/2006  |
| Input Power Level:                 | max                 | Extrapolation:              | poly4      |

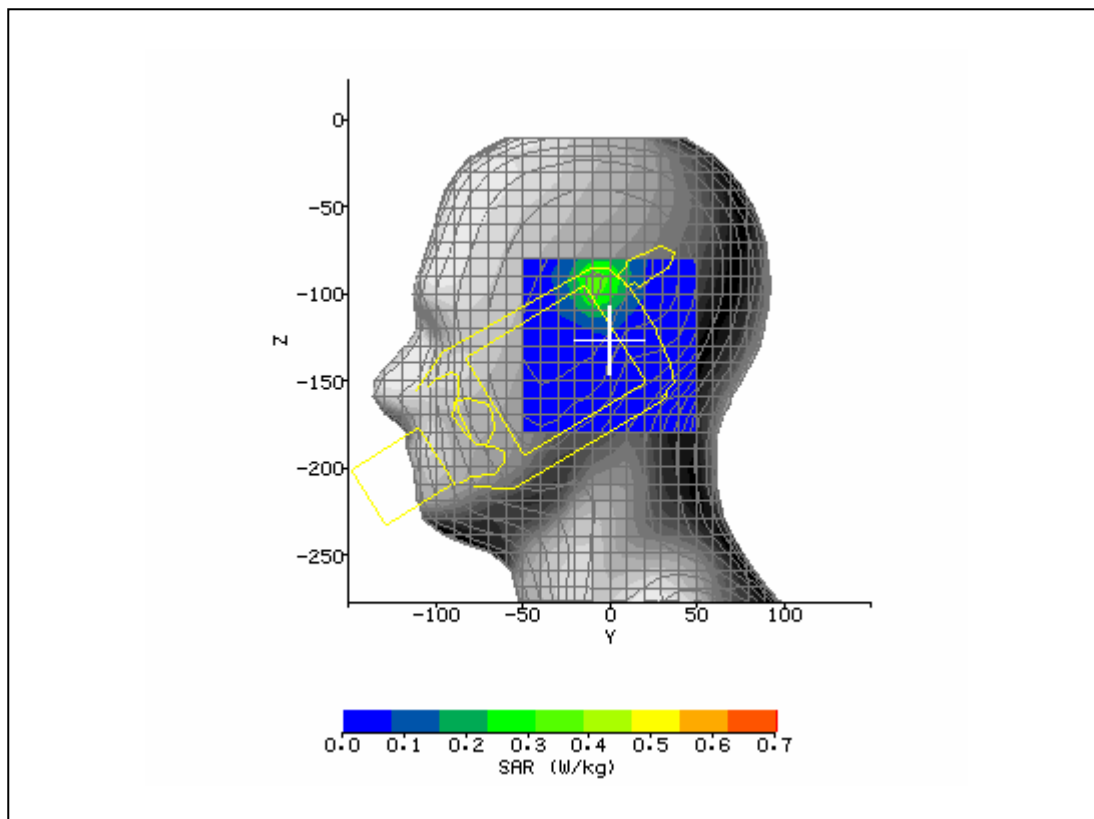


|                                           |                           |                                    |            |
|-------------------------------------------|---------------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM          | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/23/2006 10:09:16 AM     | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | bod251.txt                | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C                    | <b>Liquid Simulant:</b>            | 1900       |
| <b>Device Under Test:</b>                 | HHP D9500                 | <b>Relative Permittivity:</b>      | 53.27      |
| <b>Relative Humidity:</b>                 | 30%                       | <b>Conductivity:</b>               | 1.562      |
| <b>Phantom S/No:</b>                      | HeadBox1.csv              | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                        | <b>Max SAR X-axis Location:</b>    | 10.00 mm   |
| <b>DUT Position:</b>                      | body back against phantom | <b>Max SAR Y-axis Location:</b>    | -2.00 mm   |
| <b>Antenna Configuration:</b>             | integral                  | <b>Max E Field:</b>                | 10.57 V/m  |
| <b>Test Frequency:</b>                    | 1880MHz                   | <b>SAR 1g:</b>                     | 0.222 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668        | <b>SAR 10g:</b>                    | 0.127 W/kg |
| <b>Conversion Factors:</b>                | .473 / .473 / .473        | <b>SAR Start:</b>                  | 0.020 W/kg |
| <b>Type of Modulation:</b>                |                           | <b>SAR End:</b>                    | 0.020 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                           | <b>SAR Drift during Scan:</b>      | 3.09 %     |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20              | <b>Probe battery last changed:</b> | 6/14/06    |
| <b>Input Power Level:</b>                 | 2 timeslots TX            | <b>Extrapolation:</b>              | poly4      |

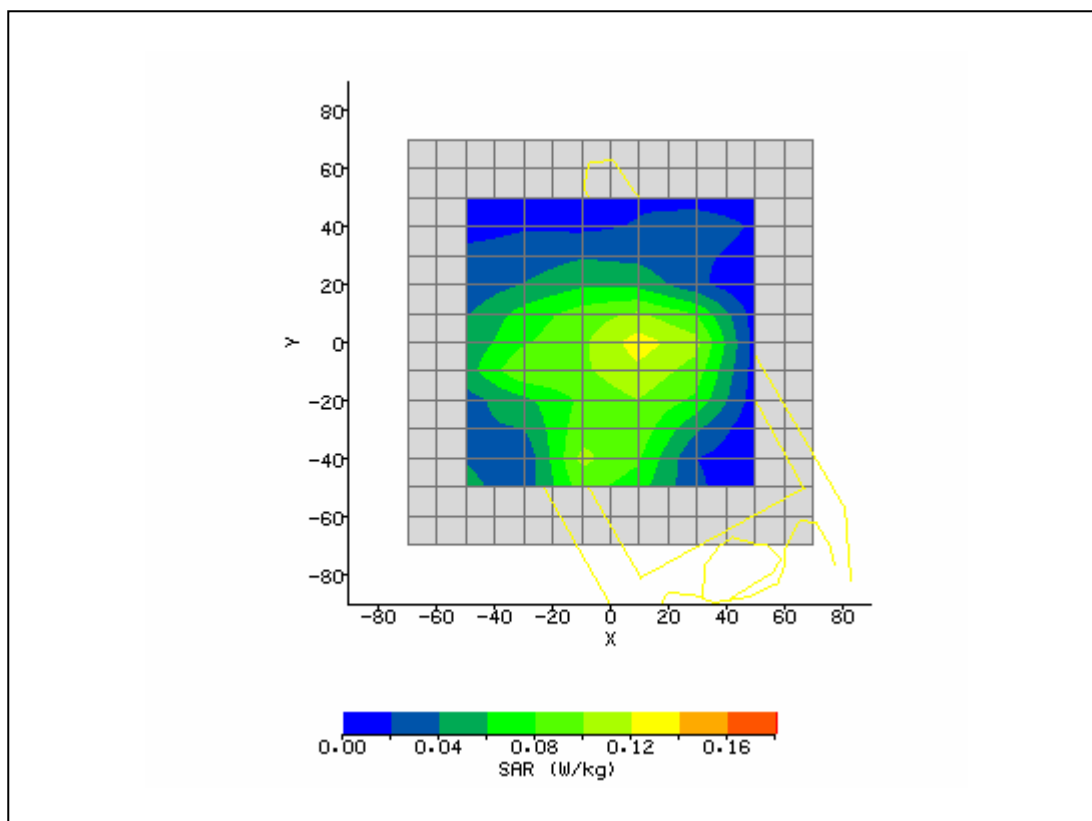





|                                           |                           |                                    |            |
|-------------------------------------------|---------------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM          | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/23/2006 10:29:59 AM     | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | bod661.txt                | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C                    | <b>Liquid Simulant:</b>            | 1900       |
| <b>Device Under Test:</b>                 | HHP D9500                 | <b>Relative Permittivity:</b>      | 53.46      |
| <b>Relative Humidity:</b>                 | 30%                       | <b>Conductivity:</b>               | 1.551      |
| <b>Phantom S/No:</b>                      | HeadBox1.csv              | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                        | <b>Max SAR X-axis Location:</b>    | 4.00 mm    |
| <b>DUT Position:</b>                      | body back against phantom | <b>Max SAR Y-axis Location:</b>    | -3.00 mm   |
| <b>Antenna Configuration:</b>             | integral                  | <b>Max E Field:</b>                | 11.07 V/m  |
| <b>Test Frequency:</b>                    | 1850.2MHz                 | <b>SAR 1g:</b>                     | 0.265 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668        | <b>SAR 10g:</b>                    | 0.156 W/kg |
| <b>Conversion Factors:</b>                | .473 / .473 / .473        | <b>SAR Start:</b>                  | 0.021 W/kg |
| <b>Type of Modulation:</b>                |                           | <b>SAR End:</b>                    | 0.020 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                           | <b>SAR Drift during Scan:</b>      | -4.76 %    |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20              | <b>Probe battery last changed:</b> | 6/14/06    |
| <b>Input Power Level:</b>                 | 2 timeslots TX            | <b>Extrapolation:</b>              | poly4      |

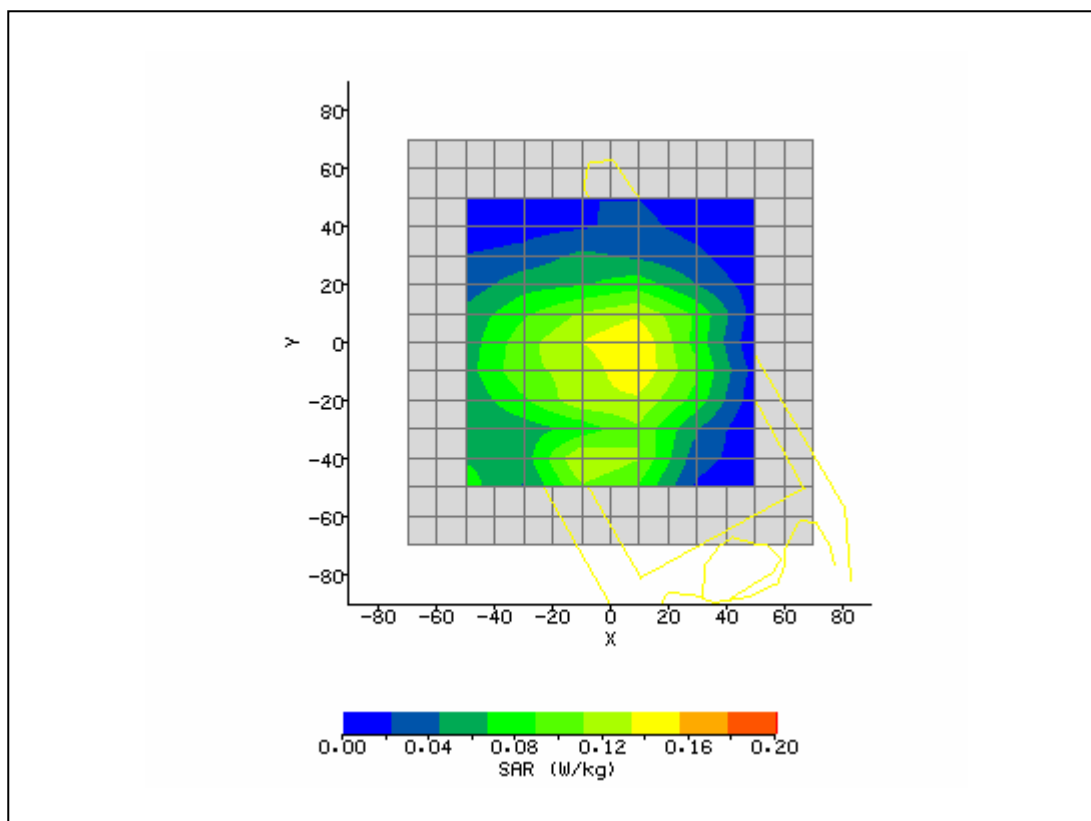

|                                           |                           |                                    |            |
|-------------------------------------------|---------------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM          | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/23/2006 10:47:29 AM     | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | bod512.txt                | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C                    | <b>Liquid Simulant:</b>            | 1900       |
| <b>Device Under Test:</b>                 | HHP D9500                 | <b>Relative Permittivity:</b>      | 53.06      |
| <b>Relative Humidity:</b>                 | 30%                       | <b>Conductivity:</b>               | 1.566      |
| <b>Phantom S/No:</b>                      | HeadBox1.csv              | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                        | <b>Max SAR X-axis Location:</b>    | 12.00 mm   |
| <b>DUT Position:</b>                      | body back against phantom | <b>Max SAR Y-axis Location:</b>    | -3.00 mm   |
| <b>Antenna Configuration:</b>             | integral                  | <b>Max E Field:</b>                | 9.84 V/m   |
| <b>Test Frequency:</b>                    | 1909.8MHz                 | <b>SAR 1g:</b>                     | 0.208 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668        | <b>SAR 10g:</b>                    | 0.107 W/kg |
| <b>Conversion Factors:</b>                | .473 / .473 / .473        | <b>SAR Start:</b>                  | 0.013 W/kg |
| <b>Type of Modulation:</b>                |                           | <b>SAR End:</b>                    | 0.013 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                           | <b>SAR Drift during Scan:</b>      | -0.41 %    |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20              | <b>Probe battery last changed:</b> | 6/14/06    |
| <b>Input Power Level:</b>                 | 2 timeslots               | <b>Extrapolation:</b>              | poly4      |

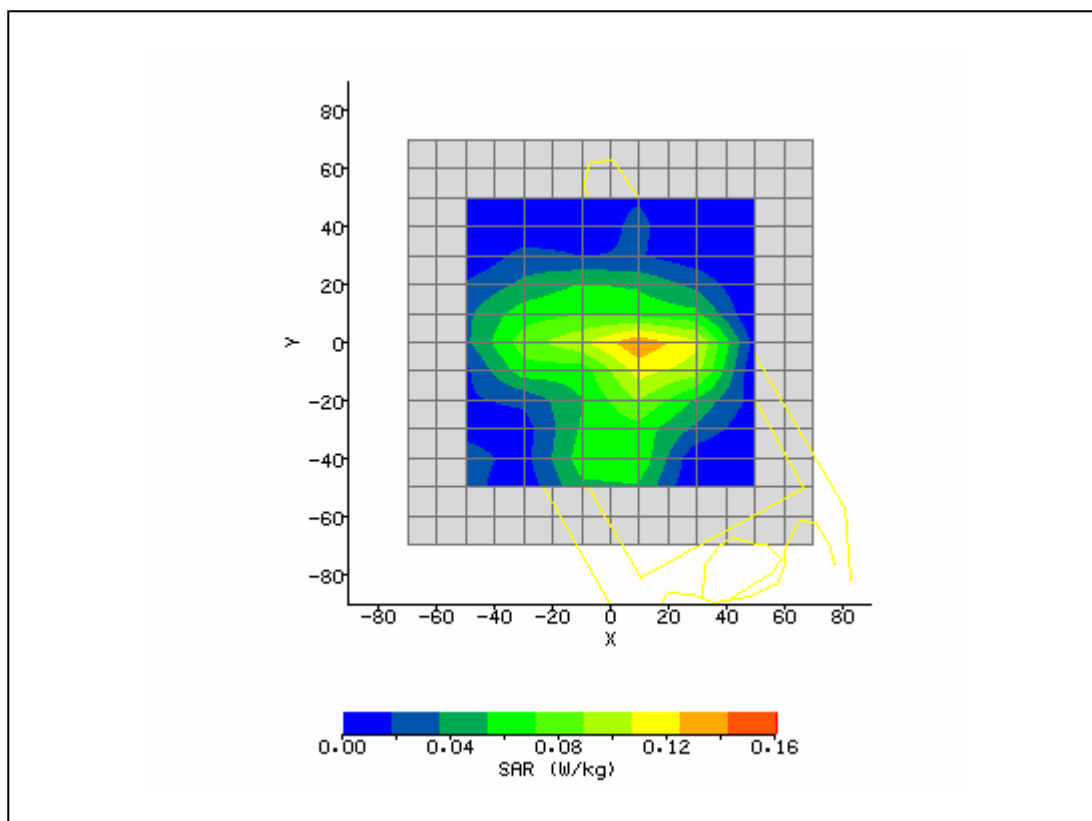

|                                           |                           |                                    |            |
|-------------------------------------------|---------------------------|------------------------------------|------------|
| <b>System / software:</b>                 | SARA2 / 2.40 VPM          | <b>Input Power Drift:</b>          |            |
| <b>Date / Time:</b>                       | 6/23/2006 9:36:14 AM      | <b>DUT Battery Model/No:</b>       |            |
| <b>Filename:</b>                          | bod190.txt                | <b>Probe Serial Number:</b>        | M0016      |
| <b>Ambient Temperature:</b>               | 22.8°C                    | <b>Liquid Simulant:</b>            | 850        |
| <b>Device Under Test:</b>                 | HHP D9500                 | <b>Relative Permittivity:</b>      | 55.90      |
| <b>Relative Humidity:</b>                 | 30%                       | <b>Conductivity:</b>               | 0.989      |
| <b>Phantom S/No:</b>                      | HeadBox1.csv              | <b>Liquid Temperature:</b>         | 22.0°C     |
| <b>Phantom Rotation:</b>                  | 0°                        | <b>Max SAR X-axis Location:</b>    | -16.00 mm  |
| <b>DUT Position:</b>                      | body back against phantom | <b>Max SAR Y-axis Location:</b>    | -17.00 mm  |
| <b>Antenna Configuration:</b>             | integral                  | <b>Max E Field:</b>                | 32.04 V/m  |
| <b>Test Frequency:</b>                    | 848.8MHz & 2402 BT        | <b>SAR 1g:</b>                     | 1.141 W/kg |
| <b>Air Factors:</b>                       | 2390 / 2143 / 2668        | <b>SAR 10g:</b>                    | 0.837 W/kg |
| <b>Conversion Factors:</b>                | .384 / .384 / .384        | <b>SAR Start:</b>                  | 0.412 W/kg |
| <b>Type of Modulation:</b>                |                           | <b>SAR End:</b>                    | 0.397 W/kg |
| <b>Modn. Duty Cycle:</b>                  |                           | <b>SAR Drift during Scan:</b>      | -3.61 %    |
| <b>Diode Compression Factors (V*200):</b> | 20 / 20 / 20              | <b>Probe battery last changed:</b> | 6/14/06    |
| <b>Input Power Level:</b>                 | 2 timeslots TX            | <b>Extrapolation:</b>              | poly4      |

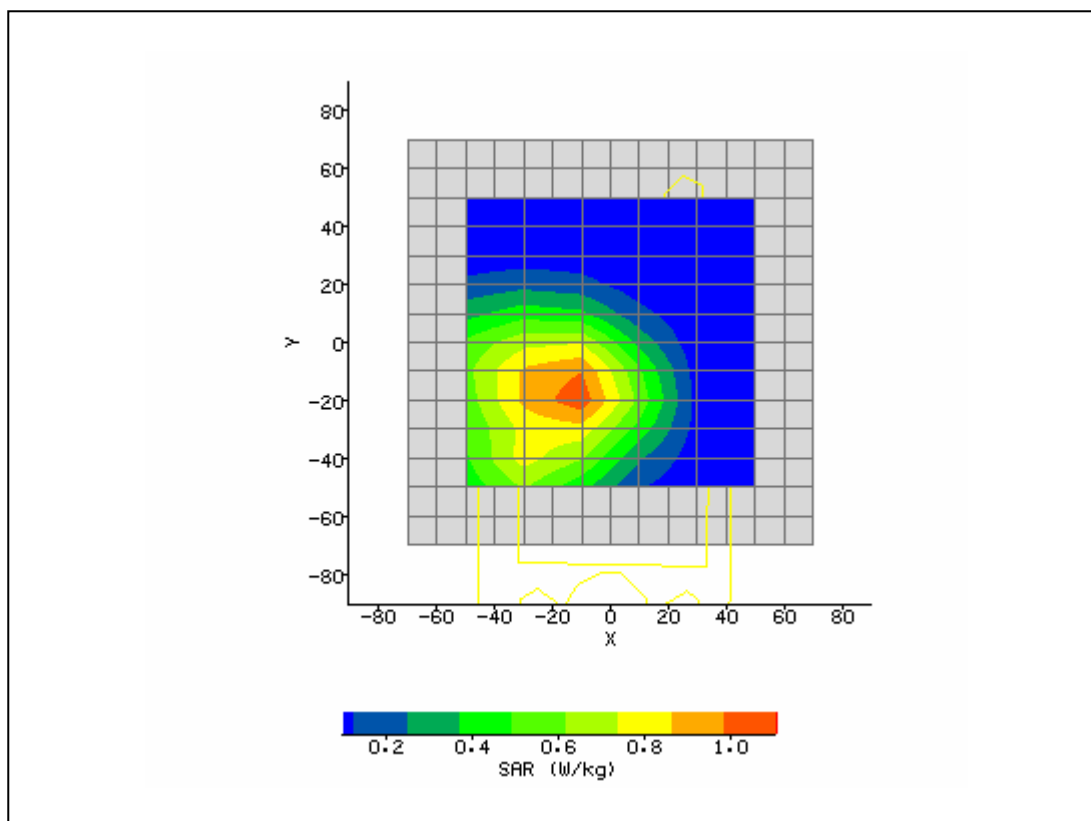

|                                    |                     |                             |            |
|------------------------------------|---------------------|-----------------------------|------------|
| System / software:                 | SARA2 / 2.40 VPM    | Input Power Drift:          |            |
| Date / Time:                       | 6/2/2006 4:44:09 PM | DUT Battery Model/No:       |            |
| Filename:                          | righttlt661.txt     | Probe Serial Number:        | M0016      |
| Ambient Temperature:               | 22.8°C              | Liquid Simulant:            | 1900       |
| Device Under Test:                 | HHP D9500           | Relative Permittivity:      | 39.62      |
| Relative Humidity:                 | 30%                 | Conductivity:               | 1.389      |
| Phantom S/No:                      | Head04_37.csv       | Liquid Temperature:         | 22.0°C     |
| Phantom Rotation:                  | 0°                  | Max SAR Y-axis Location:    | -6.00 mm   |
| DUT Position:                      | left tilt           | Max SAR Z-axis Location:    | -94.00 mm  |
| Antenna Configuration:             | integral            | Max E Field:                | 23.22 V/m  |
| Test Frequency:                    | 1850.2MHz& 2402 BT  | SAR 1g:                     | 0.596 W/kg |
| Air Factors:                       | 2390 / 2143 / 2668  | SAR 10g:                    | 0.337 W/kg |
| Conversion Factors:                | .418 / .418 / .418  | SAR Start:                  | 0.230 W/kg |
| Type of Modulation:                |                     | SAR End:                    | 0.233 W/kg |
| Modn. Duty Cycle:                  |                     | SAR Drift during Scan:      | 1.30 %     |
| Diode Compression Factors (V*200): | 20 / 20 / 20        | Probe battery last changed: | 5/24/2006  |
| Input Power Level:                 | max                 | Extrapolation:              | poly4      |

