

FCC Test Report

Report No.: AGC06754231202FR02

FCC ID	:	2AV80-BF1321-WF			
APPLICATION PURPOSE	:	Original Equipment			
PRODUCT DESIGNATION	:	Bluetooth+Wi-Fi body fat scale			
BRAND NAME	:	N/A			
MODEL NAME	:	BF1321-WF(BF1321-ITO-WF)/700029-DB, BF1807-WF, BF1807-ITO-WF, BF1513-WF, BF1513-ITO-WF, BF1901-WF, BF1901-ITO-WF, BF129-WF, BF129-ITO-WF, BF1708-WF, BF1708-ITO-WF			
APPLICANT	:	Yilai Enlighting Limited			
DATE OF ISSUE	:	Jan. 22, 2024			
STANDARD(S)	:	FCC Part 15 Subpart C §15.247			
REPORT VERSION	:	V1.0			
Contraction of the second seco					
<u>Attestation of </u>	ilc	bal Compliance (Shenzhen) Co., Ltd			





Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes	
V1.0	/	Jan. 22, 2024	Valid	Initial Release	



Table of Contents

1. General Information	5
2. Product Information	6
2.1 Product Technical Description	6
2.2 Table of Carrier Frequency	7
2.3 IEEE 802.11n Modulation Scheme	
2.4 Related Submittal(S) / Grant (S)	9
2.5 Test Methodology	9
2.6 Special Accessories	9
2.7 Equipment Modifications	9
2.8 Antenna Requirement	9
2.9 Description of Test Software	
3. Test Environment	11
3.1 Address of The Test Laboratory	11
3.2 Test Facility	11
3.3 Environmental Conditions	
3.4 Measurement Uncertainty	
3.5 List of Equipment Used	
4.System Test Configuration	
4.1 EUT Configuration	
4.2 EUT Exercise	
4.3 Configuration of Tested System	
4.4 Equipment Used In Tested System	
4.5 Summary of Test Results	
5. Description of Test Modes	
6. Duty Cycle Measurement	
7. RF Output Power Measurement	
7.1 Provisions Applicable	
7.2 Measurement Procedure	
7.3 Measurement Setup (Block Diagram of Configuration)	
7.4 Measurement Result	21
8. 6dB Bandwidth Measurement	
8.1 Provisions Applicable	
8.2 Measurement Procedure	
8.3 Measurement Setup (Block Diagram of Configuration)	
8.4 Measurement Result	
9. Power Spectral Density Measurement	



Report No.: AGC06754231202FR02 Page 4 of 82

9.1 Provisions Applicable	
9.2 Measurement Procedure	
9.3 Measurement Setup (Block Diagram of Configuration)	
9.4 Measurement Result	
10. Conducted Band Edge and Out-of-Band Emissions	41
10.1 Provisions Applicable	
10.2 Measurement Procedure	
10.3 Measurement Setup (Block Diagram of Configuration)	
10.4 Measurement Result	
11. Radiated Spurious Emission	53
11.1 Measurement Limits	
11.2 Measurement Procedure	
11.3 Measurement Setup (Block Diagram of Configuration)	
11.4 Measurement Result	
12. AC Power Line Conducted Emission	
12.1 Measurement Limits	
12.2 Block Diagram of Line Conducted Emission Test	
12.3 Preliminary Procedure of Line Conducted Emission Test	
12.4 Final Procedure of Line Conducted Emission Test	
12.5 Test Result of Line Conducted Emission Test	
Appendix I: Photographs of Test Setup	
Appendix II: Photographs of EUT	



1. General Information

Applicant	Yilai Enlighting Limited					
Address	Floor 6-8, Yilai building, No 3 Commercial Street, 3rd industrial Zone, Wuguishan Town, Zhongshan City, Guangdong Province, China					
Manufacturer	Yilai Enlighting Limited					
Address	Floor 6-8, Yilai building, No 3 Commercial Street, 3rd industrial Zone, Wuguishan Town, Zhongshan City, Guangdong Province, China					
Factory	Yilai Enlighting Limited					
Address	Floor 6-8, Yilai building, No 3 Commercial Street, 3rd industrial Zone, Wuguishan Town, Zhongshan City, Guangdong Province, China					
Product Designation	Bluetooth+Wi-Fi body fat scale					
Brand Name	N/A					
Test Model	BF1321-WF(BF1321-ITO-WF)/700029-DB					
Series Model(s)	BF1807-WF, BF1807-ITO-WF, BF1513-WF, BF1513-ITO-WF, BF1901-WF, BF1901-ITO-WF, BF129-WF, BF129-ITO-WF, BF1708-WF, BF1708-ITO-WF					
Difference Description	All the series models are the same as the test model except for the model names.					
Date of receipt of test item	Dec. 22, 2023					
Date of Test	Dec. 22, 2023 – Jan. 22, 2024					
Deviation from Standard	No any deviation from the test method					
Condition of Test Sample	Normal					
Test Result	Pass					
Test Report Form No	AGCER-FCC-2.4GWLAN-V1					

Note: The test results of this report relate only to the tested sample identified in this report.

 Prepared By
 Cici Li (Project Engineer)
 Jan. 22, 2024

 Reviewed By
 Calvin Liu (Reviewer)
 Jan. 22, 2024

 Approved By
 Max Zhang

> Max Zhang Authorized Officer

Jan. 22, 2024



2. Product Information

2.1 Product Technical Description

Equipment Type	WLAN 2.4G			
Frequency Band	2400MHz ~ 2483.5MHz			
Operation Frequency	2412MHz ~ 2462MHz			
Output Power (Average)	IEEE 802.11b:13.07dBm; IEEE 802.11g:12.54dBm; IEEE 802.11n(HT20):12.80dBm			
Output Power (Peak)	IEEE 802.11b:15.67dBm; IEEE 802.11g:20.10dBm; IEEE 802.11n(HT20):20.54dBm			
Modulation	802.11b:(DQPSK, DBPSK, CCK) DSSS 802.11g/n:(64-QAM,16-QAM, QPSK, BPSK) OFDM			
Data Rate	802.11b:1/2/5.5/11Mbps 802.11g: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps			
Number of channels	11			
Hardware Version	YLM2111-A2			
Software Version	7b84			
Antenna Designation	PCB Antenna			
Antenna Gain	2.54dBi			
Power Supply	DC 4.5V by battery			



2.2 Table of Carrier Frequency

For 2412-2462MHz:

11 channels are provided for 802.11b/g/n(HT20):

Channel	Frequency	Channel	Frequency	Channel	Frequency
01	2412 MHz	02	2417 MHz	03	2422 MHz
04	2427 MHz	05	2432 MHz	06	2437 MHz
07	2442 MHz	08	2447 MHz	09	2452 MHz
10	2457 MHz	11	2462 MHz		



2.3 IEEE 802.11n Modulation Scheme

MCS			N _{CBPS}		N _{DBPS}		Data Rate(Mbps)			
Index	Nss	Modulation	R	N _{BPSC}					8001	nsGI
					20MHz	40MHz	20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0
6	1	64-QAM	3/4	6	312	648	234	489	58.5	121.5
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0

Symbol	Explanation	
NSS	Number of spatial streams	
R	Code rate	
NBPSC	Number of coded bits per single carrier	
NCBPS	Number of coded bits per symbol	
NDBPS	Number of data bits per symbol	
GI	Guard interval	



2.4 Related Submittal(S) / Grant (S)

This submittal(s) (test report) is intended for FCC ID: 2AV8O-BF1321-WF, filing to comply with Part 2, Part 15 of the Federal Communication Commission rules.

2.5 Test Methodology

The tests were performed according to following standards:

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 15	Radio Frequency Devices
3	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

2.6 Special Accessories

Refer to section 4.4.

2.7 Equipment Modifications

Not available for this EUT intended for grant.

2.8 Antenna Requirement

Standard Requirement

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi

EUT Antenna:

The non-detachable antenna inside the device cannot be replaced by the user at will. The gain of the antenna is 2.54dBi.



2.9 Description of Test Software

For IEEE 802.11 mode:

The test utility software used during testing was "AmebaD_mptool_2V1".

Select COM COM8 ~	TX Setting RX Setting			TX Packet Setup	Packet Cour	nter	
Select COM	Ant TX	Ant R	x	Pattern	тх ок	0	
Control	A	→ A	~	Random	RX OK	1	
Initialize	Data Channe	6	~	Count			
Pwridx by Rate and Limit				0	RX ERR	0	
	Data Rate	CCK_1M	\sim	Length	Reset		
TX Power Tracking Start			_	1528	Advanced		
MAC Address	A		\sim	Interval	TX De:	st Set	
	TX Power B Index		~		FFFFFFFF	FFF	
Wlan Mode	c		View V	View Window			
~	D		~				
Testing Item	Preamble	Long_Pre	amł 🗸				
Continuous Tx 🗸 🗸	Bandwidth	20M	~				
	Limit CH	by BW					
Start Stop	Xtal.cap	64					

Software Setting Diagram

Test Mode	Channel	Power Index
802.11b	L/M/H	79
802.11g	L/M/H	90
802.11n-HT20	L/M/H	90



3. Test Environment

3.1 Address of The Test Laboratory

Laboratory: Attestation of Global Compliance (Shenzhen) Co., Ltd.

Address: 1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China

3.2 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L5488

Attestation of Global Compliance (Shenzhen) Co., Ltd. has been assessed and proved to follow CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories).

A2LA-Lab Cert. No.: 5054.02

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to follow ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC-Registration No.: 975832

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files with Registration 975832.

IC-Registration No.: 24842 (CAB identifier: CN0063)

Attestation of Global Compliance (Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the Certification and Engineering Bureau of Industry Canada. The acceptance letter from the IC is maintained in our files with Registration 24842.



3.3 Environmental Conditions

	Normal Conditions
Temperature range (°C)	15 - 35
Relative humidity range	20 % - 75 %
Pressure range (kPa)	86 - 106

3.4 Measurement Uncertainty

The reported uncertainty of measurement $y\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 2.9 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	U _c = 3.9 dB
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.9 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



3.5 List of Equipment Used

• R	RF Conducted Test System							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
\boxtimes	AGC-ER-E036	Spectrum Analyzer	Agilent	N9020A	MY49100060	2023-06-01	2024-05-31	
\boxtimes	AGC-ER-E062	Power Sensor	Agilent	U2021XA	MY54110007	2023-03-03	2024-03-02	
\boxtimes	AGC-ER-E063	Power Sensor	Agilent	U2021XA	MY54110009	2023-03-03	2024-03-02	
\boxtimes	AGC-EM-A152	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
\boxtimes	AGC-ER-E083	Signal Generator	Agilent	E4421B	US39340815	2023-06-01	2024-05-31	
	N/A	RF Connection Cable	N/A	1#	N/A	Each time	N/A	
\boxtimes	N/A	RF Connection Cable	N/A	2#	N/A	Each time	N/A	

• F	Radiated Spurious Emission							
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)	
	AGC-EM-E046	EMI Test Receiver	R&S	ESCI	10096	2023-02-18	2024-02-17	
\boxtimes	AGC-EM-E116	EMI Test Receiver	R&S	ESCI	100034	2023-06-03	2024-06-02	
\boxtimes	AGC-EM-E061	Spectrum Analyzer	Agilent	N9010A	MY53470504	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-E086	Loop Antenna	ZHINAN	ZN30900C	18051	2022-03-12	2024-03-11	
\boxtimes	AGC-EM-E001	Wideband Antenna	SCHWARZBECK	VULB9168	D69250	2023-05-11	2025-05-10	
\boxtimes	AGC-EM-E029	Broadband Ridged Horn Antenna	ETS	3117	00034609	2023-03-23	2024-03-22	
\boxtimes	AGC-EM-E082	Horn Antenna	SCHWARZBECK	BBHA 9170	#768	2023-09-24	2025-09-23	
\boxtimes	AGC-EM-E146	Pre-amplifier	ETS	3117-PA	00246148	2022-08-04	2024-08-03	
\boxtimes	AGC-EM-A119	2.4G Filter	SongYi	N/A	N/A	2023-06-01	2024-05-31	
\boxtimes	AGC-EM-A138	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	
	AGC-EM-A139	6dB Attenuator	Eeatsheep	LM-XX-6-5W	N/A	2023-06-09	2024-06-08	

AC Power Line Conducted Emission							
Used Equipment No. Test Equipment Manufacturer Model No		Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)		
	AGC-EM-E045	EMI Test Receiver	R&S	ESPI	101206	2023-06-03	2024-06-02
	AGC-EM-A130	6dB Attenuator	Eeatsheep	LM-XX-6-5W	DC-6GZ	2023-06-09	2024-06-08
	AGC-EM-E023	AMN	R&S	100086	ESH2-Z5	2023-06-03	2024/06/02

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



• Te	Test Software						
Used	Equipment No.	Test Equipment	Manufacturer	Model No.	Version Information		
	AGC-EM-S004	RE Test System	Tonscend	TS ⁺ Ver2.1(JS32-RE)	4.0.0.0		
	AGC-EM-S011	RSE Test System	Tonscend	TS⁺ Ver2.1(JS36-RSE)	4.0.0.0		
	AGC-EM-S001	CE Test System	R&S	ES-K1	V1.71		
\square	AGC-ER-S009	BT/WIFI Test System	Tonscend	JS1120-3	2.6.77.0518		



4.System Test Configuration


4.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

4.2 EUT Exercise

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

4.3 Configuration of Tested System

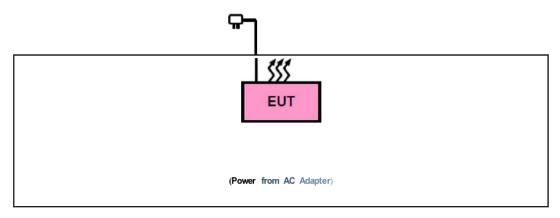

4.4 Equipment Used In Tested System

The following peripheral devices and interface cables were connected during the measurement:

Test Accessories Come From The Laboratory

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1				-	

Test Accessories Come From The Manufacturer

No.	Equipment	Model No.	Manufacturer	Specification Information	Cable
1					



4.5 Summary of Test Results

Item	FCC Rules	Description of Test	Result
1	§15.203&15.247(b)(4)	Antenna Equipment	Pass
2	§15.247 (b)(1)	RF Output Power	Pass
3	§15.247 (a)(1)	6 dB Bandwidth	Pass
4	§15.247 (e)	Power Spectral Density	Pass
5	§15.247 (d)	Conducted Band Edge and Out-of-Band Emissions	Pass
6	§15.247 (d)&15.209	Radiated Spurious Emission	Pass
7	§15.207	AC Power Line Conducted Emission	Not applicable

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



5. Description of Test Modes

	Summary table of Test Cases				
	Data Rate / Modulation				
Test Item	2.4G WLAN – 802.11b/g/n (DSSS/OFDM)				
Radiated & Conducted Test Cases	Mode 1: 802.11b_TX CH01_2412 MHz_1 Mbps(Battery powered) Mode 2: 802.11b_TX CH06_2437 MHz_1 Mbps(Battery powered) Mode 3: 802.11b_TX CH11_2462 MHz_1 Mbps(Battery powered) Mode 4: 802.11g_TX CH01_2412 MHz_6 Mbps(Battery powered) Mode 5: 802.11g_TX CH06_2437 MHz_6 Mbps(Battery powered) Mode 6: 802.11g_TX CH11_2462 MHz_6 Mbps (Battery powered) Mode 7: 802.11n-HT20_TX CH01_2412 MHz_MCS0 Mbps(Battery powered) Mode 8: 802.11n-HT20_TX CH06_2437 MHz_ MCS0 Mbps(Battery powered) Mode 9: 802.11n-HT20_TX CH11_2462 MHz_ MCS0 Mbps(Battery powered)				
AC Conducted Emission	N/A				
Note: 1. Only the result of the	Note: 1. Only the result of the worst case was recorded in the report, if no other cases.				

2. The battery is full-charged during the test.

3. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

4. For Conducted Test method, a temporary antenna connector is provided by the manufacture.



6. Duty Cycle Measurement

2.4GHz WLAN (DTS) operation is possible in 20MHz, and 40MHz channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = Peak. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

U	, ,				
Operating mode	Data rates (Mbps)	Duty Cycle (%)	Duty Cycle Factor (dB)	1/ T Minimum VBW (kHz)	Average Factor (dB)
IEEE 802.11b	1	100			
IEEE 802.11g	6	100			
IEEE 802.11n-HT20	MCS0	100			

Remark:

- 1. Duty Cycle factor = 10 * log (1/ Duty cycle)
- 2. Average factor = 20 log10 Duty Cycle
- 3. The duty cycle of each frequency band mode reflects the determination requirements of the low channel measurement value.



The test plots as follows:

IEEE 802.7	11b	IEEE 802.11g	
Aglend spectrum Audgrer - swap 54 R 89 99 6 AC CORREC SPECIAL Center Freq 2.412000000 GHz PRO: Fast IFGaincLow Address 40 dB	ALIGNAUTO 10:40:33 AM 3an 03, 2024 Type: RMS TRACE IP 2 is a so Trype: CMS trace IP 2 is a so trype CMN 2014 State St	Ayden Spectrum Analyzer Swegt AA 20 8 M State CORREC SERVED/T ALISYAA/TO 12052/05 M/Jan 03, 3024 Center Freq 2.412000000 GHz PK0 Frait → Trig:Free Run IFGainclow #Atten: 40 dB cell	Frequency Auto Tune
10 dB/dlv Ref 30.00 dBm Log	Center Freq 2.41200000 GHz	10 dB/dlv Ref 30.00 dBm	Center Freq 2.412000000 GHz
	2.41200000 GHz		2.41200000 GH2 Start Freq 2.41200000 GHz
-30 0 -40 0 -50 0	Stop Freq 2.41200000 GHz		Stop Freq 2.41200000 GHz
Center 2.412000000 GHz Res BW 8 MHz #VBW 50 MHz*	Span 0 Hz Sweep 50.66 ms (10000 pts) Auto Mitz	Center 2.412000000 GHz Span 0 Hz Res BW 8 MHz #VBW 50 MHz* Sweep 50.11 ms (2000 pts)	CF Step 8.000000 MHz Auto Man
INFR MODE TRC SCL X Y PUNCTION			Freq Offset 0 Hz
IEEE 802.11n	-HT20		
Philo: Fast Trig: Free Run If Galin.Low 10 dB/div Ref 30.00 dBm 200	ALIONATIO 1109/20 AH Im 03, 204 Type: RMS THAC IP 24 57 model The IP 24 57 model Frequency Auto Tune Center Freq Callow Start Freq Sweep 50.11 ms (2000 pts) E 800000 MHz Ruction work E 800000 MHz FreqUency Man FreqUency Man FreqUency Auto Tune Center Freq 2.41200000 GHz Sweep 50.11 ms (2000 pts) B.00000 MHz Freq Offset O Hz		
9 9 10 11 11 11 11 11 11 11 11	status		



7. RF Output Power Measurement

7.1 Provisions Applicable

For DTSs employing digital modulation techniques operating in the bands 2400-2483.5 MHz, the maximum peak conducted output power shall not exceed 1 W.

7.2 Measurement Procedure


Method PM is Measurement using an RF Peak power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.1.3
- The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast-responding diode detector.

Method PM is Measurement using an RF average power meter. The procedure for this method is as follows:

- 1. The testing follows the ANSI C63.10 Section 11.9.2.3
- 2. Measurements may be performed using a wideband RF power meter with a thermocouple detector or equivalent if all of the following conditions are satisfied:
- 3. The EUT is configured to transmit continuously, or to transmit with a constant duty cycle.
- 4. At all times when the EUT is transmitting, it shall be transmitting at its maximum power control level.
- 5. The integration period of the power meter exceeds the repetition period of the transmitted signal by at least a factor of five.
- 6. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 7. Measure the average power of the transmitter. This measurement is an average over both the ON and OFF periods of the transmitter.
- Adjust the measurement in dBm by adding [10 log (1 / D)], where D is the duty cycle {e.g., [10 log (1 / 0.25)], if the duty cycle is 25%}.
- 9. Record the test results in the report.

7.3 Measurement Setup (Block Diagram of Configuration)

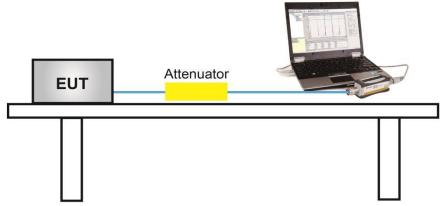



7.4 Measurement Result

Test Data of Conducted Output Power								
Test Mode	Test Channel (MHz)	Average Power (dBm)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
802.11b	2412	12.68	15.28	≪30	Pass			
	2437	12.78	15.39	≤30	Pass			
	2462	13.07	15.67	≪30	Pass			
802.11g	2412	12.16	19.70	≪30	Pass			
	2437	12.31	19.86	≪30	Pass			
	2462	12.54	20.10	≪30	Pass			
802.11n20	2412	12.80	20.54	≪30	Pass			
	2437	12.11	19.85	≪30	Pass			
	2462	12.41	20.12	≤30	Pass			



8. 6dB Bandwidth Measurement

8.1 Provisions Applicable


The minimum 6dB bandwidth shall be 500 kHz.

8.2 Measurement Procedure

The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).

- 1. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- 2. Set to the maximum power setting and enable the EUT transmit continuously.
- 3. For 6dB Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement.
- For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the OBW and set the Video bandwidth (VBW) ≥ 3 * RBW.
- 5. Detector = peak
- 6. Trace mode = max hold.
- 7. Sweep = auto couple.
- 8. Allow the trace to stabilize.
- 9. Measure and record the results in the test report.

8.3 Measurement Setup (Block Diagram of Configuration)

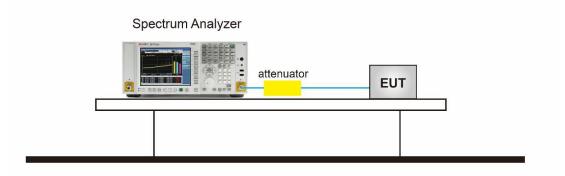





8.4 Measurement Result

Test Data of Occupied Bandwidth and DTS Bandwidth						
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	DTS Bandwidth (MHz)	DTS Bandwidth Limits (MHz)	Pass or Fail	
802.11b	2412	14.087	9.097	≥0.5	Pass	
	2437	14.087	9.094	≥0.5	Pass	
	2462	14.084	9.097	≥0.5	Pass	
802.11g	2412	16.641	16.532	≥0.5	Pass	
	2437	16.638	16.534	≥0.5	Pass	
	2462	16.632	16.532	≥0.5	Pass	
802.11n20	2412	17.787	17.742	≥0.5	Pass	
	2437	17.790	17.729	≥0.5	Pass	
	2462	17.787	17.743	≥0.5	Pass	




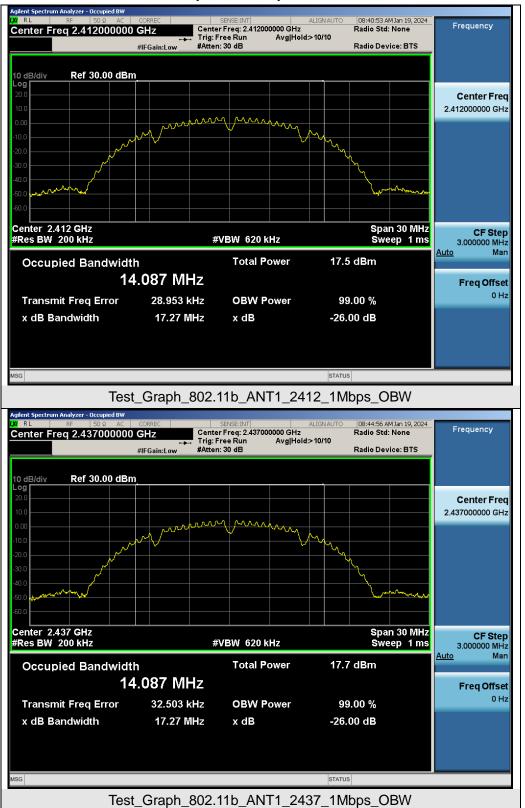


Test Graphs of Occupied Bandwidth







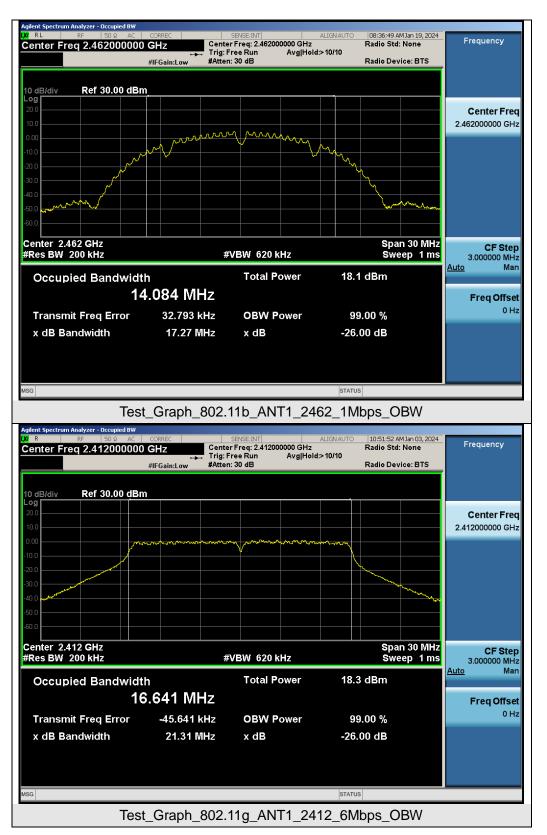







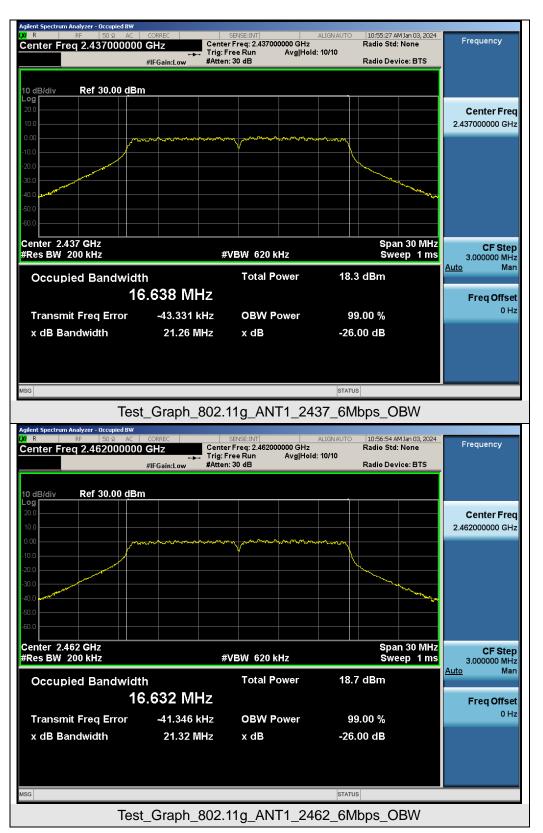






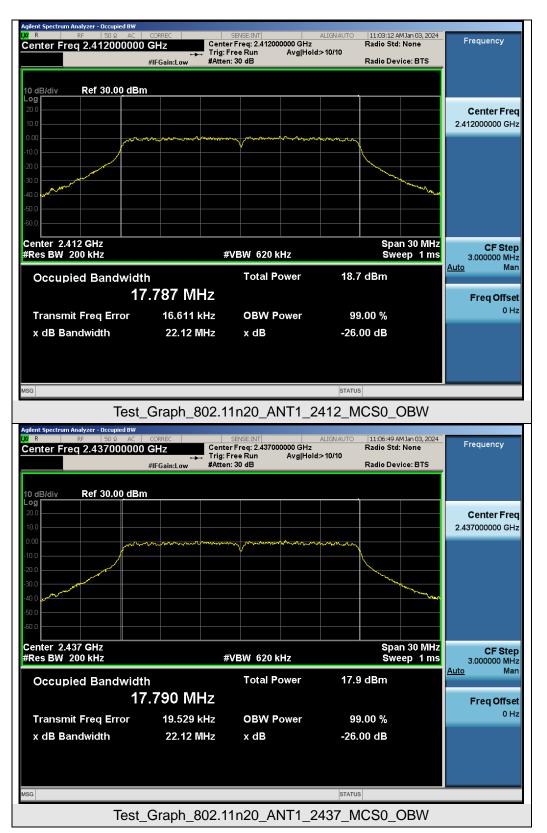






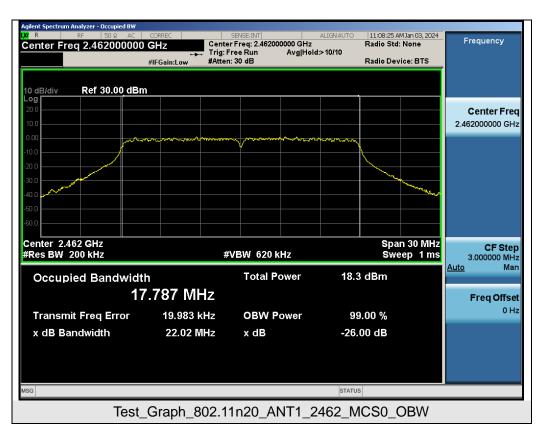




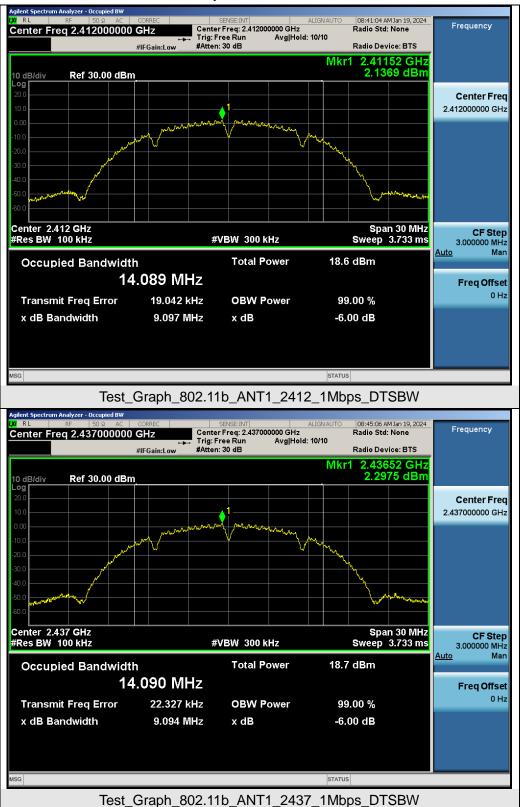

Test Graphs of DTS Bandwidth




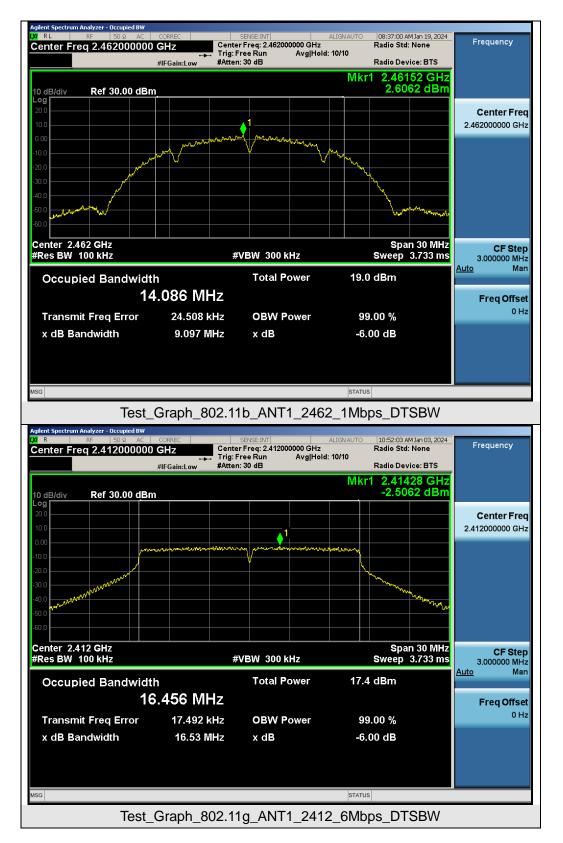








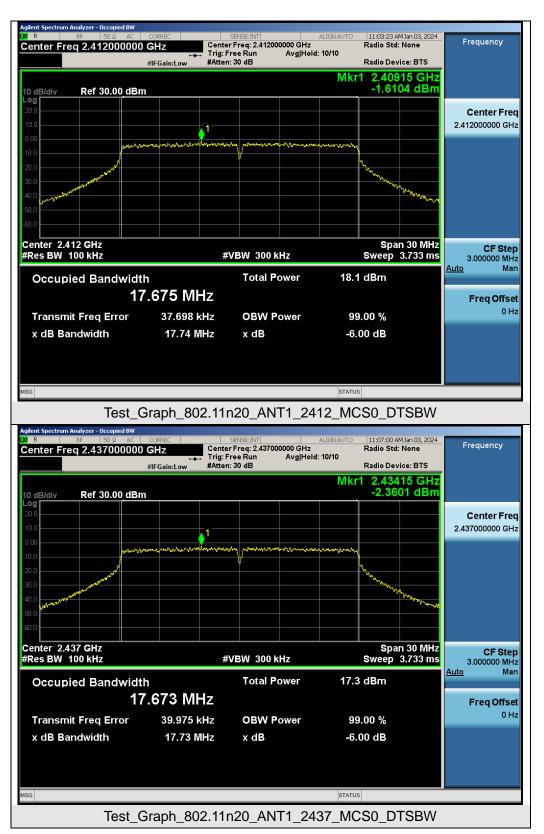



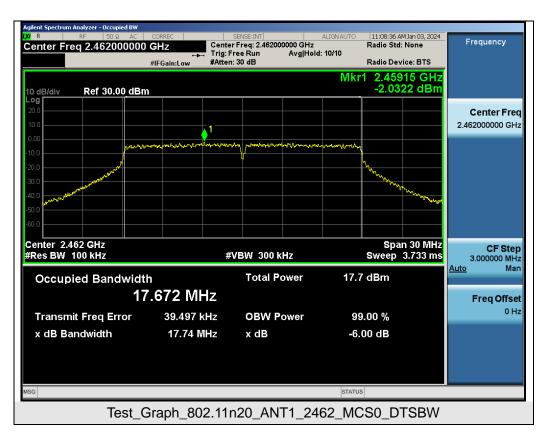



9. Power Spectral Density Measurement

9.1 Provisions Applicable

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than

8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.2 Measurement Procedure

SFor Peak power spectral density test:


- 1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 3. Set the RBW = 20 kHz.
- 4. Set the VBW \geq [3 × RBW].
- 5. Set the Span \geq [1.5 × DTS bandwidth].
- 6. Sweep time=Auto couple.
- 7. Detector function=Peak.
- 8. Trace Mode=Max hold.
- When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission.
- 11. The indicated level is the peak output power, after any corrections for external attenuators and cables.

For Average power spectral density test:

- 1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVPSD.
- 2. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator.
- 3. Set Span to at least 1.5 times the OBW.
- 4. Set RBW to:3 kHz \leq RBW \leq 100 kHz.
- 5. Set VBW≥[3×RBW].
- 6. Sweep Time=Auto couple.
- 7. Detector function=RMS (i.e., power averaging).
- 8. Trace average at least 100 traces in power averaging (rms) mode.
- 9. When the measurement bandwidth of Maximum PSD is specified in 3 kHz, add a constant factor 10*log(3kHz/20kHz) = -8.23 dB to the measured result.
- 10. Determine according to the duty cycle of the equipment: when it is less than 98%, follow the steps below.
- 11. Add [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times (because the measurement represents an average over both the ON and OFF times of the transmission). For example, add [10 log (1/0.25)] = 6 dB if the duty cycle is 25%.
- 12. Record the test results in the report.



9.3 Measurement Setup (Block Diagram of Configuration)

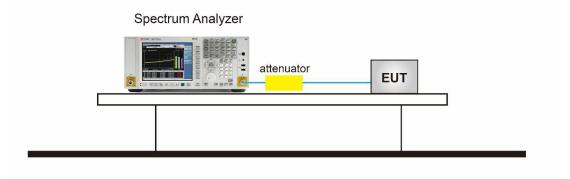


9.4 Measurement Result

Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel (MHz)	Power density (dBm/20kHz)	Power density (dBm/3kHz)	Limit (dBm/3kHz)	Pass or Fail		
802.11b	2412	-3.361	-11.600	≪8	Pass		
	2437	-3.291	-11.530	≪8	Pass		
	2462	-2.879	-11.118	≪8	Pass		
802.11g	2412	-6.891	-15.130	≪8	Pass		
	2437	-6.755	-14.994	≪8	Pass		
	2462	-6.444	-14.683	≪8	Pass		
802.11n20	2412	-5.815	-14.054	≪8	Pass		
	2437	-6.353	-14.592	≪8	Pass		
	2462	-6.235	-14.474	≪8	Pass		


Note: Power density(dBm/3kHz) = Power density(dBm/20kHz) - 10*log(20/3).



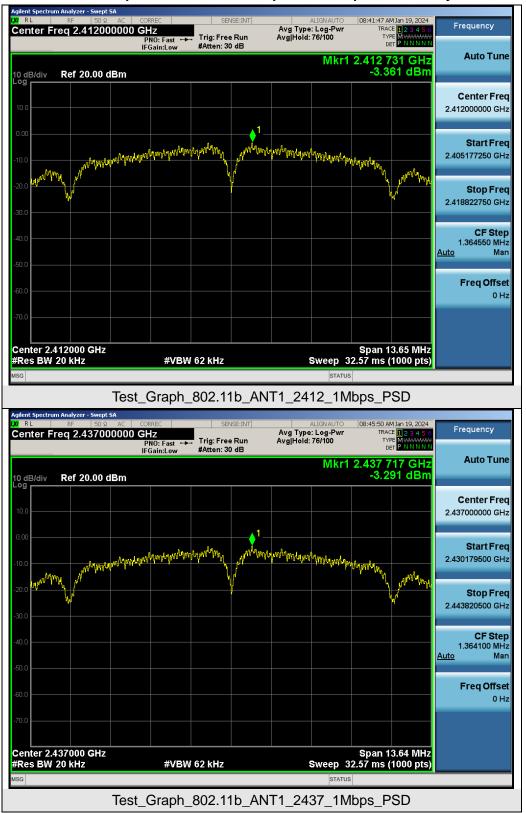


Test Graphs of Conducted Output Power Spectral Density



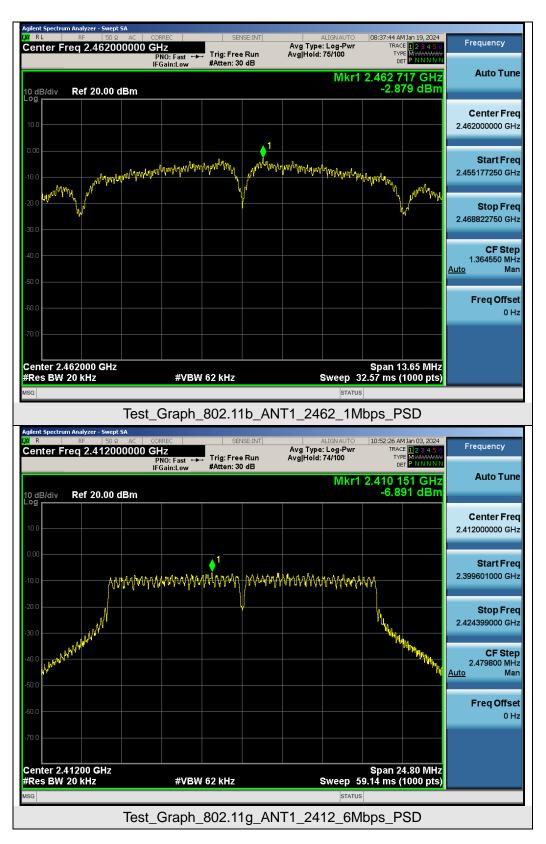


Report No.: AGC06754231202FR02 Page 38 of 82




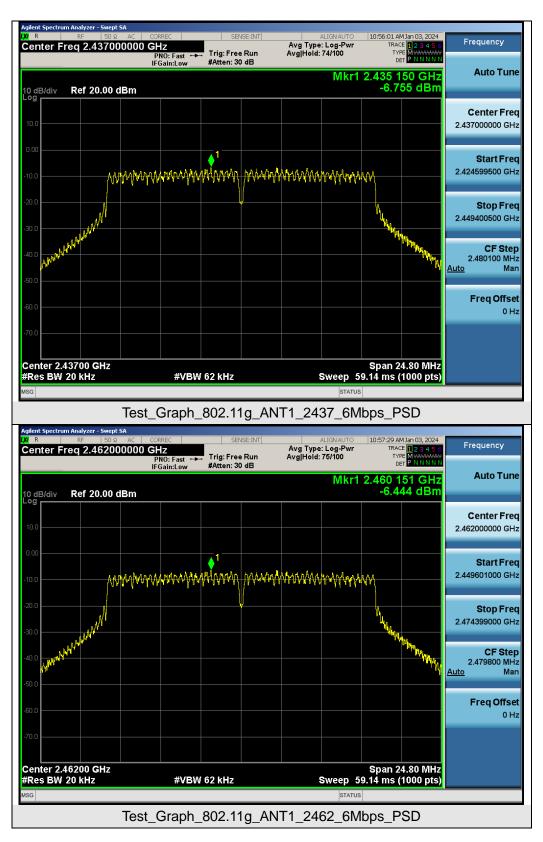


Report No.: AGC06754231202FR02 Page 39 of 82



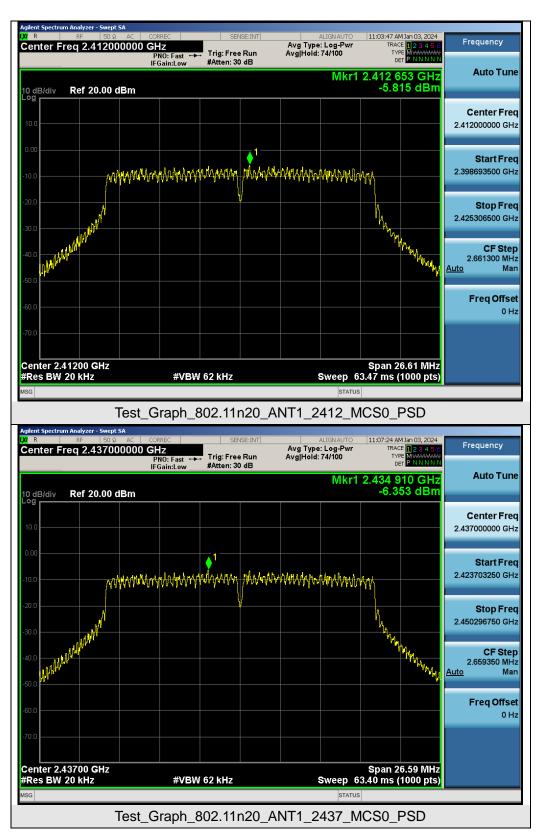





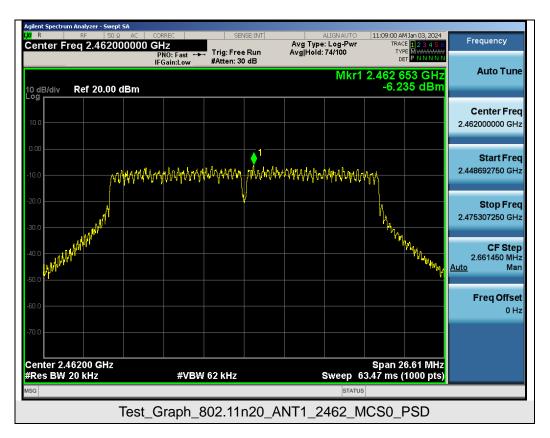



10. Conducted Band Edge and Out-of-Band Emissions

10.1 Provisions Applicable

In any 100kHz bandwidth outside the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power.

10.2 Measurement Procedure


Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Use the following spectrum analyzer settings:

- Step 1: Measurement Procedure In-Band Reference Level
 - 1. Set instrument center frequency to DTS channel center frequency.
 - 2. Set the span to \geq 1.5 times the DTS bandwidth.
 - 3. Set the RBW = 100 kHz.
 - 4. Set the VBW \geq 3 x RBW.
 - 5. Detector = peak.
 - 6. Sweep time = auto couple.
 - 7. Trace mode = max hold.
 - 8. Allow trace to fully stabilize.
 - 9. Use the peak marker function to determine the maximum PSD level.
 - 10. Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
- Step 2: Measurement Procedure Out of Band Emission
 - 1. Set RBW = 100 kHz.
 - 2. Set VBW \ge 300 kHz.
 - 3. Detector = peak.
 - 4. Sweep = auto couple.
 - 5. Trace Mode = max hold.
 - 6. Allow trace to fully stabilize.
 - 7. Use the peak marker function to determine the maximum amplitude level.


Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

10.3 Measurement Setup (Block Diagram of Configuration)

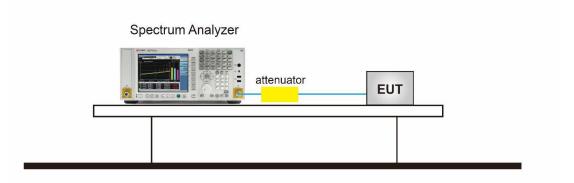




10.4 Measurement Result

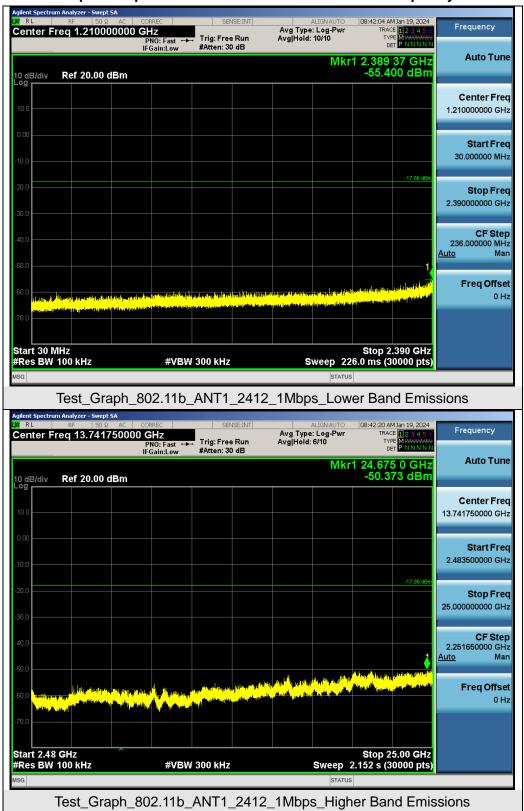


Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands




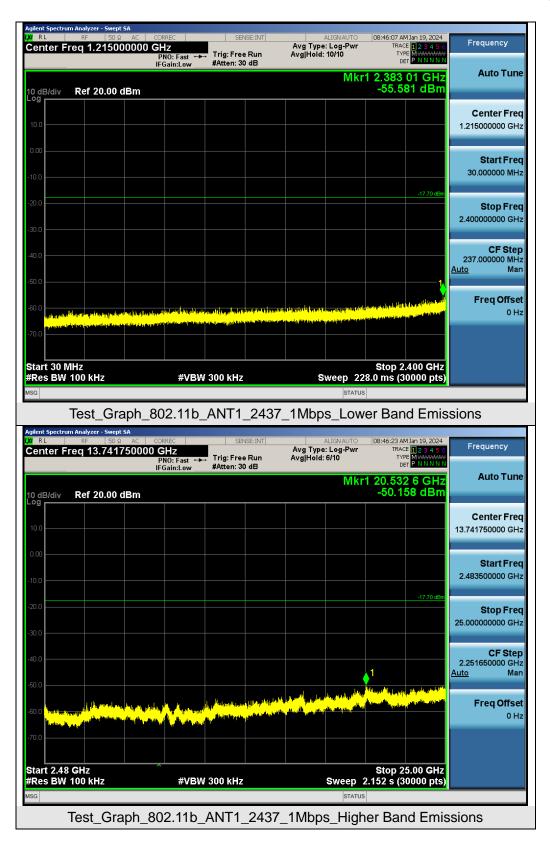



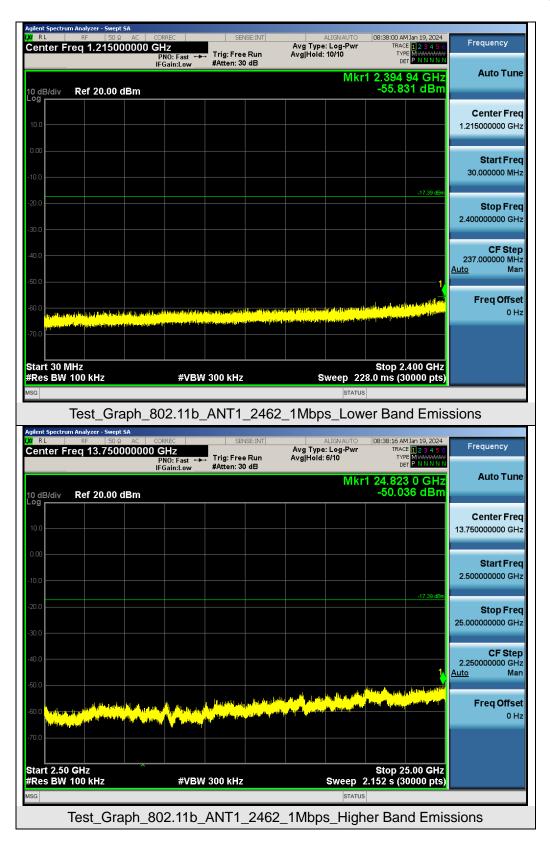




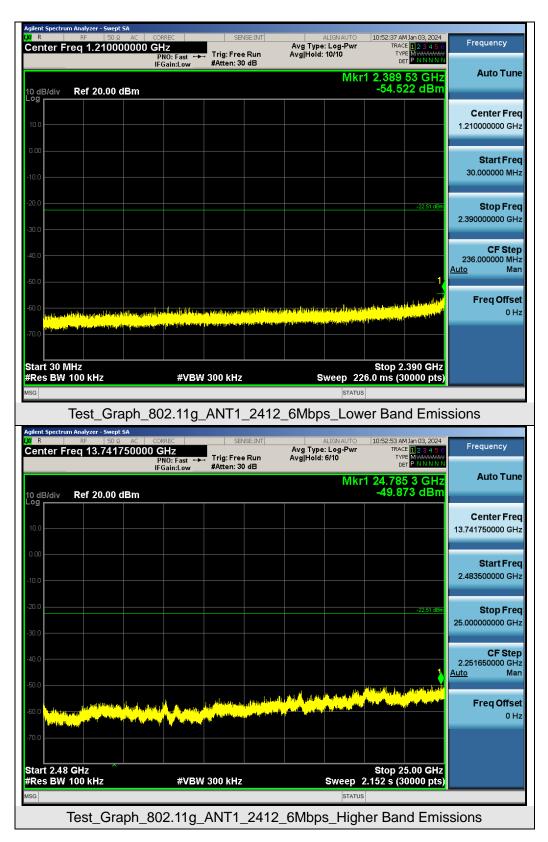


Report No.: AGC06754231202FR02 Page 46 of 82



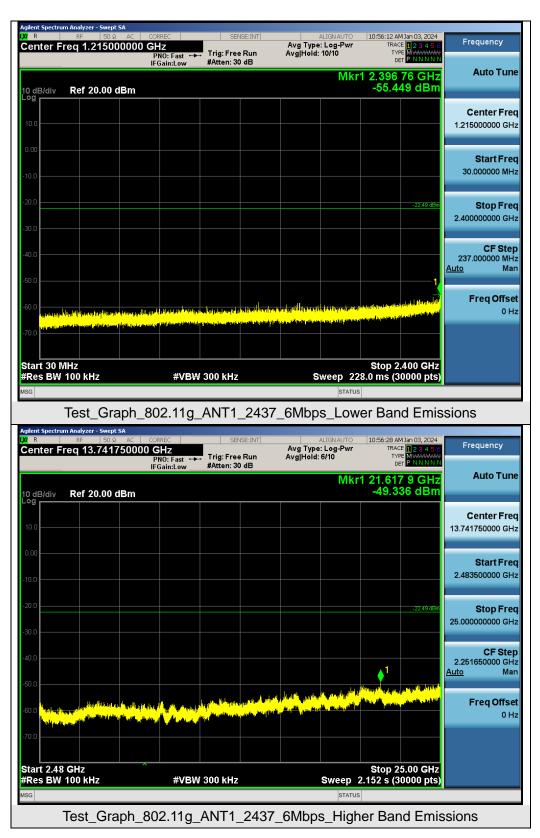




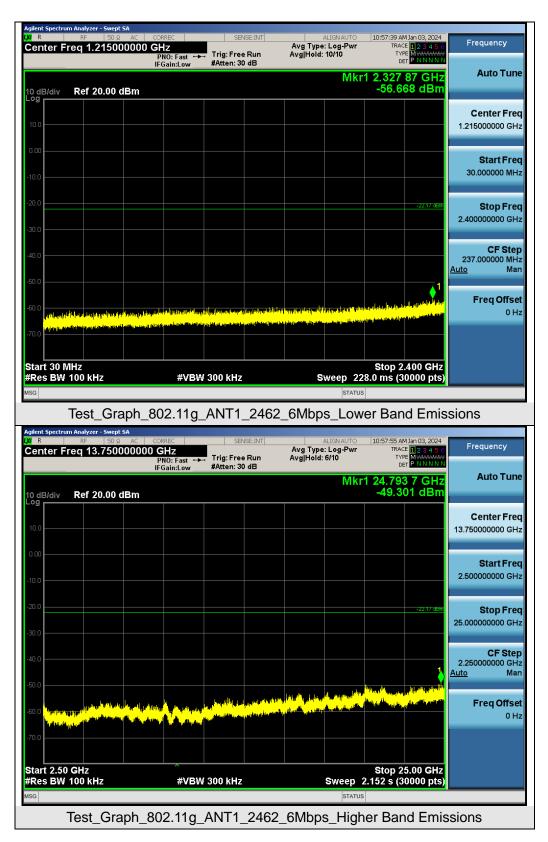


Report No.: AGC06754231202FR02 Page 48 of 82



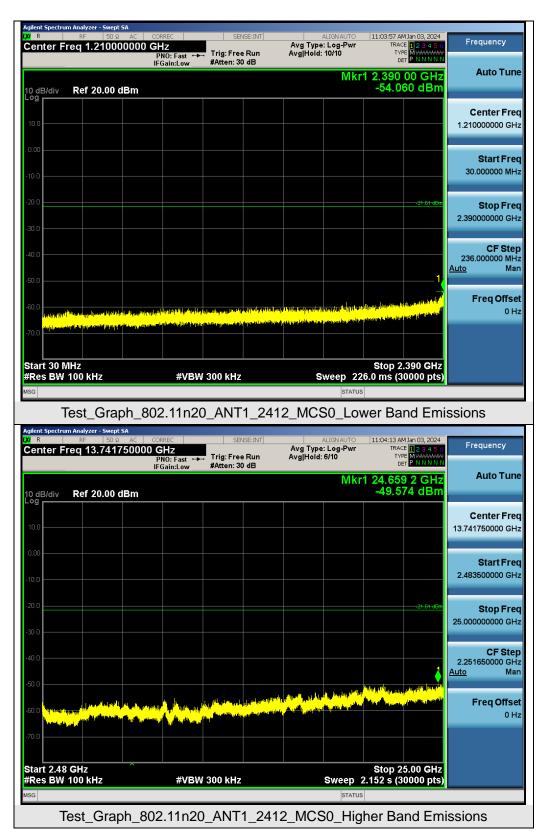


Report No.: AGC06754231202FR02 Page 49 of 82



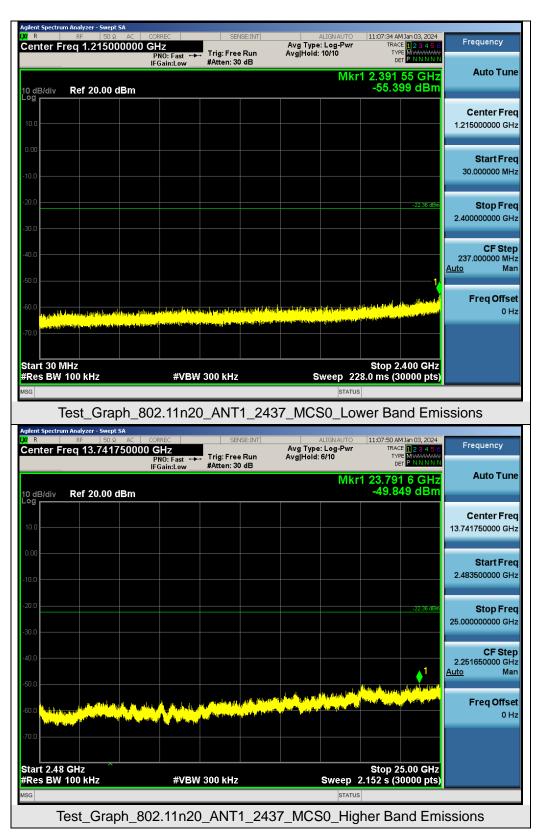

Report No.: AGC06754231202FR02 Page 50 of 82



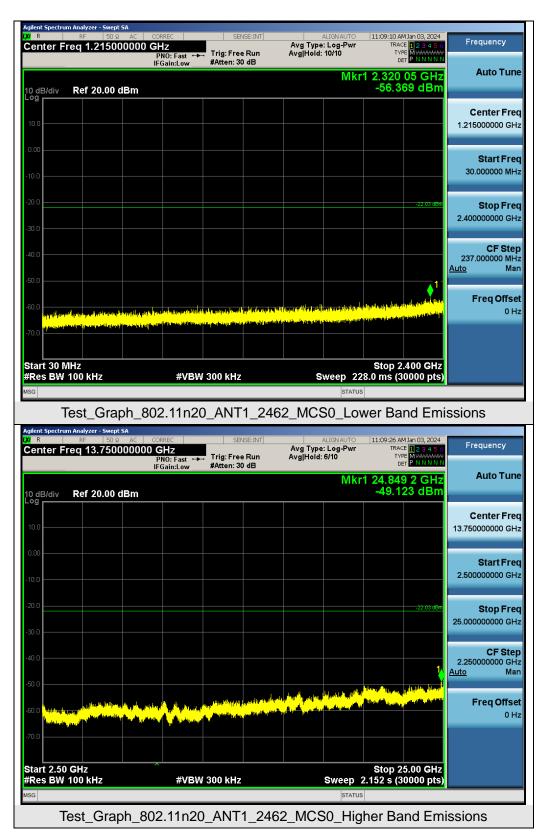





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands



Agilent Spectrum Analyzer - Swept SA					
κ RF 50 Ω AC Center Freq 2.406000000 Γ <thγ< th=""> Γ <th td="" γ<=""><td>CORREC SENSE:IN</td><td>Avg Type: Log-Pwr</td><td>11:04:22 AM Jan 03, 2024 TRACE 123456</td><td>Frequency</td></th></thγ<>	<td>CORREC SENSE:IN</td> <td>Avg Type: Log-Pwr</td> <td>11:04:22 AM Jan 03, 2024 TRACE 123456</td> <td>Frequency</td>	CORREC SENSE:IN	Avg Type: Log-Pwr	11:04:22 AM Jan 03, 2024 TRACE 123456	Frequency
10 dB/div Ref 20.00 dBm	PNO: Fast Trig: Free Rur IFGain:Low #Atten: 30 dB		400 000 0 GHz -33.462 dBm	Auto Tune	
10.0 0.00 -10.0		Jumpressingungungungungungungungungungungungungun	anne and an and a start	Center Freq 2.406000000 GHz	
-20.0	where the second s		-21 AL MAR	Start Freq 2.39000000 GHz	
-50.0 -60.0 -70.0				Stop Freq 2.422000000 GHz	
Start 2.39000 GHz #Res BW 100 kHz	#VBW 300 kHz	Sweep 4.0	Stop 2.42200 GHz 00 ms (30000 pts)	CF Step 3.200000 MHz <u>Auto</u> Man	
MKR MODE TRC SCL × 1 N 1 f 2.409 1 2 N 1 f 2.400 0 3 4 5 5 5	152 6 GHz -1.047 dBm 000 0 GHz -33.462 dBm	FUNCTION FUNCTION WIDTH	FUNCTION VALUE	Freq Offset 0 Hz	
6 7 8 9 10 11					
MSG		STATUS			
Test Graph 802	.11n20 ANT1 24 ²	12 MCS0 Lower	Band Edge E	missions	

Note: Emissions from 2483.5-2500MHz which fall in the restricted bands had been considered with the radiated emission limits specified.





11. Radiated Spurious Emission

11.1 Measurement Limits

15.209(a) Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.2 Measurement Procedure

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds.
 Any redating alternative (provided the transmitter operates for longer than 0.1 seconds), or in cases where the

Stamp" is deemed to be invalid. Copying or excerpting portion of, or latering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.
- The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start Stop Frequency	1GHz~26.5GHz
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average

Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP



• Quasi-Peak Measurements below 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. Span was set greater than 1MHz
- 3. RBW = as shown in the table above
- 4. Detector = CISPR quasi-peak
- 5. Sweep time = auto couple
- 6. Trace was allowed to stabilize

• Peak Measurements above 1GHz

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW = 3MHz
- 4. Detector = peak
- 5. Sweep time = auto couple
- 6. Trace mode = max hold
- 7. Trace was allowed to stabilize


• Average Measurements above 1GHz (Method VB)

- 1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
- 2. RBW = 1MHz
- 3. VBW setting requirements are as follows:
- 4. If the EUT is configured to transmit with duty cycle \ge 98%, set VBW = 10 Hz.
- 5. If the EUT duty cycle is < 98%, set VBW \ge 1/T. T is the minimum transmission duration.
- 6. Detector = Peak
- 7. Sweep time = auto
- 8. Trace mode = max hold




11.3 Measurement Setup (Block Diagram of Configuration)




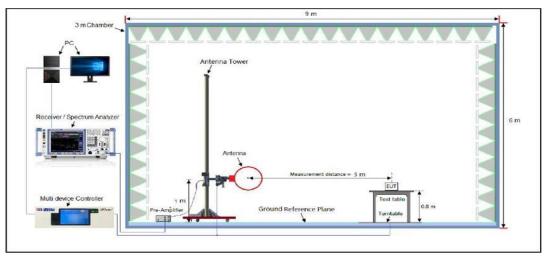

Radiated Emission Test Setup 30MHz-1000MHz

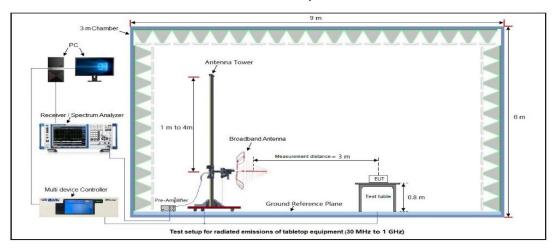

Radiated Emission Test Setup Above 1000MHz

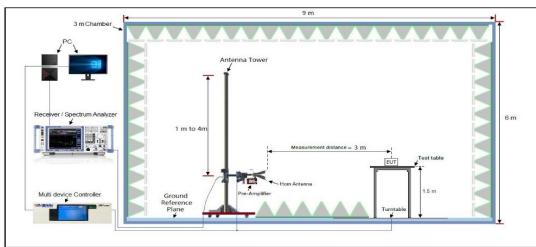

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



11.4 Measurement Result

Radiated Emission Below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.

			Ra	diated Er	nission Test	Results at 3	BOMHz-1G		
	lame	Blue	etooth+Wi-Fi	body fat	scale	Model Nar	ne	BF1321-WF / 700029-DB	(BF1321-ITO-WF)
Temp	erature	22.8	D°C			Relative H	umidity	59.4%	
Press	ure	960	hPa			Test Volta	ge	Normal Volta	ige
Worst	Mode	Moc	le 3			Antenna P	olarity	Horizontal	
						-			
	130				FCC) Part 15.207			
	120 110								
	100								
	90								
	80								
	[W/\70 60 50								
	_								
	40							4 5	6
	20			\sim	1 million of the second	m m	mahannabaha	mother when the work when	
	10					the second second	Null the second		
	-10								
	30M				100M				1G
		QP Lim		ĸ	Fre	quency[Hz]			
Final I									
	Data List								
NO.	Freq [MHz		Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
NO. 1	Freq	<u>z]</u>							Polarity Horizontal
	Freq [MHz	2] Э	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	-
1	Freq [MHz 36.79	2] 9 75	[dBµV/m] 31.57	[dB] 11.23	[dBµV/m] 40.00	[dB] 8.43	[cm] 100	[°] 200	Horizontal
1 2	Freq [MHz 36.79 102.7	2] 9 75 4	[dBµV/m] 31.57 29.41	[dB] 11.23 16.93	[dBµV/m] 40.00 43.50	[dB] 8.43 14.09	[cm] 100 100	[°] 200 10	Horizontal Horizontal
1 2 3	Freq [MHz 36.79 102.7 119.2	2] 29 75 4 74	[dBµV/m] 31.57 29.41 30.86	[dB] 11.23 16.93 15.70	[dBµV/m] 40.00 43.50 43.50	[dB] 8.43 14.09 12.64	[cm] 100 100 100	[°] 200 10 10	Horizontal Horizontal Horizontal



			Rad	liated Em	ission Test	Results at 3	BOMHz-1G	Hz	
EUT N	lame	Blue	etooth+Wi-Fi	body fat s	cale	Model Na	me	BF1321-WF(E / 700029-DB	BF1321-ITO-WF)
Temp	erature	22.8	S°C			Relative H	lumidity	59.4%	
Press	ure	960	nPa			Test Volta	ige	Normal Voltag	je
Worst	Mode	Mod	le 3			Antenna I	Polarity	Vertical	
	130				FCC	Part 15.207			
	110 100 90 80 70 60 50 40 30 20 10 0 -10 30M	QP Lim QP Dete		10	M M Free	ıuency[Hz]		45 M	16
Final [Data List								
	Freq		Level	Factor	Limit	Margin	Height	Angle	Delevity
NO.	[MHz	<u>z]</u>	[dBµV/m]	[dB]	[dBµV/m]	[dB]	[cm]	[°]	Polarity
NO. 1	35.82	-	[dBµV/m] 28.08	[dB] 11.52	[dBµV/m] 40.00		[cm] 100	[°] 140	Vertical
	-	2				[dB]			-
1	35.8	2	28.08	11.52	40.00	[dB] 11.92	100	140	Vertical
1	35.82 67.83	2 3 75	28.08 26.68	11.52 15.36	40.00	[dB] 11.92 13.32	100 100	140 180	Vertical Vertical
1 2 3	35.82 67.83 102.7	2 3 75 68	28.08 26.68 33.16	11.52 15.36 16.93	40.00 40.00 43.50	[dB] 11.92 13.32 10.34	100 100 100	140 180 270	Vertical Vertical Vertical

RESULT: Pass

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.



EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	22.8°C	Relative Humidity	59.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	47.62	0.08	47.7	74	-26.3	peak
4824.000	38.45	0.08	38.53	54	-15.47	AVG
7236.000	42.57	2.21	44.78	74	-29.22	peak
7236.000	31.29	2.21	33.5	54	-20.5	AVG
emark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	22.8°C	Relative Humidity	59.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4824.000	47.62	0.08	47.7	74	-26.3	peak
4824.000	38.42	0.08	38.5	54	-15.5	AVG
7236.000	42.16	2.21	44.37	74	-29.63	peak
7236.000	32.48	2.21	34.69	54	-19.31	AVG
Remark:					ļ	
actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			

RESULT: Pass



EUT Name	Bluetooth+Wi-	Fi body fat s	cale	Model N	ame	BF1321-WF 700029-DB	F(BF1321-ITO-V
Temperature	22.8°C			Relative	Humidity	59.4%	
Pressure	960hPa	960hPa		Test Volt	tage	Normal Volt	age
Test Mode	Mode 2			Antenna	Polarity	Horizontal	
Frequency	Meter Reading	Factor	Emis	ssion Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(d	dBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	46.28	0.14		46.42	74	-27.58	peak
4874.000	37.94	0.14		38.08	54	-15.92	AVG
7311.000	41.65	2.36		44.01	74	-29.99	peak
7311.000	32.74	2.36		35.1	54	-18.9	AVG
Remark: Factor = Anter	nna Factor + Cable	e Loss – Pre-	amplifie	er.			
	nna Factor + Cable Bluetooth+Wi-			er. Model N	ame	BF1321-WF 700029-DB	
Factor = Anter				Model N	ame Humidity		
Factor = Anter	Bluetooth+Wi-			Model N	Humidity	700029-DB	
Factor = Anter EUT Name Temperature Pressure	Bluetooth+Wi- 22.8°C			Model N Relative	Humidity	700029-DB 59.4%	
Factor = Anter EUT Name Temperature Pressure Test Mode	Bluetooth+Wi- 22.8°C 960hPa Mode 2		cale	Model N Relative Test Volt Antenna	Humidity	700029-DB 59.4% Normal Volt Vertical	age
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 2 Meter Reading	Fi body fat s Factor	cale	Model N Relative Test Volt Antenna	Humidity tage Polarity Limits	700029-DB 59.4% Normal Volt	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz)	Bluetooth+Wi- 22.8°C 960hPa Mode 2 Meter Reading (dBµV)	Fi body fat s Factor (dB)	Emis	Model N Relative Test Volt Antenna	Humidity tage Polarity Limits (dBµV/m)	700029-DB 59.4% Normal Volt Vertical Margin (dB)	age
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 2 Meter Reading	Fi body fat s Factor	Emis	Model N Relative Test Volt Antenna	Humidity tage Polarity Limits	700029-DB 59.4% Normal Volt Vertical Margin	age Value Type
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000 4874.000	Bluetooth+Wi- 22.8°C 960hPa Mode 2 Meter Reading (dBµV) 47.63	Fi body fat s Factor (dB) 0.14	Emis	Model N Relative Test Volt Antenna ssion Level JBµV/m) 47.77	Humidity tage Polarity Limits (dBµV/m) 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.23	age Value Type peak
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000	Bluetooth+Wi- 22.8°C 960hPa Mode 2 Meter Reading (dBµV) 47.63 38.42	Fi body fat s Factor (dB) 0.14 0.14	Emis	Model N Relative Test Volt Antenna Ssion Level IBµV/m) 47.77 38.56	Humidity tage Polarity Limits (dBµV/m) 74 54	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.23 -15.44	age Value Type peak AVG
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000 7311.000	Bluetooth+Wi- 22.8°C 960hPa Mode 2 Meter Reading (dBμV) 47.63 38.42 42.15	Fi body fat s	Emis	Model N Relative Test Volt Antenna ssion Level dBµV/m) 47.77 38.56 44.51	Humidity tage Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.23 -15.44 -29.49	age Value Type peak AVG peak
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000 7311.000	Bluetooth+Wi- 22.8°C 960hPa Mode 2 Meter Reading (dBμV) 47.63 38.42 42.15	Fi body fat s	Emis	Model N Relative Test Volt Antenna ssion Level dBµV/m) 47.77 38.56 44.51	Humidity tage Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.23 -15.44 -29.49	age Value Type peak AVG peak

RESULT: Pass



EUT Name	Bluetooth+Wi-	Fi body fat s	scale	Model N	ame	BF1321-WF 700029-DB	F(BF1321-ITO-V
Temperature	22.8°C			Relative	Humidity	59.4%	
Pressure	960hPa			Test Volt	age	Normal Volt	age
Test Mode	Mode 3			Antenna	Polarity	Horizontal	
Frequency	Meter Reading	Factor	Emis	ssion Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(c	dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	46.28	0.22		46.5	74	-27.5	peak
4924.000	37.84	0.22		38.06	54	-15.94	AVG
7386.000	41.08	2.64		43.72	74	-30.28	peak
7386.000	32.64	2.64		35.28	54	-18.72	AVG
Remark: Factor = Anter	nna Factor + Cable	e Loss – Pre-	amplifie	er.			
	nna Factor + Cable Bluetooth+Wi-			Model N		700029-DB	
Factor = Anter				Model N	ame Humidity		
Factor = Anter	Bluetooth+Wi-			Model N	Humidity	700029-DB	、
Factor = Anter EUT Name Temperature Pressure	Bluetooth+Wi-			Model Na Relative	Humidity	700029-DB 59.4%	、
Factor = Anter EUT Name Temperature Pressure Test Mode	Bluetooth+Wi- 22.8°C 960hPa		scale	Model N Relative Test Volt	Humidity	700029-DB 59.4% Normal Volt	age
Factor = Anter EUT Name Temperature Pressure	Bluetooth+Wi- 22.8°C 960hPa Mode 3	Fi body fat s	scale	Model N Relative Test Volt Antenna	Humidity age Polarity	700029-DB 59.4% Normal Volt Vertical	、
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 3 Meter Reading	Fi body fat s	scale Emis	Model Na Relative Test Volt Antenna	Humidity tage Polarity Limits	700029-DB 59.4% Normal Volt Vertical Margin	age
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 3 Meter Reading (dBµV)	Fi body fat s	scale Emis	Model Na Relative Test Volt Antenna	Humidity tage Polarity Limits (dBµV/m)	700029-DB 59.4% Normal Volt Vertical Margin (dB)	age Value Type
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4924.000	Bluetooth+Wi- 22.8°C 960hPa Mode 3 Meter Reading (dBµV) 46.94	Fi body fat s	scale Emis	Model Na Relative Test Volt Antenna ssion Level JBµV/m) 47.16	Humidity tage Polarity Limits (dBµV/m) 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.84	age Value Type peak
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4924.000 4924.000	Bluetooth+Wi- 22.8°C 960hPa Mode 3 Meter Reading (dBµV) 46.94 38.11	Fi body fat s	scale Emis	Model Na Relative Test Volt Antenna Ssion Level IBµV/m) 47.16 38.33	Humidity tage Polarity Limits (dBµV/m) 74 54	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.84 -15.67	age Value Type peak AVG
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4924.000 7386.000	Bluetooth+Wi- 22.8°C 960hPa Mode 3 Meter Reading (dBµV) 46.94 38.11 42.57	Fi body fat s	scale Emis	Model Na Relative Test Volt Antenna ssion Level dBµV/m) 47.16 38.33 45.21	Humidity tage Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.84 -15.67 -28.79	age Value Type peak AVG peak
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4924.000 7386.000	Bluetooth+Wi- 22.8°C 960hPa Mode 3 Meter Reading (dBµV) 46.94 38.11 42.57	Fi body fat s	scale Emis	Model Na Relative Test Volt Antenna ssion Level dBµV/m) 47.16 38.33 45.21	Humidity tage Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.84 -15.67 -28.79	age Value Type peak AVG peak

RESULT: Pass



	Name Bluetooth+Wi-Fi body fat scale			Model Name		BF1321-WF(BF1321-ITO-WF 700029-DB	
Temperature	22.8°C			Relative Humidity		59.4%	
Pressure	essure 960hPa		Test Voltage		Normal Voltage		
Test Mode	Mode 4		Antenna	Polarity	Horizontal		
Frequency	Meter Reading	Factor	Factor Emis		Limits	Margin	
(MHz)	(dBµV)	(dB)	(0	dBµV/m)	(dBµV/m)	(dB)	Value Type
4824.000	47.61	0.08		47.69	74	-26.31	peak
4824.000	38.54	0.08		38.62	54	-15.38	AVG
7236.000	42.64	2.21		44.85	74	-29.15	peak
7236.000	31.26	2.21		33.47	54	-20.53	AVG
EUT Name	Bluetooth+W	i-Fi body fat s		Model Na	ame	BF1321-WF(I 700029-DB	BF1321-ITO-W
Temperature	22.8°C			Relative	Humidity	59.4%	
Pressure	960hPa			Test Voltage		Normal Voltage	
Fest Mode	Mode 4			Antenna	Polarity	Vertical	
Frequency	Motor Dooding	Factor	[Emi		Limito	Morain	
Frequency (MHz)	Meter Reading (dBµV)	Factor (dB)		ssion Level dBµV/m)	Limits (dBµV/m)	Margin (dB)	Value Type
4824.000	(dBµV) 47.62	0.08	(0	абрулп) 47.7	(ubµv/iii) 74	-26.3	peak
4824.000	38.94	0.08		39.02	54	-26.3	AVG
7236.000	42.15	2.21		39.02 44.36	54 74	-14.98	peak
7236.000	42.15 31.29	2.21		44.36 33.5	54	-29.64	AVG
1200.000	51.23	۲.۷۱		55.5	54	-20.0	,

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

RESULT: Pass



EUT Name	Bluetooth+Wi-Fi body fat scale			Model Na	700029-DB		
Temperature	22.8°C			Relative	Humidity	59.4%	
Pressure	960hPa			Test Voltage		Normal Voltage	
Test Mode 5 Mode 5		Antenna	Polarity	ity Horizontal			
Frequency	Meter Reading	Factor	Emis	ssion Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(c	lBµV/m)	(dBµV/m)	(dB)	value Type
4874.000	46.88	0.14		47.02	74	-26.98	peak
4874.000	38.21	0.14		38.35	54	-15.65	AVG
7311.000	42.39	2.36		44.75	74	-29.25	peak
7311.000	31.58	2.36		33.94	54	-20.06	AVG
Remark: Factor = Anter	nna Factor + Cable	e Loss – Pre-	amplifie	er			
Factor = Anter	nna Factor + Cable Bluetooth+Wi-			Model Na		700029-DB	
Factor = Anter				Model Na	ame Humidity		
	Bluetooth+Wi-			Model Na	Humidity	700029-DB	``````````````````````````````````````
Factor = Anter EUT Name Temperature Pressure	Bluetooth+Wi- 22.8°C			Model Na Relative	Humidity	700029-DB 59.4%	``````````````````````````````````````
Factor = Anter EUT Name Temperature Pressure Test Mode	Bluetooth+Wi- 22.8°C 960hPa Mode 5	Fi body fat s	cale	Model Na Relative Test Volt Antenna	Humidity age Polarity	700029-DB 59.4% Normal Volt Vertical	
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 5 Meter Reading	-Fi body fat s Factor	cale	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits	700029-DB 59.4% Normal Volt Vertical	``````````````````````````````````````
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz)	Bluetooth+Wi- 22.8°C 960hPa Mode 5 Meter Reading (dBµV)	-Fi body fat s Factor (dB)	scale Emis	Model Na Relative Test Volt Antenna	Humidity age Polarity Limits (dBµV/m)	700029-DB 59.4% Normal Volt Vertical Margin (dB)	age Value Type
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000	Bluetooth+Wi- 22.8°C 960hPa Mode 5 Meter Reading (dBµV) 46.28	-Fi body fat s Factor (dB) 0.14	Emis	Model Na Relative Test Volt Antenna ssion Level IBµV/m) 46.42	Humidity age Polarity Limits (dBµV/m) 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.58	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000 4874.000	Bluetooth+Wi- 22.8°C 960hPa Mode 5 Meter Reading (dBµV) 46.28 37.54	Fi body fat s	Emis	Model Na Relative Test Volt Antenna ssion Level IBµV/m) 46.42 37.68	Humidity age Polarity Limits (dBµV/m) 74 54	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.58 -16.32	age Value Type peak AVG
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000	Bluetooth+Wi- 22.8°C 960hPa Mode 5 Meter Reading (dBµV) 46.28	-Fi body fat s Factor (dB) 0.14	Emis	Model Na Relative Test Volt Antenna ssion Level IBµV/m) 46.42	Humidity age Polarity Limits (dBµV/m) 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.58	age Value Type peak
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000 4874.000 7311.000	Bluetooth+Wi- 22.8°C 960hPa Mode 5 Meter Reading (dBμV) 46.28 37.54 41.06	Fi body fat s	Emis	Model Na Relative Test Volt Antenna ssion Level dBµV/m) 46.42 37.68 43.42	Humidity age Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.58 -16.32 -30.58	age Value Type peak AVG peak
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000 4874.000 7311.000	Bluetooth+Wi- 22.8°C 960hPa Mode 5 Meter Reading (dBμV) 46.28 37.54 41.06	Fi body fat s	Emis	Model Na Relative Test Volt Antenna ssion Level dBµV/m) 46.42 37.68 43.42	Humidity age Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.58 -16.32 -30.58	age Value Type peak AVG peak

RESULT: Pass



EUT Name	Bluetooth+Wi-Fi body fat scale			Model N	ame	BF1321-WF(BF132 700029-DB	
Temperature	22.8°C			Relative	Humidity	59.4%	
Pressure	960hPa			Test Voltage		Normal Voltage	
Test Mode	Mode 6		Antenna	Polarity	olarity Horizontal		
	i						
Frequency	Meter Reading	Factor	Emis	ssion Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(C	dBµV/m)	(dBµV/m)	(dB)	value Type
4924.000	47.94	0.22		48.16	74	-25.84	peak
4924.000	38.61	0.22		38.83	54	-15.17	AVG
7386.000	42.15	2.64		44.79	74	-29.21	peak
7386.000	31.26	2.64		33.9	54	-20.1	AVG
	nna Factor + Cable					BE1321-WE	
Factor = Anter	Bluetooth+Wi-			Model N		700029-DB	
Factor = Anter				Model N	ame Humidity		
Factor = Anter	Bluetooth+Wi-			Model N	Humidity	700029-DB	· · · · · · · · · · · · · · · · · · ·
Factor = Anter EUT Name Temperature Pressure	Bluetooth+Wi-			Model N Relative Test Volt	Humidity	700029-DB 59.4%	· · · · · · · · · · · · · · · · · · ·
Factor = Anter EUT Name Temperature Pressure Test Mode	Bluetooth+Wi- 22.8°C 960hPa Mode 6		cale	Model N Relative Test Volt	Humidity	700029-DB 59.4% Normal Volt Vertical	age
Factor = Anter EUT Name Temperature Pressure	Bluetooth+Wi- 22.8°C 960hPa	Fi body fat s		Model N Relative Test Volt Antenna	Humidity tage Polarity	700029-DB 59.4% Normal Volt	· · · · · · · · · · · · · · · · · · ·
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 6	Fi body fat s Factor	Emis	Model Na Relative Test Volt Antenna	Humidity tage Polarity Limits	700029-DB 59.4% Normal Volt Vertical Margin	age
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 6 Meter Reading (dBµV)	Fi body fat s	Emis	Model Na Relative Test Volt Antenna	Humidity tage Polarity Limits (dBµV/m)	700029-DB 59.4% Normal Volt Vertical Margin (dB)	age Value Type
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4924.000	Bluetooth+Wi- 22.8°C 960hPa Mode 6 Meter Reading (dBµV) 47.61	Fi body fat s	Emis	Model Na Relative Test Volt Antenna ssion Level JBµV/m) 47.83	Humidity tage Polarity Limits (dBµV/m) 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.17	age Value Type peak
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4924.000 4924.000	Bluetooth+Wi- 22.8°C 960hPa Mode 6 Meter Reading (dBµV) 47.61 38.52	Fi body fat s	Emis	Model Na Relative Test Volt Antenna Ssion Level IBµV/m) 47.83 38.74	Humidity tage Polarity Limits (dBµV/m) 74 54	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.17 -15.26	age Value Type peak AVG
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4924.000 4924.000 7386.000	Bluetooth+Wi- 22.8°C 960hPa Mode 6 Meter Reading (dBµV) 47.61 38.52 42.55	Fi body fat s	Emis	Model Na Relative Test Volt Antenna ssion Level dBµV/m) 47.83 38.74 45.19	Humidity tage Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.17 -15.26 -28.81	age Value Type peak AVG peak
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4924.000 4924.000 7386.000	Bluetooth+Wi- 22.8°C 960hPa Mode 6 Meter Reading (dBµV) 47.61 38.52 42.55	Fi body fat s	Emis	Model Na Relative Test Volt Antenna ssion Level dBµV/m) 47.83 38.74 45.19	Humidity tage Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.17 -15.26 -28.81	age Value Type peak AVG peak

RESULT: Pass



EUT	T Name	Bluetooth+W	/i-Fi body fat so	ale	Model N	ame	BF1321-WF(700029-DB	BF1321-ITO-WF)
Ten	nperature	22.8°C			Relative	Humidity	59.4%	
Pre	essure	sure 960hPa		Test Voltage		Normal Voltage		
Tes	t Mode	Mode 7	Mode 7		Antenna	Polarity	Horizontal	
					•		·	
	Frequency	Meter Reading	Meter Reading Factor Emis		sion Level	Limits	Margin	Value Type
	(MHz)	(dBµV)	(dB)	(0	lBµV/m)	(dBµV/m)	(dB)	value Type
	4824.000	47.62	0.08		47.7	74	-26.3	peak
	4824.000	38.42	0.08		38.5	54	-15.5	AVG
	7236.000	41.63	2.21		43.84	74	-30.16	peak
	7236.000	32.48	2.21		34.69	54	-19.31	AVG
_								
	Remark:							
F	actor = Anten	na Factor + Cabl	e Loss – Pre-a	mplifie	er.			
EU	T Name	UT Name Bluetooth+Wi-Fi body fat scale		ale	Model Name BF1321-WF(BF132 700029-DB		BF1321-ITO-WF)	
		22.8°C				59.4%		
Ten	nperature	22.8°C			Relative	Humidity	59.4%	
	nperature essure	22.8°C 960hPa			Relative Test Volt		59.4% Normal Volta	ge
Pre	-				Test Volt			ge
Pre	essure	960hPa			Test Volt	tage	Normal Volta	ge
Pre	ssure t Mode	960hPa	Factor	Emis	Test Volt	tage Polarity	Normal Volta	
Pre	ssure t Mode Frequency (MHz)	960hPa Mode 7	Factor (dB)	-	Test Volt Antenna	age Polarity	Normal Volta	ge Value Type
Pre	Frequency (MHz) 4824.000	960hPa Mode 7 Meter Reading (dBµV) 47.61	(dB) 0.08	(d	Test Volt Antenna ssion Level IBµV/m) 47.69	Limits (dBµV/m) 74	Normal Volta Vertical Margin (dB) -26.31	Value Type
Pre	Example 2 Source 2 So	960hPa Mode 7 Meter Reading (dBμV) 47.61 38.42	(dB)	(d	Test Volt Antenna ssion Level IBµV/m)	Limits (dBµV/m) 74 54	Normal Volta Vertical Margin (dB)	Value Type
Pre	Example 2015 Example 2015 Examp	960hPa Mode 7 Meter Reading (dBμV) 47.61 38.42 42.67	(dB) 0.08 0.08 2.21	(d	Test Volt Antenna ssion Level IBμV/m) 47.69 38.5 44.88	Limits (dBµV/m) 74 54 74	Normal Volta Vertical Margin (dB) -26.31 -15.5 -29.12	Value Type peak AVG peak
Pre	Example 2 Source 2 So	960hPa Mode 7 Meter Reading (dBμV) 47.61 38.42	(dB) 0.08 0.08	(d	Test Volt Antenna ssion Level IBµV/m) 47.69 38.5	Limits (dBµV/m) 74 54	Normal Volta Vertical Margin (dB) -26.31 -15.5	Value Type peak AVG
Pre	Example 2 Source 2 So	960hPa Mode 7 Meter Reading (dBμV) 47.61 38.42 42.67	(dB) 0.08 0.08 2.21	(d	Test Volt Antenna ssion Level IBμV/m) 47.69 38.5 44.88	Limits (dBµV/m) 74 54 74	Normal Volta Vertical Margin (dB) -26.31 -15.5 -29.12	Value Type peak AVG peak
Pre	Example 2 Source 2 So	960hPa Mode 7 Meter Reading (dBμV) 47.61 38.42 42.67	(dB) 0.08 0.08 2.21 2.21	(d	Test Volt Antenna asion Level IBµV/m) 47.69 38.5 44.88 34.13	Limits (dBµV/m) 74 54 74	Normal Volta Vertical Margin (dB) -26.31 -15.5 -29.12	Value Type peak AVG peak

RESULT: Pass



EUT Name	,			Model N	ame	BF1321-WF(BF1321-ITO-WI 700029-DB		
Temperature	22.8°C			Relative	Humidity	59.4% Normal Voltage		
Pressure	960hPa			Test Volt	age			
Fest Mode	Mode 8		Antenna	Polarity	Horizontal			
Frequency	Meter Reading	Factor	Factor Emis		Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(d	BµV/m)	(dBµV/m)	(dB)	value Type	
4874.000	46.29	0.14		46.43	74	-27.57	peak	
4874.000	37.54	0.14		37.68	54	-16.32	AVG	
7311.000	42.37	2.36		44.73	74	-29.27	peak	
7311.000	31.26	2.36		33.62	54	-20.38	AVG	
							+	
Remark:								
	nna Factor + Cable	e Loss – Pre-	amplifie	er.				
Factor = Anter	nna Factor + Cable Bluetooth+Wi			er. Model N	ame	BF1321-WF 700029-DB		
Factor = Anter				Model N	ame Humidity		 (BF1321-ITO-W	
Factor = Anter EUT Name Femperature	Bluetooth+Wi-			Model N	Humidity	700029-DB		
Factor = Anter EUT Name Femperature Pressure	Bluetooth+Wi			Model N Relative	Humidity	700029-DB 59.4%		
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 8	-Fi body fat s	cale	Model N Relative Test Volt Antenna	Humidity age Polarity	700029-DB59.4%Normal VoltVertical		
Factor = Anter	Bluetooth+Wi 22.8°C 960hPa Mode 8 Meter Reading	-Fi body fat s Factor	cale	Model N Relative Test Volt Antenna	Humidity age Polarity Limits	700029-DB 59.4% Normal Volt Vertical Margin		
Factor = Anter	Bluetooth+Wi 22.8°C 960hPa Mode 8 Meter Reading (dBµV)	-Fi body fat s Factor (dB)	cale Emis	Model N Relative Test Volt Antenna sion Level BµV/m)	Humidity tage Polarity Limits (dBµV/m)	700029-DB 59.4% Normal Volt Vertical Margin (dB)	age Value Type	
Factor = Anter	Bluetooth+Wi 22.8°C 960hPa Mode 8 Meter Reading (dBµV) 45.99	-Fi body fat s Factor (dB) 0.14	cale Emis	Model N Relative Test Volt Antenna sion Level BµV/m) 46.13	Humidity tage Polarity Limits (dBµV/m) 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.87	age Value Type peak	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000	Bluetooth+Wi 22.8°C 960hPa Mode 8 Meter Reading (dBµV) 45.99 36.87	-Fi body fat s Factor (dB) 0.14 0.14	cale Emis	Model N Relative Test Volt Antenna sion Level BµV/m) 46.13 37.01	Humidity tage Polarity Limits (dBµV/m) 74 54	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.87 -16.99	age Value Type peak AVG	
Factor = Anter	Bluetooth+Wi 22.8°C 960hPa Mode 8 Meter Reading (dBμV) 45.99 36.87 40.15	-Fi body fat se Factor (dB) 0.14 0.14 2.36	cale Emis	Model N Relative Test Volt Antenna sion Level BµV/m) 46.13 37.01 42.51	Humidity tage Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.87 -16.99 -31.49	age Value Type peak AVG peak	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000 4874.000	Bluetooth+Wi 22.8°C 960hPa Mode 8 Meter Reading (dBµV) 45.99 36.87	-Fi body fat s Factor (dB) 0.14 0.14	cale Emis	Model N Relative Test Volt Antenna sion Level BµV/m) 46.13 37.01	Humidity tage Polarity Limits (dBµV/m) 74 54	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.87 -16.99	age Value Type peak AVG	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4874.000 4874.000 7311.000	Bluetooth+Wi 22.8°C 960hPa Mode 8 Meter Reading (dBμV) 45.99 36.87 40.15	-Fi body fat se Factor (dB) 0.14 0.14 2.36	cale Emis	Model N Relative Test Volt Antenna sion Level BµV/m) 46.13 37.01 42.51	Humidity tage Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -27.87 -16.99 -31.49	age Value Type peak AVG peak	

RESULT: Pass



EUT Name	Bluetooth+Wi-	Bluetooth+Wi-Fi body fat scale			ame	BF1321-WF(BF1321-ITO-W 700029-DB		
Femperature	22.8°C			Relative	Humidity	59.4%		
Pressure	960hPa			Test Voltage		Normal Voltage		
Fest Mode	Mode Mode 9		Antenna	Polarity	Horizontal			
Frequency	Meter Reading	Factor	Emis	sion Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dl	BµV/m)	(dBµV/m)	(dB)	value Type	
4924.000	46.29	0.22	4	46.51	74	-27.49	peak	
4924.000	37.64	0.22	:	37.86	54	-16.14	AVG	
7386.000	42.55	2.64	4	45.19	74	-28.81	peak	
7386.000	31.61	2.64		34.25	54	-19.75	AVG	
Remark:				I				
	nna Factor + Cable	e Loss – Pre-	amplifie	r.				
	nna Factor + Cable	e Loss – Pre-	amplifie	r.				
	nna Factor + Cable Bluetooth+Wi-			r. Model Na	ame	BF1321-WF 700029-DB	(BF1321-ITO-W	
Factor = Anter				Model N	ame Humidity			
Factor = Anter	Bluetooth+Wi-			Model N	Humidity	700029-DB		
Factor = Anter EUT Name Femperature	Bluetooth+Wi- 22.8°C			Model Na Relative	Humidity	700029-DB 59.4%		
Factor = Anter EUT Name Temperature Pressure	Bluetooth+Wi- 22.8°C 960hPa			Model N Relative Test Volt	Humidity	700029-DB 59.4% Normal Volt		
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa		scale	Model N Relative Test Volt	Humidity tage Polarity Limits	700029-DB 59.4% Normal Volt	age	
Factor = Anter EUT Name Femperature Pressure Fest Mode	Bluetooth+Wi- 22.8°C 960hPa Mode 9	Fi body fat s	cale	Model N Relative Test Volt Antenna	Humidity age Polarity	700029-DB 59.4% Normal Volt Vertical		
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 9 Meter Reading	-Fi body fat s Factor	scale Emis (d	Model Na Relative Test Volt Antenna	Humidity tage Polarity Limits	700029-DB 59.4% Normal Volt Vertical Margin	age	
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 9 Meter Reading (dBµV)	-Fi body fat s Factor (dB)	Emis (d)	Model Na Relative Test Volt Antenna sion Level BµV/m)	Humidity tage Polarity Limits (dBµV/m)	700029-DB 59.4% Normal Volt Vertical Margin (dB)	age Value Type	
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 9 Meter Reading (dBµV) 47.62	-Fi body fat s Factor (dB) 0.22	scale Emis (dl	Model Na Relative Test Volt Antenna sion Level BµV/m) 47.84	Humidity tage Polarity Limits (dBµV/m) 74	700029-DB 59.4% Normal Volta Vertical Margin (dB) -26.16	age Value Type peak	
Factor = Anter	Bluetooth+Wi- 22.8°C 960hPa Mode 9 Meter Reading (dBµV) 47.62 38.42	Fi body fat s	Emis (dl	Model Na Relative Test Volt Antenna sion Level BµV/m) 47.84 38.64	Humidity tage Polarity Limits (dBµV/m) 74 54	700029-DB 59.4% Normal Volta Vertical Margin (dB) -26.16 -15.36	age Value Type peak AVG	
Factor = Anter EUT Name Temperature Pressure Test Mode Frequency (MHz) 4924.000 7386.000	Bluetooth+Wi- 22.8°C 960hPa Mode 9 Meter Reading (dBµV) 47.62 38.42 41.64	Fi body fat s	Emis (dl	Model Na Relative Test Volt Antenna sion Level BµV/m) 47.84 38.64 44.28	Humidity age Polarity Limits (dBµV/m) 74 54 74	700029-DB 59.4% Normal Volt Vertical Margin (dB) -26.16 -15.36 -29.72	age Value Type peak AVG peak	

RESULT: Pass

Note:

- 1. The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.
- 2. Factor = Antenna Factor + Cable loss Pre-amplifier gain, Margin = Emission Level-Limit.


3 yr rep**The**vir**F** actor action of the tested sample. Any objections to report issued by AGC should be submitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.




EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement

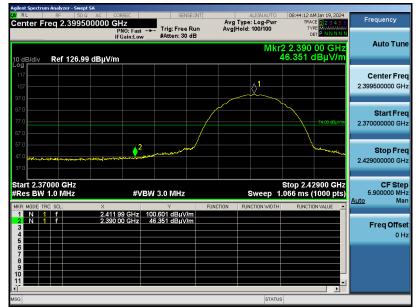

Test Graph for Average Measurement

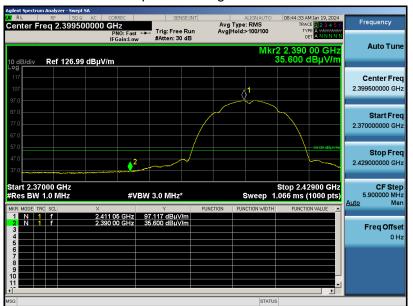


RESULT: Pass




EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna Polarity	Vertical

Test Graph for Peak Measurement

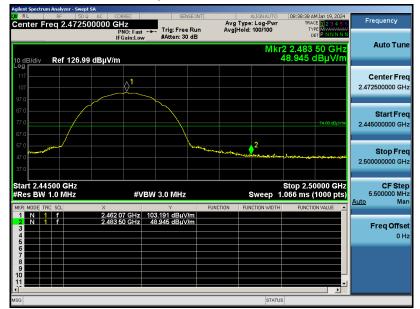

Test Graph for Average Measurement

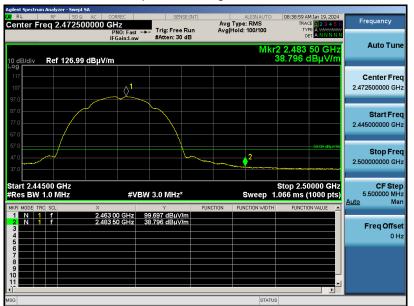

RESULT: Pass




EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement



Test Graph for Average Measurement

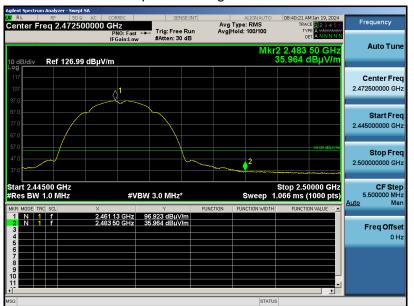


RESULT: Pass



Band Edge Emission Test Results for Restricted Bands	j
--	---

EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna Polarity	Vertical

Test Graph for Peak Measurement

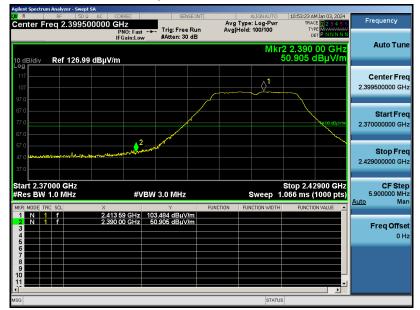

Test Graph for Average Measurement




RESULT: Pass



Band Edge Emission Test Results for Restricted Bar	lds
--	-----

EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Horizontal

Test Graph for Peak Measurement

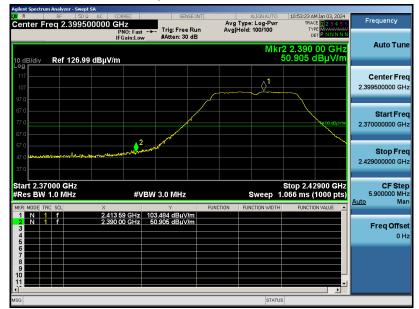

Test Graph for Average Measurement



RESULT: Pass




EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna Polarity	Vertical

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement



Test Graph for Average Measurement

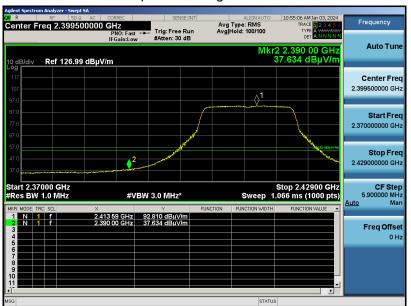

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com

 Web: http://www.agccert.com/



EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass



Band Edge Emission Test Results for Restricted Bands	Band Edg	e Emission	Test Results f	for Restricted Bands
--	----------	------------	----------------	----------------------

EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass



Band Edge Emission Test Results for Restrict	ed Bands
--	----------

EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Horizontal

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass




EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna Polarity	Vertical

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement



Test Graph for Average Measurement

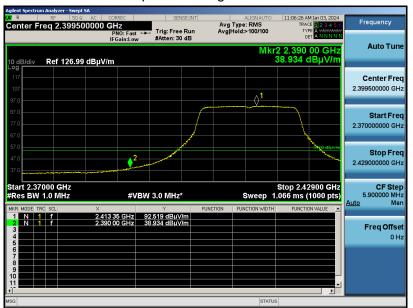

RESULT: Pass

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

 Attestation of Global Compliance(Shenzhen)Co., Ltd

 Attestation of Global Compliance(Shenzhen)Std & Tech Co., Ltd

 Tel: +86-755 2523 4088
 E-mail: agc@agccert.com



EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Horizontal

Band Edge Emission Test Results for Restricted Bands

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass



EUT Name	Bluetooth+Wi-Fi body fat scale	Model Name	BF1321-WF(BF1321-ITO-WF)/ 700029-DB
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna Polarity	Vertical

Test Graph for Peak Measurement



Test Graph for Average Measurement



RESULT: Pass

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. AC Power Line Conducted Emission

12.1 Measurement Limits


Frequency	Maximum RF Line Voltage		
Frequency	Q.P (dBµV)	Average (dBµV)	
150kHz~500kHz	66-56	56-46	
500kHz~5MHz	56	46	
5MHz~30MHz	60	50	

Note:

1. The lower limit shall apply at the transition frequency.

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2 Block Diagram of Line Conducted Emission Test

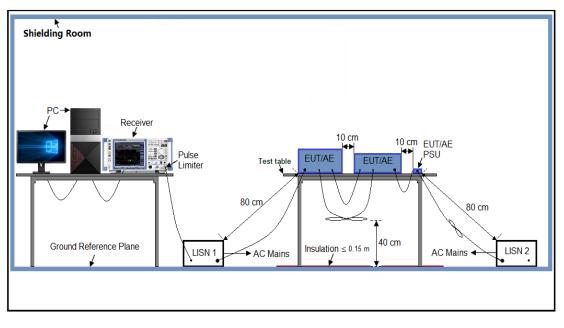



12.3 Preliminary Procedure of Line Conducted Emission Test

- 1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 Ohm load; the second scan had Line 1 connected to a 50 Ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

12.4 Final Procedure of Line Conducted Emission Test

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case was reported on the Summary Data page.

12.5 Test Result of Line Conducted Emission Test

N/A

Note: The conducted emission tests at AC port are not required for devices which only employ battery power for operation.



Report No.: AGC06754231202FR02 Page 82 of 82

Appendix I: Photographs of Test Setup

Refer to the Report No.: AGC06754231202AP01

Appendix II: Photographs of EUT

Refer to the Report No.: AGC06754231202AP02

----End of Report----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.