
Appendix for the Report

Dosimetric Assessment of the Option Globetrotter Fusion+ Card (FCC ID: NCMOGLHW-E) tested in three host products

According to the FCC Requirements

SAR Distribution Plots

September 26, 2005
IMST GmbH
Carl-Friedrich-Gauß-Str. 2
D-47475 Kamp-Lintfort

Customer
7layers AG
Borsigstrasse 11
D-40880 Ratingen

The test results only relate to the items tested.
This report shall not be reproduced except in full without the written
approval of the testing laboratory.

Table of Contents

1	SAR DISTRIBUTION PLOTS, GPRS 850 (CLASS 10) BODY	3
2	SAR DISTRIBUTION PLOTS, GPRS 1900 (CLASS 10) BODY	12
3	SAR Z-AXIS SCANS (VALIDATION)	21
4	SAR Z-AXIS SCANS (MEASUREMENTS).....	22

1 SAR Distribution Plots, GPRS 850 (Class 10) Body

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [GTyhm_1_fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.118 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.2 V/m; Power Drift = 0.052 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.127 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.138 mW/g

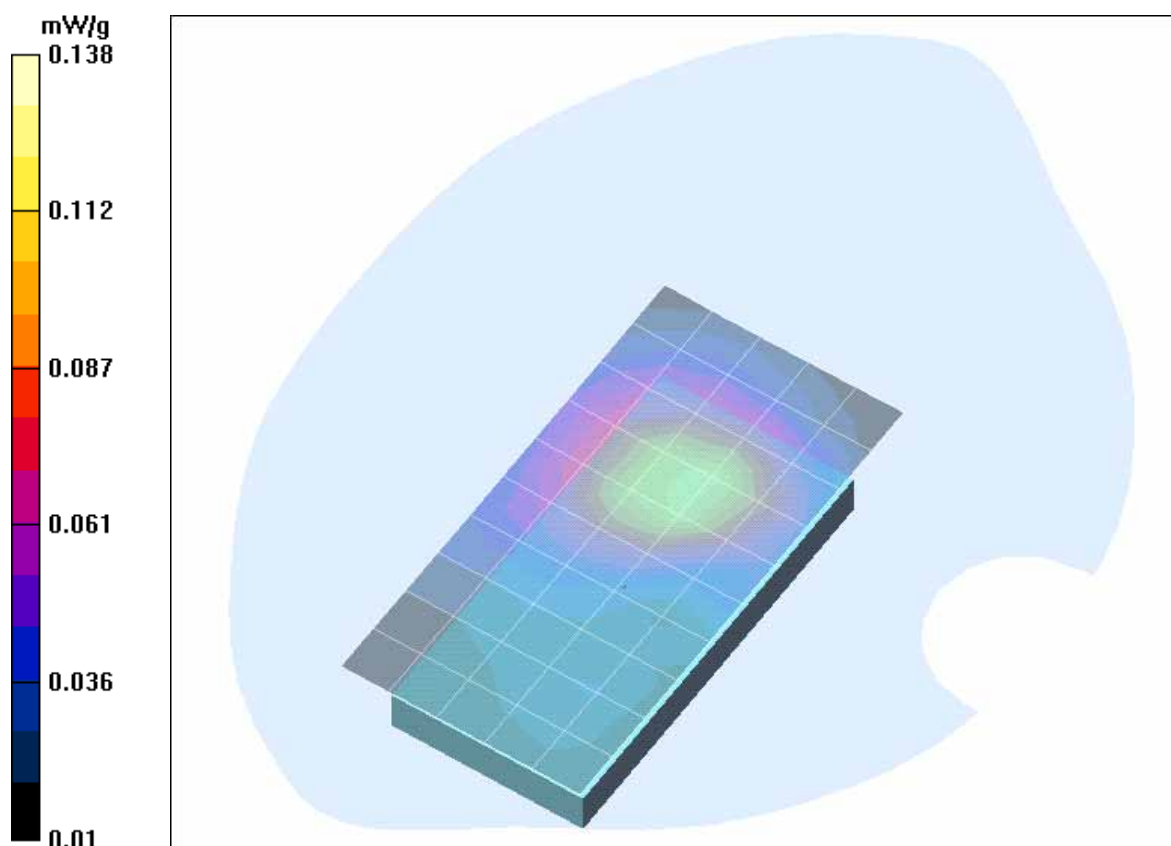


Fig. 1: SAR distribution for GPRS 850, channel 190, DELL Latitude C810, position 1. (19.09.2005; Ambient Temperature: 21.1° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [GTyhm 2 fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.301 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.6 V/m; Power Drift = -0.032 dB

Peak SAR (extrapolated) = 0.419 W/kg

SAR(1 g) = 0.285 mW/g; SAR(10 g) = 0.202 mW/g

Maximum value of SAR (measured) = 0.304 mW/g

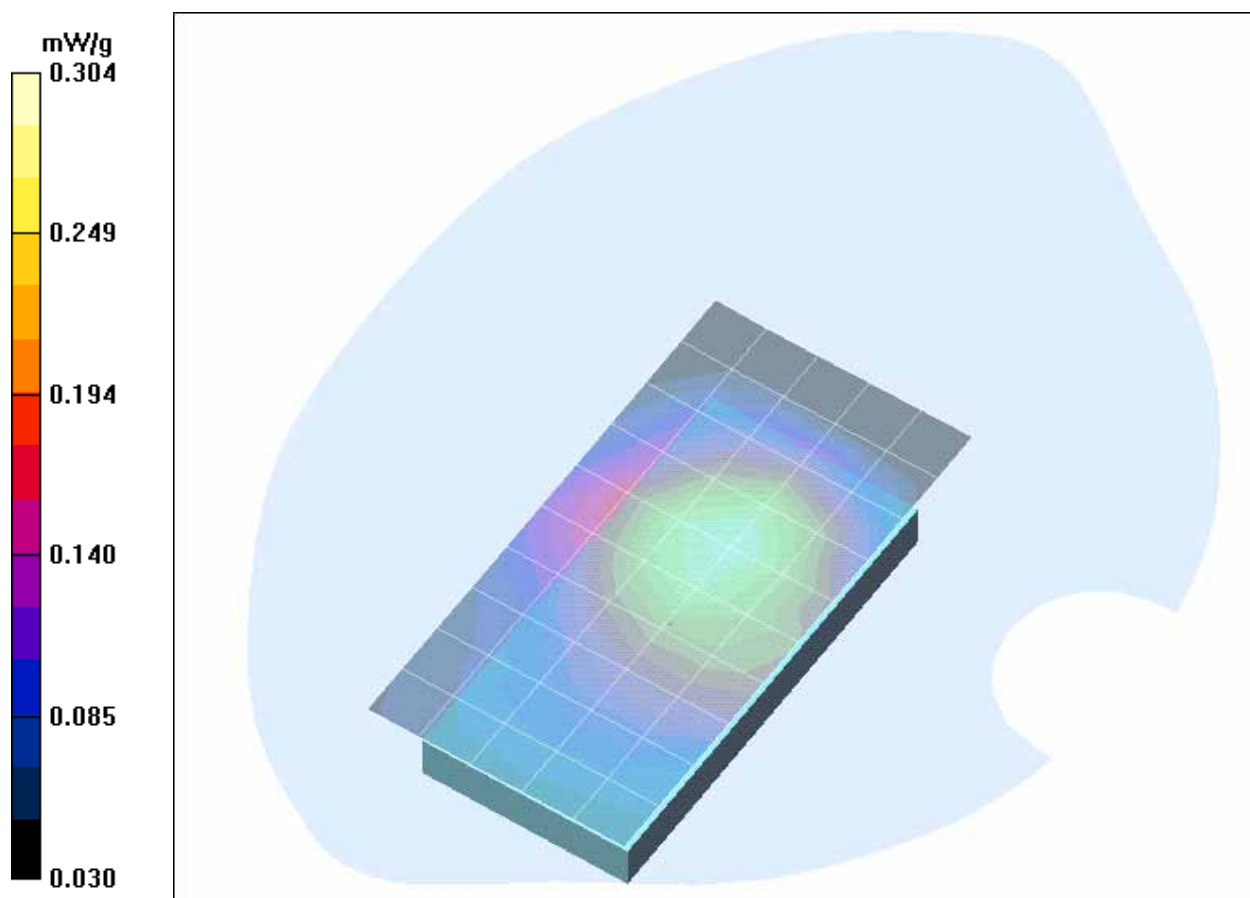


Fig. 2: SAR distribution for GPRS 850, channel 190, DELL Latitude C810, position 2. (19.09.2005; Ambient Temperature: 21.1° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); **File Name:** [GTyhm 5 fcc.da4](#)

DUT: Option; **Type:** GlobeTrotter; **Serial:** 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.039 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.40 V/m; Power Drift = 0.081 dB

Peak SAR (extrapolated) = 0.063 W/kg

SAR(1 g) = 0.040 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.045 mW/g

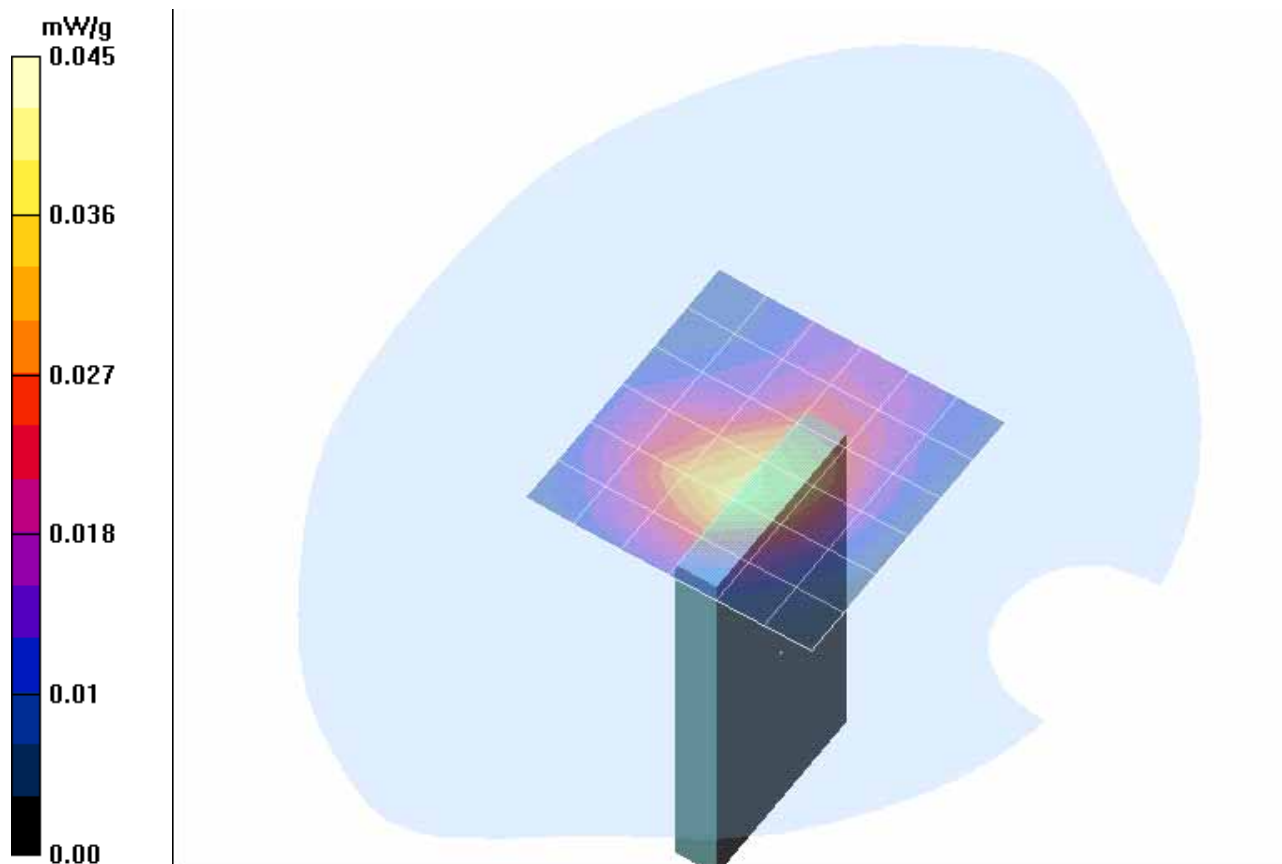


Fig. 3: SAR distribution for GPRS 850, channel 190, DELL Latitude C810, position 3. (19.09.2005; Ambient Temperature: 21.1° C; Liquid Temperature: 20.4° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [GTyahn_1_fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.781 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 24.4 V/m; Power Drift = 0.121 dB

Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.775 mW/g; SAR(10 g) = 0.532 mW/g

Maximum value of SAR (measured) = 0.834 mW/g

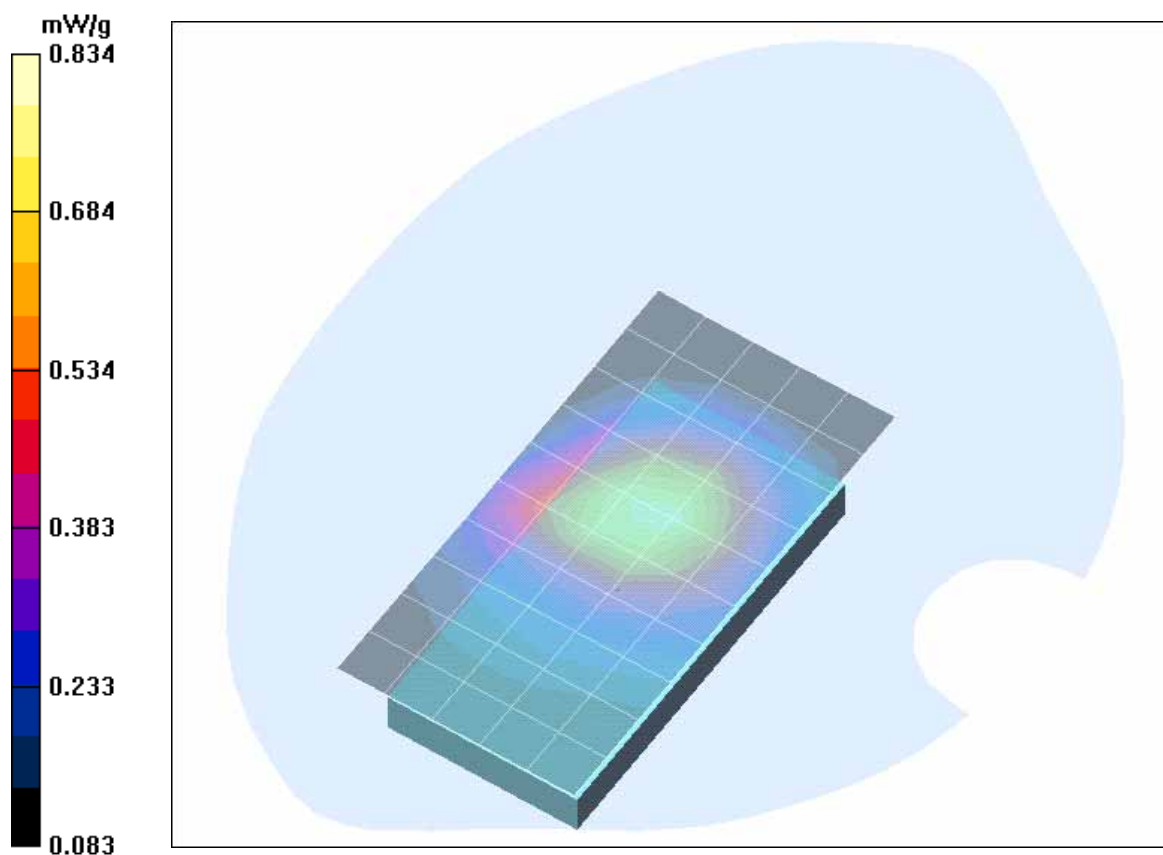


Fig. 4: SAR distribution for GPRS 850, channel 190, HP Omnibook XE2, position 1. (19.09.2005; Ambient Temperature: 21.2° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [GTyahm 2 fcc wdh.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.443 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.0 V/m; Power Drift = -0.124 dB

Peak SAR (extrapolated) = 0.574 W/kg

SAR(1 g) = 0.428 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.455 mW/g

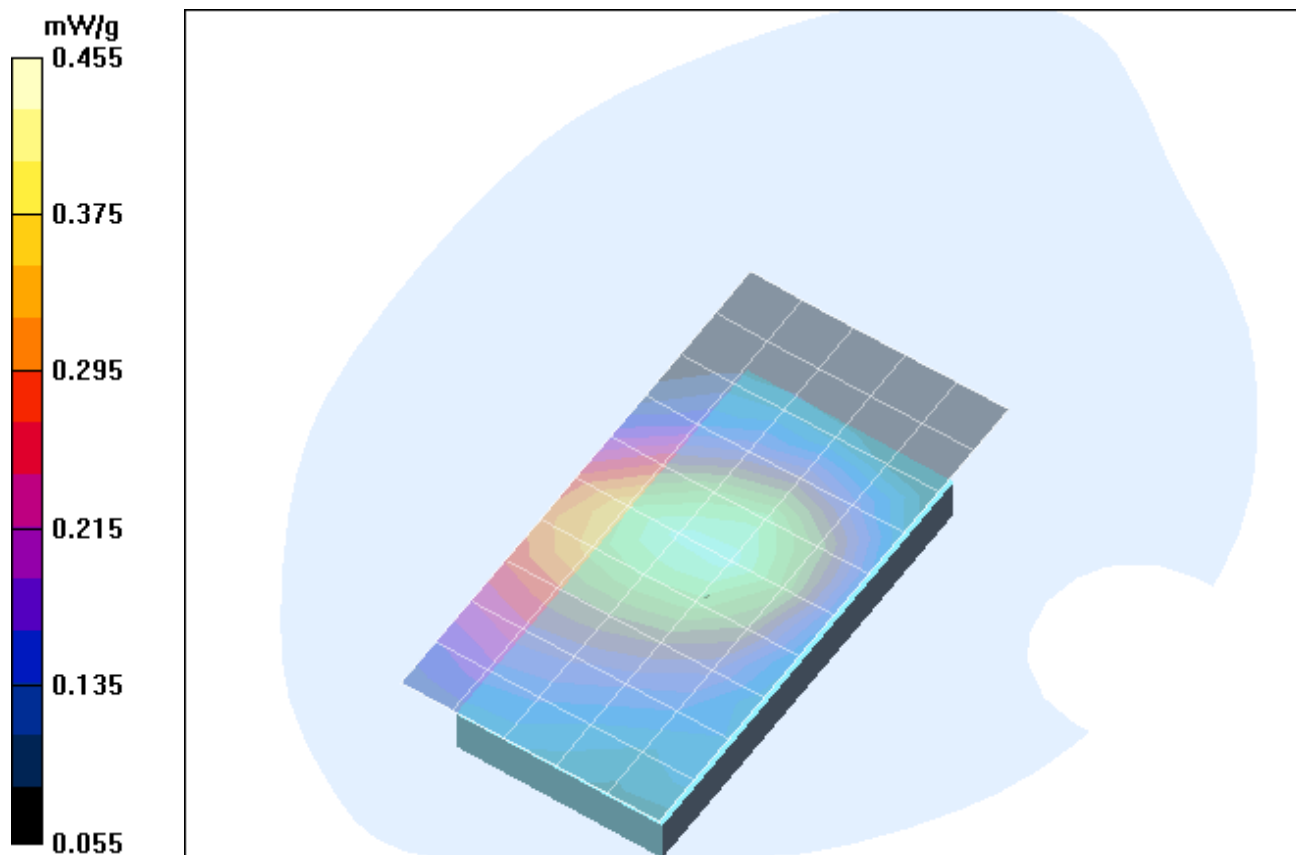


Fig. 5: SAR distribution for GPRS 850, channel 190, HP Omnibook XE2, position 2. (19.09.2005; Ambient Temperature: 21.2° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [GTyhm 5 fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.060 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.76 V/m; Power Drift = -0.173 dB

Peak SAR (extrapolated) = 0.096 W/kg

SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.059 mW/g

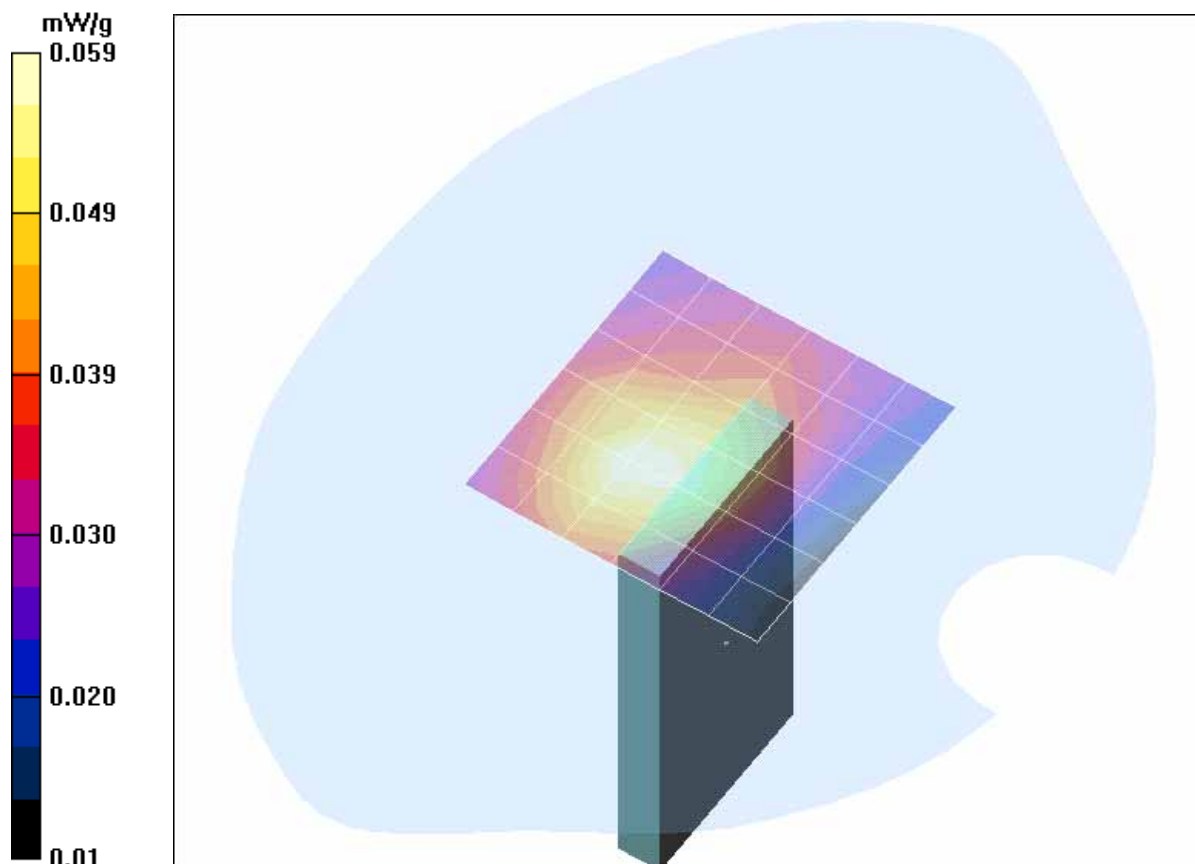


Fig. 6: SAR distribution for GPRS 850, channel 190, HP Omnibook XE2, position 3 (19.09.2005; Ambient Temperature: 21.2° C; Liquid Temperature: 20.5° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [GTyahn_1_fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.534 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.3 V/m; Power Drift = 0.007 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.503 mW/g; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.546 mW/g

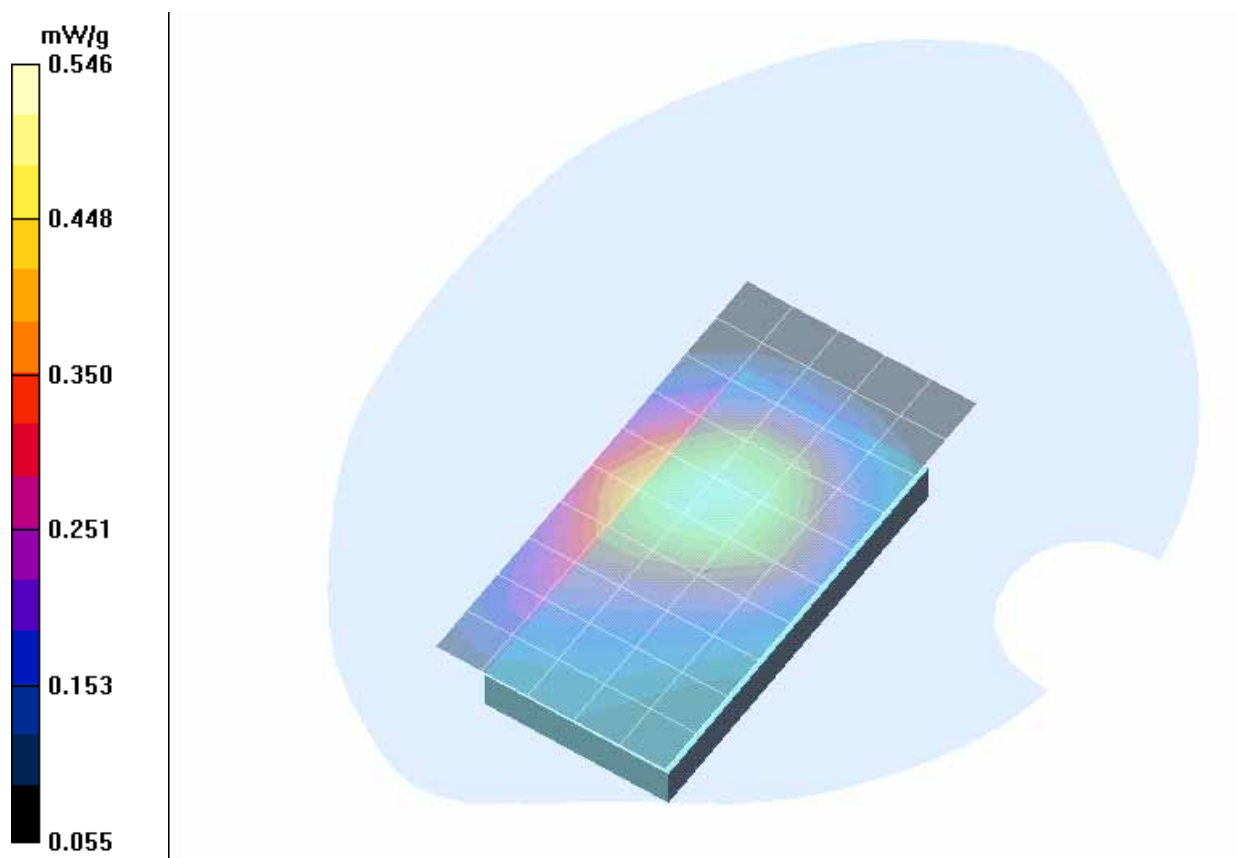


Fig. 7: SAR distribution for GPRS 850, channel 190, HP Omnibook XE3, position 1. (19.09.2005; Ambient Temperature: 21.8° C; Liquid Temperature: 20.7° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [GTyahn 2 fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (7x12x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.538 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.2 V/m; Power Drift = 0.001 dB

Peak SAR (extrapolated) = 0.711 W/kg

SAR(1 g) = 0.507 mW/g; SAR(10 g) = 0.351 mW/g

Maximum value of SAR (measured) = 0.537 mW/g

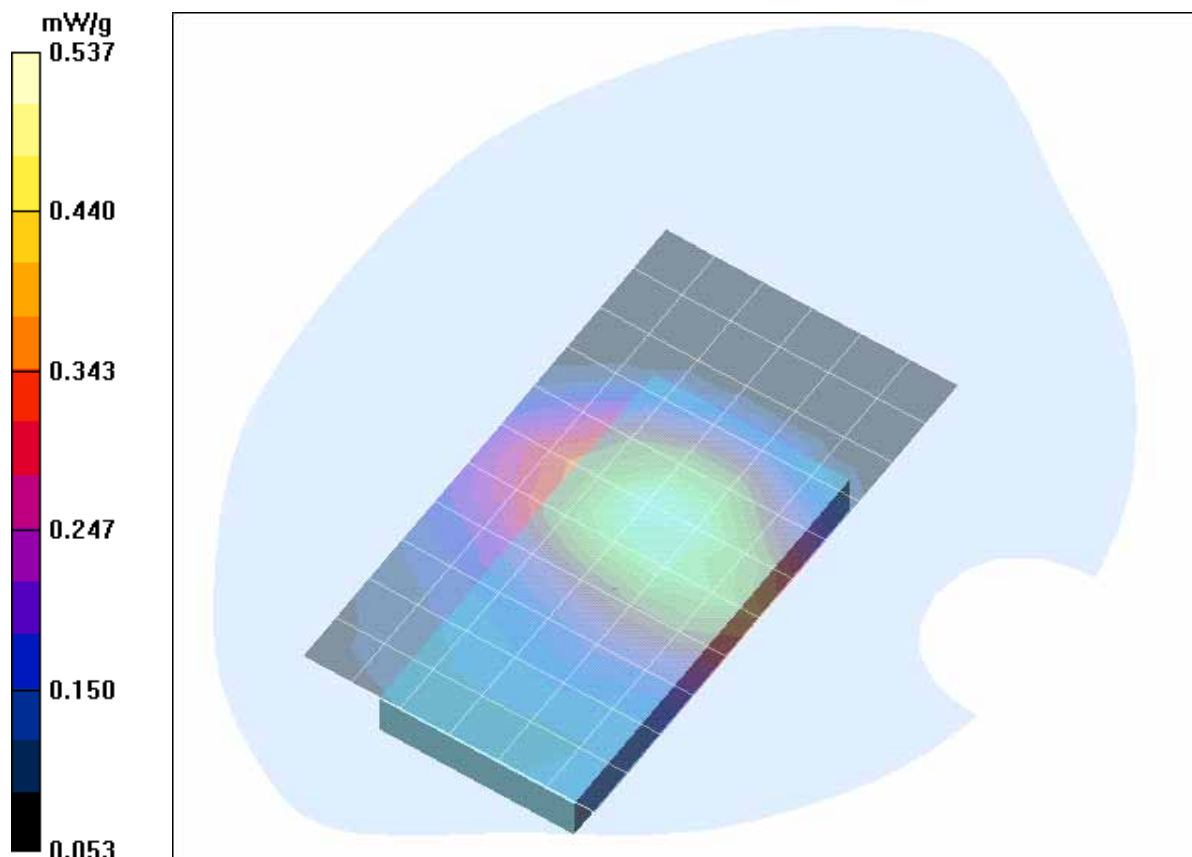


Fig. 8: SAR distribution for GPRS 850, channel 190, HP Omnibook XE3, position 2. (19.09.2005; Ambient Temperature: 21.8° C; Liquid Temperature: 20.7° C).

Test Laboratory: IMST GmbH, DASY Yellow (II); File Name: [GTyahn 5.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 850; Frequency: 836.6 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.94$ mho/m; $\epsilon_r = 55.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1669; ConvF(6.39, 6.39, 6.39); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn335; Calibrated: 17.03.2005
- Phantom: SAM Sugar 1341; Type: QD 000 P40 CB; Serial: TP-1341
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (7x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.076 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.12 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.097 W/kg

SAR(1 g) = 0.076 mW/g; SAR(10 g) = 0.055 mW/g

Maximum value of SAR (measured) = 0.079 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.12 V/m; Power Drift = 0.040 dB

Peak SAR (extrapolated) = 0.074 W/kg

SAR(1 g) = 0.045 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.052 mW/g

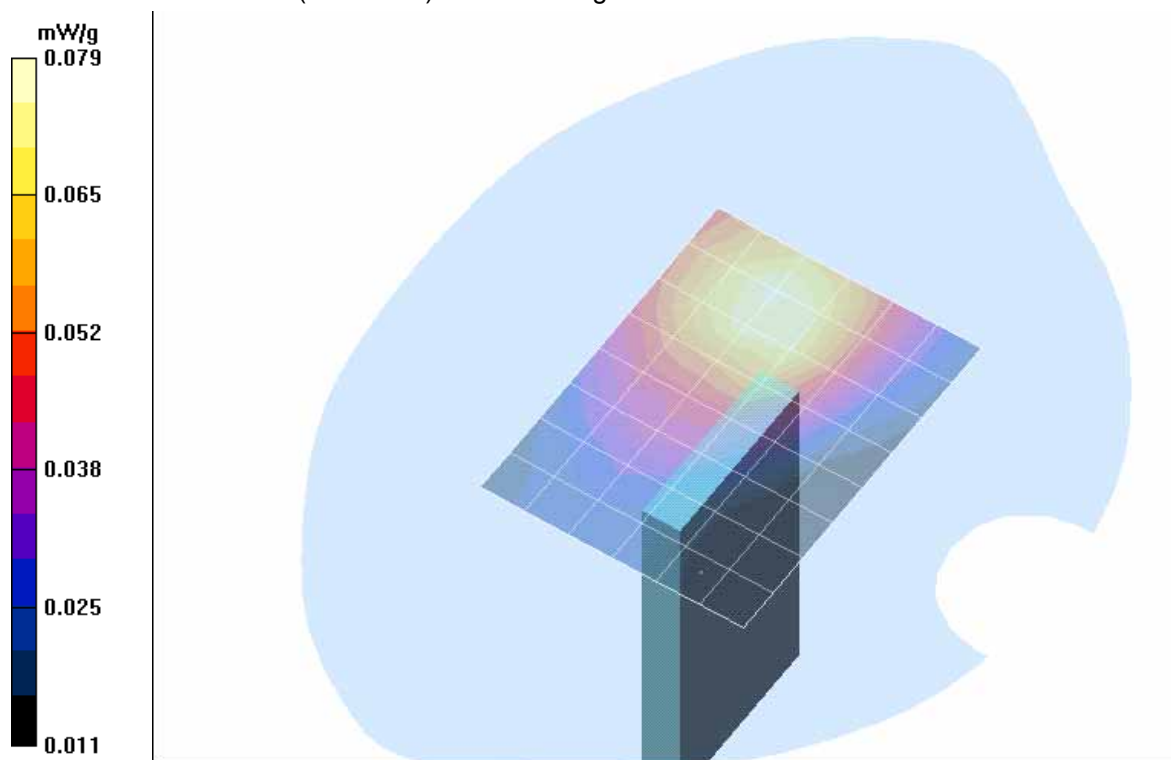


Fig. 9: SAR distribution for GPRS 850, channel 190, HP Omnibook XE3, position 3. (19.09.2005; Ambient Temperature: 21.9° C; Liquid Temperature: 20.7° C).

2 SAR Distribution Plots, GPRS 1900 (Class 10) Body

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [GTbphm_1_fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.410 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.3 V/m; Power Drift = -0.146 dB

Peak SAR (extrapolated) = 0.585 W/kg

SAR(1 g) = 0.407 mW/g; SAR(10 g) = 0.259 mW/g

Maximum value of SAR (measured) = 0.440 mW/g

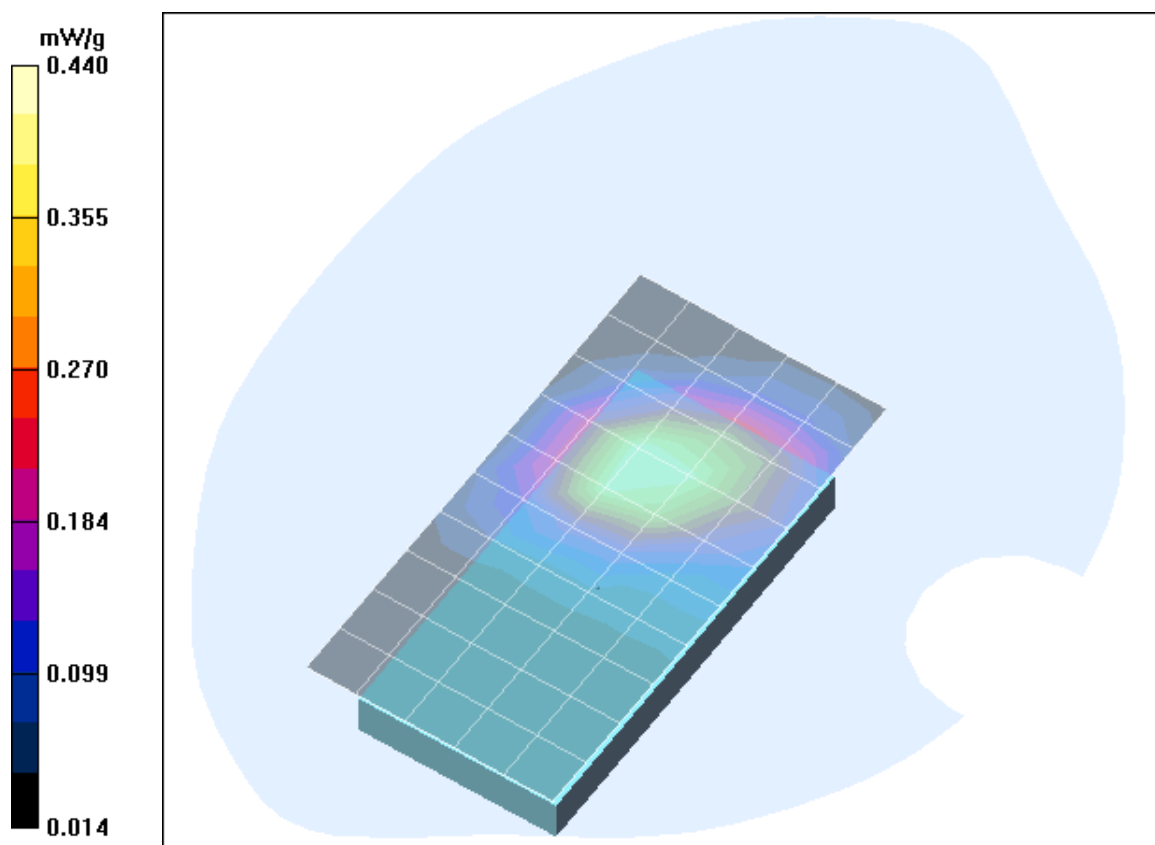


Fig. 10: SAR distribution for GPRS 1900, channel 661, DELL Latitude C810, position 1. (20.09.2005; Ambient Temperature: 21.8° C; Liquid Temperature: 20.9° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [GTbphm 2 fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.613 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.9 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.604 mW/g; SAR(10 g) = 0.364 mW/g

Maximum value of SAR (measured) = 0.641 mW/g

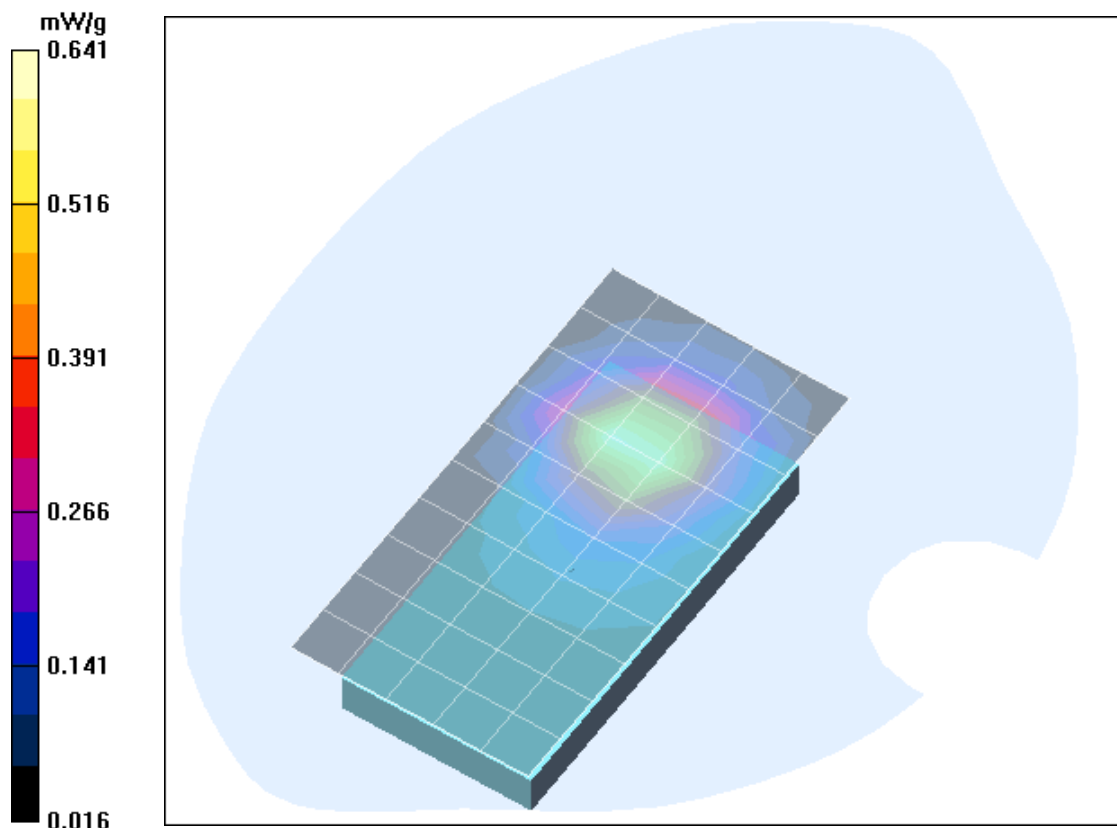


Fig. 11: SAR distribution for GPRS 1900, channel 661, DELL Latitude C810, position 2. (20.09.2005; Ambient Temperature: 21.7° C; Liquid Temperature: 20.9° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [GTbphm 5 fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.402 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 15.1 V/m; Power Drift = 0.051 dB

Peak SAR (extrapolated) = 0.593 W/kg

SAR(1 g) = 0.378 mW/g; SAR(10 g) = 0.234 mW/g

Maximum value of SAR (measured) = 0.410 mW/g

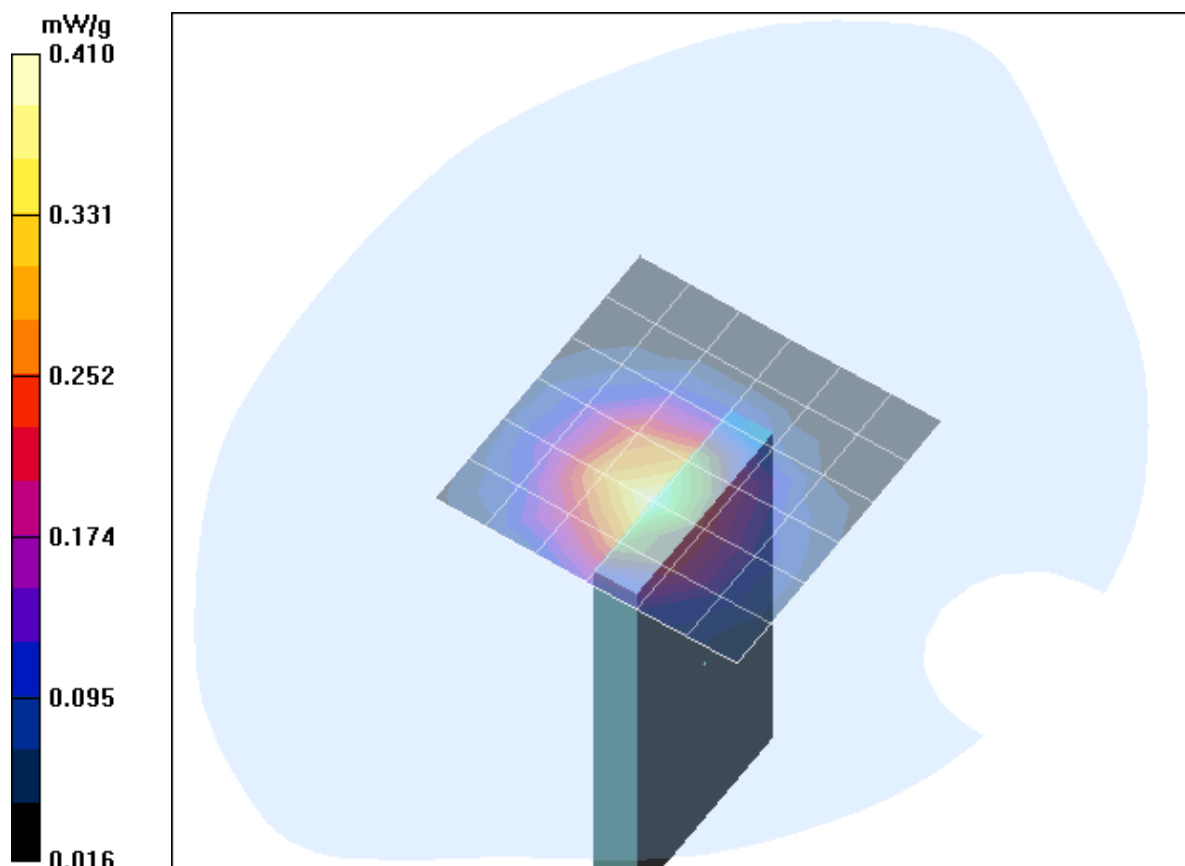


Fig. 12: SAR distribution for GPRS 1900, channel 661, DELL Latitude C810, position 3. (20.09.2005; Ambient Temperature: 21.8° C; Liquid Temperature: 20.9° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [GTbphm_1_fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.291 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.7 V/m; Power Drift = -0.046 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.272 mW/g; SAR(10 g) = 0.171 mW/g

Maximum value of SAR (measured) = 0.293 mW/g

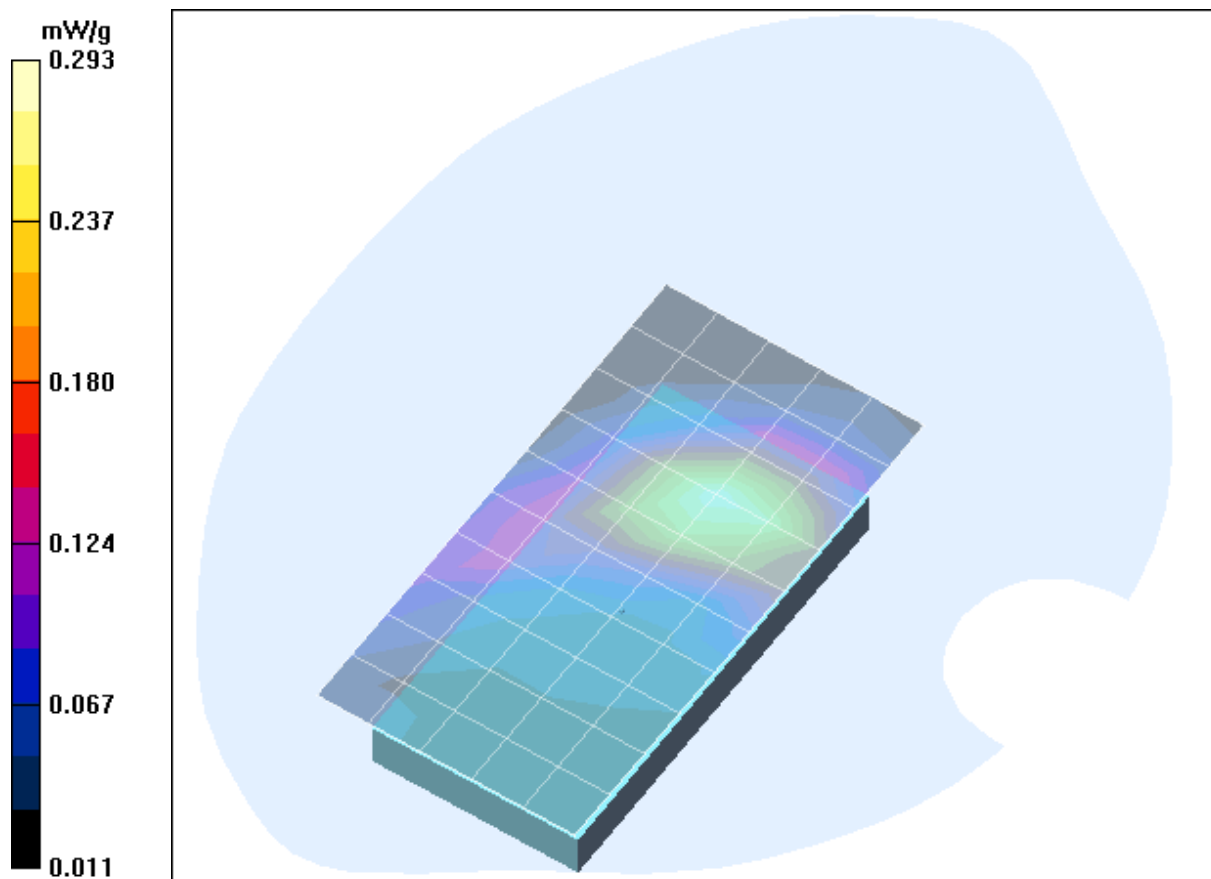


Fig. 13: SAR distribution for GPRS 1900, channel 661, HP Omnibook XE2, position 1. (20.09.2005; Ambient Temperature: 21.6° C; Liquid Temperature: 20.8° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [GTbphm 2 fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.471 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.8 V/m; Power Drift = -0.011 dB

Peak SAR (extrapolated) = 0.791 W/kg

SAR(1 g) = 0.500 mW/g; SAR(10 g) = 0.311 mW/g

Maximum value of SAR (measured) = 0.539 mW/g

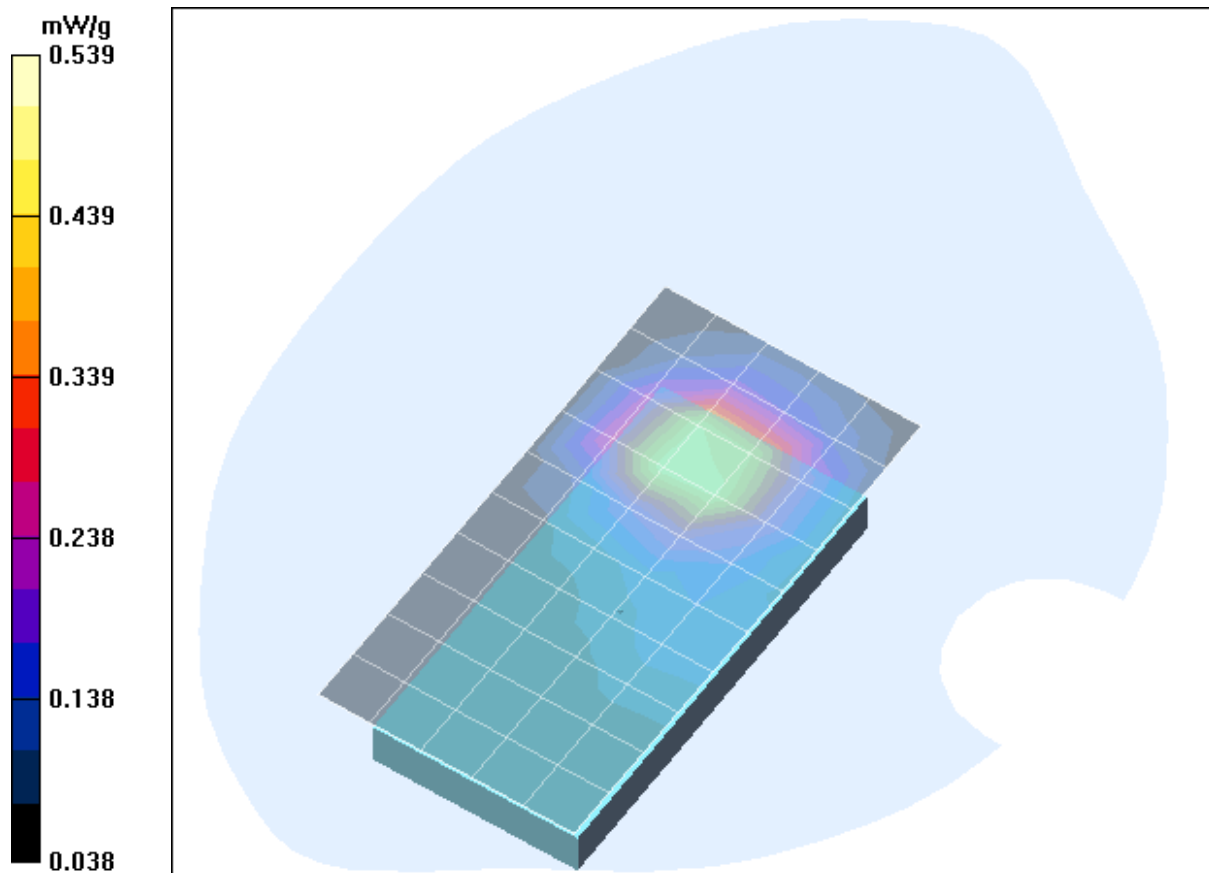


Fig. 14: SAR distribution for GPRS 1900, channel 661, HP Omnibook XE2, position 2. (20.09.2005; Ambient Temperature: 21.5° C; Liquid Temperature: 20.8° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [GTbphm 5 fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.294 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.8 V/m; Power Drift = 0.141 dB

Peak SAR (extrapolated) = 0.478 W/kg

SAR(1 g) = 0.308 mW/g; SAR(10 g) = 0.189 mW/g

Maximum value of SAR (measured) = 0.332 mW/g

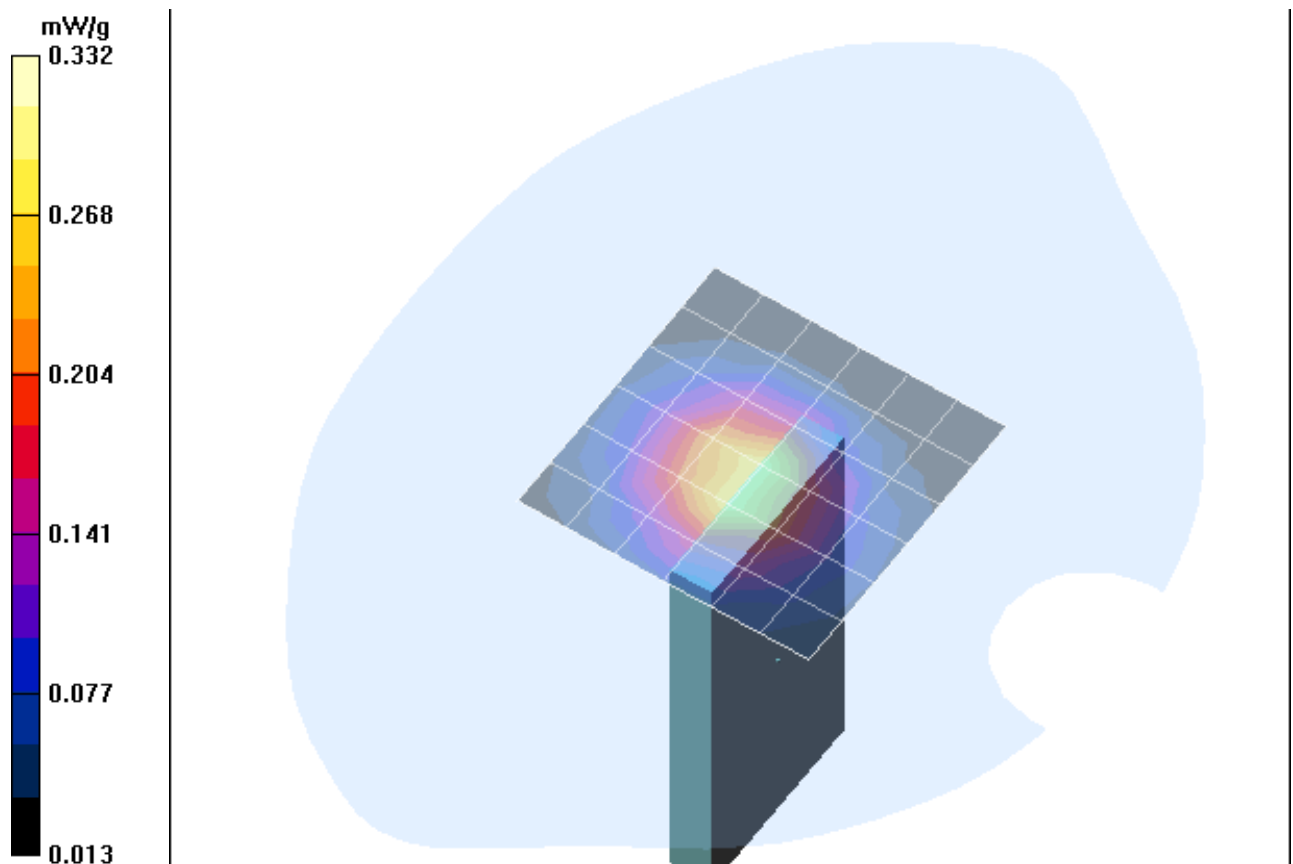


Fig. 15: SAR distribution for GPRS 1900, channel 661, HP Omnibook XE2, position 3 (20.09.2005; Ambient Temperature: 21.5° C; Liquid Temperature: 20.8° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [GTbphm_1_fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.260 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.5 V/m; Power Drift = -0.144 dB

Peak SAR (extrapolated) = 0.431 W/kg

SAR(1 g) = 0.263 mW/g; SAR(10 g) = 0.166 mW/g

Maximum value of SAR (measured) = 0.285 mW/g

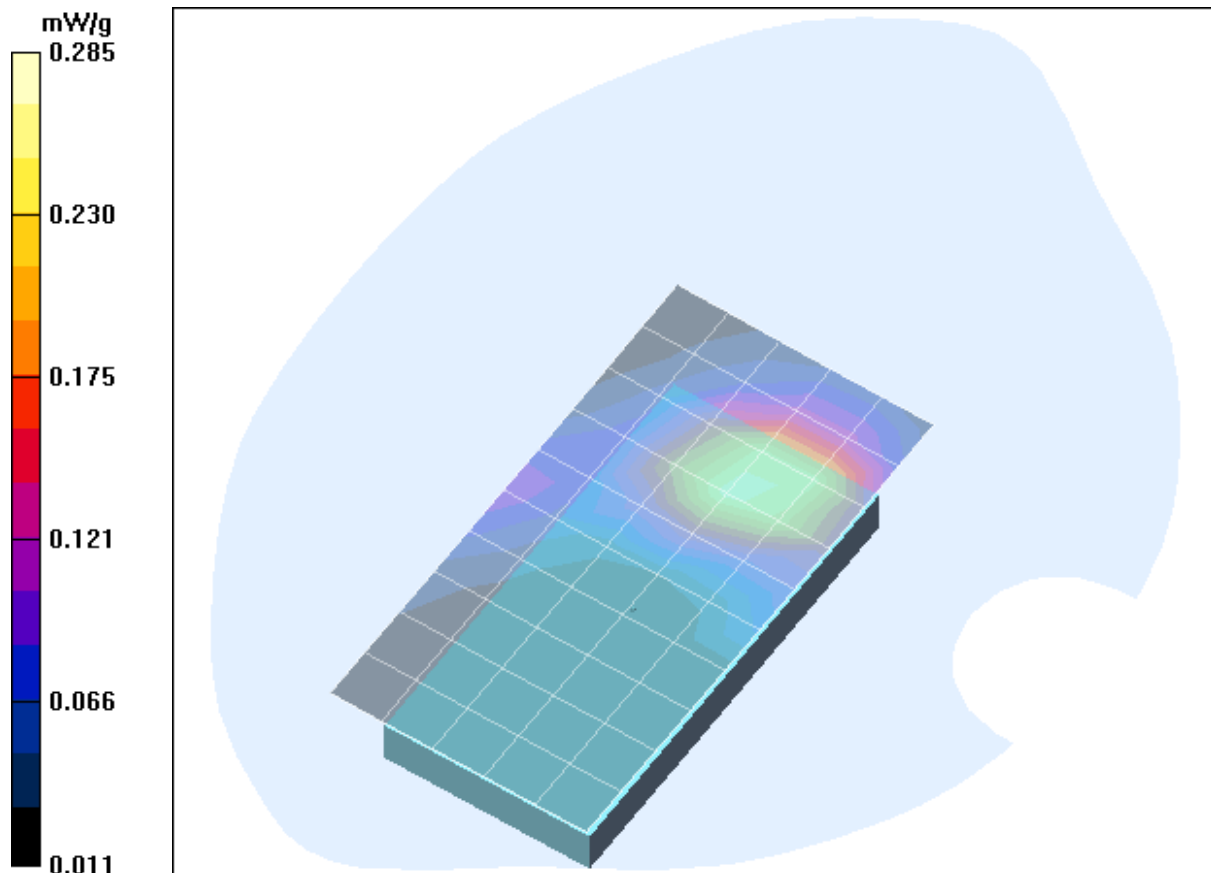


Fig. 16: SAR distribution for GPRS 1900, channel 661, HP Omnibook XE3, position 1. (20.09.2005; Ambient Temperature: 21.9° C; Liquid Temperature: 21.0° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [GTbphm 2 fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.514 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.5 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.871 W/kg

SAR(1 g) = 0.547 mW/g; SAR(10 g) = 0.339 mW/g

Maximum value of SAR (measured) = 0.589 mW/g

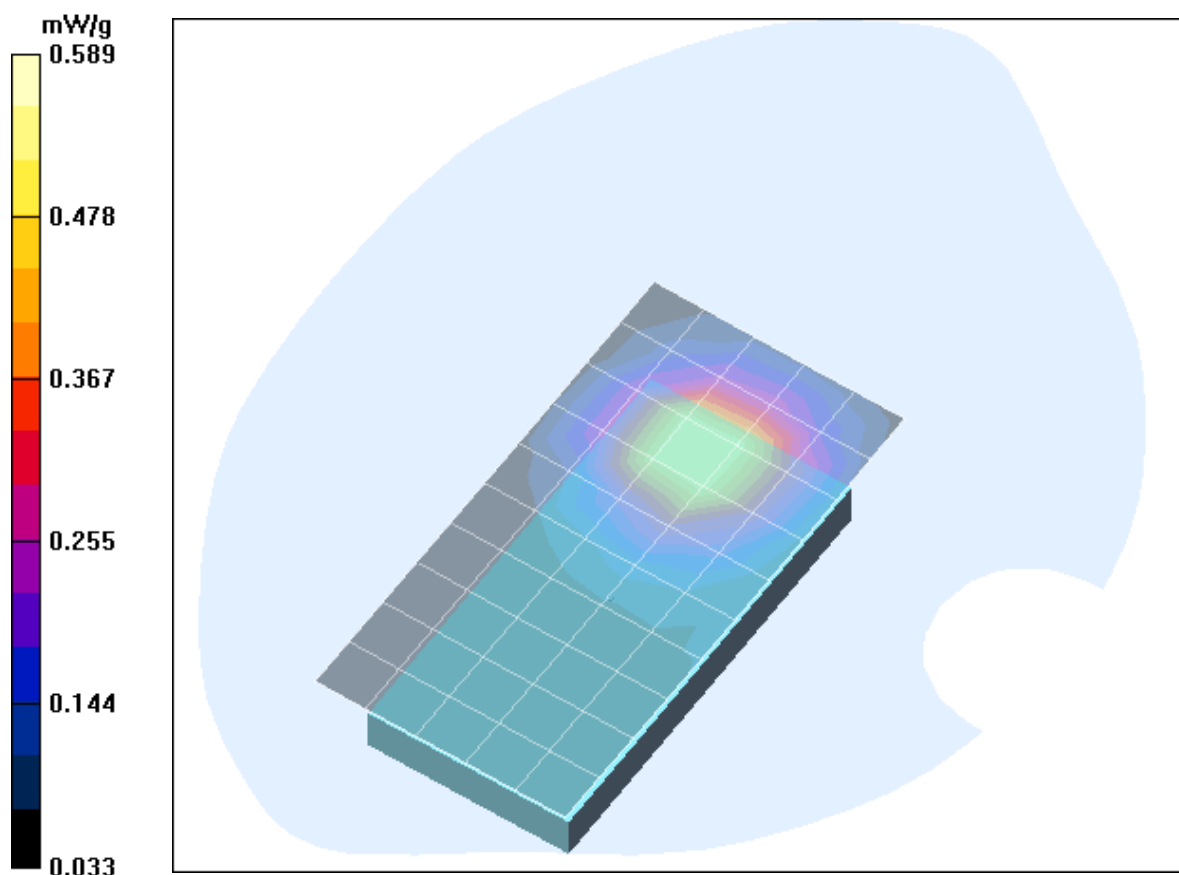


Fig. 17: SAR distribution for GPRS 1900, channel 661, HP Omnibook XE3, position 2. (20.09.2005; Ambient Temperature: 21.9° C; Liquid Temperature: 21.0° C).

Test Laboratory: IMST GmbH, DASY Blue (I); File Name: [GTbphm 5 fcc.da4](#)

DUT: Option; Type: GlobeTrotter; Serial: 004400015852005

Program Name: Unnamed Program

Communication System: GPRS 1900; Frequency: 1880 MHz; Duty Cycle: 1:4

Medium parameters used: $f = 1880$ MHz; $\sigma = 1.56$ mho/m; $\epsilon_r = 52.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY4 Configuration:

- Probe: ET3DV6R - SN1579; ConvF(4.69, 4.69, 4.69); Calibrated: 13.01.2005
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn631; Calibrated: 07.07.2005
- Phantom: SAM Glycol 1176; Type: Speag; Serial: 1176
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

Unnamed procedure/Area Scan (7x7x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.307 mW/g

Unnamed procedure/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.7 V/m; Power Drift = 0.058 dB

Peak SAR (extrapolated) = 0.477 W/kg

SAR(1 g) = 0.314 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.343 mW/g

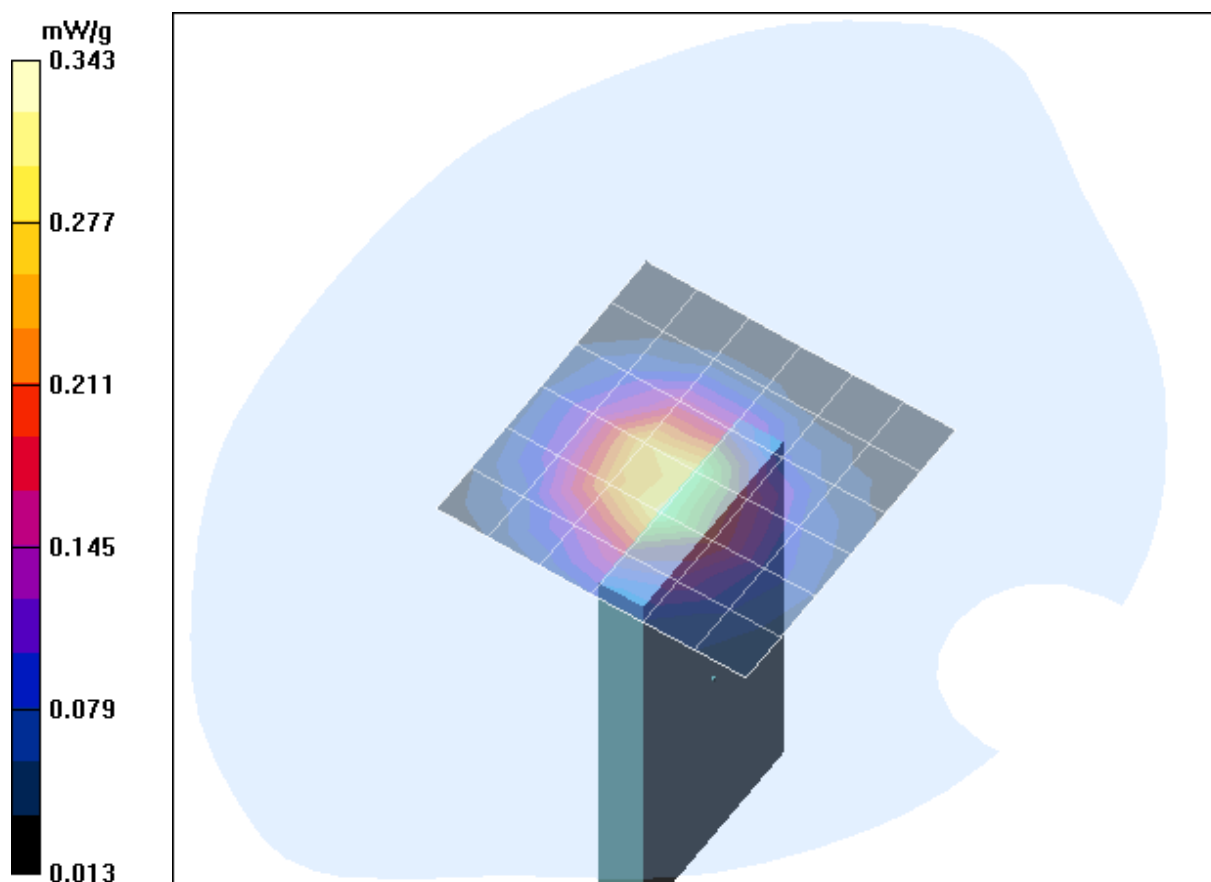


Fig. 18: SAR distribution for GPRS 1900, channel 661, HP Omnibook XE3, position 5. (20.09.2005; Ambient Temperature: 21.9° C; Liquid Temperature: 21.0° C).

3 SAR z-axis scans (Validation)

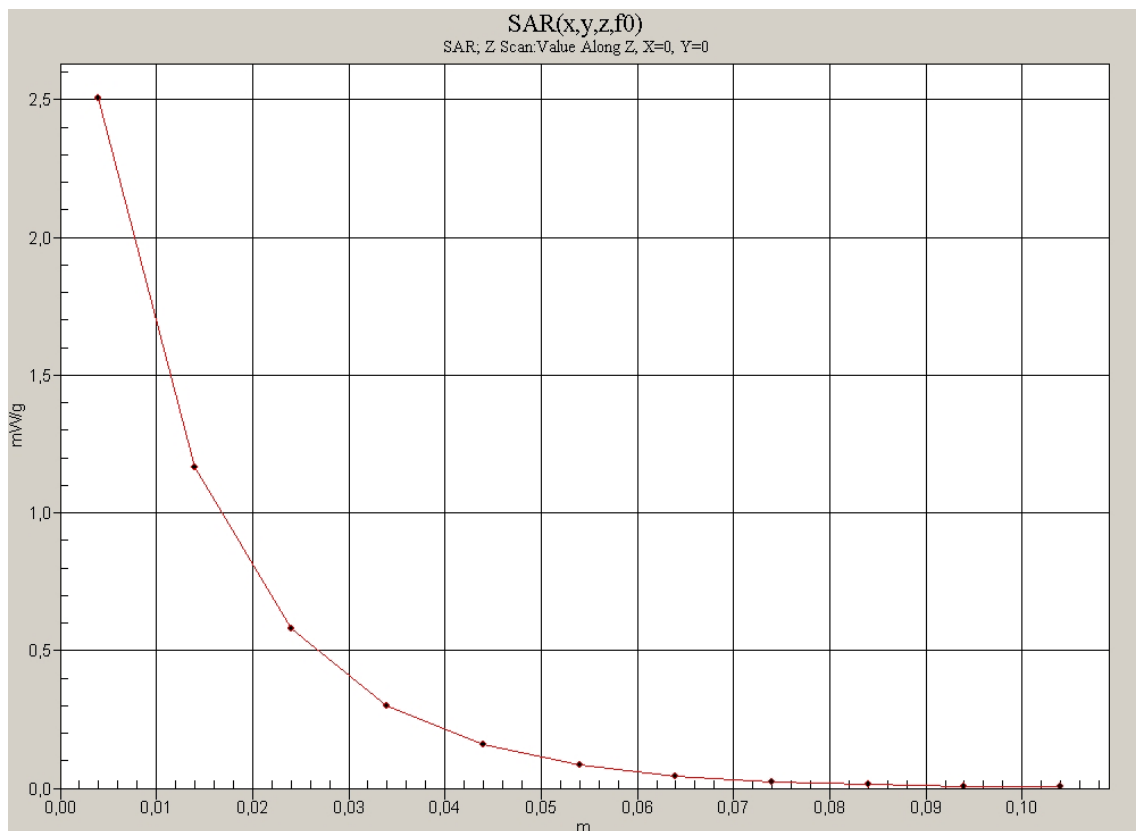


Fig. 19: SAR versus liquid depth, 835 MHz, body (19.09.2005; Ambient Temperature: 21.1° C; Liquid Temperature : 20.4° C).

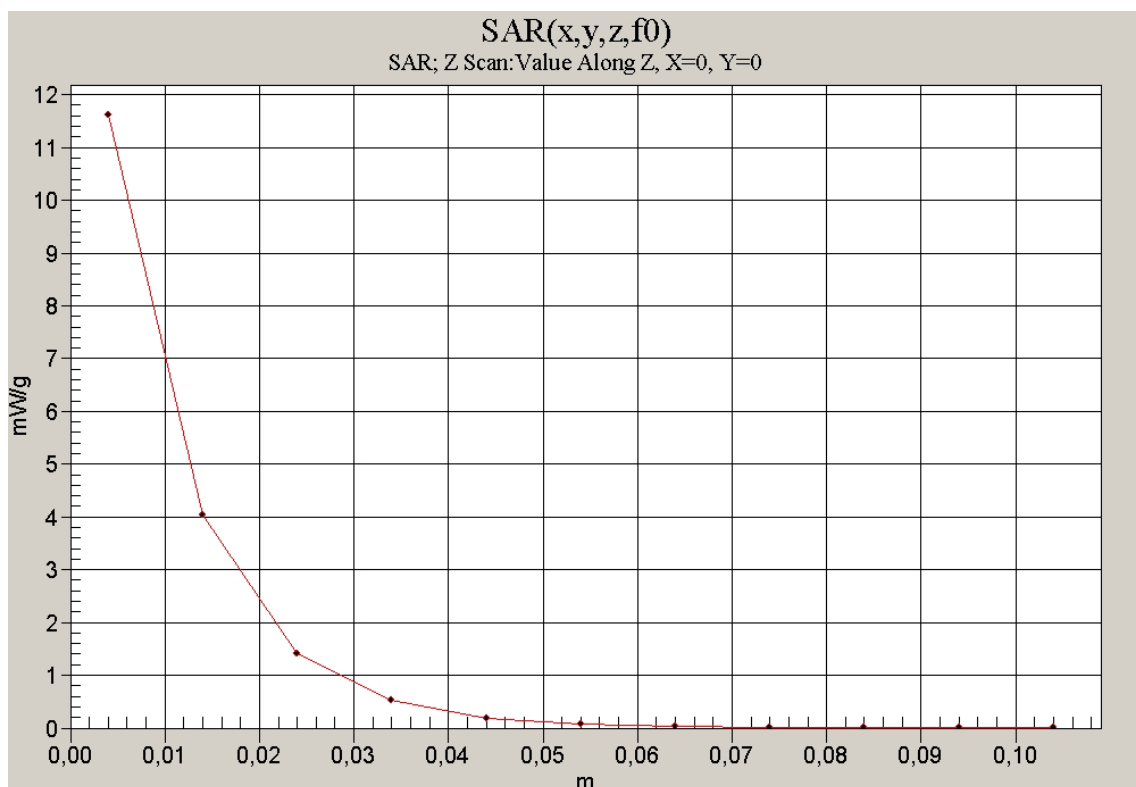


Fig. 20: SAR versus liquid depth, 1900 MHz, body (20.09.2005; Ambient Temperature: 21.6° C; Liquid Temperature : 20.8° C).

4 SAR z-axis scans (Measurements)

The following pictures show the plots of SAR versus liquid depth for the worst case values.

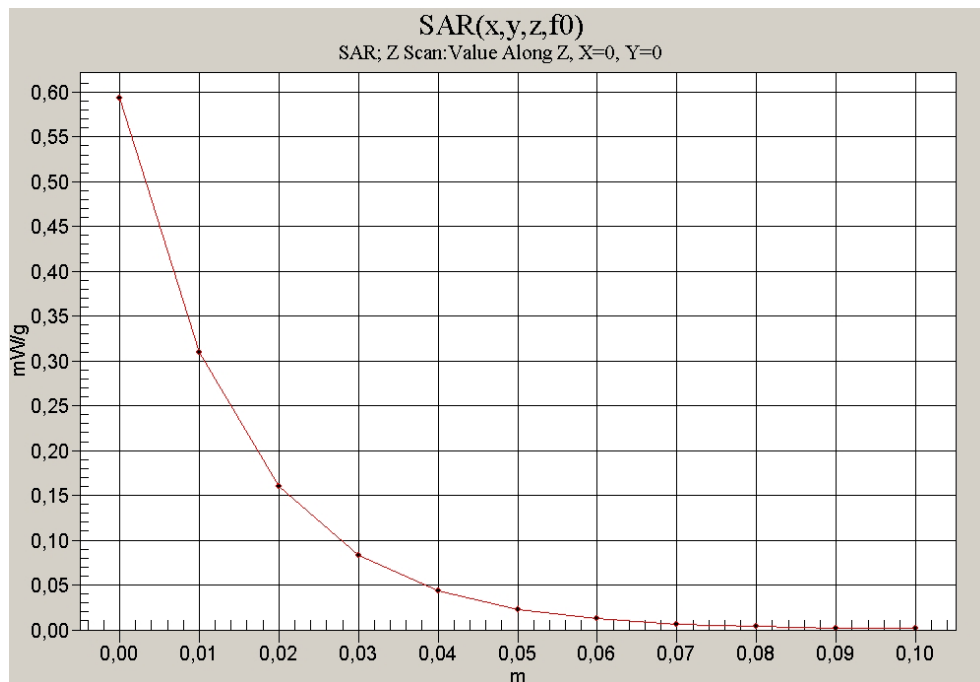


Fig. 21: SAR versus liquid depth, body: GPRS 850 (Class 10), channel 190, GT Fusion+ with a HP Omnibook XE2, position 1 (19.09.2005, Ambient Temperature: 21.2° C; Liquid Temperature : 20.5° C).

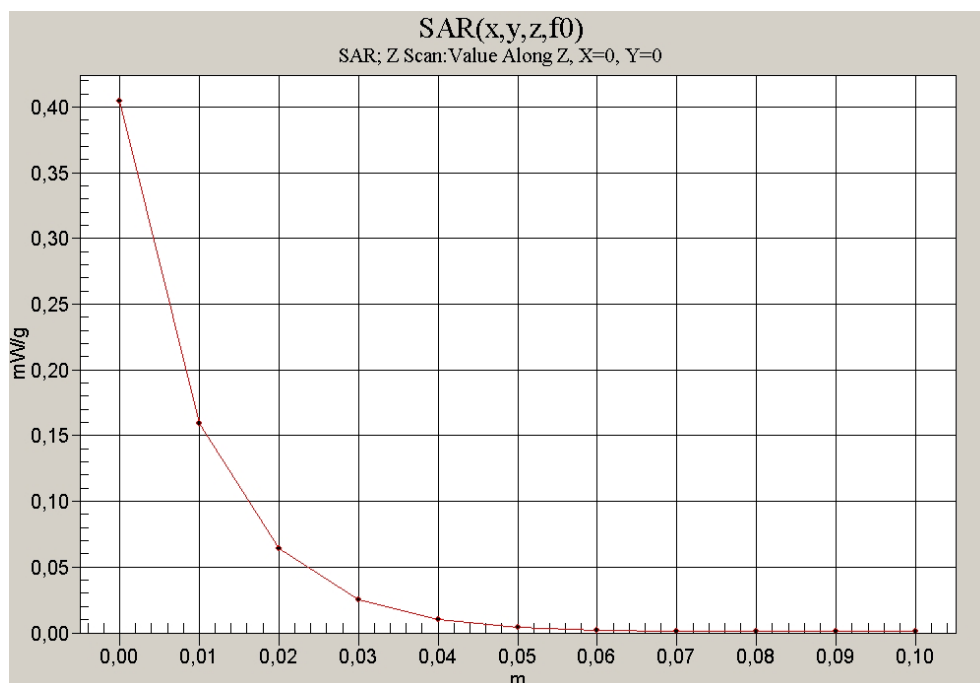


Fig. 22: SAR versus liquid depth, body: GPRS 1900 (Class 10), channel 661, GT Fusion+ with a DELL Latitude C810, position 2 (20.09.2005, Ambient Temperature: 21.7° C; Liquid Temperature : 20.9° C).