

# FCC REPORT

## (GSM & WCDMA)

**Applicant:** Sun Cupid Technology (HK) Ltd.

**Address of Applicant:** 16/F, CEO Tower, 77 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong.

**Equipment Under Test (EUT)**

Product Name: LTE Smart phone

Model No.: N6201L, G4

Trade mark: NUU

**FCC ID:** 2ADINN6201L

**Applicable standards:** FCC CFR Title 47 Part 2  
FCC CFR Title 47 Part 22 Subpart H  
FCC CFR Title 47 Part 24 Subpart E  
FCC CFR Title 47 Part 27 Subpart L

**Date of sample receipt:** 14 Dec., 2018

**Date of Test:** 14 Dec., to 22 Dec., 2018

**Date of report issued:** 25 Dec., 2018

**Test Result:** PASS\*

\* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Bruce Zhang  
Laboratory Manager

This report details the results of the testing carried out on one sample. The results contained in this test report do not relate to other samples of the same product and does not permit the use of the CCIS product certification mark. The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report.

This report may only be reproduced and distributed in full. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

## 2. Version

| Version No. | Date          | Description |
|-------------|---------------|-------------|
| 00          | 25 Dec., 2018 | Original    |
|             |               |             |
|             |               |             |
|             |               |             |
|             |               |             |

**Tested by:**

*Carey Chen*

**Date:**

25 Dec., 2018

**Test Engineer**

**Reviewed by:**

*Wimer Zhang*

**Date:**

25 Dec., 2018

**Project Engineer**

## 3. Contents

|                                                           | Page |
|-----------------------------------------------------------|------|
| 1. COVER PAGE .....                                       | 1    |
| 2. VERSION.....                                           | 2    |
| 3. CONTENTS.....                                          | 3    |
| 4. TEST SUMMARY .....                                     | 4    |
| 5. GENERAL INFORMATION .....                              | 5    |
| 5.1 CLIENT INFORMATION.....                               | 5    |
| 5.2 GENERAL DESCRIPTION OF E.U.T.....                     | 5    |
| 5.3 TEST MODES.....                                       | 7    |
| 5.4 DESCRIPTION OF SUPPORT UNITS.....                     | 7    |
| 5.5 MEASUREMENT UNCERTAINTY.....                          | 7    |
| 5.6 LABORATORY FACILITY.....                              | 7    |
| 5.7 LABORATORY LOCATION .....                             | 8    |
| 5.8 TEST INSTRUMENTS LIST.....                            | 8    |
| 6. TEST RESULTS.....                                      | 9    |
| 6.1 CONDUCTED OUTPUT POWER, ERP AND EIRP .....            | 9    |
| 6.2 PEAK-TO-AVERAGE POWER RATIO .....                     | 13   |
| 6.3 OCCUPY BANDWIDTH .....                                | 16   |
| 6.4 MODULATION CHARACTERISTIC.....                        | 25   |
| 6.5 OUT OF BAND EMISSION AT ANTENNA TERMINALS .....       | 25   |
| 6.6 FIELD STRENGTH OF SPURIOUS RADIATION MEASUREMENT..... | 35   |
| 6.7 FREQUENCY STABILITY V.S. TEMPERATURE MEASUREMENT..... | 41   |
| 6.8 FREQUENCY STABILITY V.S. VOLTAGE MEASUREMENT .....    | 45   |
| 7 TEST SETUP PHOTO.....                                   | 48   |
| 8 EUT CONSTRUCTIONAL DETAILS .....                        | 49   |

## 4. Test Summary

| Test Item                                                               | Section in CFR 47                                                         | Result                               |
|-------------------------------------------------------------------------|---------------------------------------------------------------------------|--------------------------------------|
| RF Exposure (SAR)                                                       | Part 1.1307<br>Part 2.1093                                                | Pass<br>(Please refer to SAR Report) |
| RF Output Power                                                         | Part 2.1046<br>Part 22.913 (a)(2)<br>Part 24.232 (c)<br>Part 27.50 (d)(4) | Pass                                 |
| Peak-to-Average Power Ratio                                             | Part 24.232 (d)<br>Part 27.50(d)(5)                                       | Pass                                 |
| Modulation Characteristics                                              | Part 2.1047                                                               | Pass                                 |
| 99% & -26 dB Occupied Bandwidth                                         | Part 2.1049<br>Part 22.917(b)<br>Part 24.238(b)<br>Part 27.53(h)          | Pass                                 |
| Out of band emission at antenna terminals                               | Part 2.1053<br>Part 22.917 (a)<br>Part 24.238 (a)<br>Part 27.53 (h)       | Pass                                 |
| Field strength of spurious radiation                                    | Part 22.917 (a)<br>Part 24.238 (a)<br>Part 27.53 (h)                      | Pass                                 |
| Frequency stability vs. temperature                                     | Part 22.355<br>Part 24.235<br>Part 27.54<br>Part 2.1055(a)(1)(b)          | Pass                                 |
| Frequency stability vs. voltage                                         | Part 22.355<br>Part 24.235<br>Part 27.54<br>Part 2.1055(d)(2)             | Pass                                 |
| Pass: The EUT complies with the essential requirements in the standard. |                                                                           |                                      |

## 5. General Information

### 5.1 Client Information

|              |                                                                                            |
|--------------|--------------------------------------------------------------------------------------------|
| Applicant:   | Sun Cupid Technology (HK) Ltd.                                                             |
| Address:     | 16/F, CEO Tower, 77 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong.                  |
| Manufacturer | Sun Cupid Technology (HK) Ltd.                                                             |
| Address:     | 16/F, CEO Tower, 77 Wing Hong Street, Cheung Sha Wan, Kowloon, Hong Kong.                  |
| Factory:     | SUNCUPID (ShenZhen) Electronic Ltd                                                         |
| Address:     | Baolong Industrial City, Longgang District, Shenzhen Hi-Tech Road, Building 1, A 7, China. |

### 5.2 General Description of E.U.T.

|                            |                                                                                                                                                                                                                                                                      |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:              | LTE Smart phone                                                                                                                                                                                                                                                      |
| Model No.:                 | N6201L, G4                                                                                                                                                                                                                                                           |
| Operation Frequency range: | GSM 850: 824.20MHz-848.80MHz<br>PCS1900: 1850.20MHz-1909.80MHz<br>WCDMA Band V: 826.4MHz-846.6MHz<br>WCDMA Band II: 1852.4 MHz-1907.6 MHz<br>WCDMA Band IV: 1712.4 MHz-1752.6 MHz                                                                                    |
| Modulation type:           | GSM/GPRS: GMSK, UMTS: QPSK, EGPRS: 8PSK                                                                                                                                                                                                                              |
| Antenna type:              | Internal Antenna                                                                                                                                                                                                                                                     |
| Antenna gain:              | GSM 850: -1.53 dBi<br>PCS 1900: 0.11 dBi<br>WCDMA Band V: -0.12 dBi<br>WCDMA Band II: 0.12 dBi<br>WCDMA Band IV: 0.50 dBi                                                                                                                                            |
| Power supply:              | Rechargeable Li-ion Battery DC 3.85V, 3750mAh                                                                                                                                                                                                                        |
| AC adapter:                | Model: HJ-FC001K7-US<br>Input: AC100-240V, 50/60Hz, 0.6A<br>Output: DC 5.0V, 2000mA / DC 9.0V, 2000mA                                                                                                                                                                |
| Test Sample Condition:     | The test samples were provided in good working order with no visible defects.                                                                                                                                                                                        |
| Remark:                    | N6201L, G4 were identical inside, the electrical circuit design, layout, components used and internal wiring, with only difference being model name and for different areas , They all have two memory configurations, 1:6G(RAM) + 64G(ROM); 2: 6G(RAM) + 128G(ROM). |

## Operation Frequency List:

| GSM 850       |                 | PCS1900       |                 |
|---------------|-----------------|---------------|-----------------|
| Channel       | Frequency (MHz) | Channel       | Frequency (MHz) |
| 128           | 824.20          | 512           | 1850.20         |
| 129           | 824.40          | 513           | 1850.40         |
| ....          | ....            | ....          | ....            |
| 189           | 836.40          | 660           | 1879.80         |
| 190           | 836.60          | 661           | 1880.00         |
| 191           | 836.80          | 662           | 1880.20         |
| ...           | ...             | ...           | ...             |
| 250           | 848.60          | 809           | 1909.60         |
| 251           | 848.80          | 810           | 1909.80         |
| WCDMA Band V  |                 | WCDMA Band II |                 |
| Channel       | Frequency (MHz) | Channel       | Frequency (MHz) |
| 4132          | 826.40          | 9262          | 1852.40         |
| 4133          | 826.60          | 9263          | 1852.60         |
| ....          | ....            | ....          | ....            |
| 4182          | 836.40          | 9399          | 1879.80         |
| 4183          | 836.60          | 9400          | 1880.00         |
| 4184          | 836.80          | 9401          | 1880.20         |
| ...           | ...             | ...           | ...             |
| 4232          | 846.40          | 9537          | 1907.40         |
| 4233          | 846.60          | 9538          | 1907.60         |
| WCDMA Band IV |                 |               |                 |
| Channel       | Frequency (MHz) |               |                 |
| 1312          | 1712.40         |               |                 |
| 1313          | 1712.60         |               |                 |
| ....          | ....            |               |                 |
| 1412          | 1732.40         |               |                 |
| 1413          | 1732.60         |               |                 |
| 1414          | 1732.80         |               |                 |
| ...           | ...             |               |                 |
| 1512          | 1752.40         |               |                 |
| 1513          | 1752.60         |               |                 |

Regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| GSM850          |      |                | PCS1900         |      |                |
|-----------------|------|----------------|-----------------|------|----------------|
| Channel         |      | Frequency(MHz) | Channel         |      | Frequency(MHz) |
| Lowest channel  | 128  | 824.20         | Lowest channel  | 512  | 1850.20        |
| Middle channel  | 190  | 836.60         | Middle channel  | 661  | 1880.00        |
| Highest channel | 251  | 848.80         | Highest channel | 810  | 1909.80        |
| WCDMA Band V    |      |                | WCDMA Band II   |      |                |
| Channel         |      | Frequency(MHz) | Channel         |      | Frequency(MHz) |
| Lowest channel  | 4132 | 826.40         | Lowest channel  | 9262 | 1852.40        |
| Middle channel  | 4183 | 836.60         | Middle channel  | 9400 | 1880.00        |
| Highest channel | 4233 | 846.60         | Highest channel | 9538 | 1907.60        |
| WCDMA Band IV   |      |                |                 |      |                |
| Channel         |      | Frequency(MHz) |                 |      |                |
| Lowest channel  | 1312 | 1712.40        |                 |      |                |
| Middle channel  | 1413 | 1732.60        |                 |      |                |
| Highest channel | 1513 | 1752.60        |                 |      |                |

### 5.3 Test modes

| Operating Environment:                                                                                                                                                                                                                                                                                                                                                                                                       |                                                                 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| Temperature:                                                                                                                                                                                                                                                                                                                                                                                                                 | Normal: 15°C ~ 35°C, Extreme: -30°C ~ +50°C                     |
| Humidity:                                                                                                                                                                                                                                                                                                                                                                                                                    | 20 % ~ 75 % RH                                                  |
| Atmospheric Pressure:                                                                                                                                                                                                                                                                                                                                                                                                        | 1008 mbar                                                       |
| Voltage:                                                                                                                                                                                                                                                                                                                                                                                                                     | Nominal: 3.85Vdc, Extreme: Low 3.5 Vdc, High 4.40 Vdc           |
| Test mode:                                                                                                                                                                                                                                                                                                                                                                                                                   |                                                                 |
| GSM mode                                                                                                                                                                                                                                                                                                                                                                                                                     | Keep the EUT communication with simulated station in GSM mode   |
| GPRS mode                                                                                                                                                                                                                                                                                                                                                                                                                    | Keep the EUT communication with simulated station in GPRS mode  |
| EGPRS mode                                                                                                                                                                                                                                                                                                                                                                                                                   | Keep the EUT communication with simulated station in EGPRS mode |
| RMC mode                                                                                                                                                                                                                                                                                                                                                                                                                     | Keep the EUT communication with simulated station in RMC mode   |
| HSDPA                                                                                                                                                                                                                                                                                                                                                                                                                        | Keep the EUT communication with simulated station in HSDPA mode |
| HSUPA                                                                                                                                                                                                                                                                                                                                                                                                                        | Keep the EUT communication with simulated station in HSUPA mode |
| Remark: The EUT has been tested under continuous transmitting mode. Channel Low, Mid and High for each type band with rated data rate were chosen for full testing. The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for these modes with power adaptor, earphone and Data cable. Just the worst case position (H mode) shown in report. |                                                                 |

### 5.4 Description of Support Units

| Test Equipment    | Manufacturer | Model No. | Serial No. |
|-------------------|--------------|-----------|------------|
| Simulated Station | Anritsu      | MT8820C   | 6201026545 |

### 5.5 Measurement Uncertainty

| Parameters                          | Expanded Uncertainty |
|-------------------------------------|----------------------|
| Radiated Emission (9kHz ~ 30MHz)    | ±2.76 dB (k=2)       |
| Radiated Emission (30MHz ~ 1000MHz) | ±4.28 dB (k=2)       |
| Radiated Emission (1GHz ~ 18GHz)    | ±5.72 dB (k=2)       |
| Radiated Emission (18GHz ~ 40GHz)   | ±2.88 dB (k=2)       |

### 5.6 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Registration No.: 727551**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been accredited as a testing laboratory by FCC (Federal Communications Commission). The Registration No. is 727551.

- **IC - Registration No.: 10106A-1**

The 3m Semi-anechoic chamber of Shenzhen Zhongjian Nanfang Testing Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.

- **CNAS - Registration No.: CNAS L6048**

Shenzhen Zhongjian Nanfang Testing Co., Ltd. is accredited to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L6048.

- **A2LA - Registration No.: 4346.01**

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

## 5.7 Laboratory Location


Shenzhen Zhongjian Nanfang Testing Co., Ltd.  
Address: No. B-C, 1/F., Building 2, Laodong No.2 Industrial Park, Xixiang Road,  
Bao'an District, Shenzhen, Guangdong, China  
Tel: +86-755-23118282, Fax: +86-755-23116366  
Email: info@ccis-cb.com, Website: http://www.ccis-cb.com

## 5.8 Test Instruments list

| Test Equipment               | Manufacturer    | Model No.     | Serial No.         | Cal. Date<br>(mm-dd-yy) | Cal. Due date<br>(mm-dd-yy) |
|------------------------------|-----------------|---------------|--------------------|-------------------------|-----------------------------|
| 3m SAC                       | SAEMC           | 9m*6m*6m      | 966                | 07-22-2017              | 07-21-2020                  |
| BiConiLog Antenna            | SCHWARZBECK     | VULB9163      | 497                | 03-16-2018              | 03-15-2019                  |
| Biconical Antenna            | SCHWARZBECK     | VUBA9117      | 359                | 06-22-2017              | 06-21-2020                  |
| Horn Antenna                 | SCHWARZBECK     | BBHA9120D     | 916                | 03-16-2018              | 03-15-2019                  |
| Horn Antenna                 | SCHWARZBECK     | BBHA9120D     | 1805               | 06-22-2017              | 06-21-2020                  |
| Horn Antenna                 | SCHWARZBECK     | BBHA 9170     | BBHA9170582        | 11-21-2018              | 11-20-2019                  |
| EMI Test Software            | AUDIX           | E3            | Version: 6.110919b |                         |                             |
| Pre-amplifier                | HP              | 8447D         | 2944A09358         | 03-07-2018              | 03-06-2019                  |
| Pre-amplifier                | CD              | PAP-1G18      | 11804              | 03-07-2018              | 03-06-2019                  |
| Spectrum analyzer            | Rohde & Schwarz | FSP30         | 101454             | 03-07-2018              | 03-06-2019                  |
| Spectrum analyzer            | Rohde & Schwarz | FSP40         | 100363             | 11-21-2018              | 11-20-2019                  |
| EMI Test Receiver            | Rohde & Schwarz | ESRP7         | 101070             | 03-07-2018              | 03-06-2019                  |
| Spectrum Analyzer            | Agilent         | N9020A        | MY50510123         | 11-10-2018              | 11-09-2019                  |
| Signal Generator             | Rohde & Schwarz | SMX           | 835454/016         | 03-07-2018              | 03-06-2019                  |
| Signal Generator             | R&S             | SMR20         | 1008100050         | 03-07-2018              | 03-06-2019                  |
| RF Switch Unit               | MWRFTTEST       | MW200         | N/A                | N/A                     | N/A                         |
| Test Software                | MWRFTTEST       | MTS8200       | Version: 2.0.0.0   |                         |                             |
| Cable                        | ZDECL           | Z108-NJ-NJ-81 | 1608458            | 03-07-2018              | 03-06-2019                  |
| Cable                        | MICRO-COAX      | MFR64639      | K10742-5           | 03-07-2018              | 03-06-2019                  |
| Cable                        | SUHNER          | SUCOFLEX100   | 58193/4PE          | 03-07-2018              | 03-06-2019                  |
| DC Power Supply              | XinNuoEr        | WYK-10020K    | 1409050110020      | 10-31-2018              | 10-30-2019                  |
| Temperature Humidity Chamber | HengPu          | HPGDS-500     | 20140828008        | 09-24-2018              | 09-23-2019                  |
| Simulated Station            | Rohde & Schwarz | CMW500        | 140493             | 07-16-2018              | 07-15-2019                  |

## 6. Test results

### 6.1 Conducted Output Power, ERP and EIRP
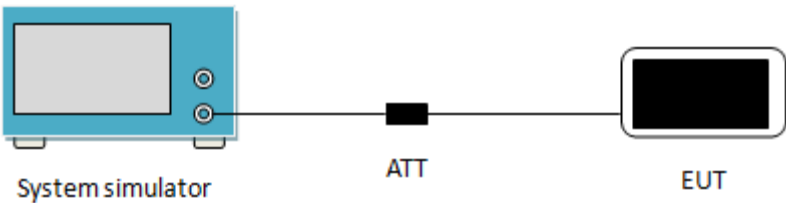
|                   |                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.913(a)(2), FCC part 24.232(c), FCC part 27.50(d)(4)                                                                                                                                                                                                                                                                                                                       |
| Test Method:      | ANSI/TIA-603-D 2010                                                                                                                                                                                                                                                                                                                                                                   |
| Limit:            | GSM 850: 7W, PCS 1900: 2W<br>WCDMA Band V: 7W, WCDMA Band II: 2W, WCDMA Band IV: 1W                                                                                                                                                                                                                                                                                                   |
| Test setup:       |  <p>The diagram illustrates the test setup. On the left is a blue 'System simulator' with a screen and two ports. A line connects one of its ports to a black 'ATT' (attenuator) block. Another line connects the other side of the 'ATT' block to a black 'EUT' (Equipment Under Test) device.</p> |
| Test Procedure:   | The transmitter output was connected to a calibrated attenuator, the other end of which was connected to the simulated station. Transmitter output power was read off in dBm.                                                                                                                                                                                                         |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                      |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                      |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                |


**Measurement Data:**

| EUT Mode                                                           | Burst Average power (dBm) |               |               |
|--------------------------------------------------------------------|---------------------------|---------------|---------------|
|                                                                    | 128                       | 190           | 251           |
|                                                                    | 824.20 (MHz)              | 836.60 (MHz)  | 848.80 (MHz)  |
| GSM 850                                                            | 32.04                     | 33.05         | 33.04         |
| GPRS 850 (1 Uplink slot)                                           | 32.94                     | 32.93         | 32.96         |
| GPRS 850 (2 Uplink slot)                                           | 32.16                     | 32.18         | 32.2          |
| GPRS 850 (3 Uplink slot)                                           | 30.26                     | 30.31         | 30.36         |
| GPRS 850 (4 Uplink slot)                                           | 29.00                     | 29.07         | 29.12         |
| Antenna Gain (dBi)                                                 | -1.53                     |               |               |
| Max. ERP (dBm)                                                     | 29.37                     |               |               |
| ERP Limit (dBm)                                                    | 38.45                     |               |               |
| EGPRS 850 (1 Uplink slot)                                          | 27.46                     | 27.39         | 27.45         |
| EGPRS 850 (2 Uplink slot)                                          | 26.07                     | 26.10         | 26.11         |
| EGPRS 850 (3 Uplink slot)                                          | 23.79                     | 23.71         | 23.82         |
| EGPRS 850 (4 Uplink slot)                                          | 22.40                     | 22.33         | 22.42         |
| Antenna Gain (dBi)                                                 | -1.53                     |               |               |
| Max. ERP (dBm)                                                     | 23.78                     |               |               |
| ERP Limit (dBm)                                                    | 38.45                     |               |               |
|                                                                    |                           |               |               |
| EUT Mode                                                           | Burst Average power (dBm) |               |               |
|                                                                    | 512                       | 661           | 810           |
|                                                                    | 1850.20 (MHz)             | 1880.00 (MHz) | 1909.80 (MHz) |
| PCS 1900                                                           | 29.79                     | 29.81         | 29.85         |
| GPRS 1900 (1 Uplink slot)                                          | 29.72                     | 29.74         | 29.79         |
| GPRS 1900 (2 Uplink slot)                                          | 28.87                     | 28.9          | 28.98         |
| GPRS 1900 (3 Uplink slot)                                          | 26.85                     | 26.91         | 27.01         |
| GPRS 1900 (4 Uplink slot)                                          | 25.76                     | 25.82         | 25.92         |
| Antenna Gain (dBi)                                                 | 0.11                      |               |               |
| Max. EIRP (dBm)                                                    | 29.96                     |               |               |
| EIRP Limit (dBm)                                                   | 33.00                     |               |               |
| EGPRS 1900 (1 Uplink slot)                                         | 25.99                     | 25.92         | 25.82         |
| EGPRS 1900 (2 Uplink slot)                                         | 24.71                     | 24.62         | 24.59         |
| EGPRS 1900 (3 Uplink slot)                                         | 22.67                     | 22.58         | 22.42         |
| EGPRS 1900 (4 Uplink slot)                                         | 21.33                     | 21.2          | 21.08         |
| Antenna Gain (dBi)                                                 | 0.11                      |               |               |
| Max. EIRP (dBm)                                                    | 26.10                     |               |               |
| EIRP Limit (dBm)                                                   | 33.00                     |               |               |
| Note: EIRP (dBm) = Burst Average power (dBm) + Antenna Gain (dBi). |                           |               |               |
| ERP (dBm ) = EIRP (dBm) - 2.15 (dB).                               |                           |               |               |

| EUT Mode                                                           |           | Burst Average power (dBm) |               |               |
|--------------------------------------------------------------------|-----------|---------------------------|---------------|---------------|
|                                                                    |           | 4132                      | 4183          | 4233          |
|                                                                    |           | 826.40 (MHz)              | 836.60 (MHz)  | 846.60 (MHz)  |
| UMTS 850<br>HSDPA                                                  | Subtest 1 | 22.82                     | 22.84         | 22.87         |
|                                                                    | Subtest 2 | 22.48                     | 22.43         | 22.48         |
|                                                                    | Subtest 3 | 20.93                     | 20.91         | 20.91         |
|                                                                    | Subtest 4 | 20.86                     | 20.85         | 20.95         |
| UMTS 850<br>HSUPA                                                  | Subtest 1 | 22.33                     | 22.35         | 22.38         |
|                                                                    | Subtest 2 | 22.79                     | 22.79         | 22.82         |
|                                                                    | Subtest 3 | 20.37                     | 20.36         | 20.34         |
|                                                                    | Subtest 4 | 22.86                     | 22.81         | 22.89         |
|                                                                    | Subtest 5 | 21.40                     | 21.29         | 21.34         |
| UMTS 850 RMC                                                       | 12.2kbps  | 23.91                     | 23.89         | 23.91         |
| UMTS 850 AMR                                                       | 12.2kbps  | 23.82                     | 23.79         | 23.69         |
| Antenna Gain (dBi)                                                 |           | -0.12                     |               |               |
| Max. ERP (dBm)                                                     |           | 21.64                     |               |               |
| ERP Limit (dBm)                                                    |           | 38.45                     |               |               |
|                                                                    |           |                           |               |               |
| EUT Mode                                                           |           | Burst Average power (dBm) |               |               |
|                                                                    |           | 9262                      | 9400          | 9538          |
|                                                                    |           | 1852.40 (MHz)             | 1880.00 (MHz) | 1907.60 (MHz) |
| UMTS 1900<br>HSDPA                                                 | Subtest 1 | 22.19                     | 22.07         | 22.06         |
|                                                                    | Subtest 2 | 21.71                     | 21.71         | 21.68         |
|                                                                    | Subtest 3 | 20.14                     | 20.20         | 20.11         |
|                                                                    | Subtest 4 | 20.15                     | 20.06         | 20.01         |
| UMTS 1900<br>HSUPA                                                 | Subtest 1 | 21.63                     | 21.67         | 21.56         |
|                                                                    | Subtest 2 | 22.03                     | 22.01         | 22.01         |
|                                                                    | Subtest 3 | 19.74                     | 19.75         | 19.60         |
|                                                                    | Subtest 4 | 22.06                     | 22.01         | 21.96         |
|                                                                    | Subtest 5 | 20.61                     | 20.64         | 20.49         |
| UMTS 1900 RMC                                                      | 12.2kbps  | 23.14                     | 23.15         | 23.21         |
| UMTS 1900 AMR                                                      | 12.2kbps  | 23.06                     | 23.02         | 23.03         |
| Antenna Gain (dBi)                                                 |           | 0.12                      |               |               |
| Max. EIRP (dBm)                                                    |           | 23.33                     |               |               |
| EIRP Limit (dBm)                                                   |           | 33.00                     |               |               |
| Note: EIRP (dBm) = Burst Average power (dBm) + Antenna Gain (dBi). |           |                           |               |               |
| ERP (dBm ) = EIRP (dBm) - 2.15 (dB).                               |           |                           |               |               |

| EUT Mode                                                           |           | Burst Average power (dBm) |               |               |
|--------------------------------------------------------------------|-----------|---------------------------|---------------|---------------|
|                                                                    |           | 1312                      | 1412          | 1513          |
|                                                                    |           | 1712.40 (MHz)             | 1732.40 (MHz) | 1752.60 (MHz) |
| UMTS 1700<br>HSDPA                                                 | Subtest 1 | 21.93                     | 22.03         | 21.9          |
|                                                                    | Subtest 2 | 21.61                     | 21.61         | 21.6          |
|                                                                    | Subtest 3 | 20.21                     | 20.09         | 19.96         |
|                                                                    | Subtest 4 | 20.23                     | 20.26         | 20.08         |
| UMTS 1700<br>HSUPA                                                 | Subtest 1 | 21.72                     | 21.68         | 21.57         |
|                                                                    | Subtest 2 | 22.04                     | 22            | 21.99         |
|                                                                    | Subtest 3 | 19.79                     | 19.81         | 19.61         |
|                                                                    | Subtest 4 | 22.04                     | 22.04         | 22.02         |
|                                                                    | Subtest 5 | 20.64                     | 20.63         | 20.61         |
| UMTS 1700 RMC                                                      | 12.2kbps  | 23.14                     | 23.11         | 22.96         |
| UMTS 1700 AMR                                                      | 12.2kbps  | 23.01                     | 22.98         | 22.82         |
| Antenna Gain (dBi)                                                 |           | 0.50                      |               |               |
| Max. EIRP (dBm)                                                    |           | 23.57                     |               |               |
| EIRP Limit (dBm)                                                   |           | 30.00                     |               |               |
| Note: EIRP (dBm) = Burst Average power (dBm) + Antenna Gain (dBi). |           |                           |               |               |


## 6.2 Peak-to-Average Power Ratio
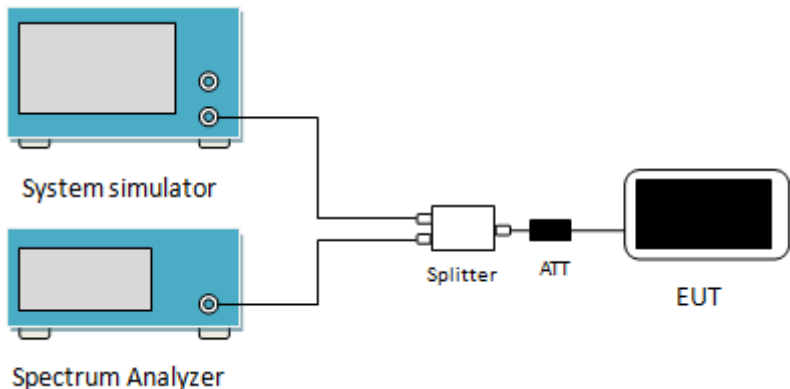
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 24.232(d), FCC part 27.50(d)(5)                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Test Method       | ANSI/TIA-603-D 2010                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Limit:            | The peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.                                                                                                                                                                                                                                                                                                                                                                                   |
| Test setup:       |  <p>The diagram shows a test setup for measuring the Peak-to-Average Power Ratio (PAR). It includes a System simulator, a Spectrum Analyzer, a Splitter, an ATT (Attenuator), and the EUT (Equipment Under Test). The System simulator and Spectrum Analyzer are connected to the Splitter. The Splitter is connected to the ATT, which is then connected to the EUT.</p> |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.</li> <li>2 Set the CCDF option in spectrum analyzer, RBW <math>\geq</math> OBW,</li> <li>3 Set the EUT working in highest power level, measured and recorded the 0.1% as PAPR level.</li> <li>4 Repeat step 1~3 at other frequency and modulations.</li> </ol>                                              |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                      |


### Measurement Data:

| Modulation    | Test channel | PAPR  |
|---------------|--------------|-------|
| GSM 850       | 190          | -0.08 |
| EGPRS 850     | 190          | -0.09 |
| PCS 1900      | 661          | -0.20 |
| EGPRS 1900    | 661          | -0.20 |
| UMTS 850 RMC  | 4183         | 3.00  |
| UMTS 1900 RMC | 9400         | 3.20  |
| UMTS1700 RMC  | 1413         | 2.88  |

Test plots as below:

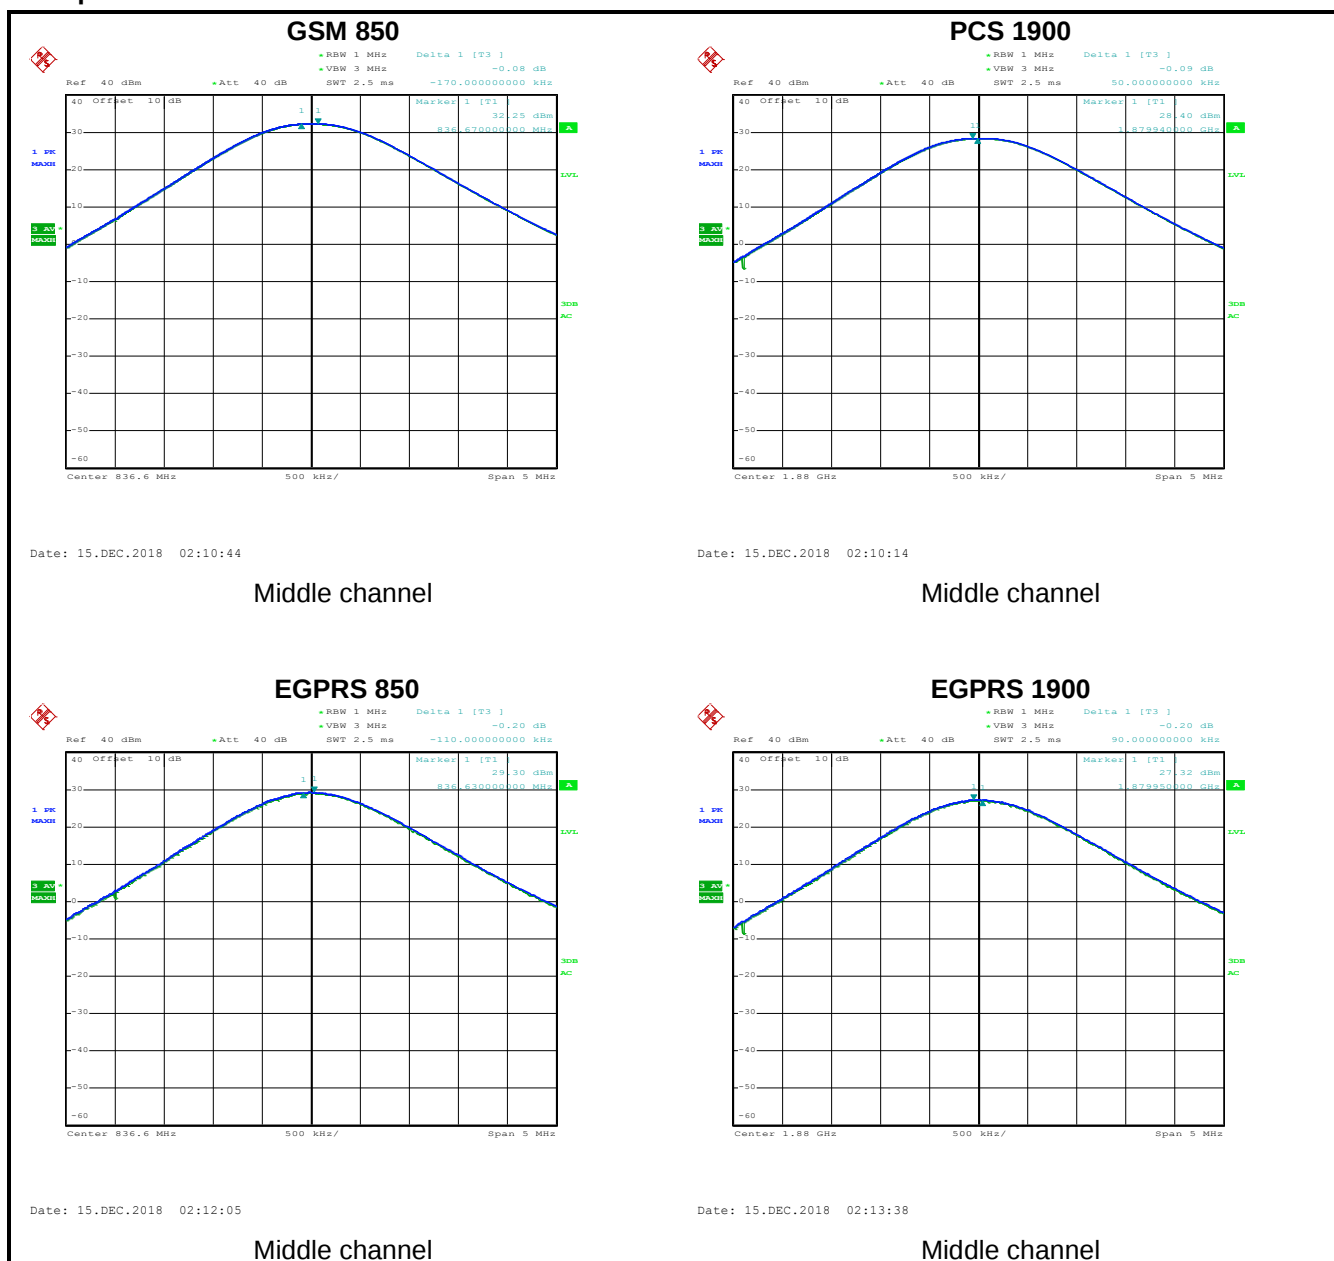


## UMTS 850 RMC

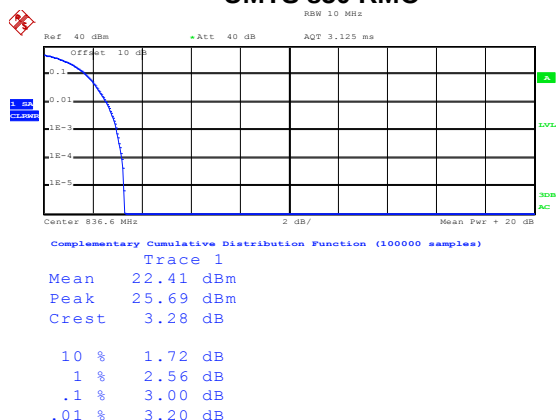

Date: 15.DEC.2018 02:50:03

Middle channel


## UMTS 1900 RMC

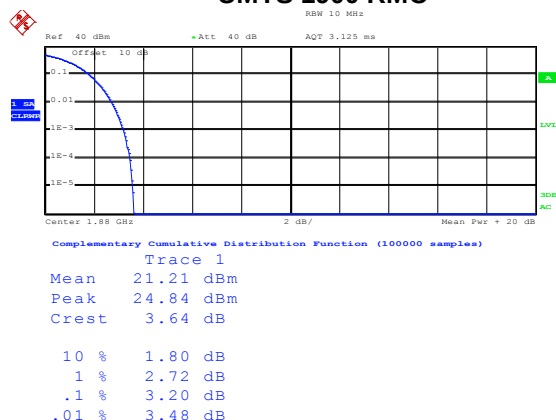

Date: 15.DEC.2018 02:49:10

Middle channel


## UMTS1700 RMC

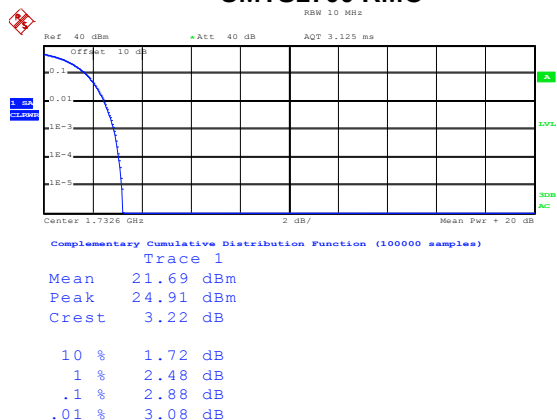

Date: 15.DEC.2018 02:49:33

Middle channel

## 6.3 Occupy Bandwidth
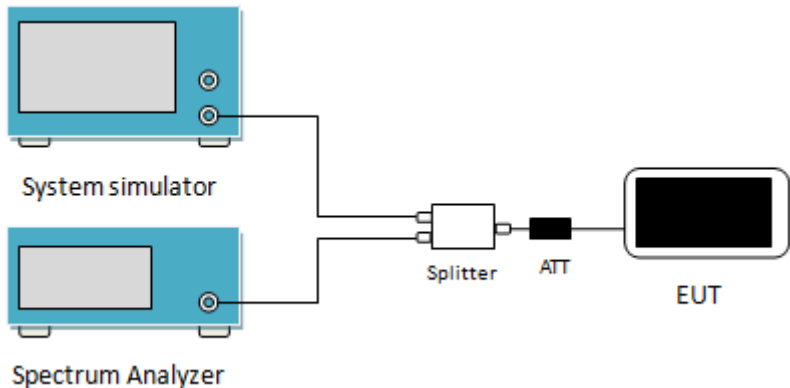
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917(b), FCC part 24.238(b), FCC Part 27.53(h)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test Method:      | ANSI/TIA-603-D 2010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test setup:       |  <p>The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single output port. These two ports are connected to a single input port of a white rectangular 'Splitter'. The Splitter has two output ports. One output port is connected to a black rectangular 'ATT' (Attenuator). The other output port is connected to the input of a black rectangular 'EUT' (Equipment Under Test).</p> |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer</li> <li>2. RBW was set to about 1% of emission BW, VBW= 3 times RBW.</li> <li>3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.</li> </ol>                                                                                                                                                                                                  |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

**Measurement Data:**

| EUT Mode               | Channel | Frequency (MHz) | 99% Occupy bandwidth (kHz) | -26dB bandwidth (kHz) |
|------------------------|---------|-----------------|----------------------------|-----------------------|
| GSM 850                | 128     | 824.2           | 248                        | 318                   |
|                        | 190     | 836.6           | 244                        | 314                   |
|                        | 251     | 848.8           | 244                        | 328                   |
| EGPRS850               | 128     | 824.2           | 246                        | 312                   |
|                        | 190     | 836.6           | 244                        | 316                   |
|                        | 251     | 848.8           | 250                        | 312                   |
| PCS 1900               | 512     | 1850.2          | 242                        | 320                   |
|                        | 661     | 1880.0          | 250                        | 318                   |
|                        | 810     | 1909.8          | 246                        | 318                   |
| EGPRS1900              | 512     | 1850.2          | 250                        | 318                   |
|                        | 661     | 1880.0          | 248                        | 318                   |
|                        | 810     | 1909.8          | 250                        | 314                   |
| UMTS 850<br>12.2k RMC  | 4132    | 826.4           | 4180                       | 4740                  |
|                        | 4183    | 836.6           | 4180                       | 4720                  |
|                        | 4233    | 846.6           | 4180                       | 4700                  |
| UMTS 1900<br>12.2k RMC | 9262    | 1852.4          | 4180                       | 4680                  |
|                        | 9400    | 1880.0          | 4200                       | 4720                  |
|                        | 9538    | 1907.6          | 4180                       | 4720                  |
| UMTS 1700<br>12.2k RMC | 1312    | 1712.40         | 4180                       | 4720                  |
|                        | 1413    | 1732.60         | 4180                       | 4720                  |
|                        | 1513    | 1752.60         | 4180                       | 4740                  |


*Note:*

*GSM & GPRS use the same modulation technical (GMSK), and with the same channels, so the 99% OBW and the -26dB of GPRS not performed.*

Test plot as follows:


## GSM 850

### 99% Occupancy bandwidth

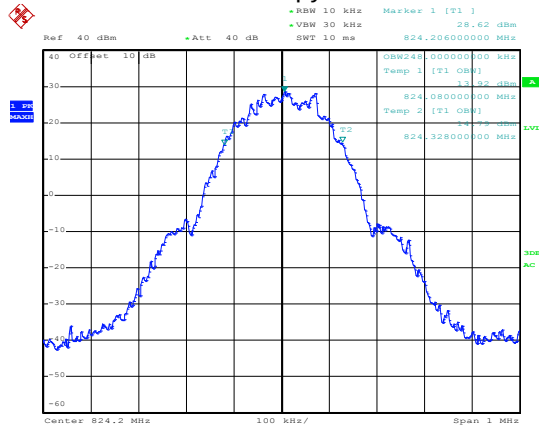


Date: 15.DEC.2018 02:03:19

### 26dB Emission Bandwidth

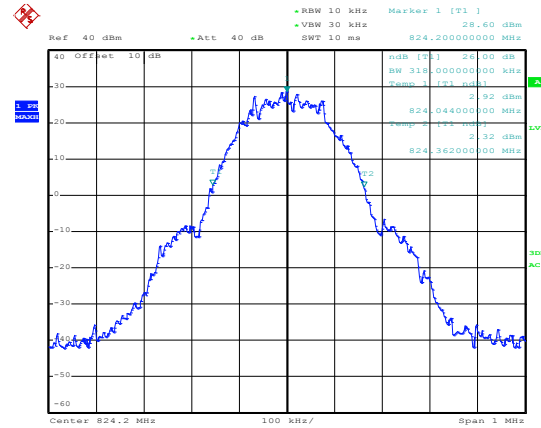


Date: 15.DEC.2018 02:03:29

### Lowest channel

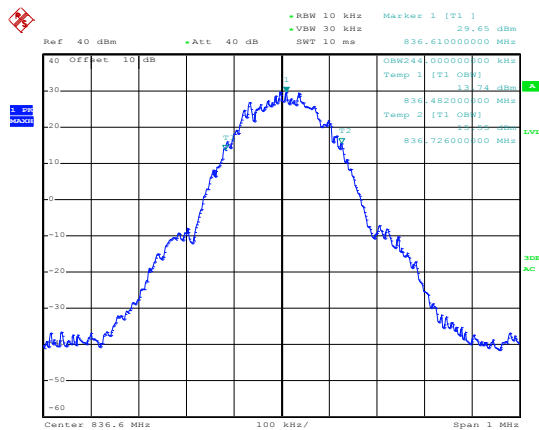


Date: 15.DEC.2018 02:03:54

### Lowest channel

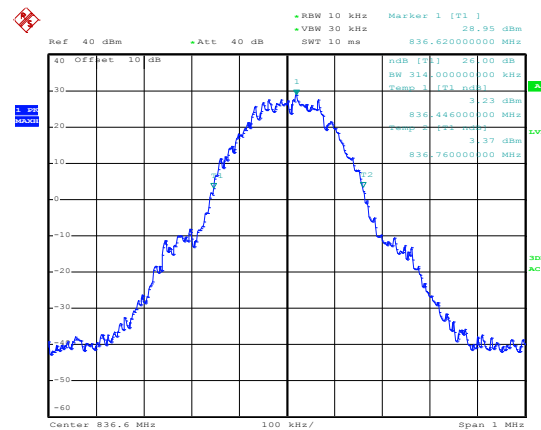


Date: 15.DEC.2018 02:03:41

### Middle channel

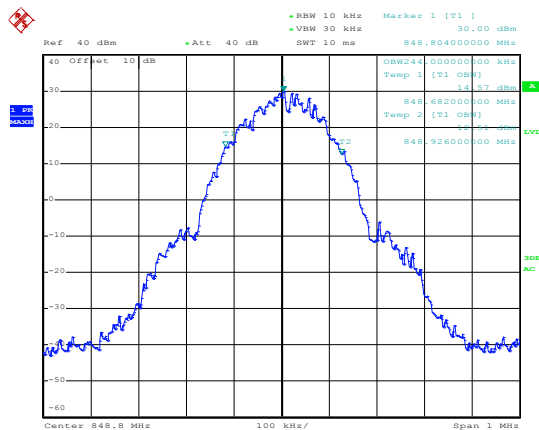

Date: 15.DEC.2018 02:04:23

### Middle channel

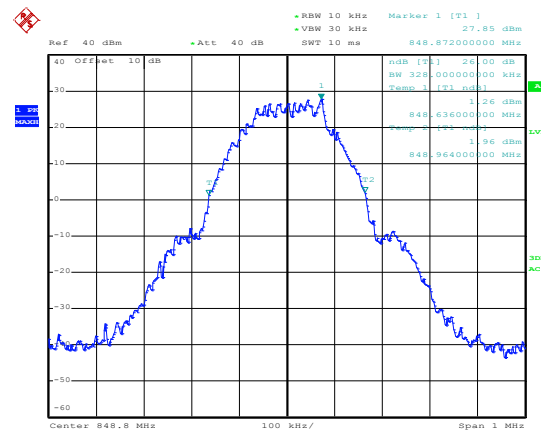

Date: 15.DEC.2018 02:04:31

### Highest channel

### Highest channel

99% Occupy bandwidth



## 26dB Emission Bandwidth



Date: 15-DEC-2018 02:21:41

Date: 15-DEC-2018 02:21:31


Date: 15.DEC.2018 02:21:53

Date: 15.DEC.2018 02:22:04

## Highest channel


## PCS 1900

## 99% Occupancy bandwidth

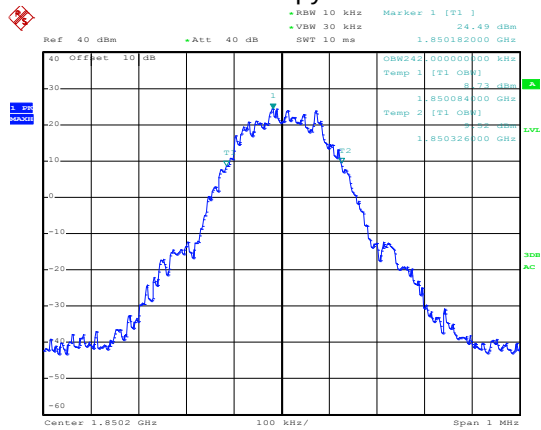


Date: 15.DEC.2018 02:05:10

## 26dB Emission Bandwidth

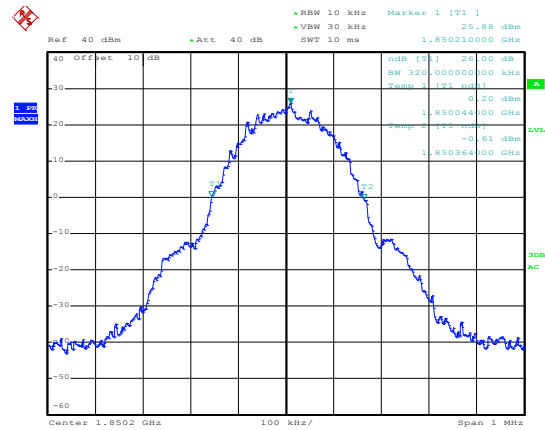


Date: 15.DEC.2018 02:05:02

## Lowest channel

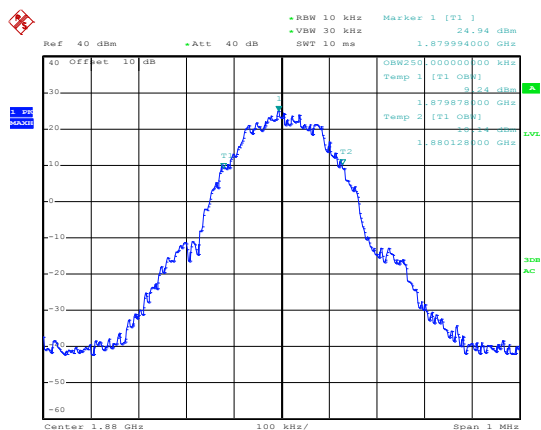


Date: 15.DEC.2018 02:05:21

## Lowest channel

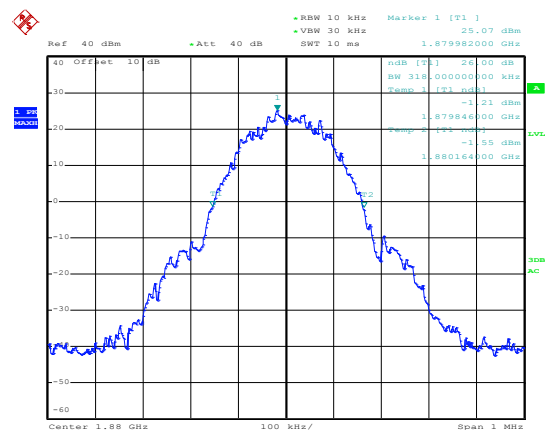


Date: 15.DEC.2018 02:05:30

## Middle channel

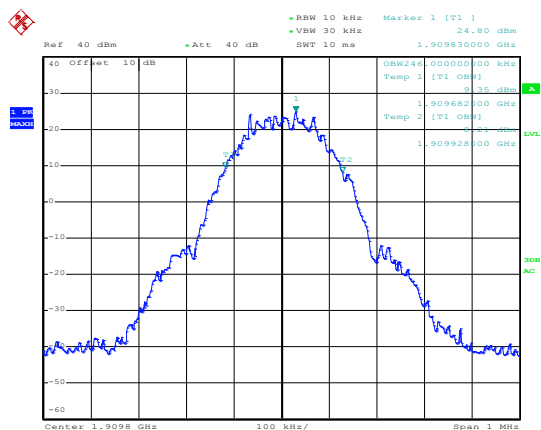

Date: 15.DEC.2018 02:06:12

## Middle channel

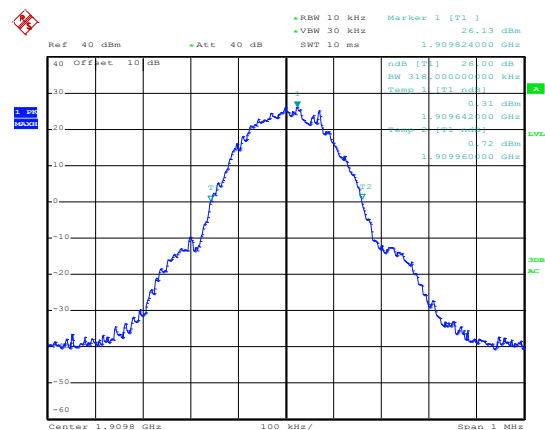


Date: 15.DEC.2018 02:06:04

## Highest channel

## Highest channel


## EGPRS 1900

### 99% Occupancy bandwidth

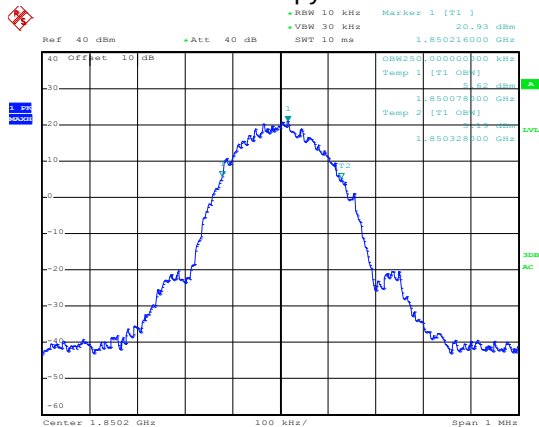


Date: 15.DEC.2018 02:19:01

### 26dB Emission Bandwidth

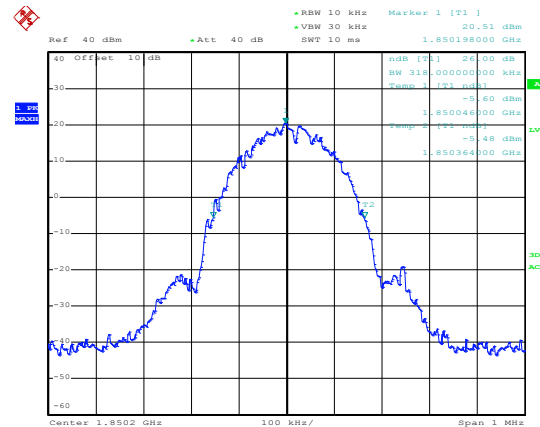


Date: 15.DEC.2018 02:18:50

### Lowest channel

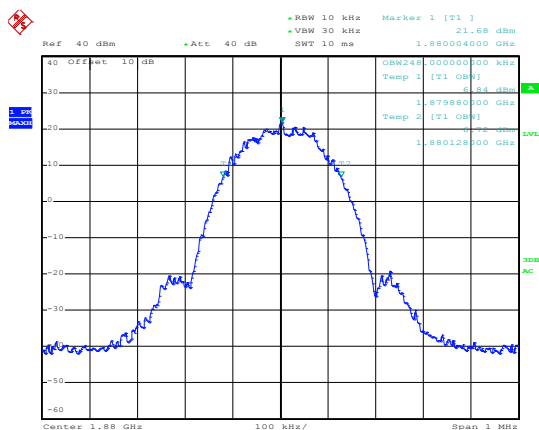


Date: 15.DEC.2018 02:18:16

### Lowest channel

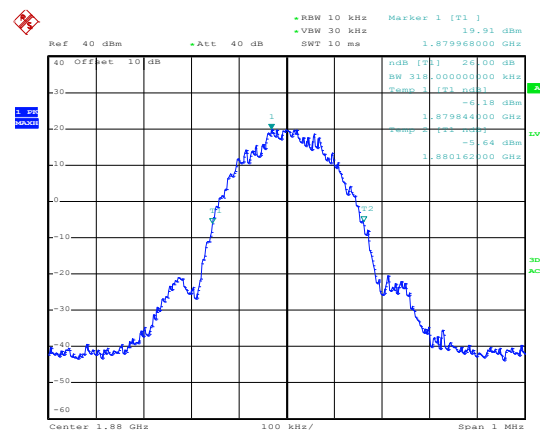


Date: 15.DEC.2018 02:18:24

### Middle channel

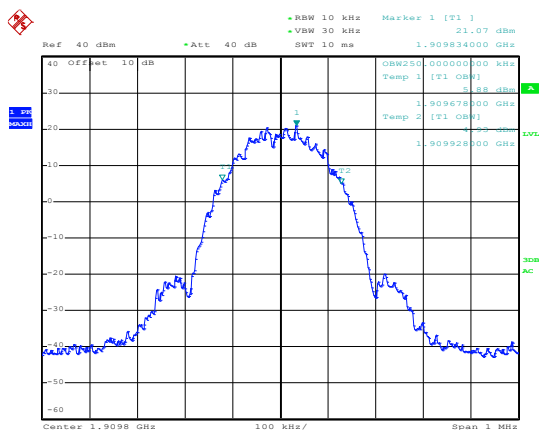

Date: 15.DEC.2018 02:17:22

### Middle channel

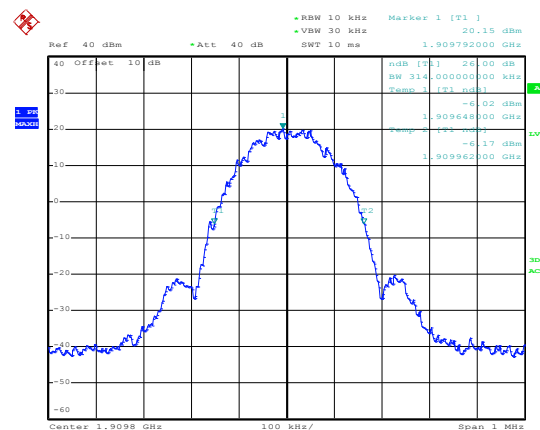


Date: 15.DEC.2018 02:17:37

### Highest channel

### Highest channel


## UMTS 850 12.2k RMC

## 99% Occupancy bandwidth

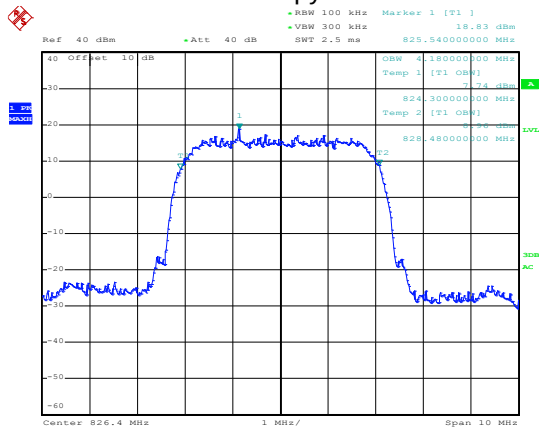


Date: 15.DEC.2018 02:28:11

## 26dB Emission Bandwidth

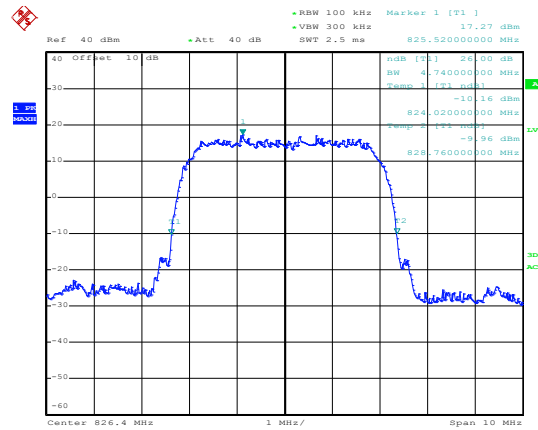


Date: 15.DEC.2018 02:28:19

## Lowest channel

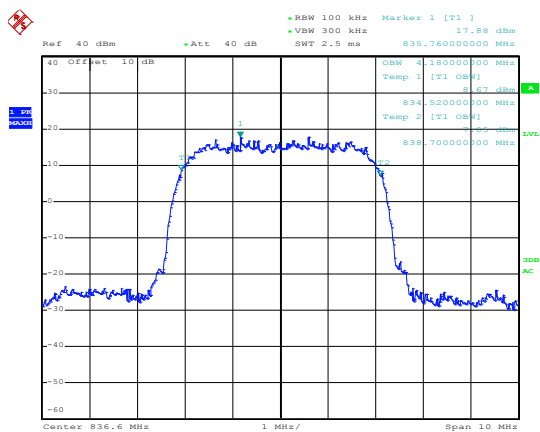


Date: 15.DEC.2018 02:27:56

## Lowest channel

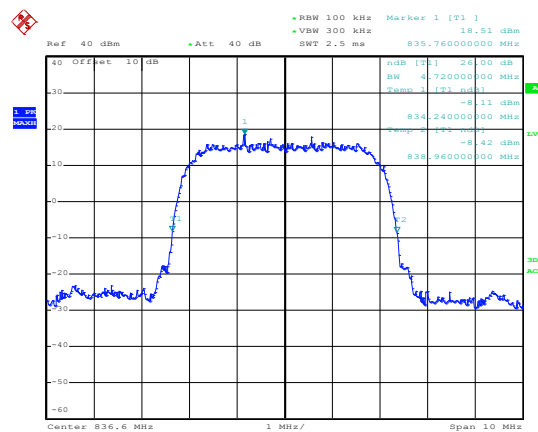


Date: 15.DEC.2018 02:27:47

## Middle channel

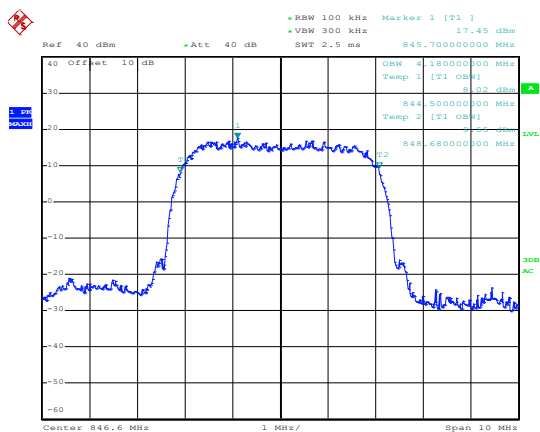

Date: 15.DEC.2018 02:27:22

## Middle channel

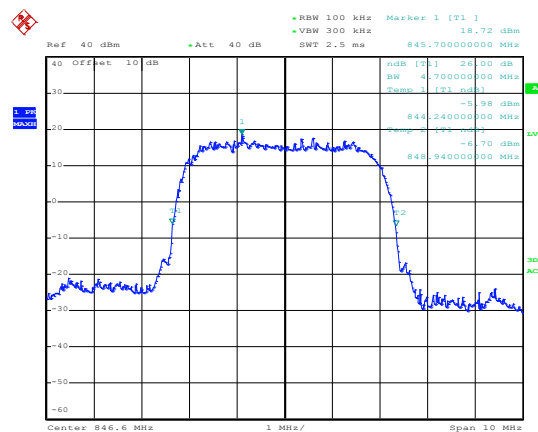


Date: 15.DEC.2018 02:27:32

## Highest channel




## Highest channel

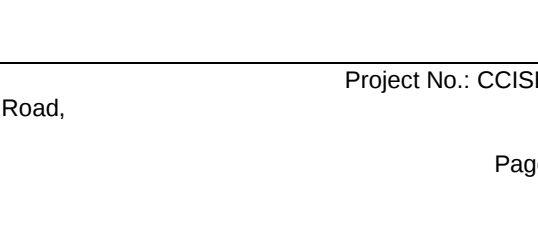


## UMTS 1900 12.2k RMC

### 99% Occupancy bandwidth

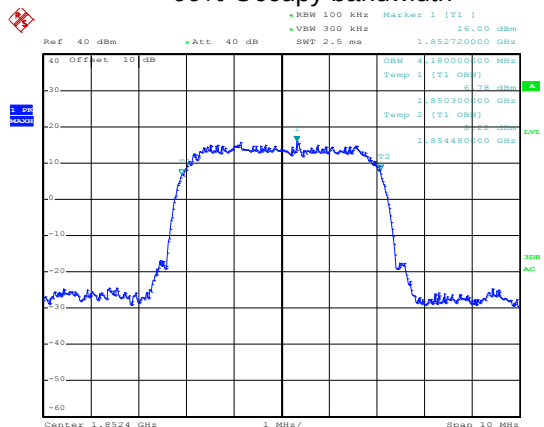


Date: 15.DEC.2018 02:38:27

### 26dB Emission Bandwidth

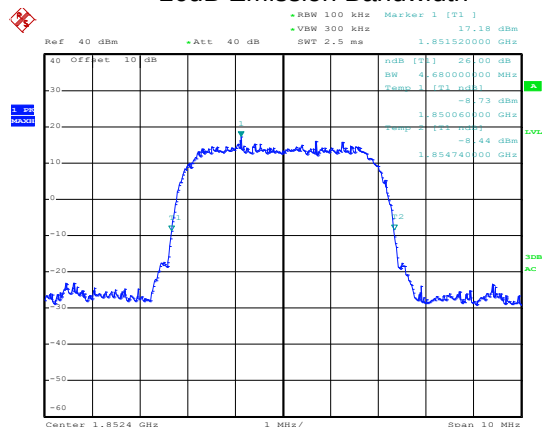


Date: 15.DEC.2018 02:38:36

### Lowest channel

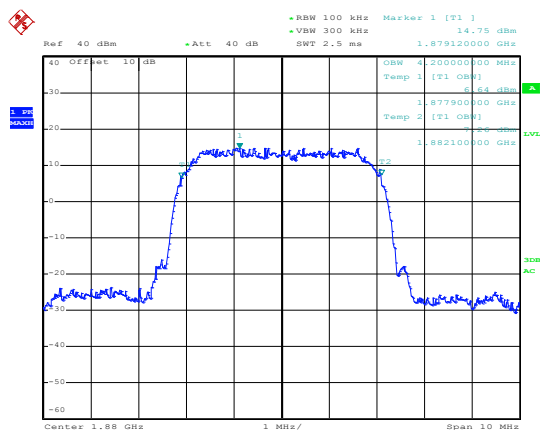


Date: 15.DEC.2018 02:38:59

### Lowest channel

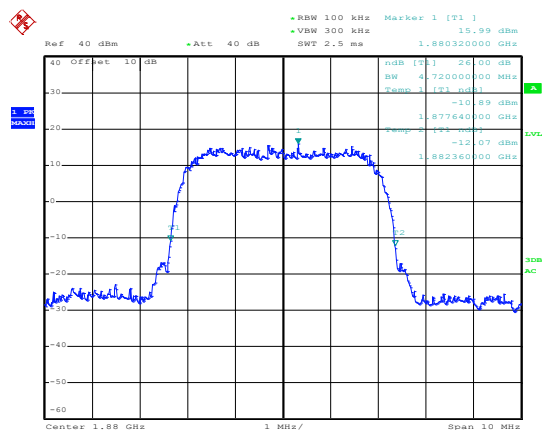


Date: 15.DEC.2018 02:38:52

### Middle channel

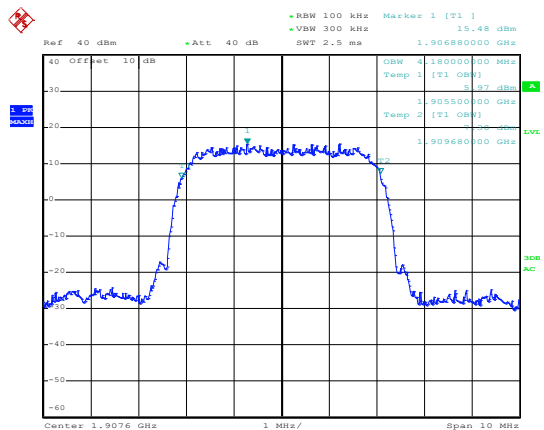

Date: 15.DEC.2018 02:39:14

### Middle channel

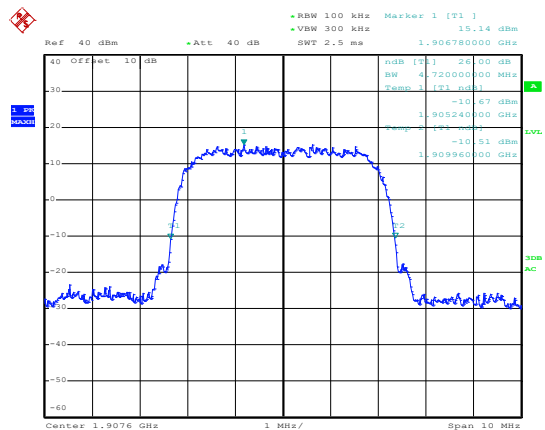


Date: 15.DEC.2018 02:39:23

### Highest channel

### Highest channel


## UMTS 1700 12.2k RMC

### 99% Occupancy bandwidth

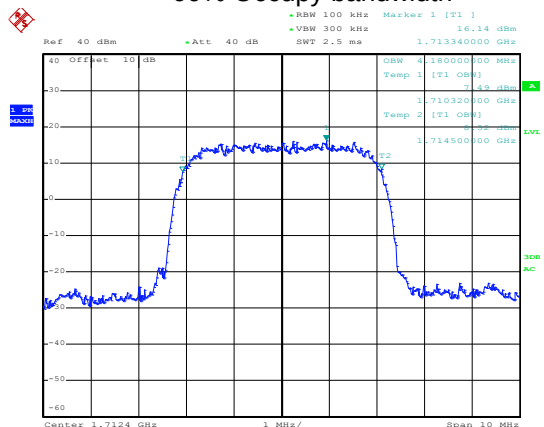


Date: 15.DEC.2018 02:32:14

### 26dB Emission Bandwidth

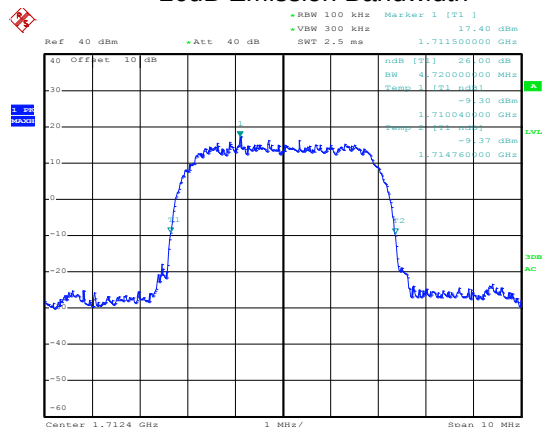


Date: 15.DEC.2018 02:32:22

### Lowest channel

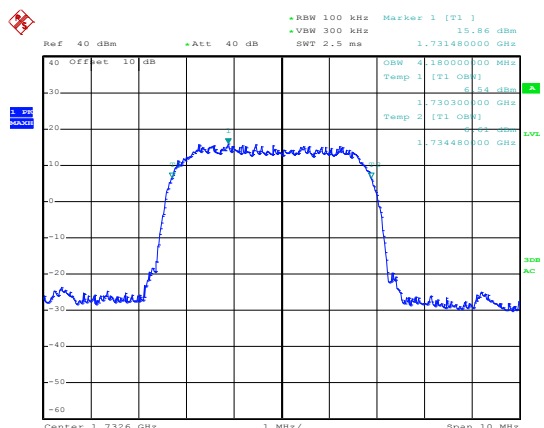


Date: 15.DEC.2018 02:31:57

### Lowest channel

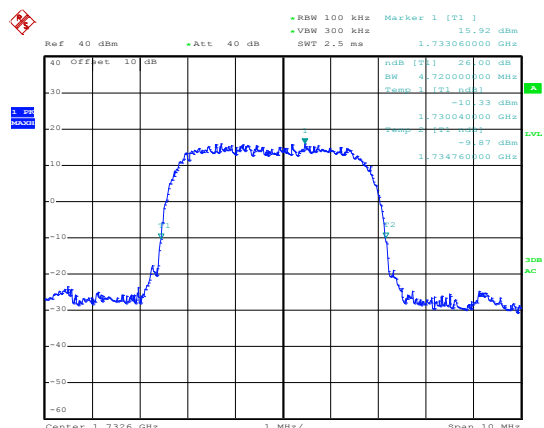


Date: 15.DEC.2018 02:31:50

### Middle channel

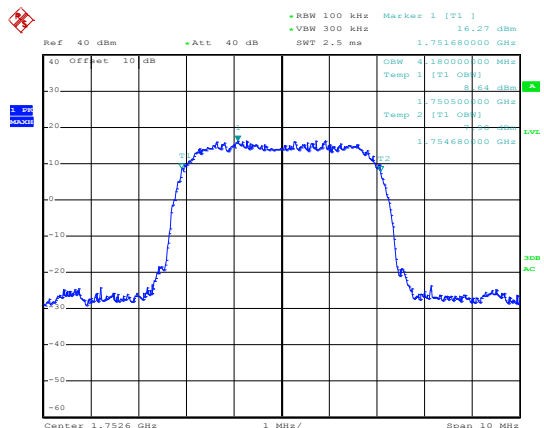

Date: 15.DEC.2018 02:31:21

### Middle channel

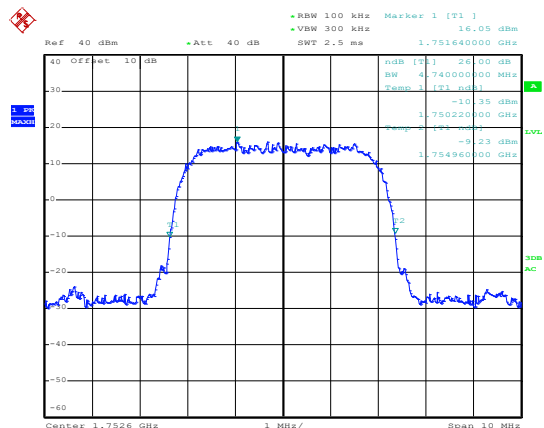

Date: 15.DEC.2018 02:31:29


### Highest channel

### Highest channel


## 6.4 Modulation Characteristic

According to FCC § 2.1047(d), Part 22H & 24E & 27L there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

## 6.5 Out of band emission at antenna terminals
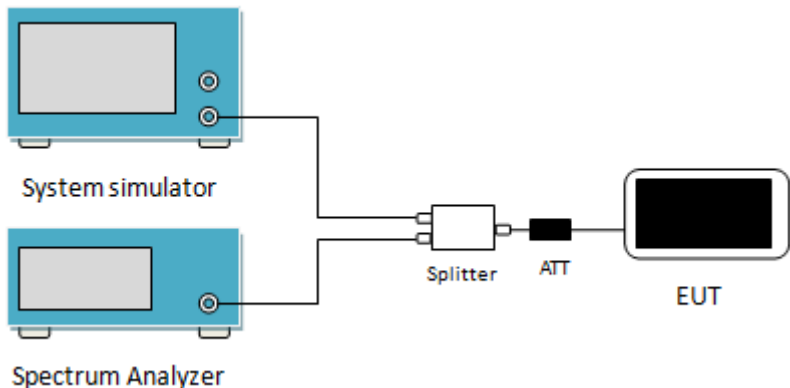
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917(a), FCC part 24.238(a), FCC Part 27.53 (h)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Test Method:      | ANSI/TIA-603-D 2010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Limit:            | -13dBm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test setup:       |  <p>The diagram illustrates the test setup. On the left, there are two blue rectangular units: the top one is labeled 'System simulator' and the bottom one is labeled 'Spectrum Analyzer'. Both have a single output port. These two ports are connected to a single input port of a white rectangular unit labeled 'Splitter'. The 'Splitter' has two output ports. One output port is connected to a black rectangular unit labeled 'ATT' (Attenuator). The other output port of the 'Splitter' is connected to the input port of a white rectangular unit labeled 'EUT' (Equipment Under Test).</p>                                                                                                                                            |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1 The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.</li> <li>2 The resolution bandwidth of the spectrum analyzer was set at 100 kHz when below 1GHz, 1MHz when above 1 GHz; sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.</li> <li>3 For the out of band: Set the RBW=100 kHz, VBW=300 kHz when below 1 GHz, RBW =1 MHz, VBW=3 MHz when above 1 GHz, Start=30MHz, Stop= 10th harmonic.</li> <li>4 Band Edge Requirements: In the 1 MHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of at least 1 percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.</li> </ol> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |

Test plots as follows (Spurious emission):

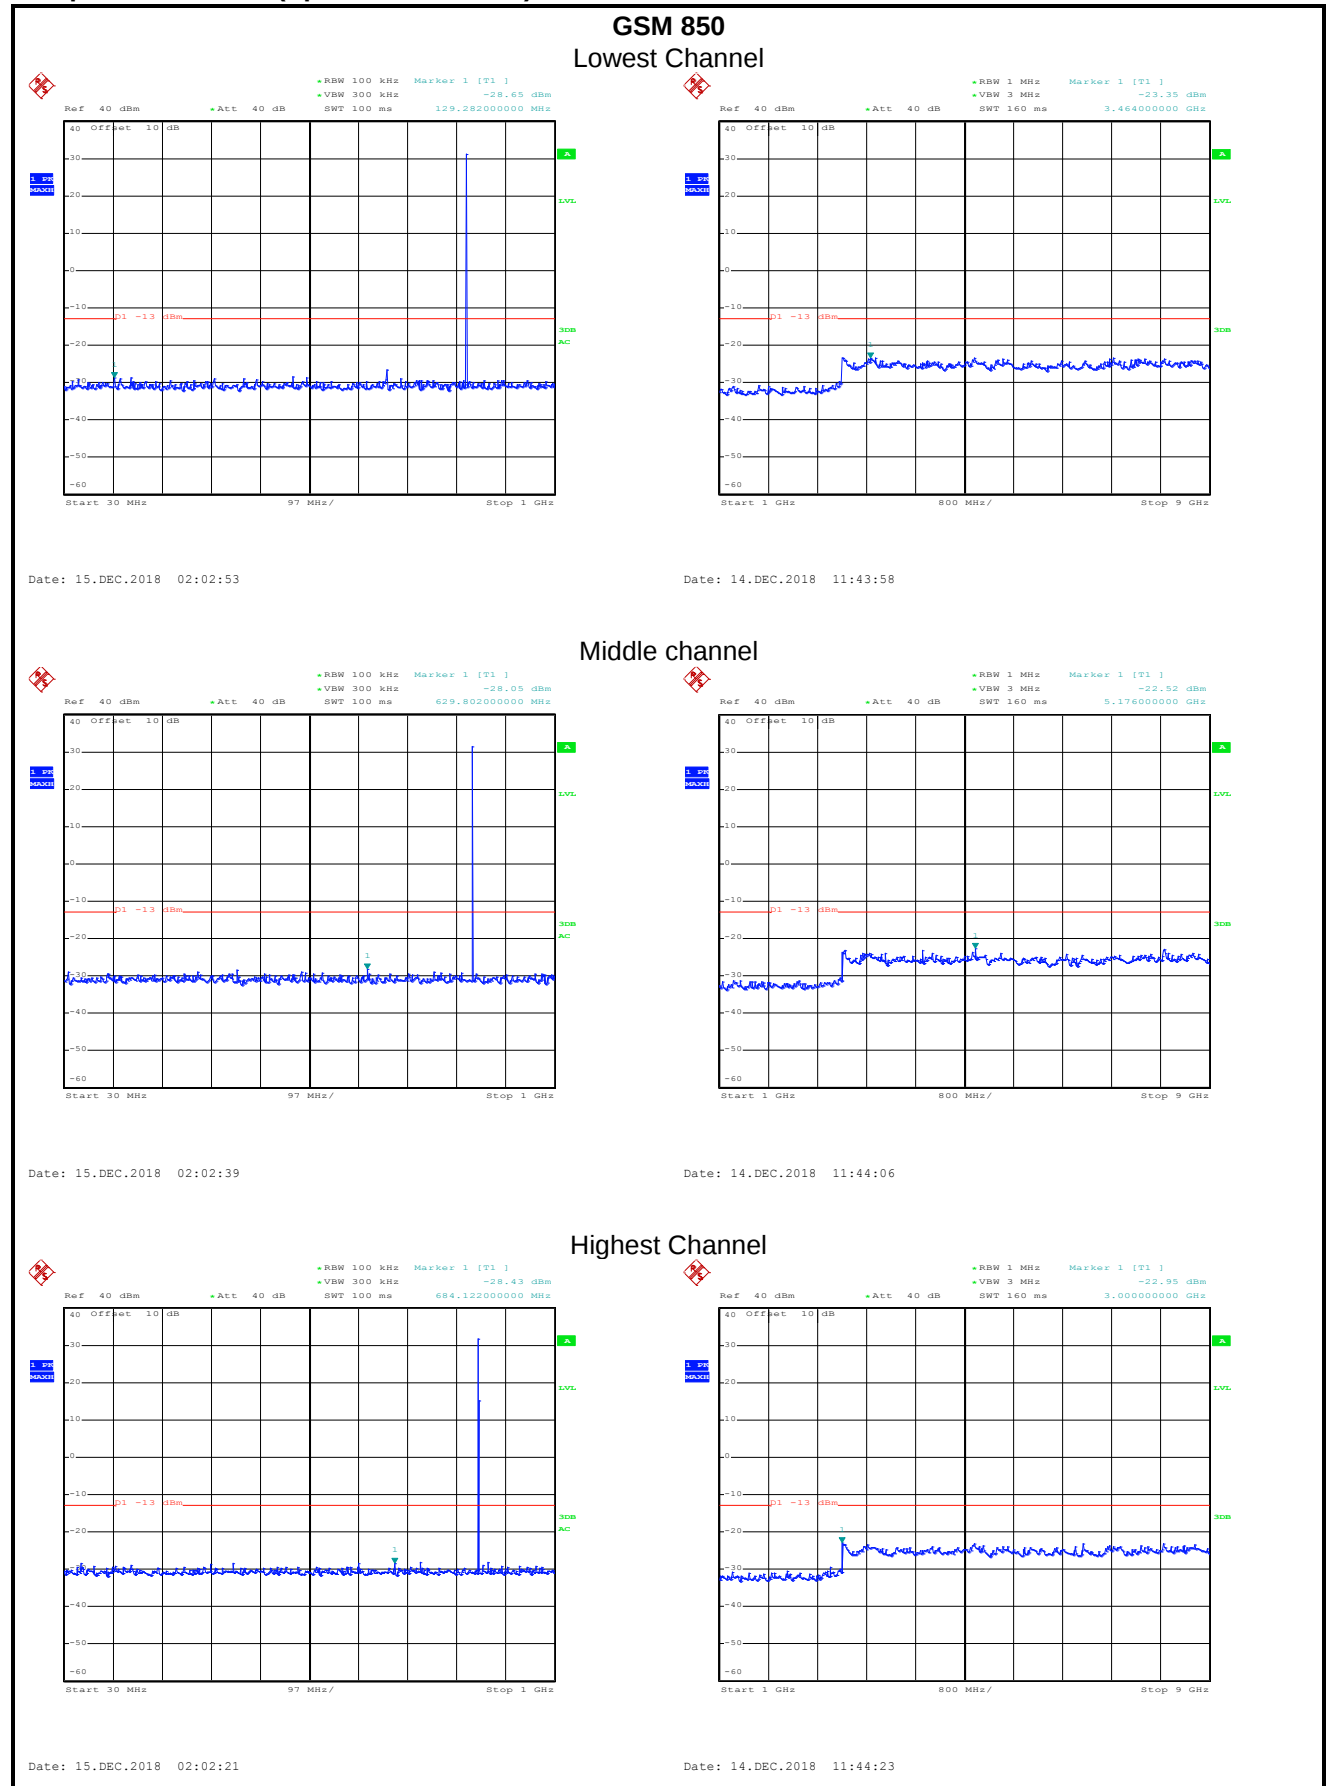

RBW 100 kHz Marker 1 [T1]  
 -29.73 dBm  
 VSW 300 kHz  
 SWT 100 ms 557.68000000 MHz

Ref 40 dBm •Att 40 dB

40 Off dB

30

20

10

0

-10

-20

-30

-40

-50

-60

1.00

NOISE

557.68000000 MHz

Start 557.67 MHz Stop 557.69 MHz

Ref 30 dBm  
 • Att 30 dB  
 • BW 1 MHz  
 • VSW 3 MHz  
 • SWT 380 ms  
 Marker 1 [T1]  
 -25.57 dBm  
 13.69200000 GHz

30  
 20  
 10  
 0  
 -10  
 -20  
 -30  
 -40  
 -50  
 -60  
 -70

13.691 GHz  
 13.692 GHz  
 13.693 GHz

13.69200000 GHz

-13 dBm

-25.57 dBm

13.69200000 GHz

13.69200000 GHz

[illegible]

RBW 100 kHz VBW 300 kHz SWT 100 ms Marker 1 [T1] -28.53 dBm

Ref 40 dBm Att 40 dB

1.00 V

0.0001 MHz


01 -13 dBm

Span 20 MHz Pos 1.00 dB


[illegible]

Date: 14.DEC.2018 11:47:28

## UMTS 850 12.2k RMC Lowest Channel

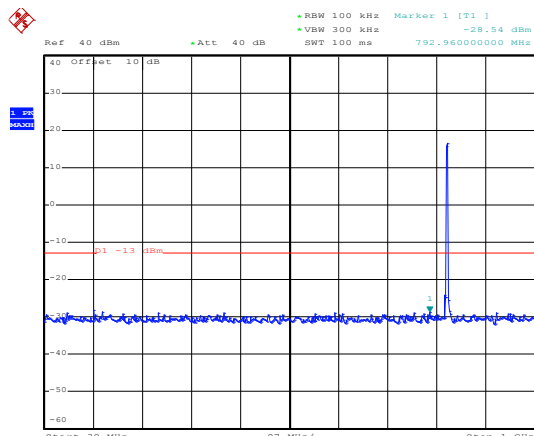


Date: 15.DEC.2018 02:26:25

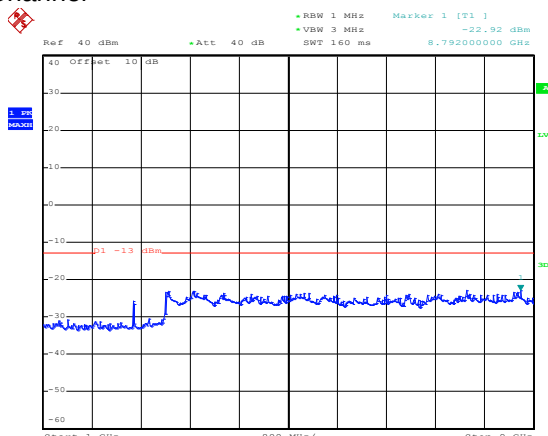


Date: 14.DEC.2018 11:39:36

## Middle Channel

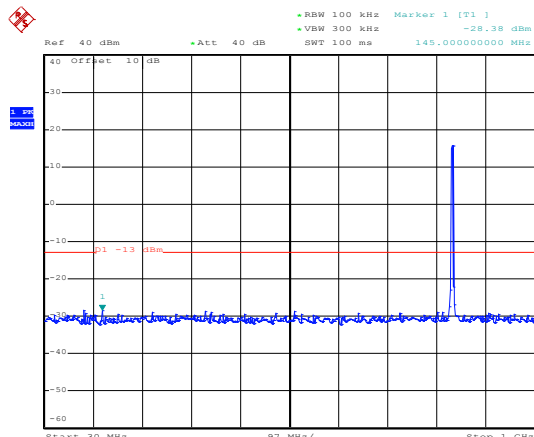


Date: 15.DEC.2018 02:26:43

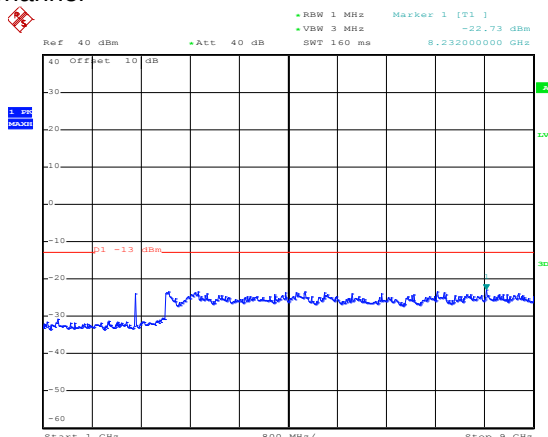


Date: 14.DEC.2018 11:39:48

## Highest Channel

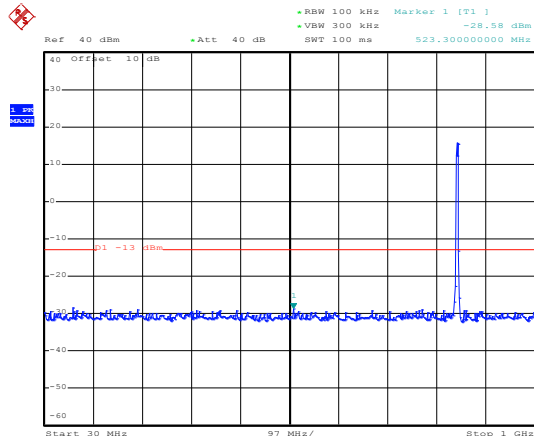


Date: 15.DEC.2018 02:26:58

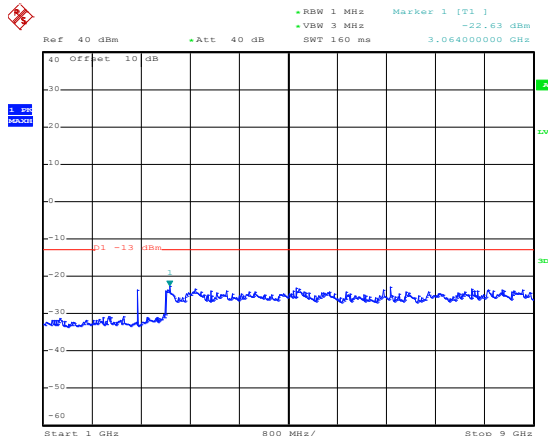


Date: 14.DEC.2018 11:39:59

## UMTS 1900 12.2k RMC Lowest Channel

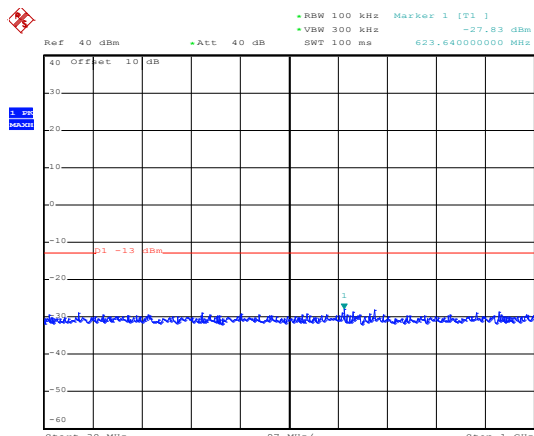


Date: 15.DEC.2018 02:36:15

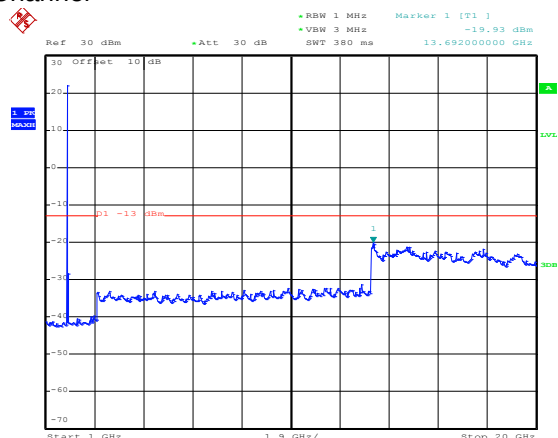


Date: 14.DEC.2018 11:35:42

## Middle Channel

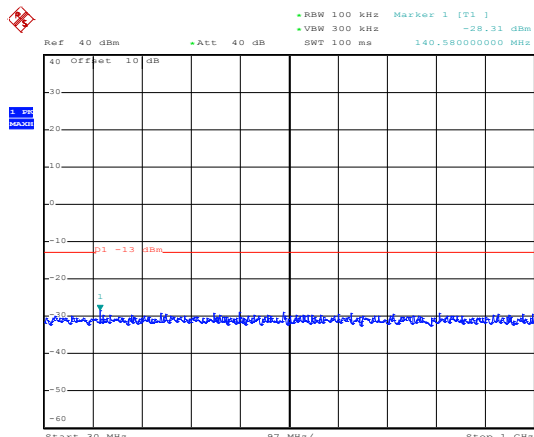


Date: 15.DEC.2018 02:36:24

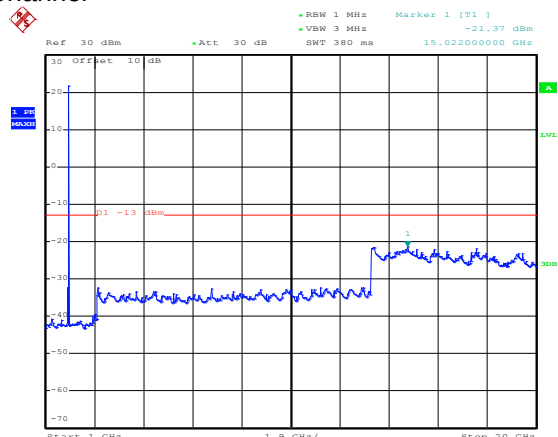


Date: 14.DEC.2018 11:36:00

## Highest Channel

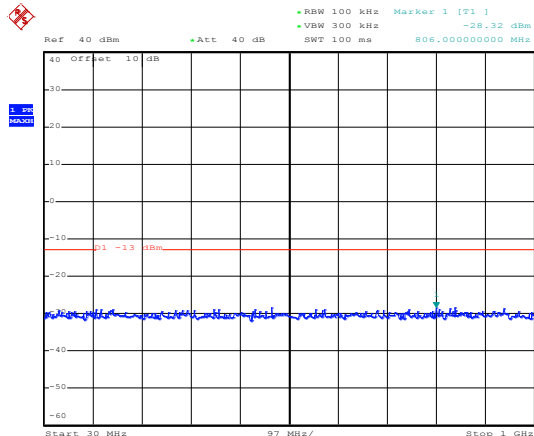


Date: 15.DEC.2018 02:36:43

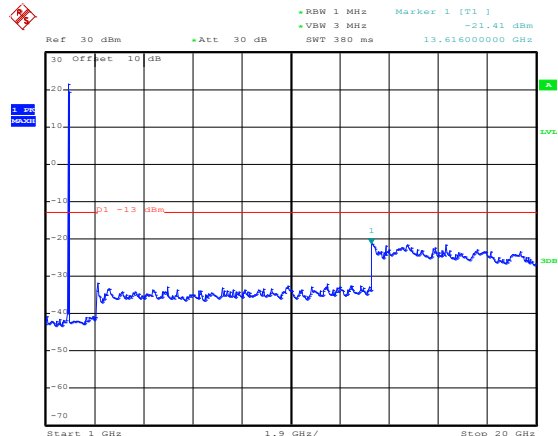


Date: 14.DEC.2018 11:36:18

## UMTS 1700 12.2k RMC Lowest Channel

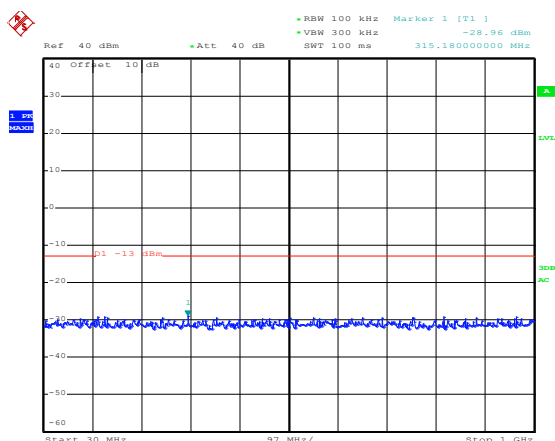


Date: 15.DEC.2018 02:35:44

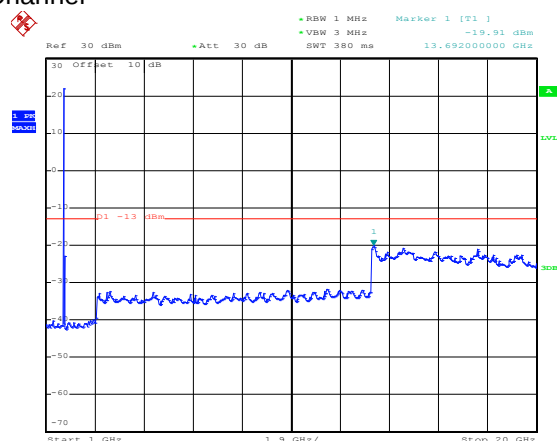


Date: 14.DEC.2018 11:34:30

## Middle Channel

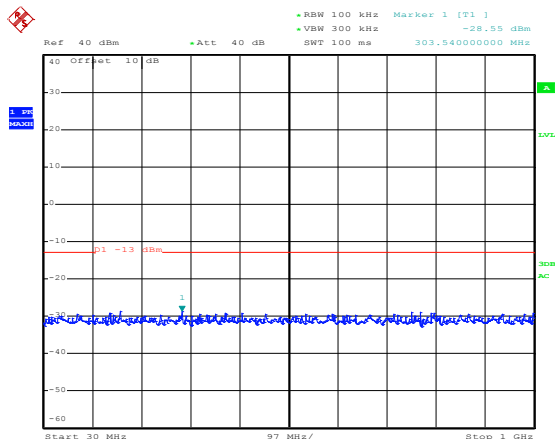


Date: 15.DEC.2018 02:35:36

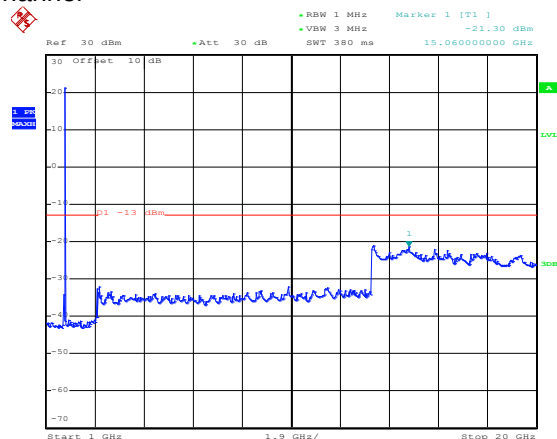


Date: 14.DEC.2018 11:34:45

## Highest Channel

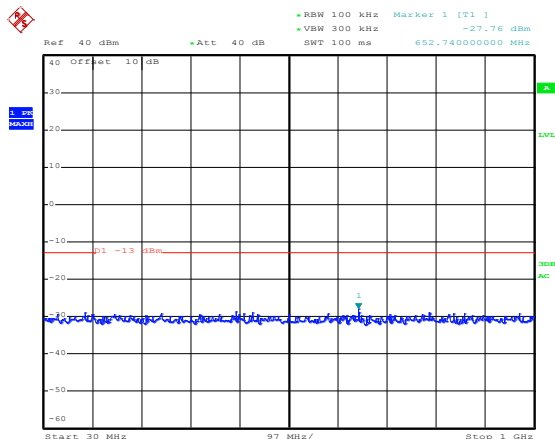


Date: 15.DEC.2018 02:35:27

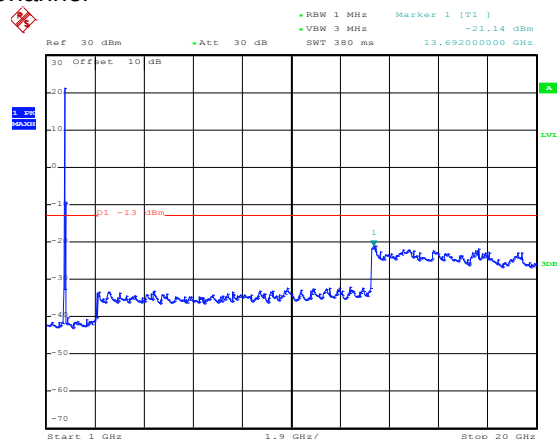

Date: 14.DEC.2018 11:35:01


## Band edge emission:

### GSM850

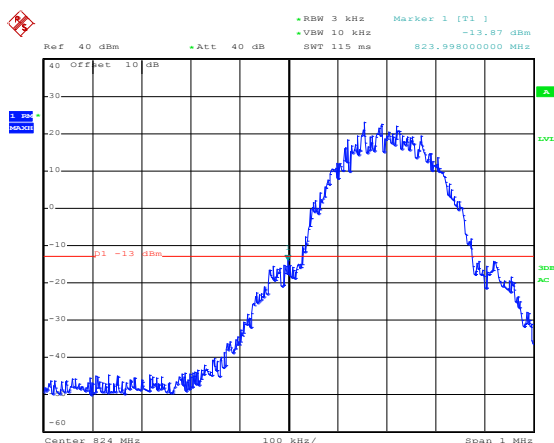

Date: 15.DEC.2018 01:59:57


Lowest channel

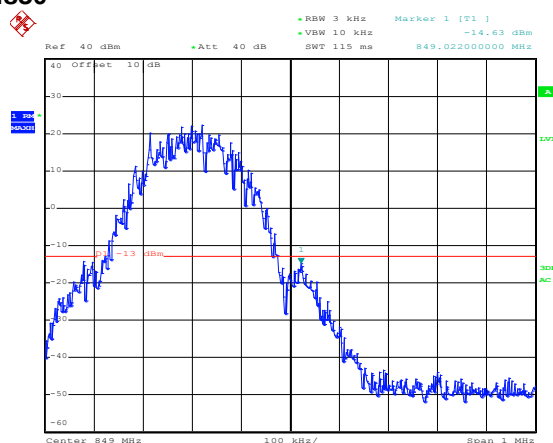

Date: 15.DEC.2018 02:00:59


Highest channel

### PCS1900

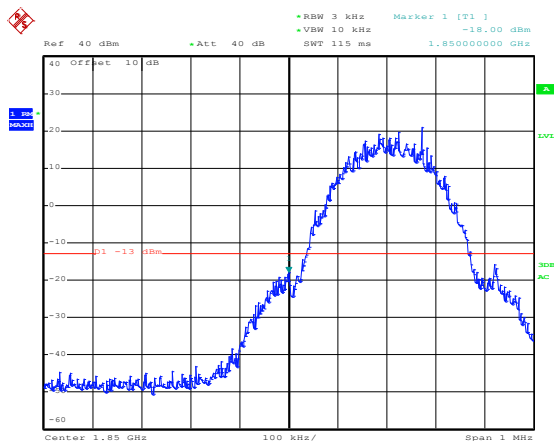

Date: 15.DEC.2018 02:07:05


Lowest channel

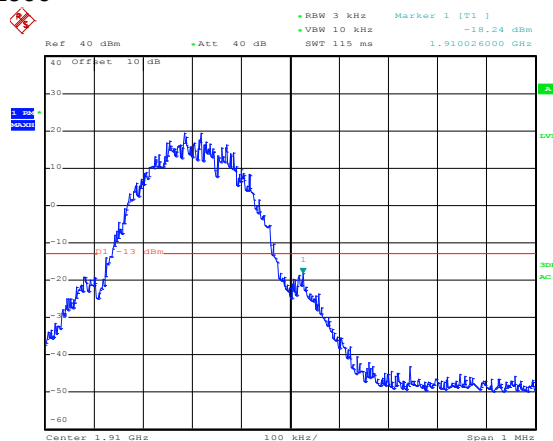

Date: 15.DEC.2018 02:06:41


Highest channel

## EGPRS850

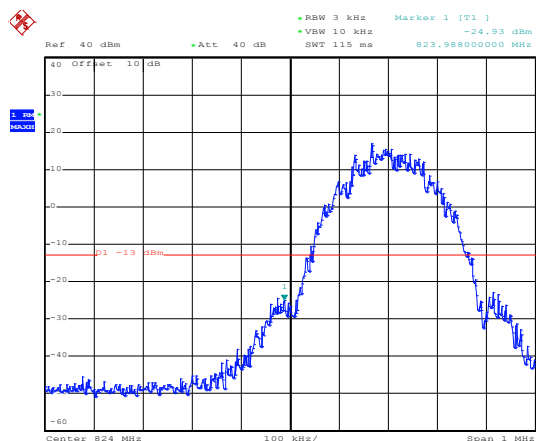

Date: 15.DEC.2018 02:22:58


Lowest channel

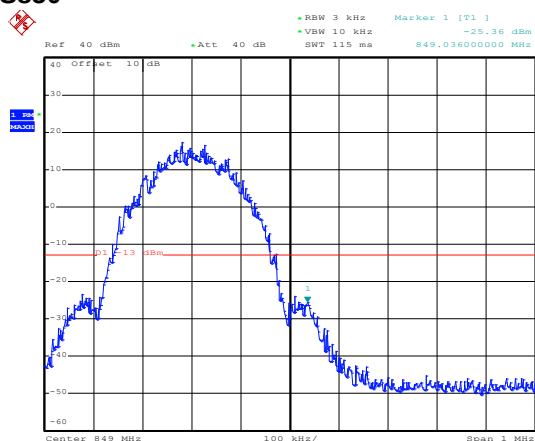

Date: 15.DEC.2018 02:22:38


Highest channel

## EGPRS1900

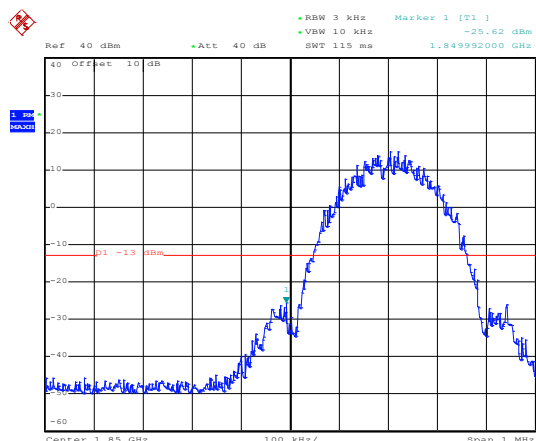

Date: 15.DEC.2018 02:15:18


Lowest channel

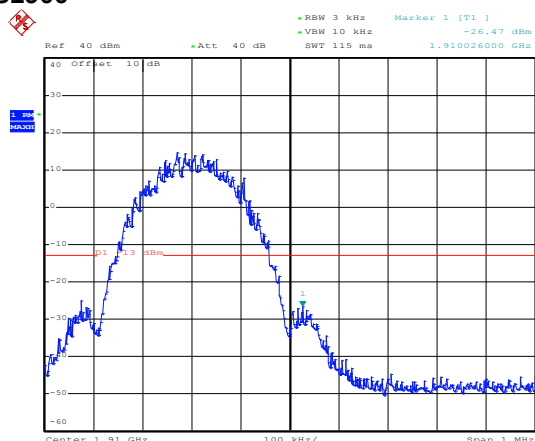

Date: 15.DEC.2018 02:15:49


Highest channel

## UMTS 850 RMC 12.2kbps

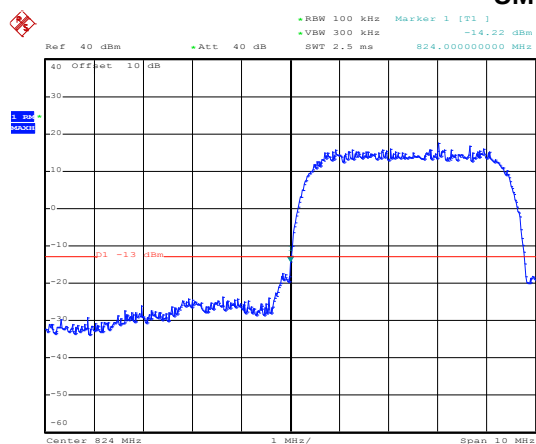

Date: 15.DEC.2018 02:25:56


Lowest channel

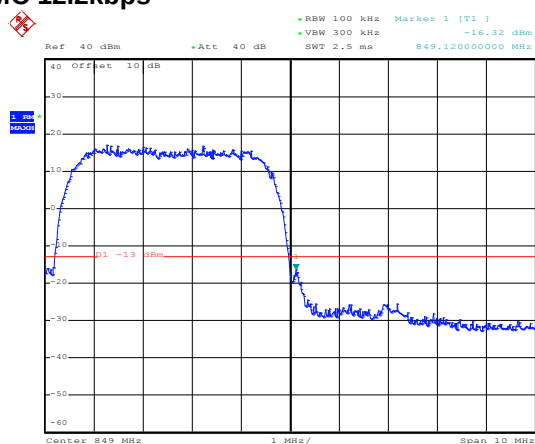

Date: 15.DEC.2018 02:25:37


Highest channel

## UMTS 1900 RMC 12.2kbps

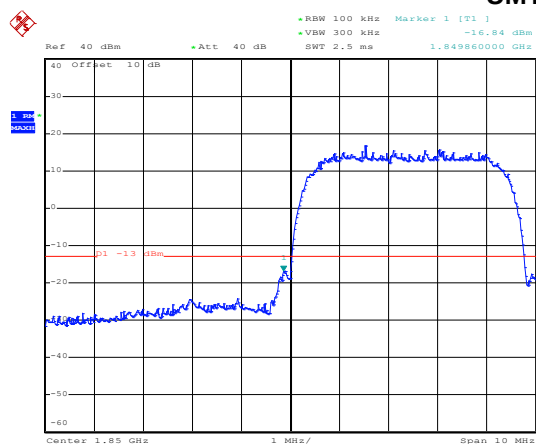


Date: 15.DEC.2018 02:38:01

Lowest channel


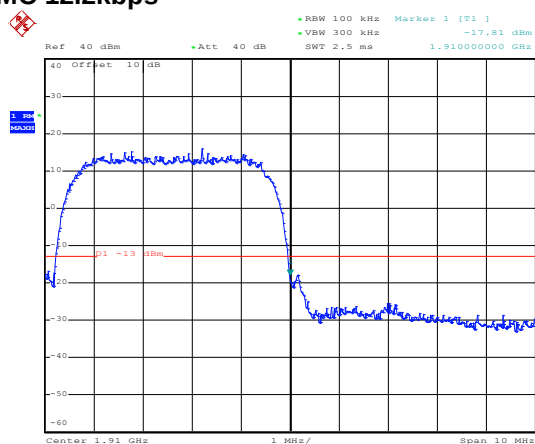


Date: 15.DEC.2018 02:37:34

Highest channel

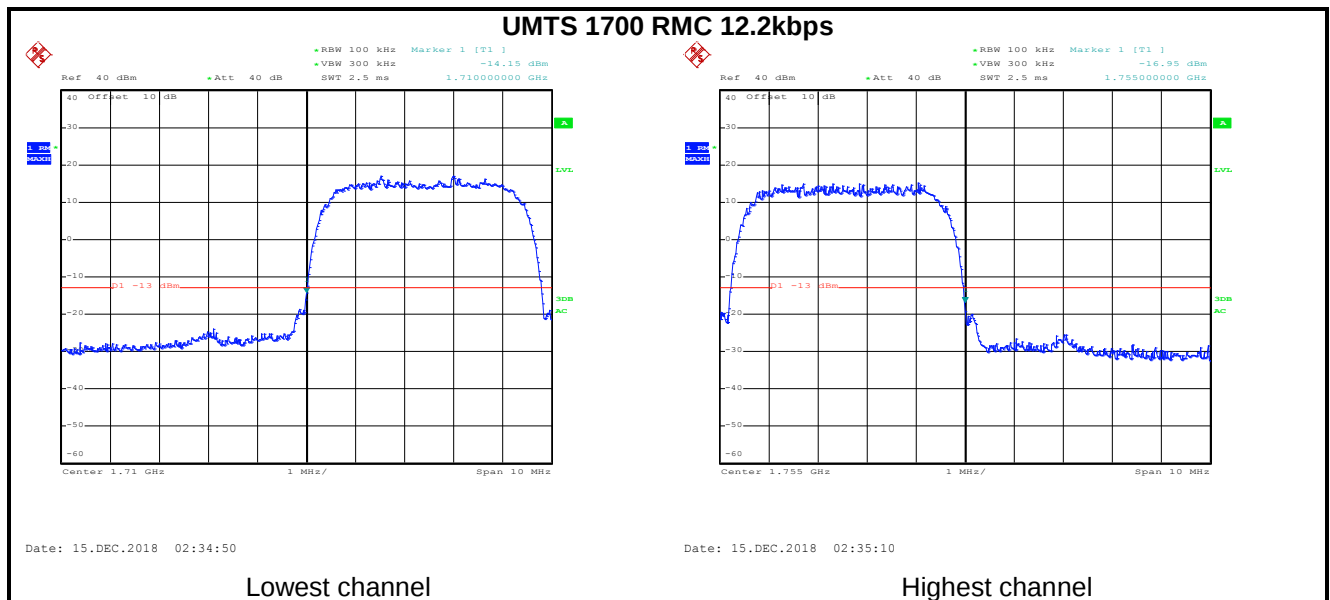

## 6.6 Field strength of spurious radiation measurement
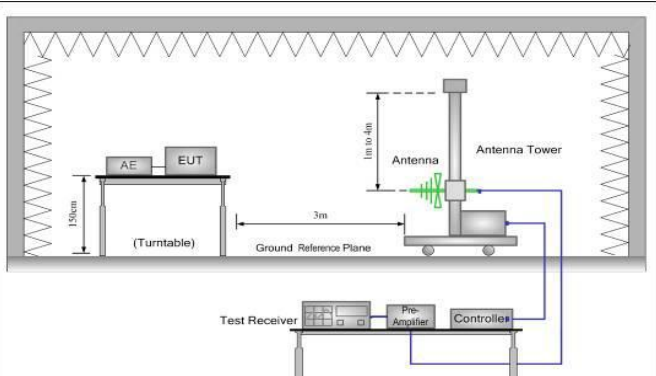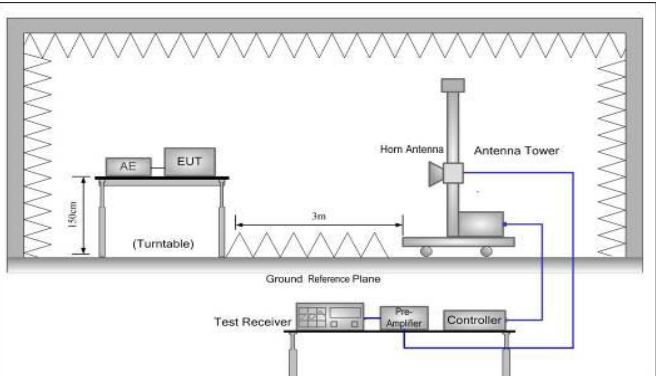
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC part 22.917(a), FCC part 24.238(a), FCC part 27.53(h)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Method:      | ANSI/TIA-603-D 2010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Limit:            | -13dBm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Test setup:       | <p>Below 1GHz</p>  <p>Above 1GHz</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Procedure:   | <ol style="list-style-type: none"> <li>1. The EUT was placed on an non-conductive turntable using a non-conductive support. The radiated emission at the fundamental frequency was measured at 3 m with a test antenna and EMI spectrum analyzer.</li> <li>2. During the tests, the antenna height and the EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. This maximization process was repeated with the EUT positioned in each of its three orthogonal orientations.</li> <li>3. The frequency range up to tenth harmonic was investigated for each of three fundamental frequency (low, middle and high channels). Once spurious emission was identified, the power of the emission was determined using the substitution method.</li> <li>4. The spurious emissions attenuation was calculated as the difference between radiated power at the fundamental frequency and the spurious emissions frequency.<br/> <math display="block">ERP / EIRP = S.G. \text{ output (dBm) } + \text{Antenna Gain(dB/dBi)} - \text{Cable Loss (dB)}</math> </li> </ol> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Test mode:        | Refer to section 5.3 for details.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |

**Measurement Data (worst case):**

| GSM850                                                                                           |                   |             |             |        |
|--------------------------------------------------------------------------------------------------|-------------------|-------------|-------------|--------|
| Lowest channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 1648.40                                                                                          | Vertical          | -52.31      | -13.00      | Pass   |
| 2472.60                                                                                          | V                 | -55.83      |             |        |
| 3296.80                                                                                          | V                 | -54.54      |             |        |
| 1648.40                                                                                          | Horizontal        | -54.02      | -13.00      | Pass   |
| 2472.60                                                                                          | H                 | -55.35      |             |        |
| 3296.80                                                                                          | H                 | -54.42      |             |        |
| Middle channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 1673.20                                                                                          | Vertical          | -54.98      | -13.00      | Pass   |
| 2509.80                                                                                          | V                 | -54.34      |             |        |
| 3346.40                                                                                          | V                 | -54.01      |             |        |
| 1673.20                                                                                          | Horizontal        | -54.00      | -13.00      | Pass   |
| 2509.80                                                                                          | H                 | -54.27      |             |        |
| 3346.40                                                                                          | H                 | -52.97      |             |        |
| Highest channel                                                                                  |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 1697.60                                                                                          | Vertical          | -55.32      | -13.00      | Pass   |
| 2546.40                                                                                          | V                 | -53.64      |             |        |
| 3395.20                                                                                          | V                 | -54.09      |             |        |
| 1697.60                                                                                          | Horizontal        | -54.66      | -13.00      | Pass   |
| 2546.40                                                                                          | H                 | -53.68      |             |        |
| 3395.20                                                                                          | H                 | -53.64      |             |        |
| Remark:                                                                                          |                   |             |             |        |
| 1. The emission levels of below 1 GHz are very lower than the limit and not show in test report. |                   |             |             |        |

| PCS1900                                                                                          |                   |             |             |        |
|--------------------------------------------------------------------------------------------------|-------------------|-------------|-------------|--------|
| Lowest channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 3700.40                                                                                          | Vertical          | -52.00      | -13.00      | Pass   |
| 5550.60                                                                                          | V                 | -45.36      |             |        |
| 3700.40                                                                                          | Horizontal        | -54.09      | -13.00      | Pass   |
| 5550.60                                                                                          | H                 | -44.81      |             |        |
| Middle channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 3760.00                                                                                          | Vertical          | -41.74      | -13.00      | Pass   |
| 5640.00                                                                                          | V                 | -41.85      |             |        |
| 3760.00                                                                                          | Horizontal        | -41.74      | -13.00      | Pass   |
| 5640.00                                                                                          | H                 | -41.85      |             |        |
| Highest channel                                                                                  |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 3819.60                                                                                          | Vertical          | -41.79      | -13.00      | Pass   |
| 5729.40                                                                                          | V                 | -41.94      |             |        |
| 3819.60                                                                                          | Horizontal        | -52.70      | -13.00      | Pass   |
| 5729.40                                                                                          | H                 | -46.14      |             |        |
| Remark:                                                                                          |                   |             |             |        |
| 1. The emission levels of below 1 GHz are very lower than the limit and not show in test report. |                   |             |             |        |

| WCDMA BAND V 12.2k RMC                                                                           |                   |             |             |        |
|--------------------------------------------------------------------------------------------------|-------------------|-------------|-------------|--------|
| Lowest channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 1652.80                                                                                          | Vertical          | -54.50      | -13.00      | Pass   |
| 2479.20                                                                                          | V                 | -47.41      |             |        |
| 3305.60                                                                                          | V                 | -53.80      |             |        |
| 1652.80                                                                                          | Horizontal        | -53.06      | -13.00      | Pass   |
| 2479.20                                                                                          | H                 | -51.56      |             |        |
| 3305.60                                                                                          | H                 | -53.62      |             |        |
| Middle channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 1673.20                                                                                          | Vertical          | -52.16      | -13.00      | Pass   |
| 2509.80                                                                                          | V                 | -44.64      |             |        |
| 3346.40                                                                                          | V                 | -54.53      |             |        |
| 1673.20                                                                                          | Horizontal        | -53.01      | -13.00      | Pass   |
| 2509.80                                                                                          | H                 | -49.36      |             |        |
| 3346.40                                                                                          | H                 | -54.77      |             |        |
| Highest channel                                                                                  |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 1693.20                                                                                          | Vertical          | -57.31      | -13.00      | Pass   |
| 2539.80                                                                                          | V                 | -44.52      |             |        |
| 3386.40                                                                                          | V                 | -54.44      |             |        |
| 1693.20                                                                                          | Horizontal        | -58.79      | -13.00      | Pass   |
| 2539.80                                                                                          | H                 | -46.08      |             |        |
| 3386.40                                                                                          | H                 | -53.77      |             |        |
| Remark:                                                                                          |                   |             |             |        |
| 1. The emission levels of below 1 GHz are very lower than the limit and not show in test report. |                   |             |             |        |

| WCDMA Band II 12.2k RMC                                                                          |                   |             |             |        |
|--------------------------------------------------------------------------------------------------|-------------------|-------------|-------------|--------|
| Lowest channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 3704.80                                                                                          | Vertical          | -53.28      | -13.00      | Pass   |
| 5557.20                                                                                          | V                 | -48.28      |             |        |
| 3704.80                                                                                          | Horizontal        | -54.03      | -13.00      | Pass   |
| 5557.20                                                                                          | H                 | -49.01      |             |        |
| Middle channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 3760.00                                                                                          | Vertical          | -52.88      | -13.00      | Pass   |
| 5640.00                                                                                          | V                 | -47.90      |             |        |
| 3760.00                                                                                          | Horizontal        | -54.10      | -13.00      | Pass   |
| 5640.00                                                                                          | H                 | -47.46      |             |        |
| Highest channel                                                                                  |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 3815.20                                                                                          | Vertical          | -51.37      | -13.00      | Pass   |
| 5722.80                                                                                          | V                 | -47.61      |             |        |
| 3815.20                                                                                          | Horizontal        | -53.34      | -13.00      | Pass   |
| 5722.80                                                                                          | H                 | -46.40      |             |        |
| Remark:                                                                                          |                   |             |             |        |
| 1. The emission levels of below 1 GHz are very lower than the limit and not show in test report. |                   |             |             |        |

| WCDMA Band IV 12.2k RMC                                                                          |                   |             |             |        |
|--------------------------------------------------------------------------------------------------|-------------------|-------------|-------------|--------|
| Lowest channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 3424.40                                                                                          | Vertical          | -52.91      | -13.00      | Pass   |
| 5136.60                                                                                          | V                 | -41.65      |             |        |
| 3424.40                                                                                          | Horizontal        | -52.72      | -13.00      | Pass   |
| 5136.60                                                                                          | H                 | -41.67      |             |        |
| Middle channel                                                                                   |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 3464.80                                                                                          | Vertical          | -52.25      | -13.00      | Pass   |
| 5197.20                                                                                          | V                 | -35.26      |             |        |
| 3464.80                                                                                          | Horizontal        | -50.30      | -13.00      | Pass   |
| 5197.20                                                                                          | H                 | -39.50      |             |        |
| Highest channel                                                                                  |                   |             |             |        |
| Frequency (MHz)                                                                                  | Spurious Emission |             | Limit (dBm) | Result |
|                                                                                                  | Polarization      | Level (dBm) |             |        |
| 3505.20                                                                                          | Vertical          | -53.17      | -13.00      | Pass   |
| 5257.80                                                                                          | V                 | -36.47      |             |        |
| 3505.20                                                                                          | Horizontal        | -53.30      | -13.00      | Pass   |
| 5257.80                                                                                          | H                 | -39.29      |             |        |
| Remark:                                                                                          |                   |             |             |        |
| 1. The emission levels of below 1 GHz are very lower than the limit and not show in test report. |                   |             |             |        |

## 6.7 Frequency stability V.S. Temperature measurement

|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 22.355, FCC Part 24.235, FCC Part 27.54, FCC Part 2.1055(a)(1)(b)                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Test Method:      | ANSI/TIA-6-3-D 2010                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Limit:            | ±2.5 ppm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Test setup:       | <p>The diagram illustrates the test setup. A Power Source is connected to a Temperature &amp; Humidity Chamber. Inside the chamber is the EUT (Equipment Under Test). A Divider is connected to the EUT and also to two external devices, SS (Spectrum Analyzer) and SA (Spectrum Analyzer).</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test procedure:   | <ol style="list-style-type: none"> <li>1. The equipment under test was connected to an external DC power supply and input rated voltage.</li> <li>2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.</li> <li>3. The EUT was placed inside the temperature chamber.</li> <li>4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.</li> <li>5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.</li> <li>6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached</li> </ol> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |


## Measurement Data (the worst channel):

| Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz |                  |                 |          |             |        |
|-----------------------------------------------------------------|------------------|-----------------|----------|-------------|--------|
| Power supplied (Vdc)                                            | Temperature (°C) | Frequency error |          | Limit (ppm) | Result |
|                                                                 |                  | Hz              | ppm      |             |        |
| 3.85                                                            | -30              | 173             | 0.206789 | ±2.5        | Pass   |
|                                                                 | -20              | 154             | 0.184078 |             |        |
|                                                                 | -10              | 135             | 0.161367 |             |        |
|                                                                 | 0                | 124             | 0.148219 |             |        |
|                                                                 | 10               | 113             | 0.135071 |             |        |
|                                                                 | 20               | 141             | 0.168539 |             |        |
|                                                                 | 30               | 138             | 0.164953 |             |        |
|                                                                 | 40               | 127             | 0.151805 |             |        |
|                                                                 | 50               | 116             | 0.138656 |             |        |
| Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz |                  |                 |          |             |        |
| Power supplied (Vdc)                                            | Temperature (°C) | Frequency error |          | Limit (ppm) | Result |
|                                                                 |                  | Hz              | ppm      |             |        |
| 3.85                                                            | -30              | 177             | 0.09415  | ±2.5        | Pass   |
|                                                                 | -20              | 154             | 0.08191  |             |        |
|                                                                 | -10              | 140             | 0.07447  |             |        |
|                                                                 | 0                | 128             | 0.06809  |             |        |
|                                                                 | 10               | 124             | 0.06596  |             |        |
|                                                                 | 20               | 115             | 0.06117  |             |        |
|                                                                 | 30               | 106             | 0.05638  |             |        |
|                                                                 | 40               | 137             | 0.07287  |             |        |
|                                                                 | 50               | 145             | 0.07713  |             |        |
| Note: Only the worst case shown in the report.                  |                  |                 |          |             |        |

| Reference Frequency: EGPRS850 Middle channel=190 channel=836.6MHz  |                  |                 |          |             |        |
|--------------------------------------------------------------------|------------------|-----------------|----------|-------------|--------|
| Power supplied (Vdc)                                               | Temperature (°C) | Frequency error |          | Limit (ppm) | Result |
|                                                                    |                  | Hz              | ppm      |             |        |
| 3.85                                                               | -30              | 176             | 0.210375 | ±2.5        | Pass   |
|                                                                    | -20              | 157             | 0.187664 |             |        |
|                                                                    | -10              | 138             | 0.164953 |             |        |
|                                                                    | 0                | 127             | 0.151805 |             |        |
|                                                                    | 10               | 116             | 0.138656 |             |        |
|                                                                    | 20               | 144             | 0.172125 |             |        |
|                                                                    | 30               | 141             | 0.168539 |             |        |
|                                                                    | 40               | 130             | 0.155391 |             |        |
|                                                                    | 50               | 119             | 0.142242 |             |        |
| Reference Frequency: EGPRS 1900 Middle channel=661 channel=1880MHz |                  |                 |          |             |        |
| Power supplied (Vdc)                                               | Temperature (°C) | Frequency error |          | Limit (ppm) | Result |
|                                                                    |                  | Hz              | ppm      |             |        |
| 3.85                                                               | -30              | 181             | 0.096277 | ±2.5        | Pass   |
|                                                                    | -20              | 158             | 0.084043 |             |        |
|                                                                    | -10              | 144             | 0.076596 |             |        |
|                                                                    | 0                | 132             | 0.070213 |             |        |
|                                                                    | 10               | 128             | 0.068085 |             |        |
|                                                                    | 20               | 119             | 0.063298 |             |        |
|                                                                    | 30               | 110             | 0.058511 |             |        |
|                                                                    | 40               | 141             | 0.075000 |             |        |
|                                                                    | 50               | 149             | 0.079255 |             |        |
| Note: Only the worst case shown in the report.                     |                  |                 |          |             |        |

| Reference Frequency: WCDMA BAND V 12.2k RMC Middle channel=4183 channel=836.6MHz |                  |                 |          |             |        |
|----------------------------------------------------------------------------------|------------------|-----------------|----------|-------------|--------|
| Power supplied (Vdc)                                                             | Temperature (°C) | Frequency error |          | Limit (ppm) | Result |
|                                                                                  |                  | Hz              | ppm      |             |        |
| 3.85                                                                             | -30              | 168             | 0.200813 | ±2.5        | Pass   |
|                                                                                  | -20              | 141             | 0.168539 |             |        |
|                                                                                  | -10              | 134             | 0.160172 |             |        |
|                                                                                  | 0                | 121             | 0.144633 |             |        |
|                                                                                  | 10               | 107             | 0.127899 |             |        |
|                                                                                  | 20               | 159             | 0.190055 |             |        |
|                                                                                  | 30               | 161             | 0.192446 |             |        |
|                                                                                  | 40               | 137             | 0.163758 |             |        |
|                                                                                  | 50               | 144             | 0.172125 |             |        |
| Reference Frequency: WCDMA BAND II 12.2k RMC Middle channel=9400 channel=1880MHz |                  |                 |          |             |        |
| Power supplied (Vdc)                                                             | Temperature (°C) | Frequency error |          | Limit (ppm) | Result |
|                                                                                  |                  | Hz              | ppm      |             |        |
| 3.85                                                                             | -30              | 188             | 0.10000  | ±2.5        | Pass   |
|                                                                                  | -20              | 150             | 0.07979  |             |        |
|                                                                                  | -10              | 141             | 0.07500  |             |        |
|                                                                                  | 0                | 164             | 0.08723  |             |        |
|                                                                                  | 10               | 143             | 0.07606  |             |        |
|                                                                                  | 20               | 125             | 0.06649  |             |        |
|                                                                                  | 30               | 146             | 0.07766  |             |        |
|                                                                                  | 40               | 134             | 0.07128  |             |        |
|                                                                                  | 50               | 150             | 0.07979  |             |        |
| Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz    |                  |                 |          |             |        |
| Power supplied (Vdc)                                                             | Temperature (°C) | Frequency error |          | Limit (ppm) | Result |
|                                                                                  |                  | Hz              | ppm      |             |        |
| 3.85                                                                             | -30              | 174             | 0.100427 | ±2.5        | Pass   |
|                                                                                  | -20              | 144             | 0.083112 |             |        |
|                                                                                  | -10              | 145             | 0.083689 |             |        |
|                                                                                  | 0                | 128             | 0.073877 |             |        |
|                                                                                  | 10               | 110             | 0.063488 |             |        |
|                                                                                  | 20               | 146             | 0.084266 |             |        |
|                                                                                  | 30               | 170             | 0.098118 |             |        |
|                                                                                  | 40               | 160             | 0.092347 |             |        |
|                                                                                  | 50               | 131             | 0.075609 |             |        |
| Note: Only the worst case shown in the report.                                   |                  |                 |          |             |        |

## 6.8 Frequency stability V.S. Voltage measurement
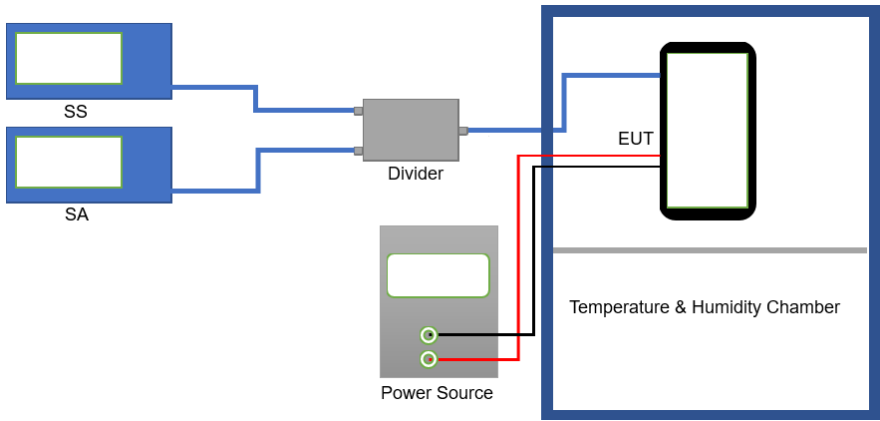
|                   |                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|-------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Test Requirement: | FCC Part 22.355, FCC Part 24.235, FCC Part 27.54, FCC Part 2.1055(d)(2)                                                                                                                                                                                                                                                                                                                                                                        |
| Test Method:      | ANSI/TIA-603-D 2010                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Limit:            | ±2.5ppm                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Test setup:       |  <p>The diagram illustrates the test setup. A Spectrum Analyzer (SA) and a Signal Source (SS) are connected to a Divider. The Divider is connected to the EUT (Equipment Under Test) inside a Temperature &amp; Humidity Chamber. A Power Source is also connected to the EUT.</p>                                                                           |
| Test procedure:   | <ol style="list-style-type: none"> <li>1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.</li> <li>2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.</li> <li>3. Reduce the input voltage to specify extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.</li> </ol> |
| Test Instruments: | Refer to section 5.8 for details                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test mode:        | Refer to section 5.3 for details                                                                                                                                                                                                                                                                                                                                                                                                               |
| Test results:     | Passed                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## Measurement Data (the worst channel):

| Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz     |                      |                 |          |             |        |
|---------------------------------------------------------------------|----------------------|-----------------|----------|-------------|--------|
| Temperature (°C)                                                    | Power supplied (Vdc) | Frequency error |          | Limit (ppm) | Result |
|                                                                     |                      | Hz              | ppm      |             |        |
| 25                                                                  | 4.40                 | 84              | 0.100406 | ±2.5        | Pass   |
|                                                                     | 3.85                 | 77              | 0.092039 |             |        |
|                                                                     | 3.50                 | 67              | 0.080086 |             |        |
| Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz     |                      |                 |          |             |        |
| Temperature (°C)                                                    | Power supplied (Vdc) | Frequency error |          | Limit (ppm) | Result |
|                                                                     |                      | Hz              | ppm      |             |        |
| 25                                                                  | 4.40                 | 88              | 0.04681  | ±2.5        | Pass   |
|                                                                     | 3.85                 | 72              | 0.03830  |             |        |
|                                                                     | 3.50                 | 78              | 0.04149  |             |        |
| Reference Frequency: EGPRS 850 Middle channel= 190 channel=836.6MHz |                      |                 |          |             |        |
| Temperature (°C)                                                    | Power supplied (Vdc) | Frequency error |          | Limit (ppm) | Result |
|                                                                     |                      | Hz              | ppm      |             |        |
| 25                                                                  | 4.40                 | 98              | 0.117141 | ±2.5        | Pass   |
|                                                                     | 3.85                 | 90              | 0.107578 |             |        |
|                                                                     | 3.50                 | 72              | 0.086063 |             |        |
| Reference Frequency: EGPRS 1900 Middle channel= 661 channel=1880MHz |                      |                 |          |             |        |
| Temperature (°C)                                                    | Power supplied (Vdc) | Frequency error |          | Limit (ppm) | Result |
|                                                                     |                      | Hz              | ppm      |             |        |
| 25                                                                  | 4.40                 | 87              | 0.046277 | ±2.5        | Pass   |
|                                                                     | 3.85                 | 76              | 0.040426 |             |        |
|                                                                     | 3.50                 | 88              | 0.046809 |             |        |
| Note: Only the worst case shown in the report.                      |                      |                 |          |             |        |

| Reference Frequency: UMTS 850 12.2k RMC Middle channel=4183 channel=836.6MHz  |                      |                 |          |             |        |
|-------------------------------------------------------------------------------|----------------------|-----------------|----------|-------------|--------|
| Temperature (°C)                                                              | Power supplied (Vdc) | Frequency error |          | Limit (ppm) | Result |
|                                                                               |                      | Hz              | ppm      |             |        |
| 25                                                                            | 4.40                 | 86              | 0.102797 | ±2.5        | Pass   |
|                                                                               | 3.85                 | 92              | 0.109969 |             |        |
|                                                                               | 3.50                 | 65              | 0.077695 |             |        |
| Reference Frequency: UMTS 1900 12.2k RMC Middle channel=9400 channel=1880MHz  |                      |                 |          |             |        |
| Temperature (°C)                                                              | Power supplied (Vdc) | Frequency error |          | Limit (ppm) | Result |
|                                                                               |                      | Hz              | ppm      |             |        |
| 25                                                                            | 4.40                 | 80              | 0.042553 | ±2.5        | Pass   |
|                                                                               | 3.85                 | 83              | 0.044149 |             |        |
|                                                                               | 3.50                 | 71              | 0.037766 |             |        |
| Reference Frequency: UMTS1700 12.2k RMC Middle channel=1413 channel=1732.6MHz |                      |                 |          |             |        |
| Temperature (°C)                                                              | Power supplied (Vdc) | Frequency error |          | Limit (ppm) | Result |
|                                                                               |                      | Hz              | ppm      |             |        |
| 25                                                                            | 4.40                 | 92              | 0.053099 | 2.5         | Pass   |
|                                                                               | 3.85                 | 86              | 0.049636 |             |        |
|                                                                               | 3.50                 | 59              | 0.034053 |             |        |
| Note: Only the worst case shown in the report.                                |                      |                 |          |             |        |