


R-8558 X10 15-1972 Conducted Emissions PL 5/28/00 LEAD-HOT

hp

10 dB/

OFFSET
10.0
dB

DL
48.0
dBμV

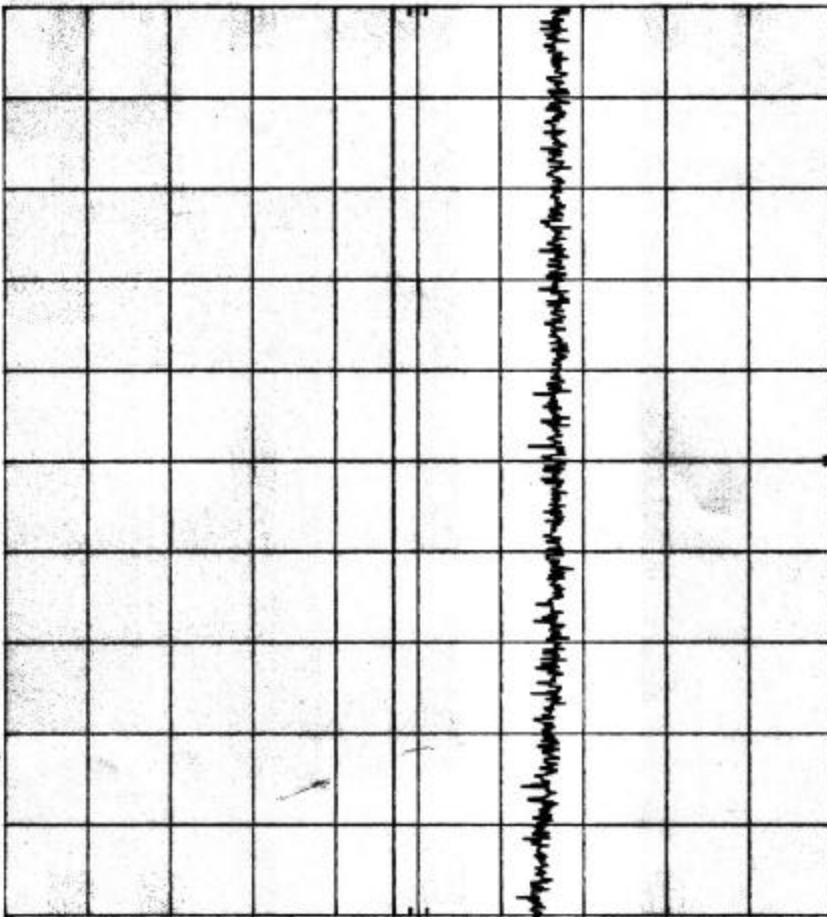

START 450 kHz RES BW 10 kHz VBW 30 kHz STOP 1.70 MHz SWP 20.0 sec

Customer: X-10(USA)
Test Sample: 2.4GHz RF Transmitter
Model No.: 15-1972
Test Method: FCC 15.207(a) Conducted Emissions, 450kHz-30MHz
Notes: Lead-HOT
Detector=peak
Date: May26, 2000 Tech: Peter Lananno Sheet 1 of 6




Retlif Testing Laboratories

Report No. R-8558-1

R-8558 X10 15-1972 Conducted Emissions PL 5/26/00 LEAD-Neutral
 REF 95.0 dBμV ATTEN 10 dB

10 dB/
 OFFSET 10.0 dB
 DL 48.0 dBμV

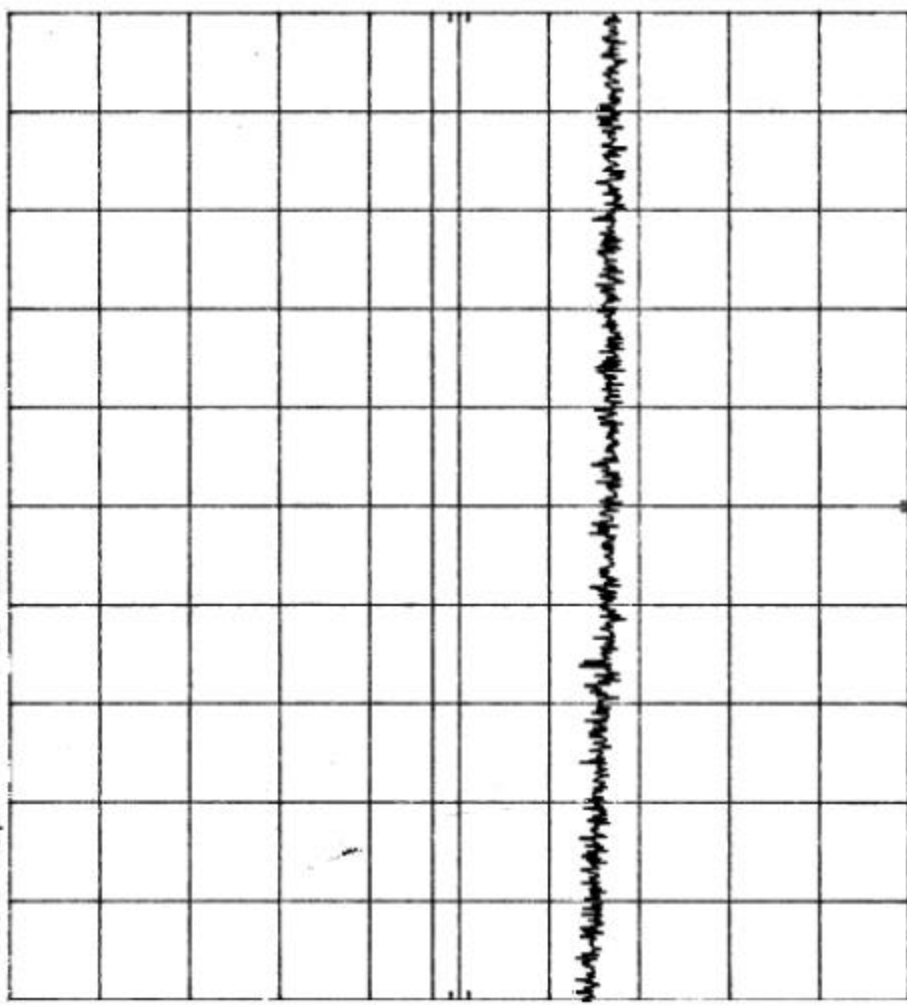

START 450 kHz RES BW 10 kHz VBW 30 kHz STOP 1.70 MHz SWP 20.0 sec

Customer: X-0(USA)
 Test Sample: 2.4GHz RF Transmitter
 Model No.: 151972
 Test Method: FCC 15.207(a) Conducted Emissions, 450kHz-30MHz
 Notes: 1. also HIFUTRAL
 Detector=peak
 Date: May26, 2000 Tech: Peter Lanama Sheet 2 of 6



Retlif Testing Laboratories

Report No. R-8558-1


R-8558 X10 15-1972 Conducted Emissions PL 5/26/00 LEAD- H₀+
 REF 95.0 dBμV ATTEN 10 dB

hp

10 dB/

OFFSET
 10.0
 dB

DL
 48.0
 dBμV

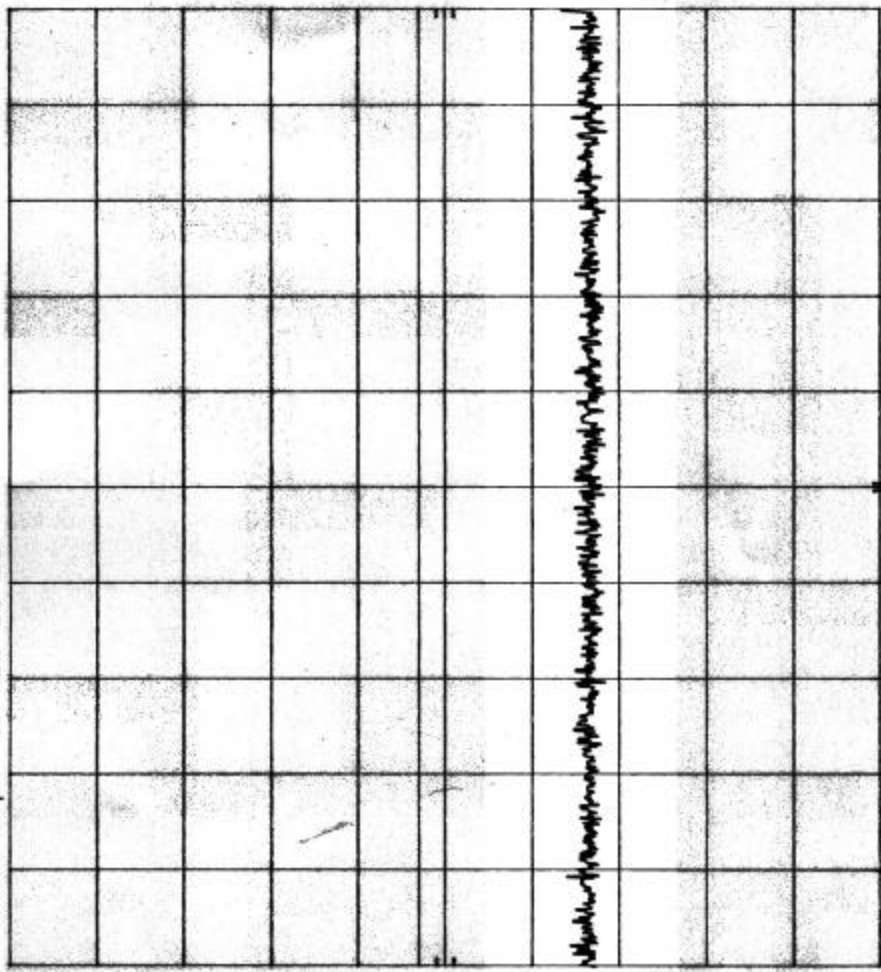

START 1.70 MHz RES BW 10 kHz VBW 30 kHz STOP 10.00 MHz SWP 20.0 sec

Customer:	X-10(USA)
Test Sample:	2.4GHz RF Transmitter
Model No.:	15-1972
Test Method:	FCC 15.207(a) Conducted Emissions, 450kHz-30MHz
Notes:	Lead-HOT
	Detector=peak
Date:	May26, 2000
Tech:	Peter Liananna
Sheet	3 of 6



Retlif Testing Laboratories

Report No. R-8558-1

R-8558 X10 15-1972 Conducted Emissions PL 5/26/00 LEAD-Neutral


hp

REF 95.0 dBμV ATTEN 10 dB

10 dB/

OFFSET
10.0
dB

DL
48.0
dBμV

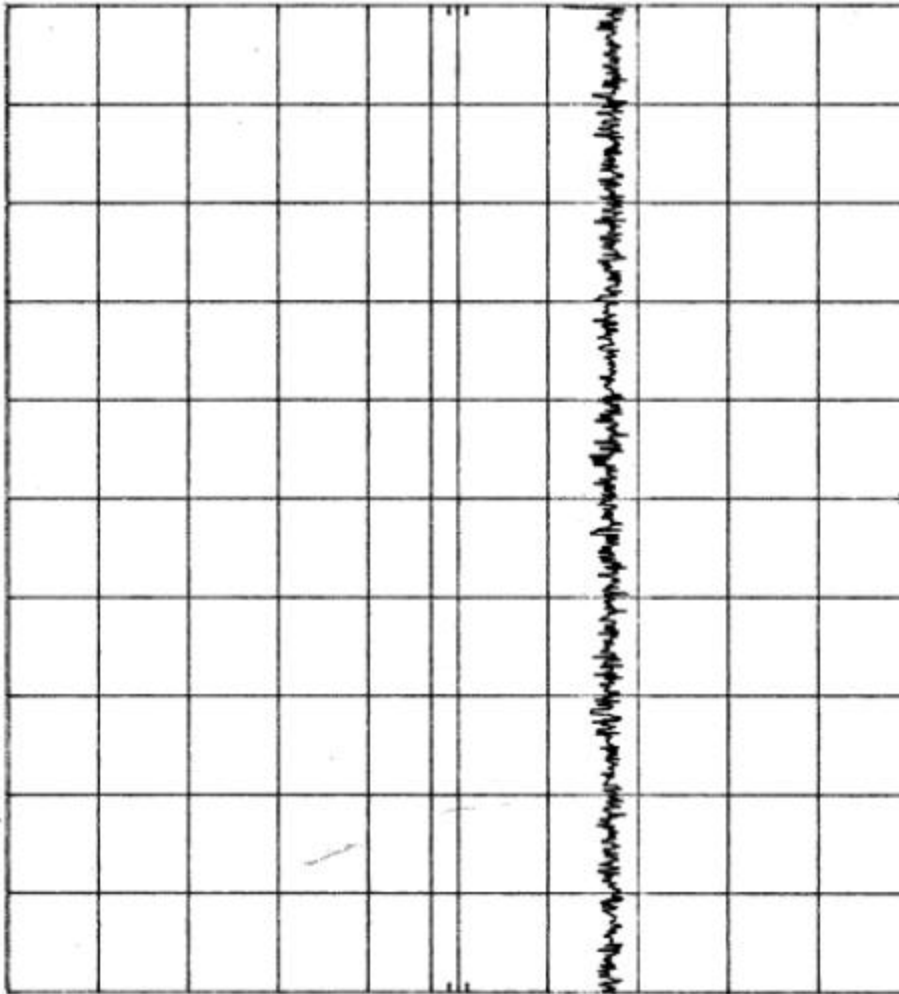

START 1.70 MHz

RES BW 10 kHz

VBW 30 kHz

STOP 10.00 MHz

SWP 20.0 sec

Customer:	X-10(USA)
Test Sample:	2.4GHz RF Transmitter
Model No.:	15-1972
Test Method:	FCC 15.207(a) Conducted Emissions, 450kHz-30MHz
Notes:	Lead-NEUTRAL Detector=peak
Date:	May26, 2000
Tech:	Peter Lianana
Sheet	4 of 6



Retlif Testing Laboratories

Report No. R-8558-1

R-8558 X10 15-1972 Conducted Emissions PL 5/26/00 LEAD- μ +
 REF 95.0 dB μ V ATTEN 10 dB

hp

10 dB/

OFFSET


10.0

dB

DL

48.0

dB μ V

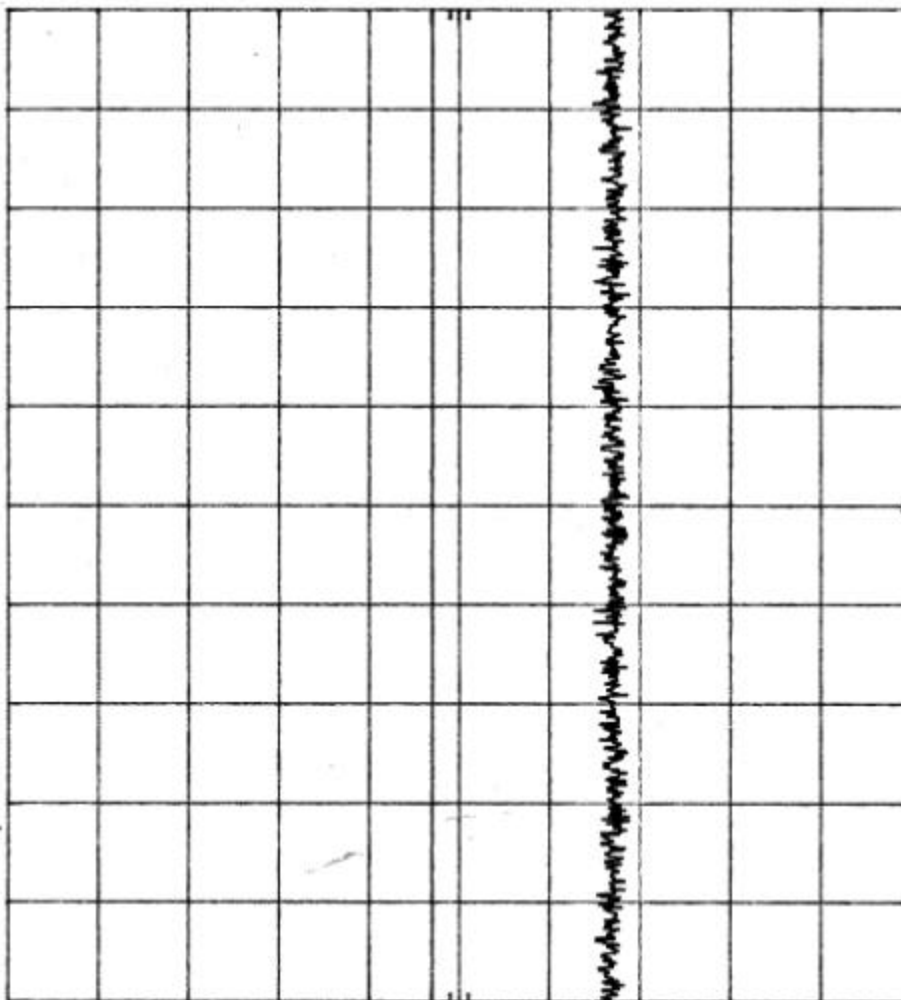

START 10.0 MHz
 RES BW 10 kHz
 VBW 30 kHz
 STOP 30.0 MHz
 SWP 20.0 sec

Customer:	X 10(USA)
Test Sample:	2.4GHz RF Transmitter
Model No.:	15-1972
Test Method:	FCC 15.207(a) Conducted Emissions, 450kHz-30MHz
Notes:	Lead-MOT
	Detector-peak
Date:	May26, 2000
Tech:	Peter Lananna
Sheet	5 of 6



Retlif Testing Laboratories

Report No. R-8558-1

R-8558 X10 15-1972 Conducted Emissions PL 5/26/00 LEAD-Neutral

hp


10 dB/

OFFSET

10.0
dB

DL

48.0
dBμV

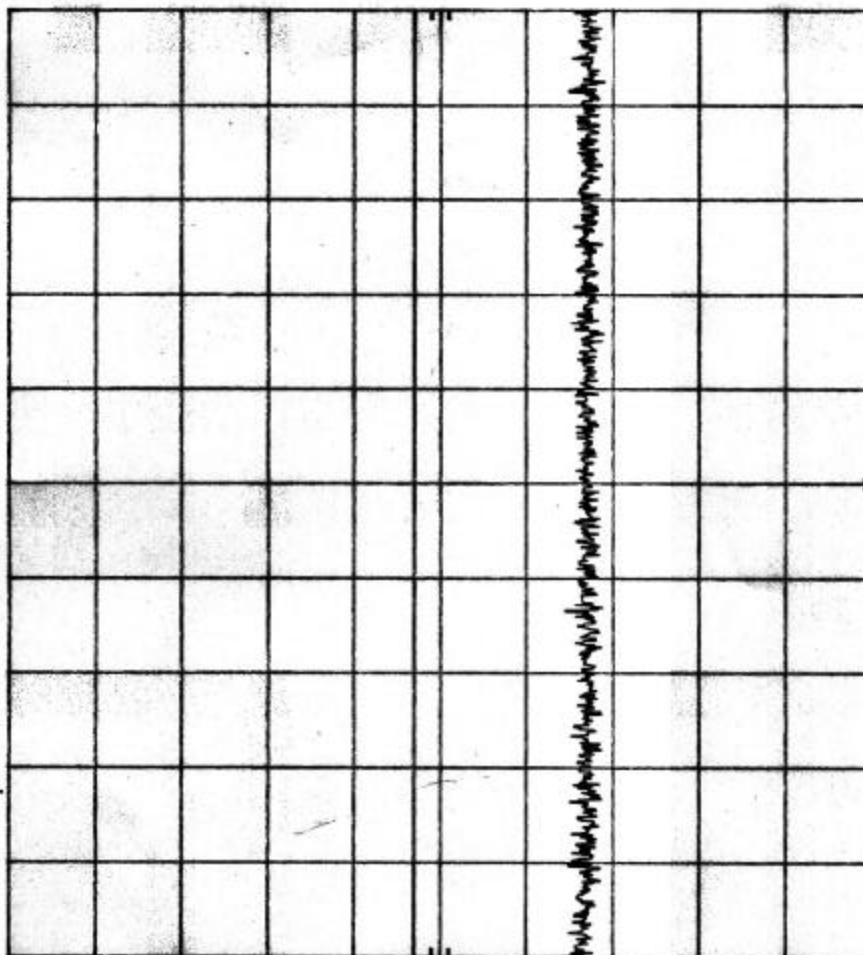

START 10.0 MHz

RES BW 10 kHz

VBW 30 kHz

STOP 30.0 MHz

SWP 20.0 sec

Customer:	X-10(USA)
Test Sample:	2.4GHz RF Transmitter
Model No.:	15-1972
Test Method:	FCC 15.207(a) Conducted Emissions, 450kHz-30MHz
Notes:	Lead-NEUTRAL
	Detector-peak
Date:	May26, 2000
Tech:	Peter Lananna
Sheet	6 of 6



Retlif Testing Laboratories

Report No. R-8558-1