


Test at TX 2437 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.39 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2442.00 MHz	---	---	1.47	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 19854 MHz	0	---	10.6	dB	INFO

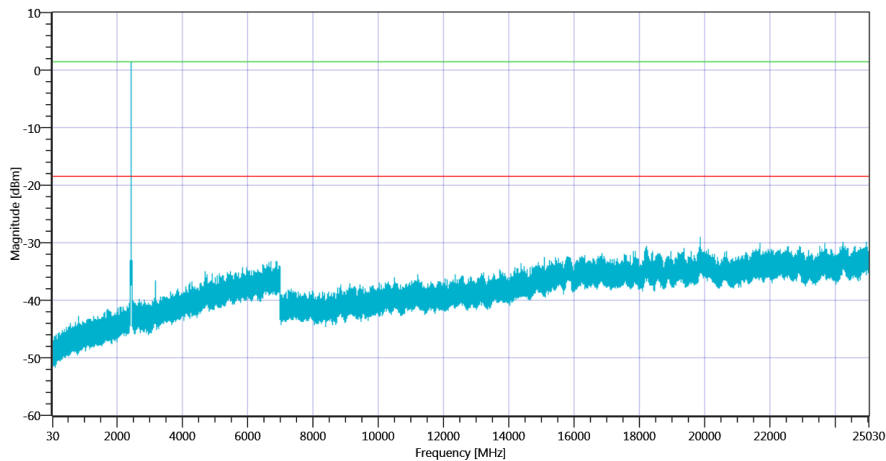

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2437_29092020_152738.png

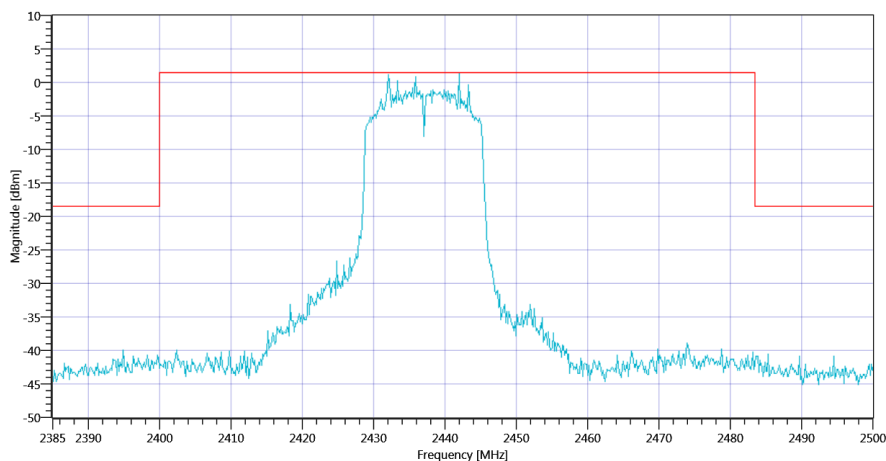

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2437_29092020_152741.png

TEST FINISHED

General Verdict 29.09.2020 15:27:43 / RT: 292 s

PASS

54. FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode

Test References	
TC Start	29.09.2020 15:34:45
Ambit Temp [°C] Humidity [rel%]	22.7 0
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 g-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 g-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2462 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.08 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2465.83 MHz	---	---	4.15	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-152.05	dB	INFO

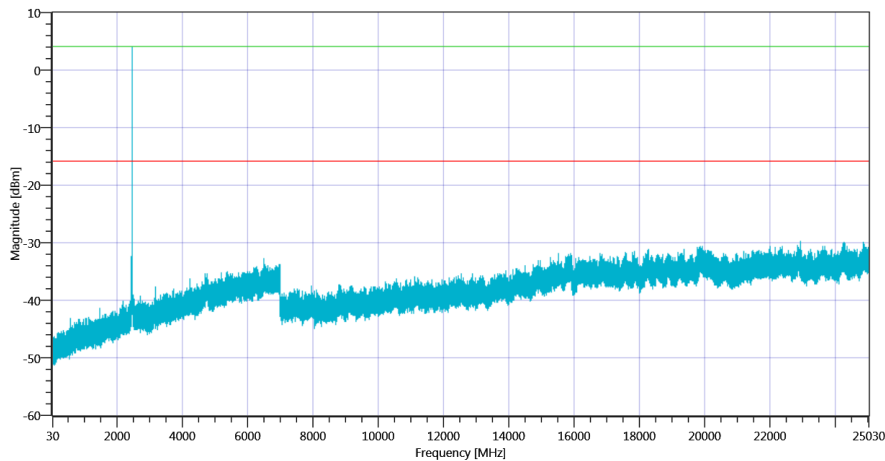

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2462_29092020_153933.png

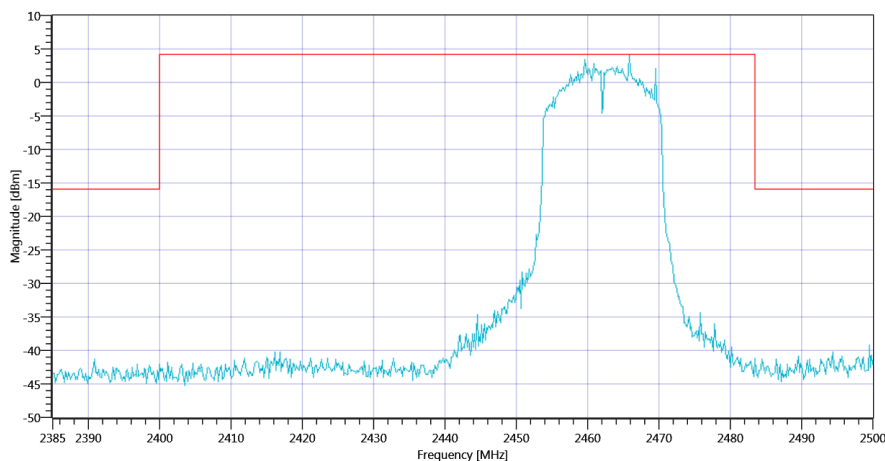

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 g-mode 2462_29092020_153936.png

TEST FINISHED

General Verdict 29.09.2020 15:39:38 / RT: 292 s

PASS

55. FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode

Test References	
TC Start	29.09.2020 15:45:19
Ambit Temp [°C] Humidity [rel%]	22.7 0
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2412 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	12.38 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2410.67 MHz	---	---	2.66	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-151.41	dB	INFO

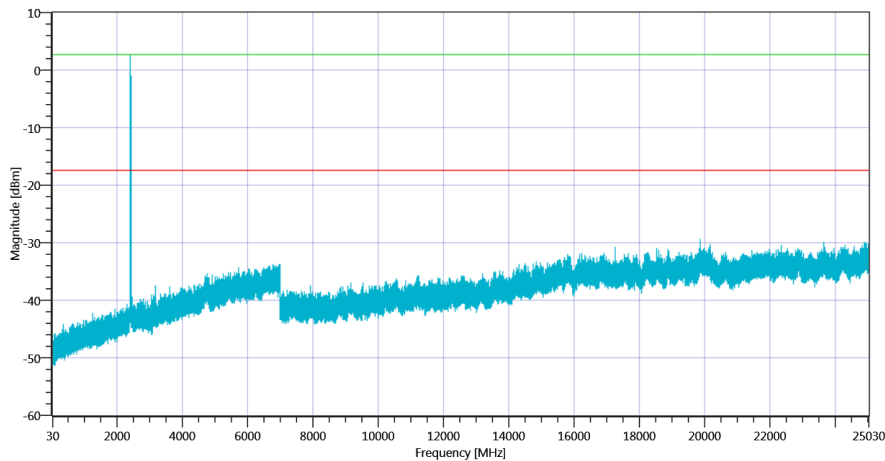

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2412_29092020_155007.png

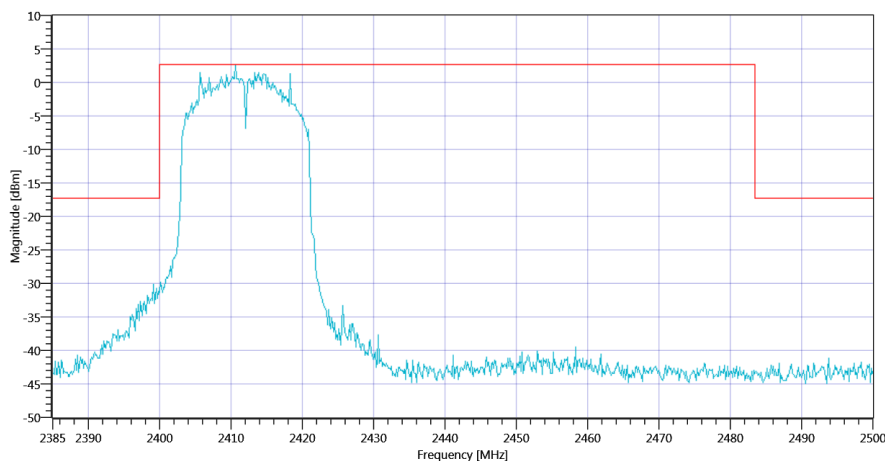

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2412_29092020_155010.png

TEST FINISHED

General Verdict 29.09.2020 15:50:12 / RT: 293 s

PASS

56. FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode

Test References	
TC Start	29.09.2020 16:12:25
Ambit Temp [°C] Humidity [rel%]	22.7 0
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2437 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.24 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2430.83 MHz	---	---	0.22	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 30 MHz	0	---	-151.19	dB	INFO

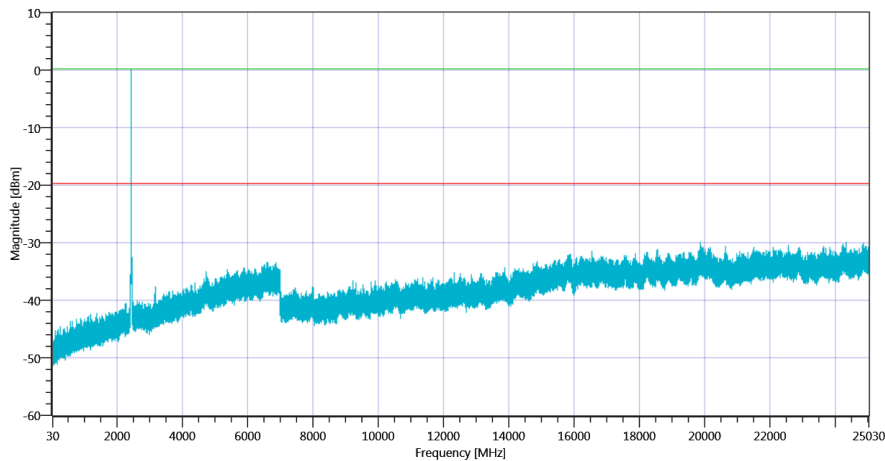

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2437_29092020_161713.png

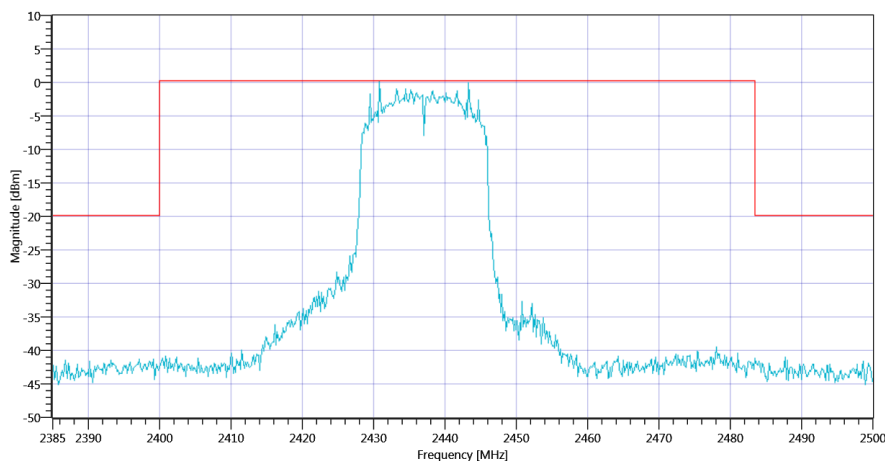

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2437_29092020_161716.png

TEST FINISHED

General Verdict 29.09.2020 16:17:18 / RT: 292 s

PASS

57. FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode

Test References	
TC Start	29.09.2020 16:21:42
Ambit Temp [°C] Humidity [rel%]	22.8 0
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT20_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT20-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2462 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	13.85 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2467.00 MHz	---	---	4.16	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24909.167 MHz	0	---	13.77	dB	INFO

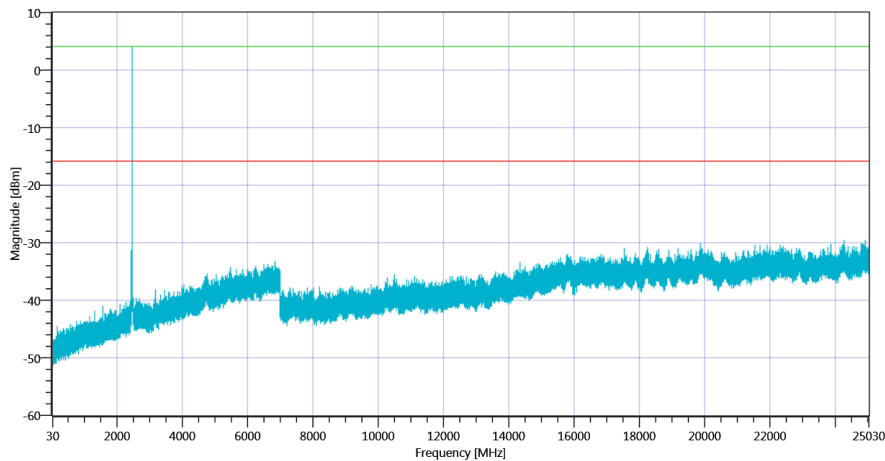

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2462_29092020_162630.png

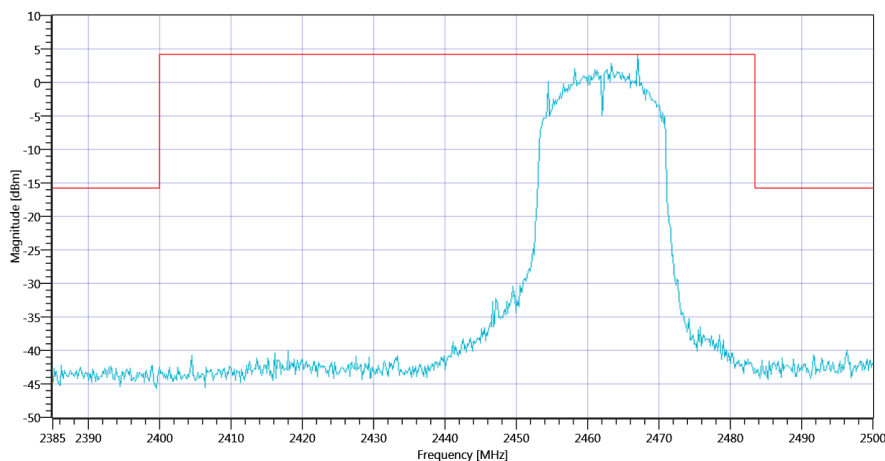

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT20-mode 2462_29092020_162633.png

TEST FINISHED

General Verdict 29.09.2020 16:26:35 / RT: 292 s

PASS

58. FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode

Test References	
TC Start	30.09.2020 06:14:44
Ambit Temp [°C] Humidity [rel%]	20.7 0
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2422 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.77 0 30
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2415.83 MHz	---	---	0.87	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2397.167 MHz	0	---	4.95	dB	INFO

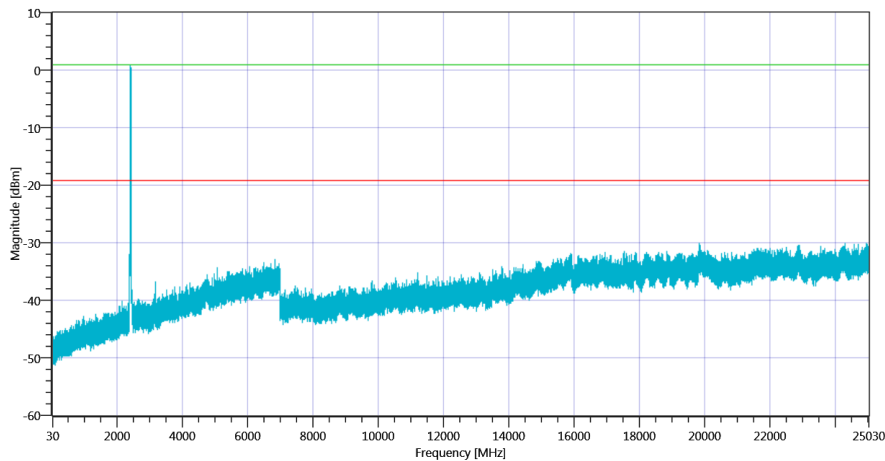

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2422_30092020_061932.png

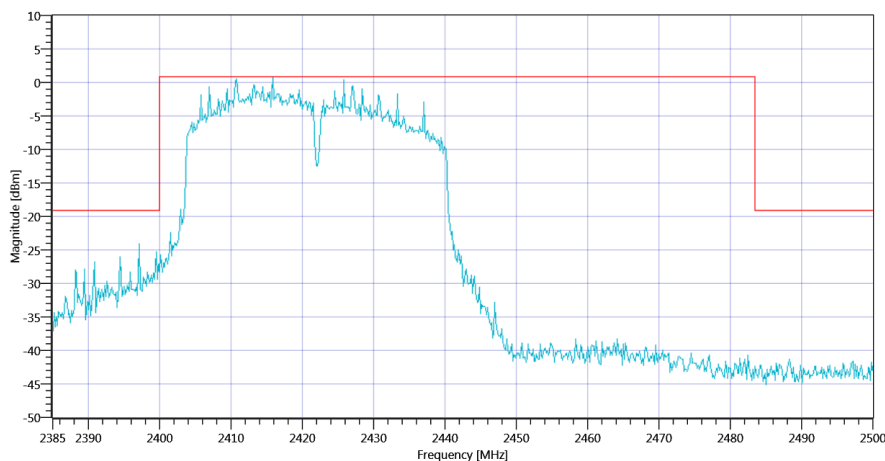

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2422_30092020_061935.png

TEST FINISHED

General Verdict 30.09.2020 06:19:37 / RT: 293 s

PASS

59. FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode

Test References	
TC Start	30.09.2020 06:51:23
Ambit Temp [°C] Humidity [rel%]	21.1 0
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60



Test at TX 2437 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	7.51 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.83 MHz	---	---	-1.17	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.5 MHz	0	---	10.81	dB	INFO

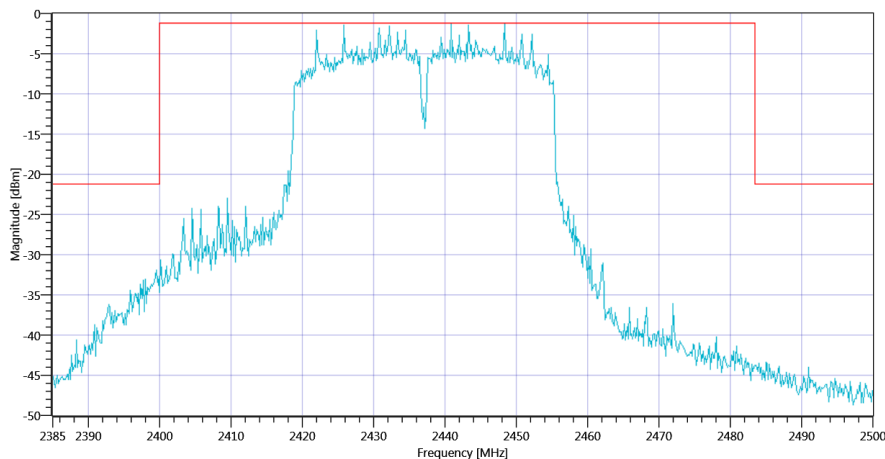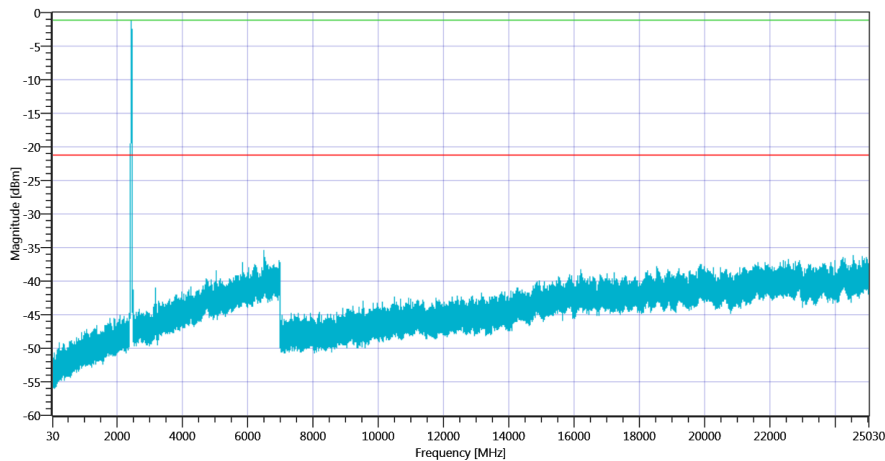

TEST FINISHED

General Verdict	30.09.2020 06:56:16 / RT: 293 s	PASS
-----------------	---------------------------------	------

60. FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode

Test References	
TC Start	30.09.2020 07:01:29
Ambit Temp [°C] Humidity [rel%]	21.2 0
System Version	1.0.0.51
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
Class / TC Version	TC_VM_FCC15247_TX_Emissions_Conducted_V01 Version: 0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - WLAN 2G4 nHT40_mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 nHT40-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2422
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2452
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2452 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.44 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2463.33 MHz	---	---	1.49	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 24184.833 MHz	0	---	17.05	dB	INFO

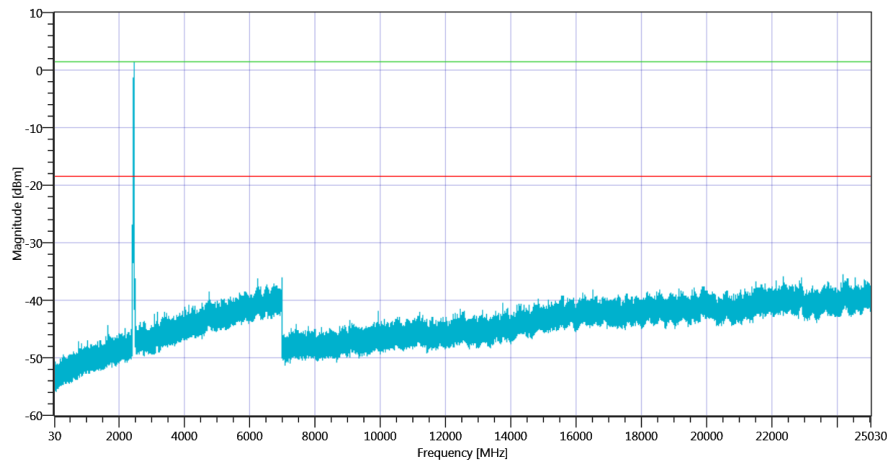

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2452_30092020_070618.png

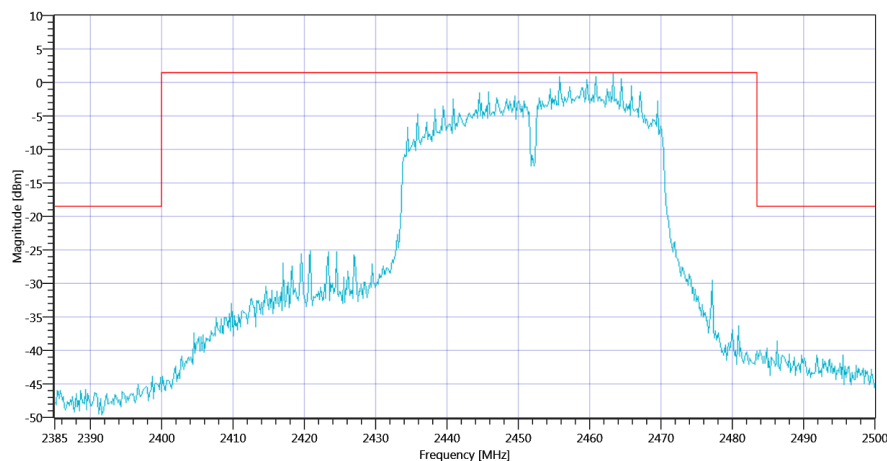

Plot_FCC Part 15.247 TX Spurious Conducted ~ WLAN2G4 nHT40-mode 2452_30092020_070621.png

TEST FINISHED

General Verdict 30.09.2020 07:06:22 / RT: 293 s

PASS

61. Common2G4 Peak OP 3MHz/3MHz ~ WLAN2G4 b-mode

Test References	
TC Start	29.09.2020 14:05:11
Ambit Temp [°C] Humidity [rel%]	22.4 0
System Version	1.0.0.51
Test Specification	None
Test Method	
Class / TC Version	TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01 Version: 0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	True Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2412 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	19.49 15.57 20
Start [MHz] Stop [MHz]	2362.000 2462.000
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	14.86	dBm	Info
Peak Power	---	---	30.619634	mW	Info
Frequency at Peak	---	---	2411.7	MHz	Info

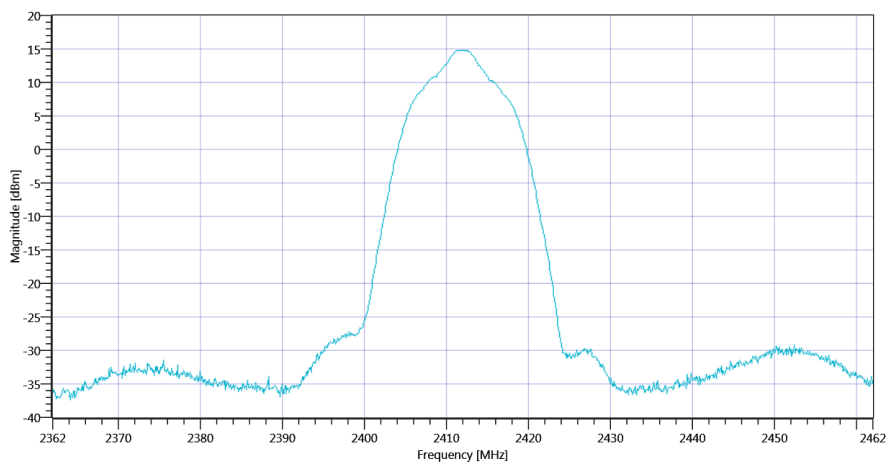

Plot_Common2G4 Peak OP 3MHz-3MHz ~ WLAN2G4 b-mode_29092020_140541.png

TEST FINISHED

General Verdict	29.09.2020 14:05:42 / RT: 30 s	PASS
-----------------	--------------------------------	------

62. Common2G4 Peak OP 3MHz/3MHz ~ WLAN2G4 b-mode

Test References	
TC Start	29.09.2020 14:39:43
Ambit Temp [°C] Humidity [rel%]	22.6 0
System Version	1.0.0.51
Test Specification	None
Test Method	
Class / TC Version	TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01 Version: 0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	True Freq [MHz] 2437
Frequency high to test	False Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2437 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	16.82 15.49 20
Start [MHz] Stop [MHz]	2387.000 2487.000
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	12.26	dBm	Info
Peak Power	---	---	16.826741	mW	Info
Frequency at Peak	---	---	2437.2	MHz	Info

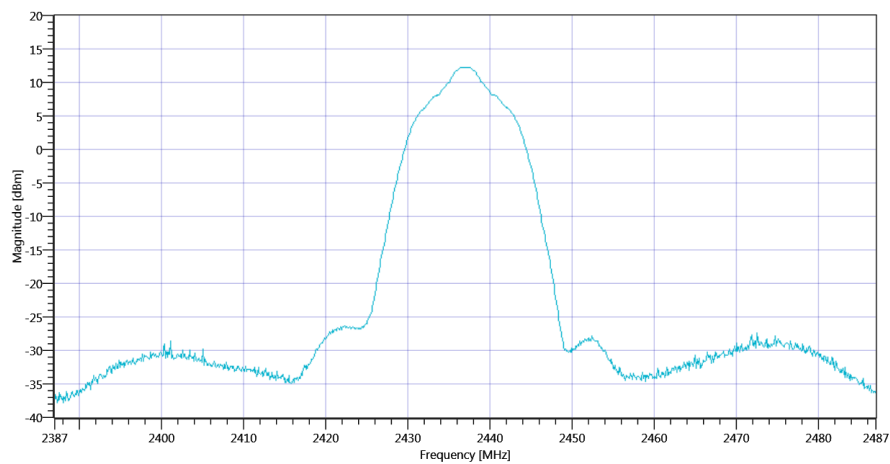

Plot_Common2G4 Peak OP 3MHz-3MHz ~ WLAN2G4 b-mode_29092020_144012.png

TEST FINISHED

General Verdict 29.09.2020 14:40:13 / RT: 30 s

PASS

63. Common2G4 Peak OP 3MHz/3MHz ~ WLAN2G4 b-mode

Test References	
TC Start	29.09.2020 14:50:12
Ambit Temp [°C] Humidity [rel%]	22.6 0
System Version	1.0.0.51
Test Specification	None
Test Method	
Class / TC Version	TC_VM_Common2G4_Peak_Output_Power_Conducted_3MHz_3MHz_V01 Version: 0.0.1
My Description	Peak Output Power conducted 3MHz/3MHz WLAN 2G4 b-mode
Add. Information	

Test Parameter	
Technology to test	WLAN2G4 b-mode
Antenna Port used	1
Temperature	mid
Voltage	mid
Frequency low to test	False Freq [MHz] 2412
Frequency mid to test	False Freq [MHz] 2437
Frequency high to test	True Freq [MHz] 2462
Switched Path	IUT - SignalingUnit - SpectrumAnalyzer
Devices in use	SA: Rohde&Schwarz,FSV-40,1307.9002K40/101042,3.60


Test at TX 2462 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	20.38 15.42 20
Start [MHz] Stop [MHz]	2412.000 2512.000
RBW [MHz] VBW [MHz]	3.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 10 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	---	15.72	dBm	Info
Peak Power	---	---	37.325016	mW	Info
Frequency at Peak	---	---	2462.2	MHz	Info

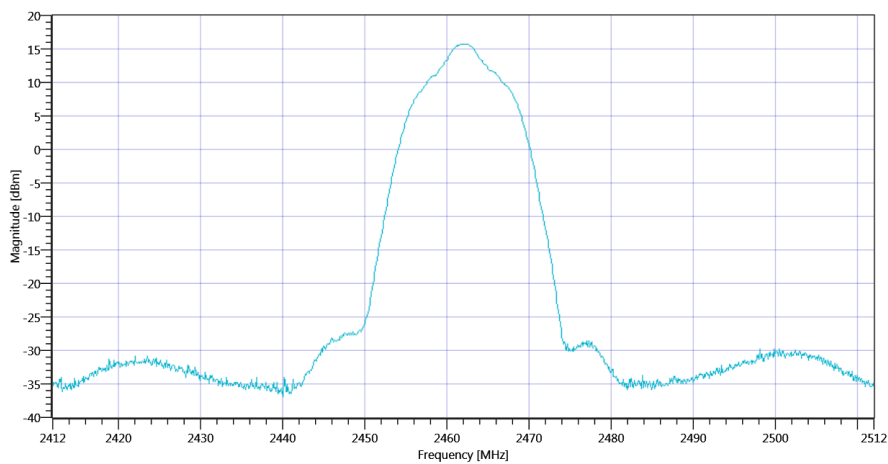

TEST FINISHED

General Verdict 29.09.2020 14:50:42 / RT: 29 s

PASS

- END OF DOCUMENT -