

Report No.: TRE1706030102 Page: 126 of 204 Issued: 2017-07-19




Report No.: TRE1706030102 Page: 127 of 204 Issued: 2017-07-19

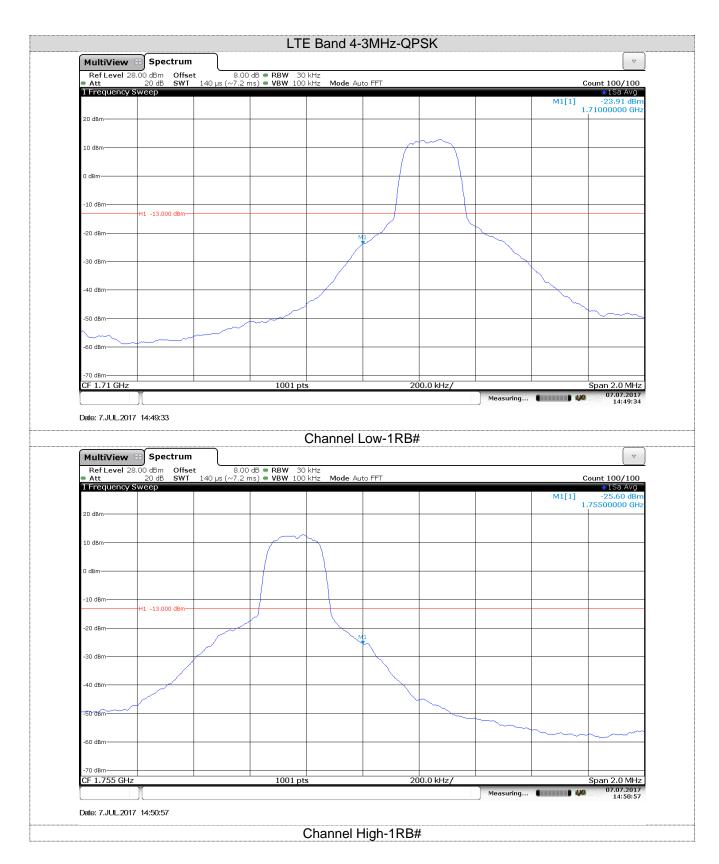


Report No.: TRE1706030102 Page: 128 of 204 Issued: 2017-07-19

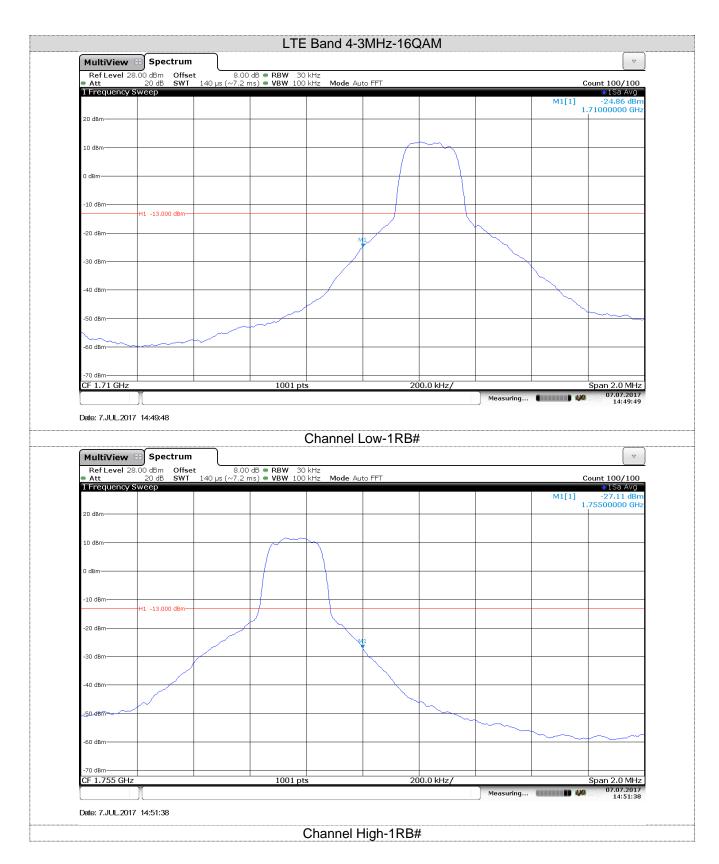


Report No.: TRE1706030102 Page: 129 of 204 Issued: 2017-07-19

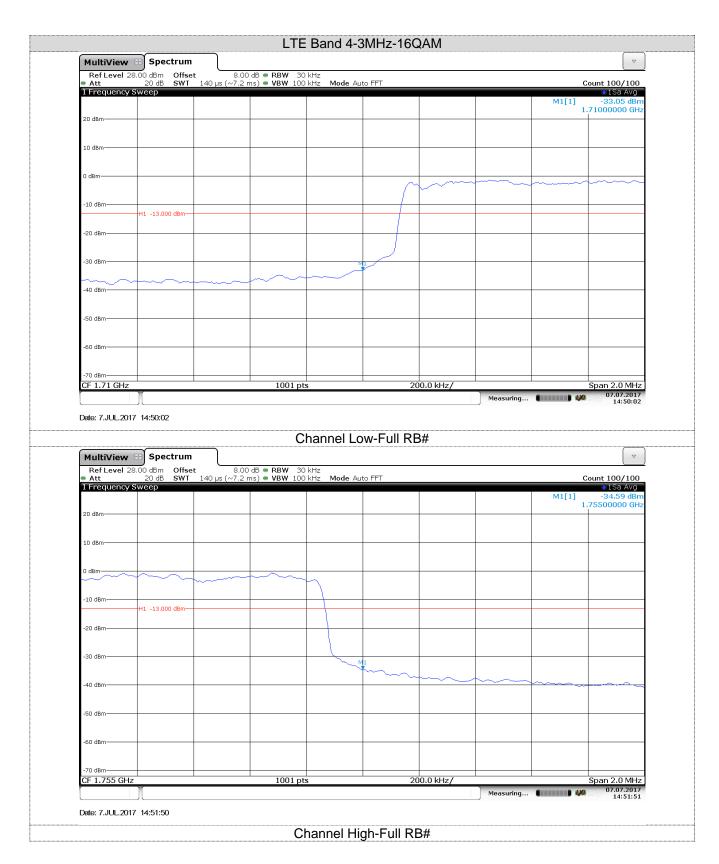


Report No.: TRE1706030102 Page: 130 of 204 Issued: 2017-07-19

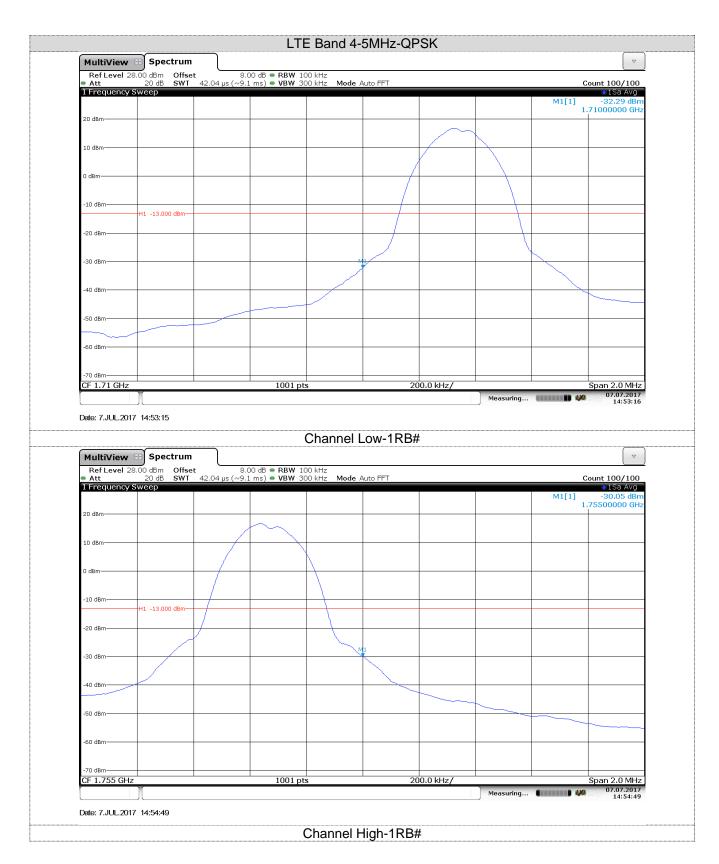


Report No.: TRE1706030102 Page: 131 of 204 Issued: 2017-07-19

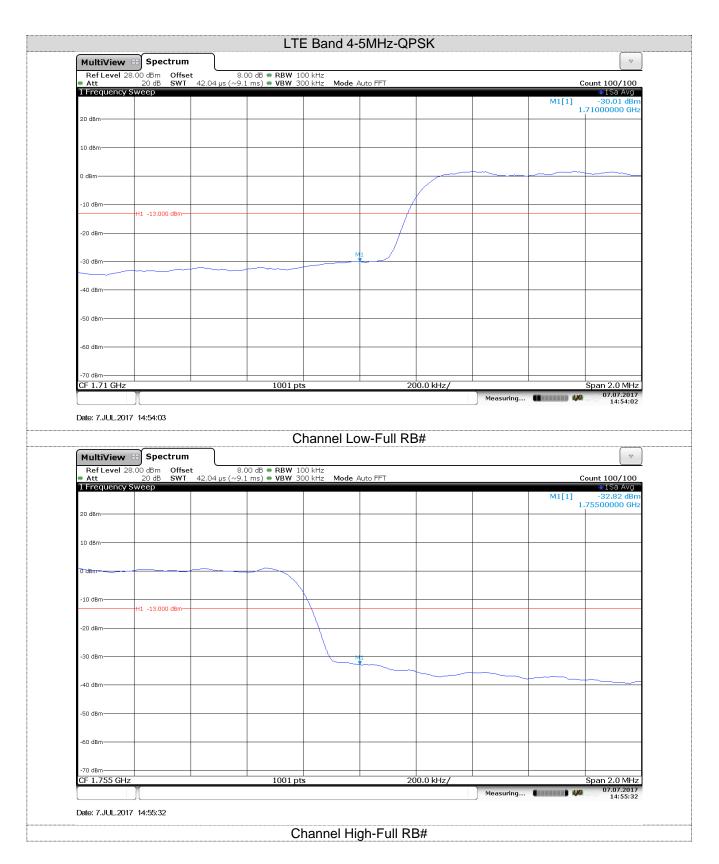


Report No.: TRE1706030102 Page: 132 of 204 Issued: 2017-07-19

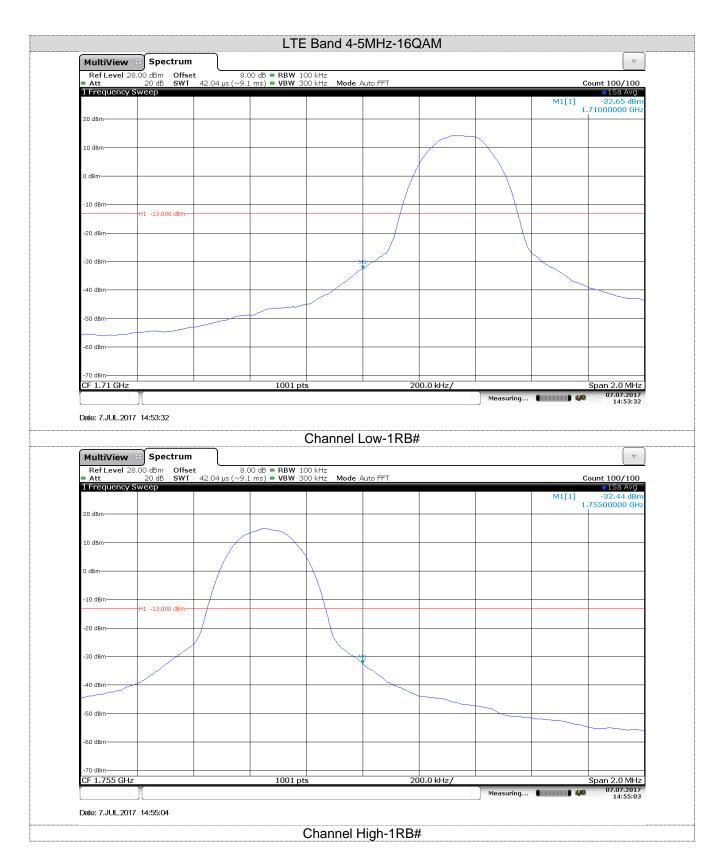


Report No.: TRE1706030102 Page: 133 of 204 Issued: 2017-07-19

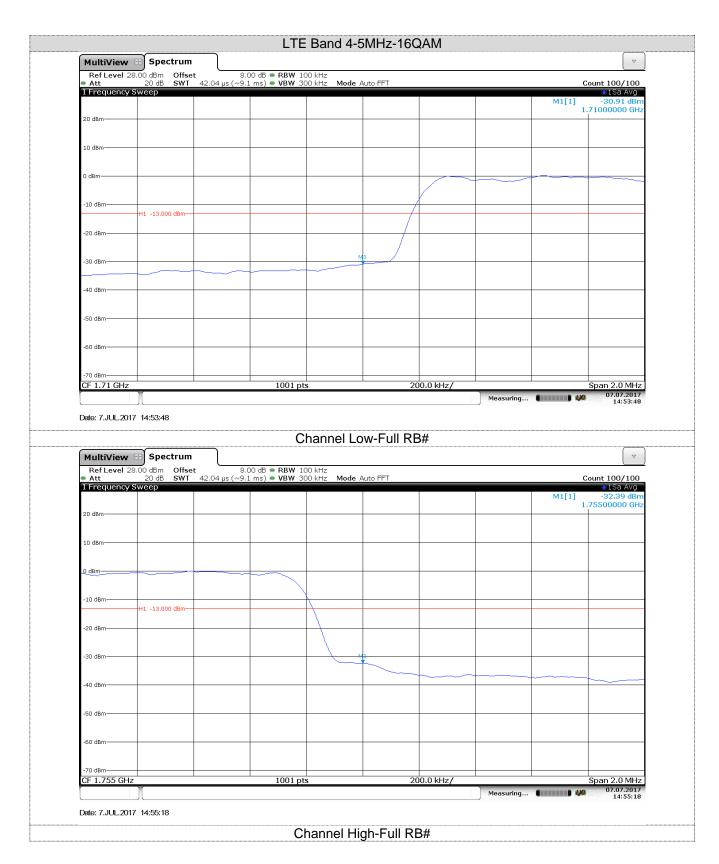


Report No.: TRE1706030102 Page: 134 of 204 Issued: 2017-07-19

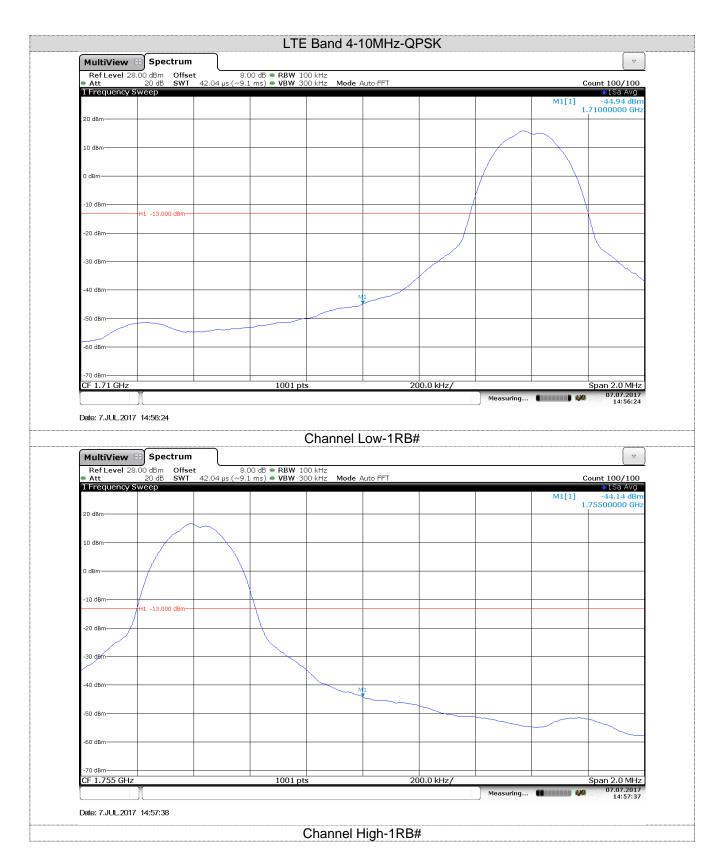


Report No.: TRE1706030102 Page: 135 of 204 Issued: 2017-07-19

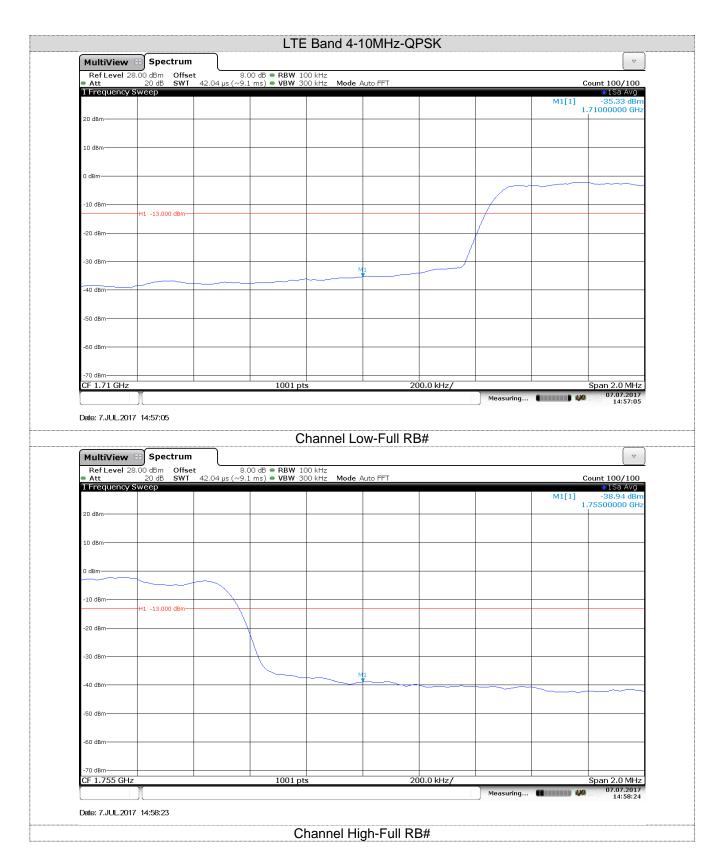


Report No.: TRE1706030102 Page: 136 of 204 Issued: 2017-07-19

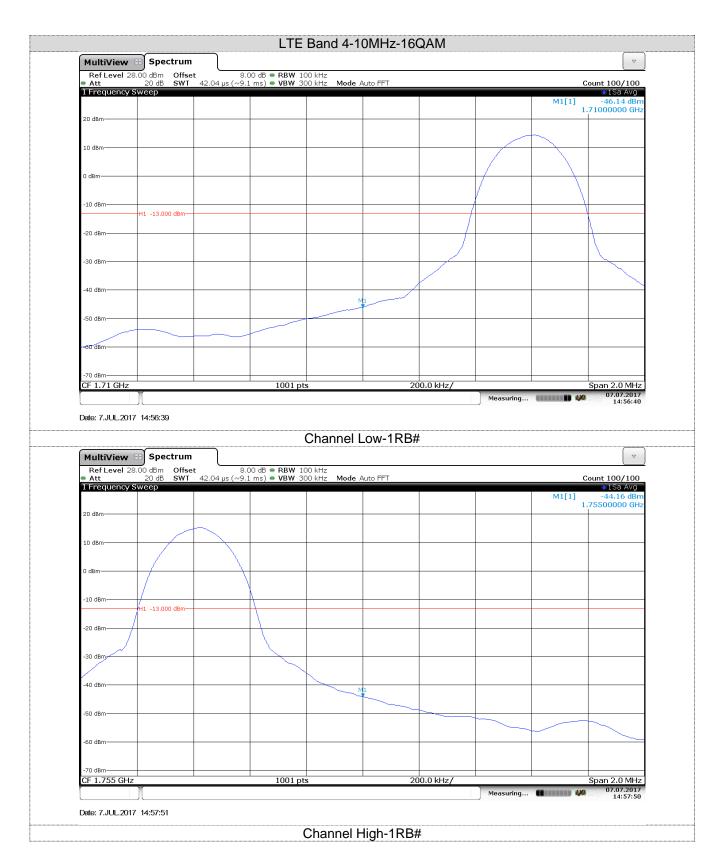


Report No.: TRE1706030102 Page: 137 of 204 Issued: 2017-07-19

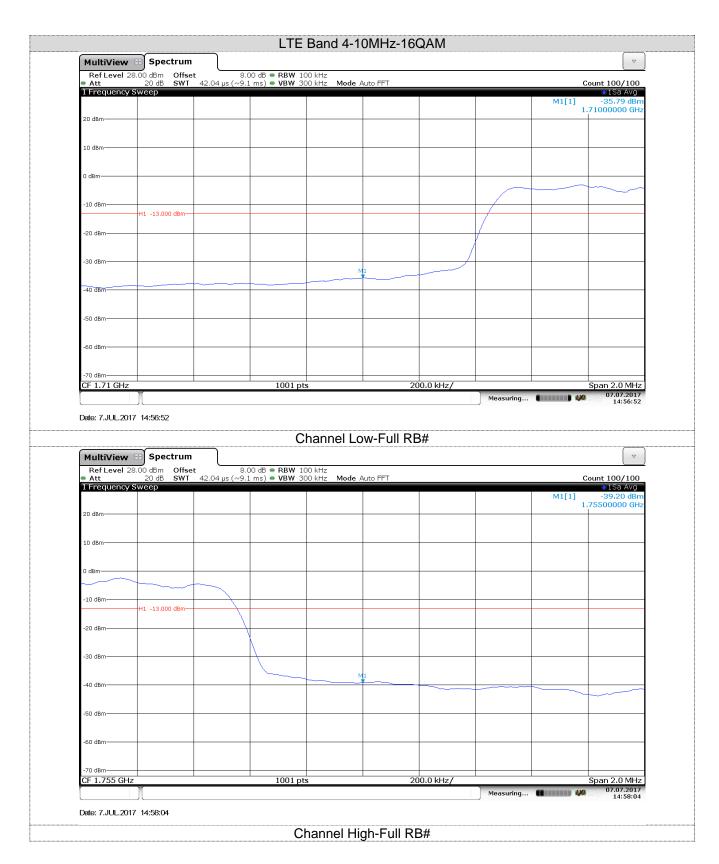


Report No.: TRE1706030102 Page: 138 of 204 Issued: 2017-07-19

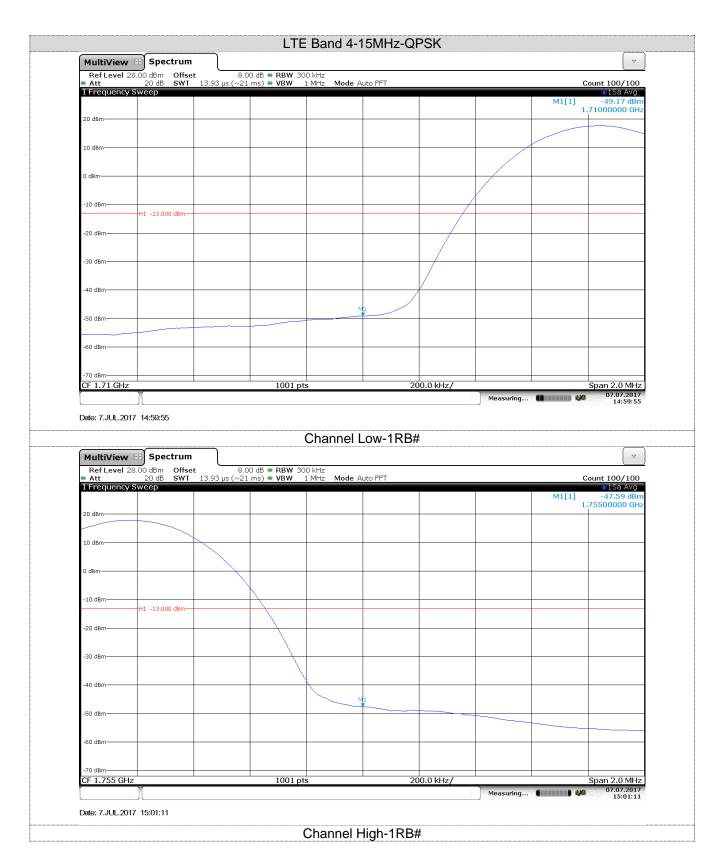


Report No.: TRE1706030102 Page: 139 of 204 Issued: 2017-07-19

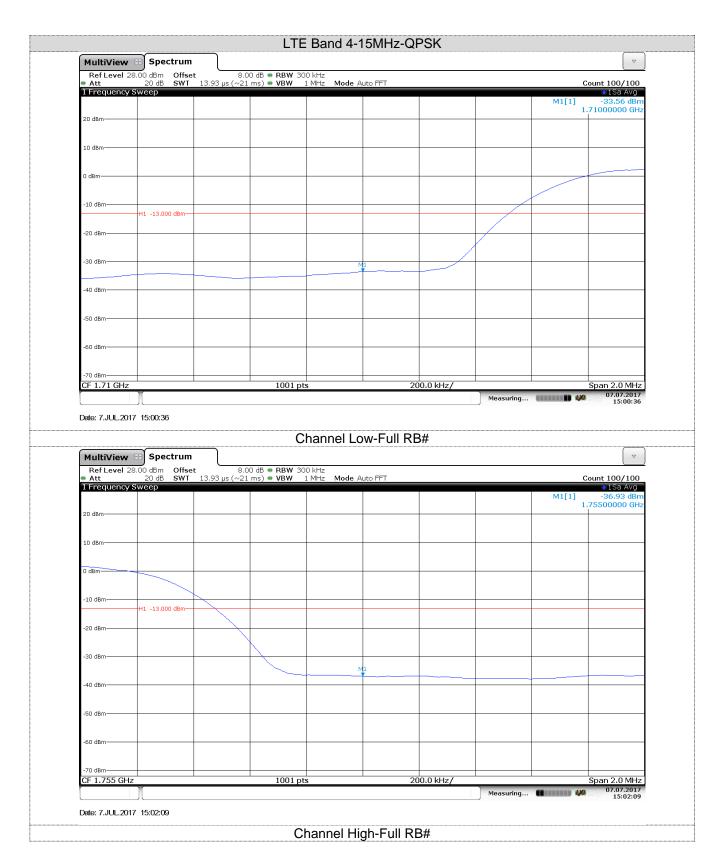


Report No.: TRE1706030102 Page: 140 of 204 Issued: 2017-07-19

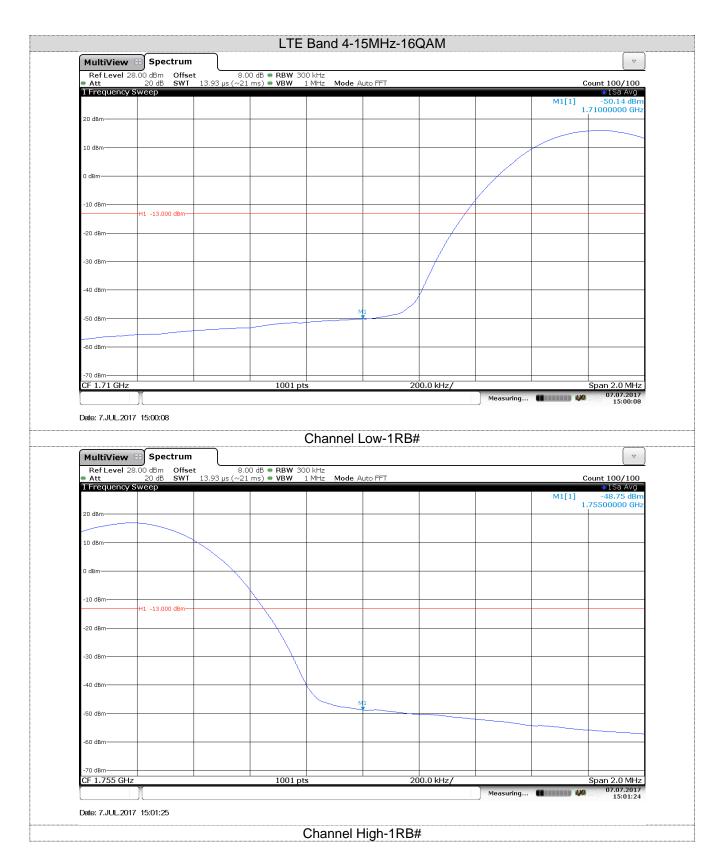


Report No.: TRE1706030102 Page: 141 of 204 Issued: 2017-07-19

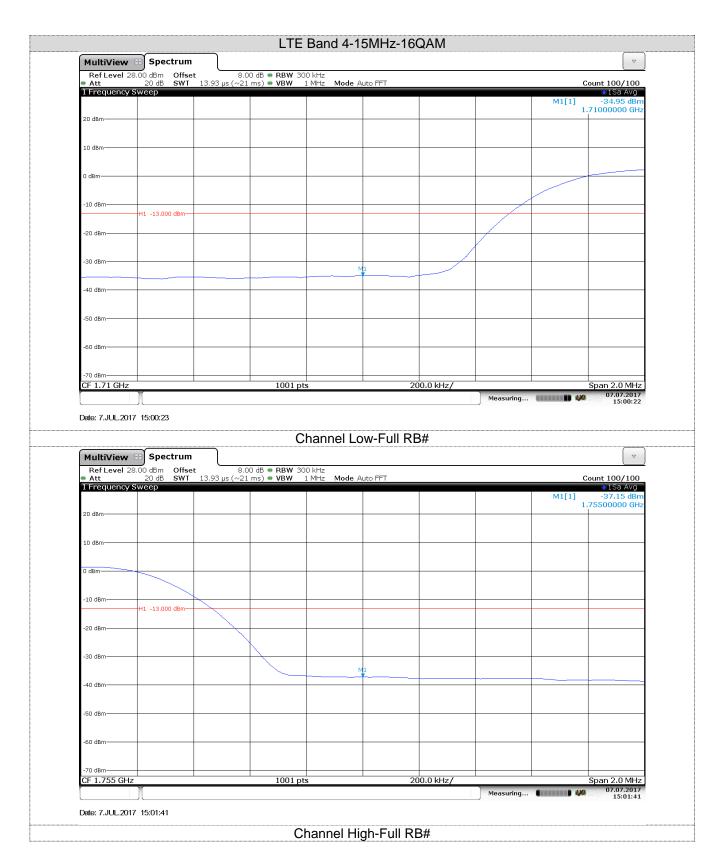


Report No.: TRE1706030102 Page: 142 of 204 Issued: 2017-07-19

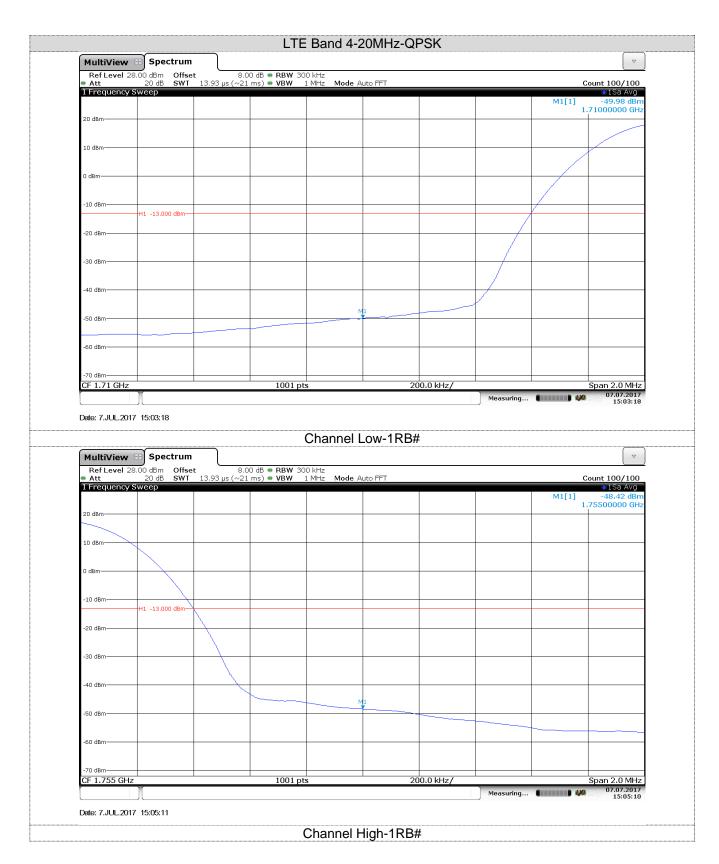


Report No.: TRE1706030102 Page: 143 of 204 Issued: 2017-07-19

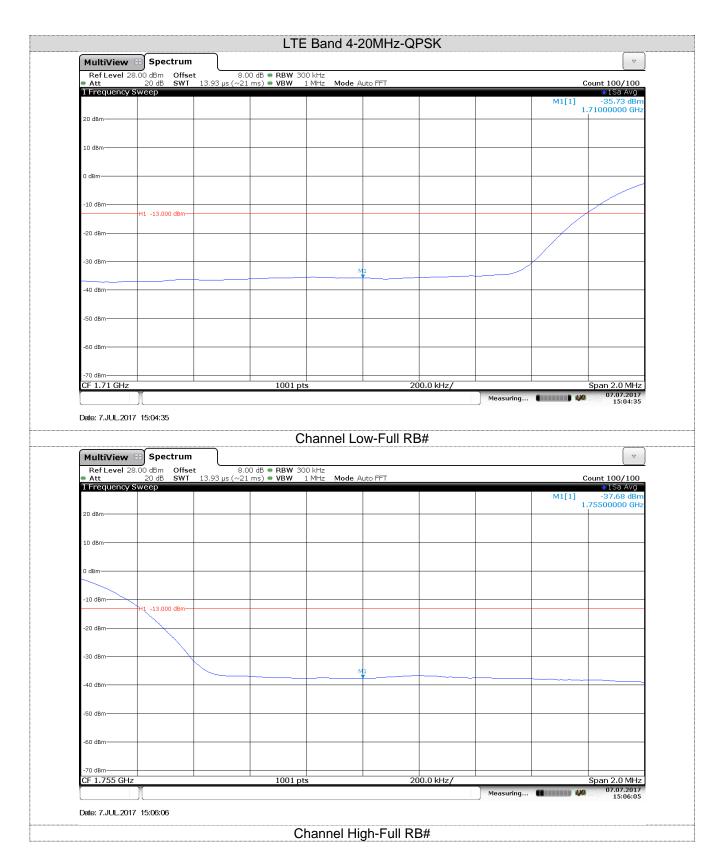



Report No.: TRE1706030102 Page: 144 of 204 Issued: 2017-07-19

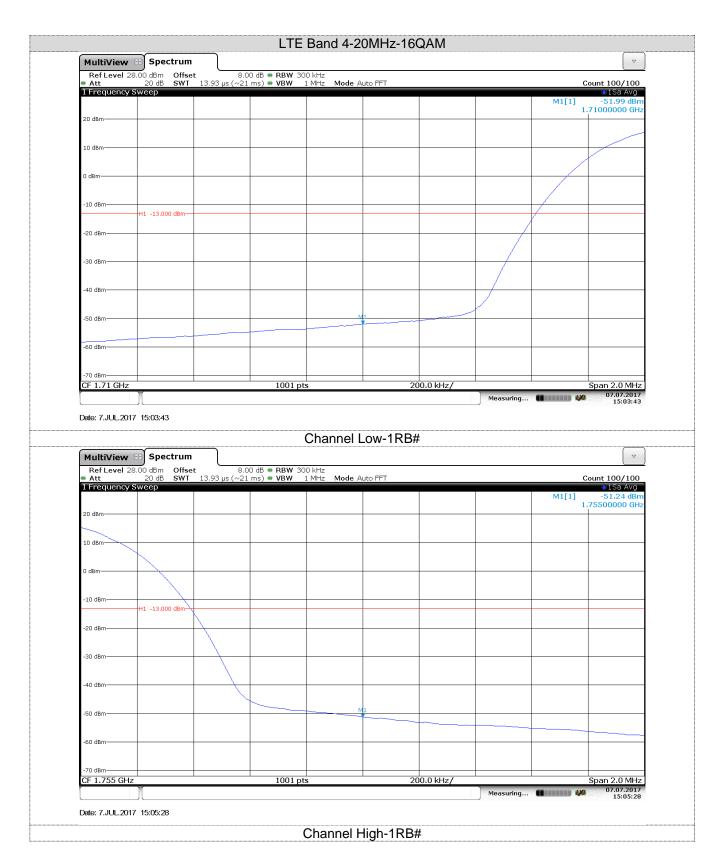



Report No.: TRE1706030102 Page: 145 of 204 Issued: 2017-07-19

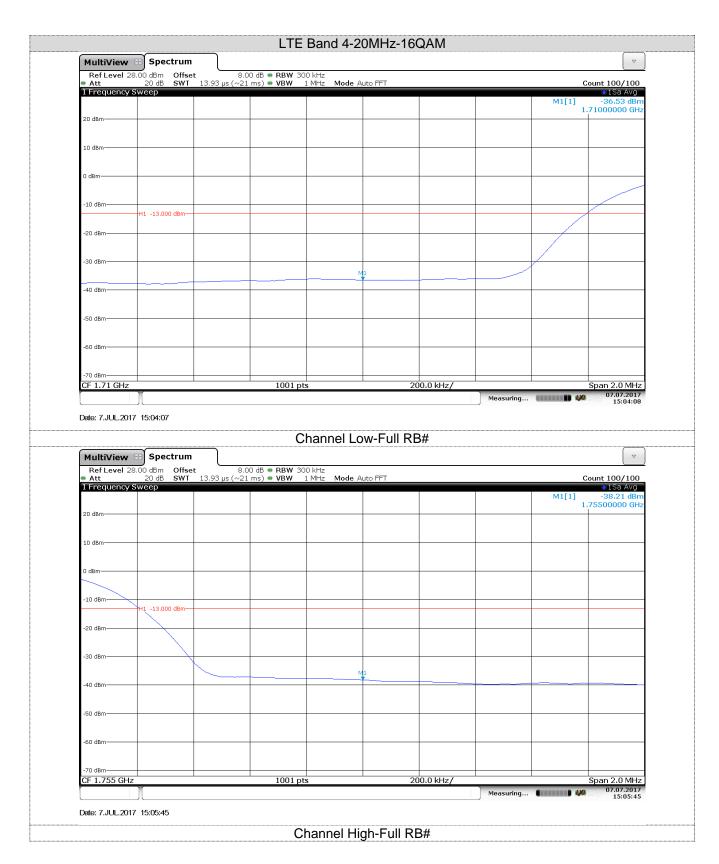


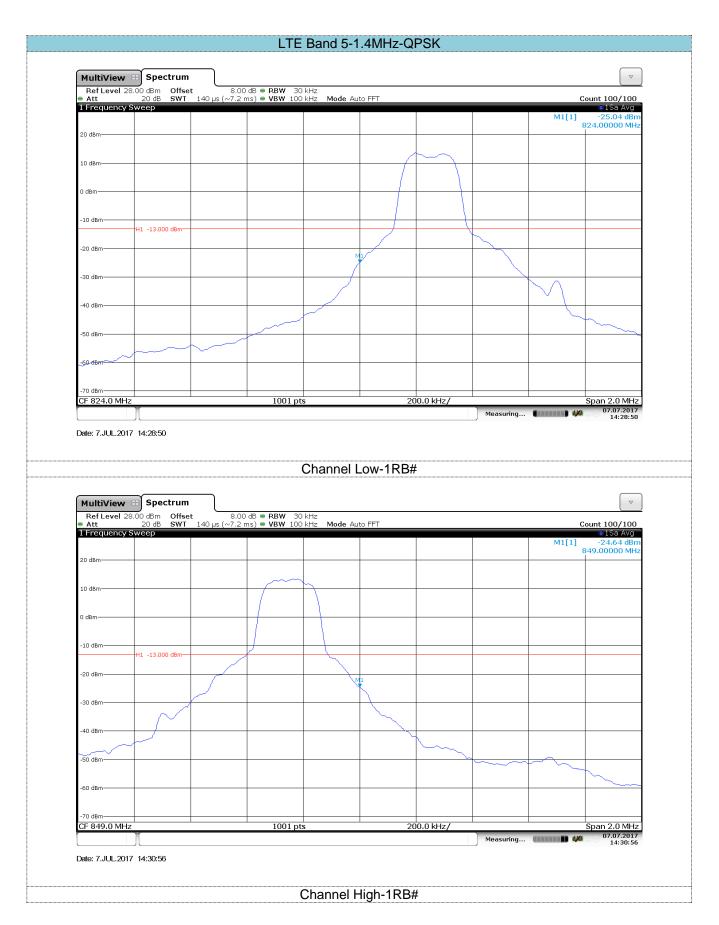

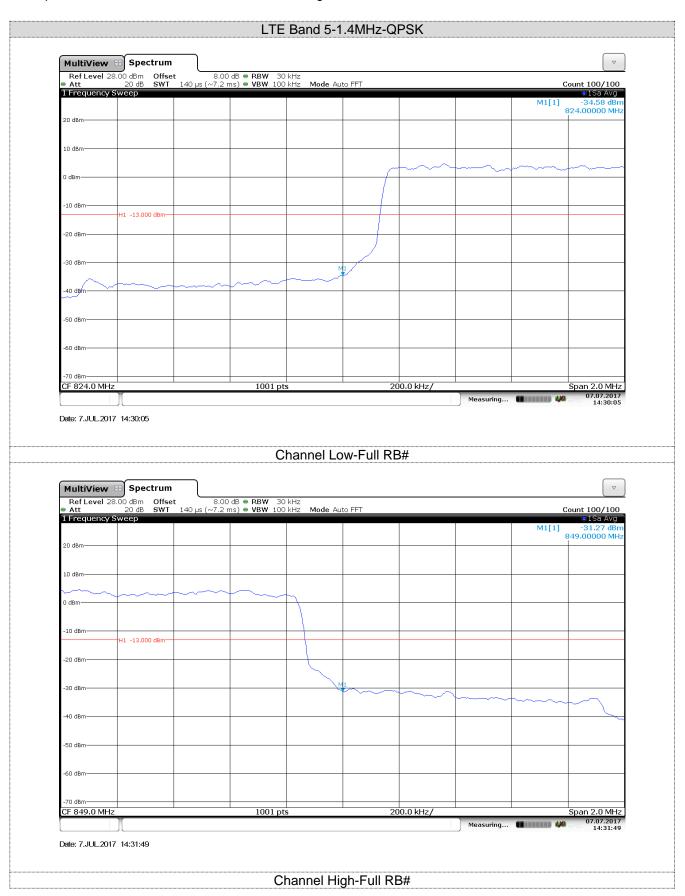


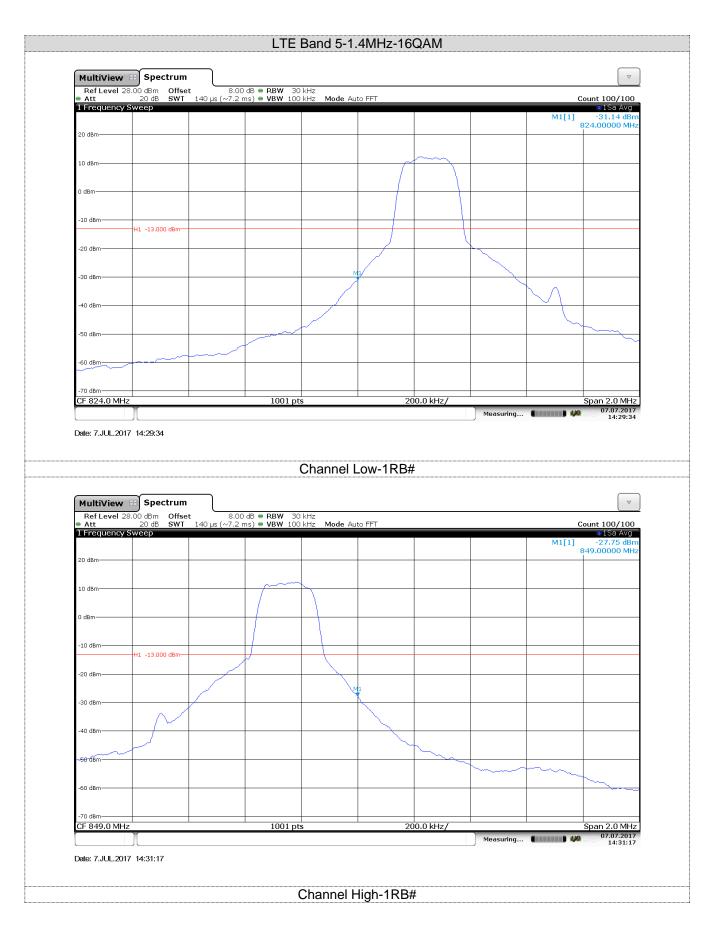


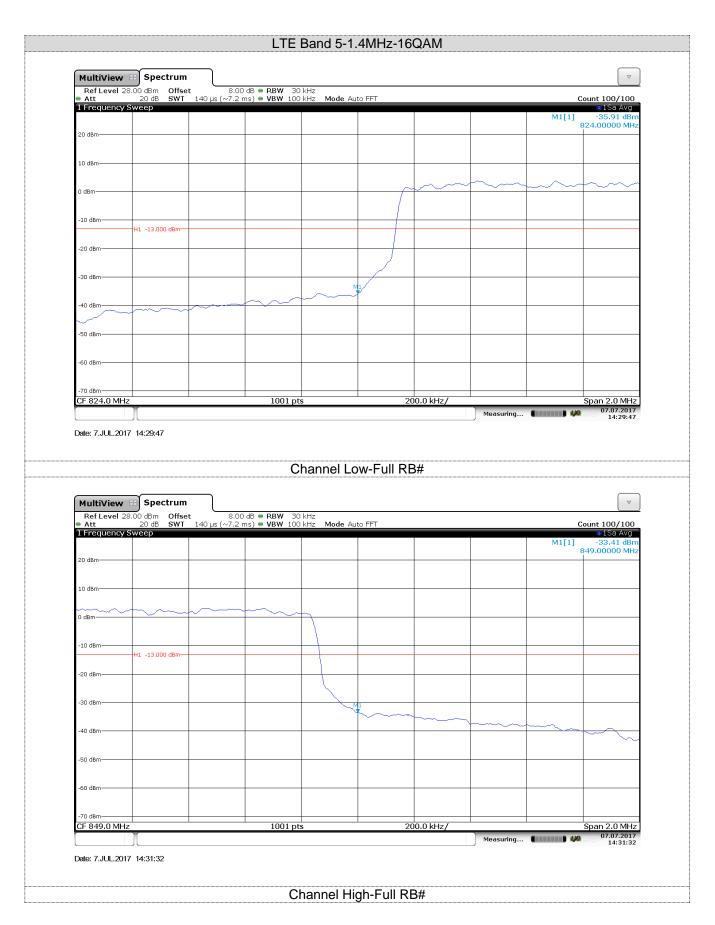

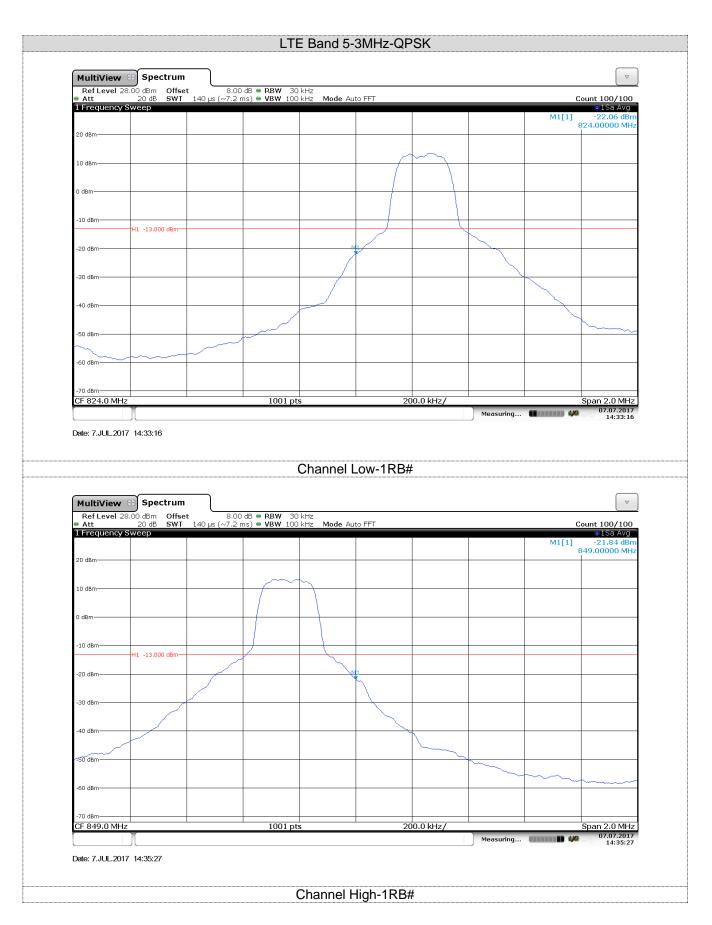





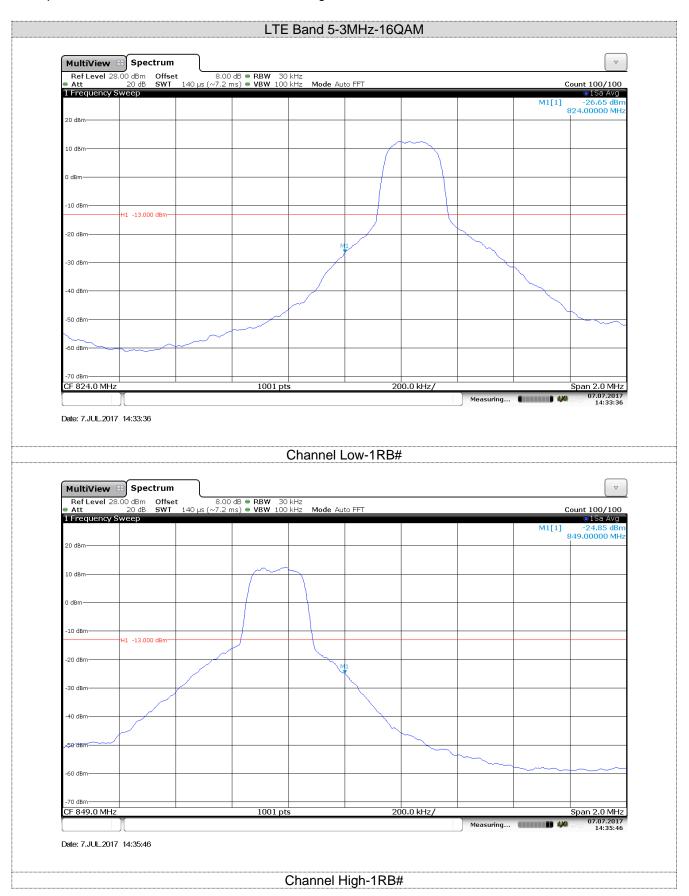


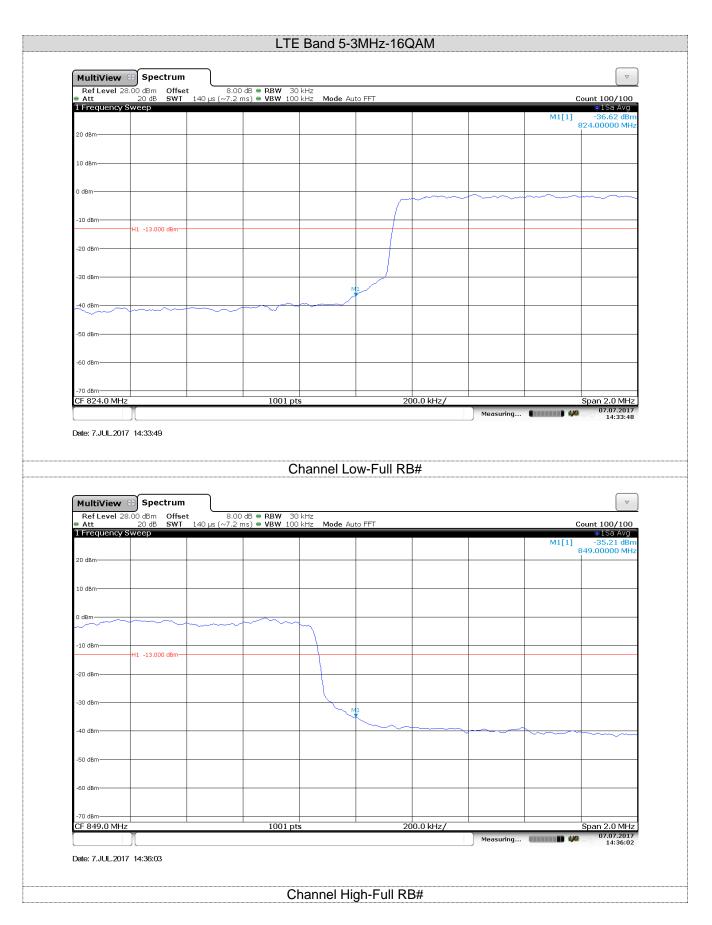


Report No.: TRE1706030102 Page: 154 of 204 Issued: 2017-07-19

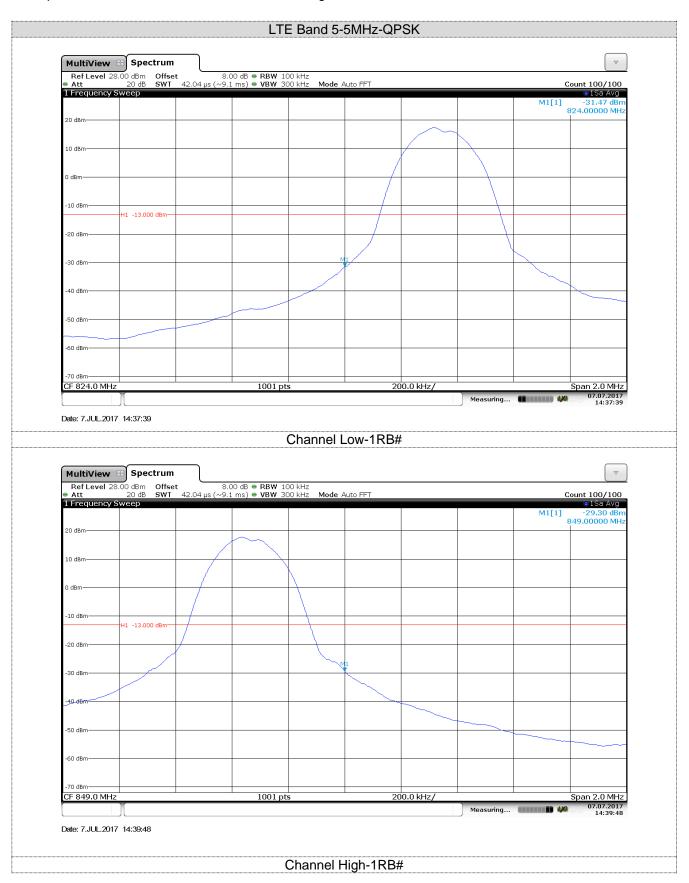


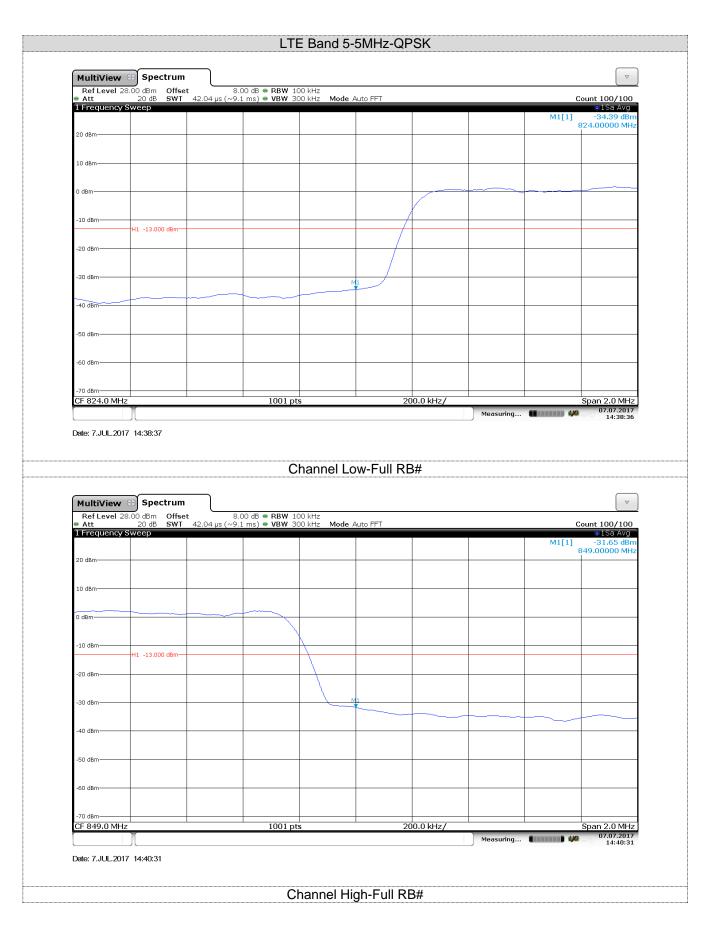


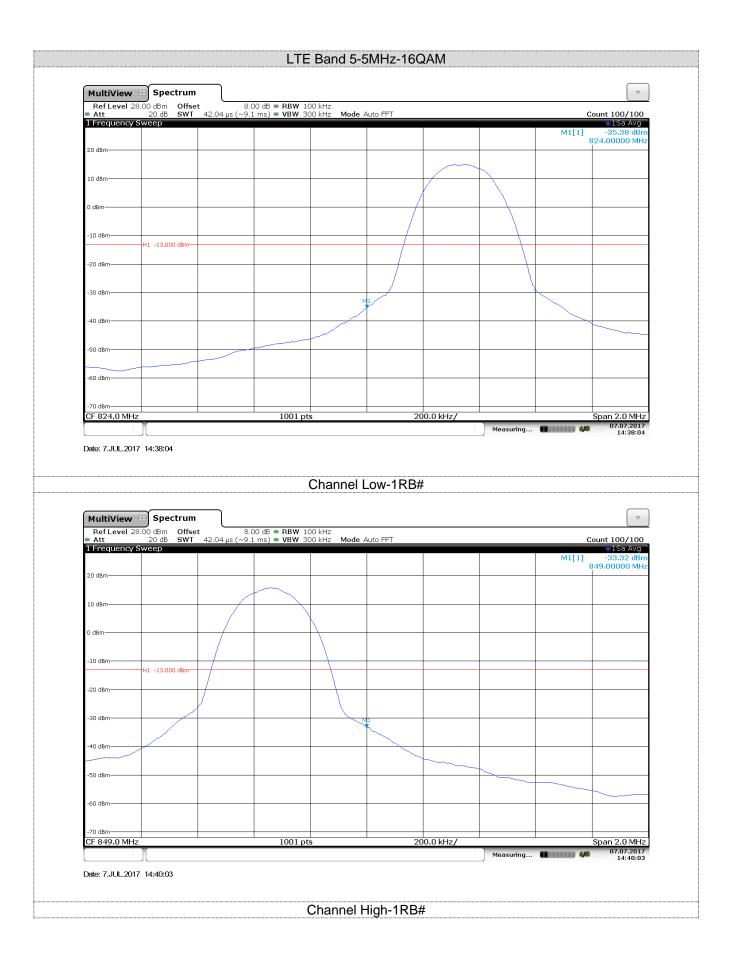




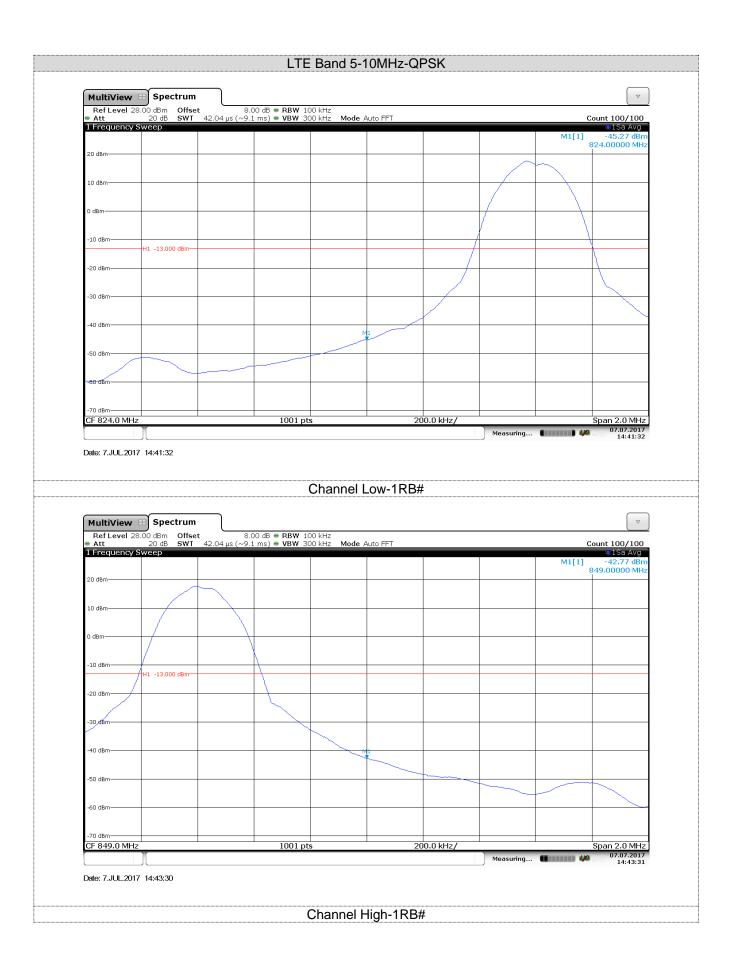


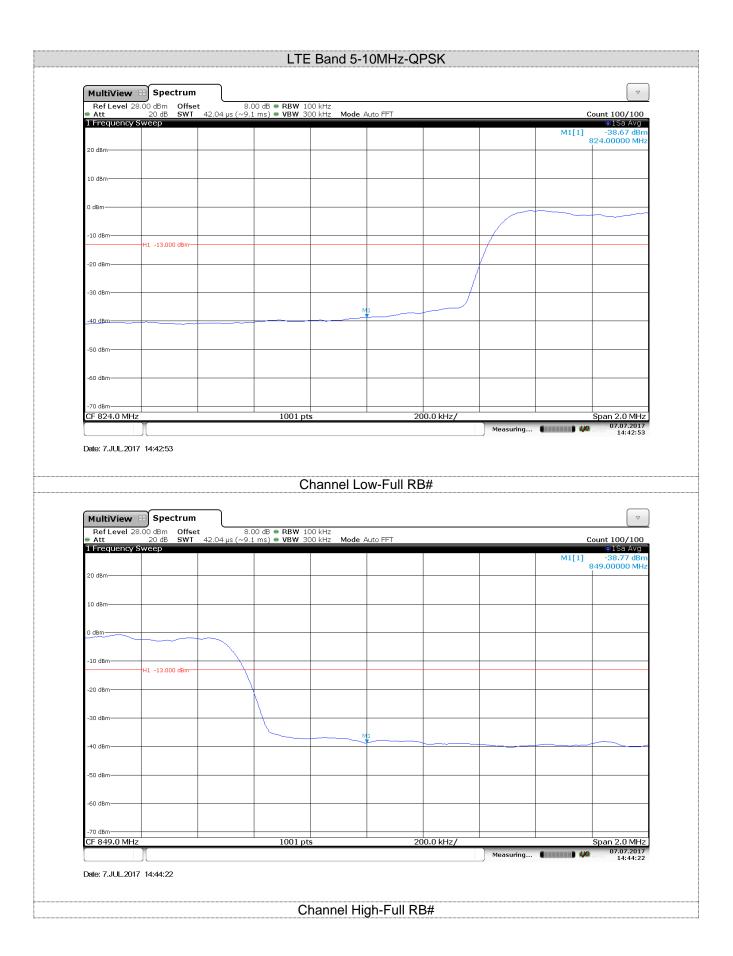


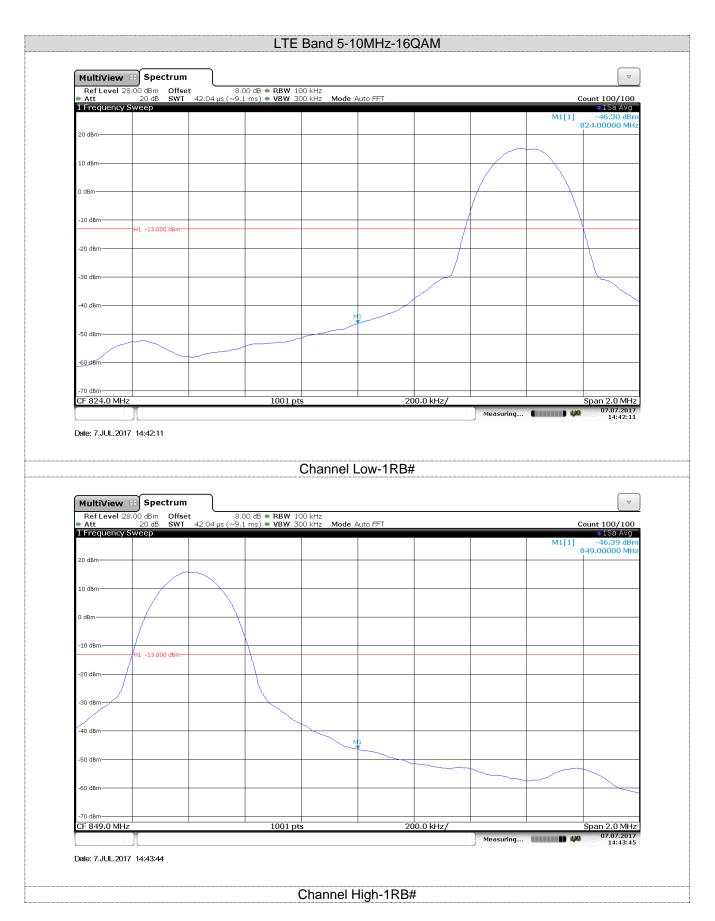

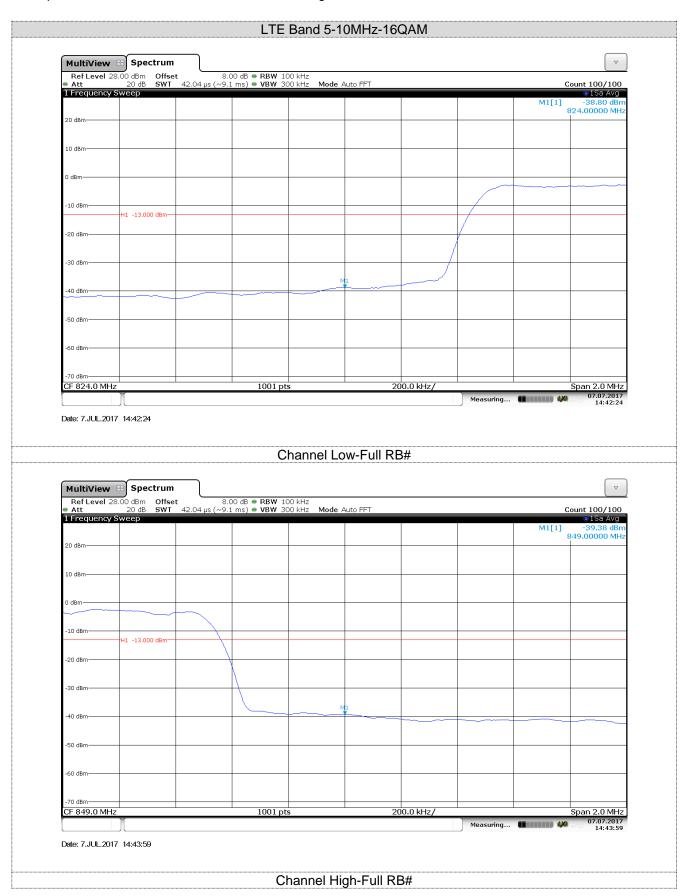


Report No.: TRE1706030102 Page: 162 of 204 Issued: 2017-07-19

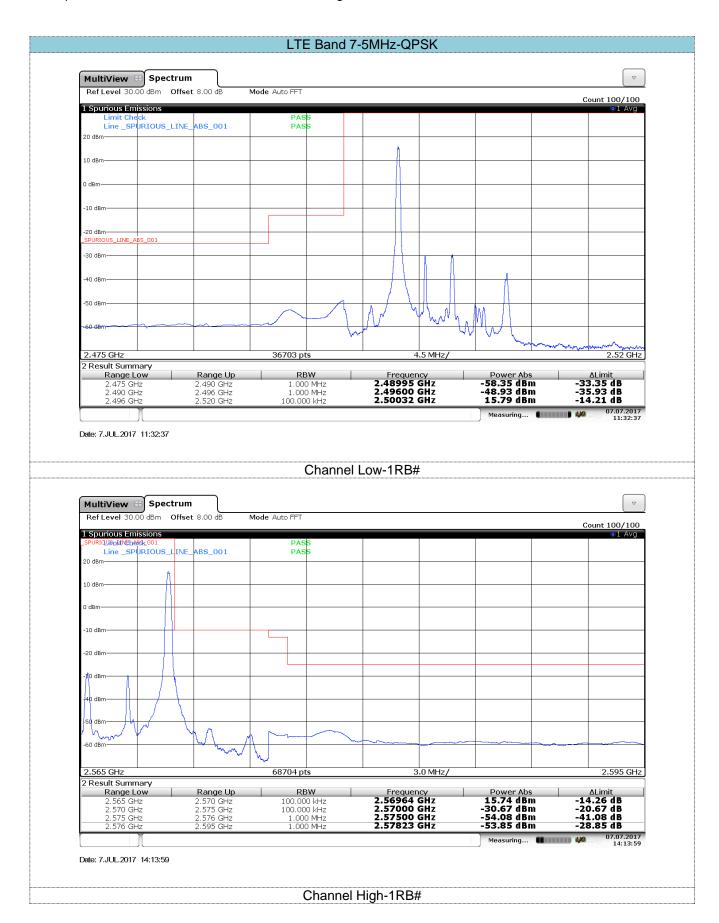


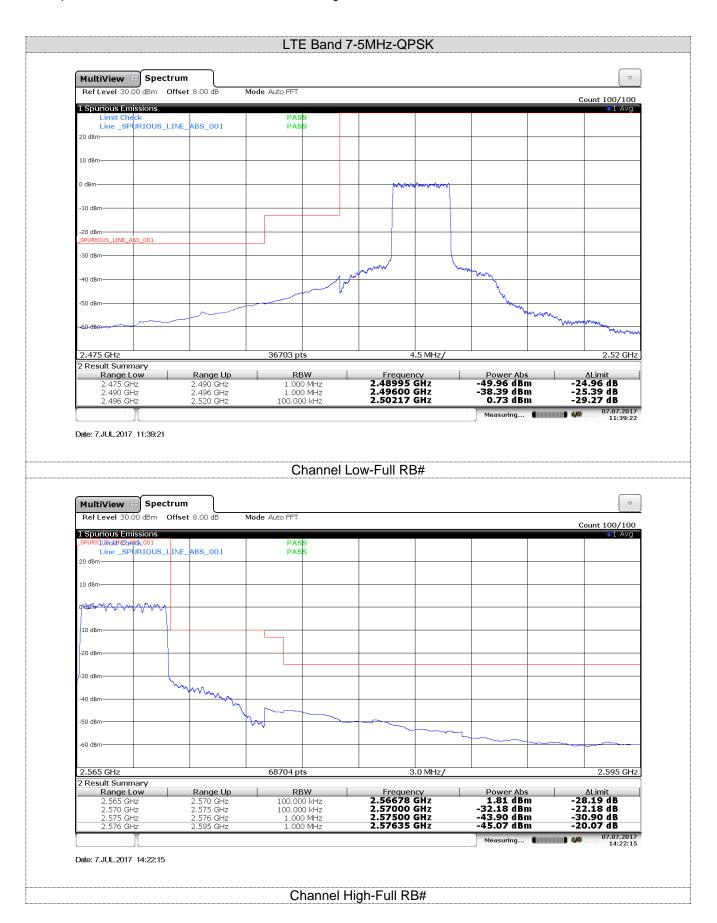


Report No.: TRE1706030102 Page: 164 of 204 Issued: 2017-07-19

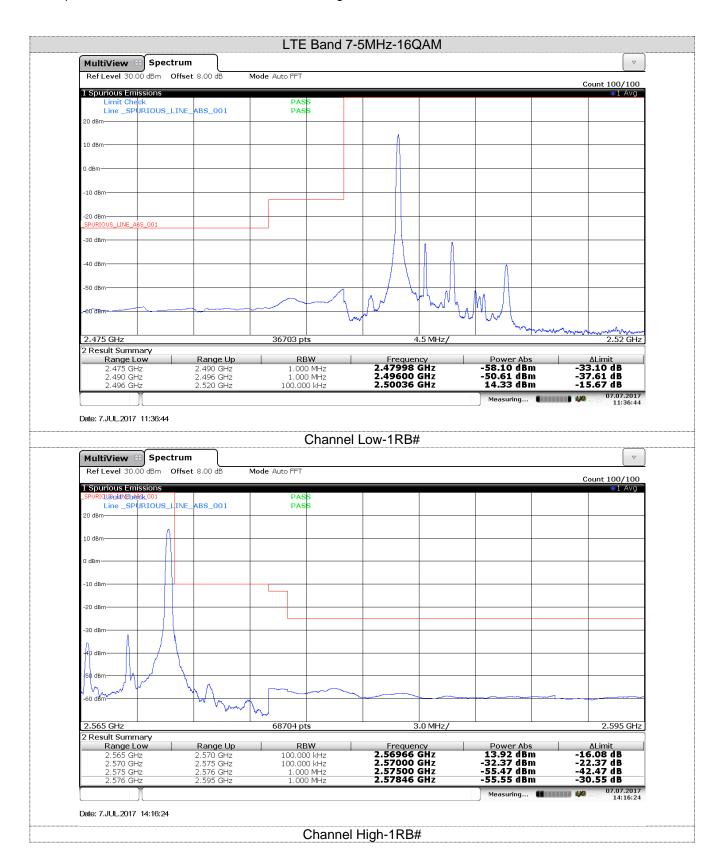


Report No.: TRE1706030102 Page: 165 of 204 Issued: 2017-07-19

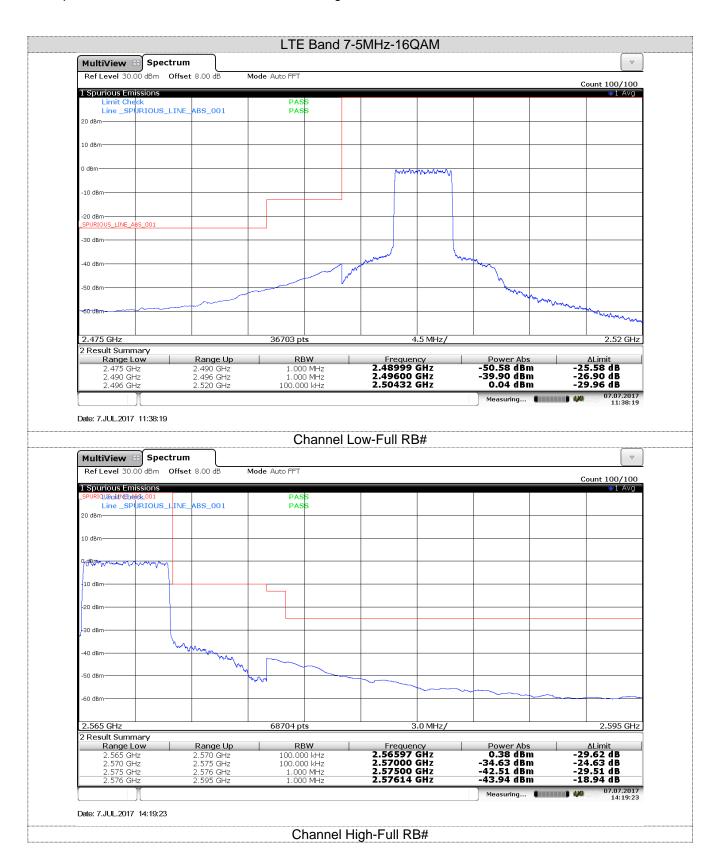


Report No.: TRE1706030102 Page: 166 of 204 Issued: 2017-07-19

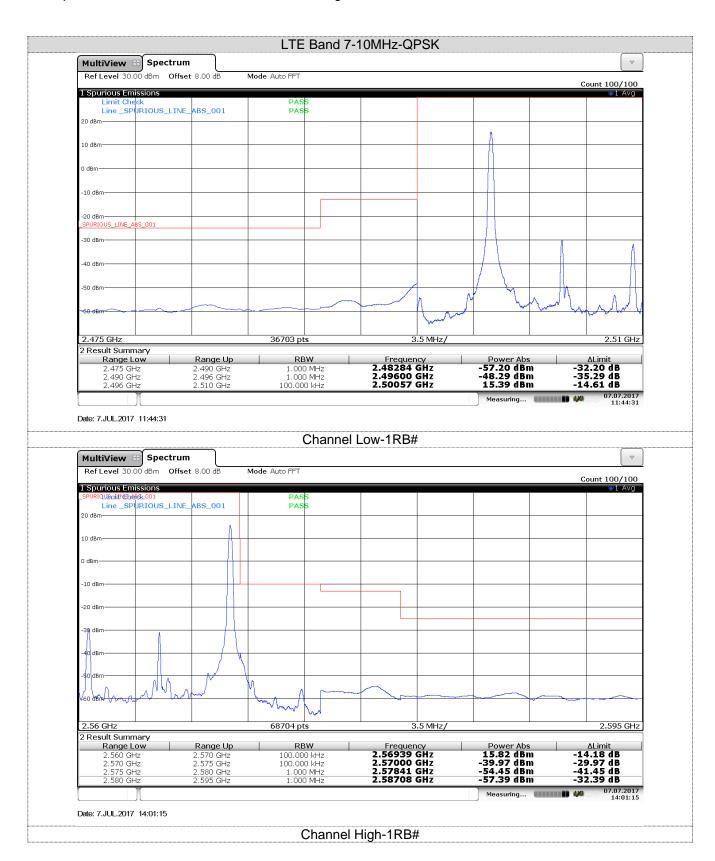


Report No.: TRE1706030102 Page: 167 of 204 Issued: 2017-07-19

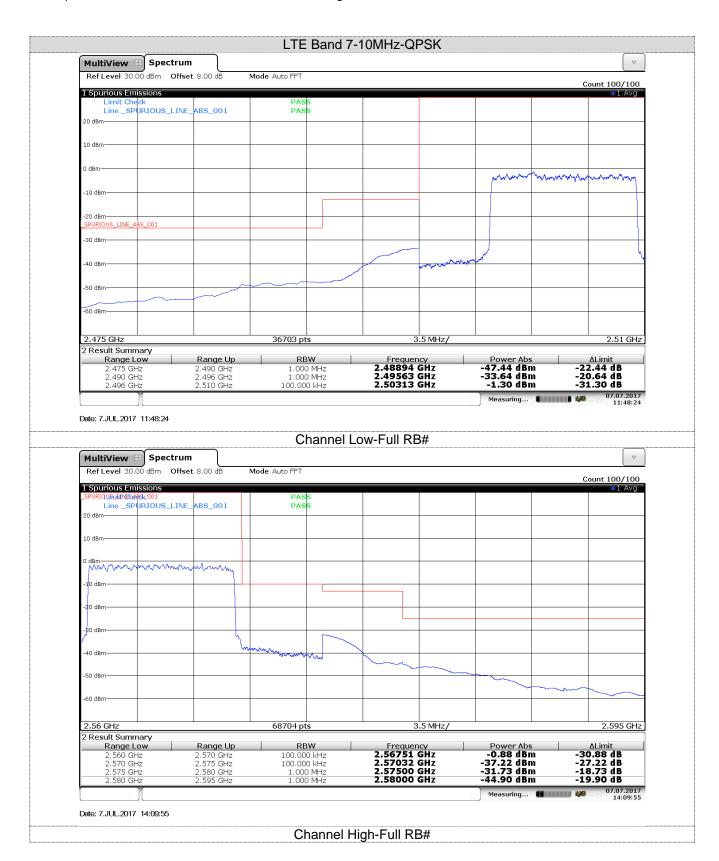


Report No.: TRE1706030102 Page: 168 of 204 Issued: 2017-07-19

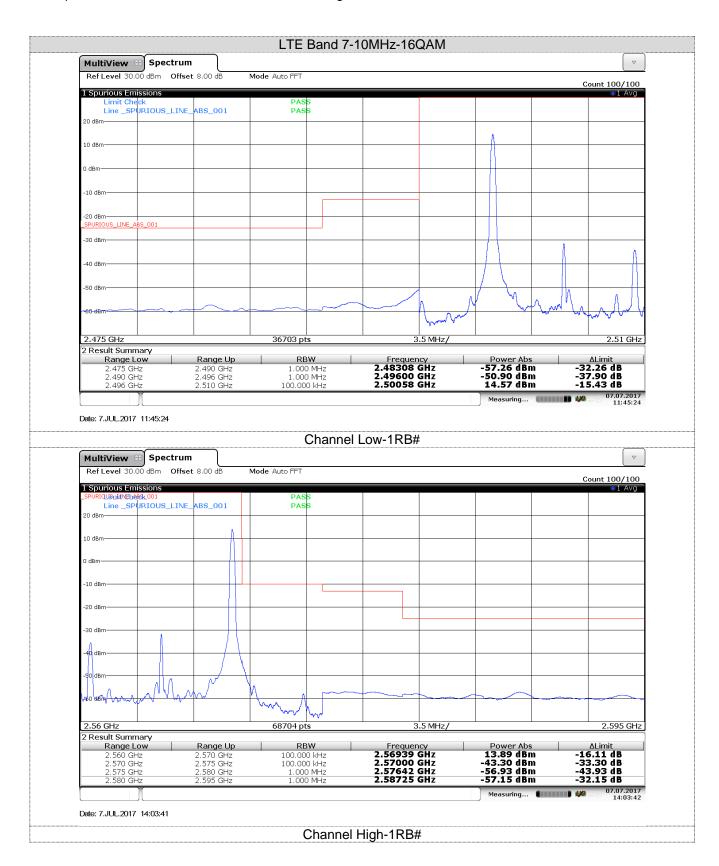


Report No.: TRE1706030102 Page: 169 of 204 Issued: 2017-07-19

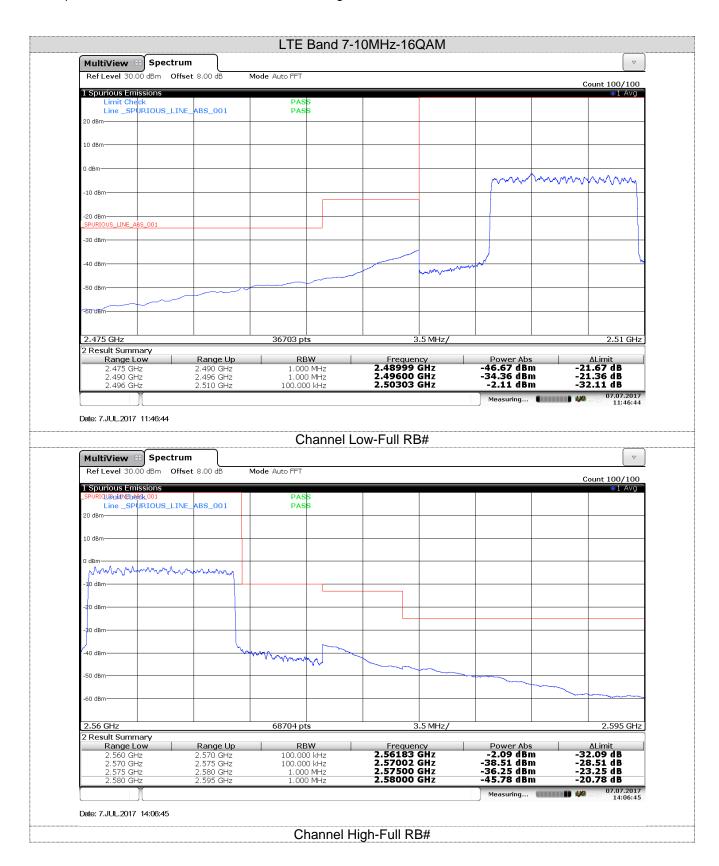


Report No.: TRE1706030102 Page: 170 of 204 Issued: 2017-07-19

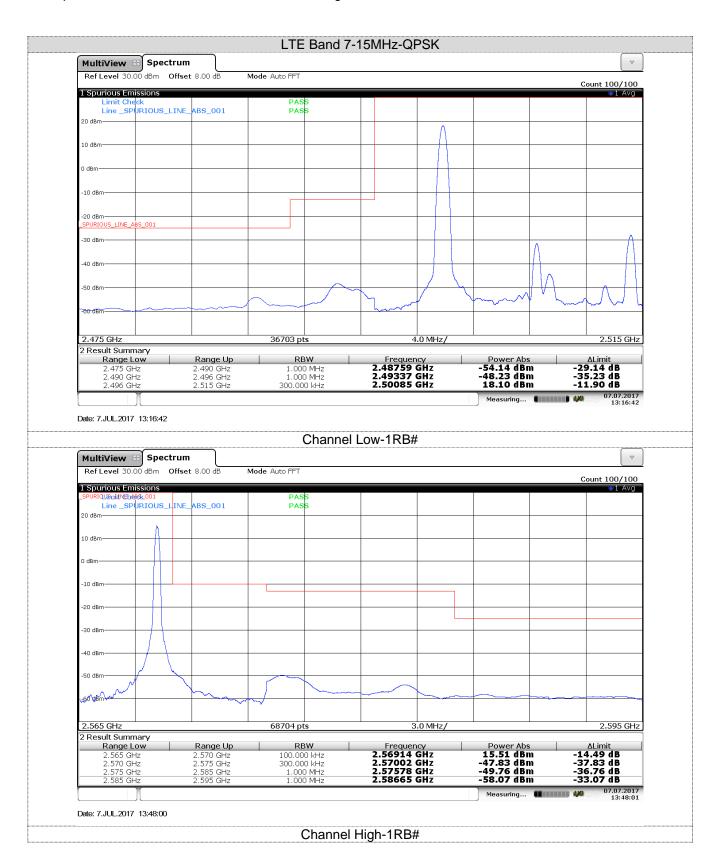


Report No.: TRE1706030102 Page: 171 of 204 Issued: 2017-07-19

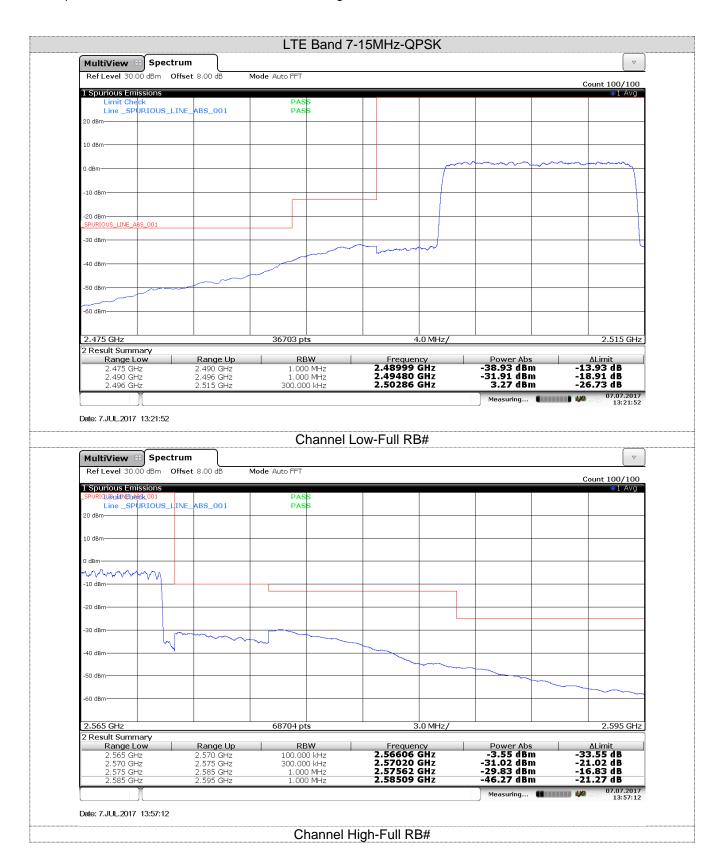


Report No.: TRE1706030102 Page: 172 of 204 Issued: 2017-07-19

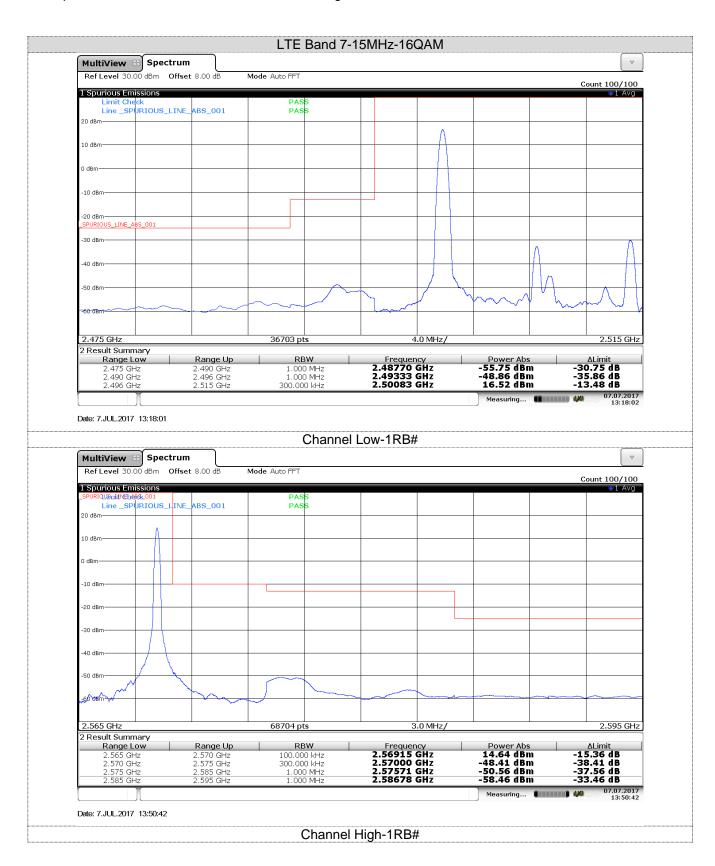


Report No.: TRE1706030102 Page: 173 of 204 Issued: 2017-07-19

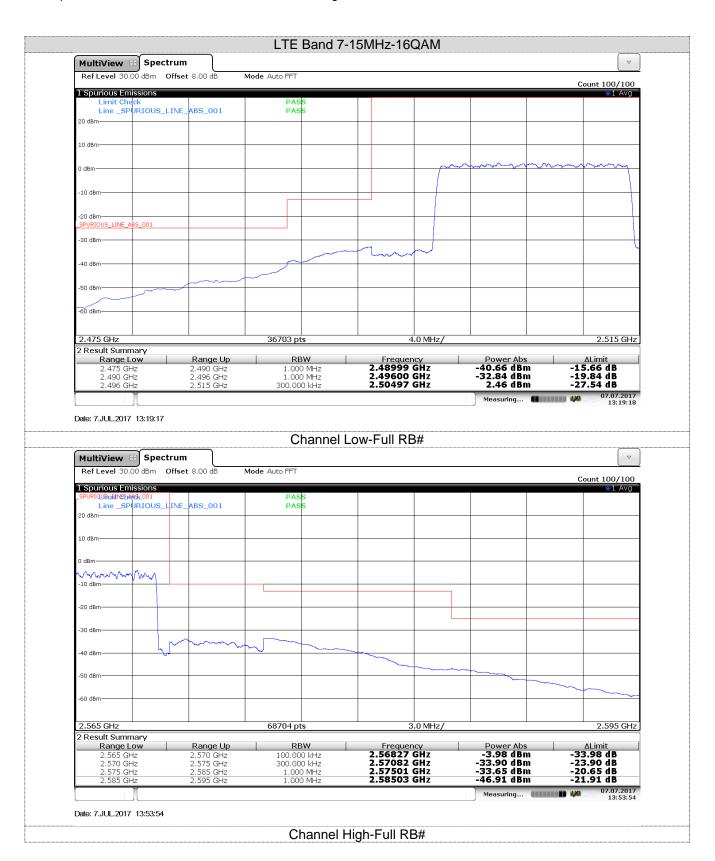


Report No.: TRE1706030102 Page: 174 of 204 Issued: 2017-07-19

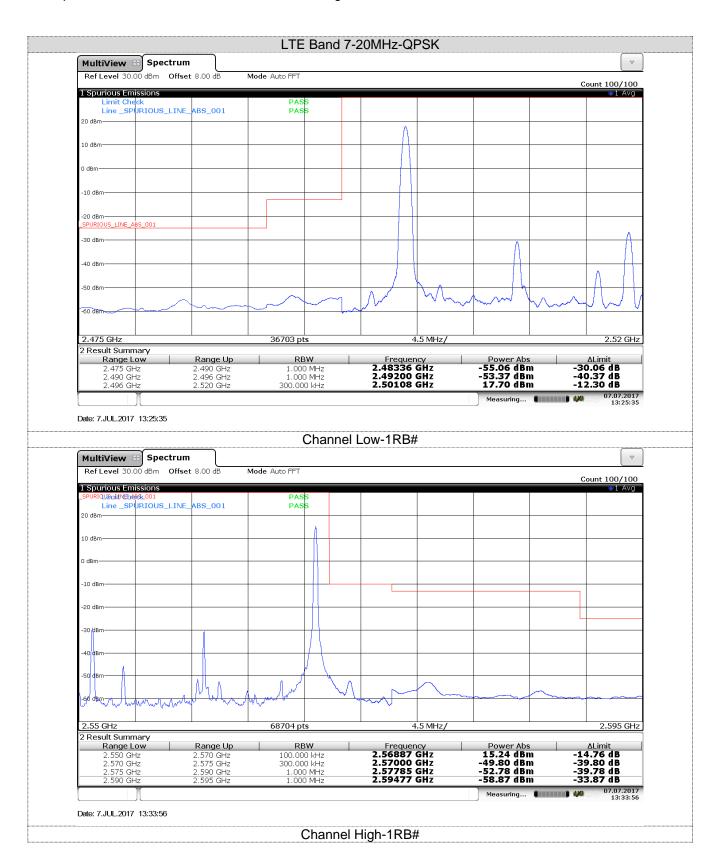

Report No.: TRE1706030102 Page: 175 of 204 Issued: 2017-07-19

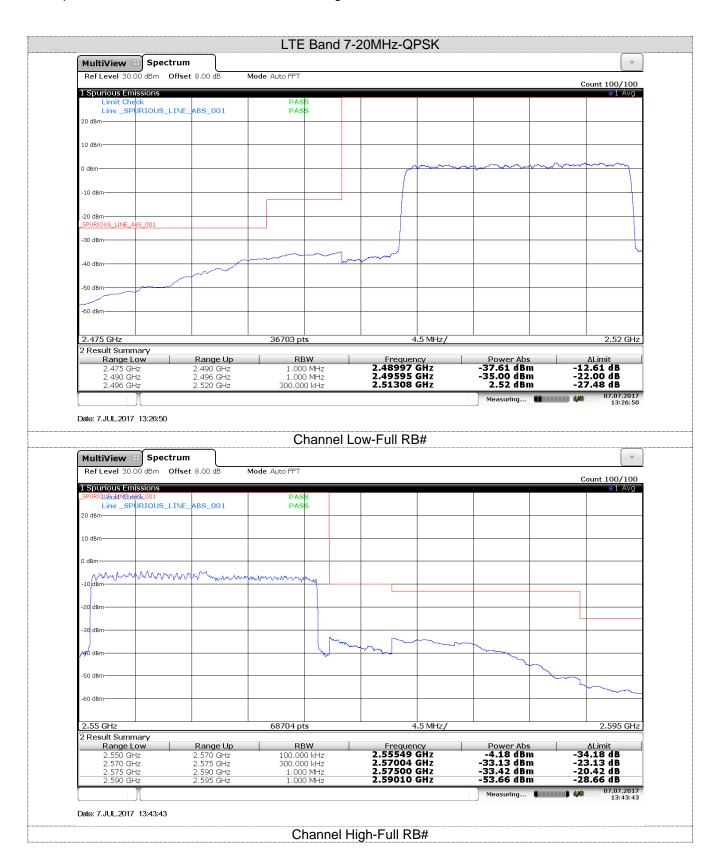

Report No.: TRE1706030102 Page: 176 of 204 Issued: 2017-07-19

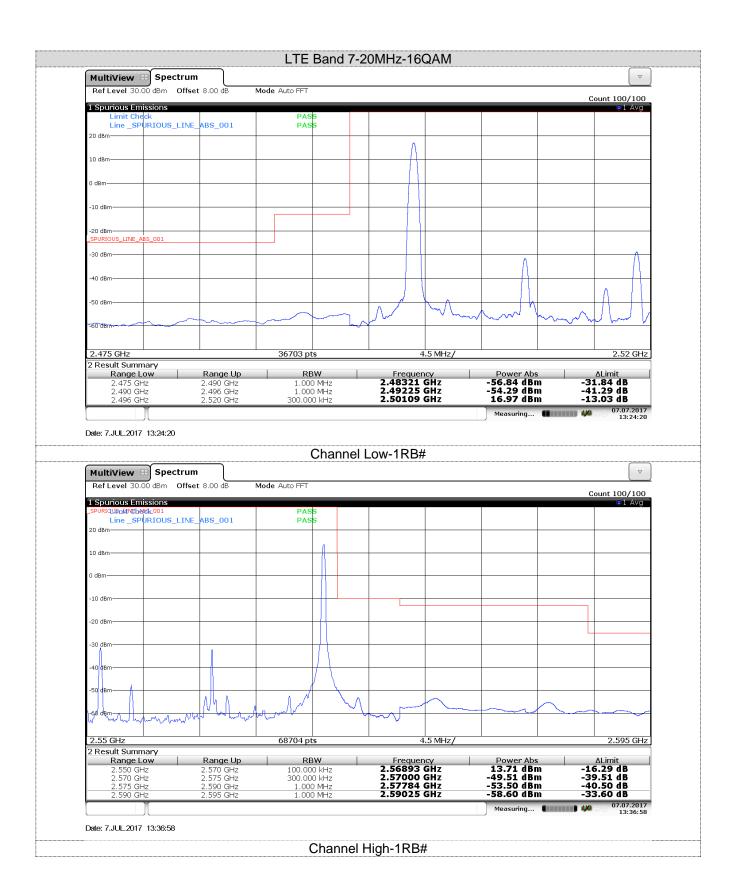

Report No.: TRE1706030102 Page: 177 of 204 Issued: 2017-07-19




Report No.: TRE1706030102 Page: 178 of 204 Issued: 2017-07-19

5.5. ERP AND EIRP

LIMIT

LTE Band 2: EIRP<2W ,LTE Band 4:EIRP<1W,LTE Band 5:ERP<7W,LTE Band 7:EIPR<2W

TEST CONFIGURATION

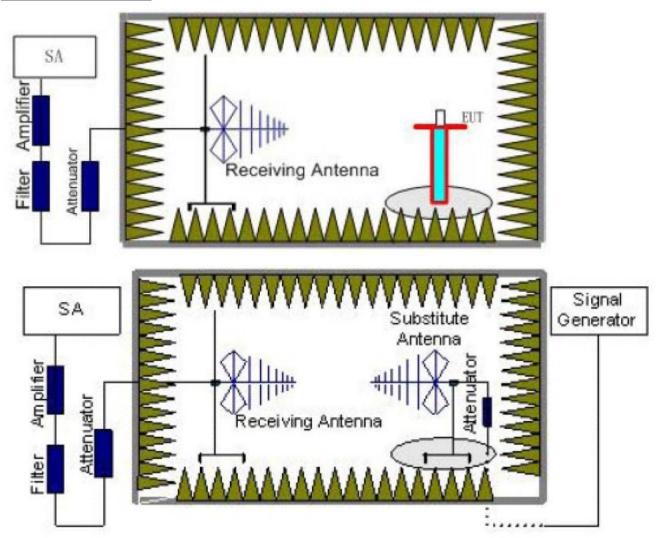

TEST PROCEDURE

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest isconnected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the substitution antenna, and adjust the level of the signal generator output until the value of the receiver

Report No.: TRE1706030102 Page: 179 of 204 Issued: 2017-07-19

reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below:

Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706030102 Page: 180 of 204 Issued: 2017-07-19

LTE Band 2-1.4MHz									
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result				
iviodulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Vesuit				
	Low	20.24	18.43						
QPSK	Mid	20.45	18.25		PASS				
	High	20.55	18.33	22.00					
	Low	20.16	18.49	33.00					
16QAM	Mid	20.18	18.19		PASS				
	High	20.43	18.27						

LTE Band 2-3MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dBm)	Result			
Modulation	Channel	Vertical	Horizontal	LIIIII (UDIII)	Nesult			
	Low	20.25	18.32					
QPSK	Mid	20.43	18.43		PASS			
	High	20.44	18.45	22.00				
	Low	19.98	18.26	33.00				
16QAM	Mid	20.03	18.33		PASS			
	High	20.46	18.46					

	LTE Band 2-5MHz								
Modulation	Channal	EIRP	(dBm)	Limit (dDm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	20.22	18.21						
QPSK	Mid	20.14	18.14		PASS				
	High	20.52	18.43	22.00					
	Low	19.62	18.21	33.00					
16QAM	Mid	19.54	18.14		PASS				
	High	21.00	18.53						

LTE Band 2-10MHz									
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result				
Wodulation	Channel	Vertical	Horizontal	Limit (dBm) 33.00	Result				
	Low	19.64	17.66	-					
QPSK	Mid	19.75	17.82		PASS				
	High	19.52	17.51						
	Low	19.57	17.19	33.00					
16QAM	Mid	19.93	17.92		PASS				
	High	19.37	17.33						

Report No.: TRE1706030102 Page: 181 of 204 Issued: 2017-07-19

LTE Band 2-15MHz									
Modulation	Channel	EIRP	EIRP (dBm)		Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.65	17.88						
QPSK	Mid	20.41	18.06	00.00	PASS				
	High	19.52	17.52						
	Low	20.05	17.88	33.00					
16QAM	Mid	20.41	18.06		PASS				
	High	19.62	17.52						

LTE Band 2-20MHz									
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result				
iviodulation	Channel	Vertical	Horizontal	LITTIL (UDITI)	Result				
	Low	19.44	17.64						
QPSK	Mid	19.52	17.52	-	PASS				
	High	19.37	17.86						
	Low	19.81	17.72	33.00					
16QAM	Mid	20.07	17.66		PASS				
	High	19.41	17.87						

LTE Band 4-1.4MHz									
Modulation		EIRP (dBm)		Limit (dPm)	Result				
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.58	17.52	30.00					
QPSK	Mid	19.74	17.67		PASS				
	High	19.66	17.56						
	Low	19.46	17.58						
16QAM	Mid	19.47	17.61		PASS				
	High	19.72	17.50						

	LTE Band 4-3MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Popult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.65	17.25		PASS				
QPSK	Mid	19.74	17.32						
	High	19.52	17.21						
	Low	19.39	17.19	30.00					
16QAM	Mid	19.35	17.22		PASS				
	High	19.54	17.21						

Report No.: TRE1706030102 Page: 182 of 204 Issued: 2017-07-19

		LTE Band	4-5MHz		
Maril Jackar	Observat	EIRP (dBm)		Limit (dDm)	Result
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Resuit
	Low	19.52	17.23		
QPSK	Mid	19.47	17.21	00.00	PASS
	High	19.66	17.36		
	Low	19.13	17.14	30.00	
16QAM	Mid	19.86	17.28		PASS
	High	19.35	17.29		

	LTE Band 4-10MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Popult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.64	17.32						
QPSK	Mid	19.52	17.21		PASS				
	High	19.38	17.18	20.00					
	Low	19.49	17.33	30.00					
16QAM	Mid	19.51	17.20		PASS				
	High	19.52	17.17						

	LTE Band 4-15MHz								
Modulation	Channel	EIRP (dBm)		Limit (dDm)	Dogult				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result				
	Low	19.43	17.17						
QPSK	Mid	18.52	17.02		PASS				
	High	19.33	17.32						
	Low	19.10	17.17	30.00					
16QAM	Mid	18.52	17.02		PASS				
	High	19.24	17.32						

	LTE Band 4-20MHz								
Modulation	Channel	EIRP	(dBm)	Limit (dDm)	Result				
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Kesuit				
	Low	18.52	16.94						
QPSK	Mid	18.43	16.75		PASS				
	High	18.55	16.91						
	Low	18.21	16.88	30.00					
16QAM	Mid	17.97	16.63		PASS				
	High	18.98	17.01						

Report No.: TRE1706030102 Page: 183 of 204 Issued: 2017-07-19

LTE Band 5-1.4MHz							
Modulation	Channel	ERP	ERP (dBm)		Result		
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	20.02	18.43	20.50			
QPSK	Mid	20.14	18.25		PASS		
	High	20.22	18.33				
	Low	19.88	18.54	- - -			
16QAM	Mid	20.24	18.15		PASS		
	High	19.76	18.43]			

LTE Band 5-3MHz							
Modulation	ERP (c		(dBm)	Limit (dBm)	Dogult		
Modulation	Channel	Vertical	Horizontal	Liffiit (dbfff)	Result		
	Low	20.15	18.43				
QPSK	Mid	20.01	18.52		PASS		
	High	20.15	18.33	00.50			
	Low	19.69	18.33	38.50			
16QAM	Mid	19.33	18.35		PASS		
	High	20.15	18.34				

LTE Band 5-5MHz							
Madulatian	Channal	ERP	(dBm)	Limit (dPm)	Dogult		
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	19.65	17.33				
QPSK	Mid	19.74	17.52		PASS		
	High	19.52	17.43	20.50			
	Low	19.96	17.26	38.50			
16QAM	Mid	19.50	17.57		PASS		
	High	19.29	17.38				

	LTE Band 5-10MHz							
NA o alcaladá a se	Channel	ERP	ERP (dBm)		Dogult			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	19.56	17.34	20.50				
QPSK	Mid	19.36	17.25		PASS			
	High	19.58	17.38					
	Low	19.22	17.18	— 38.50 —				
16QAM	Mid	19.12	17.63		PASS			
	High	19.22	17.33					

Report No.: TRE1706030102 Page: 184 of 204 Issued: 2017-07-19

LTE Band 7-5MHz							
Modulation	Channel	EIRP	EIRP (dBm)		Result		
iviodulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	19.78	17.85	22.00			
QPSK	Mid	19.64	17.52		PASS		
	High	19.52	17.44				
	Low	19.86	17.78	33.00			
16QAM	Mid	19.58	17.58		PASS		
	High	19.80	17.38]			

LTE Band 7-10MHz							
Madulation	Channel EIRP (d		(dBm)	Limit (dPm)	Popult		
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result		
	Low	19.47	17.44				
QPSK	Mid	18.98	17.21		PASS		
	High	19.63	17.52	22.00			
	Low	19.75	17.50	33.00			
16QAM	Mid	19.39	17.32		PASS		
	High	19.65	17.53				

	LTE Band 7-15MHz							
Maril Indian	Channel	EIRP	(dBm)	Limit (dDm)	Dogult			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	19.44	17.24					
QPSK	Mid	19.05	17.36		PASS			
	High	19.25	17.88	22.00				
	Low	20.00	17.12	33.00				
16QAM	Mid	18.62	17.46		PASS			
	High	18.83	17.79					

	LTE Band 7-20MHz							
Modulation	Channel	EIRP	(dBm)	Limit (dPm)	Result			
Modulation	Channel	Vertical	Horizontal	Limit (dBm)	Result			
	Low	18.33	16.94	22.00				
QPSK	Mid	18.52	16.97		PASS			
	High	18.47	16.95					
	Low	17.71	16.97	33.00				
16QAM	Mid	18.09	17.55		PASS			
	High	17.82	17.70					


Report No.: TRE1706030102 Page: 185 of 204 Issued: 2017-07-19

5.6. Radiated Spurious Emssion

LIMIT

LTE Band 2/4/17:<-13dBm;LTE Band 7<-25dBm

TEST CONFIGURATION

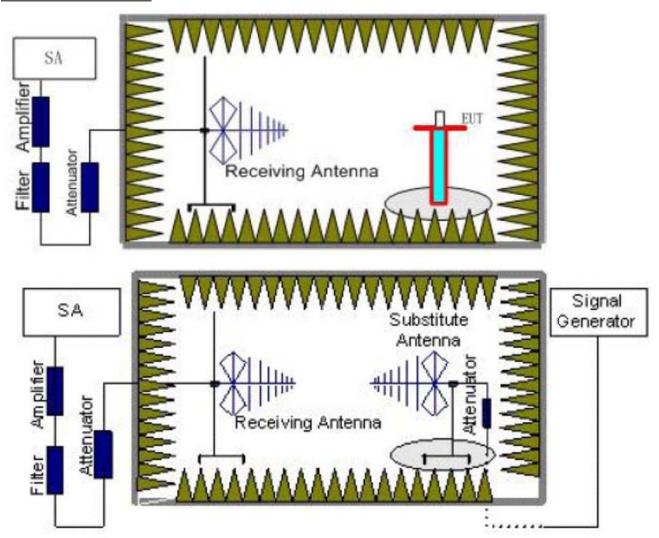

TEST RESULTS

- 1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
- 2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
- 3. The EUT is then put into continuously transmitting mode at its maximum power level during the test.Set Test Receiver or Spectrum RBW=1MHz,VBW=3MHz for above 1GHz and RBW=100kHz,VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
- 4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the

Report No.: TRE1706030102 Page: 186 of 204 Issued: 2017-07-19

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

- 5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (PcI) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
- 6. The measurement results are obtained as described below:

Power(EIRP)=PMea- PAg - Pcl + Ga

We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substituation test; The measurement results are amend as described below: Power(EIRP)=PMea- Pcl + Ga

7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.

ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

I E S I WIODE	EST MODE	
---------------	-----------------	--

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706030102 Page: 187 of 204 Issued: 2017-07-19

LTE Band 2-1.4MHz							
Channel	Frequency	Spurious	Emission	L''((JD)	D It		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3701.4	Vertical	-38.52				
	5552.1	V	-36.79	-13.00	Pass		
Low	7402.8	V					
Low	3701.4	Horizontal	-40.58				
	5552.1	Н	-40.75	-13.00	Pass		
	7402.8	Н					
	3760	Vertical	-37.83	-13.00	Pass		
	5640	V	-36.93				
Mid	7520	V					
IVIIU	3760	Horizontal	-40.43				
	5640	Н	-40.60	-13.00	Pass		
	7520	Н					
	3818.6	Vertical	-38.09				
	5727.9	V	-37.16	-13.00	Pass		
⊔iah	7637.2	V					
High	3818.6	Horizontal	-40.46				
	5727.9	Н	-40.57	-13.00	Pass		
	7637.2	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-3MHz							
Channel	Frequency	Frequency Spurious E		Lineit (alDree)	Danult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3703	Vertical	-39.17				
	5554.5	V	-36.65	-13.00	Pass		
Low	7406	V					
LOW	3703	Horizontal	-39.76				
	5554.5	Н	-36.53	-13.00	Pass		
	7406	Н					
	3760	Vertical	-39.66				
	5640	V	-36.14	-13.00	Pass		
Mid	7520	V					
iviiu	3760	Horizontal	-39.55				
	5640	Н	-35.73	-13.00	Pass		
	7520	Н					
	3817	Vertical	-40.27				
	5725.5	V	-35.86	-13.00	Pass		
Lliah	7634	V					
High	3817	Horizontal	-39.74				
	5725.5	Н	-35.75	-13.00	Pass		
	7634	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706030102 Page: 188 of 204 Issued: 2017-07-19

LTE Band 2-5MHz							
Channal	Frequency	Spurious I	Emission	Limit (dPm)	D It		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3705	Vertical	-39.59				
	5557.5	V	-36.83	-13.00	Pass		
Low	7410	V					
LOW	3705	Horizontal	-38.80				
	5557.5	Н	-36.99	-13.00	Pass		
	7410	Н					
	3760	Vertical	-38.93	-13.00	Pass		
	5640	V	-37.52				
Mid	7520	V					
IVIIU	3760	Horizontal	-38.40				
	5640	Н	-38.46	-13.00	Pass		
	7520	Н					
	3815	Vertical	-36.78				
	5722.5	V	-38.15	-13.00	Pass		
∐iah	7630	V					
High	3815	Horizontal	-37.34				
	5722.5	Н	-38.26	-13.00	Pass		
	7630	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-10MHz							
Channal	Frequency	Spurious Emission		Limit (dDm)	Decut		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3710	Vertical	-39.03				
	5565	V	-37.13	-13.00	Pass		
Low	7420	V					
LOW	3710	Horizontal	-37.68				
	5565	Н	-37.40	-13.00	Pass		
	7420	Н					
	3760	Vertical	-37.90	-13.00	Pass		
	5640	V	-38.30				
Mid	7520	V					
iviiu	3760	Horizontal	-37.01				
	5640	Н	-39.00	-13.00	Pass		
	7520	Н					
	3810	Vertical	-35.80				
	5715	V	-38.77	-13.00	Pass		
High	7620	V					
riigii	3810	Horizontal	-35.04				
	5715	Н	-38.61	-13.00	Pass		
	7620	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706030102 Page: 189 of 204 Issued: 2017-07-19

LTE Band 2-15MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Danill		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3705	Vertical	-38.08				
	5557.5	V	-37.52	-13.00	Pass		
Low	7410	V					
LOW	3705	Horizontal	-36.30				
	5557.5	Н	-37.89	-13.00	Pass		
	7410	Н					
	3760	Vertical	-36.59	-13.00	Pass		
	5640	V	-39.07				
Mid	7520	V					
iviiu	3760	Horizontal	-35.41				
	5640	Н	-38.44	-13.00	Pass		
	7520	Н					
	3815	Vertical	-36.49				
	5722.5	V	-38.65	-13.00	Pass		
High	7630	V					
riigii	3815	Horizontal	-36.74				
	5722.5	Н	-38.70	-13.00	Pass		
	7630	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-20MHz							
Channal	Frequency	Spurious	Emission	Lineit (dDae)	D 1		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3720	Vertical	-36.82				
	5580	V	-37.96	-13.00	Pass		
Low	7440	V					
LOW	3720	Horizontal	-34.81				
	5580	Н	-38.38	-13.00	Pass		
	7440	Н					
	3760	Vertical	-35.14		Pass		
	5640	V	-39.71	-13.00			
Mid	7520	V					
IVIIU	3760	Horizontal	-33.81				
	5640	Н	-39.04	-13.00	Pass		
	7520	Н					
	3800	Vertical	-34.97				
	5700	V	-39.26	-13.00	Pass		
High	7600	V					
High	3800	Horizontal	-36.38				
	5700	Н	-39.55	-13.00	Pass		
	7600	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706030102 Page: 190 of 204 Issued: 2017-07-19

LTE Band 4-1.4MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Danult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3421.4	Vertical	-40.88				
	5132.1	V	-44.69	-13.00	Pass		
Low	6842.8	V					
LOW	3421.4	Horizontal	-43.75				
	5132.1	Н	-47.88	-13.00	Pass		
	6842.8	Н					
	3465	Vertical	-40.77	-13.00	Pass		
	5197.5	V	-44.79				
Mid	6930	V					
iviiu	3465	Horizontal	-43.88				
	5197.5	Н	-47.99	-13.00	Pass		
	6930	Н					
	3508.6	Vertical	-40.60				
	5262.9	V	-44.62	-13.00	Pass		
∐ iah	7017.2	V					
High	3508.6	Horizontal	-43.90				
	5262.9	Н	-48.00	-13.00	Pass		
	7017.2	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-3MHz							
Channal	Frequency	Spurious	Emission	Limit (dDm)	D !!		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3423	Vertical	-40.42				
	5134.5	V	-44.59	-13.00	Pass		
Low	6846	V					
LOW	3423	Horizontal	-43.78				
	5134.5	Н	-47.78	-13.00	Pass		
	6846	Н					
	3465	Vertical	-40.50	-13.00	Pass		
	5197.5	V	-44.66				
Mid	6930	V					
IVIIU	3465	Horizontal	-43.90				
	5197.5	Н	-47.68	-13.00	Pass		
	6930	Н					
	3507	Vertical	-40.32				
	5260.5	V	-44.82	-13.00	Pass		
∐iah	7014	V					
High	3423	Horizontal	-43.87		_		
	5134.5	Н	-47.71	-13.00	Pass		
	6846	Н					

- 1. Remark"--- means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706030102 Page: 191 of 204 Issued: 2017-07-19

LTE Band 4-5MHz							
Channal	Frequency	Spurious	Emission	Limit (dDm)	D 11		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3425	Vertical	-40.76				
	5137.5	V	-44.76	-13.00	Pass		
Low	6850	V					
LOW	3425	Horizontal	-44.04				
	5137.5	Н	-47.87	-13.00	Pass		
	6850	Н					
	3465	Vertical	-40.63	-13.00	Pass		
	5197.5	V	-44.64				
Mid	6930	V	-				
iviiu	3465	Horizontal	-44.26				
	5197.5	Н	-48.05	-13.00	Pass		
	6930	Н					
	3505	Vertical	-40.33				
	5257.5	V	-44.36	-13.00	Pass		
∐iah	7010	V	-				
High	3505	Horizontal	-44.38		_		
	5257.5	Н	-48.16	-13.00	Pass		
	7010	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Band	d 4-10MHz		
Channal	Frequency	iency Spurious Emis		Limit (dDm)	D 11
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	3430	Vertical	-40.20		
	5145	V	-45.06	-13.00	Pass
Low	6860	V			
LOW	3430	Horizontal	-43.96		
	5145	Н	-47.81	-13.00	Pass
	6860	Н			
	3465	Vertical	-40.42	-13.00	Pass
	5197.5	V	-45.27		
Mid	6930	V			
IVIIU	3465	Horizontal	-43.82		
	5197.5	Н	-47.69	-13.00	Pass
	6930	Н	-		
	3500	Vertical	-40.62		
	5250	V	-45.45	-13.00	Pass
Lliah	7000	V	-		
High	3500	Horizontal	-43.65		
	5250	Н	-47.54	-13.00	Pass
	7000	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706030102 Page: 192 of 204 Issued: 2017-07-19

LTE Band 4-15MHz							
Channel	Frequency	Spurious	Emission	Limit (dPm)	D It		
Chamilei	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3435	Vertical	-39.25				
	5152.5	V	-45.45	-13.00	Pass		
Low	6870	V					
LOW	3435	Horizontal	-44.04				
	5152.5	Н	-47.17	-13.00	Pass		
	6870	Н					
	3465	Vertical	-39.54	-13.00	Pass		
	5197.5	V	-45.72				
Mid	6930	V					
iviid	3465	Horizontal	-43.95				
	5197.5	Н	-47.09	-13.00	Pass		
	6930	Н					
	3490	Vertical	-39.67				
	5235	V	-45.84	-13.00	Pass		
Lliah	6980	V					
High	3490	Horizontal	-43.89				
	5235	Н	-47.04	-13.00	Pass		
	6980	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-20MHz							
Channal	Frequency	Spurious Emission		Limit (dDm)	D 1		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	3440	Vertical	-37.99				
	5160	V	-46.28	-13.00	Pass		
Low	6880	V					
LOW	3440	Horizontal	-43.48				
	5160	Н	-47.40	-13.00	Pass		
	6880	Н					
	3465	Vertical	-37.68	-13.00	Pass		
	5197.5	V	-46.04				
Mid	6930	V					
IVIIU	3465	Horizontal	-43.24				
	5197.5	Н	-47.59	-13.00	Pass		
	6930	Н					
	3490	Vertical	-38.01				
	5235	V	-47.70	-13.00	Pass		
High	6980	V					
riigii	3490	Horizontal	-43.17		_		
	5235	Н	-47.10	-13.00	Pass		
	6980	Н					

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706030102 Page: 193 of 204 Issued: 2017-07-19

		LTE Ban	d 5-1.4MHz		
Channel	Frequency	Spurious Emission		Limit (dDm)	Dooult
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1649.4	Vertical	-44.36		
	2474.1	V	-45.88	-13.00	Pass
Low	3298.8	V			
LOW	1649.4	Horizontal	-49.35		
	2474.1	Н	-50.65	-13.00	Pass
	3298.8	Н			
	1673	Vertical	-44.20		Pass
	2509.5	V	-45.73	-13.00	
Mid	3346	V			
iviiu	1673	Horizontal	-49.19		
	2509.5	Н	-50.52	-13.00	Pass
	3346	Н			
	1696.6	Vertical	-44.43		
	2544.9	V	-45.94	-13.00	Pass
⊔iah	3393.2	V	-		
High	1696.6	Horizontal	-49.23		
	2544.9	Н	-50.56	-13.00	Pass
	3393.2	Н			

Remark:

- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Bar	nd 5-3MHz		
Channel	Frequency	Spurious Emission		Limit (dDm)	D
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result
	1651	Vertical	-44.39		
	2476.5	V	-45.85	-13.00	Pass
Low	3302	V			
LOW	1651	Horizontal	-49.48		
	2476.5	Н	-50.68	-13.00	Pass
	3302	Н			
	1673	Vertical	-44.49	-13.00	Pass
	2509.5	V	-45.94		
Mid	3346	V			
iviiu	1673	Horizontal	-49.32		
	2509.5	Н	-50.81	-13.00	Pass
	3346	Н			
	1696.6	Vertical	-45.06		
	2544.9	V	-46.88	-13.00	Pass
Lliah	3393.2	V			
High	1696.6	Horizontal	-50.26		
	2544.9	Н	-51.70	-13.00	Pass
	3393.2	Н			

- 1. Remark"---" means that the emission level is too low to be measured
- The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706030102 Page: 194 of 204 Issued: 2017-07-19

LTE Band 5-5MHz							
Channel	Frequency	Spurious	Emission	Limit (dDm)	Danult		
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result		
	1653	Vertical	-44.43				
	2479.5	V	-45.81	-13.00	Pass		
Low	3306	V					
LOW	1653	Horizontal	-49.64				
	2479.5	Н	-50.71	-13.00	Pass		
	3306	Н					
	1673	Vertical	-44.56	-13.00	Pass		
	2509.5	V	-45.93				
Mid	3346	V					
IVIIU	1673	Horizontal	-49.44				
	2509.5	Н	-46.64	-13.00	Pass		
	3346	Н					
	1695	Vertical	-45.27				
	2542.5	V	-47.10	-13.00	Pass		
∐iah	3390	V					
High	1695	Horizontal	-49.75				
	2542.5	Н	-46.93	-13.00	Pass		
	3390	Н					

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 5-10MHz								
Channal	Frequency	Spurious	Emission	Limeit (dDms)	Dooult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	1658	Vertical	-44.45						
	2487	V -45.79 -		-13.00	Pass				
Low	3316	V							
LOW	1658	Horizontal	-49.73						
	2487	Н	-50.73	-13.00	Pass				
	3316	Н							
	1673	Vertical	-44.52						
	2509.5	V	-45.86	-13.00	Pass				
Mid	3346	V							
IVIIU	1673	Horizontal	-49.39						
	2509.5	Н	-50.67	-13.00	Pass				
	3346	Н							
	1688	Vertical	-44.42						
	2532	V	-45.95	-13.00	Pass				
High	3376	V	1						
riigii	1688	Horizontal	-49.39		_				
	2532	Н	-50.68	-13.00	Pass				
	3376	Н							

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706030102 Page: 195 of 204 Issued: 2017-07-19

	LTE Band 7-5MHz								
Channel	Frequency	Spurious	Emission	Limit (dDm)	Dooult				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	5005	Vertical	-38.69						
	7507.5	V	-40.52	-25.00	Pass				
Low	10010	V							
LOW	5005	Horizontal	-41.75						
	7507.5	Н	-45.64	-25.00	Pass				
	10010	Н							
	5070	Vertical	-37.87						
	7605	V	-39.80	-25.00	Pass				
Mid	10140	V							
IVIIG	5070	Horizontal	-40.91						
	7605	Н	-40.45	-25.00	Pass				
	10140	Н							
	5135	Vertical	-38.52						
	7702.5	V	-40.87	-25.00	Pass				
High	10270	V							
riigii	5135	Horizontal	-40.64		_				
	7702.5	Н	-40.93	-25.00	Pass				
	10270	Н							

Remark:

- Remark"---" means that the emission level is too low to be measured The emission levels of below 1 GHz are very lower than the limit and not show in test report.

		LTE Ban	d 7-10MHz			
Channel	Frequency	Spurious	Emission	Limit (dDm)	Result	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	5010	Vertical	-38.67			
	7515	V	-40.54	-25.00	Pass	
Low	10020	V				
LOW	5010	Horizontal	-41.65			
	7515	Н	-45.62	-25.00	Pass	
	10020	Н				
	5070	Vertical	-38.59		Pass	
	7605	V	-40.47	-25.00		
Mid	10140	V				
iviiu	5070	Horizontal	-42.08		Pass	
	7605	Н	-40.14	-25.00		
	10140	Н				
	5130	Vertical	-38.26			
	7695	V	-39.93	-25.00	Pass	
High	10260	V				
riigii	5130	Horizontal	-42.01			
	7695	Н	-39.94	-25.00	Pass	
	10260	Н				

- 1. Remark"---" means that the emission level is too low to be measured
- The emission levels of below 1 GHz are very lower than the limit and not show in test report.

Report No.: TRE1706030102 Page: 196 of 204 Issued: 2017-07-19

		LTE Ban	d 7-15MHz			
Channel	Frequency	Spurious	Emission	Limit (dPm)	Result	
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result	
	5015	Vertical	-38.66			
	7522.5	V	-40.55	-25.00	Pass	
Low	10030	V				
LOW	5015	Horizontal	-41.61			
	7522.5	Н	-45.61	-25.00	Pass	
	10030	Н				
	5070	Vertical	-38.63		Pass	
	7605	V	-40.52	-25.00		
Mid	10140	V				
IVIIU	5070	Horizontal	-42.27			
	7605	Н	-40.02	-25.00	Pass	
	10140	Н				
	5125	Vertical	-38.13			
	7687.5	V	-39.70	-25.00	Pass	
Lliah	10250	V				
High	5125	Horizontal	-42.11			
	7687.5	Н	-39.73	-25.00	Pass	
	10250	Н				

Remark:

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

	LTE Band 7-20MHz								
Channal	Frequency	Spurious	Emission	Linnit (dDmn)	Daguit				
Channel	(MHz)	Polarization	Level (dBm)	Limit (dBm)	Result				
	5015	Vertical	-38.64						
	7522.5	V	-40.57	-25.00	Pass				
Low	10030	V							
Low	5015	Horizontal	-41.56						
	7522.5	Н	-45.60	-25.00	Pass				
	10030	Н							
	5070	Vertical	-38.60						
	7605	V	-40.52	-25.00	Pass				
Mid	10140	V							
iviiu	5070	Horizontal	-41.99						
	7605	Н	-40.19	-25.00	Pass				
	10140	Н							
	5125	Vertical	-38.27						
	7687.5	V	-39.98	-25.00	Pass				
Lliah	10250	V							
High	5125	Horizontal	-41.92						
	7687.5	Н	-39.99	-25.00	Pass				
	10250	Н							

- 1. Remark"---" means that the emission level is too low to be measured
- 2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.


Report No.: TRE1706030102 Page: 197 of 204 Issued: 2017-07-19

5.7. Frequency stability V.S. Temperature measurement

LIMIT

2.5ppm

TEST CONFIGURATION

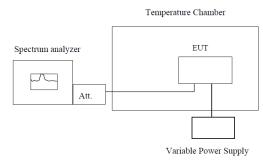

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. The equipment under test was connected to an external DC power supply and input rated voltage.
- 2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
- 3. The EUT was placed inside the temperature chamber.
- Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
- 5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
- Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706030102 Page: 198 of 204 Issued: 2017-07-19

Re	ference Frequency	y: LTE Band	d 2 Middle ch	nannel=188	30MHz,20MHz	Bandwidth	
Dawarawaliad	Taman a rati ira		Freque	ncy error		l imais	
Power supplied (Vdc)	Temperature (°C)	QPSK		16QAM		Limit (ppm)	Result
(740)	(0)	Hz	ppm	Hz	ppm	(PP111)	
	-30	5	0.0027	10	0.0053		
	-20	6	0.0032	13	0.0069		
	-10	8	0.0043	15	0.0080		
	0	2	0.0011	12	0.0064		
3.80	10	3	0.0016	13	0.0069	2.50	Pass
	20	5	0.0027	14	0.0074		
	30	7	0.0037	15	0.0080	1	
	40	6	0.0032	13	0.0069	1	
	50	8	0.0043	14	0.0074		
Ref	erence Frequency	: LTE Band	4 Middle cha	annel=1732	2.5MHz,20MHz	Bandwidth	
	_		Freque	ncy error		Limit	
Power supplied (Vdc)	Temperature (°C)	QF	PSK	10	16QAM		Result
(vuc)	(C)	Hz	ppm	Hz	ppm	- (ppm)	
	-30	6	0.0035	20	0.0115		
	-20	5	0.0029	23	0.0133	1	
	-10	7	0.0040	25	0.0144		
	0	8	0.0046	24	0.0139	1	
3.80	10	5	0.0029	23	0.0133	2.50	Pass
	20	8	0.0046	22	0.0127		
	30	6	0.0035	25	0.0144		
	40	7	0.0040	23	0.0133		
	50	4	0.0023	22	0.0127	1	
Re	ference Frequency	/: LTE Band	5 Middle ch	annel=836	.5MHz,10MHz	Bandwidth	
				ncy error	•		
Power supplied	Temperature	QF	PSK	10	6QAM	Limit	Result
(Vdc)	(°C)	Hz	ppm	Hz	ppm	(ppm)	
	-30	4	0.0048	18	0.0215		
	-20	6	0.0072	16	0.0191		
	-10	5	0.0060	15	0.0179		
	0	3	0.0036	16	0.0191	1	
3.80	10	5	0.0060	17	0.0203	2.50	Pass
	20	4	0.0048	15	0.0179		1 033
	30	6	0.0072	16	0.0191		
	40	7	0.0084	19	0.0227		
	50	5	0.0060	18	0.0215	†	

Report No.: TRE1706030102 Page: 199 of 204 Issued: 2017-07-19

Reference Frequency: LTE Band 7 Middle channel=2535MHz,20MHz Bandwidth							
Dames a maliad	T		Frequ	1 ::			
Power supplied (Vdc)	Temperature (°C)	QF	PSK	16	QAM	Limit (ppm)	Result
(٧٥٥)	(0)	Hz	ppm	Hz	ppm	(ррііі)	
	-30	13	0.0051	25	0.0099	2.50	
	-20	11	0.0043	23	0.0091		Pass
	-10	13	0.0051	24	0.0095		
	0	14	0.0055	25	0.0099		
3.80	10	13	0.0051	27	0.0107		
	20	15	0.0059	26	0.0103		
	30	12	0.0047	21	0.0083		
	40	16	0.0063	22	0.0087		
	50	17	0.0067	23	0.0091		


Report No.: TRE1706030102 Page: 200 of 204 Issued: 2017-07-19

5.8. Frequency stability V.S. Voltagemeasurement

LIMIT

2.5ppm

TEST CONFIGURATION

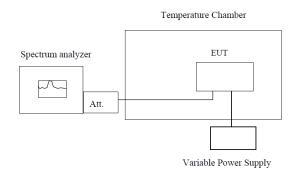

Note: Measurement setup for testing on Antenna connector

TEST PROCEDURE

- 1. Set chamber temperature to 25°C. Use a variable DC power source topower the EUT and set the voltage to rated voltage.
- 2. Set the spectrum analyzer RBW lowenough to obtain the desired frequency resolution and recorded the frequency.
- 3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, recordthe maximum frequency change.

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706030102 Page: 201 of 204 Issued: 2017-07-19

Refe	erence Frequenc	v: LTE Ban	d 2 Middle c	hannel=1880	MHz.20MHz	Bandwidth	
	Power) · _ · _ · _ ·		ency error	,		
Temperature (°C)	supplied	QF	PSK	-	QAM	Limit	Result
	(Vdc)	Hz	ppm	Hz	ppm	- (ppm)	
	4.35	5	0.0027	8	0.0043		
25	3.80	6	0.0032	7	0.0037	2.50	Pass
	3.60	4	0.0021	8	0.0043		
Refe	rence Frequency	: LTE Band	4 Middle ch	annel=1732	5MHz,20MHz	Bandwidth	
	Power		Freque	ency error		Linait	
Temperature (°C)	supplied	QF	PSK	160	QAM	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(PP)	
25	4.35	11	0.0063	15	0.0087		
	3.80	13	0.0075	13	0.0075	2.50	Pass
	3.60	12	0.0069	12	0.0069		
Refe	rence Frequency	: LTE Band	d 5 Middle cl	nannel=836.	5MHz,10MHz	Bandwidth	
	Power	Frequency error				Limit	
Temperature (°C)	supplied	QPSK		16QAM		(ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm	(PP)	
	4.35	16	0.0191	17	0.0203		
25	3.80	14	0.0167	19	0.0227	2.50	Pass
	3.60	15	0.0179	18	0.0215		
Refe	erence Frequenc	y: LTE Ban	d 7 Middle c	hannel=2535	5MHz,20MHz	Bandwidth	
	Power		•	ency error		Limit	
Temperature (°C)	supplied		PSK		QAM	Limit (ppm)	Result
	(Vdc)	Hz	ppm	Hz	ppm		
	4.35	18	0.0071	21	0.0083		
25	3.80	19	0.0075	22	0.0087	2.50	Pass
	3.60	16	0.0063	20	0.0079]	


Report No.: TRE1706030102 Page: 202 of 204 Issued: 2017-07-19

5.9. Peak-Average Ratio

LIMIT

13dB

TEST CONFIGURATION

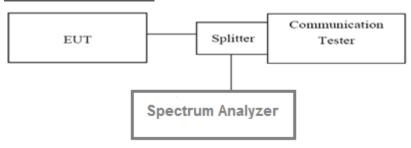

TEST PROCEDURE

According with KDB 971168

- 1. The signal analyzer's CCDF measurement profile is enabled
- 2. Frequency = carrier center frequency
- 3. Measurement BW > Emission bandwidth of signal
- 4. The signal analyzer was set to collect one million samples to generate the CCDF curve
- 5. The measurement interval was set depending on the type of signal analyzed. Forcontinuous signals (>98% duty cycle), the measurement interval was set to 1ms. For bursttransmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that issynced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

TEST MODE:

Please refer to the clause 3.3

TEST RESULTS

 Report No.: TRE1706030102 Page: 203 of 204 Issued: 2017-07-19

LTE Band 2-20MHz								
Modulation	QP:	SK	16Q	AM	Limit/dD)	Doordt		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	4.66	5.44	5.34	6.16	13.00	Pass		
Mid	5.18	5.78	5.70	6.64	13.00	Pass		
High	4.38	5.86	5.80	6.52	13.00	Pass		

LTE Band 4-20MHz								
Modulation	QP:	SK	16Q	AM	Limit/dD)	Decult		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	5.88	5.84	6.36	6.58	13.00	Pass		
Mid	4.94	5.54	5.34	6.38	13.00	Pass		
High	5.46	5.96	6.74	6.62	13.00	Pass		


LTE Band 5-10MHz								
Modulation	QPS	SK	16Q	AM	Limit/dD\	Result		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	3.90	5.24	4.86	6.04	13.00	Pass		
Mid	5.26	5.64	5.94	6.36	13.00	Pass		
High	3.80	5.12	4.70	5.94	13.00	Pass		


LTE Band 7-20MHz								
Modulation	QP:	SK	16Q	AM	Limit/dD)	Dooult		
Channel	1RB#	Full RB#	1RB#	Full RB#	Limit(dB)	Result		
Low	4.24	5.54	4.82	6.28	13.00	Pass		
Mid	4.68	5.46	5.30	6.14	13.00	Pass		
High	4.12	5.34	5.04	6.08	13.00	Pass		

Report No.: TRE1706030102 Page: 204 of 204 Issued: 2017-07-19

6. Test Setup Photos of the EUT

Radiated emission:

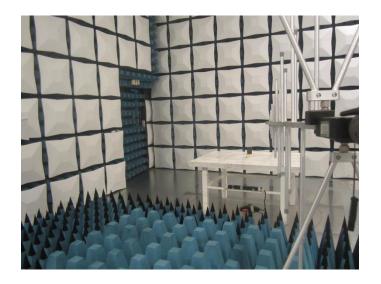

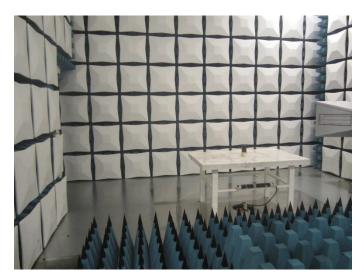

7. External and Internal Photos of the EUT

Reference to the test report No.: TRE1706030101.	
End of Report	