


| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

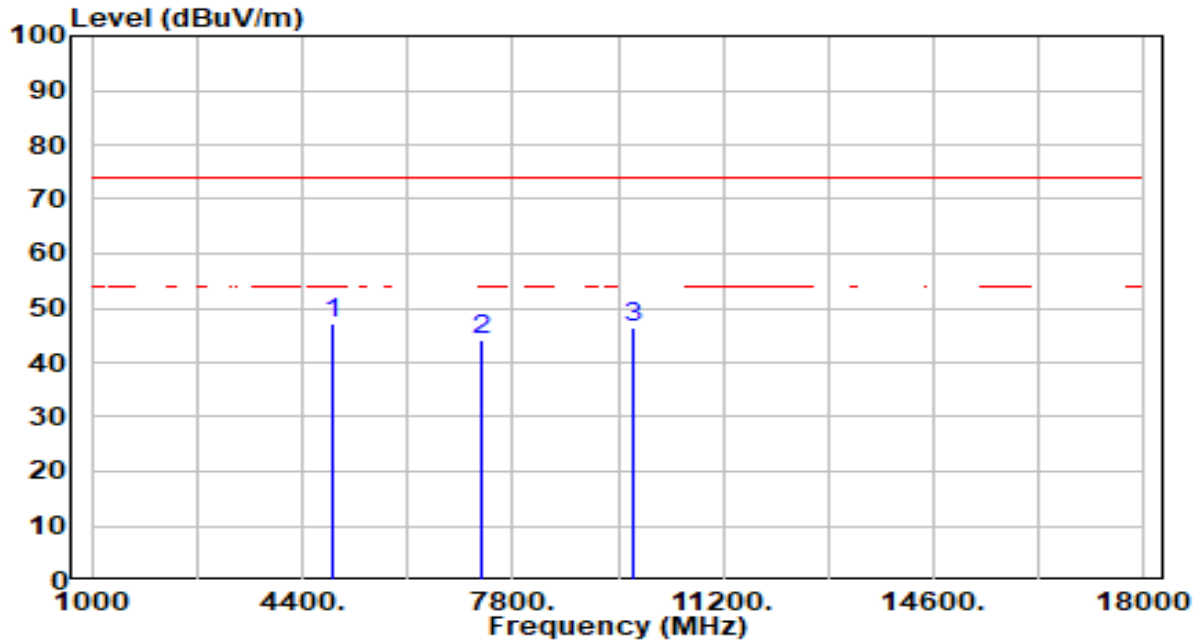


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 4874.000 | 46.94 | 0.36 | 47.31 | -26.69 | 74.00 | 200 | 46 | Peak |
| 2 | 7311.000 | 38.49 | 5.59 | 44.08 | -29.92 | 74.00 | 200 | 100 | Peak |
| 3 | 9748.000 | 41.22 | 5.34 | 46.57 | -27.43 | 74.00 | 200 | 23 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

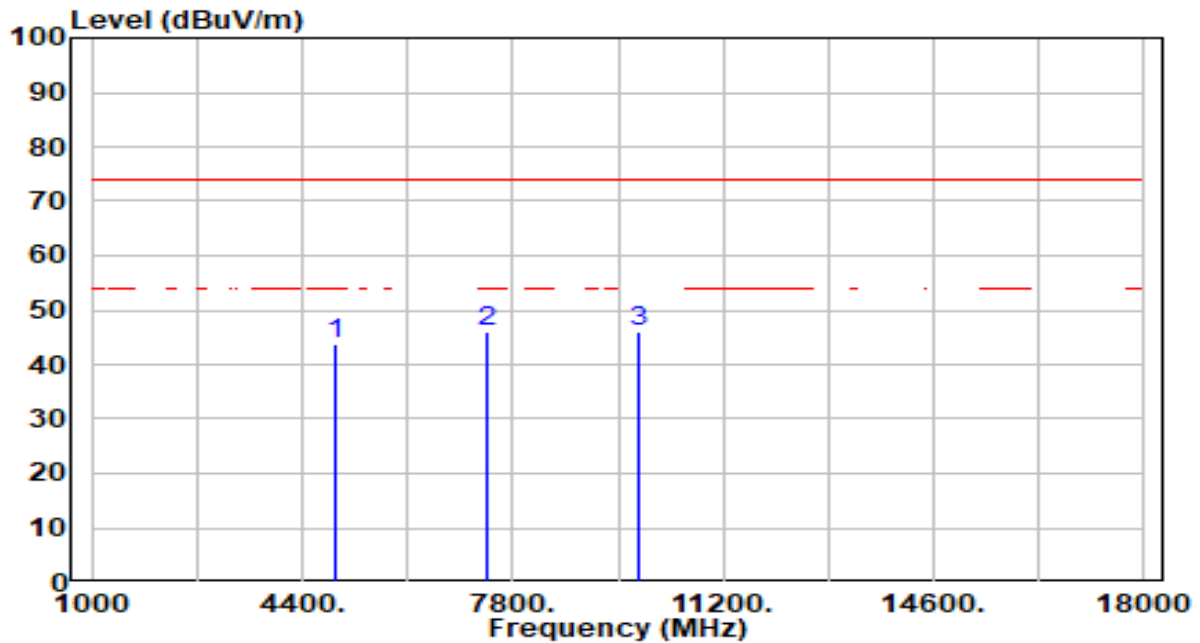


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4924.000 | 43.20 | 0.49 | 43.69 | -30.31 | 74.00 | 200 | 73 | Peak |
| 2 | 7386.000 | 40.25 | 5.64 | 45.89 | -28.11 | 74.00 | 200 | 25 | Peak |
| 3 | * 9848.000 | 40.77 | 5.39 | 46.15 | -27.85 | 74.00 | 200 | 73 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

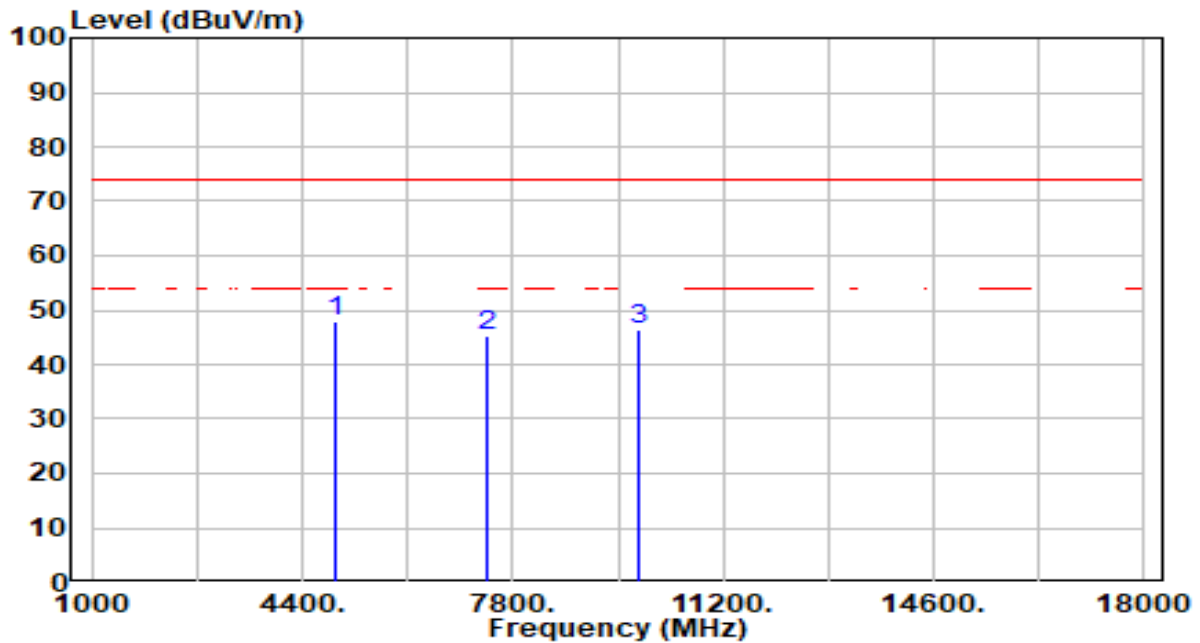


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 4924.000 | 47.52 | 0.49 | 48.01 | -25.99 | 74.00 | 200 | 42 | Peak |
| 2 | 7386.000 | 39.73 | 5.64 | 45.37 | -28.63 | 74.00 | 200 | 172 | Peak |
| 3 | 9848.000 | 41.18 | 5.39 | 46.56 | -27.44 | 74.00 | 200 | 14 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

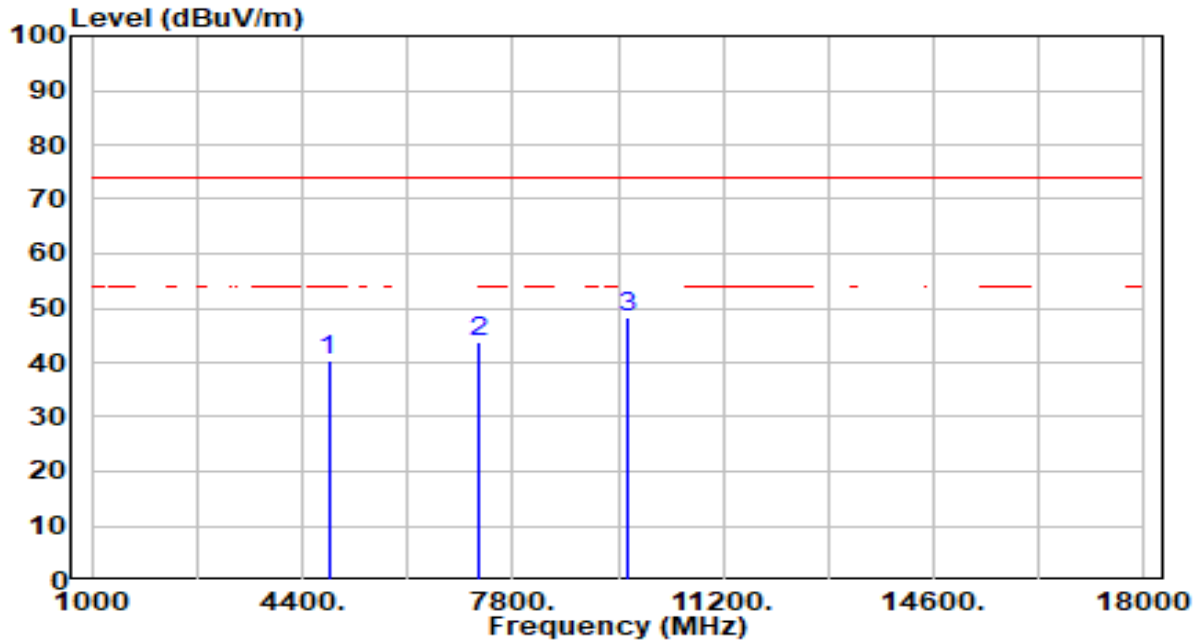


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4824.000 | 40.26 | 0.23 | 40.49 | -33.51 | 74.00 | 200 | 8 | Peak |
| 2 | 7236.000 | 38.15 | 5.54 | 43.70 | -30.30 | 74.00 | 200 | 0 | Peak |
| 3 | * 9648.000 | 43.14 | 5.30 | 48.44 | -25.56 | 74.00 | 200 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

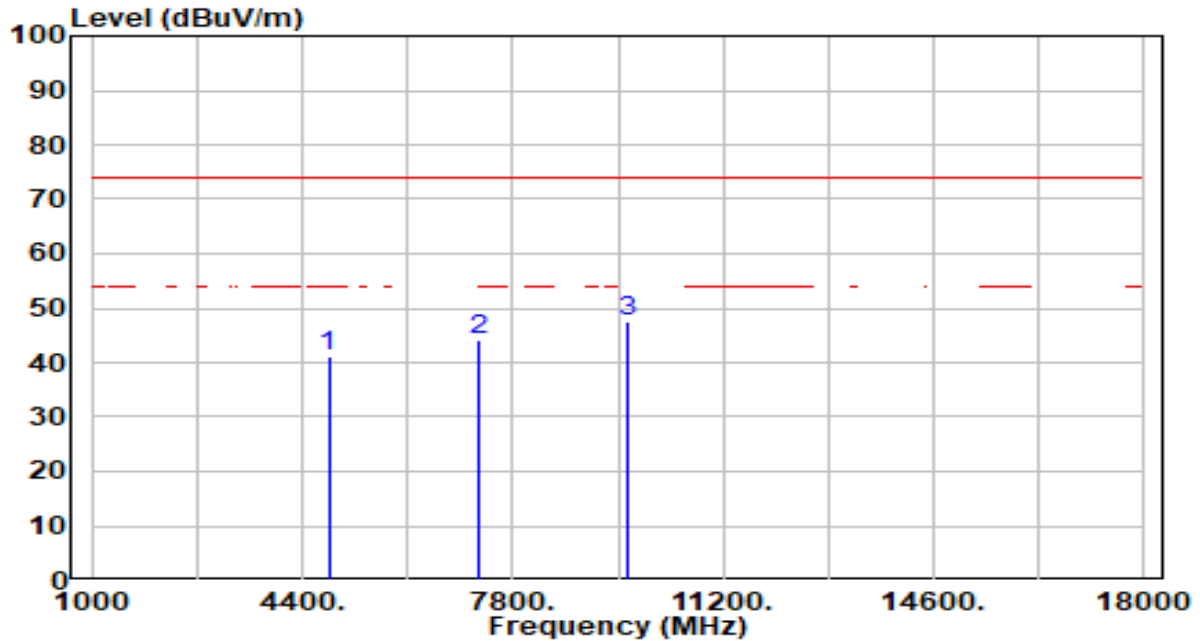


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4824.000 | 40.72 | 0.23 | 40.95 | -33.05 | 74.00 | 200 | 71 | Peak |
| 2 | 7236.000 | 38.58 | 5.54 | 44.12 | -29.88 | 74.00 | 200 | 32 | Peak |
| 3 | * 9648.000 | 42.17 | 5.30 | 47.47 | -26.53 | 74.00 | 200 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

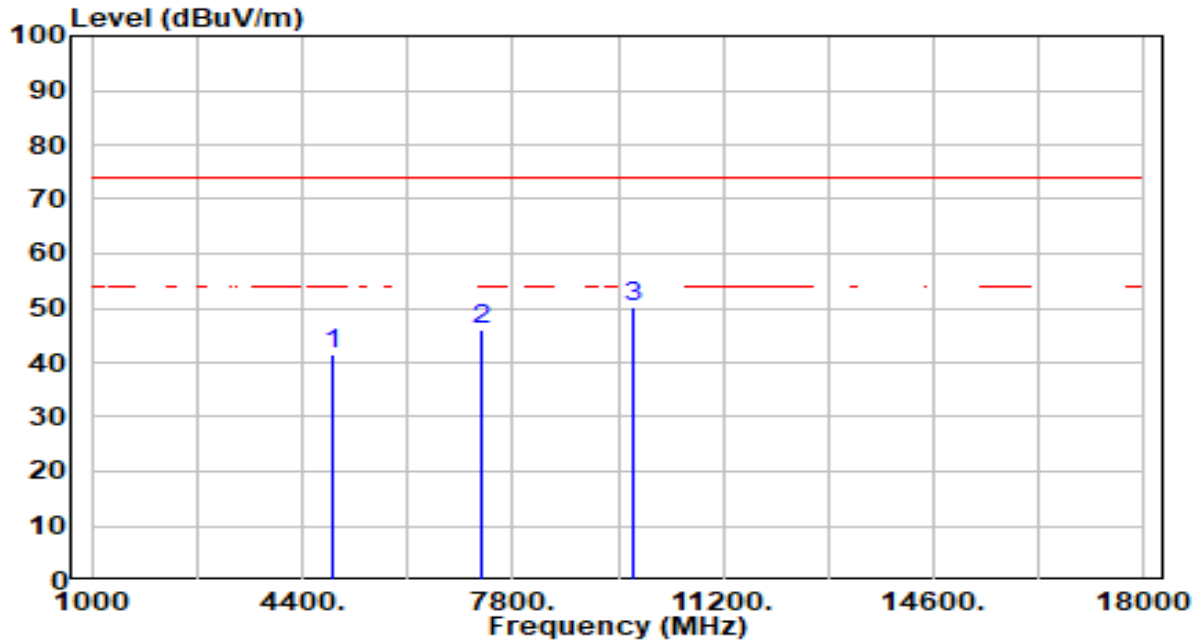


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 41.25 | 0.36 | 41.61 | -32.39 | 74.00 | 200 | 0 | Peak |
| 2 | 7311.000 | 40.39 | 5.59 | 45.98 | -28.02 | 74.00 | 200 | 294 | Peak |
| 3 | * 9748.000 | 44.99 | 5.34 | 50.33 | -23.67 | 74.00 | 200 | 251 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

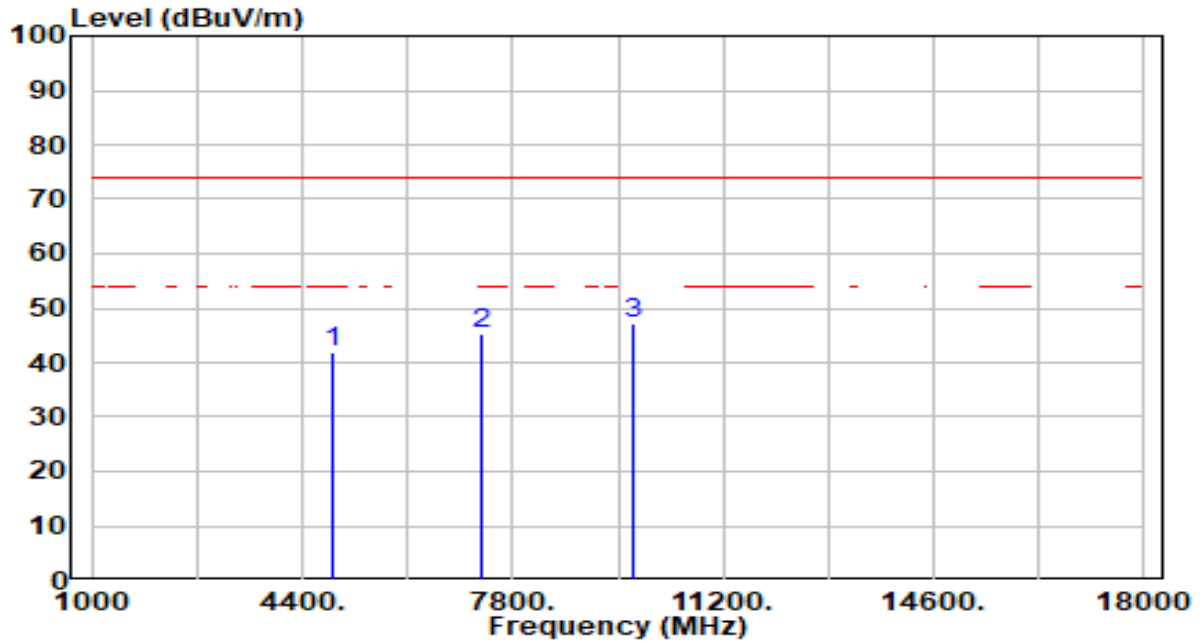


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 41.34 | 0.36 | 41.71 | -32.29 | 74.00 | 200 | 71 | Peak |
| 2 | 7311.000 | 39.53 | 5.59 | 45.12 | -28.88 | 74.00 | 200 | 1 | Peak |
| 3 | * 9748.000 | 41.82 | 5.34 | 47.16 | -26.84 | 74.00 | 200 | 248 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

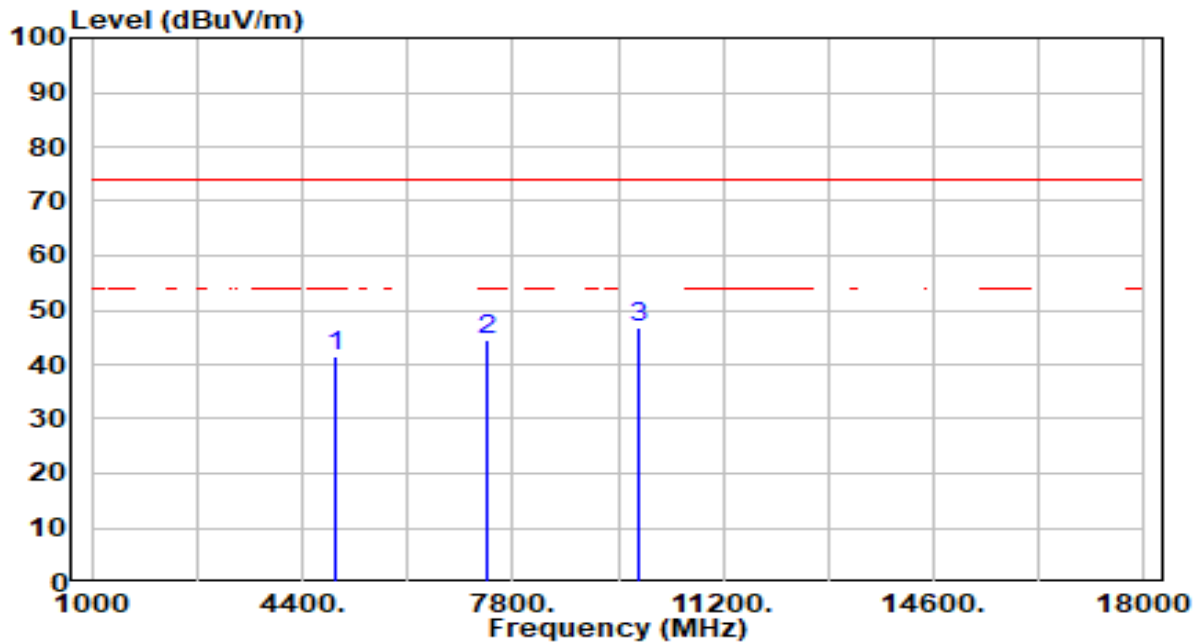


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4924.000 | 41.10 | 0.49 | 41.59 | -32.41 | 74.00 | 200 | 326 | Peak |
| 2 | 7386.000 | 39.05 | 5.64 | 44.68 | -29.32 | 74.00 | 200 | 160 | Peak |
| 3 | * 9848.000 | 41.39 | 5.39 | 46.78 | -27.22 | 74.00 | 200 | 340 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

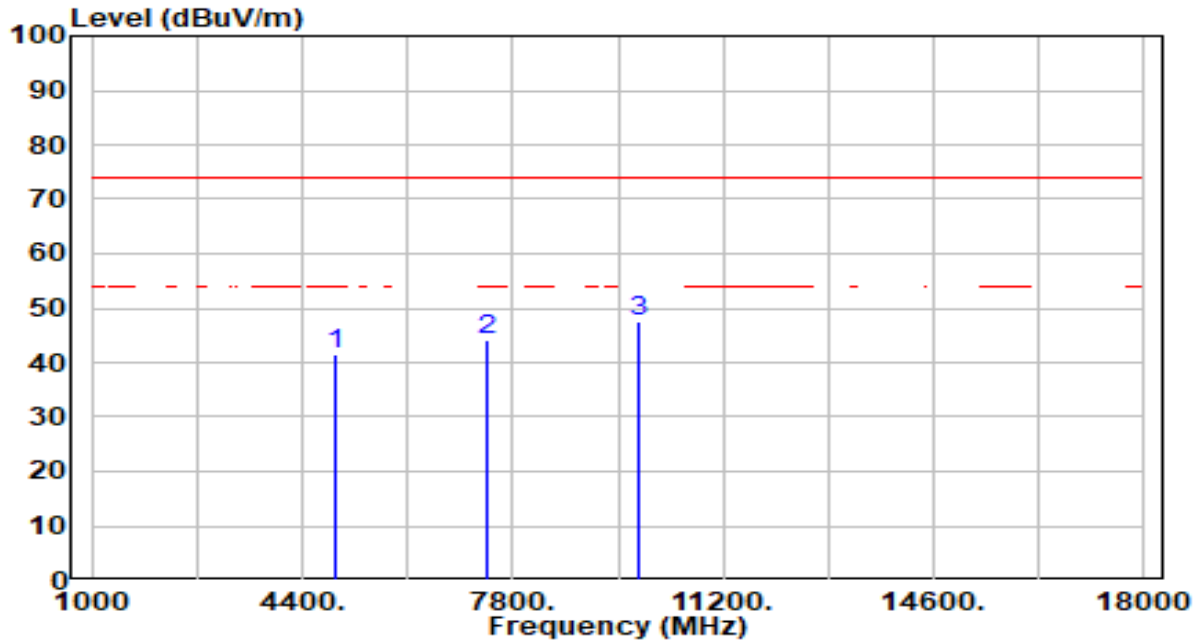


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4924.000 | 41.11 | 0.49 | 41.61 | -32.39 | 74.00 | 200 | 74 | Peak |
| 2 | 7386.000 | 38.50 | 5.64 | 44.14 | -29.86 | 74.00 | 200 | 249 | Peak |
| 3 | * 9848.000 | 42.07 | 5.39 | 47.46 | -26.54 | 74.00 | 200 | 121 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

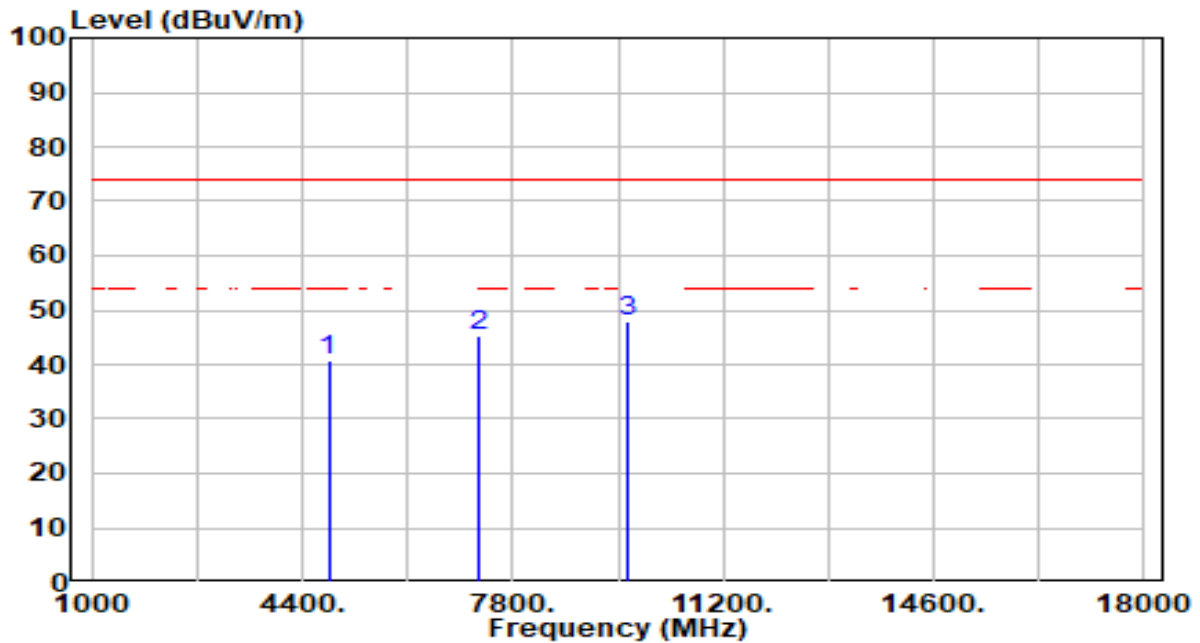


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4824.000 | 40.59 | 0.23 | 40.82 | -33.18 | 74.00 | 200 | 88 | Peak |
| 2 | 7236.000 | 39.58 | 5.54 | 45.13 | -28.87 | 74.00 | 200 | 294 | Peak |
| 3 | * 9648.000 | 42.45 | 5.30 | 47.75 | -26.25 | 74.00 | 200 | 232 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

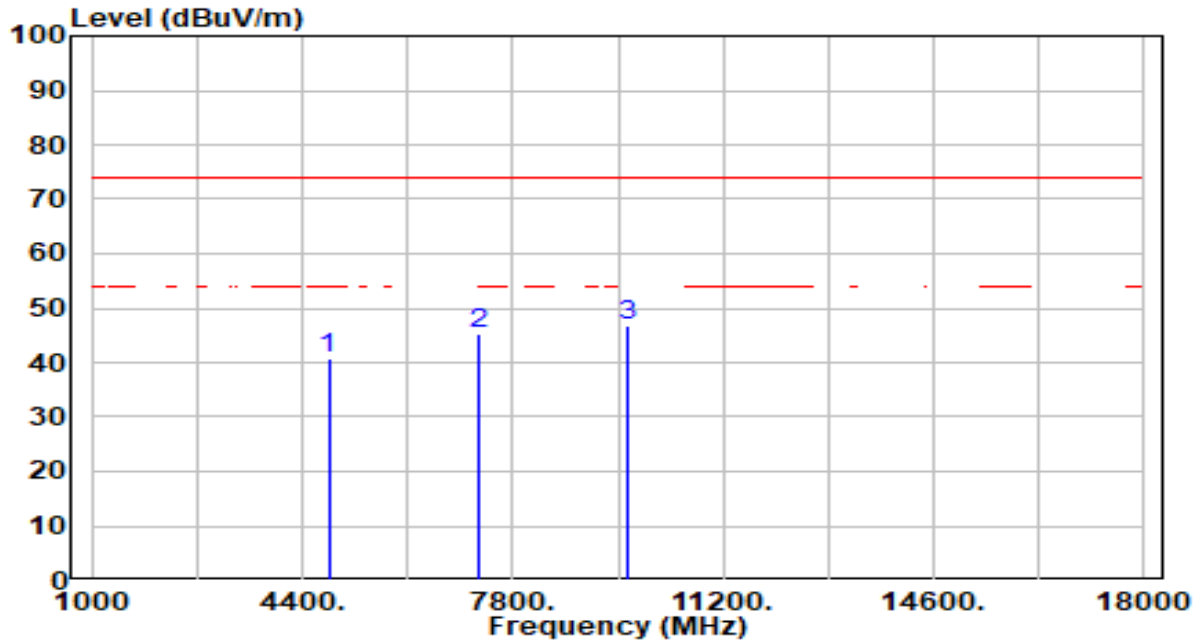


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4824.000 | 40.63 | 0.23 | 40.86 | -33.14 | 74.00 | 200 | 143 | Peak |
| 2 | 7236.000 | 39.60 | 5.54 | 45.14 | -28.86 | 74.00 | 200 | 360 | Peak |
| 3 | * 9648.000 | 41.62 | 5.30 | 46.93 | -27.07 | 74.00 | 200 | 118 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

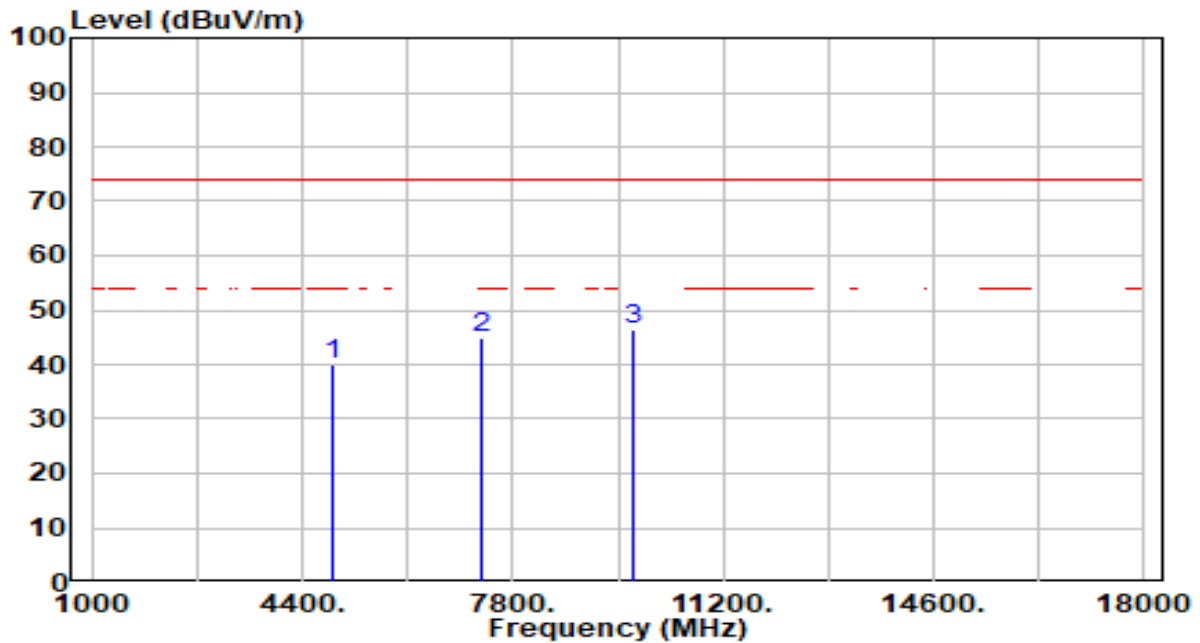


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 39.63 | 0.36 | 39.99 | -34.01 | 74.00 | 200 | 155 | Peak |
| 2 | 7311.000 | 39.37 | 5.59 | 44.96 | -29.04 | 74.00 | 200 | 200 | Peak |
| 3 | * 9748.000 | 41.14 | 5.34 | 46.48 | -27.52 | 74.00 | 200 | 8 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

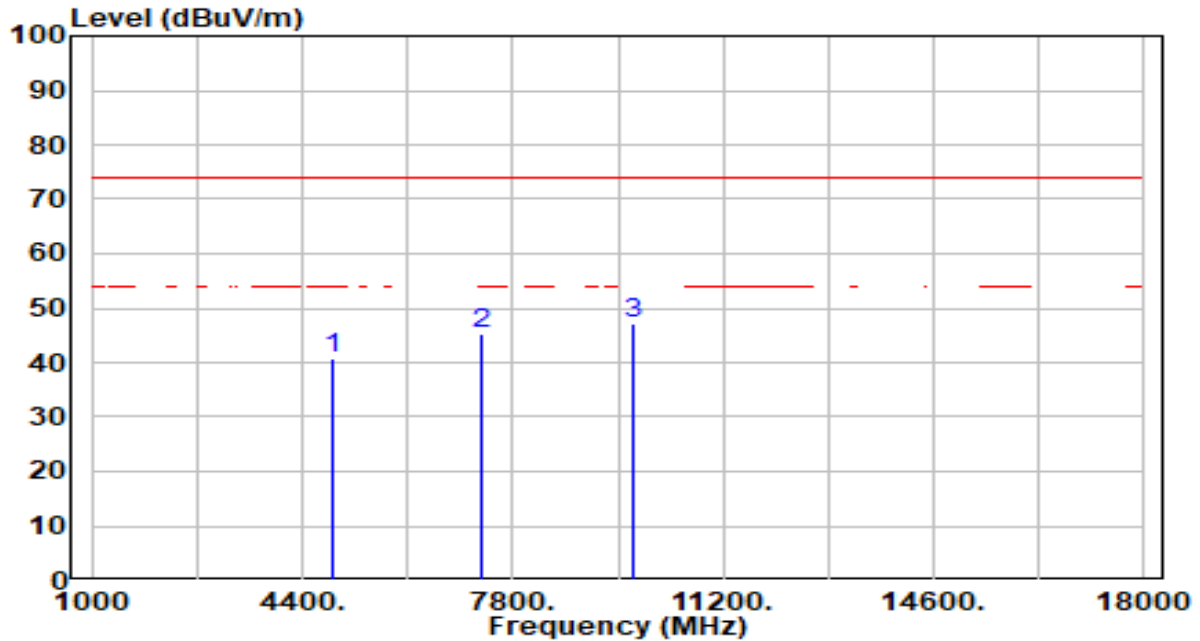


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 40.26 | 0.36 | 40.62 | -33.38 | 74.00 | 200 | 334 | Peak |
| 2 | 7311.000 | 39.68 | 5.59 | 45.27 | -28.73 | 74.00 | 200 | 286 | Peak |
| 3 | * 9748.000 | 41.73 | 5.34 | 47.07 | -26.93 | 74.00 | 200 | 351 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

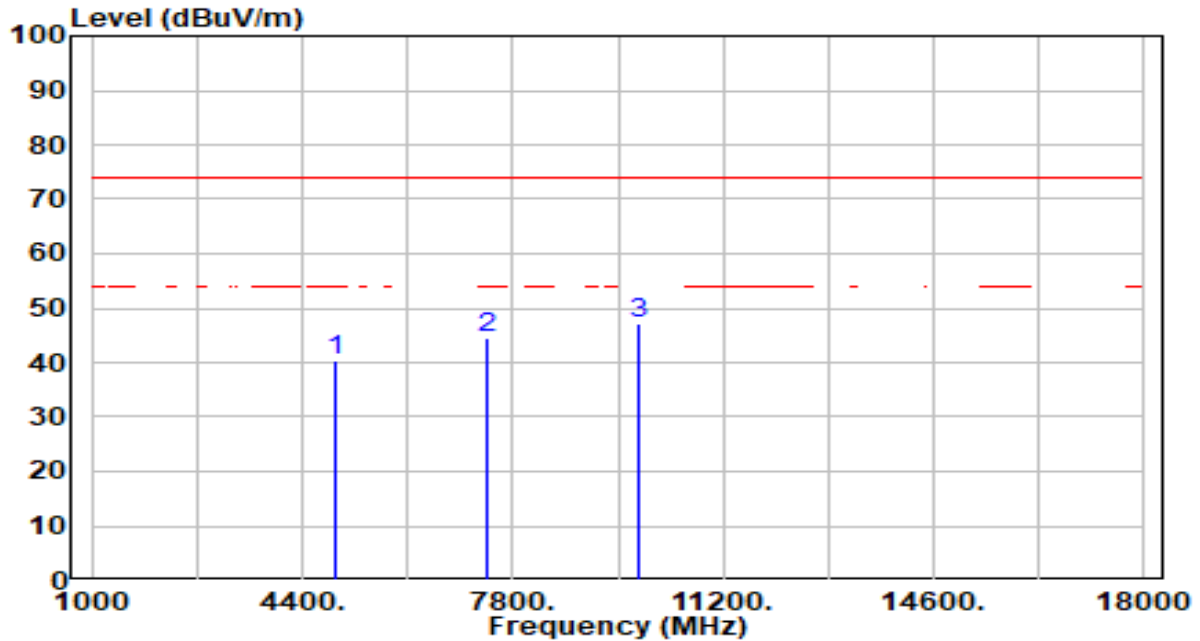


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4924.000 | 39.72 | 0.49 | 40.21 | -33.79 | 74.00 | 200 | 148 | Peak |
| 2 | 7386.000 | 38.97 | 5.64 | 44.60 | -29.40 | 74.00 | 200 | 174 | Peak |
| 3 | * 9848.000 | 41.75 | 5.39 | 47.14 | -26.86 | 74.00 | 200 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

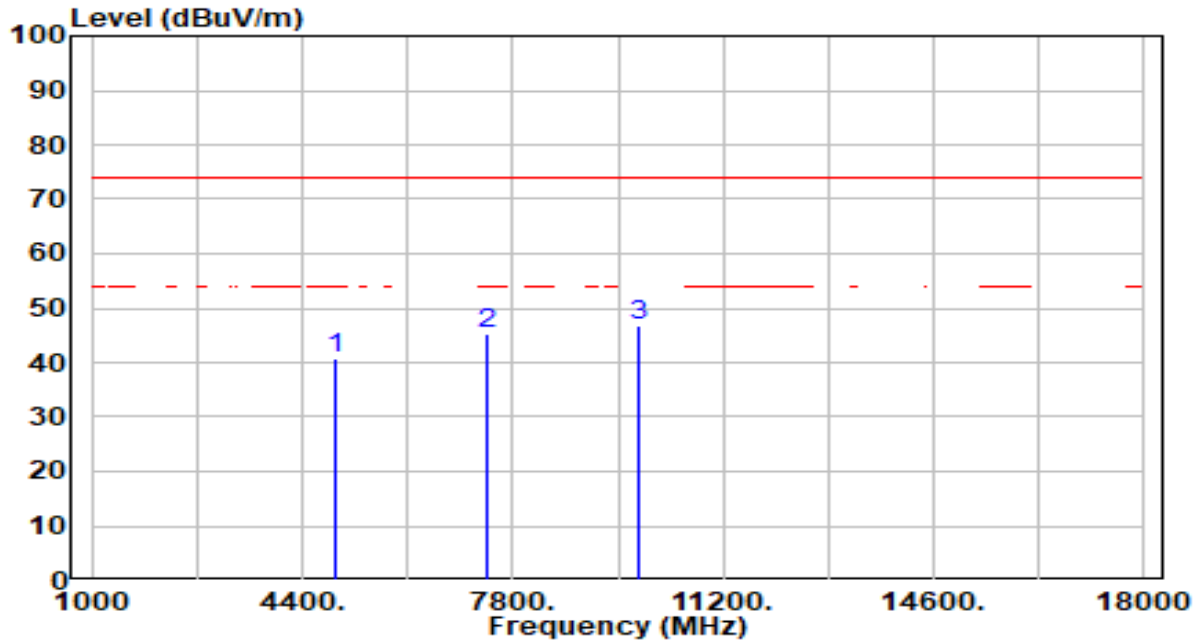


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4924.000 | 40.16 | 0.49 | 40.65 | -33.35 | 74.00 | 200 | 0 | Peak |
| 2 | 7386.000 | 39.46 | 5.64 | 45.10 | -28.90 | 74.00 | 200 | 0 | Peak |
| 3 | * 9848.000 | 41.53 | 5.39 | 46.91 | -27.09 | 74.00 | 200 | 306 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

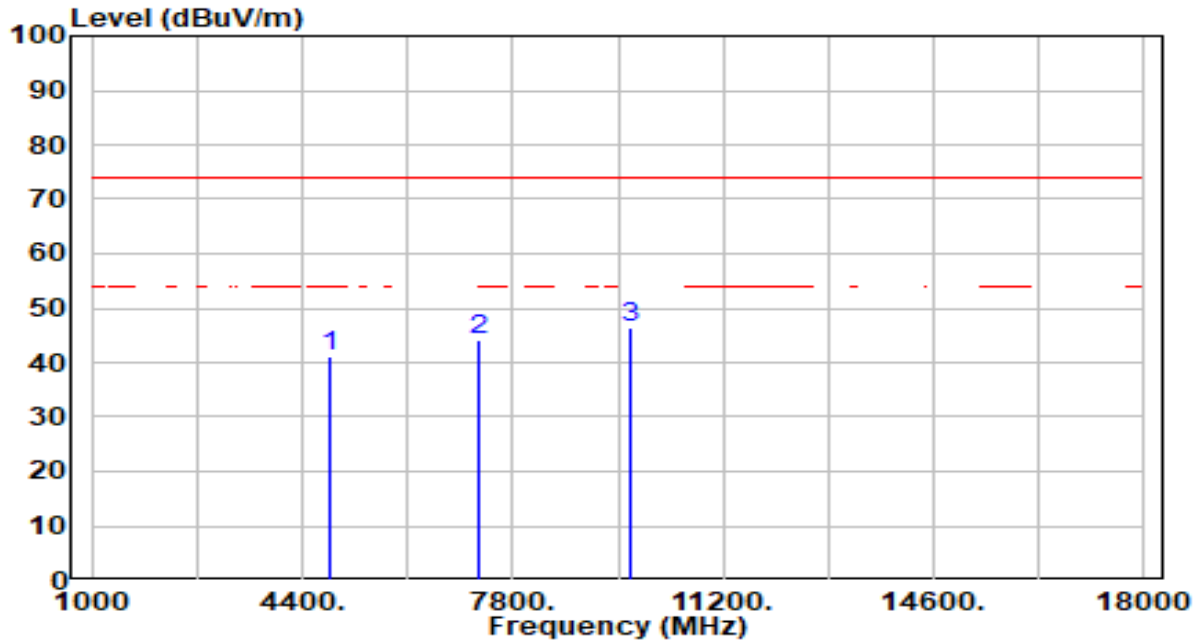


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4844.000 | 40.67 | 0.28 | 40.95 | -33.05 | 74.00 | 200 | 160 | Peak |
| 2 | 7266.000 | 38.60 | 5.56 | 44.17 | -29.83 | 74.00 | 200 | 0 | Peak |
| 3 | * 9688.000 | 41.10 | 5.32 | 46.41 | -27.59 | 74.00 | 0 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

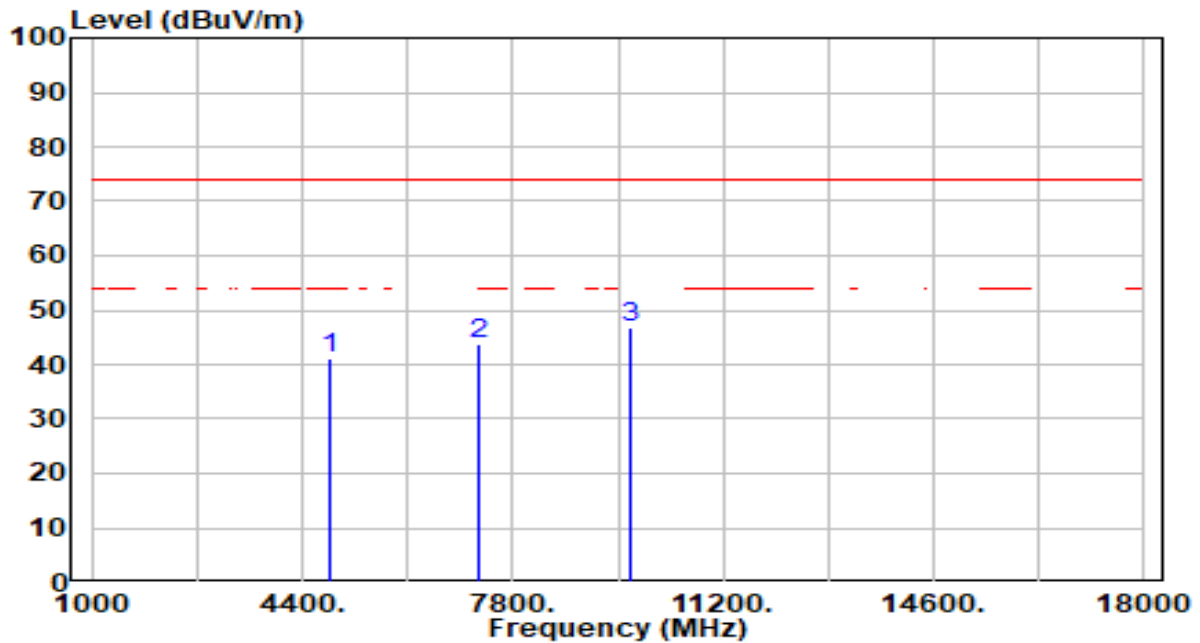


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4844.000 | 40.95 | 0.28 | 41.24 | -32.76 | 74.00 | 200 | 309 | Peak |
| 2 | 7266.000 | 38.32 | 5.56 | 43.88 | -30.12 | 74.00 | 200 | 223 | Peak |
| 3 | * 9688.000 | 41.40 | 5.32 | 46.72 | -27.28 | 74.00 | 200 | 197 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

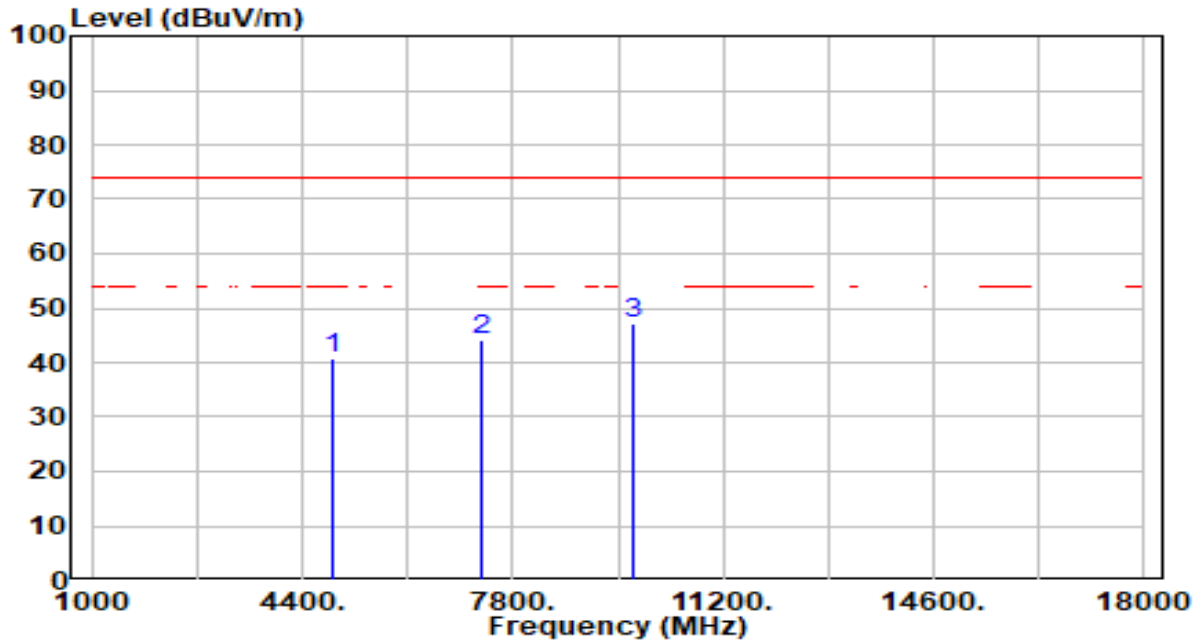


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 40.31 | 0.36 | 40.67 | -33.33 | 74.00 | 200 | 112 | Peak |
| 2 | 7311.000 | 38.43 | 5.59 | 44.02 | -29.98 | 74.00 | 200 | 161 | Peak |
| 3 | * 9748.000 | 41.65 | 5.34 | 47.00 | -27.00 | 74.00 | 200 | 169 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

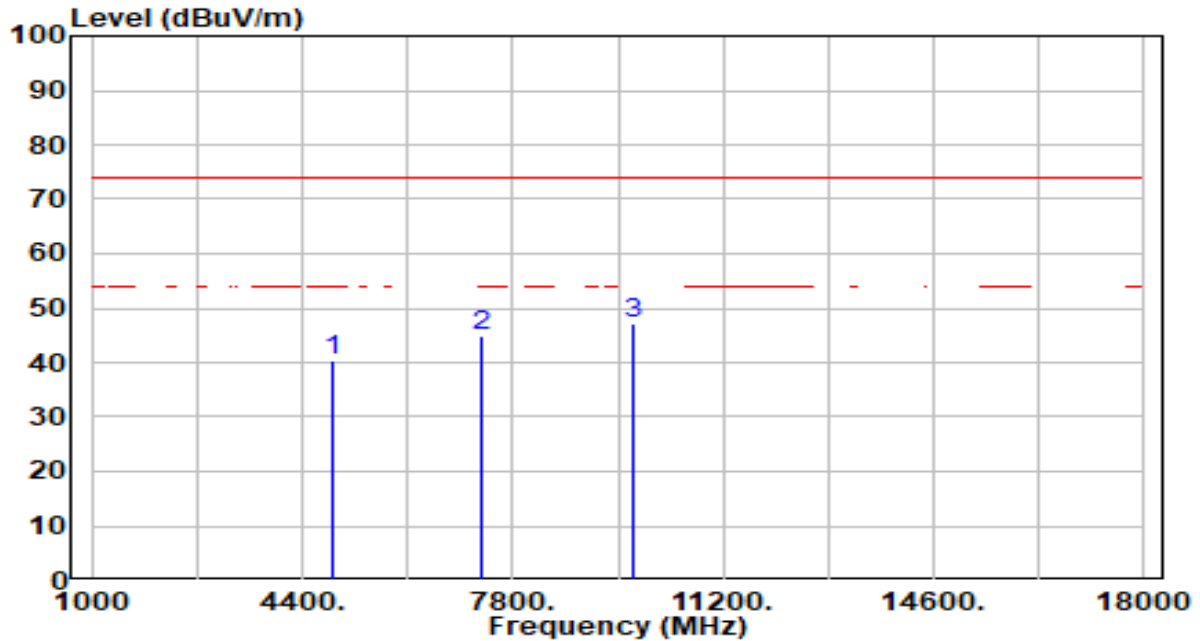


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 40.07 | 0.36 | 40.44 | -33.56 | 74.00 | 200 | 257 | Peak |
| 2 | 7311.000 | 39.30 | 5.59 | 44.89 | -29.11 | 74.00 | 200 | 11 | Peak |
| 3 | * 9748.000 | 41.64 | 5.34 | 46.98 | -27.02 | 74.00 | 200 | 360 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

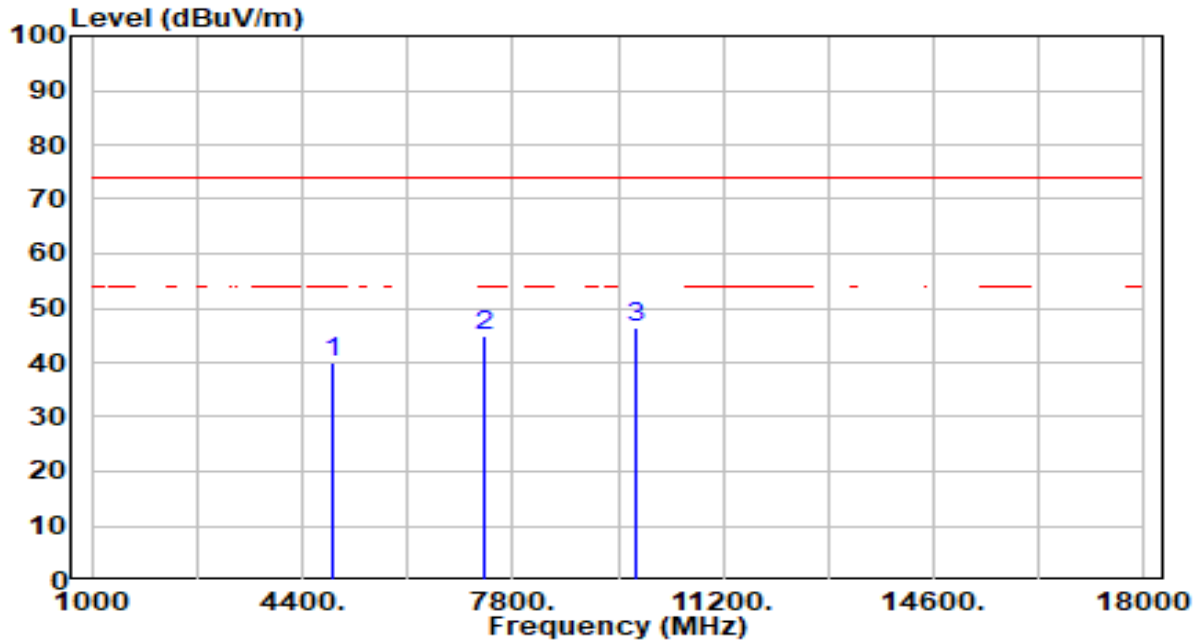


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4904.000 | 39.55 | 0.44 | 39.99 | -34.01 | 74.00 | 200 | 348 | Peak |
| 2 | 7356.000 | 39.18 | 5.62 | 44.80 | -29.20 | 74.00 | 200 | 348 | Peak |
| 3 | * 9808.000 | 41.07 | 5.37 | 46.44 | -27.56 | 74.00 | 200 | 317 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

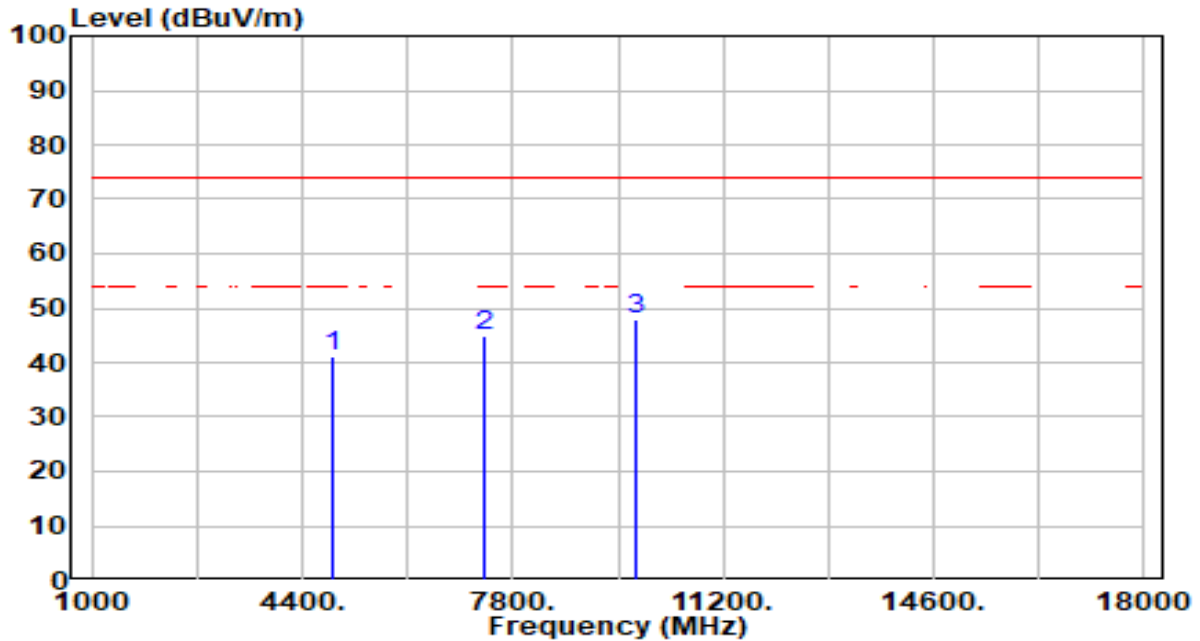


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4904.000 | 40.80 | 0.44 | 41.24 | -32.76 | 74.00 | 200 | 281 | Peak |
| 2 | 7356.000 | 39.11 | 5.62 | 44.73 | -29.27 | 74.00 | 200 | 195 | Peak |
| 3 | * 9808.000 | 42.49 | 5.37 | 47.86 | -26.14 | 74.00 | 200 | 275 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

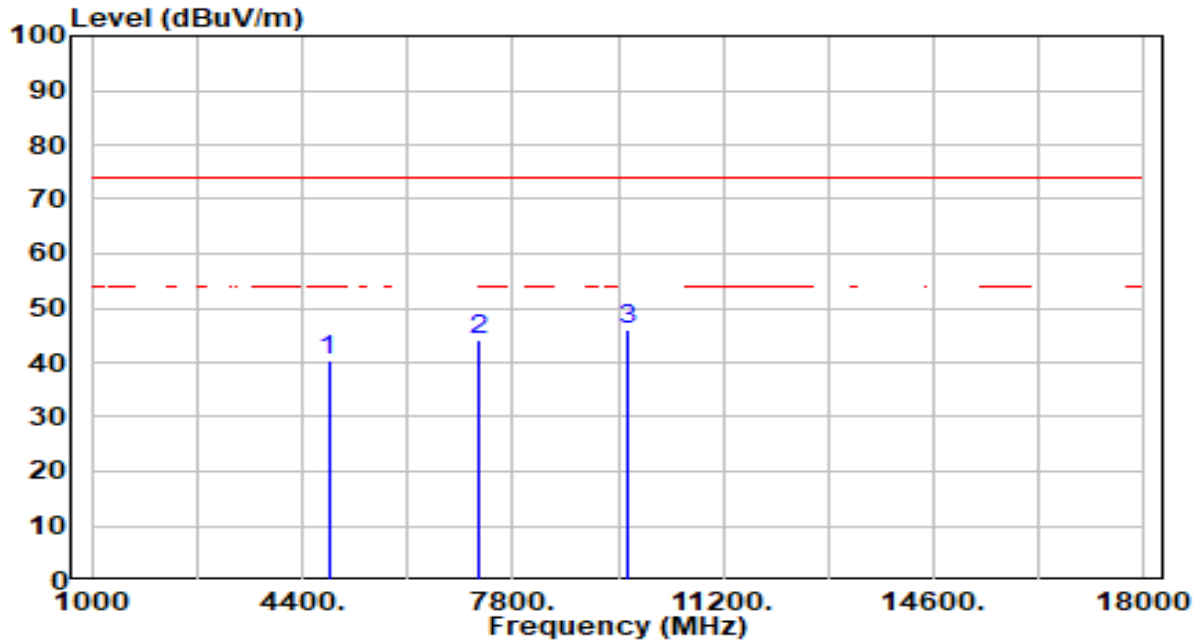


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4824.000 | 40.04 | 0.23 | 40.27 | -33.73 | 74.00 | 200 | 25 | Peak |
| 2 | 7236.000 | 38.54 | 5.54 | 44.08 | -29.92 | 74.00 | 200 | 148 | Peak |
| 3 | * 9648.000 | 40.92 | 5.30 | 46.22 | -27.78 | 74.00 | 200 | 219 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

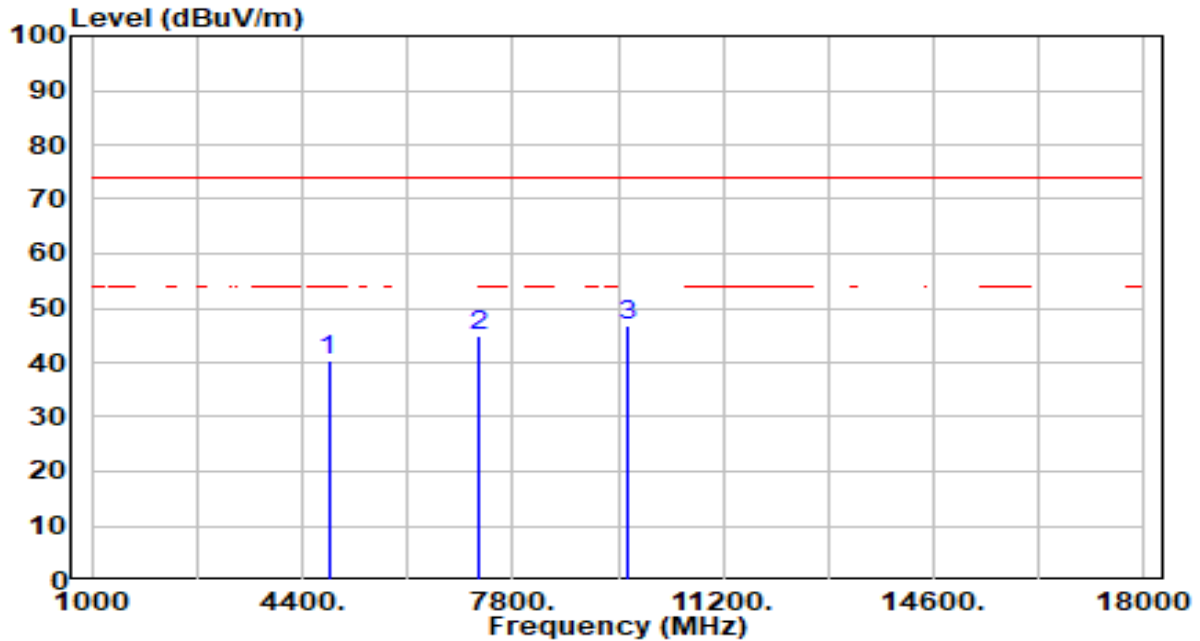


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4824.000 | 40.20 | 0.23 | 40.44 | -33.56 | 74.00 | 200 | 143 | Peak |
| 2 | 7236.000 | 39.40 | 5.54 | 44.95 | -29.05 | 74.00 | 200 | 274 | Peak |
| 3 | * 9648.000 | 41.54 | 5.30 | 46.84 | -27.16 | 74.00 | 200 | 360 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

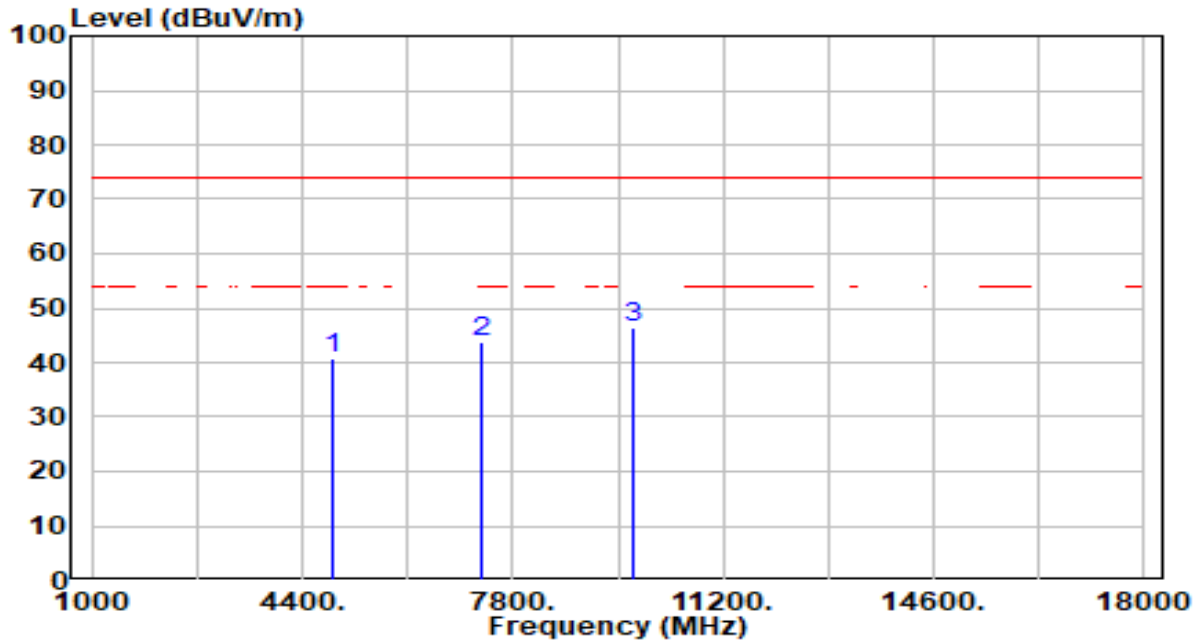


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 40.32 | 0.36 | 40.68 | -33.32 | 74.00 | 200 | 97 | Peak |
| 2 | 7311.000 | 38.21 | 5.59 | 43.80 | -30.20 | 74.00 | 200 | 195 | Peak |
| 3 | * 9748.000 | 41.01 | 5.34 | 46.36 | -27.64 | 74.00 | 200 | 97 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

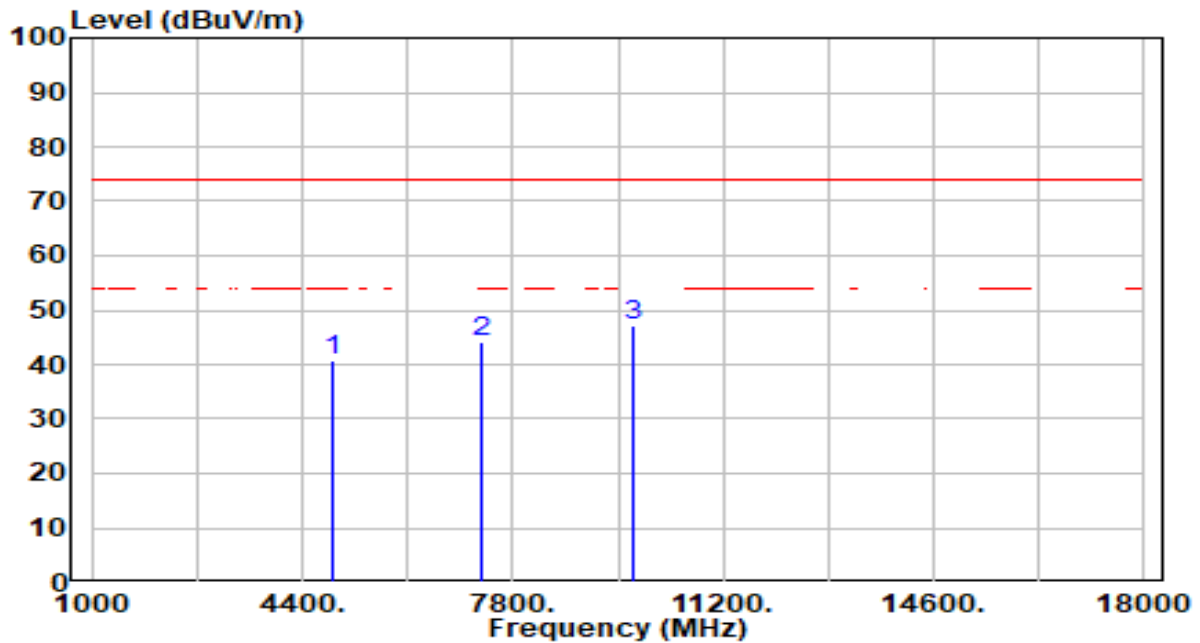


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 40.33 | 0.36 | 40.69 | -33.31 | 74.00 | 200 | 16 | Peak |
| 2 | 7311.000 | 38.51 | 5.59 | 44.10 | -29.90 | 74.00 | 200 | 44 | Peak |
| 3 | * 9748.000 | 41.84 | 5.34 | 47.18 | -26.82 | 74.00 | 200 | 55 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

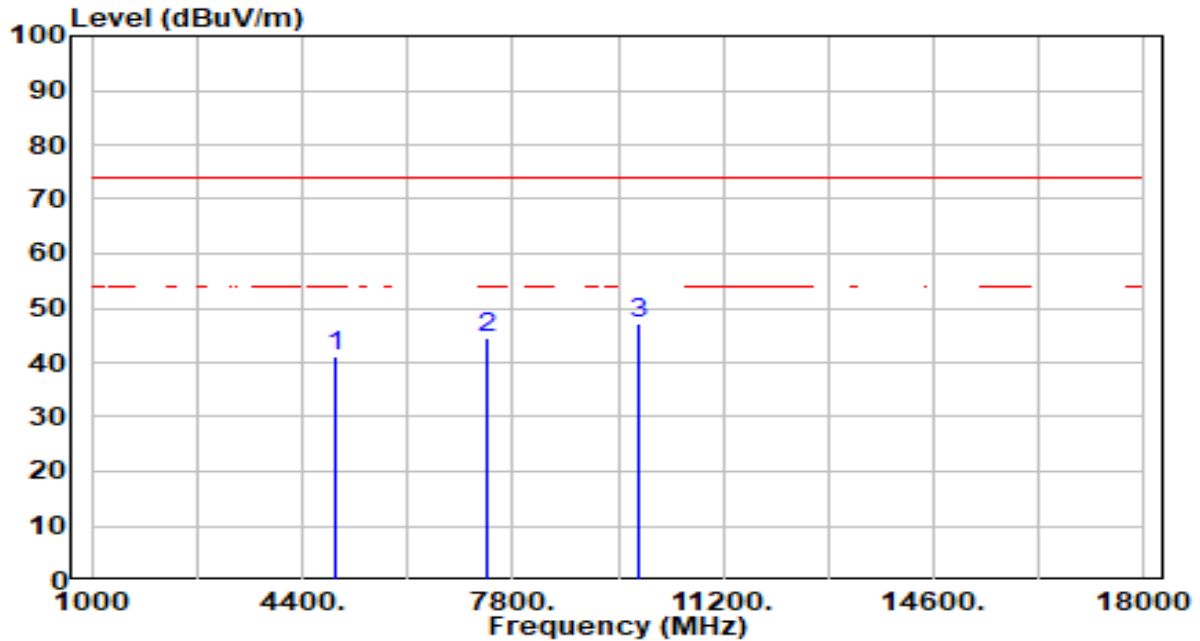


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4924.000 | 40.61 | 0.49 | 41.10 | -32.90 | 74.00 | 200 | 345 | Peak |
| 2 | 7386.000 | 38.76 | 5.64 | 44.40 | -29.60 | 74.00 | 200 | 104 | Peak |
| 3 | * 9848.000 | 41.77 | 5.39 | 47.16 | -26.84 | 74.00 | 200 | 112 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

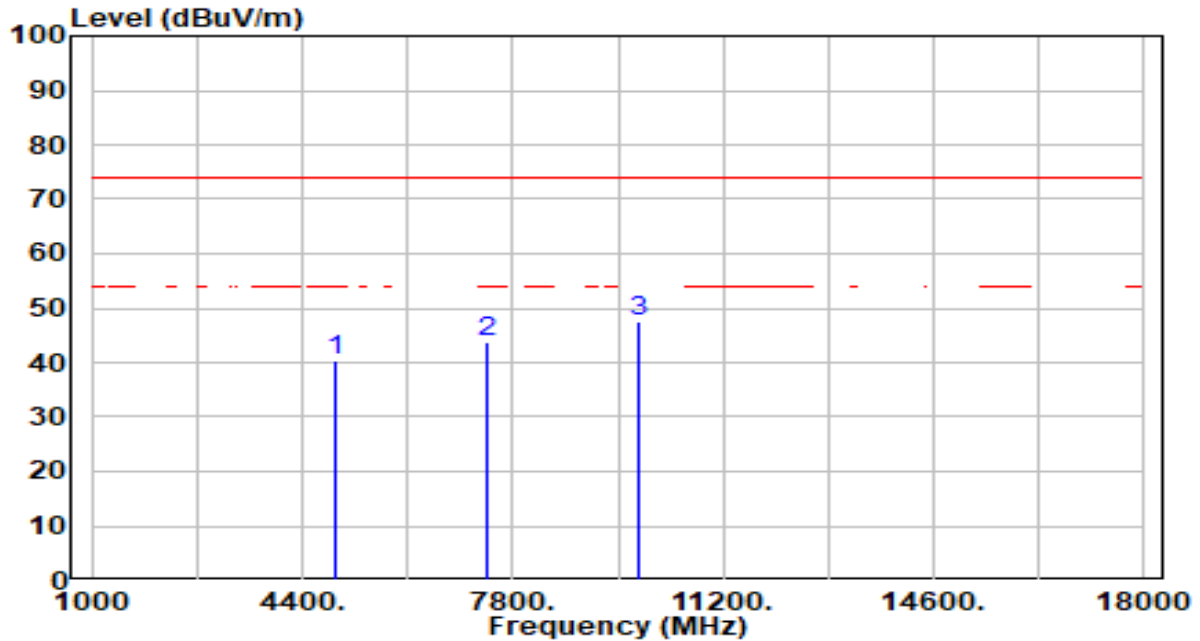


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4924.000 | 40.04 | 0.49 | 40.53 | -33.47 | 74.00 | 200 | 10 | Peak |
| 2 | 7386.000 | 38.29 | 5.64 | 43.93 | -30.07 | 74.00 | 200 | 360 | Peak |
| 3 | * 9848.000 | 42.01 | 5.39 | 47.40 | -26.60 | 74.00 | 200 | 273 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

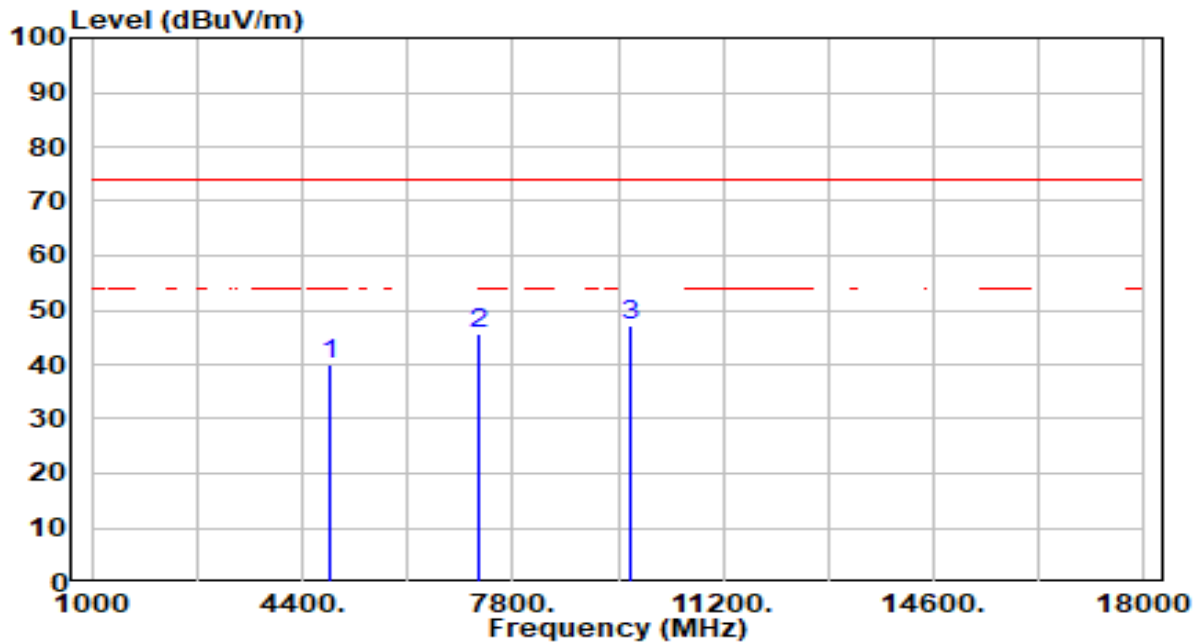


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4844.000 | 39.65 | 0.28 | 39.94 | -34.06 | 74.00 | 200 | 81 | Peak |
| 2 | 7266.000 | 40.02 | 5.56 | 45.58 | -28.42 | 74.00 | 200 | 109 | Peak |
| 3 | * 9688.000 | 41.67 | 5.32 | 46.99 | -27.01 | 74.00 | 200 | 168 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

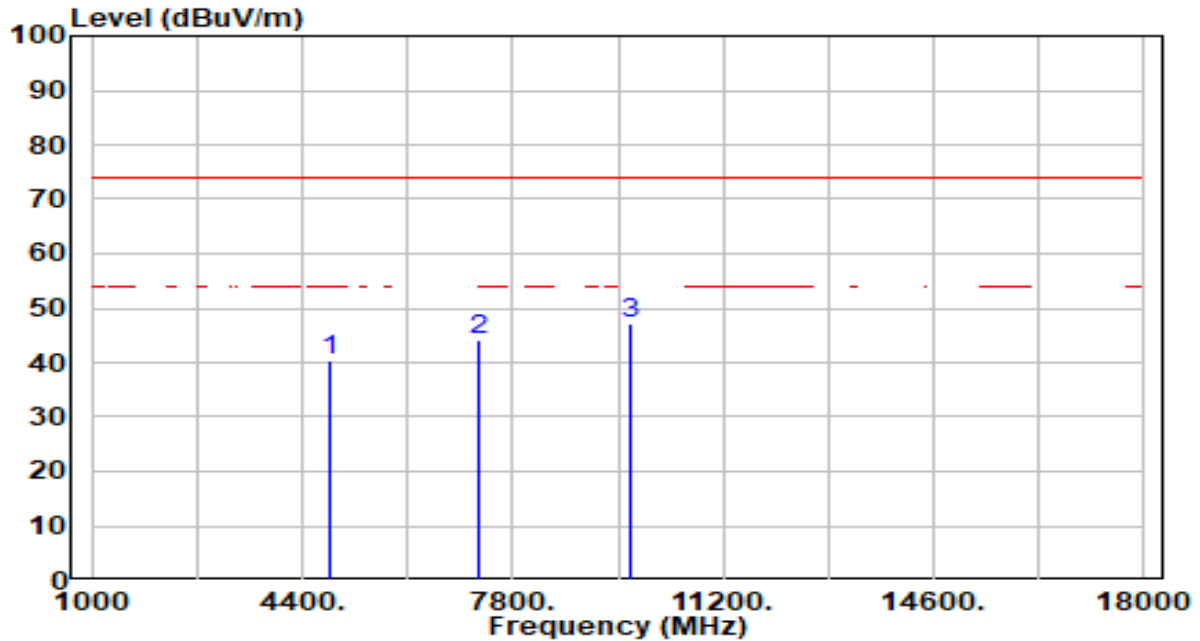


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4844.000 | 39.99 | 0.28 | 40.28 | -33.72 | 74.00 | 200 | 347 | Peak |
| 2 | 7266.000 | 38.47 | 5.56 | 44.03 | -29.97 | 74.00 | 200 | 352 | Peak |
| 3 | * 9688.000 | 41.90 | 5.32 | 47.22 | -26.78 | 74.00 | 200 | 164 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

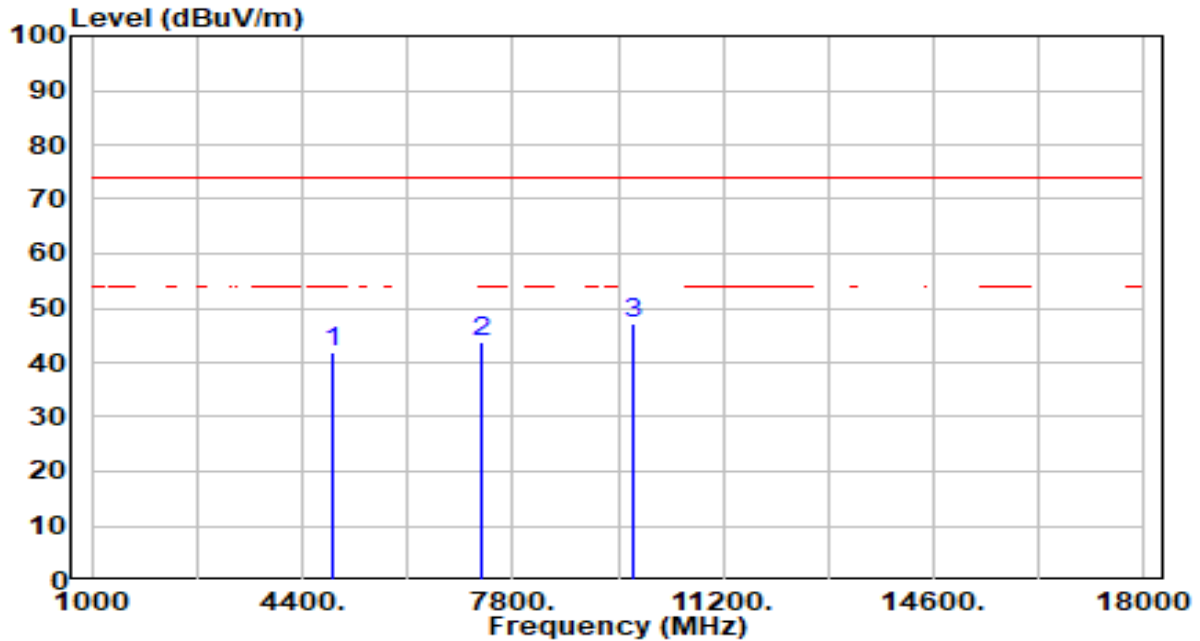


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 41.34 | 0.36 | 41.71 | -32.29 | 74.00 | 200 | 353 | Peak |
| 2 | 7311.000 | 38.27 | 5.59 | 43.86 | -30.14 | 74.00 | 200 | 86 | Peak |
| 3 | * 9748.000 | 41.73 | 5.34 | 47.08 | -26.92 | 74.00 | 200 | 66 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

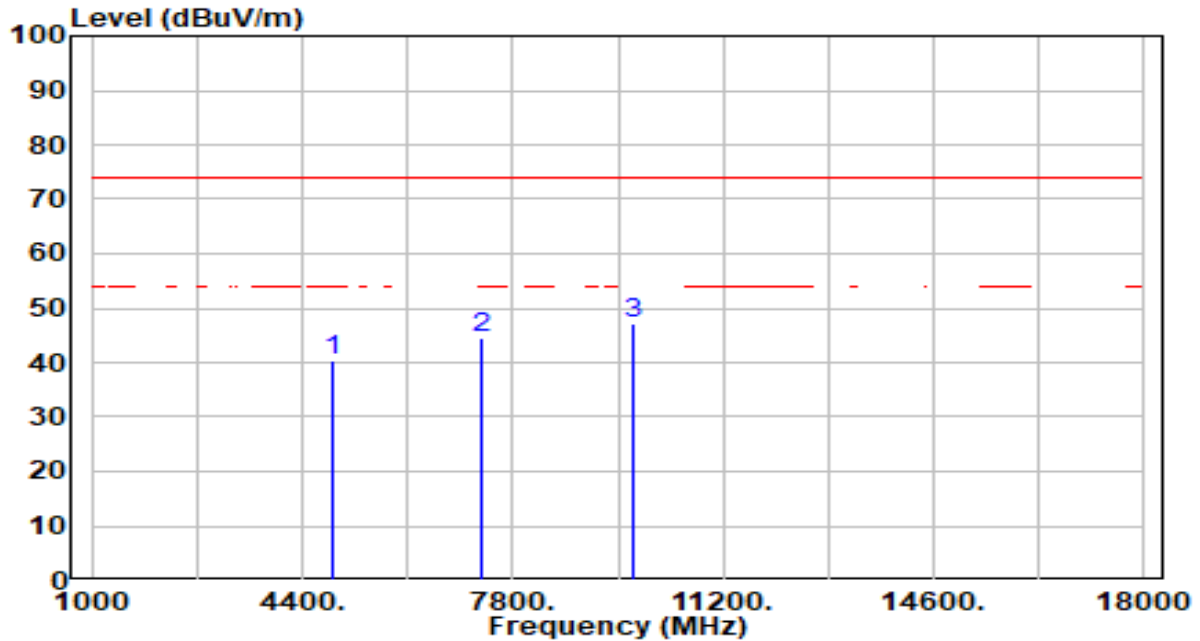


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 40.17 | 0.36 | 40.54 | -33.46 | 74.00 | 200 | 75 | Peak |
| 2 | 7311.000 | 38.93 | 5.59 | 44.52 | -29.48 | 74.00 | 200 | 188 | Peak |
| 3 | * 9748.000 | 41.73 | 5.34 | 47.08 | -26.92 | 74.00 | 200 | 111 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

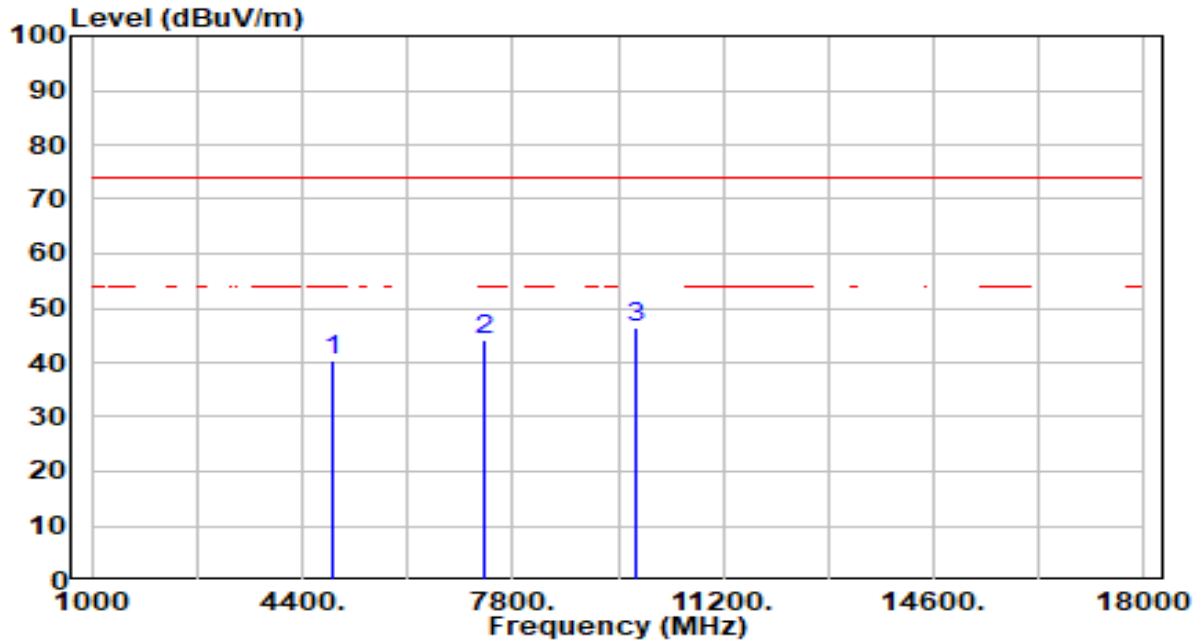


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4904.000 | 39.95 | 0.44 | 40.39 | -33.61 | 74.00 | 200 | 265 | Peak |
| 2 | 7356.000 | 38.71 | 5.62 | 44.33 | -29.67 | 74.00 | 200 | 0 | Peak |
| 3 | * 9808.000 | 40.95 | 5.37 | 46.32 | -27.68 | 74.00 | 200 | 33 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

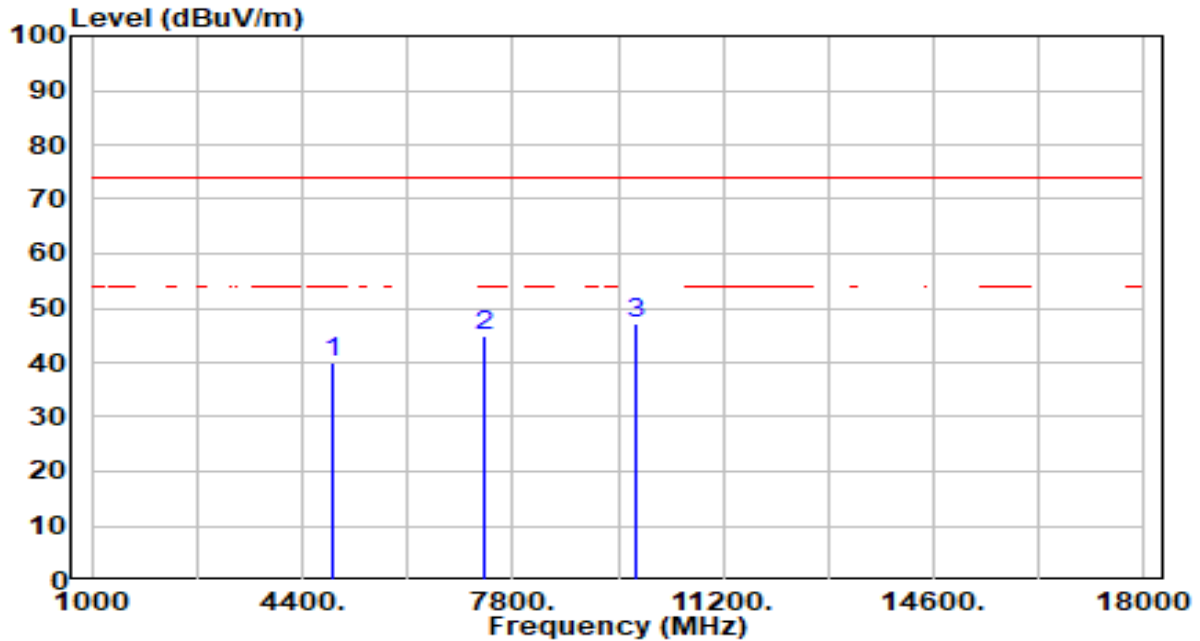


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4904.000 | 39.75 | 0.44 | 40.19 | -33.81 | 74.00 | 200 | 163 | Peak |
| 2 | 7356.000 | 39.35 | 5.62 | 44.97 | -29.03 | 74.00 | 200 | 322 | Peak |
| 3 | * 9808.000 | 41.71 | 5.37 | 47.08 | -26.92 | 74.00 | 200 | 29 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

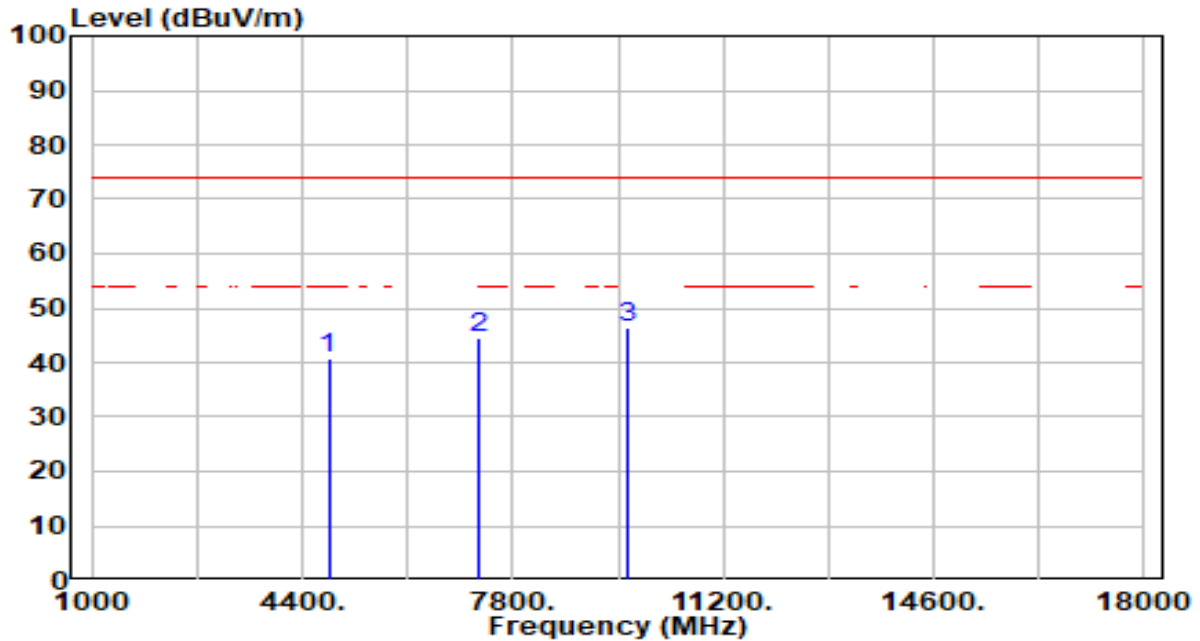


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4824.000 | 40.55 | 0.23 | 40.79 | -33.21 | 74.00 | 200 | 251 | Peak |
| 2 | 7236.000 | 38.87 | 5.54 | 44.41 | -29.59 | 74.00 | 200 | 188 | Peak |
| 3 | * 9648.000 | 41.18 | 5.30 | 46.49 | -27.51 | 74.00 | 200 | 10 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

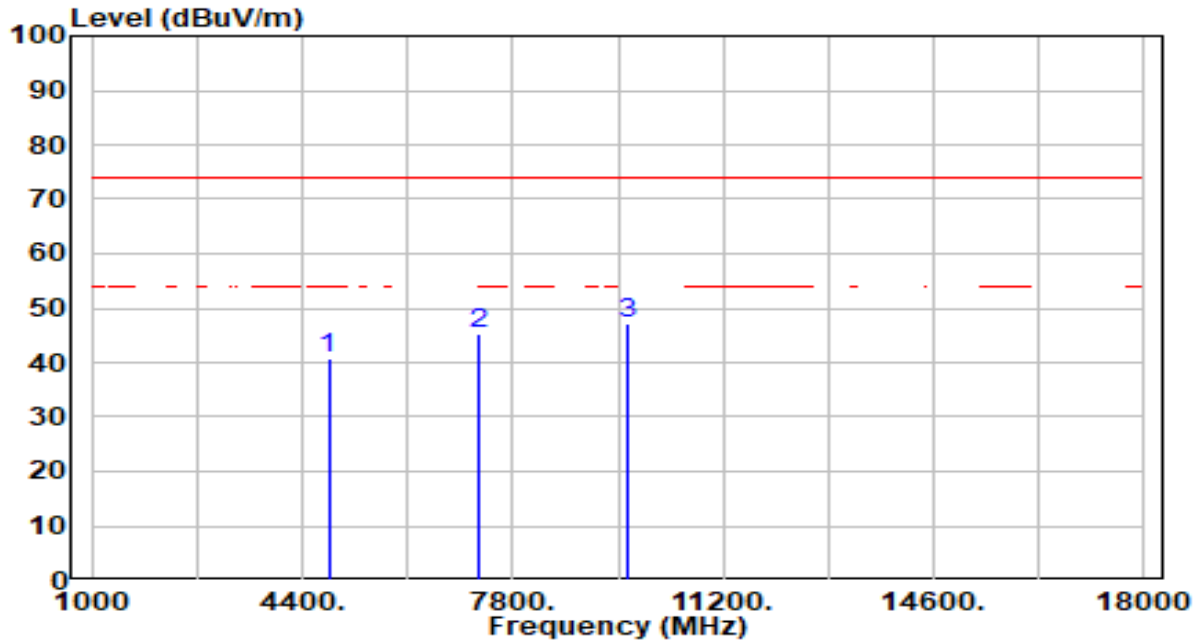


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4824.000 | 40.36 | 0.23 | 40.60 | -33.40 | 74.00 | 200 | 284 | Peak |
| 2 | 7236.000 | 39.79 | 5.54 | 45.33 | -28.67 | 74.00 | 200 | 115 | Peak |
| 3 | * 9648.000 | 41.81 | 5.30 | 47.11 | -26.89 | 74.00 | 200 | 346 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

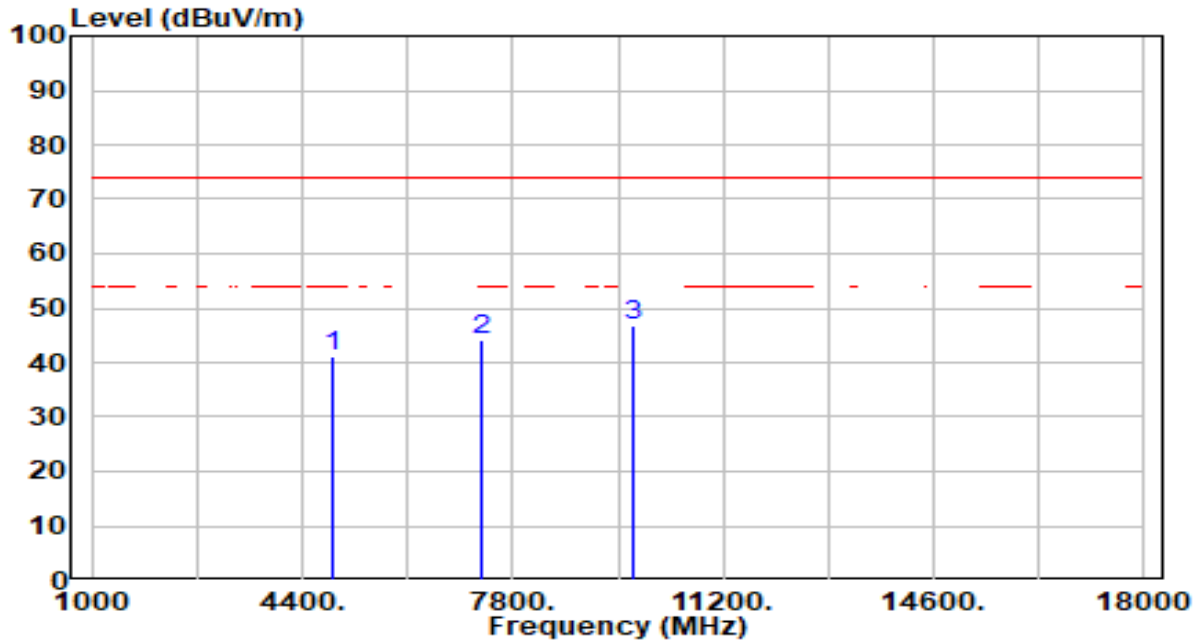


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 40.93 | 0.36 | 41.29 | -32.71 | 74.00 | 200 | 0 | Peak |
| 2 | 7311.000 | 38.58 | 5.59 | 44.17 | -29.83 | 74.00 | 200 | 45 | Peak |
| 3 | * 9748.000 | 41.58 | 5.34 | 46.92 | -27.08 | 74.00 | 200 | 190 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

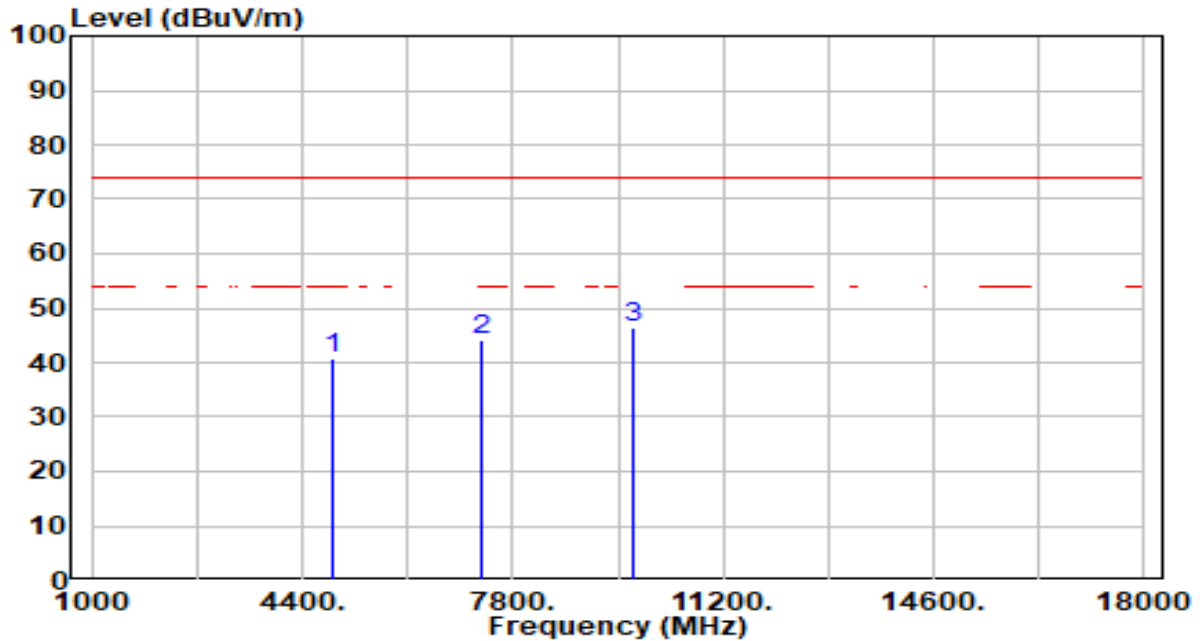


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 40.33 | 0.36 | 40.70 | -33.30 | 74.00 | 200 | 108 | Peak |
| 2 | 7311.000 | 38.45 | 5.59 | 44.04 | -29.96 | 74.00 | 200 | 136 | Peak |
| 3 | * 9748.000 | 41.07 | 5.34 | 46.42 | -27.58 | 74.00 | 200 | 60 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

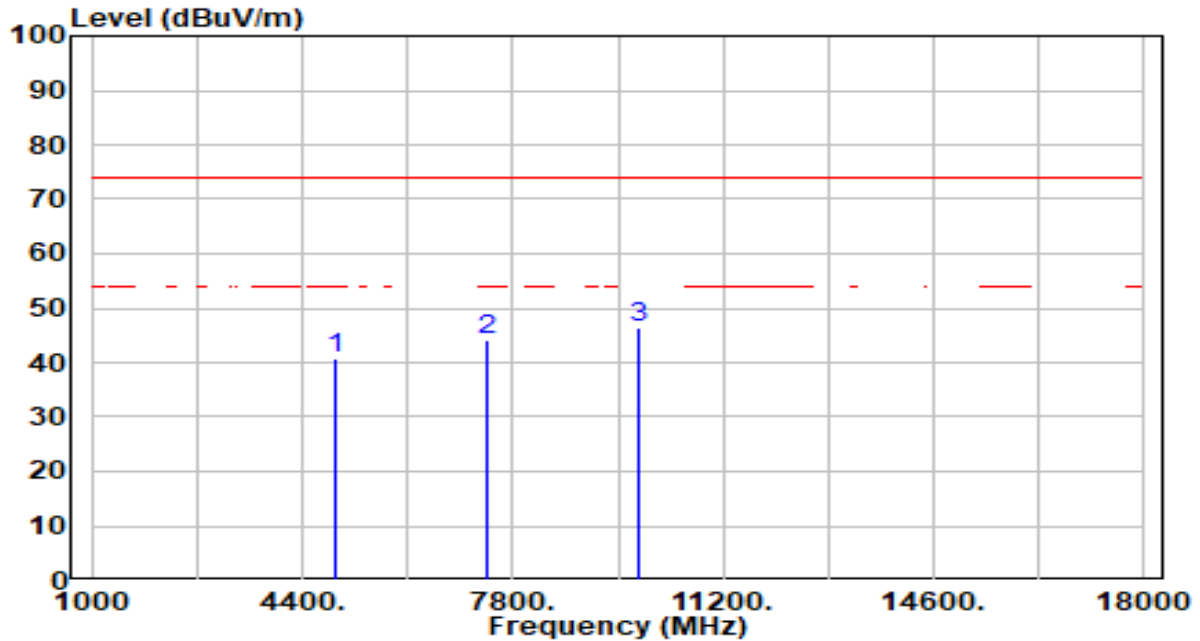


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4924.000 | 40.24 | 0.49 | 40.73 | -33.27 | 74.00 | 200 | 230 | Peak |
| 2 | 7386.000 | 38.48 | 5.64 | 44.11 | -29.89 | 74.00 | 200 | 317 | Peak |
| 3 | * 9848.000 | 40.90 | 5.39 | 46.28 | -27.72 | 74.00 | 200 | 28 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

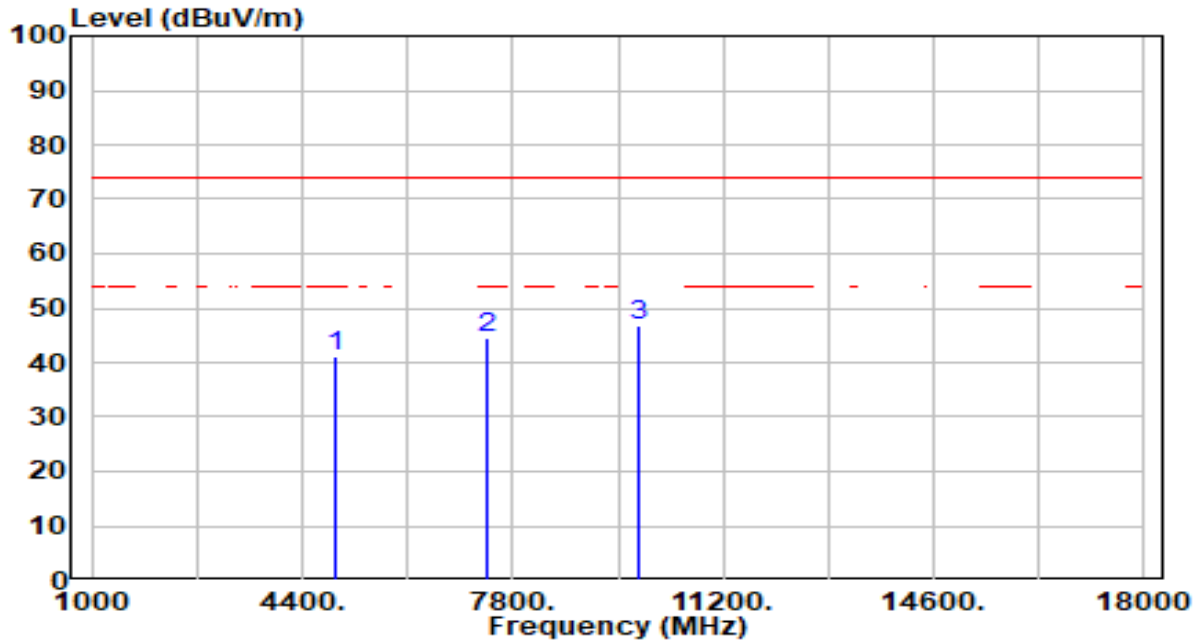


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4924.000 | 40.52 | 0.49 | 41.01 | -32.99 | 74.00 | 200 | 23 | Peak |
| 2 | 7386.000 | 38.83 | 5.64 | 44.47 | -29.53 | 74.00 | 200 | 321 | Peak |
| 3 | * 9848.000 | 41.33 | 5.39 | 46.71 | -27.29 | 74.00 | 200 | 6 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

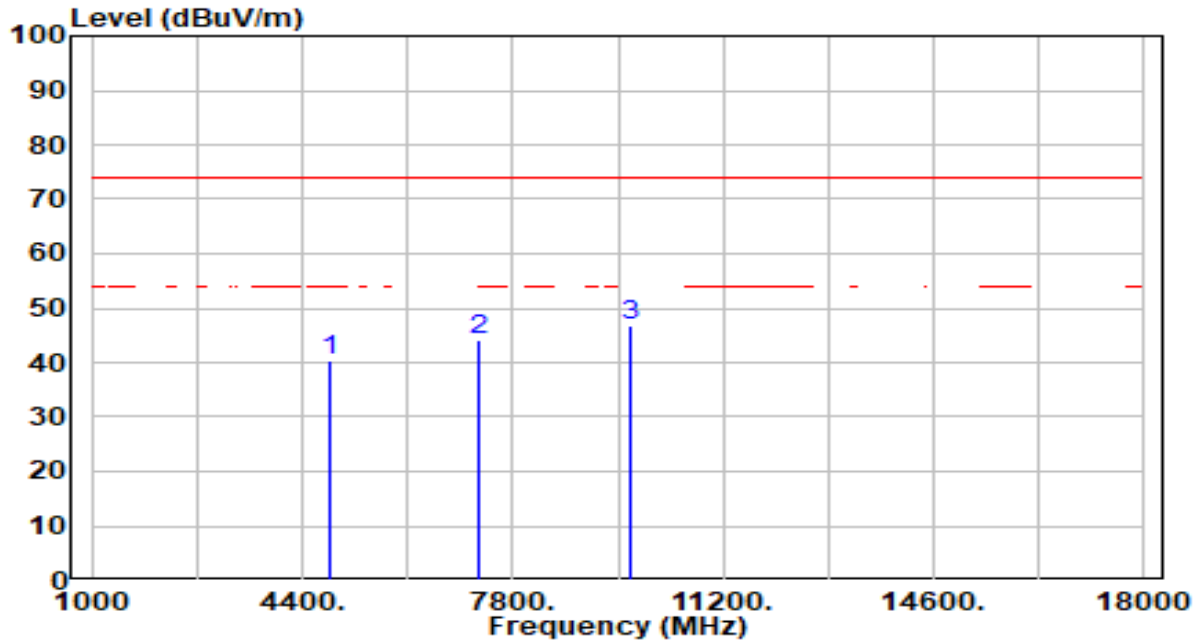


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4844.000 | 39.95 | 0.28 | 40.23 | -33.77 | 74.00 | 200 | 243 | Peak |
| 2 | 7266.000 | 38.62 | 5.56 | 44.19 | -29.81 | 74.00 | 200 | 185 | Peak |
| 3 | * 9688.000 | 41.29 | 5.32 | 46.60 | -27.40 | 74.00 | 200 | 30 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

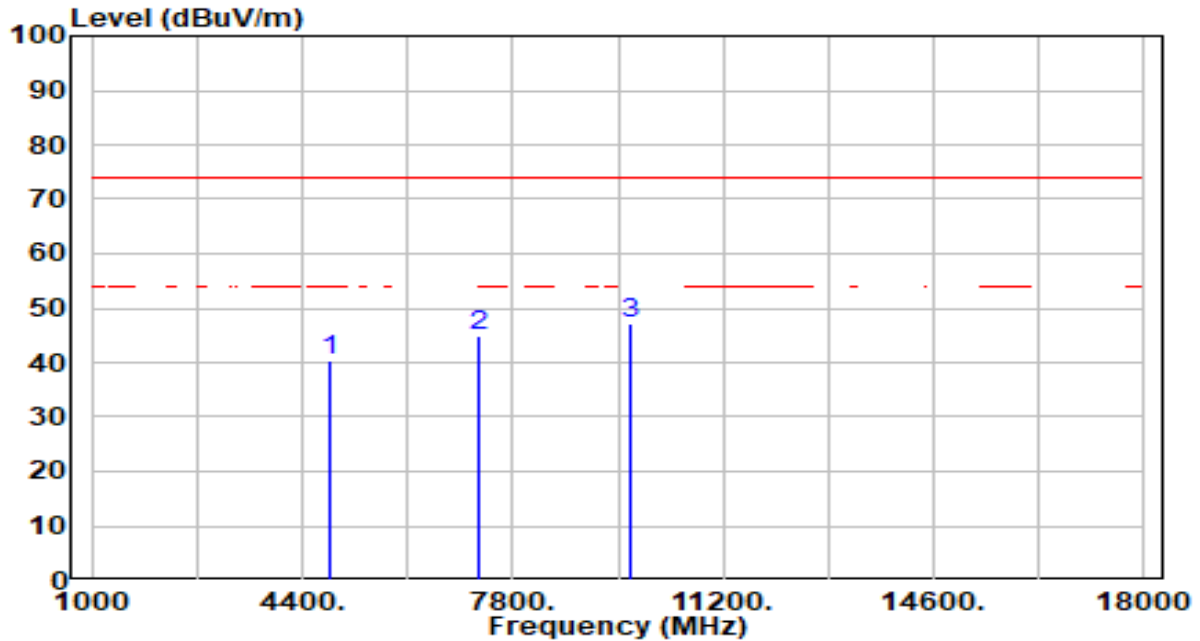


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4844.000 | 40.12 | 0.28 | 40.40 | -33.60 | 74.00 | 200 | 335 | Peak |
| 2 | 7266.000 | 39.29 | 5.56 | 44.85 | -29.15 | 74.00 | 200 | 145 | Peak |
| 3 | * 9688.000 | 41.85 | 5.32 | 47.17 | -26.83 | 74.00 | 200 | 231 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

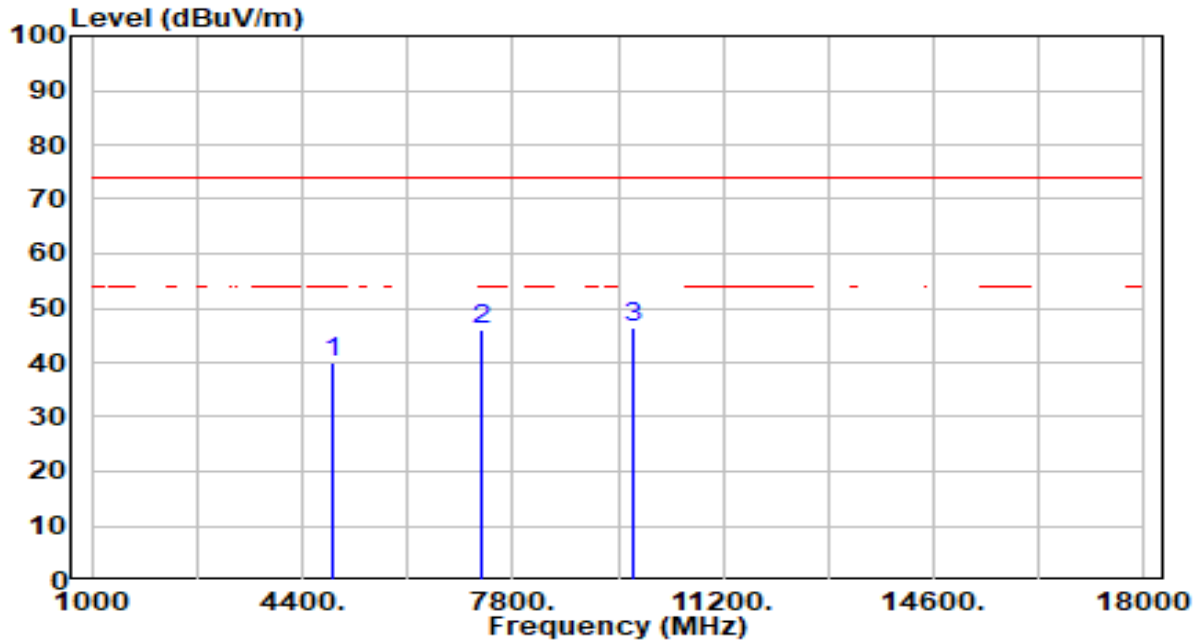


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 39.81 | 0.36 | 40.18 | -33.82 | 74.00 | 200 | 202 | Peak |
| 2 | 7311.000 | 40.30 | 5.59 | 45.89 | -28.11 | 74.00 | 200 | 107 | Peak |
| 3 | * 9748.000 | 41.20 | 5.34 | 46.54 | -27.46 | 74.00 | 200 | 76 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

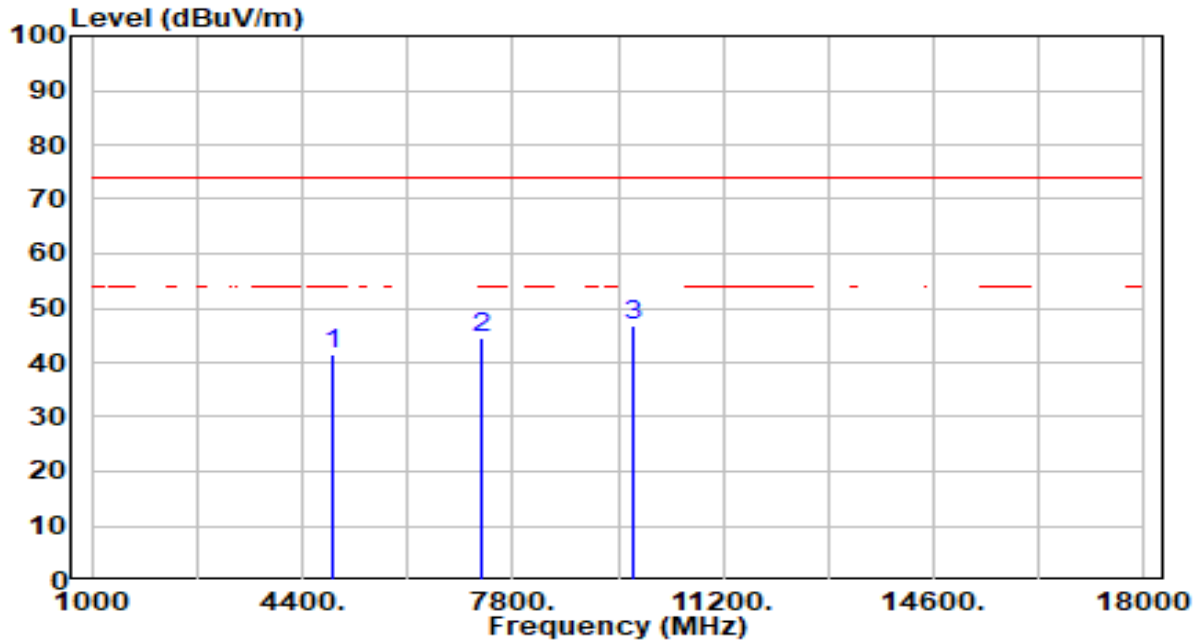


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4874.000 | 41.31 | 0.36 | 41.67 | -32.33 | 74.00 | 200 | 52 | Peak |
| 2 | 7311.000 | 39.11 | 5.59 | 44.70 | -29.30 | 74.00 | 200 | 60 | Peak |
| 3 | * 9748.000 | 41.58 | 5.34 | 46.92 | -27.08 | 74.00 | 200 | 167 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

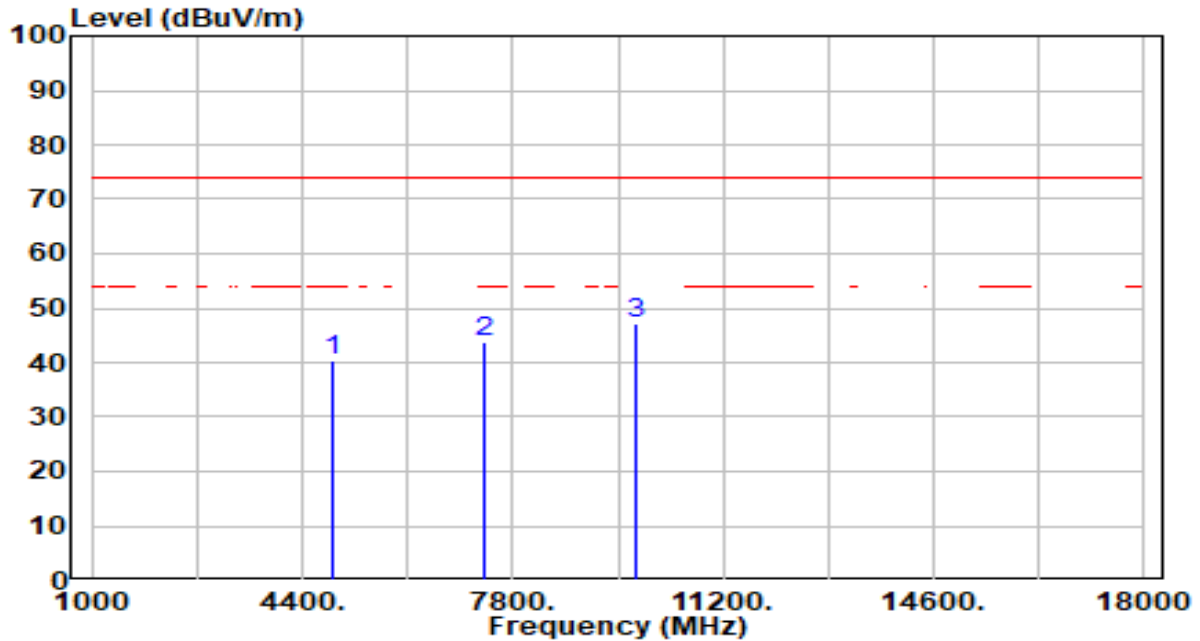


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4904.000 | 39.77 | 0.44 | 40.21 | -33.79 | 74.00 | 200 | 215 | Peak |
| 2 | 7356.000 | 38.30 | 5.62 | 43.91 | -30.09 | 74.00 | 200 | 344 | Peak |
| 3 | * 9808.000 | 41.73 | 5.37 | 47.10 | -26.90 | 74.00 | 200 | 218 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

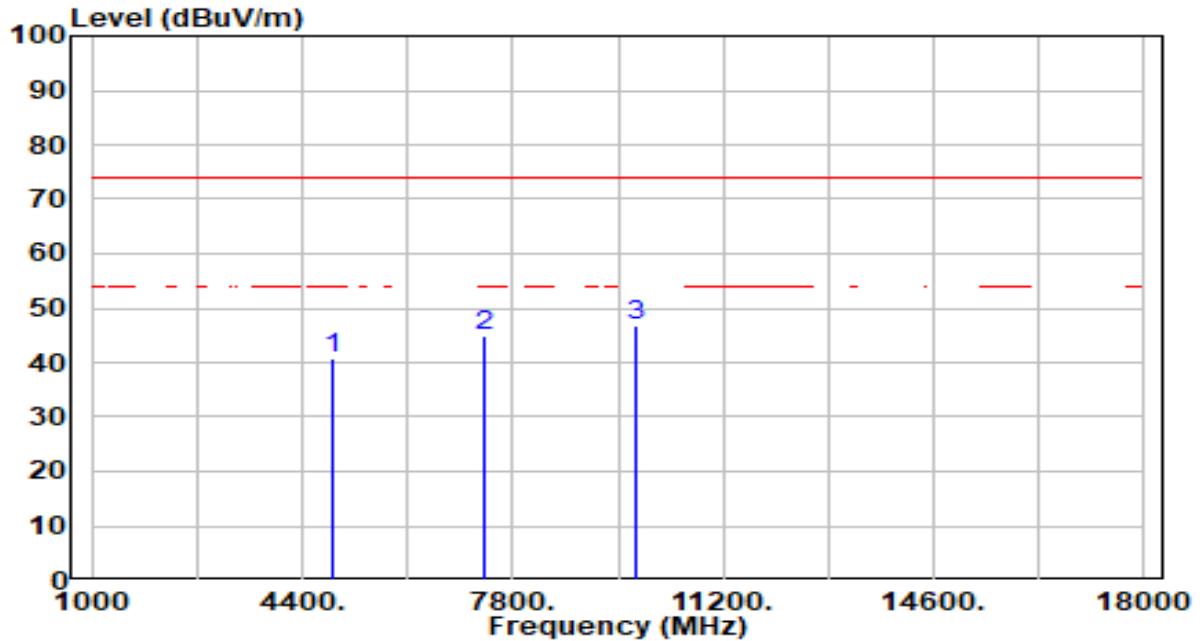


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 4904.000 | 40.26 | 0.44 | 40.70 | -33.30 | 74.00 | 200 | 360 | Peak |
| 2 | 7356.000 | 39.48 | 5.62 | 45.09 | -28.91 | 74.00 | 200 | 0 | Peak |
| 3 | * 9808.000 | 41.54 | 5.37 | 46.91 | -27.09 | 74.00 | 200 | 173 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal Antenna Data

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-22 |
| Factor | BBHA 9170 | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / You |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_Horizontal Ant | Test Voltage | AC 120V/60Hz |

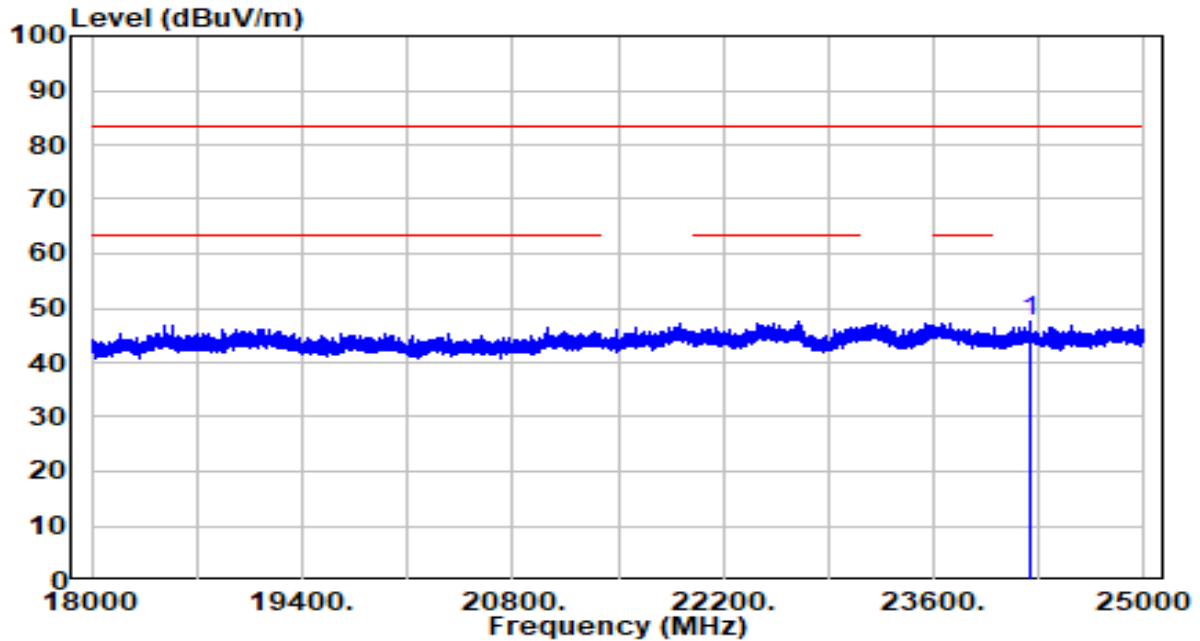


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 24240.440 | 34.93 | 12.52 | 47.45 | -36.05 | 83.50 | 150 | 360 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-22 |
| Factor | BBHA 9170 | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / You |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_Horizontal Ant | Test Voltage | AC 120V/60Hz |

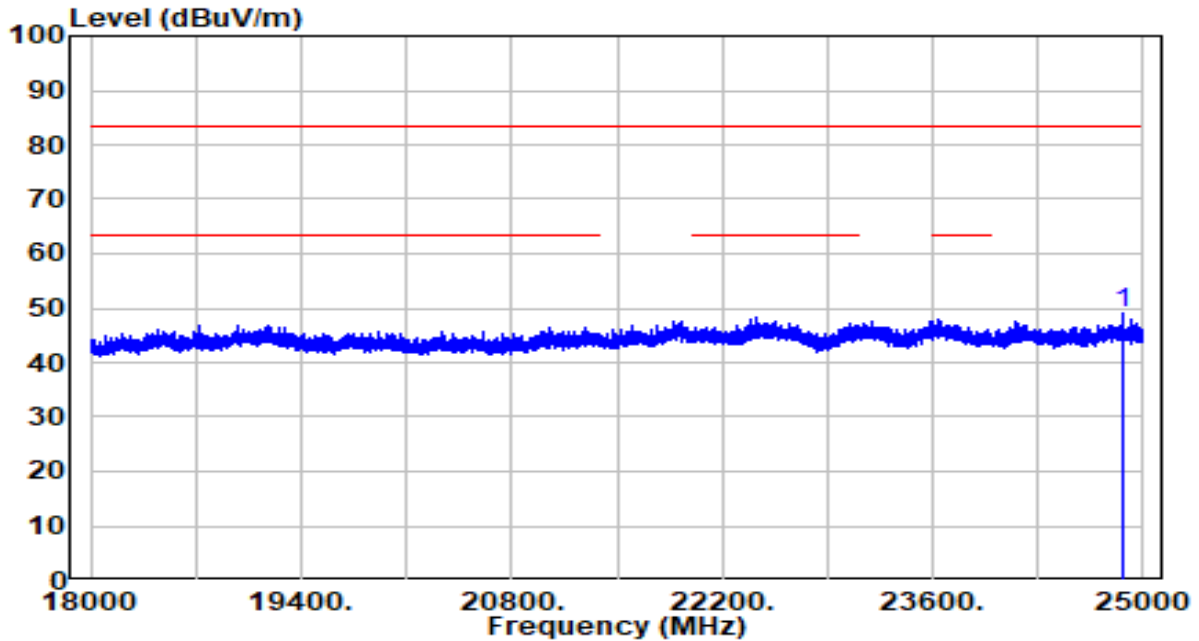


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 24864.000 | 36.04 | 12.93 | 48.97 | -34.53 | 83.50 | 150 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical Antenna Data

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-22 |
| Factor | BBHA 9170 | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / You |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

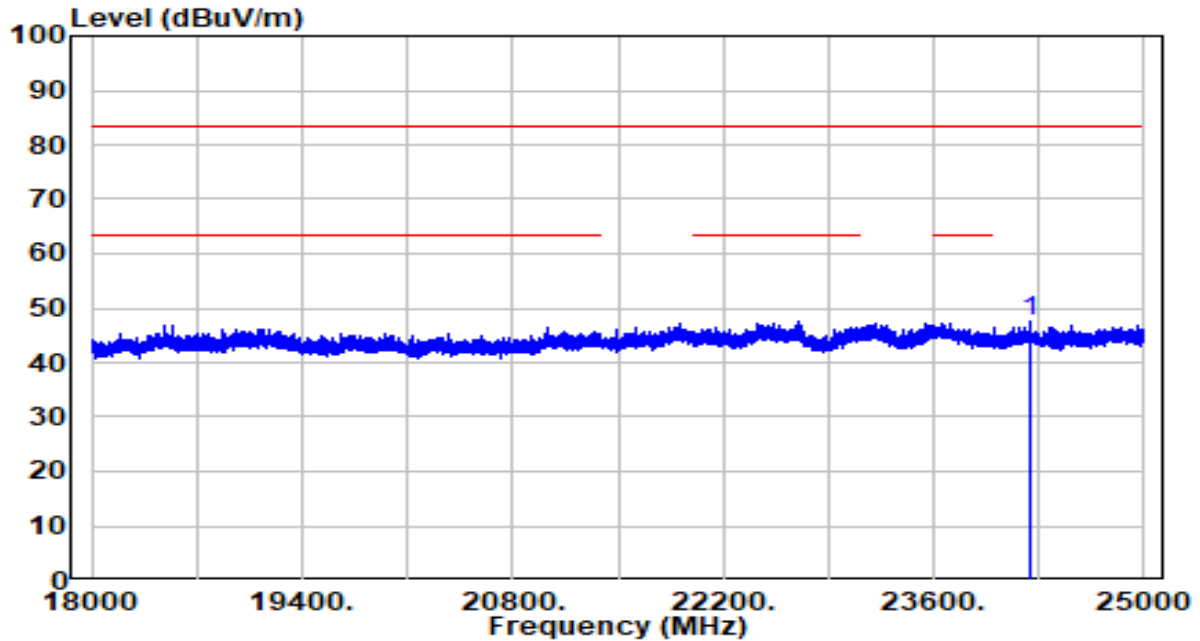


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 24240.440 | 34.93 | 12.52 | 47.45 | -36.05 | 83.50 | 150 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-22 |
| Factor | BBHA 9170 | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / You |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

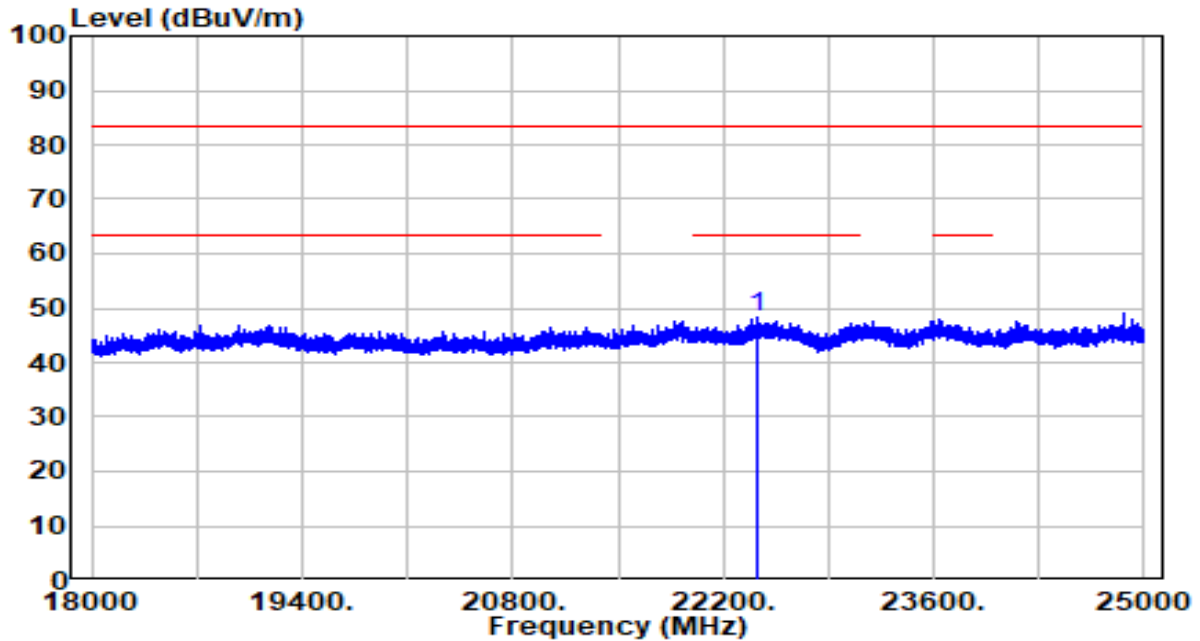


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 22428.880 | 36.66 | 11.80 | 48.46 | -35.04 | 83.50 | 150 | 0 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-22 |
| Factor | BBHA 9170 | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / You |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

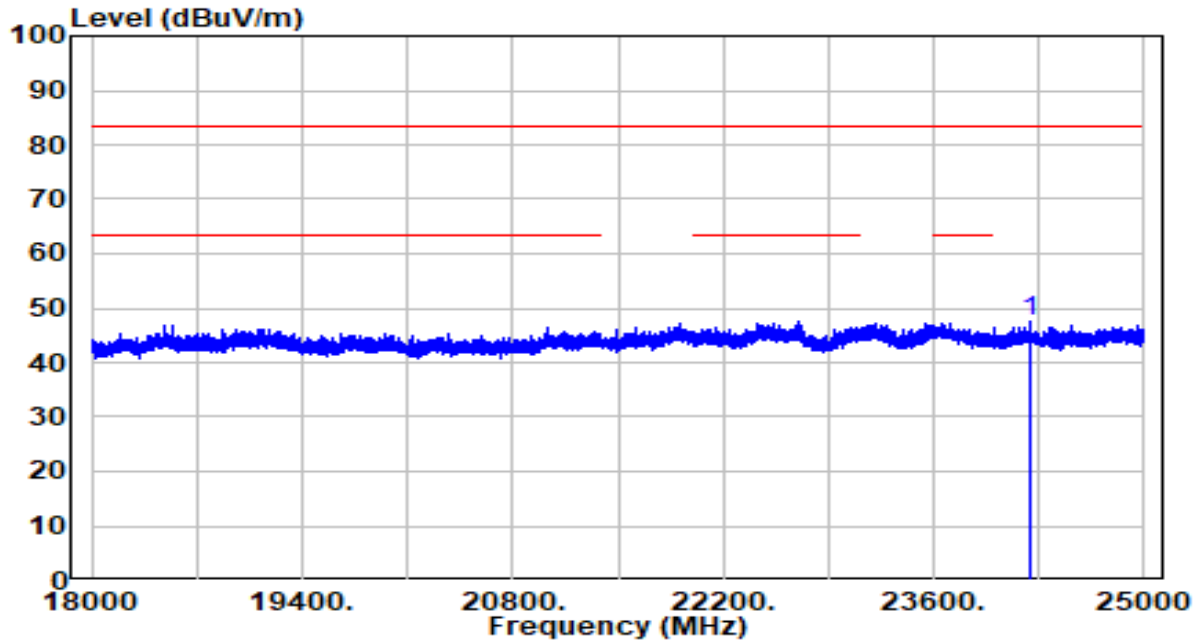


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 24240.440 | 34.93 | 12.52 | 47.45 | -36.05 | 83.50 | 150 | 0 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|--------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-22 |
| Factor | BBHA 9170 | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / You |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

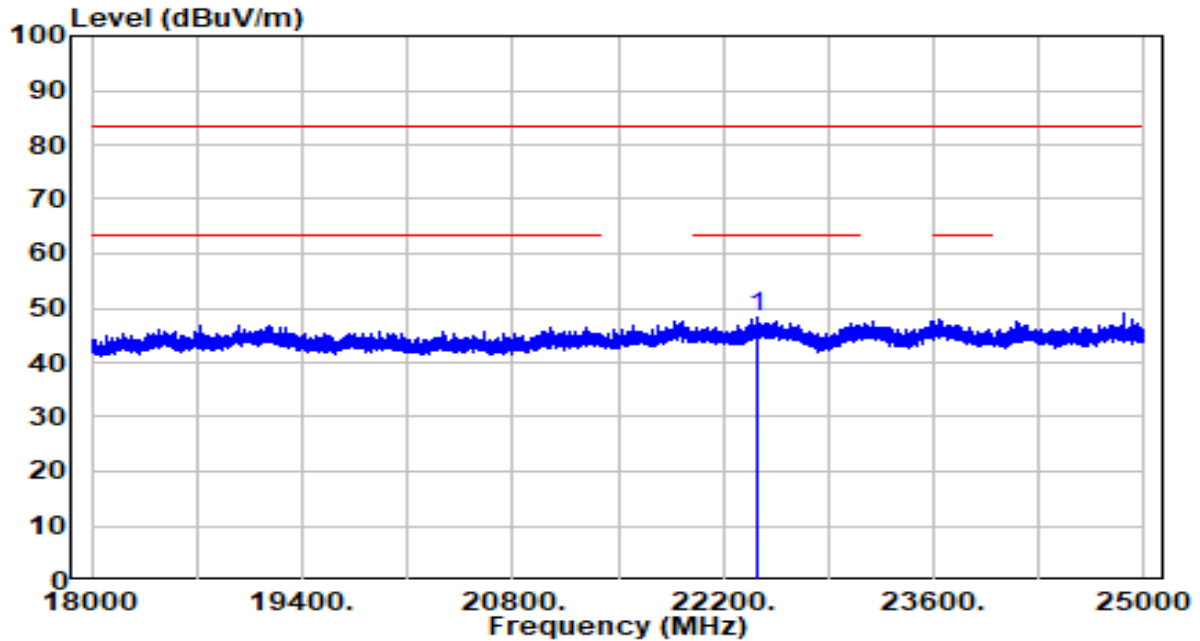

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 22428.880 | 36.66 | 11.80 | 48.46 | -35.04 | 83.50 | 150 | 0 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.7. Radiated Restricted Band Edge Measurement

7.7.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency (MHz) | Frequency (MHz) | Frequency (MHz) | Frequency (GHz) |
|----------------------------|-----------------------|--------------------|--------------------|
| 0.090 - 0.110 | 16.42 - 16.423 | 399.9 - 410 | 4.5 - 5.15 |
| ¹ 0.495 - 0.505 | 16.69475 - 16.69525 | 608 - 614 | 5.35 - 5.46 |
| 2.1735 - 2.1905 | 16.80425 - 16.80475 | 960 - 1240 | 7.25 - 7.75 |
| 4.125 - 4.128 | 25.5 - 25.67 | 1300 - 1427 | 8.025 - 8.5 |
| 4.17725 - 4.17775 | 37.5 - 38.25 | 1435 - 1626.5 | 9.0 - 9.2 |
| 4.20725 - 4.20775 | 73 - 74.6 | 1645.5 - 1646.5 | 9.3 - 9.5 |
| 6.215 - 6.218 | 74.8 - 75.2 | 1660 - 1710 | 10.6 - 12.7 |
| 6.26775 - 6.26825 | 108 - 121.94 | 1718.8 - 1722.2 | 13.25 - 13.4 |
| 6.31175 - 6.31225 | 123 - 138 | 2200 - 2300 | 14.47 - 14.5 |
| 8.291 - 8.294 | 149.9 - 150.05 | 2310 - 2390 | 15.35 - 16.2 |
| 8.362 - 8.366 | 156.52475 - 156.52525 | 2483.5 - 2500 | 17.7 - 21.4 |
| 8.37625 - 8.38675 | 156.7 - 156.9 | 2690 - 2900 | 22.01 - 23.12 |
| 8.41425 - 8.41475 | 162.0125 - 167.17 | 3260 - 3267 | 23.6 - 24.0 |
| 12.29 - 12.293 | 167.72 - 173.2 | 3332 - 3339 | 31.2 - 31.8 |
| 12.51975 - 12.52025 | 240 - 285 | 3345.8 - 3358 | 36.43 - 36.5 |
| 12.57675 - 12.57725 | 322 - 335.4 | 3600 - 4400 | (²) |
| 13.36 - 13.41 | -- | -- | -- |

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 Limits | | |
|---|--------------------------|-------------------------------|
| Frequency [MHz] | Field Strength [uV/m] | Measured Distance [Meters] |
| 0.009 - 0.490 | 2400/F (kHz) | 300 |
| 0.490 - 1.705 | 24000/F (kHz) | 30 |
| 1.705 - 30 | 30 | 30 |
| 30 - 88 | 100 | 3 |
| 88 - 216 | 150 | 3 |
| 216 - 960 | 200 | 3 |
| Above 960 | 500 | 3 |

7.7.2. Test Procedure Used

ANSI C63.10-2013 Section 6.3 & 6.6 & 11.13

7.7.3. Test Setting

Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize


Average Measurements above 1GHz (Method VB)

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.

If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$. T is the minimum transmission duration.

4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize


7.7.4. Test Setup

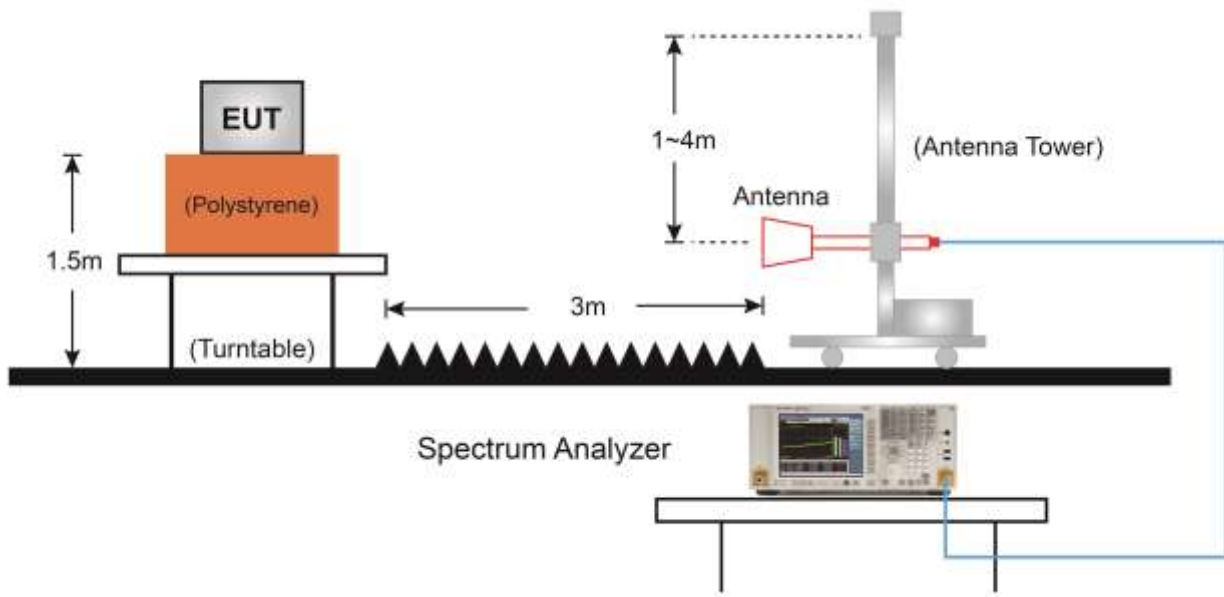

7.7.5. Test Result

Horizontal Antenna Data

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

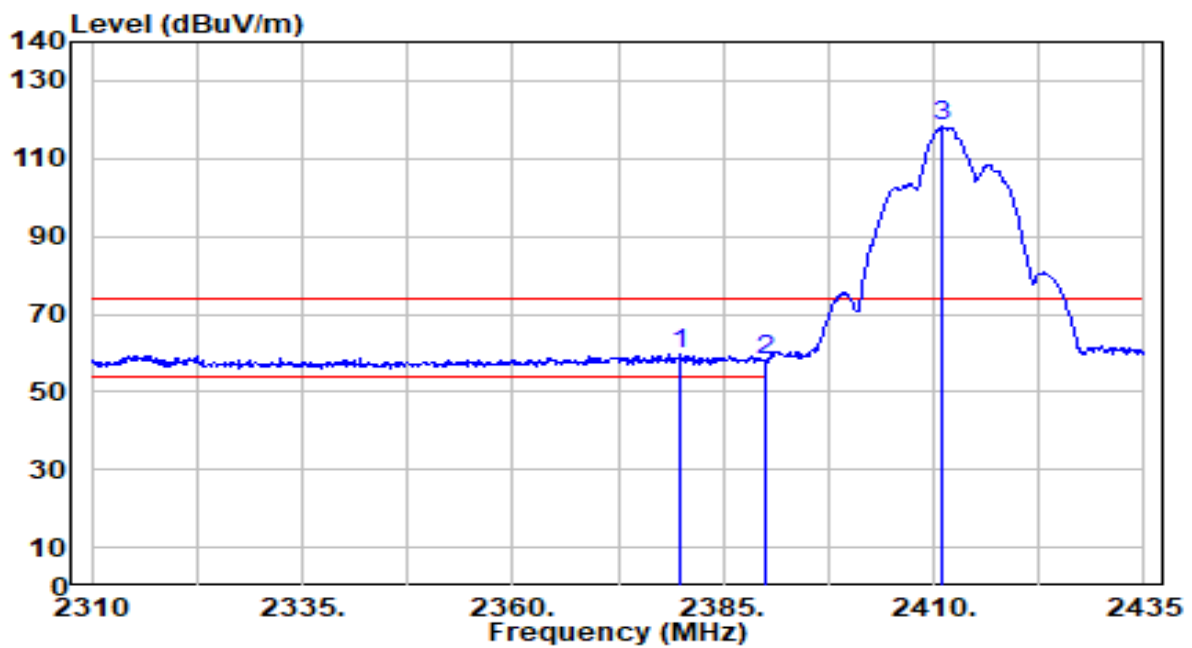


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2380.000 | 29.16 | 30.42 | 59.58 | -14.42 | 74.00 | 190 | 40 | Peak |
| 2 | | 2390.000 | 27.66 | 30.45 | 58.11 | -15.89 | 74.00 | 190 | 40 | Peak |
| 3 | | 2411.000 | 87.62 | 30.49 | 118.11 | N/A | N/A | 190 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

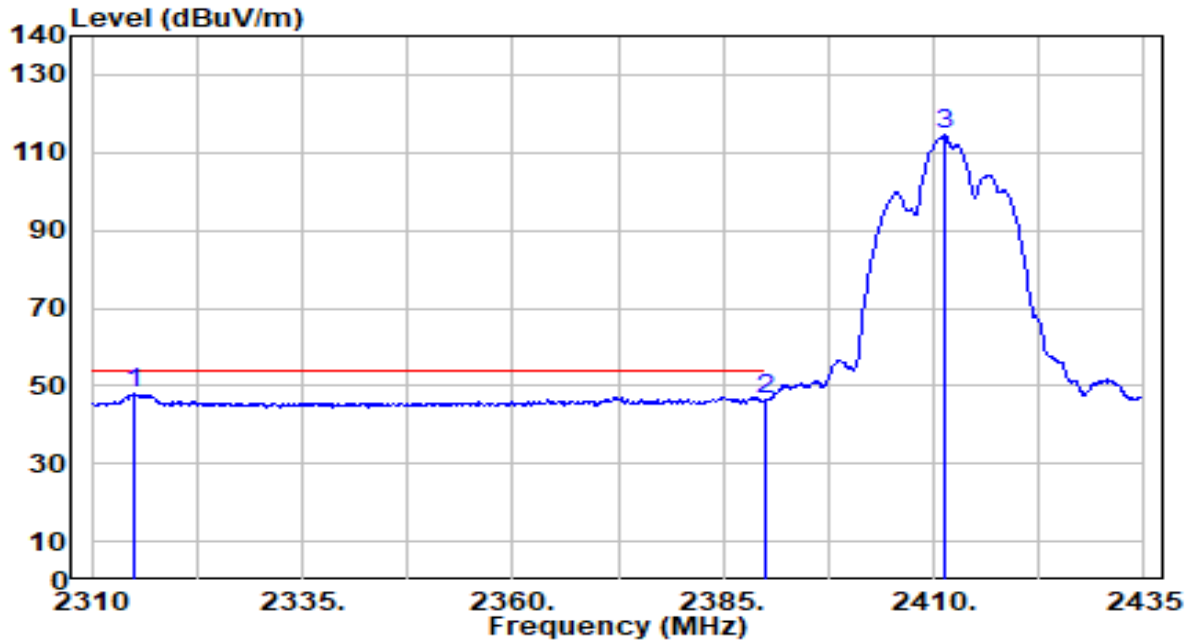


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2315.000 | 17.96 | 30.23 | 48.20 | -5.80 | 54.00 | 190 | 40 | Average |
| 2 | 2390.000 | 16.01 | 30.45 | 46.46 | -7.54 | 54.00 | 190 | 40 | Average |
| 3 | 2411.250 | 84.01 | 30.49 | 114.50 | N/A | N/A | 190 | 40 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

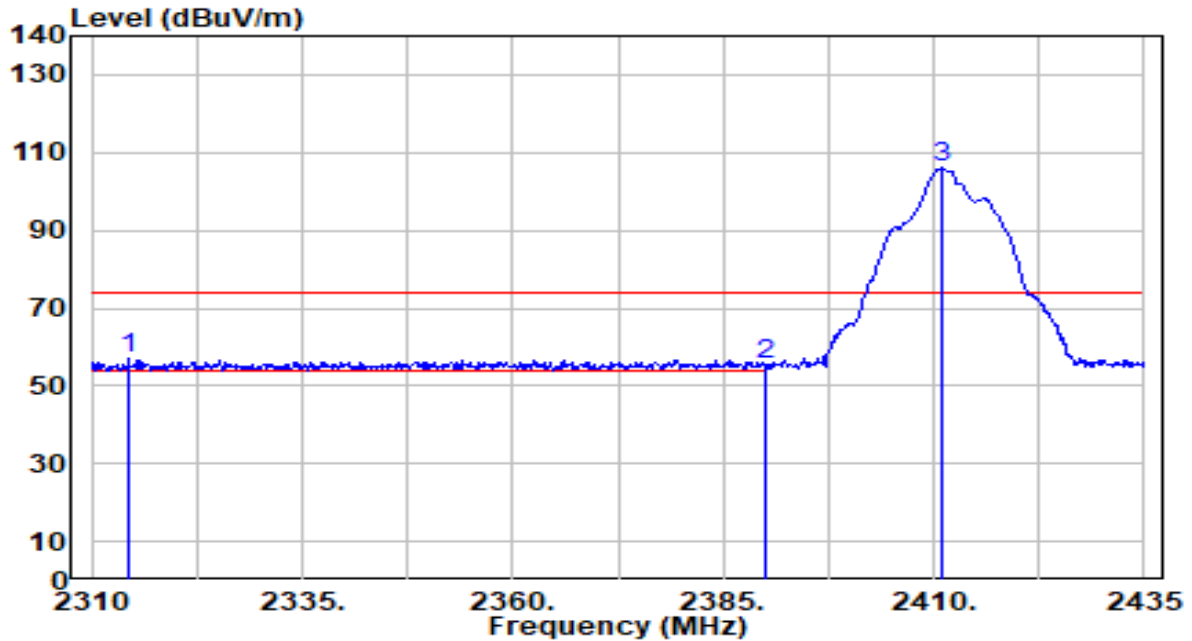


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2314.375 | 26.60 | 30.23 | 56.83 | -17.17 | 74.00 | 308 | 124 | Peak |
| 2 | 2390.000 | 24.79 | 30.45 | 55.24 | -18.76 | 74.00 | 308 | 124 | Peak |
| 3 | 2411.000 | 75.48 | 30.49 | 105.97 | N/A | N/A | 308 | 124 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

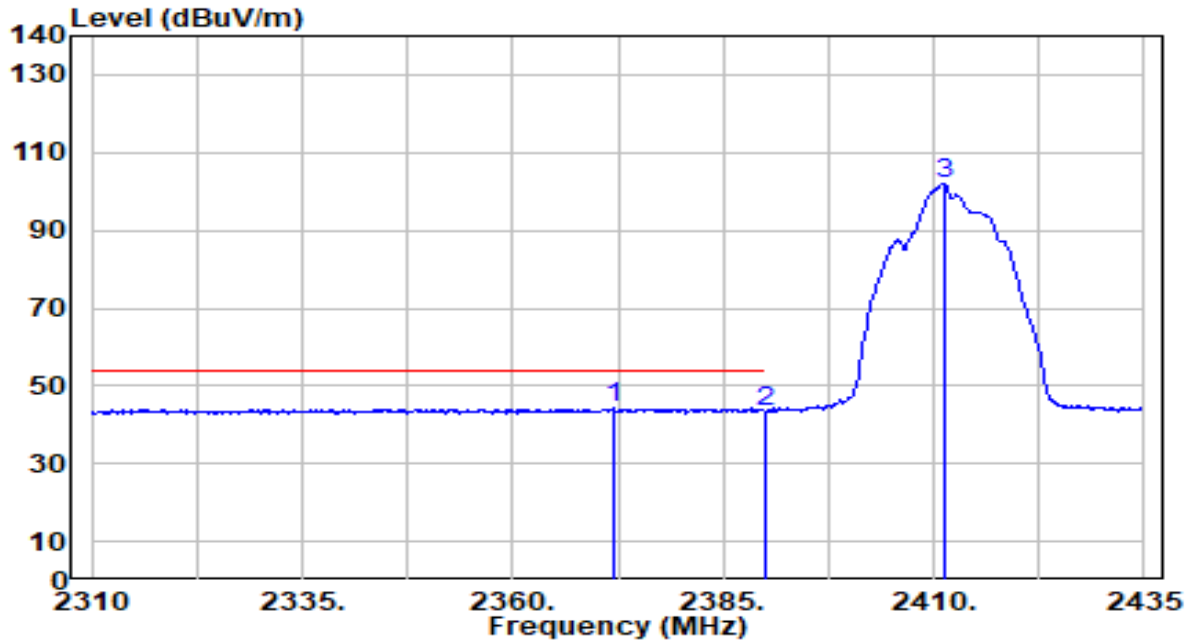


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2372.000 | 13.79 | 30.40 | 44.19 | -9.81 | 54.00 | 308 | 124 | Average |
| 2 | 2390.000 | 12.99 | 30.45 | 43.44 | -10.56 | 54.00 | 308 | 124 | Average |
| 3 | 2411.375 | 71.58 | 30.49 | 102.07 | N/A | N/A | 308 | 124 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

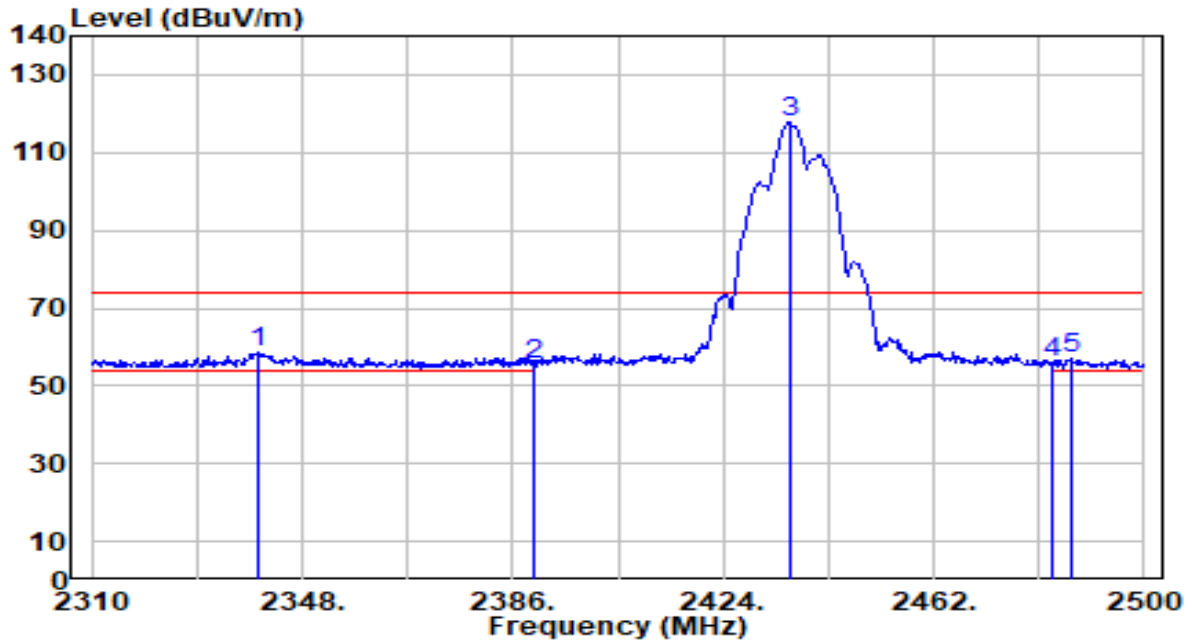


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2340.210 | 28.21 | 30.31 | 58.51 | -15.49 | 74.00 | 195 | 140 | Peak |
| 2 | 2390.000 | 25.24 | 30.45 | 55.69 | -18.31 | 74.00 | 195 | 140 | Peak |
| 3 | 2435.970 | 87.31 | 30.52 | 117.83 | N/A | N/A | 195 | 140 | Peak |
| 4 | 2483.500 | 25.21 | 30.59 | 55.80 | -18.20 | 74.00 | 195 | 140 | Peak |
| 5 | 2486.700 | 26.50 | 30.59 | 57.09 | -16.91 | 74.00 | 195 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

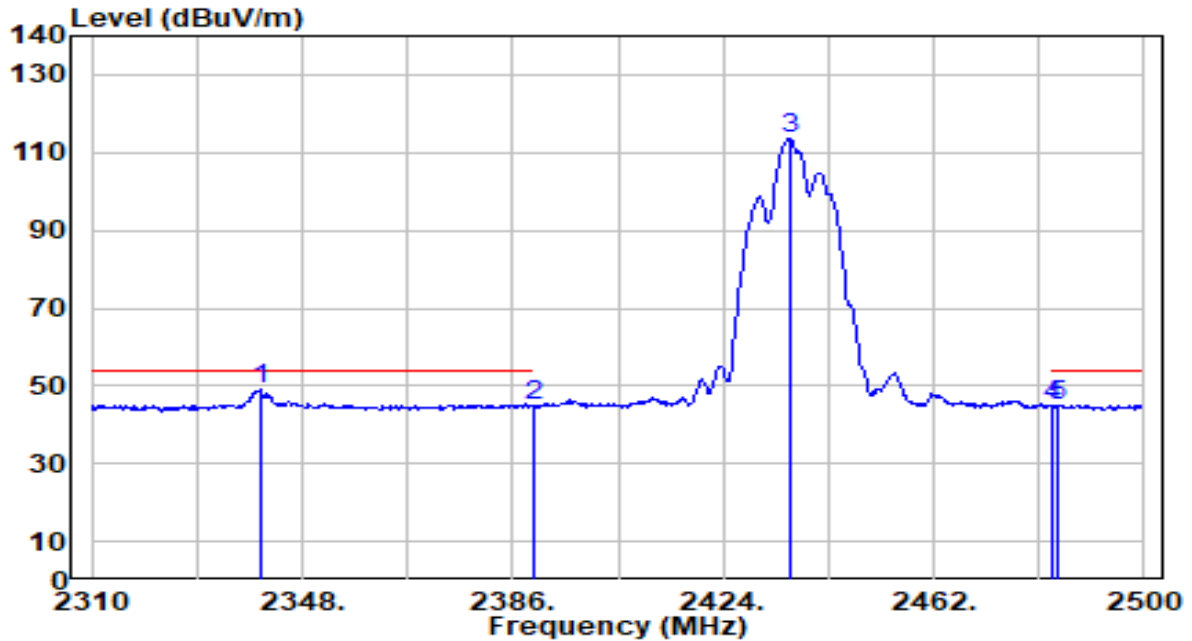


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2340.400 | 18.77 | 30.31 | 49.07 | -4.93 | 54.00 | 195 | 140 | Average |
| 2 | 2390.000 | 14.54 | 30.45 | 44.99 | -9.01 | 54.00 | 195 | 140 | Average |
| 3 | 2435.970 | 83.11 | 30.52 | 113.63 | N/A | N/A | 195 | 140 | Average |
| 4 | 2483.500 | 14.46 | 30.59 | 45.05 | -8.95 | 54.00 | 195 | 140 | Average |
| 5 | 2484.610 | 14.46 | 30.59 | 45.05 | -8.95 | 54.00 | 195 | 140 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

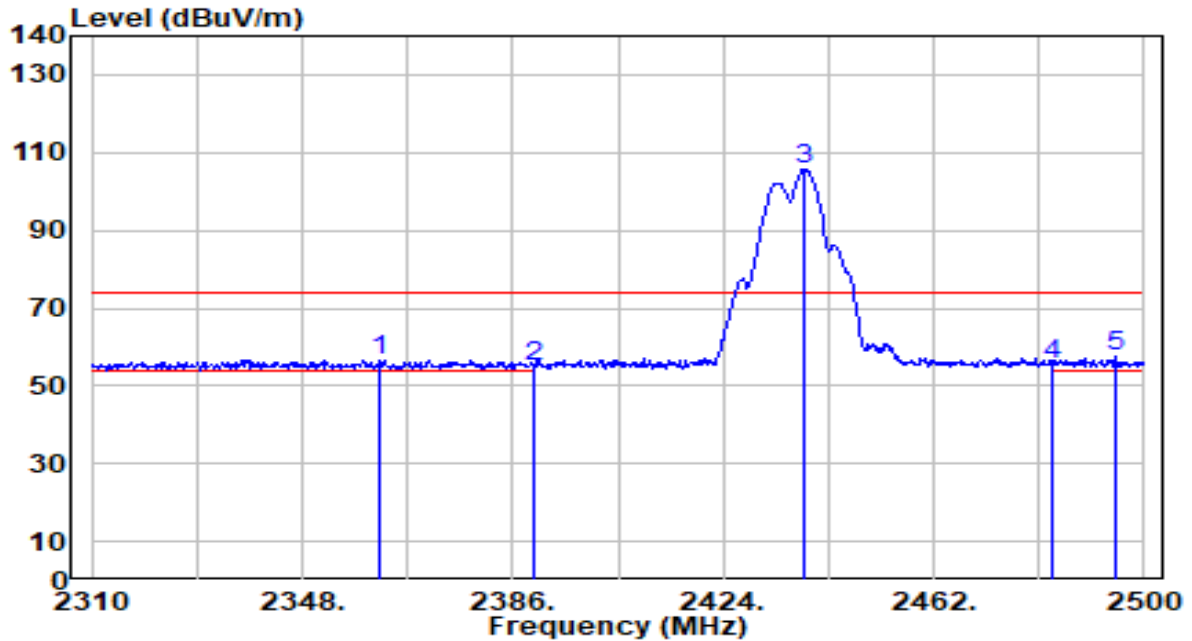


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2361.870 | 26.37 | 30.37 | 56.74 | -17.26 | 74.00 | 297 | 102 | Peak |
| 2 | 2390.000 | 24.71 | 30.45 | 55.16 | -18.84 | 74.00 | 297 | 102 | Peak |
| 3 | 2438.630 | 75.29 | 30.53 | 105.81 | N/A | N/A | 297 | 102 | Peak |
| 4 | 2483.500 | 24.84 | 30.59 | 55.43 | -18.57 | 74.00 | 297 | 102 | Peak |
| 5 | * 2494.680 | 27.04 | 30.60 | 57.65 | -16.35 | 74.00 | 297 | 102 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

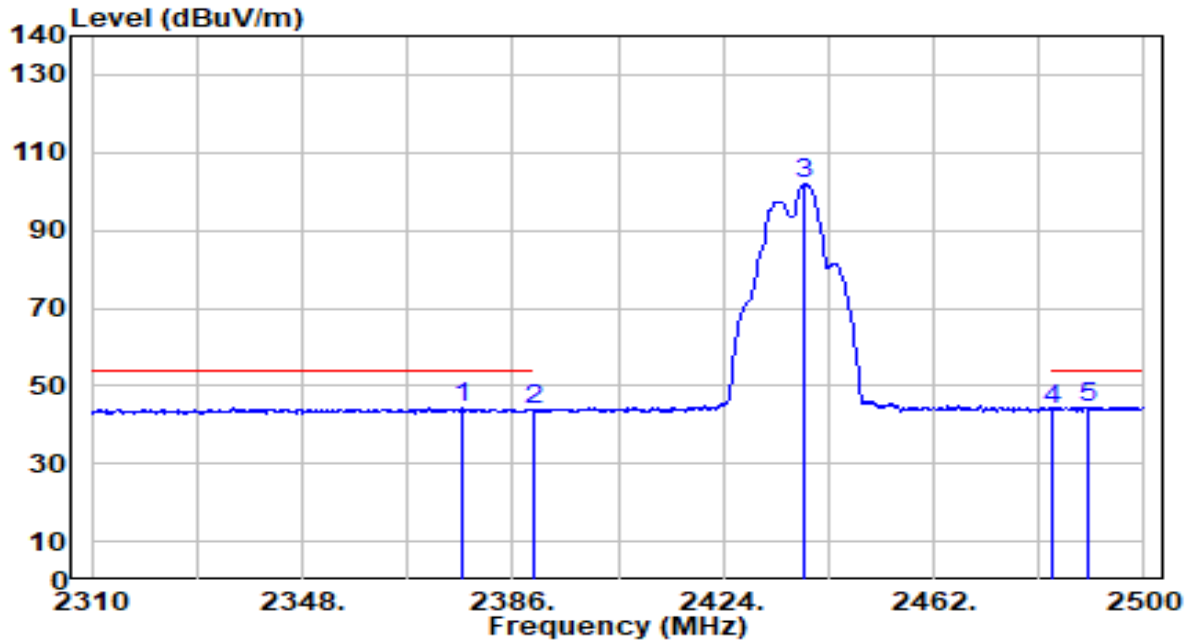


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2377.070 | 13.80 | 30.41 | 44.21 | -9.79 | 54.00 | 297 | 102 | Average |
| 2 | 2390.000 | 13.50 | 30.45 | 43.95 | -10.05 | 54.00 | 297 | 102 | Average |
| 3 | 2438.820 | 71.29 | 30.53 | 101.82 | N/A | N/A | 297 | 102 | Average |
| 4 | 2483.500 | 13.52 | 30.59 | 44.11 | -9.89 | 54.00 | 297 | 102 | Average |
| 5 | * 2489.930 | 14.03 | 30.60 | 44.63 | -9.37 | 54.00 | 297 | 102 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

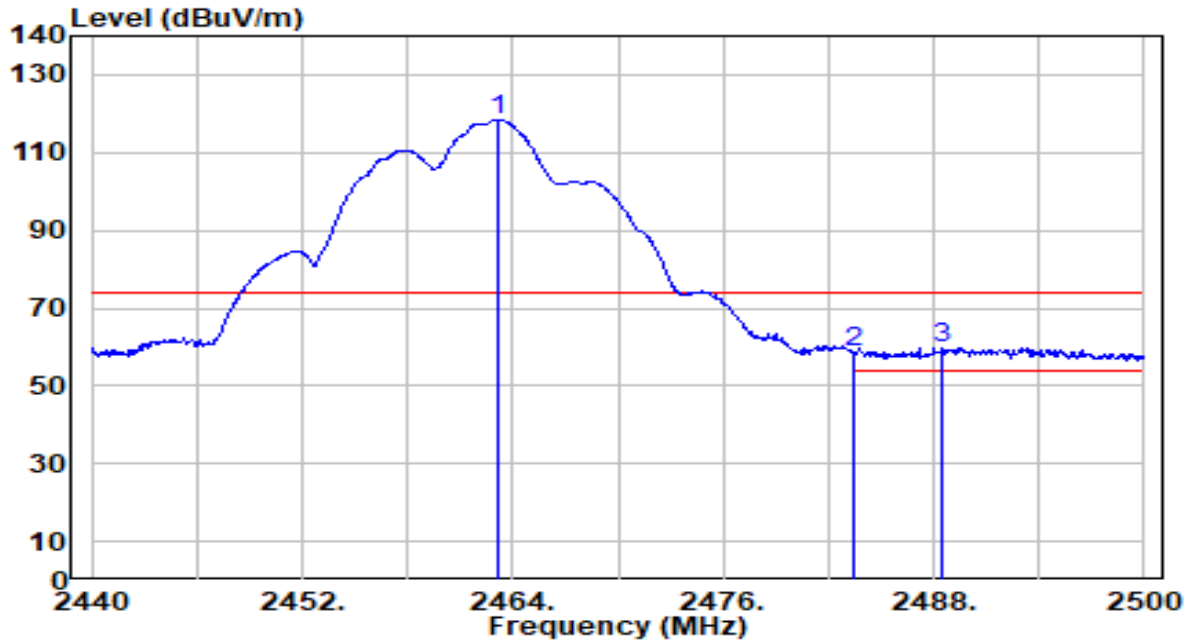


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.100 | 87.96 | 30.56 | 118.53 | N/A | N/A | 170 | 6 | Peak |
| 2 | 2483.500 | 28.10 | 30.59 | 58.68 | -15.32 | 74.00 | 170 | 6 | Peak |
| 3 | * 2488.480 | 29.23 | 30.59 | 59.82 | -14.18 | 74.00 | 170 | 6 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

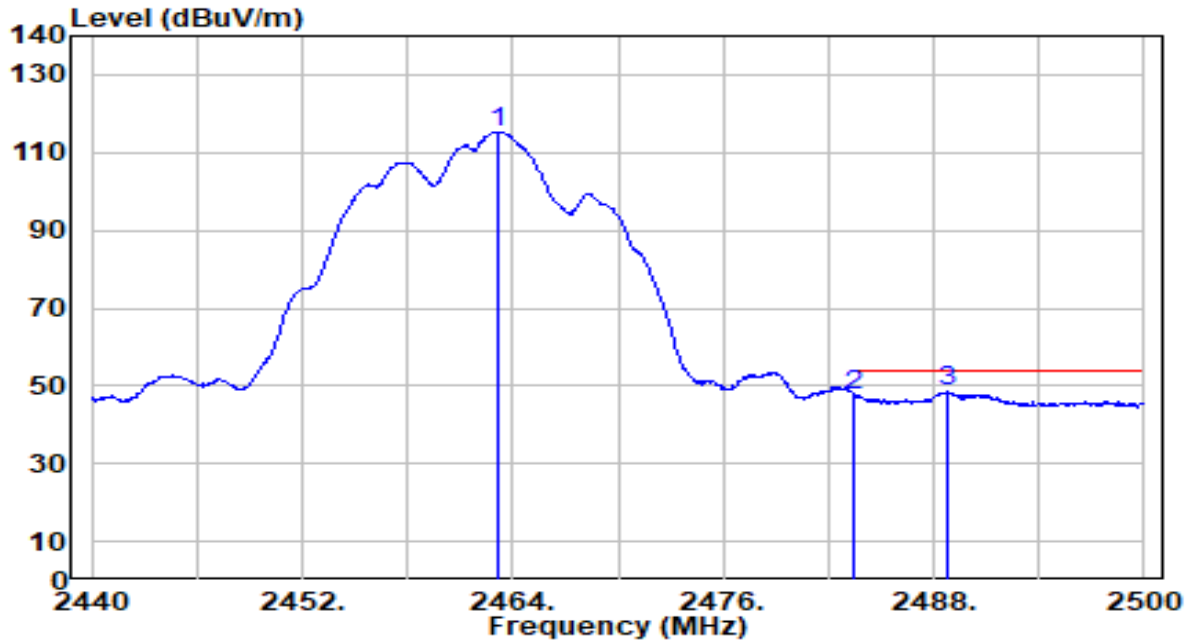


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.100 | 84.81 | 30.56 | 115.37 | N/A | N/A | 170 | 6 | Average |
| 2 | 2483.500 | 17.15 | 30.59 | 47.74 | -6.26 | 54.00 | 170 | 6 | Average |
| 3 | * 2488.780 | 17.86 | 30.59 | 48.45 | -5.55 | 54.00 | 170 | 6 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

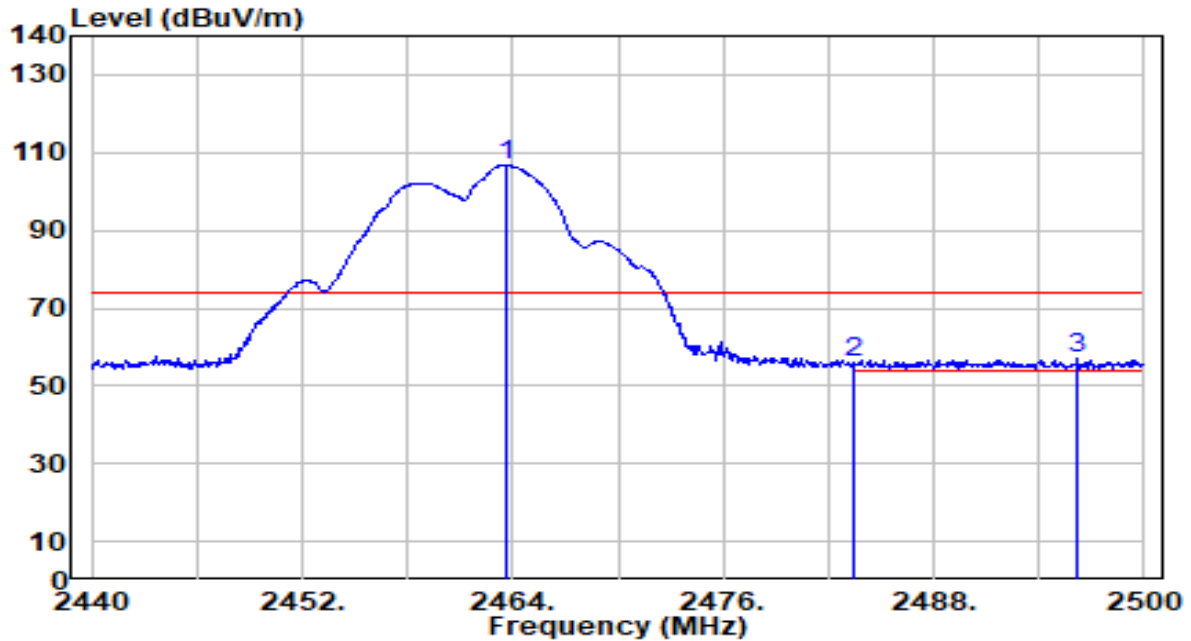


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.580 | 76.19 | 30.56 | 106.75 | N/A | N/A | 282 | 103 | Peak |
| 2 | 2483.500 | 25.18 | 30.59 | 55.77 | -18.23 | 74.00 | 282 | 103 | Peak |
| 3 | * 2496.220 | 26.23 | 30.60 | 56.83 | -17.17 | 74.00 | 282 | 103 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

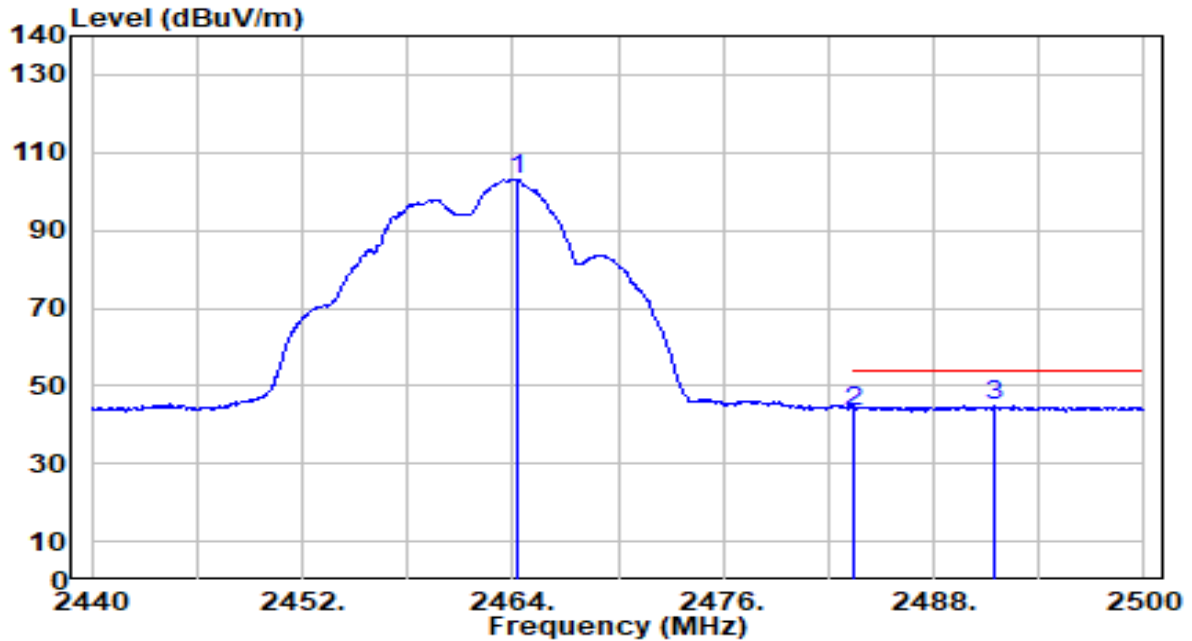


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2464.300 | 72.55 | 30.56 | 103.11 | N/A | N/A | 282 | 103 | Average |
| 2 | 2483.500 | 12.95 | 30.59 | 43.54 | -10.46 | 54.00 | 282 | 103 | Average |
| 3 | * 2491.420 | 14.19 | 30.60 | 44.79 | -9.21 | 54.00 | 282 | 103 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

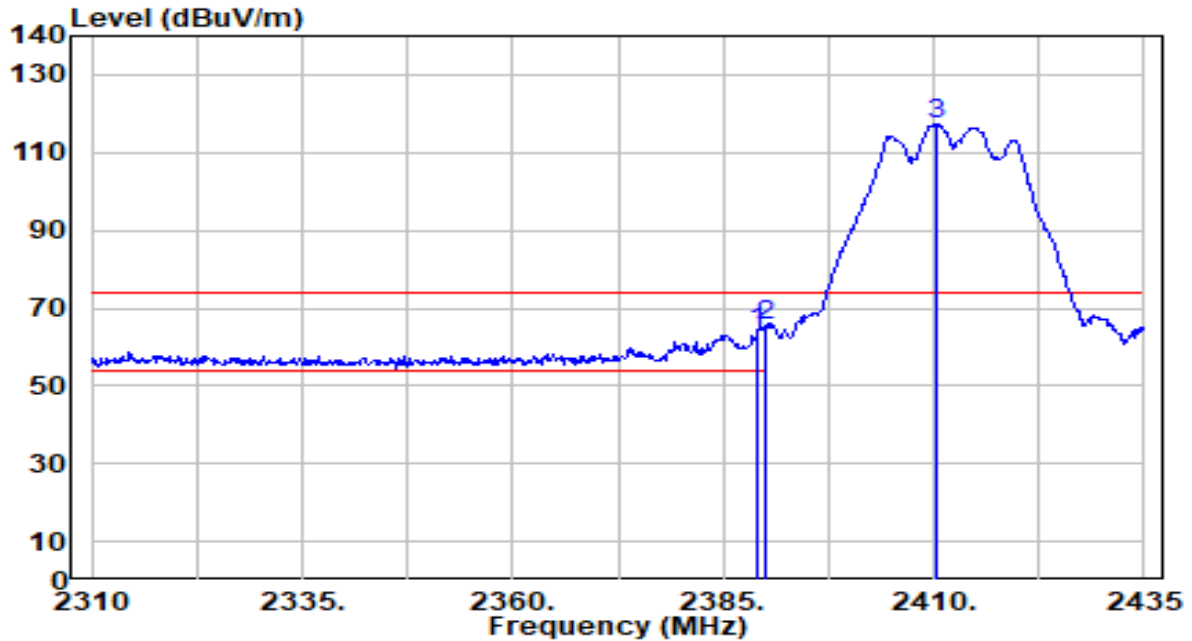


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.000 | 33.63 | 30.44 | 64.08 | -9.92 | 74.00 | 190 | 40 | Peak |
| 2 | * 2390.000 | 35.20 | 30.45 | 65.65 | -8.35 | 74.00 | 190 | 40 | Peak |
| 3 | 2410.375 | 86.89 | 30.49 | 117.38 | N/A | N/A | 190 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

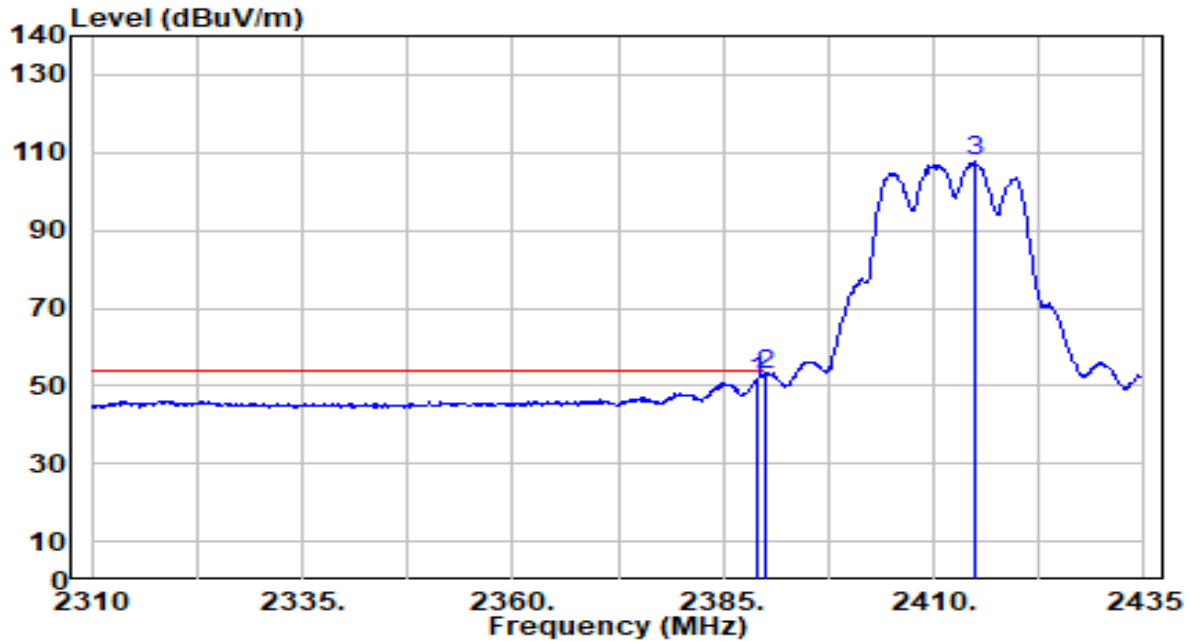


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.000 | 21.00 | 30.44 | 51.44 | -2.56 | 54.00 | 190 | 40 | Average |
| 2 | * 2390.000 | 23.41 | 30.45 | 53.86 | -0.14 | 54.00 | 190 | 40 | Average |
| 3 | 2415.000 | 77.02 | 30.50 | 107.51 | N/A | N/A | 190 | 40 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

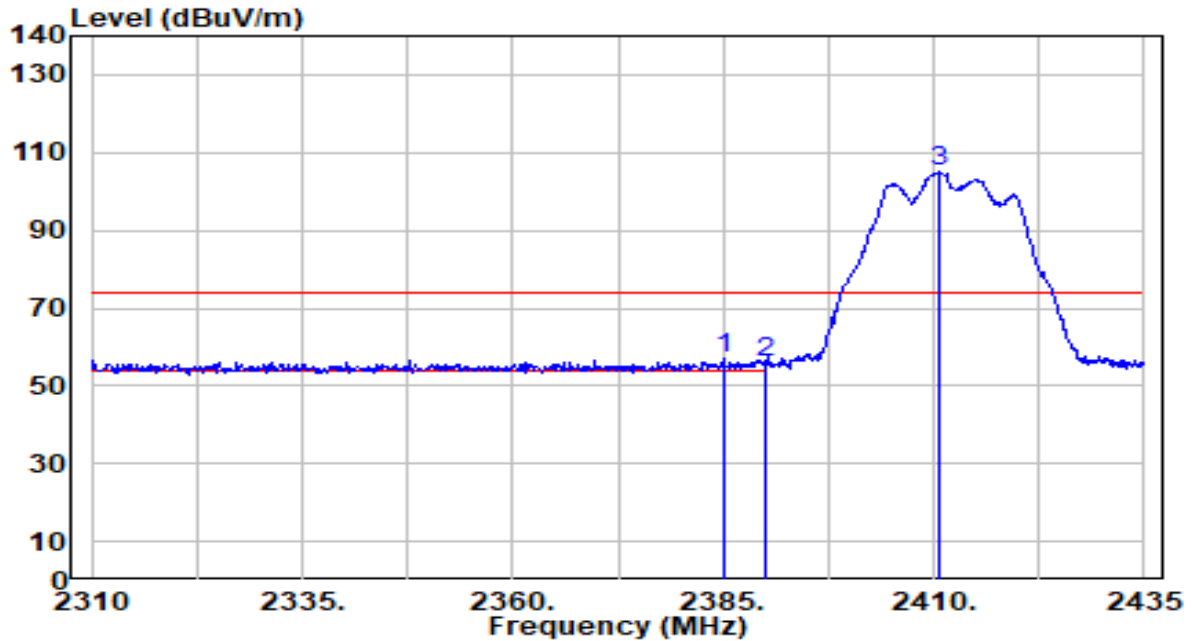


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 26.52 | 30.43 | 56.95 | -17.05 | 74.00 | 308 | 124 | Peak |
| 2 | | 25.56 | 30.45 | 56.01 | -17.99 | 74.00 | 308 | 124 | Peak |
| 3 | | 74.45 | 30.49 | 104.94 | N/A | N/A | 308 | 124 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

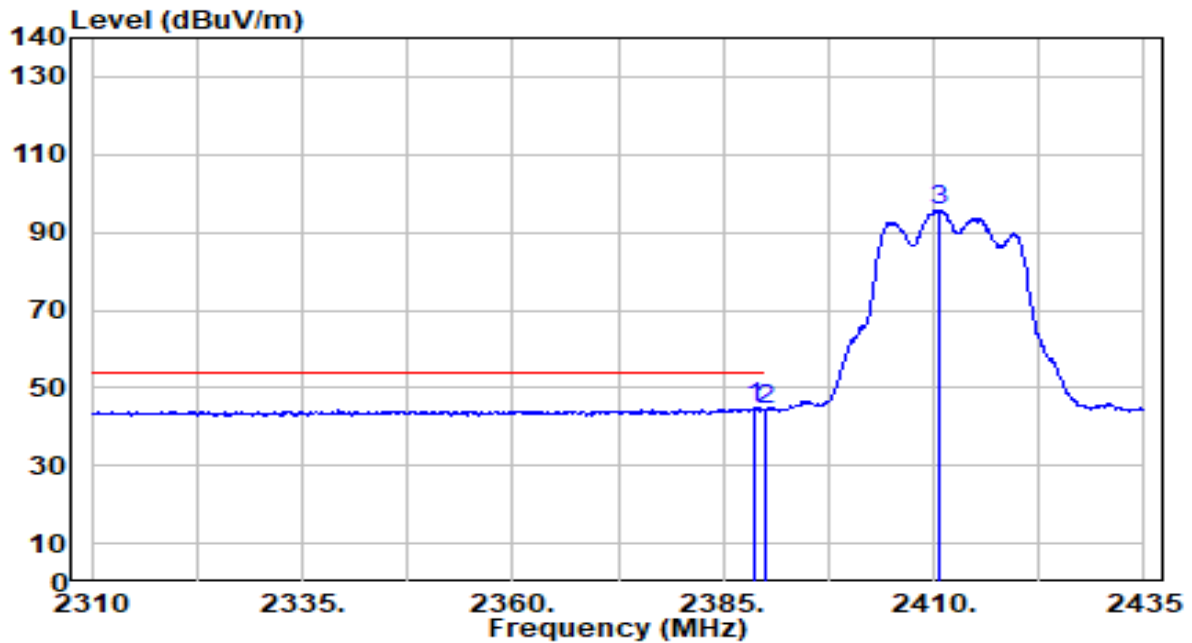


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 2388.625 | 14.21 | 30.44 | 44.65 | -9.35 | 54.00 | 308 | 124 | Average |
| 2 | | 2390.000 | 13.74 | 30.45 | 44.19 | -9.81 | 54.00 | 308 | 124 | Average |
| 3 | | 2410.750 | 65.34 | 30.49 | 95.83 | N/A | N/A | 308 | 124 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

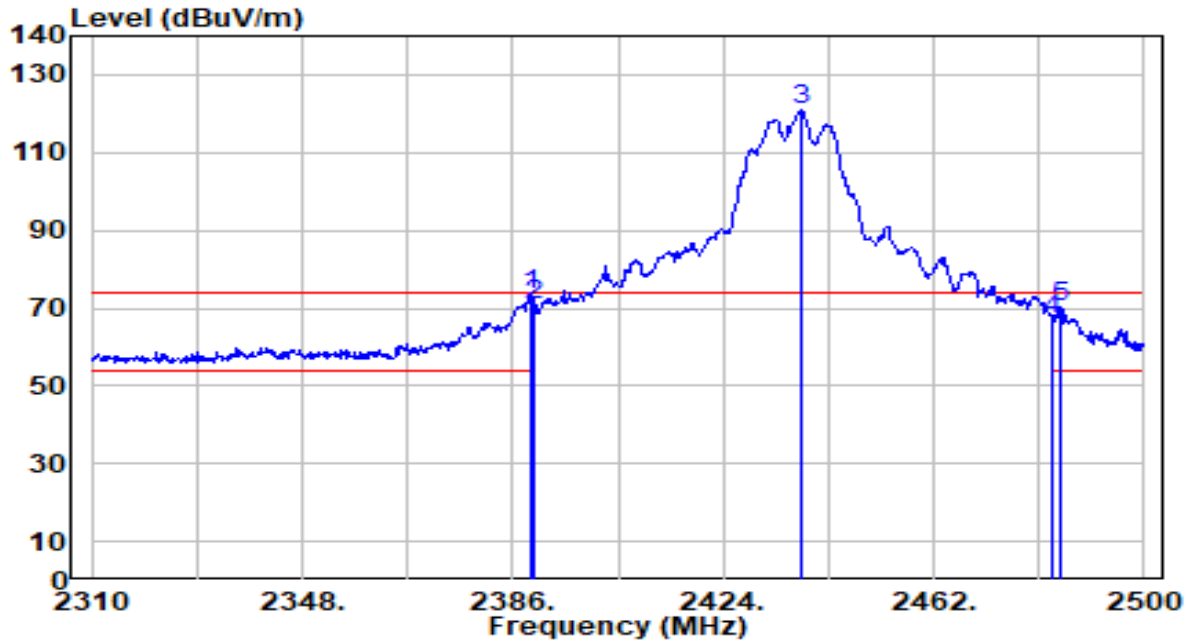


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2389.420 | 42.92 | 30.45 | 73.36 | -0.64 | 74.00 | 195 | 140 | Peak |
| 2 | 2390.000 | 40.61 | 30.45 | 71.06 | -2.94 | 74.00 | 195 | 140 | Peak |
| 3 | 2438.060 | 90.28 | 30.53 | 120.80 | N/A | N/A | 195 | 140 | Peak |
| 4 | 2483.500 | 36.60 | 30.59 | 67.18 | -6.82 | 74.00 | 195 | 140 | Peak |
| 5 | 2484.990 | 39.58 | 30.59 | 70.17 | -3.83 | 74.00 | 195 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

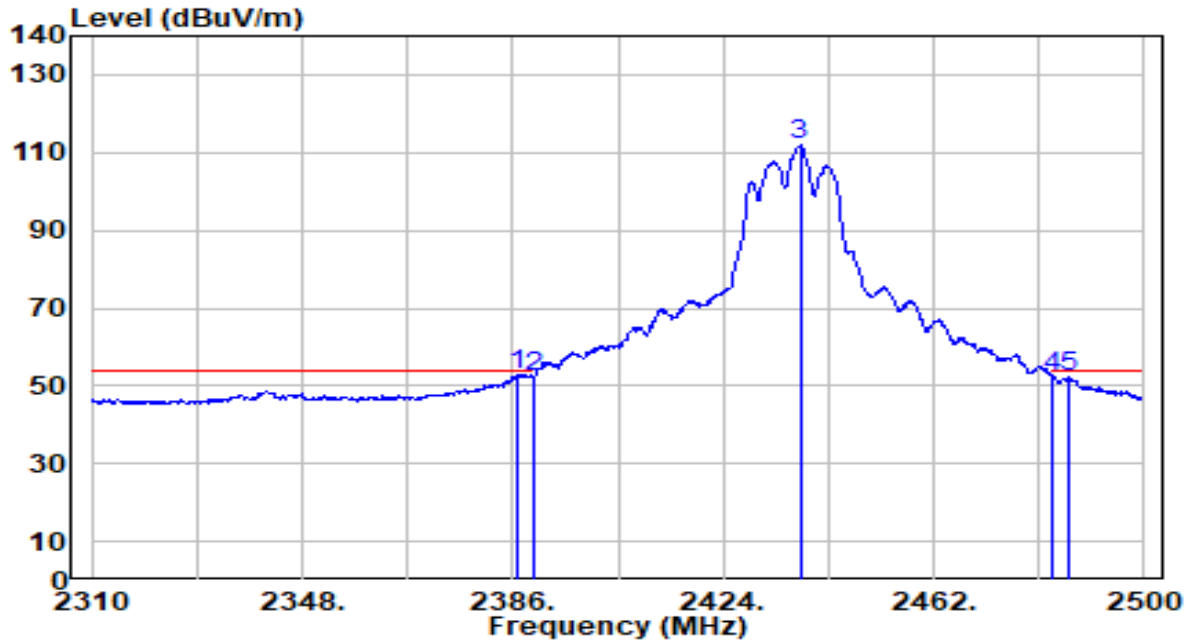


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2386.950 | 22.39 | 30.44 | 52.83 | -1.17 | 54.00 | 195 | 140 | Average |
| 2 | 2390.000 | 21.85 | 30.45 | 52.30 | -1.70 | 54.00 | 195 | 140 | Average |
| 3 | 2437.870 | 81.50 | 30.53 | 112.03 | N/A | N/A | 195 | 140 | Average |
| 4 | 2483.500 | 21.71 | 30.59 | 52.29 | -1.71 | 54.00 | 195 | 140 | Average |
| 5 | 2486.320 | 21.70 | 30.59 | 52.29 | -1.71 | 54.00 | 195 | 140 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

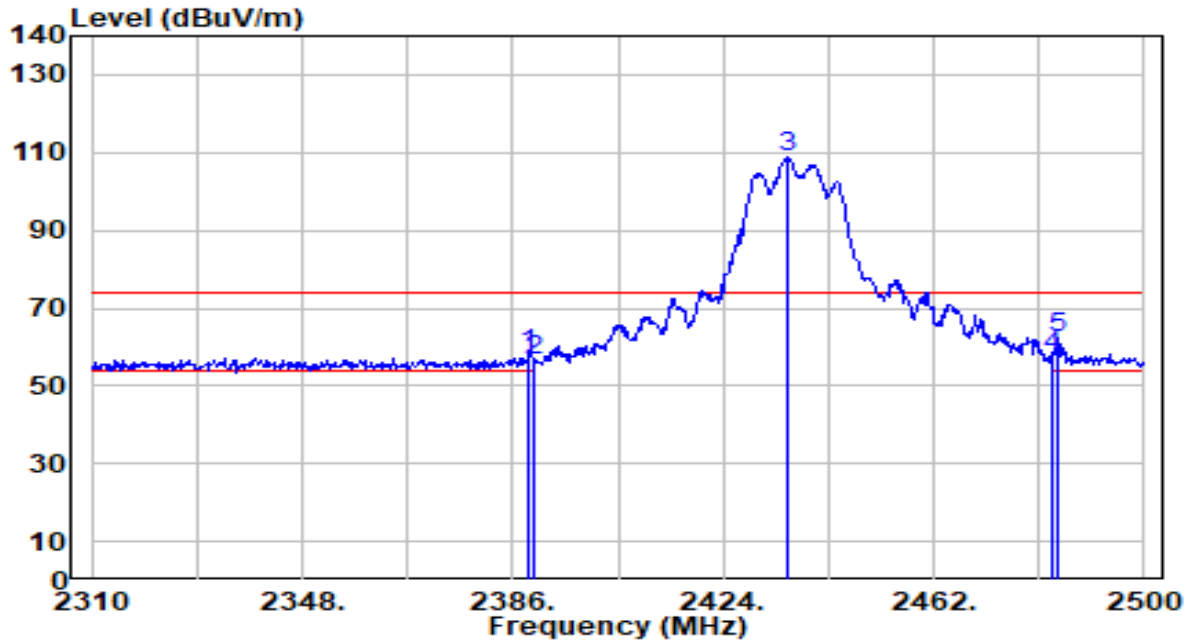


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.040 | 27.86 | 30.44 | 58.30 | -15.70 | 74.00 | 297 | 102 | Peak |
| 2 | 2390.000 | 25.82 | 30.45 | 56.27 | -17.73 | 74.00 | 297 | 102 | Peak |
| 3 | 2435.780 | 78.08 | 30.52 | 108.61 | N/A | N/A | 297 | 102 | Peak |
| 4 | 2483.500 | 26.83 | 30.59 | 57.41 | -16.59 | 74.00 | 297 | 102 | Peak |
| 5 | * 2484.420 | 31.50 | 30.59 | 62.09 | -11.91 | 74.00 | 297 | 102 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

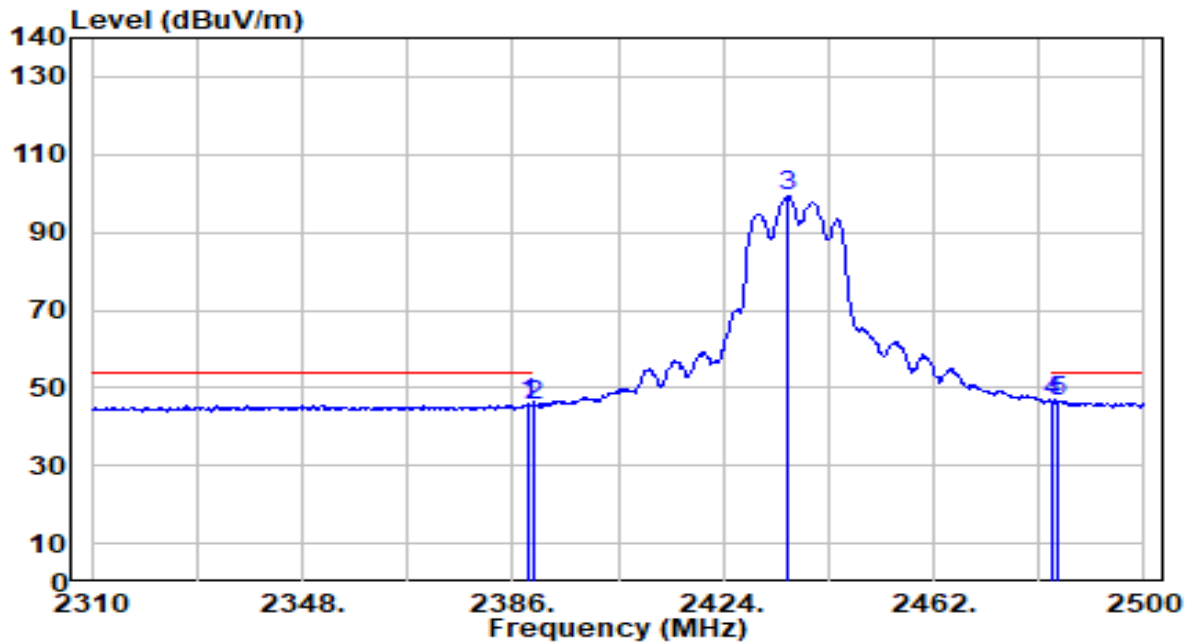


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.850 | 15.30 | 30.44 | 45.75 | -8.25 | 54.00 | 297 | 102 | Average |
| 2 | 2390.000 | 14.87 | 30.45 | 45.32 | -8.68 | 54.00 | 297 | 102 | Average |
| 3 | 2435.590 | 68.64 | 30.52 | 99.16 | N/A | N/A | 297 | 102 | Average |
| 4 | 2483.500 | 15.70 | 30.59 | 46.29 | -7.71 | 54.00 | 297 | 102 | Average |
| 5 | * 2484.230 | 16.00 | 30.59 | 46.59 | -7.41 | 54.00 | 297 | 102 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

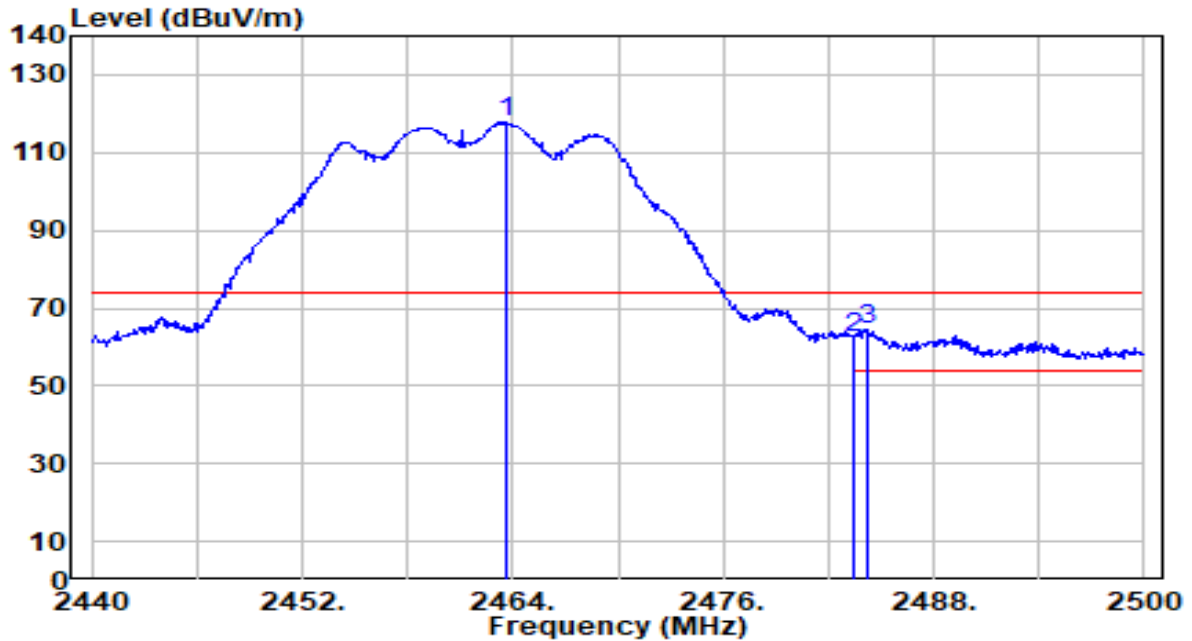


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.580 | 87.40 | 30.56 | 117.96 | N/A | N/A | 170 | 6 | Peak |
| 2 | 2483.500 | 31.76 | 30.59 | 62.34 | -11.66 | 74.00 | 170 | 6 | Peak |
| 3 | * 2484.160 | 34.07 | 30.59 | 64.66 | -9.34 | 74.00 | 170 | 6 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

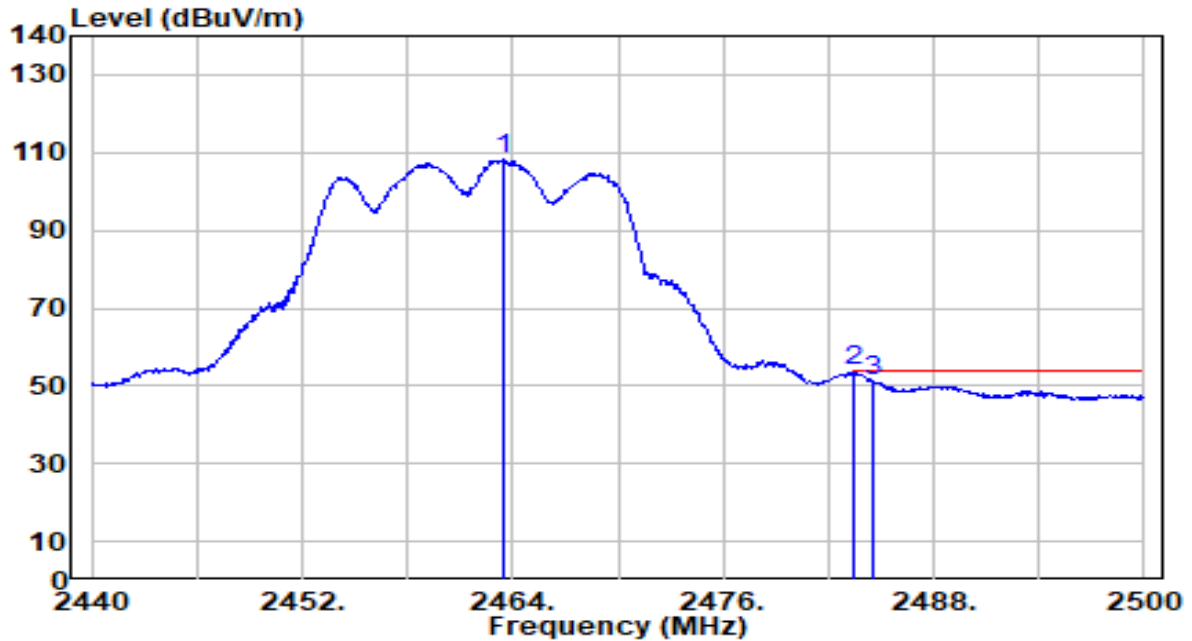


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.460 | 77.77 | 30.56 | 108.34 | N/A | N/A | 170 | 6 | Average |
| 2 | * 2483.500 | 23.15 | 30.59 | 53.74 | -0.26 | 54.00 | 170 | 6 | Average |
| 3 | 2484.520 | 20.63 | 30.59 | 51.22 | -2.78 | 54.00 | 170 | 6 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

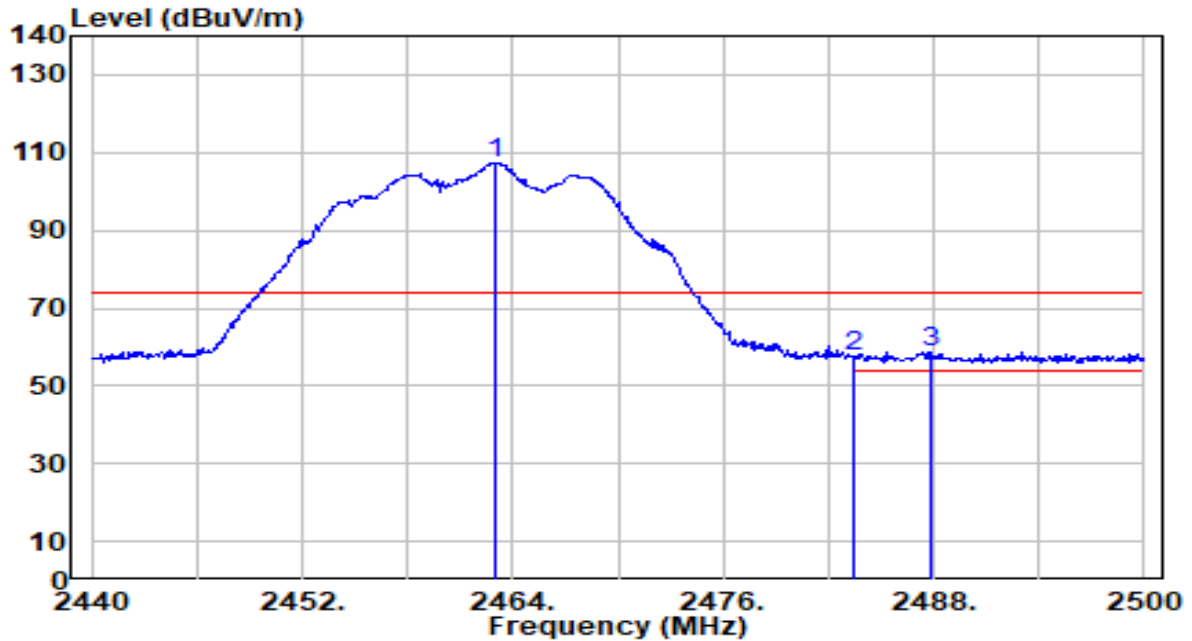


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.040 | 76.83 | 30.56 | 107.39 | N/A | N/A | 282 | 103 | Peak |
| 2 | 2483.500 | 26.97 | 30.59 | 57.55 | -16.45 | 74.00 | 282 | 103 | Peak |
| 3 | * 2487.880 | 28.05 | 30.59 | 58.64 | -15.36 | 74.00 | 282 | 103 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

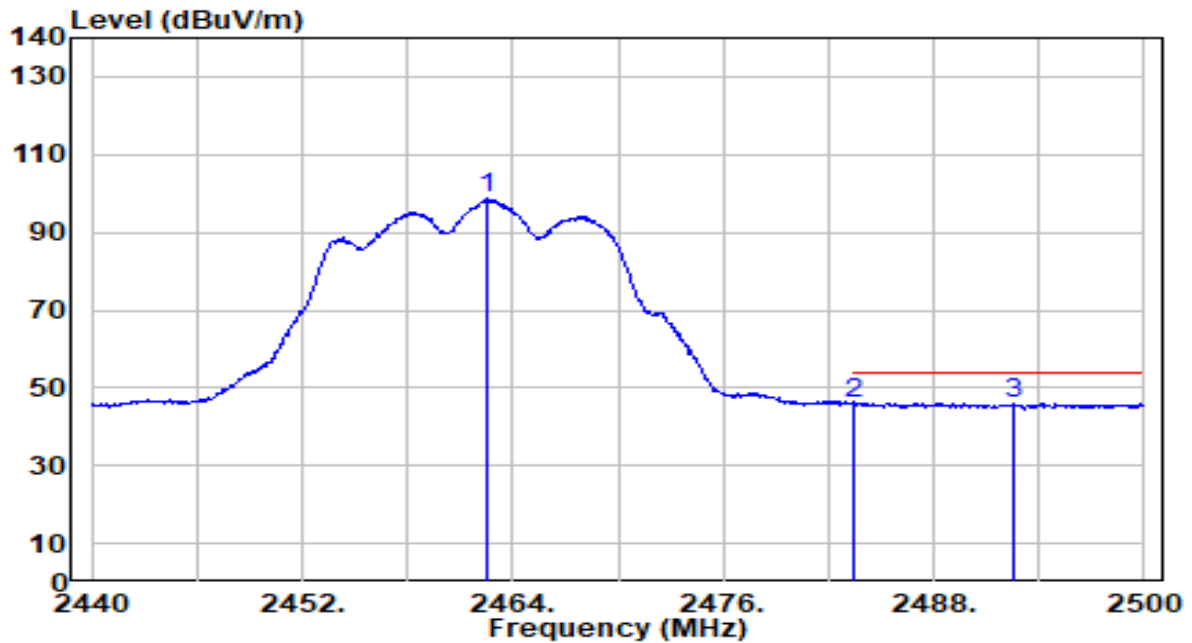


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2462.560 | 67.98 | 30.56 | 98.54 | N/A | N/A | 282 | 103 | Average |
| 2 | 2483.500 | 15.36 | 30.59 | 45.95 | -8.05 | 54.00 | 282 | 103 | Average |
| 3 | * 2492.560 | 15.51 | 30.60 | 46.11 | -7.89 | 54.00 | 282 | 103 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

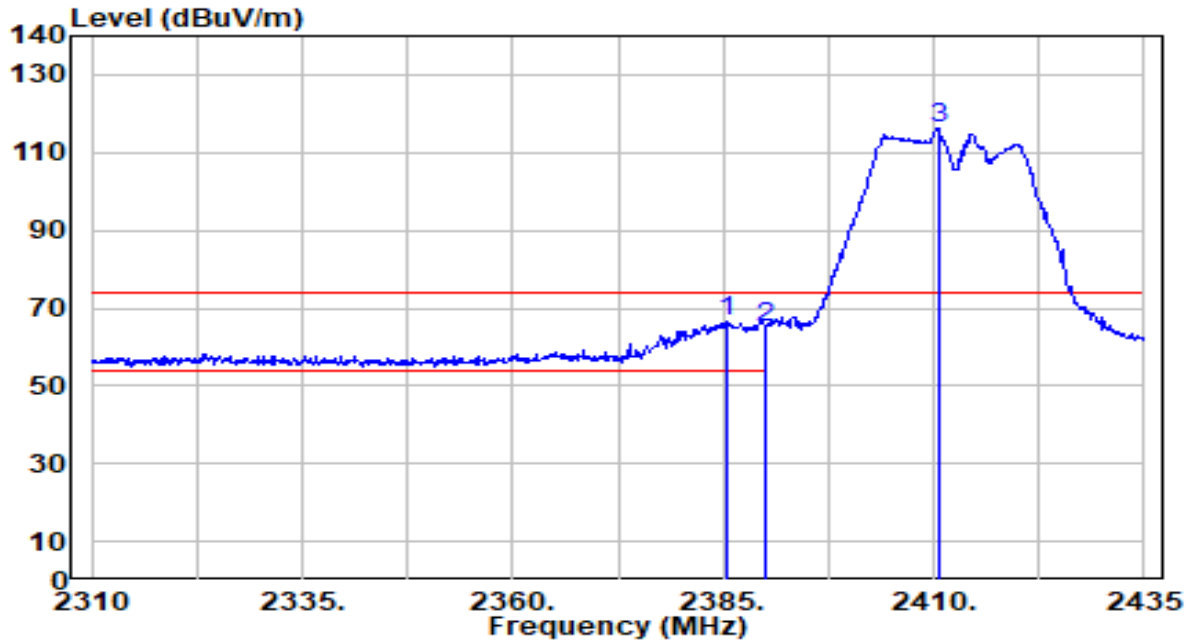


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2385.375 | 36.11 | 30.43 | 66.54 | -7.46 | 74.00 | 190 | 40 | Peak |
| 2 | 2390.000 | 34.42 | 30.45 | 64.87 | -9.13 | 74.00 | 190 | 40 | Peak |
| 3 | 2410.500 | 85.96 | 30.49 | 116.45 | N/A | N/A | 190 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

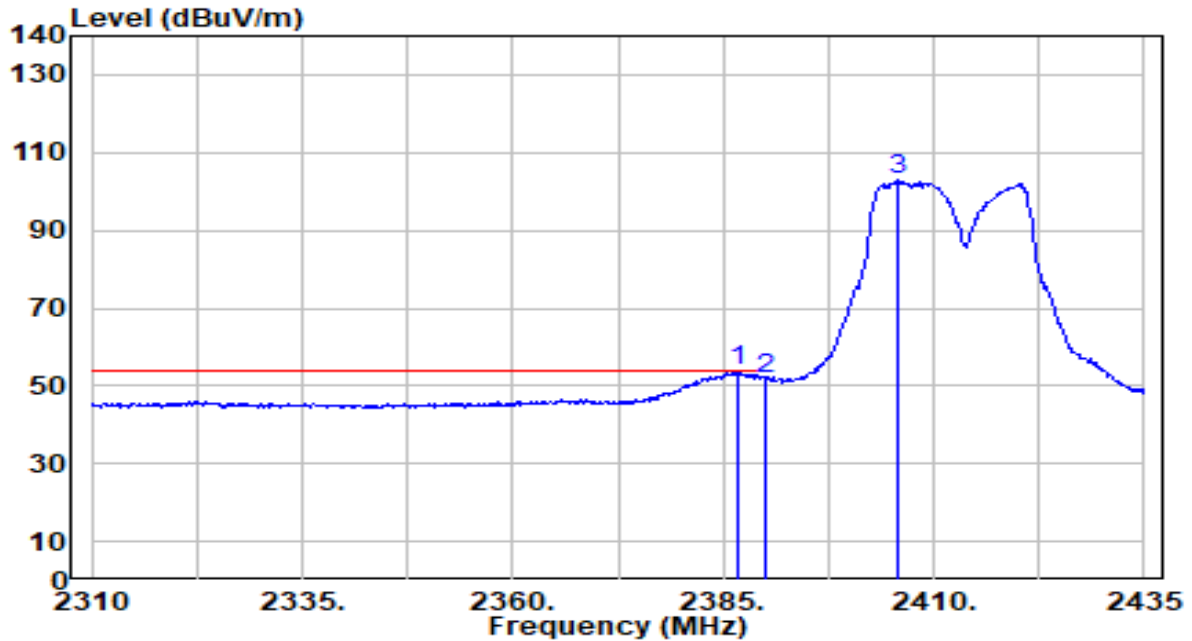


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 23.34 | 30.44 | 53.78 | -0.22 | 54.00 | 190 | 40 | Average |
| 2 | | 21.54 | 30.45 | 51.99 | -2.01 | 54.00 | 190 | 40 | Average |
| 3 | | 72.36 | 30.48 | 102.84 | N/A | N/A | 190 | 40 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

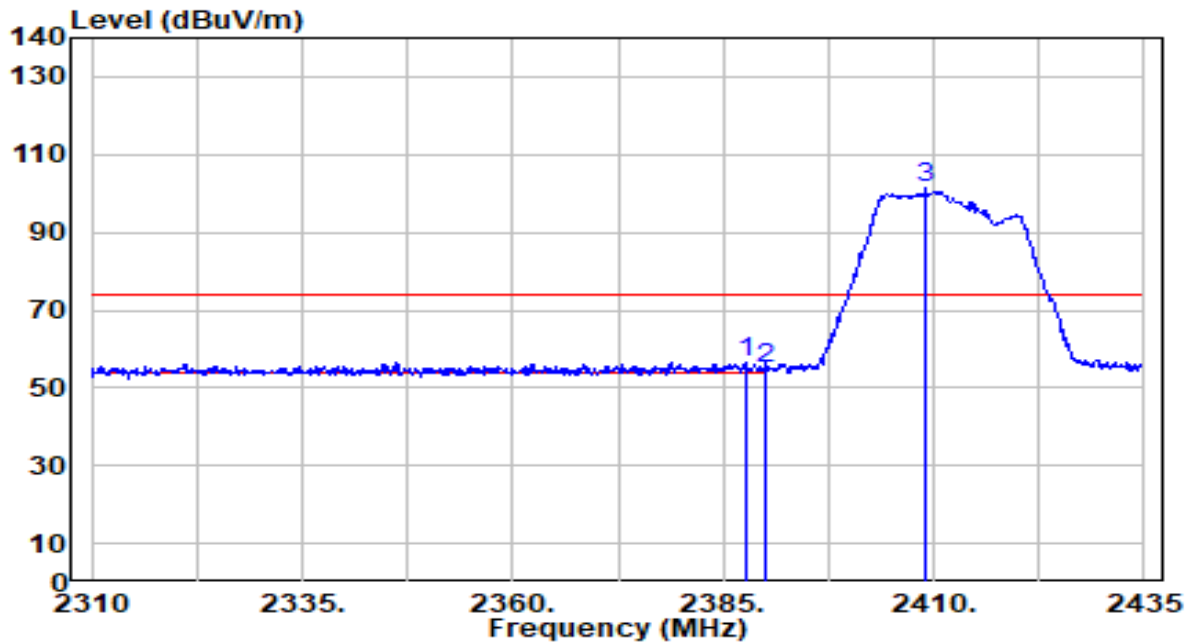


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 26.00 | 30.44 | 56.44 | -17.56 | 74.00 | 308 | 124 | Peak |
| 2 | | 24.69 | 30.45 | 55.14 | -18.86 | 74.00 | 308 | 124 | Peak |
| 3 | | 70.71 | 30.49 | 101.20 | N/A | N/A | 308 | 124 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

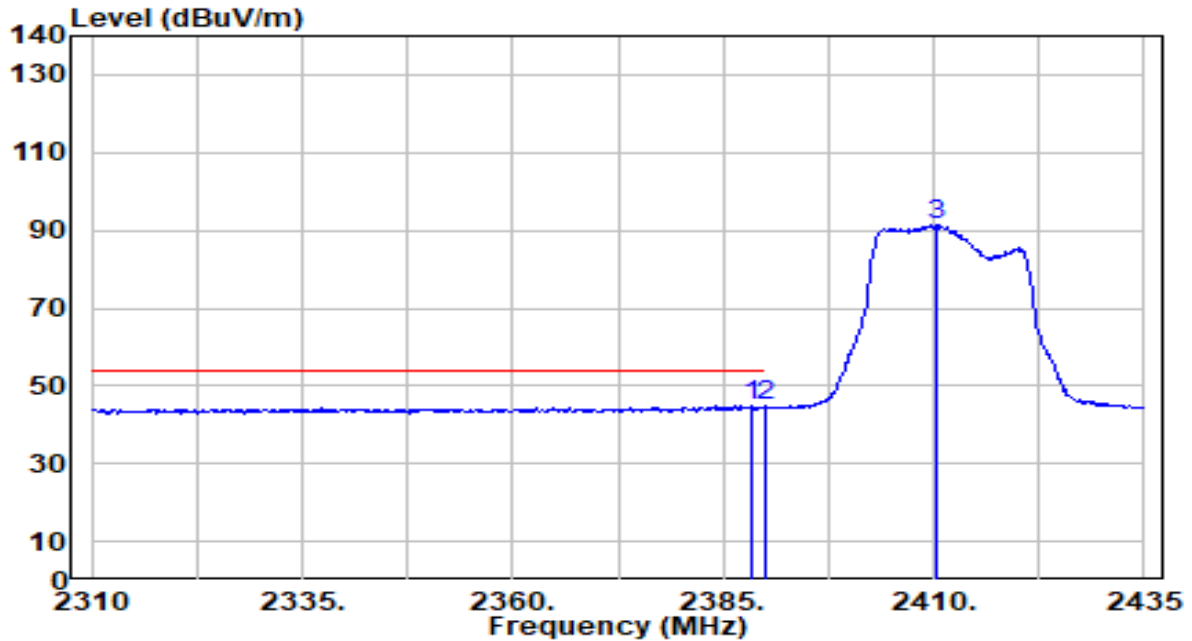


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2388.250 | 14.54 | 30.44 | 44.98 | -9.02 | 54.00 | 308 | 124 | Average |
| 2 | 2390.000 | 14.42 | 30.45 | 44.87 | -9.13 | 54.00 | 308 | 124 | Average |
| 3 | 2410.375 | 61.05 | 30.49 | 91.54 | N/A | N/A | 308 | 124 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

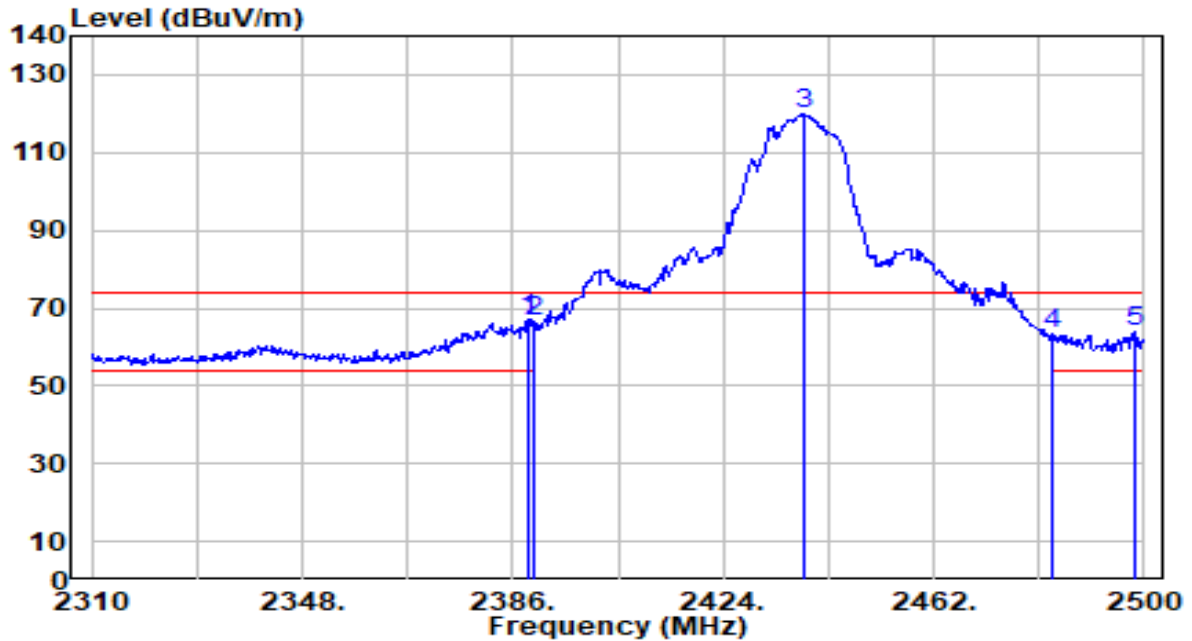


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.040 | 36.42 | 30.44 | 66.87 | -7.13 | 74.00 | 195 | 140 | Peak |
| 2 | 2390.000 | 35.89 | 30.45 | 66.34 | -7.66 | 74.00 | 195 | 140 | Peak |
| 3 | * 2438.440 | 89.35 | 30.53 | 119.88 | N/A | N/A | 195 | 140 | Peak |
| 4 | 2483.500 | 33.06 | 30.59 | 63.65 | -10.35 | 74.00 | 195 | 140 | Peak |
| 5 | 2498.100 | 33.11 | 30.61 | 63.72 | -10.28 | 74.00 | 195 | 140 | Peak |

Note:

- " *", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

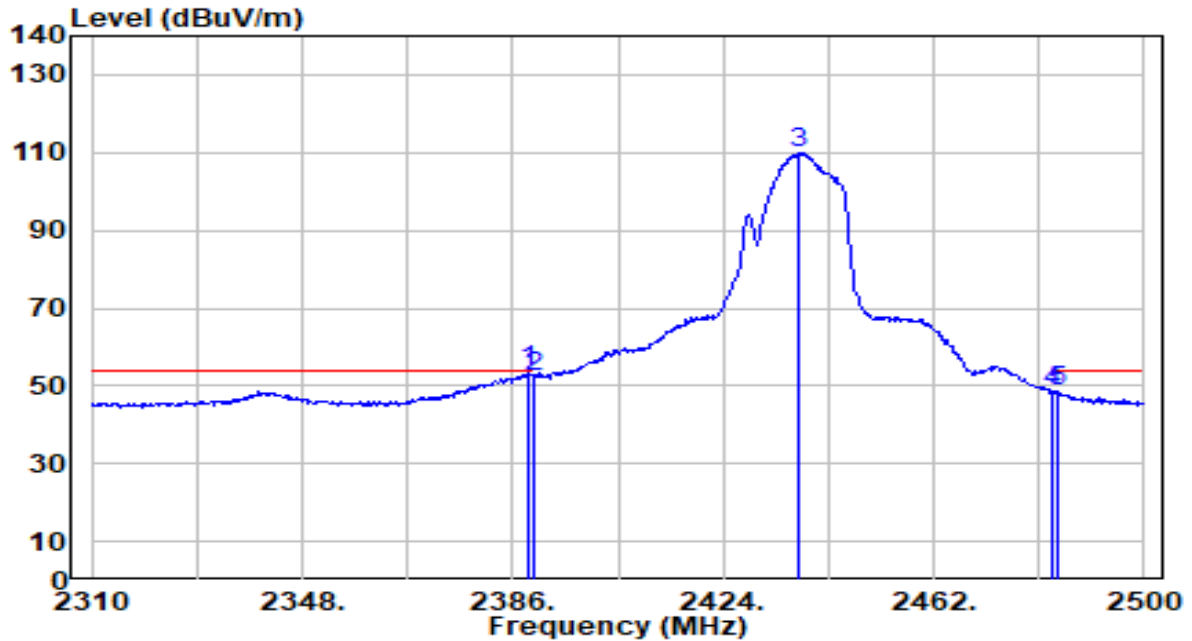


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2389.040 | 23.29 | 30.44 | 53.73 | -0.27 | 54.00 | 195 | 140 | Average |
| 2 | 2390.000 | 21.67 | 30.45 | 52.12 | -1.88 | 54.00 | 195 | 140 | Average |
| 3 | 2437.680 | 79.31 | 30.53 | 109.84 | N/A | N/A | 195 | 140 | Average |
| 4 | 2483.500 | 17.90 | 30.59 | 48.49 | -5.51 | 54.00 | 195 | 140 | Average |
| 5 | 2484.230 | 17.77 | 30.59 | 48.36 | -5.64 | 54.00 | 195 | 140 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

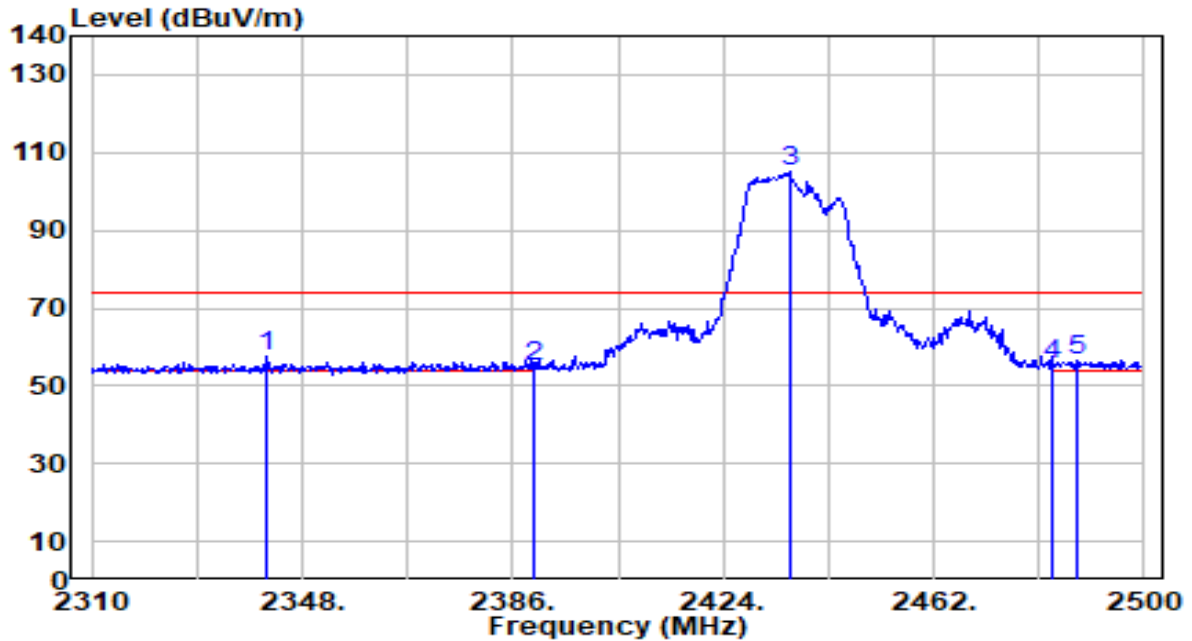


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2341.730 | 27.15 | 30.31 | 57.46 | -16.54 | 74.00 | 297 | 102 | Peak |
| 2 | 2390.000 | 24.58 | 30.45 | 55.03 | -18.97 | 74.00 | 297 | 102 | Peak |
| 3 | 2435.970 | 74.78 | 30.52 | 105.30 | N/A | N/A | 297 | 102 | Peak |
| 4 | 2483.500 | 24.77 | 30.59 | 55.36 | -18.64 | 74.00 | 297 | 102 | Peak |
| 5 | 2488.030 | 25.72 | 30.59 | 56.31 | -17.69 | 74.00 | 297 | 102 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

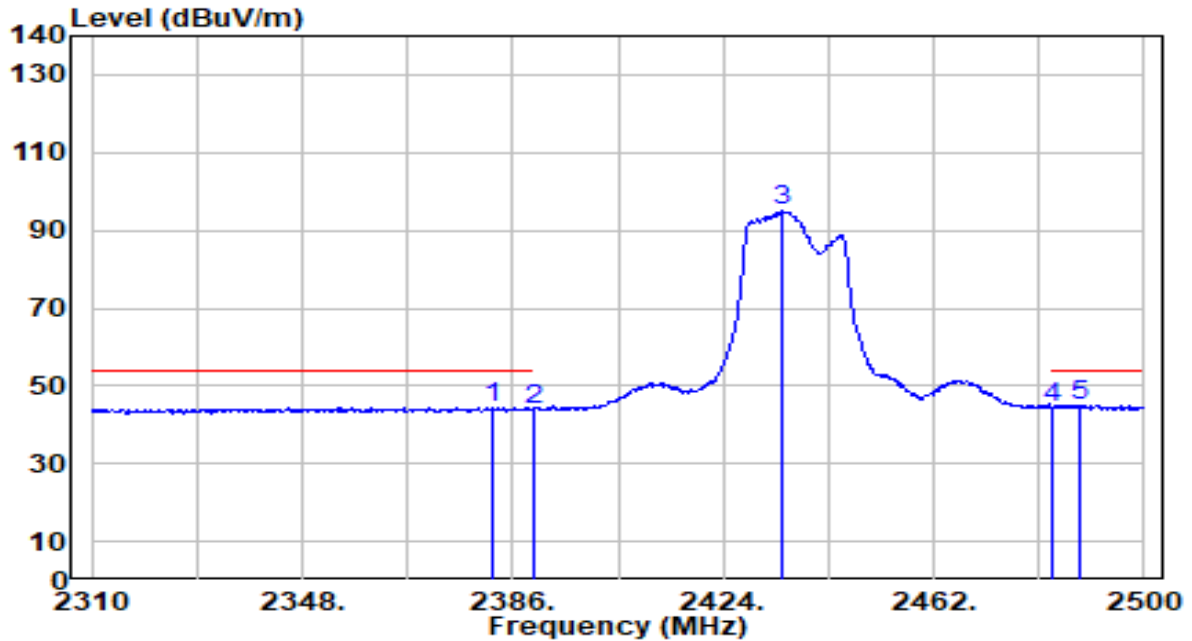


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2382.580 | 14.12 | 30.43 | 44.55 | -9.45 | 54.00 | 297 | 102 | Average |
| 2 | 2390.000 | 13.61 | 30.45 | 44.05 | -9.95 | 54.00 | 297 | 102 | Average |
| 3 | 2434.640 | 64.72 | 30.52 | 95.24 | N/A | N/A | 297 | 102 | Average |
| 4 | 2483.500 | 14.03 | 30.59 | 44.61 | -9.39 | 54.00 | 297 | 102 | Average |
| 5 | * 2488.410 | 14.44 | 30.59 | 45.04 | -8.96 | 54.00 | 297 | 102 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

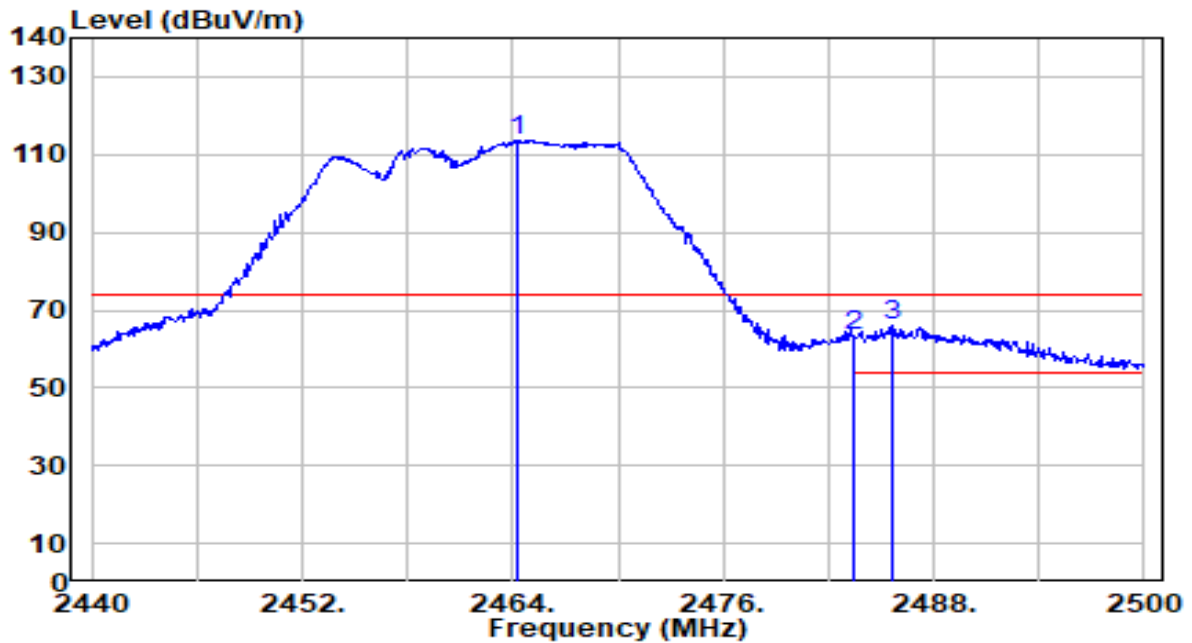


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2464.240 | 82.96 | 30.56 | 113.53 | N/A | N/A | 170 | 6 | Peak |
| 2 | 2483.500 | 32.70 | 30.59 | 63.29 | -10.71 | 74.00 | 170 | 6 | Peak |
| 3 | * 2485.600 | 35.19 | 30.59 | 65.78 | -8.22 | 74.00 | 170 | 6 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

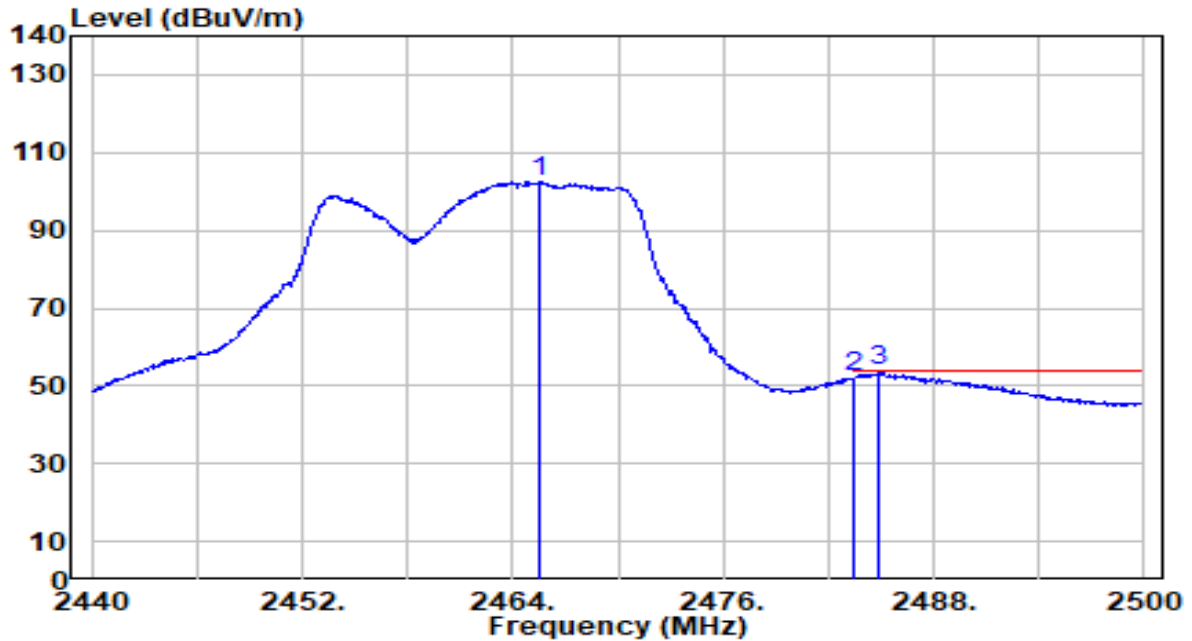


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2465.560 | 71.94 | 30.56 | 102.51 | N/A | N/A | 170 | 6 | Average |
| 2 | 2483.500 | 21.73 | 30.59 | 52.32 | -1.68 | 54.00 | 170 | 6 | Average |
| 3 | * 2484.880 | 23.15 | 30.59 | 53.74 | -0.26 | 54.00 | 170 | 6 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

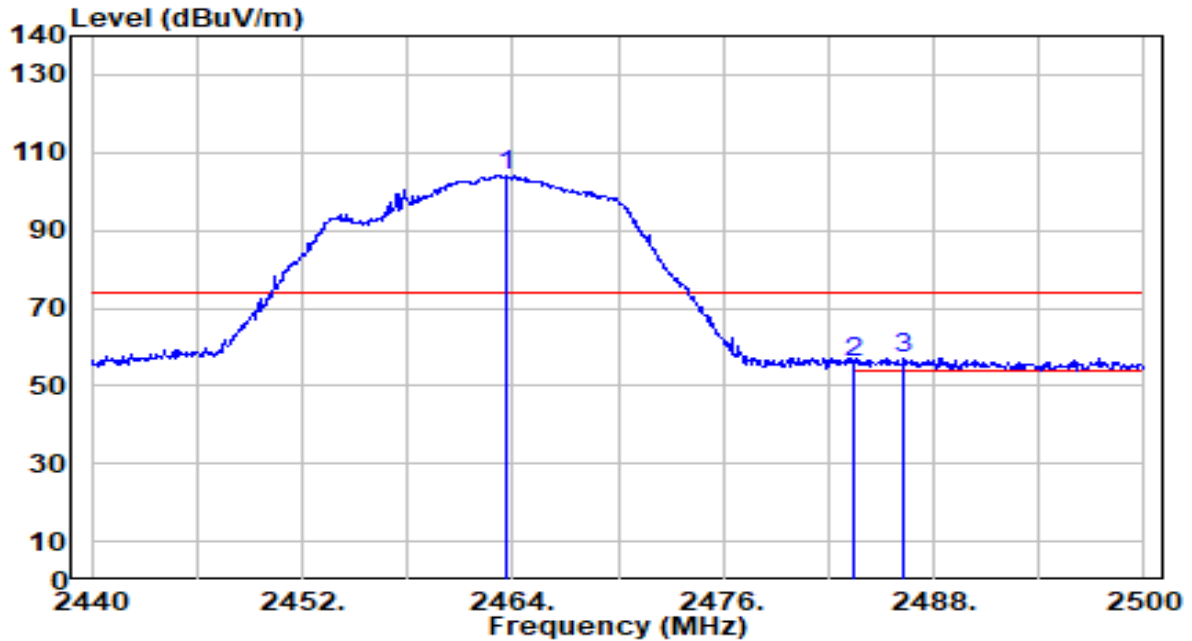


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.700 | 73.43 | 30.56 | 103.99 | N/A | N/A | 282 | 103 | Peak |
| 2 | 2483.500 | 25.38 | 30.59 | 55.97 | -18.03 | 74.00 | 282 | 103 | Peak |
| 3 | * 2486.320 | 26.63 | 30.59 | 57.23 | -16.77 | 74.00 | 282 | 103 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

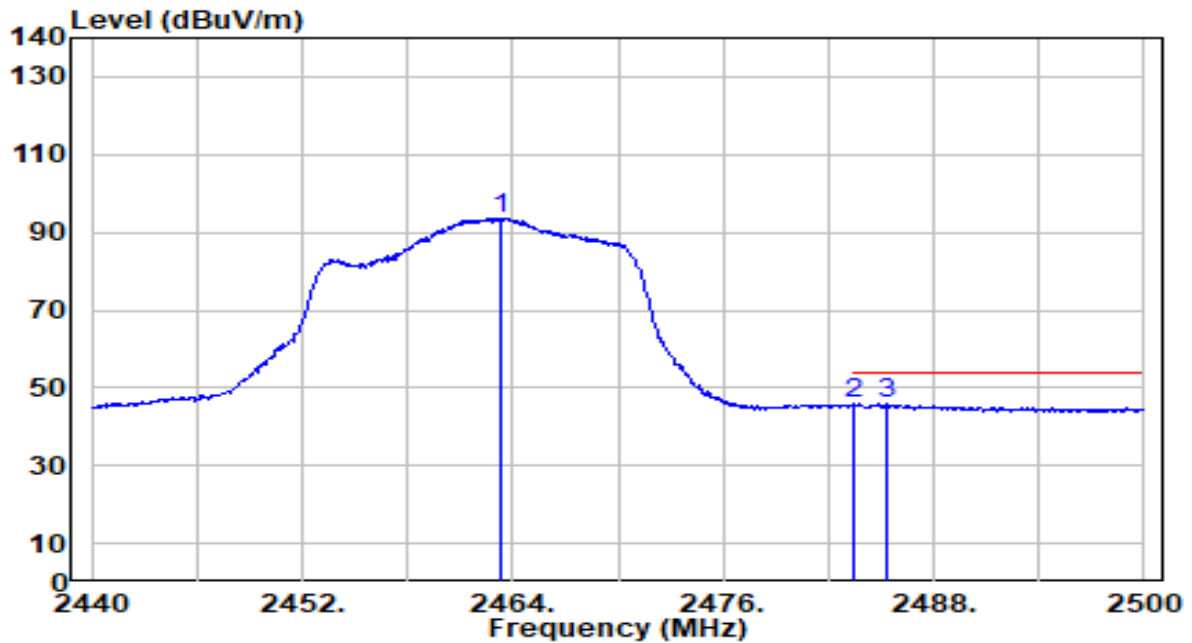


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.340 | 63.09 | 30.56 | 93.65 | N/A | N/A | 282 | 103 | Average |
| 2 | 2483.500 | 15.22 | 30.59 | 45.81 | -8.19 | 54.00 | 282 | 103 | Average |
| 3 | * 2485.300 | 15.28 | 30.59 | 45.87 | -8.13 | 54.00 | 282 | 103 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

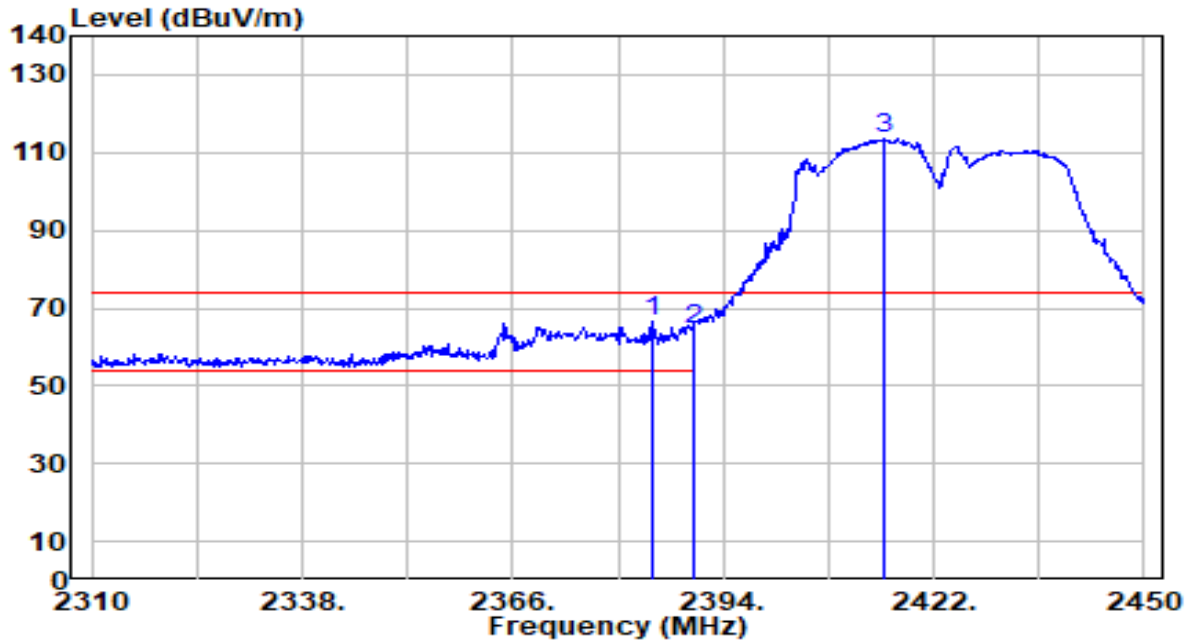


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2384.760 | 35.98 | 30.43 | 66.41 | -7.59 | 74.00 | 190 | 40 | Peak |
| 2 | 2390.000 | 34.17 | 30.45 | 64.61 | -9.39 | 74.00 | 190 | 40 | Peak |
| 3 | 2415.280 | 82.96 | 30.50 | 113.45 | N/A | N/A | 190 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

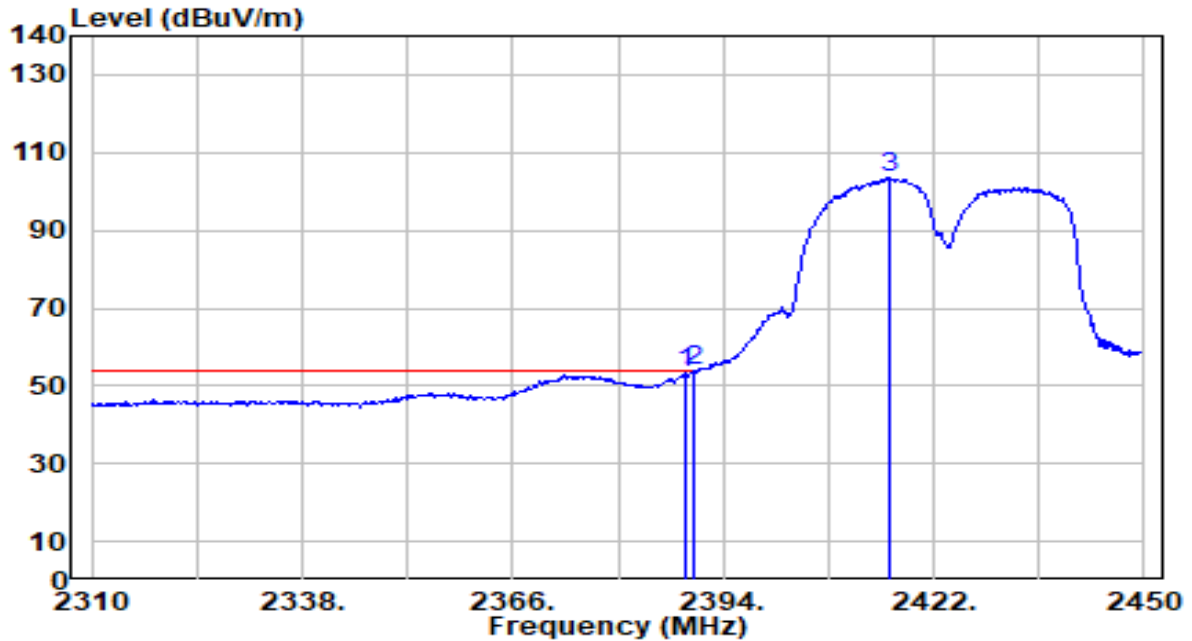


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.960 | 22.72 | 30.44 | 53.16 | -0.84 | 54.00 | 190 | 40 | Average |
| 2 | * 2390.000 | 23.31 | 30.45 | 53.76 | -0.24 | 54.00 | 190 | 40 | Average |
| 3 | 2416.120 | 72.86 | 30.50 | 103.35 | N/A | N/A | 190 | 40 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

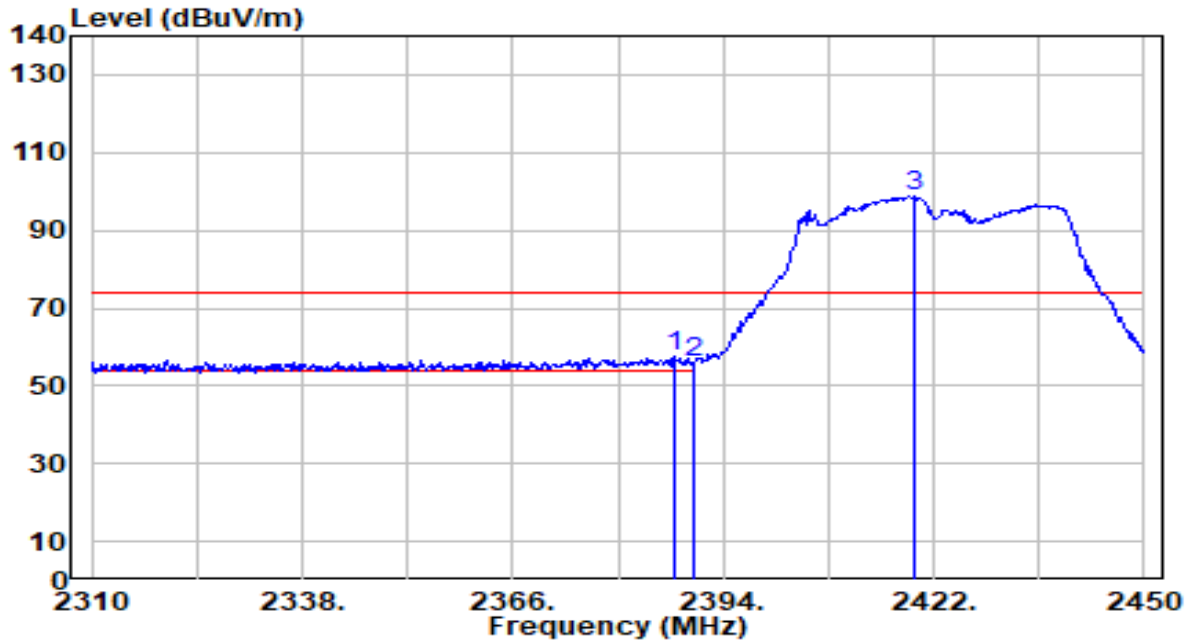


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2387.700 | 27.09 | 30.44 | 57.53 | -16.47 | 74.00 | 308 | 124 | Peak |
| 2 | 2390.000 | 25.66 | 30.45 | 56.11 | -17.89 | 74.00 | 308 | 124 | Peak |
| 3 | 2419.340 | 68.18 | 30.50 | 98.69 | N/A | N/A | 308 | 124 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

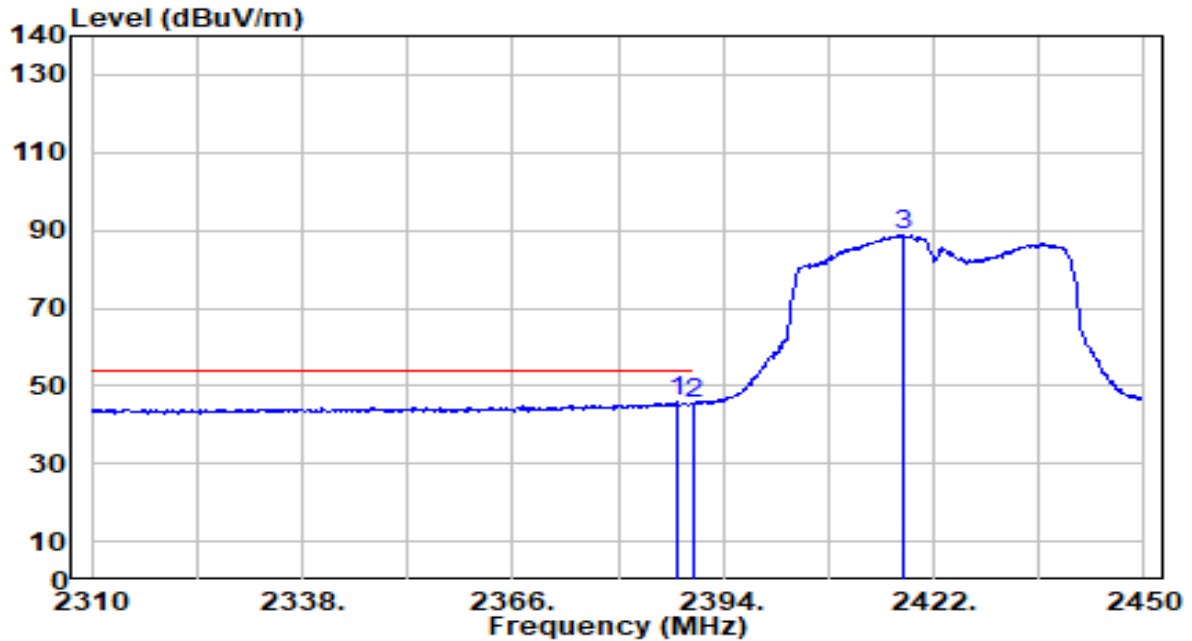


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 2387.840 | 15.28 | 30.44 | 45.73 | -8.27 | 54.00 | 308 | 124 | Average |
| 2 | | 2390.000 | 15.19 | 30.45 | 45.63 | -8.37 | 54.00 | 308 | 124 | Average |
| 3 | | 2417.800 | 58.31 | 30.50 | 88.81 | N/A | N/A | 308 | 124 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

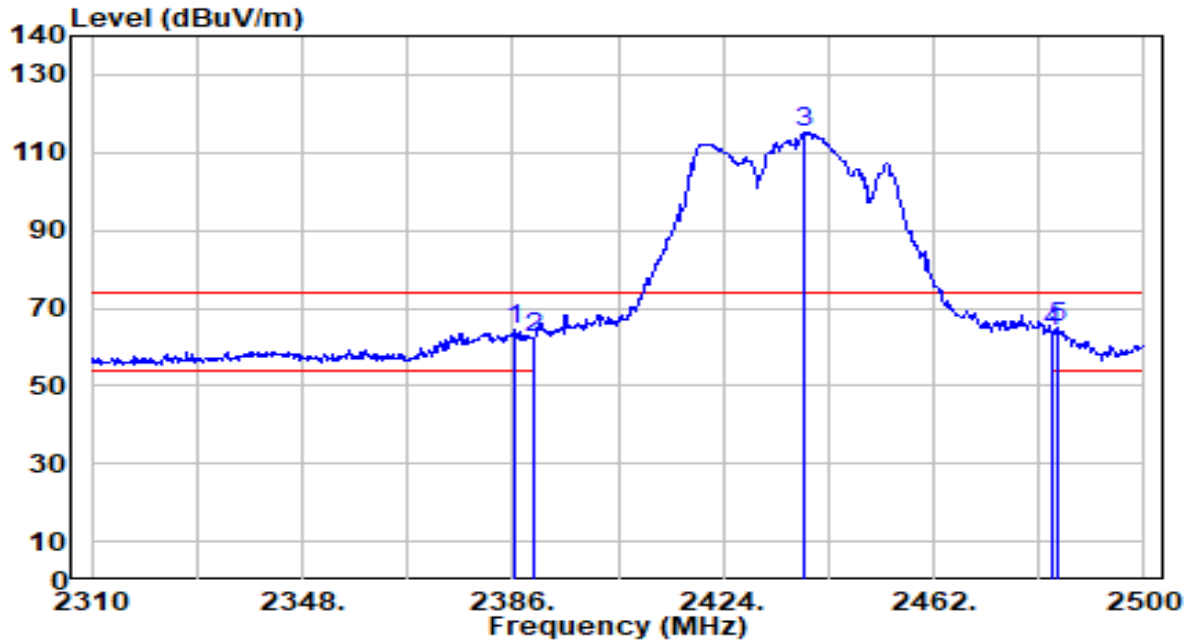


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2386.380 | 33.99 | 30.44 | 64.43 | -9.57 | 74.00 | 195 | 140 | Peak |
| 2 | 2390.000 | 32.10 | 30.45 | 62.55 | -11.45 | 74.00 | 195 | 140 | Peak |
| 3 | 2438.630 | 84.58 | 30.53 | 115.11 | N/A | N/A | 195 | 140 | Peak |
| 4 | 2483.500 | 33.38 | 30.59 | 63.97 | -10.03 | 74.00 | 195 | 140 | Peak |
| 5 | * 2484.230 | 34.58 | 30.59 | 65.17 | -8.83 | 74.00 | 195 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

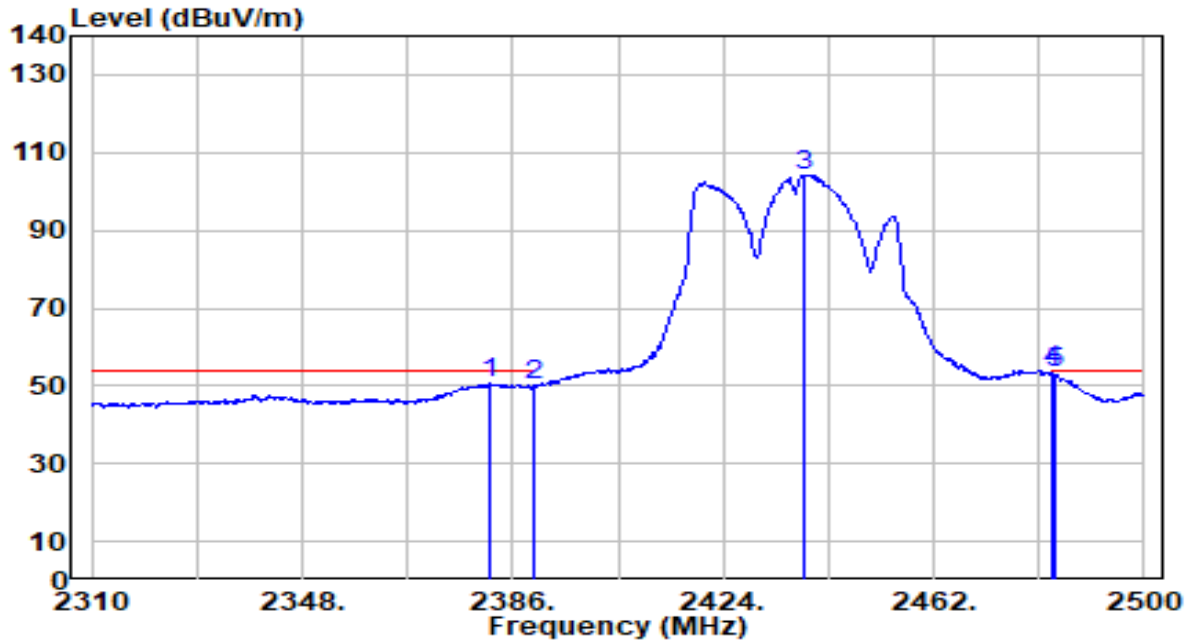


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2382.010 | 20.06 | 30.42 | 50.49 | -3.51 | 54.00 | 195 | 140 | Average |
| 2 | 2390.000 | 19.54 | 30.45 | 49.99 | -4.01 | 54.00 | 195 | 140 | Average |
| 3 | 2438.820 | 73.65 | 30.53 | 104.18 | N/A | N/A | 195 | 140 | Average |
| 4 | * 2483.500 | 23.12 | 30.59 | 53.71 | -0.29 | 54.00 | 195 | 140 | Average |
| 5 | 2484.040 | 22.93 | 30.59 | 53.52 | -0.48 | 54.00 | 195 | 140 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

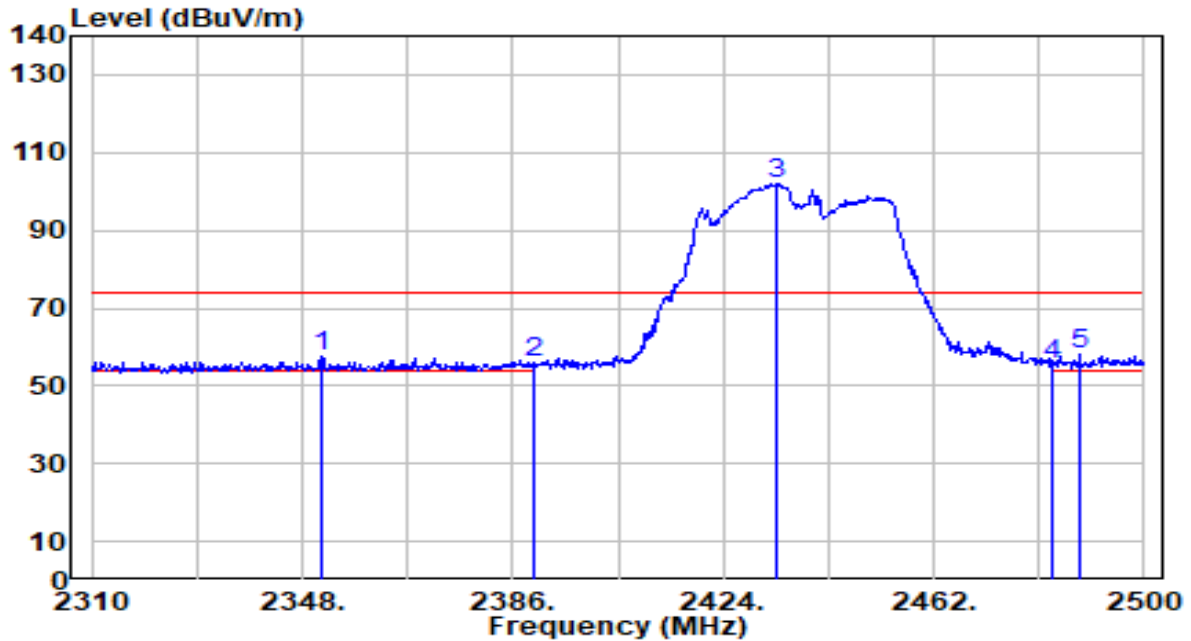


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2351.610 | 26.98 | 30.34 | 57.32 | -16.68 | 74.00 | 297 | 102 | Peak |
| 2 | 2390.000 | 25.34 | 30.45 | 55.79 | -18.21 | 74.00 | 297 | 102 | Peak |
| 3 | 2433.500 | 71.46 | 30.52 | 101.98 | N/A | N/A | 297 | 102 | Peak |
| 4 | 2483.500 | 24.62 | 30.59 | 55.21 | -18.79 | 74.00 | 297 | 102 | Peak |
| 5 | * 2488.410 | 27.28 | 30.59 | 57.88 | -16.12 | 74.00 | 297 | 102 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

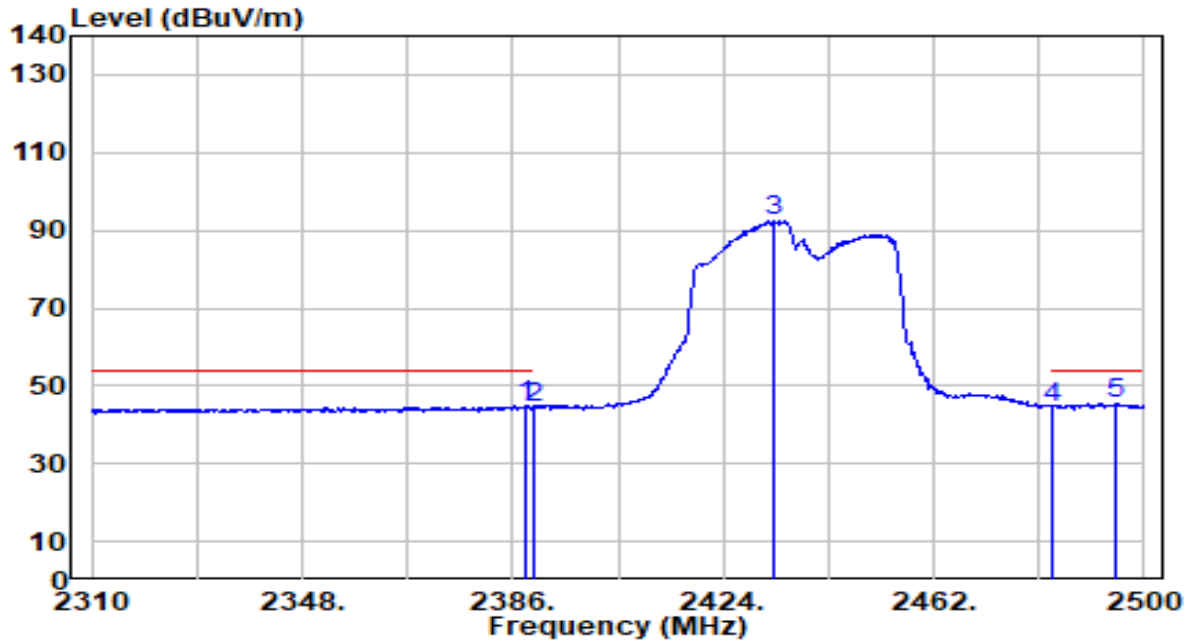


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.280 | 14.53 | 30.44 | 44.97 | -9.03 | 54.00 | 297 | 102 | Average |
| 2 | 2390.000 | 14.14 | 30.45 | 44.59 | -9.41 | 54.00 | 297 | 102 | Average |
| 3 | 2433.120 | 62.19 | 30.52 | 92.71 | N/A | N/A | 297 | 102 | Average |
| 4 | 2483.500 | 13.74 | 30.59 | 44.33 | -9.67 | 54.00 | 297 | 102 | Average |
| 5 | * 2494.870 | 14.83 | 30.60 | 45.44 | -8.56 | 54.00 | 297 | 102 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

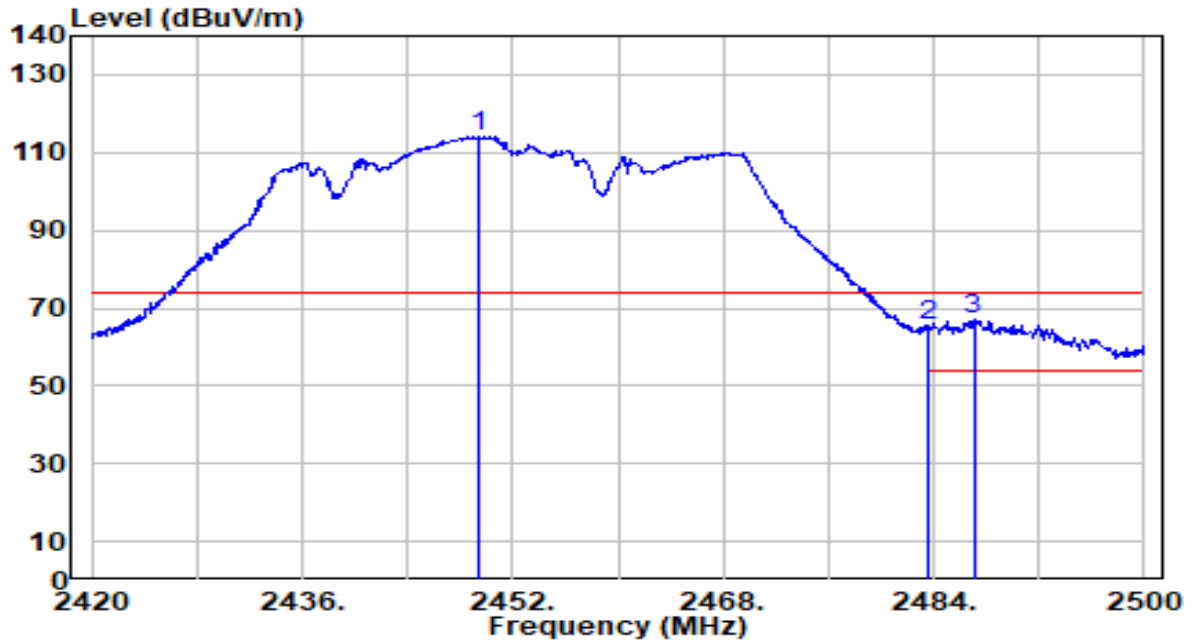


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2449.520 | 83.58 | 30.54 | 114.12 | N/A | N/A | 170 | 6 | Peak |
| 2 | 2483.500 | 34.96 | 30.59 | 65.55 | -8.45 | 74.00 | 170 | 6 | Peak |
| 3 | * 2487.040 | 36.60 | 30.59 | 67.19 | -6.81 | 74.00 | 170 | 6 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

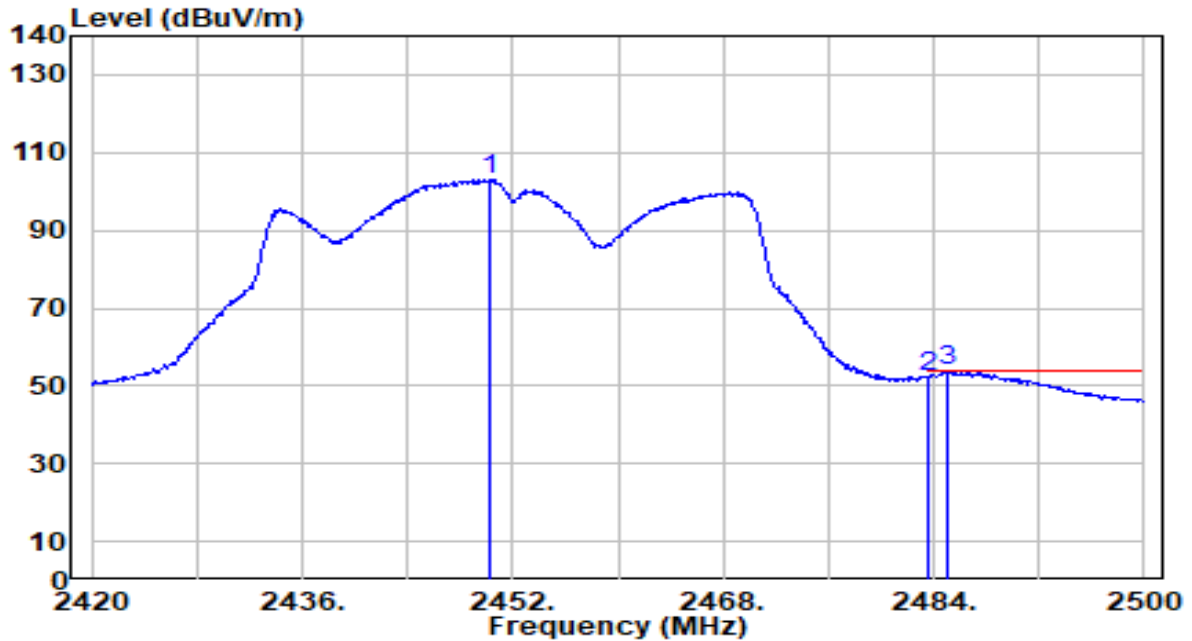


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2450.160 | 72.58 | 30.54 | 103.12 | N/A | N/A | 170 | 6 | Average |
| 2 | 2483.500 | 21.80 | 30.59 | 52.39 | -1.61 | 54.00 | 170 | 6 | Average |
| 3 | * 2484.960 | 23.19 | 30.59 | 53.78 | -0.22 | 54.00 | 170 | 6 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

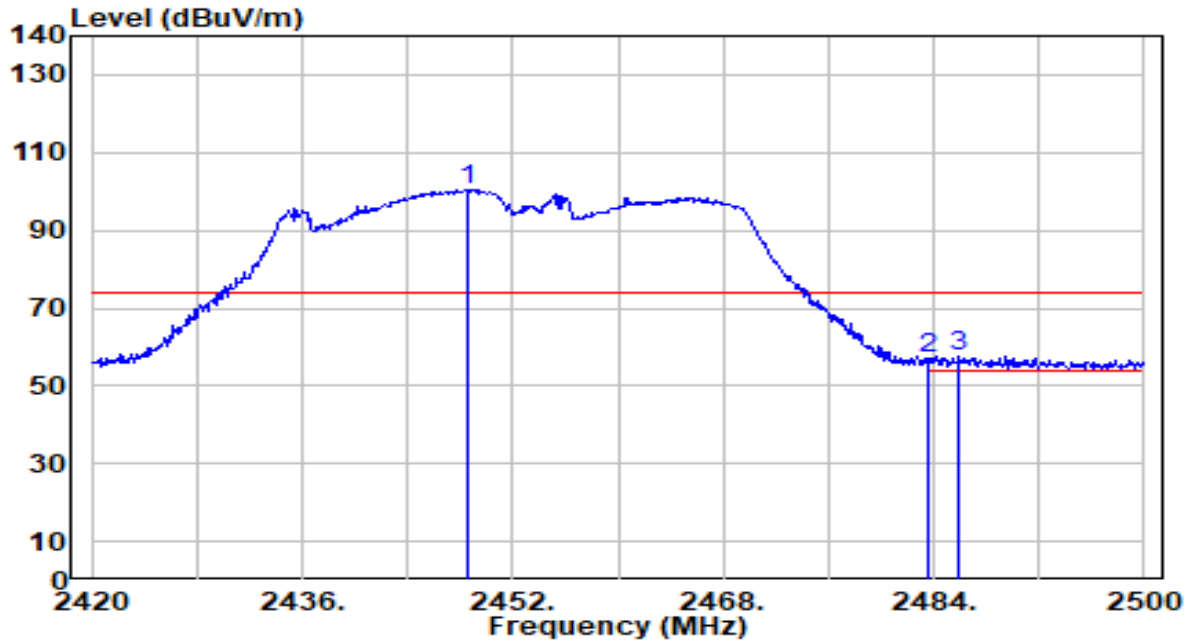


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2448.640 | 69.97 | 30.54 | 100.51 | N/A | N/A | 282 | 103 | Peak |
| 2 | 2483.500 | 26.68 | 30.59 | 57.27 | -16.73 | 74.00 | 282 | 103 | Peak |
| 3 | * 2485.920 | 27.04 | 30.59 | 57.63 | -16.37 | 74.00 | 282 | 103 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

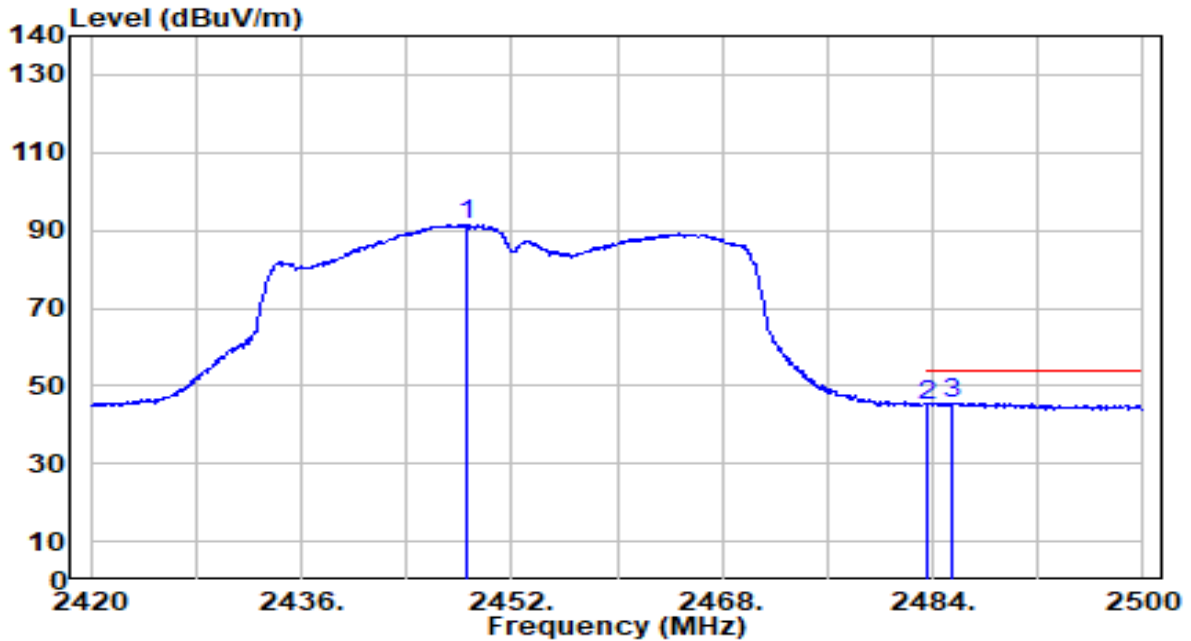


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2448.640 | 61.02 | 30.54 | 91.56 | N/A | N/A | 282 | 103 | Average |
| 2 | 2483.500 | 14.49 | 30.59 | 45.08 | -8.92 | 54.00 | 282 | 103 | Average |
| 3 | * 2485.520 | 15.10 | 30.59 | 45.69 | -8.31 | 54.00 | 282 | 103 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

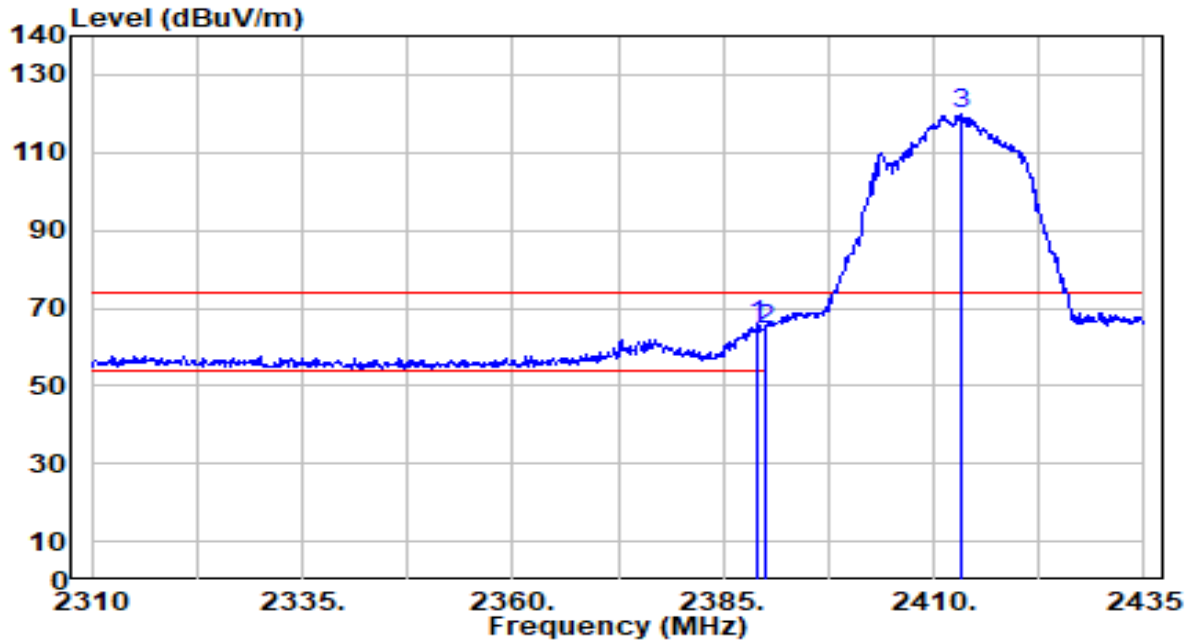


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2389.000 | 34.83 | 30.44 | 65.27 | -8.73 | 74.00 | 190 | 40 | Peak |
| 2 | 2390.000 | 34.12 | 30.45 | 64.57 | -9.43 | 74.00 | 190 | 40 | Peak |
| 3 | 2413.125 | 89.61 | 30.49 | 120.10 | N/A | N/A | 190 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

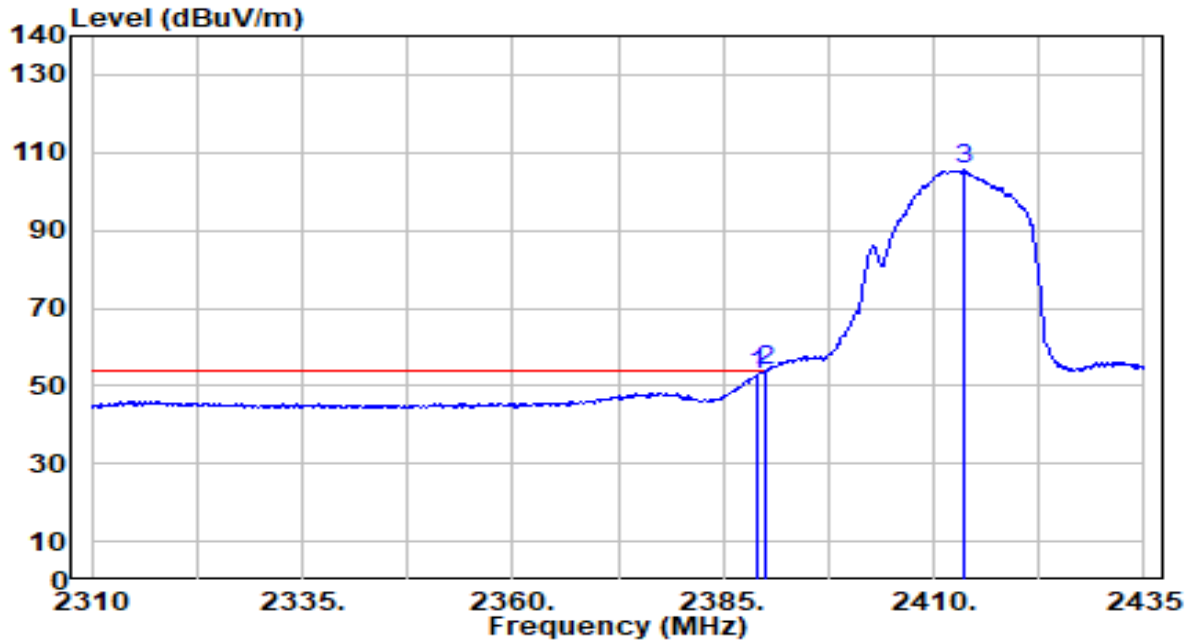


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.000 | 22.39 | 30.44 | 52.84 | -1.16 | 54.00 | 190 | 40 | Average |
| 2 | * 2390.000 | 23.30 | 30.45 | 53.74 | -0.26 | 54.00 | 190 | 40 | Average |
| 3 | 2413.625 | 74.96 | 30.49 | 105.46 | N/A | N/A | 190 | 40 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

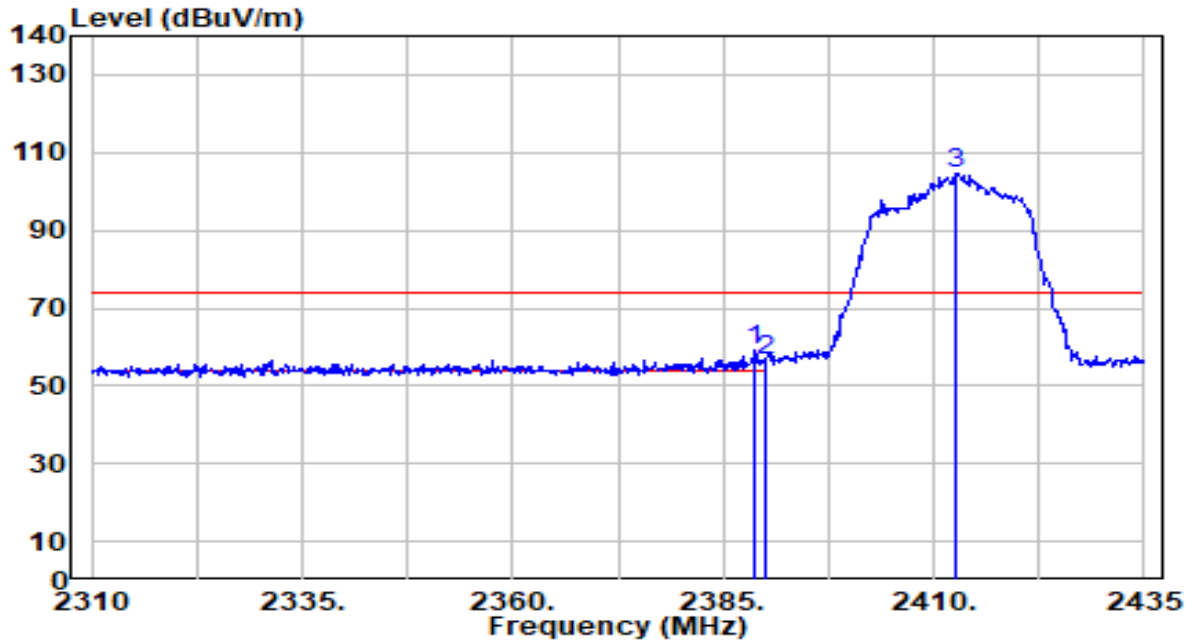


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 28.64 | 30.44 | 59.08 | -14.92 | 74.00 | 308 | 124 | Peak |
| 2 | | 26.14 | 30.45 | 56.58 | -17.42 | 74.00 | 308 | 124 | Peak |
| 3 | | 74.21 | 30.49 | 104.71 | N/A | N/A | 308 | 124 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

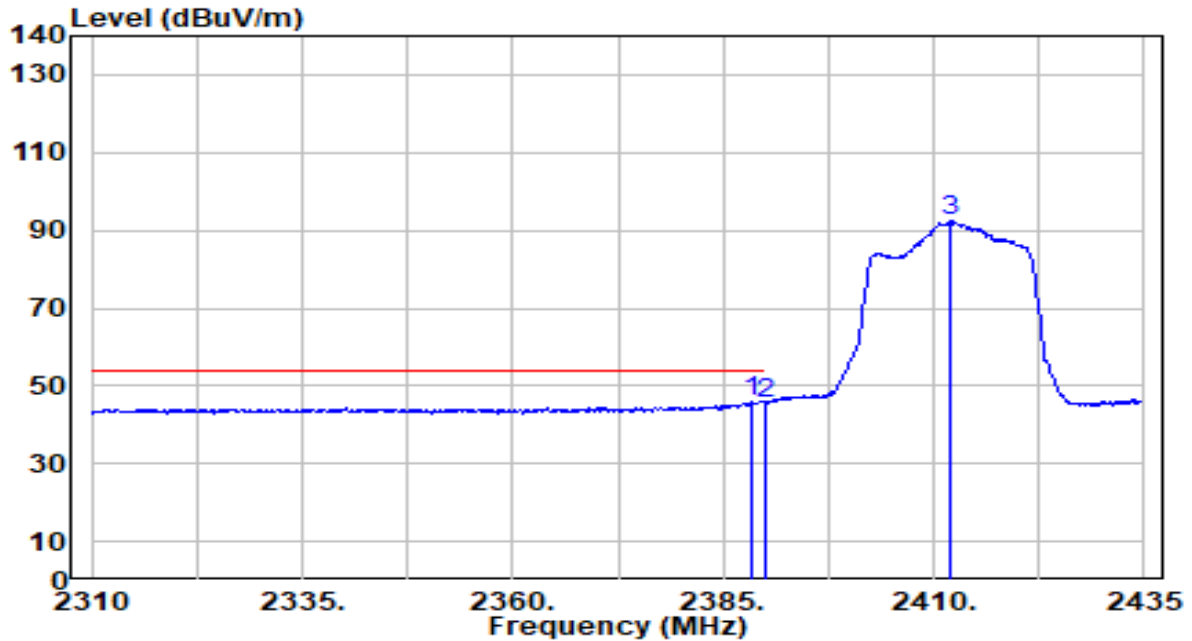


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2388.500 | 15.31 | 30.44 | 45.76 | -8.24 | 54.00 | 308 | 124 | Average |
| 2 | 2390.000 | 15.09 | 30.45 | 45.54 | -8.46 | 54.00 | 308 | 124 | Average |
| 3 | 2412.000 | 61.75 | 30.49 | 92.24 | N/A | N/A | 308 | 124 | Average |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

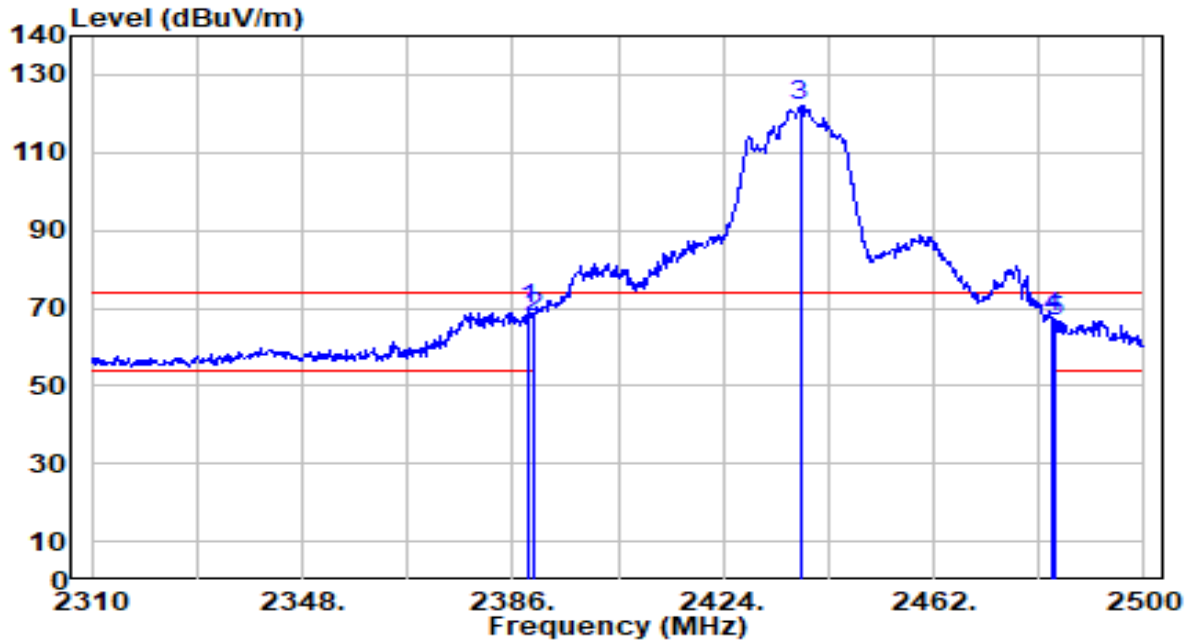


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2389.040 | 39.45 | 30.44 | 69.89 | -4.11 | 74.00 | 195 | 140 | Peak |
| 2 | 2390.000 | 37.41 | 30.45 | 67.86 | -6.14 | 74.00 | 195 | 140 | Peak |
| 3 | 2437.870 | 91.56 | 30.53 | 122.09 | N/A | N/A | 195 | 140 | Peak |
| 4 | 2483.500 | 36.87 | 30.59 | 67.46 | -6.54 | 74.00 | 195 | 140 | Peak |
| 5 | 2484.040 | 36.24 | 30.59 | 66.83 | -7.17 | 74.00 | 195 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

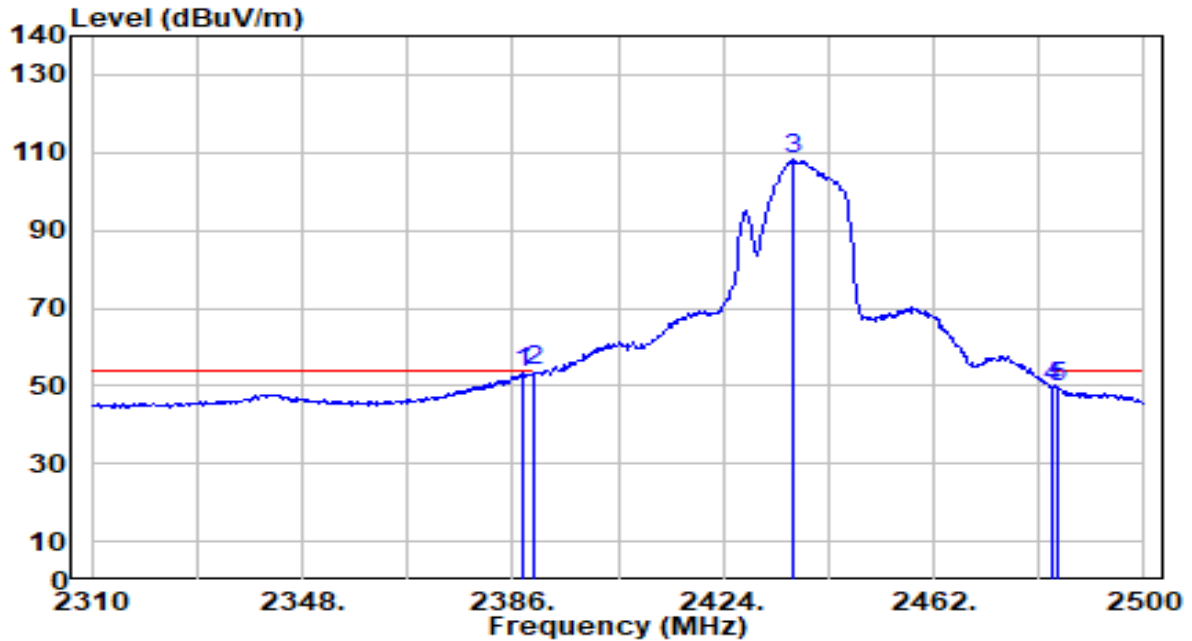


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2387.900 | 23.00 | 30.44 | 53.44 | -0.56 | 54.00 | 195 | 140 | Average |
| 2 | * 2390.000 | 23.30 | 30.45 | 53.74 | -0.26 | 54.00 | 195 | 140 | Average |
| 3 | 2436.540 | 77.75 | 30.52 | 108.27 | N/A | N/A | 195 | 140 | Average |
| 4 | 2483.500 | 18.88 | 30.59 | 49.47 | -4.53 | 54.00 | 195 | 140 | Average |
| 5 | 2484.230 | 19.33 | 30.59 | 49.92 | -4.08 | 54.00 | 195 | 140 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

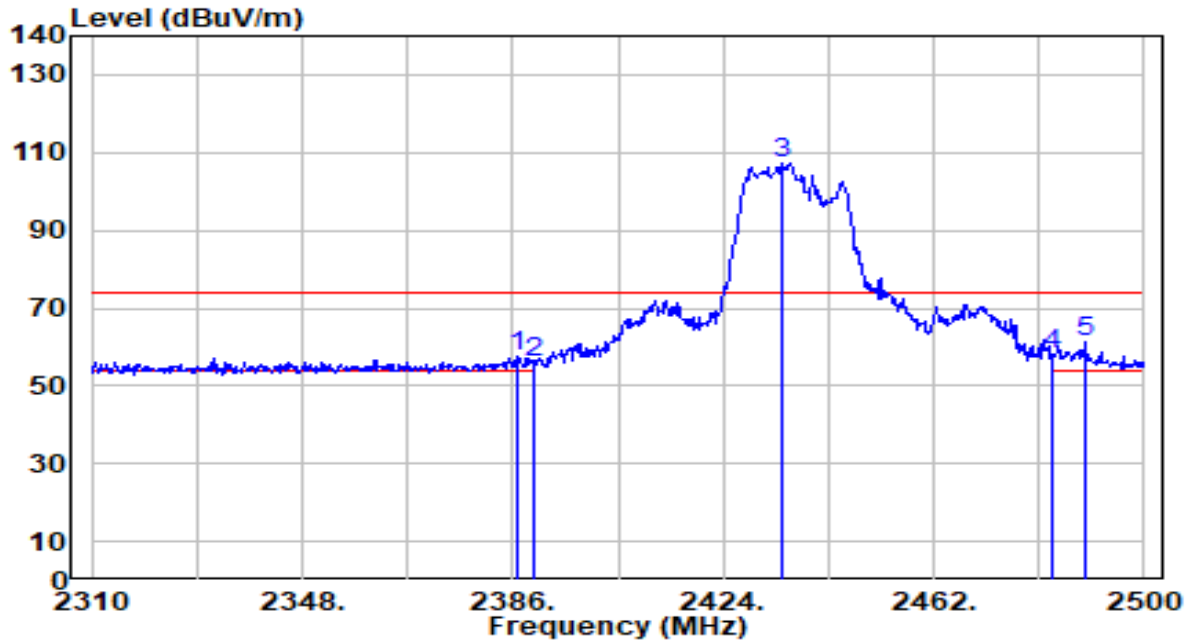


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2386.760 | 27.08 | 30.44 | 57.52 | -16.48 | 74.00 | 297 | 102 | Peak |
| 2 | 2390.000 | 25.54 | 30.45 | 55.99 | -18.01 | 74.00 | 297 | 102 | Peak |
| 3 | 2434.830 | 76.77 | 30.52 | 107.29 | N/A | N/A | 297 | 102 | Peak |
| 4 | 2483.500 | 27.68 | 30.59 | 58.27 | -15.73 | 74.00 | 297 | 102 | Peak |
| 5 | * 2489.170 | 30.47 | 30.60 | 61.06 | -12.94 | 74.00 | 297 | 102 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

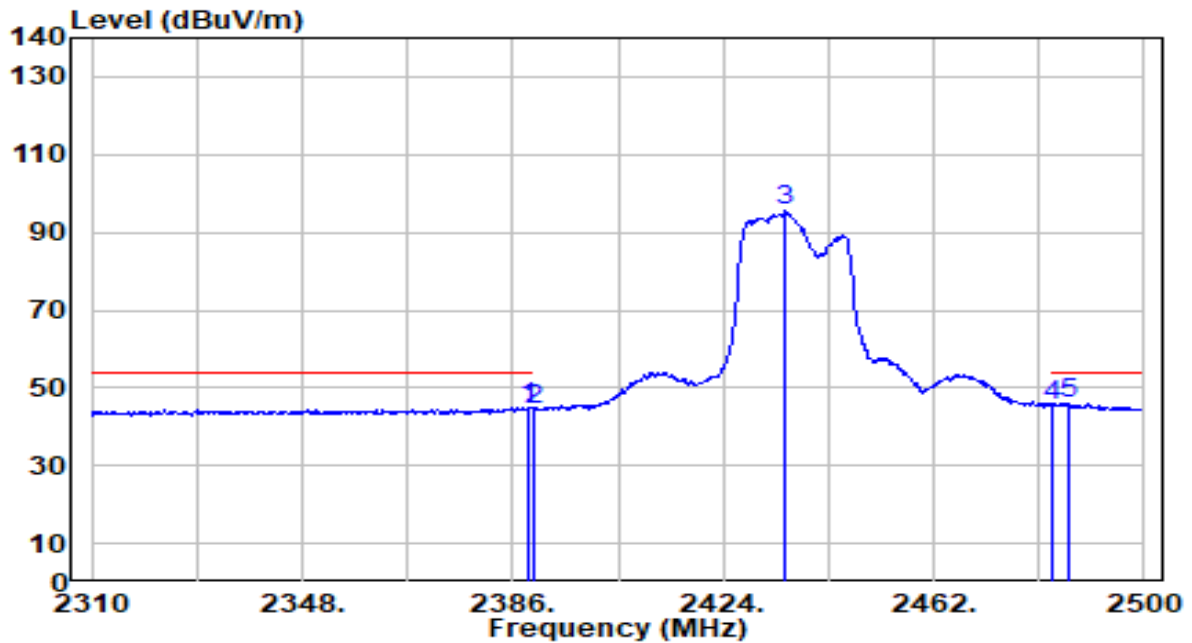


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.040 | 14.56 | 30.44 | 45.00 | -9.00 | 54.00 | 297 | 102 | Average |
| 2 | 2390.000 | 14.10 | 30.45 | 44.55 | -9.45 | 54.00 | 297 | 102 | Average |
| 3 | 2435.210 | 64.91 | 30.52 | 95.43 | N/A | N/A | 297 | 102 | Average |
| 4 | 2483.500 | 14.82 | 30.59 | 45.40 | -8.60 | 54.00 | 297 | 102 | Average |
| 5 | * 2486.510 | 15.30 | 30.59 | 45.89 | -8.11 | 54.00 | 297 | 102 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

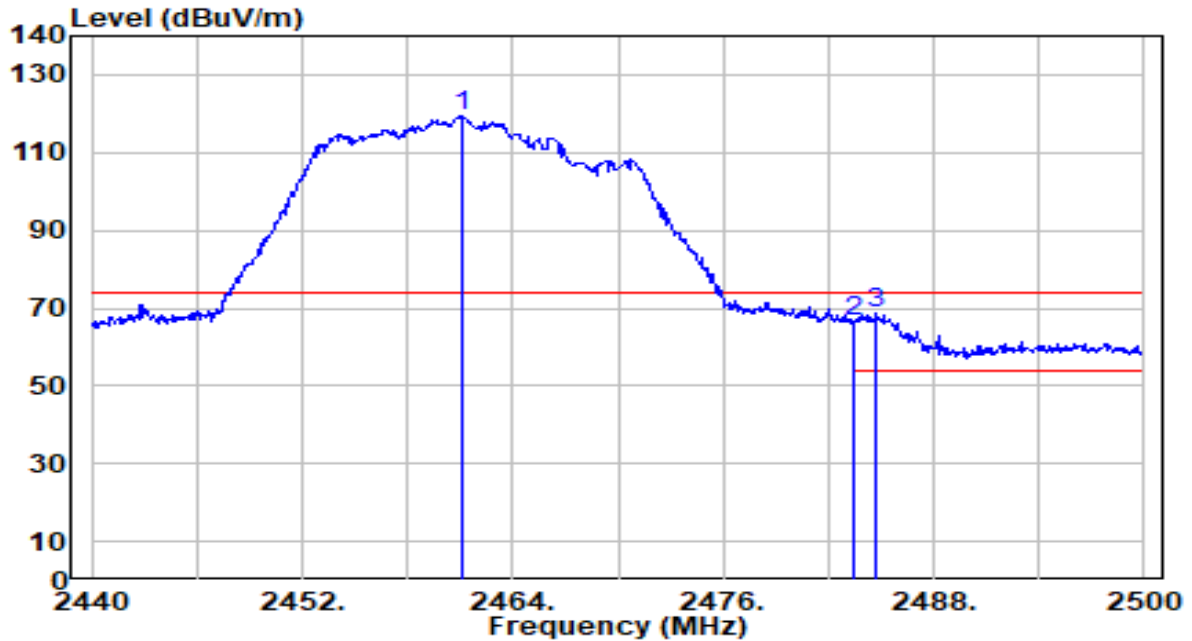


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2461.060 | 88.67 | 30.56 | 119.23 | N/A | N/A | 170 | 6 | Peak |
| 2 | 2483.500 | 36.07 | 30.59 | 66.66 | -7.34 | 74.00 | 170 | 6 | Peak |
| 3 | * 2484.760 | 37.87 | 30.59 | 68.46 | -5.54 | 74.00 | 170 | 6 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

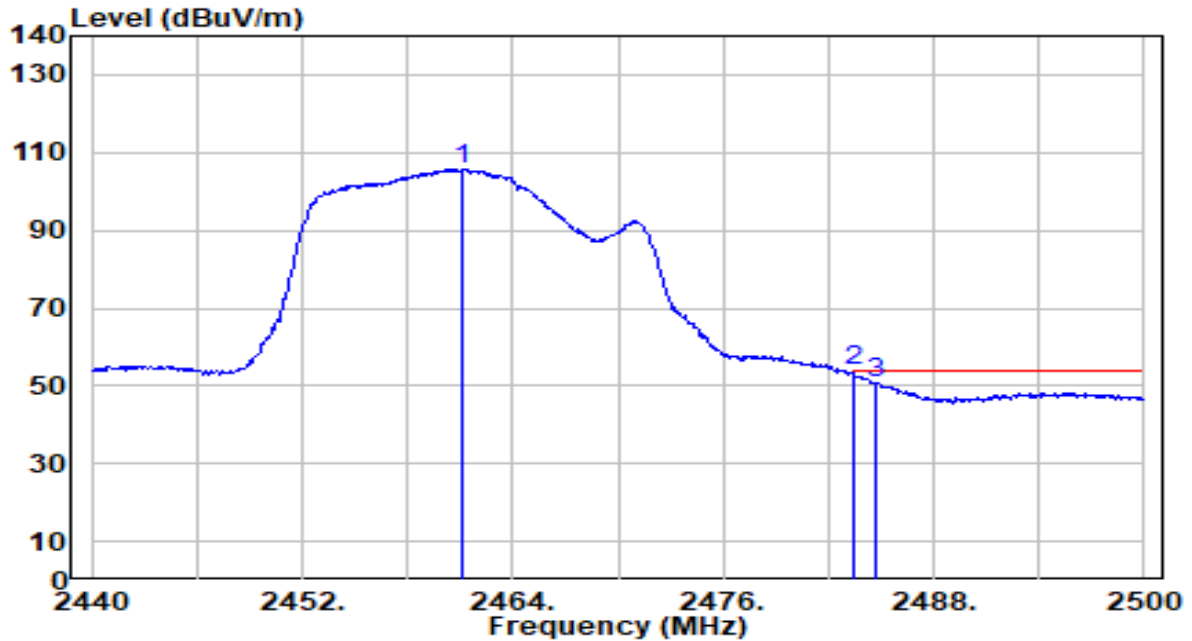


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2461.120 | 75.32 | 30.56 | 105.88 | N/A | N/A | 170 | 6 | Average |
| 2 | * 2483.500 | 23.13 | 30.59 | 53.72 | -0.28 | 54.00 | 170 | 6 | Average |
| 3 | 2484.700 | 20.36 | 30.59 | 50.95 | -3.05 | 54.00 | 170 | 6 | Average |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

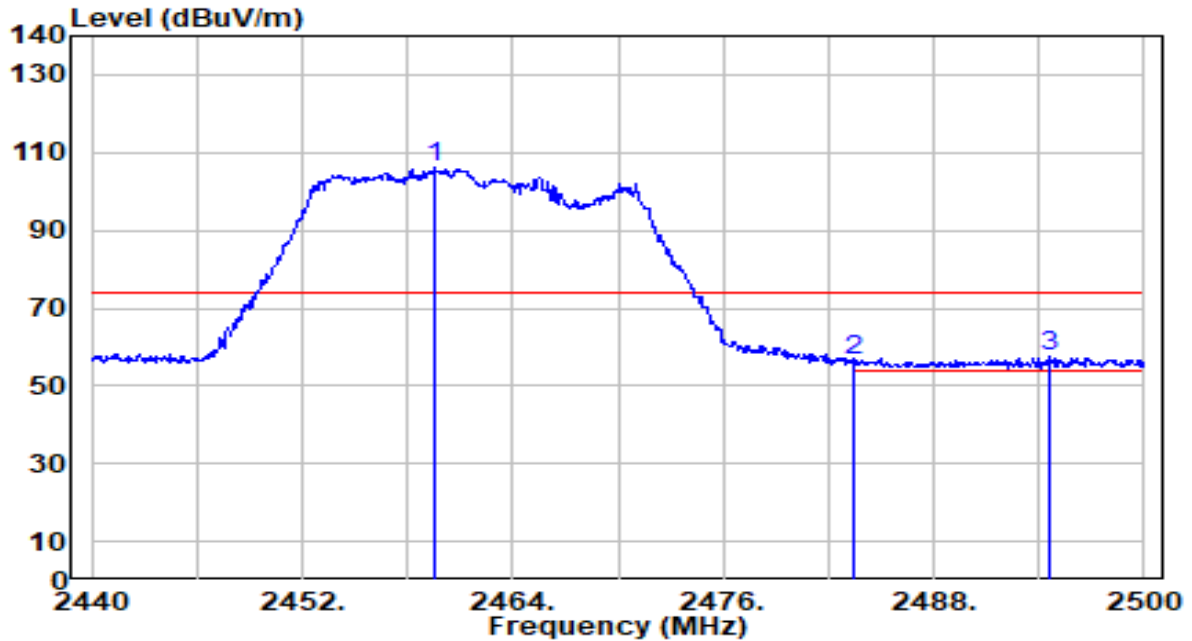


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2459.620 | 75.65 | 30.56 | 106.20 | N/A | N/A | 282 | 103 | Peak |
| 2 | 2483.500 | 25.88 | 30.59 | 56.47 | -17.53 | 74.00 | 282 | 103 | Peak |
| 3 | * 2494.540 | 26.80 | 30.60 | 57.40 | -16.60 | 74.00 | 282 | 103 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

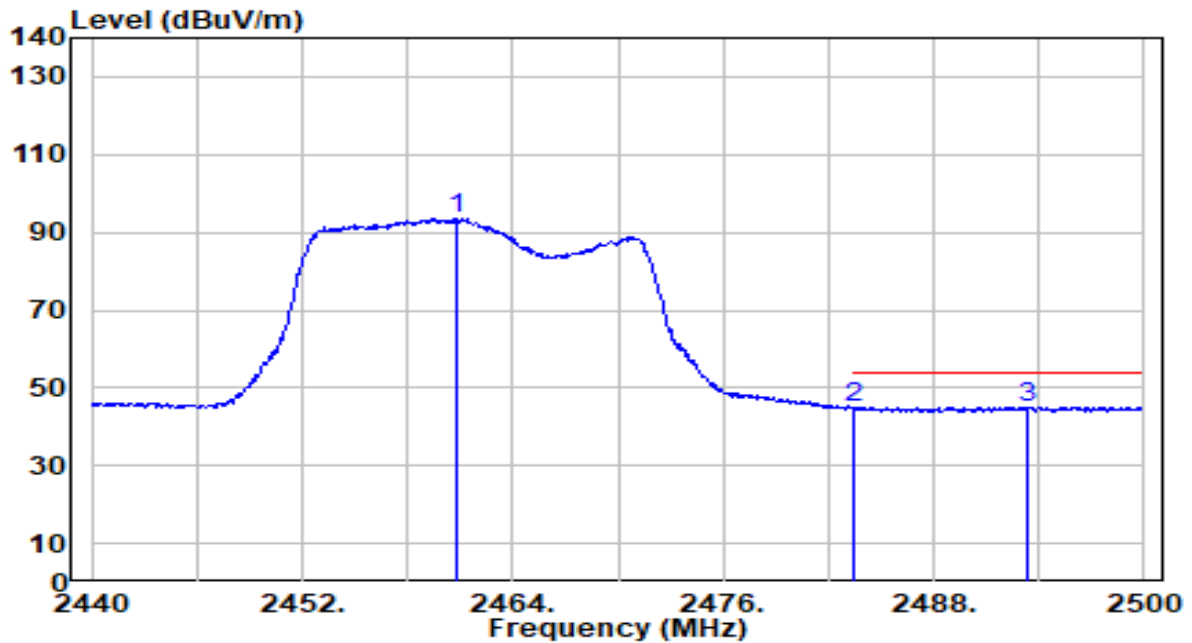


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.760 | 62.79 | 30.56 | 93.35 | N/A | N/A | 282 | 103 | Average |
| 2 | 2483.500 | 14.51 | 30.59 | 45.10 | -8.90 | 54.00 | 282 | 103 | Average |
| 3 | * 2493.340 | 14.56 | 30.60 | 45.16 | -8.84 | 54.00 | 282 | 103 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

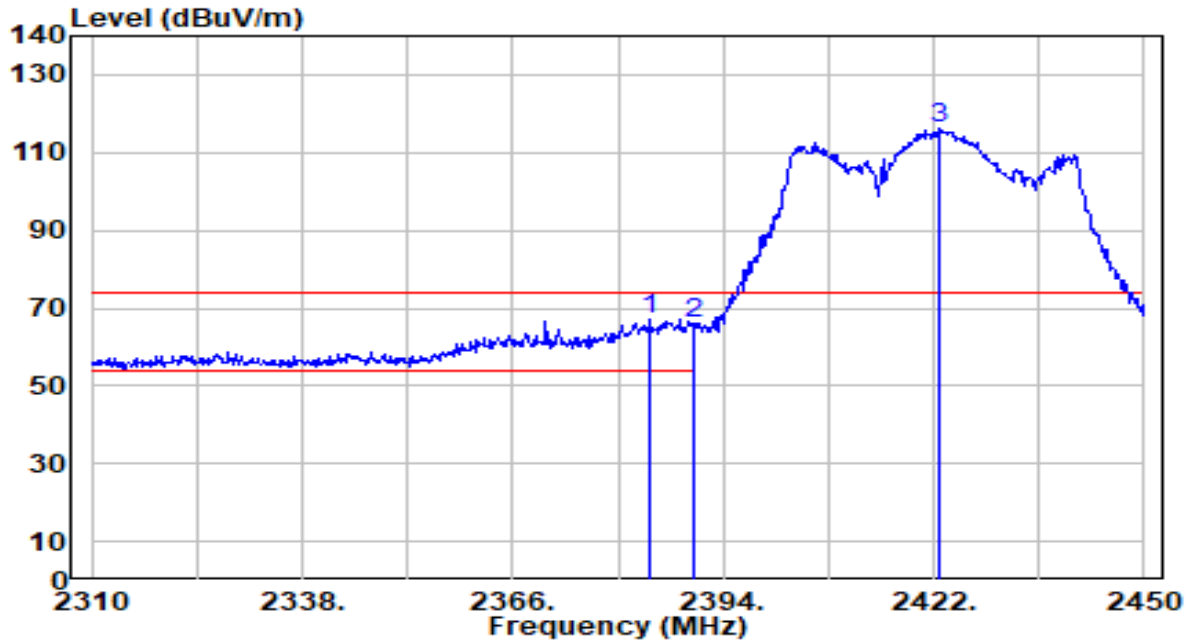


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2384.200 | 36.61 | 30.43 | 67.04 | -6.96 | 74.00 | 190 | 40 | Peak |
| 2 | 2390.000 | 35.70 | 30.45 | 66.15 | -7.85 | 74.00 | 190 | 40 | Peak |
| 3 | 2422.560 | 85.72 | 30.51 | 116.22 | N/A | N/A | 190 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

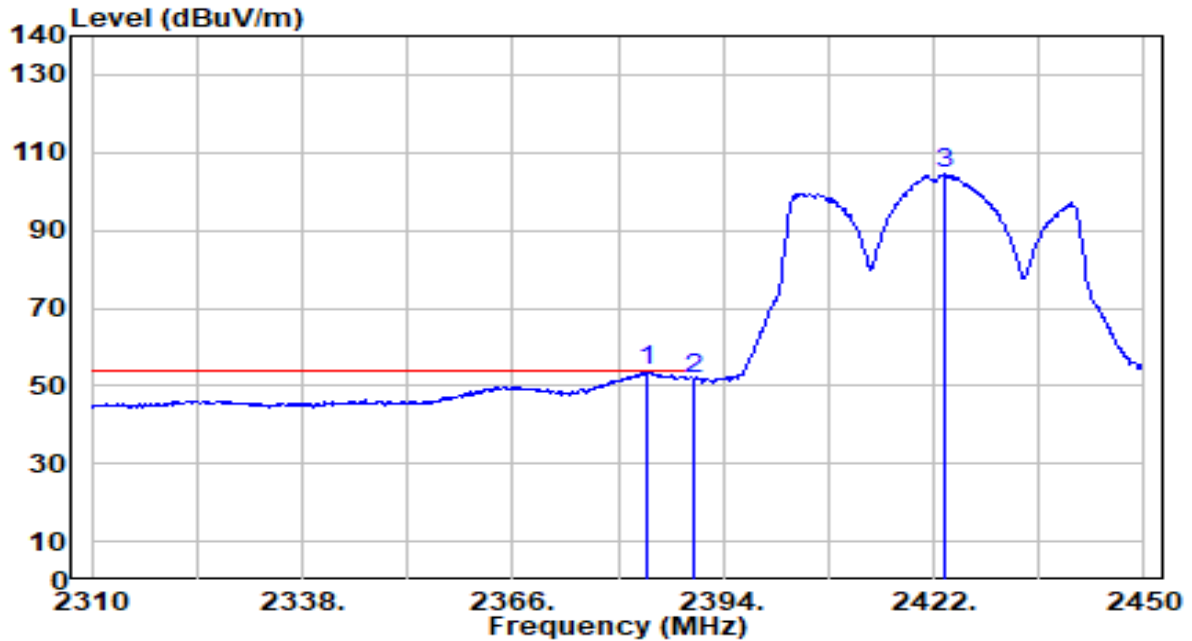


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2383.920 | 23.36 | 30.43 | 53.79 | -0.21 | 54.00 | 190 | 40 | Average |
| 2 | 2390.000 | 21.25 | 30.45 | 51.70 | -2.30 | 54.00 | 190 | 40 | Average |
| 3 | 2423.400 | 73.86 | 30.51 | 104.37 | N/A | N/A | 190 | 40 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

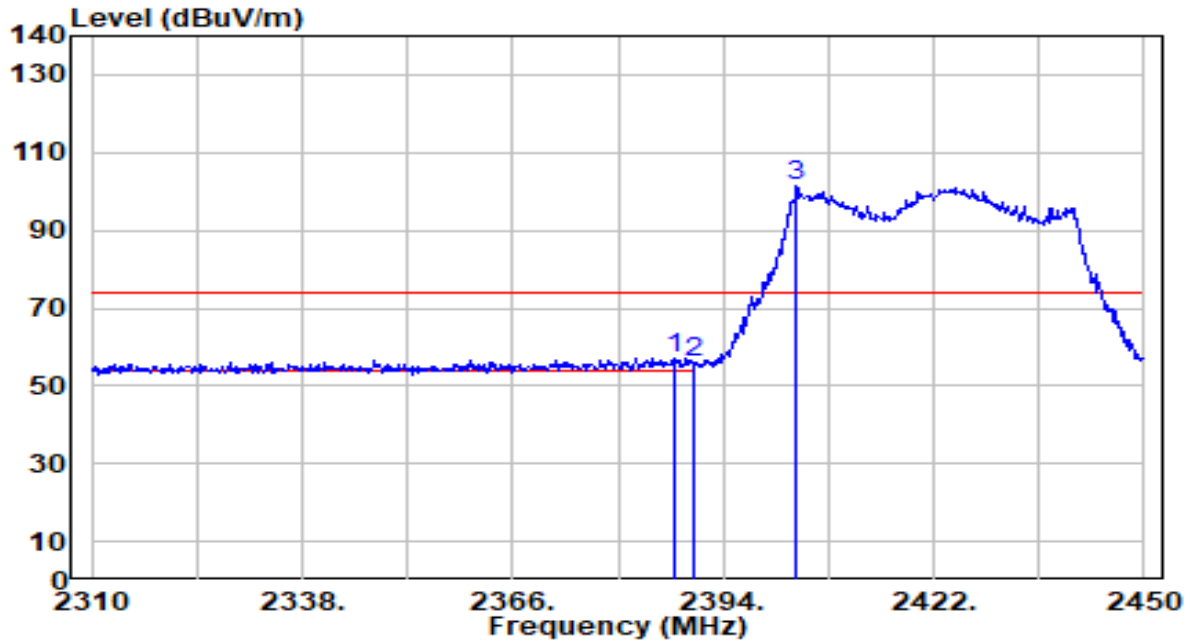


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2387.420 | 26.49 | 30.44 | 56.93 | -17.07 | 74.00 | 308 | 124 | Peak |
| 2 | 2390.000 | 25.56 | 30.45 | 56.01 | -17.99 | 74.00 | 308 | 124 | Peak |
| 3 | 2403.800 | 70.75 | 30.48 | 101.23 | N/A | N/A | 308 | 124 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

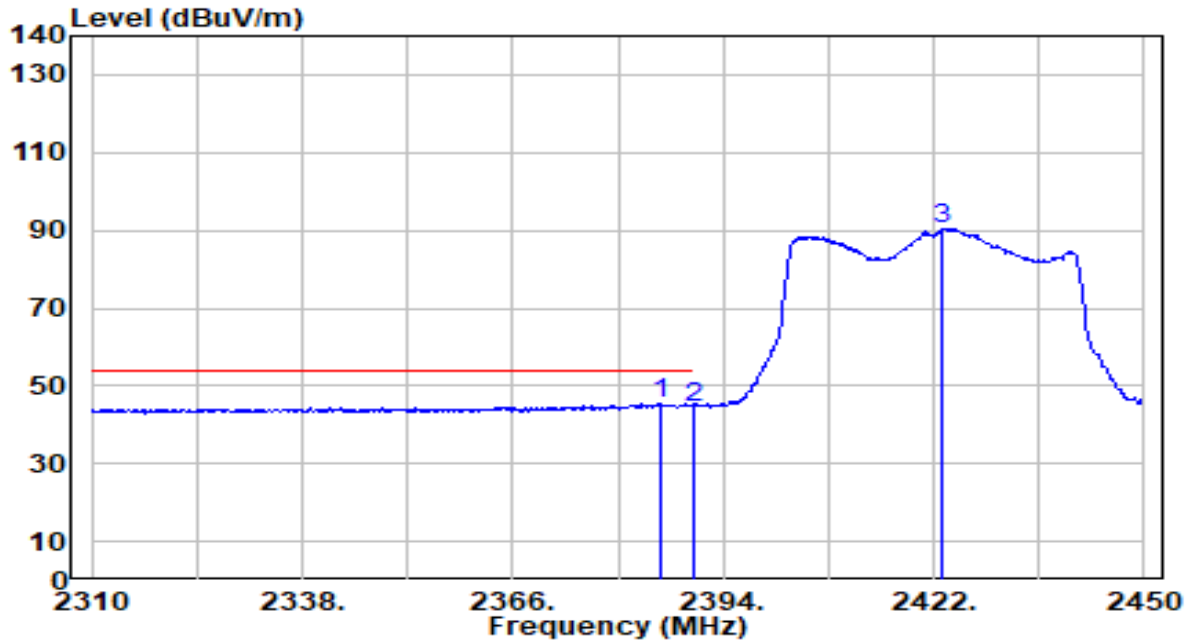


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 2385.600 | 14.95 | 30.44 | 45.39 | -8.61 | 54.00 | 308 | 124 | Average |
| 2 | | 2390.000 | 14.14 | 30.45 | 44.59 | -9.41 | 54.00 | 308 | 124 | Average |
| 3 | | 2423.120 | 59.97 | 30.51 | 90.48 | N/A | N/A | 308 | 124 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

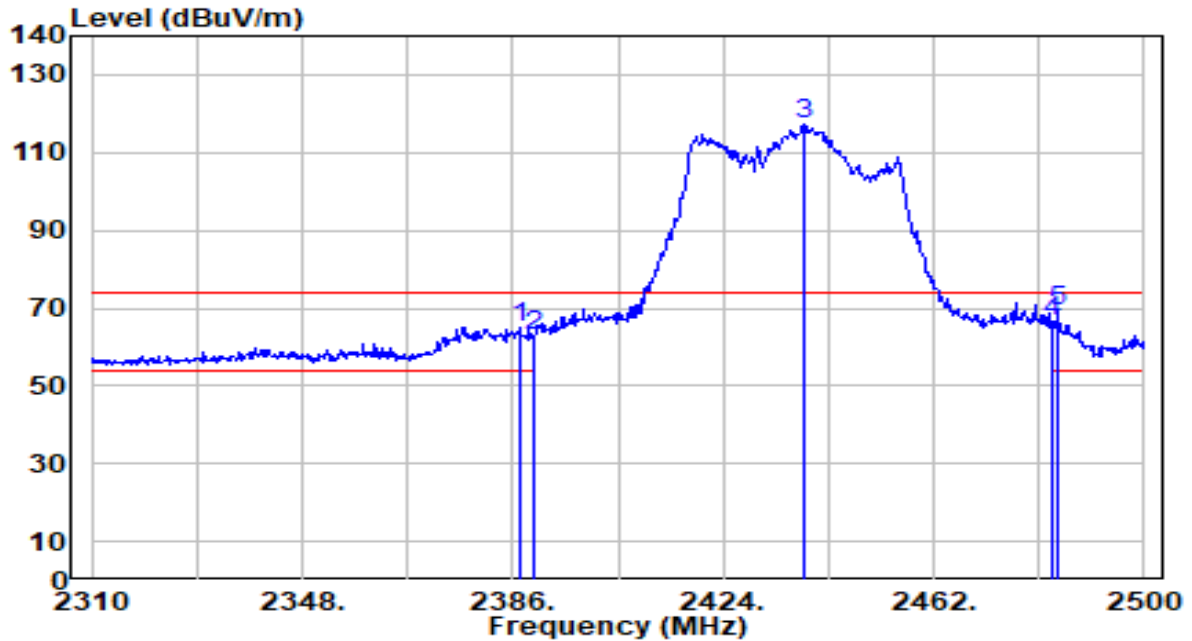


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2387.330 | 34.53 | 30.44 | 64.97 | -9.03 | 74.00 | 195 | 140 | Peak |
| 2 | 2390.000 | 32.58 | 30.45 | 63.03 | -10.97 | 74.00 | 195 | 140 | Peak |
| 3 | 2438.630 | 86.73 | 30.53 | 117.26 | N/A | N/A | 195 | 140 | Peak |
| 4 | 2483.500 | 35.75 | 30.59 | 66.34 | -7.66 | 74.00 | 195 | 140 | Peak |
| 5 | * 2484.420 | 38.76 | 30.59 | 69.35 | -4.65 | 74.00 | 195 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

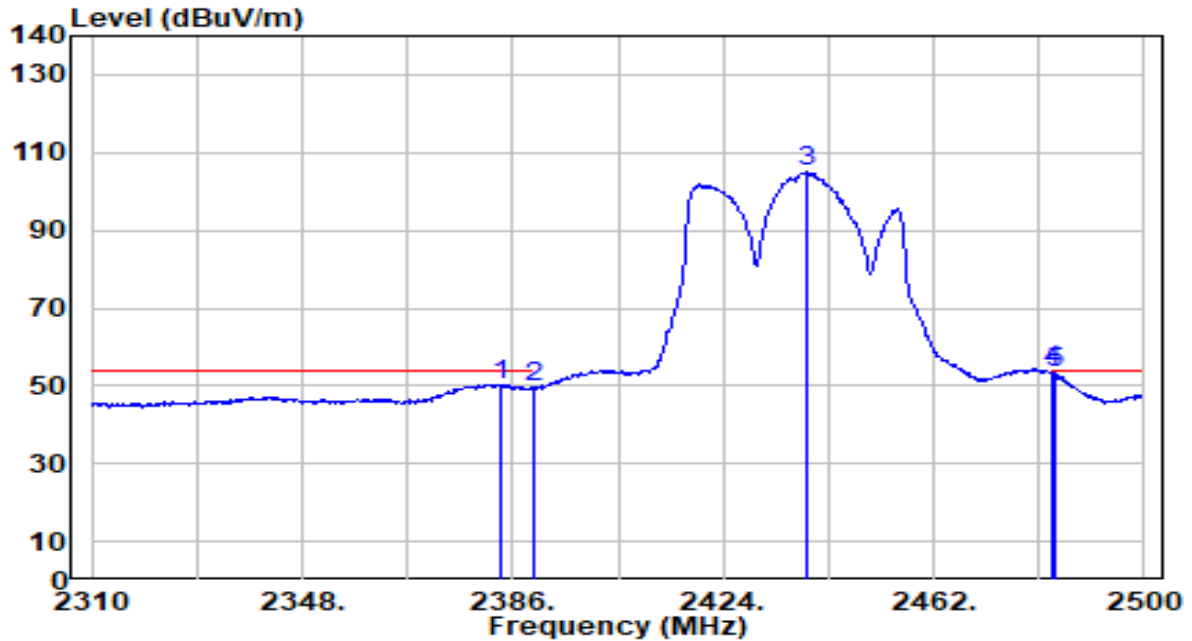


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2383.720 | 19.96 | 30.43 | 50.39 | -3.61 | 54.00 | 195 | 140 | Average |
| 2 | 2390.000 | 19.36 | 30.45 | 49.81 | -4.19 | 54.00 | 195 | 140 | Average |
| 3 | 2439.200 | 74.62 | 30.53 | 105.15 | N/A | N/A | 195 | 140 | Average |
| 4 | * 2483.500 | 23.19 | 30.59 | 53.78 | -0.22 | 54.00 | 195 | 140 | Average |
| 5 | 2484.040 | 22.99 | 30.59 | 53.58 | -0.42 | 54.00 | 195 | 140 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

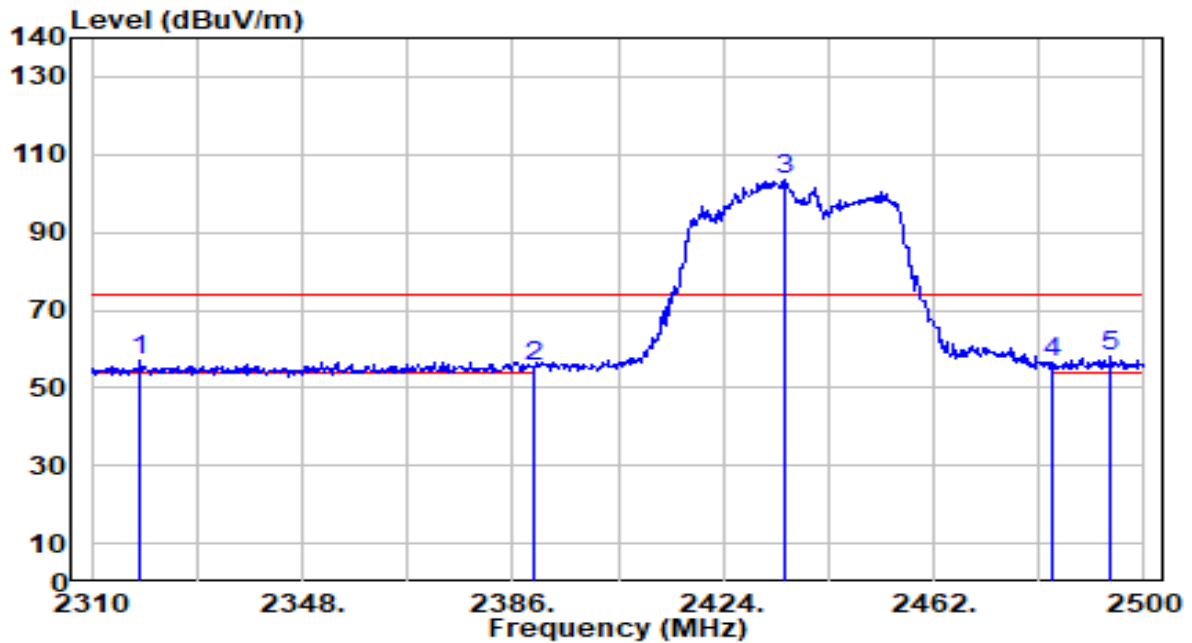


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2318.740 | 26.58 | 30.25 | 56.82 | -17.18 | 74.00 | 297 | 102 | Peak |
| 2 | 2390.000 | 25.02 | 30.45 | 55.46 | -18.54 | 74.00 | 297 | 102 | Peak |
| 3 | 2435.020 | 73.13 | 30.52 | 103.66 | N/A | N/A | 297 | 102 | Peak |
| 4 | 2483.500 | 25.83 | 30.59 | 56.42 | -17.58 | 74.00 | 297 | 102 | Peak |
| 5 | * 2493.920 | 27.41 | 30.60 | 58.01 | -15.99 | 74.00 | 297 | 102 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

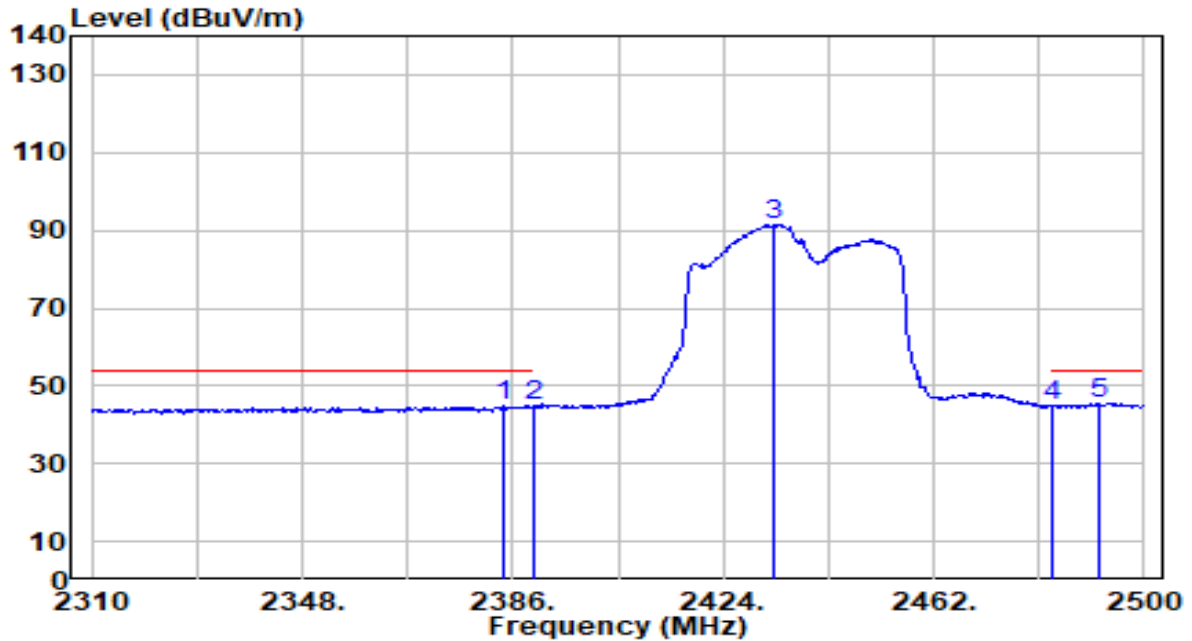


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2384.480 | 14.31 | 30.43 | 44.75 | -9.25 | 54.00 | 297 | 102 | Average |
| 2 | 2390.000 | 14.52 | 30.45 | 44.96 | -9.04 | 54.00 | 297 | 102 | Average |
| 3 | 2433.310 | 61.02 | 30.52 | 91.54 | N/A | N/A | 297 | 102 | Average |
| 4 | 2483.500 | 14.30 | 30.59 | 44.89 | -9.11 | 54.00 | 297 | 102 | Average |
| 5 | * 2491.830 | 15.09 | 30.60 | 45.69 | -8.31 | 54.00 | 297 | 102 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

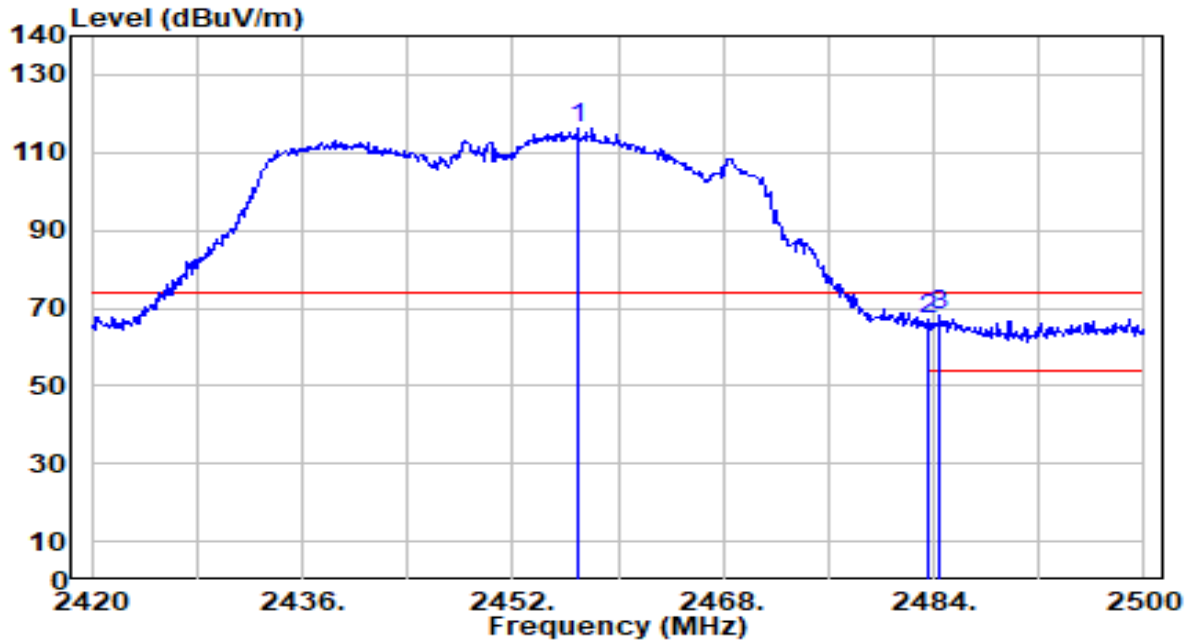


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2456.880 | 85.55 | 30.55 | 116.11 | N/A | N/A | 170 | 6 | Peak |
| 2 | 2483.500 | 36.42 | 30.59 | 67.01 | -6.99 | 74.00 | 170 | 6 | Peak |
| 3 | * 2484.480 | 37.65 | 30.59 | 68.23 | -5.77 | 74.00 | 170 | 6 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

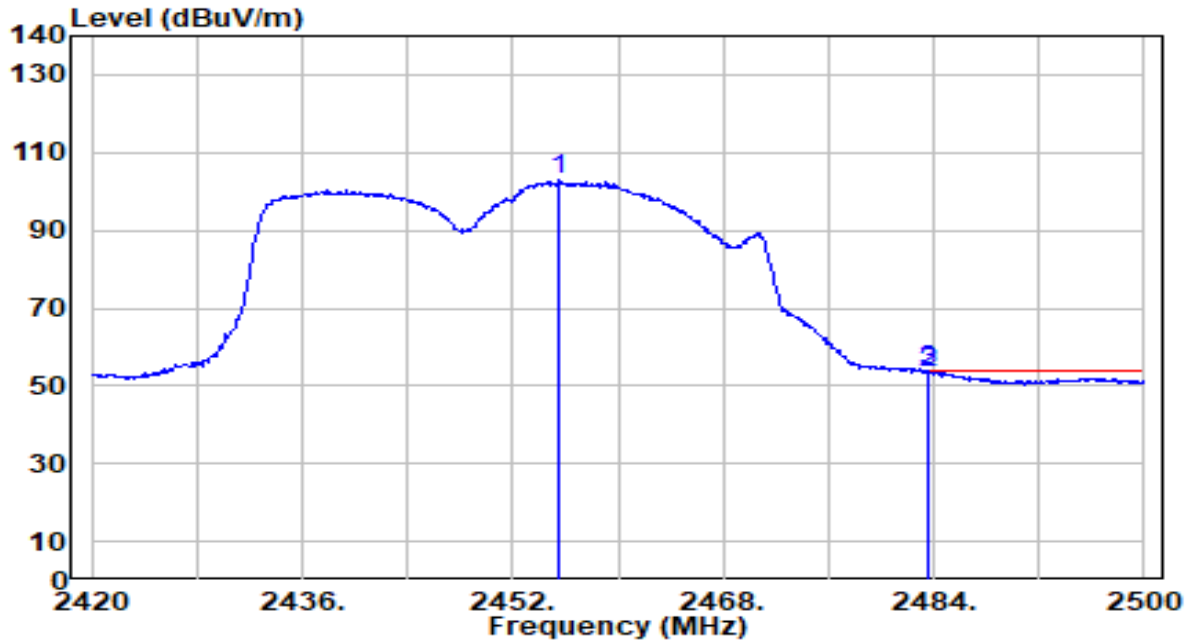


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.520 | 72.24 | 30.55 | 102.79 | N/A | N/A | 170 | 6 | Average |
| 2 | 2483.500 | 22.81 | 30.59 | 53.40 | -0.60 | 54.00 | 170 | 6 | Average |
| 3 | * 2483.680 | 23.28 | 30.59 | 53.87 | -0.13 | 54.00 | 170 | 6 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

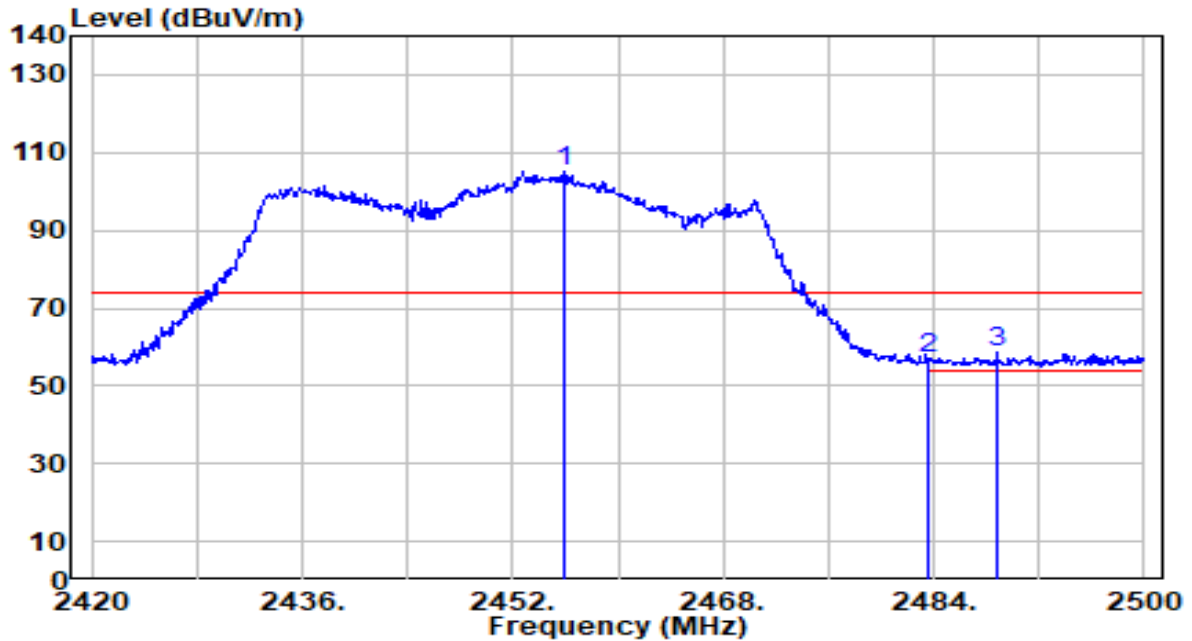


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2456.000 | 74.49 | 30.55 | 105.04 | N/A | N/A | 282 | 103 | Peak |
| 2 | 2483.500 | 26.24 | 30.59 | 56.83 | -17.17 | 74.00 | 282 | 103 | Peak |
| 3 | * 2488.800 | 28.00 | 30.59 | 58.59 | -15.41 | 74.00 | 282 | 103 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

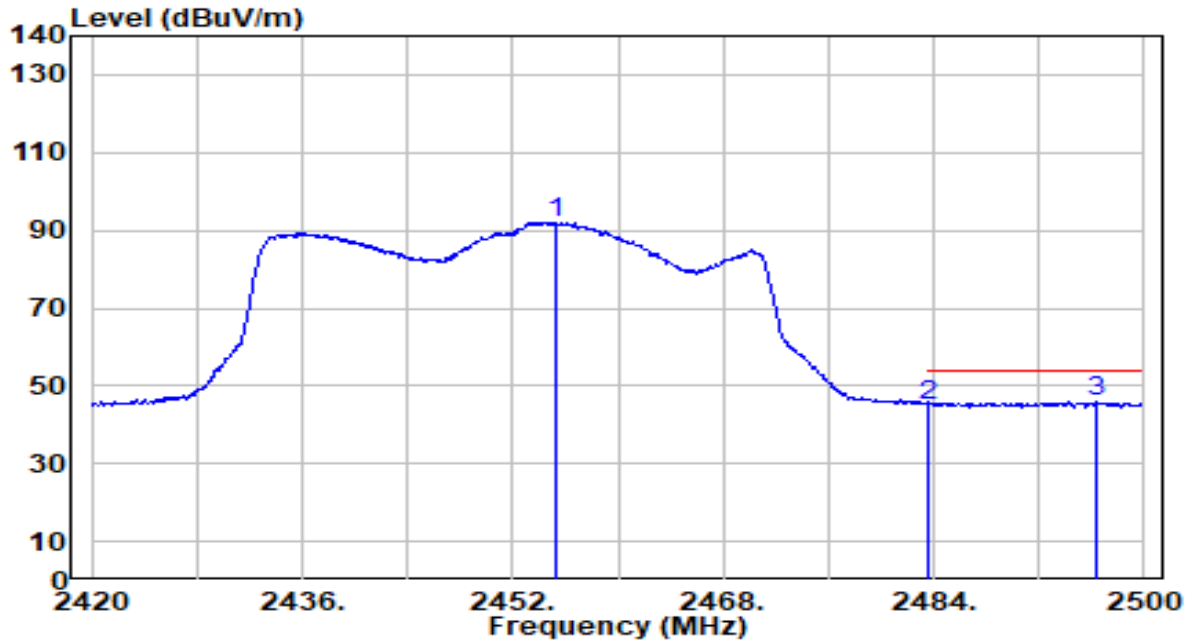


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.280 | 61.50 | 30.55 | 92.05 | N/A | N/A | 282 | 103 | Average |
| 2 | 2483.500 | 14.51 | 30.59 | 45.10 | -8.90 | 54.00 | 282 | 103 | Average |
| 3 | * 2496.400 | 15.19 | 30.61 | 45.80 | -8.20 | 54.00 | 282 | 103 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

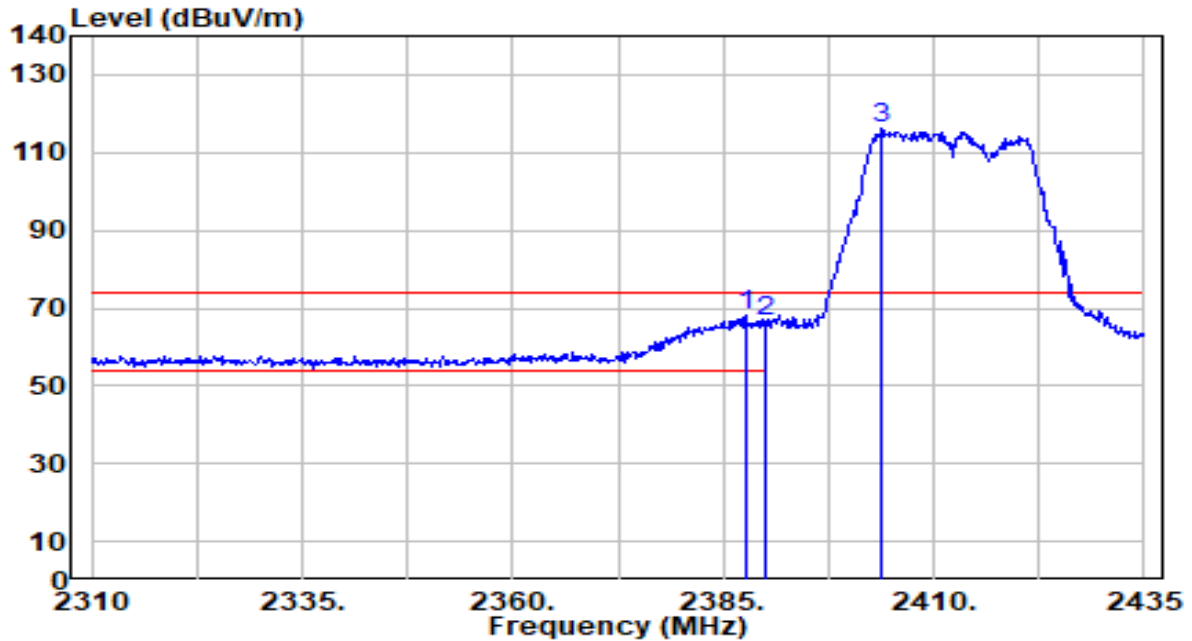


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2387.625 | 37.54 | 30.44 | 67.98 | -6.02 | 74.00 | 190 | 40 | Peak |
| 2 | | 2390.000 | 36.32 | 30.45 | 66.77 | -7.23 | 74.00 | 190 | 40 | Peak |
| 3 | | 2403.875 | 85.56 | 30.48 | 116.04 | N/A | N/A | 190 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

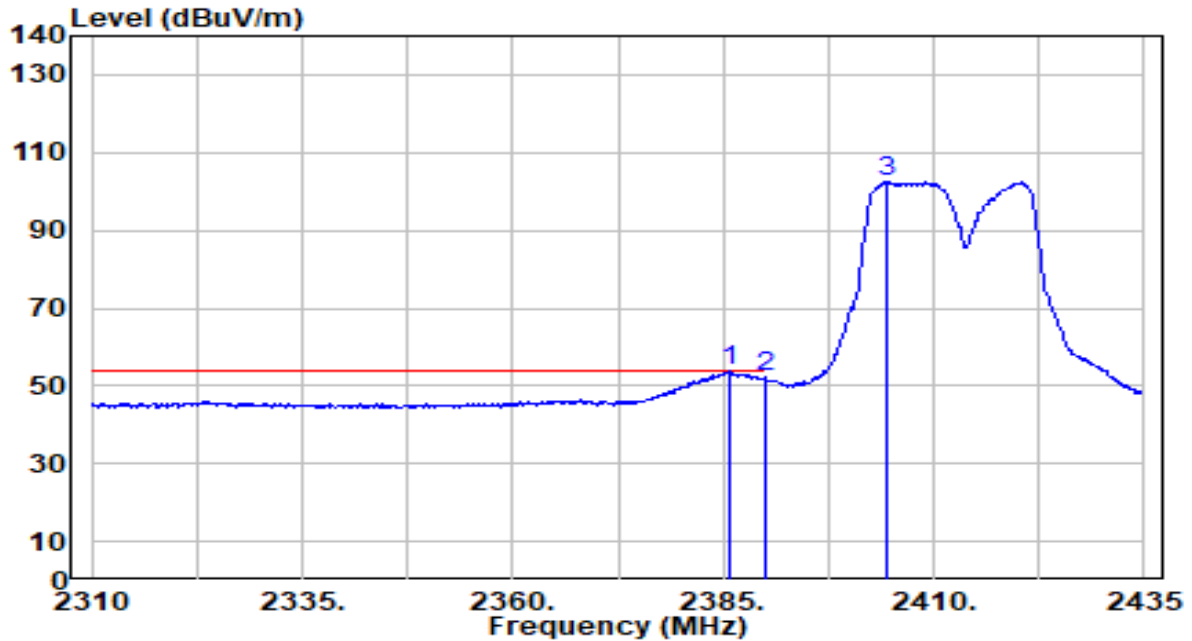


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 23.34 | 30.44 | 53.78 | -0.22 | 54.00 | 190 | 40 | Average |
| 2 | | 21.63 | 30.45 | 52.08 | -1.92 | 54.00 | 190 | 40 | Average |
| 3 | | 71.99 | 30.48 | 102.47 | N/A | N/A | 190 | 40 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

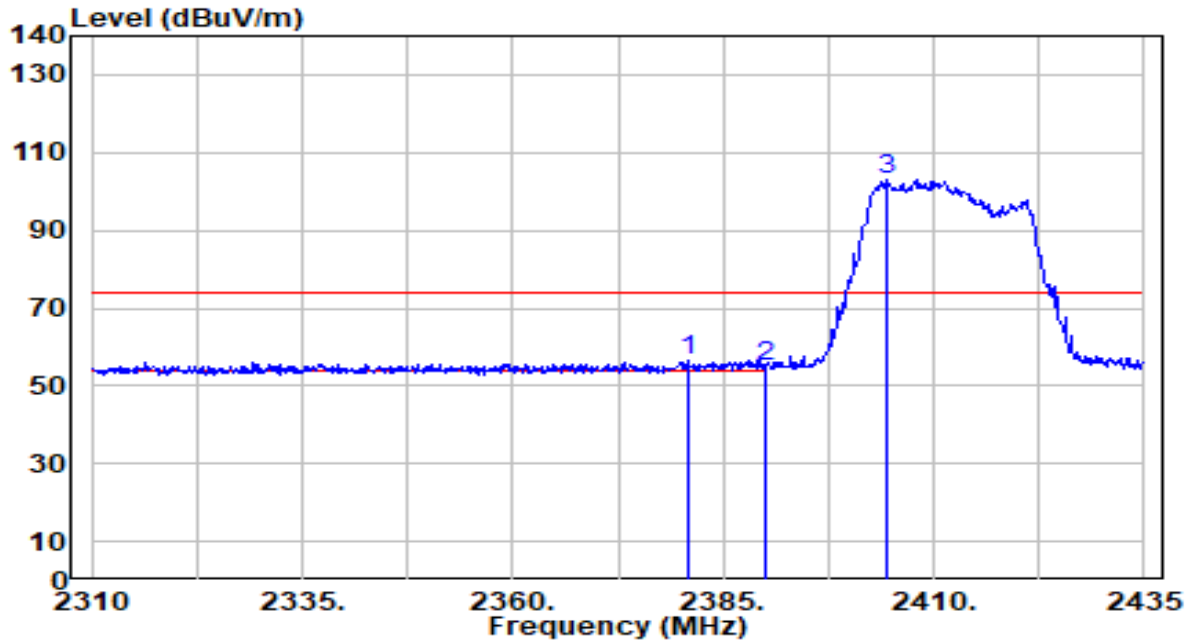


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 26.08 | 30.42 | 56.50 | -17.50 | 74.00 | 308 | 124 | Peak |
| 2 | | 24.48 | 30.45 | 54.93 | -19.07 | 74.00 | 308 | 124 | Peak |
| 3 | | 72.48 | 30.48 | 102.96 | N/A | N/A | 308 | 124 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

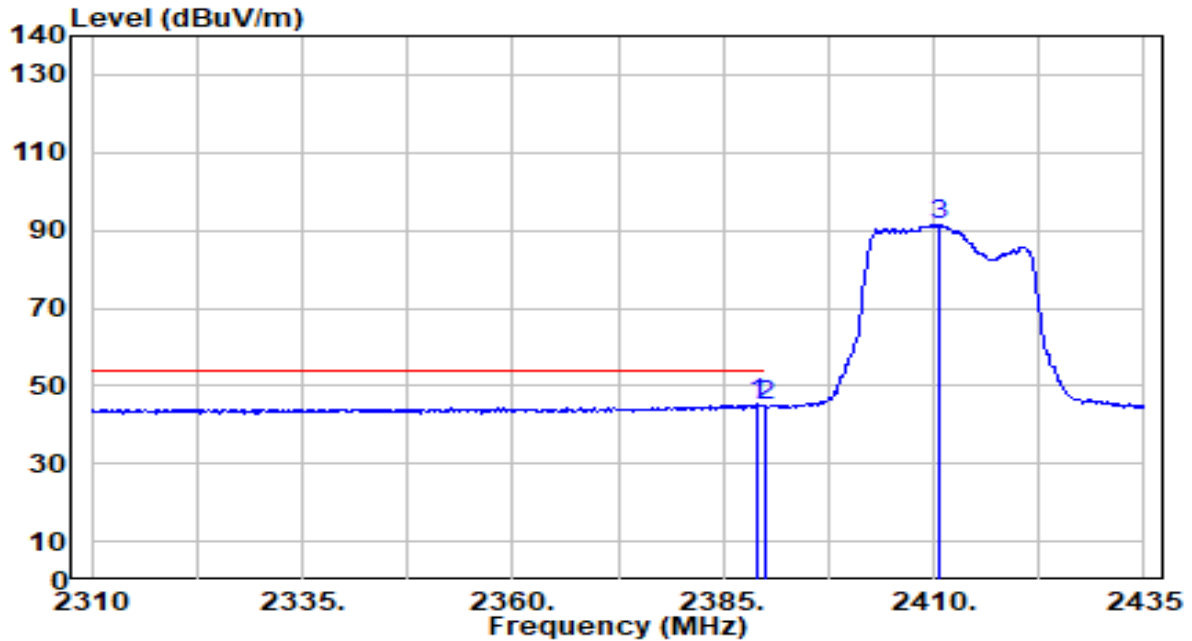


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 2389.000 | 14.83 | 30.44 | 45.27 | -8.73 | 54.00 | 308 | 124 | Average |
| 2 | | 2390.000 | 14.36 | 30.45 | 44.80 | -9.20 | 54.00 | 308 | 124 | Average |
| 3 | | 2410.750 | 60.97 | 30.49 | 91.47 | N/A | N/A | 308 | 124 | Average |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

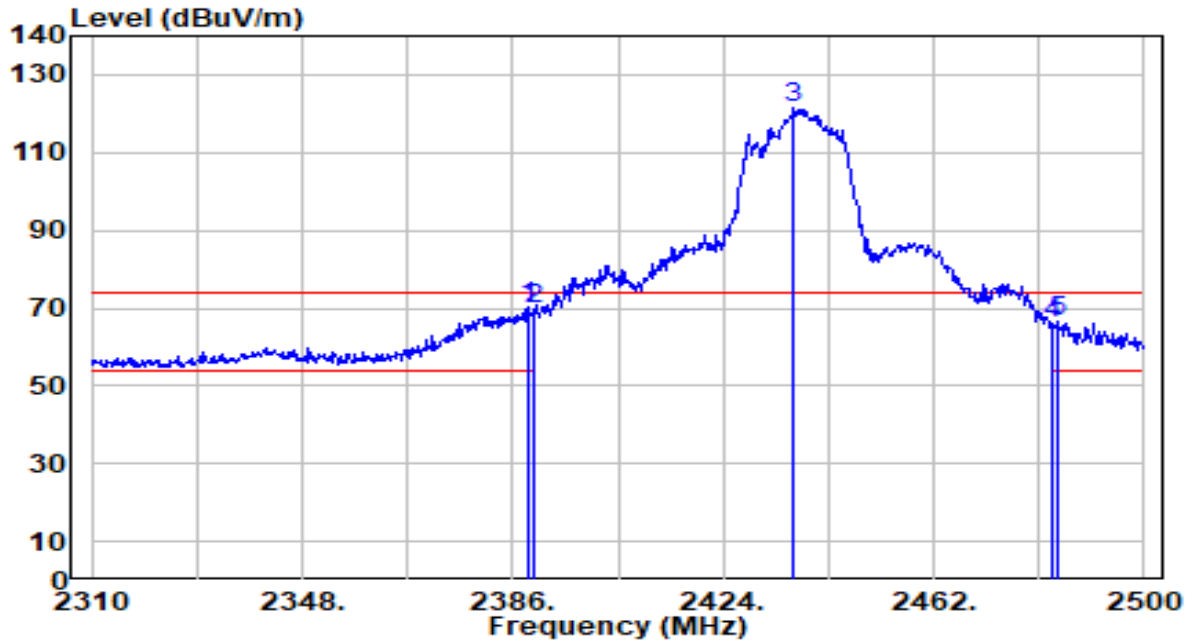


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2388.660 | 40.04 | 30.44 | 70.48 | -3.52 | 74.00 | 195 | 140 | Peak |
| 2 | 2390.000 | 39.36 | 30.45 | 69.81 | -4.19 | 74.00 | 195 | 140 | Peak |
| 3 | 2436.730 | 90.85 | 30.53 | 121.38 | N/A | N/A | 195 | 140 | Peak |
| 4 | 2483.500 | 35.34 | 30.59 | 65.93 | -8.07 | 74.00 | 195 | 140 | Peak |
| 5 | 2484.420 | 36.12 | 30.59 | 66.71 | -7.29 | 74.00 | 195 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

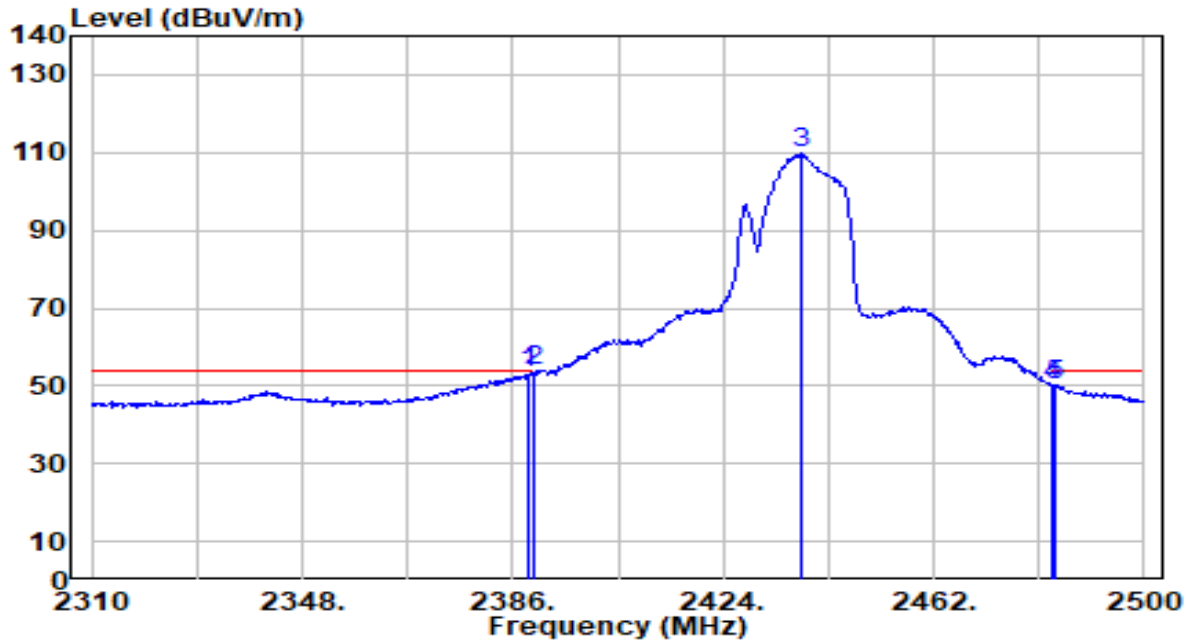


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.660 | 23.04 | 30.44 | 53.48 | -0.52 | 54.00 | 195 | 140 | Average |
| 2 | * 2390.000 | 23.38 | 30.45 | 53.83 | -0.17 | 54.00 | 195 | 140 | Average |
| 3 | 2438.060 | 79.25 | 30.53 | 109.78 | N/A | N/A | 195 | 140 | Average |
| 4 | 2483.500 | 19.50 | 30.59 | 50.09 | -3.91 | 54.00 | 195 | 140 | Average |
| 5 | 2484.040 | 19.39 | 30.59 | 49.98 | -4.02 | 54.00 | 195 | 140 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

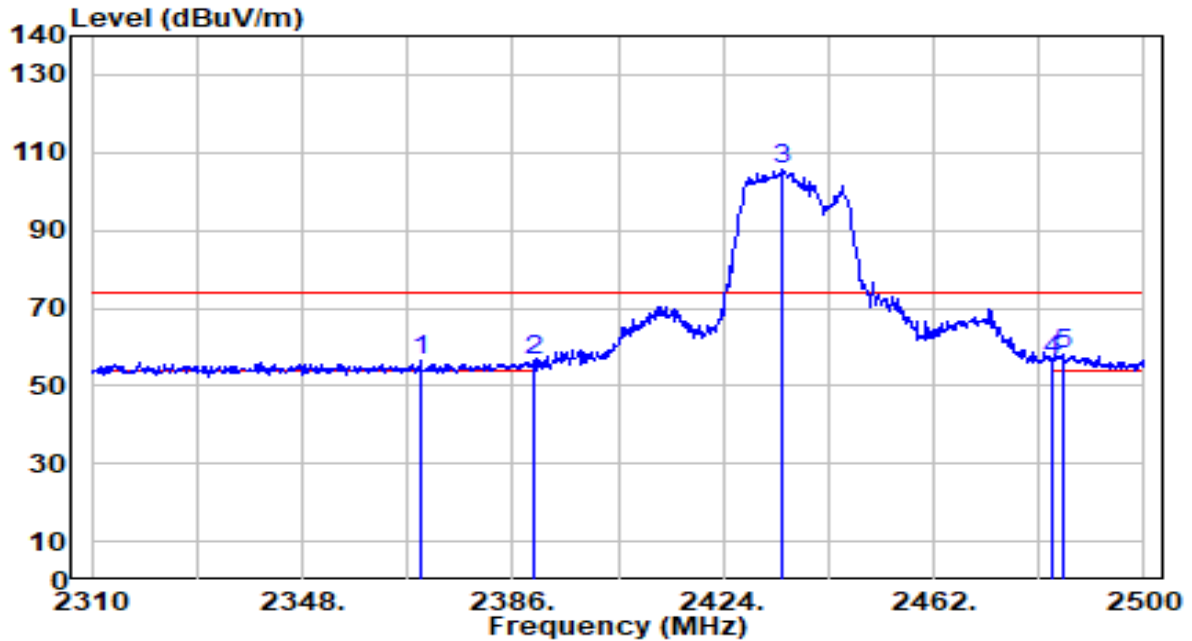


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2369.280 | 25.91 | 30.39 | 56.30 | -17.70 | 74.00 | 297 | 102 | Peak |
| 2 | 2390.000 | 26.12 | 30.45 | 56.56 | -17.44 | 74.00 | 297 | 102 | Peak |
| 3 | 2434.830 | 74.95 | 30.52 | 105.48 | N/A | N/A | 297 | 102 | Peak |
| 4 | 2483.500 | 25.94 | 30.59 | 56.53 | -17.47 | 74.00 | 297 | 102 | Peak |
| 5 | * 2485.370 | 27.59 | 30.59 | 58.18 | -15.82 | 74.00 | 297 | 102 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

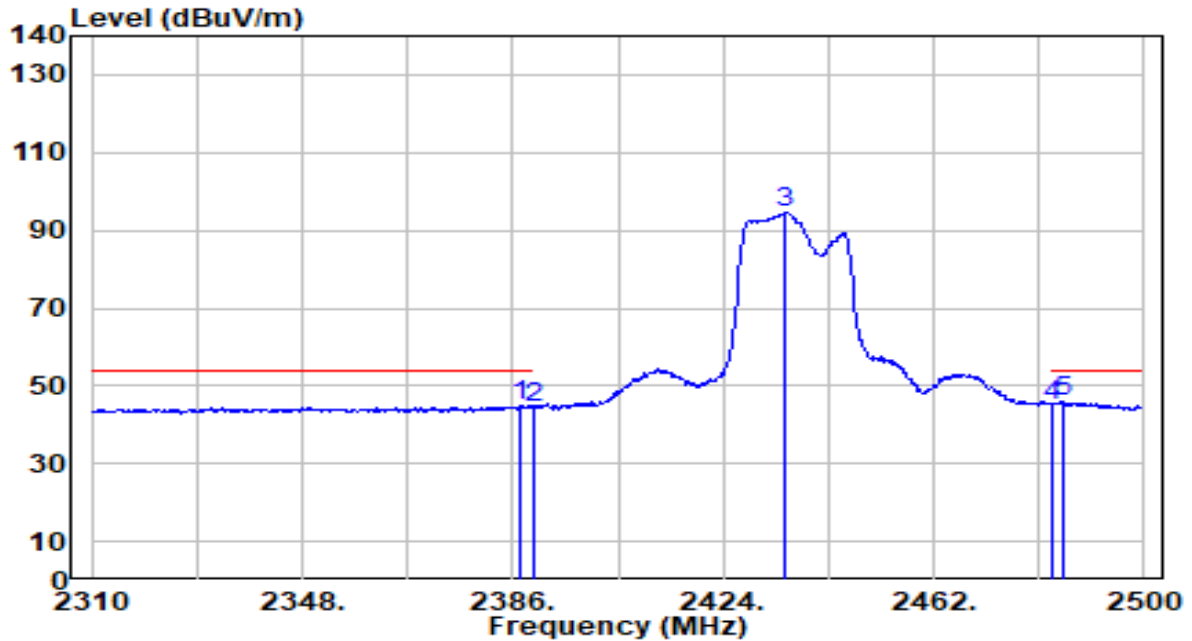


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2387.520 | 14.53 | 30.44 | 44.97 | -9.03 | 54.00 | 297 | 102 | Average |
| 2 | 2390.000 | 13.88 | 30.45 | 44.33 | -9.67 | 54.00 | 297 | 102 | Average |
| 3 | 2435.210 | 64.21 | 30.52 | 94.74 | N/A | N/A | 297 | 102 | Average |
| 4 | 2483.500 | 14.56 | 30.59 | 45.15 | -8.85 | 54.00 | 297 | 102 | Average |
| 5 | * 2485.560 | 15.26 | 30.59 | 45.85 | -8.15 | 54.00 | 297 | 102 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

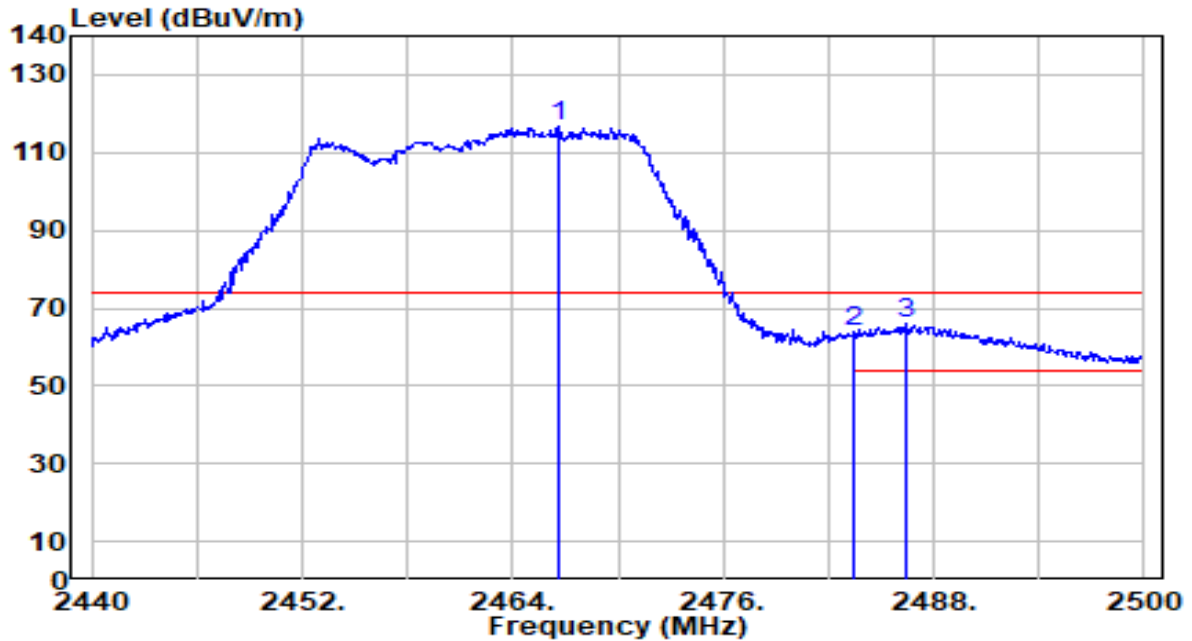


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2466.580 | 86.20 | 30.57 | 116.76 | N/A | N/A | 170 | 6 | Peak |
| 2 | 2483.500 | 33.15 | 30.59 | 63.73 | -10.27 | 74.00 | 170 | 6 | Peak |
| 3 | * 2486.380 | 35.47 | 30.59 | 66.06 | -7.94 | 74.00 | 170 | 6 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

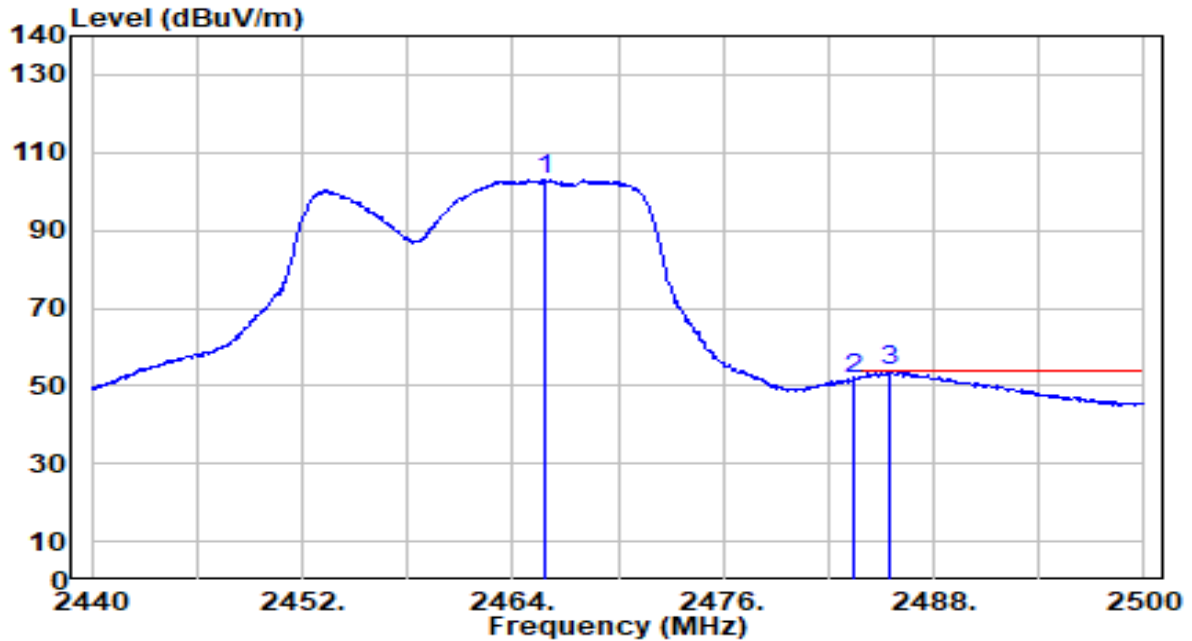


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2465.860 | 72.66 | 30.56 | 103.23 | N/A | N/A | 170 | 6 | Average |
| 2 | 2483.500 | 21.29 | 30.59 | 51.88 | -2.12 | 54.00 | 170 | 6 | Average |
| 3 | * 2485.420 | 23.21 | 30.59 | 53.80 | -0.20 | 54.00 | 170 | 6 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

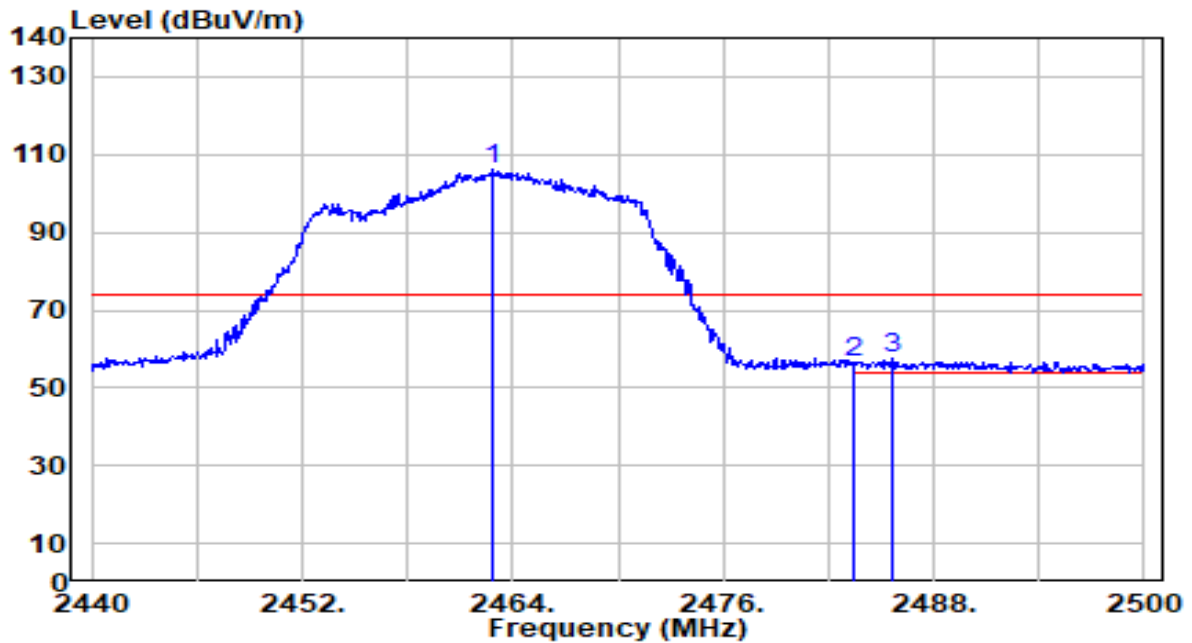


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2462.920 | 75.60 | 30.56 | 106.16 | N/A | N/A | 282 | 103 | Peak |
| 2 | 2483.500 | 26.18 | 30.59 | 56.77 | -17.23 | 74.00 | 282 | 103 | Peak |
| 3 | * 2485.600 | 26.83 | 30.59 | 57.42 | -16.58 | 74.00 | 282 | 103 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

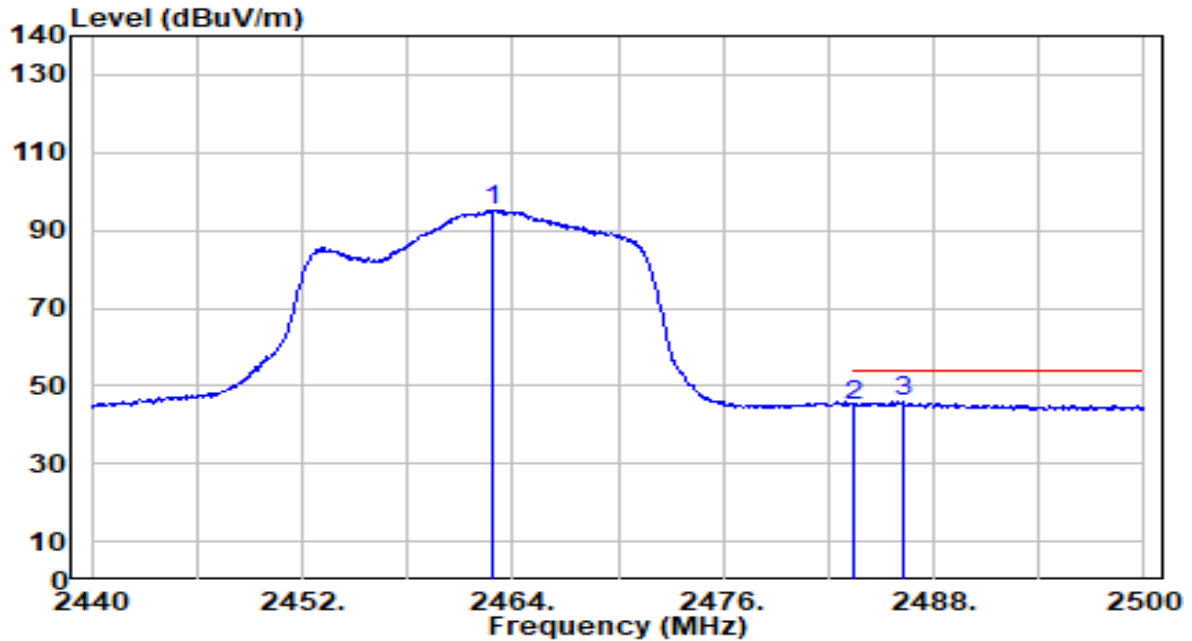


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2462.860 | 64.58 | 30.56 | 95.14 | N/A | N/A | 282 | 103 | Average |
| 2 | 2483.500 | 14.55 | 30.59 | 45.14 | -8.86 | 54.00 | 282 | 103 | Average |
| 3 | * 2486.200 | 15.26 | 30.59 | 45.85 | -8.15 | 54.00 | 282 | 103 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

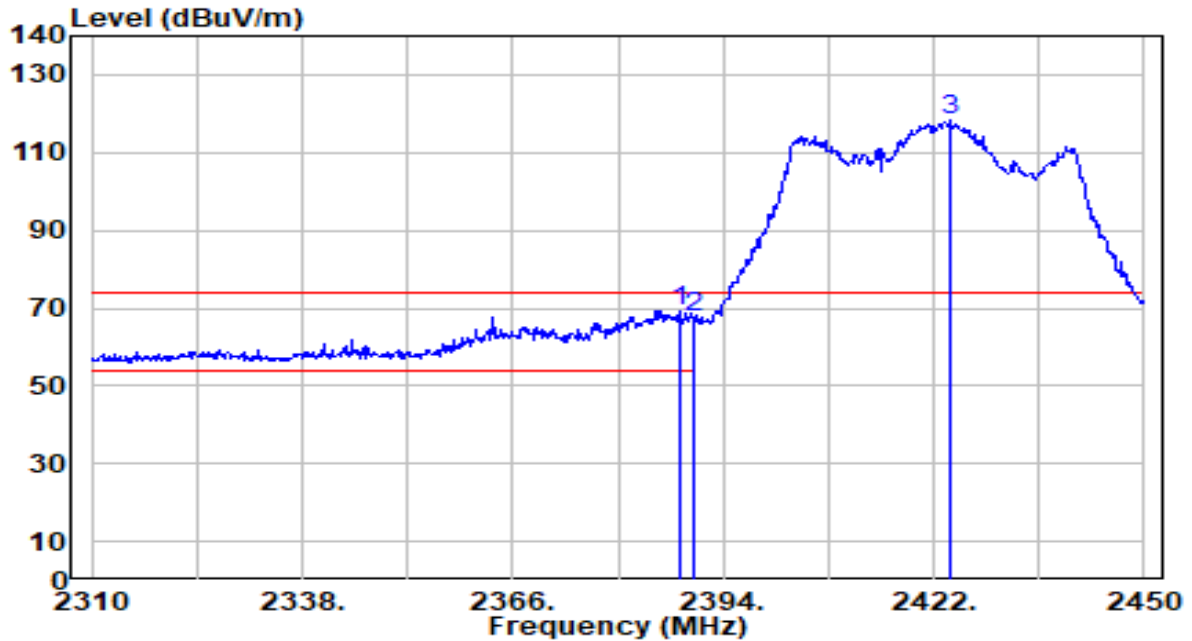


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2388.120 | 38.88 | 30.44 | 69.33 | -4.67 | 74.00 | 190 | 40 | Peak |
| 2 | | 2390.000 | 37.41 | 30.45 | 67.86 | -6.14 | 74.00 | 190 | 40 | Peak |
| 3 | | 2424.240 | 87.62 | 30.51 | 118.13 | N/A | N/A | 190 | 40 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

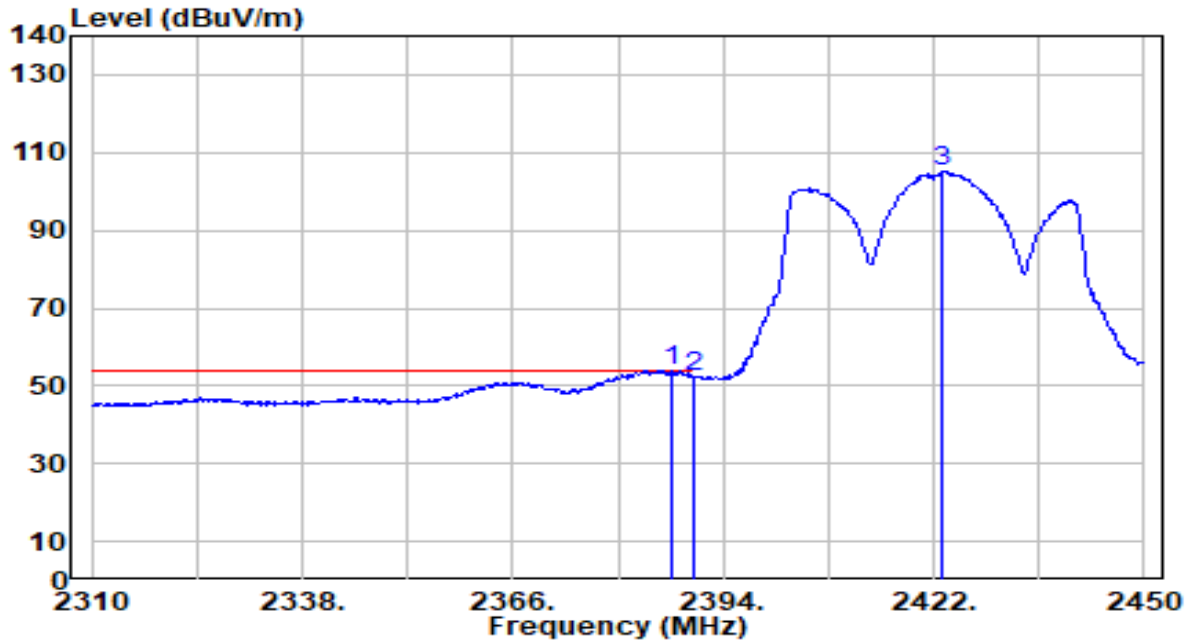


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2387.280 | 23.31 | 30.44 | 53.75 | -0.25 | 54.00 | 190 | 40 | Average |
| 2 | 2390.000 | 21.95 | 30.45 | 52.39 | -1.61 | 54.00 | 190 | 40 | Average |
| 3 | 2423.260 | 74.68 | 30.51 | 105.18 | N/A | N/A | 190 | 40 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

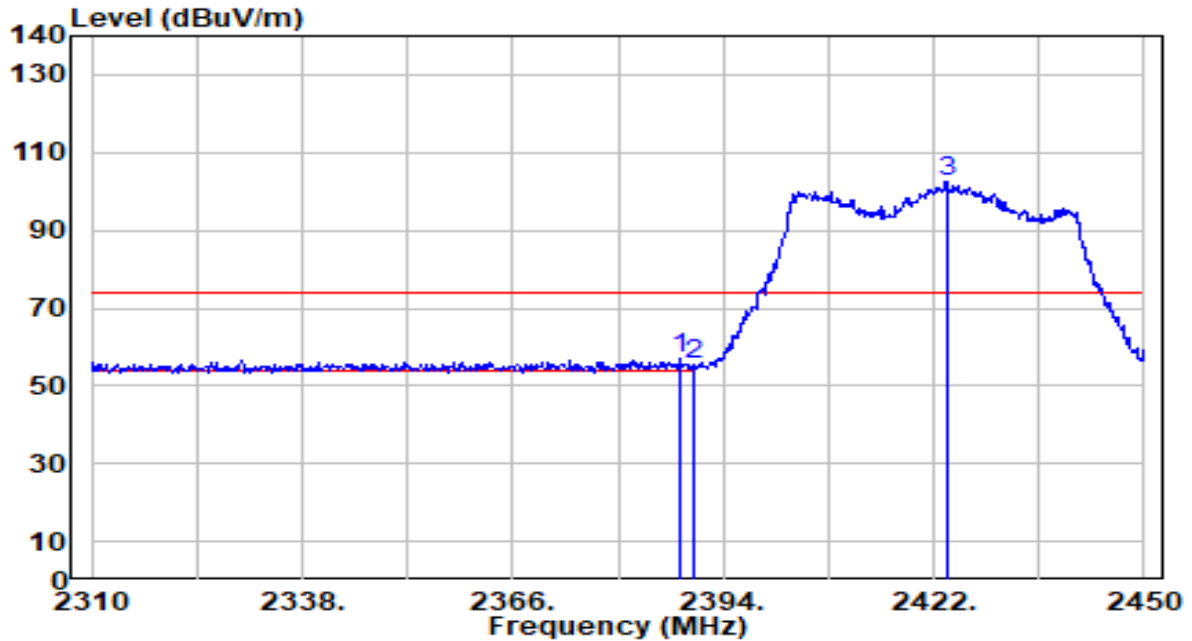


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2388.260 | 26.58 | 30.44 | 57.02 | -16.98 | 74.00 | 308 | 124 | Peak |
| 2 | 2390.000 | 25.16 | 30.45 | 55.61 | -18.39 | 74.00 | 308 | 124 | Peak |
| 3 | 2423.680 | 71.88 | 30.51 | 102.39 | N/A | N/A | 308 | 124 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

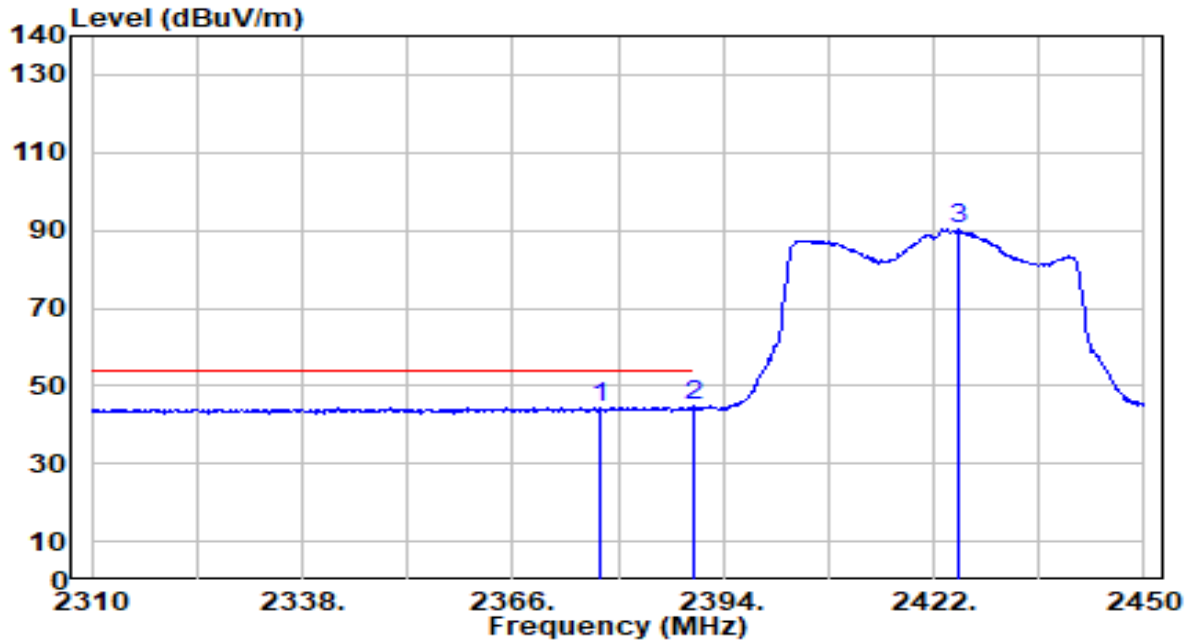


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2377.620 | 14.16 | 30.41 | 44.58 | -9.42 | 54.00 | 308 | 124 | Average |
| 2 | * 2390.000 | 14.29 | 30.45 | 44.73 | -9.27 | 54.00 | 308 | 124 | Average |
| 3 | 2425.220 | 59.75 | 30.51 | 90.26 | N/A | N/A | 308 | 124 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

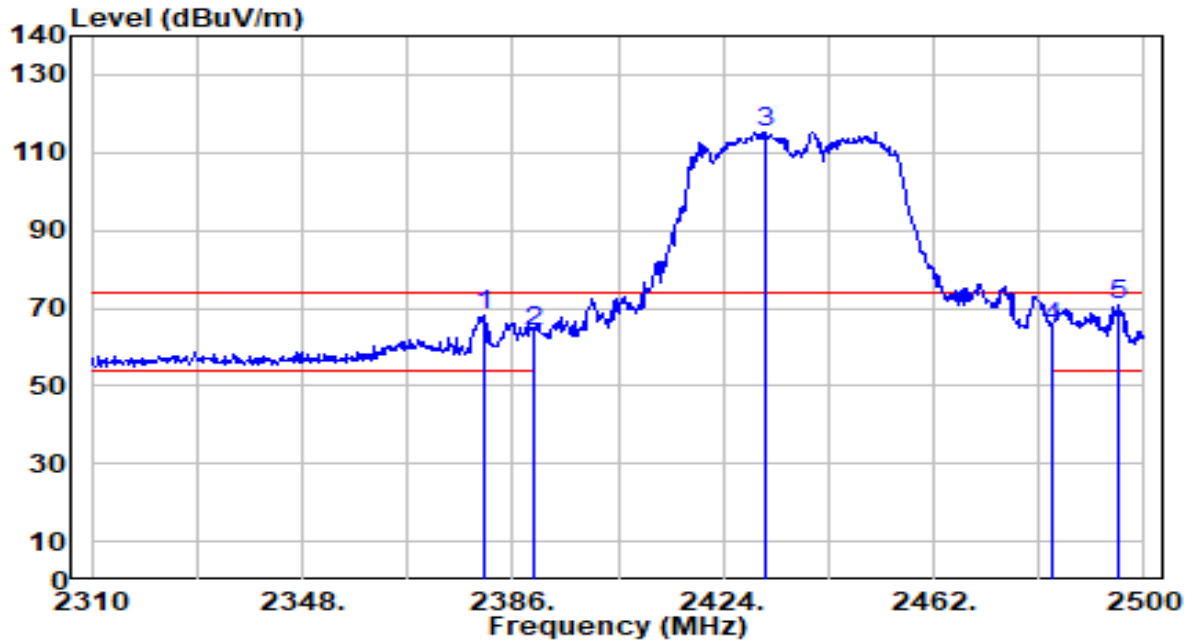


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2380.680 | 37.61 | 30.42 | 68.03 | -5.97 | 74.00 | 195 | 140 | Peak |
| 2 | 2390.000 | 33.28 | 30.45 | 63.73 | -10.27 | 74.00 | 195 | 140 | Peak |
| 3 | 2431.790 | 84.91 | 30.52 | 115.42 | N/A | N/A | 195 | 140 | Peak |
| 4 | 2483.500 | 34.20 | 30.59 | 64.79 | -9.21 | 74.00 | 195 | 140 | Peak |
| 5 | * 2495.440 | 40.16 | 30.60 | 70.76 | -3.24 | 74.00 | 195 | 140 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

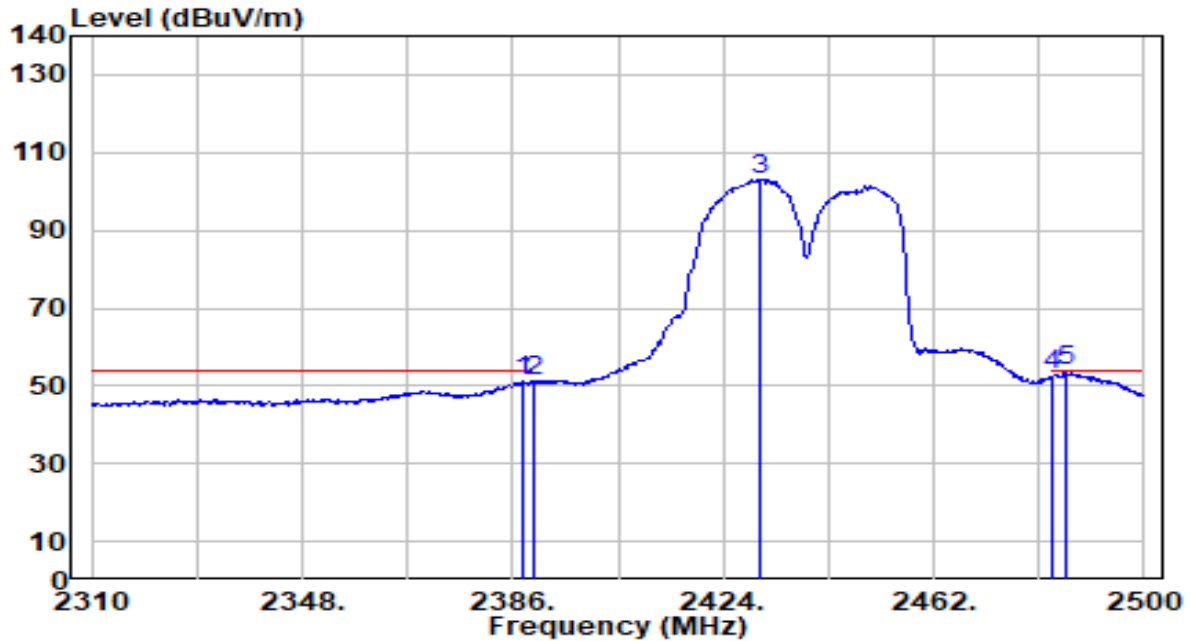


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2387.710 | 20.65 | 30.44 | 51.10 | -2.90 | 54.00 | 195 | 140 | Average |
| 2 | 2390.000 | 20.59 | 30.45 | 51.03 | -2.97 | 54.00 | 195 | 140 | Average |
| 3 | 2430.460 | 72.73 | 30.52 | 103.25 | N/A | N/A | 195 | 140 | Average |
| 4 | 2483.500 | 22.14 | 30.59 | 52.73 | -1.27 | 54.00 | 195 | 140 | Average |
| 5 | * 2485.940 | 23.21 | 30.59 | 53.80 | -0.20 | 54.00 | 195 | 140 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

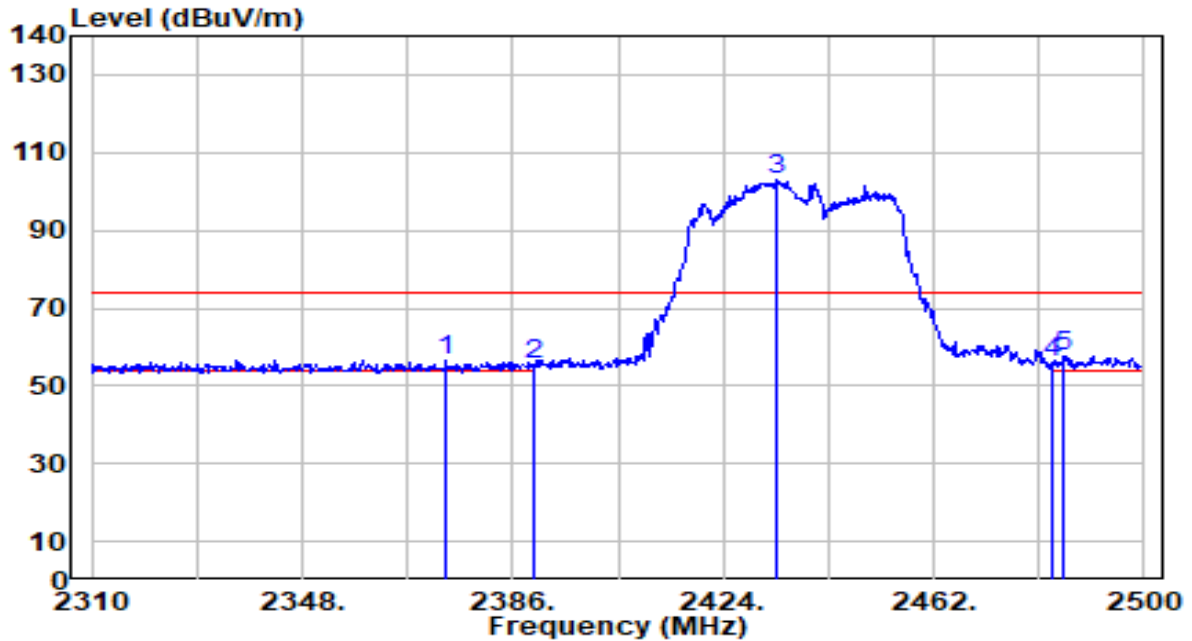


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2374.030 | 26.23 | 30.40 | 56.63 | -17.37 | 74.00 | 297 | 102 | Peak |
| 2 | 2390.000 | 24.77 | 30.45 | 55.22 | -18.78 | 74.00 | 297 | 102 | Peak |
| 3 | 2433.500 | 72.49 | 30.52 | 103.01 | N/A | N/A | 297 | 102 | Peak |
| 4 | 2483.500 | 25.46 | 30.59 | 56.05 | -17.95 | 74.00 | 297 | 102 | Peak |
| 5 | * 2485.560 | 27.20 | 30.59 | 57.79 | -16.21 | 74.00 | 297 | 102 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

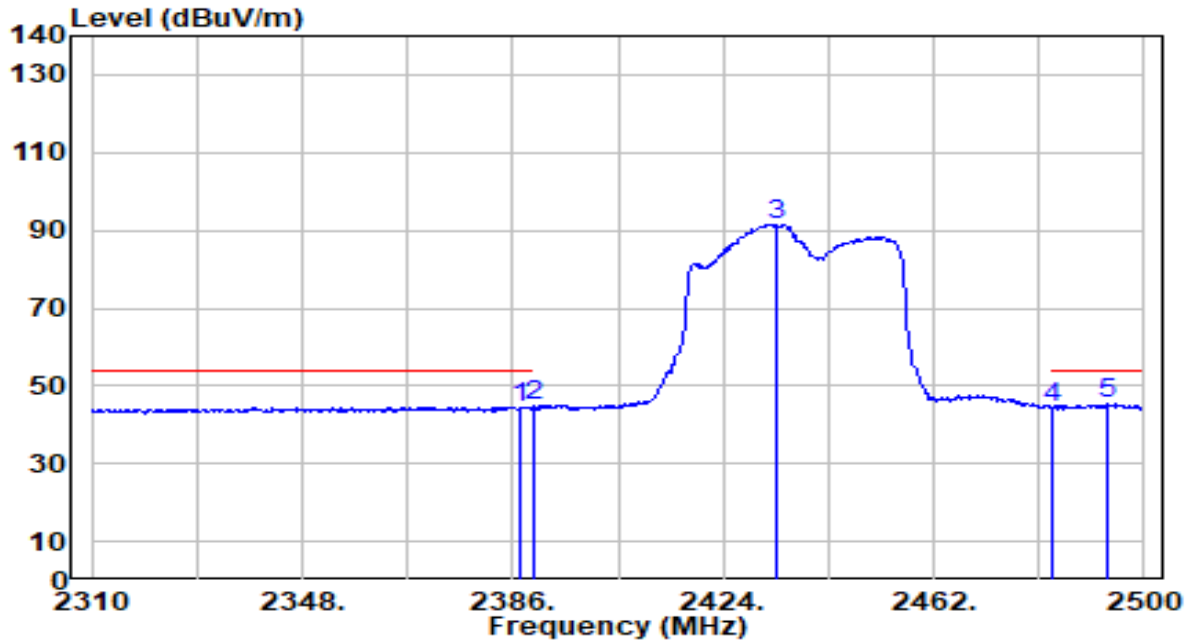


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2387.330 | 14.13 | 30.44 | 44.57 | -9.43 | 54.00 | 297 | 102 | Average |
| 2 | 2390.000 | 14.25 | 30.45 | 44.70 | -9.30 | 54.00 | 297 | 102 | Average |
| 3 | 2433.690 | 61.11 | 30.52 | 91.63 | N/A | N/A | 297 | 102 | Average |
| 4 | 2483.500 | 14.05 | 30.59 | 44.63 | -9.37 | 54.00 | 297 | 102 | Average |
| 5 | * 2493.540 | 14.61 | 30.60 | 45.21 | -8.79 | 54.00 | 297 | 102 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

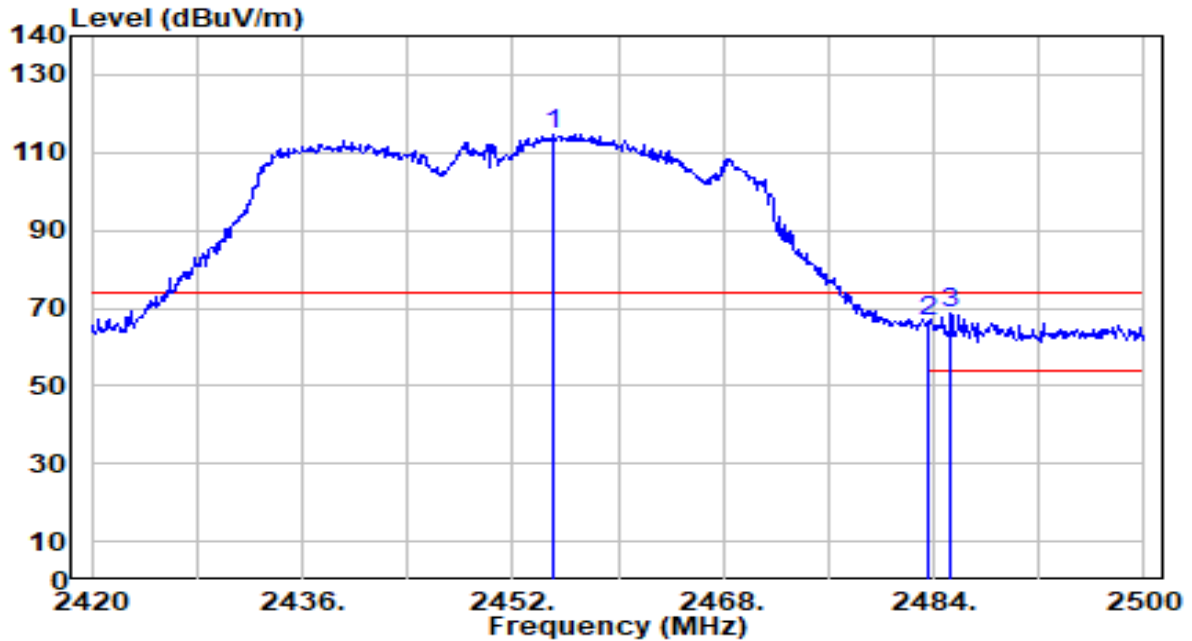


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.040 | 84.29 | 30.55 | 114.84 | N/A | N/A | 170 | 6 | Peak |
| 2 | 2483.500 | 35.84 | 30.59 | 66.43 | -7.57 | 74.00 | 170 | 6 | Peak |
| 3 | * 2485.280 | 37.97 | 30.59 | 68.56 | -5.44 | 74.00 | 170 | 6 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

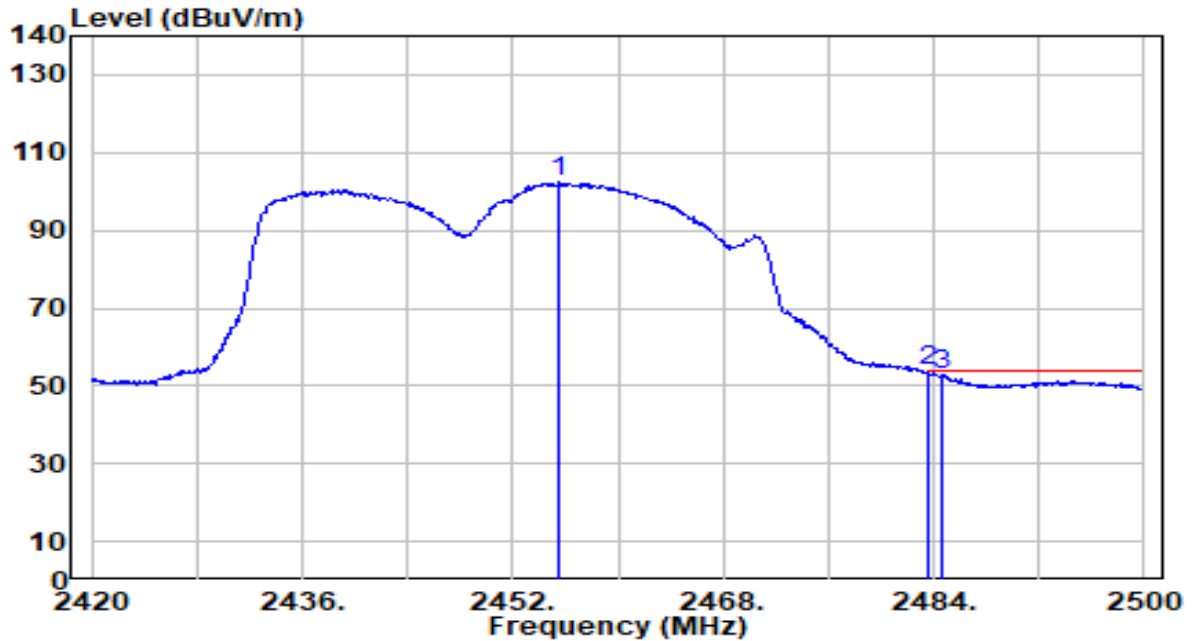


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.520 | 71.68 | 30.55 | 102.23 | N/A | N/A | 170 | 6 | Average |
| 2 | * 2483.500 | 23.14 | 30.59 | 53.72 | -0.28 | 54.00 | 170 | 6 | Average |
| 3 | 2484.560 | 22.25 | 30.59 | 52.84 | -1.16 | 54.00 | 170 | 6 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

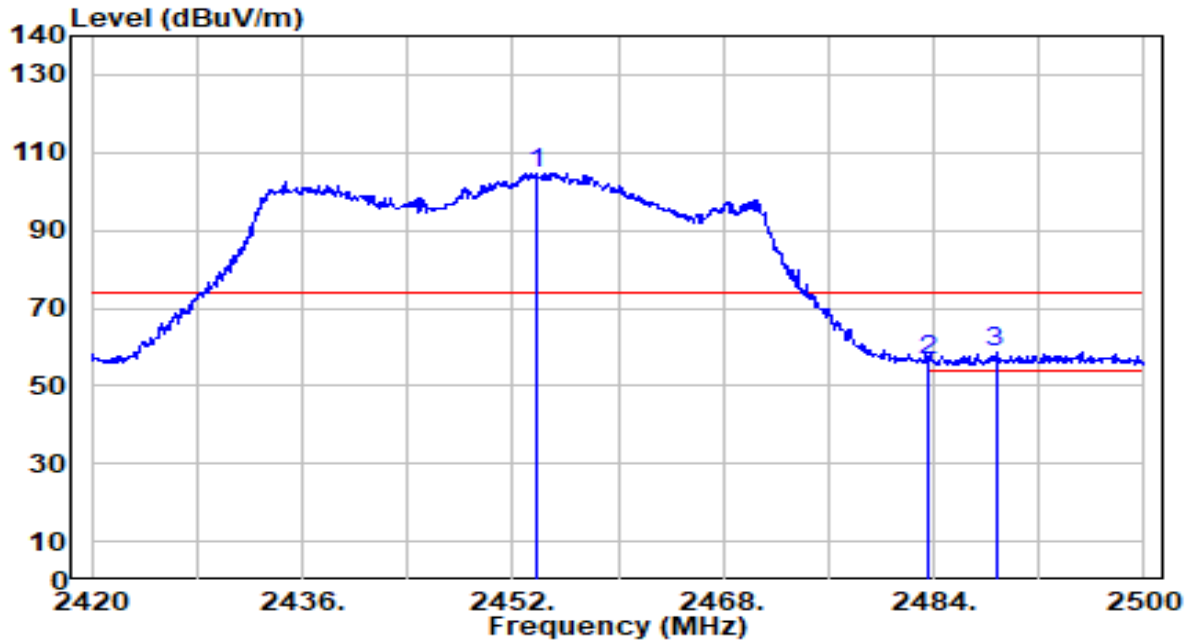


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2453.840 | 74.18 | 30.55 | 104.73 | N/A | N/A | 282 | 103 | Peak |
| 2 | 2483.500 | 25.81 | 30.59 | 56.40 | -17.60 | 74.00 | 282 | 103 | Peak |
| 3 | * 2488.720 | 27.95 | 30.59 | 58.55 | -15.45 | 74.00 | 282 | 103 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-16 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Horizontal Ant | Test Voltage | AC 120V/60Hz |

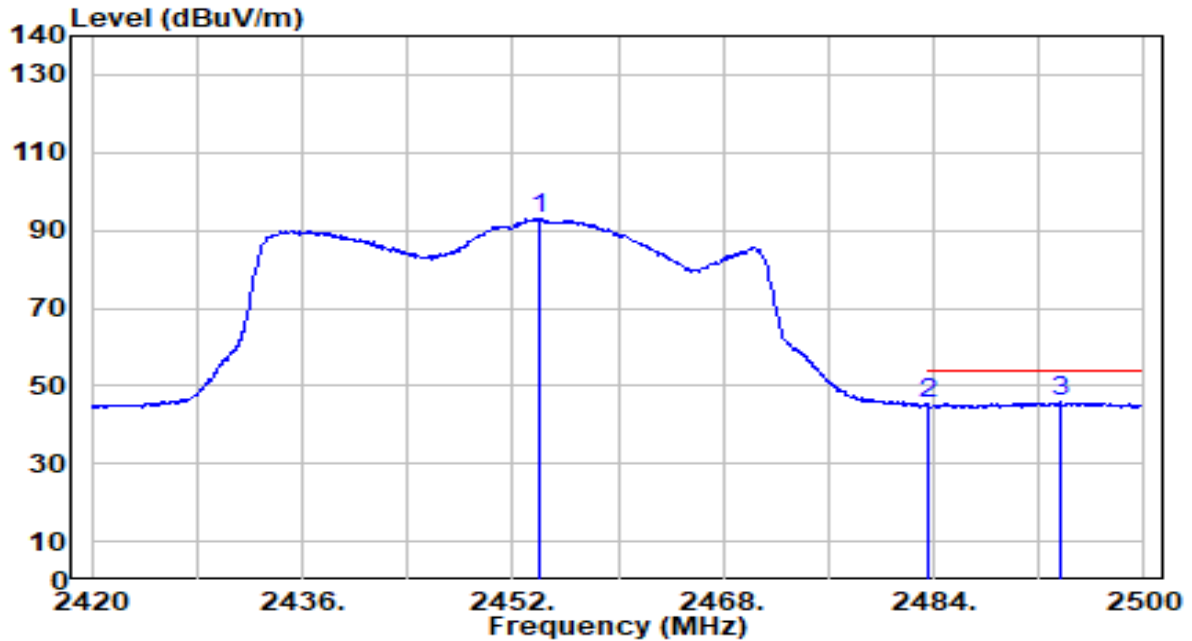


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2454.000 | 62.68 | 30.55 | 93.23 | N/A | N/A | 282 | 103 | Average |
| 2 | 2483.500 | 14.98 | 30.59 | 45.57 | -8.43 | 54.00 | 282 | 103 | Average |
| 3 | * 2493.680 | 15.22 | 30.60 | 45.82 | -8.18 | 54.00 | 282 | 103 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_RX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

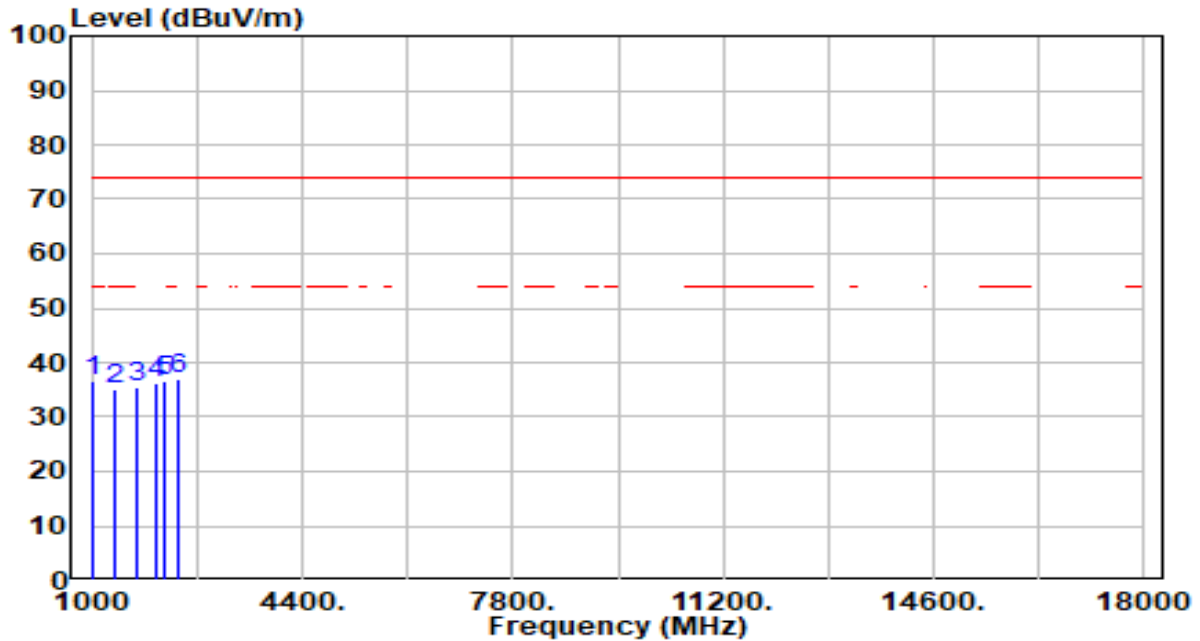


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 1038.000 | 44.63 | -8.17 | 36.46 | -37.54 | 74.00 | 100 | 25 | Peak |
| 2 | 1364.000 | 42.70 | -7.42 | 35.27 | -38.73 | 74.00 | 200 | 70 | Peak |
| 3 | 1717.000 | 42.95 | -7.34 | 35.61 | -38.39 | 74.00 | 144 | 360 | Peak |
| 4 | 2028.000 | 41.96 | -5.90 | 36.05 | -37.95 | 74.00 | 200 | 180 | Peak |
| 5 | 2182.000 | 42.09 | -5.54 | 36.55 | -37.45 | 74.00 | 200 | 346 | Peak |
| 6 | * 2381.000 | 42.16 | -5.16 | 37.00 | -37.00 | 74.00 | 200 | 87 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_RX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

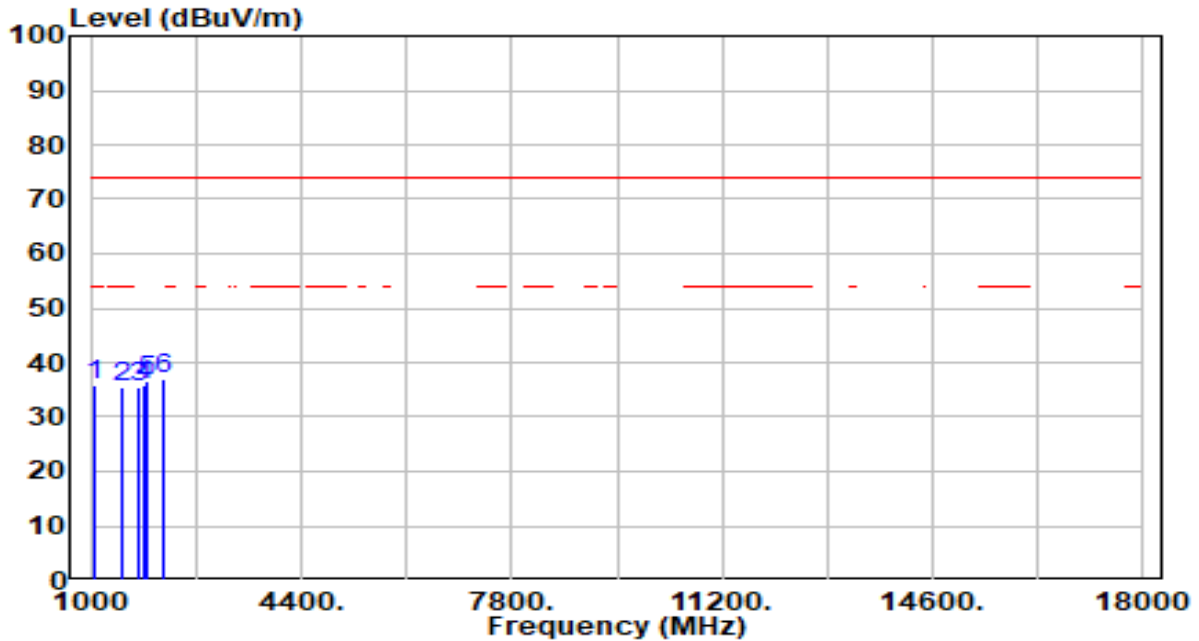


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 1072.000 | 43.91 | -8.17 | 35.75 | -38.25 | 74.00 | 200 | 220 | Peak |
| 2 | 1493.000 | 43.07 | -7.49 | 35.57 | -38.43 | 74.00 | 300 | 56 | Peak |
| 3 | 1783.000 | 42.69 | -7.09 | 35.60 | -38.40 | 74.00 | 100 | 14 | Peak |
| 4 | 1851.000 | 42.59 | -6.76 | 35.83 | -38.17 | 74.00 | 116 | 360 | Peak |
| 5 | 1914.000 | 42.89 | -6.42 | 36.46 | -37.54 | 74.00 | 100 | 34 | Peak |
| 6 | * 2189.000 | 42.50 | -5.52 | 36.98 | -37.02 | 74.00 | 100 | 360 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical Antenna Data

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

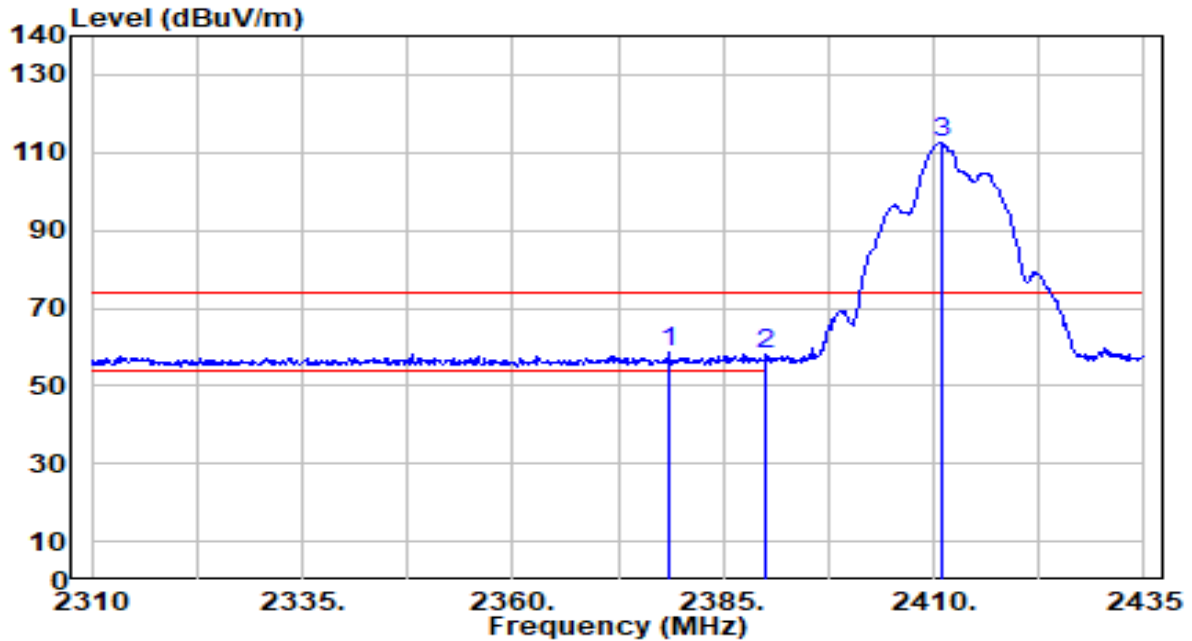


| No | | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 2378.500 | 28.20 | 30.41 | 58.62 | -15.38 | 74.00 | 138 | 310 | Peak |
| 2 | | 2390.000 | 27.50 | 30.45 | 57.95 | -16.05 | 74.00 | 138 | 310 | Peak |
| 3 | | 2410.875 | 81.90 | 30.49 | 112.39 | N/A | N/A | 138 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

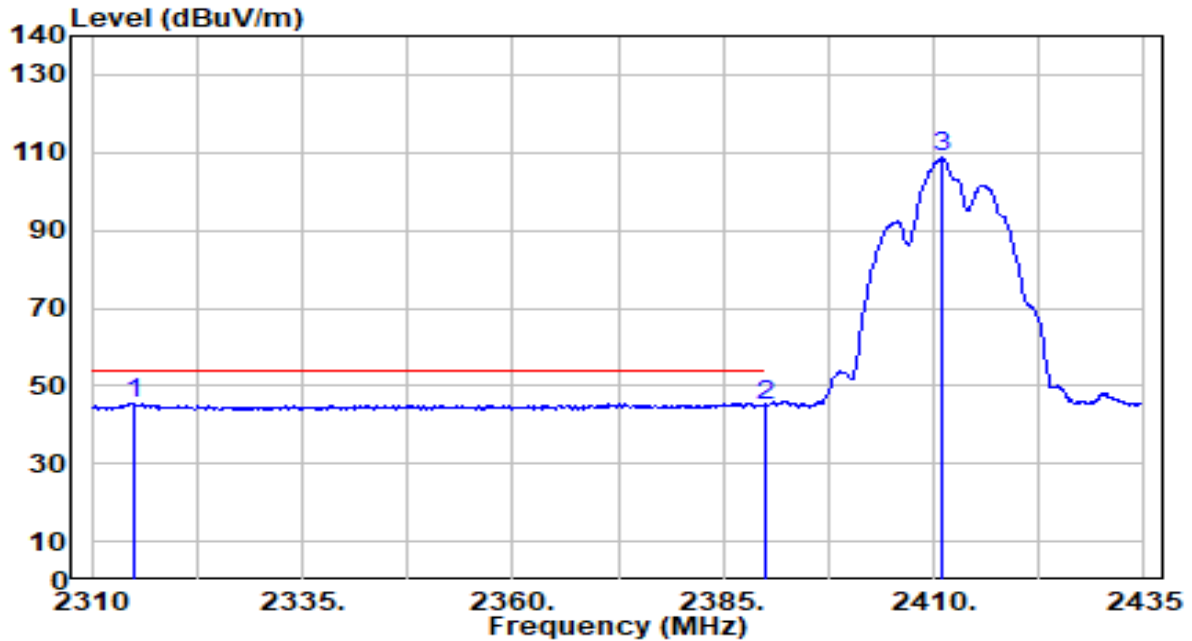


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2315.000 | 15.44 | 30.23 | 45.67 | -8.33 | 54.00 | 138 | 310 | Average |
| 2 | 2390.000 | 14.21 | 30.45 | 44.66 | -9.34 | 54.00 | 138 | 310 | Average |
| 3 | 2410.875 | 78.20 | 30.49 | 108.69 | N/A | N/A | 138 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

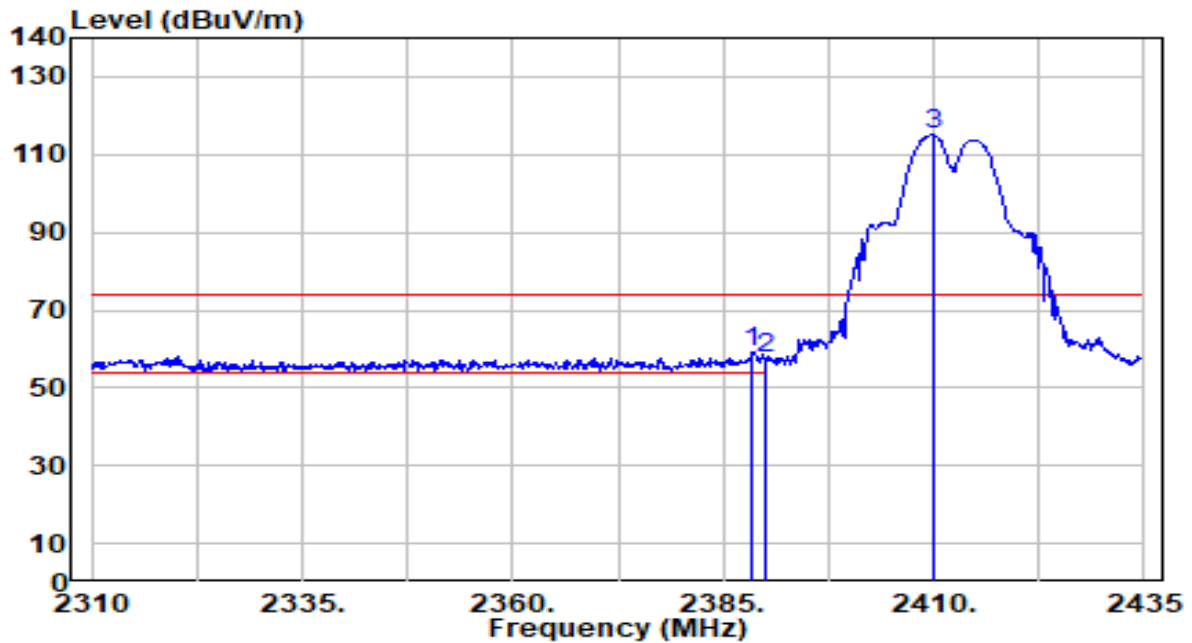


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2388.500 | 28.81 | 30.44 | 59.25 | -14.75 | 74.00 | 100 | 58 | Peak |
| 2 | | 2390.000 | 27.32 | 30.45 | 57.77 | -16.23 | 74.00 | 100 | 58 | Peak |
| 3 | | 2410.000 | 84.49 | 30.49 | 114.98 | N/A | N/A | 100 | 58 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

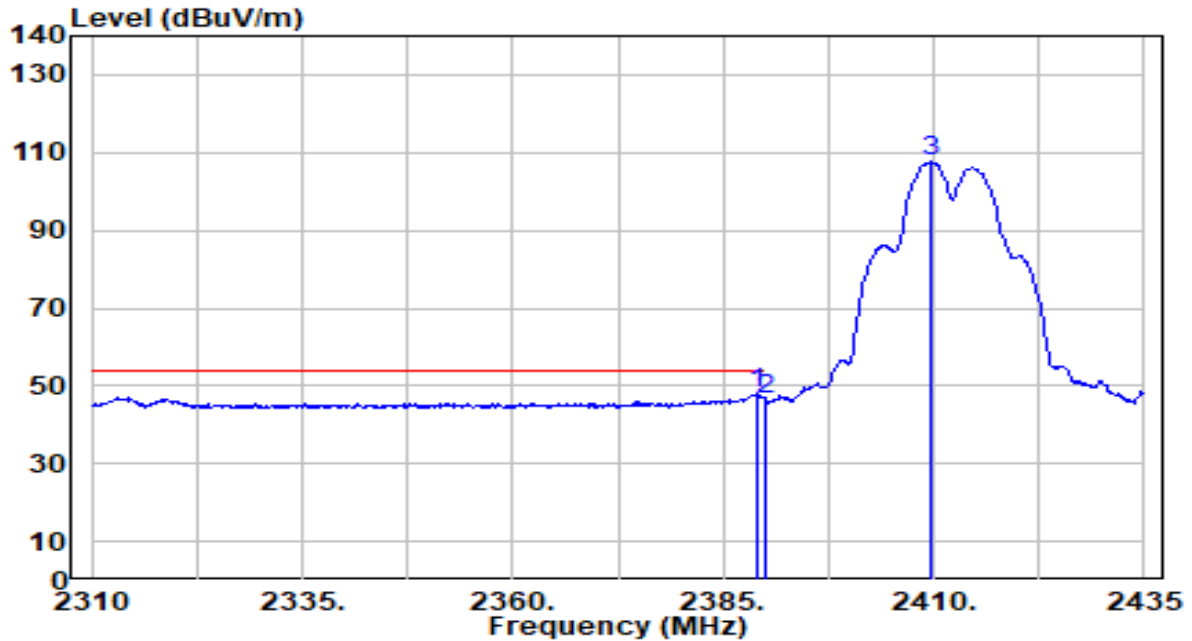


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2389.000 | 17.50 | 30.44 | 47.94 | -6.06 | 54.00 | 100 | 58 | Average |
| 2 | 2390.000 | 15.78 | 30.45 | 46.23 | -7.77 | 54.00 | 100 | 58 | Average |
| 3 | 2409.750 | 77.10 | 30.49 | 107.59 | N/A | N/A | 100 | 58 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

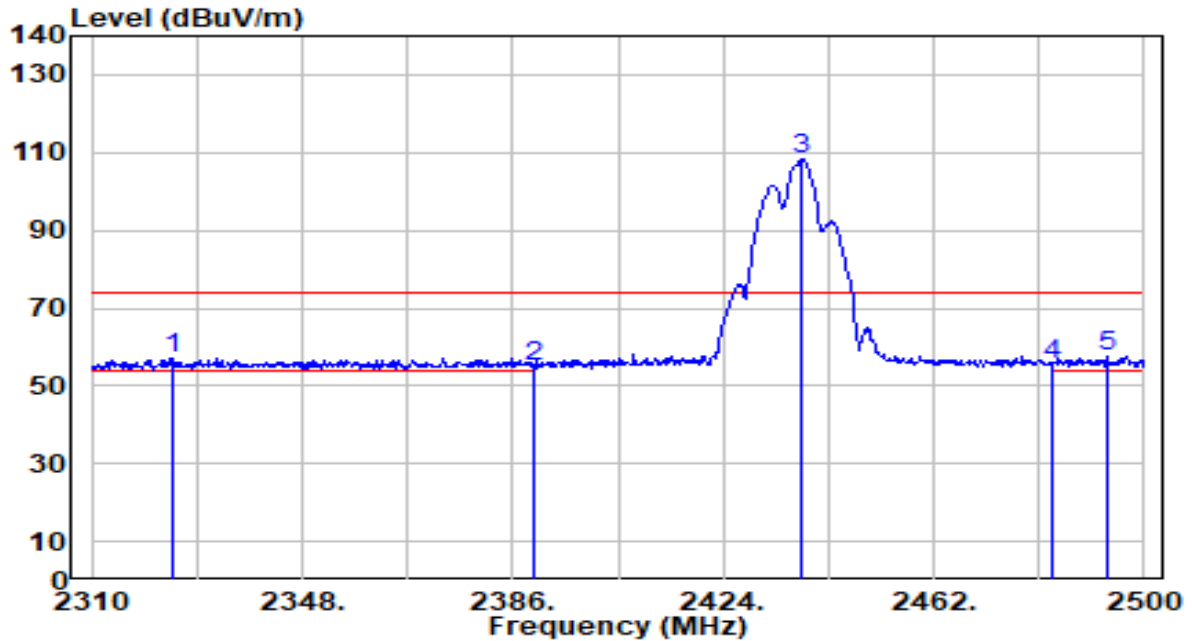


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2324.820 | 26.97 | 30.26 | 57.23 | -16.77 | 74.00 | 165 | 201 | Peak |
| 2 | 2390.000 | 24.43 | 30.45 | 54.88 | -19.12 | 74.00 | 165 | 201 | Peak |
| 3 | 2438.250 | 77.81 | 30.53 | 108.34 | N/A | N/A | 165 | 201 | Peak |
| 4 | 2483.500 | 24.72 | 30.59 | 55.31 | -18.69 | 74.00 | 165 | 201 | Peak |
| 5 | * 2493.160 | 27.18 | 30.60 | 57.78 | -16.22 | 74.00 | 165 | 201 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

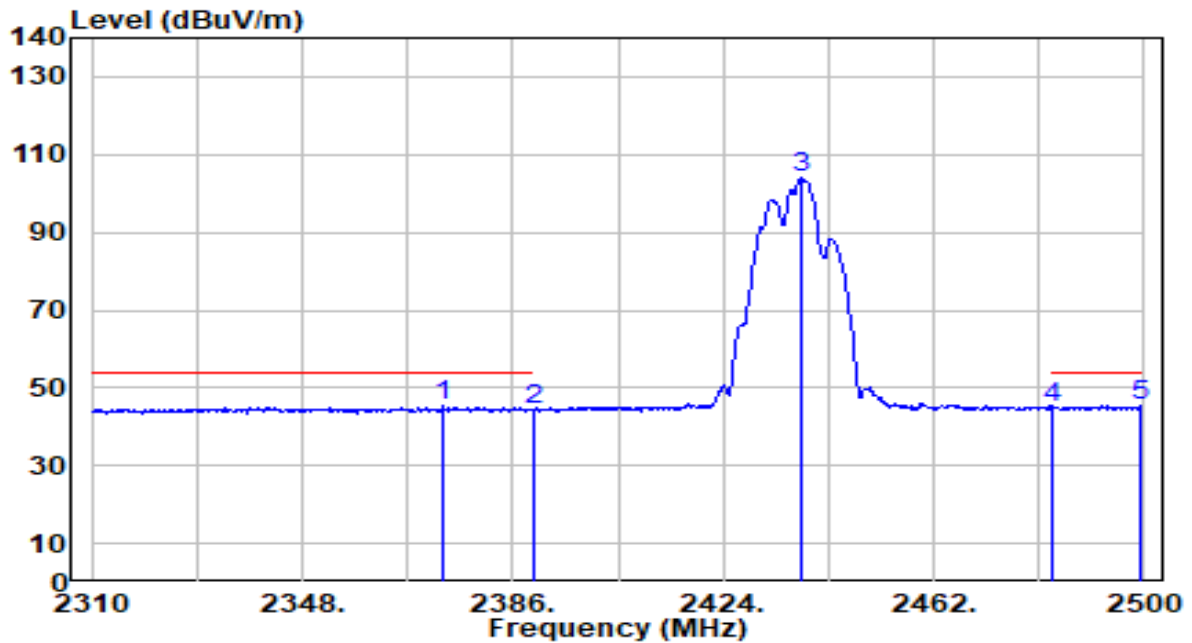


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2373.460 | 14.90 | 30.40 | 45.30 | -8.70 | 54.00 | 165 | 201 | Average |
| 2 | 2390.000 | 13.78 | 30.45 | 44.22 | -9.78 | 54.00 | 165 | 201 | Average |
| 3 | 2438.060 | 73.49 | 30.53 | 104.01 | N/A | N/A | 165 | 201 | Average |
| 4 | 2483.500 | 14.26 | 30.59 | 44.85 | -9.15 | 54.00 | 165 | 201 | Average |
| 5 | * 2499.430 | 14.79 | 30.61 | 45.40 | -8.60 | 54.00 | 165 | 201 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

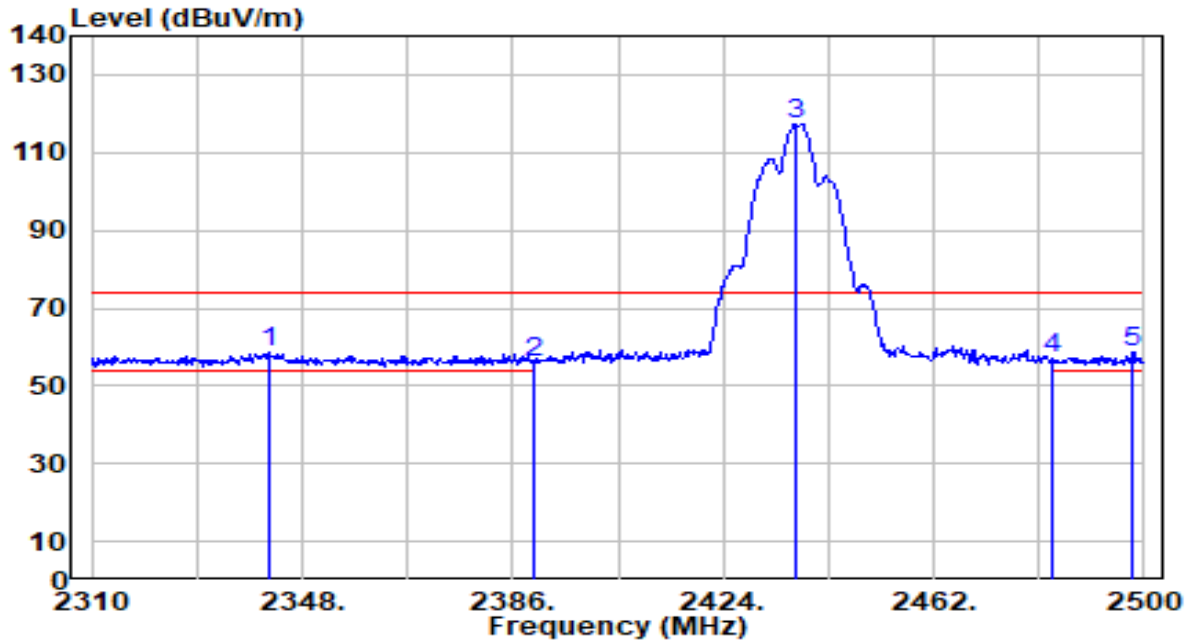


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2342.110 | 28.50 | 30.31 | 58.81 | -15.19 | 74.00 | 156 | 289 | Peak |
| 2 | 2390.000 | 25.61 | 30.45 | 56.05 | -17.95 | 74.00 | 156 | 289 | Peak |
| 3 | 2437.110 | 86.92 | 30.53 | 117.44 | N/A | N/A | 156 | 289 | Peak |
| 4 | 2483.500 | 26.53 | 30.59 | 57.12 | -16.88 | 74.00 | 156 | 289 | Peak |
| 5 | 2497.910 | 27.90 | 30.61 | 58.51 | -15.49 | 74.00 | 156 | 289 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

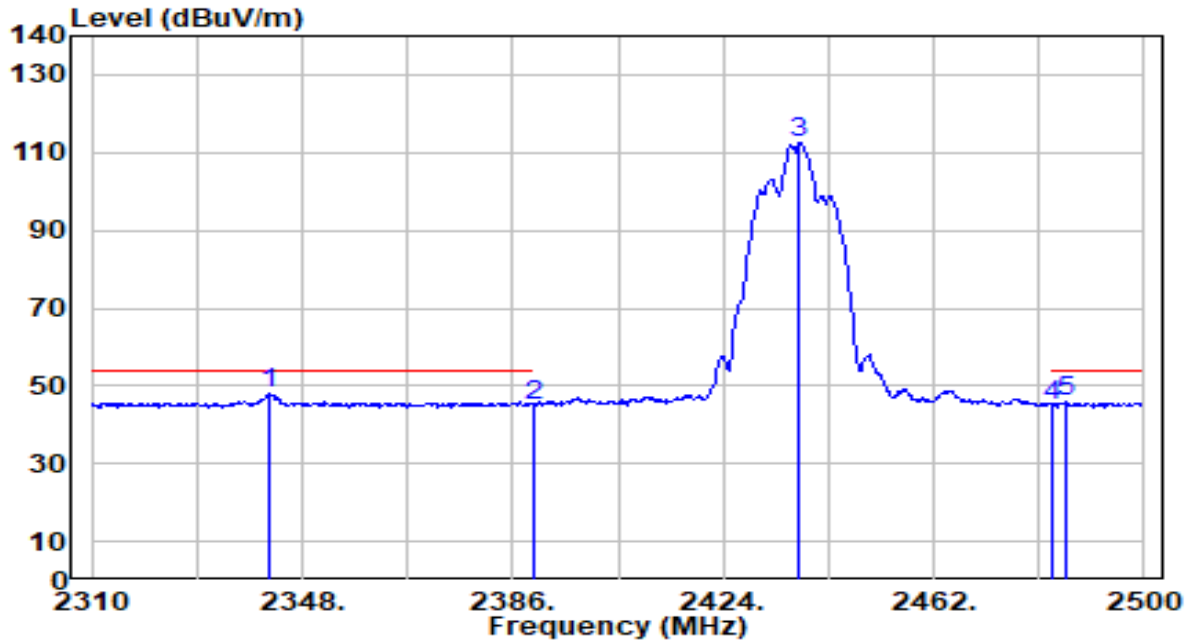


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2341.920 | 17.56 | 30.31 | 47.87 | -6.13 | 54.00 | 156 | 289 | Average |
| 2 | 2390.000 | 14.59 | 30.45 | 45.04 | -8.96 | 54.00 | 156 | 289 | Average |
| 3 | 2437.680 | 82.16 | 30.53 | 112.69 | N/A | N/A | 156 | 289 | Average |
| 4 | 2483.500 | 14.46 | 30.59 | 45.04 | -8.96 | 54.00 | 156 | 289 | Average |
| 5 | 2486.130 | 15.17 | 30.59 | 45.76 | -8.24 | 54.00 | 156 | 289 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

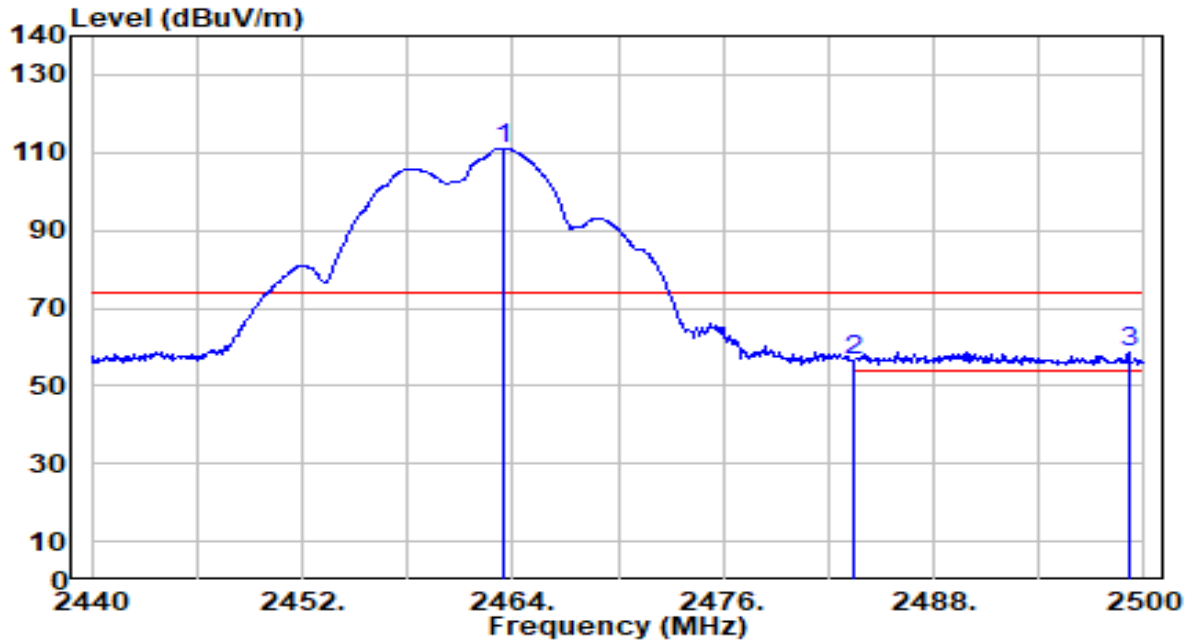


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.460 | 80.54 | 30.56 | 111.10 | N/A | N/A | 179 | 310 | Peak |
| 2 | 2483.500 | 25.76 | 30.59 | 56.35 | -17.65 | 74.00 | 179 | 310 | Peak |
| 3 | * 2499.100 | 28.08 | 30.61 | 58.69 | -15.31 | 74.00 | 179 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

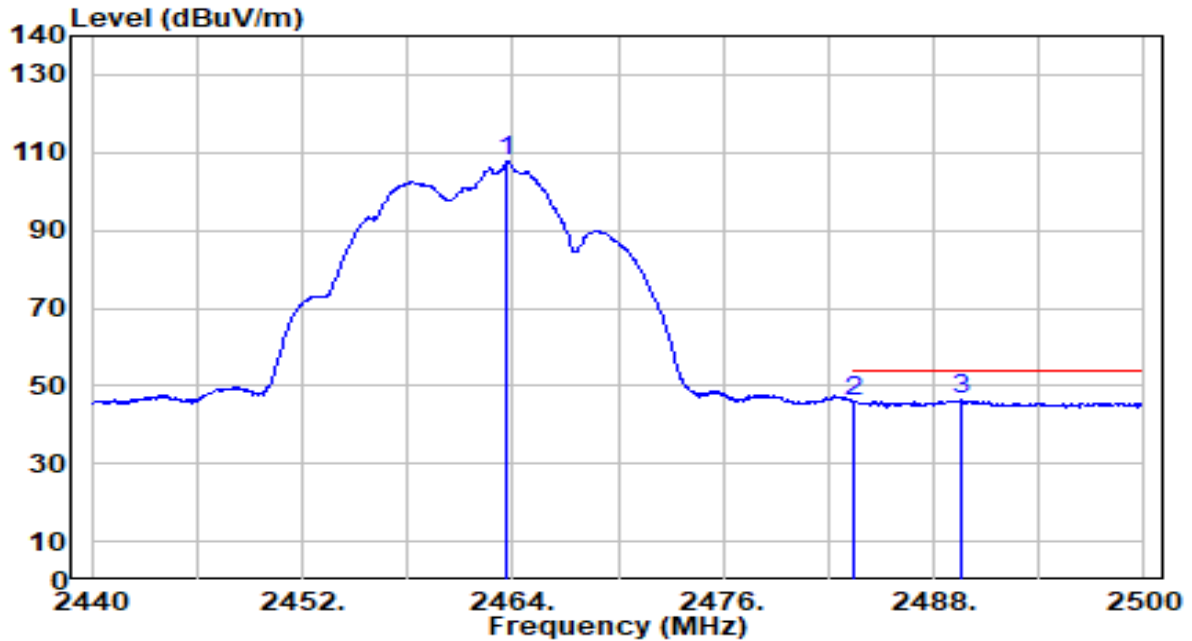


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.640 | 77.00 | 30.56 | 107.56 | N/A | N/A | 179 | 310 | Average |
| 2 | 2483.500 | 15.48 | 30.59 | 46.07 | -7.93 | 54.00 | 179 | 310 | Average |
| 3 | * 2489.500 | 15.89 | 30.60 | 46.49 | -7.51 | 54.00 | 179 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

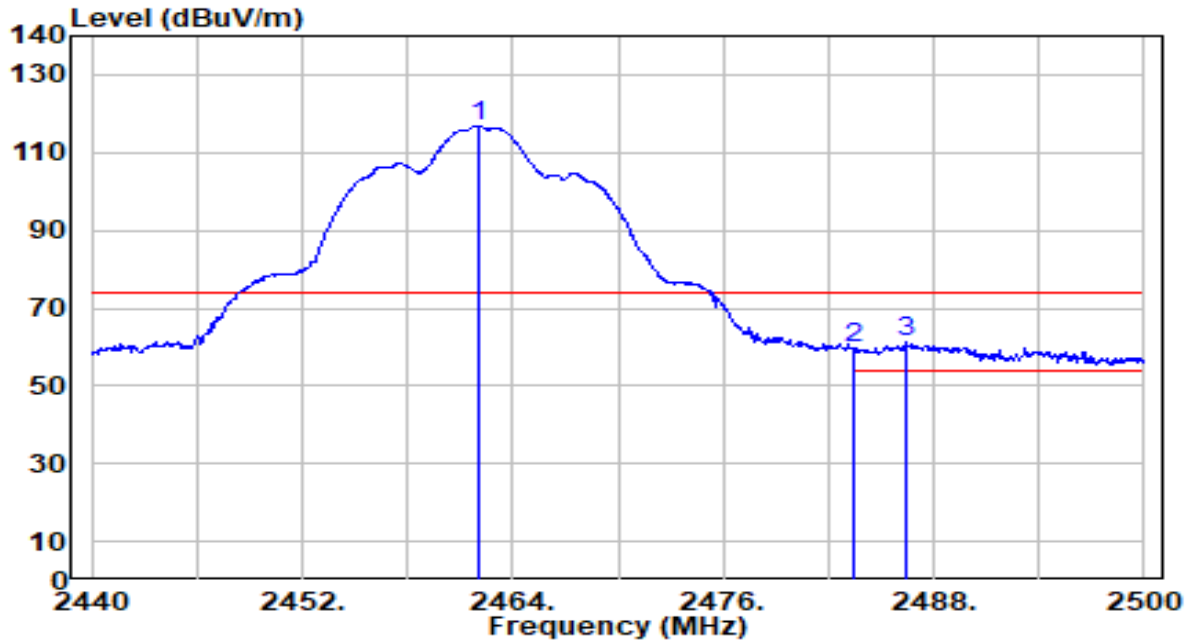


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2462.020 | 86.39 | 30.56 | 116.95 | N/A | N/A | 100 | 54 | Peak |
| 2 | 2483.500 | 29.27 | 30.59 | 59.86 | -14.14 | 74.00 | 100 | 54 | Peak |
| 3 | * 2486.500 | 30.58 | 30.59 | 61.17 | -12.83 | 74.00 | 100 | 54 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11b_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

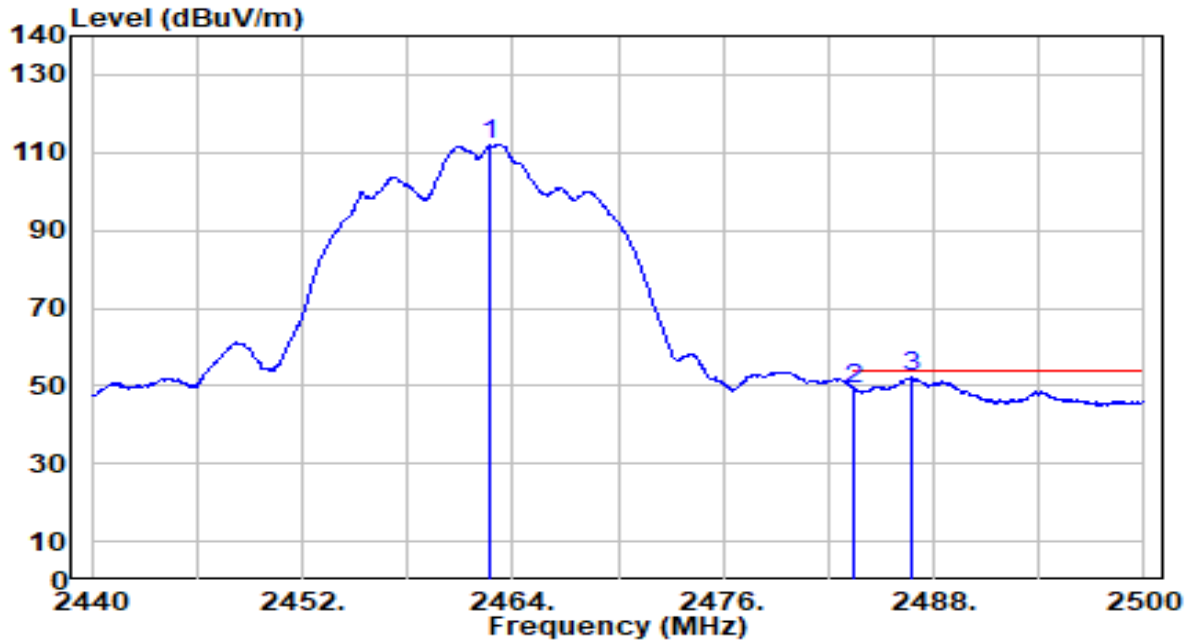


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2462.680 | 81.54 | 30.56 | 112.10 | N/A | N/A | 100 | 54 | Average |
| 2 | 2483.500 | 18.36 | 30.59 | 48.95 | -5.05 | 54.00 | 100 | 54 | Average |
| 3 | * 2486.740 | 21.73 | 30.59 | 52.32 | -1.68 | 54.00 | 100 | 54 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

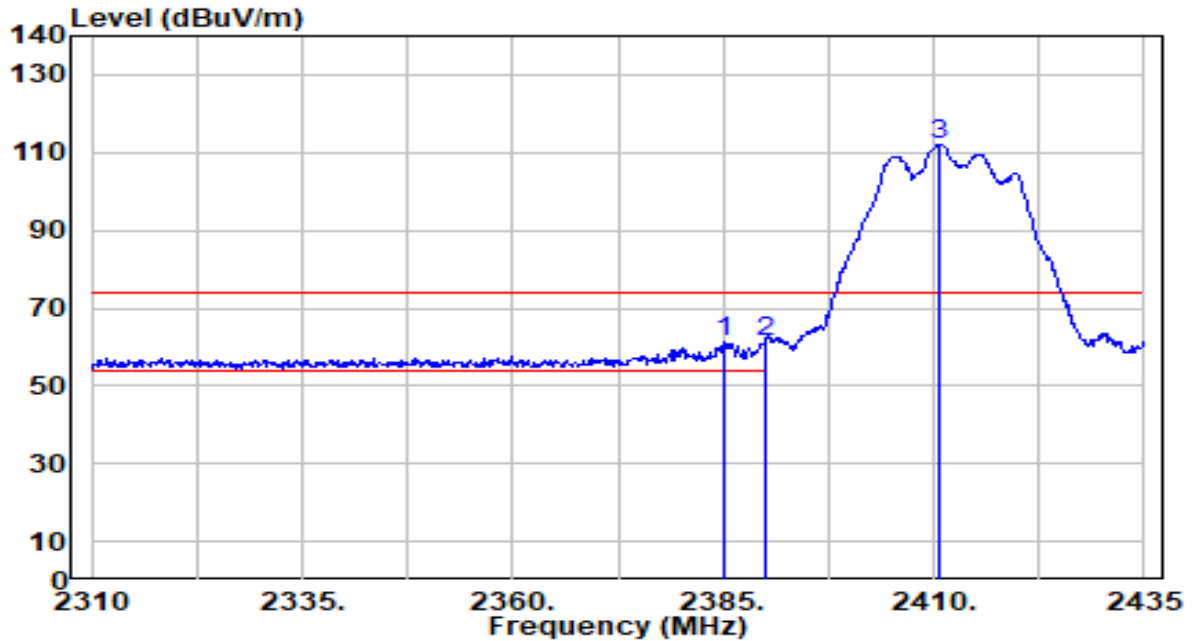


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2385.250 | 30.69 | 30.43 | 61.12 | -12.88 | 74.00 | 138 | 310 | Peak |
| 2 | * 2390.000 | 31.05 | 30.45 | 61.50 | -12.50 | 74.00 | 138 | 310 | Peak |
| 3 | 2410.500 | 81.58 | 30.49 | 112.07 | N/A | N/A | 138 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

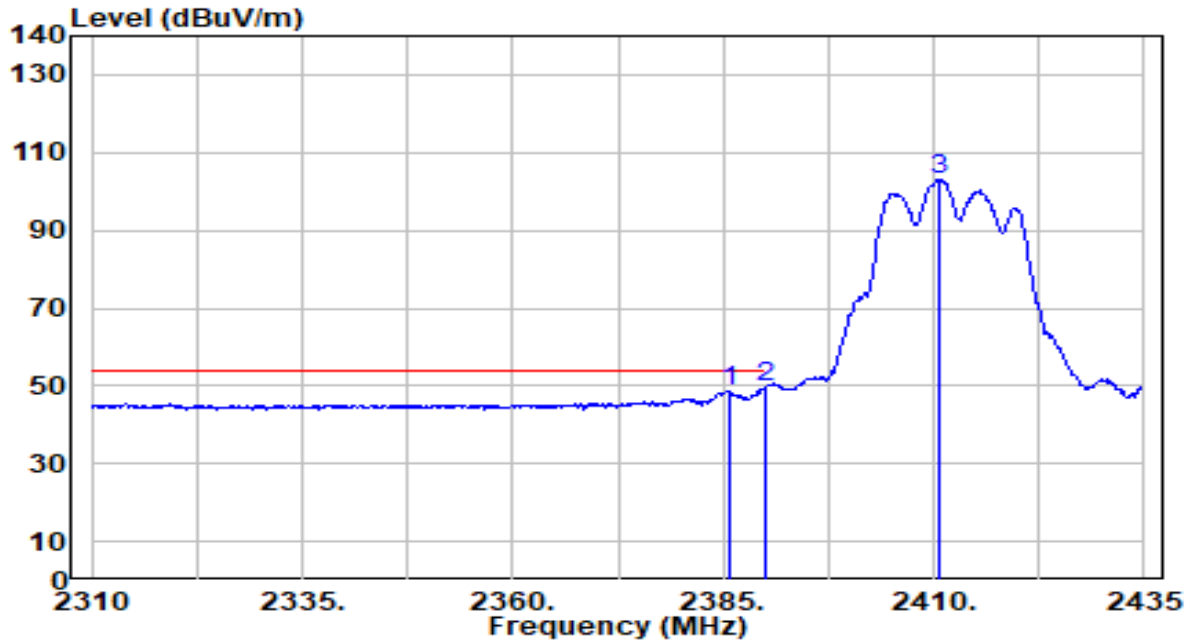


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2385.625 | 18.22 | 30.44 | 48.66 | -5.34 | 54.00 | 138 | 310 | Average |
| 2 | * 2390.000 | 19.26 | 30.45 | 49.71 | -4.29 | 54.00 | 138 | 310 | Average |
| 3 | 2410.750 | 72.47 | 30.49 | 102.96 | N/A | N/A | 138 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

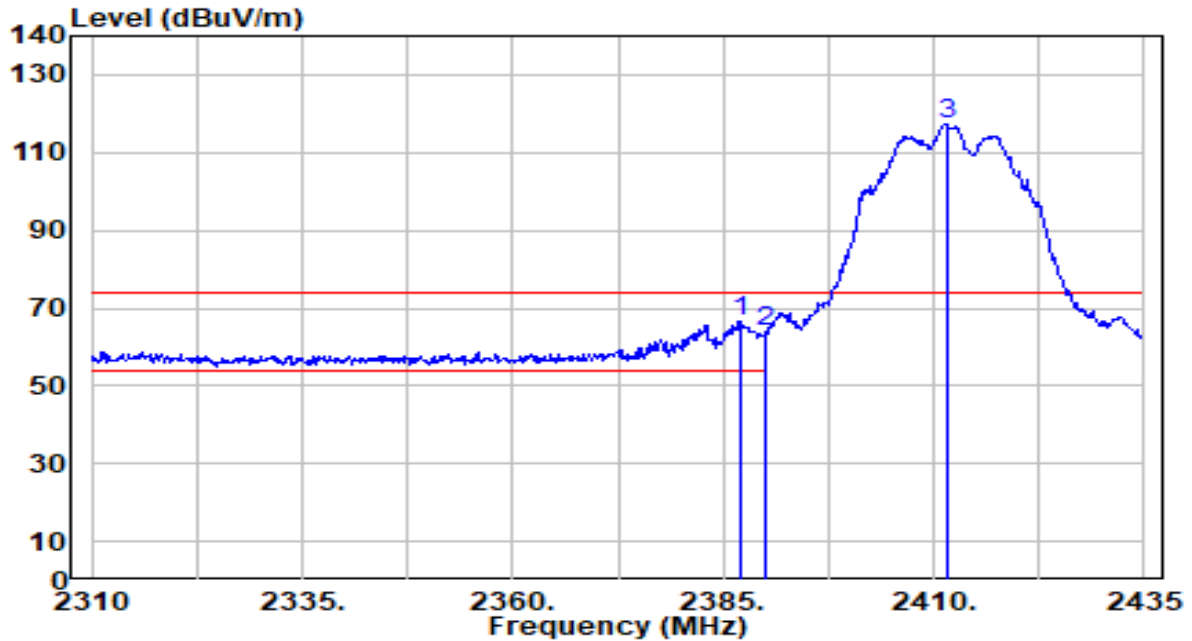


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2387.125 | 36.23 | 30.44 | 66.66 | -7.34 | 74.00 | 100 | 58 | Peak |
| 2 | | 2390.000 | 33.68 | 30.45 | 64.12 | -9.88 | 74.00 | 100 | 58 | Peak |
| 3 | | 2411.500 | 86.57 | 30.49 | 117.06 | N/A | N/A | 100 | 58 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

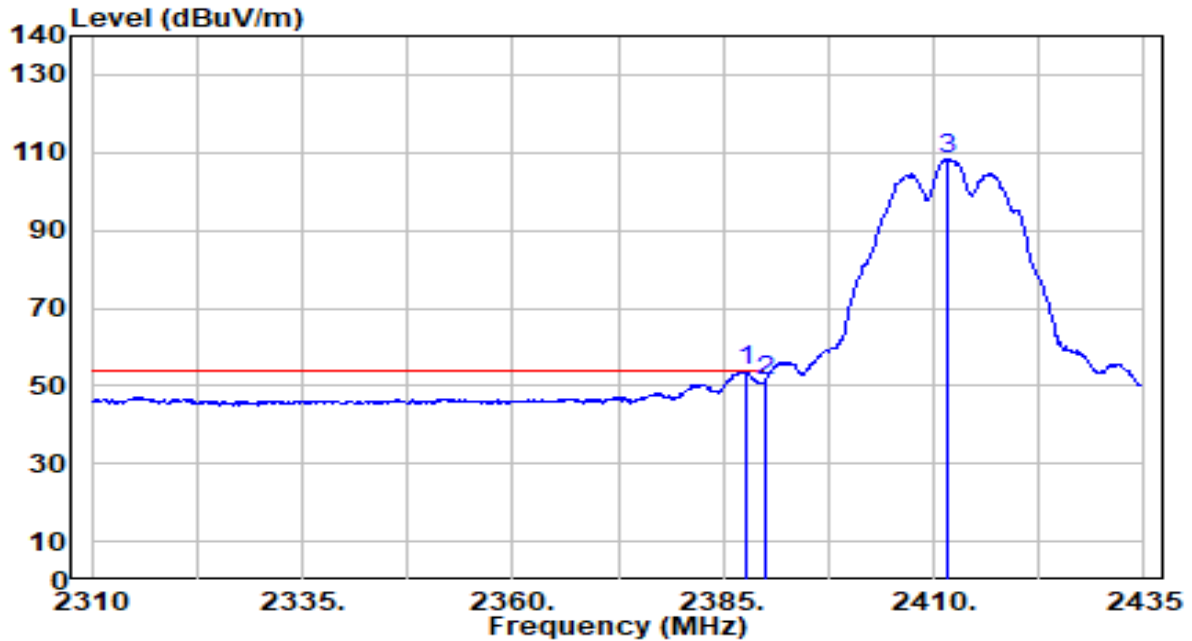


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 23.31 | 30.44 | 53.76 | -0.24 | 54.00 | 100 | 58 | Average |
| 2 | | 20.98 | 30.45 | 51.43 | -2.57 | 54.00 | 100 | 58 | Average |
| 3 | | 77.98 | 30.49 | 108.48 | N/A | N/A | 100 | 58 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

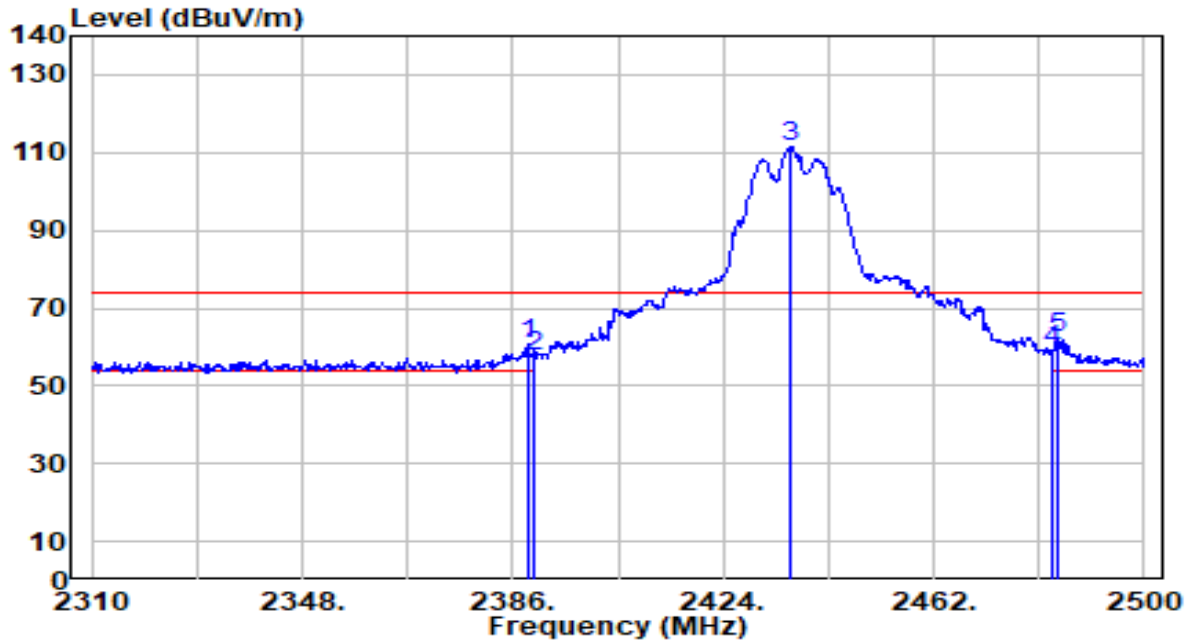


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.660 | 30.08 | 30.44 | 60.52 | -13.48 | 74.00 | 165 | 201 | Peak |
| 2 | 2390.000 | 27.22 | 30.45 | 57.66 | -16.34 | 74.00 | 165 | 201 | Peak |
| 3 | 2436.350 | 81.14 | 30.52 | 111.66 | N/A | N/A | 165 | 201 | Peak |
| 4 | 2483.500 | 28.80 | 30.59 | 59.39 | -14.61 | 74.00 | 165 | 201 | Peak |
| 5 | * 2484.610 | 31.58 | 30.59 | 62.17 | -11.83 | 74.00 | 165 | 201 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

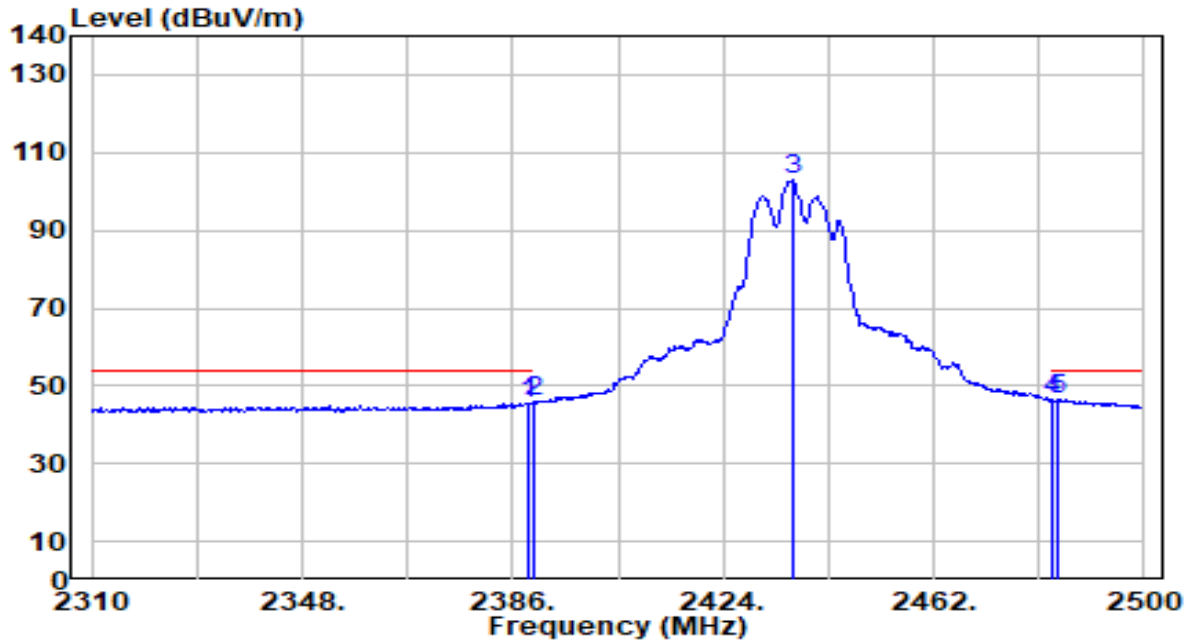


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.040 | 15.06 | 30.44 | 45.50 | -8.50 | 54.00 | 165 | 201 | Average |
| 2 | 2390.000 | 15.32 | 30.45 | 45.77 | -8.23 | 54.00 | 165 | 201 | Average |
| 3 | 2436.540 | 72.35 | 30.52 | 102.88 | N/A | N/A | 165 | 201 | Average |
| 4 | 2483.500 | 15.65 | 30.59 | 46.24 | -7.76 | 54.00 | 165 | 201 | Average |
| 5 | * 2484.610 | 15.88 | 30.59 | 46.47 | -7.53 | 54.00 | 165 | 201 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

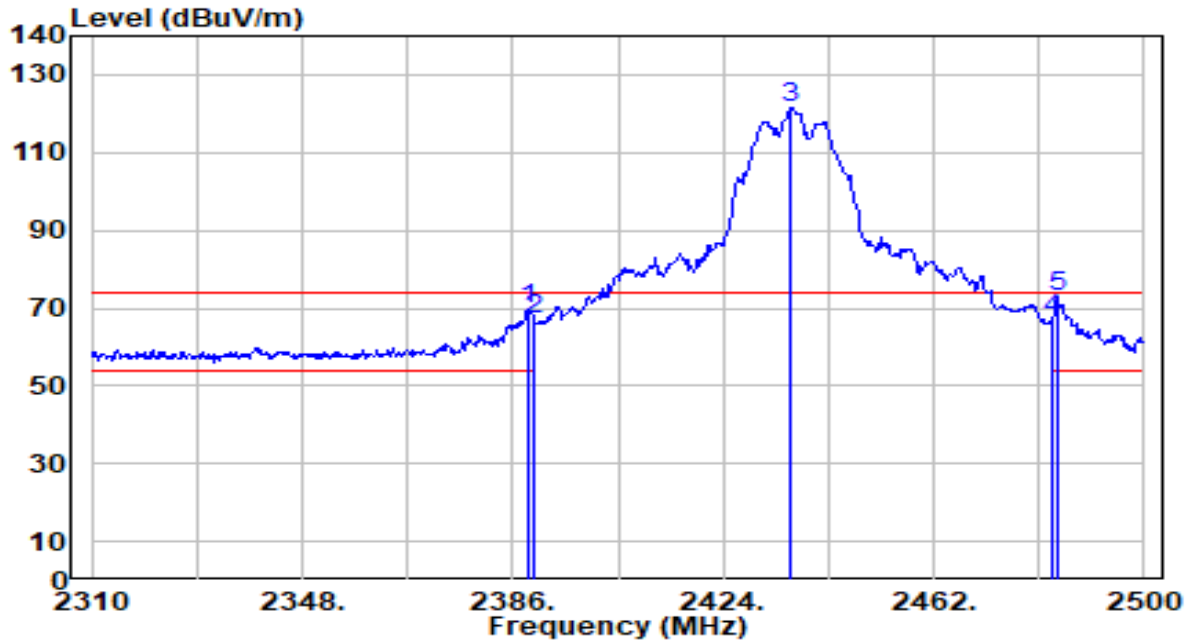


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.040 | 39.23 | 30.44 | 69.67 | -4.33 | 74.00 | 156 | 289 | Peak |
| 2 | 2390.000 | 36.80 | 30.45 | 67.24 | -6.76 | 74.00 | 156 | 289 | Peak |
| 3 | 2436.350 | 90.81 | 30.52 | 121.34 | N/A | N/A | 156 | 289 | Peak |
| 4 | 2483.500 | 36.42 | 30.59 | 67.00 | -7.00 | 74.00 | 156 | 289 | Peak |
| 5 | * 2484.230 | 42.25 | 30.59 | 72.84 | -1.16 | 74.00 | 156 | 289 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

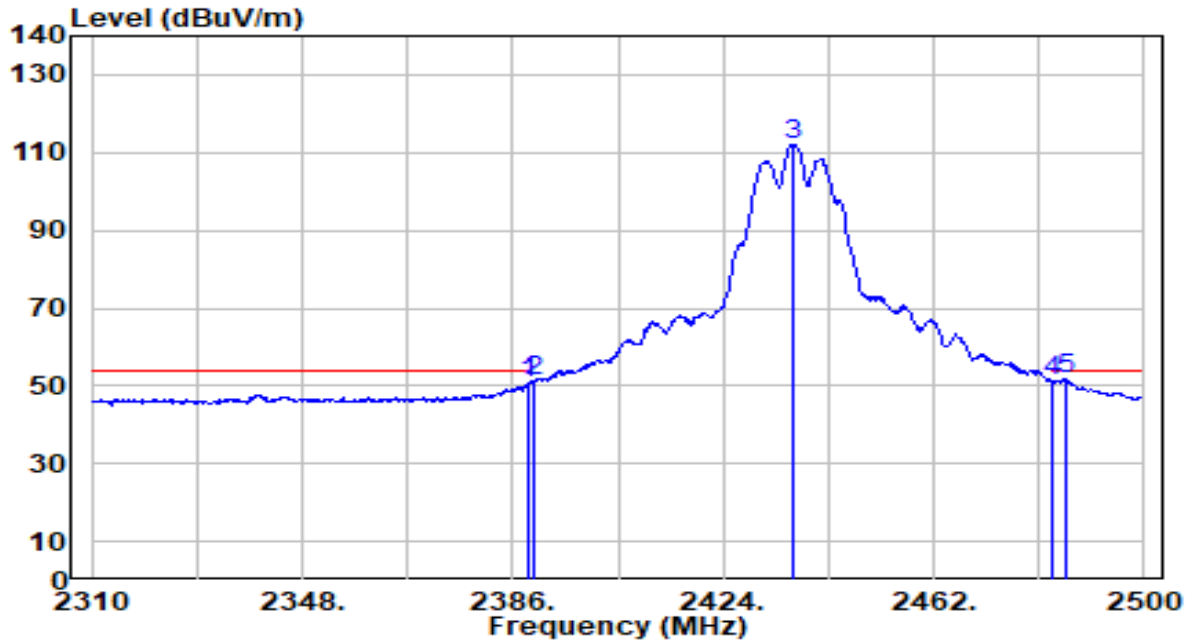


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.040 | 20.48 | 30.44 | 50.93 | -3.07 | 54.00 | 156 | 289 | Average |
| 2 | 2390.000 | 20.68 | 30.45 | 51.13 | -2.87 | 54.00 | 156 | 289 | Average |
| 3 | 2436.540 | 81.52 | 30.52 | 112.04 | N/A | N/A | 156 | 289 | Average |
| 4 | 2483.500 | 20.77 | 30.59 | 51.36 | -2.64 | 54.00 | 156 | 289 | Average |
| 5 | * 2485.750s | 21.12 | 30.59 | 51.71 | -2.29 | 54.00 | 156 | 289 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 10 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

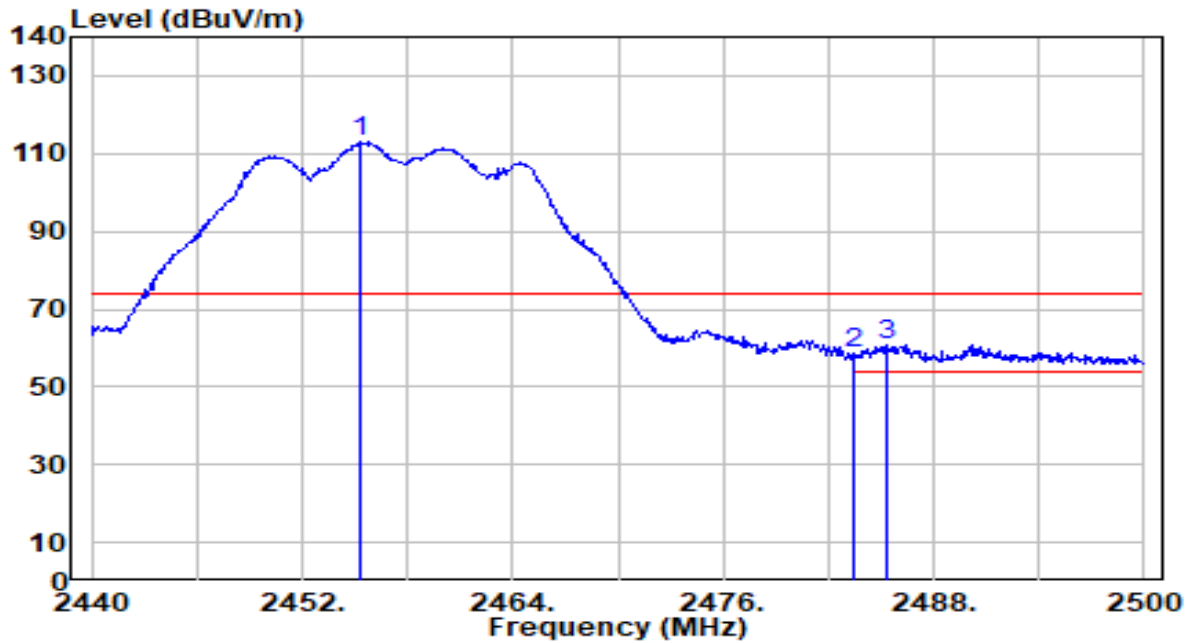


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.300 | 82.47 | 30.55 | 113.02 | N/A | N/A | 160 | 319 | Peak |
| 2 | 2483.500 | 27.98 | 30.59 | 58.56 | -15.44 | 74.00 | 160 | 319 | Peak |
| 3 | * 2485.360 | 30.37 | 30.59 | 60.96 | -13.04 | 74.00 | 160 | 319 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 10 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

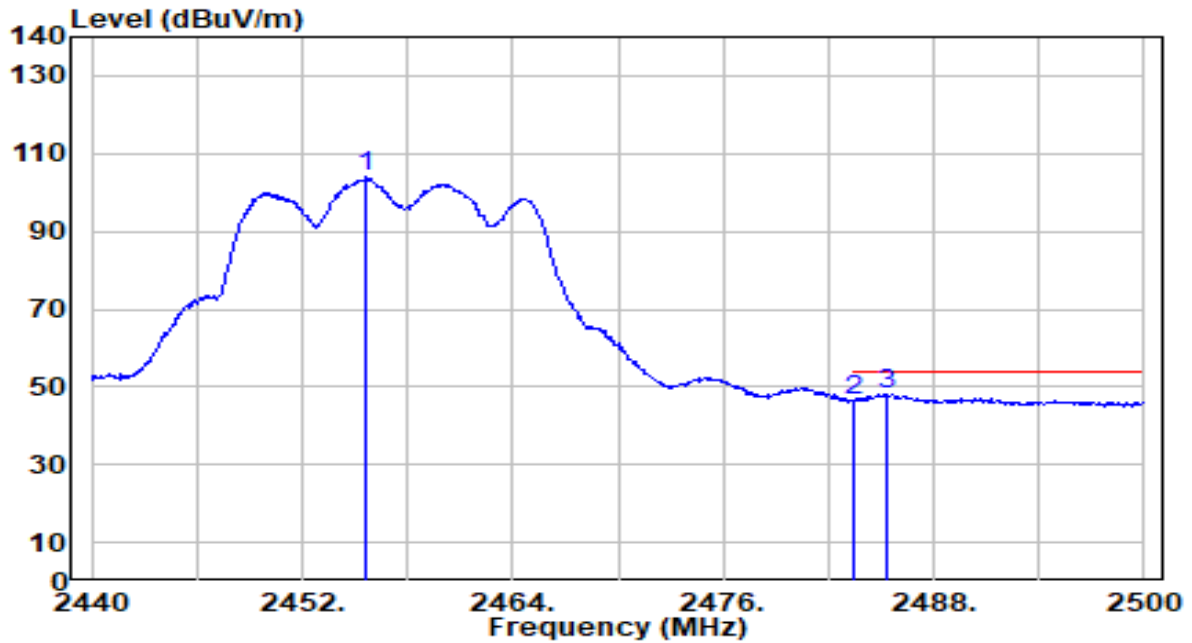


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.600 | 73.35 | 30.55 | 103.90 | N/A | N/A | 160 | 319 | Average |
| 2 | 2483.500 | 15.65 | 30.59 | 46.24 | -7.76 | 54.00 | 160 | 319 | Average |
| 3 | * 2485.300 | 17.62 | 30.59 | 48.21 | -5.79 | 54.00 | 160 | 319 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 10 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

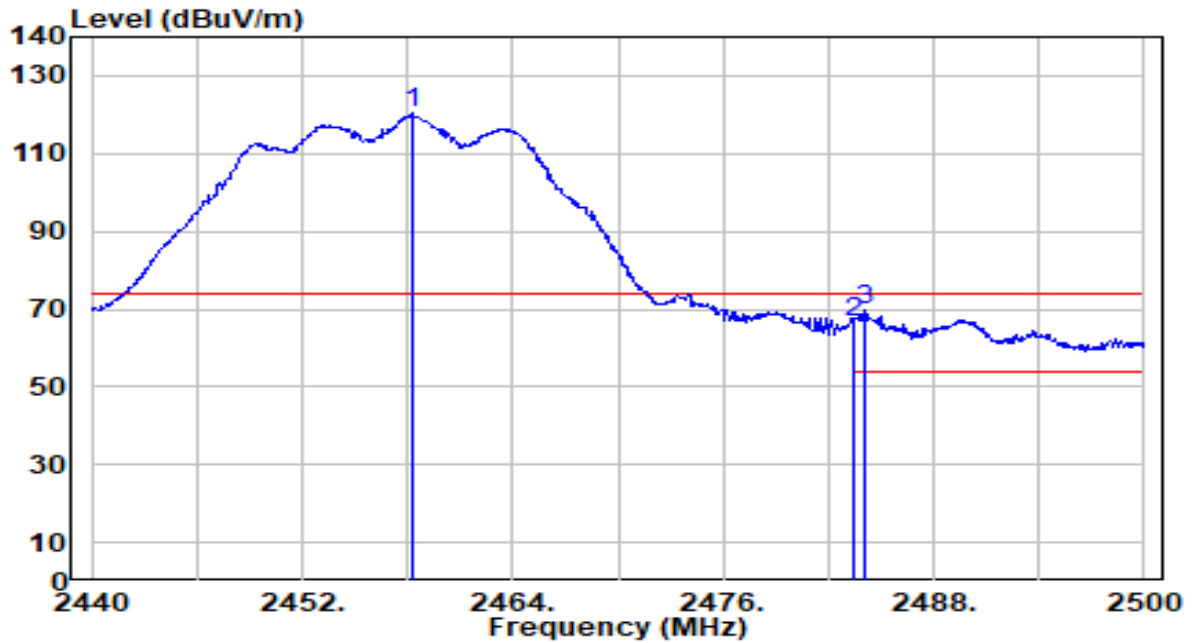


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2458.240 | 89.80 | 30.55 | 120.36 | N/A | N/A | 162 | 306 | Peak |
| 2 | 2483.500 | 35.90 | 30.59 | 66.49 | -7.51 | 74.00 | 162 | 306 | Peak |
| 3 | * 2484.100 | 39.04 | 30.59 | 69.63 | -4.37 | 74.00 | 162 | 306 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 10 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

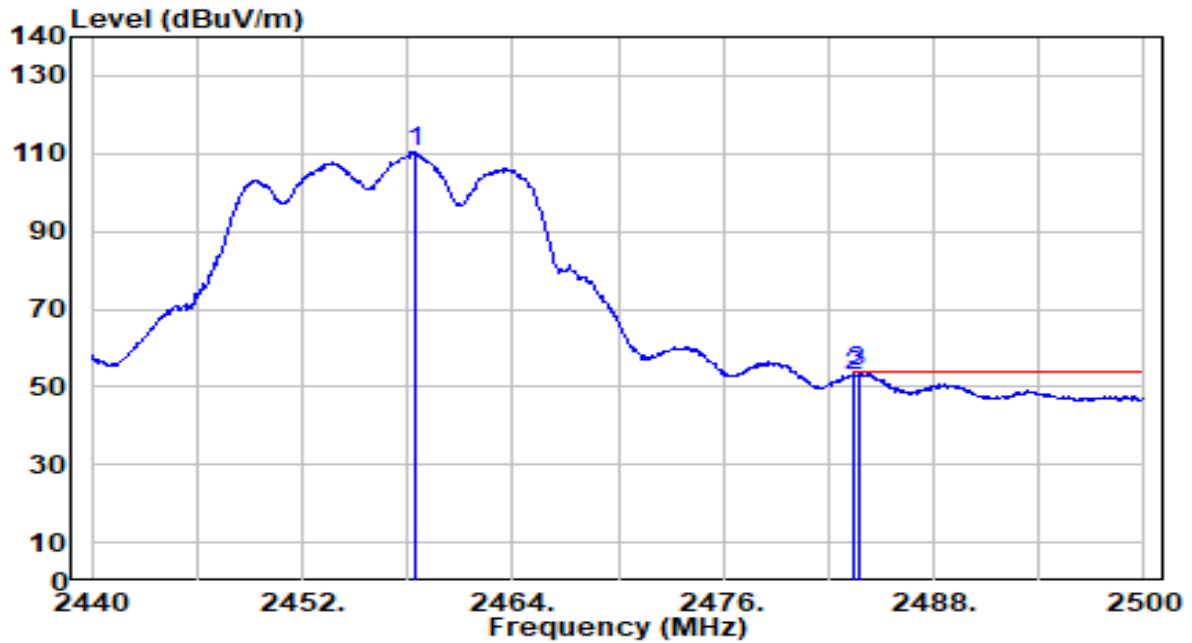


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2458.420 | 79.88 | 30.55 | 110.44 | N/A | N/A | 162 | 306 | Average |
| 2 | 2483.500 | 22.37 | 30.59 | 52.96 | -1.04 | 54.00 | 162 | 306 | Average |
| 3 | * 2483.680 | 23.18 | 30.59 | 53.77 | -0.23 | 54.00 | 162 | 306 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

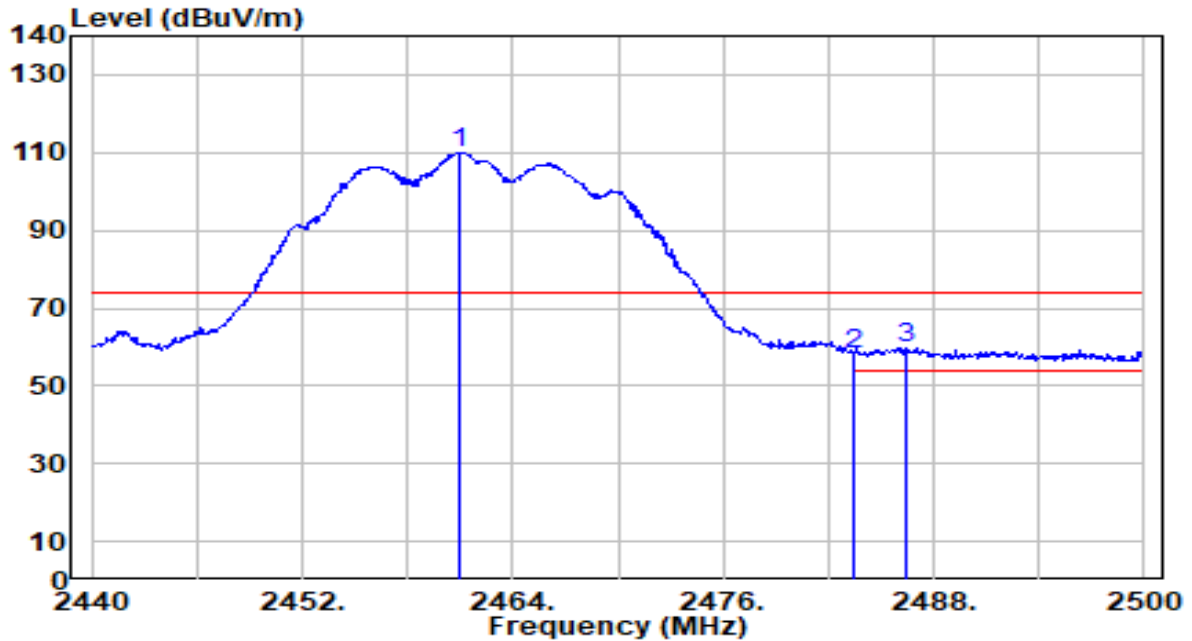


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.940 | 79.24 | 30.56 | 109.80 | N/A | N/A | 179 | 310 | Peak |
| 2 | 2483.500 | 27.74 | 30.59 | 58.32 | -15.68 | 74.00 | 179 | 310 | Peak |
| 3 | * 2486.500 | 29.01 | 30.59 | 59.60 | -14.40 | 74.00 | 179 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

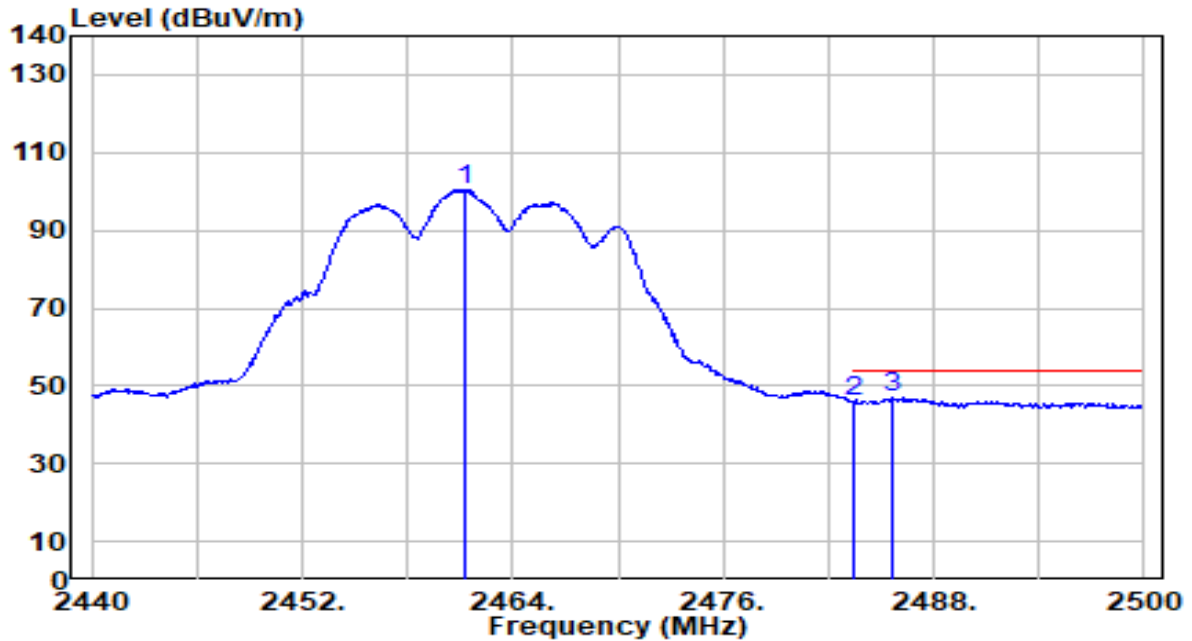


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2461.240 | 69.99 | 30.56 | 100.54 | N/A | N/A | 179 | 310 | Average |
| 2 | 2483.500 | 15.28 | 30.59 | 45.86 | -8.14 | 54.00 | 179 | 310 | Average |
| 3 | * 2485.600 | 16.25 | 30.59 | 46.84 | -7.16 | 54.00 | 179 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

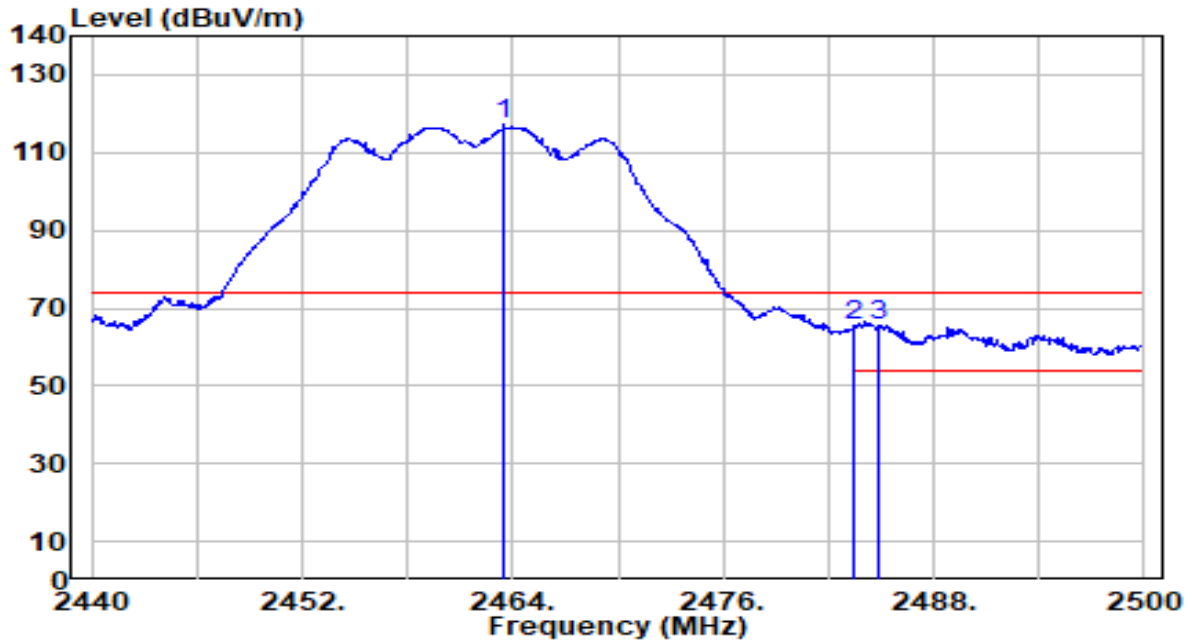


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2463.460 | 86.67 | 30.56 | 117.23 | N/A | N/A | 100 | 54 | Peak |
| 2 | 2483.500 | 34.97 | 30.59 | 65.56 | -8.44 | 74.00 | 100 | 54 | Peak |
| 3 | * 2484.820 | 35.11 | 30.59 | 65.70 | -8.30 | 74.00 | 100 | 54 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11g_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

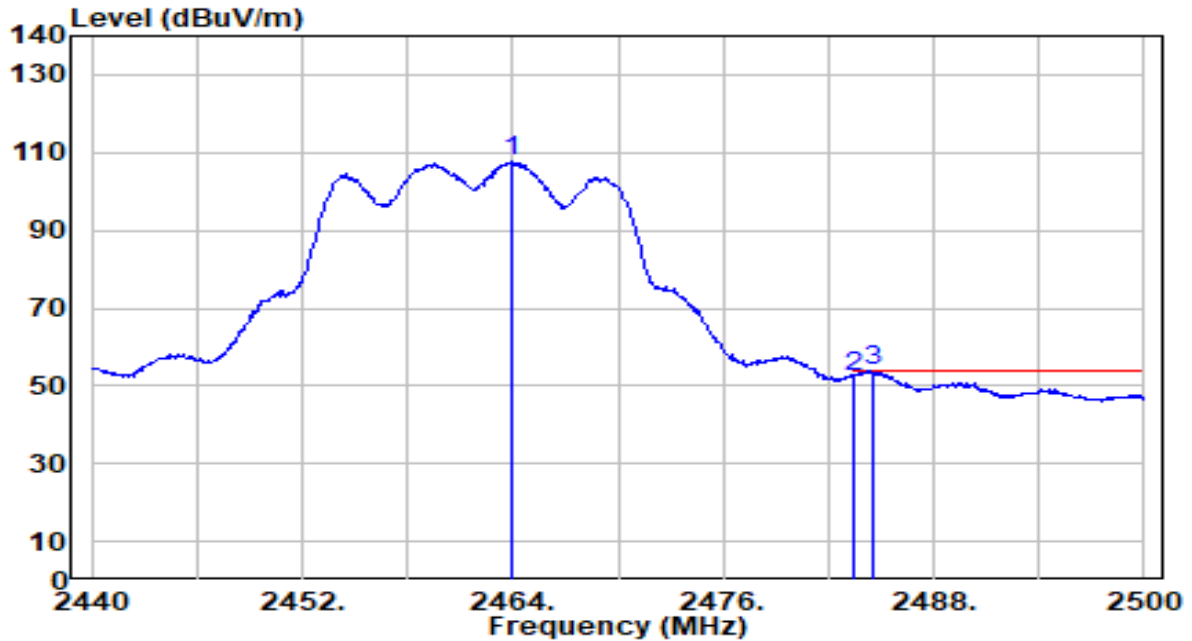


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2464.000 | 77.28 | 30.56 | 107.84 | N/A | N/A | 100 | 54 | Average |
| 2 | 2483.500 | 21.84 | 30.59 | 52.43 | -1.57 | 54.00 | 100 | 54 | Average |
| 3 | * 2484.520 | 23.21 | 30.59 | 53.80 | -0.20 | 54.00 | 100 | 54 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

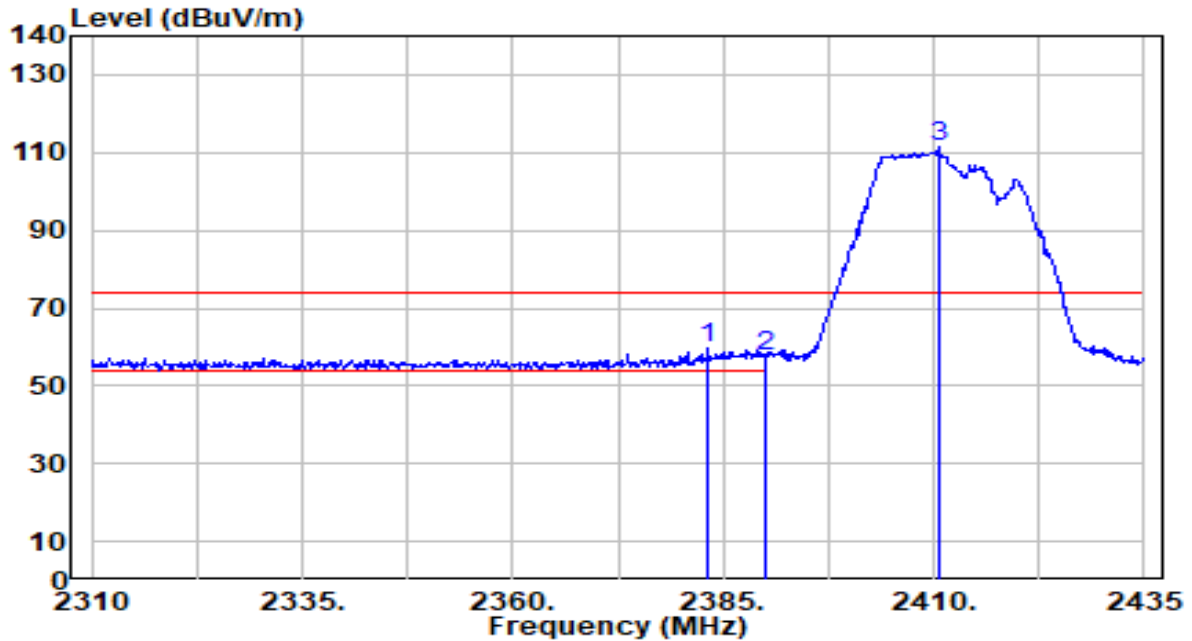


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 29.18 | 30.43 | 59.61 | -14.39 | 74.00 | 138 | 310 | Peak |
| 2 | | 27.39 | 30.45 | 57.84 | -16.16 | 74.00 | 138 | 310 | Peak |
| 3 | | 80.93 | 30.49 | 111.43 | N/A | N/A | 138 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

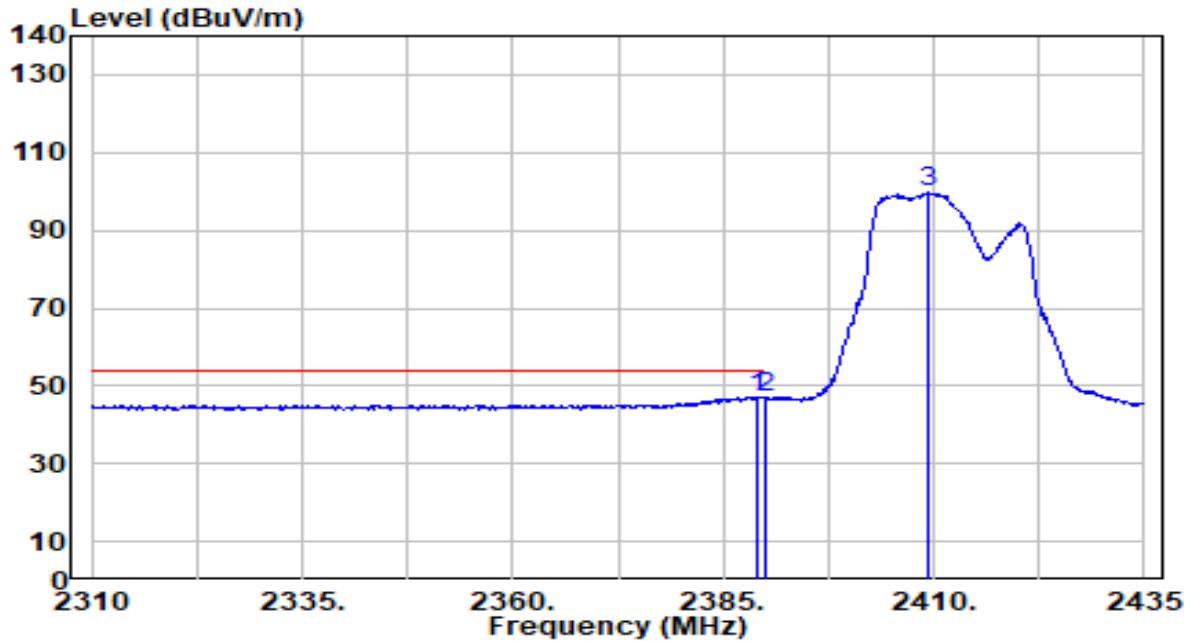


| No | | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 2389.000 | 16.74 | 30.44 | 47.19 | -6.81 | 54.00 | 138 | 310 | Average |
| 2 | | 2390.000 | 16.39 | 30.45 | 46.84 | -7.16 | 54.00 | 138 | 310 | Average |
| 3 | | 2409.500 | 69.24 | 30.49 | 99.72 | N/A | N/A | 138 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

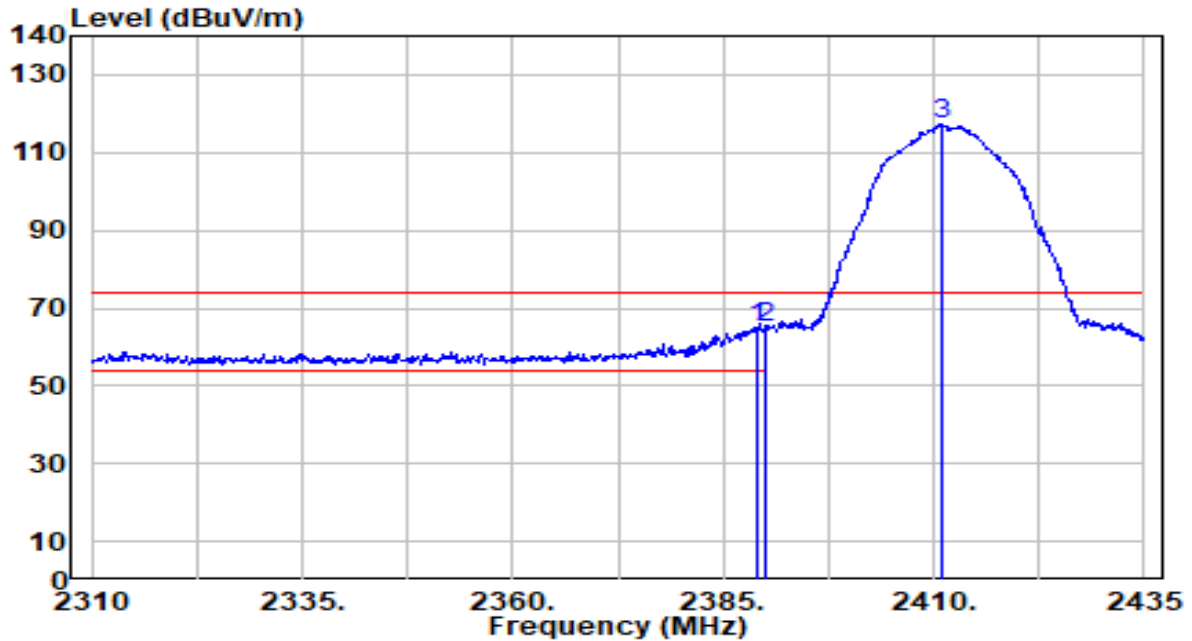


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.000 | 34.47 | 30.44 | 64.92 | -9.08 | 74.00 | 100 | 58 | Peak |
| 2 | * 2390.000 | 34.66 | 30.45 | 65.11 | -8.89 | 74.00 | 100 | 58 | Peak |
| 3 | 2410.875 | 86.63 | 30.49 | 117.12 | N/A | N/A | 100 | 58 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

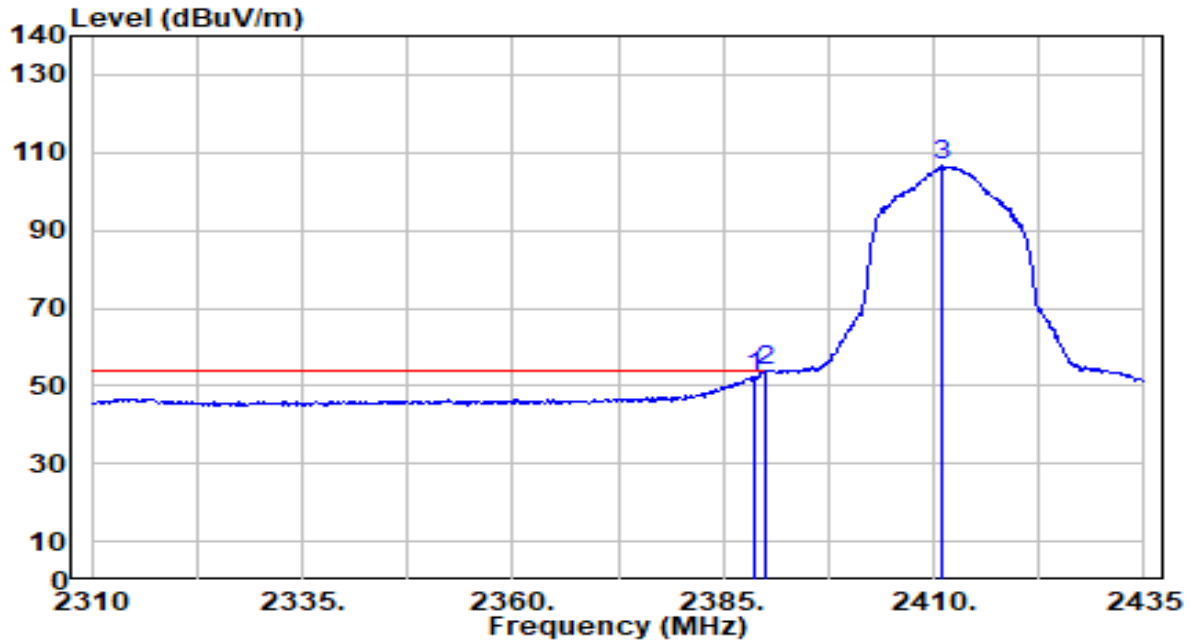


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.750 | 21.82 | 30.44 | 52.26 | -1.74 | 54.00 | 100 | 58 | Average |
| 2 | * 2390.000 | 23.32 | 30.45 | 53.77 | -0.23 | 54.00 | 100 | 58 | Average |
| 3 | 2411.125 | 75.97 | 30.49 | 106.46 | N/A | N/A | 100 | 58 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 2 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

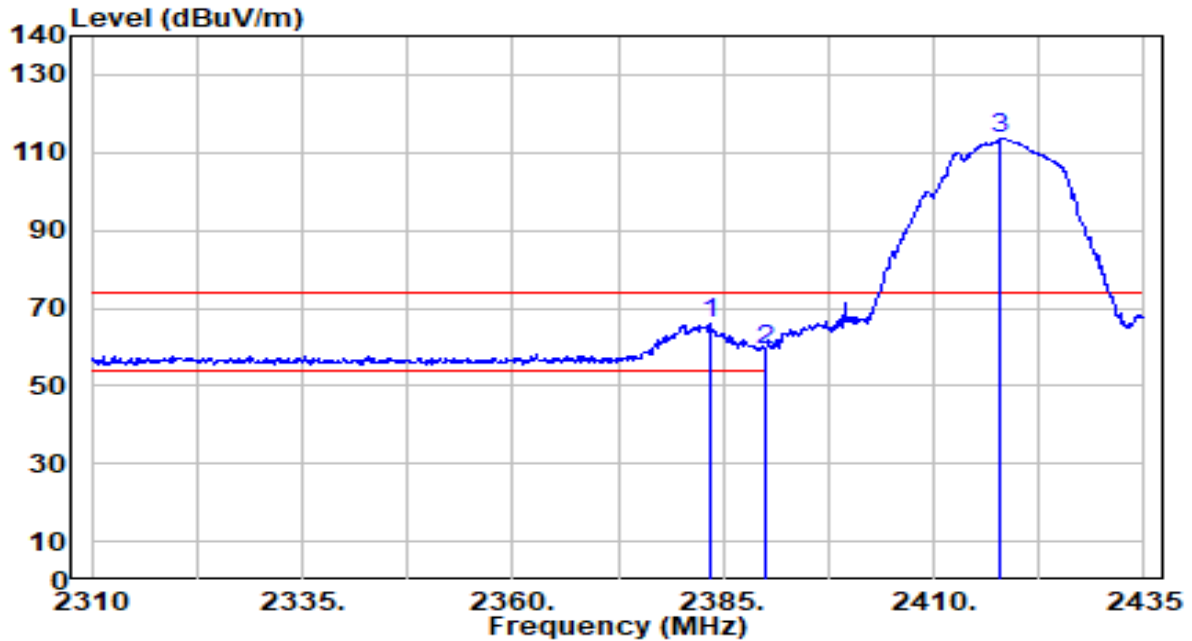


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2383.500 | 35.36 | 30.43 | 65.79 | -8.21 | 74.00 | 196 | 323 | Peak |
| 2 | 2390.000 | 28.97 | 30.45 | 59.42 | -14.58 | 74.00 | 196 | 323 | Peak |
| 3 | 2417.750 | 83.18 | 30.50 | 113.68 | N/A | N/A | 196 | 323 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 2 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

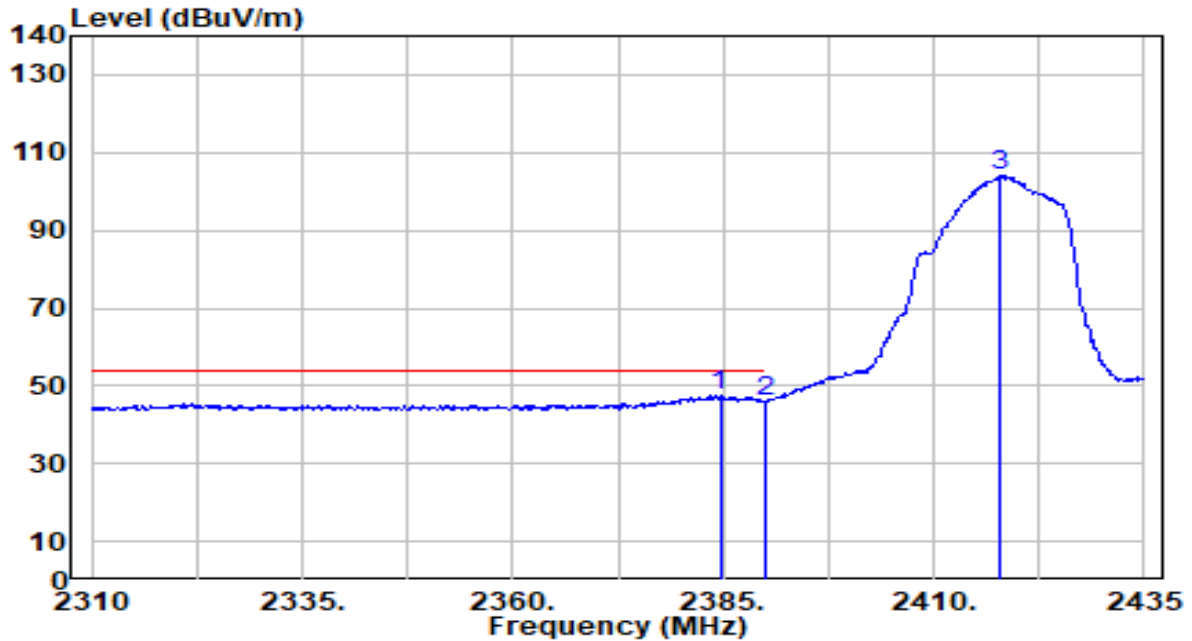


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2384.625 | 17.20 | 30.43 | 47.63 | -6.37 | 54.00 | 196 | 323 | Average |
| 2 | 2390.000 | 15.38 | 30.45 | 45.83 | -8.17 | 54.00 | 196 | 323 | Average |
| 3 | 2417.750 | 73.63 | 30.50 | 104.13 | N/A | N/A | 196 | 323 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 2 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

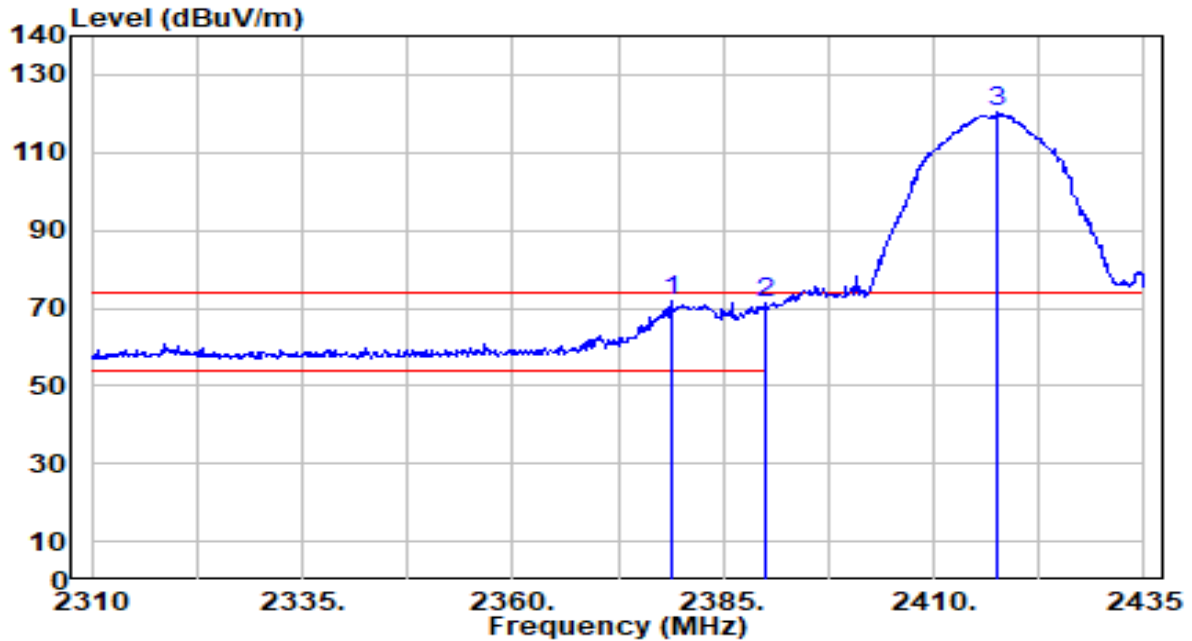


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2378.750 | 41.29 | 30.42 | 71.71 | -2.29 | 74.00 | 197 | 184 | Peak |
| 2 | 2390.000 | 40.63 | 30.45 | 71.08 | -2.92 | 74.00 | 197 | 184 | Peak |
| 3 | 2417.625 | 89.70 | 30.50 | 120.20 | N/A | N/A | 197 | 184 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 2 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

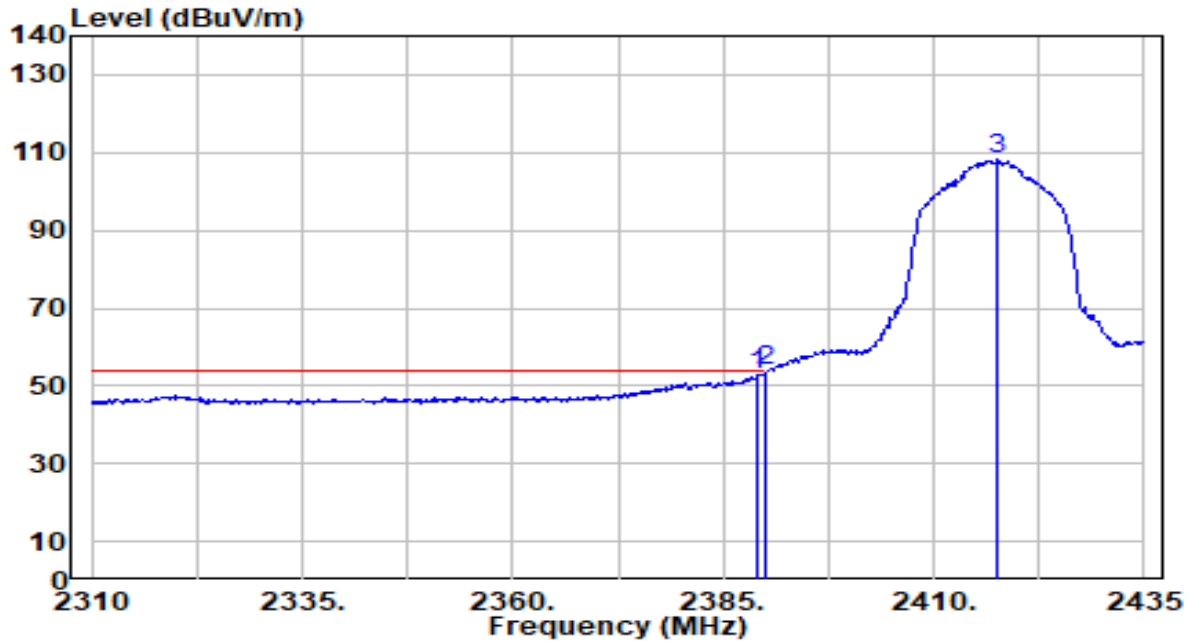


S

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.000 | 22.29 | 30.44 | 52.74 | -1.26 | 54.00 | 197 | 184 | Average |
| 2 | * 2390.000 | 23.32 | 30.45 | 53.76 | -0.24 | 54.00 | 197 | 184 | Average |
| 3 | 2417.625 | 77.57 | 30.50 | 108.07 | N/A | N/A | 197 | 184 | Average |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

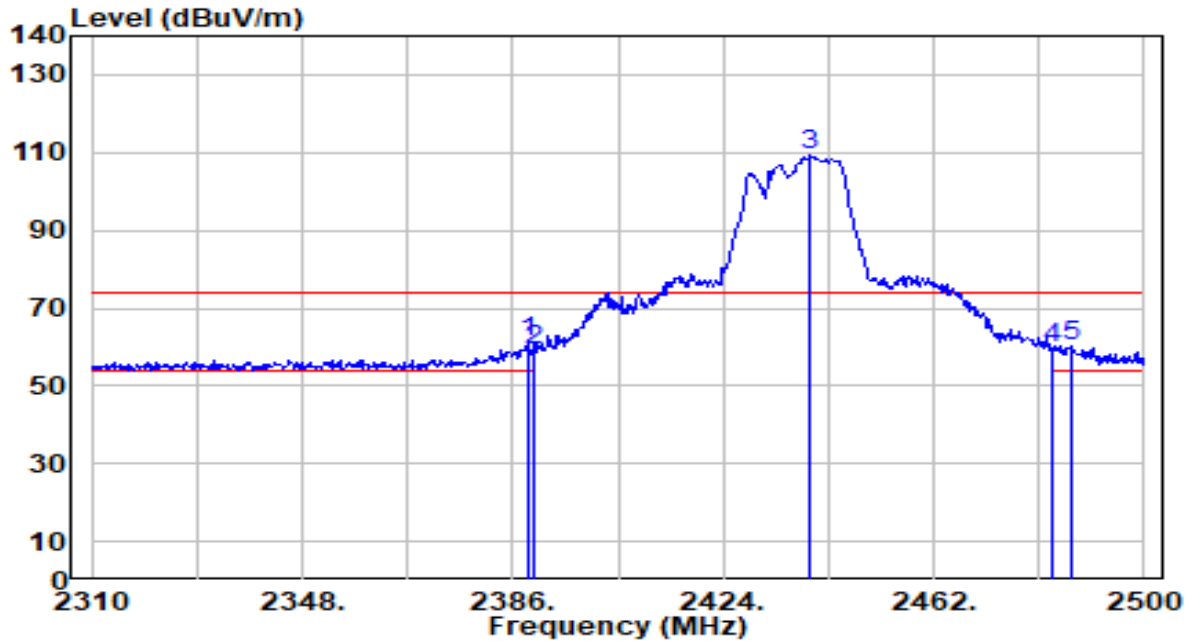


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2388.660 | 30.83 | 30.44 | 61.27 | -12.73 | 74.00 | 165 | 201 | Peak |
| 2 | 2390.000 | 28.90 | 30.45 | 59.35 | -14.65 | 74.00 | 165 | 201 | Peak |
| 3 | 2439.770 | 78.66 | 30.53 | 109.19 | N/A | N/A | 165 | 201 | Peak |
| 4 | 2483.500 | 29.20 | 30.59 | 59.79 | -14.21 | 74.00 | 165 | 201 | Peak |
| 5 | 2486.890 | 29.42 | 30.59 | 60.01 | -13.99 | 74.00 | 165 | 201 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

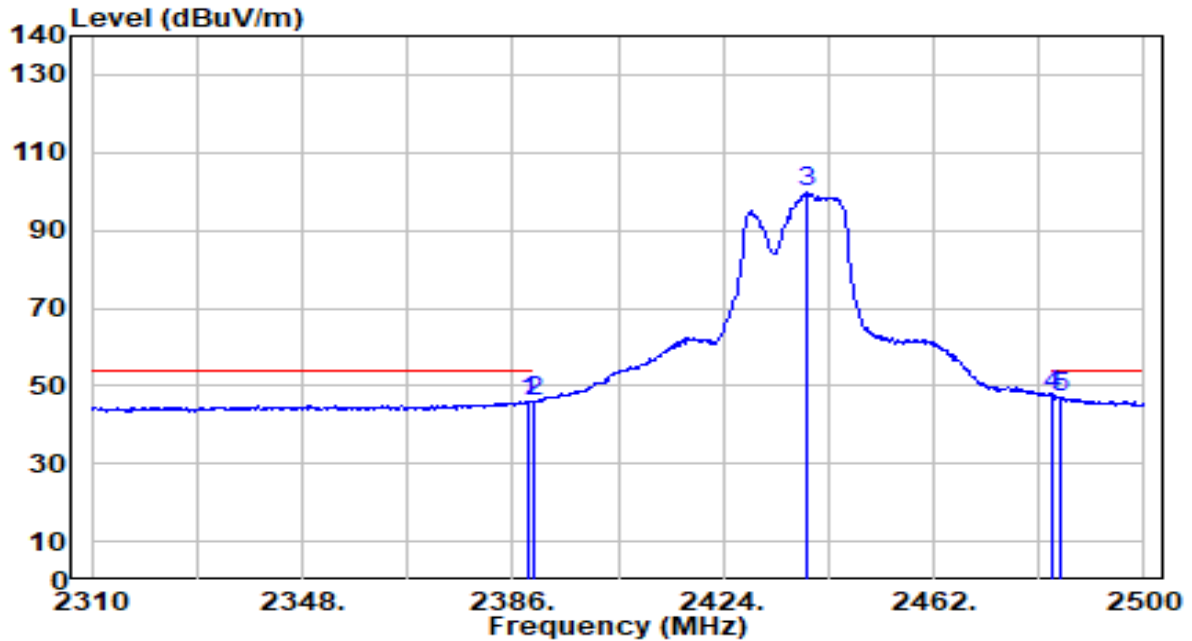


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.660 | 15.58 | 30.44 | 46.03 | -7.97 | 54.00 | 165 | 201 | Average |
| 2 | 2390.000 | 15.53 | 30.45 | 45.98 | -8.02 | 54.00 | 165 | 201 | Average |
| 3 | 2439.010 | 69.08 | 30.53 | 99.60 | N/A | N/A | 165 | 201 | Average |
| 4 | * 2483.500 | 16.79 | 30.59 | 47.38 | -6.62 | 54.00 | 165 | 201 | Average |
| 5 | 2484.990 | 16.57 | 30.59 | 47.16 | -6.84 | 54.00 | 165 | 201 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

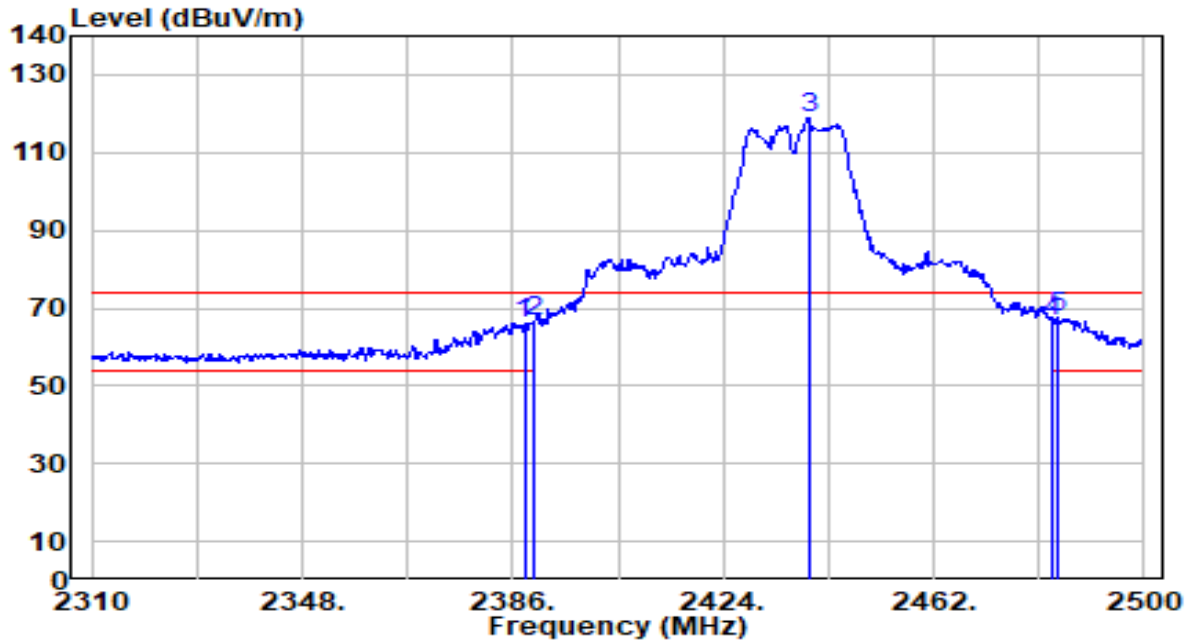


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.090 | 35.61 | 30.44 | 66.05 | -7.95 | 74.00 | 156 | 289 | Peak |
| 2 | 2390.000 | 36.18 | 30.45 | 66.63 | -7.37 | 74.00 | 156 | 289 | Peak |
| 3 | 2439.390 | 88.18 | 30.53 | 118.70 | N/A | N/A | 156 | 289 | Peak |
| 4 | 2483.500 | 36.21 | 30.59 | 66.80 | -7.20 | 74.00 | 156 | 289 | Peak |
| 5 | * 2484.420 | 36.80 | 30.59 | 67.39 | -6.61 | 74.00 | 156 | 289 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

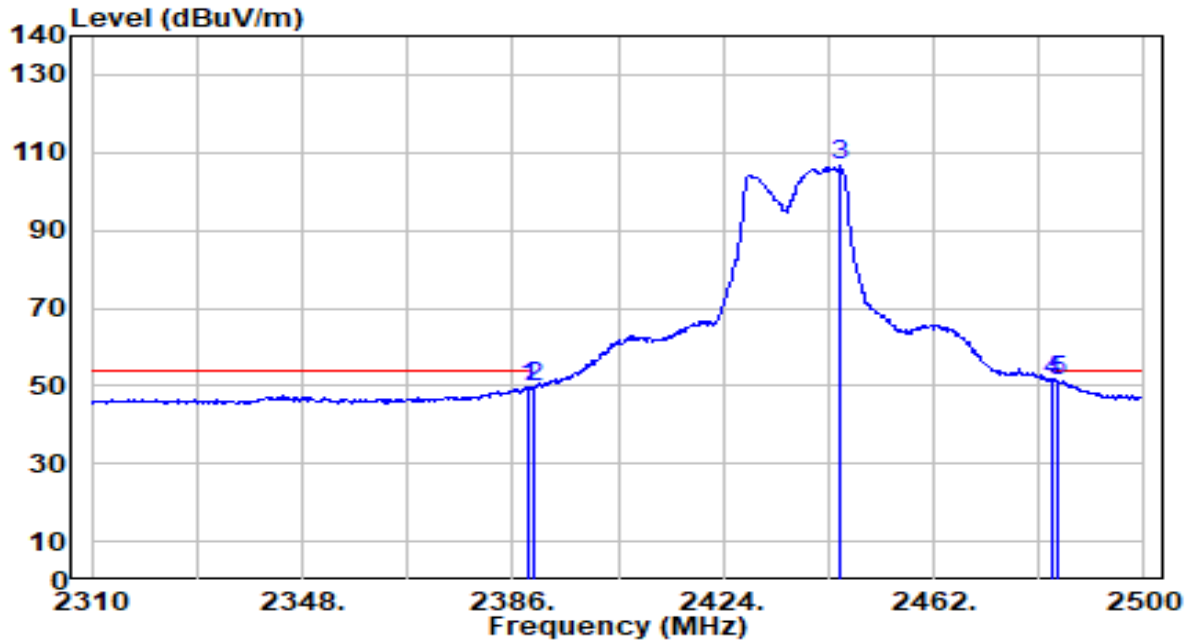


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.660 | 19.45 | 30.44 | 49.89 | -4.11 | 54.00 | 156 | 289 | Average |
| 2 | 2390.000 | 19.10 | 30.45 | 49.55 | -4.45 | 54.00 | 156 | 289 | Average |
| 3 | 2445.090 | 76.02 | 30.54 | 106.56 | N/A | N/A | 156 | 289 | Average |
| 4 | 2483.500 | 20.73 | 30.59 | 51.31 | -2.69 | 54.00 | 156 | 289 | Average |
| 5 | * 2484.420 | 20.87 | 30.59 | 51.46 | -2.54 | 54.00 | 156 | 289 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 10 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

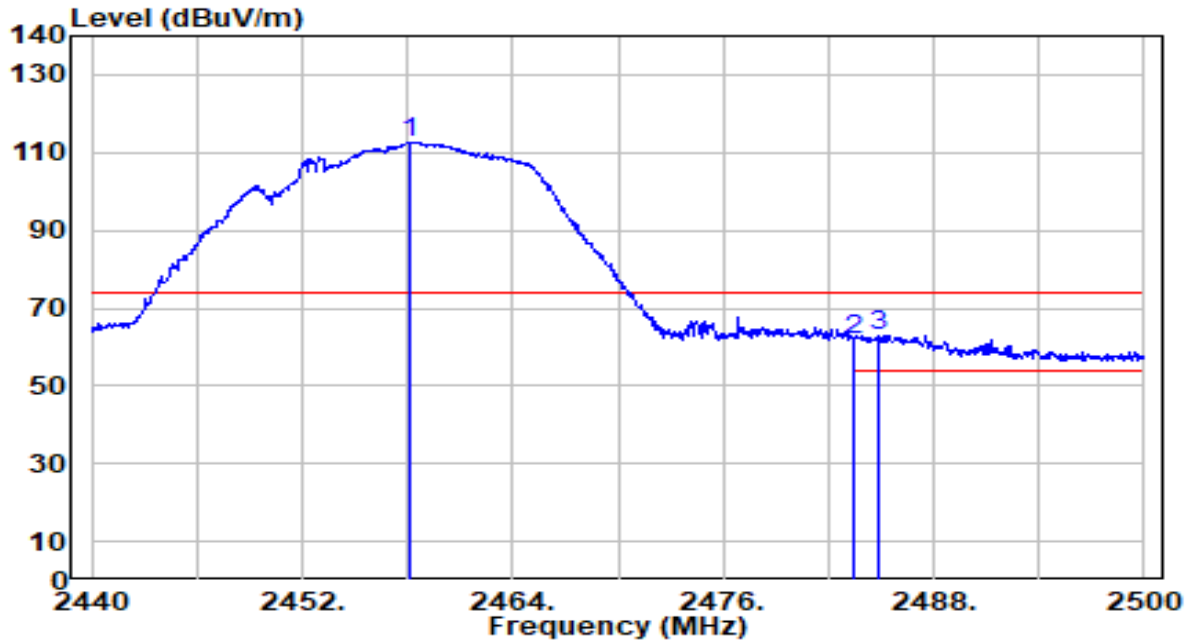


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2458.180 | 82.08 | 30.55 | 112.63 | N/A | N/A | 160 | 319 | Peak |
| 2 | 2483.500 | 31.44 | 30.59 | 62.02 | -11.98 | 74.00 | 160 | 319 | Peak |
| 3 | * 2484.820 | 32.47 | 30.59 | 63.06 | -10.94 | 74.00 | 160 | 319 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 10 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

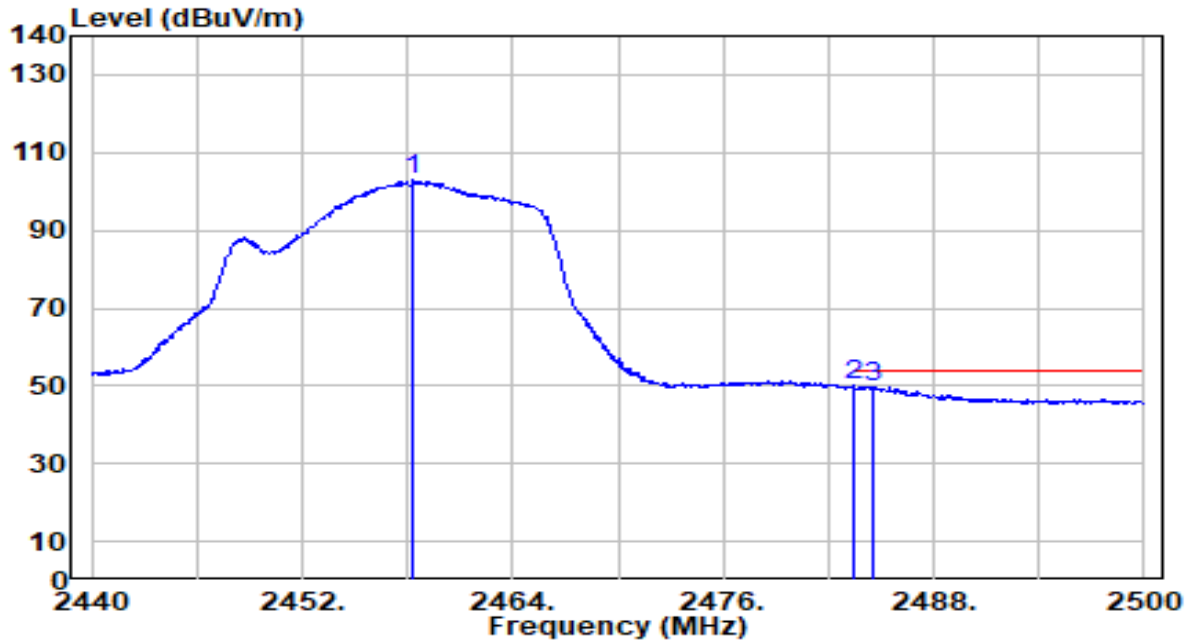


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2458.360 | 72.56 | 30.55 | 103.11 | N/A | N/A | 160 | 319 | Average |
| 2 | * 2483.500 | 19.44 | 30.59 | 50.02 | -3.98 | 54.00 | 160 | 319 | Average |
| 3 | 2484.580 | 18.88 | 30.59 | 49.46 | -4.54 | 54.00 | 160 | 319 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 10 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

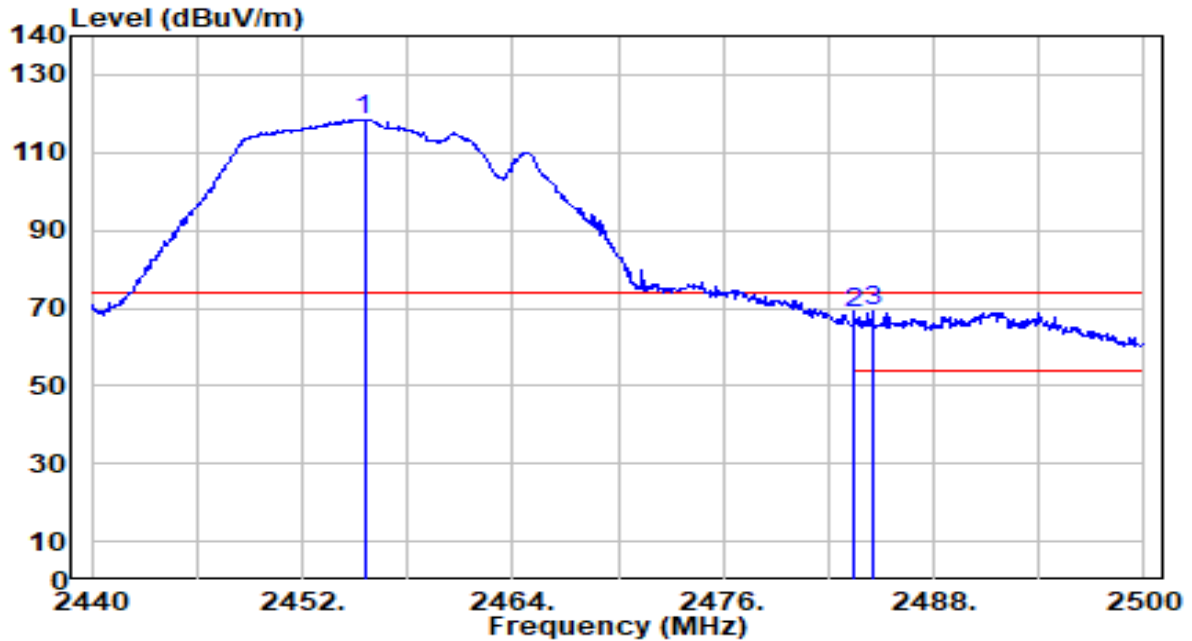


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.540 | 88.04 | 30.55 | 118.59 | N/A | N/A | 162 | 306 | Peak |
| 2 | 2483.500 | 38.24 | 30.59 | 68.83 | -5.17 | 74.00 | 162 | 306 | Peak |
| 3 | * 2484.520 | 38.68 | 30.59 | 69.27 | -4.73 | 74.00 | 162 | 306 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 10 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

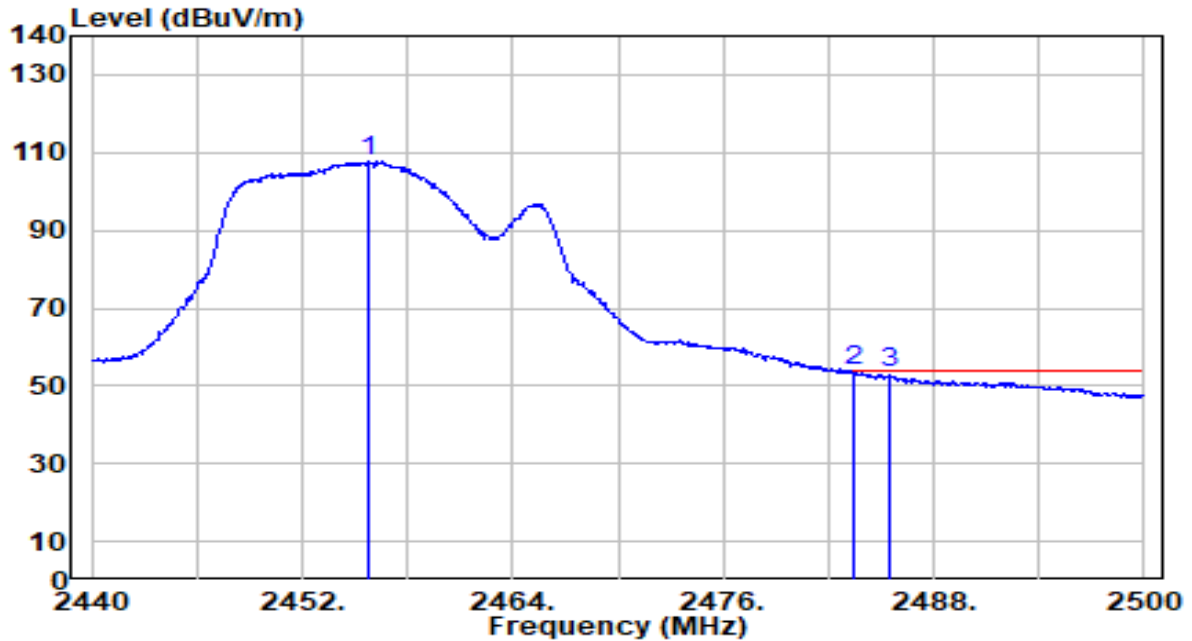


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.720 | 77.13 | 30.55 | 107.69 | N/A | N/A | 162 | 306 | Average |
| 2 | * 2483.500 | 23.30 | 30.59 | 53.89 | -0.11 | 54.00 | 162 | 306 | Average |
| 3 | 2485.540 | 22.79 | 30.59 | 53.38 | -0.62 | 54.00 | 162 | 306 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

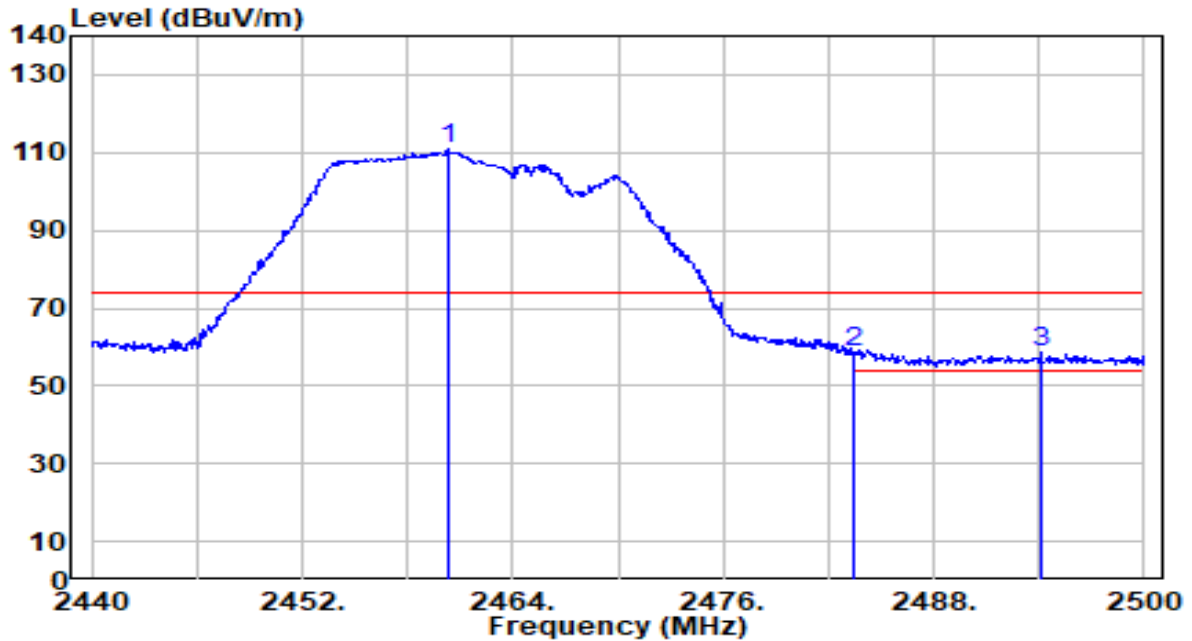


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.340 | 80.14 | 30.56 | 110.69 | N/A | N/A | 179 | 310 | Peak |
| 2 | 2483.500 | 28.08 | 30.59 | 58.67 | -15.33 | 74.00 | 179 | 310 | Peak |
| 3 | * 2494.120 | 28.27 | 30.60 | 58.87 | -15.13 | 74.00 | 179 | 310 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

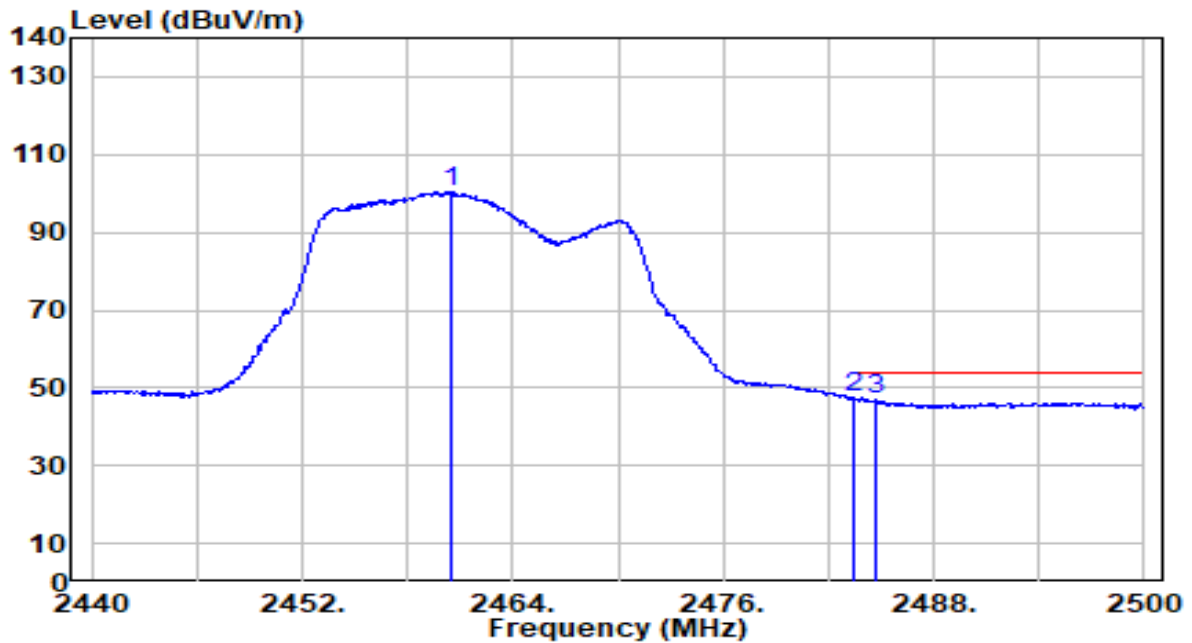


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.460 | 69.78 | 30.56 | 100.33 | N/A | N/A | 179 | 310 | Average |
| 2 | * 2483.500 | 16.74 | 30.59 | 47.32 | -6.68 | 54.00 | 179 | 310 | Average |
| 3 | 2484.700 | 16.38 | 30.59 | 46.97 | -7.03 | 54.00 | 179 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

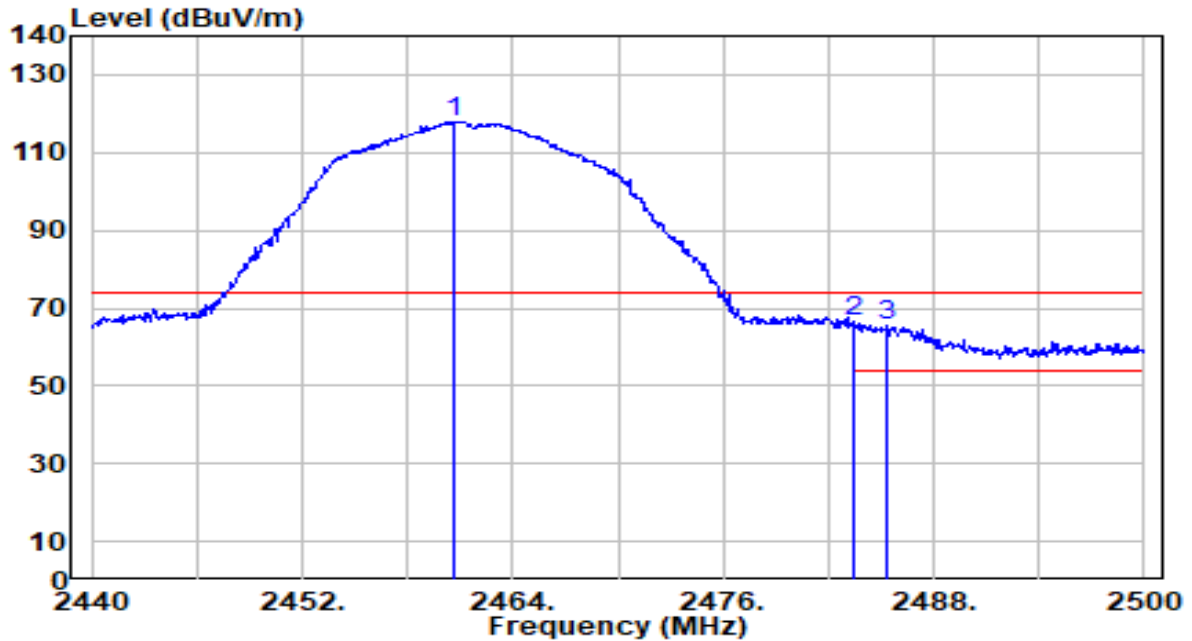


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.640 | 87.42 | 30.56 | 117.98 | N/A | N/A | 100 | 54 | Peak |
| 2 | * 2483.500 | 36.03 | 30.59 | 66.62 | -7.38 | 74.00 | 100 | 54 | Peak |
| 3 | 2485.360 | 35.09 | 30.59 | 65.68 | -8.32 | 74.00 | 100 | 54 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

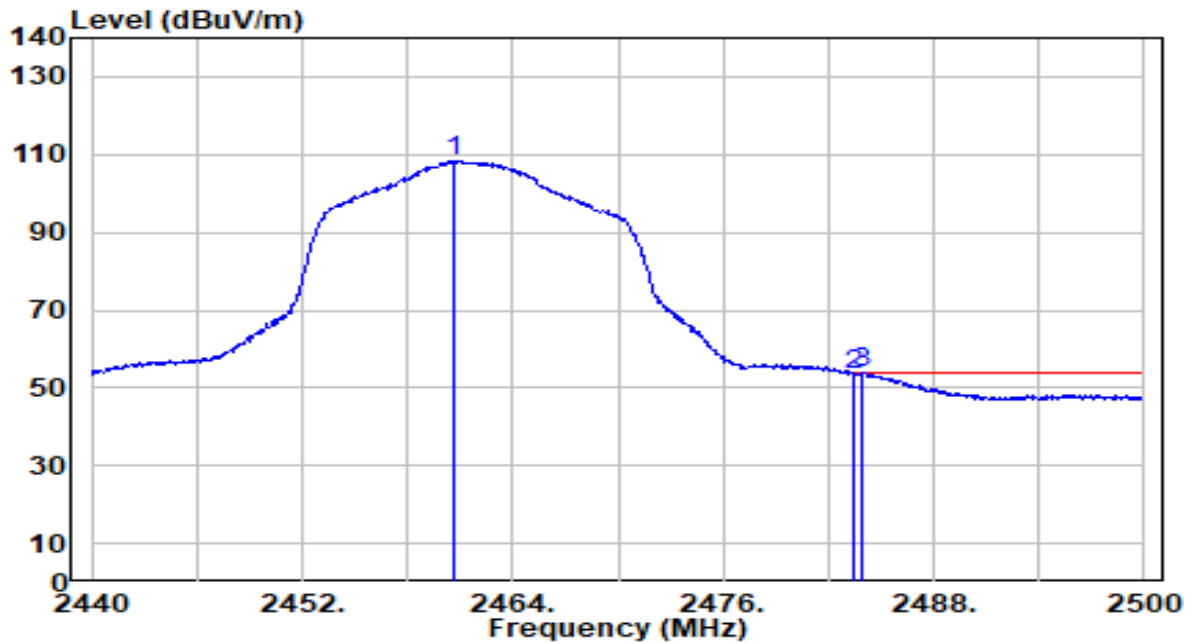


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.640 | 77.71 | 30.56 | 108.27 | N/A | N/A | 100 | 54 | Average |
| 2 | 2483.500 | 22.94 | 30.59 | 53.53 | -0.47 | 54.00 | 100 | 54 | Average |
| 3 | * 2483.980 | 23.26 | 30.59 | 53.85 | -0.15 | 54.00 | 100 | 54 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

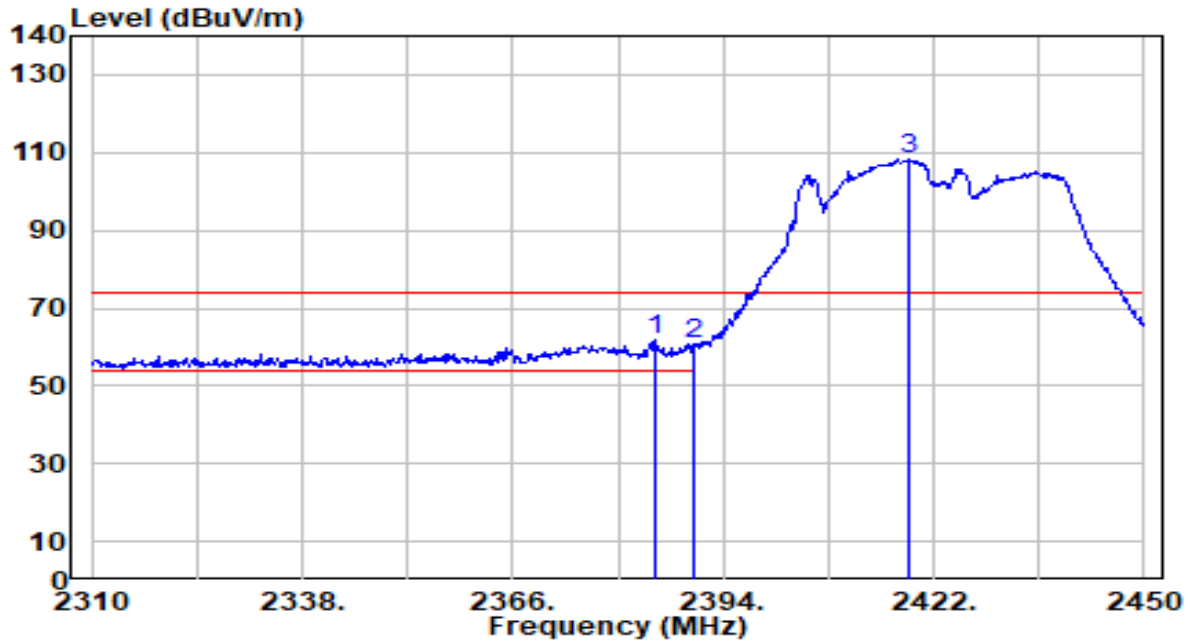


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2384.900 | 31.56 | 30.43 | 61.99 | -12.01 | 74.00 | 138 | 310 | Peak |
| 2 | 2390.000 | 30.08 | 30.45 | 60.53 | -13.47 | 74.00 | 138 | 310 | Peak |
| 3 | 2418.780 | 77.62 | 30.50 | 108.12 | N/A | N/A | 138 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

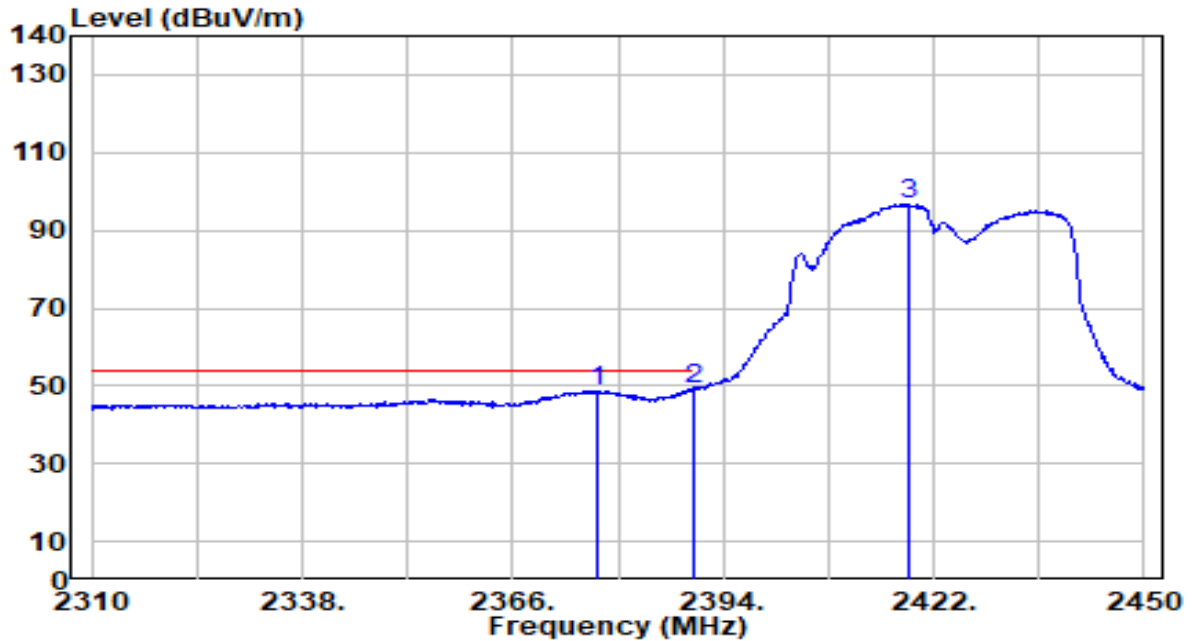


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2377.200 | 18.36 | 30.41 | 48.77 | -5.23 | 54.00 | 138 | 310 | Average |
| 2 | * 2390.000 | 18.67 | 30.45 | 49.12 | -4.88 | 54.00 | 138 | 310 | Average |
| 3 | 2418.640 | 66.23 | 30.50 | 96.73 | N/A | N/A | 138 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

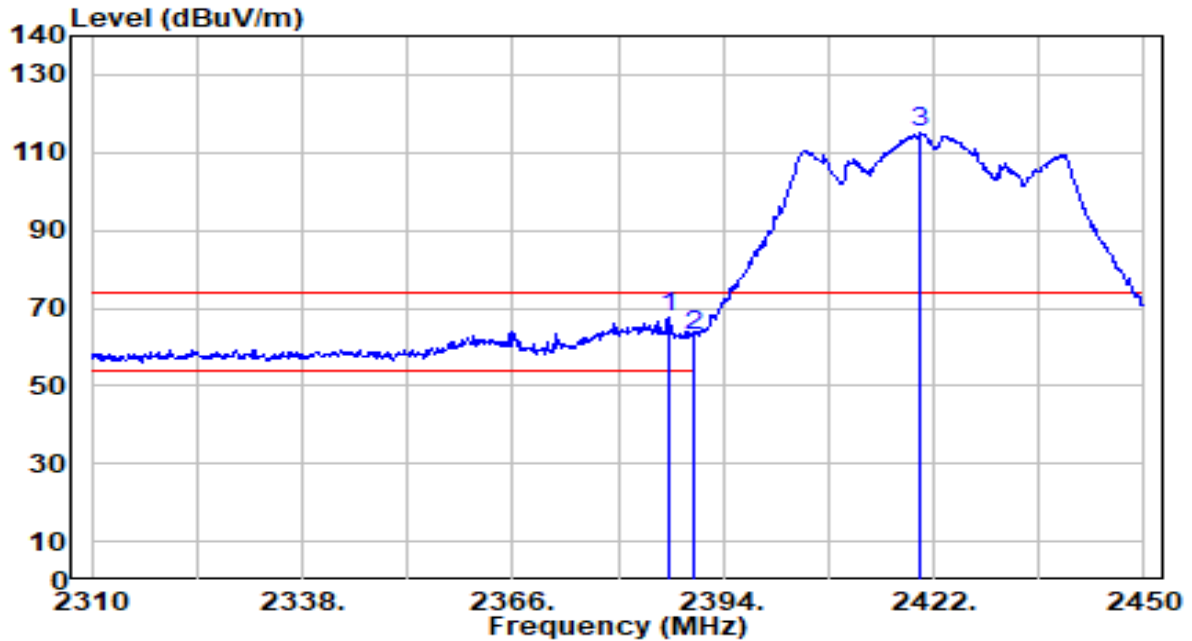


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2386.720 | 36.92 | 30.44 | 67.36 | -6.64 | 74.00 | 100 | 58 | Peak |
| 2 | 2390.000 | 32.64 | 30.45 | 63.08 | -10.92 | 74.00 | 100 | 58 | Peak |
| 3 | 2420.320 | 84.47 | 30.50 | 114.97 | N/A | N/A | 100 | 58 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

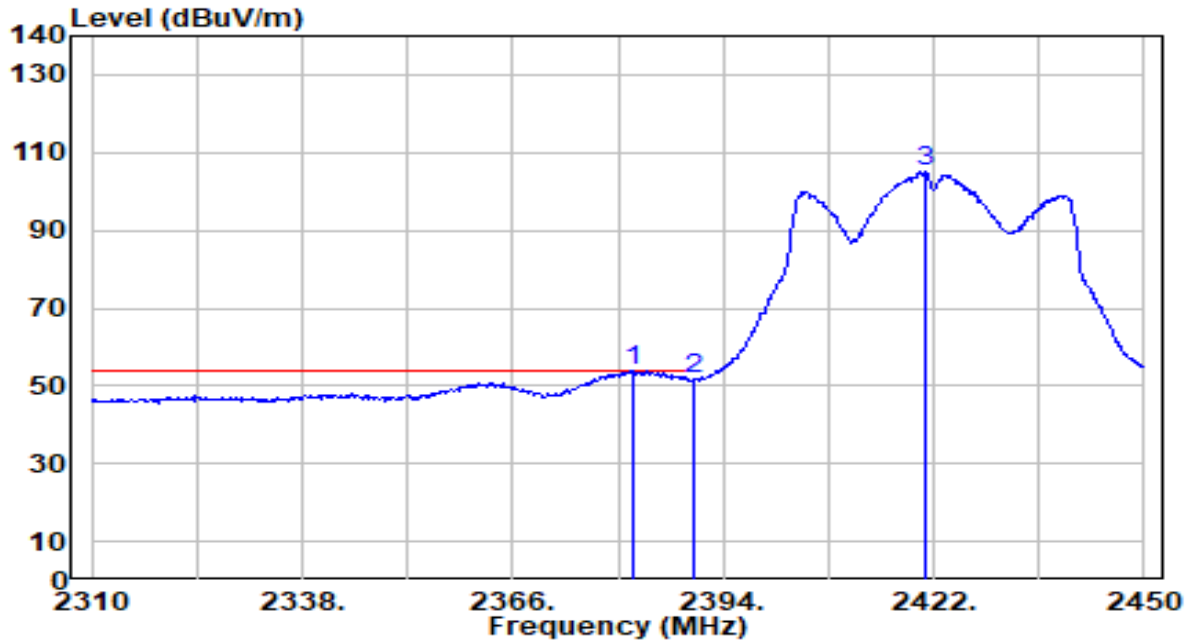


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2382.100 | 23.40 | 30.43 | 53.82 | -0.18 | 54.00 | 100 | 58 | Average |
| 2 | 2390.000 | 21.19 | 30.45 | 51.64 | -2.36 | 54.00 | 100 | 58 | Average |
| 3 | 2420.740 | 74.54 | 30.50 | 105.04 | N/A | N/A | 100 | 58 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

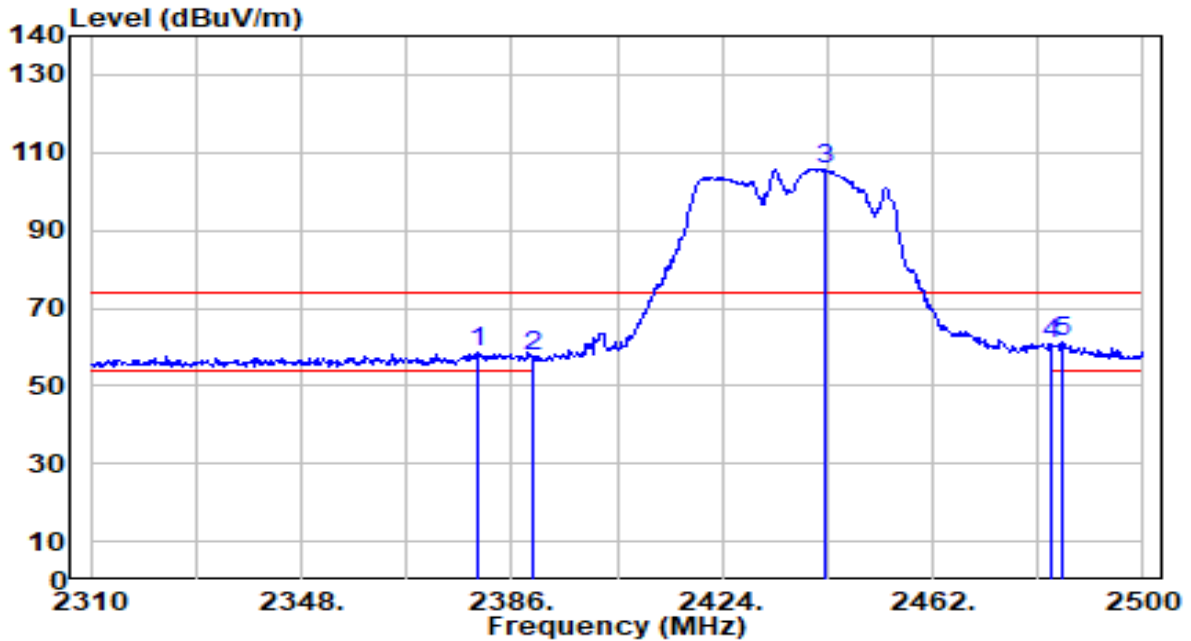


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2380.110 | 28.20 | 30.42 | 58.62 | -15.38 | 74.00 | 165 | 201 | Peak |
| 2 | 2390.000 | 26.92 | 30.45 | 57.37 | -16.63 | 74.00 | 165 | 201 | Peak |
| 3 | 2442.430 | 75.31 | 30.53 | 105.84 | N/A | N/A | 165 | 201 | Peak |
| 4 | 2483.500 | 30.37 | 30.59 | 60.96 | -13.04 | 74.00 | 165 | 201 | Peak |
| 5 | * 2485.180 | 30.44 | 30.59 | 61.03 | -12.97 | 74.00 | 165 | 201 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

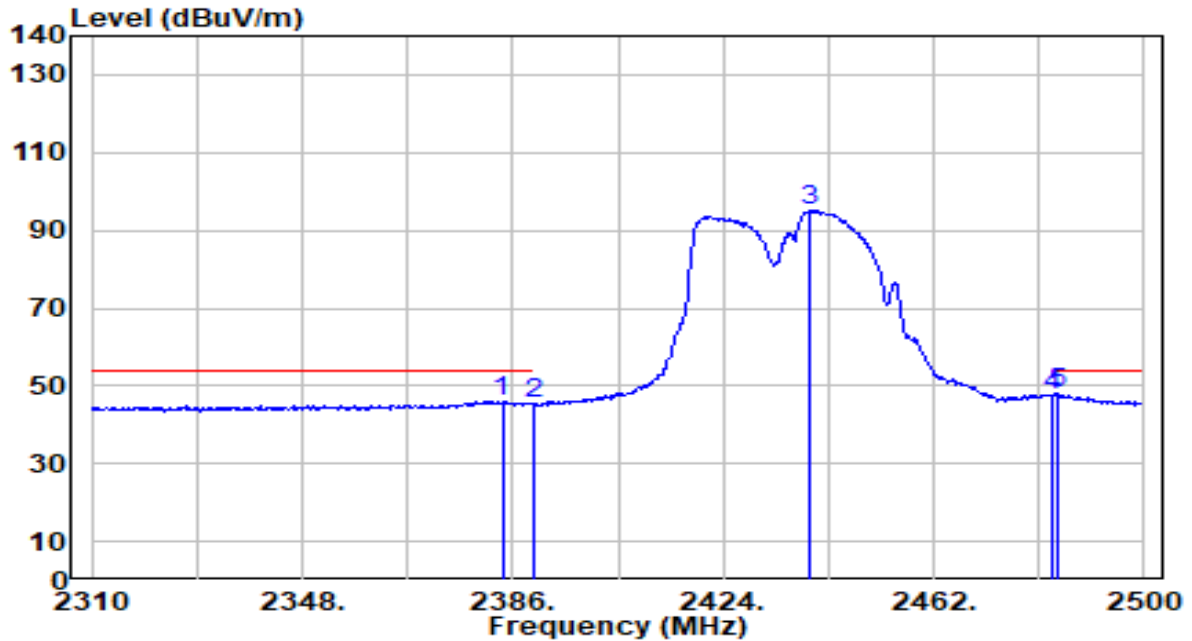


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2384.100 | 15.65 | 30.43 | 46.08 | -7.92 | 54.00 | 165 | 201 | Average |
| 2 | 2390.000 | 14.94 | 30.45 | 45.39 | -8.61 | 54.00 | 165 | 201 | Average |
| 3 | 2439.770 | 64.54 | 30.53 | 95.07 | N/A | N/A | 165 | 201 | Average |
| 4 | 2483.500 | 16.87 | 30.59 | 47.45 | -6.55 | 54.00 | 165 | 201 | Average |
| 5 | * 2484.420 | 17.26 | 30.59 | 47.85 | -6.15 | 54.00 | 165 | 201 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

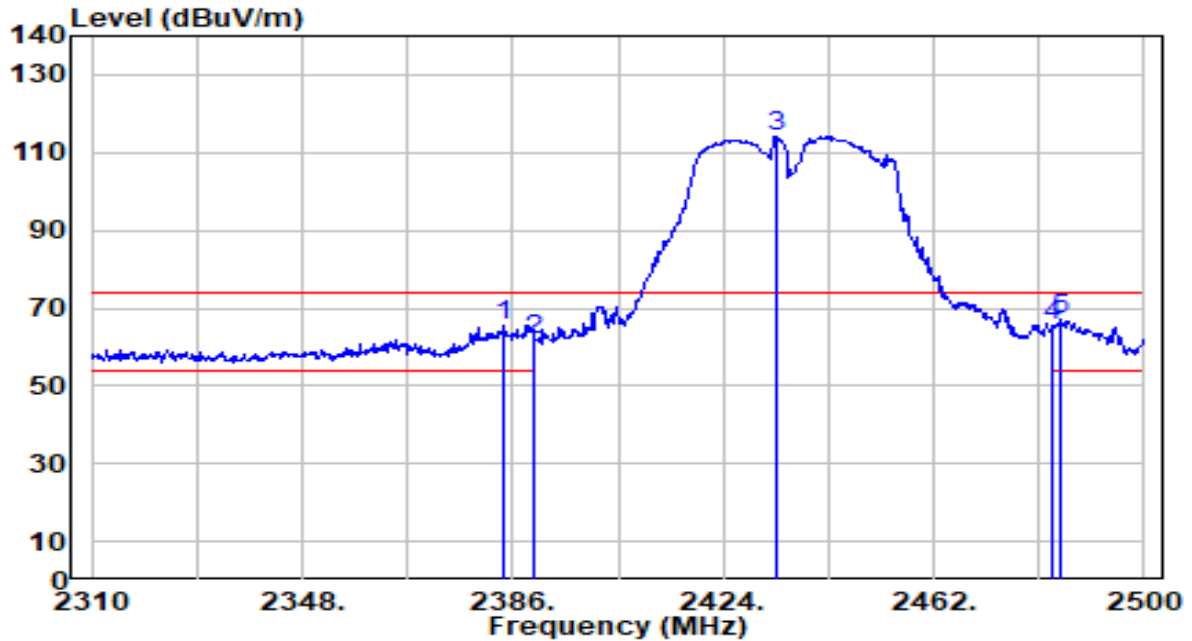


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2384.290 | 34.91 | 30.43 | 65.34 | -8.66 | 74.00 | 156 | 289 | Peak |
| 2 | 2390.000 | 31.15 | 30.45 | 61.60 | -12.40 | 74.00 | 156 | 289 | Peak |
| 3 | 2433.500 | 83.85 | 30.52 | 114.37 | N/A | N/A | 156 | 289 | Peak |
| 4 | 2483.500 | 34.74 | 30.59 | 65.33 | -8.67 | 74.00 | 156 | 289 | Peak |
| 5 | * 2484.990 | 36.65 | 30.59 | 67.24 | -6.76 | 74.00 | 156 | 289 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

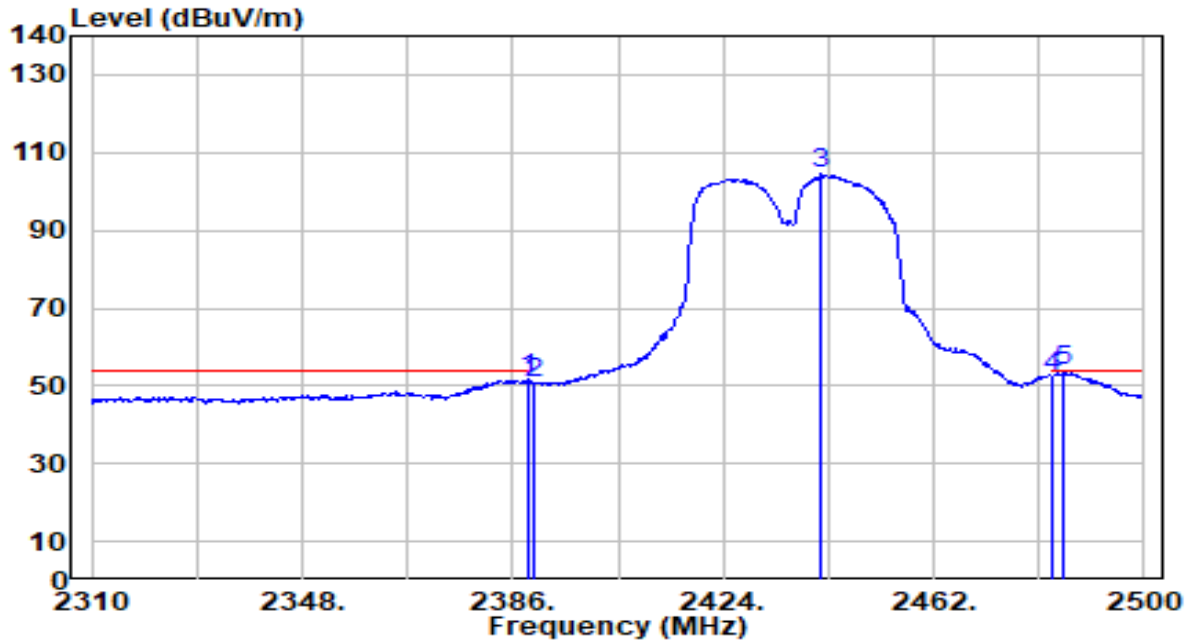


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.040 | 21.08 | 30.44 | 51.53 | -2.47 | 54.00 | 156 | 289 | Average |
| 2 | 2390.000 | 20.02 | 30.45 | 50.46 | -3.54 | 54.00 | 156 | 289 | Average |
| 3 | 2441.670 | 73.82 | 30.53 | 104.36 | N/A | N/A | 156 | 289 | Average |
| 4 | 2483.500 | 21.85 | 30.59 | 52.44 | -1.56 | 54.00 | 156 | 289 | Average |
| 5 | * 2485.560 | 23.16 | 30.59 | 53.75 | -0.25 | 54.00 | 156 | 289 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

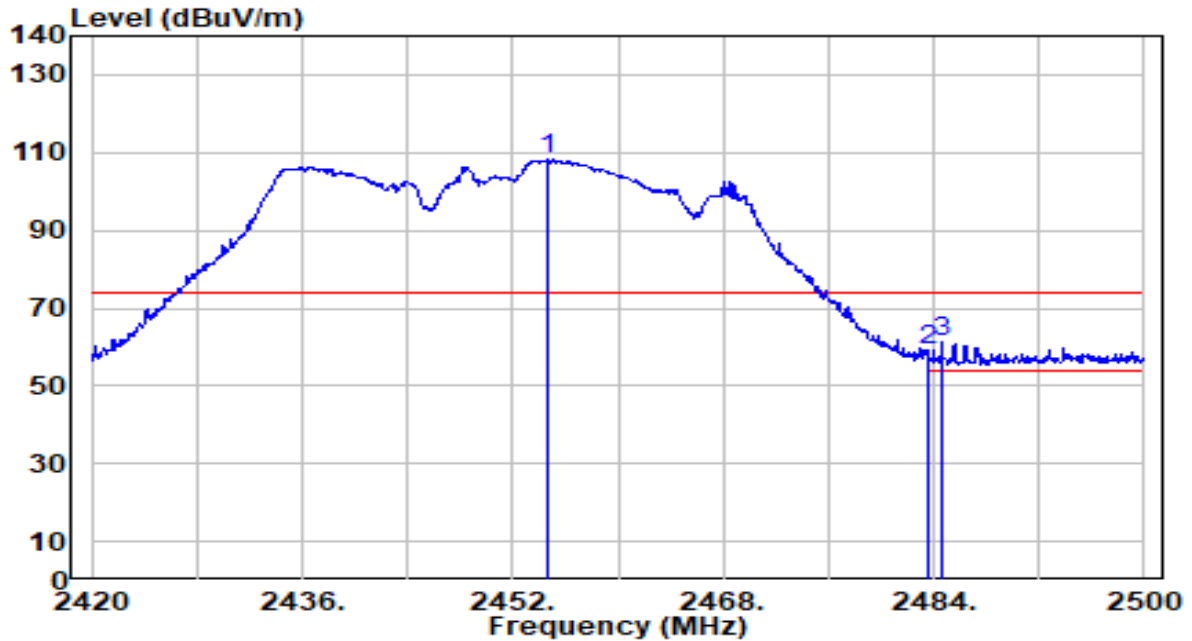


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2454.640 | 77.59 | 30.55 | 108.14 | N/A | N/A | 179 | 310 | Peak |
| 2 | 2483.500 | 28.64 | 30.59 | 59.23 | -14.77 | 74.00 | 179 | 310 | Peak |
| 3 | * 2484.640 | 30.51 | 30.59 | 61.10 | -12.90 | 74.00 | 179 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_Vetical Ant | Test Voltage | AC 120V/60Hz |

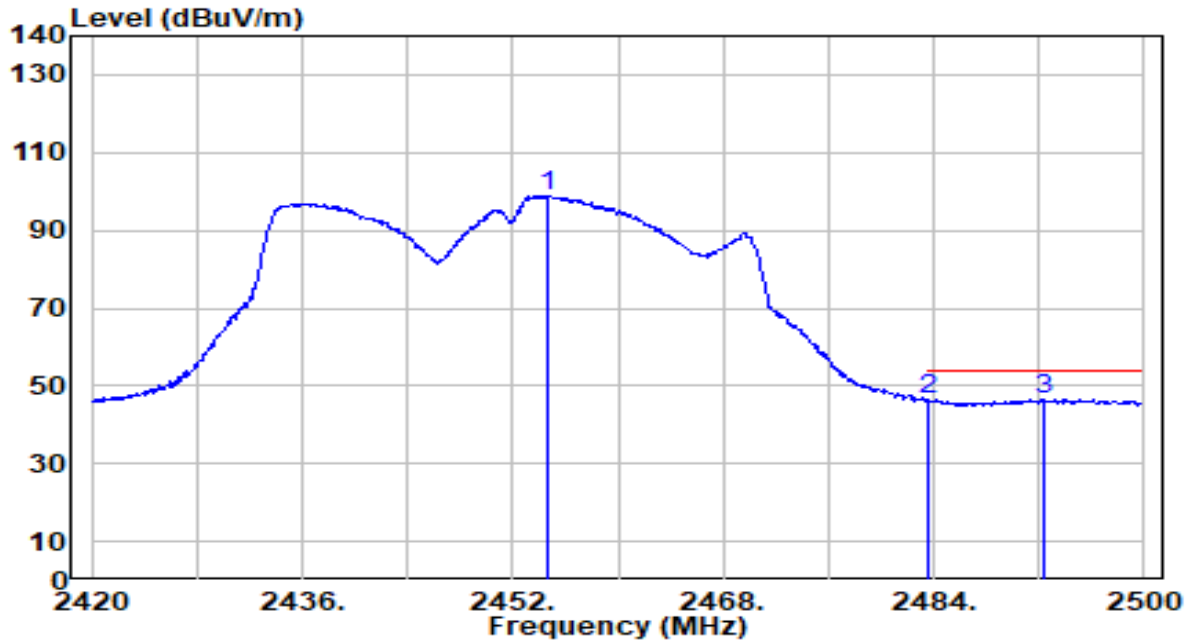


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2454.640 | 68.31 | 30.55 | 98.86 | N/A | N/A | 179 | 310 | Average |
| 2 | * 2483.500 | 15.91 | 30.59 | 46.50 | -7.50 | 54.00 | 179 | 310 | Average |
| 3 | 2492.400 | 15.88 | 30.60 | 46.48 | -7.52 | 54.00 | 179 | 310 | Average |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

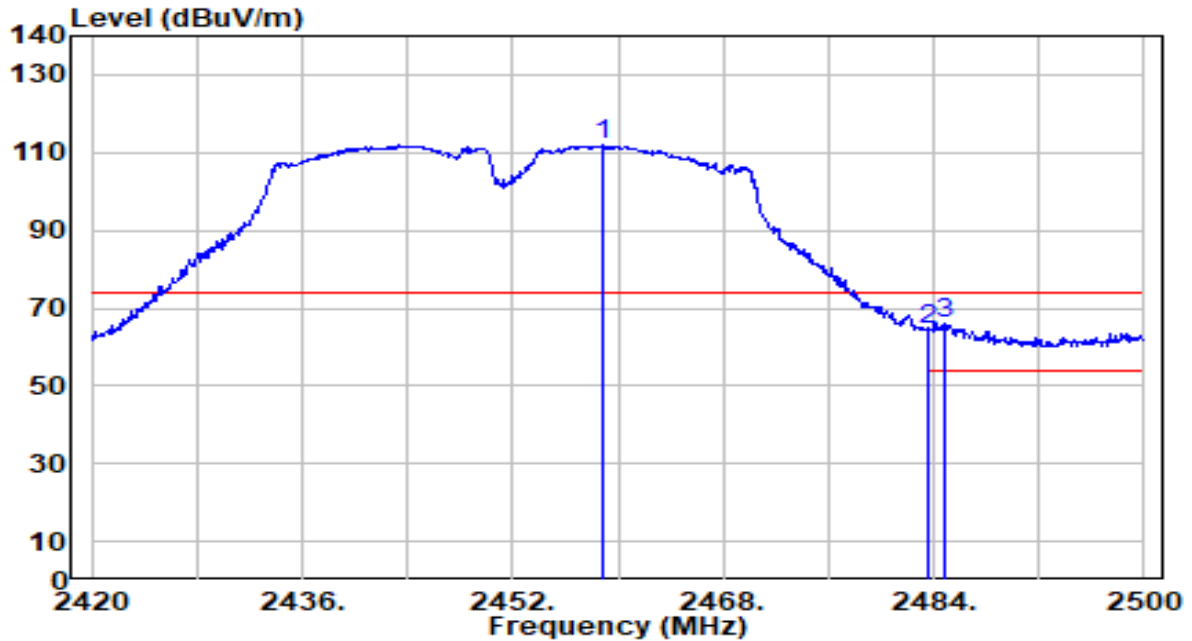


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2458.800 | 81.49 | 30.55 | 112.04 | N/A | N/A | 100 | 54 | Peak |
| 2 | 2483.500 | 33.62 | 30.59 | 64.21 | -9.79 | 74.00 | 100 | 54 | Peak |
| 3 | * 2484.800 | 35.28 | 30.59 | 65.87 | -8.13 | 74.00 | 100 | 54 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11n-40MHz_TX_CH 9 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

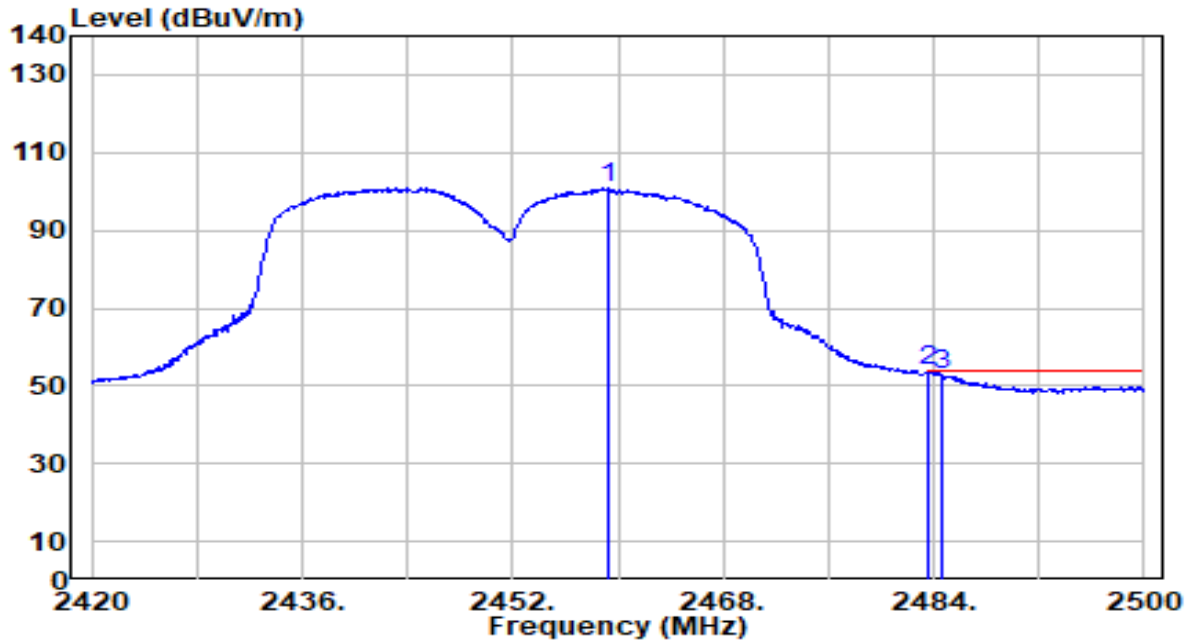


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2459.360 | 70.27 | 30.56 | 100.83 | N/A | N/A | 100 | 54 | Average |
| 2 | * 2483.500 | 23.19 | 30.59 | 53.78 | -0.22 | 54.00 | 100 | 54 | Average |
| 3 | 2484.640 | 22.04 | 30.59 | 52.63 | -1.37 | 54.00 | 100 | 54 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

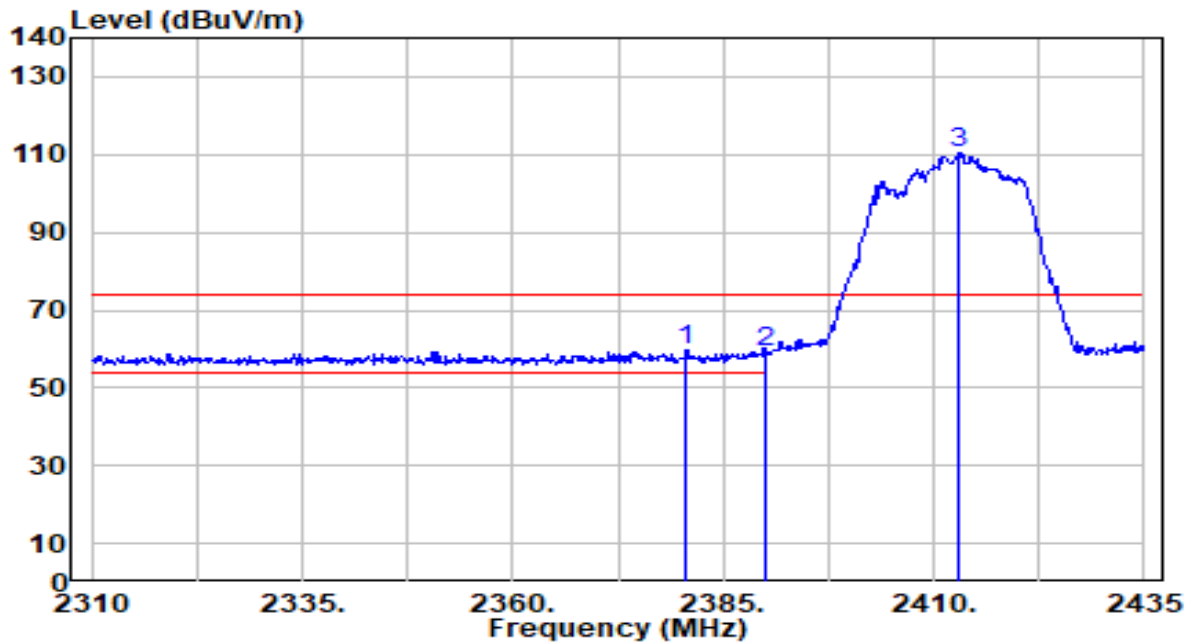


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2380.625 | 29.34 | 30.42 | 59.76 | -14.24 | 74.00 | 138 | 310 | Peak |
| 2 | | 2390.000 | 28.74 | 30.45 | 59.19 | -14.81 | 74.00 | 138 | 310 | Peak |
| 3 | | 2412.875 | 80.16 | 30.49 | 110.65 | N/A | N/A | 138 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

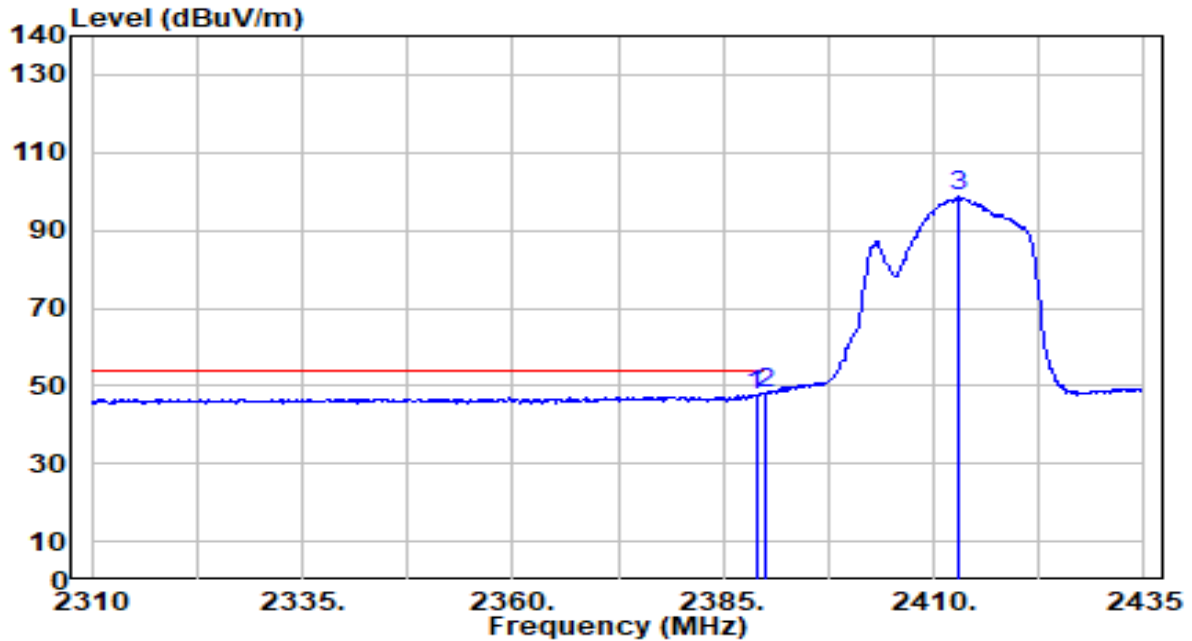


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.875 | 17.19 | 30.44 | 47.64 | -6.36 | 54.00 | 138 | 310 | Average |
| 2 | * 2390.000 | 17.86 | 30.45 | 48.30 | -5.70 | 54.00 | 138 | 310 | Average |
| 3 | 2413.000 | 68.06 | 30.49 | 98.55 | N/A | N/A | 138 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

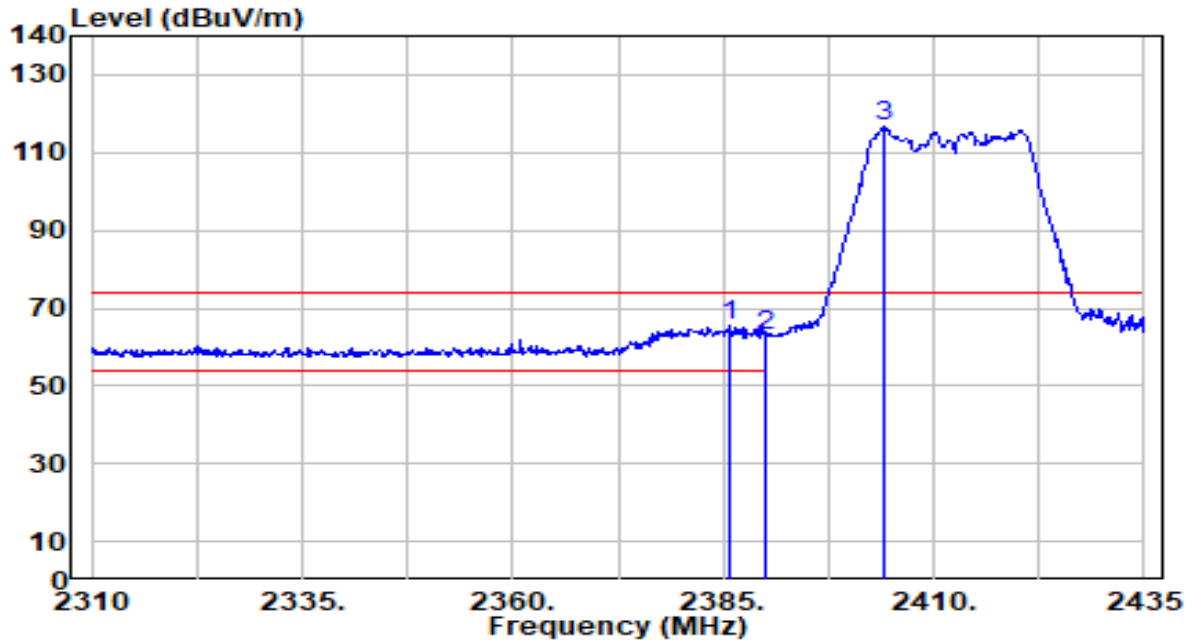


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2385.750 | 35.19 | 30.44 | 65.62 | -8.38 | 74.00 | 100 | 58 | Peak |
| 2 | 2390.000 | 32.55 | 30.45 | 62.99 | -11.01 | 74.00 | 100 | 58 | Peak |
| 3 | 2404.250 | 86.11 | 30.48 | 116.59 | N/A | N/A | 100 | 58 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

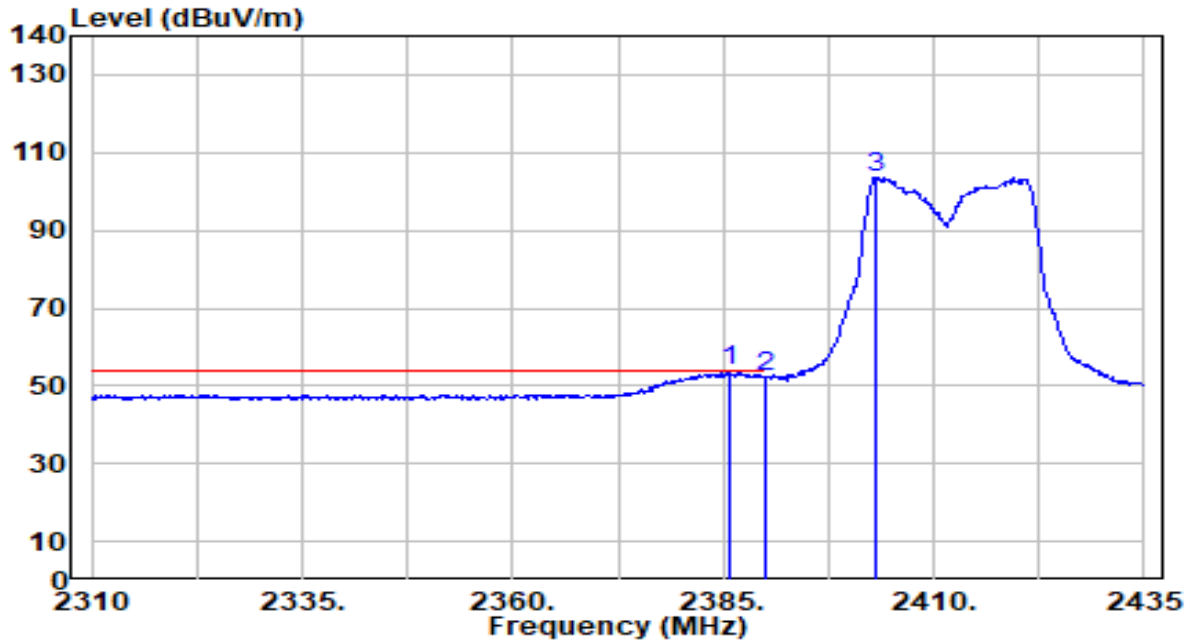


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 23.30 | 30.44 | 53.73 | -0.27 | 54.00 | 100 | 58 | Average |
| 2 | | 21.66 | 30.45 | 52.11 | -1.89 | 54.00 | 100 | 58 | Average |
| 3 | | 73.29 | 30.48 | 103.77 | N/A | N/A | 100 | 58 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

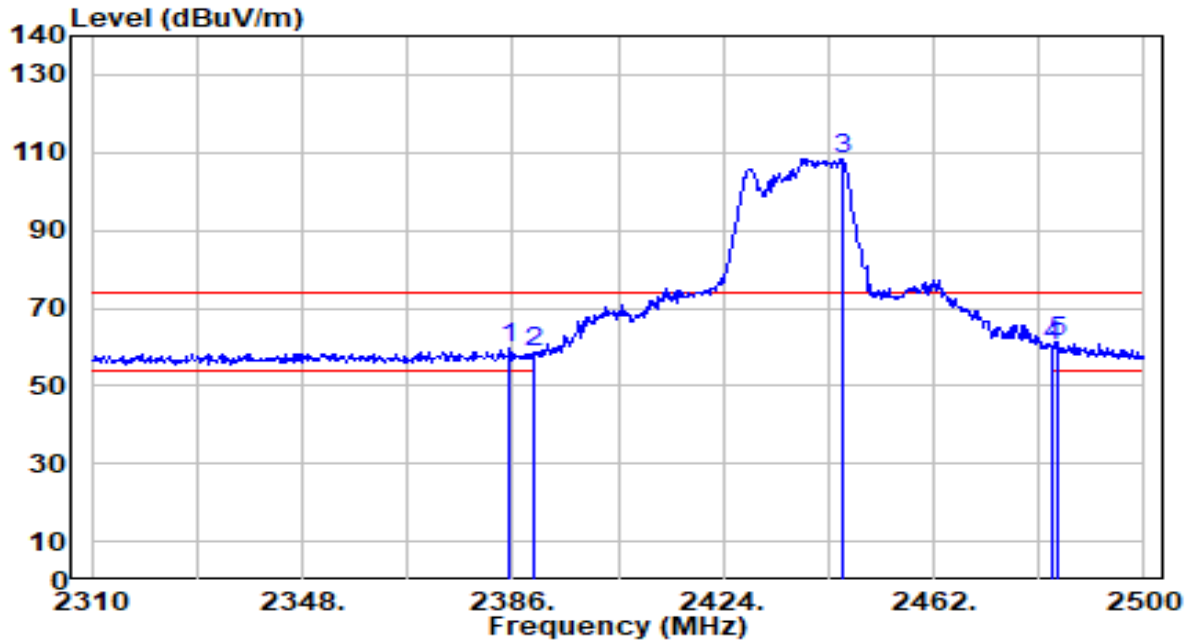


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2385.430 | 29.18 | 30.43 | 59.61 | -14.39 | 74.00 | 165 | 201 | Peak |
| 2 | 2390.000 | 28.29 | 30.45 | 58.74 | -15.26 | 74.00 | 165 | 201 | Peak |
| 3 | 2445.470 | 77.99 | 30.54 | 108.52 | N/A | N/A | 165 | 201 | Peak |
| 4 | 2483.500 | 29.75 | 30.59 | 60.34 | -13.66 | 74.00 | 165 | 201 | Peak |
| 5 | * 2484.420 | 30.56 | 30.59 | 61.15 | -12.85 | 74.00 | 165 | 201 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

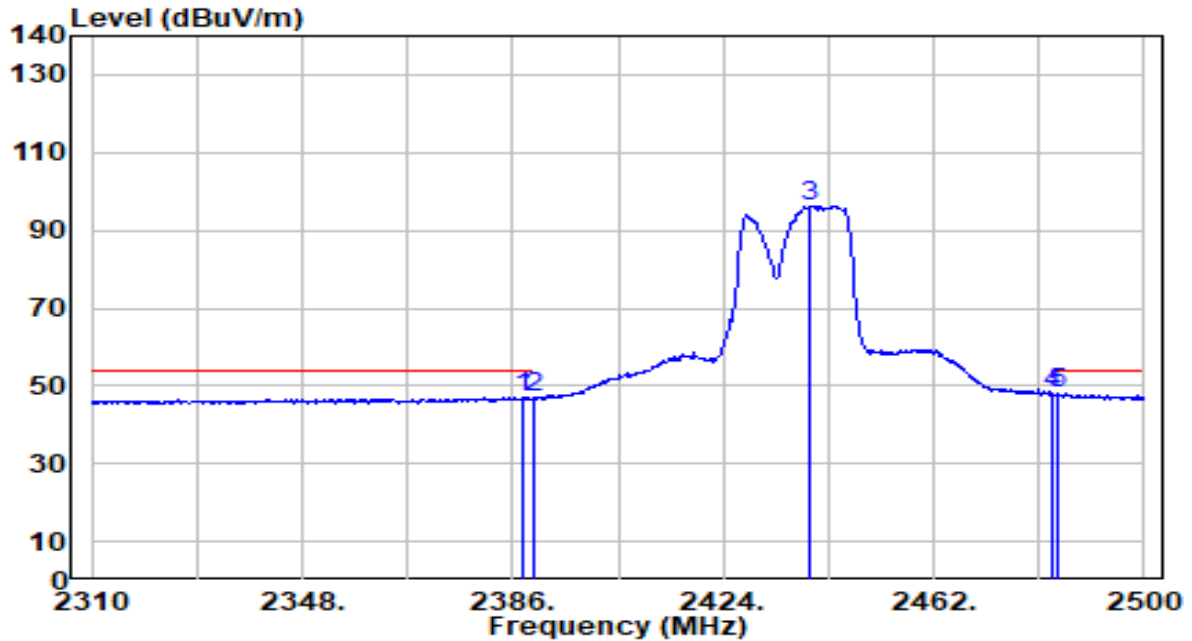


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2387.710 | 16.49 | 30.44 | 46.94 | -7.06 | 54.00 | 165 | 201 | Average |
| 2 | 2390.000 | 16.54 | 30.45 | 46.99 | -7.01 | 54.00 | 165 | 201 | Average |
| 3 | 2439.770 | 65.88 | 30.53 | 96.41 | N/A | N/A | 165 | 201 | Average |
| 4 | 2483.500 | 17.52 | 30.59 | 48.11 | -5.89 | 54.00 | 165 | 201 | Average |
| 5 | * 2484.230 | 17.54 | 30.59 | 48.13 | -5.87 | 54.00 | 165 | 201 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

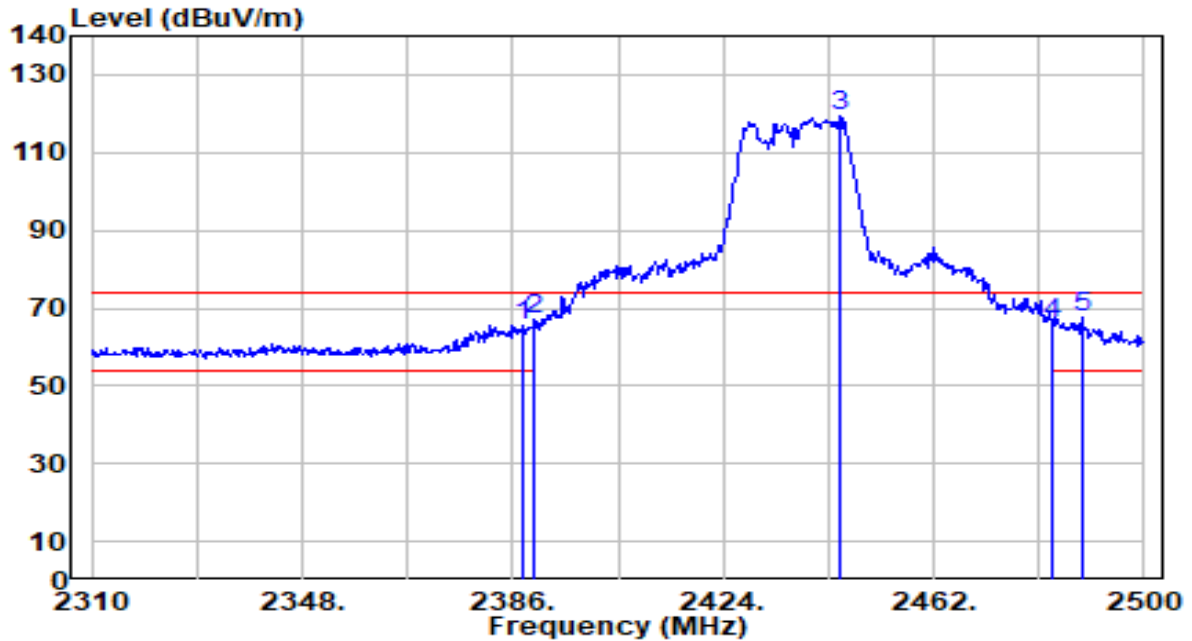


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2387.900 | 35.14 | 30.44 | 65.59 | -8.41 | 74.00 | 156 | 289 | Peak |
| 2 | 2390.000 | 36.41 | 30.45 | 66.86 | -7.14 | 74.00 | 156 | 289 | Peak |
| 3 | 2445.280 | 88.61 | 30.54 | 119.15 | N/A | N/A | 156 | 289 | Peak |
| 4 | 2483.500 | 35.23 | 30.59 | 65.82 | -8.18 | 74.00 | 156 | 289 | Peak |
| 5 | * 2488.790 | 36.98 | 30.59 | 67.57 | -6.43 | 74.00 | 156 | 289 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

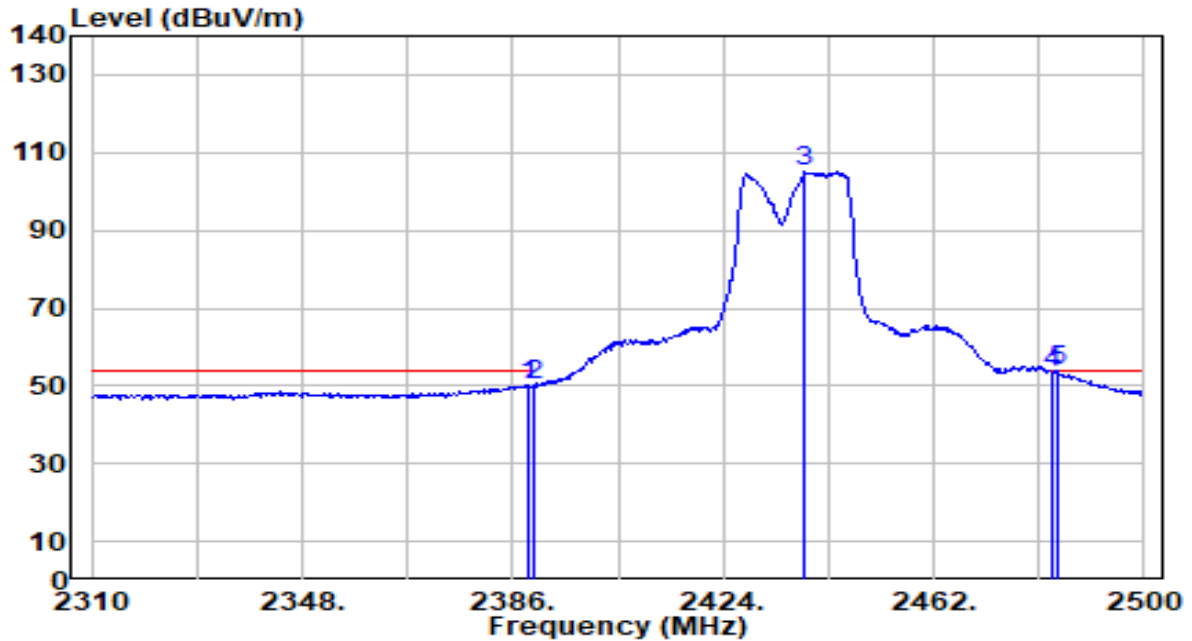


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.850 | 19.85 | 30.44 | 50.29 | -3.71 | 54.00 | 156 | 289 | Average |
| 2 | 2390.000 | 19.55 | 30.45 | 50.00 | -4.00 | 54.00 | 156 | 289 | Average |
| 3 | 2438.820 | 74.37 | 30.53 | 104.90 | N/A | N/A | 156 | 289 | Average |
| 4 | 2483.500 | 22.65 | 30.59 | 53.23 | -0.77 | 54.00 | 156 | 289 | Average |
| 5 | * 2484.230 | 23.24 | 30.59 | 53.82 | -0.18 | 54.00 | 156 | 289 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 10 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

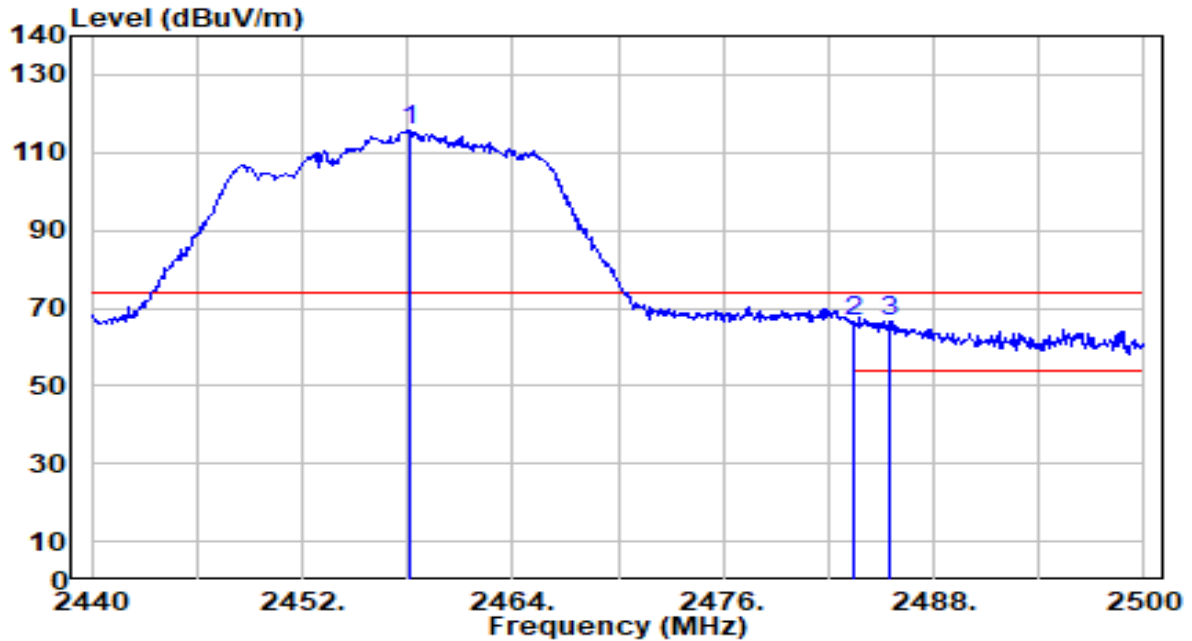


S

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2458.120 | 85.20 | 30.55 | 115.75 | N/A | N/A | 160 | 319 | Peak |
| 2 | 2483.500 | 35.85 | 30.59 | 66.44 | -7.56 | 74.00 | 160 | 319 | Peak |
| 3 | * 2485.420 | 36.17 | 30.59 | 66.76 | -7.24 | 74.00 | 160 | 319 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 10 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

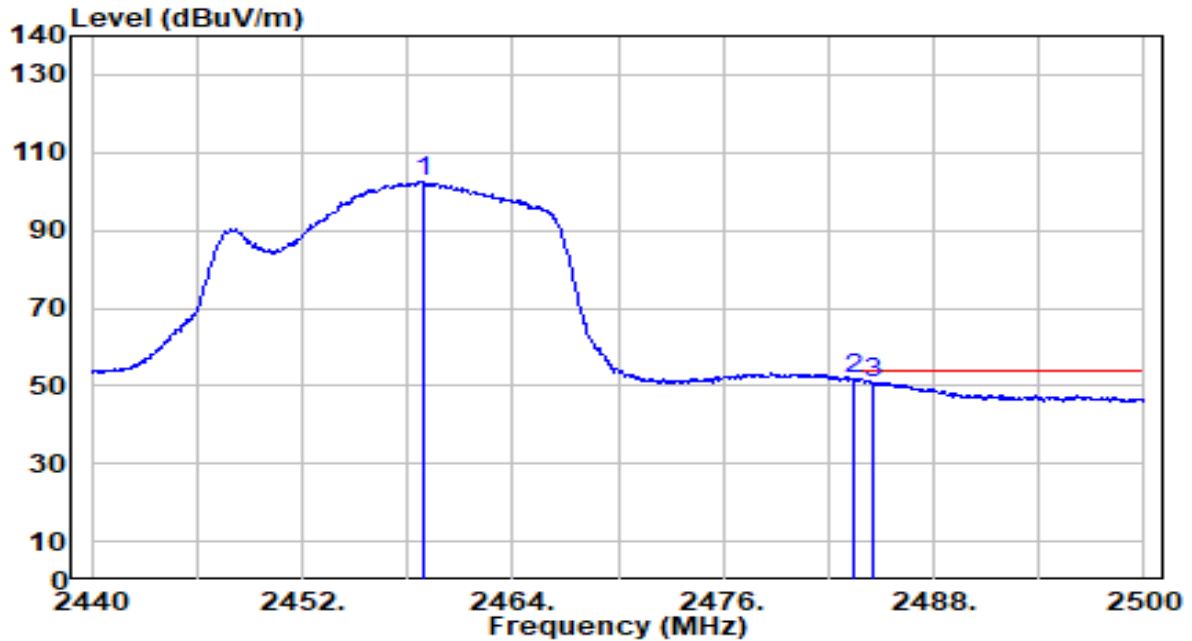


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2458.900 | 72.15 | 30.55 | 102.71 | N/A | N/A | 160 | 319 | Average |
| 2 | * 2483.500 | 21.02 | 30.59 | 51.61 | -2.39 | 54.00 | 160 | 319 | Average |
| 3 | 2484.520 | 20.33 | 30.59 | 50.92 | -3.08 | 54.00 | 160 | 319 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 10 ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

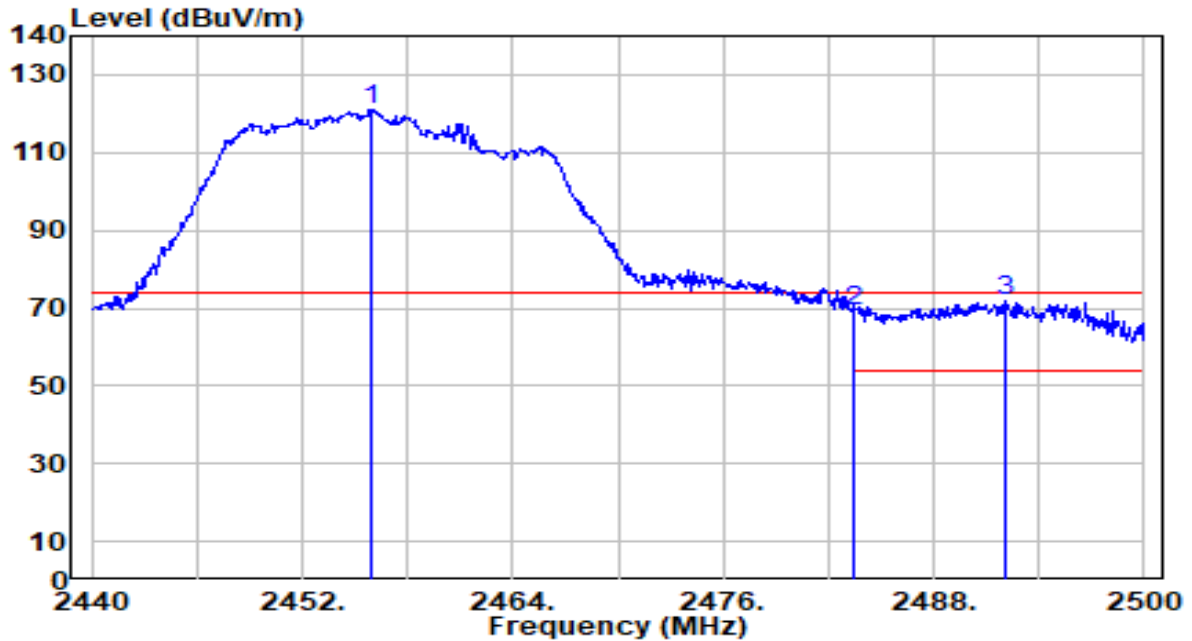


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.900 | 90.51 | 30.55 | 121.06 | N/A | N/A | 162 | 306 | Peak |
| 2 | 2483.500 | 38.43 | 30.59 | 69.02 | -4.98 | 74.00 | 162 | 306 | Peak |
| 3 | * 2492.080 | 41.07 | 30.60 | 71.67 | -2.33 | 74.00 | 162 | 306 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 10 ANT 0+1_Verical Ant | Test Voltage | AC 120V/60Hz |

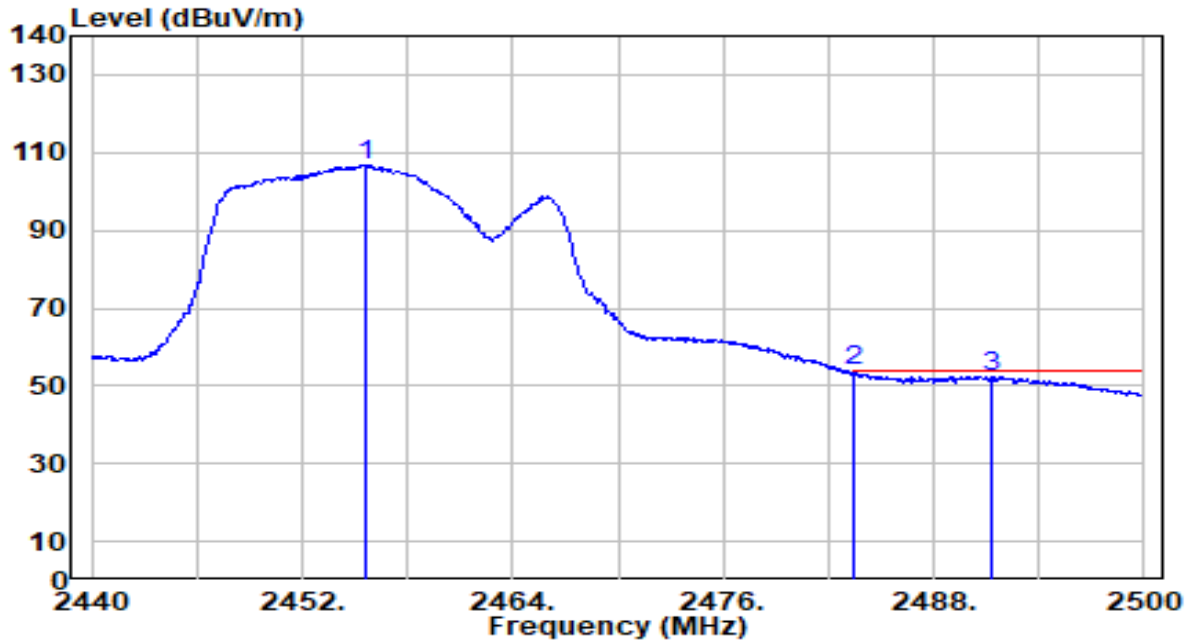


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2455.600 | 76.28 | 30.55 | 106.83 | N/A | N/A | 162 | 306 | Average |
| 2 | * 2483.500 | 23.15 | 30.59 | 53.74 | -0.26 | 54.00 | 162 | 306 | Average |
| 3 | 2491.360 | 21.81 | 30.60 | 52.41 | -1.59 | 54.00 | 162 | 306 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

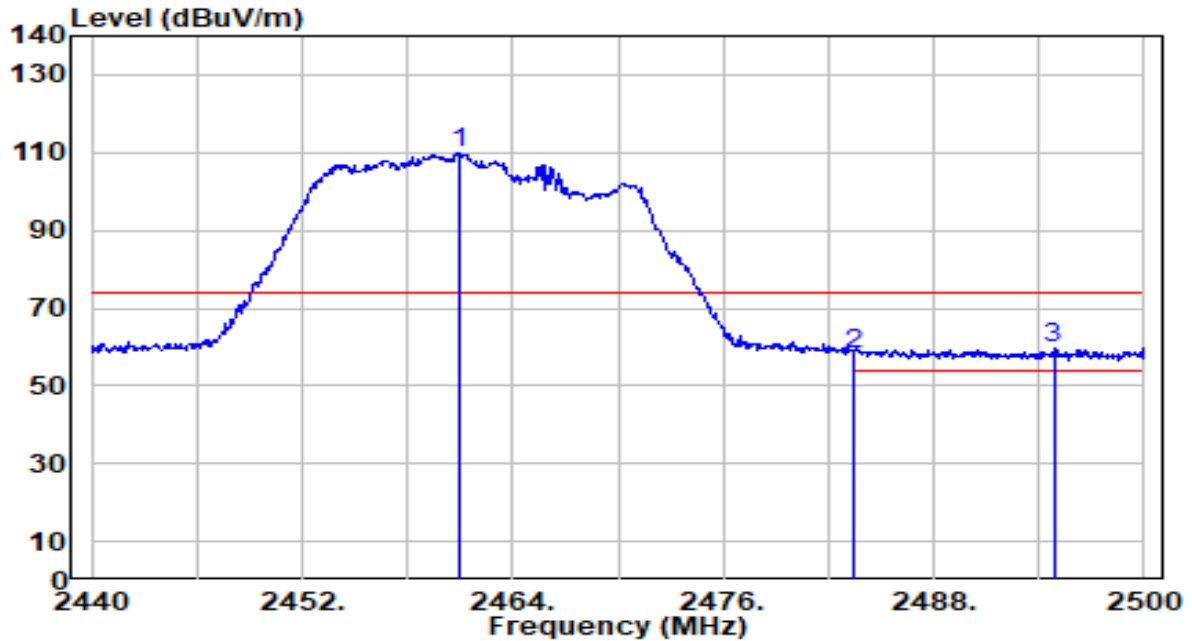


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2461.000 | 79.35 | 30.56 | 109.90 | N/A | N/A | 179 | 310 | Peak |
| 2 | 2483.500 | 27.54 | 30.59 | 58.13 | -15.87 | 74.00 | 179 | 310 | Peak |
| 3 | * 2494.840 | 29.22 | 30.60 | 59.82 | -14.18 | 74.00 | 179 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

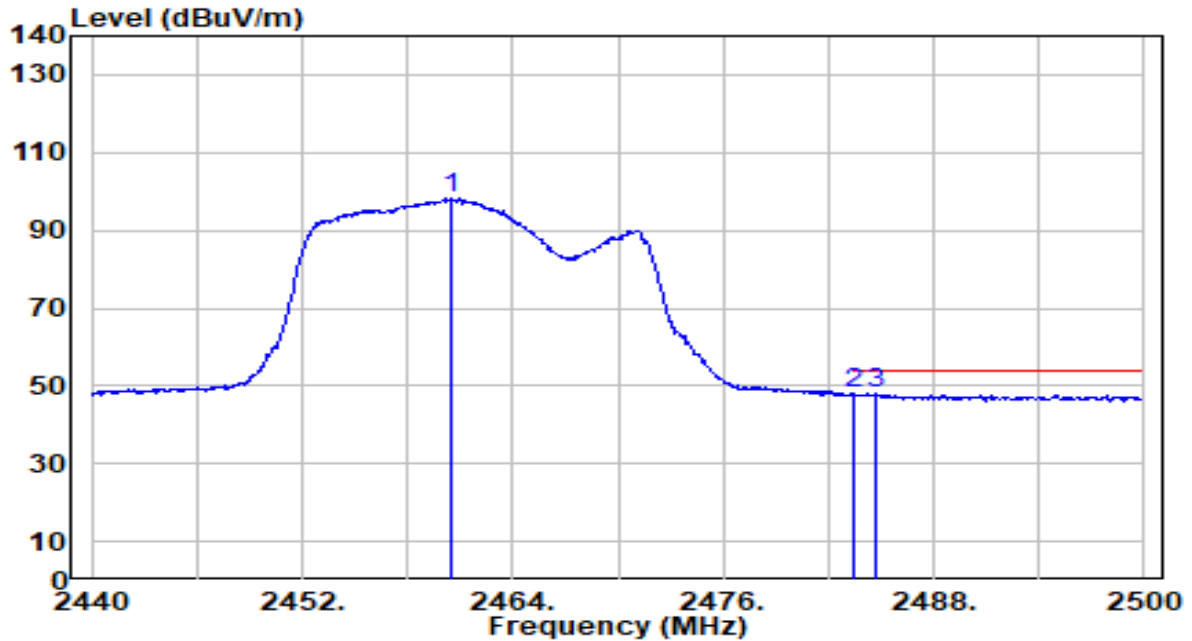


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.520 | 67.73 | 30.56 | 98.29 | N/A | N/A | 179 | 310 | Average |
| 2 | * 2483.500 | 17.26 | 30.59 | 47.85 | -6.15 | 54.00 | 179 | 310 | Average |
| 3 | 2484.760 | 17.25 | 30.59 | 47.84 | -6.16 | 54.00 | 179 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

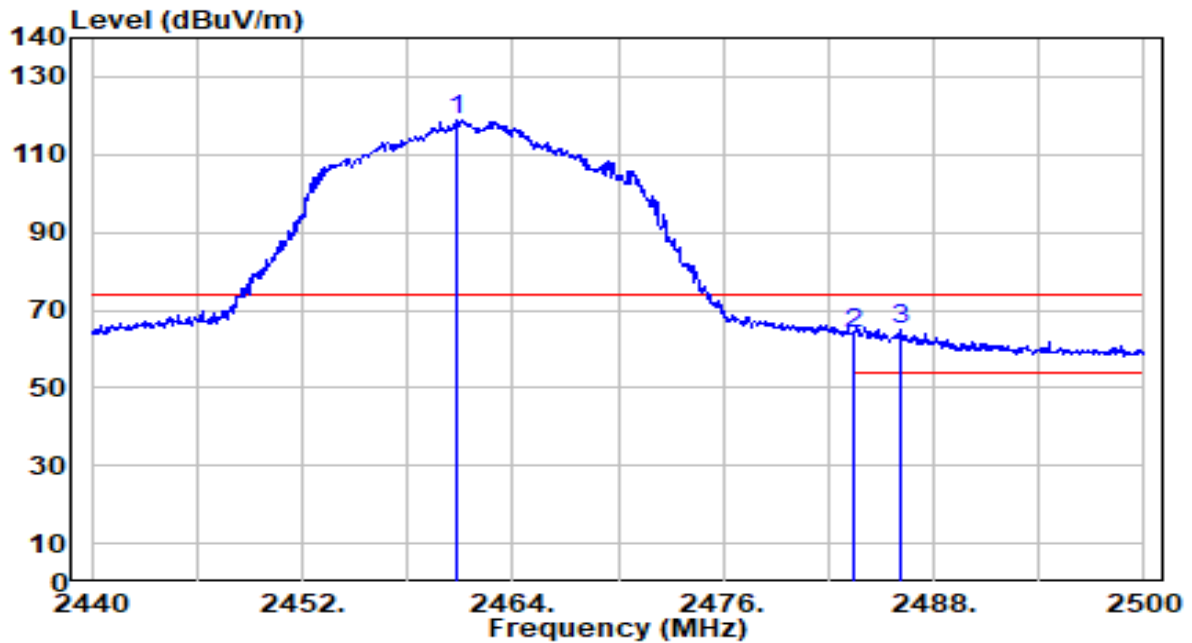


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.880 | 88.27 | 30.56 | 118.83 | N/A | N/A | 100 | 54 | Peak |
| 2 | 2483.500 | 33.36 | 30.59 | 63.95 | -10.05 | 74.00 | 100 | 54 | Peak |
| 3 | * 2486.080 | 34.26 | 30.59 | 64.86 | -9.14 | 74.00 | 100 | 54 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

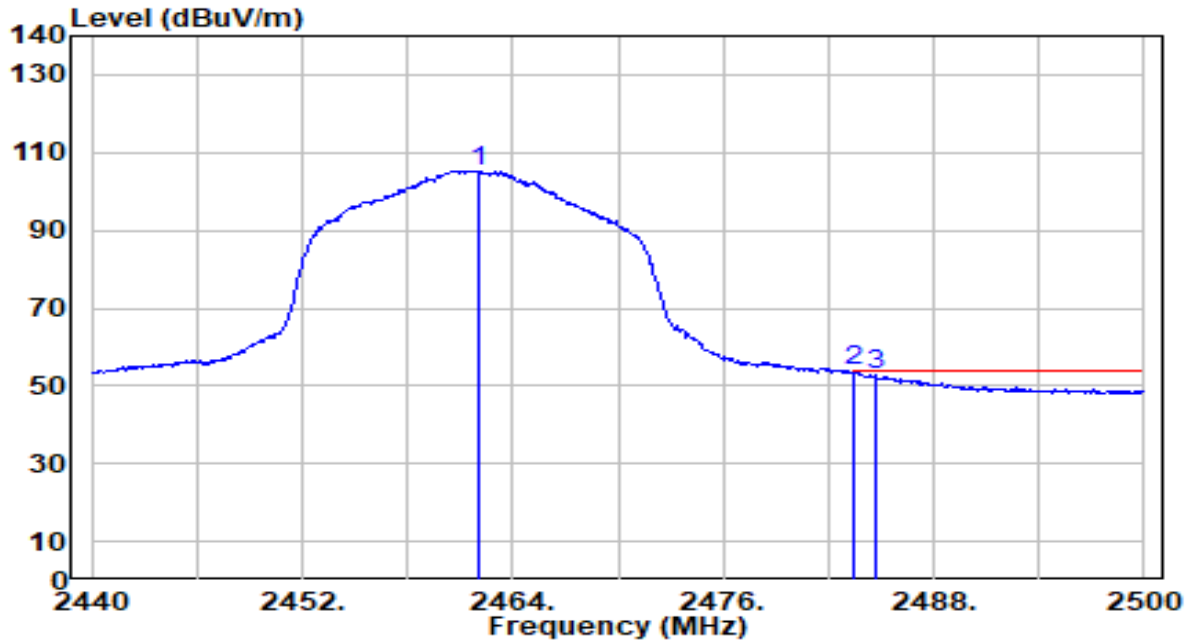


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2462.080 | 74.73 | 30.56 | 105.29 | N/A | N/A | 100 | 54 | Average |
| 2 | * 2483.500 | 23.14 | 30.59 | 53.73 | -0.27 | 54.00 | 100 | 54 | Average |
| 3 | 2484.700 | 22.03 | 30.59 | 52.62 | -1.38 | 54.00 | 100 | 54 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

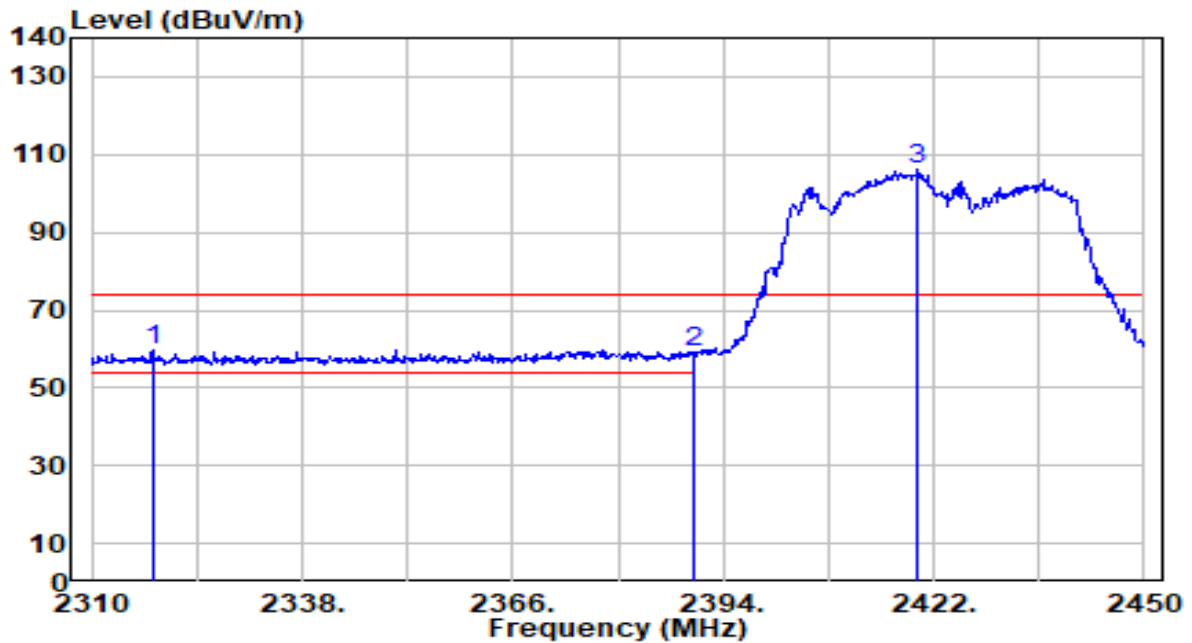


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2318.120 | 29.51 | 30.24 | 59.76 | -14.24 | 74.00 | 138 | 310 | Peak |
| 2 | 2390.000 | 28.50 | 30.45 | 58.94 | -15.06 | 74.00 | 138 | 310 | Peak |
| 3 | 2419.900 | 75.60 | 30.50 | 106.11 | N/A | N/A | 138 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

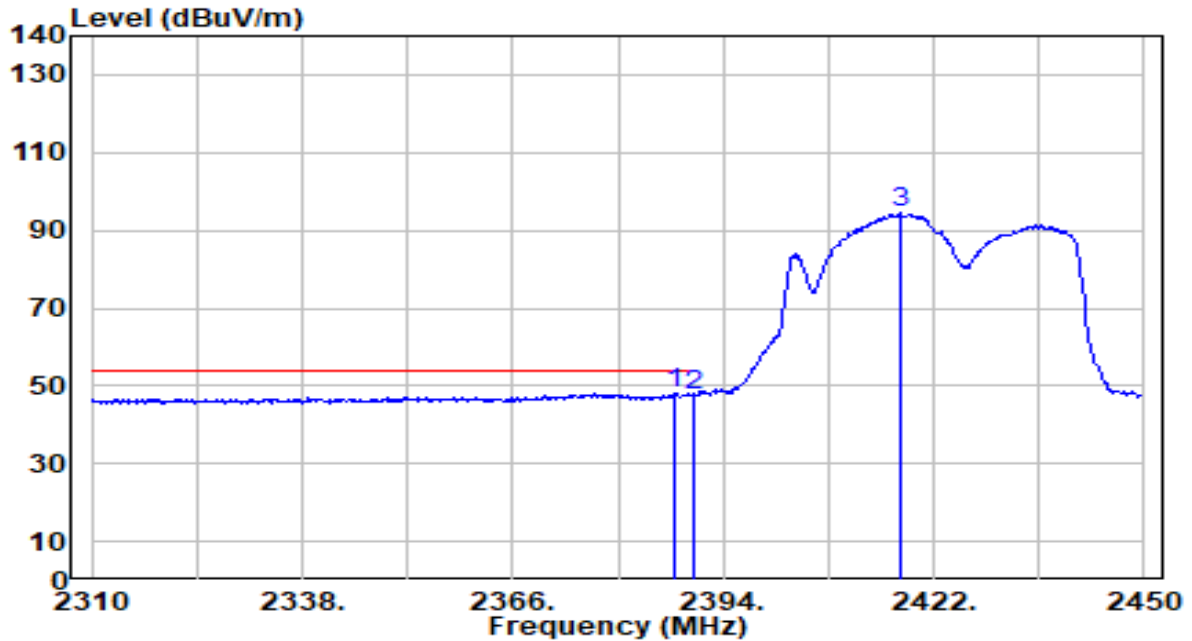


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 2387.420 | 17.45 | 30.44 | 47.89 | -6.11 | 54.00 | 138 | 310 | Average |
| 2 | | 2390.000 | 17.21 | 30.45 | 47.66 | -6.34 | 54.00 | 138 | 310 | Average |
| 3 | | 2417.520 | 63.86 | 30.50 | 94.36 | N/A | N/A | 138 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

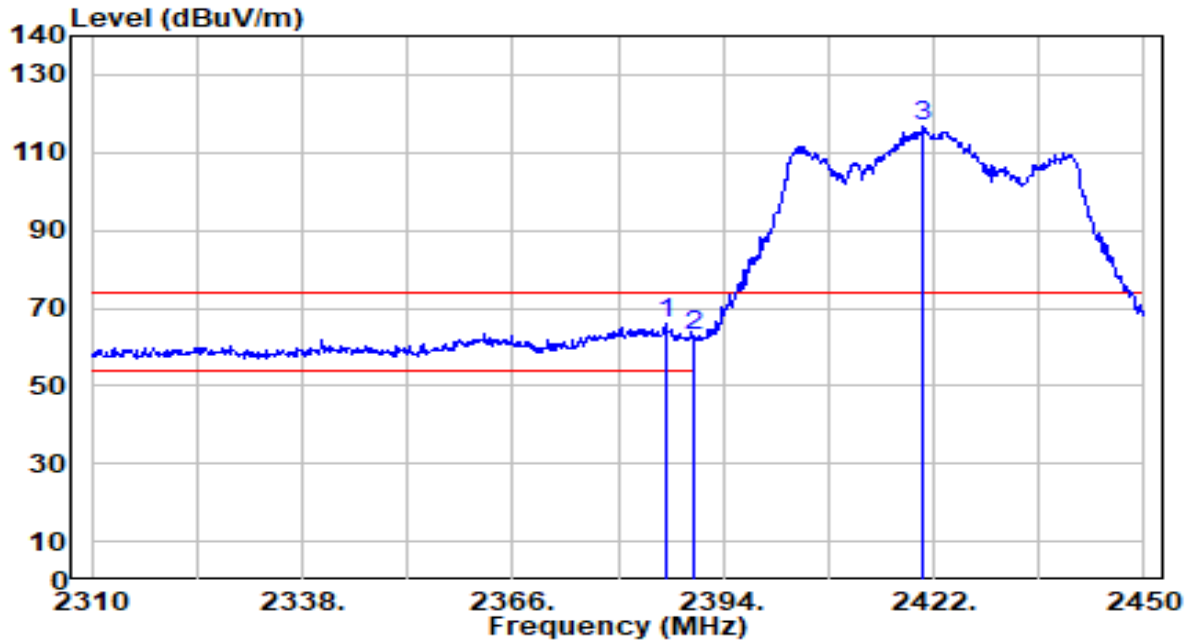


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2386.300 | 35.56 | 30.44 | 66.00 | -8.00 | 74.00 | 100 | 58 | Peak |
| 2 | | 2390.000 | 32.42 | 30.45 | 62.87 | -11.13 | 74.00 | 100 | 58 | Peak |
| 3 | | 2420.600 | 86.06 | 30.50 | 116.57 | N/A | N/A | 100 | 58 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

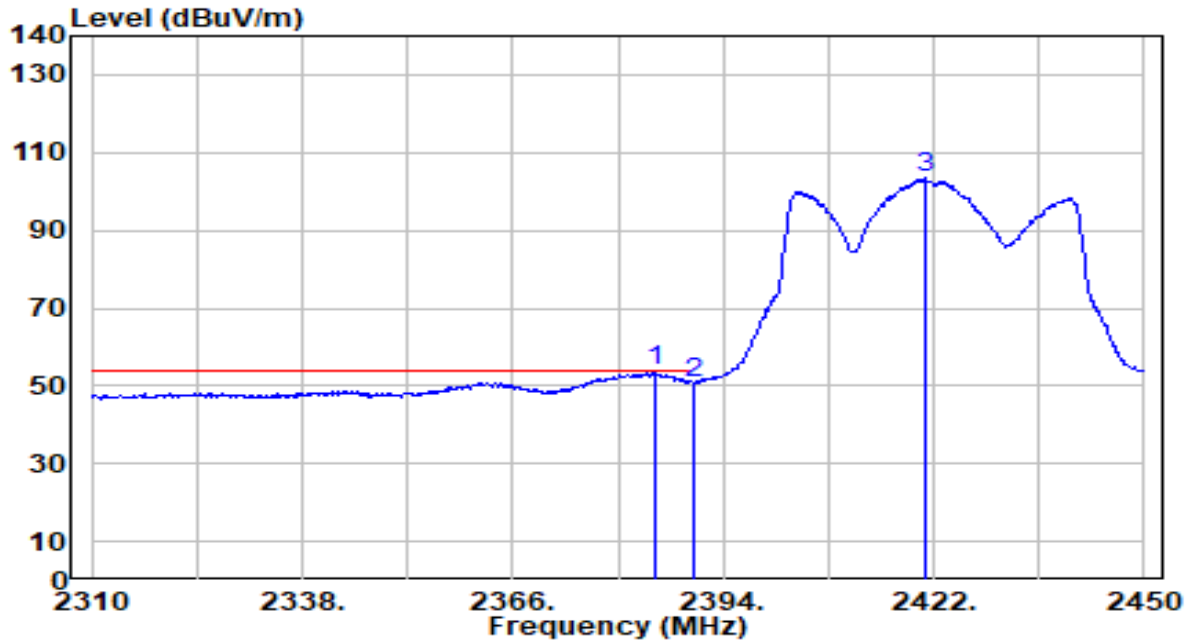


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2384.900 | 23.34 | 30.43 | 53.78 | -0.22 | 54.00 | 100 | 58 | Average |
| 2 | 2390.000 | 20.26 | 30.45 | 50.70 | -3.30 | 54.00 | 100 | 58 | Average |
| 3 | 2421.020 | 72.83 | 30.50 | 103.33 | N/A | N/A | 100 | 58 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

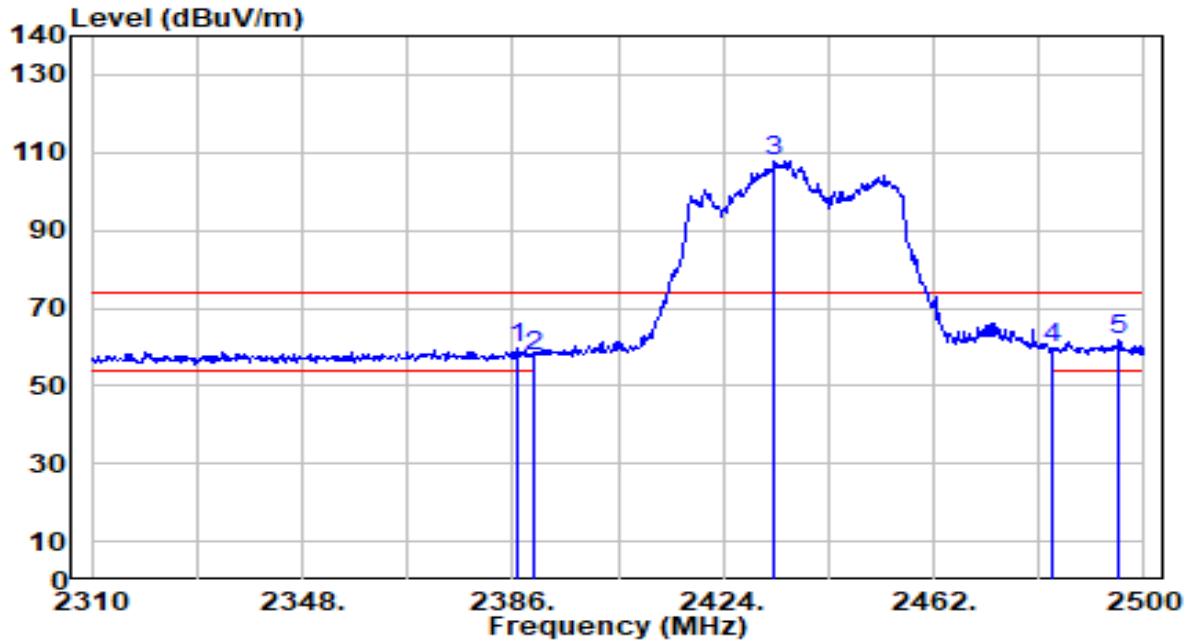


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2386.760 | 29.08 | 30.44 | 59.51 | -14.49 | 74.00 | 165 | 201 | Peak |
| 2 | 2390.000 | 27.34 | 30.45 | 57.79 | -16.21 | 74.00 | 165 | 201 | Peak |
| 3 | 2433.310 | 77.41 | 30.52 | 107.93 | N/A | N/A | 165 | 201 | Peak |
| 4 | 2483.500 | 28.88 | 30.59 | 59.47 | -14.53 | 74.00 | 165 | 201 | Peak |
| 5 | * 2495.440 | 30.95 | 30.60 | 61.55 | -12.45 | 74.00 | 165 | 201 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

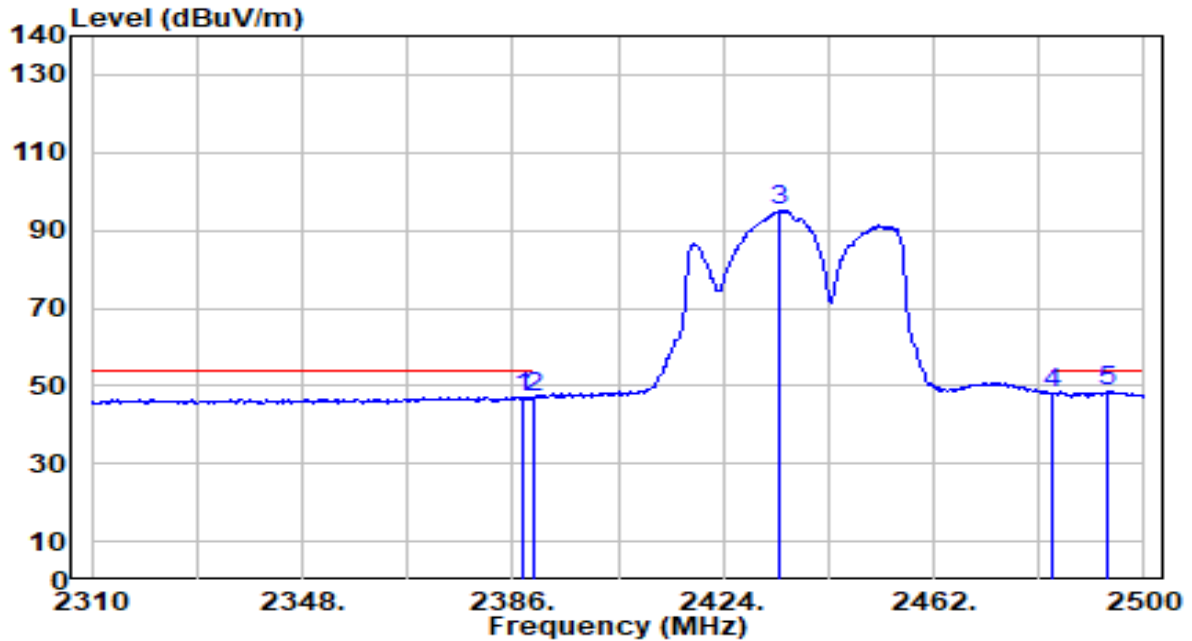


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2387.900 | 16.66 | 30.44 | 47.11 | -6.89 | 54.00 | 165 | 201 | Average |
| 2 | 2390.000 | 16.35 | 30.45 | 46.80 | -7.20 | 54.00 | 165 | 201 | Average |
| 3 | 2434.260 | 64.61 | 30.52 | 95.13 | N/A | N/A | 165 | 201 | Average |
| 4 | 2483.500 | 17.32 | 30.59 | 47.91 | -6.09 | 54.00 | 165 | 201 | Average |
| 5 | * 2493.540 | 18.00 | 30.60 | 48.60 | -5.40 | 54.00 | 165 | 201 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

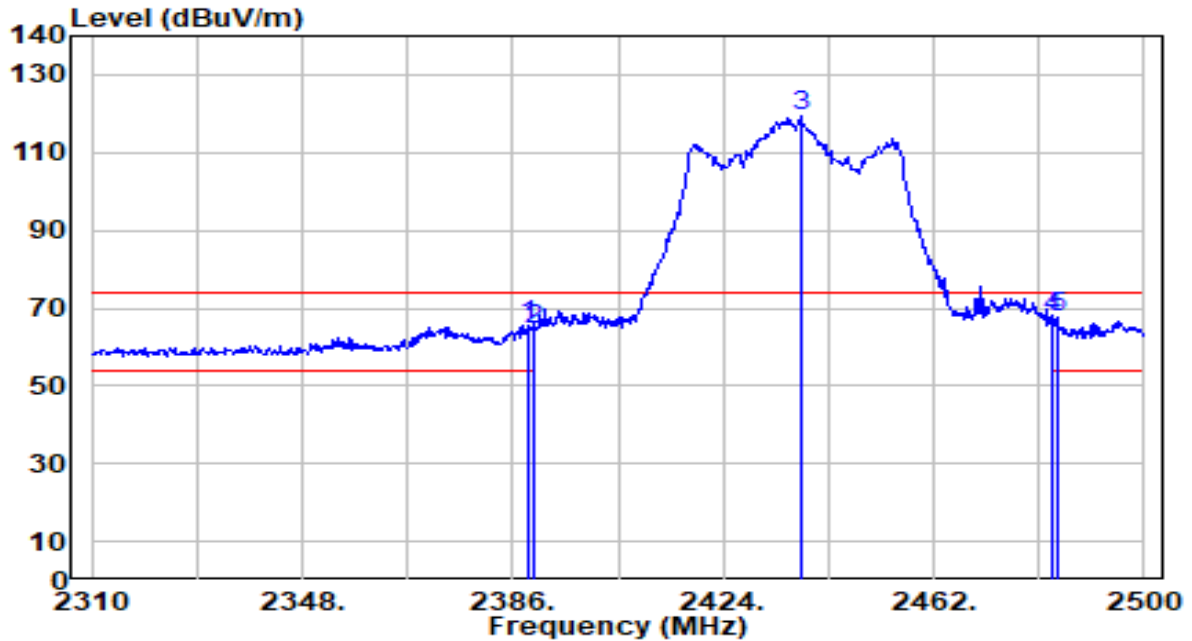


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.040 | 35.15 | 30.44 | 65.59 | -8.41 | 74.00 | 156 | 289 | Peak |
| 2 | 2390.000 | 34.23 | 30.45 | 64.68 | -9.32 | 74.00 | 156 | 289 | Peak |
| 3 | 2438.060 | 88.62 | 30.53 | 119.15 | N/A | N/A | 156 | 289 | Peak |
| 4 | * 2483.500 | 37.15 | 30.59 | 67.74 | -6.26 | 74.00 | 156 | 289 | Peak |
| 5 | 2484.230 | 36.95 | 30.59 | 67.53 | -6.47 | 74.00 | 156 | 289 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

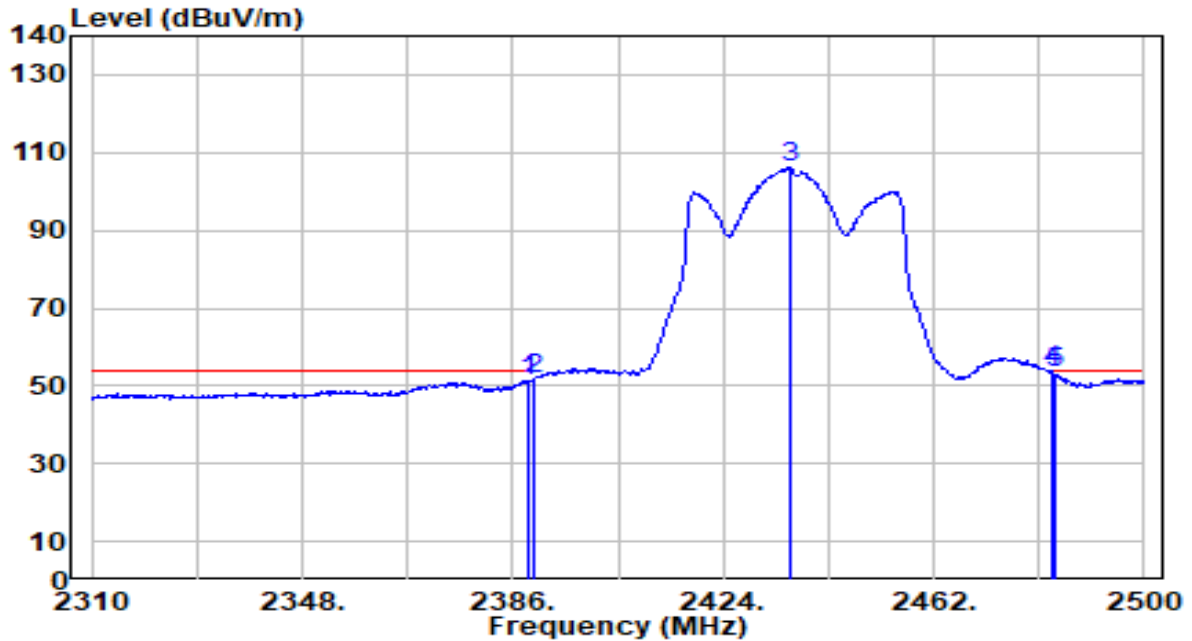


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.850 | 20.92 | 30.44 | 51.36 | -2.64 | 54.00 | 156 | 289 | Average |
| 2 | 2390.000 | 21.57 | 30.45 | 52.01 | -1.99 | 54.00 | 156 | 289 | Average |
| 3 | 2436.160 | 75.53 | 30.52 | 106.05 | N/A | N/A | 156 | 289 | Average |
| 4 | * 2483.500 | 23.20 | 30.59 | 53.79 | -0.21 | 54.00 | 156 | 289 | Average |
| 5 | 2484.040 | 22.68 | 30.59 | 53.27 | -0.73 | 54.00 | 156 | 289 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

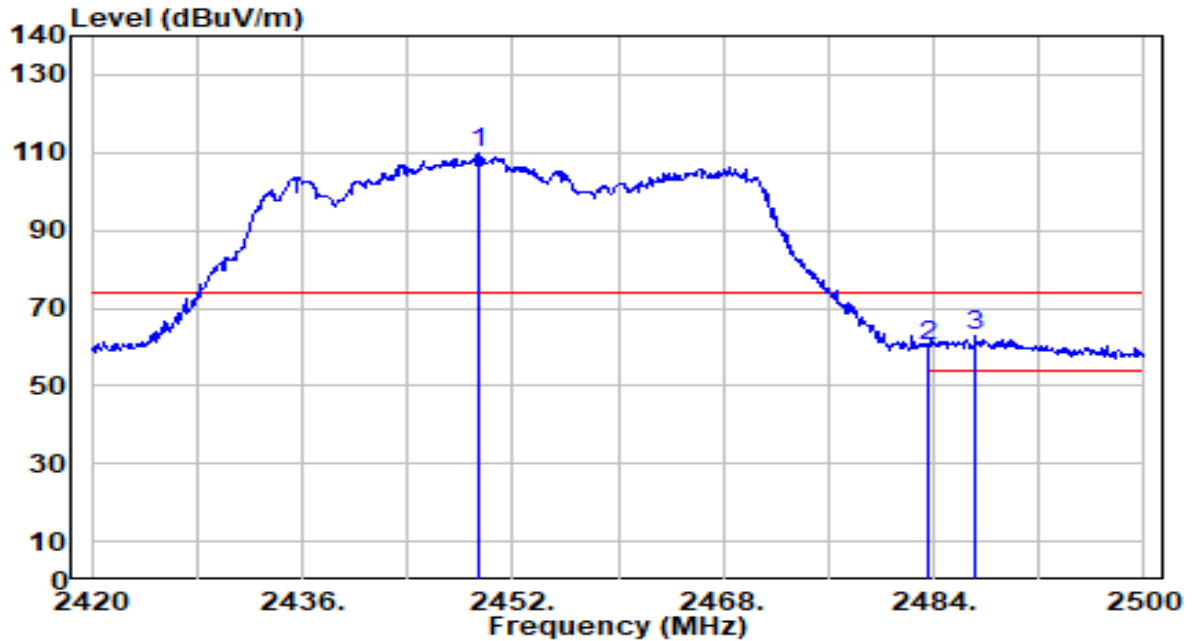


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2449.520 | 79.59 | 30.54 | 110.14 | N/A | N/A | 179 | 310 | Peak |
| 2 | 2483.500 | 29.39 | 30.59 | 59.98 | -14.02 | 74.00 | 179 | 310 | Peak |
| 3 | * 2487.200 | 32.12 | 30.59 | 62.71 | -11.29 | 74.00 | 179 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

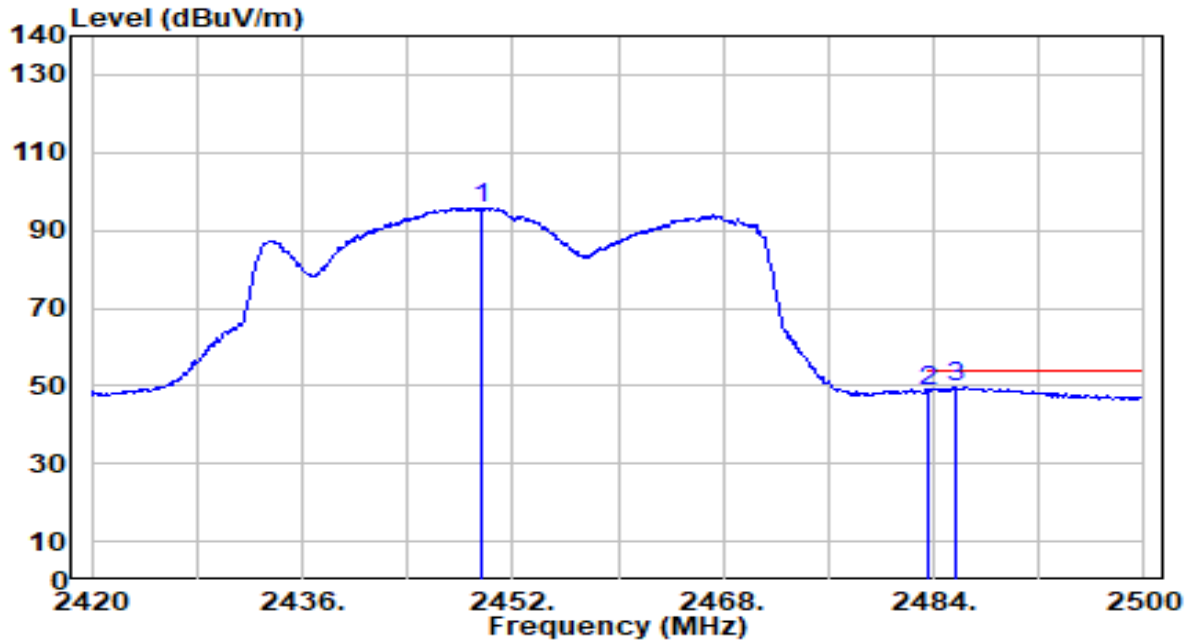


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2449.600 | 65.34 | 30.54 | 95.88 | N/A | N/A | 179 | 310 | Average |
| 2 | 2483.500 | 18.01 | 30.59 | 48.59 | -5.41 | 54.00 | 179 | 310 | Average |
| 3 | * 2485.760 | 19.06 | 30.59 | 49.65 | -4.35 | 54.00 | 179 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

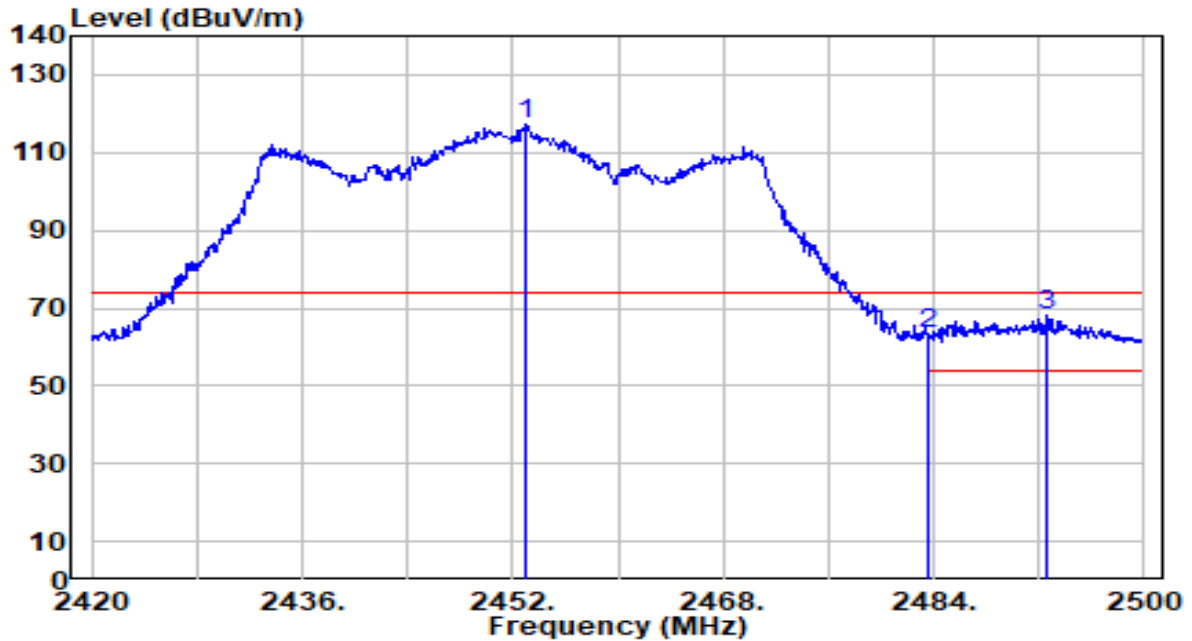


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2453.040 | 86.56 | 30.55 | 117.10 | N/A | N/A | 100 | 54 | Peak |
| 2 | 2483.500 | 32.61 | 30.59 | 63.20 | -10.80 | 74.00 | 100 | 54 | Peak |
| 3 | * 2492.560 | 37.57 | 30.60 | 68.17 | -5.83 | 74.00 | 100 | 54 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

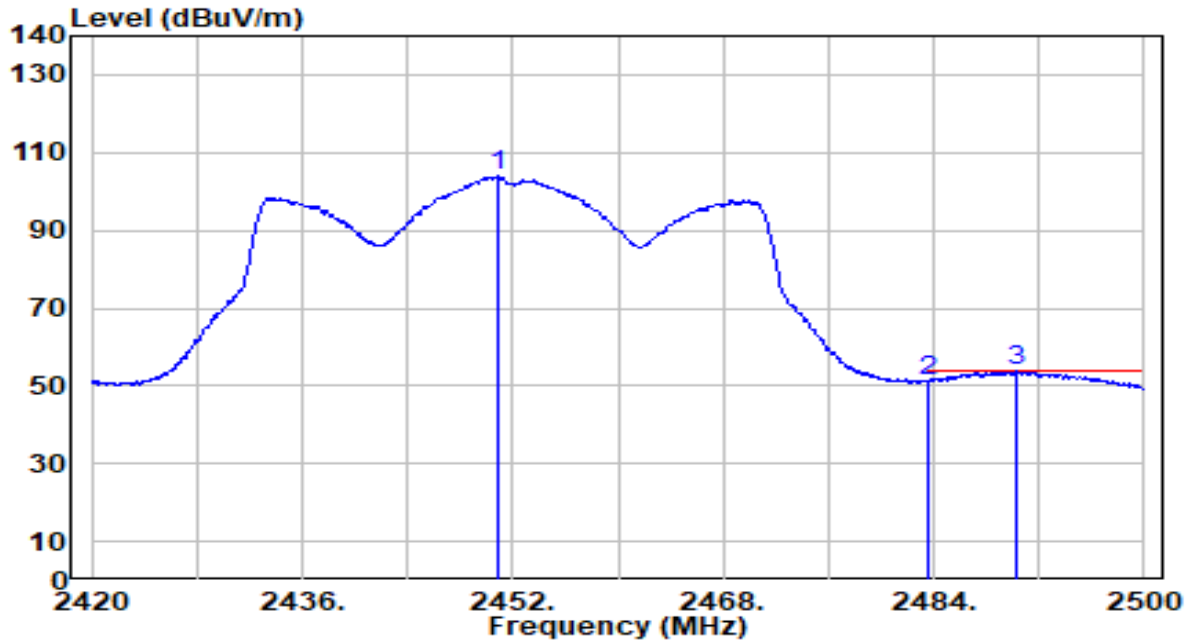


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2450.880 | 73.30 | 30.54 | 103.84 | N/A | N/A | 100 | 54 | Average |
| 2 | 2483.500 | 20.81 | 30.59 | 51.39 | -2.61 | 54.00 | 100 | 54 | Average |
| 3 | * 2490.240 | 23.15 | 30.60 | 53.75 | -0.25 | 54.00 | 100 | 54 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

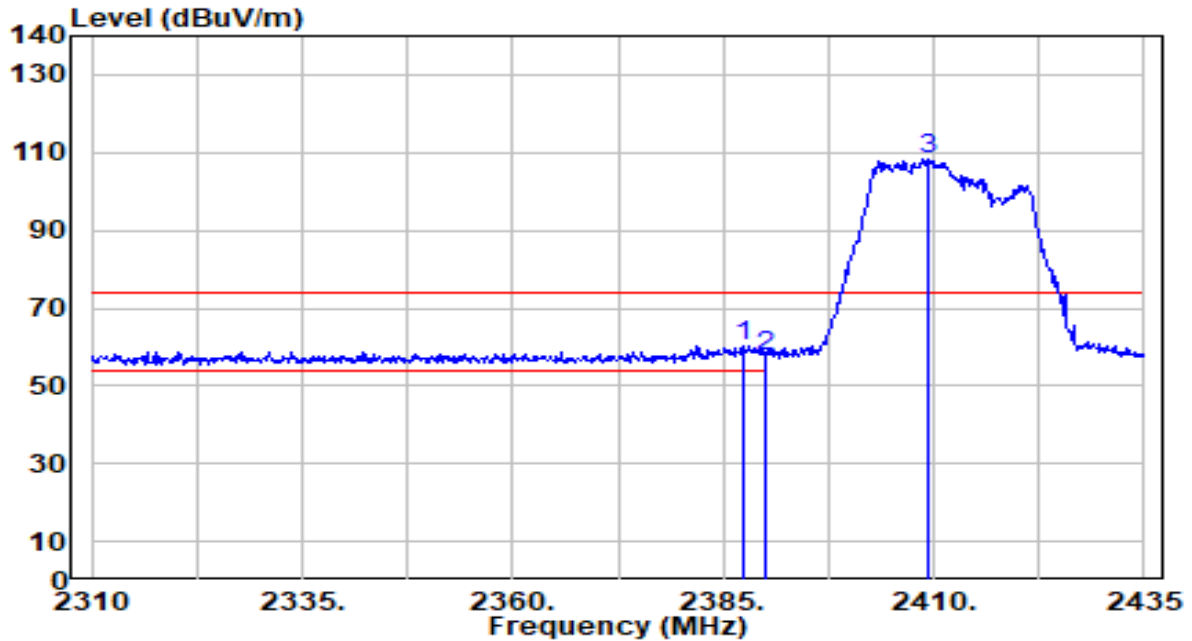


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2387.250 | 29.90 | 30.44 | 60.34 | -13.66 | 74.00 | 138 | 310 | Peak |
| 2 | 2390.000 | 27.29 | 30.45 | 57.74 | -16.26 | 74.00 | 138 | 310 | Peak |
| 3 | 2409.375 | 77.89 | 30.49 | 108.38 | N/A | N/A | 138 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

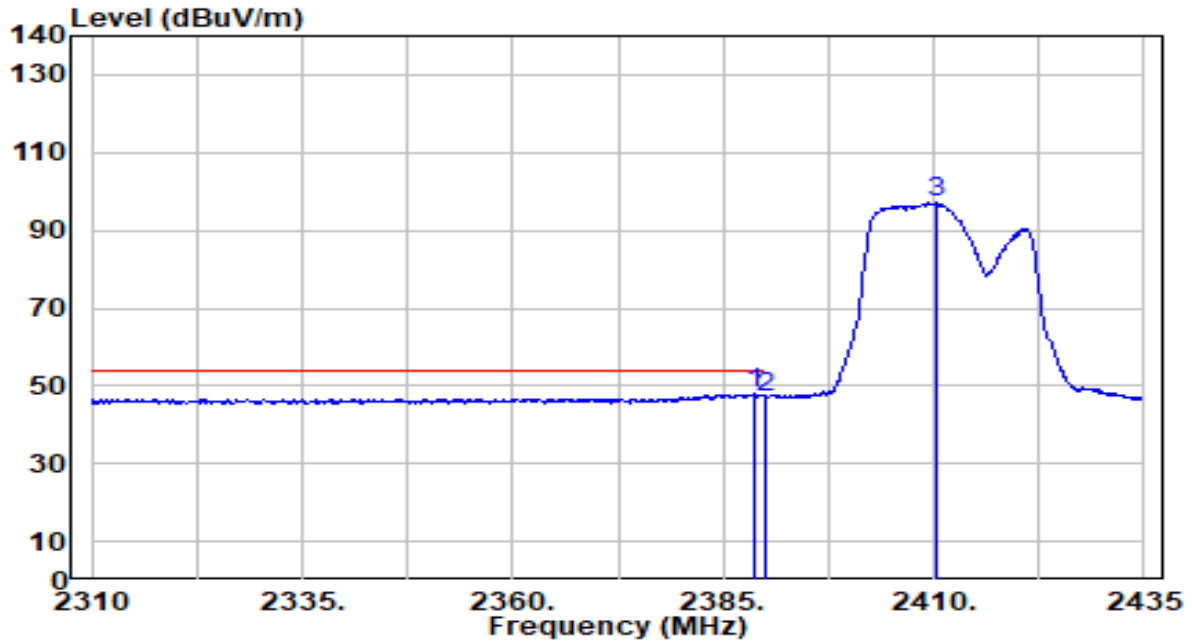


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 2388.625 | 17.49 | 30.44 | 47.93 | -6.07 | 54.00 | 138 | 310 | Average |
| 2 | | 2390.000 | 16.73 | 30.45 | 47.18 | -6.82 | 54.00 | 138 | 310 | Average |
| 3 | | 2410.375 | 66.66 | 30.49 | 97.15 | N/A | N/A | 138 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

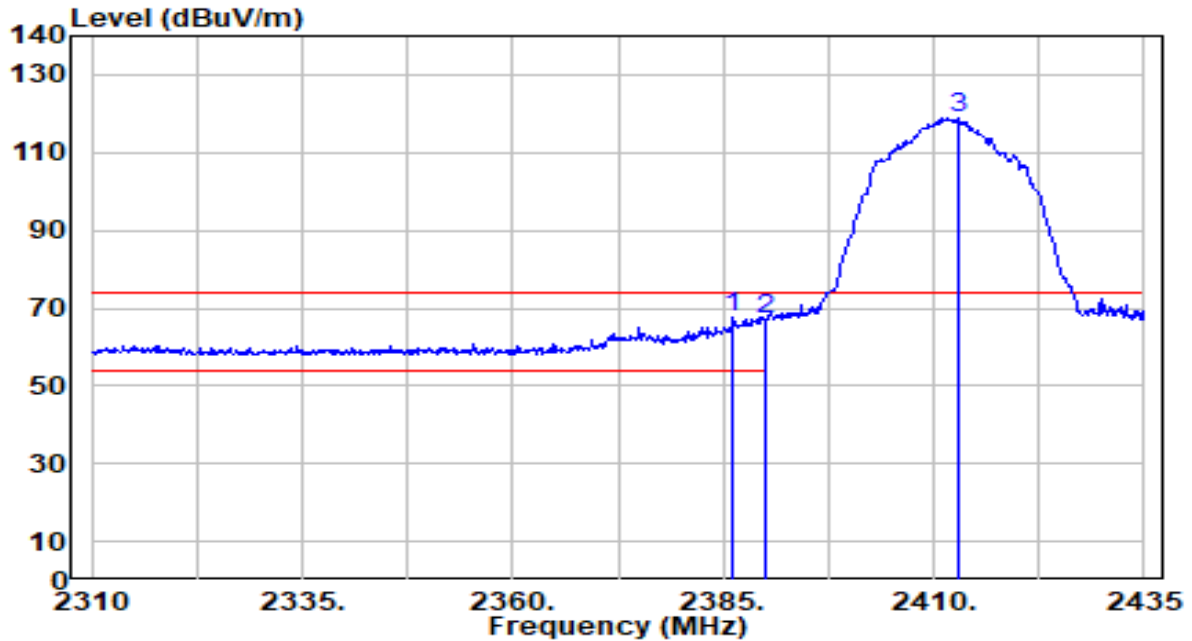


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|------|
| 1 | * | 2386.125 | 37.11 | 30.44 | 67.55 | -6.45 | 74.00 | 100 | 58 | Peak |
| 2 | | 2390.000 | 36.78 | 30.45 | 67.23 | -6.77 | 74.00 | 100 | 58 | Peak |
| 3 | | 2413.000 | 88.35 | 30.49 | 118.84 | N/A | N/A | 100 | 58 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 1 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

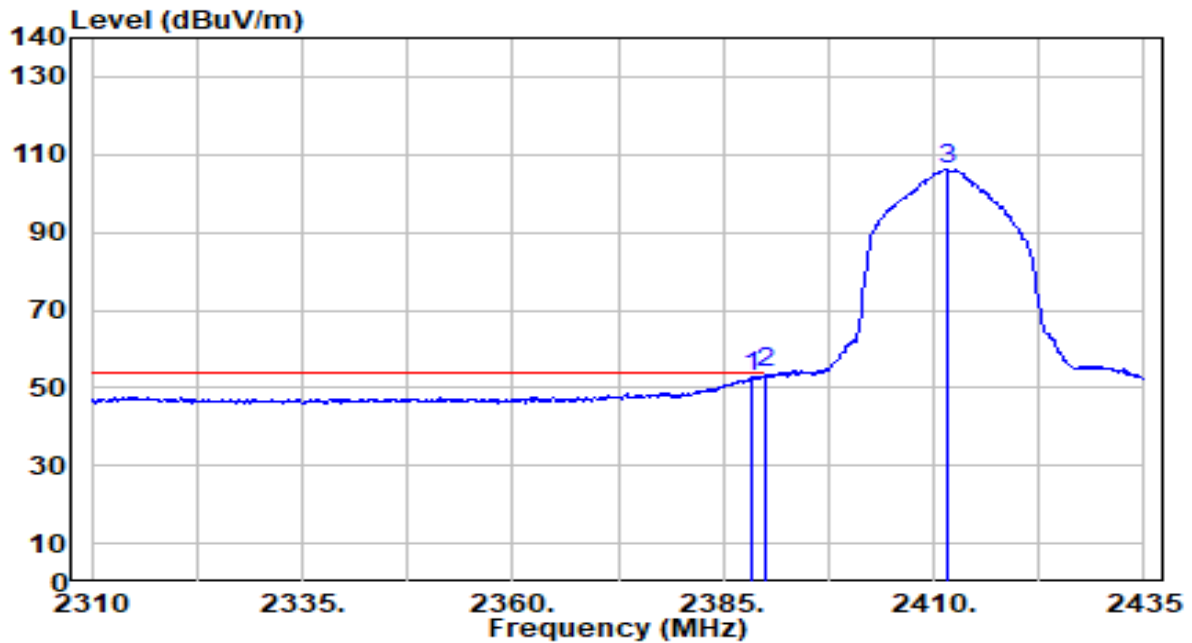


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.375 | 22.45 | 30.44 | 52.89 | -1.11 | 54.00 | 100 | 58 | Average |
| 2 | * 2390.000 | 23.30 | 30.45 | 53.75 | -0.25 | 54.00 | 100 | 58 | Average |
| 3 | 2411.500 | 75.94 | 30.49 | 106.43 | N/A | N/A | 100 | 58 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

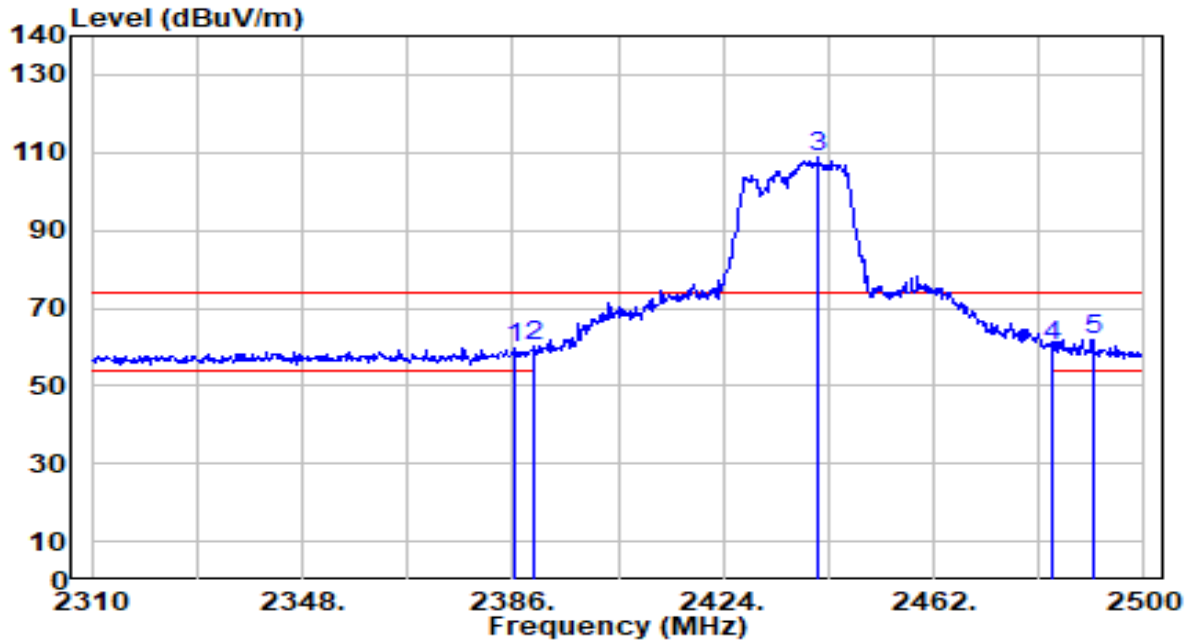


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2386.380 | 29.11 | 30.44 | 59.54 | -14.46 | 74.00 | 165 | 201 | Peak |
| 2 | 2390.000 | 29.59 | 30.45 | 60.04 | -13.96 | 74.00 | 165 | 201 | Peak |
| 3 | 2441.100 | 78.05 | 30.53 | 108.58 | N/A | N/A | 165 | 201 | Peak |
| 4 | 2483.500 | 29.49 | 30.59 | 60.08 | -13.92 | 74.00 | 165 | 201 | Peak |
| 5 | * 2490.880 | 31.32 | 30.60 | 61.92 | -12.08 | 74.00 | 165 | 201 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

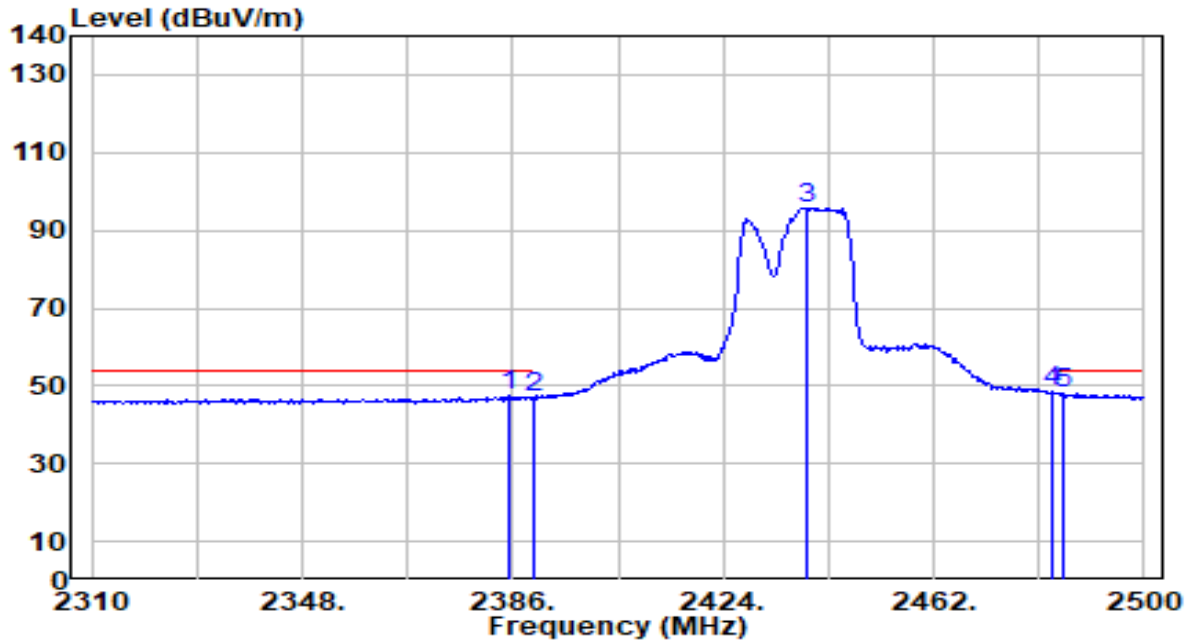


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2385.430 | 16.92 | 30.43 | 47.36 | -6.64 | 54.00 | 165 | 201 | Average |
| 2 | 2390.000 | 16.58 | 30.45 | 47.03 | -6.97 | 54.00 | 165 | 201 | Average |
| 3 | 2439.200 | 65.33 | 30.53 | 95.86 | N/A | N/A | 165 | 201 | Average |
| 4 | * 2483.500 | 17.76 | 30.59 | 48.35 | -5.65 | 54.00 | 165 | 201 | Average |
| 5 | 2485.370 | 17.54 | 30.59 | 48.13 | -5.87 | 54.00 | 165 | 201 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

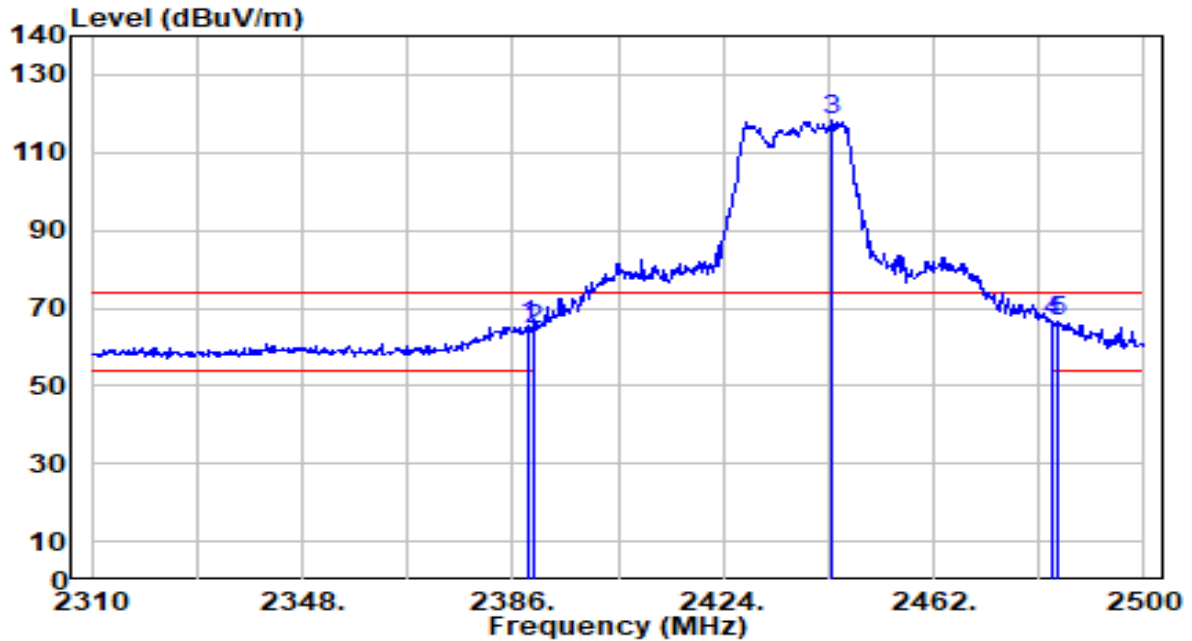


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.660 | 35.02 | 30.44 | 65.47 | -8.53 | 74.00 | 156 | 289 | Peak |
| 2 | 2390.000 | 34.03 | 30.45 | 64.48 | -9.52 | 74.00 | 156 | 289 | Peak |
| 3 | 2443.760 | 87.71 | 30.53 | 118.25 | N/A | N/A | 156 | 289 | Peak |
| 4 | * 2483.500 | 35.88 | 30.59 | 66.47 | -7.53 | 74.00 | 156 | 289 | Peak |
| 5 | 2484.610 | 35.83 | 30.59 | 66.42 | -7.58 | 74.00 | 156 | 289 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

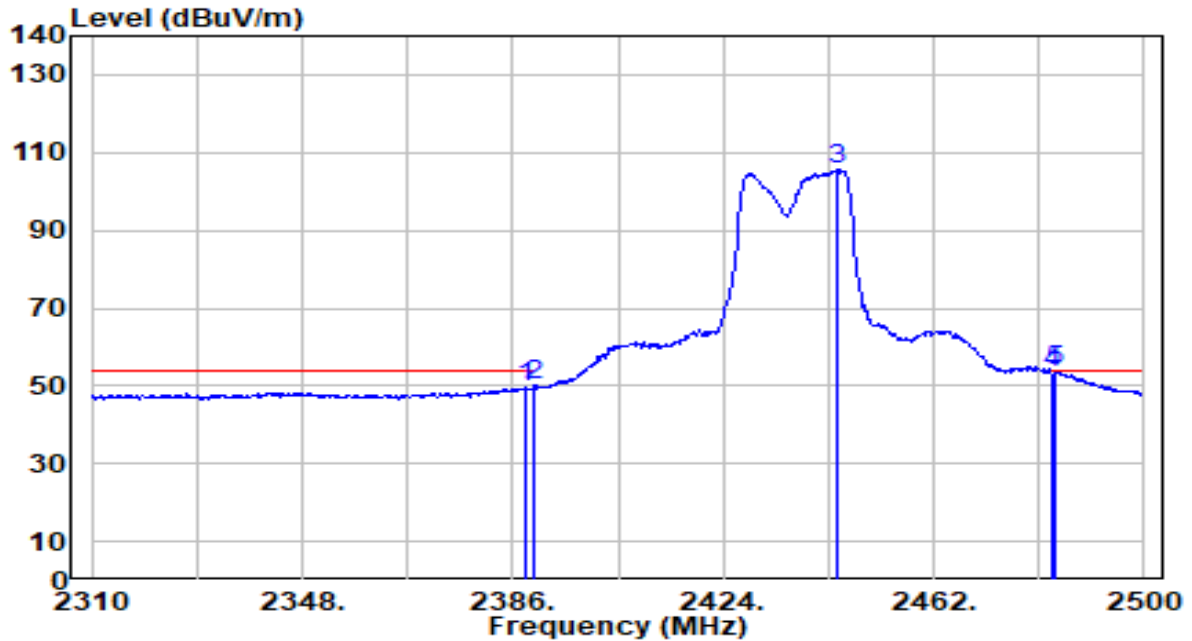


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2388.280 | 19.09 | 30.44 | 49.53 | -4.47 | 54.00 | 156 | 289 | Average |
| 2 | 2390.000 | 19.50 | 30.45 | 49.94 | -4.06 | 54.00 | 156 | 289 | Average |
| 3 | 2444.710 | 74.92 | 30.54 | 105.46 | N/A | N/A | 156 | 289 | Average |
| 4 | 2483.500 | 22.86 | 30.59 | 53.45 | -0.55 | 54.00 | 156 | 289 | Average |
| 5 | * 2484.040 | 23.17 | 30.59 | 53.76 | -0.24 | 54.00 | 156 | 289 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

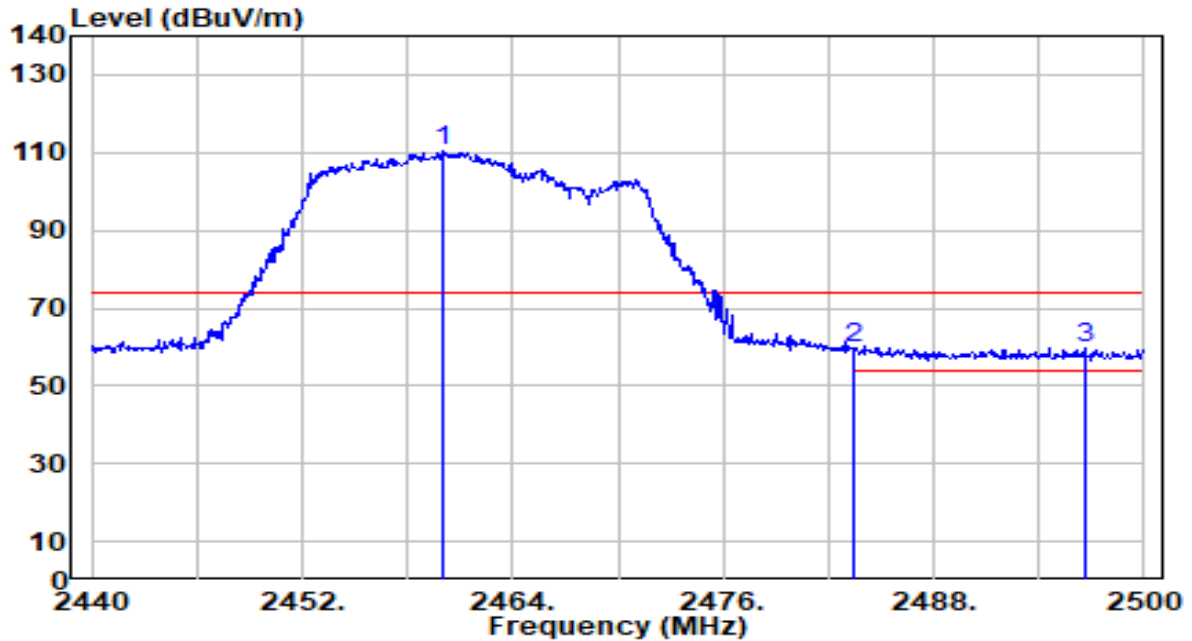


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2459.980 | 79.61 | 30.56 | 110.17 | N/A | N/A | 179 | 310 | Peak |
| 2 | 2483.500 | 28.95 | 30.59 | 59.54 | -14.46 | 74.00 | 179 | 310 | Peak |
| 3 | * 2496.580 | 29.35 | 30.61 | 59.96 | -14.04 | 74.00 | 179 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

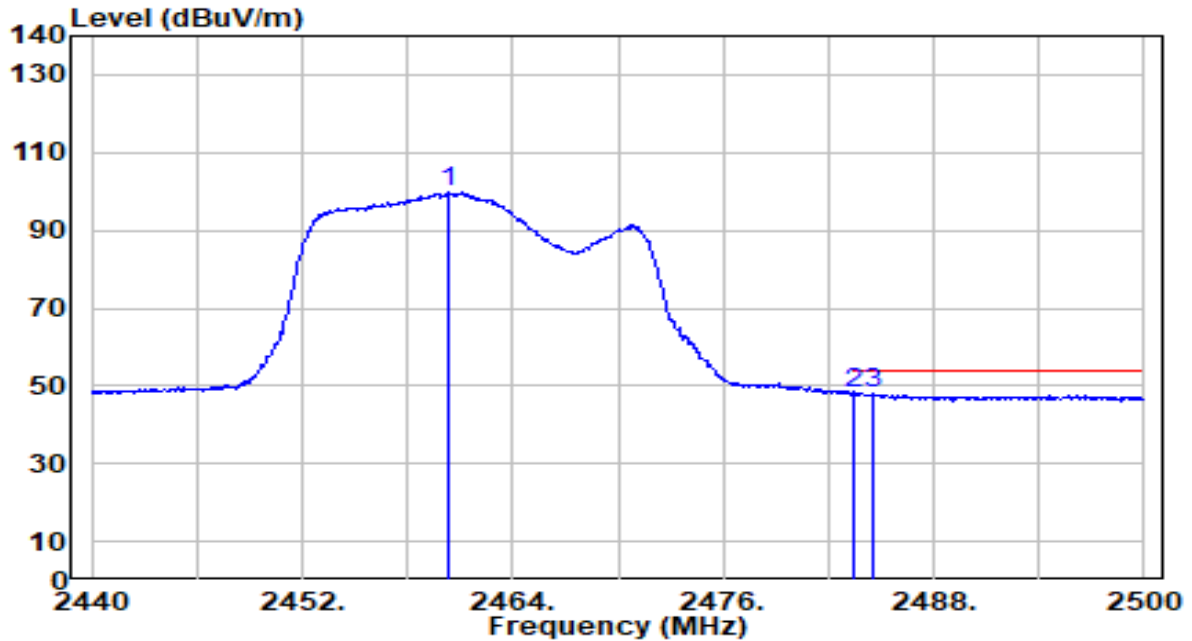


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.340 | 69.12 | 30.56 | 99.67 | N/A | N/A | 179 | 310 | Average |
| 2 | 2483.500 | 17.38 | 30.59 | 47.97 | -6.03 | 54.00 | 179 | 310 | Average |
| 3 | * 2484.520 | 17.48 | 30.59 | 48.06 | -5.94 | 54.00 | 179 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

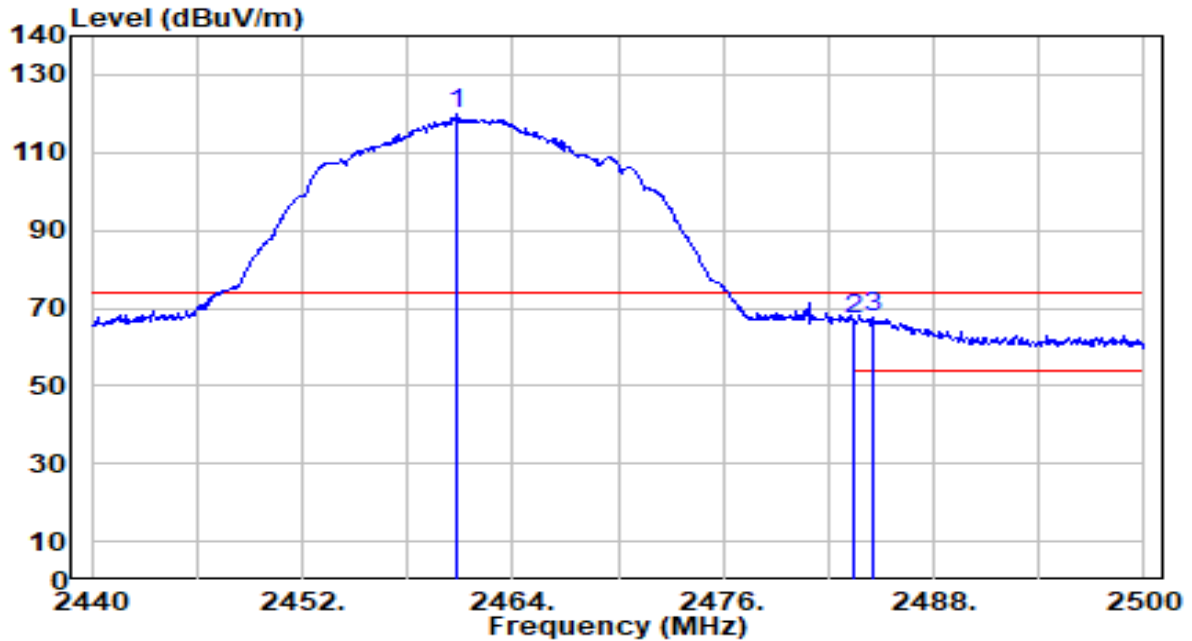


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2460.880 | 89.36 | 30.56 | 119.92 | N/A | N/A | 100 | 54 | Peak |
| 2 | 2483.500 | 36.44 | 30.59 | 67.03 | -6.97 | 74.00 | 100 | 54 | Peak |
| 3 | * 2484.520 | 37.10 | 30.59 | 67.69 | -6.31 | 74.00 | 100 | 54 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|--|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_CH 11 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

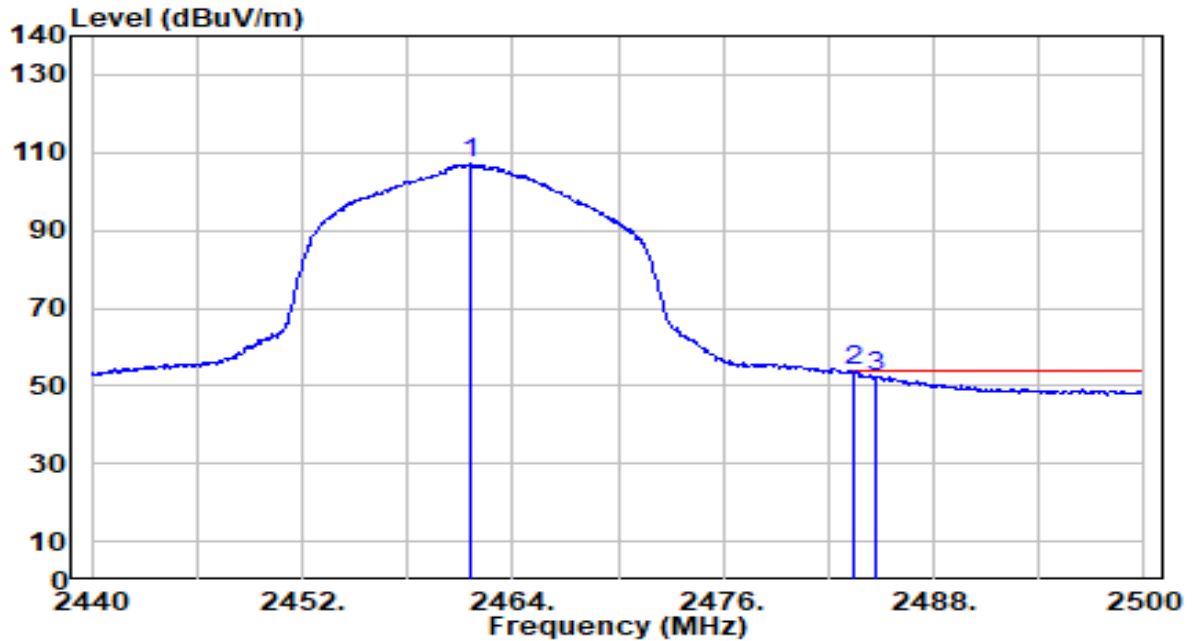


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2461.540 | 76.72 | 30.56 | 107.28 | N/A | N/A | 100 | 54 | Average |
| 2 | * 2483.500 | 23.17 | 30.59 | 53.76 | -0.24 | 54.00 | 100 | 54 | Average |
| 3 | 2484.640 | 21.84 | 30.59 | 52.43 | -1.57 | 54.00 | 100 | 54 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

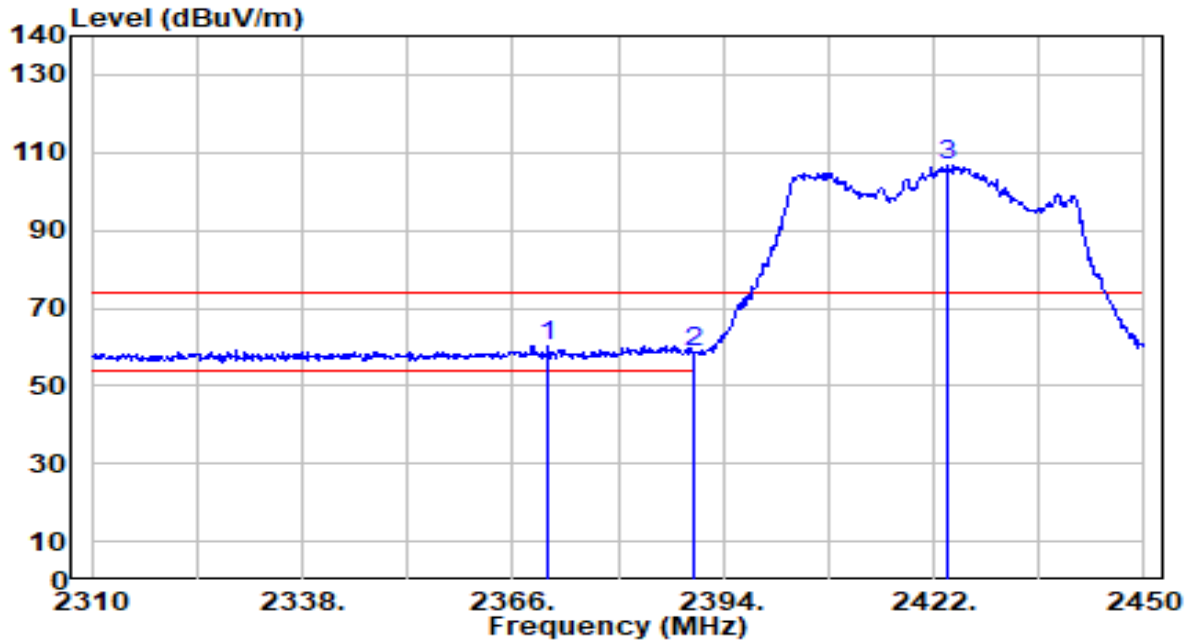


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2370.620 | 29.95 | 30.39 | 60.34 | -13.66 | 74.00 | 138 | 310 | Peak |
| 2 | 2390.000 | 28.03 | 30.45 | 58.48 | -15.52 | 74.00 | 138 | 310 | Peak |
| 3 | 2423.820 | 75.99 | 30.51 | 106.49 | N/A | N/A | 138 | 310 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

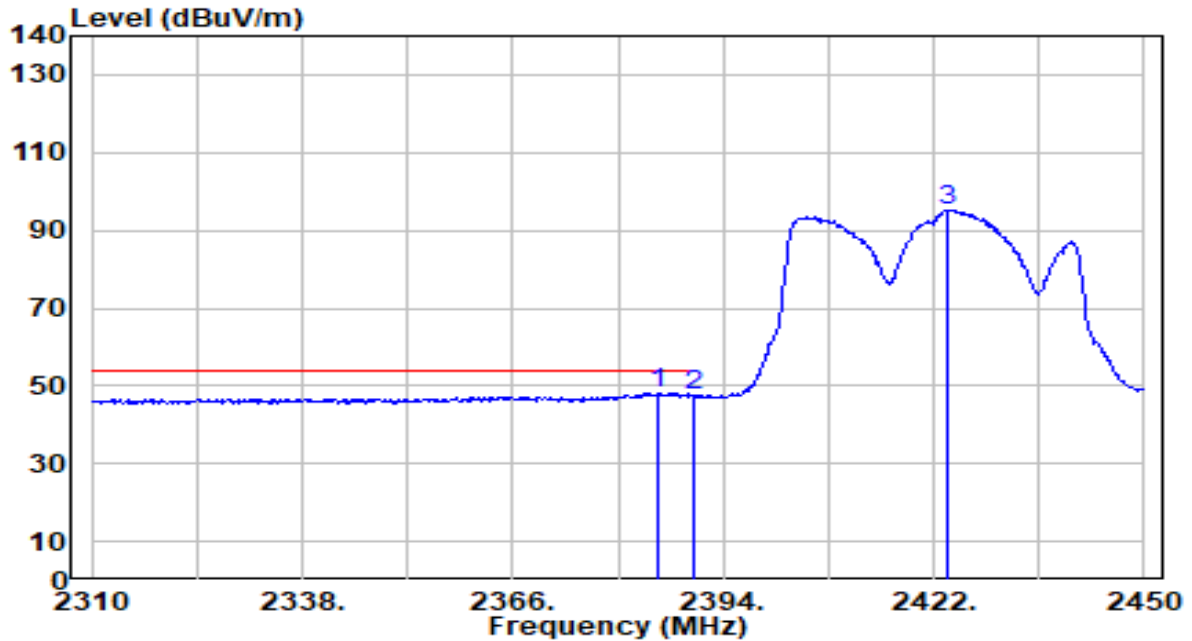


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) | |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|---------|
| 1 | * | 2385.320 | 17.66 | 30.43 | 48.10 | -5.90 | 54.00 | 138 | 310 | Average |
| 2 | | 2390.000 | 16.84 | 30.45 | 47.28 | -6.72 | 54.00 | 138 | 310 | Average |
| 3 | | 2423.960 | 64.80 | 30.51 | 95.31 | N/A | N/A | 138 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

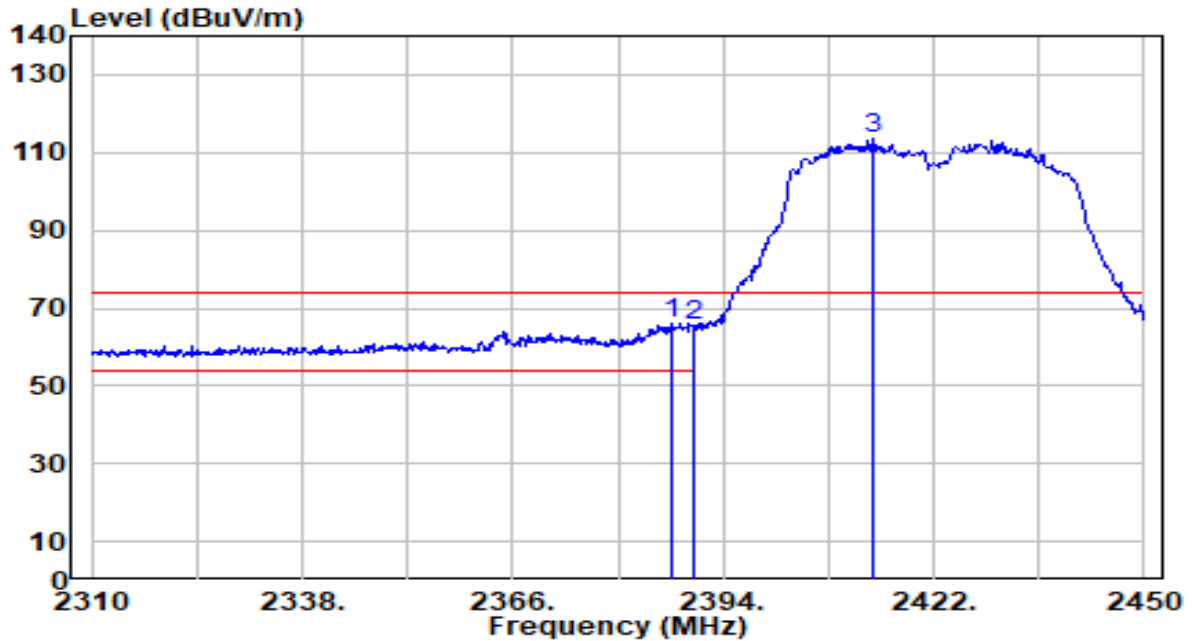


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2387.280 | 35.69 | 30.44 | 66.13 | -7.87 | 74.00 | 100 | 58 | Peak |
| 2 | 2390.000 | 35.28 | 30.45 | 65.72 | -8.28 | 74.00 | 100 | 58 | Peak |
| 3 | 2413.880 | 82.87 | 30.49 | 113.36 | N/A | N/A | 100 | 58 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 3 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

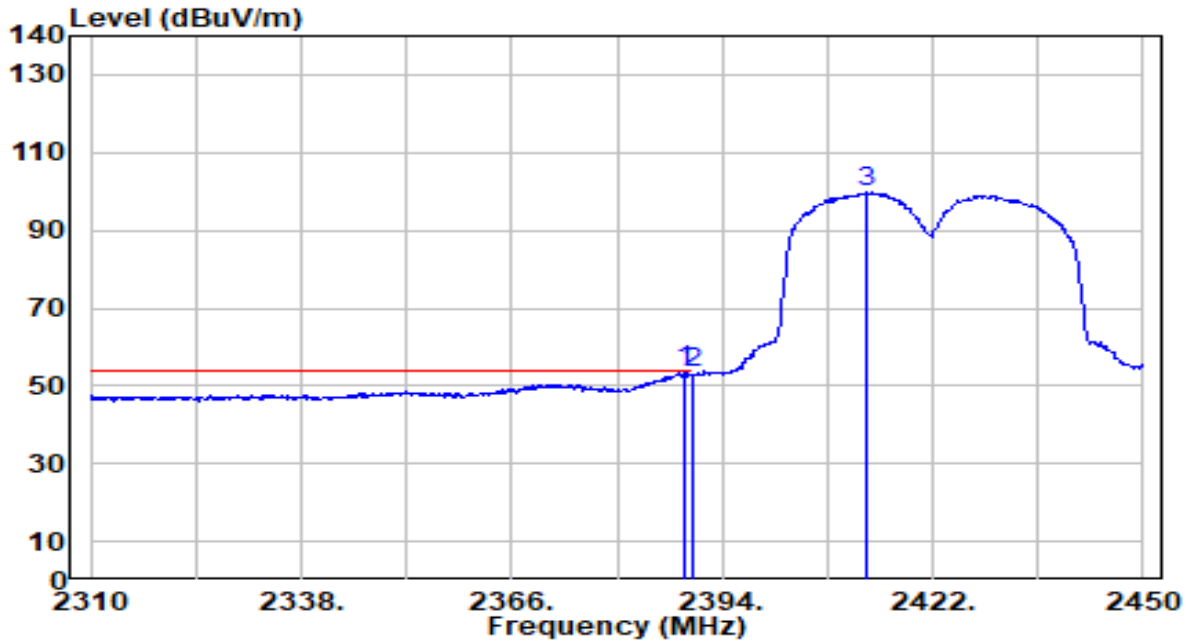


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * | 23.34 | 30.44 | 53.78 | -0.22 | 54.00 | 100 | 58 | Average |
| 2 | | 22.79 | 30.45 | 53.24 | -0.76 | 54.00 | 100 | 58 | Average |
| 3 | | 69.26 | 30.49 | 99.75 | N/A | N/A | 100 | 58 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

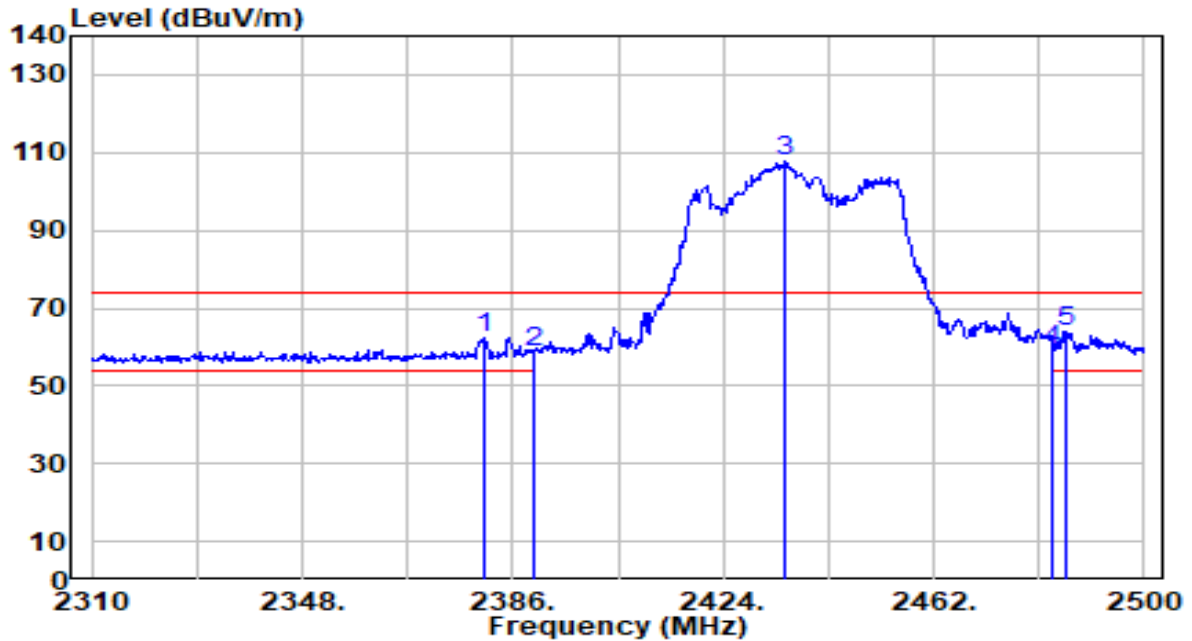


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2380.680 | 32.07 | 30.42 | 62.49 | -11.51 | 74.00 | 165 | 201 | Peak |
| 2 | 2390.000 | 27.98 | 30.45 | 58.43 | -15.57 | 74.00 | 165 | 201 | Peak |
| 3 | 2435.210 | 77.00 | 30.52 | 107.52 | N/A | N/A | 165 | 201 | Peak |
| 4 | 2483.500 | 28.66 | 30.59 | 59.25 | -14.75 | 74.00 | 165 | 201 | Peak |
| 5 | 2485.940 | 33.16 | 30.59 | 63.76 | -10.24 | 74.00 | 165 | 201 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

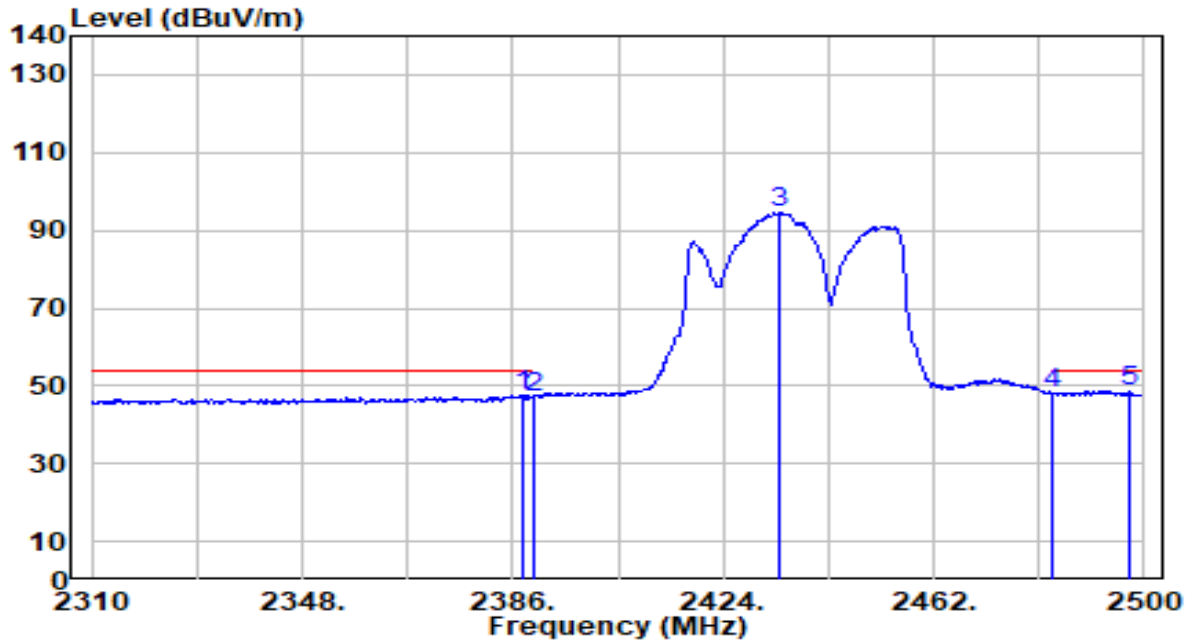


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2387.900 | 17.18 | 30.44 | 47.62 | -6.38 | 54.00 | 165 | 201 | Average |
| 2 | 2390.000 | 16.63 | 30.45 | 47.08 | -6.92 | 54.00 | 165 | 201 | Average |
| 3 | 2434.260 | 64.07 | 30.52 | 94.59 | N/A | N/A | 165 | 201 | Average |
| 4 | 2483.500 | 17.42 | 30.59 | 48.01 | -5.99 | 54.00 | 165 | 201 | Average |
| 5 | * 2497.150 | 17.97 | 30.61 | 48.57 | -5.43 | 54.00 | 165 | 201 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

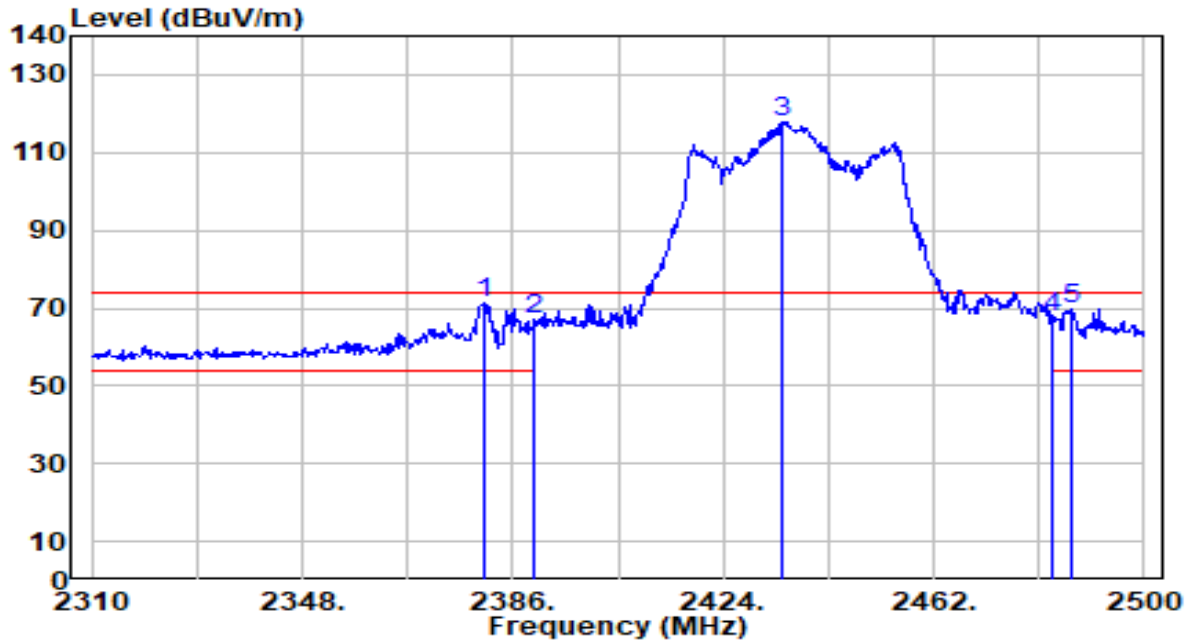


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | * 2381.060 | 41.10 | 30.42 | 71.52 | -2.48 | 74.00 | 156 | 289 | Peak |
| 2 | 2390.000 | 36.57 | 30.45 | 67.02 | -6.98 | 74.00 | 156 | 289 | Peak |
| 3 | 2434.640 | 87.49 | 30.52 | 118.01 | N/A | N/A | 156 | 289 | Peak |
| 4 | 2483.500 | 37.17 | 30.59 | 67.76 | -6.24 | 74.00 | 156 | 289 | Peak |
| 5 | 2487.080 | 39.24 | 30.59 | 69.83 | -4.17 | 74.00 | 156 | 289 | Peak |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 6 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

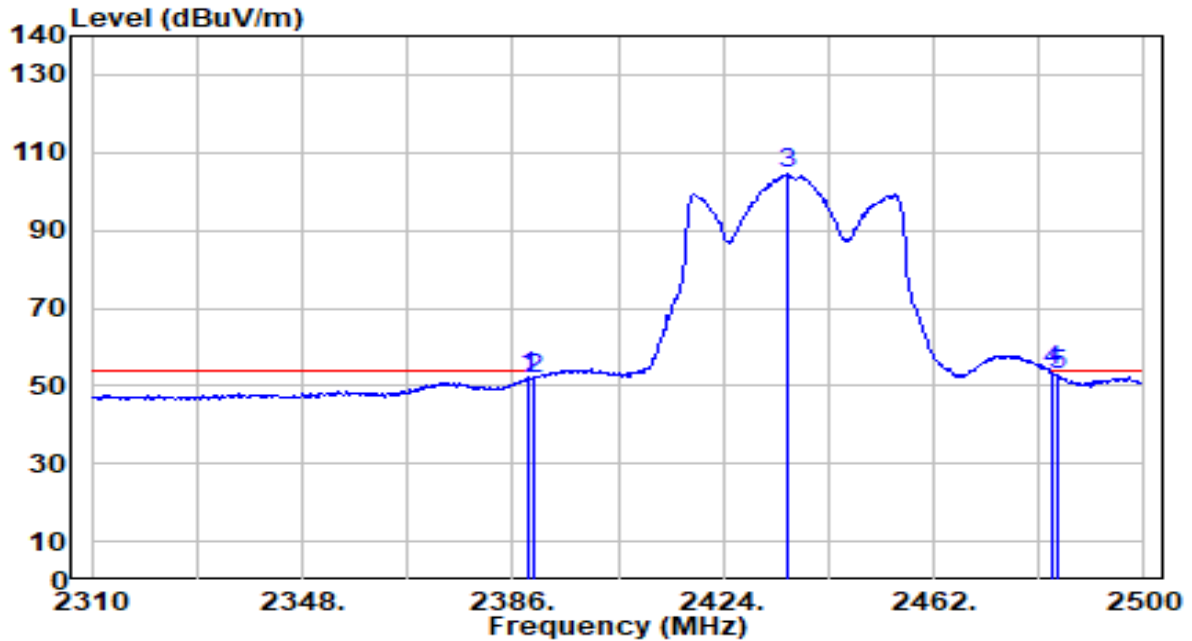


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2389.040 | 21.75 | 30.44 | 52.19 | -1.81 | 54.00 | 156 | 289 | Average |
| 2 | 2390.000 | 21.53 | 30.45 | 51.98 | -2.02 | 54.00 | 156 | 289 | Average |
| 3 | 2435.590 | 74.10 | 30.52 | 104.62 | N/A | N/A | 156 | 289 | Average |
| 4 | * 2483.500 | 23.16 | 30.59 | 53.74 | -0.26 | 54.00 | 156 | 289 | Average |
| 5 | 2484.610 | 22.29 | 30.59 | 52.88 | -1.12 | 54.00 | 156 | 289 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

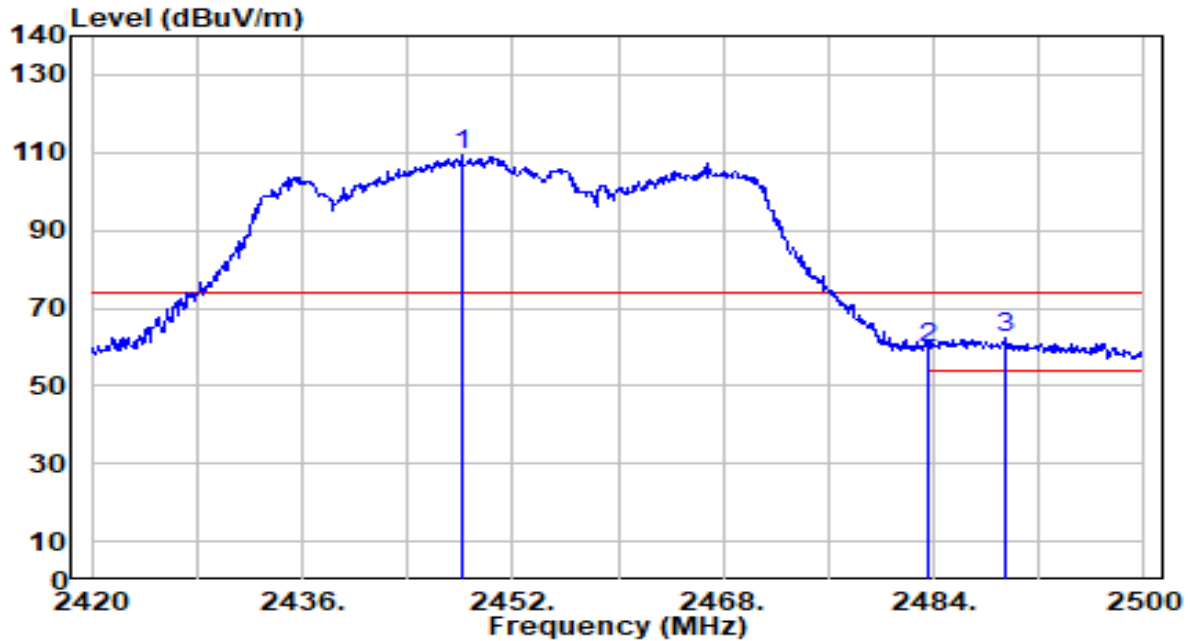


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2448.080 | 78.80 | 30.54 | 109.34 | N/A | N/A | 179 | 310 | Peak |
| 2 | 2483.500 | 29.21 | 30.59 | 59.80 | -14.20 | 74.00 | 179 | 310 | Peak |
| 3 | * 2489.520 | 31.82 | 30.60 | 62.42 | -11.58 | 74.00 | 179 | 310 | Peak |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Horizontal | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

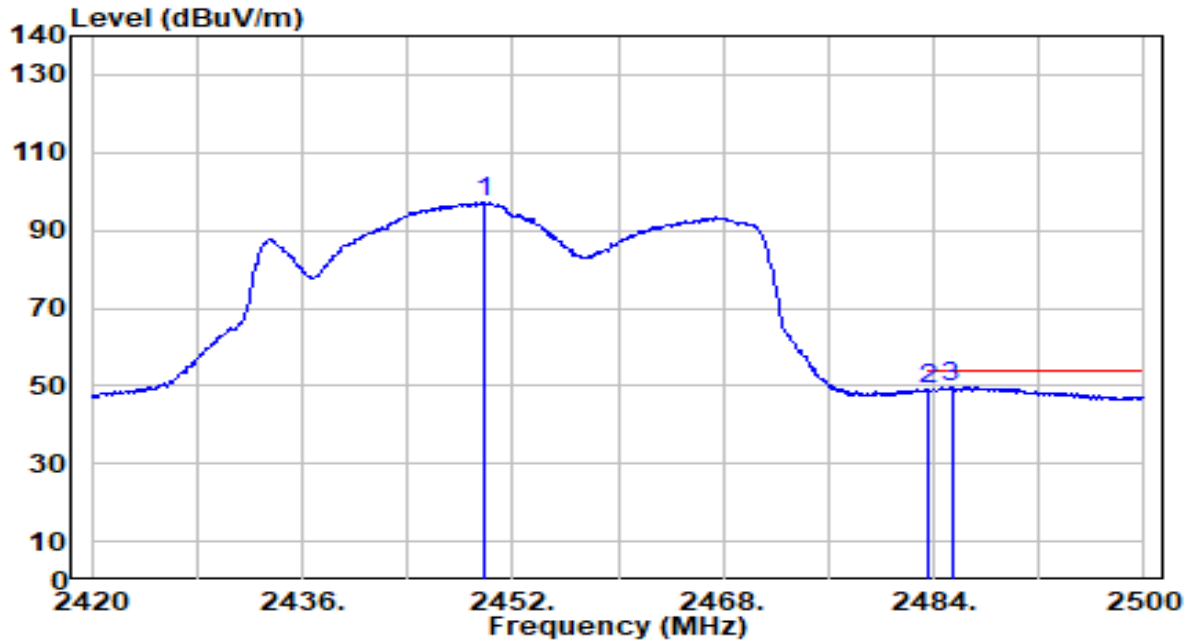


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2449.840 | 66.62 | 30.54 | 97.16 | N/A | N/A | 179 | 310 | Average |
| 2 | 2483.500 | 18.32 | 30.59 | 48.91 | -5.09 | 54.00 | 179 | 310 | Average |
| 3 | * 2485.360 | 18.97 | 30.59 | 49.56 | -4.44 | 54.00 | 179 | 310 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

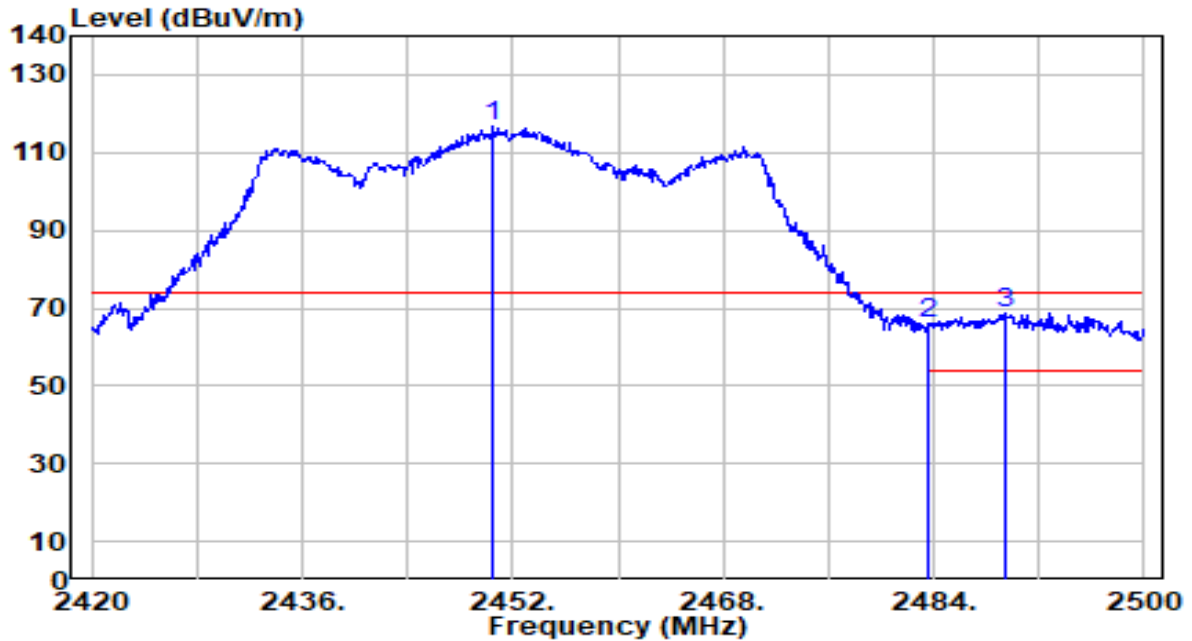


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2450.480 | 86.03 | 30.54 | 116.58 | N/A | N/A | 100 | 54 | Peak |
| 2 | 2483.500 | 35.56 | 30.59 | 66.15 | -7.85 | 74.00 | 100 | 54 | Peak |
| 3 | * 2489.520 | 38.31 | 30.60 | 68.90 | -5.10 | 74.00 | 100 | 54 | Peak |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

| | | | |
|-----------|---|----------------------|---------------|
| EUT | BE5000 Outdoor/indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-07-18 |
| Factor | DRH18-E | Temp. / Humidity | 20°C /65% |
| Polarity | Vertical | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_CH 9 ANT 0+1_ Vertical Ant | Test Voltage | AC 120V/60Hz |

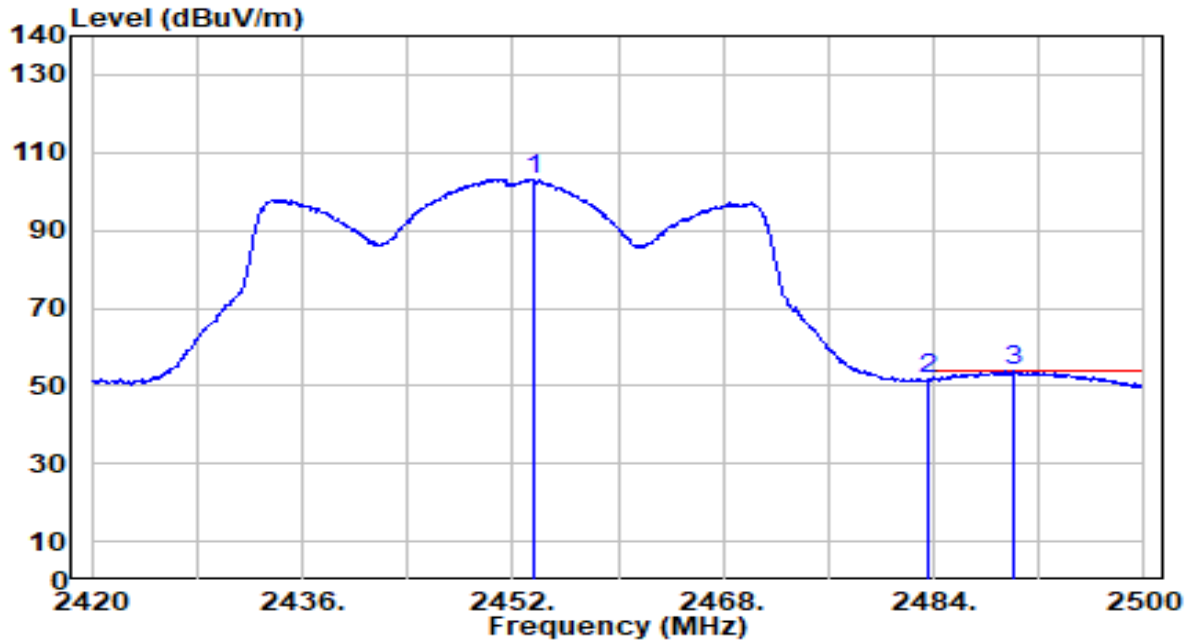

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1 | 2453.520 | 72.61 | 30.55 | 103.16 | N/A | N/A | 100 | 54 | Average |
| 2 | 2483.500 | 21.10 | 30.59 | 51.69 | -2.31 | 54.00 | 100 | 54 | Average |
| 3 | * 2490.160 | 23.26 | 30.60 | 53.86 | -0.14 | 54.00 | 100 | 54 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

| FCC Part 15 Subpart C Paragraph 15.207 Limits | | |
|---|-----------|-----------|
| Frequency (MHz) | QP (dBuV) | AV (dBuV) |
| 0.15 - 0.50 | 66 - 56 | 56 - 46 |
| 0.50 - 5.0 | 56 | 46 |
| 5.0 - 30 | 60 | 50 |

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.8.2. Test Setup

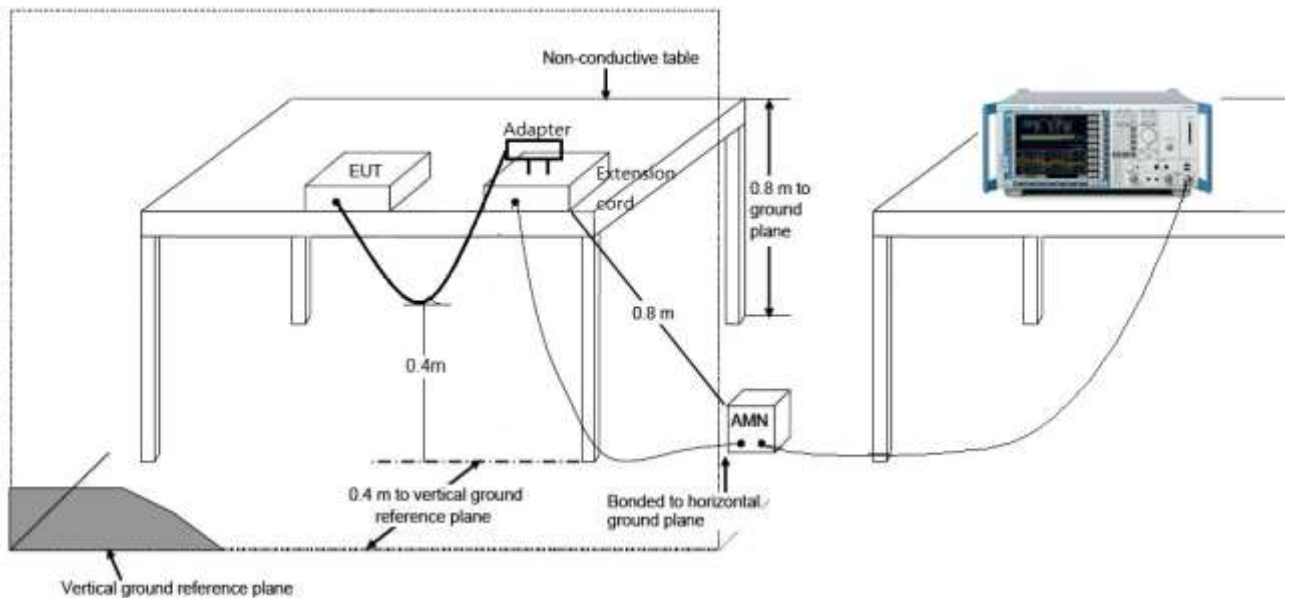

7.8.3. Test Result

Horizontal Antenna Data

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-08-14 |
| Factor | CE_ENV216-L1 (Filter ON) | Temp. / Humidity | 26.8°C /52% |
| Polarity | Line1 | Site / Test Engineer | SR2 / Will |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1_Horizontal Ant | Test Voltage | AC 120V/60Hz |

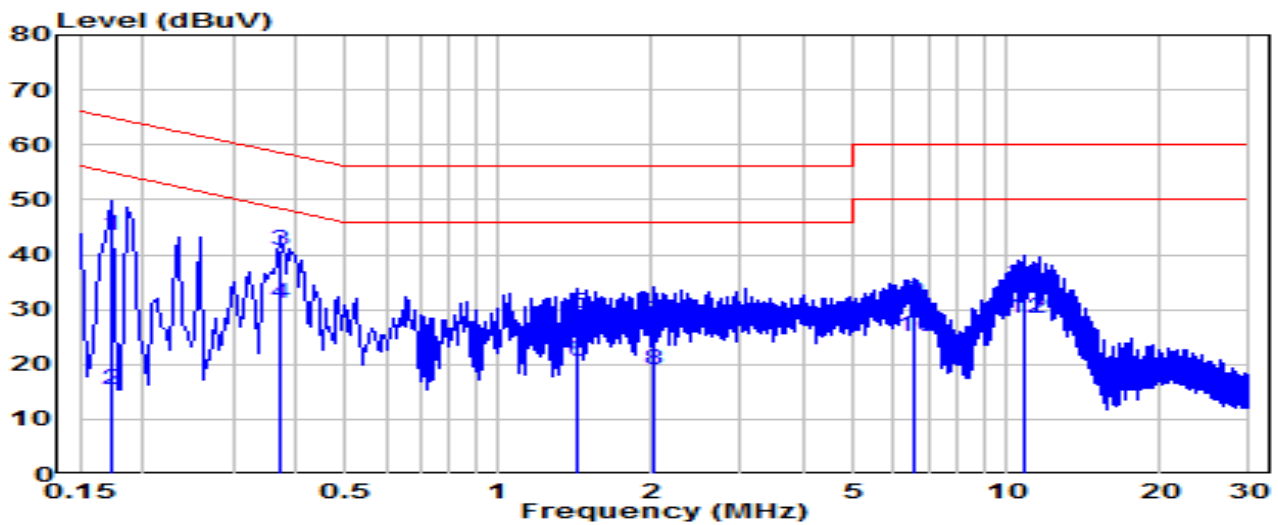


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV) | Margin (dB) | Limit (dBUV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.172 | 33.83 | 9.63 | 43.46 | -21.37 | 64.84 | QP |
| 2 | 0.172 | 5.83 | 9.63 | 15.46 | -39.37 | 54.84 | Average |
| 3 | * 0.370 | 31.16 | 9.64 | 40.80 | -17.69 | 58.49 | QP |
| 4 | * 0.370 | 21.34 | 9.64 | 30.98 | -17.51 | 48.49 | Average |
| 5 | 1.423 | 19.51 | 9.69 | 29.20 | -26.80 | 56.00 | QP |
| 6 | 1.423 | 10.97 | 9.69 | 20.66 | -25.34 | 46.00 | Average |
| 7 | 2.013 | 18.00 | 9.70 | 27.70 | -28.30 | 56.00 | QP |
| 8 | 2.013 | 9.26 | 9.70 | 18.96 | -27.04 | 46.00 | Average |
| 9 | 6.553 | 21.65 | 9.78 | 31.44 | -28.56 | 60.00 | QP |
| 10 | 6.553 | 15.25 | 9.78 | 25.03 | -24.97 | 50.00 | Average |
| 11 | 10.809 | 24.81 | 9.87 | 34.69 | -25.31 | 60.00 | QP |
| 12 | 10.809 | 18.59 | 9.87 | 28.47 | -21.53 | 50.00 | Average |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).

3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-08-14 |
| Factor | CE_ENV216-N (Filter ON) | Temp. / Humidity | 26.8°C /52% |
| Polarity | Neutral | Site / Test Engineer | SR2 / Will |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1_Horizontal Ant | Test Voltage | AC 120V/60Hz |

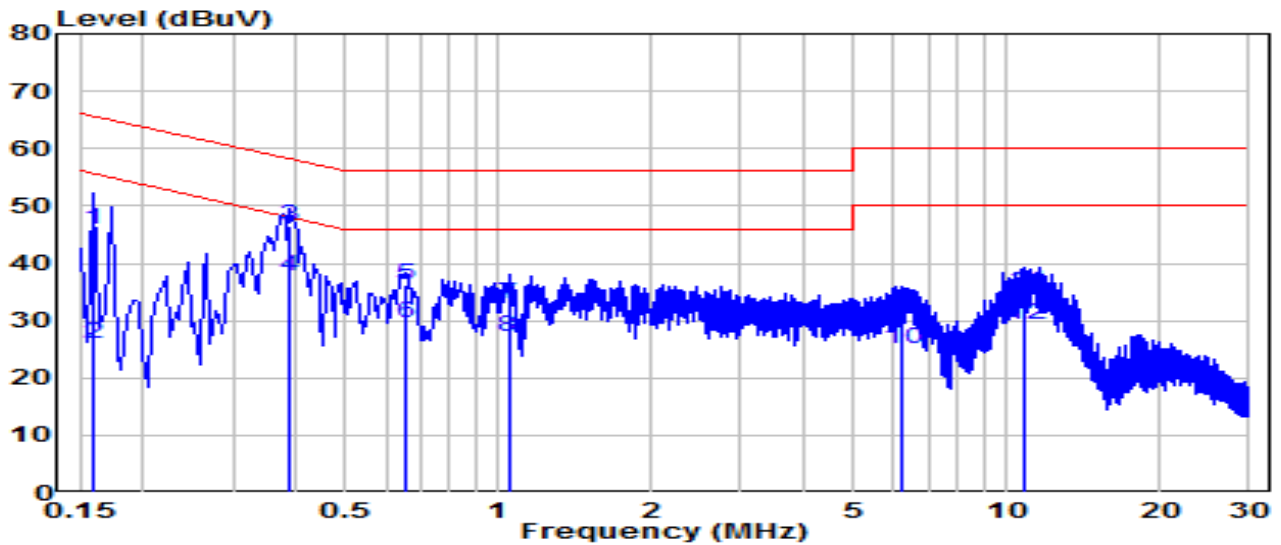


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.159 | 36.13 | 9.63 | 45.76 | -19.76 | 65.52 | QP |
| 2 | 0.159 | 16.24 | 9.63 | 25.87 | -29.64 | 55.52 | Average |
| 3 | * 0.388 | 36.88 | 9.64 | 46.52 | -11.58 | 58.10 | QP |
| 4 | * 0.388 | 28.03 | 9.64 | 37.68 | -10.42 | 48.10 | Average |
| 5 | 0.654 | 26.57 | 9.66 | 36.23 | -19.77 | 56.00 | QP |
| 6 | 0.654 | 19.91 | 9.66 | 29.57 | -16.43 | 46.00 | Average |
| 7 | 1.045 | 23.26 | 9.68 | 32.94 | -23.06 | 56.00 | QP |
| 8 | 1.045 | 17.40 | 9.68 | 27.08 | -18.92 | 46.00 | Average |
| 9 | 6.211 | 21.78 | 9.79 | 31.57 | -28.43 | 60.00 | QP |
| 10 | 6.211 | 15.19 | 9.79 | 24.98 | -25.02 | 50.00 | Average |
| 11 | 10.899 | 25.00 | 9.90 | 34.90 | -25.10 | 60.00 | QP |
| 12 | 10.899 | 19.41 | 9.90 | 29.31 | -20.69 | 50.00 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-08-14 |
| Factor | CE_ENV216-L1 (Filter ON) | Temp. / Humidity | 26.8°C /52% |
| Polarity | Line1 | Site / Test Engineer | SR2 / Will |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1_Horizontal Ant | Test Voltage | AC 240V/60Hz |

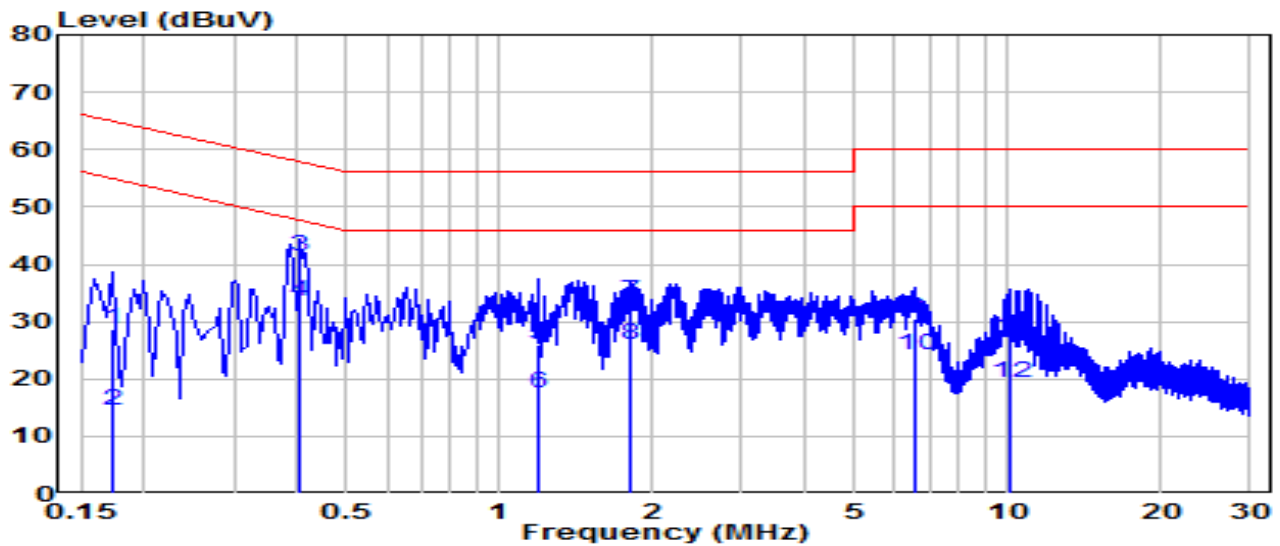


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.172 | 18.93 | 9.63 | 28.56 | -36.28 | 64.84 | QP |
| 2 | 0.172 | 4.74 | 9.63 | 14.37 | -40.47 | 54.84 | Average |
| 3 | * 0.406 | 31.65 | 9.64 | 41.30 | -16.42 | 57.72 | QP |
| 4 | * 0.406 | 23.89 | 9.64 | 33.53 | -14.19 | 47.72 | Average |
| 5 | 1.194 | 16.25 | 9.68 | 25.94 | -30.06 | 56.00 | QP |
| 6 | 1.194 | 7.77 | 9.68 | 17.46 | -28.54 | 46.00 | Average |
| 7 | 1.801 | 23.79 | 9.70 | 33.48 | -22.52 | 56.00 | QP |
| 8 | 1.801 | 16.37 | 9.70 | 26.07 | -19.93 | 46.00 | Average |
| 9 | 6.611 | 20.76 | 9.79 | 30.54 | -29.46 | 60.00 | QP |
| 10 | 6.611 | 14.40 | 9.79 | 24.19 | -25.81 | 50.00 | Average |
| 11 | 10.152 | 17.22 | 9.87 | 27.09 | -32.91 | 60.00 | QP |
| 12 | 10.152 | 9.34 | 9.87 | 19.21 | -30.79 | 50.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-08-14 |
| Factor | CE_ENV216-N (Filter ON) | Temp. / Humidity | 26.8°C /52% |
| Polarity | Neutral | Site / Test Engineer | SR2 / Will |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1_Horizontal Ant | Test Voltage | AC 240V/60Hz |

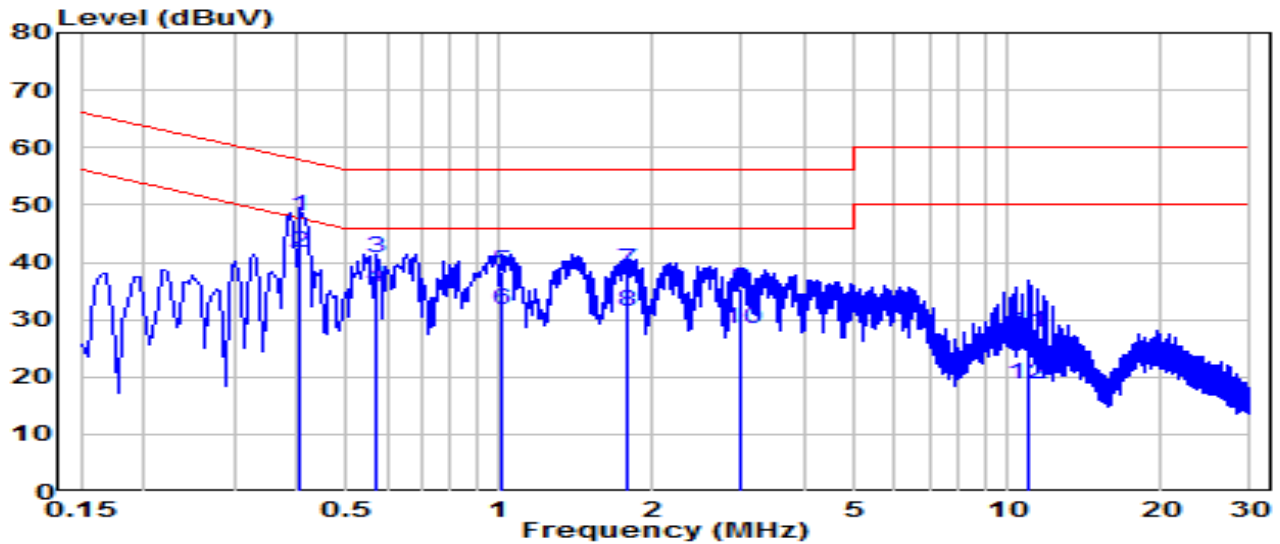


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | * 0.406 | 38.41 | 9.64 | 48.05 | -9.67 | 57.72 | QP |
| 2 | * 0.406 | 32.01 | 9.64 | 41.66 | -6.06 | 47.72 | Average |
| 3 | 0.573 | 31.05 | 9.66 | 40.71 | -15.29 | 56.00 | QP |
| 4 | 0.573 | 25.99 | 9.66 | 35.65 | -10.35 | 46.00 | Average |
| 5 | 1.014 | 28.79 | 9.68 | 38.47 | -17.53 | 56.00 | QP |
| 6 | 1.014 | 21.88 | 9.68 | 31.57 | -14.43 | 46.00 | Average |
| 7 | 1.792 | 29.03 | 9.70 | 38.73 | -17.27 | 56.00 | QP |
| 8 | 1.792 | 21.63 | 9.70 | 31.34 | -14.66 | 46.00 | Average |
| 9 | 2.994 | 25.55 | 9.72 | 35.28 | -20.72 | 56.00 | QP |
| 10 | 2.994 | 18.54 | 9.72 | 28.26 | -17.74 | 46.00 | Average |
| 11 | 10.922 | 17.75 | 9.90 | 27.65 | -32.35 | 60.00 | QP |
| 12 | 10.922 | 8.78 | 9.90 | 18.68 | -31.32 | 50.00 | Average |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

Vertical Antenna Data

| | | | |
|-----------|--|----------------------|--------------|
| EUT | BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-08-14 |
| Factor | CE_ENV216-L1 (Filter ON) | Temp. / Humidity | 26.8°C /52% |
| Polarity | Line1 | Site / Test Engineer | SR2 / Will |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1_Vertical Ant | Test Voltage | AC 120V/60Hz |

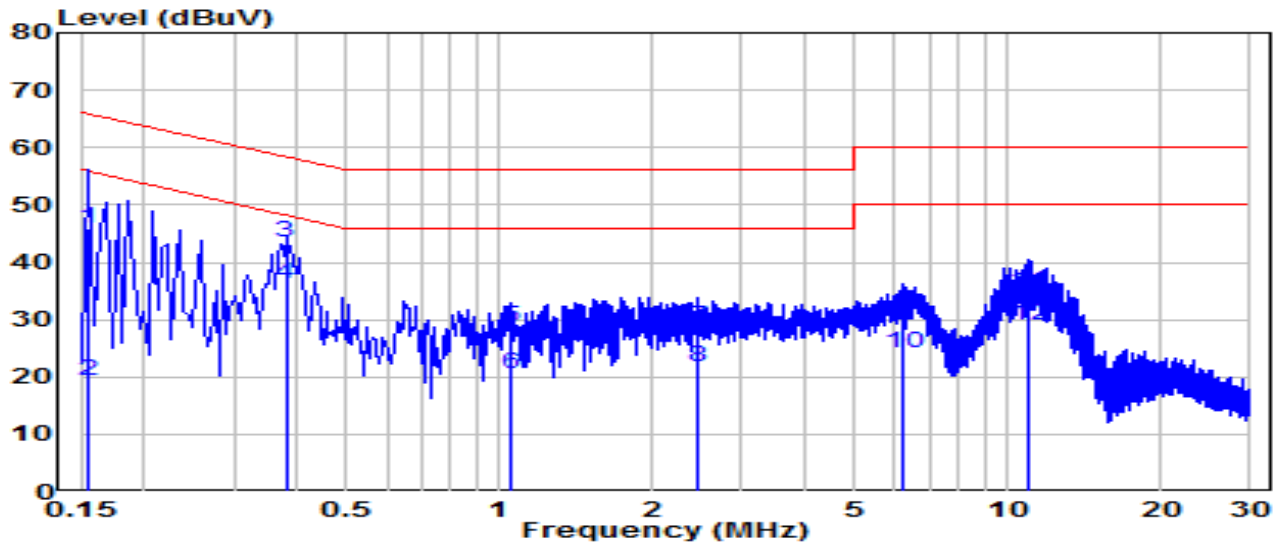


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB) | Measurement (dBUV) | Margin (dB) | Limit (dBUV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.154 | 36.40 | 9.63 | 46.03 | -19.72 | 65.75 | QP |
| 2 | 0.154 | 9.78 | 9.63 | 19.41 | -36.34 | 55.75 | Average |
| 3 | * 0.379 | 33.68 | 9.64 | 43.32 | -14.97 | 58.29 | QP |
| 4 | * 0.379 | 26.71 | 9.64 | 36.35 | -11.94 | 48.29 | Average |
| 5 | 1.054 | 19.08 | 9.68 | 28.76 | -27.24 | 56.00 | QP |
| 6 | 1.054 | 10.75 | 9.68 | 20.43 | -25.57 | 46.00 | Average |
| 7 | 2.449 | 18.99 | 9.71 | 28.70 | -27.30 | 56.00 | QP |
| 8 | 2.449 | 12.04 | 9.71 | 21.75 | -24.25 | 46.00 | Average |
| 9 | 6.251 | 20.91 | 9.78 | 30.68 | -29.32 | 60.00 | QP |
| 10 | 6.251 | 14.44 | 9.78 | 24.22 | -25.78 | 50.00 | Average |
| 11 | 10.931 | 24.83 | 9.88 | 34.71 | -25.29 | 60.00 | QP |
| 12 | 10.931 | 19.00 | 9.88 | 28.88 | -21.12 | 50.00 | Average |

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-08-14 |
| Factor | CE_ENV216-N (Filter ON) | Temp. / Humidity | 26.8°C /52% |
| Polarity | Neutral | Site / Test Engineer | SR2 / Will |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1_Veritical Ant | Test Voltage | AC 120V/60Hz |

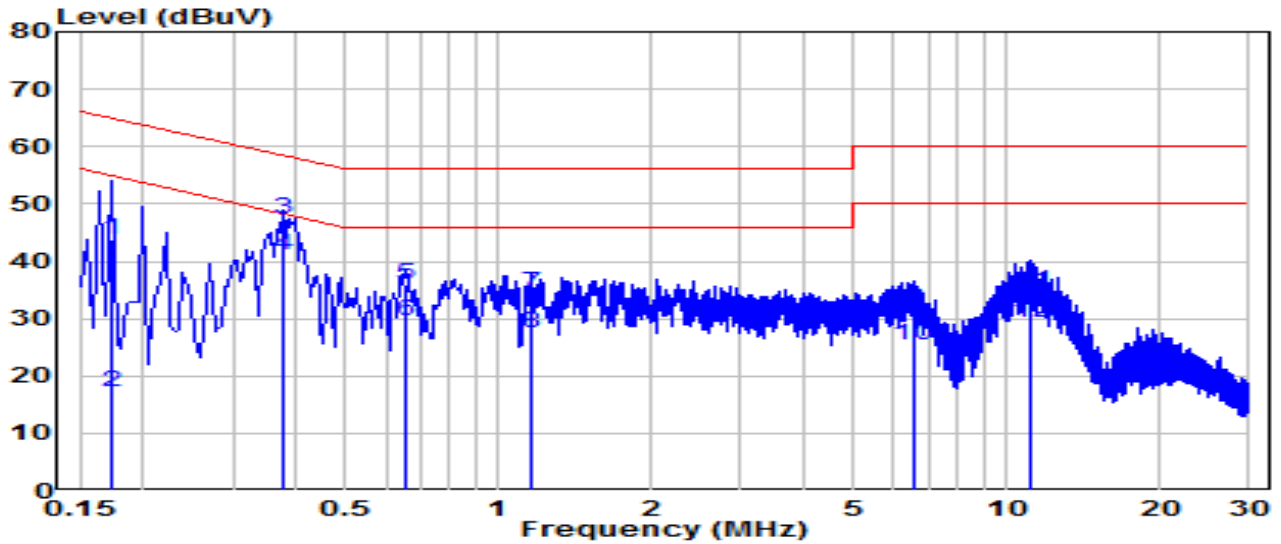


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | 0.172 | 34.12 | 9.63 | 43.75 | -21.09 | 64.84 | QP |
| 2 | 0.172 | 7.56 | 9.63 | 17.19 | -37.64 | 54.84 | Average |
| 3 | * 0.375 | 37.75 | 9.64 | 47.39 | -11.00 | 58.39 | QP |
| 4 | * 0.375 | 31.30 | 9.64 | 40.94 | -7.45 | 48.39 | Average |
| 5 | 0.654 | 26.39 | 9.66 | 36.05 | -19.95 | 56.00 | QP |
| 6 | 0.654 | 20.04 | 9.66 | 29.70 | -16.30 | 46.00 | Average |
| 7 | 1.158 | 24.87 | 9.68 | 34.56 | -21.44 | 56.00 | QP |
| 8 | 1.158 | 17.90 | 9.68 | 27.58 | -18.42 | 46.00 | Average |
| 9 | 6.535 | 21.89 | 9.80 | 31.69 | -28.31 | 60.00 | QP |
| 10 | 6.535 | 15.45 | 9.80 | 25.25 | -24.75 | 50.00 | Average |
| 11 | 11.178 | 24.93 | 9.90 | 34.84 | -25.16 | 60.00 | QP |
| 12 | 11.178 | 19.30 | 9.90 | 29.21 | -20.79 | 50.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|---|----------------------|--------------|
| EUT | BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-08-14 |
| Factor | CE_ENV216-L1 (Filter ON) | Temp. / Humidity | 26.8°C /52% |
| Polarity | Line1 | Site / Test Engineer | SR2 / Will |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1_Vertical Ant | Test Voltage | AC 240V/60Hz |

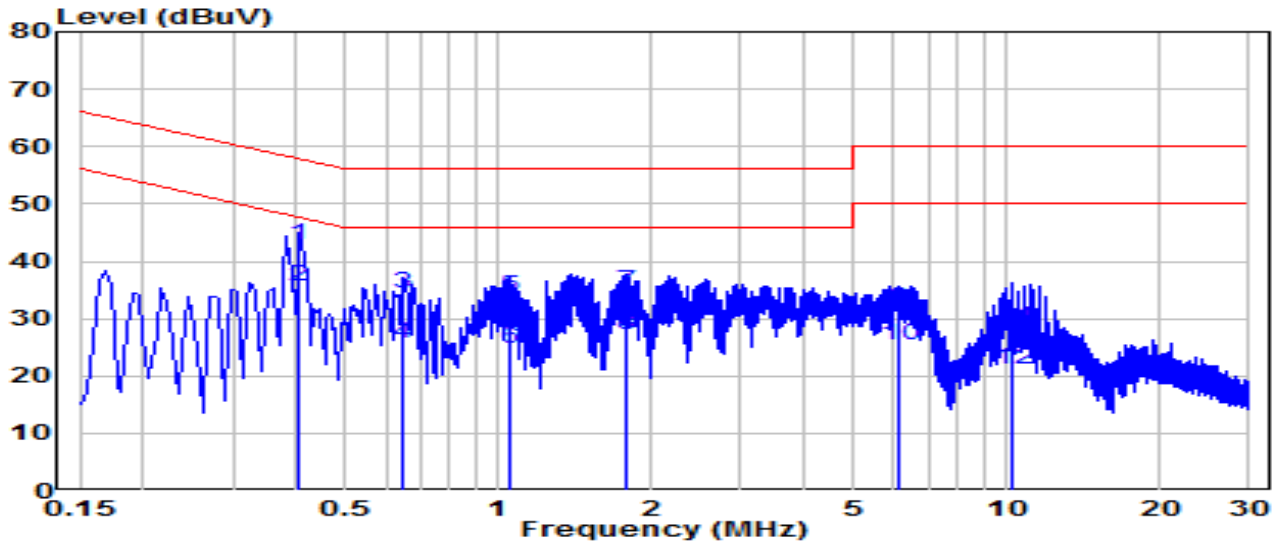


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | * 0.406 | 33.15 | 9.64 | 42.79 | -14.93 | 57.72 | QP |
| 2 | * 0.406 | 25.87 | 9.64 | 35.51 | -12.21 | 47.72 | Average |
| 3 | 0.649 | 24.77 | 9.66 | 34.43 | -21.57 | 56.00 | QP |
| 4 | 0.649 | 16.01 | 9.66 | 25.67 | -20.33 | 46.00 | Average |
| 5 | 1.054 | 24.25 | 9.68 | 33.93 | -22.07 | 56.00 | QP |
| 6 | 1.054 | 15.00 | 9.68 | 24.68 | -21.32 | 46.00 | Average |
| 7 | 1.788 | 24.99 | 9.70 | 34.69 | -21.31 | 56.00 | QP |
| 8 | 1.788 | 17.55 | 9.70 | 27.24 | -18.76 | 46.00 | Average |
| 9 | 6.143 | 22.04 | 9.77 | 31.81 | -28.19 | 60.00 | QP |
| 10 | 6.143 | 15.59 | 9.77 | 25.36 | -24.64 | 50.00 | Average |
| 11 | 10.287 | 18.56 | 9.87 | 28.43 | -31.57 | 60.00 | QP |
| 12 | 10.287 | 11.13 | 9.87 | 21.00 | -29.00 | 50.00 | Average |

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

| | | | |
|-----------|--|----------------------|--------------|
| EUT | BE5000 Outdoor/Indoor Mesh Wi-Fi 7 Router | Date of Test | 2024-08-14 |
| Factor | CE_ENV216-N (Filter ON) | Temp. / Humidity | 26.8°C /52% |
| Polarity | Neutral | Site / Test Engineer | SR2 / Will |
| Test Mode | 802.11n-20MHz_TX_CH 6_ANT 0+1_Vertical Ant | Test Voltage | AC 240V/60Hz |

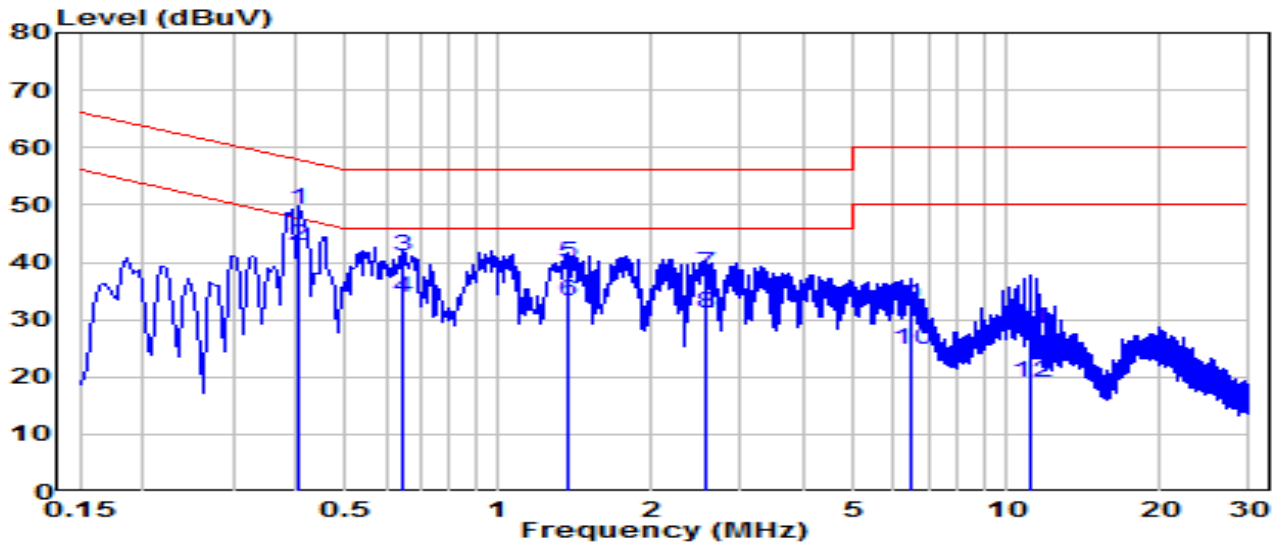

| No | Frequency (MHz) | Reading (dBuV) | C.F (dB) | Measurement (dBuV) | Margin (dB) | Limit (dBuV) | Remark (QP/PK/AV) |
|----|-----------------|----------------|----------|--------------------|-------------|--------------|-------------------|
| 1 | * 0.406 | 39.44 | 9.64 | 49.08 | -8.64 | 57.72 | QP |
| 2 | * 0.406 | 33.27 | 9.64 | 42.91 | -4.81 | 47.72 | Average |
| 3 | 0.649 | 31.40 | 9.66 | 41.06 | -14.94 | 56.00 | QP |
| 4 | 0.649 | 24.06 | 9.66 | 33.72 | -12.28 | 46.00 | Average |
| 5 | 1.378 | 30.27 | 9.69 | 39.96 | -16.04 | 56.00 | QP |
| 6 | 1.378 | 23.63 | 9.69 | 33.32 | -12.68 | 46.00 | Average |
| 7 | 2.571 | 28.27 | 9.72 | 37.99 | -18.01 | 56.00 | QP |
| 8 | 2.571 | 21.37 | 9.72 | 31.09 | -14.91 | 46.00 | Average |
| 9 | 6.449 | 22.42 | 9.80 | 32.22 | -27.78 | 60.00 | QP |
| 10 | 6.449 | 15.07 | 9.80 | 24.87 | -25.13 | 50.00 | Average |
| 11 | 11.133 | 18.47 | 9.90 | 28.37 | -31.63 | 60.00 | QP |
| 12 | 11.133 | 9.27 | 9.90 | 19.17 | -30.83 | 50.00 | Average |

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
- Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is compliance with Part 15C of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2406TW0101-UT” file.

Appendix B : External Photograph

Refer to “2406TW0101-UE” file.

Appendix C : Internal Photograph

Refer to “2406TW0101-UI” file.

————— The End —————