

# FCC Test Report

**Applicant** : Gopod Group Limited.

**Address** : 6/F., 235 Wing Lok Trade Centre, Sheung Wan,  
Hong Kong, China

**Product Name** : Qi2 Magnetic Wireless Charge Cable

**Report Date** : Jul. 29, 2024

**Shenzhen Anbotek Compliance Laboratory Limited**



**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com.cn



# Contents

1. General Information .....	5
1.1. Client Information .....	5
1.2. Description of Device (EUT) .....	5
1.3. Auxiliary Equipment Used During Test .....	6
1.4. Description of Test Modes .....	6
1.5. Measurement Uncertainty .....	6
1.6. Test Summary .....	7
1.7. Description of Test Facility .....	8
1.8. Disclaimer .....	8
1.9. Test Equipment List .....	9
2. Antenna requirement .....	10
2.1. Conclusion .....	10
3. Conducted Emission at AC power line .....	11
3.1. EUT Operation .....	11
3.2. Test Setup .....	11
3.3. Test Data .....	12
4. Emissions in frequency bands (below 30MHz) .....	14
4.1. EUT Operation .....	14
4.2. Test Setup .....	15
4.3. Test Data .....	16
5. Emissions in frequency bands (30MHz - 1GHz) .....	20
5.1. EUT Operation .....	20
5.2. Test Setup .....	21
5.3. Test Data .....	22
6. 20dB Occupy Bandwidth Test .....	24
6.1. EUT Operation .....	24
6.2. Test Setup .....	24
6.3. Test Data .....	25
APPENDIX I -- TEST SETUP PHOTOGRAPH .....	27
APPENDIX II -- EXTERNAL PHOTOGRAPH .....	27
APPENDIX III -- INTERNAL PHOTOGRAPH .....	27



Report No.: 182512C400191101

FCC ID: 2AQZH-D467C6

Page 3 of 27

# TEST REPORT

Applicant : Gopod Group Limited.  
Manufacturer : Gopod Group Holding Limited  
Product Name : Qi2 Magnetic Wireless Charge Cable  
Model No. : D467C6  
Trade Mark : Gmobi  
Rating(s) : Input: 5V= 2A/9V= 2.22A/12V= 1.67A  
Output: 5W/7.5W/15W  
Test Standard(s) : **47 CFR Part 15.209**  
**ANSI C63.10-2020**

The device described above is tested by Shenzhen Anbotek Compliance Laboratory Limited to determine the maximum emission levels emanating from the device and the severe levels of the device can endure and its performance criterion. The measurement results are contained in this test report and Shenzhen Anbotek Compliance Laboratory Limited is assumed full of responsibility for the accuracy and completeness of these measurements. Also, this report shows that the EUT (Equipment Under Test) is technically compliant with above listed standard(s) requirements. This report applies to above tested sample only and shall not be reproduced in part without written approval of Shenzhen Anbotek Compliance Laboratory Limited.


Date of Receipt:

Jun. 15, 2024

Date of Test:

Jun. 17, 2024 to Jun. 26, 2024

Prepared By:

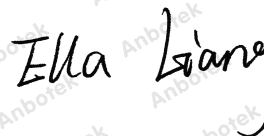

(Ella Liang)

Approved &amp; Authorized Signer:



(Edward Pan)

## Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com.cn





Revision History

Report Version	Description	Issued Date
R00	Original Issue.	Jul. 29, 2024



## 1. General Information

### 1.1. Client Information

Applicant	:	Gopod Group Limited.
Address	:	6/F., 235 Wing Lok Trade Centre, Sheung Wan, Hong Kong, China
Manufacturer	:	Gopod Group Holding Limited
Address	:	301, 4/F, 5/F, 6/F, Building#8 & 6/F, 7/F, Tower#C, Lian Jian Industrial Park II, Shang Henglang Community, DaLang St, LongHua Dist, Shenzhen, China
Factory	:	Gopod Group Holding Limited
Address	:	301, 4/F, 5/F, 6/F, Building#8 & 6/F, 7/F, Tower#C, Lian Jian Industrial Park II, Shang Henglang Community, DaLang St, LongHua Dist, Shenzhen, China

### 1.2. Description of Device (EUT)

Product Name	:	Qi2 Magnetic Wireless Charge Cable
Model No.	:	D467C6
Trade Mark	:	Gmobi
Test Power Supply	:	AC 120V/60Hz for Adapter
Test Sample No.	:	1-2-1(Normal Sample), 1-2-2(Engineering Sample)
Adapter	:	N/A
<b>RF Specification</b>		
Operation Frequency	:	115kHz-360kHz
Modulation Type	:	FSK
Antenna Type	:	Inductive loop coil Antenna
<b>Remark:</b> (1) All of the RF specification are provided by customer. (2) For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.		



### 1.3. Auxiliary Equipment Used During Test

Title	Manufacturer	Model No.	Serial No.
Xiaomi 33W adapter	Xiaomi	MDY-11-EX	SA62212LA04358J
Apple Phone	Apple	iPhone 12	DNPDJC7T0DYF

### 1.4. Description of Test Modes

Pretest Modes	Descriptions
TM1	WTP Mode (5W 1% Load)
TM2	WTP Mode (5W 50% Load)
TM3	WTP Mode (5W 99% Load)
TM4	WTP Mode (7.5W 1% Load)
TM5	WTP Mode (7.5W 50% Load)
TM6	WTP Mode (7.5W 99% Load)
TM7	WTP Mode (15W 1% Load)
TM8	WTP Mode (15W 50% Load)
TM9	WTP Mode (15W 99% Load)
TM10	Standby Mode

### 1.5. Measurement Uncertainty

Parameter	Uncertainty
Conducted emissions (AMN 150kHz~30MHz)	3.4dB
Radiated emissions (Below 30MHz)	3.53dB
Radiated spurious emissions (30MHz~1GHz)	Horizontal: 3.92dB; Vertical: 4.52dB
The measurement uncertainty and decision risk evaluated according to AB/WI-RF-F-032. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.	





**1.6. Test Summary**

Test Items	Test Modes	Status
Antenna requirement	/	P
Conducted Emission at AC power line	Mode1,2,3,4,5,6,7,8,9,10	P
Emissions in frequency bands (below 30MHz)	Mode1,2,3,4,5,6,7,8,9,10	P
Emissions in frequency bands (30MHz - 1GHz)	Mode1,2,3,4,5,6,7,8,9,10	P
20dB Occupy Bandwidth Test	Mode1,2,3,4,5,6,7,8,9,10	P
Note: P: Pass N: N/A, not applicable		

**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline  
400-003-0500  
www.anbotek.com.cn



## 1.7. Description of Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

### **FCC-Registration No.:434132**

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No. 434132.

### **ISED-Registration No.: 8058A**

Shenzhen Anbotech Compliance Laboratory Limited, EMC Laboratory has been registered and fully described in a report filed with the (ISED) Innovation, Science and Economic Development Canada. The acceptance letter from the ISED is maintained in our files. Registration 8058A.

### **Test Location**

Shenzhen Anbotech Compliance Laboratory Limited.

1/F, Building D, Sogood Science and Technology Park, Sanwei community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.

## 1.8. Disclaimer

1. The test report is invalid if not marked with the signatures of the persons responsible for preparing and approving the test report.
2. The test report is invalid if there is any evidence and/or falsification.
3. The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein.
4. This document may not be altered or revised in any way unless done so by Anbotech and all revisions are duly noted in the revisions section.
5. Content of the test report, in part or in full, cannot be used for publicity and/or promotional purposes without prior written approval from the laboratory.
6. The authenticity of the information provided by the customer is the responsibility of the customer and the laboratory is not responsible for its authenticity.

The laboratory is only responsible for the data released by the laboratory, except for the part provided by the applicant.





**1.9. Test Equipment List****Conducted Emission at AC power line**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	L.I.S.N. Artificial Mains Network	Rohde & Schwarz	ENV216	100055	2024-01-18	2025-01-17
2	Three Phase V-type Artificial Power Network	CYBERTEK	EM5040DT	E215040D T001	2024-01-17	2025-01-16
3	Software Name EZ-EMC	Farad Technology	ANB-03A	N/A	/	/
4	EMI Test Receiver	Rohde & Schwarz	ESPI3	100926	2023-10-12	2024-10-11

**Emissions in frequency bands (below 30MHz)**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	2024-01-23	2025-01-22
2	Pre-amplifier	SONOMA	310N	186860	2024-01-17	2025-01-16
3	Loop Antenna (9K-30M)	Schwarzbeck	FMZB1519 B	00053	2023-10-12	2024-10-11
4	Software Name EZ-EMC	Farad Technology	ANB-03A	N/A	/	/

**Emissions in frequency bands (30MHz - 1GHz)**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal.Due Date
1	EMI Test Receiver	Rohde & Schwarz	ESR26	101481	2024-01-23	2025-01-22
2	Pre-amplifier	SONOMA	310N	186860	2024-01-17	2025-01-16
3	Bilog Broadband Antenna	Schwarzbeck	VULB9163	345	2022-10-23	2025-10-22
4	Loop Antenna (9K-30M)	Schwarzbeck	FMZB1519 B	00053	2023-10-12	2024-10-11
5	EMI Test Software EZ-EMC	SHURPLE	N/A	N/A	/	/



## 2. Antenna requirement

Test Requirement:

Refer to 47 CFR Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### 2.1. Conclusion

The antenna is a Inductive loop coil Antenna which permanently attached. It complies with the standard requirement.




### 3. Conducted Emission at AC power line

Test Requirement:	Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN).		
Test Limit:	Frequency of emission (MHz)	Conducted limit (dB $\mu$ V)	
		Quasi-peak	Average
	0.15-0.5	66 to 56*	56 to 46*
	0.5-5	56	46
	5-30	60	50
	*Decreases with the logarithm of the frequency.		
Test Method:	ANSI C63.10-2020 section 6.2		
Procedure:	Refer to ANSI C63.10-2020 section 6.2, standard test method for ac power-line conducted emissions from unlicensed wireless devices		

#### 3.1. EUT Operation

Operating Environment:	
Test mode:	TM1: WTP Mode (5W 1% Load) TM2: WTP Mode (5W 50% Load) TM3: WTP Mode (5W 99% Load) TM4: WTP Mode (7.5W 1% Load) TM5: WTP Mode (7.5W 50% Load) TM6: WTP Mode (7.5W 99% Load) TM7: WTP Mode (15W 1% Load) TM8: WTP Mode (15W 50% Load) TM9: WTP Mode (15W 99% Load) TM10: Standby Mode

#### 3.2. Test Setup

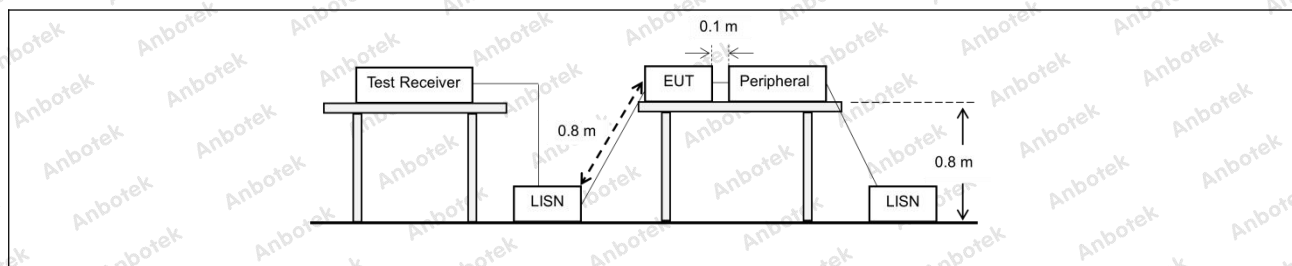




## 3.3. Test Data

Temperature:	24.9 °C	Humidity:	53%	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	-----	-----------------------	---------

TM7 / Line: Line

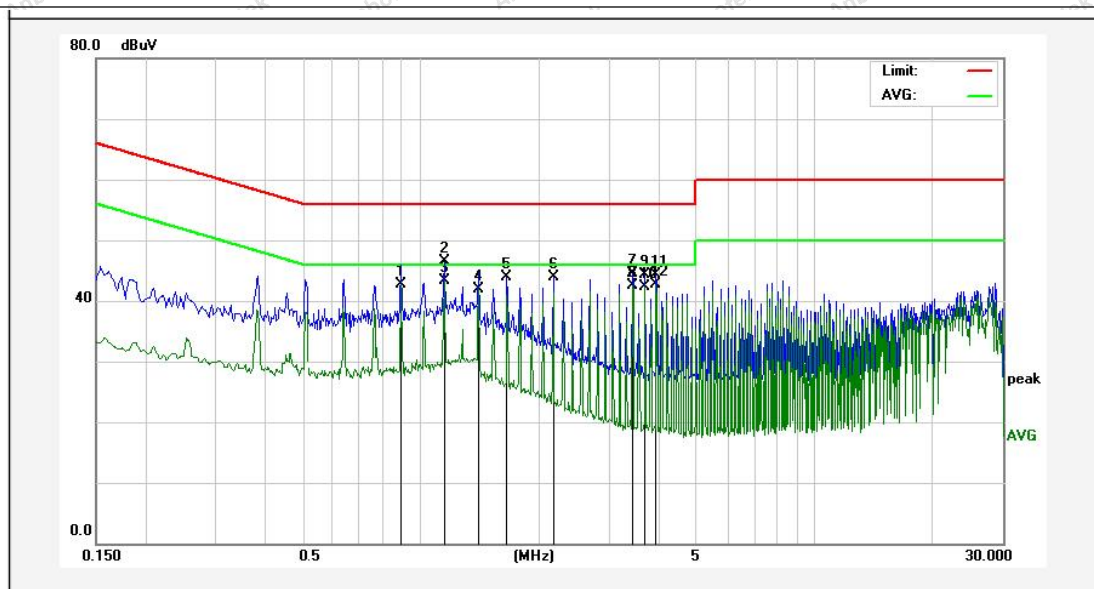

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.8940	24.77	17.86	42.63	46.00	-3.37	AVG	
2	1.1500	28.62	17.85	46.47	56.00	-9.53	QP	
3	1.1500	25.53	17.85	43.38	46.00	-2.62	AVG	
4	1.4060	24.04	17.84	41.88	46.00	-4.12	AVG	
5	1.6620	26.06	17.84	43.90	56.00	-12.10	QP	
6	2.1740	26.08	17.83	43.91	56.00	-12.09	QP	
7	3.4500	26.64	17.84	44.48	56.00	-11.52	QP	
8	3.4500	24.69	17.84	42.53	46.00	-3.47	AVG	
9	3.7060	26.55	17.85	44.40	56.00	-11.60	QP	
10	3.7060	24.47	17.85	42.32	46.00	-3.68	AVG	
11	3.9620	26.53	17.85	44.38	56.00	-11.62	QP	
12	3.9620	24.80	17.85	42.65	46.00	-3.35	AVG	



Report No.: 182512C400191101

FCC ID: 2AQZH-D467C6


Page 13 of 27

Temperature: 24.9°C

Humidity: 53%

Atmospheric Pressure: 101 kPa

TM7 / Line: Neutral

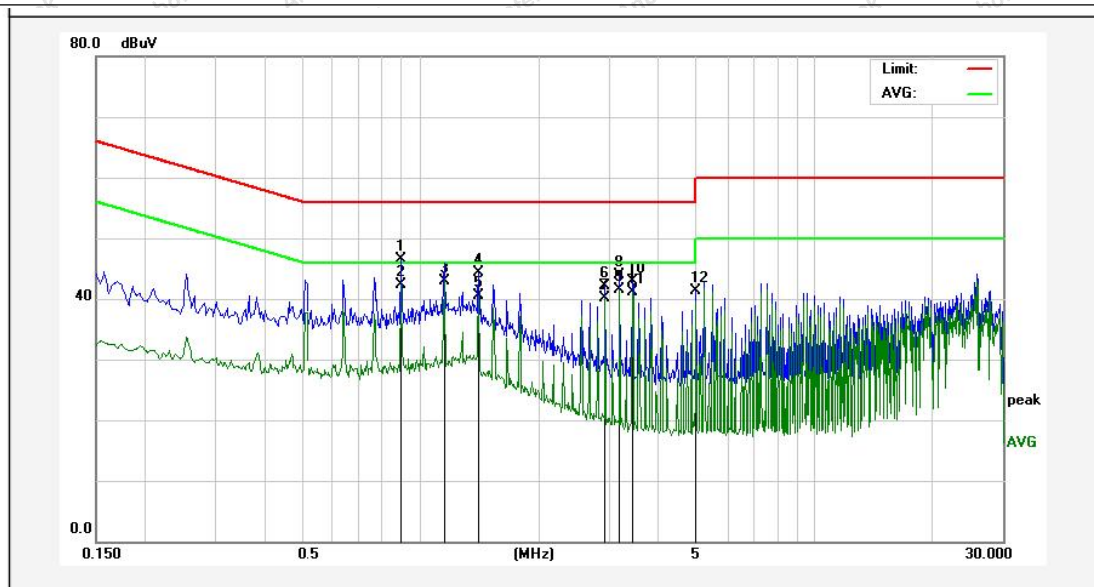

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Over Limit (dB)	Detector	Remark
1	0.8940	28.71	17.86	46.57	56.00	-9.43	QP	
2	0.8940	24.42	17.86	42.28	46.00	-3.72	AVG	
3	1.1500	25.12	17.85	42.97	46.00	-3.03	AVG	
4	1.4060	26.51	17.84	44.35	56.00	-11.65	QP	
5	1.4060	22.61	17.84	40.45	46.00	-5.55	AVG	
6	2.9420	24.35	17.84	42.19	56.00	-13.81	QP	
7	2.9420	22.22	17.84	40.06	46.00	-5.94	AVG	
8	3.1940	26.02	17.84	43.86	56.00	-12.14	QP	
9	3.1940	23.68	17.84	41.52	46.00	-4.48	AVG	
10	3.4500	25.09	17.84	42.93	56.00	-13.07	QP	
11	3.4500	23.25	17.84	41.09	46.00	-4.91	AVG	
12	4.9860	23.52	17.85	41.37	56.00	-14.63	QP	



#### 4. Emissions in frequency bands (below 30MHz)

Test Requirement:	47 CFR Part 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.</p>			
Test Method:	ANSI C63.10-2020 section 6.4		
Procedure:	ANSI C63.10-2020 section 6.4		


#### 4.1. EUT Operation

Operating Environment:	
Test mode:	TM1: WTP Mode (5W 1% Load) TM2: WTP Mode (5W 50% Load) TM3: WTP Mode (5W 99% Load) TM4: WTP Mode (7.5W 1% Load) TM5: WTP Mode (7.5W 50% Load) TM6: WTP Mode (7.5W 99% Load) TM7: WTP Mode (15W 1% Load) TM8: WTP Mode (15W 50% Load) TM9: WTP Mode (15W 99% Load) TM10: Standby Mode





## 4.2. Test Setup

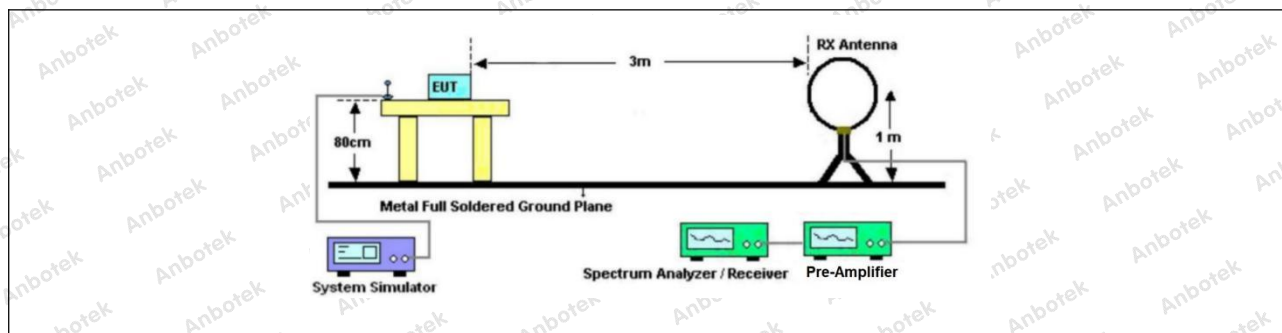


## 4.3. Test Data

Temperature:	23.5 °C	Humidity:	49 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM7 / Polarization: Horizontal

Fundamental

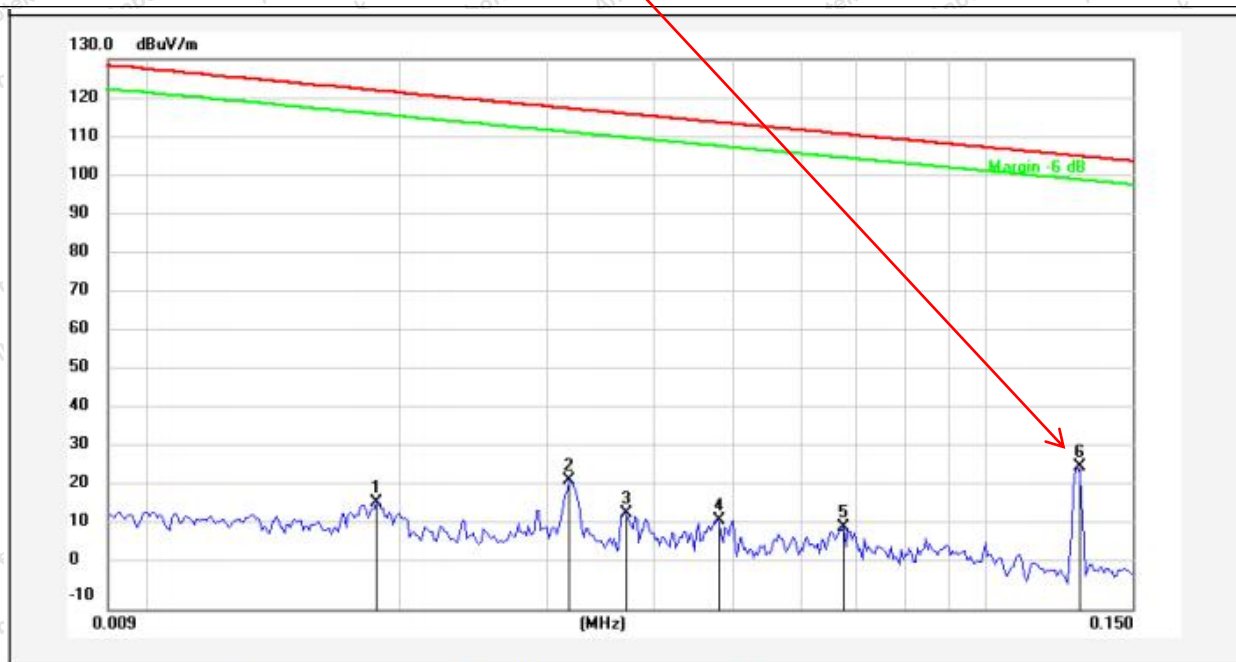

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	0.0188	-3.25	20.30	17.05	121.95	-104.90	QP			
2	0.0319	2.32	20.56	22.88	117.38	-94.50	QP			
3	0.0372	-6.06	20.43	14.37	116.06	-101.69	QP			
4	0.0479	-7.75	20.42	12.67	113.87	-101.20	QP			
5	0.0678	-9.54	20.37	10.83	110.87	-100.04	QP			
6	0.1289	5.77	20.34	26.11	105.33	-79.22	QP			



Report No.: 182512C400191101

FCC ID: 2AQZH-D467C6

Page 17 of 27


Temperature: 23.5 °C

Humidity: 49 %

Atmospheric Pressure:

101 kPa

TM7 / Polarization: Vertical

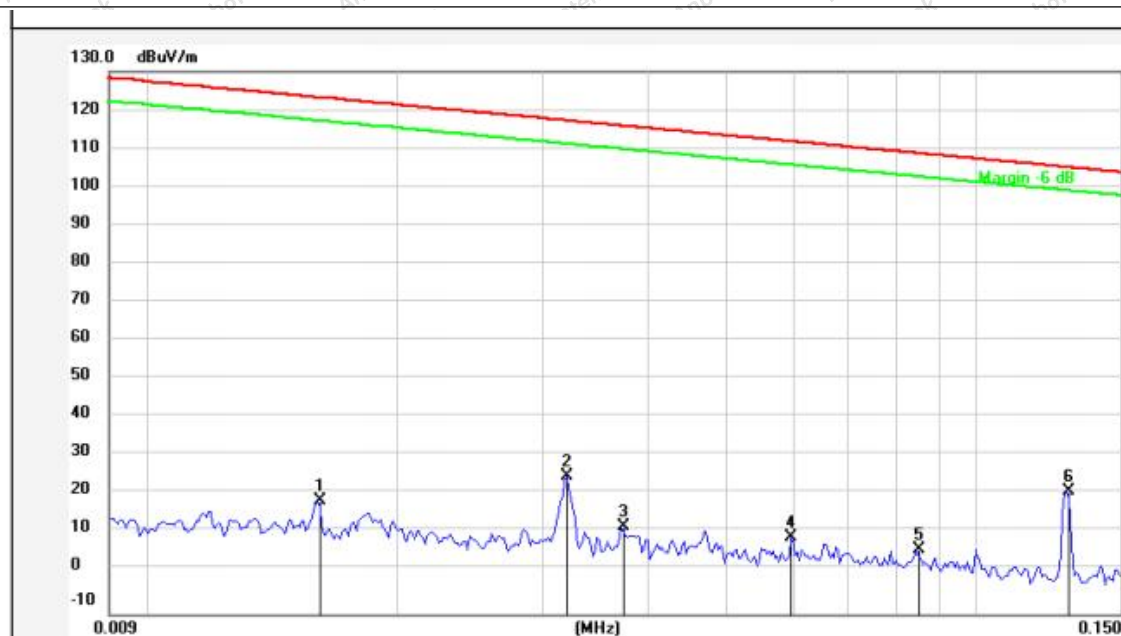

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	0.0161	-1.02	20.28	19.26	123.29	-104.03	QP			
2	0.0321	5.13	20.56	25.69	117.33	-91.64	QP			
3	0.0374	-7.76	20.43	12.67	116.01	-103.34	QP			
4	0.0599	-10.76	20.37	9.61	111.94	-102.33	QP			
5	0.0850	-13.62	20.38	6.76	108.92	-102.16	QP			
6	0.1289	1.24	20.34	21.58	105.33	-83.75	QP			






Temperature: 23.5 °C

Humidity: 49 %

Atmospheric Pressure: 101 kPa

TM7 / Polarization: Horizontal

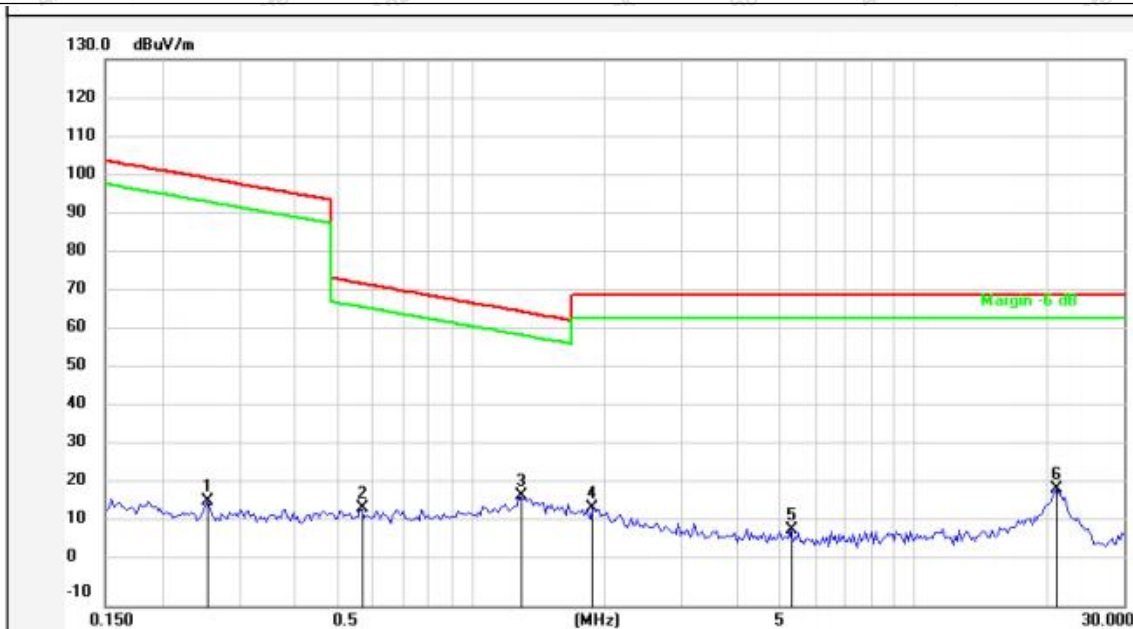

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	0.2548	-3.49	20.30	16.81	99.44	-82.63	QP			
2	0.5641	-5.36	20.28	14.92	72.58	-57.66	QP			
3	1.2892	-2.11	20.26	18.15	65.42	-47.27	QP			
4	1.8879	-5.27	20.28	15.01	69.50	-54.49	QP			
5	5.2770	-11.03	20.40	9.37	69.50	-60.13	QP			
6	21.1471	-0.49	20.59	20.10	69.50	-49.40	QP			



Report No.: 182512C400191101

FCC ID: 2AQZH-D467C6

Page 19 of 27


Temperature: 23.5 °C

Humidity: 49 %

Atmospheric Pressure:

101 kPa

TM7 / Polarization: Vertical

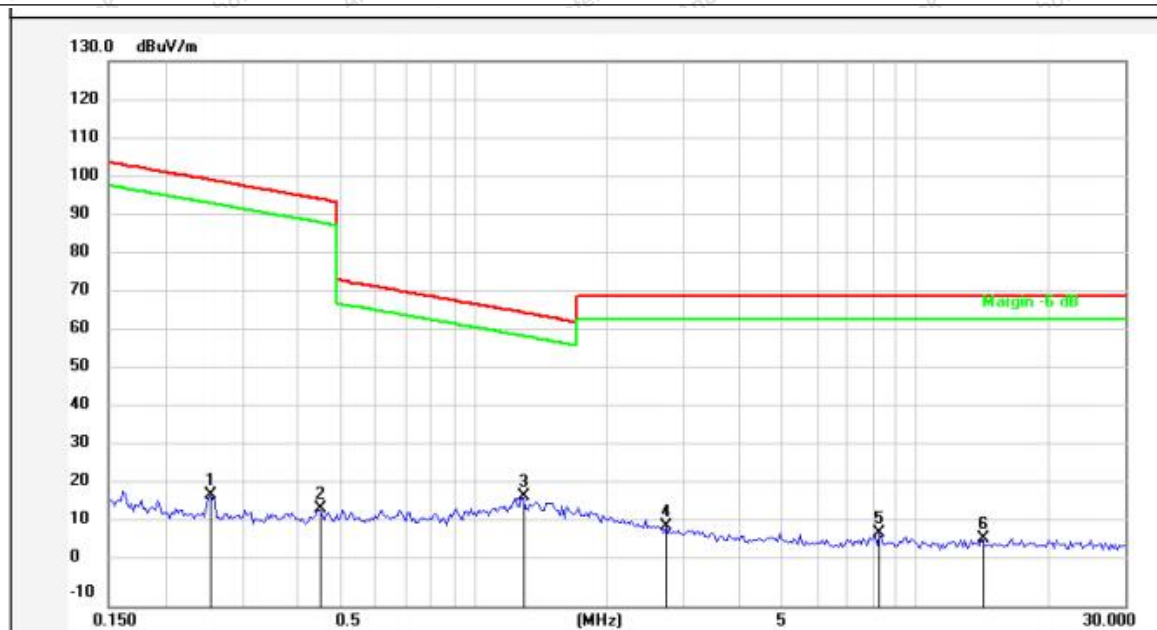

No.	Freq. (MHz)	Reading (dBuV)	Factor ()	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	0.2548	-1.94	20.30	18.36	99.44	-81.08	QP			
2	0.4468	-5.21	20.27	15.06	94.60	-79.54	QP			
3	1.2892	-2.10	20.26	18.16	65.42	-47.26	QP			
4	2.7356	-9.66	20.29	10.63	69.50	-58.87	QP			
5	8.3228	-11.85	20.50	8.65	69.50	-60.85	QP			
6	14.1376	-13.09	20.54	7.45	69.50	-62.05	QP			



## 5. Emissions in frequency bands (30MHz - 1GHz)

Test Requirement:	47 CFR Part 15.209		
Test Limit:	Frequency (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
	0.009-0.490	2400/F(kHz)	300
	0.490-1.705	24000/F(kHz)	30
	1.705-30.0	30	30
	30-88	100 **	3
	88-216	150 **	3
	216-960	200 **	3
	Above 960	500	3
<p>** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this part, e.g., §§ 15.231 and 15.241.</p> <p>In the emission table above, the tighter limit applies at the band edges. The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9–90 kHz, 110–490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.</p> <p>As shown in § 15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.</p>			
Test Method:	ANSI C63.10-2020 section 6.5		
Procedure:	ANSI C63.10-2020 section 6.5		


### 5.1. EUT Operation

Operating Environment:	
Test mode:	TM1: WTP Mode (5W 1% Load) TM2: WTP Mode (5W 50% Load) TM3: WTP Mode (5W 99% Load) TM4: WTP Mode (7.5W 1% Load) TM5: WTP Mode (7.5W 50% Load) TM6: WTP Mode (7.5W 99% Load) TM7: WTP Mode (15W 1% Load) TM8: WTP Mode (15W 50% Load) TM9: WTP Mode (15W 99% Load) TM10: Standby Mode






## 5.2. Test Setup

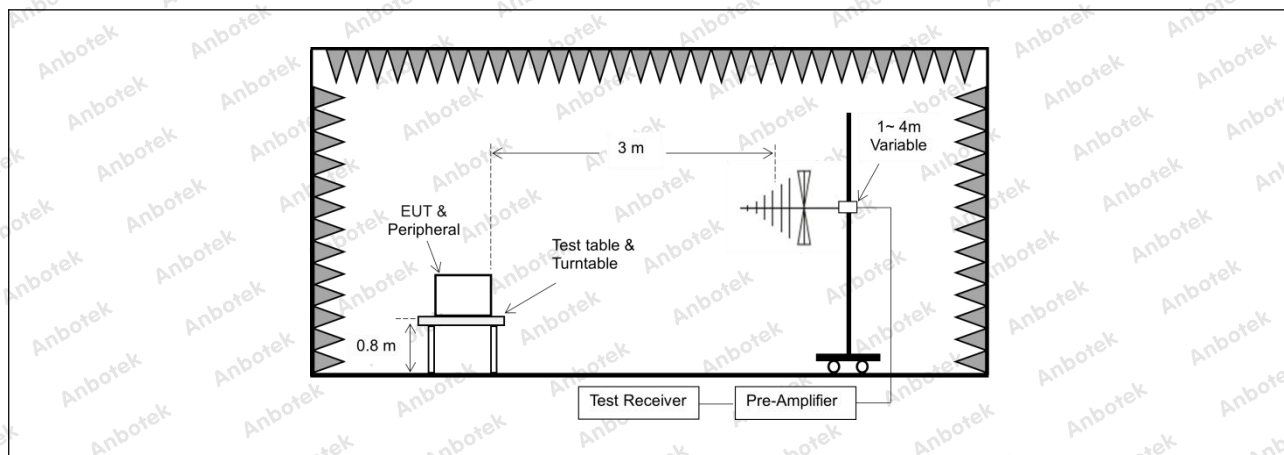

### 5.3. Test Data

Temperature:	23.5 °C	Humidity:	48 %	Atmospheric Pressure:	101 kPa
--------------	---------	-----------	------	-----------------------	---------

TM7 / Polarization: Horizontal

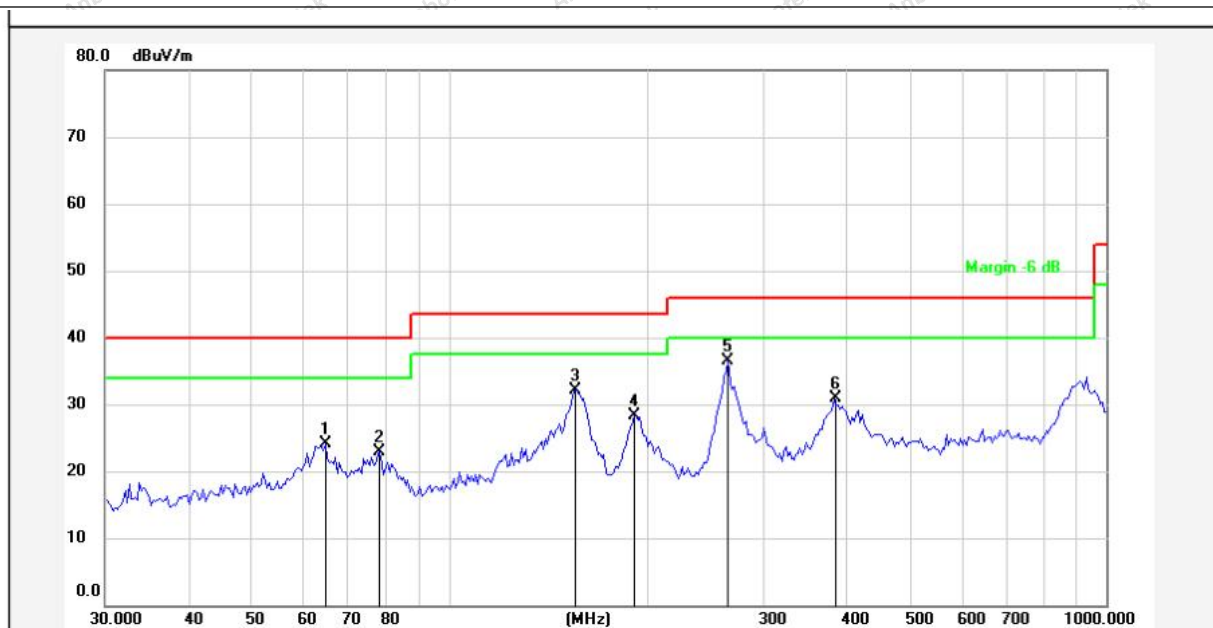

No.	Freq. (MHz)	Reading (dBuV)	Factor ( )	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	64.8865	42.62	-18.48	24.14	40.00	-15.86	QP			
2	78.4133	43.37	-20.55	22.82	40.00	-17.18	QP			
3	155.9101	50.92	-18.74	32.18	43.50	-11.32	QP			
4	191.0738	44.31	-16.08	28.23	43.50	-15.27	QP			
5	265.6757	51.06	-14.65	36.41	46.00	-9.59	QP			
6	385.2805	42.38	-11.57	30.81	46.00	-15.19	QP			



Report No.: 182512C400191101

FCC ID: 2AQZH-D467C6

Page 23 of 27


Temperature: 23.5 °C

Humidity: 48 %

Atmospheric Pressure:

101 kPa

TM7 / Polarization: Vertical

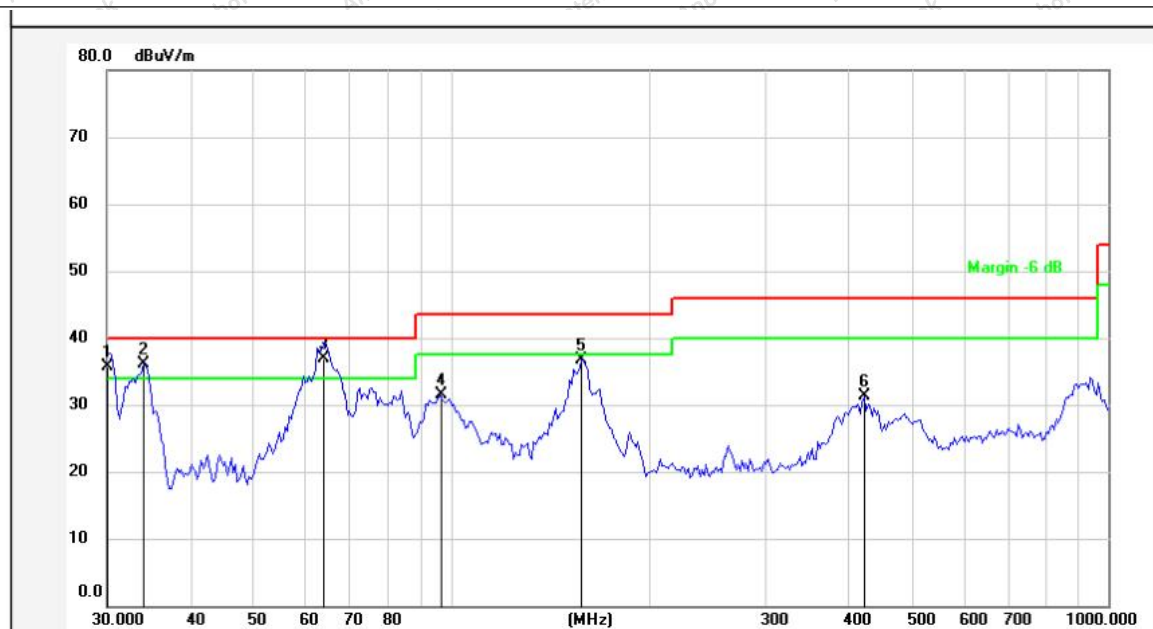

No.	Freq. (MHz)	Reading (dBuV)	Factor ( )	Result (dBuV/m)	Limit (dBuV/m)	Over Limit (dB)	Detector			
1	30.2111	56.02	-20.26	35.76	40.00	-4.24	QP			
2	34.0365	55.74	-19.60	36.14	40.00	-3.86	QP			
3	63.9131	54.98	-18.09	36.89	40.00	-3.11	QP			
4	96.0986	47.83	-16.39	31.44	43.50	-12.06	QP			
5	158.1123	55.32	-18.57	36.75	43.50	-6.75	QP			
6	425.0280	42.71	-11.50	31.21	46.00	-14.79	QP			

## Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community, Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline

400-003-0500

www.anbotek.com.cn






## 6. 20dB Occupy Bandwidth Test

Test Standard	FCC Part15 C Section 15.215(c)
Test Limit	Intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§ 15.217 through 15.257 and in subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.
Procedure:	The bandwidth of the fundamental frequency was measured by spectrum analyzer with RBW=1%-5%OBW, VBW≥3*RBW. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

### 6.1. EUT Operation

Operating Environment:	
Test mode:	TM1: WTP Mode (5W 1% Load) TM2: WTP Mode (5W 50% Load) TM3: WTP Mode (5W 99% Load) TM4: WTP Mode (7.5W 1% Load) TM5: WTP Mode (7.5W 50% Load) TM6: WTP Mode (7.5W 99% Load) TM7: WTP Mode (15W 1% Load) TM8: WTP Mode (15W 50% Load) TM9: WTP Mode (15W 99% Load) TM10: Standby Mode

### 6.2. Test Setup

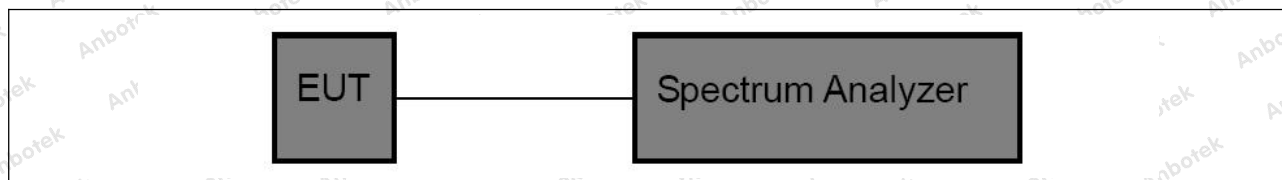

**6.3. Test Data**

Temperature:	25 °C	Humidity:	55 %	Atmospheric Pressure:	101 kPa
--------------	-------	-----------	------	-----------------------	---------

**Shenzhen Anbotek Compliance Laboratory Limited**

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline  
400-003-0500  
www.anbotek.com.cn




Report No.: 182512C400191101

FCC ID: 2AQZH-D467C6

Page 26 of 27

Freq. (MHz)	Bandwidth (kHz)	Results
0.129	1.179	PASS

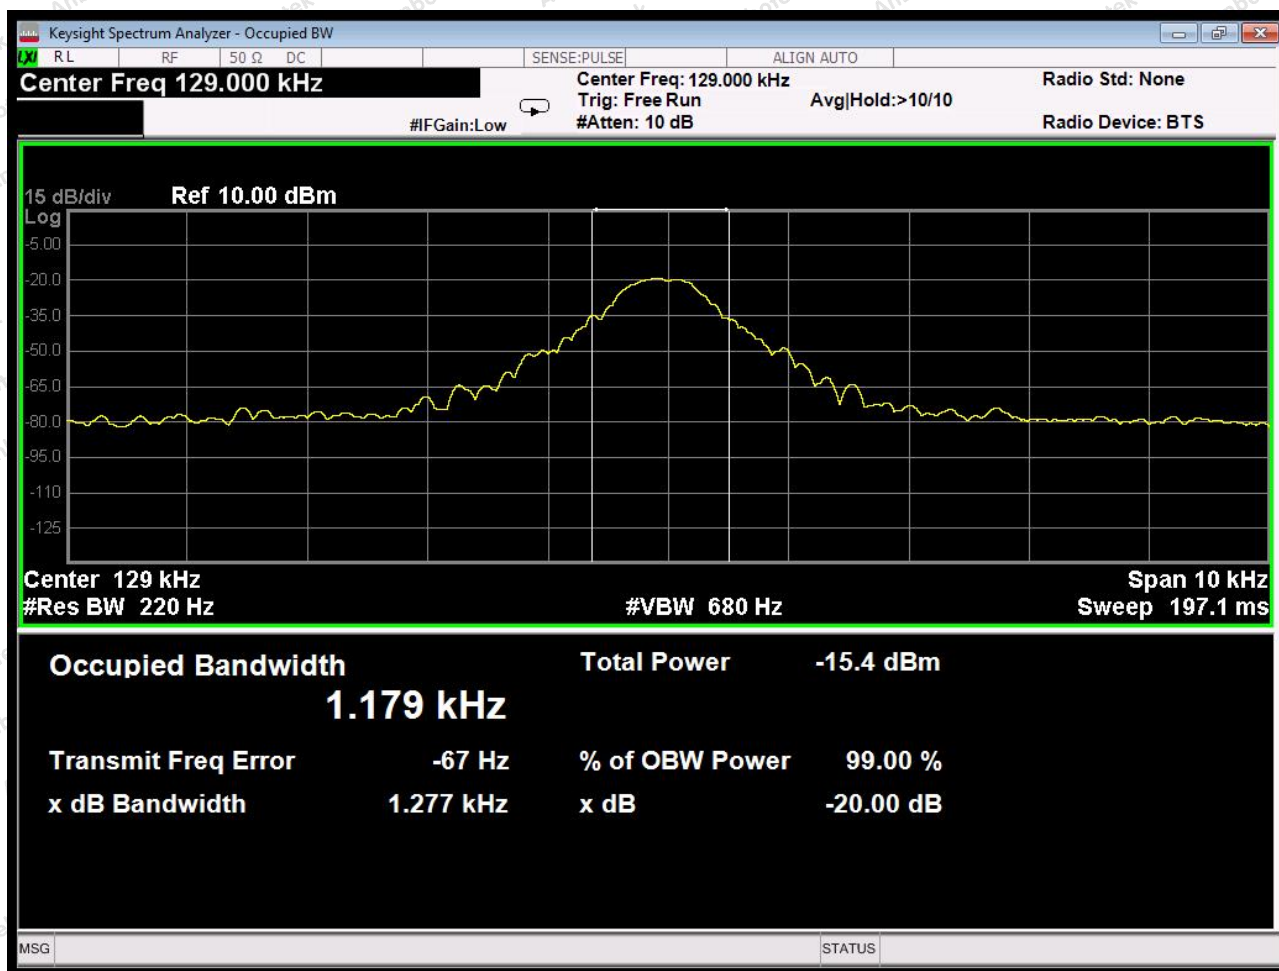

## Shenzhen Anbotek Compliance Laboratory Limited

Address: 1/F., Building D, Sogood Science and Technology Park, Sanwei Community,  
Hangcheng Street, Bao'an District, Shenzhen, Guangdong, China.  
Tel: (86)0755-26066440 Fax: (86)0755-26014772 Email: service@anbotek.com



Hotline

400-003-0500  
www.anbotek.com.cn





**APPENDIX I -- TEST SETUP PHOTOGRAPH**

Please refer to separated files Appendix I -- Test Setup Photograph\_RF

**APPENDIX II -- EXTERNAL PHOTOGRAPH**

Please refer to separated files Appendix II -- External Photograph

**APPENDIX III -- INTERNAL PHOTOGRAPH**

Please refer to separated files Appendix III -- Internal Photograph

----- End of Report -----

