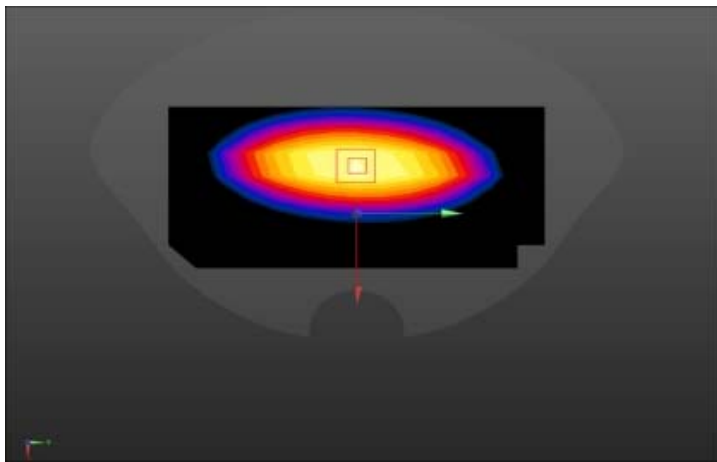
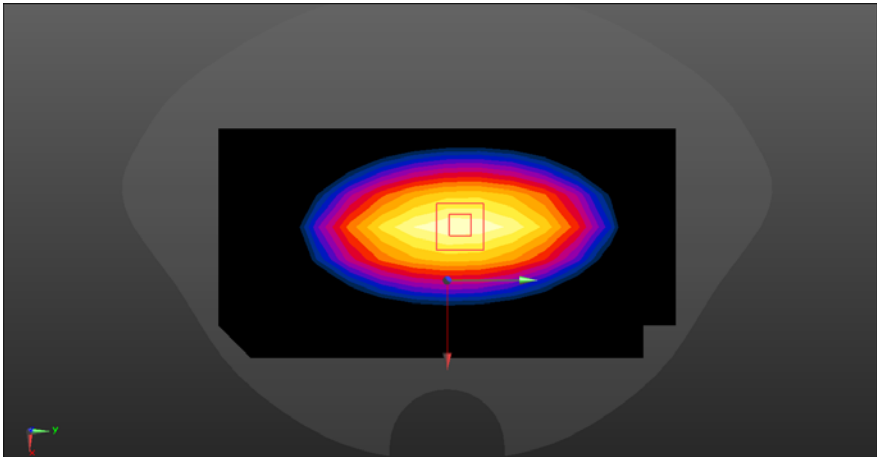


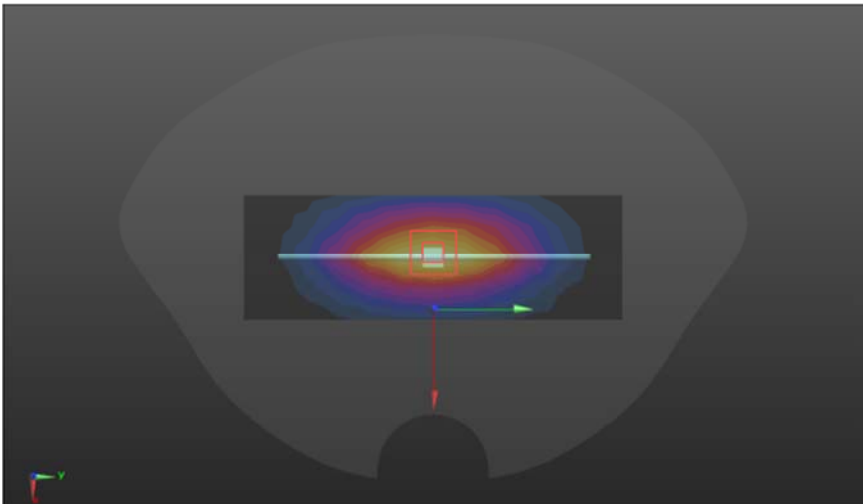
ANNEX A – TEST PLOTS

System check	750MHz(2021.08.31)
Communication System: UID 0, CW (0) Frequency: 750 MHz; Duty cycle:1:1 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.85 \text{ S/m}$; $\epsilon_r = 42.2$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.75, 9.75, 9.75); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) System Performance Check at Frequencies 750MHz/d=15mm, Pin=250mW, dist=3.0mm (ES-Probe)/Area Scan (8x15x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 2.16 W/kg System Performance Check at Frequencies 750MHz/d=15mm, Pin=250mW, dist=3.0mm (ES-Probe)/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 41.00 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 3.26 W/kg SAR(1 g) = 2.13 W/kg; SAR(10 g) = 1.44 W/kg Maximum value of SAR (measured) = 2.49 W/kg 	

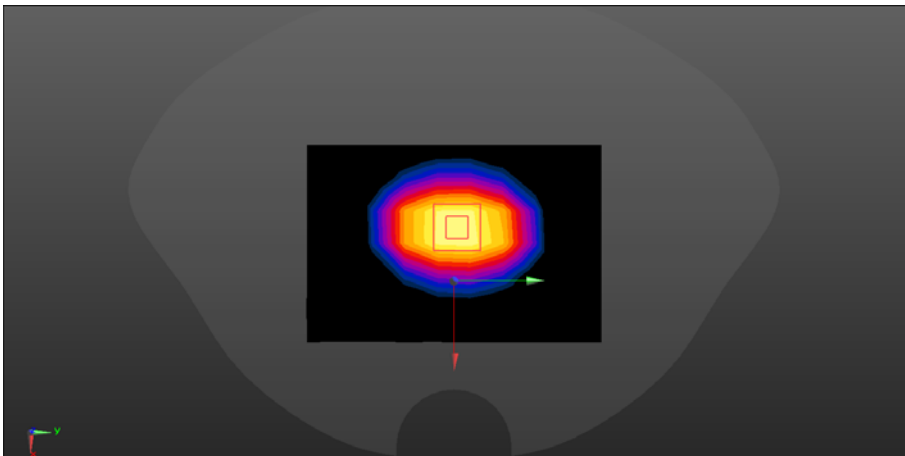
SRTC performed system check by using 250mw at antenna port

System check	835MHz(2021.08.31)
Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty cycle:1:1 Medium parameters used (interpolated): $f = 835 \text{ MHz}$; $\sigma = 0.93 \text{ S/m}$; $\epsilon_r = 40.08$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) ; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 835/835/Area Scan (8x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 2.72 W/kg Configuration 835/835/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 51.67 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 3.58 W/kg SAR(1 g) = 2.35 W/kg; SAR(10 g) = 1.59 W/kg Maximum value of SAR (measured) = 2.75 W/kg 	

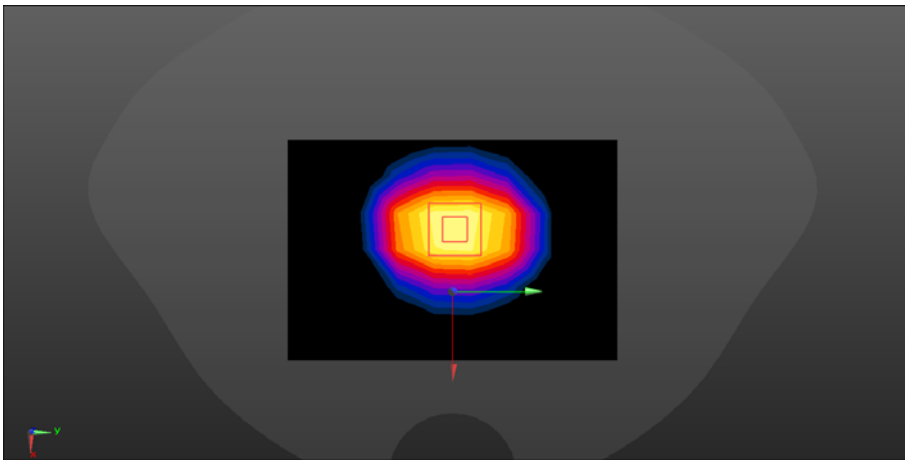
SRTC performed system check by using 250mw at antenna port

System check	900MHz(2021.09.01)
Communication System: UID 0, CW (0); Frequency: 900 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 900 \text{ MHz}$; $\sigma = 1.02 \text{ S/m}$; $\epsilon_r = 40.24$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) ; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D900/Dipole 900MHz/Area Scan (5x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 3.42 W/kg D900/Dipole 900MHz/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 62.05 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 3.94 W/kg SAR(1 g) = 2.58W/kg; SAR(10 g) = 1.69 W/kg Maximum value of SAR (measured) = 3.46 W/kg 	

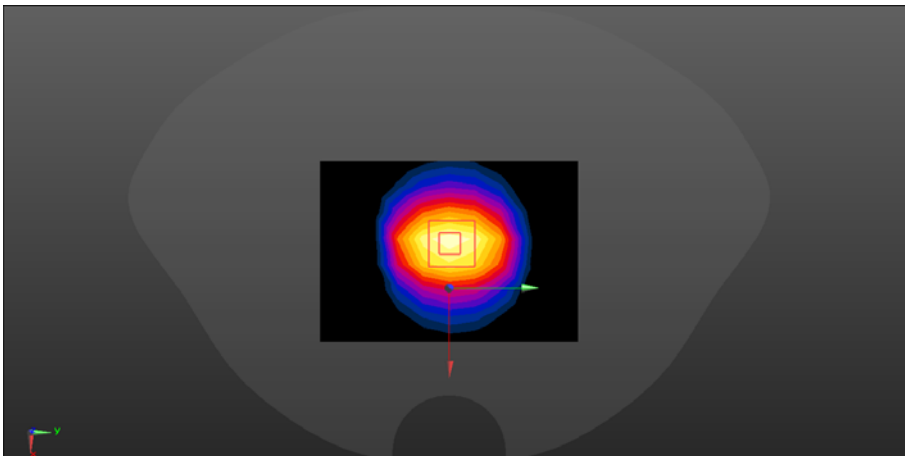
SRTC performed system check by using 250mw at antenna port

System check	1800MHz(2021.09.02)
Communication System: UID 0, CW (0); Frequency: 1800 MHz; Duty cycle:1:1 Medium parameters used: $f = 1800 \text{ MHz}$; $\sigma = 1.35 \text{ S/m}$; $\epsilon_r = 41.1$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(8.27, 8.27, 8.27) ; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 1800/1800/Area Scan (7x10x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 8.31 W/kg Configuration 1800/1800/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.60 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 17.5 W/kg SAR(1 g) = 9.53W/kg; SAR(10 g) = 5.29 W/kg Maximum value of SAR (measured) = 12.1 W/kg 	

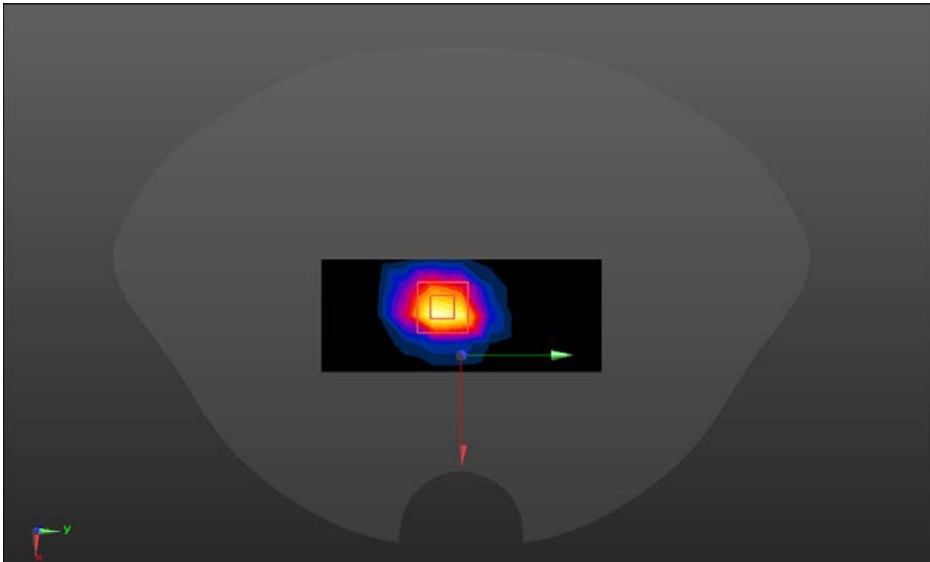
SRTC performed system check by using 250mw at antenna port

System check	2000MHz(2021.09.03)
Communication System: UID 0, CW (0); Frequency: 2000 MHz; Duty cycle:1:1 Medium parameters used: $f = 2000 \text{ MHz}$; $\sigma = 1.34 \text{ S/m}$; $\epsilon_r = 39.08$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.94, 7.94, 7.94); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 2000/2000/Area Scan (7x10x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 8.40 W/kg Configuration 2000/2000/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$ Reference Value = 76.22 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 18.7 W/kg SAR(1 g) = 10.27 W/kg; SAR(10 g) = 5.08 W/kg Maximum value of SAR (measured) = 12.9 W/kg 	

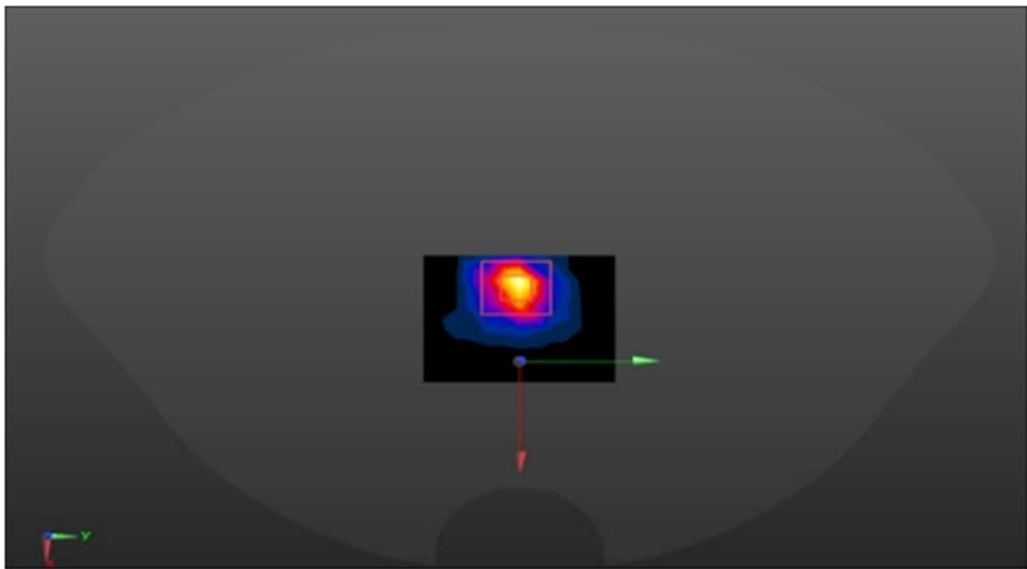
SRTC performed system check by using 250mw at antenna port

System check	2450MHz(2021.09.04)
Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty cycle:1:1 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 38.7$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) System Performance Check at Frequencies 2450 MHz/2450/Area Scan (8x11x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 21.2 W/kg System Performance Check at Frequencies 2450 MHz/2450/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 108.3 V/m; Power Drift = 0.19 dB Peak SAR (extrapolated) = 28.2 W/kg SAR(1 g) = 12.95 W/kg; SAR(10 g) = 5.92 W/kg Maximum value of SAR (measured) = 22.6 W/kg 	

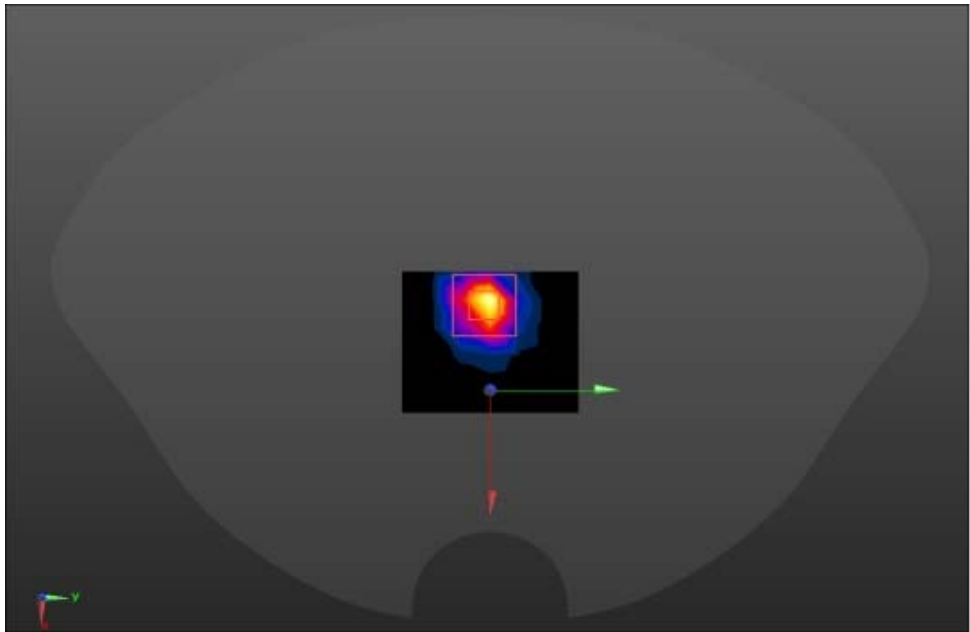
SRTC performed system check by using 250mw at antenna port

System check	2600MHz(2021.09.05)
Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 2600$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 38$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) SYSTEM CHECK 2600/Area Scan (5x11x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 22.7 W/kg SYSTEM CHECK 2600/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 102.2 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 33.7 W/kg SAR(1 g) = 13.4 W/kg; SAR(10 g) = 6.49 W/kg Maximum value of SAR (measured) = 26.6 W/kg 	

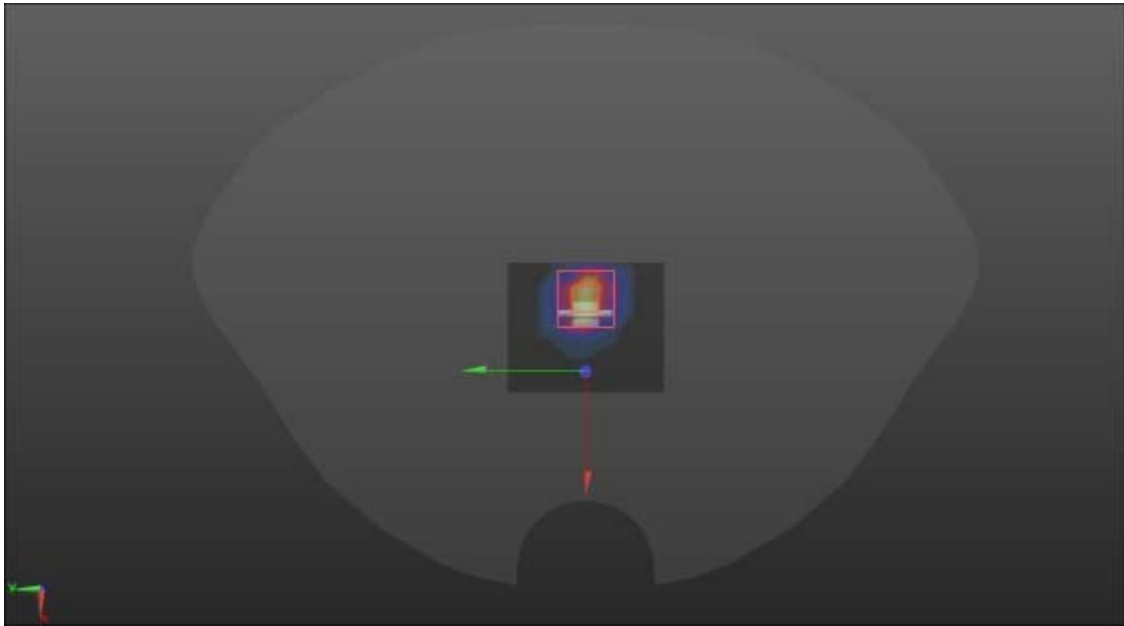
SRTC performed system check by using 250mw at antenna port

System check	5200MHz(2021.09.06)
Communication System: UID 0, CW (0); Frequency: 5200 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.5 \text{ S/m}$; $\epsilon_r = 35.8$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.57, 5.57, 5.57) ; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 4/SYSTEM CHECK 5200MHz/Area Scan (6x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 1.85 W/kg Configuration 4/SYSTEM CHECK 5200MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 11.17 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.42 W/kg SAR(1 g) = 0.774 W/kg; SAR(10 g) = 0.213 W/kg Maximum value of SAR (measured) = 2.16 W/kg 	

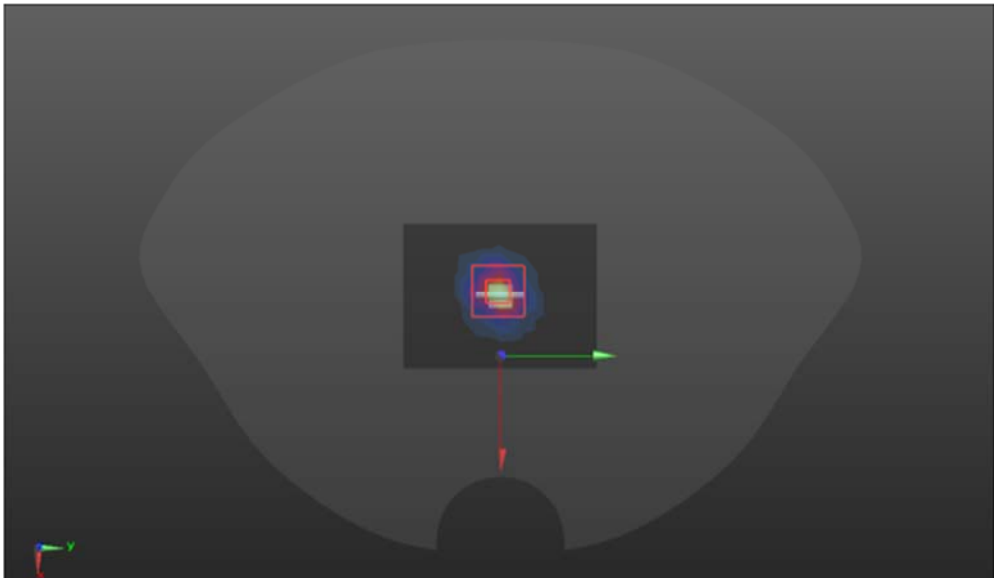
SRTC performed system check by using 10mw at antenna port

System check	5300MHz(2021.09.07)
Communication System: UID 0, CW (0); Frequency: 5300 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.88 \text{ S/m}$; $\epsilon_r = 36.4$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.43, 5.43, 5.43) ; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 4/SYSTEM CHECK 5300MHz/Area Scan (6x7x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 1.77 W/kg Configuration 4/SYSTEM CHECK 5300MHz/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 10.42 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 3.85 W/kg SAR(1 g) = 0.81 W/kg; SAR(10 g) = 0.212 W/kg Maximum value of SAR (measured) = 2.19 W/kg 	

SRTC performed system check by using 10mw at antenna port

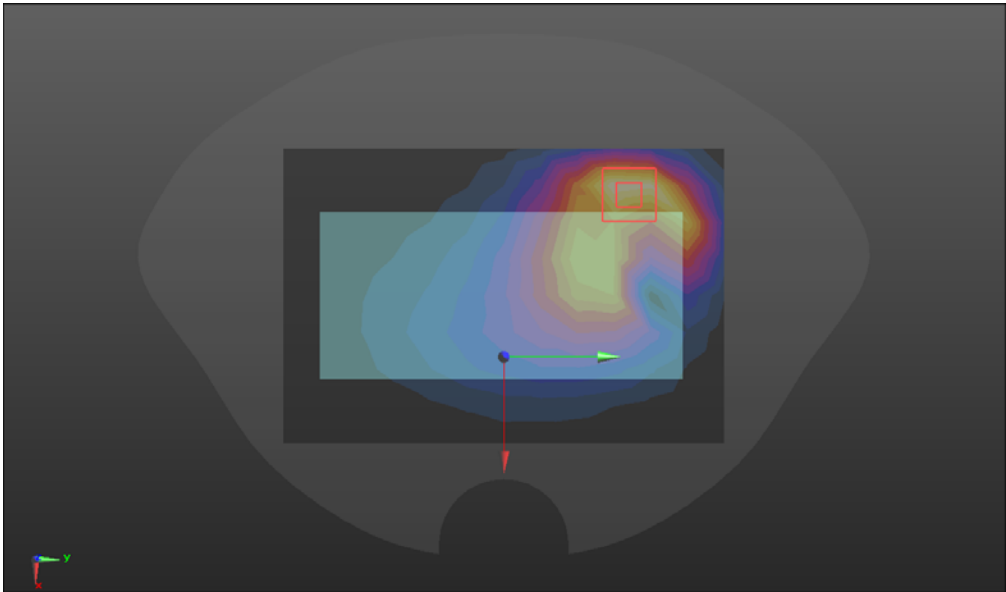
System check	5600MHz(2021.09.08)
Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5600$ MHz; $\sigma = 4.86$ S/m; $\epsilon_r = 36.2$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95) ; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Configuration 4/SYSTEM CHECK 5600MHz /Area Scan (6x7x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.71 W/kg Configuration 4/SYSTEM CHECK 5600MHz /Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 12.13 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.87 W/kg SAR(1 g) = 0.76 W/kg; SAR(10 g) = 0.224 W/kg Maximum value of SAR (measured) = 2.34 W/kg 	

SRTC performed system check by using 10mw at antenna port

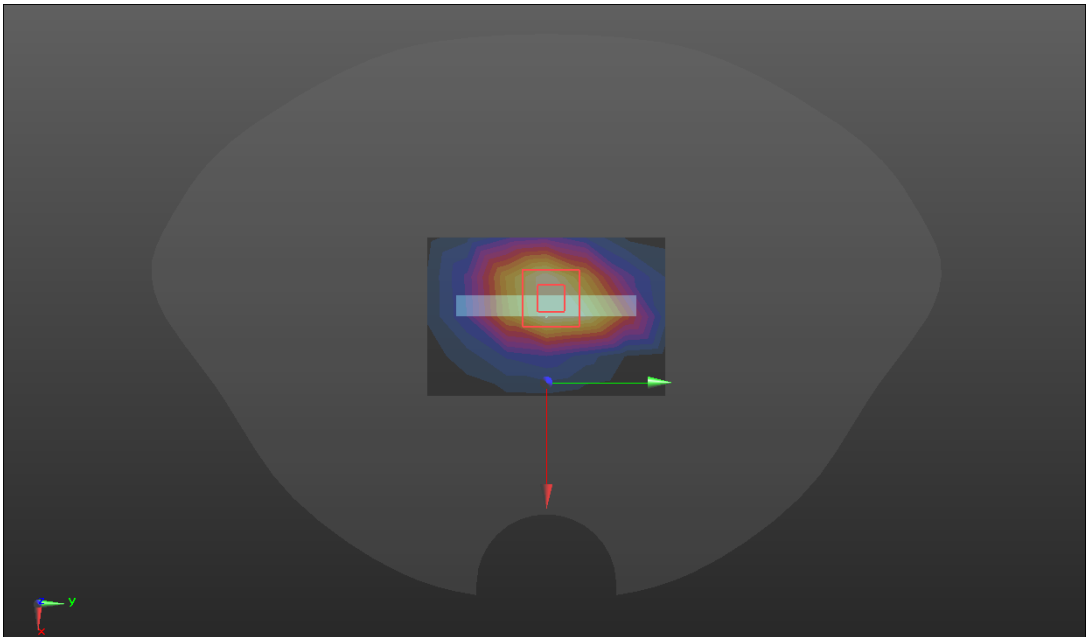
System check	5800MHz(2021.09.09)
Communication System: UID 0, CW (0); Frequency: 5800 MHz; Duty Cycle: 1:1 Medium parameters used: $f = 5800$ MHz; $\sigma = 5.11$ S/m; $\epsilon_r = 35.6$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.12, 5.12, 5.12); Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) D5GV2 /D5800 SYSTEM CHECK 2/Area Scan (7x9x1): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 1.81 W/kg D5GV2 /D5800 SYSTEM CHECK 2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 14.34 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 3.45 W/kg SAR(1 g) = 0.82 W/kg; SAR(10 g) = 0.218 W/kg Maximum value of SAR (measured) = 1.89 W/kg 	

SRTC performed system check by using 10mw at antenna port

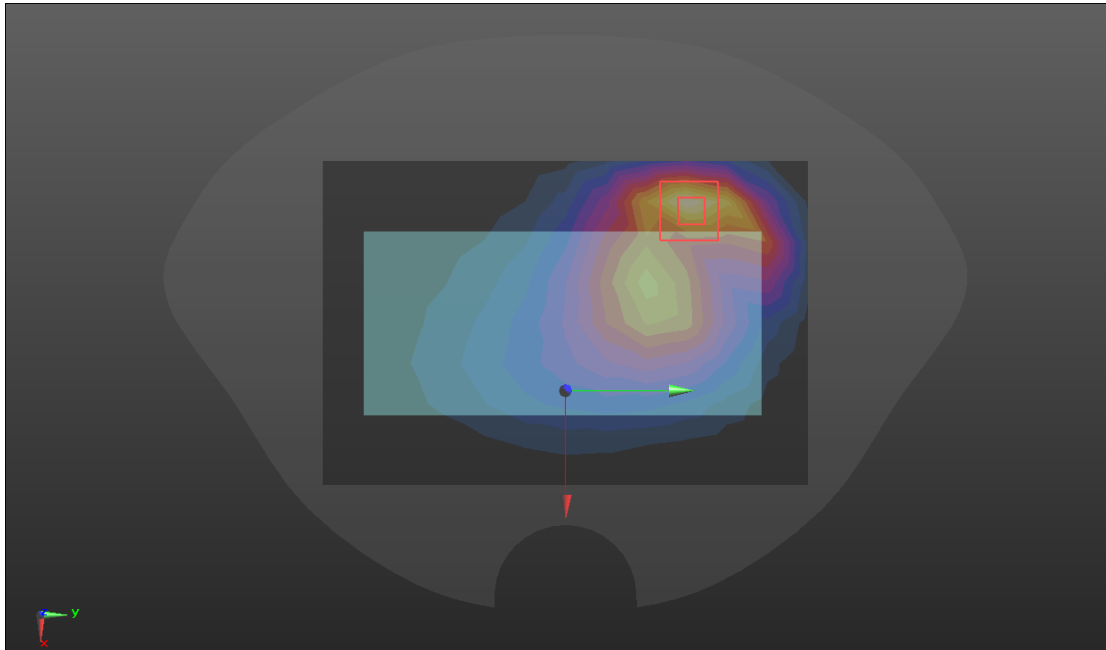
GSM 850

Hotspot	Front(2021.08.31)
Communication System: UID 0, Generic GSM (0); Frequency: 836.6 MHz;Duty Cycle: 4:8.30042 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) @ 836.6 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) FRONT/GSM850/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.320 W/kg FRONT/GSM850/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.60 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 0.456 W/kg SAR(1 g) = 0.342 W/kg; SAR(10 g) = 0.140 W/kg Maximum value of SAR (measured) = 0.373 W/kg	
	

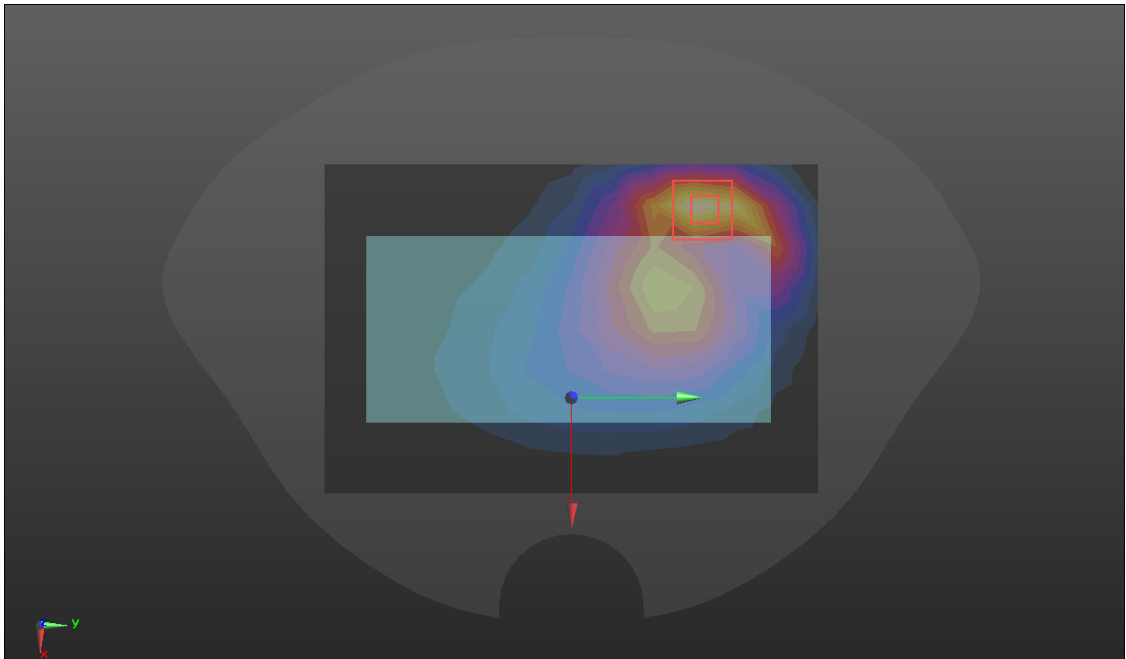
GSM 1900

Hotspot	Bottom(2021.09.02)
Communication System: UID 0, Generic GSM (0); Frequency: 1880 MHz;Duty Cycle: 4:8.30042 Medium parameters used (interpolated): $f = 1880$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.99, 7.99, 7.99) @ 1880 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) BOTTOM/GSM 1900/Area Scan (5x7x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.337 W/kg BOTTOM/GSM 1900/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 15.93 V/m; Power Drift = 0.10 dB Peak SAR (extrapolated) = 0.509 W/kg SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.165 W/kg Maximum value of SAR (measured) = 0.426 W/kg	
	

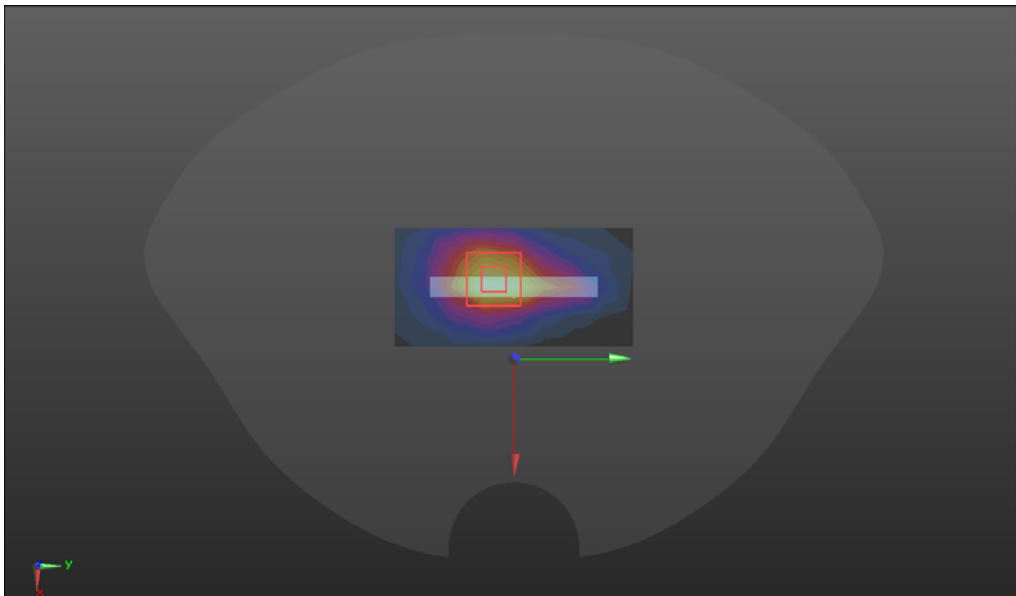
WCDMA BAND V

Hotspot	Front(2021.08.31)
Communication System: UID 0, WCDMA 5 (0); Frequency: 836.6 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.6$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) @ 836.6 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) FRONT/W5/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.241 W/kg FRONT/W5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 10.23 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 0.312 W/kg SAR(1 g) = 0.223 W/kg; SAR(10 g) = 0.098 W/kg Maximum value of SAR (measured) = 0.254 W/kg	
	

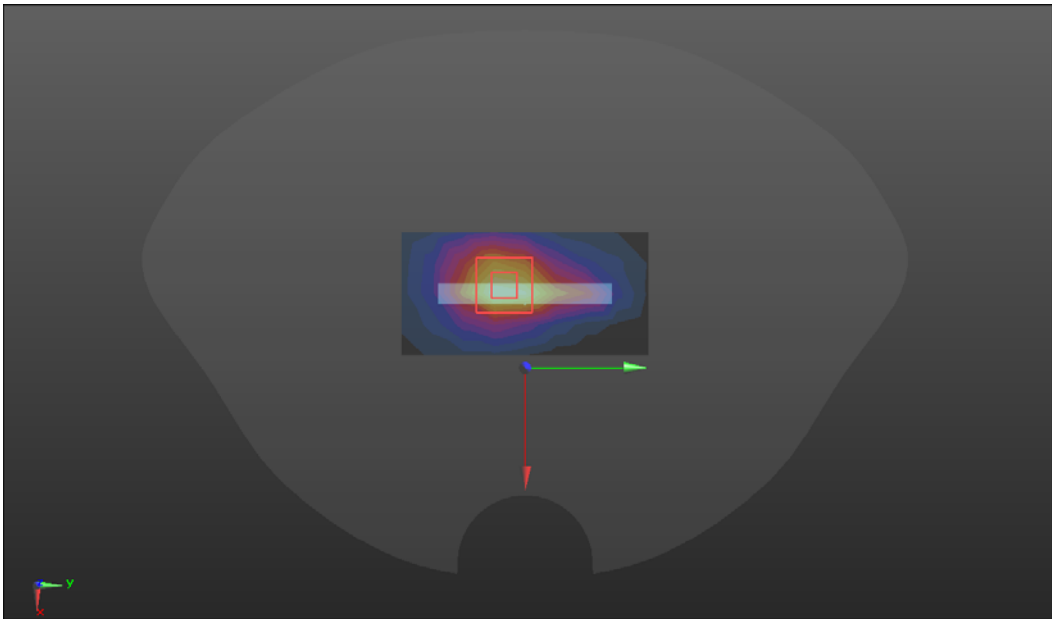
LTE BAND 5

Hotspot	Front(2021.08.31)
Communication System: UID 0, LTE BAND05 (0); Frequency: 836.5 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 836.5$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.528$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(9.39, 9.39, 9.39) @ 836.5 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) FRONT/LTE B5/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (measured) = 0.228 W/kg FRONT/LTE B5/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 9.308 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.283 W/kg SAR(1 g) = 0.186 W/kg; SAR(10 g) = 0.087 W/kg Maximum value of SAR (measured) = 0.235 W/kg 	

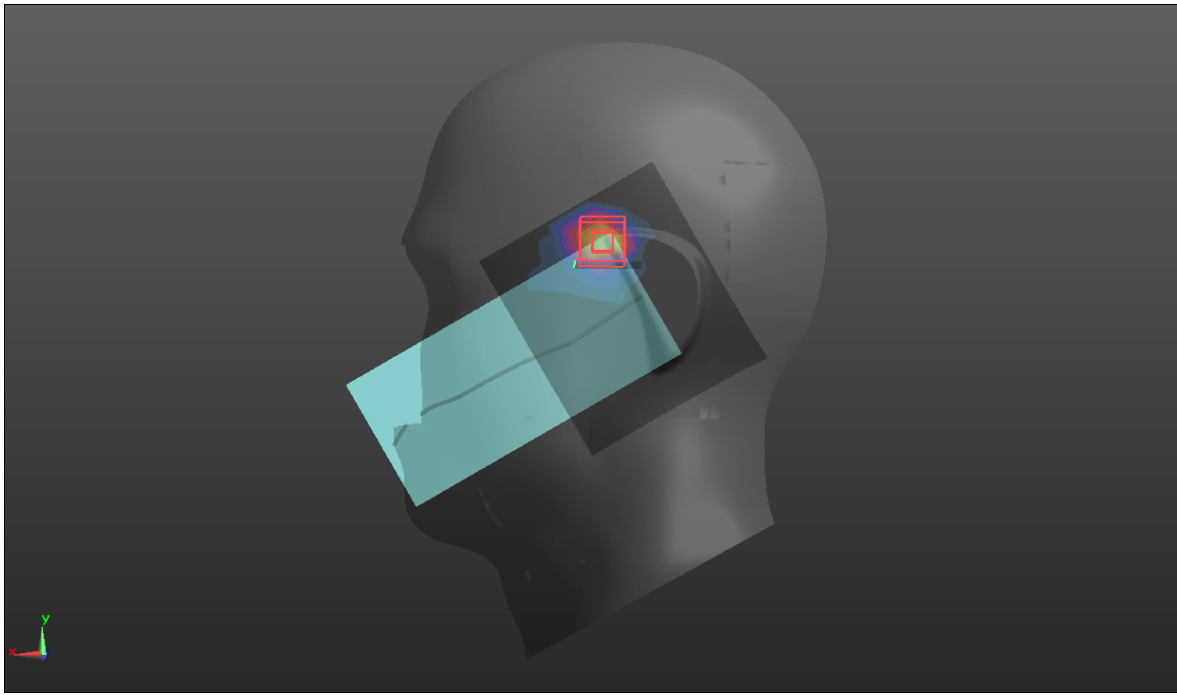
LTE BAND 38

Hotspot	Bottom(2021.09.05)
Communication System: UID 0, LTE BAND38 (0); Frequency: 2595 MHz;Duty Cycle: 0.633:1 Medium parameters used (interpolated): $f = 2595$ MHz; $\sigma = 1.954$ S/m; $\epsilon_r = 39.006$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37) @ 2595 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) BOTTOM/LTE38/Area Scan (5x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.461 W/kg BOTTOM/LTE38/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 13.93 V/m; Power Drift = 0.13 dB Peak SAR (extrapolated) = 0.618 W/kg SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.159 W/kg Maximum value of SAR (measured) = 0.497 W/kg	
	

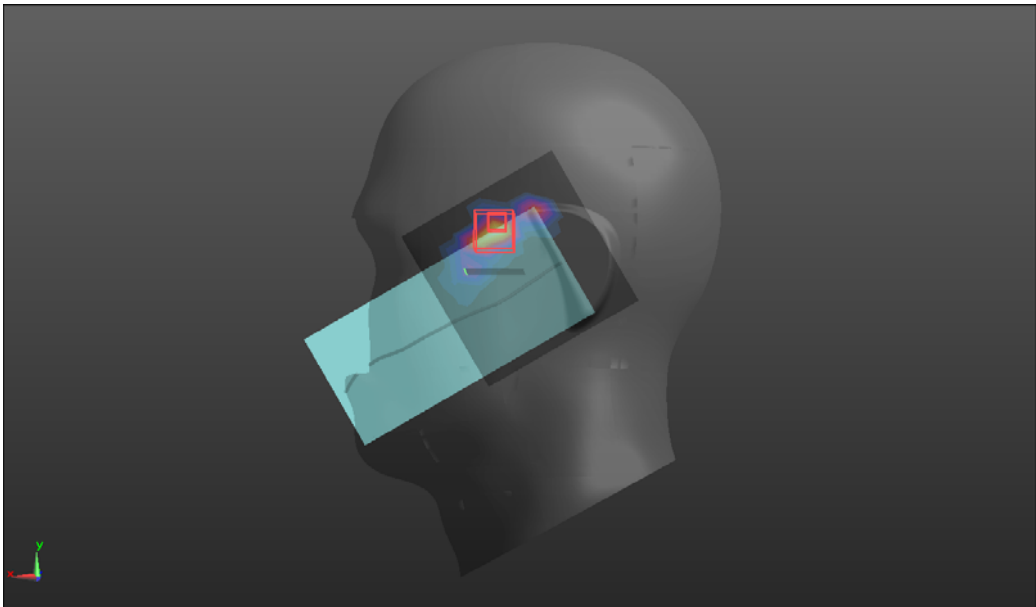
LTE BAND 41

Hotspot	Bottom(2021.09.05)
Communication System: UID 0, LTE BAND41 (0); Frequency: 2593 MHz;Duty Cycle: 0.633:1 Medium parameters used (interpolated): $f = 2593$ MHz; $\sigma = 1.952$ S/m; $\epsilon_r = 39.009$; $\rho = 1000$ kg/m³ Phantom section: Flat Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.37, 7.37, 7.37) @ 2593 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) BOTTOM/LTE41/Area Scan (5x9x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.460 W/kg BOTTOM/LTE41/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 13.92 V/m; Power Drift = 0.16 dB Peak SAR (extrapolated) = 0.619 W/kg SAR(1 g) = 0.4 W/kg; SAR(10 g) = 0.159 W/kg Maximum value of SAR (measured) = 0.498 W/kg	
	

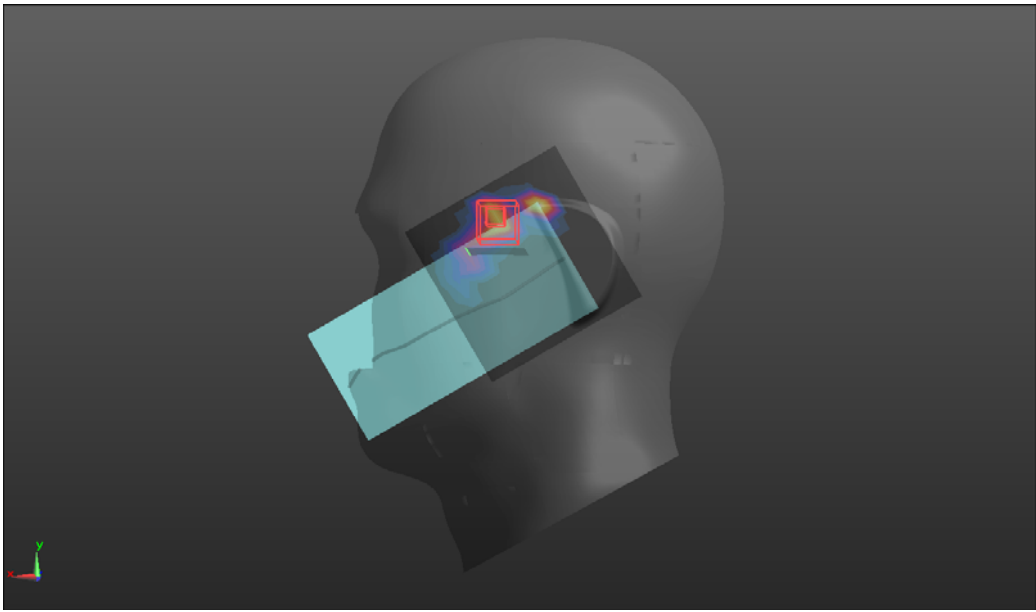
WIFI 2.4GHz

Head	Left cheek(2021.09.04)
Communication System: UID 0, WIFI 2.4GHz (0); Frequency: 2437 MHz;Duty Cycle:1 :1.01 Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.788$ S/m; $\epsilon_r = 39.219$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48) @ 2437 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Left cheek/WIFI 2.4/Area Scan (9x10x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.702 W/kg Left cheek/WIFI 2.4/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.978 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 1.09 W/kg SAR(1 g) = 0.482 W/kg; SAR(10 g) = 0.202 W/kg Maximum value of SAR (measured) = 0.726 W/kg	
	

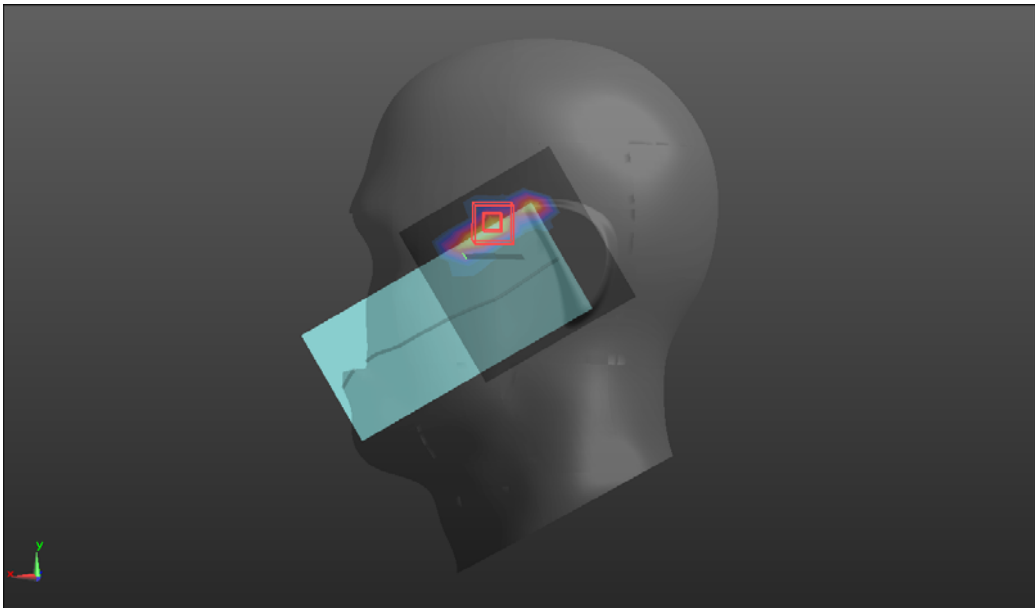
WIFI 5GHz UNII-1

Head	Left cheek(2021.09.06)
Communication System: UID 0, WIFI 5.3G (0); Frequency: 5220 MHz;Duty Cycle: 1:1.01 Medium parameters used (interpolated): $f = 5220 \text{ MHz}$; $\sigma = 4.68 \text{ S/m}$; $\epsilon_r = 35.98$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.57, 5.57, 5.57) @ 5220 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Left cheek/WIFI 5.2/Area Scan (13x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.514 W/kg Left cheek/WIFI 5.2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 0.8330 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 1.71 W/kg SAR(1 g) = 0.308 W/kg; SAR(10 g) = 0.067 W/g Maximum value of SAR (measured) = 1.30 W/kg	
	

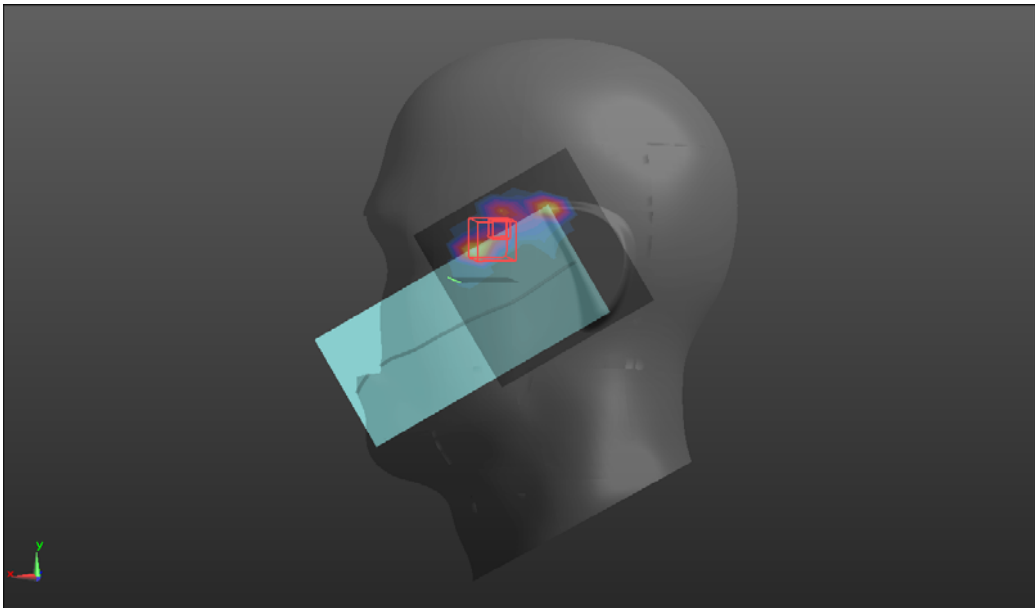
WIFI 5GHz UNII-2A

Head	Left cheek(2021.09.07)
Communication System: UID 0, WIFI 5.3G (0); Frequency: 5280 MHz;Duty Cycle: 1:1.01 Medium parameters used (interpolated): $f = 5280 \text{ MHz}$; $\sigma = 4.74 \text{ S/m}$; $\epsilon_r = 35.92$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.43, 5.43, 5.43) @ 5280 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Left cheek/WIFI 5.3 2/Area Scan (13x13x1)): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.306 W/kg Left cheek/WIFI 5.3 2/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 0 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 1.87 W/kg SAR(1 g) = 0.239 W/kg; SAR(10 g) = 0.052 W/kg Maximum value of SAR (measured) = 1.07 W/kg 	

WIFI 5GHz UNII-2C

Head	Left cheek(2021.09.08)
Communication System: UID 0, WIFI 5.6G (0); Frequency: 5580 MHz;Duty Cycle: 1:1.01 Medium parameters used (interpolated): $f = 5580$ MHz; $\sigma = 5.049$ S/m; $\epsilon_r = 35.526$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(4.95, 4.95, 4.95) @ 5580 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Left cheek/WIFI 5.5/Area Scan (13x13x1)): Measurement grid: dx=10mm, dy=10mm Maximum value of SAR (measured) = 0.220 W/kg Left cheek/WIFI 5.5/Zoom Scan (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm Reference Value = 0 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 0.753 W/kg SAR(1 g) = 0.142 W/kg; SAR(10 g) = 0.030 W/kg Maximum value of SAR (measured) = 0.574 W/kg	
	

WIFI 5GHz UNII-3

Head	Left cheek(2021.09.09)
Communication System: UID 0, WIFI 5.8G (0); Frequency: 5785 MHz;Duty Cycle: 1:1 Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 5.255 \text{ S/m}$; $\epsilon_r = 35.315$; $\rho = 1000 \text{ kg/m}^3$ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(5.12, 5.12, 5.12) @ 5785 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) Left cheek/WIFI 5.8/Area Scan (13x13x1)): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$ Maximum value of SAR (measured) = 0.151 W/kg Left cheek/WIFI 5.8/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$ Reference Value = 0.3010 V/m; Power Drift = -.00 dB Peak SAR (extrapolated) = 0.746 W/kg SAR(1 g) = 0.069 W/kg; SAR(10 g) = 0.017 W/kg Maximum value of SAR (measured) = 0.515 W/kg 	

Bluetooth

Head	Left cheek(2021.09.04)
Communication System: UID 0, BT (0); Frequency: 2441 MHz;Duty Cycle: 1:1.08 Medium parameters used (interpolated): $f = 2441$ MHz; $\sigma = 1.792$ S/m; $\epsilon_r = 39.213$; $\rho = 1000$ kg/m³ Phantom section: Left Section DASY5 Configuration: - Probe: EX3DV4 - SN3708; ConvF(7.48, 7.48, 7.48) @ 2441 MHz; Calibrated: 10/30/2020 - Sensor-Surface: 1.4mm (Mechanical Surface Detection) - Electronics: DAE4 Sn720; Calibrated: 9/30/2020 - Phantom: Twin-SAM 1559; Type: QD 000 P40 CD; Serial: xxxx - Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483) LEFT CHEEK/BT/Area Scan (11x11x1): Measurement grid: dx=12mm, dy=12mm Maximum value of SAR (measured) = 0.291 W/kg LEFT CHEEK/BT/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.925 V/m; Power Drift = 0.07 dB Peak SAR (extrapolated) = 0.386 W/kg SAR(1 g) = 0.064 W/kg; SAR(10 g) = 0.032 W/kg Maximum value of SAR (measured) = 0.279 W/kg	
