

Test Plot 1#: GSM 850 High Body Back**DUT: 10.1 INCHES LTE TABLET PC; Type: 104S; Serial: 2W1W-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 848.8 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 848.8$ MHz; $\sigma = 0.936$ S/m; $\epsilon_r = 41.918$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @848.8 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (6x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.75 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.23 V/m; Power Drift = 0.14dB

Peak SAR (extrapolated) = 3.73 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.476 W/kg

Maximum value of SAR (measured) = 1.79 W/kg

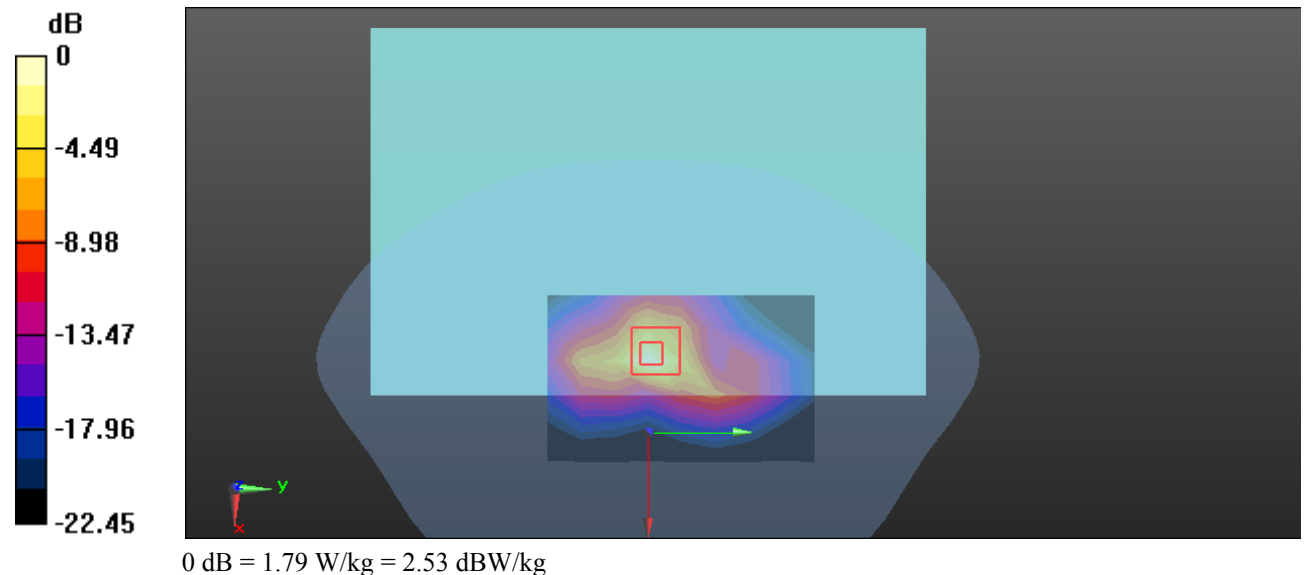

Test Plot 2#: PCS 1900 Mid Body Back**DUT: 10.1 INCHES LTE TABLET PC; Type: 104S; Serial: 2W1W-1**

Communication System: Generic GPRS-2 slots (0); Frequency: 1880 MHz; Duty Cycle: 1:4
Medium parameters used: $f = 1880$ MHz; $\sigma = 1.412$ S/m; $\epsilon_r = 39.452$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1880 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.26 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.961 V/m; Power Drift = 0.06dB

Peak SAR (extrapolated) = 2.94 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.412 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

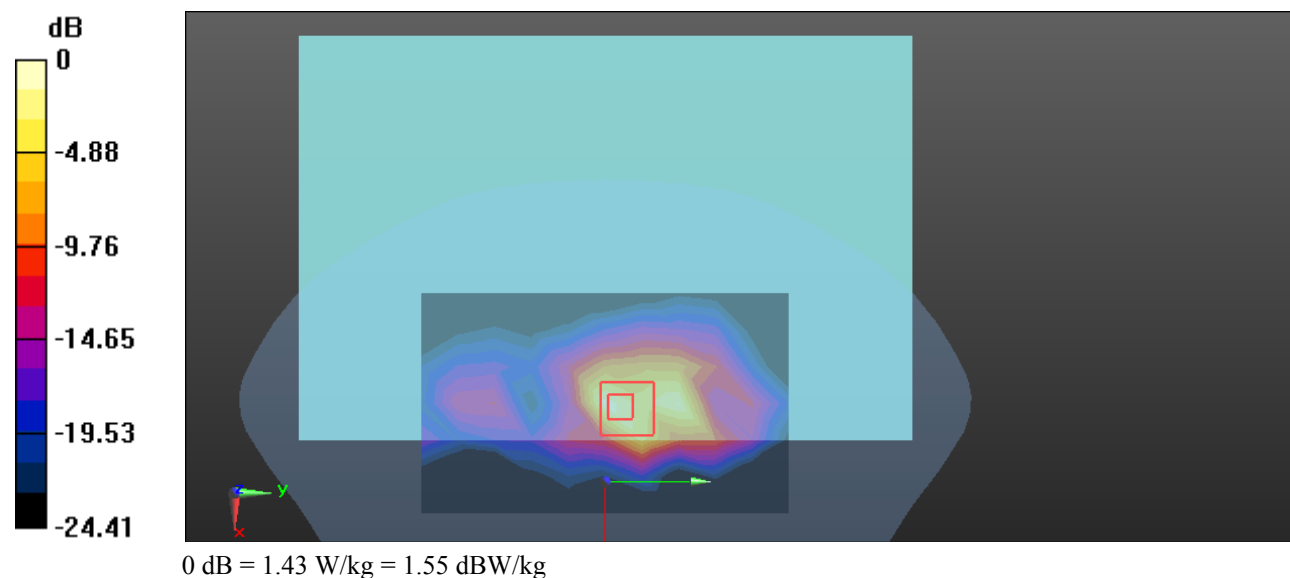

Test Plot 3#: WCDMA Band 2 Low Body Back**DUT: 10.1 INCHES LTE TABLET PC; Type: 104S; Serial: 2W1W-1**

Communication System: Generic WCDMA (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.405$ S/m; $\epsilon_r = 39.673$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1852.4 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.30 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.10 V/m; Power Drift = 0.04dB

Peak SAR (extrapolated) = 3.11 W/kg

SAR(1 g) = 1.13 W/kg; SAR(10 g) = 0.453 W/kg

Maximum value of SAR (measured) = 1.43 W/kg

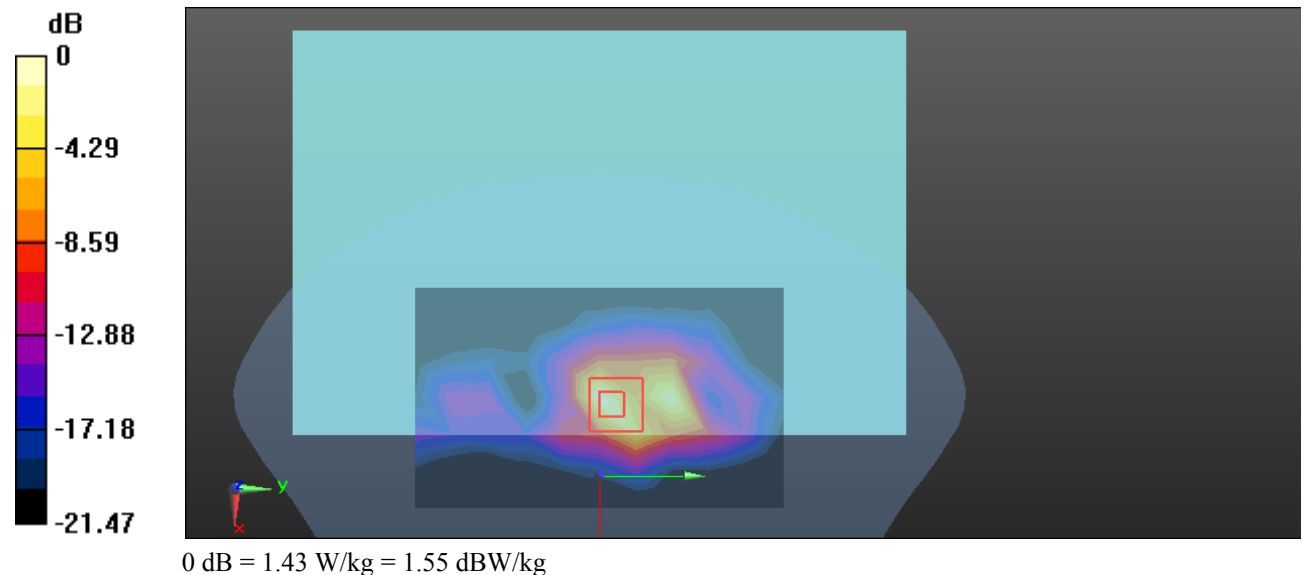

Test Plot 4#: WCDMA Band 4 High Body Back**DUT: 10.1 INCHES LTE TABLET PC; Type: 104S; Serial: 2W1W-1**

Communication System: Generic WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 40.704$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @1752.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.681 W/kg


Zoom Scan (6x6x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.33 V/m; Power Drift = 0.01dB

Peak SAR (extrapolated) = 2.90 W/kg

SAR(1 g) = 0.927 W/kg; SAR(10 g) = 0.399 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

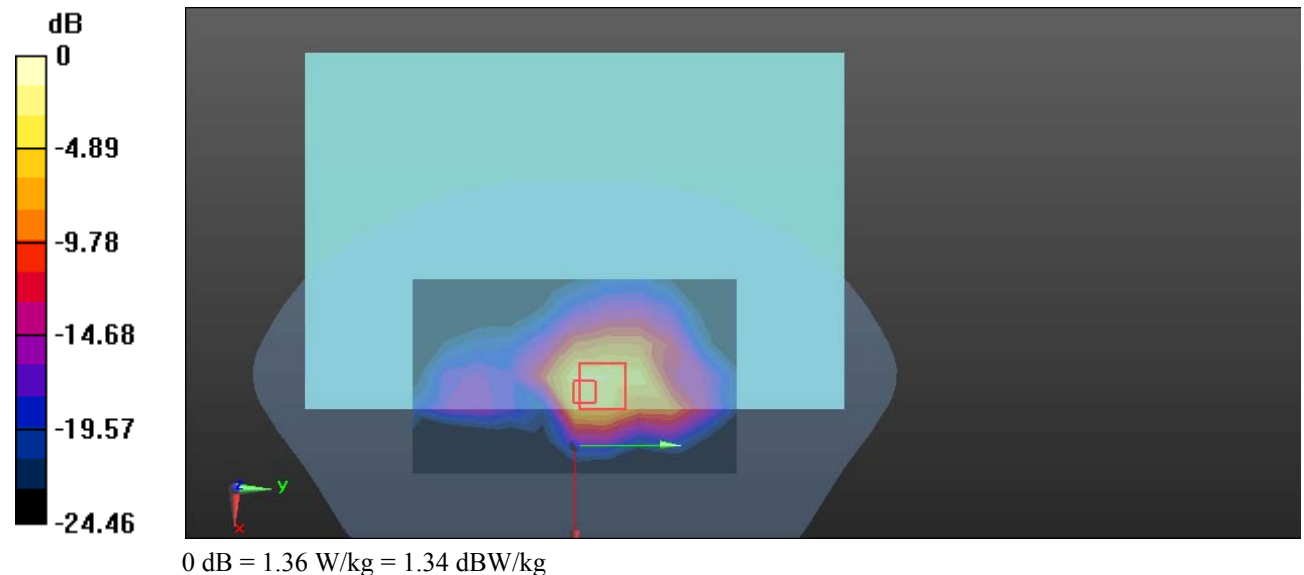

Test Plot 5#: WCDMA Band 5 High Body Back**DUT: 10.1 INCHES LTE TABLET PC; Type: 104S; Serial: 2W1W-1**

Communication System: Generic WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 846.6$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 41.922$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @846.6 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.34 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.70 V/m; Power Drift = 0.18dB

Peak SAR (extrapolated) = 4.55 W/kg

SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.437 W/kg

Maximum value of SAR (measured) = 1.36 W/kg

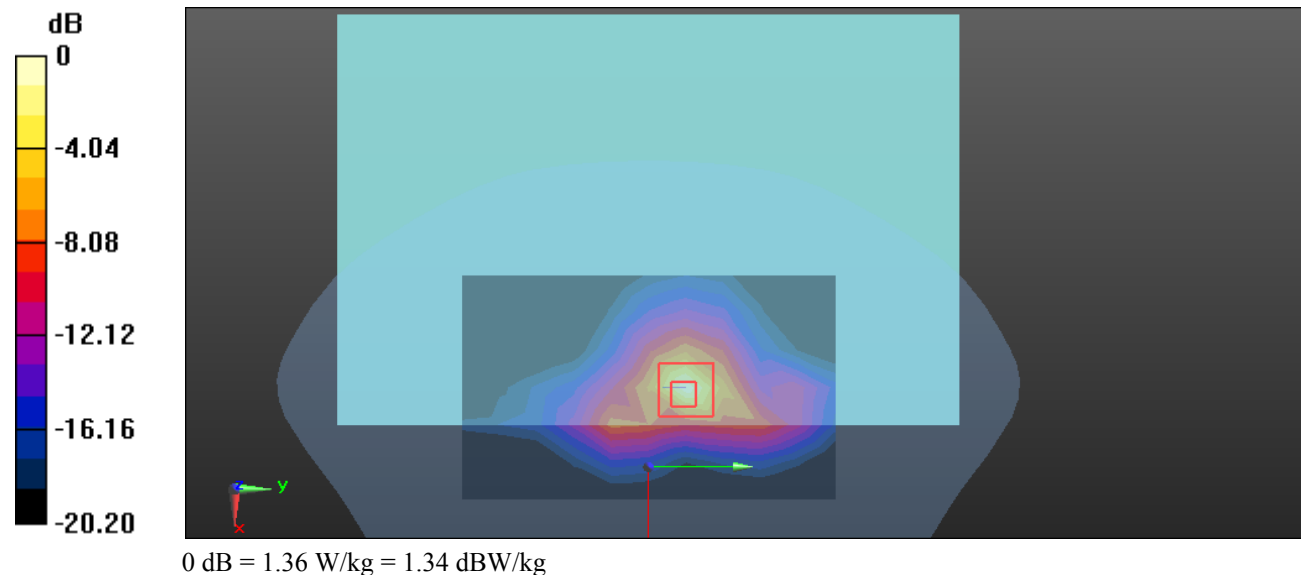

Test Plot 6#: LTE Band 2 1RB Low Body Back**DUT: 10.1 INCHES LTE TABLET PC; Type: 104S; Serial: 2W1W-1**

Communication System: Generic FDD-LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1860$ MHz; $\sigma = 1.407$ S/m; $\epsilon_r = 39.637$; $\rho = 1000$ kg/m³ ;
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.37, 8.32, 7.54) @1860 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection);
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.949 W/kg


Zoom Scan (5x5x7) /Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.33 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 2.44 W/kg

SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.405 W/kg

Maximum value of SAR (measured) = 1.07 W/kg

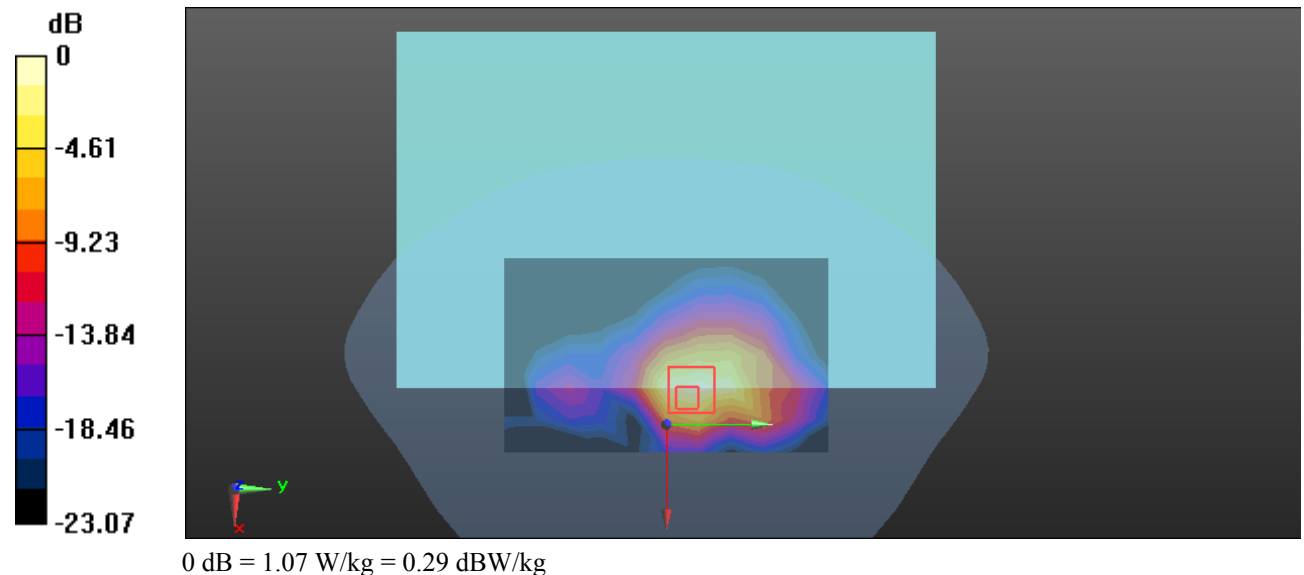

Test Plot 7#: LTE Band 4 1RB High Body Back**DUT: 10.1 INCHES LTE TABLET PC; Type: 104S; Serial: 2W1W-1**

Communication System: Generic FDD-LTE (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1745$ MHz; $\sigma = 1.352$ S/m; $\epsilon_r = 40.808$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(7.56, 8.56, 7.71) @ 1745 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.737 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.25 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 2.99 W/kg

SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.390 W/kg

Maximum value of SAR (measured) = 1.42 W/kg

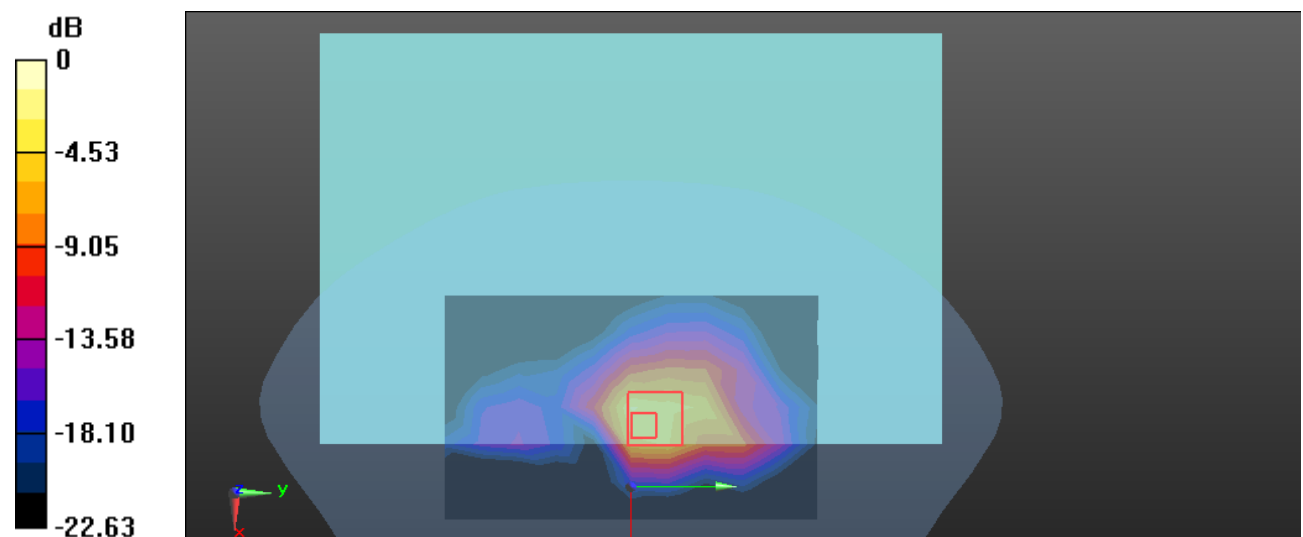

0 dB = 1.42 W/kg = 1.52 dBW/kg

Test Plot 8#: LTE Band 5 1RB High Body Back**DUT: 10.1 INCHES LTE TABLET PC; Type: 104S; Serial: 2W1W-1**

Communication System: Generic FDD-LTE (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.931 \text{ S/m}$; $\epsilon_r = 41.933$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(8.42, 9.5, 8.93) @ 844 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (7x11x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.42 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.31 V/m; Power Drift = 0.19 dB

Peak SAR (extrapolated) = 4.60 W/kg

SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.463 W/kg

Maximum value of SAR (measured) = 1.44 W/kg

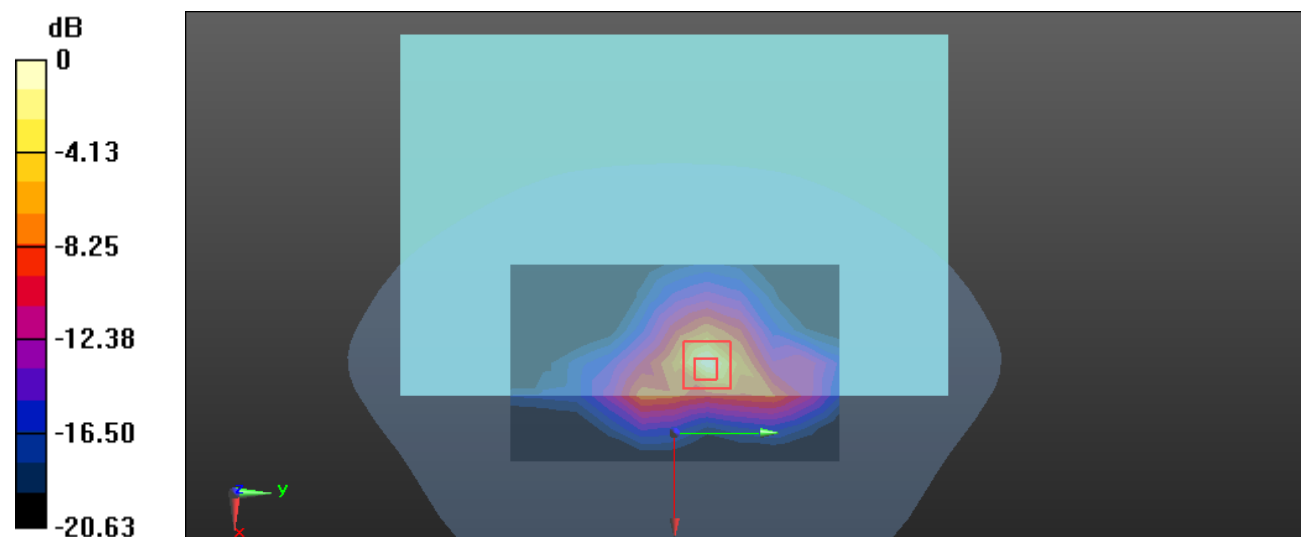

Test Plot 9#: 5.8G WiFi Low Body Back**DUT: 10.1 INCHES LTE TABLET PC; Type: 104S; Serial: 2W1W-1**

Communication System: UID 0, 802.11 a (0); Frequency: 5745 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5745 \text{ MHz}$; $\sigma = 5.265 \text{ S/m}$; $\epsilon_r = 35.127$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN7329; ConvF(4.54, 5.16, 4.7) @ 5745 MHz; Calibrated: 2024/3/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1354; Calibrated: 2024/12/3
- Phantom: Twin SAM; Type: Twin SAM V5.0; Serial: TP:1412
- Measurement SW: DASY52, Version 52.10 (2); SEMCAD X Version 14.6.12 (7470)

Area Scan (10x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.523 W/kg


Zoom Scan (8x8x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 3.644 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.968 W/kg

SAR(1 g) = 0.236 W/kg; SAR(10 g) = 0.062 W/kg

Maximum value of SAR (measured) = 0.573 W/kg

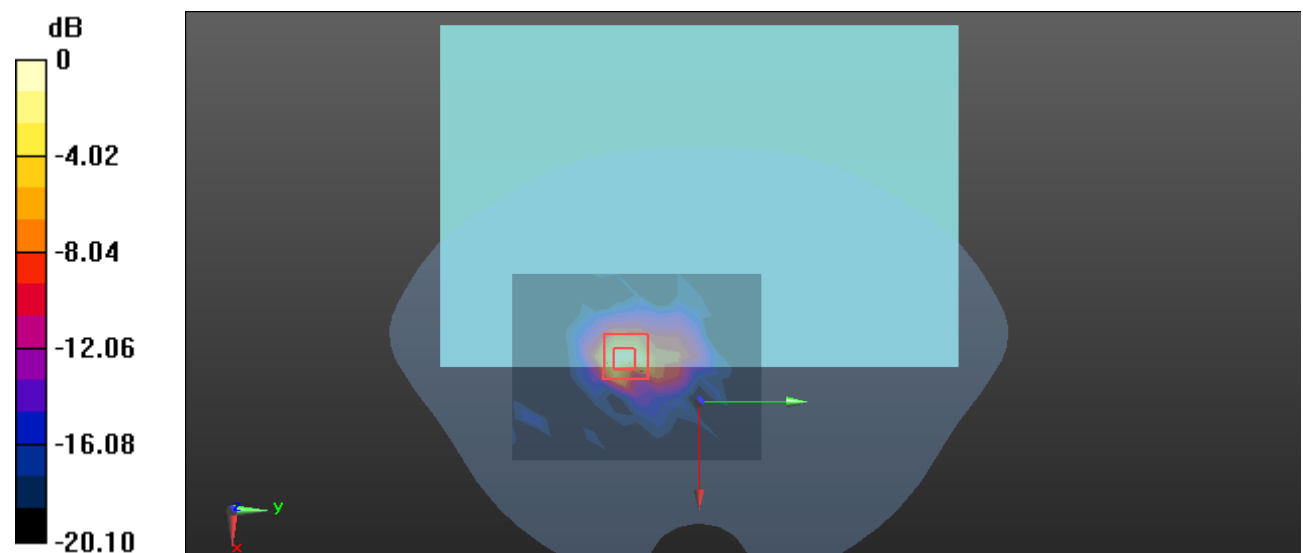 $0 \text{ dB} = 0.573 \text{ W/kg} = -2.42 \text{ dBW/kg}$