



Report No.: TW2106177-03E File Reference No.: 2021-08-19

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Product: VR Headset

Model No.: CVR-255-64, CVR-255-32

Trademark: CLASS VR

Test Standards: FCC Part 15.247

Test Result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 15.247 for the

evaluation of electromagnetic compatibility

Approved By

Jack Chung

Manager

Dated: August 19, 2021

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le Village, Nanshan District, Shenzhen, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: TW2106177-03E Page 2 of 87

Date: 2021-08-19



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meet with ISO/IEC-17025 requirements, which is approved by CNAL. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:2005 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 744189

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 744189.

Industry Canada (IC) — Registration No.:5205A

The EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 5205A.

A2LA (Certification Number:5013.01)

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (A2LA). Certification Number:5013.01

Page 3 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty.	5
1.7	Test By	5
2.0	List of Measurement Equipment	6
3.0	Technical Details	8
3.1	Summary of Test Results.	8
3.2	Test Standards.	8
4.0	EUT Modification.	8
5.0	Power Line Conducted Emission Test.	9
5.1	Schematics of the Test.	9
5.2	Test Method and Test Procedure.	9
5.3	Configuration of the EUT.	9
5.4	EUT Operating Condition.	10
5.5	Conducted Emission Limit.	10
5.6	Test Result.	10
6.0	Radiated Emission test.	13
6.1	Test Method and Test Procedure.	13
6.2	Configuration of the EUT.	14
6.3	EUT Operation Condition.	14
6.4	Radiated Emission Limit.	14
7.0	6dB Bandwidth Measurement.	24
8.0	Maximum Output Power	44
9.0	Power Spectral Density Measurement.	47
10.0	Out of Band Measurement.	66
11.0	Antenna Requirement.	84
12.0	FCC ID Label.	85
13.0	Photo of Test Setup and EUT View.	86

Date: 2021-08-19



1.0 General Details

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Zone C, 1st Floor, Block B, Jun Xiang Da Building, Zhongshan Park Road West, Tong Le

Village, Nanshan District, Shenzhen, China

Telephone: (755) 83448688 Fax: (755) 83442996

Site Listed with Federal Communications commission (FCC)

Registration Number:744189 For 3m Anechoic Chamber

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m Anechoic Chamber

1.2 Applicant Details

Applicant: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community, Huaqiangbei,

Futian District, Shenzhen

Telephone: -Fax: --

1.3 Description of EUT

Product: VR Headset

Manufacturer: Shenzhen Jingwah Information Technology Co., Ltd.

Address: 6F, Bldg.4, Jinghua Square, No. 168, Zhenzhong Rd., Fuqiang Community,

Huaqiangbei, Futian District, Shenzhen

Brand Name: CLASS VR
Model Number: CVR-255-64
Additional Model Number: CVR-255-32
Hardware Version: EM_AX139_MB_V1.0
Software Version: qfil-cvr25564-1.1.11-64gb

Serial No.: 251VRBESG1

Type of Modulation IEEE 802.11b: DSSS (CCK, QPSK, DBPSK)

IEEE 802.11g/n (HT20, HT40): OFDM (64QAM, 16QAM, QPSK, BPSK)

Frequency range IEEE 802.11b/g/n (HT20): 2412-2462MHz; 802.11n HT40: 2422-2452MHz

Channel Spacing 5MHz for IEEE 802.11b/g/n HT20, HT40

Air Data Rate IEEE 802.11b: 11, 5.5, 2, 1 Mbps

IEEE 802.11g: 54, 48,36, 24, 18, 12, 9, 6 Mbps

IEEE 802.11n HT20/HT40: mcs0-mcs9

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2106177-03E Page 5 of 87

Date: 2021-08-19



Frequency Selection By software

Channel Number IEEE 802.11b/g/n (HT20): 11 Channels; EEE 802.11n (HT40): 7 Channels;

Antenna: Two FPC antenna used. The gain of the antennas is 2.5dBi for each one (Get from the

antenna specification provided the manufacturer)

Power Supply: Model: AV-ASC-USB-002; Input: 100-240V~, 1.3A, 50/60Hz;

Output: DC5V, 2.4A*5 or DC5V, 1A*10

Input Voltage: DC5V, 2.4A

Battery: DC3.8V, 3800mAh, 14.44Wh Li-ion battery

1.4 Submitted Sample: 3 Samples

1.5 Test Duration

2021-06-15 to 2021-08-18

1.6 Test Uncertainty

Conducted Emissions Uncertainty =3.6dB

Radiated Emissions below 1GHz Uncertainty =4.7dB

Radiated Emissions above 1GHz Uncertainty =6.0dB

Conducted Power Uncertainty =6.0dB

Occupied Channel Bandwidth Uncertainty = 5%

1.7 Test Engineer

Terry Tang

The sample tested by

Print Name: Terry Tang

Report No.: TW2106177-03E

Date: 2021-08-19



2.0 Test Equipment					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2021-06-18	2022-06-17
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2021-06-18	2022-06-17
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2021-06-18	2022-06-17
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2021-06-18	2022-06-17
Loop Antenna	EMCO	6507	00078608	2021-06-18	2022-06-17
Spectrum	R&S	FSIQ26	100292	2021-06-18	2022-06-17
Horn Antenna	A-INFO	LB-180400-KF	J211060660	2021-06-18	2022-06-17
Horn Antenna	R&S	BBHA 9120D	9120D-631	2021-07-02	2024-07-01
Power meter	Anritsu	ML2487A	6K00003613	2021-06-18	2022-06-17
Power sensor	Anritsu	MA2491A	32263	2021-06-18	2022-06-17
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2021-07-02	2024-07-01
9*6*6 Anechoic			N/A	2018-02-07	2021-02-06
EMI Test Receiver	RS	ESVB	826156/011	2021-06-18	2022-06-17
EMI Test Receiver	RS	ESH3	860904/006	2021-06-18	2022-06-17
Spectrum	HP/Agilent	ESA-L1500A	US37451154	2021-06-18	2022-06-17
Spectrum	HP/Agilent	E4407B	MY50441392	2021-06-18	2022-06-17
Spectrum	RS	FSP	1164.4391.38	2021-01-15	2022-01-14
RF Cable	Zhengdi	ZT26-NJ-NJ-8M/F A		2021-06-18	2022-06-17
RF Cable	Zhengdi	7m		2021-06-18	2022-06-17
RF Switch	EM	EMSW18	060391	2021-06-18	2022-06-17
Pre-Amplifier	Schwarebeck	BBV9743	#218	2021-06-18	2022-06-17
Pre-Amplifier	HP/Agilent	8449B	3008A00160	2021-06-18	2022-06-17
LISN	SCHAFFNER	NNB42	00012	2021-01-15	2022-01-14

2.2 Automation Test Software

For Conducted Emission Test

Name	Version
EZ-EMC	Ver.EMC-CON 3A1.1

For Radiated Emissions

Name	Version
EMI Test Software BL410-EV18.91	V18.905
EMI Test Software BL410-EV18.806 High Frequency	V18.06

The report refers only to the sample tested and does not apply to the bulk.

This report released in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.

Page 7 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



3. DESCRIPTION OF TEST MODES

IEEE 802.11b, 802.11g, 802.11n (HT20) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2412
Middle	2437
High	2462

IEEE 802.11b mode: 1Mbps data rate (worst case) was chosen for full testing. IEEE 802.11g mode: 6Mbps data rate (worst case) was chosen for full testing. IEEE 802.11n (HT20) mode: mcs0 (worst case) were chosen for full testing

IEEE 802.11n (HT40) mode

The EUT had been tested under operating condition. There are three channels have been tested as following:

Channel	Frequency (MHz)
Low	2422
Middle	2437
High	2452

IEEE 802.11n (HT40) mode: msc0 data rate (worst case) were chosen for full testing

Note: During the test, the duty cycle was set up to >98%

Page 8 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



3.0 **Technical Details**

3.1 **Summary of test results**

The EUT has been tested ac	cording to the following speci	fications:	
Standard	Test Type	Result	Notes
CCC Part 15, Paragraph 15.207	Conducted Emission Test	PASS	Complies
FCC Part 15 Subpart C Paragraph 15.247(a)(2) Limit	Spectrum bandwidth of an Orthogonal Frequency Division Multiplex System Limit: 6dB bandwidth>500kHz	PASS	Complies
FCC Part 15, Paragraph 15.247(b)	Maximum peak output power Limit: max. 30dBm	PASS	Complies
CC Part 15, Paragraph 15.205	Transmitter Radiated	PASS	Complies
& 15.209	Emission Limit: Table 15.209		
FCC Part 15, Paragraph 15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Complies
FCC Part 15, Paragraph 15.247(d)	Out of Band Emission and Restricted Band Radiation Limit: 20dB less than peak value of fundamental frequency Restricted band limit:	PASS	Complies

3.2 **Test Standards**

FCC Part 15 Subpart & Subpart C, Paragraph 15.247

4.0 **EUT Modification**

No modification by SHENZHEN TIMEWAY TESTING LABORATORIES.


Report No.: TW2106177-03E

Date: 2021-08-19



5.0 Power Line Conducted Emission Test

5.1 Schematics of the test

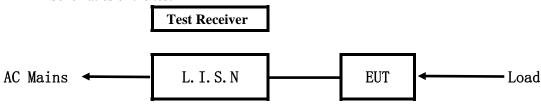


EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz Block diagram of Test setup

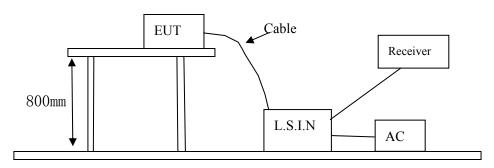

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

A. EUT

Device	Manufacturer	Model	FCC ID
VD Handart	Shenzhen Jingwah Information	CVR-255-64,	DDD CVD 255 64
VR Headset	Technology Co., Ltd.	CVR-255-32	RBD-CVR-255-64

B. Internal Device

Device	Manufacturer	Model	FCC ID/DOC
N/A			

C. Peripherals

Device	Manufacturer	Model	Rating
N/A			

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: TW2106177-03E Page 10 of 87

Date: 2021-08-19



5.4 EUT Operating Condition

Operating condition is according to ANSI C63.10-2013.

- A Setup the EUT and simulators as shown on follow
- B Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

Frequency	Limits (d	lB μV)
(MHz)	Quasi-peak Level	Average Level
$0.15 \sim 0.50$	66.0~56.0*	56.0~46.0*
$0.50 \sim 5.00$	56.0	46.0
5.00 ~ 30.00	60.0	50.0

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results

The frequency spectrum from 0.15MHz to 30MHz was investigated. All reading are quasi-peak values with a resolution bandwidth of 9kHz.

Date: 2021-08-19



A: Conducted Emission on Live Terminal (150kHz to 30MHz)


EUT Operating Environment

Temperature: 26℃ Humidity: 65%RH Atmospheric Pressure: 101 kPa

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

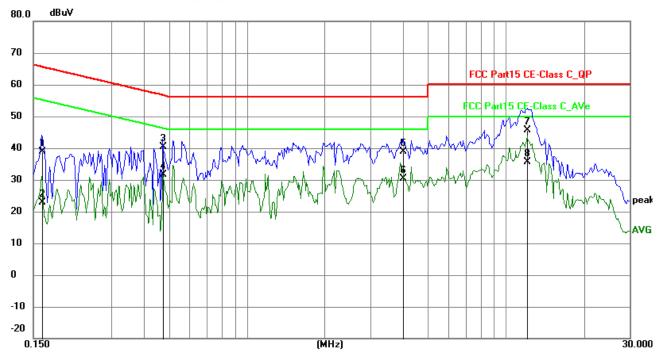

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1617	29.14	9.78	38.92	65.38	-26.46	QP	Р
2	0.1617	13.12	9.78	22.90	55.38	-32.48	AVG	Р
3	0.4737	30.56	9.77	40.33	56.45	-16.12	QP	Р
4	0.4737	21.81	9.77	31.58	46.45	-14.87	AVG	Р
5	4.0101	28.96	9.89	38.85	56.00	-17.15	QP	Р
6	4.0101	20.47	9.89	30.36	46.00	-15.64	AVG	Р
7	12.0753	35.34	10.25	45.59	60.00	-14.41	QP	Р
8	12.0753	25.49	10.25	35.74	50.00	-14.26	AVG	Р

Date: 2021-08-19



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)


EUT Operating Environment

Humidity: 65%RH Atmospheric Pressure: 101 kPa Temperature: 26°C

EUT set Condition: Keep WIFI Transmitting

Results: Pass

Please refer to following diagram for individual

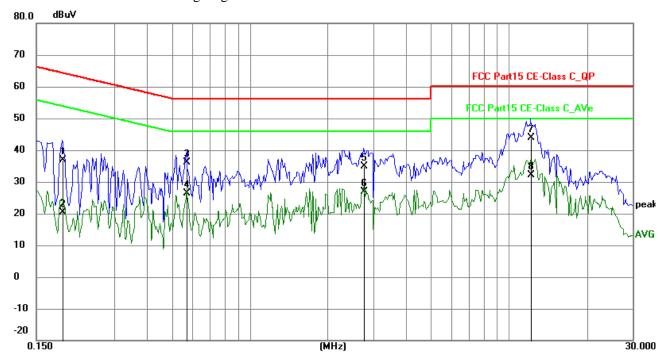

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1890	27.15	9.76	36.91	64.08	-27.17	QP	Р
2	0.1890	10.60	9.76	20.36	54.08	-33.72	AVG	Р
3	0.5712	26.42	9.77	36.19	56.00	-19.81	QP	Р
4	0.5712	16.49	9.77	26.26	46.00	-19.74	AVG	Р
5	2.7552	25.02	9.83	34.85	56.00	-21.15	QP	Р
6	2.7552	16.97	9.83	26.80	46.00	-19.20	AVG	П
7	12.1767	33.68	10.26	43.94	60.00	-16.06	QP	Р
8	12.1767	21.86	10.26	32.12	50.00	-17.88	AVG	Р

Page 13 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




6 Radiated Emission Test

- 6.1 Test Method and test Procedure:
- (1) The EUT was tested according to ANSI C63.10-2013. The radiated test was performed at Timeway EMC Laboratory. This site is on file with the FCC laboratory division, Registration No. 744189
- (2) The EUT, peripherals were put on the turntable which table size is 1m x 1.5 m, table high 0.8 m. All set up is according to ANSI C63.10-2013.
- (3) The frequency spectrum from 30 MHz to 25 GHz was investigated. All readings from 30 MHz to 1 GHz are Quasi-peak values with a resolution bandwidth of 120 kHz. F For measurement above 1GHz, peak values with RBW=1MHz VBW=3MHz and PK detector. AV value with RBW=1MHz, VBW=3MHz and RMS detector. Measurements were made at 3 meters.
- (4) The antenna high is varied from 1 m to 4 m high to find the maximum emission for each frequency.
- (5) Maximizing procedure was performed on the six (6) highest emissions to ensure EUT compliance is with all installation combinations. All data was recorded in the peak detection mode. Quasi-peak readings was performed only when an emission was found to be marginal (within -4 dB of specification limit), and are distinguished with a "QP" in the data table.
- (6) The antenna polarization: Vertical polarization and Horizontal polarization.

Block diagram of Test setup

For radiated emissions from 9kHz to 30MHz

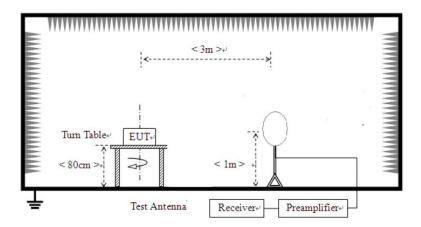


Page 14 of 87

Report No.: TW2106177-03E


Date: 2021-08-19



For radiated emissions from 30MHz to1GHz

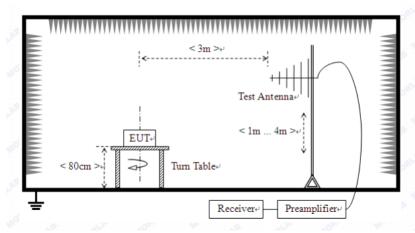

For radiated emissions above 1GHz

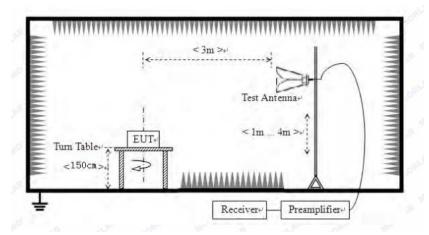

- 6.2 Configuration of The EUT
 Same as section 5.3 of this report
- 6.3 EUT Operating Condition
 Same as section 5.4 of this report.
- 6.4 Radiated Emission Limit

All emission from a digital device, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below:

Report No.: TW2106177-03E

Date: 2021-08-19



Page 15 of 87

Frequencies in restricted band are complied to limit on Paragraph 15.209

Frequency Range (MHz)	Distance (m)	Field strength (dB μ V/m)
30-88	3	40.0
88-216	3	43.5
216-960	3	46.0
Above 960	3	54.0

Note:

- 1. RF Voltage (dBuV) = 20 log RF Voltage (uV)
- 2. In the Above Table, the higher limit applies at the band edges.
- 3. Distance refers to the distance in meters between the measuring instrument antenna and the EUT
- 4. This is a handhold device. The radiated emissions should be tested under 3-axes position (Lying, Side, and Stand), After pre-test. It was found that the worse radiated emission was get at the lying position.
- 5. Worse case were recorded in the test report. 802.11b was the worst case.

Page 16 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Horizontal (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

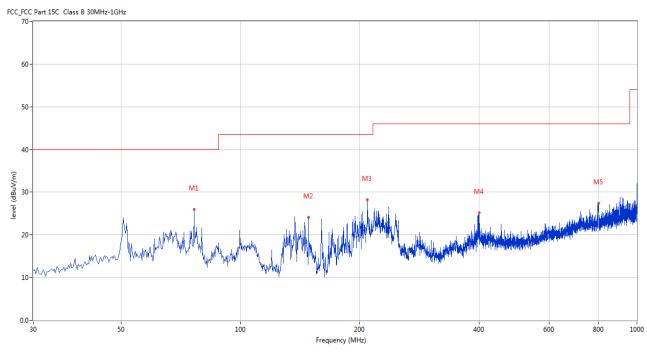

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
1	76.306	26.03	-17.58	40.0	-13.97	Peak	217.00	100	Horizontal	Pass
2	148.310	24.13	-17.16	43.5	-19.37	Peak	225.00	100	Horizontal	Pass
3	208.920	28.20	-13.64	43.5	-15.30	Peak	352.00	100	Horizontal	Pass
4	400.205	25.23	-8.58	46.0	-20.77	Peak	161.00	100	Horizontal	Pass
5	799.745	27.37	-2.97	46.0	-18.63	Peak	189.00	100	Horizontal	Pass

Page 17 of 87 Report No.: TW2106177-03E

Date: 2021-08-19




Test result General Radiated Emission Data and Harmonics Radiated Emission Data

Radiated Emission In Vertical (30MHz----1000MHz)

EUT set Condition: **Keep Transmitting**

Results: Pass

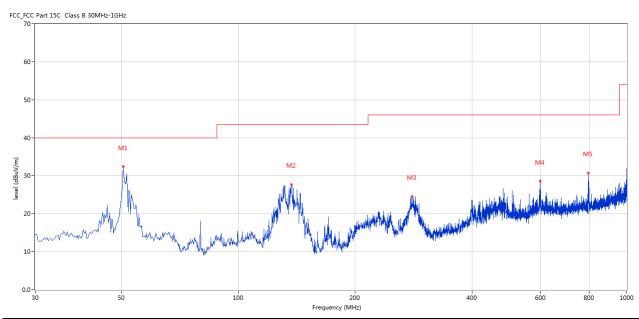

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
1	50.607	32.37	-11.39	40.0	-7.63	Peak	39.00	100	Vertical	Pass
2	136.916	27.69	-17.19	43.5	-15.81	Peak	130.00	100	Vertical	Pass
3	279.955	24.52	-11.50	46.0	-21.48	Peak	130.00	100	Vertical	Pass
4	598.278	28.54	-5.12	46.0	-17.46	Peak	74.00	100	Vertical	Pass
5	796.836	30.66	-3.06	46.0	-15.34	Peak	165.00	100	Vertical	Pass

Page 18 of 87


Report No.: TW2106177-03E

Date: 2021-08-19



Please refer to the following test plots for details:

CH01 for 11n 802.11b: Horizontal

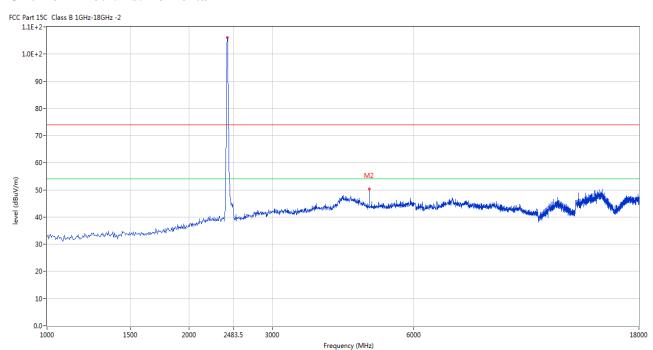


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4824.044	50.28	3.14	74.0	-23.72	Peak	261.00	100	Horizontal	Pass

Page 19 of 87 Report No.: TW2106177-03E

Date: 2021-08-19



CH01 for 11b: Vertical

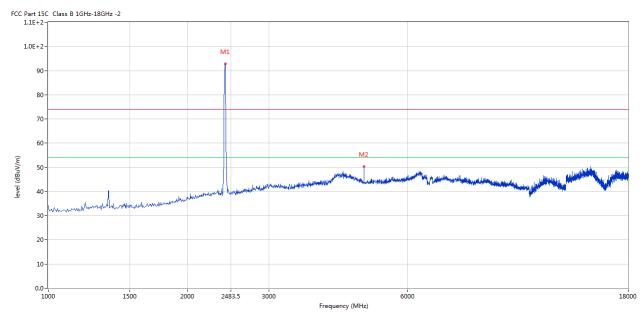


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4824.044	50.42	3.14	74.0	-23.58	Peak	358.00	100	Vertical	Pass

Page 20 of 87 Report No.: TW2106177-03E

Date: 2021-08-19



CH06 for 11b: Vertical

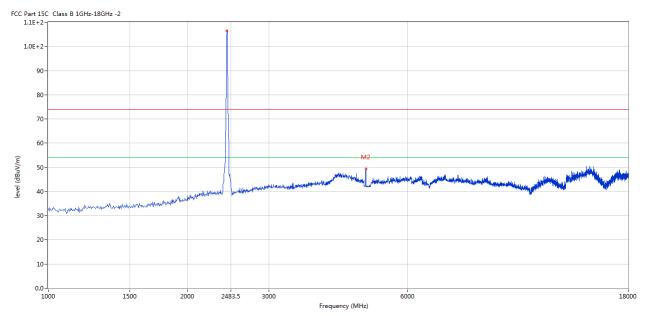


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4875.031	49.97	3.19	74.0	-24.03	Peak	256.00	100	Horizontal	Pass

Page 21 of 87 Report No.: TW2106177-03E

Date: 2021-08-19



CH06 for 11b: Horizontal

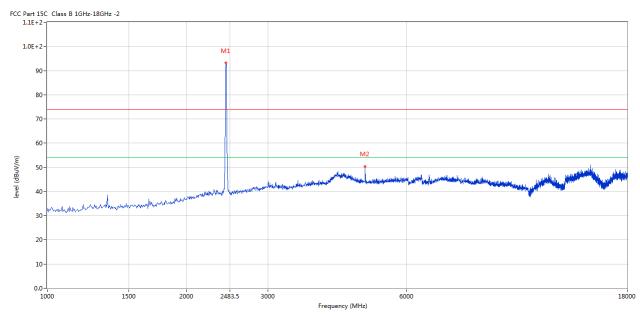


No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4875.031	50.31	3.19	74.0	-23.69	Peak	133.00	100	Vertical	Pass

Page 22 of 87 Report No.: TW2106177-03E

Date: 2021-08-19



CH11 for 11b: Vertical

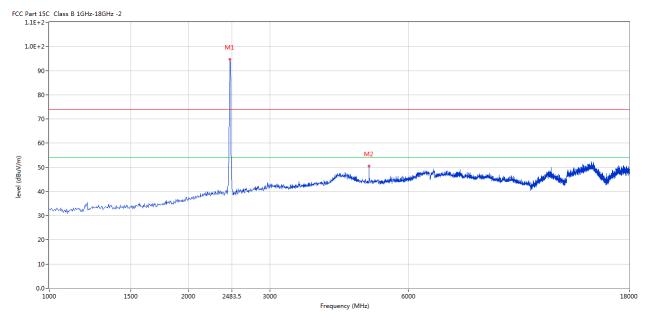

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)		(o)	(cm)		
2	4921.770	50.52	3.27	74.0	-23.48	Peak	21.00	100	Vertical	Pass


Page 23 of 87

Date: 2021-08-19

Report No.: TW2106177-03E



CH11 for 11b: Horizontal

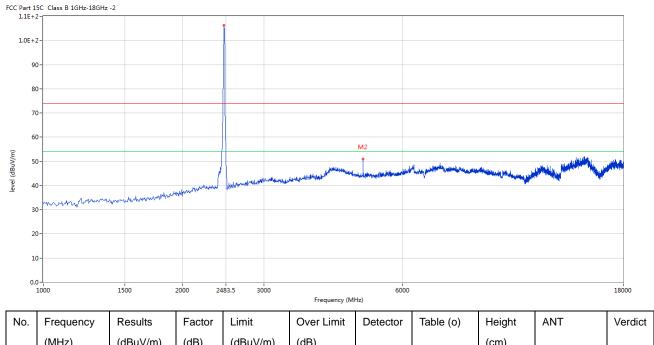

No.	Frequency	Results	Factor	Limit	Over Limit	Detector	Table (o)	Height	ANT	Verdict
	(MHz)	(dBuV/m)	(dB)	(dBuV/m)	(dB)			(cm)		
2	4921.770	50.00	3.27	74.0	-23.00	Peak	251.00	100	Horizontal	Pass

Note: 1. Result Level = Reading + Factor

- 2. Factor= AF + Cable Loss- Preamp
- 3. Margin = Result– Limit
- 4. The measured PK value less than the AV limit, no necessary to take down the AV measurement result.
- 5. For radiated Emissions from 18-25GHz, it is only the floor noise.
- 5. For radiated emissions below 30MHz, it is the floor noise and the field strength is much less than the limit for 20dB.

Page 24 of 87


Report No.: TW2106177-03E

Date: 2021-08-19



7.0 6dB Bandwidth Measurement

7.1 Test Setup



7.2 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is >500 kHz

7.3 Test Procedure

- 1. Set resolution bandwidth (RBW) = 100 kHz
- 2. Set the video bandwidth (VBW) \geq 3 x RBW.
- 3. Detector = Peak.
- 4. Trace mode = \max hold.
- 5. Sweep = auto couple.
- 6. Allow the trace to stabilize.
- 7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.4 Test Result

Page 25 of 87 Report No.: TW2106177-03E

Date: 2021-08-19



6dB Occupied Bandwidth

EUT		VR	Headset		Model		CVR-	255-64
Mode		80	02.11b		Input Vol	tage	DC	3.8V
Temperat	ure	24	deg. C,		Humidity	,	56%	% RH
Channel	Char	nnel Frequency (MHz)	Data Transfer Rate (Mbps)		ndwidth Hz)		mum Limit MHz)	Pass/ Fail
1		2412	1	9.	08		0.5	Pass
6		2437	1	9.	08		0.5	Pass
11		2462	1	9.	9.08		0.5	Pass
1		2412	11	7.	94		0.5	Pass
6		2437	11	7.	88	0.5		Pass
11	11 2462		11	7.88		0.5		Pass

Note: Two antennas (J1501 and J1503) were tested and only the worst cased was recorded in the test report. J1501 was the worst case.


Page 26 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



1. 802.11b at 1Mbps of CH01

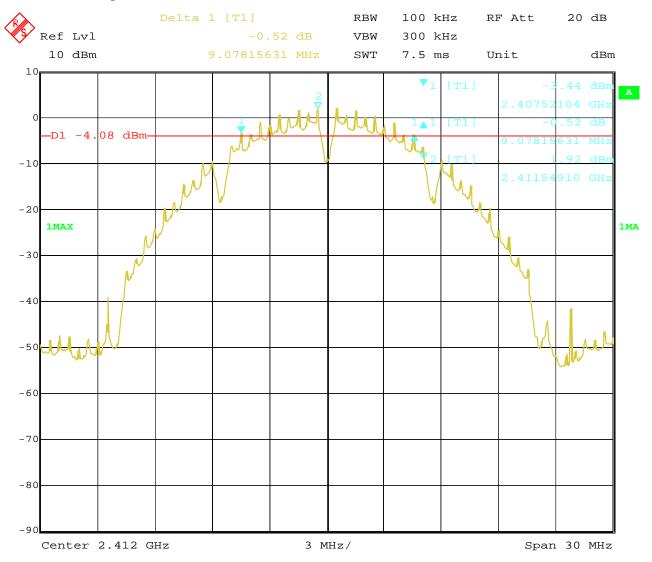

Date: 16.AUG.2021 13:04:26


Page 27 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



2. 802.11b at 1Mbps of CH06

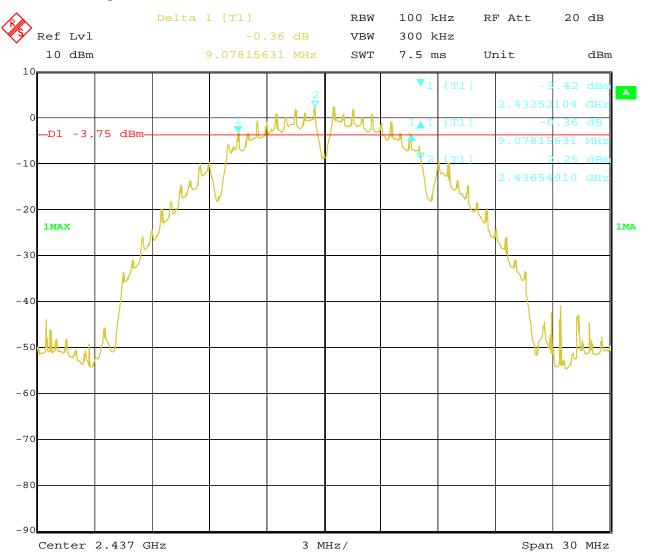

Date: 16.AUG.2021 13:57:36


Page 28 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



3. 802.11b at 1Mbps of CH11

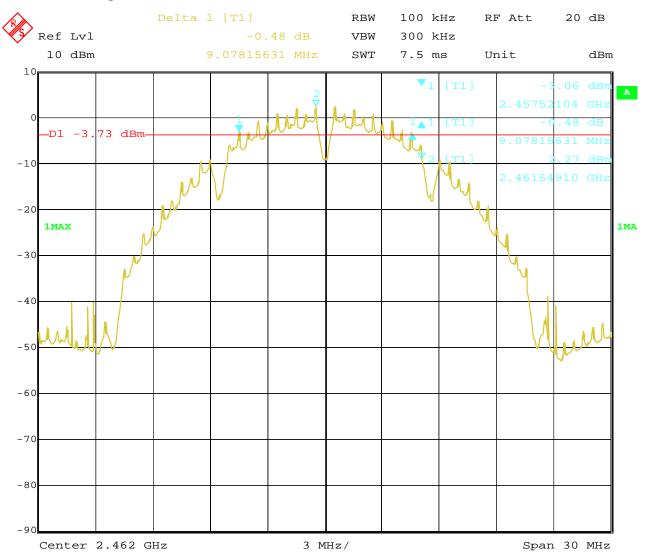

Date: 16.AUG.2021 14:06:29


Page 29 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



4. 802.11b at 11Mbps of CH01

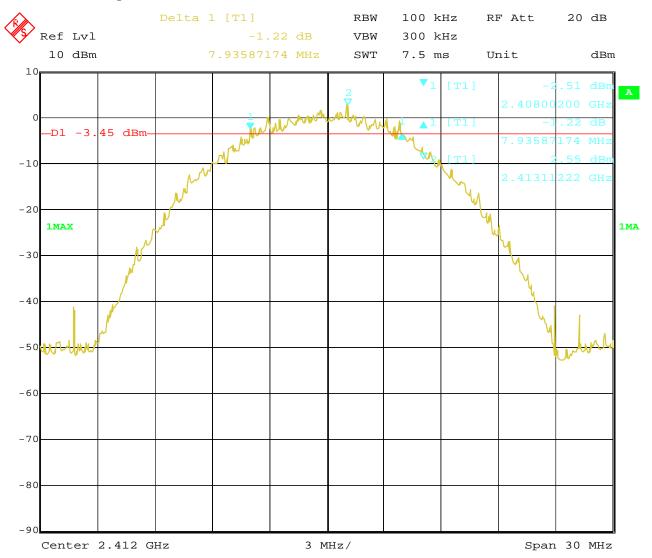

Date: 16.AUG.2021 13:15:04


Page 30 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



5. 802.11b at 11Mbps of CH06

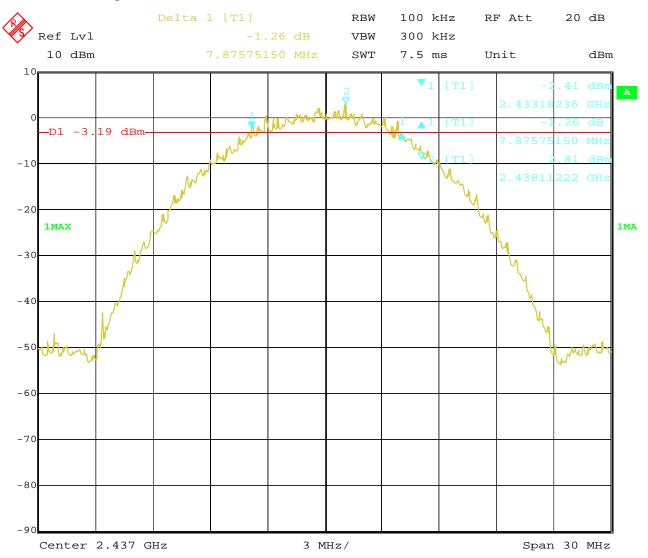

Date: 16.AUG.2021 14:00:20


Page 31 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



6. 802.11b at 11Mbps of CH11

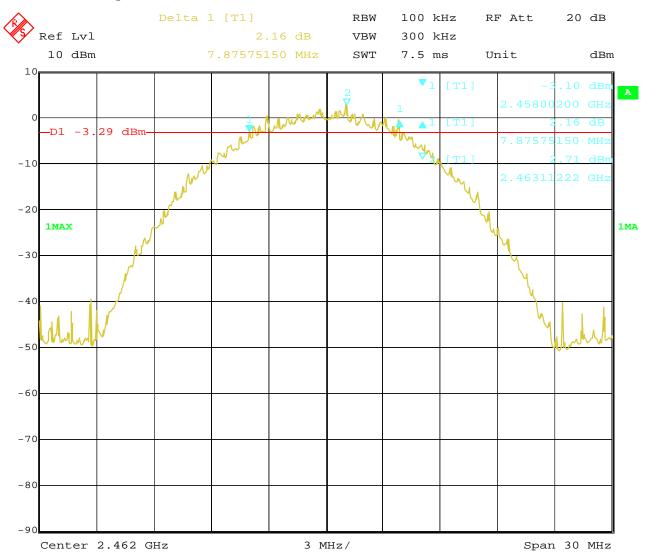

Date: 16.AUG.2021 14:04:20

Page 32 of 87 Report No.: TW2106177-03E

Date: 2021-08-19



6dB Occupied Bandwidth

EUT		VR	Headset		Model		CV	R-255-64
Mode		8	02.11g		Input Vol	tage	Ι	DC3.8V
Temperat	ure	24	deg. C,		Humidity	,	5	6% RH
Channel	Chan	nel Frequency (MHz)	Data Transfer Rate (Mbps)		andwidth Hz)		num Limit MHz)	Pass/ Fail
1		2412	6	16.35			0.5	Pass
6		2437	6	16.35		0.5		Pass
11		2462	6	16	.41	0.5		Pass

Note: Two antennas (J1501 and J1503) were tested and only the worst cased was recorded in the test report. J1501 was the worst case.

Page 33 of 87


Report No.: TW2106177-03E

Date: 2021-08-19



Test Plots:

1. 802.11g at 6Mbps of CH01

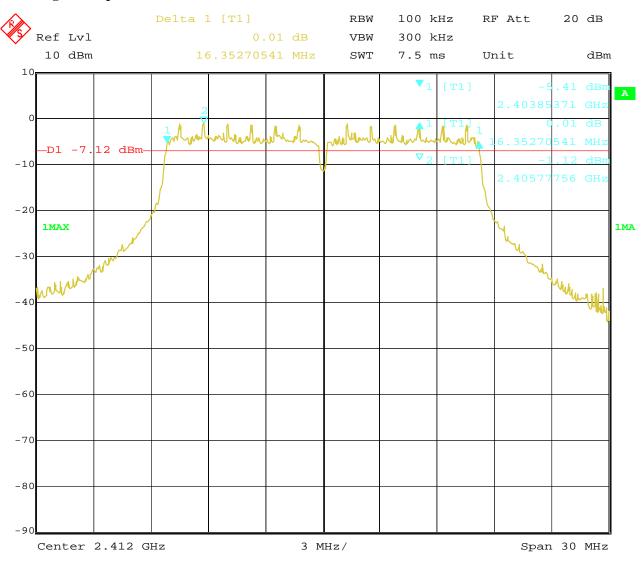

16.AUG.2021 13:18:50 Date:


Page 34 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



2. 802.11g at 6Mbps of CH06

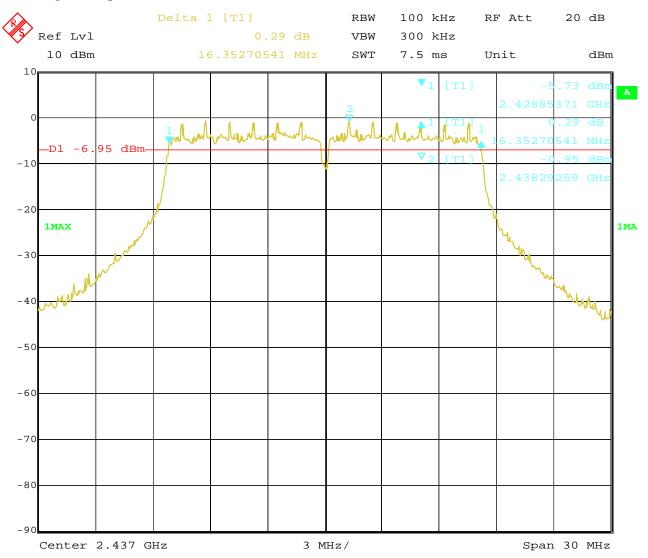

Date: 16.AUG.2021 13:54:22


Page 35 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



3. 802.11g at 6Mbps of CH11

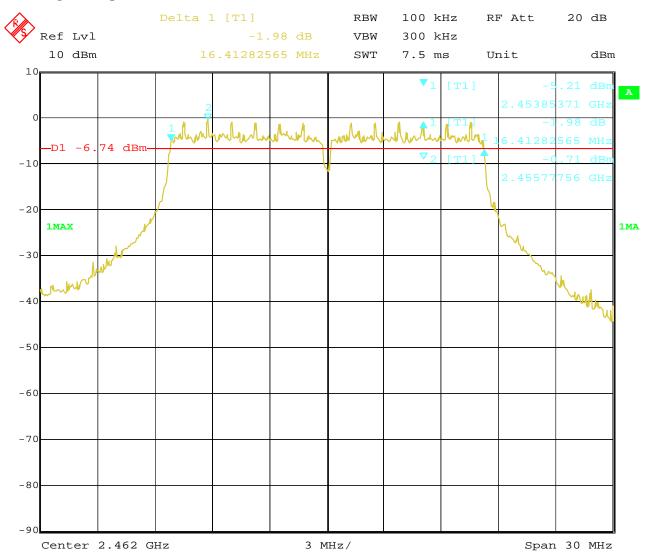

Date: 16.AUG.2021 14:09:19

Page 36 of 87 Report No.: TW2106177-03E

Date: 2021-08-19



6dB Occupied Bandwidth

EUT		VR Headset			Model		CVR-255-64	
Mode		802.11n HT20			Input Voltage		DC3.8V	
Temperature		24 deg. C,			Humidity		56% RH	
Channel	Channel Frequency (MHz)		Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
1	2412		mcs0	17.56		0.5		Pass
6	2437		mcs0	17.56		0.5		Pass
11		2462	mcs0	17.56		0.5		Pass

Note: Two antennas (J1501 and J1503) were tested and only the worst cased was recorded in the test report. J1501 was the worst case.

Page 37 of 87


Report No.: TW2106177-03E

Date: 2021-08-19



Test Plots:

1. 802.11n at HT20 of CH01

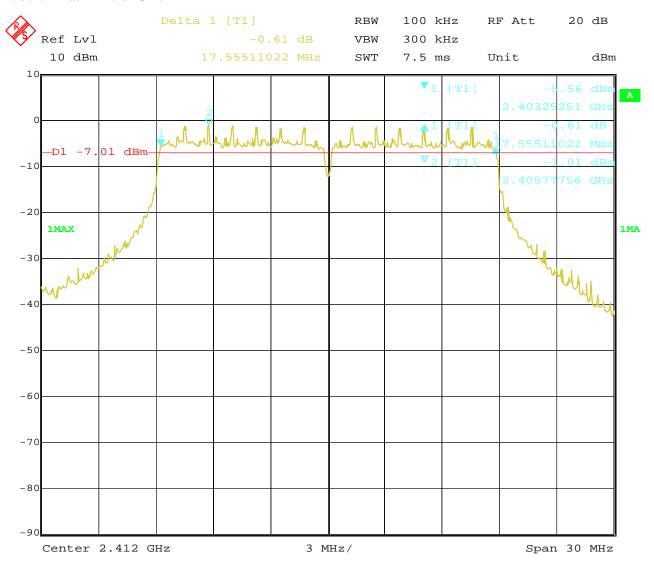


16.AUG.2021 14:12:43 Date:

Report No.: TW2106177-03E Page 38 of 87

Date: 2021-08-19



2. 802.11n at HT20 of CH06

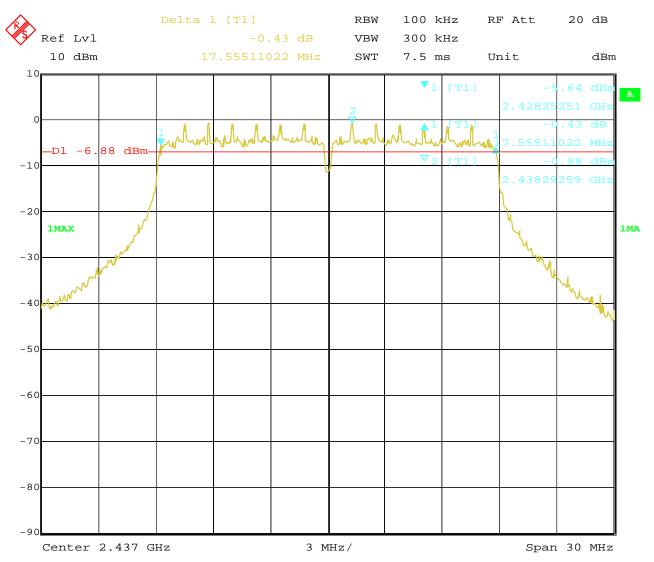


Date: 16.AUG.2021 14:17:22 Report No.: TW2106177-03E Page 39 of 87

Date: 2021-08-19



3. 802.11n at HT20 of CH11

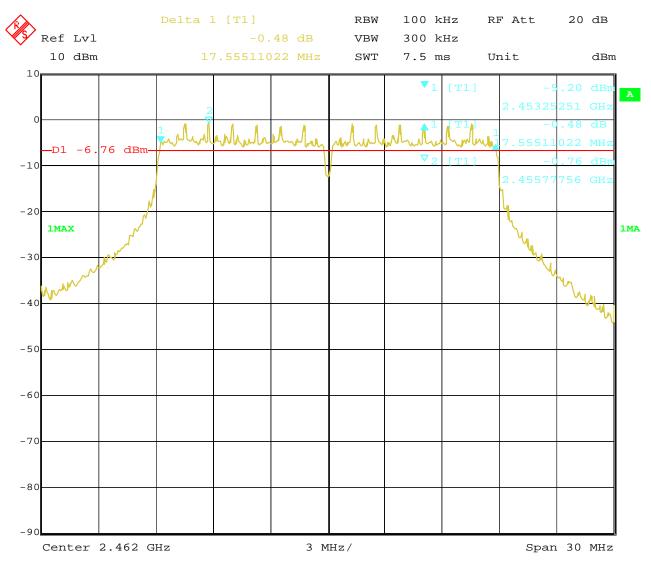

Date: 16.AUG.2021 14:18:51 Report No.: TW2106177-03E Page 40 of 87

Date: 2021-08-19



6dB Occupied Bandwidth

EUT		VR	Headset		Model		CVR-	255-64
Mode	802.		11n HT40		Input Voltage		DC3.8V	
Temperat	Temperature 24		deg. C,		Humidity		56% RH	
Channel	Char	nnel Frequency (MHz)	Data Transfer Rate (Mbps)	6 dB Bandwidth (MHz)		Minimum Limit (MHz)		Pass/ Fail
3		2422	mcs0	36	.47		0.5	Pass
6		2437	mcs0	36	36.02		0.5	Pass
9		2452	mcs0	36	.15		0.5	Pass

Note: Two antennas (J1501 and J1503) were tested and only the worst cased was recorded in the test report. J1501 was the worst case.

Page 41 of 87


Report No.: TW2106177-03E

Date: 2021-08-19



Test Plots:

1. 802.11n at HT40 of CH03

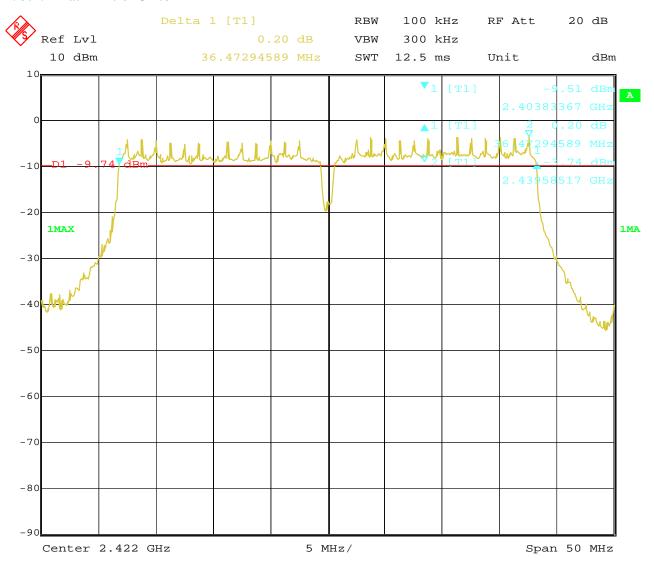

Date: 16.AUG.2021 14:22:05


Page 42 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



2. 802.11n at HT40 of CH06

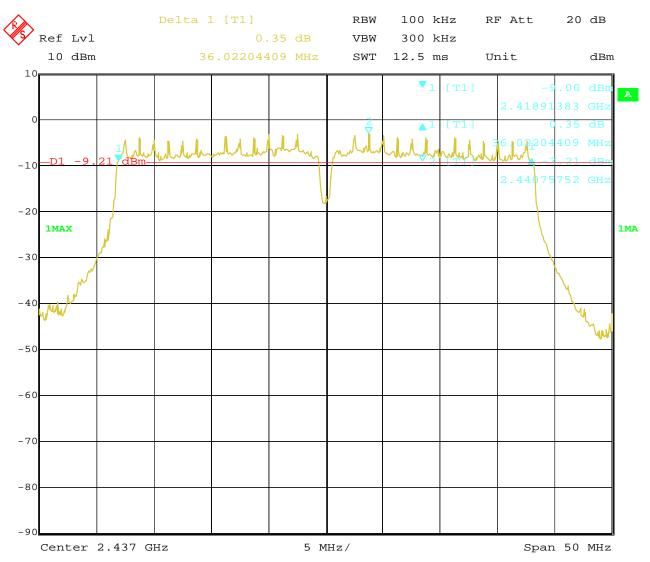


Date: 16.AUG.2021 14:24:56 Report No.: TW2106177-03E Page 43 of 87

Date: 2021-08-19



3. 802.11n at HT40 of CH09

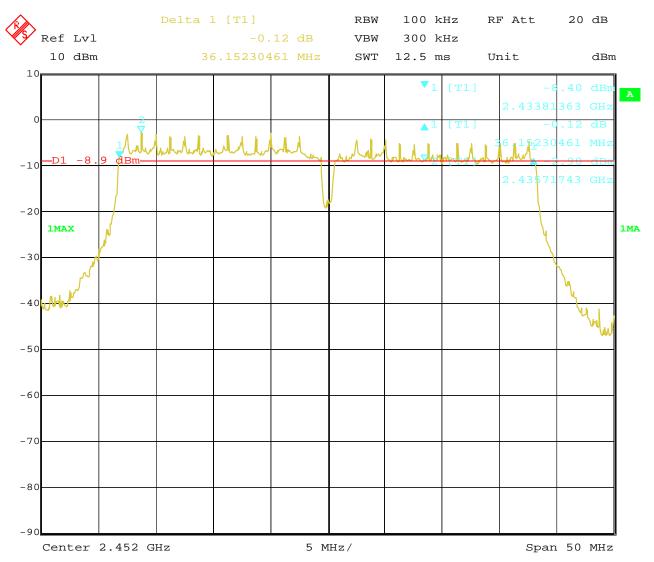

Date: 16.AUG.2021 14:28:11 Report No.: TW2106177-03E


Date: 2021-08-19



Page 44 of 87

8. Maximum Output Power

8.1 Test Setup



8.2 Limits of Maximum Output Power

The Maximum Output Power Measurement is 30dBm.

8.3 Test Procedure

The RF power output was measured with a Power meter connected to the RF Antenna connector (conducted measurement) while EUT was operating in transmit mode at the appropriate centre frequency.

Note: The Average power was measured

Page 45 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



8.4Test Results

EUT			VR Headset		Mod	del	CVR-2	55-64
Mode		802.11b		Test Voltage		DC3.8V		
Temperat	Temperature 24 deg. C,		Humidity		56% RH			
Channel	Frequ	uency	J1501 Power	J1501 Power J150		Total Max. Power	Power Limit	Pass/ Fail
Chamier	(MH	z)	dBm		dBm	Output (dBm)	(dBm)	1 455/ 1 411
1	2412		10.23		10.18	13.22	30	Pass
6	2437		10.73	10.27		13.52	30	Pass
11	2462		10.70		10.04	13.39	30	Pass

Note: 1. At finial test to get the worst-case emission at 1Mbps for CH01, CH06 and CH11

2. The result basic equation calculation as follow:Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT			VR Headset		Mod	del	CVR-2	55-64
Mode		802.11g		Test Voltage		DC3.8V		
Temperat	ure	ire 24 deg. C, H		Humidity		56% RH		
Channel	Frequ	uency	J1501 Power	J1501 Power J150		Total Max. Power	Power Limit	Pass/ Fail
Chamie	(MH	z)	dBm		dBm	Output (dBm)	(dBm)	1 455/ 1 411
1	2412		9.29		9.72	12.52	30	Pass
6	2437	,	9.62		9.94	12.79	30	Pass
11	2462		9.77		10.35	13.08	30	Pass

Note: 1. At finial test to get the worst-case emission at 6Mbps for CH01, CH06 and CH11

- The result basic equation calculation as follow:
 Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

The report refers only to the sample tested and does not apply to the bulk.

Page 46 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



EUT			VR Headset		Mod	del	CVR-255-64	
Mode	Mode 802.11n (HT20)			Test Voltage		DC3.8V		
Temperat	Temperature 24 deg. C,		Humidity		56% RH			
Channel	Frequency J1501 Power		J1501 Power	J1503 Power		Total Max. Power	Power Limit	Pass/ Fail
Chamier	(MH	z)	dBm		dBm	Output (dBm)	(dBm)	1 435/ 1 411
1	2412	,	9.83		9.34	12.60	30	Pass
6	2437	1	9.07		9.54	12.32	30	Pass
11	2462		9.35		9.81	12.60	30	Pass

Note: 1. At finial test to get the worst-case emission at mcs0 of 11n HT20 for CH01, CH06 and CH11

2. The result basic equation calculation as follow:Power Output = Power Reading + Cable loss + Attenuator

3. The worse case was recorded

EUT			VR Headset		Mod	del	CVR-2	55-64
Mode	Mode 802.11n (HT40)		Test Voltage		DC3.8V			
Temperat	Temperature 24 deg. C, Hun		Humidity		56% RH			
Channel	Frequency J1501 Power J		J15	503 Power	Total Max. Power	Power Limit	Pass/ Fail	
Chamie	(MH	z)	dBm		dBm	Output (dBm)	(dBm)	1 455/ 1 411
3	2422		8.20		8.78	11.51	30	Pass
6	2437	1	8.63		9.03	11.84	30	Pass
9	2452	,	8.54		8.98	11.78	30	Pass

Note: 1. At finial test to get the worst-case emission at msc0 of 11n HT40 for CH03, CH06 and CH09

- 2. The result basic equation calculation as follow: Power Output = Power Reading + Cable loss + Attenuator
- 3. The worse case was recorded

Page 47 of 87


Report No.: TW2106177-03E

Date: 2021-08-19



9. Power Spectral Density Measurement

9.1 Test Setup



9.2 Limits of Power Spectral Density Measurement

The Maximum Power Spectral Density Measurement is 8dBm/3kHz.

9.3 Test Procedure

- 1. Use this procedure when the maximum peak conducted output power in the fundamental emission is used to demonstrate compliance.
- 2. Set the RBW = 10 kHz.
- 3. Set the VBW \geq 30 kHz.
- 4. Set the span to 1.5 times the DTS channel bandwidth.
- 5. Detector = peak.
- 6. Sweep time = auto couple.
- 7. Trace mode = max hold.
- 8. Allow trace to fully stabilize.
- 9. Use the peak marker function to determine the maximum amplitude level.
- 10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.
- 11. The resulting peak PSD level must be $\leq 8 \text{ dBm/3kHz}$.

Report No.: TW2106177-03E

Date: 2021-08-19



9.4Test Result

EUT			VR Headset		N	Model	CVR-255-64		
Mode		802.11b 11Mbps		Test Voltage		DC3.8V			
Temperat	ure		24 deg. C,		Humidity			56% RH	
Channel	_	uency IHz)	J1501 Power Fa		actor		rer Spectral Bm/10kHz)	Limit (dBm/3kHz)	Pass/ Fail
1	24	412	-9.34		3.01	-6	.33	8	Pass
6	24	437	-8.93		3.01	-5	.92	8	Pass
1	24	462	-8.96		3.01	-5	.95	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. J1501 and J1503 were tested and J1501 was the worst case

EUT			VR Headset		N	Model	CVR-255-64		
Mode		802.11b 1Mbps		Test Voltage		DC3.8V			
Temperat	ure		24 deg. C,		Humidity		56% RH		
Channel		uency IHz)	J1501 Power Spectral Density			Total Power Spectral Density (dBm/10kHz)		Limit (dBm/3kHz)	Pass/ Fail
1	24	412	-8.93		3.01	-5	.92	8	Pass
6	24	437	-10.42		3.01	-7	.41	8	Pass
1	24	462	-10.95		3.01	-7	.94	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. J1501 and J1503 were tested and J1501 was the worst case

Report No.: TW2106177-03E Page 49 of 87

Date: 2021-08-19



EUT			VR Headset		N	Model	CVR-255-64		
Mode			802.11g 6Mbps		Test Voltage		DC3.8V		
Temperat	ture		24 deg. C,		Hu	Humidity		56% RH	
Channel	Freq	uency	J1501 Power	F	actor	Total Pow	er Spectral	Limit	Pass/ Fail
	(M	(Hz)	Spectral Density			Density (d	Bm/10kHz)	(dBm/3kHz)	
1	24	412	-10.63		3.01	-7	.62	8	Pass
6	24	437	-10.86		3.01	-7	.85	8	Pass
1	24	162	-10.63		3.01	-7	.62	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. J1501 and J1503 were tested and J1503 was the worst case

EUT		VR Headset		N	Model	CVR-255-64			
Mode		802.11n HT20 mcs0		Test Voltage		DC3.8V			
Temperat	ure		24 deg. C,		Humidity			56% RH	
Channel	Freq	uency	J1501 Power Fa		actor	Total Pow	er Spectral	Limit	Pass/ Fail
	(M	(Hz)	Spectral Density			Density (d	Bm/10kHz)	(dBm/3kHz)	
1	24	412	-10.87		3.01	-7	.86	8	Pass
6	24	437	-9.76		3.01	-6	.75	8	Pass
1	24	462	-10.67		3.01	-7	.66	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

2. Factor=10log2=3.01

3. J1501 and J1503 were tested and J1501 was the worst case

Report No.: TW2106177-03E Page 50 of 87

Date: 2021-08-19



EUT		VR Headset		N	Model	CVR-255-64			
Mode		80	802.11n HT40 mcs0		Test Voltage		DC3.8V		
Temperat	ture		24 deg. C,	24 deg. C,		Humidity		56% RH	
Channel	Freq	uency	J1501 Power	F	actor	Total Pow	er Spectral	Limit	Pass/ Fail
	(M	(Hz)	Spectral Density			Density (d	Bm/10kHz)	(dBm/3kHz)	
3	24	122	-10.26		3.01	-7	.25	8	Pass
6	24	437	-11.34		3.01	-8	.33	8	Pass
9	24	152	-11.30		3.01	-8	.29	8	Pass

Note: 1. Total Power Spectral Density = Ant1 Power Spectral Density + Factor

^{2.} Factor=10log2=3.01

^{3.} J1501 and J1503 were tested and J1503 was the worst case


Report No.: TW2106177-03E Page 51 of 87

Date: 2021-08-19



9.5 Photo of Power Spectral Density Measurement

1.802.11b at 11Mbps of CH01

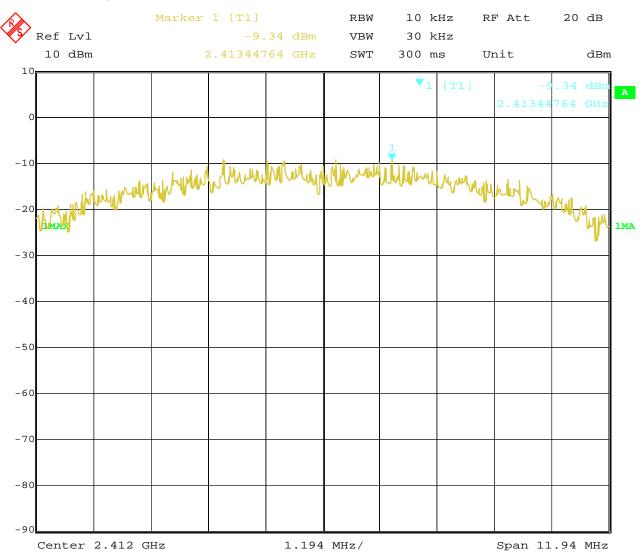

16.AUG.2021 15:51:19 Date:


Page 52 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



2. 802.11b at 11Mbps at CH06

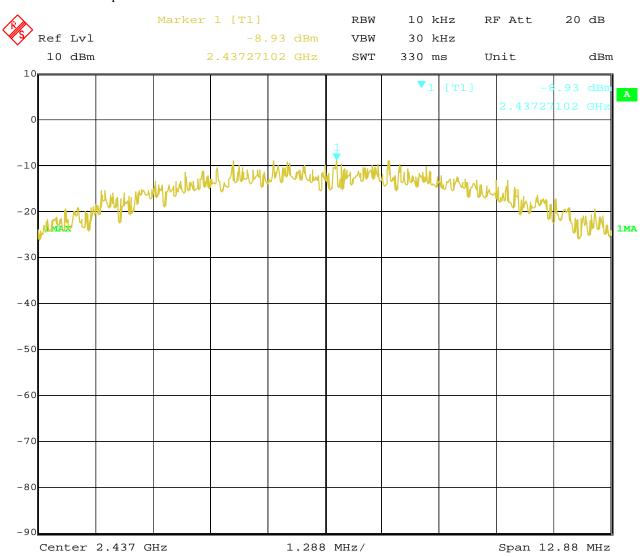

Date: 16.AUG.2021 15:52:34


Page 53 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



3. 802.11b at 11Mbps of CH11

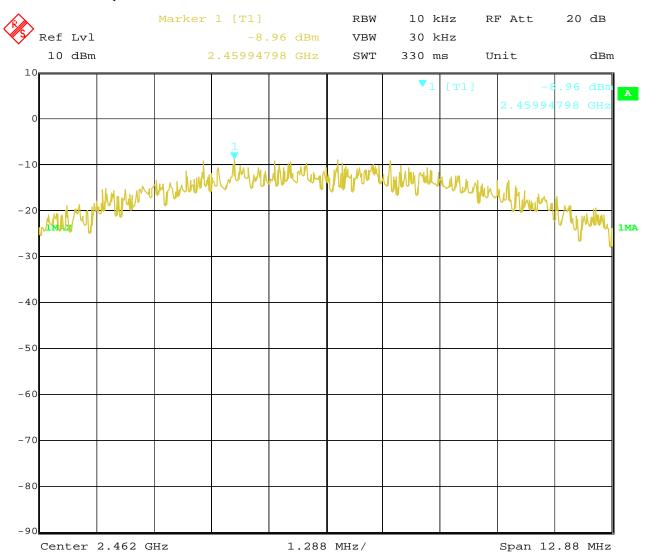

Date: 16.AUG.2021 15:53:14


Page 54 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



4. 802.11b at 1Mbps of CH1

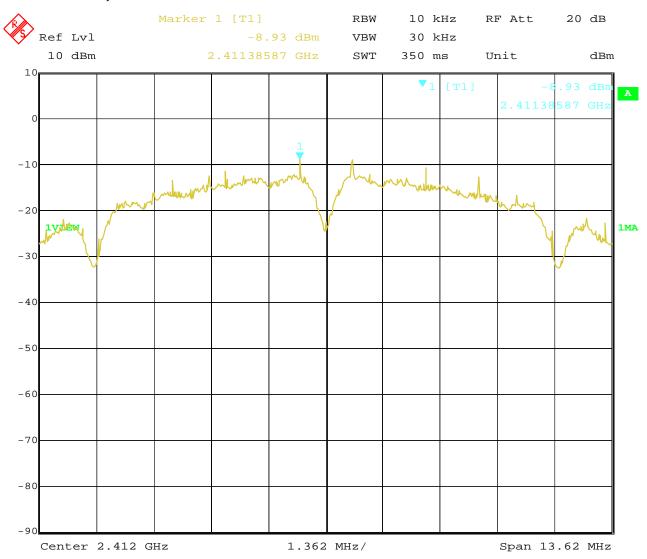

Date: 16.AUG.2021 15:55:47


Page 55 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



5. 802.11b at 1Mbps of CH6

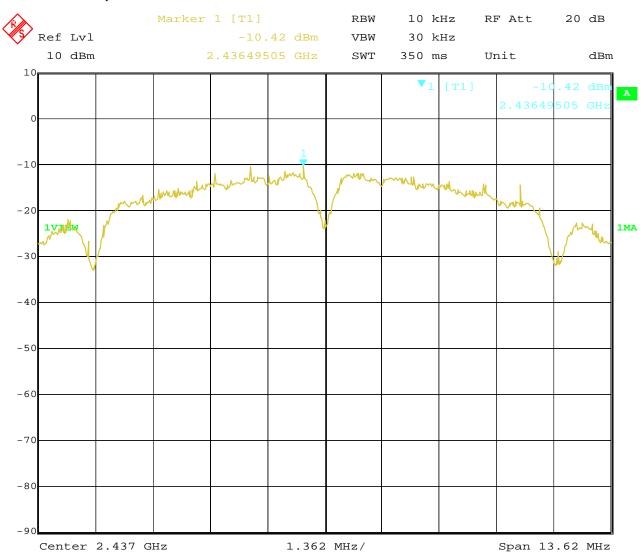

Date: 16.AUG.2021 15:55:04


Page 56 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



6. 802.11b at 1Mbps of CH11

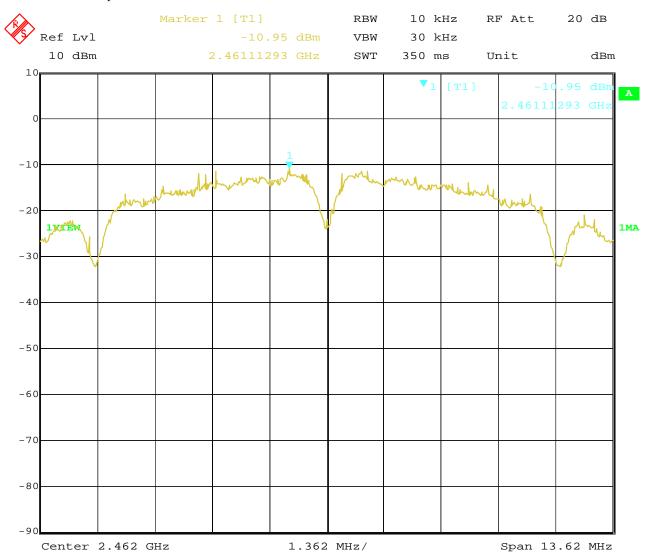

Date: 16.AUG.2021 15:54:30


Page 57 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



7. 802.11g at 6Mbps of CH1

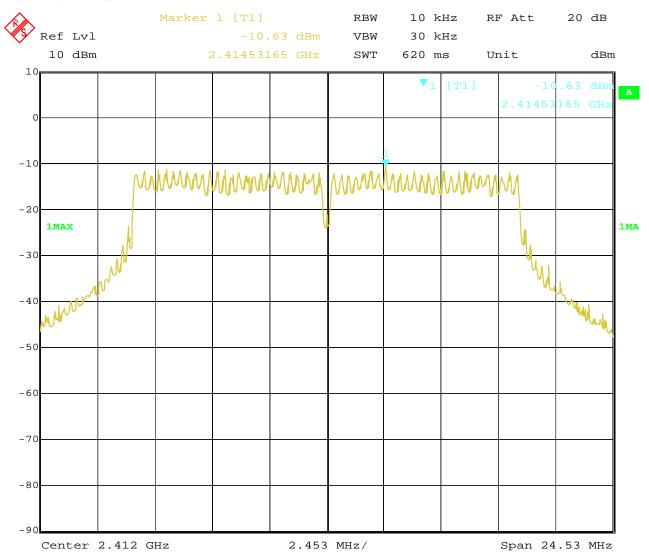

Date: 16.AUG.2021 15:57:55


Page 58 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



8. 802.11g at 6Mbps of CH6

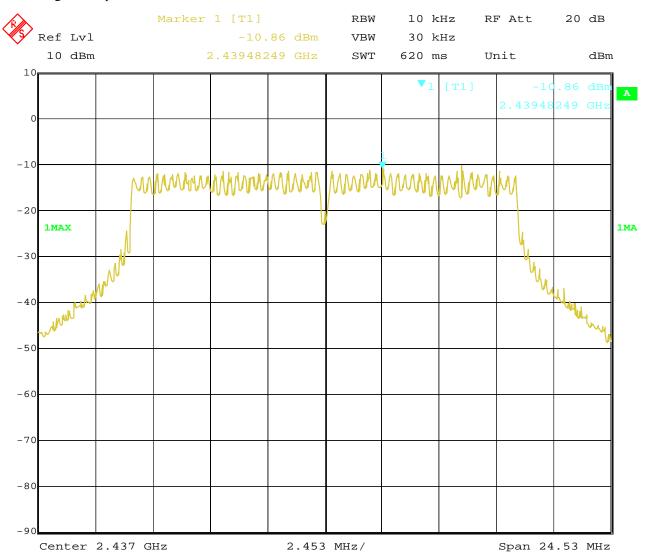

Date: 16.AUG.2021 15:58:52


Page 59 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



9. 802.11g at 6Mbps of CH11

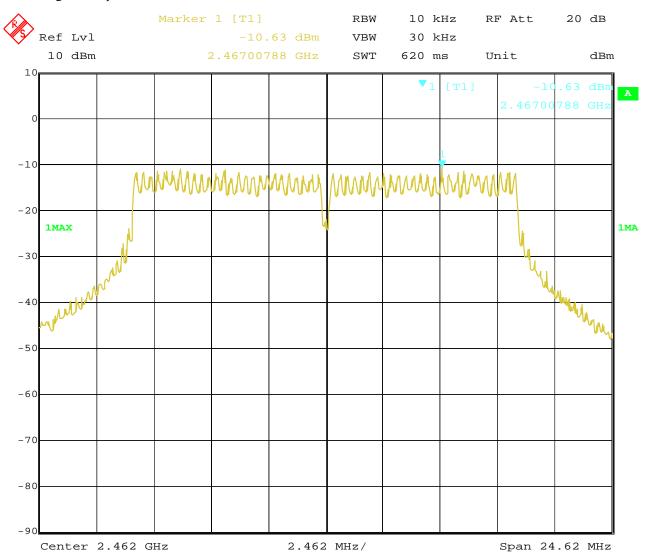

Date: 16.AUG.2021 15:59:47


Page 60 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



10. 802.11n at HT20 of CH01

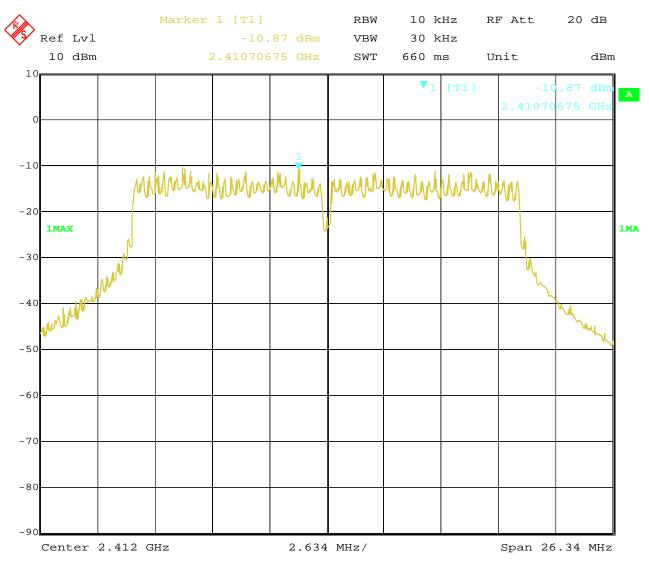

Date: 16.AUG.2021 16:01:12


Page 61 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



11. 802.11n at HT20 of CH06

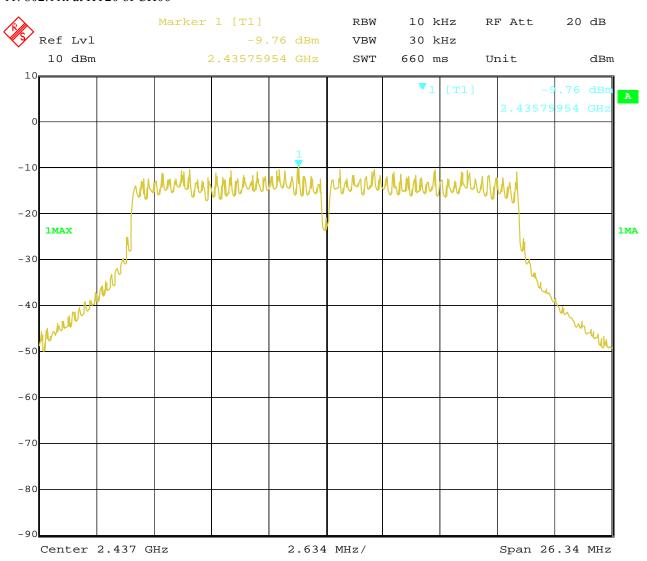


Date: 16.AUG.2021 16:04:17 Page 62 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



12. 802.11n at HT20 of CH11

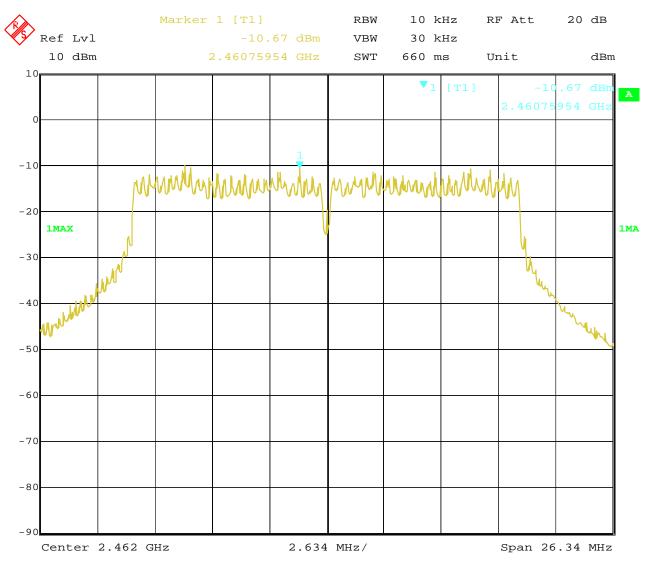

Date: 16.AUG.2021 16:05:03


Page 63 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



13. 802.11n at HT40 of CH01

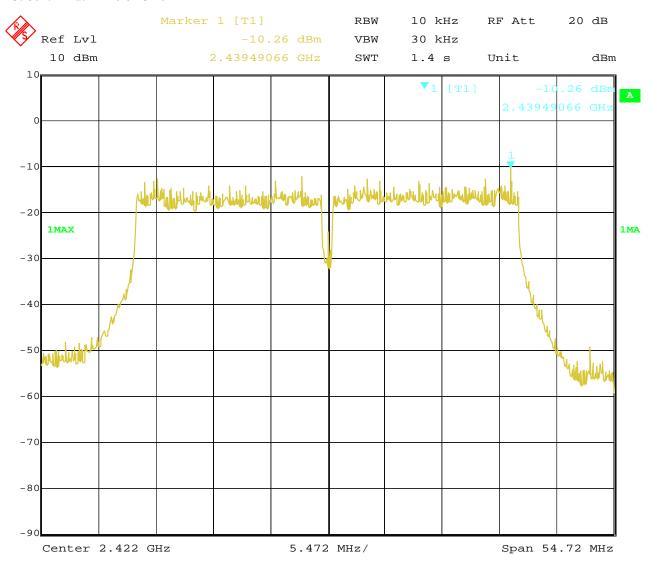

Date: 16.AUG.2021 16:11:30


Page 64 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



14. 802.11n at HT40 of CH04

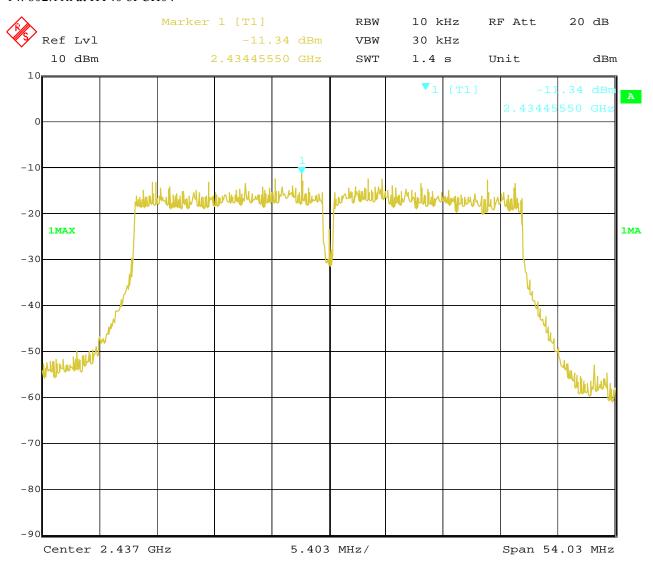

Date: 16.AUG.2021 16:13:29


Page 65 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



15. 802.11n at HT40 of CH07

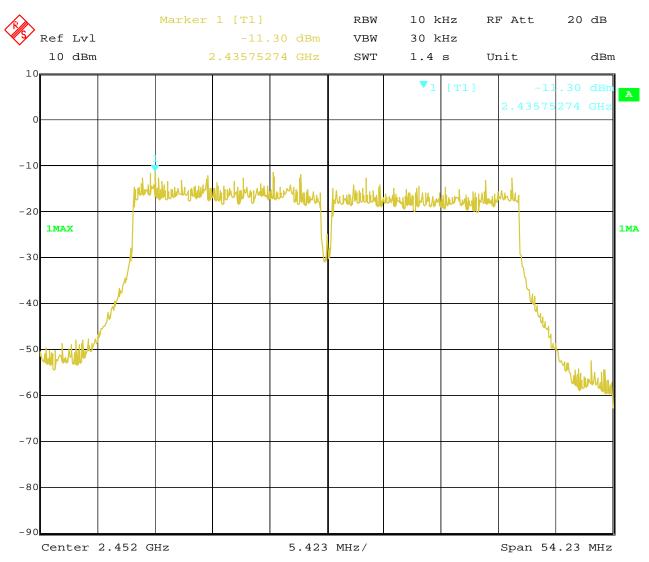

Date: 16.AUG.2021 16:17:57


Page 66 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



10 Out of Band Measurement 10.1 Test Setup for band edge



The restricted band requirement based on radiated emission test; please see the clause 6 for the test setup

10.2 Limits of Out of Band Emissions Measurement

- 1. Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).
- 2. Fall in the restricted bands listed in section 15.205. The maximum permitted average field strength is listed in section 15.209.

10.3 Test Procedure

For signals in the restricted bands above and below the 2.4-2.483GHz allocated band a measurement was made of radiated emission test.(Peak values with RBW=VBW=1MHz and PK detector. AV value with RBW=1MHz, VBW=10Hz and PK detector)

For bandage test, the spectrum set as follows: RBW=100, VBW=300 kHz. A conducted measurement used

10.4 Test Result

Please see next pages

Note: 1. for band-edge measurement, the frequency from 30MHz-25GHz was tested. And It met the FCC rule.

2. Two antennas were tested and only the worst cased was recorded in the test report. J1501 was the worst case.

Page 67 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




For 802.11b mode

CH01 at 1Mbps

Band-edge Measurement 10.4

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

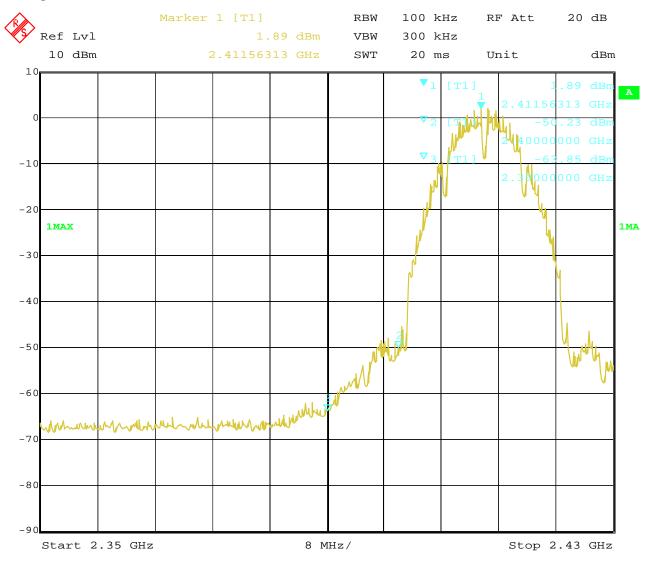

Date: 16.AUG.2021 16:41:52

Page 68 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




CH11 at 1Mbps

10.4 Band-edge Measurement

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

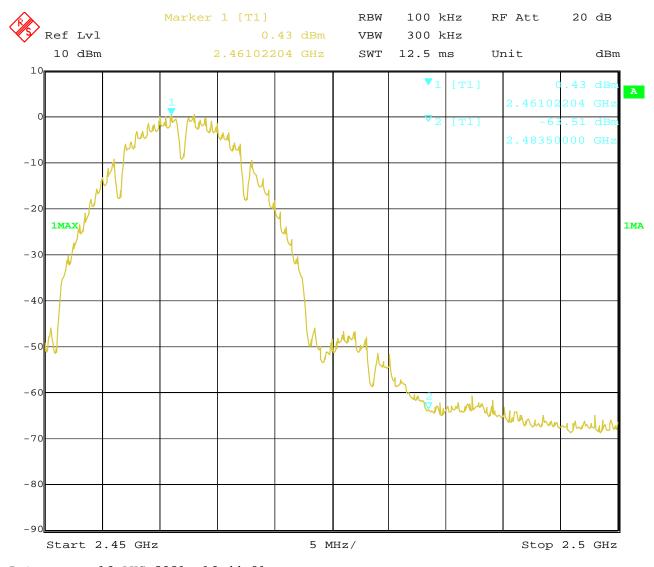

16.AUG.2021 Date: 16:44:01

Page 69 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




For 802.11b mode

CH01 at 11Mbps

Band-edge Measurement 10.4

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

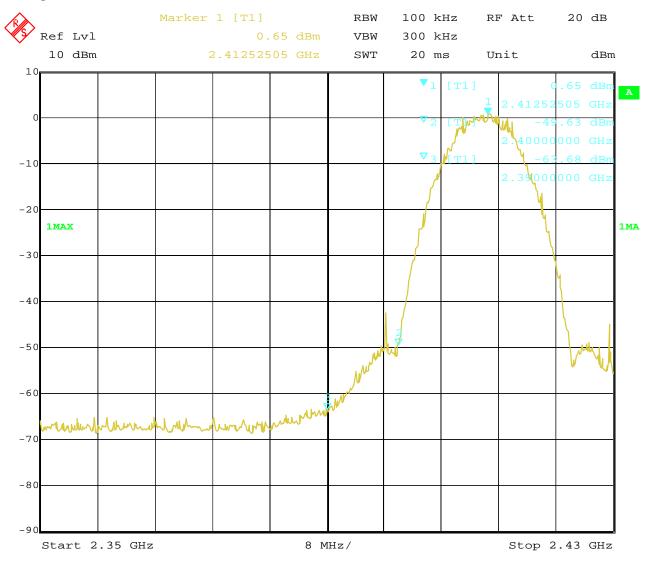

Date: 16.AUG.2021 16:42:20

Page 70 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




CH11 at 11Mbps

10.4 Band-edge Measurement

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

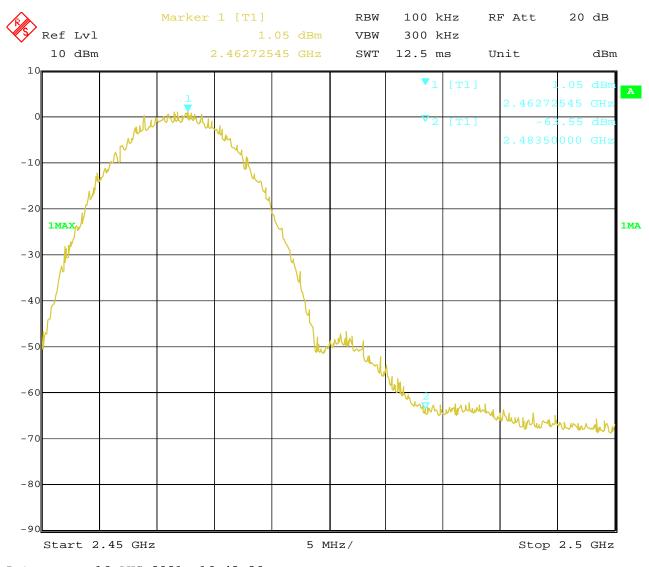

16.AUG.2021 Date: 16:43:26

Page 71 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




For 802.11g mode

CH01 at 6Mbps

10.4 Band-edge Measurement

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

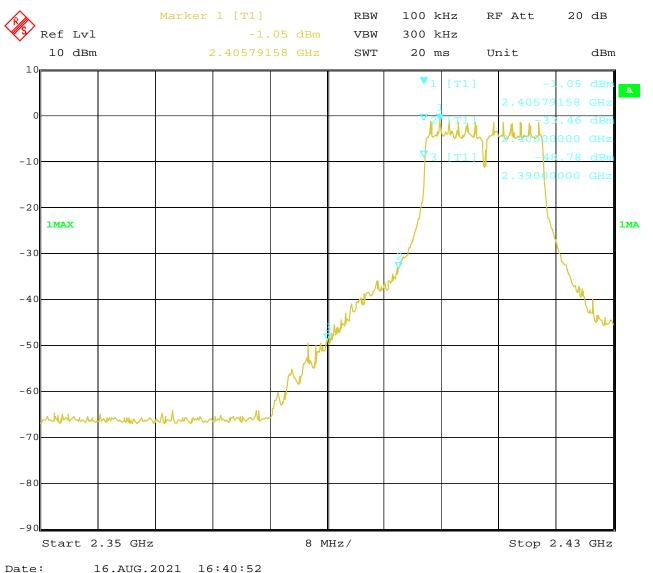

Date:

Page 72 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




CH11 at 6Mbps

10.4 Band-edge Measurement

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

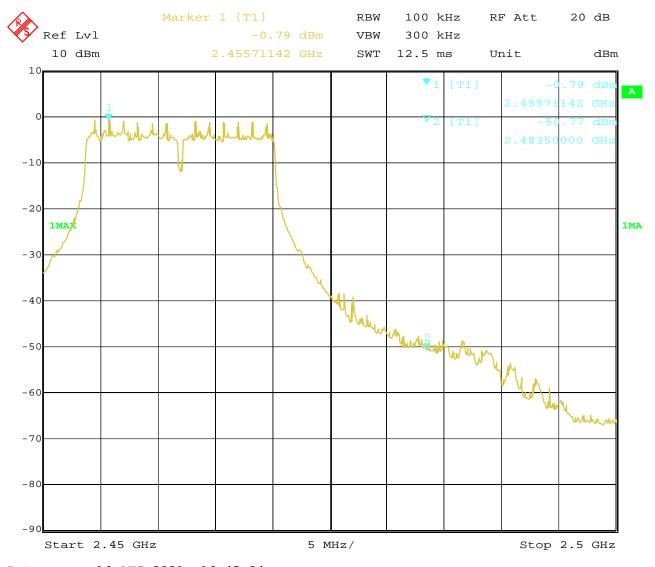

16.AUG.2021 Date: 16:45:24

Page 73 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




For 802.11n (HT20) mode

CH01 at mcs0

10.4 Band-edge Measurement

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

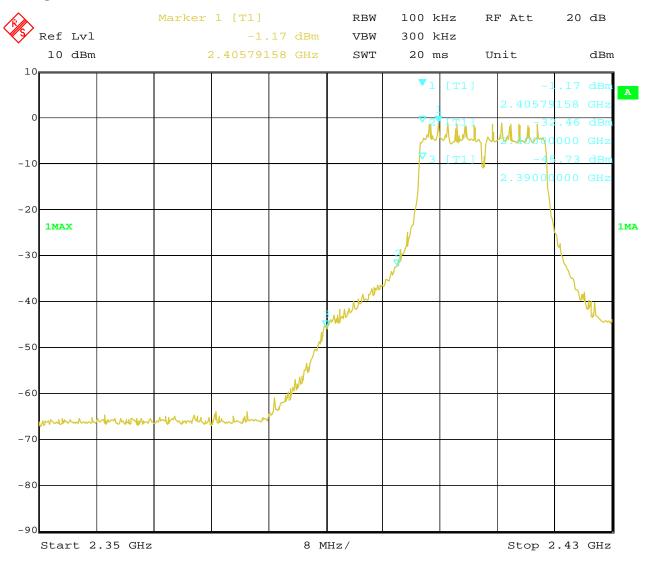

Date: 16.AUG.2021 16:39:19

Page 74 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




CH11 at mcs0

10.4 Band-edge Measurement

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

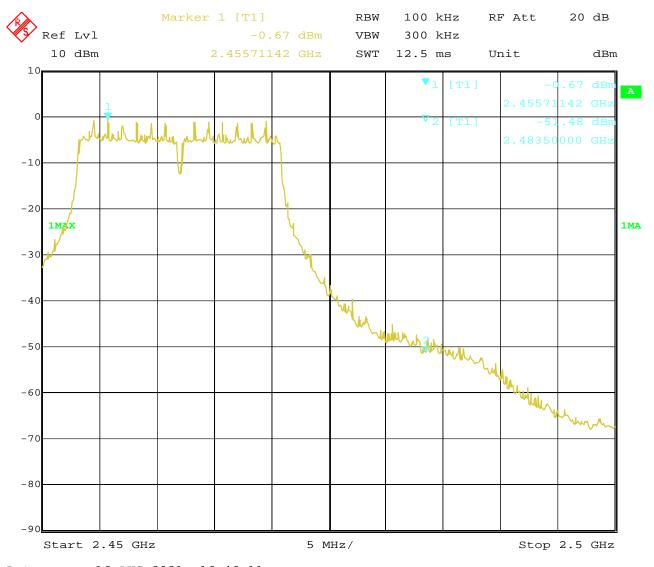

16.AUG.2021 Date: 16:46:11

Page 75 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




For 802.11n (HT40) mode

CH03 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

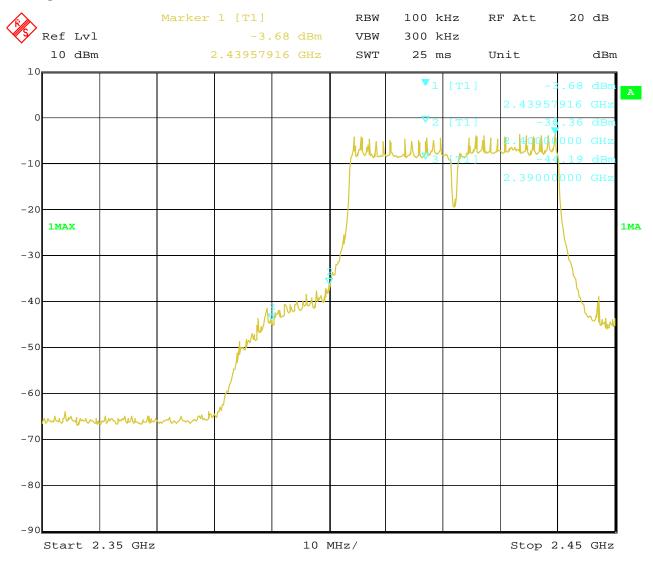

Date: 16.AUG.2021 16:23:13

Page 76 of 87

Report No.: TW2106177-03E

Date: 2021-08-19




CH09 at msc0

10.4 Band-edge and Restricted band Measurement

EUT	VR Headset	Model	CVR-255-64
Mode	Keeping Transmitting	Input Voltage	DC3.8V
Temperature	24 deg. C,	Humidity	56% RH
Test Result:	Pass	Detector	PK

Test Figure:

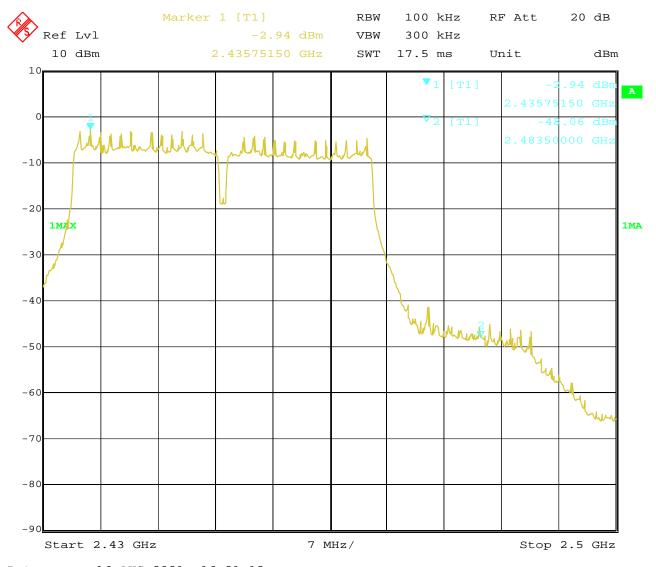

Date: 16.AUG.2021 16:21:13

Report No.: TW2106177-03E Page 77 of 87

Date: 2021-08-19



10.5 Restricted band Measurement

EUT	VR Headset		Model	CVR-255-64		
Mode	Keeping	Transmitting	Input Voltage	DC3.8V		
Temperature	24	deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
	802.11b mode, Low Channel, Horizontal					
2390	PK (dBµV/m)	66.75	T ::4	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBµV/m)		
	802.11b mode, Vertical					
2390	PK (dBμV/m)	56.08	Limit	74(dBμV/m)		
	AV (dBμV/m)		Lillit	54(dBμV/m)		

EUT	VR Headset		Model	CVR-255-64	
Mode	Keeping	g Transmitting	Input Voltage	DC3.8V	
Temperature	24	deg. C,	Humidity	56% RH	
Test Result:		Pass	Detector	PK	
802.11b mode, High Channel, Horizontal					
2483.5	PK (dBµV/m)	67.18	T 114	$74(dB\mu V/m)$	
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$	
802.11b mode, High Channel, Vertical					
2483.5	PK (dBµV/m)	56.69	T ::4	74(dBµV/m)	
	AV (dBμV/m)		Limit	54(dBμV/m)	

Report No.: TW2106177-03E Page 78 of 87

Date: 2021-08-19



10.5 Restricted band Measurement

EUT	VR Headset		Model	CVR-255-64	
Mode	Keeping	g Transmitting	Input Voltage	DC3.8V	
Temperature	24	4 deg. C,	Humidity	56% RH	
Test Result:		Pass	Detector	PK	
	802.11g mode, Low Channel, Horizontal				
2390	PK (dBμV/m)	69.15	Limit	$74(dB\mu V/m)$	
	AV (dBμV/m)		Limit	54(dBμV/m)	
	802.11g mode, Vertical				
2390	PK (dBμV/m)	58.36	Limit	74(dBμV/m)	
	AV (dBμV/m)		Limit	54(dBμV/m)	

EUT	VR Headset		Model	CVR-255-64		
Mode	Keeping	g Transmitting	Input Voltage	DC3.8V		
Temperature	24	l deg. C,	Humidity	56% RH		
Test Result:		Pass	Detector	PK		
	802.11g mode, High Channel, Horizontal					
2483.5	PK (dBμV/m)	69.26	T 100.14	$74(dB\mu V/m)$		
	AV (dBμV/m)		Limit	54(dBµV/m)		
	802.11g mode, High Channel, Vertical					
2483.5	PK (dBμV/m)	58.67	Limit	$74(dB\mu V/m)$		
	AV (dBμV/m)			$54(dB\mu V/m)$		

Report No.: TW2106177-03E Page 79 of 87

Date: 2021-08-19



10.5 Restricted band Measurement

EUT	VR Headset		Model	CVR-255-64	
Mode	Keeping	g Transmitting	Input Voltage	DC3.8V	
Temperature	24	4 deg. C,	Humidity	56% RH	
Test Result:		Pass	Detector	PK	
	802.11n HT20 mode, Low Channel, Horizontal				
2390	PK (dBμV/m)	69.22	T ::4	$74(dB\mu V/m)$	
	AV (dBμV/m)		Limit	54(dBμV/m)	
	802.11n HT20 mode, Low Channel, Vertical				
2390	PK (dBμV/m)	58.75	Limit	74(dBμV/m)	
	AV (dBμV/m)		Limit	54(dBμV/m)	

10.5 Restricted	band wicasureme	110			
EUT	VR Headset		Model	CVR-255-64	
Mode	Keeping	g Transmitting	Input Voltage	DC3.8V	
Temperature	24	4 deg. C,	Humidity	56% RH	
Test Result:		Pass	Detector	PK	
	802.11n HT20 mode, High Channel, Horizontal				
2483.5	PK (dBμV/m)	69.28	T tools	$74(dB\mu V/m)$	
	AV (dBμV/m)		Limit	$54(dB\mu V/m)$	
802.11n HT20 mode, High Channel, Vertical					
2483.5	PK (dBμV/m)	59.63	Limit	$74(dB\mu V/m)$	
	AV (dBμV/m)			$54(dB\mu V/m)$	

Page 80 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



EUT	VR	R Headset	Model	CVR-255-64	
Mode	Keeping	g Transmitting	Input Voltage	DC3.8V	
Temperature	24	4 deg. C,	Humidity	56% RH	
Test Result:		Pass	Detector	PK	
	802.11n HT40 mode, Low Channel, Horizontal				
2390	PK (dBμV/m)	69.35	T ::4	$74(dB\mu V/m)$	
	$AV (dB\mu V/m)$	50.79	Limit	$54(dB\mu V/m)$	
	802.11n HT20 mode, Low Channel, Vertical				
2390	PK (dBμV/m)	56.31	Limit	74(dBμV/m)	
	AV (dBμV/m)	47.89		$54(dB\mu V/m)$	




Page 81 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



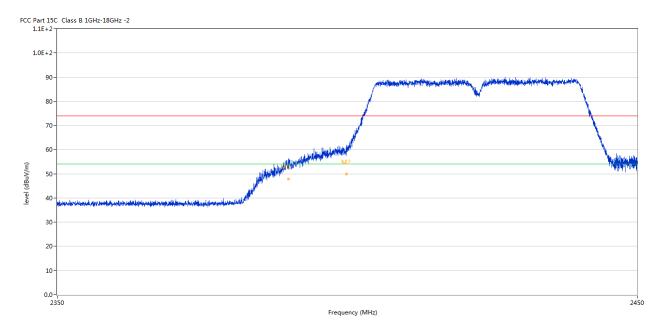


Page 82 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



EUT	VR Headset		Model	CVR-255-64	
Mode	Keeping	g Transmitting	Input Voltage	120V~	
Temperature	24	4 deg. C,	Humidity	56% RH	
Test Result:		Pass	Detector	PK	
	802.11n HT40 mode, High Channel, Horizontal				
2483.5	PK (dBµV/m)	69.48	T 114	$74(dB\mu V/m)$	
	$AV (dB\mu V/m)$	50.96	Limit	54(dBμV/m)	
802.11n HT20 mode, High Channel, Vertical					
2483.5	PK (dBμV/m)	55.35	Limit	74(dBμV/m)	
	$AV (dB\mu V/m)$	47.79	Limit	$54(dB\mu V/m)$	

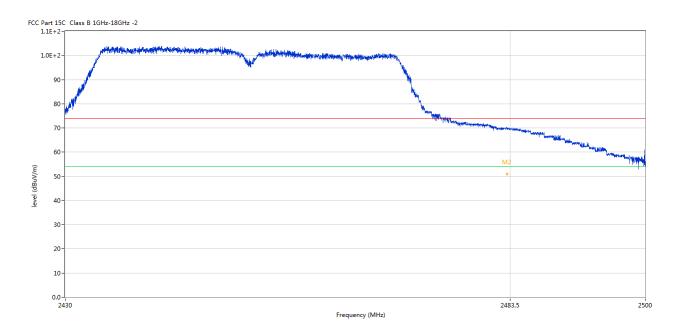


Page 83 of 87

Report No.: TW2106177-03E

Date: 2021-08-19



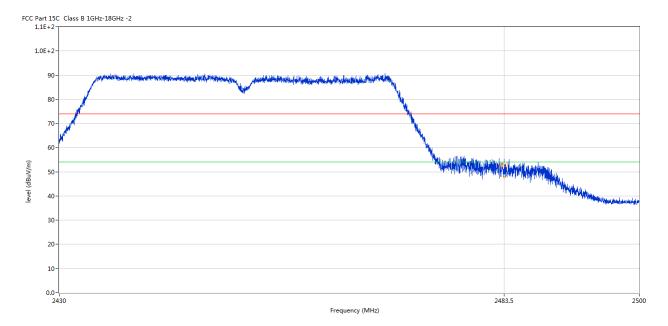

Report No.: TW2106177-03E

Date: 2021-08-19



Page 84 of 87

11.0 Antenna Requirement

11.1 Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitter antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the mount in dB that the directional gain of the antenna exceeds 6 dBi.

11.2 Antenna Connected construction

Two FPC antenna used. The gain of the antennas is 2.5dBi for each one (Get from the antenna specification provided the manufacturer)

Report No.: TW2106177-03E Page 85 of 87

Date: 2021-08-19




12.0 FCC ID Label

FCC ID: RBD-CVR-255-64

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:

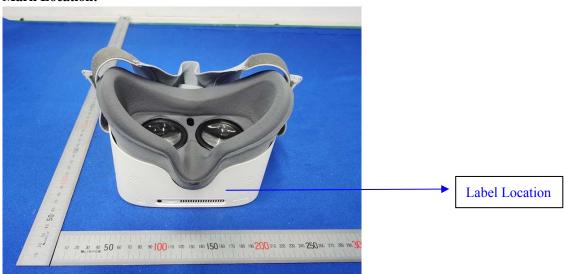

Page 86 of 87


Report No.: TW2106177-03E

Date: 2021-08-19



13.0 Photo of testing

Conducted Emission Test Setup:

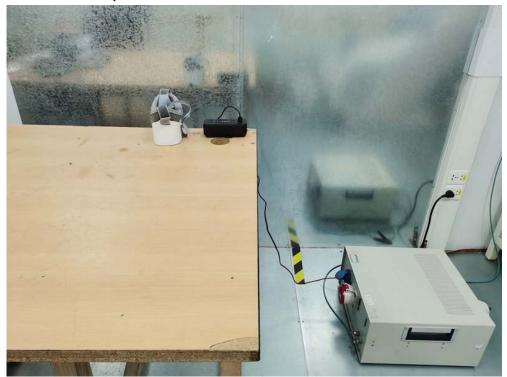


Report No.: TW2106177-03E

Date: 2021-08-19



Radiated Emission Test Setup:

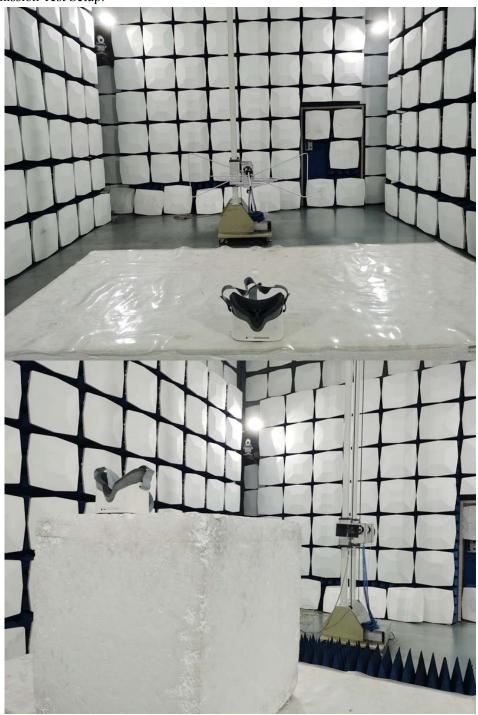

Photographs - EUT

Please refer test report TW2106177-01E

End of the report

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES. to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES. will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. The SHENZHEN TIMEWAY TESTING LABORATORIES. reserves the rights to withdraw it and to

adopt any other remedies which may be appropriate.