



# EMC TEST REPORT

**Report No.:** SET2021-00260

**Product Name:** Tianxuan M300

**FCC ID:** 2AYGT-TIANXUAN

**Model No. :** M300F, M3abX, M6abX (a=0~9;b=0~9;X =A~Z)

**Applicant:** IRay Technology Co.,Ltd

**Address:** 11GUIYANG STREET, YANTAI ECONOMY AND TECHNOLOGY  
DEVELOPMENT DISTRICT, YANTAI SHANDONG P.R.CHINA

**Received Date:** 2020.10.10

**Dates of Testing:** 2020.10.10 —2021.02.22

**Issued by:** CCIC Southern Testing Co., Ltd.

**Lab Location:** Electronic Testing Building, No. 43 Shahe Road, Xili Street,  
Nanshan District, Shenzhen, Guangdong, China.

**Tel:** 86 755 26627338    **Fax:** 86 755 26627238

This test report consists of **19** pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



## Test Report

**Product Name**..... Tianxuan M300

**Model No.** ..... M300F, M3abX, M6abX (a=0~9;b=0~9;X =A~Z)

**Trade name** ..... InfiRay

**Applicant**..... IRay Technology Co.,Ltd

**Applicant Address**..... 11GUIYANG STREET, YANTAI ECONOMY AND  
TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI  
SHANDONG P.R.CHINA

**Manufacturer** ..... IRay Technology Co.,Ltd

**Manufacturer Address** .... 11GUIYANG STREET, YANTAI ECONOMY AND  
TECHNOLOGY DEVELOPMENT DISTRICT, YANTAI  
SHANDONG P.R.CHINA

**Test Standards**..... 47 CFR Part 15 Subpart B

**Test Result**..... PASS

**Tested by** ..... Zhang Pei Sen  
Pei Sen Zhang Test Engineer 2021.02.22

**Reviewed by** ..... Chris You  
Chris You Senior Engineer 2021.02.22

**Approved by** ..... Shuangwen Zhang  
Shuangwen Zhang, Manager 2021.02.22

**TABLE OF CONTENTS**

<b>1.</b>	<b>GENERAL INFORMATION .....</b>	<b>4</b>
<b>1.1</b>	<b>EUT Description .....</b>	<b>4</b>
<b>1.2</b>	<b>Test Standards and Results .....</b>	<b>5</b>
<b>1.3</b>	<b>Facilities and Accreditations .....</b>	<b>6</b>
1.3.1	Facilities .....	6
1.3.2	Test Environment Conditions .....	6
1.3.3	Measurement Uncertainty .....	6
<b>2.</b>	<b>TEST CONDITIONS SETTING .....</b>	<b>7</b>
<b>2.1</b>	<b>Test Peripherals .....</b>	<b>7</b>
<b>2.2</b>	<b>Test Mode .....</b>	<b>7</b>
<b>2.3</b>	<b>Test Setup and Equipments List.....</b>	<b>8</b>
2.3.1	Conducted Emission .....	8
2.3.2	Radiated Emission.....	8
<b>3.</b>	<b>47 CFR PART 15B REQUIREMENTS .....</b>	<b>11</b>
<b>3.1</b>	<b>Conducted Emission .....</b>	<b>11</b>
3.1.1	Requirement .....	11
3.1.2	Test Description .....	11
3.1.3	Test Result .....	11
<b>3.2</b>	<b>Radiated Emission .....</b>	<b>14</b>
3.2.1	Requirement .....	14
3.2.2	Test Description .....	15
3.2.3	Test Result .....	15

Change History		
Issue	Date	Reason for change
1.0	2021.02.22	First edition



## 1. GENERAL INFORMATION

### 1.1 EUT Description

EUT Name ..... : Tianxuan M300  
Trade Name.....: InfiRay  
Brand Name.....: InfiRay  
Power supply.....: Battery  
Brand Name: Lishen  
Model No.: LR2170SF  
Capacitance: 4500mAh  
Rated Voltage: 4.20V  
Charge Limit: 3.60V  
Manufacturer :Shenzhen Rishengzhi Electronics Technology Co,Ltd  
Ancillary Equipment.....: AC Adapter:  
Model No.: SK22G-05002002  
I/p: 100-240V~50/60Hz ,1500mA  
O/p: 5.0V --- 2A  
Manufacturer :Shenzhen Simsukian Electronics Technology Co,Ltd.

*Note1:*The EUT is a Tianxuan M300;

*Note 2:*For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

*Note 3:* The EUT is Tianxuan M300, the main test model is M300F, the covered difference model are M3abX and M6abX (a=0~9;b=0~9;X=A~Z), the model difference represents the software function or regional difference which declared by manufacture.



## 1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart B:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart B 2018	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Result
1	15.107	Conducted Emission	PASS
2	15.109	Radiated Emission	PASS

NOTE:

(1) The EUT has been tested according to 47 CFR Part 15 Subpart B, Class B. The test procedure is according to ANSI C63.4:2014.



## 1.3 Facilities and Accreditations

### 1.3.1 Facilities

#### **FCC-Registration No.: CN1283**

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until June 30th, 2021.

#### **A2LA Code: 5721.01**

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025. The accreditation certificate number is 5721.01.

### 1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature ( °C):	15 °C - 35 °C
Relative Humidity (%):	25% -75%
Atmospheric Pressure (kPa):	86kPa-106kPa

### 1.3.3 Measurement Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission:	Uc = 3.6 dB (k=2)
Uncertainty of Radiated Emission:	Uc = 4.5 dB (k=2)

## 2. TEST CONDITIONS SETTING

### 2.1 Test Peripherals

The following is a listing of the EUT and peripherals utilized during the performance of EMC test:

#### Support Equipment:

Description	Brand name	Model	Serial No.	FCCID
Notebook	ThinkPad	E430C	A131101550	N/A
Mouse	Logitech	M100r	25011051	DOC

#### Support Cable:

Description	Shield Type	Ferrite Core	Length
PC Power adapter Cable	Un- shielding	No	1.2m
Mouse Cable	Un- shielding	No	1m

### 2.2 Test Mode

The EUT have the following typical setups during the test:

Setup1: Wifi + charger

Setup2: EUT+ Computer data transmission


Setup3: Idle + charger

Note: Only worst-case mode setup 1 mode data provide at the report

## 2.3 Test Setup and Equipments List

### 2.3.1 Conducted Emission

#### A. Test Setup:

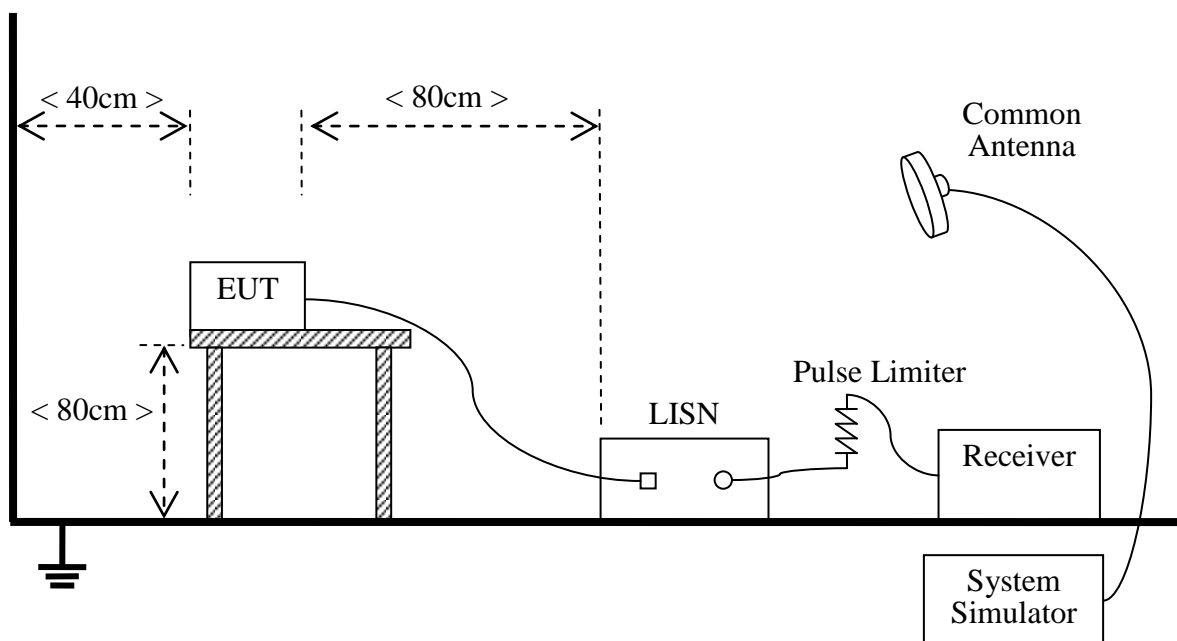

The EUT is placed on a 0.8m high insulating table, which stands on the grounded conducting floor, and keeps 0.4m away from the grounded conducting wall. The EUT is connected to the power mains through a LISN which provides  $50\Omega/50\mu\text{H}$  of coupling impedance for the measuring instrument. The Common Antenna is used for the call between the EUT and the System Simulator (SS). A Pulse Limiter is used to protect the measuring instrument. The factors of the whole test system are calibrated to correct the reading.

#### B. Equipments List:


Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2020.11.21	2021.09.20
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2020.11.21	2021.09.21
Cable	MATCHING PAD	W7	/	2020.08.02	2021.08.02

### 2.3.2 Radiated Emission


#### A. Test Setup:

- 1) For radiated emissions from 30MHz to 1GHz



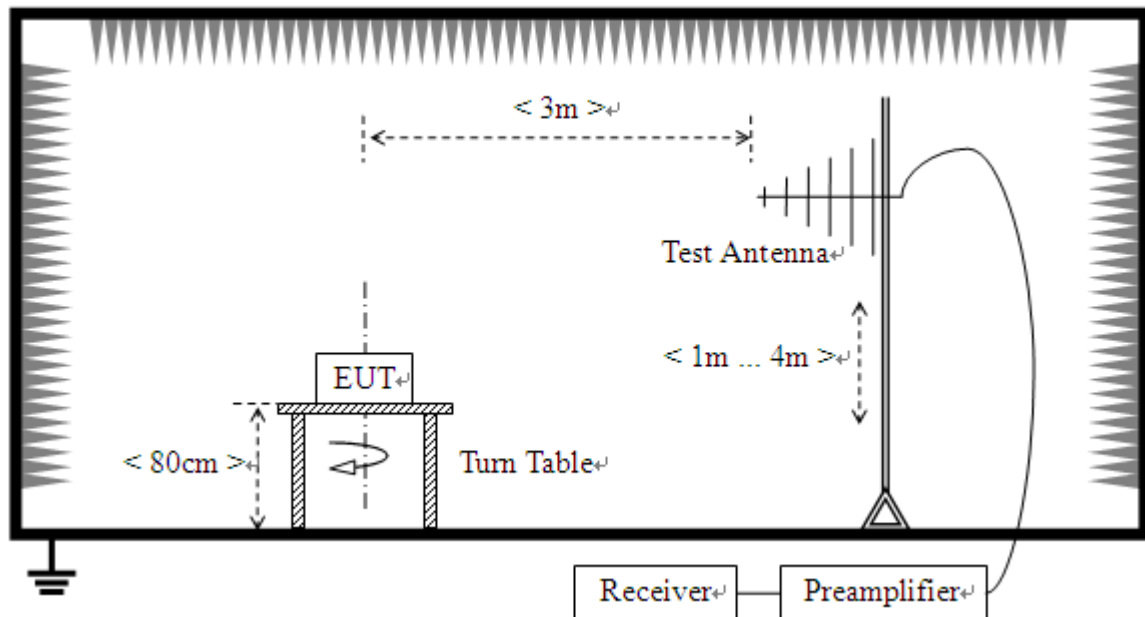

2) For radiated emissions above 1GHz

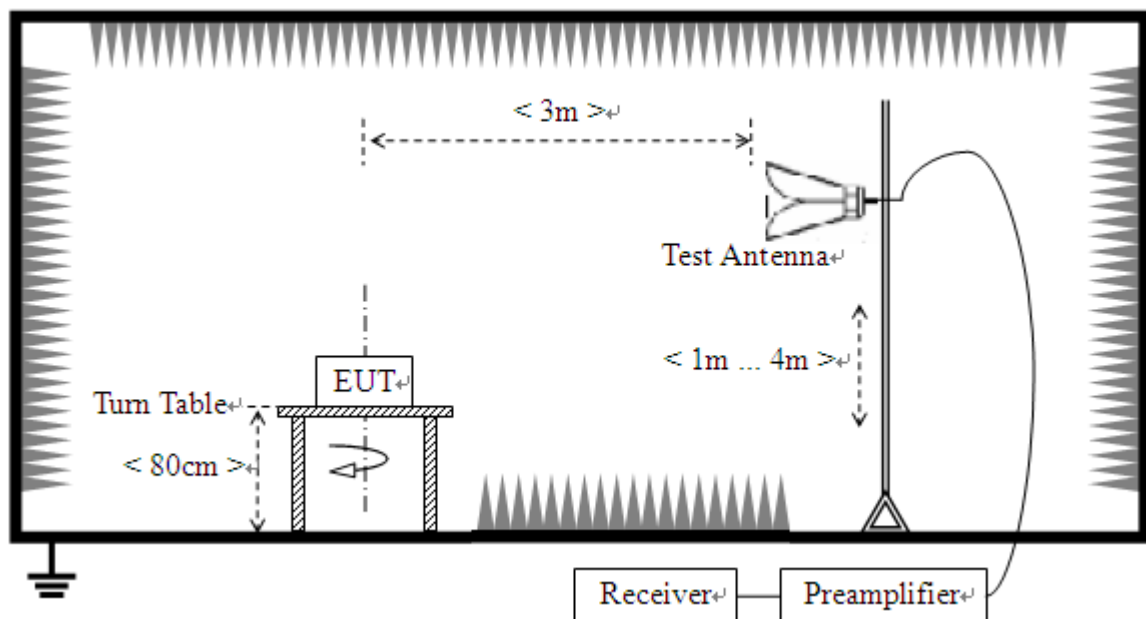

## B. Test Procedure

The test is performed in a 3m Semi-Anechoic Chamber; the antenna factor, cable loss and so on of the site (factors) is calculated to correct the reading. The EUT is placed on a 0.8m high insulating Turn Table, and keeps 3m away from the Test Antenna, which is mounted on a



variable-height antenna master tower.

For the test Antenna:

- 1) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength. The emission levels at both horizontal and vertical polarizations should be tested.

**C. Equipments List:**

Description	Manufacturer	Model	Serial No.	Calibration Date	Calibration Due. Date
Test Receiver	KEYSIGHT	N9038A	A141202036	2020.11.21	2021.09.20
LISN	ROHDE&SCHWARZ	ENV216	A140701847	2020.11.21	2021.09.21
Shield Room	Xinju Electronics	L7300*W4500 *H3100	A181003226	2018.09.06	2021.09.05
EMI Test Receiver	ROHDE&SCHWARZ	ESCI	A0902601	2020.07.01	2021.06.23
Broadband Ant.	2786	ETC	A150402239	2018.09.17	2021.09.16
3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2019.03.26	2023.03.25
EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2020.10.21	2021.08.12
System Simulator	ROHDE&SCHWARZ	CMW500	A150802214	2019.07.30	2021.07.29
5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2019.03.25	2023.03.24
EMI Horn Ant.	ROHDE&SCHWARZ	HF906	A0304225	2019.04.17	2022.04.17

### 3. 47 CFR PART 15B REQUIREMENTS

#### 3.1 Conducted Emission

##### 3.1.1 Requirement

According to FCC section 15.107, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).

Frequency range (MHz)	Conducted Limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

**Note:**

- The limit subjects to the Class B digital device.
- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

##### 3.1.2 Test Description

See section 2.3.1 of this report.

##### 3.1.3 Test Result


The maximum conducted interference is searched using Peak (PK), Quasi-peak (QP) and Average (AV) detectors; the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. All test modes are considered, refer to recorded points and plots below.

**Note:**

Devices subject to Part 15 must be tested for all available U.S. voltages and frequencies (such as a Nominal 120V AC,50/60Hz) for which the device is capable of operation. A device rated for 50/60 Hz operation need not be tested at both frequencies provided the radiated and line conducted emissions are the same at both frequencies.

## Test voltage and frequency (120V AC,60Hz)

### A. Mains terminal disturbance voltage, L phase

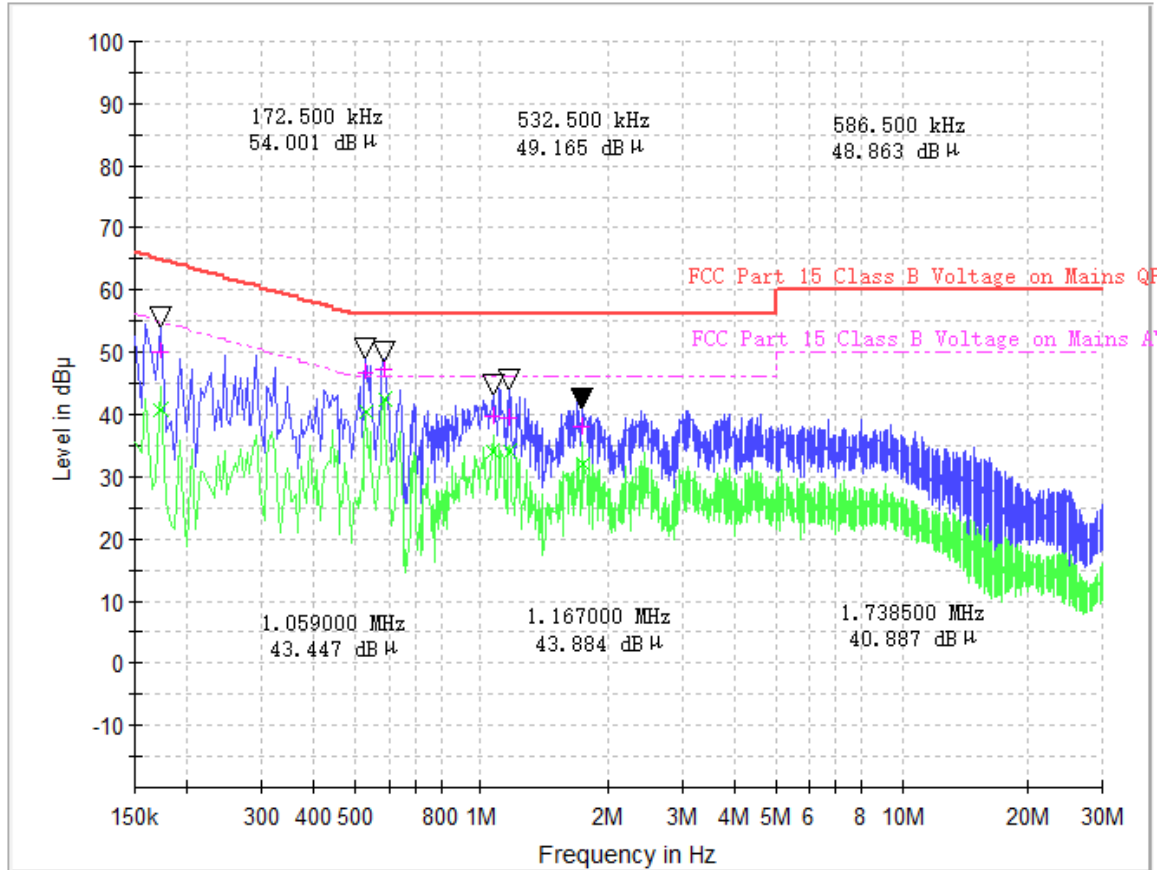


(Plot A: L Phase)

Frequency (MHz)	QuasiPea k	CAverage (dB μ V)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μ V)
0.172500	49.97	40.53	0.1	20.7	14.87	64.8	14.31	54.8
0.532500	46.79	40.26	0.1	20.4	9.21	56.0	5.74	46.0
0.586500	47.08	42.43	0.1	20.3	8.92	56.0	3.57	46.0
1.059000	39.77	33.81	0.1	20.4	16.23	56.0	12.19	46.0
1.167000	39.47	34.02	0.1	20.1	16.53	56.0	11.98	46.0
1.738500	37.99	31.83	0.1	20.2	18.01	56.0	14.17	46.0

Note: Correction factor=Cabel loss+ attenuation factor  
attenuation factor=10dB

## B. Mains terminal disturbance voltage, N phase

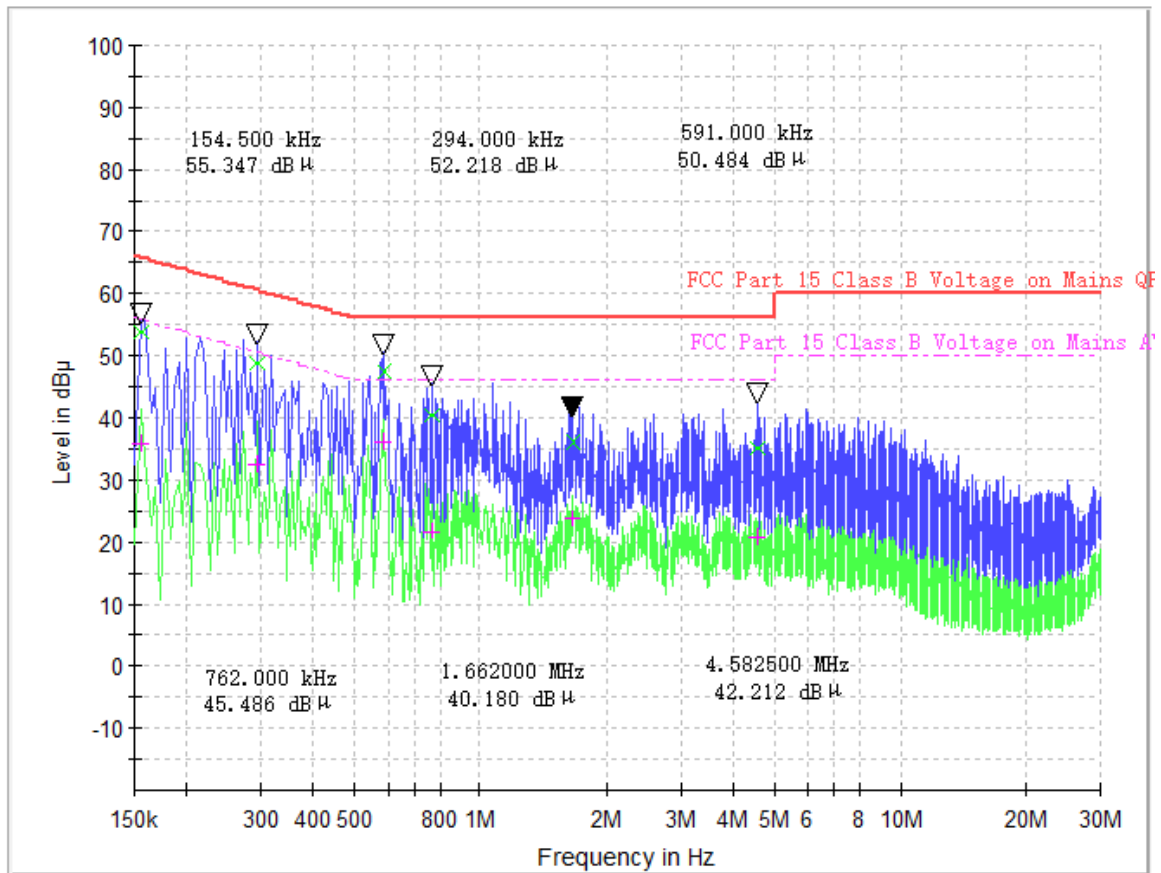

(Plot B: N Phase)

Frequency (MHz)	QuasiPea k	CAverage (dB μV)	Cabel Loss (dB)	Corr. (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dB μV)
0.154500	53.63	35.70	0.1	21.3	12.12	65.8	20.05	55.8
0.294000	48.80	32.30	0.1	20.4	11.61	60.4	18.11	50.4
0.591000	47.26	35.88	0.1	20.6	8.74	56.0	10.12	46.0
0.762000	40.22	21.46	0.1	19.8	15.78	56.0	24.54	46.0
1.662000	35.89	23.47	0.1	20.1	20.11	56.0	22.53	46.0
4.582500	35.10	20.46	0.1	20.5	20.90	56.0	25.54	46.0

## 3.2 Radiated Emission

### 3.2.1 Requirement

According to FCC section 15.109, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency range (MHz)	Field Strength		Field Strength Limitation at 3m Measurement Dist	
	$\mu\text{V/m}$	Dist	( $\mu\text{V/m}$ )	( $\text{dBuV/m}$ )
0.009 - 0.490	$2400/F(\text{kHz})$	300m	$10000 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 80$
0.490 - 1.705	$2400/F(\text{kHz})$	30m	$100 * 2400/F(\text{kHz})$	$20\log 2400/F(\text{kHz}) + 40$
1.705 - 30.00	30	30m	$100 * 30$	$20\log 30 + 40$
30.0 - 88.0	100	3m	100	$20\log 100$
88.0 - 216.0	150	3m	150	$20\log 150$
216.0 - 960.0	200	3m	200	$20\log 200$
Above 960.0	500	3m	500	$20\log 500$

- As shown in FCC section 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector. When average radiated emission measurements are specified in this part, including emission measurements below 1000MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit for the frequency being investigated unless a different peak emission limit is otherwise specified in the rules.
- Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.
- For below 1G :QP detector RBW 120kHz ,VBW 300kHz.
- For Above 1G: PK detector RBW 1MHz,VBW 3MHz for PK value ;AV detector RBW 1MHz, VBW 10Hz for AV value.

#### Note:

- The tighter limit shall apply at the boundary between two frequency range.
- Limitation expressed in  $\text{dBuV/m}$  is calculated by  $20\log \text{Emission Level}(\mu\text{V/m})$ .
- If measurement is made at 3m distance, then F.S Limitation at 3m distance is adjusted by using the formula of  $Ld1 = Ld2 * (d2/d1)^2$ .

Example:

F.S Limit at 30m distance is  $30\mu\text{V/m}$ , then F.S Limitation at 3m distance is adjusted as

$$Ld1 = L1 = 30\mu\text{V/m} * (10)^2 = 100 * 30\mu\text{V/m}.$$

### **3.2.2 Test Description**

See section 2.3.2 of this report.


### **3.2.3 Test Result**

The maximum radiated emission is searched using PK, QP and AV detectors; the emission levels more than the limits, and that have narrow margins from the limits will be re-measured with AV and QP detectors. Both the vertical and the horizontal polarizations of the Test Antenna are considered to perform the tests. All test modes are considered, refer to recorded points and plots below.

The amplitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be reported.

Note: All radiated emission tests were performed in X, Y, Z axis direction, and only the worst axis test condition was recorded in this test report.

### A.Radiation disturbances, antenna polarization:Vertical

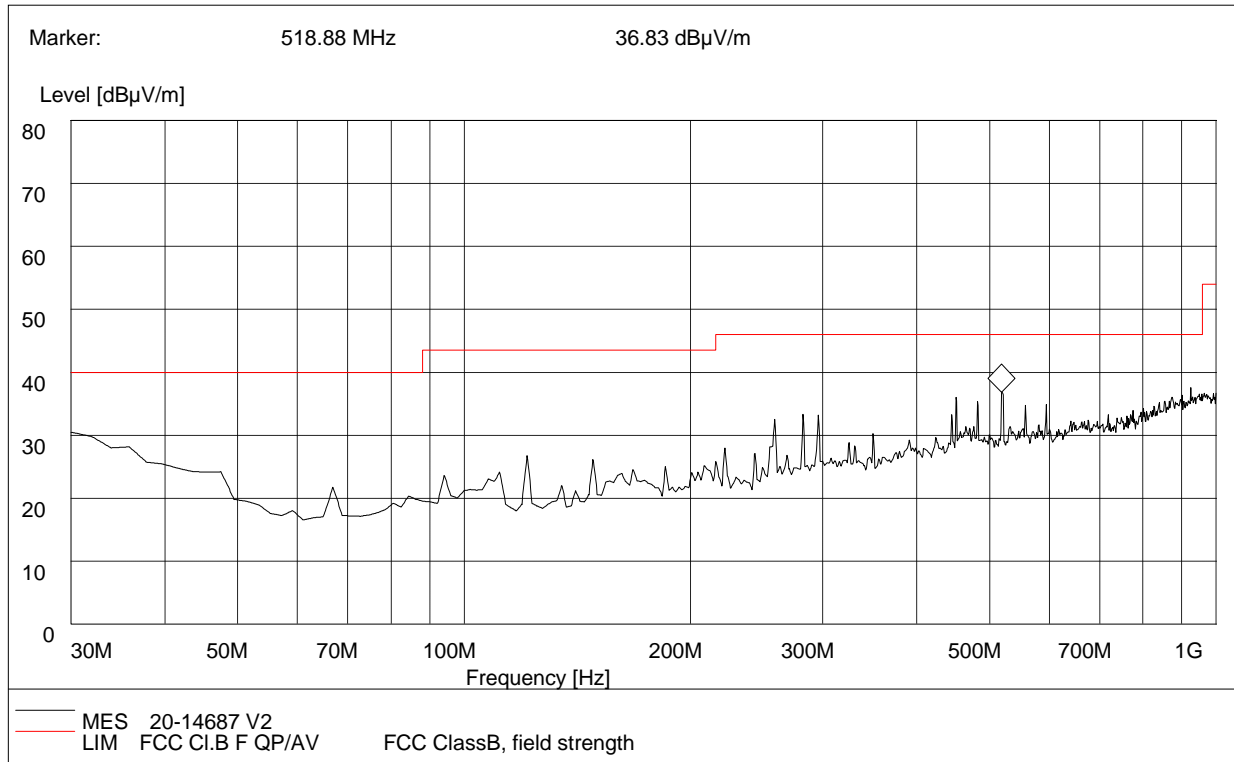


(Plot C: Test Antenna Vertical 30M - 1G)

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	29.27	120.000	114	40.0	10.73	Vertical	0.4	26.3	Pass
35.61	26.89	120.000	116	40.0	13.11	Vertical	0.6	26.3	Pass
121.37	24.61	120.000	227	43.5	18.89	Vertical	0.4	26.3	Pass
282.25	30.59	120.000	186	46.0	15.41	Vertical	0.7	29.0	Pass
450.37	33.67	120.000	168	46.0	12.33	Vertical	0.5	29.0	Pass
518.64	33.69	120.000	206	46.0	12.31	Vertical	0.8	29.0	Pass



## B.Radiation disturbances, antenna polarization: Horizontal

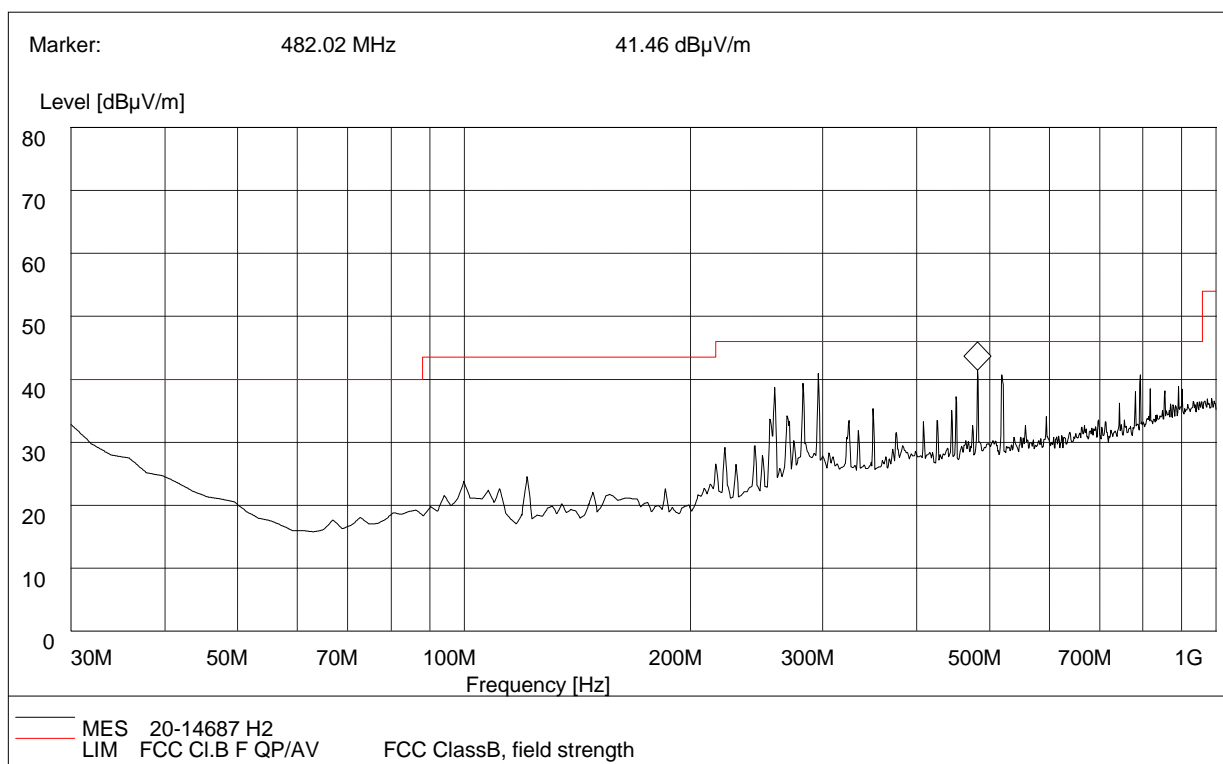


(Plot D: Test Antenna Horizontal 30M - 1G)

Frequency (MHz)	QuasiPeak (dB $\mu$ V/m)	Bandwidth (kHz)	Antenna height (cm)	Limit (dB $\mu$ V/m)	Margin (dB)	Antenna	Cable Loss(dB)	ANT. Factor(dB)	Verdict
30.00	28.39	120.000	121	40.0	11.61	Horizontal	0.5	26.3	Pass
258.30	36.25	120.000	216	46.0	9.75	Horizontal	0.5	27.4	Pass
282.42	36.86	120.000	116	46.0	9.14	Horizontal	0.6	29.0	Pass
295.37	37.59	120.000	226	46.0	8.41	Horizontal	0.5	28.3	Pass
482.06	39.59	120.000	184	46.0	6.41	Horizontal	0.4	29.4	Pass
518.67	37.58	120.000	219	46.0	8.42	Horizontal	1.0	28.9	Pass

**Test Result: PASS**


### A.Radiation disturbances, antenna polarization: Horizontal

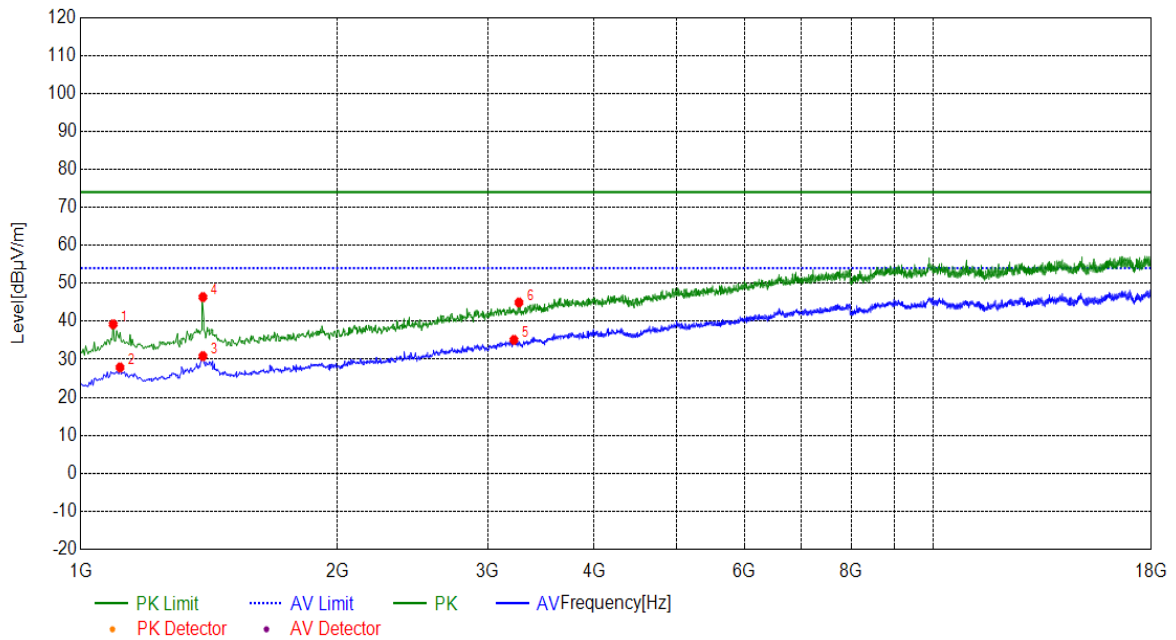

(Plot E: Test Antenna Horizontal 1G – 18G)

NO.	Freq. [MHz]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1091.81	39.24	74.00	34.76	PK	100	320	Horizontal
2	1112.22	27.88	54.00	26.12	AV	100	110	Horizontal
3	1391.07	30.86	54.00	23.14	AV	100	110	Horizontal
4	1391.07	46.40	74.00	27.60	PK	100	120	Horizontal
5	3220.64	35.13	54.00	18.87	AV	100	120	Horizontal
6	3264.85	44.97	74.00	29.03	PK	100	220	Horizontal

## B.Radiation disturbances, antenna polarization: Vertical

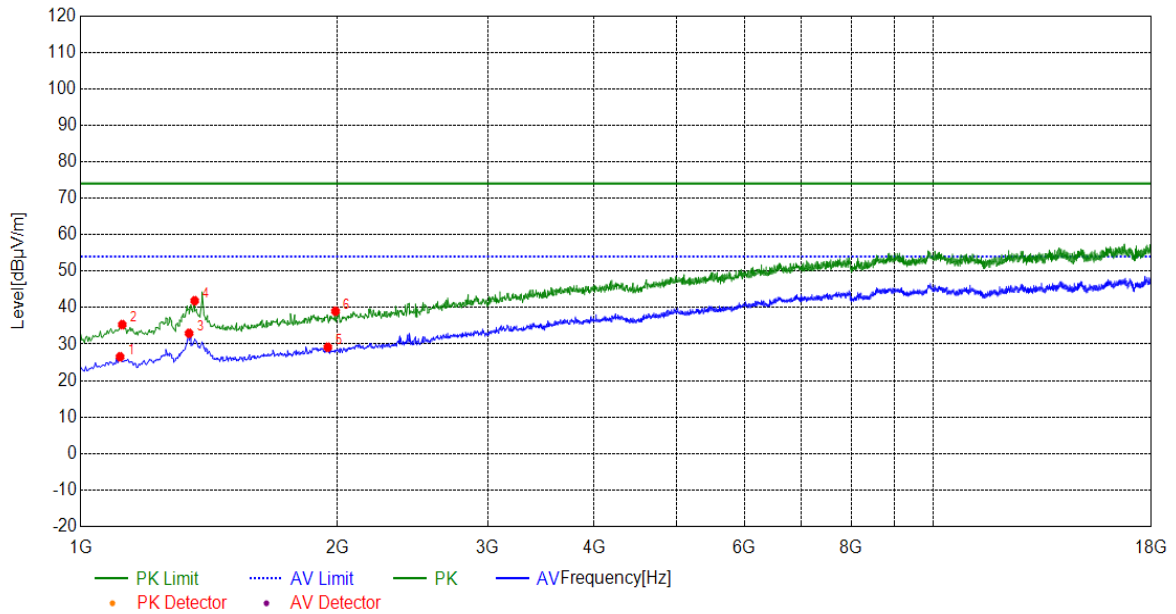

(Plot F: Test Antenna Vertical 1G – 18G)

NO.	Freq. [MHz]	Level [dBµV/m]	Limit [dBµV/m]	Margin [dB]	Trace	Height [cm]	Angle [°]	Polarity
1	1112.22	26.54	54.00	27.46	AV	100	330	Vertical
2	1119.02	35.36	74.00	38.64	PK	100	260	Vertical
3	1340.06	32.96	54.00	21.04	AV	100	40	Vertical
4	1360.47	41.90	74.00	32.10	PK	100	190	Vertical
5	1948.78	29.16	54.00	24.84	AV	100	120	Vertical
6	1989.59	39.02	74.00	34.98	PK	100	200	Vertical

-----End of Report-----