



FCC RF Test Report

APPLICANT : AltoBeam Inc.
EQUIPMENT : ATBM6132
BRAND NAME : ALTOBEAM
MODEL NAME : ATBM6132
FCC ID : 2BAVSATBM6132
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 22, 2024 ~ Jun. 07, 2024

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

Sporton International Inc. (ShenZhen)

1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055

People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
2.6 Measurement Results Explanation Example.....	10
3 TEST RESULT	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	16
3.5 Radiated Band Edges and Spurious Emission Measurement	29
3.6 AC Conducted Emission Measurement.....	33
3.7 Antenna Requirements.....	35
4 LIST OF MEASURING EQUIPMENT	36
5 MEASUREMENT UNCERTAINTY	37
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR431203B	Rev. 01	Initial issue of report	Jun. 14, 2024



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report Only	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 2.42 dB at 2.76 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 0.88 dB at 2389.97 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

AltoBeam Inc.

B808, Tsinghua Tongfang Hi-Tech Plaza, Haidian Beijing China

1.2 Manufacturer

AltoBeam Inc.

B808, Tsinghua Tongfang Hi-Tech Plaza, Haidian Beijing China

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	ATBM6132
Brand Name	ALTOBEAM
Model Name	ATBM6132
FCC ID	2BAVSATBM6132
HW Version	V1.2
SW Version	V2.10.120
EUT Stage	Production Unit

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 16.07 dBm (0.0405 W) 802.11g : 26.63 dBm (0.4603 W) 802.11n HT20 : 26.52 dBm (0.4487 W) 802.11n HT40 : 23.20 dBm (0.2089 W)
99% Occupied Bandwidth	802.11b : 14.99MHz 802.11g : 19.28MHz 802.11n HT20 : 19.98MHz 802.11n HT40 : 36.76MHz
Antenna Type / Gain	Rod Antenna type with gain 2.52 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-SZ TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH01-SZ	CN1256	421272

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH01-SZ	AUDIX	E3	6.2009-8-24
2.	CO01-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-

2.2 Test Mode


Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0


Test Cases	
AC Conducted Emission	Mode 1 :WLAN Link(2.4G) + Charging from NB
Remark: For Radiated Test Cases, The tests were performance with Notebook.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

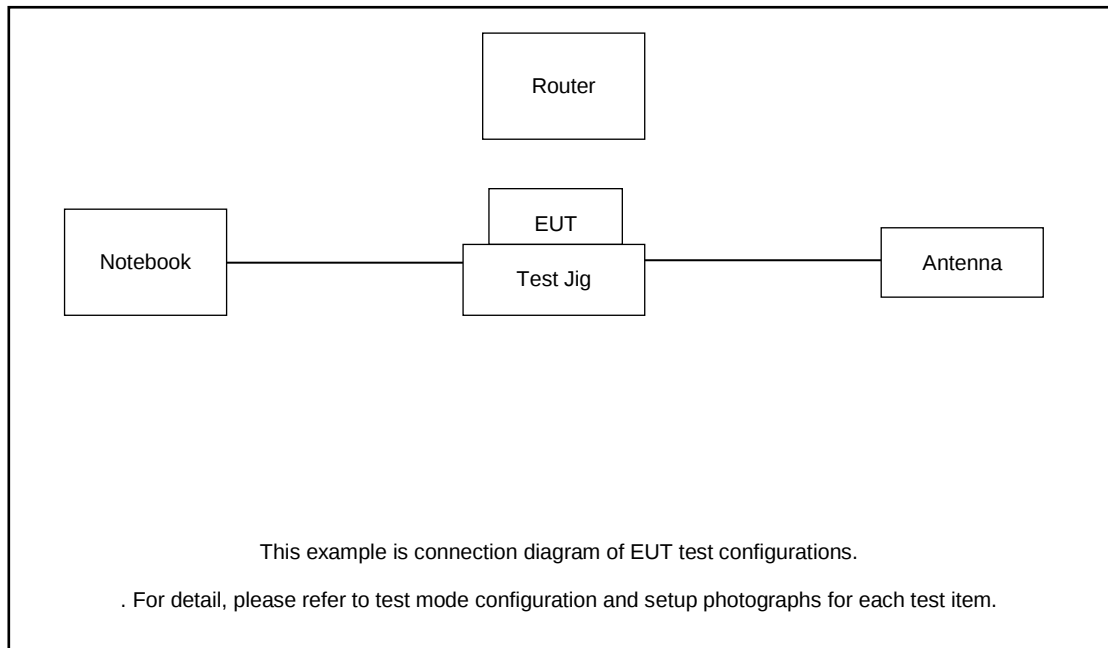

Radiated Emission:

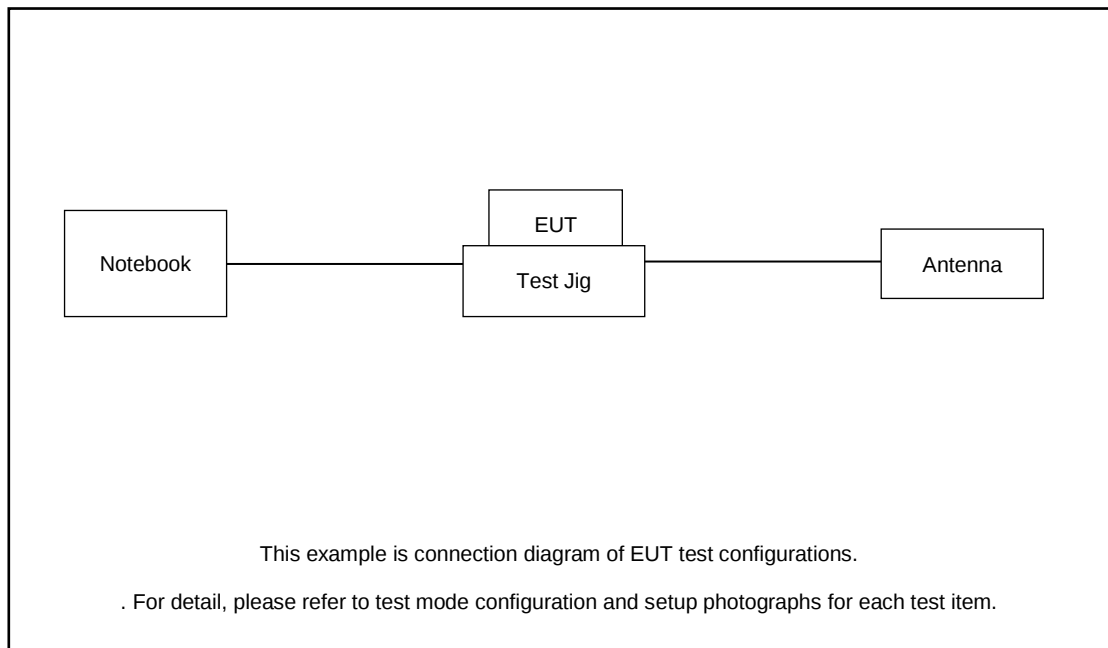

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
2.	Notebook	N/A	N/A	N/A	N/A	N/A
3.	Antenna	N/A	N/A	N/A	N/A	N/A
4.	Test Jig	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example:

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 11.00 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 11.00 + 10 = 21.00 (dB)

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1%~5% of OBW and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

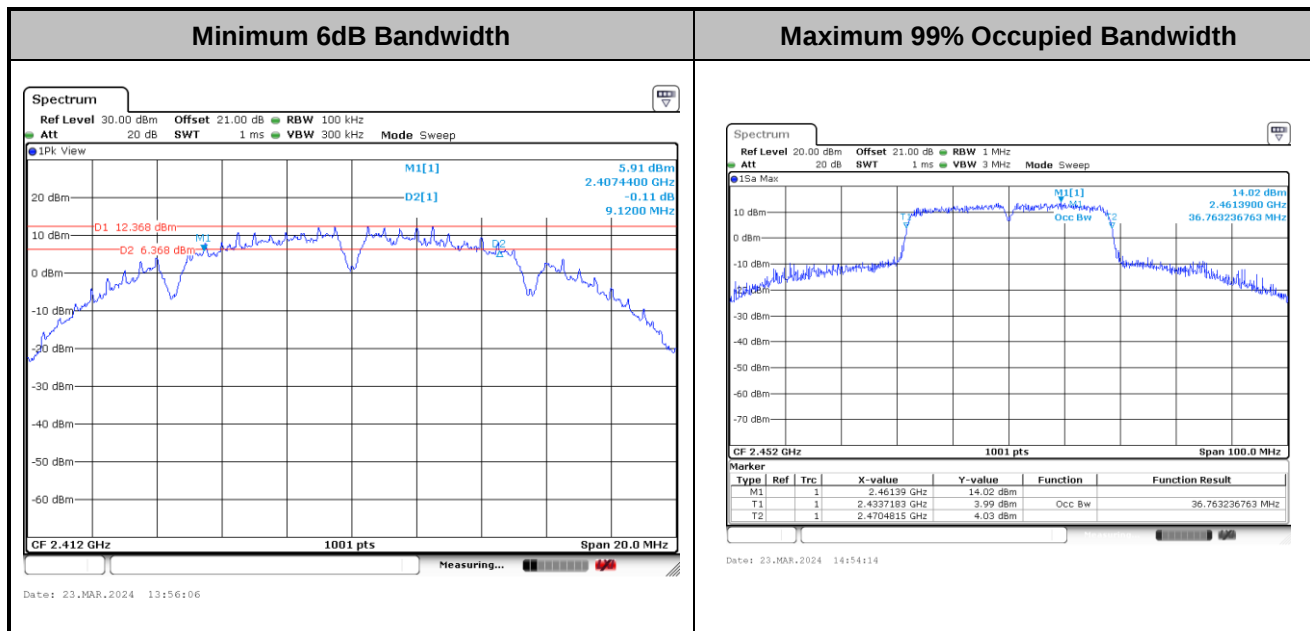

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

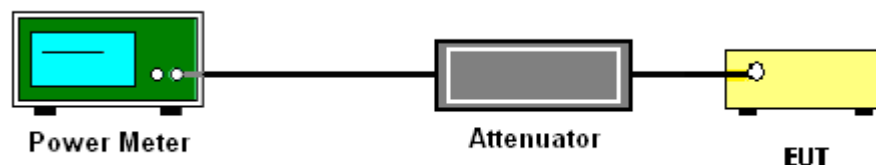

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures


1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.

3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

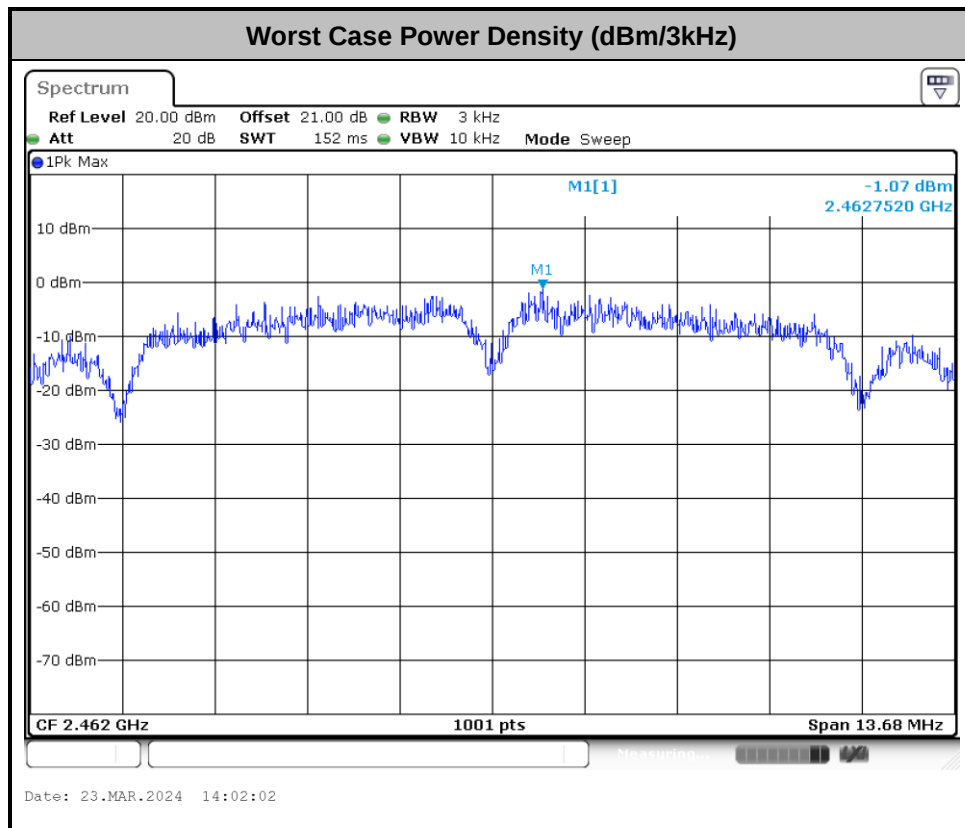

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.11
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup






3.4.5 Test Result of Conducted Band Edges and Spurious Emission


Test Engineer :	ZhiQiang Chen	Temperature :	24~26°C
		Relative Humidity :	50~53%

Test Mode :	802.11b	Test Channel :	01
-------------	---------	----------------	----

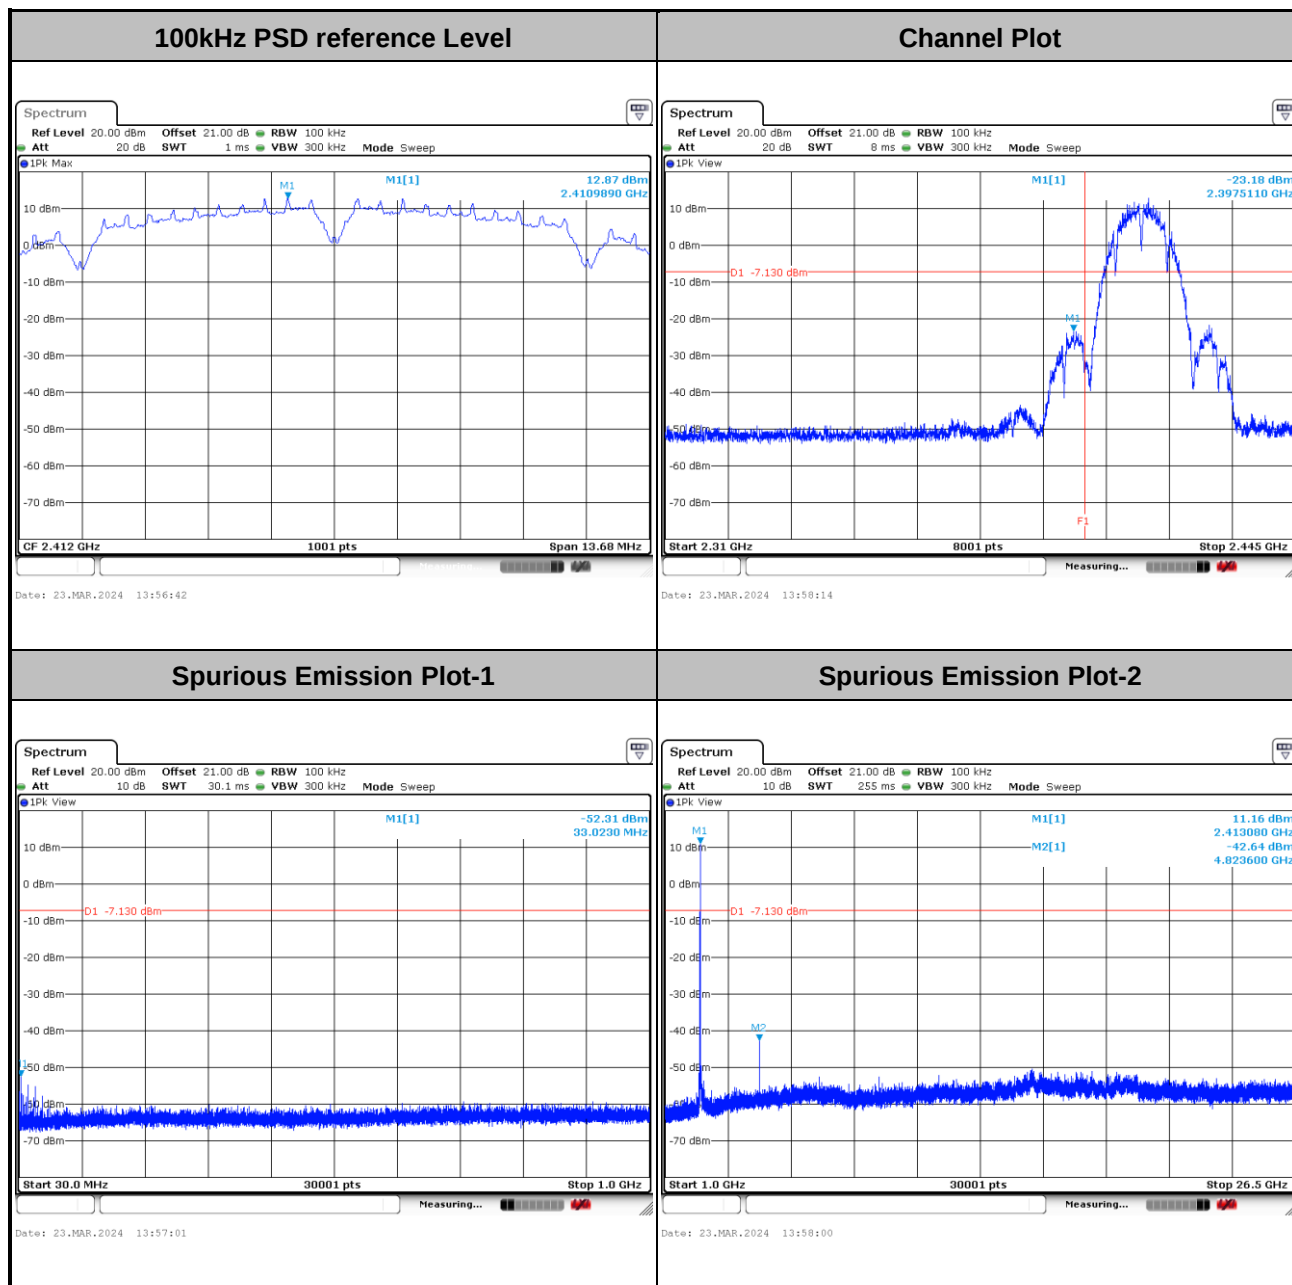




Test Mode :	802.11b	Test Channel :	06
-------------	---------	----------------	----

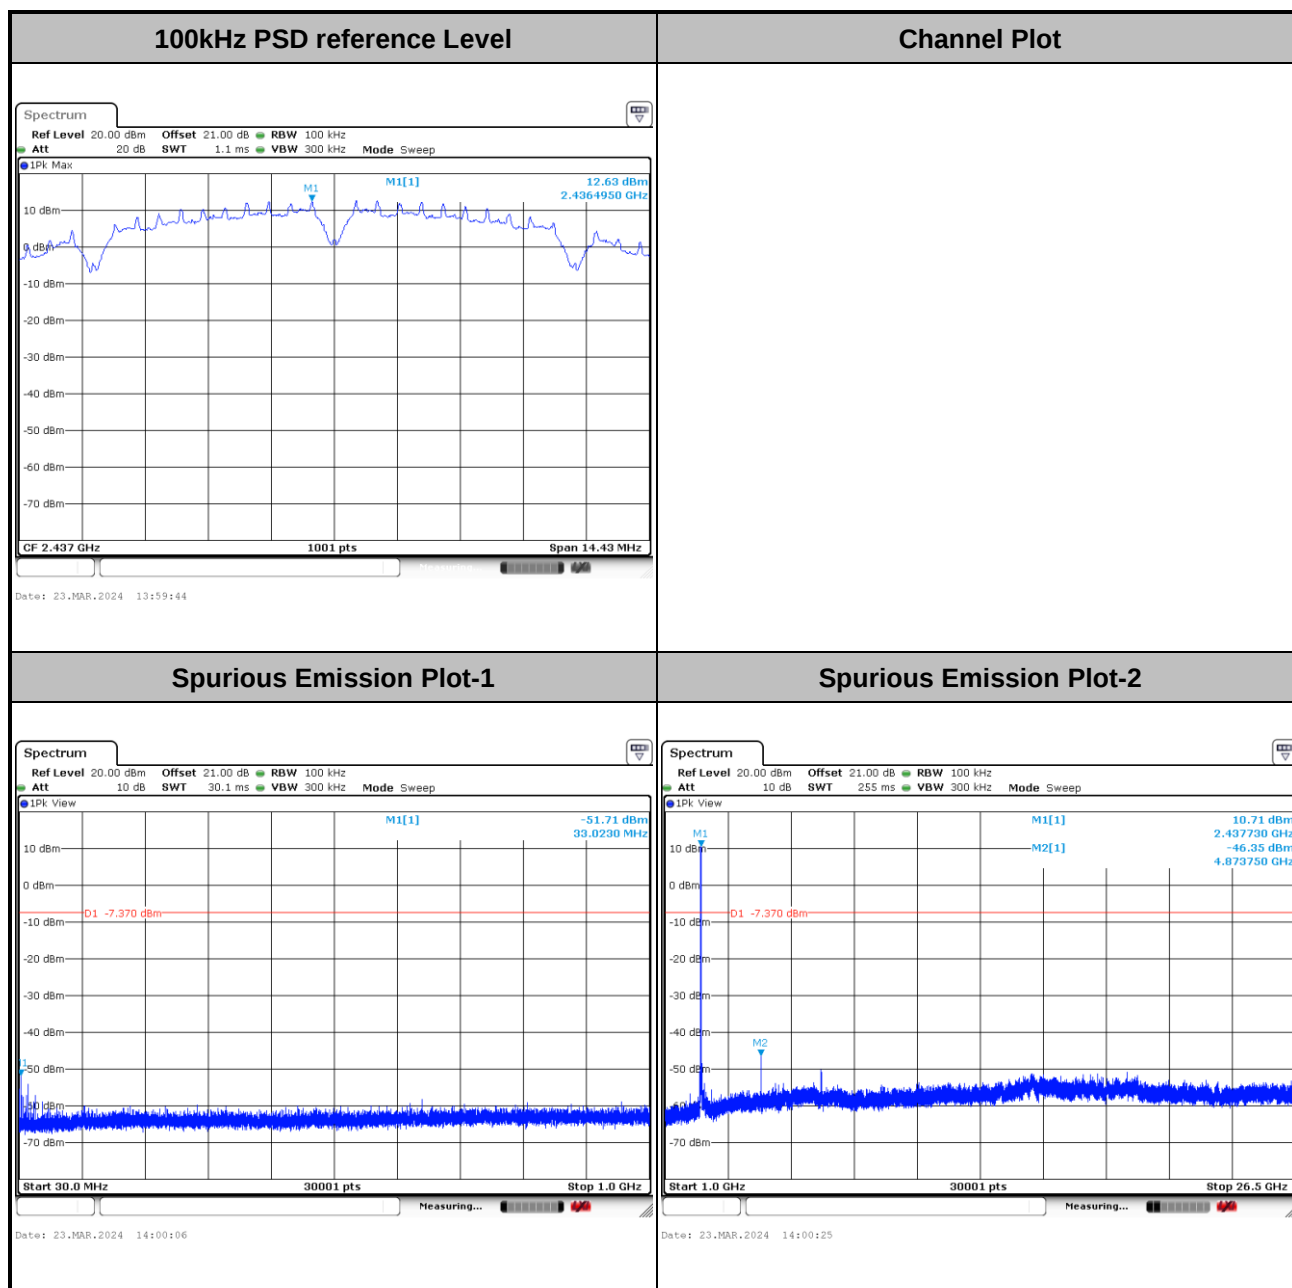




Test Mode :	802.11b	Test Channel :	11
-------------	---------	----------------	----

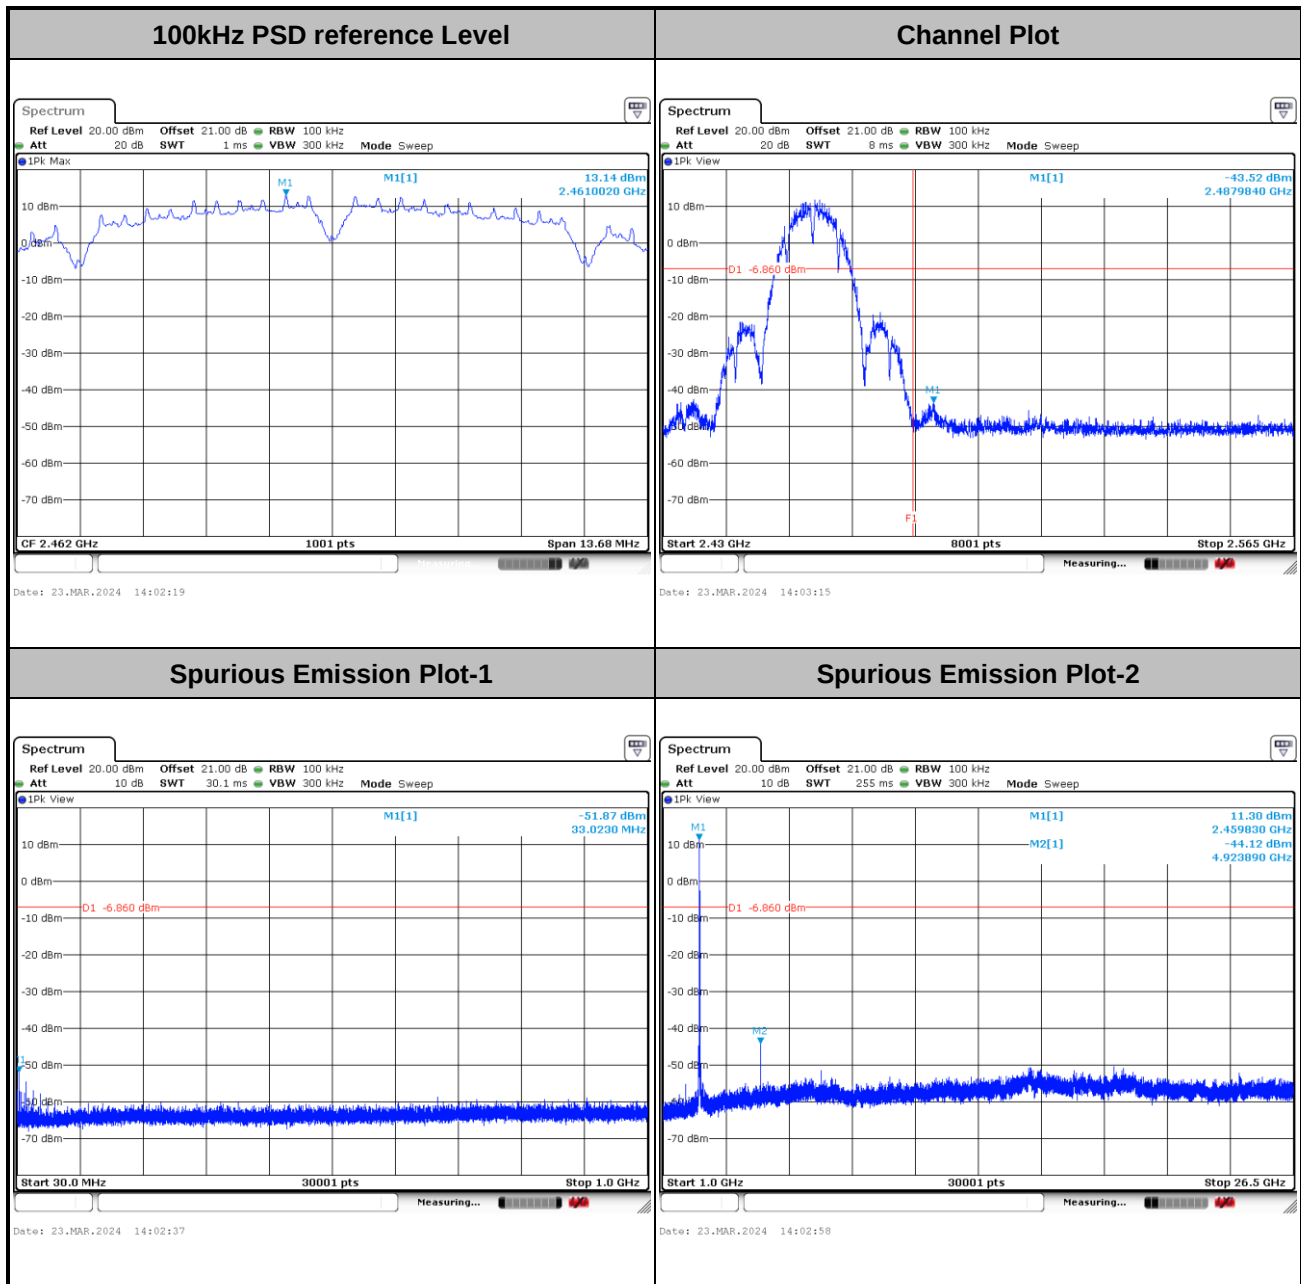




Test Mode :	802.11g	Test Channel :	01
-------------	---------	----------------	----


100kHz PSD reference Level

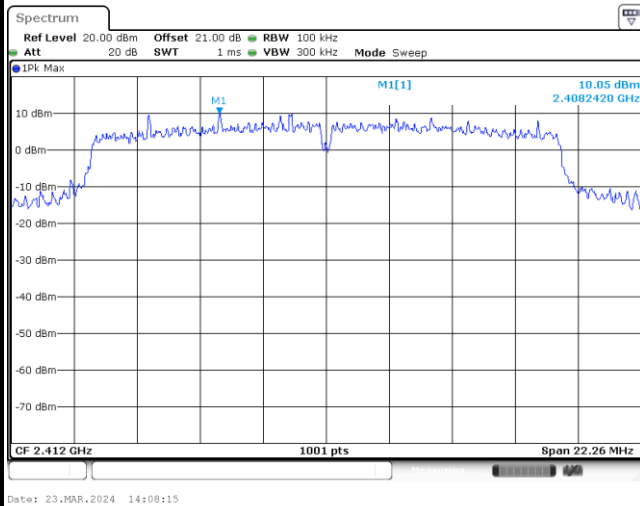


Channel Plot

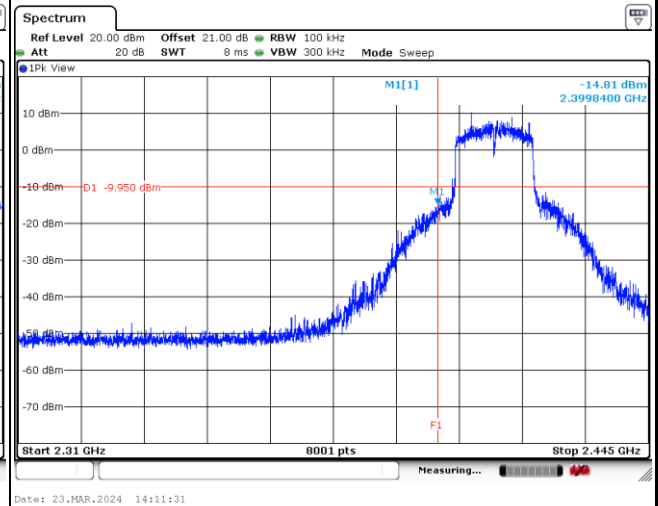

Spurious Emission Plot-1

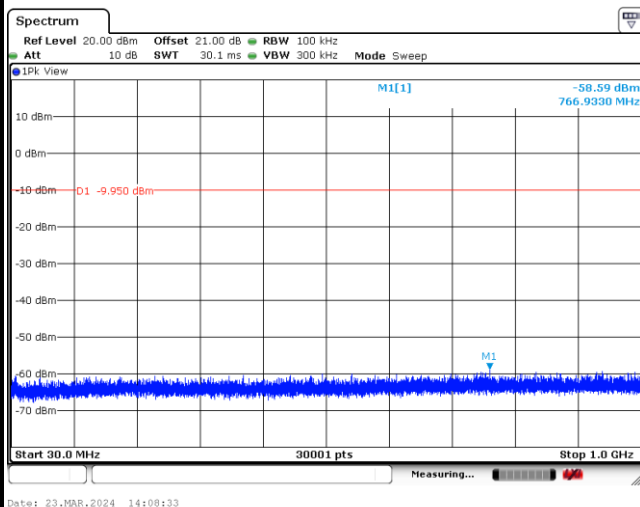


Spurious Emission Plot-2

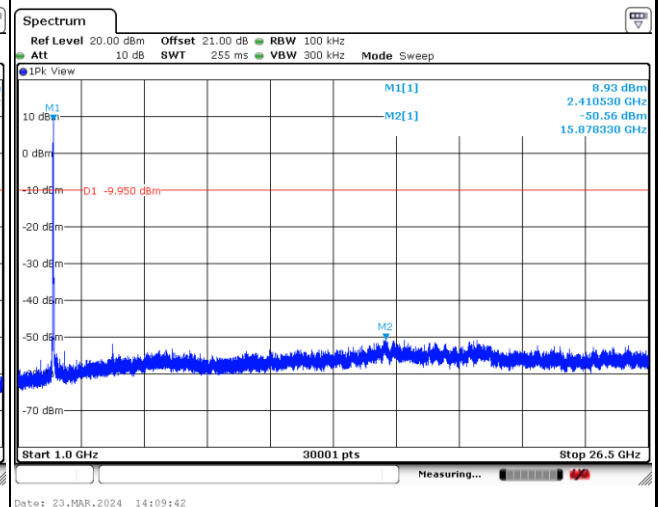




Test Mode :	802.11g	Test Channel :	06
-------------	---------	----------------	----

100kHz PSD reference Level

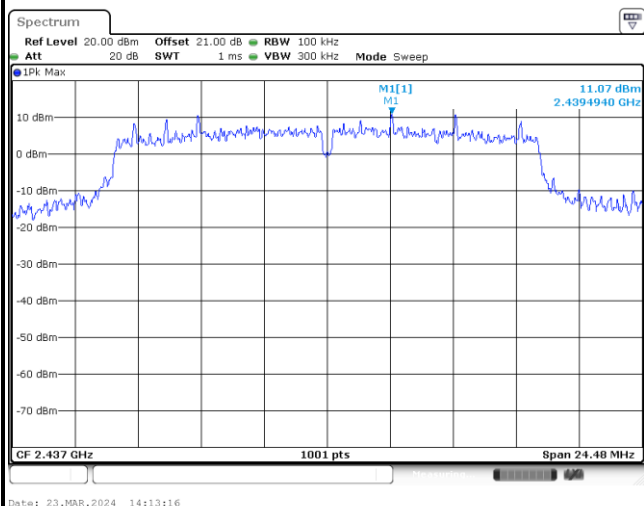


Channel Plot

Spurious Emission Plot-1

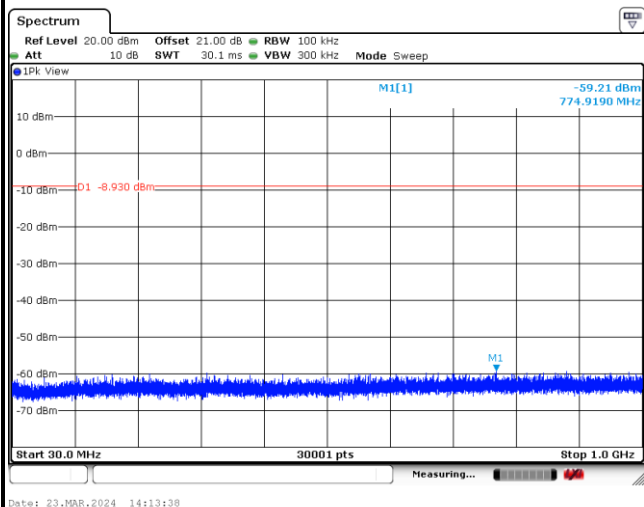


Spurious Emission Plot-2

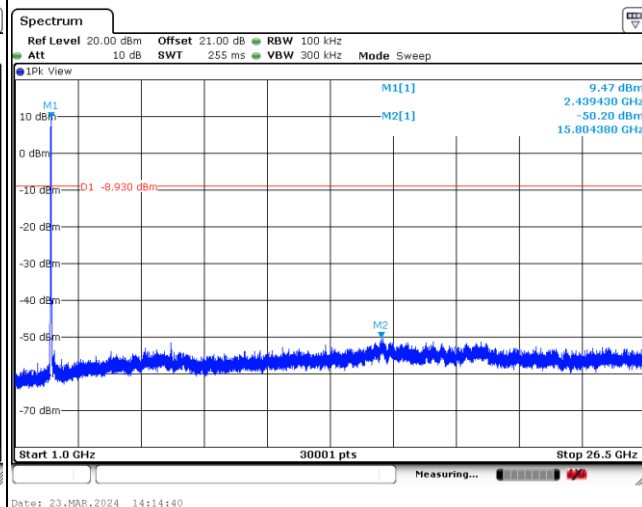




Test Mode :	802.11g	Test Channel :	11
-------------	---------	----------------	----

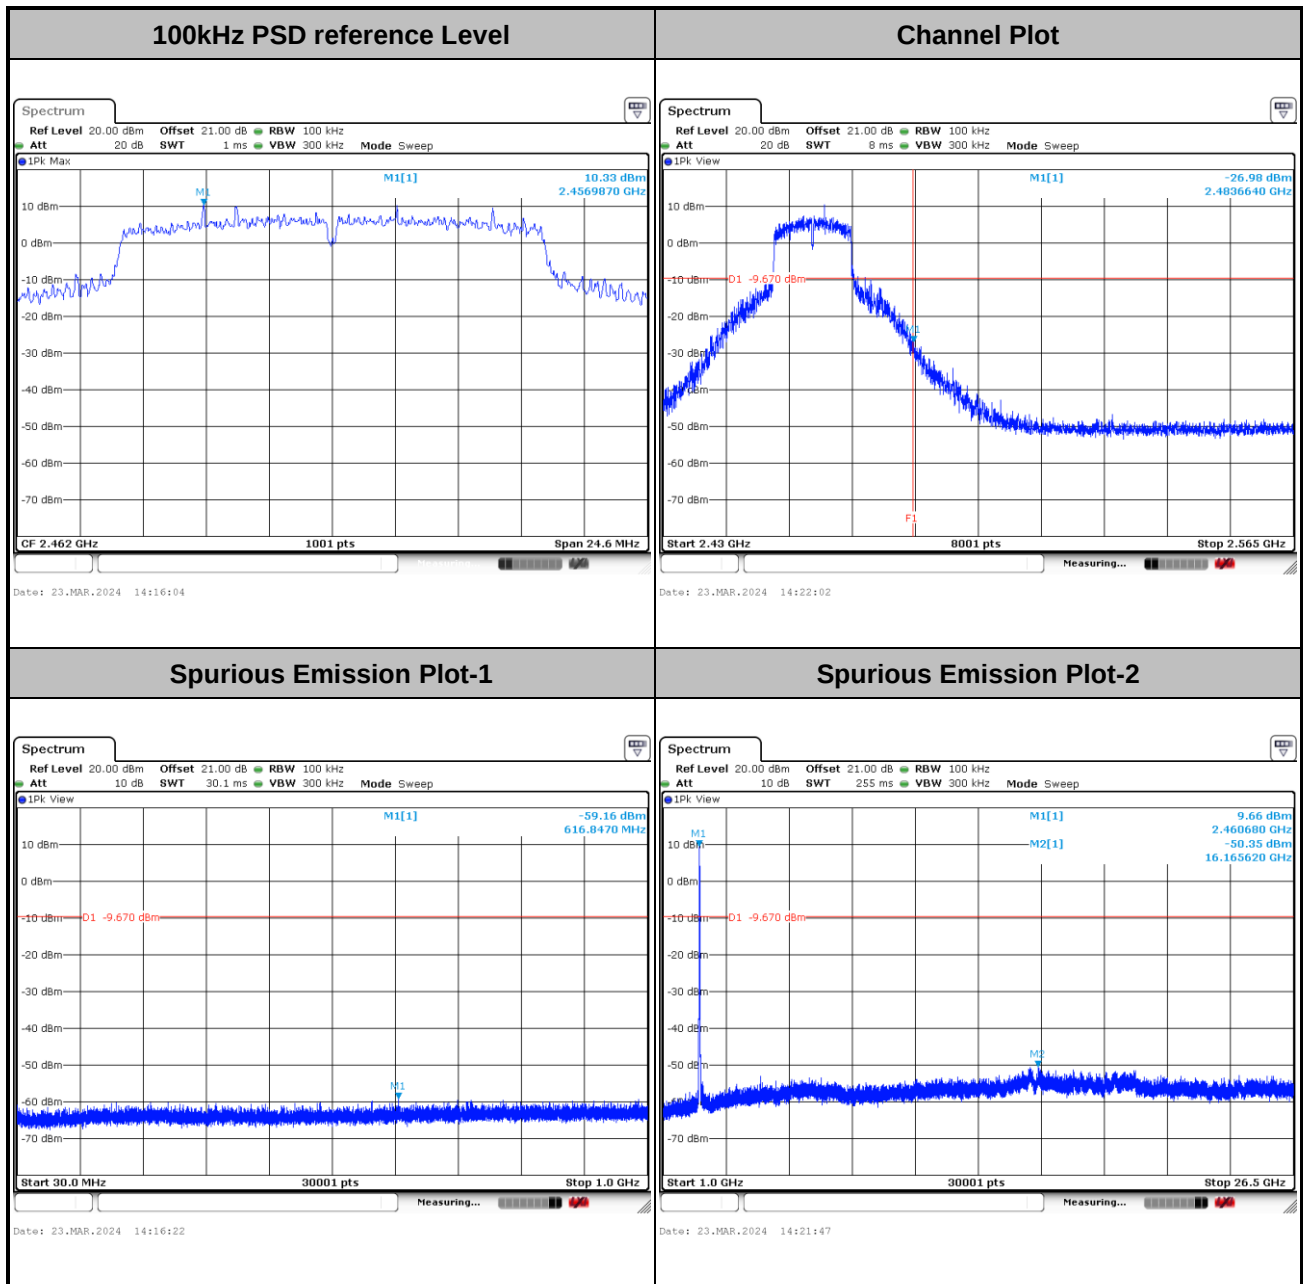




Test Mode :	802.11n HT20	Test Channel :	01
-------------	--------------	----------------	----

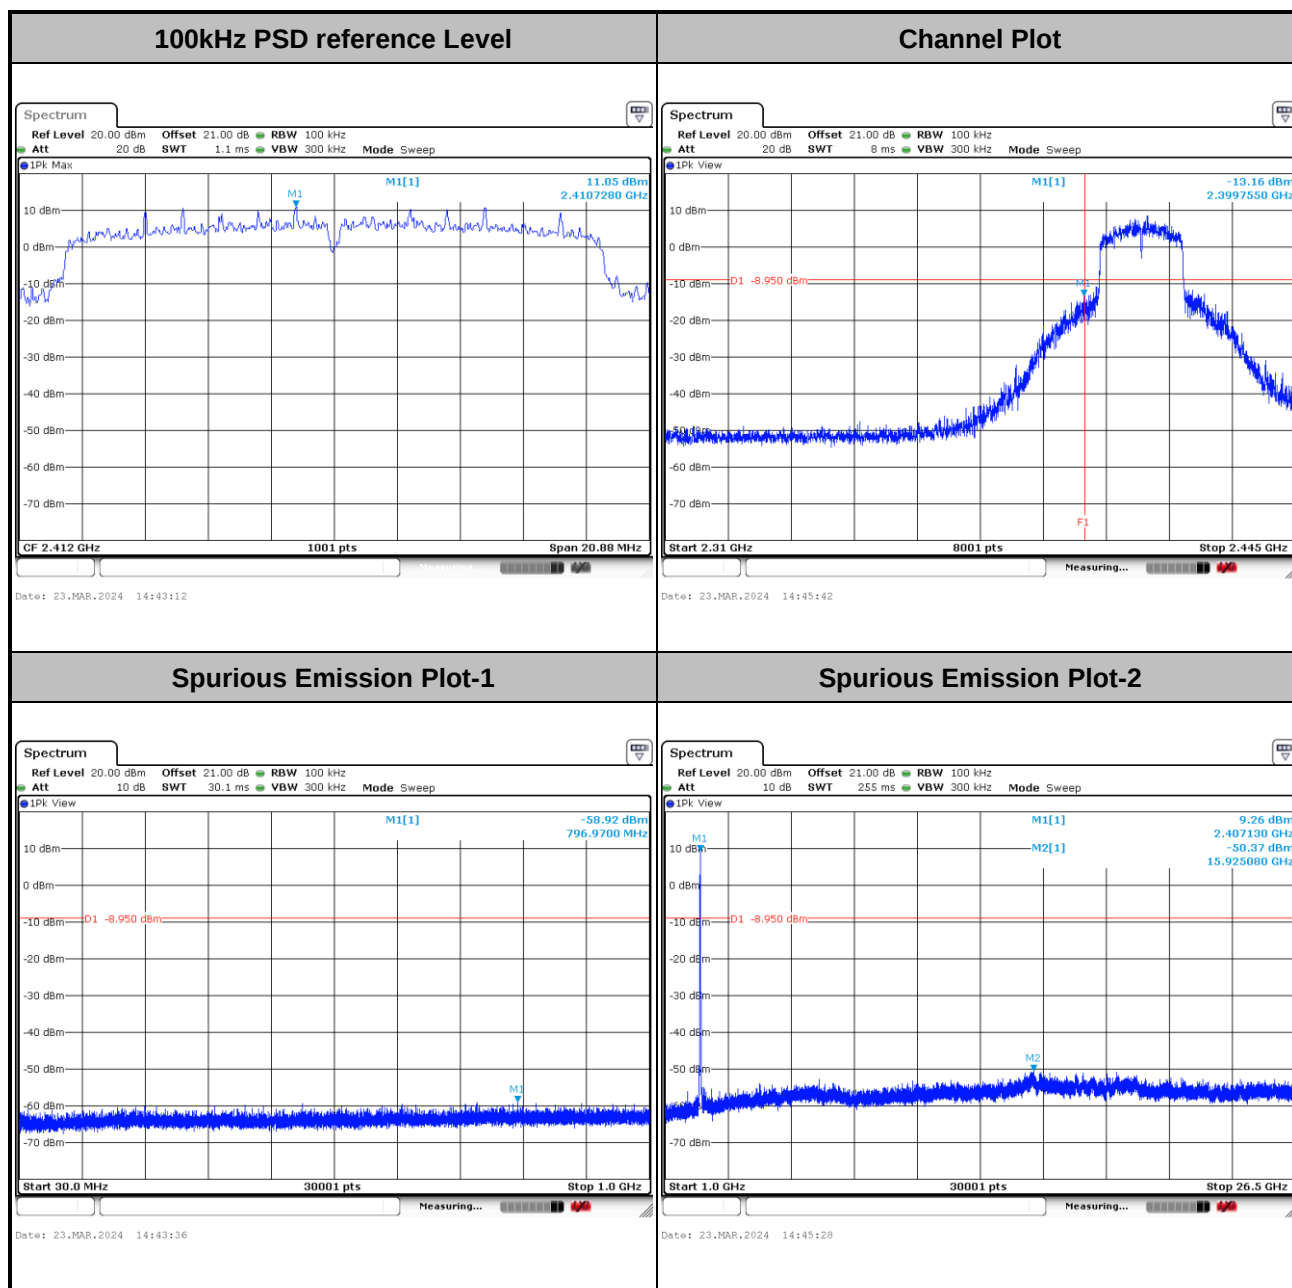




Test Mode :	802.11n HT20	Test Channel :	06
-------------	--------------	----------------	----

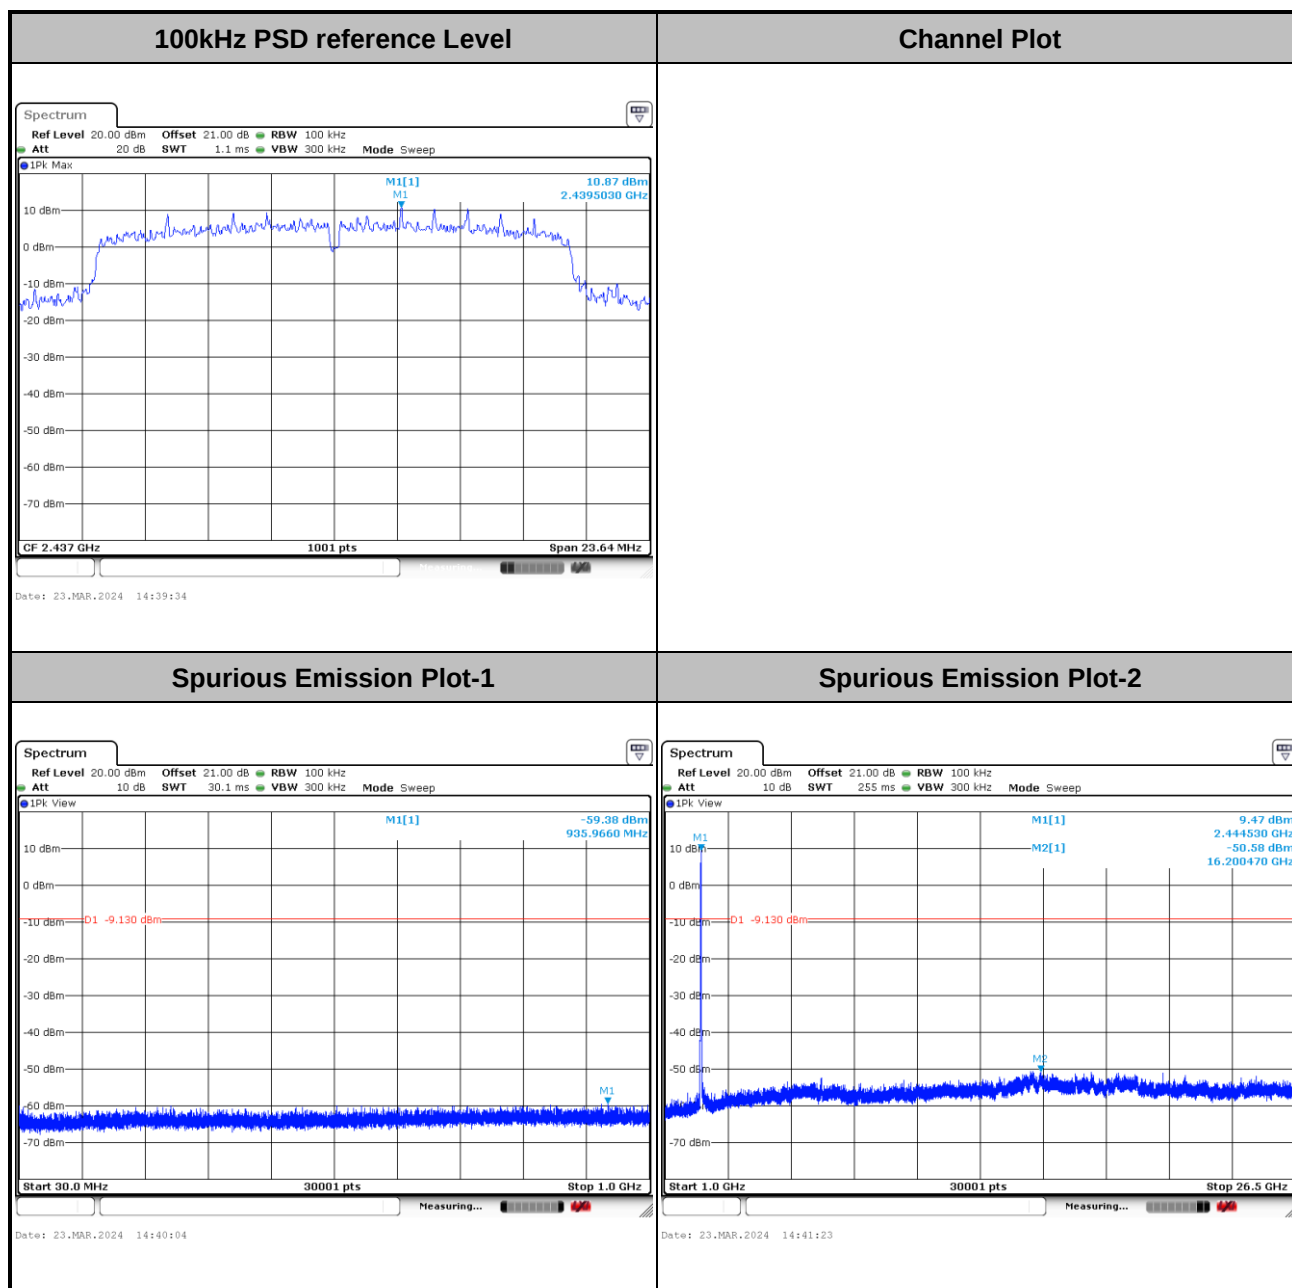





Test Mode :	802.11n HT20	Test Channel :	11
-------------	--------------	----------------	----

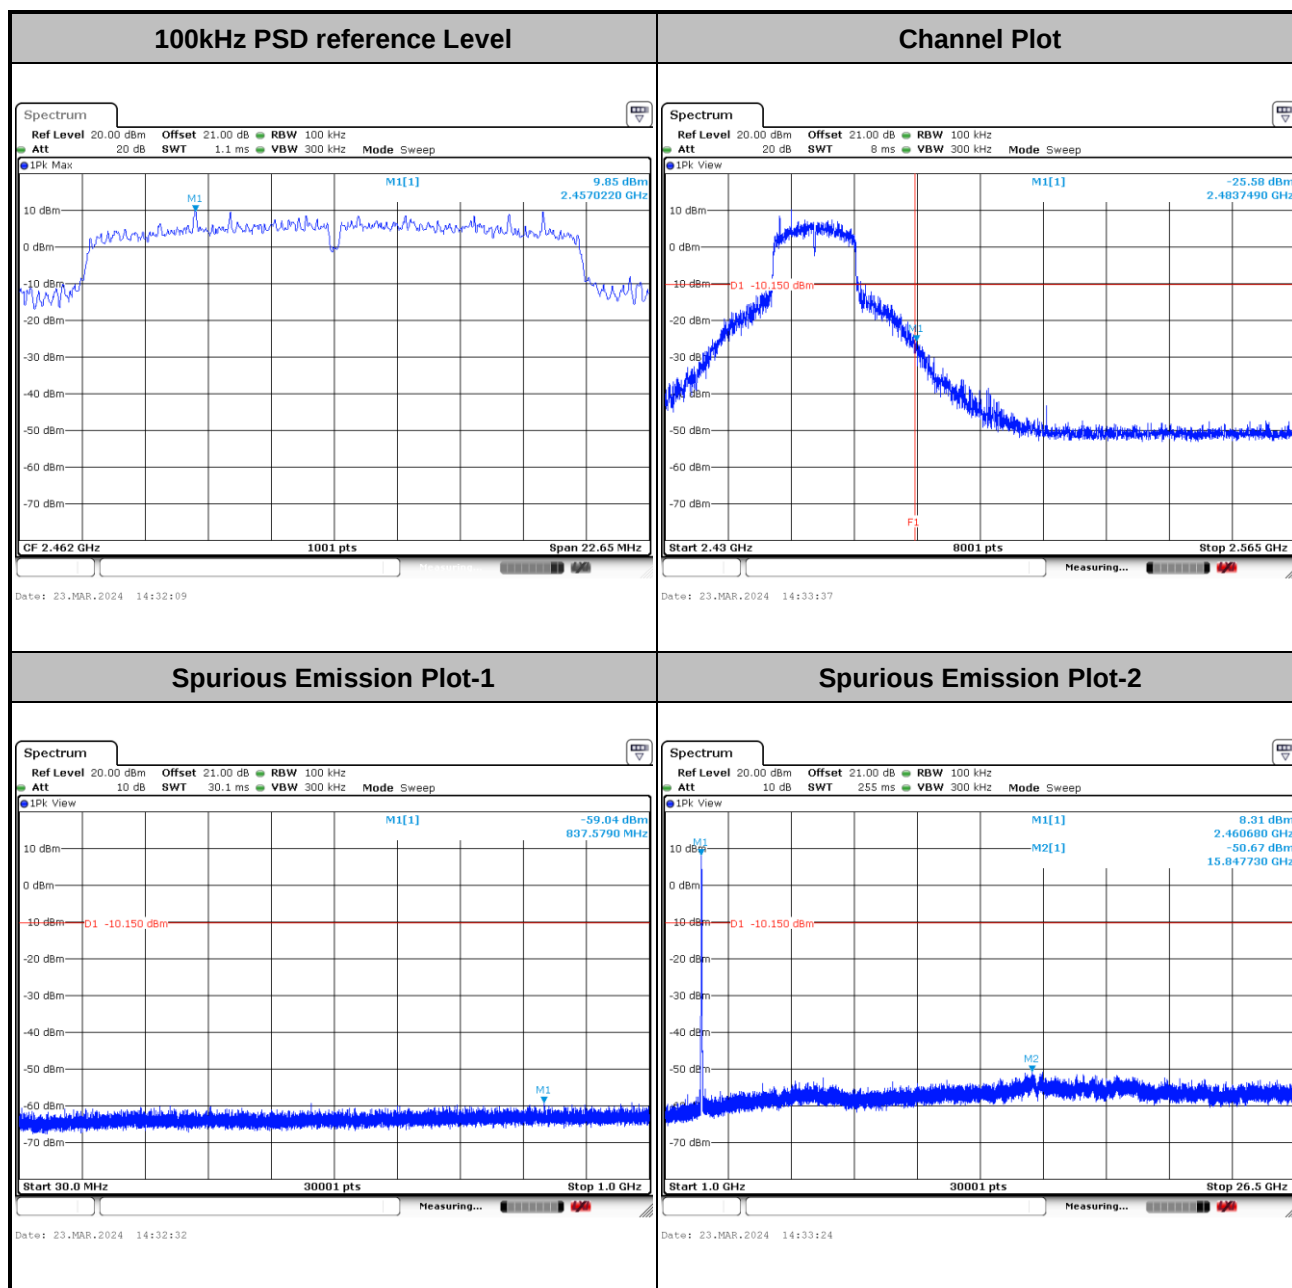



Test Mode :	802.11n HT40	Test Channel :	03
-------------	--------------	----------------	----

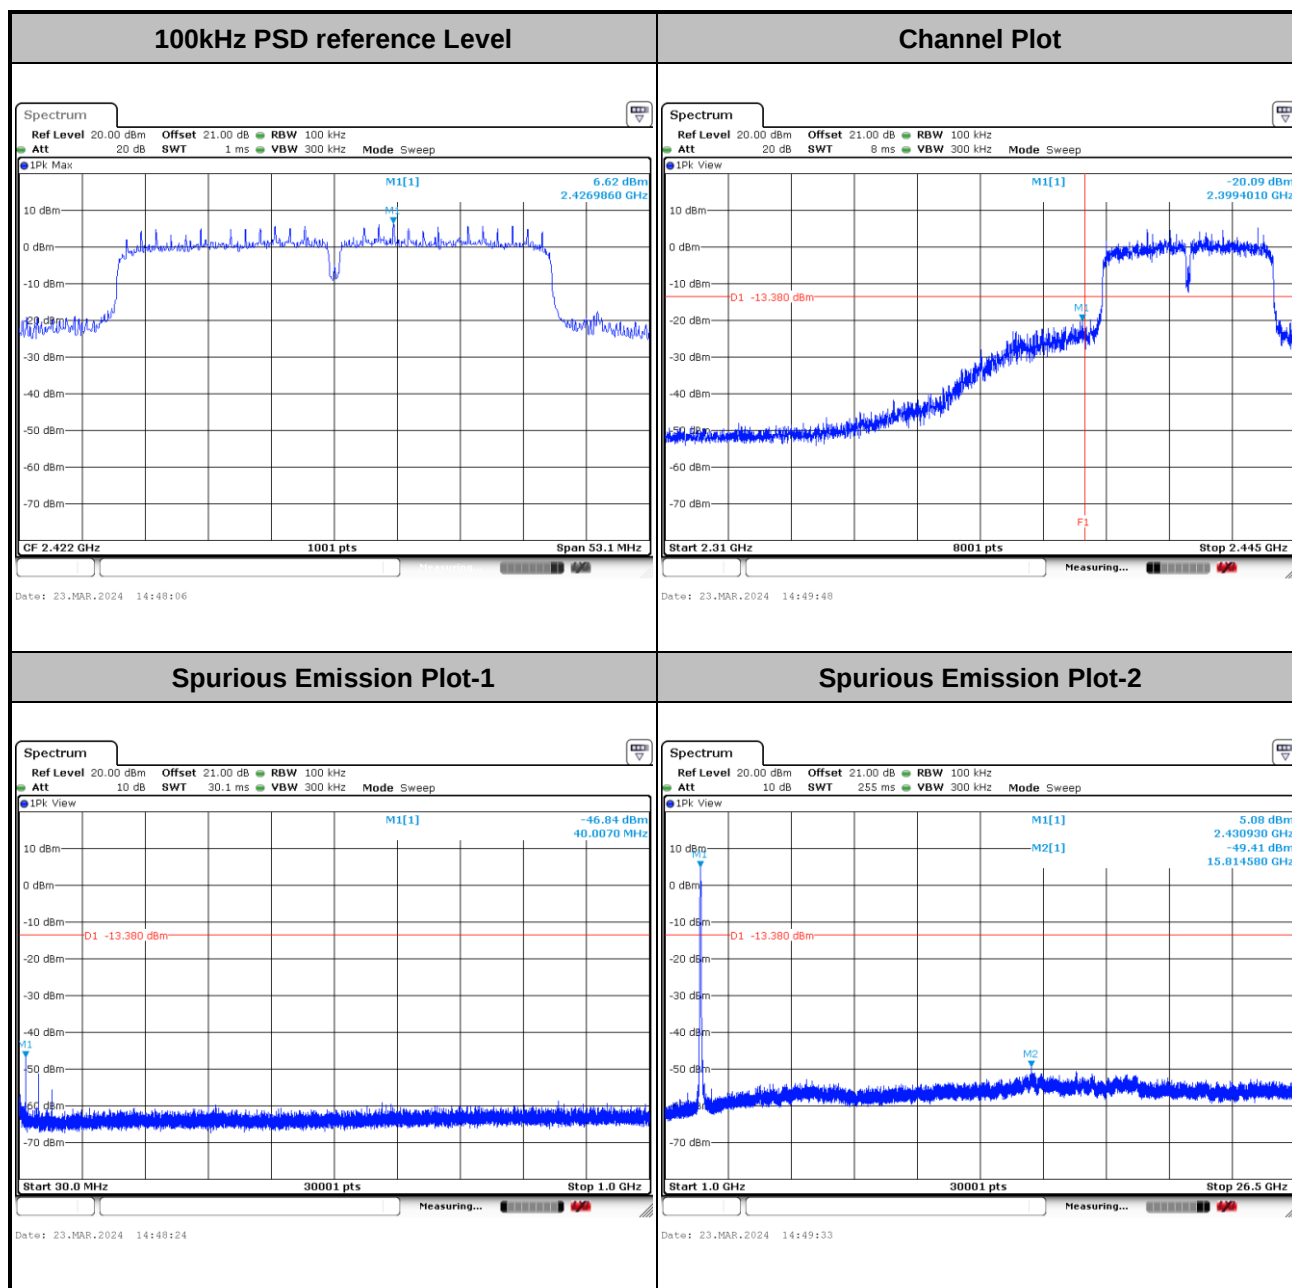

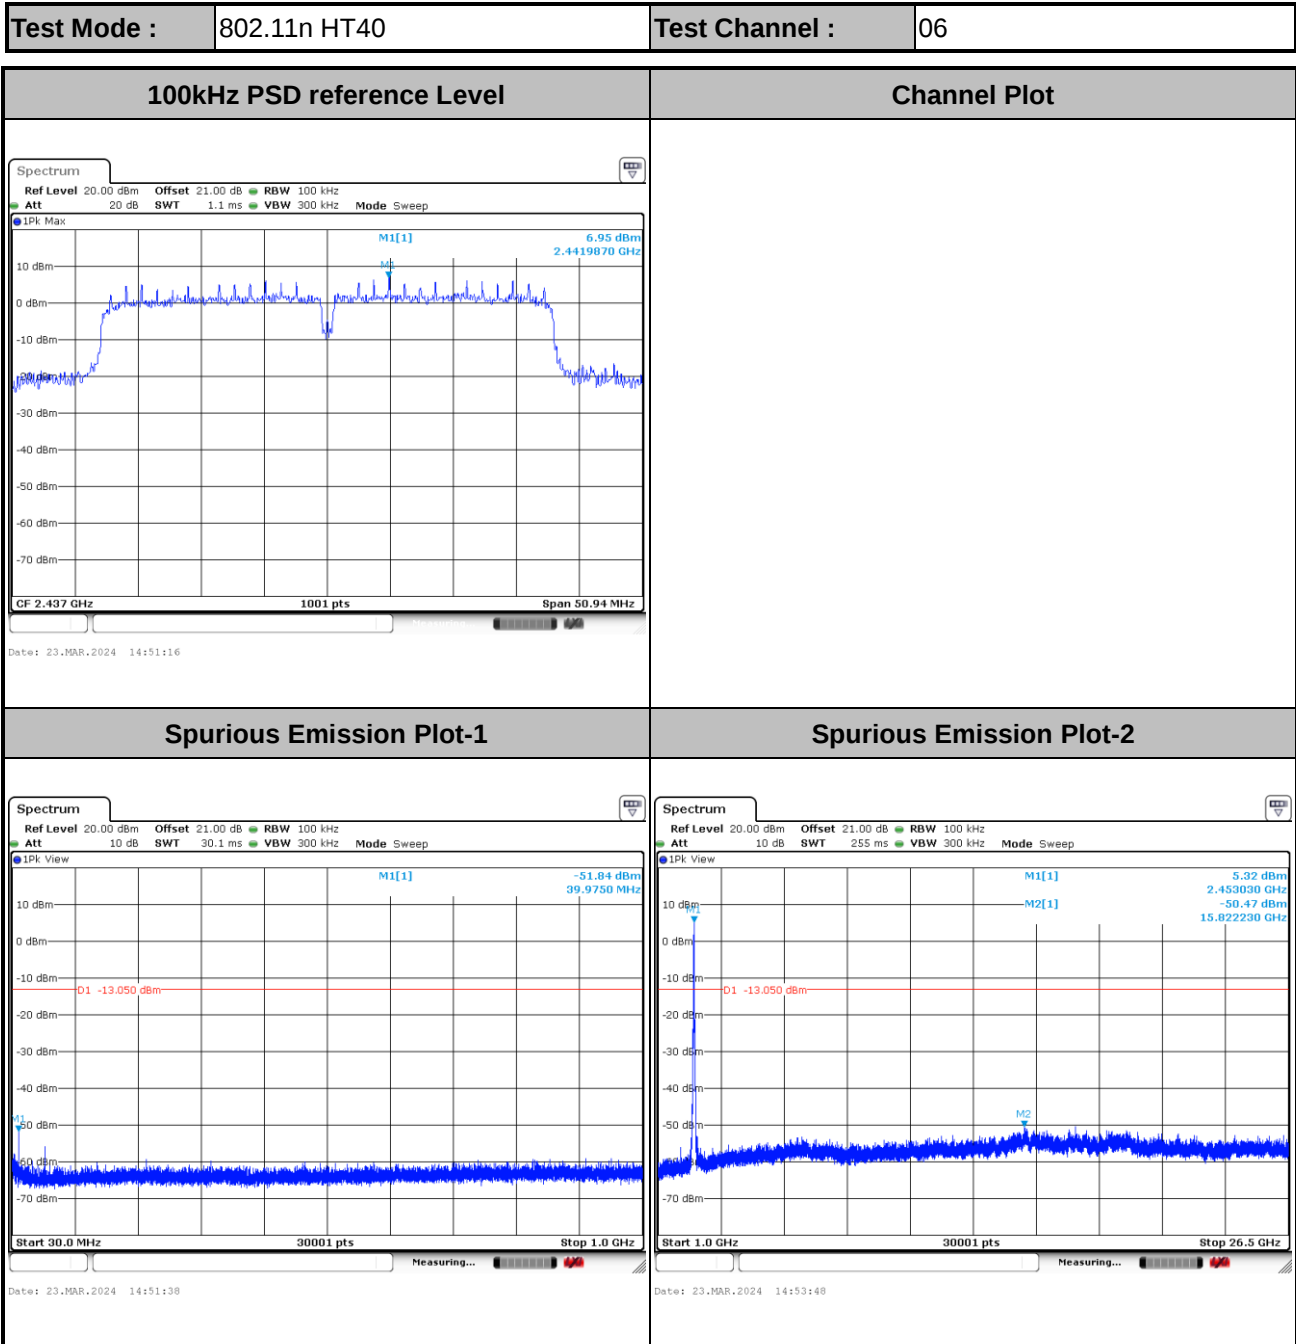





Test Mode : 802.11n HT40

Test Channel : 09


100kHz PSD reference Level

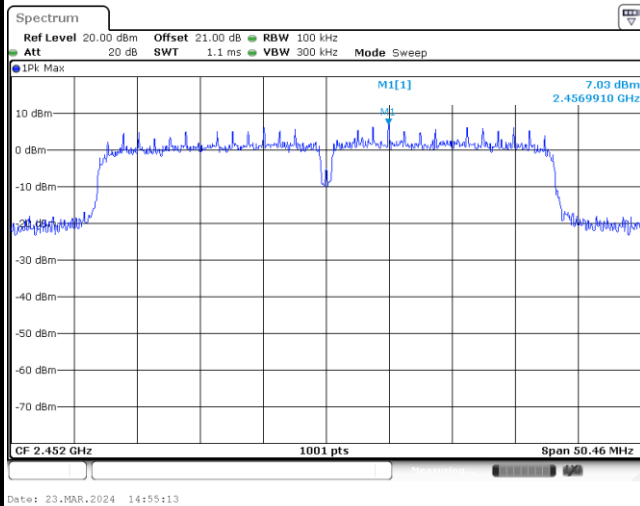


Channel Plot

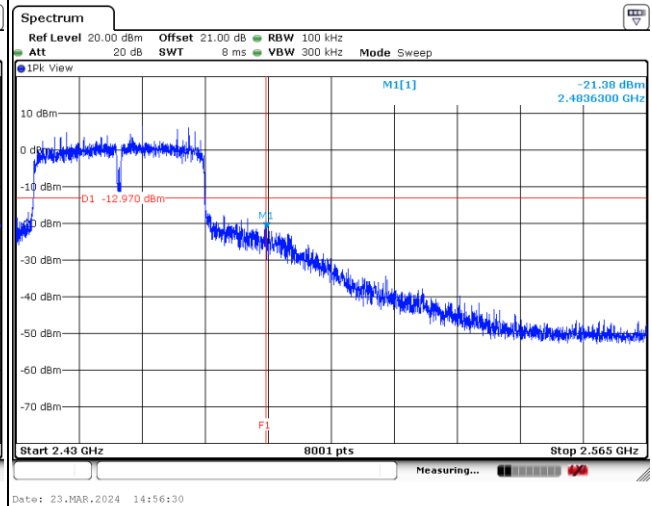

Spurious Emission Plot-1

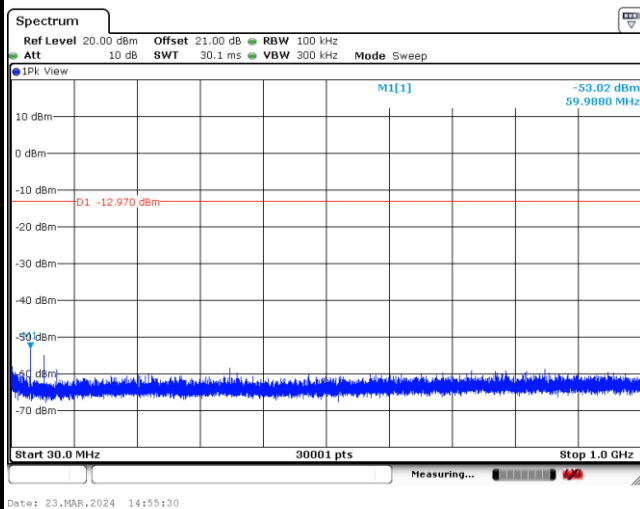

Spurious Emission Plot-2

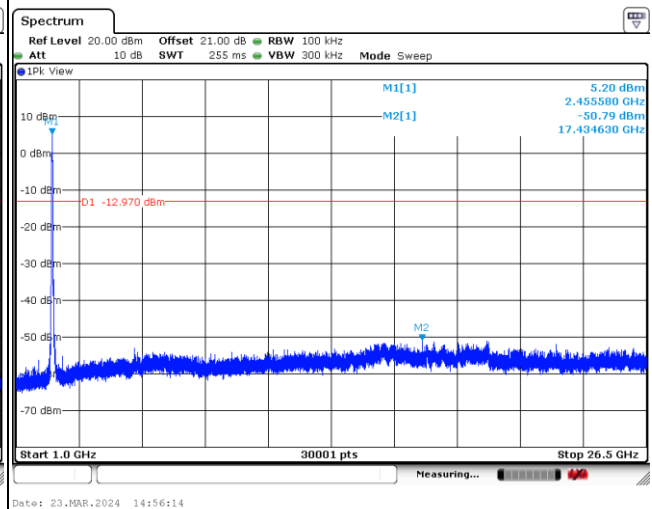



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

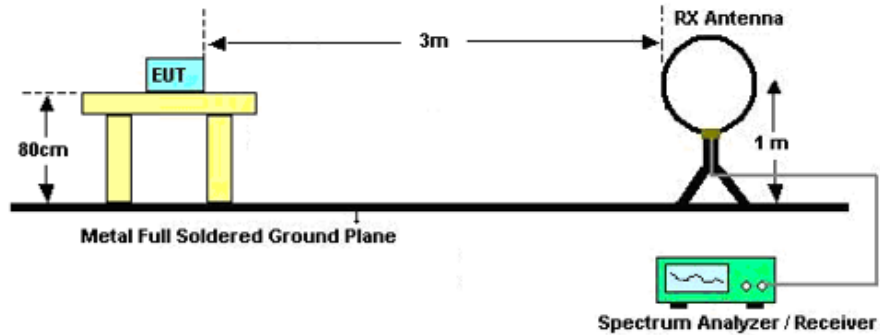

For radiated emissions from 30MHz to 1GHz

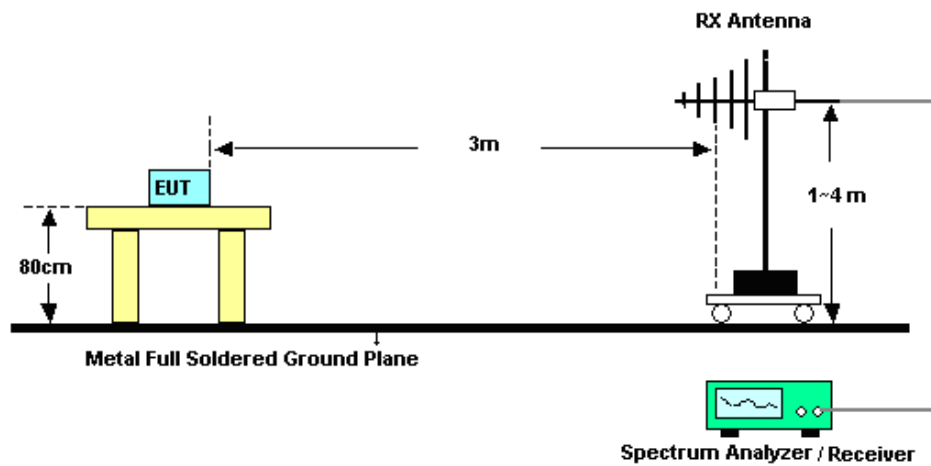

For radiated emissions above 1GHz

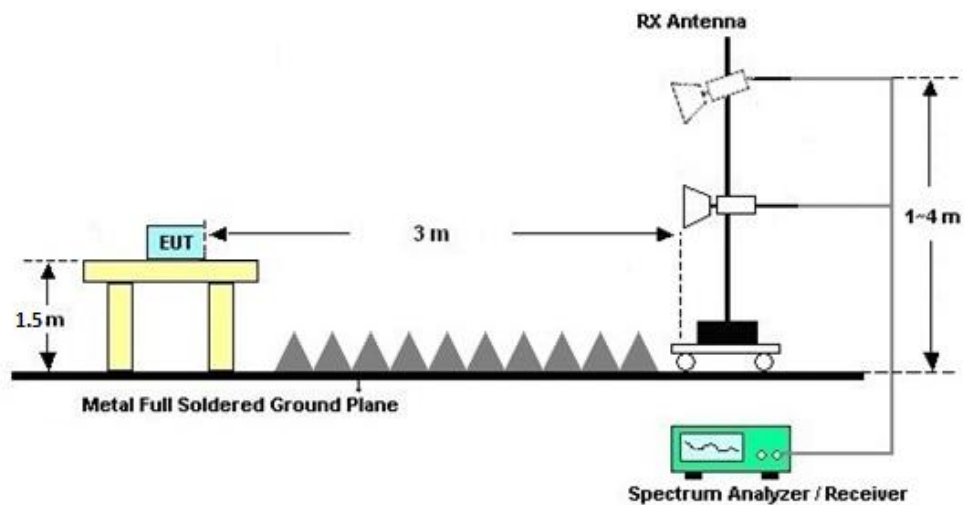



3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room, and it was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9kHz) with Maximum Hold Mode.

3.6.4 Test Setup

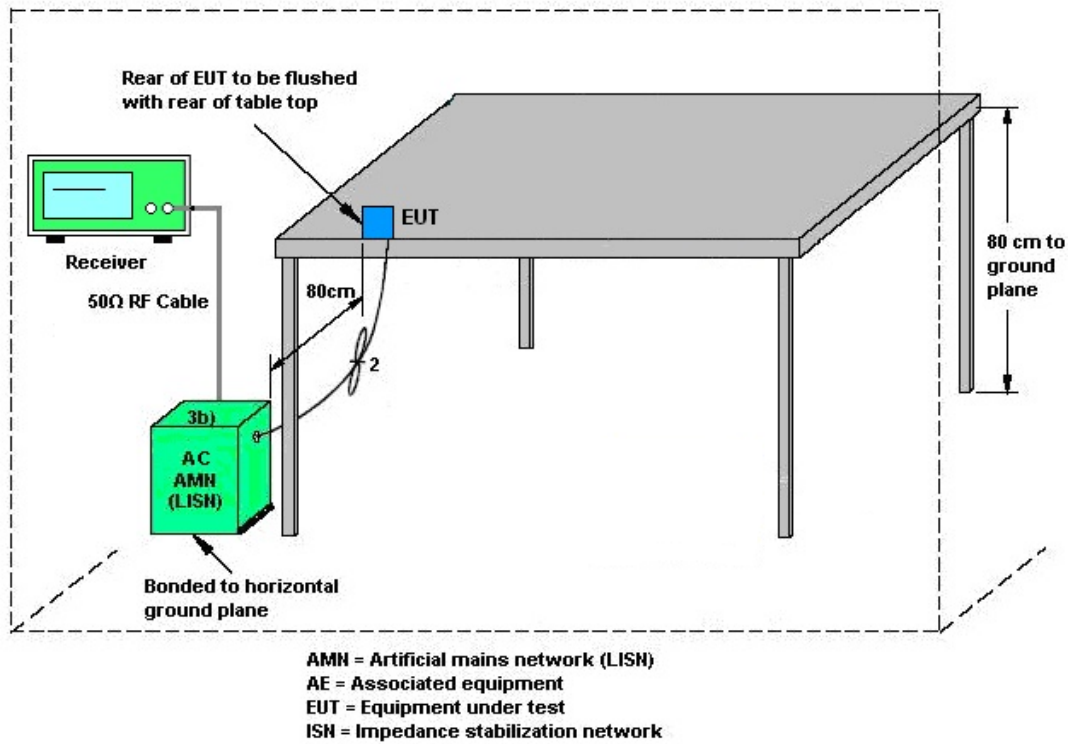

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	Agilent	N9038A	MY52260185	20Hz~26.5GHz	Dec. 27, 2023	Mar. 26, 2024~May 31, 2024	Dec. 26, 2024	Radiation (03CH01-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 07, 2023	Mar. 26, 2024~May 31, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jul. 28, 2022	Mar. 26, 2024~May 31, 2024	Jul. 27, 2024	Radiation (03CH01-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz~2GHz	Oct. 24, 2023	Mar. 26, 2024~May 31, 2024	Oct. 23, 2025	Radiation (03CH01-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 08, 2023	Mar. 26, 2024~May 31, 2024	Jul. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2023	Mar. 26, 2024~Mar. 31, 2024	Apr. 07, 2024	Radiation (03CH01-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	May 20, 2024~May 31, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 04, 2023	Mar. 26, 2024~Mar. 31, 2024	Apr. 03, 2024	Radiation (03CH01-SZ)
LF Amplifier	Burgeon	BPA-530	102209	0.01~3000Mhz	Apr. 09, 2024	May 20, 2024~May 31, 2024	Apr. 08, 2025	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 18, 2023	Mar. 26, 2024~May 31, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 18, 2023	Mar. 26, 2024~May 31, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 07, 2023	Mar. 26, 2024~May 31, 2024	Jul. 06, 2024	Radiation (03CH01-SZ)
AC Power Source	Chroma	61601	616010001985	N/A	Oct. 18, 2023	Mar. 26, 2024~May 31, 2024	Oct. 17, 2024	Radiation (03CH01-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 26, 2024~May 31, 2024	NCR	Radiation (03CH01-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 26, 2024~May 31, 2024	NCR	Radiation (03CH01-SZ)
EMI Receiver	R&S	ESR7	101630	9kHz~7GHz;	Jul. 06, 2023	Jun. 07, 2024	Jul. 05, 2024	Conduction (CO01-SZ)
AC LISN	R&S	ENV216	100063	9kHz~30MHz	Aug. 21, 2023	Jun. 07, 2024	Aug. 20, 2024	Conduction (CO01-SZ)
AC LISN (for auxiliary equipment)	EMCO	3816/2SH	00103892	9kHz~30MHz	Oct. 16, 2023	Jun. 07, 2024	Oct. 15, 2024	Conduction (CO01-SZ)
AC Power Source	Chroma	61602	616020000891	100Vac~250Vac	Jul. 07, 2023	Jun. 07, 2024	Jul. 06, 2024	Conduction (CO01-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	Mar. 23, 2024	Apr. 05, 2024	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 29, 2023	Mar. 23, 2024	Dec. 28, 2024	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Aug. 21, 2023	Mar. 23, 2024	Aug. 20, 2024	Conducted (TH01-SZ)
Thermo meter	Anymetre	JR593	#7	- 10℃ ~ 50℃ 10%RH~99%RH	Apr. 08, 2023	Mar. 23, 2024	Apr. 07, 2024	Conducted (TH01-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.2 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.3 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Chen ZhiQiang	Temperature:	21~25	°C
Test Date:	2024/3/23	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Output Power

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
					Ant 1	Ant 1
11b	1Mbps	1	1	2412	6.91	13.71
11b	1Mbps	1	6	2437	6.91	12.37
11b	1Mbps	1	11	2462	6.91	13.53
11g	6Mbps	1	1	2412	6.92	16.27
11g	6Mbps	1	2	2417	6.92	17.85
11g	6Mbps	1	3	2422	6.92	19.67
11g	6Mbps	1	6	2437	6.92	20.82
11g	6Mbps	1	7	2442	6.92	19.29
11g	6Mbps	1	8	2447	6.92	18.58
11g	6Mbps	1	9	2452	6.92	17.45
11g	6Mbps	1	10	2457	6.92	16.18
11g	6Mbps	1	11	2462	6.92	13.62
HT20	MCS0	1	1	2412	6.93	15.48
HT20	MCS0	1	2	2417	6.93	17.73
HT20	MCS0	1	3	2422	6.93	19.15
HT20	MCS0	1	6	2437	6.93	20.78
HT20	MCS0	1	7	2442	6.93	18.81
HT20	MCS0	1	8	2447	6.93	18.03
HT20	MCS0	1	9	2452	6.93	16.83
HT20	MCS0	1	10	2457	6.93	15.60
HT20	MCS0	1	11	2462	6.93	13.13
HT40	MCS0	1	3	2422	6.11	13.39
HT40	MCS0	1	6	2437	6.11	13.38
HT40	MCS0	1	9	2452	6.11	11.83

Setting
Ant 1
deltagain=-8.5
deltagain=-9.5
deltagain=-8
deltagain=-5.5
deltagain=-3.5
deltagain=-1.5
deltagain=0
deltagain=-1.5
deltagain=-2.5
deltagain=-4
deltagain=-4.5
deltagain=-7.5
deltagain=-6
deltagain=-3.5
deltagain=-2
deltagain=0
deltagain=-2
deltagain=-3
deltagain=-4.5
deltagain=-5
deltagain=-8
deltagain=-8
deltagain=-8
deltagain=-9.5

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
Peak Output Power

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
					Ant 1	Ant 1	Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	16.07	30.00	2.52	18.59	36.00	Pass
11b	1Mbps	1	6	2437	14.76	30.00	2.52	17.28	36.00	Pass
11b	1Mbps	1	11	2462	15.97	30.00	2.52	18.49	36.00	Pass
11g	6Mbps	1	1	2412	25.55	30.00	2.52	28.07	36.00	Pass
11g	6Mbps	1	2	2417	25.75	30.00	2.52	28.27	36.00	Pass
11g	6Mbps	1	3	2422	25.80	30.00	2.52	28.32	36.00	Pass
11g	6Mbps	1	6	2437	26.63	30.00	2.52	29.15	36.00	Pass
11g	6Mbps	1	7	2442	25.35	30.00	2.52	27.87	36.00	Pass
11g	6Mbps	1	8	2447	25.08	30.00	2.52	27.60	36.00	Pass
11g	6Mbps	1	9	2452	25.06	30.00	2.52	27.58	36.00	Pass
11g	6Mbps	1	10	2457	24.52	30.00	2.52	27.04	36.00	Pass
11g	6Mbps	1	11	2462	23.95	30.00	2.52	26.47	36.00	Pass
HT20	MCS0	1	1	2412	24.90	30.00	2.52	27.42	36.00	Pass
HT20	MCS0	1	2	2417	25.35	30.00	2.52	27.87	36.00	Pass
HT20	MCS0	1	3	2422	25.56	30.00	2.52	28.08	36.00	Pass
HT20	MCS0	1	6	2437	26.52	30.00	2.52	29.04	36.00	Pass
HT20	MCS0	1	7	2442	25.33	30.00	2.52	27.85	36.00	Pass
HT20	MCS0	1	8	2447	25.30	30.00	2.52	27.82	36.00	Pass
HT20	MCS0	1	9	2452	24.60	30.00	2.52	27.12	36.00	Pass
HT20	MCS0	1	10	2457	24.13	30.00	2.52	26.65	36.00	Pass
HT20	MCS0	1	11	2462	23.17	30.00	2.52	25.69	36.00	Pass
HT40	MCS0	1	3	2422	23.20	30.00	2.52	25.72	36.00	Pass
HT40	MCS0	1	6	2437	22.82	30.00	2.52	25.34	36.00	Pass
HT40	MCS0	1	9	2452	22.58	30.00	2.52	25.10	36.00	Pass

Note: Measured power (dBm) has offset with cable loss.

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
					Ant 1	Ant 1		
11b	1Mbps	1	1	2412	14.84	9.12	0.50	Pass
11b	1Mbps	1	6	2437	14.84	9.62	0.50	Pass
11b	1Mbps	1	11	2462	14.99	9.12	0.50	Pass
11g	6Mbps	1	1	2412	17.68	14.84	0.50	Pass
11g	6Mbps	1	6	2437	17.78	16.32	0.50	Pass
11g	6Mbps	1	11	2462	19.28	16.40	0.50	Pass
HT20	MCS0	1	1	2412	18.63	13.92	0.50	Pass
HT20	MCS0	1	6	2437	18.78	15.76	0.50	Pass
HT20	MCS0	1	11	2462	19.98	15.10	0.50	Pass
HT40	MCS0	1	3	2422	36.46	35.40	0.50	Pass
HT40	MCS0	1	6	2437	36.56	33.96	0.50	Pass
HT40	MCS0	1	9	2452	36.76	33.64	0.50	Pass


TEST RESULTS DATA
Peak Power Spectral Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm/3kHz)	DG (dBi)	Peak PSD Limit (dBm/3kHz)	Pass/Fail
					Ant 1	Ant 1	Ant 1	
11b	1Mbps	1	1	2412	-1.59	2.52	8.00	Pass
11b	1Mbps	1	6	2437	-1.86	2.52	8.00	Pass
11b	1Mbps	1	11	2462	-1.07	2.52	8.00	Pass
11g	6Mbps	1	1	2412	-4.61	2.52	8.00	Pass
11g	6Mbps	1	6	2437	-4.69	2.52	8.00	Pass
11g	6Mbps	1	11	2462	-3.82	2.52	8.00	Pass
HT20	MCS0	1	1	2412	-4.75	2.52	8.00	Pass
HT20	MCS0	1	6	2437	-4.03	2.52	8.00	Pass
HT20	MCS0	1	11	2462	-4.51	2.52	8.00	Pass
HT40	MCS0	1	3	2422	-8.65	2.52	8.00	Pass
HT40	MCS0	1	6	2437	-9.06	2.52	8.00	Pass
HT40	MCS0	1	9	2452	-8.95	2.52	8.00	Pass

Measured power density (dBm) has offset with cable loss.




Appendix B. AC Conducted Emission Test Results

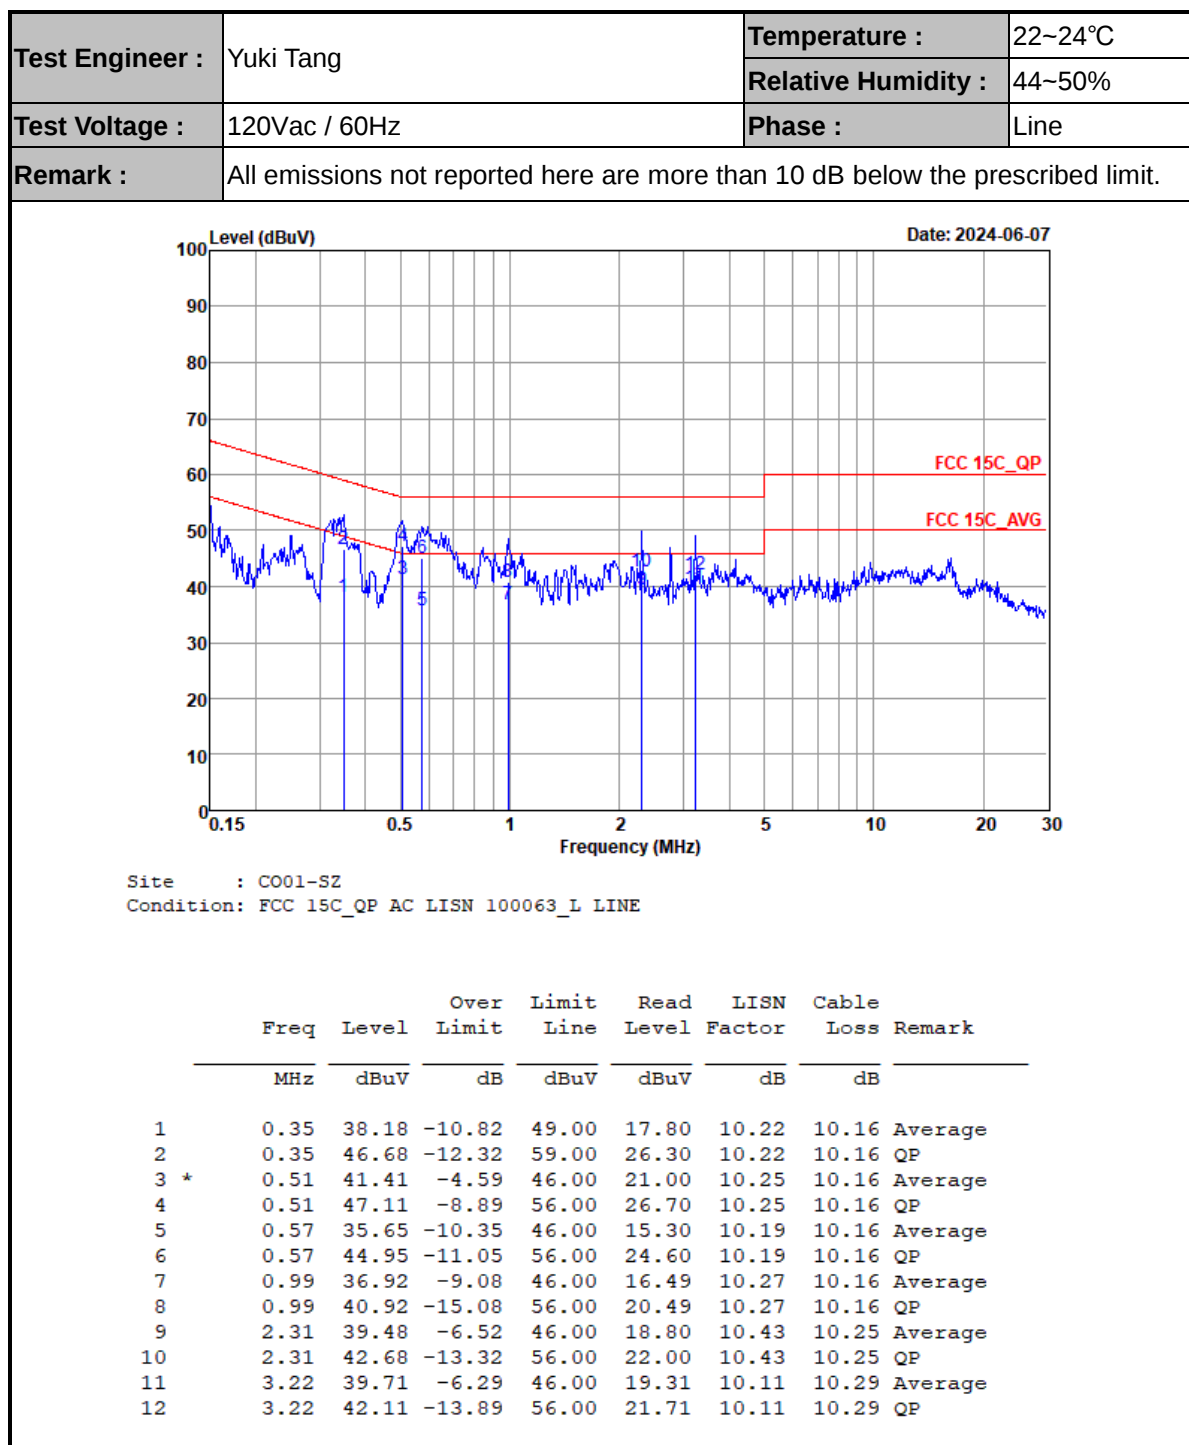



Test Engineer :	Yuki Tang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

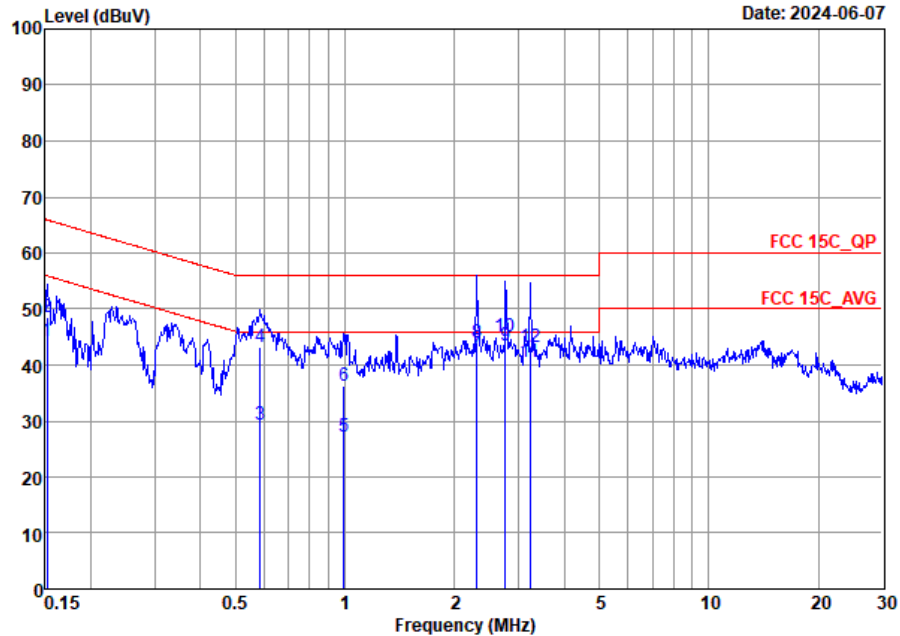

Site : C001-SZ
Condition: FCC 15C_QP AC LISN 100063_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.15	44.20	-11.71	55.91	23.91	10.16	10.13	Average
2	0.15	48.50	-17.41	65.91	28.21	10.16	10.13	QP
3	0.59	29.31	-16.69	46.00	9.00	10.15	10.16	Average
4	0.59	43.21	-12.79	56.00	22.90	10.15	10.16	QP
5	0.99	27.19	-18.81	46.00	6.80	10.23	10.16	Average
6	0.99	36.39	-19.61	56.00	16.00	10.23	10.16	QP
7	2.31	42.43	-3.57	46.00	21.90	10.28	10.25	Average
8	2.31	44.03	-11.97	56.00	23.50	10.28	10.25	QP
9 *	2.76	43.58	-2.42	46.00	23.01	10.30	10.27	Average
10	2.76	45.08	-10.92	56.00	24.51	10.30	10.27	QP
11	3.22	40.57	-5.43	46.00	19.80	10.48	10.29	Average
12	3.22	43.07	-12.93	56.00	22.30	10.48	10.29	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Wenbo Xiao	Relative Humidity :	50%
		Temperature :	20℃~22℃

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	SISO	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	SISO	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	SISO	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	SISO	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	SISO	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	SISO	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	SISO	802.11n HT20	01	2412	MCS0	-	-
Mode 8	2400-2483.5	SISO	802.11n HT20	06	2437	MCS0	-	-
Mode 9	2400-2483.5	SISO	802.11n HT20	11	2462	MCS0	-	-
Mode 10	2400-2483.5	SISO	802.11n HT40	03	2422	MCS0	-	-
Mode 11	2400-2483.5	SISO	802.11n HT40	09	2452	MCS0	-	-
Mode 12	2400-2483.5	SISO	802.11n HT40	03	2422	MCS0	-	LF
Mode 13	2400-2483.5	SISO	802.11n HT40	06	2437	MCS0	-	-
Mode 14	2400-2483.5	SISO	802.11g	02	2417	6Mbps	-	-
Mode 15	2400-2483.5	SISO	802.11g	03	2422	6Mbps	-	-
Mode 16	2400-2483.5	SISO	802.11g	10	2457	6Mbps	-	-
Mode 17	2400-2483.5	SISO	802.11g	09	2452	6Mbps	-	-
Mode 18	2400-2483.5	SISO	802.11g	08	2447	6Mbps	-	-
Mode 19	2400-2483.5	SISO	802.11g	07	2442	6Mbps	-	-
Mode 20	2400-2483.5	SISO	802.11n HT20	02	2417	MCS0	-	-
Mode 21	2400-2483.5	SISO	802.11n HT20	03	2422	MCS0	-	-
Mode 22	2400-2483.5	SISO	802.11n HT20	10	2457	MCS0	-	-
Mode 23	2400-2483.5	SISO	802.11n HT20	09	2452	MCS0	-	-
Mode 24	2400-2483.5	SISO	802.11n HT20	08	2447	MCS0	-	-
Mode 25	2400-2483.5	SISO	802.11n HT20	07	2442	MCS0	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2386.05	52.95	54.00	-1.05	V	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	53.11	54.00	-0.89	V	Average	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	4874.00	53.04	54.00	-0.96	V	Average	Pass	Harmonic
3	802.11b	11	2486.02	52.68	54.00	-1.32	V	AVERAGE	Pass	Band Edge
3	802.11b	11	4924.00	53.06	54.00	-0.94	V	Average	Pass	Harmonic
4	802.11g	01	2389.95	53.01	54.00	-0.99	V	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	49.29	54.00	-4.71	V	Average	Pass	Harmonic
5	802.11g	06	2483.56	52.69	54.00	-1.31	V	AVERAGE	Pass	Band Edge
5	802.11g	06	7311.00	49.20	54.00	-4.80	V	Average	Pass	Harmonic
6	802.11g	11	2483.55	51.74	54.00	-2.26	V	AVERAGE	Pass	Band Edge
6	802.11g	11	7386.00	48.24	54.00	-5.76	V	Average	Pass	Harmonic
7	802.11n HT20	01	2389.95	52.48	54.00	-1.52	V	AVERAGE	Pass	Band Edge
7	802.11n HT20	01	4824.00	48.55	54.00	-5.45	V	Average	Pass	Harmonic
8	802.11n HT20	06	2483.81	52.99	54.00	-1.01	V	AVERAGE	Pass	Band Edge
8	802.11n HT20	06	7311.00	48.59	54.00	-5.41	V	Average	Pass	Harmonic
9	802.11n HT20	11	2483.51	52.77	54.00	-1.23	V	AVERAGE	Pass	Band Edge
9	802.11n HT20	11	4924.00	45.32	54.00	-8.68	V	Average	Pass	Harmonic
10	802.11n HT40	03	2389.97	53.12	54.00	-0.88	V	AVERAGE	Pass	Band Edge
10	802.11n HT40	03	4844.00	50.64	74.00	-23.36	V	Peak	Pass	Harmonic
11	802.11n HT40	09	2486.56	53.02	54.00	-0.98	V	AVERAGE	Pass	Band Edge
11	802.11n HT40	09	-	-	-	-	-	-	-	Harmonic
12	802.11n HT40	11	419.94	31.57	46.00	-14.43	H	PEAK	PASS	LF
13	802.11n HT40	06	2483.75	53.10	54.00	-0.90	V	AVERAGE	Pass	Band Edge
13	802.11n HT40	06	-	-	-	-	-	-	-	Harmonic
14	802.11g	02	2389.82	51.81	54.00	-2.19	V	AVERAGE	Pass	Band Edge
14	802.11g	02	-	-	-	-	-	-	-	Harmonic
15	802.11g	03	2389.95	52.81	54.00	-1.19	V	AVERAGE	Pass	Band Edge
15	802.11g	03	-	-	-	-	-	-	-	Harmonic
16	802.11g	10	2483.55	52.96	54.00	-1.04	V	AVERAGE	Pass	Band Edge
16	802.11g	10	-	-	-	-	-	-	-	Harmonic
17	802.11g	09	2483.63	53.09	54.00	-0.91	V	AVERAGE	Pass	Band Edge
17	802.11g	09	-	-	-	-	-	-	-	Harmonic
18	802.11g	08	2483.57	52.98	54.00	-1.02	V	AVERAGE	Pass	Band Edge
18	802.11g	08	-	-	-	-	-	-	-	Harmonic
19	802.11g	07	2483.56	51.94	54.00	-2.06	V	AVERAGE	Pass	Band Edge
19	802.11g	07	-	-	-	-	-	-	-	Harmonic
20	802.11n HT20	02	2389.69	52.53	54.00	-1.47	V	AVERAGE	Pass	Band Edge
20	802.11n HT20	02	-	-	-	-	-	-	-	Harmonic
21	802.11n HT20	03	2389.82	53.09	54.00	-0.91	V	AVERAGE	Pass	Band Edge
21	802.11n HT20	03	-	-	-	-	-	-	-	Harmonic
22	802.11n HT20	10	2483.57	52.87	54.00	-1.13	V	AVERAGE	Pass	Band Edge
22	802.11n HT20	10	-	-	-	-	-	-	-	Harmonic
23	802.11n HT20	09	2483.68	52.84	54.00	-1.16	V	AVERAGE	Pass	Band Edge
23	802.11n HT20	09	-	-	-	-	-	-	-	Harmonic
24	802.11n HT20	08	2483.57	53.04	54.00	-0.96	V	AVERAGE	Pass	Band Edge
24	802.11n HT20	08	-	-	-	-	-	-	-	Harmonic
25	802.11n HT20	07	2483.62	52.13	54.00	-1.87	V	AVERAGE	Pass	Band Edge
25	802.11n HT20	07	-	-	-	-	-	-	-	Harmonic



Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																			
ANT	SISO																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2385.40</td><td>49.11</td><td>74.00</td><td>-24.89</td><td>41.19</td><td>32.25</td><td>7.75</td><td>32.08</td><td>100</td><td>163 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2385.40	49.11	74.00	-24.89	41.19	32.25	7.75	32.08	100	163 PEAK	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>96.58</td><td>-----</td><td>-----</td><td>88.54</td><td>32.31</td><td>7.81</td><td>32.08</td><td>100</td><td>163 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.58	-----	-----	88.54	32.31	7.81	32.08	100	163 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2385.40	49.11	74.00	-24.89	41.19	32.25	7.75	32.08	100	163 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	96.58	-----	-----	88.54	32.31	7.81	32.08	100	163 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.05</td><td>39.96</td><td>54.00</td><td>-14.04</td><td>32.04</td><td>32.25</td><td>7.75</td><td>32.08</td><td>100</td><td>163 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2386.05	39.96	54.00	-14.04	32.04	32.25	7.75	32.08	100	163 AVERAGE	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>93.15</td><td>-----</td><td>-----</td><td>85.12</td><td>32.30</td><td>7.81</td><td>32.08</td><td>100</td><td>163 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	93.15	-----	-----	85.12	32.30	7.81	32.08	100	163 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2386.05	39.96	54.00	-14.04	32.04	32.25	7.75	32.08	100	163 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	93.15	-----	-----	85.12	32.30	7.81	32.08	100	163 AVERAGE																																																																										



		1																																																																																								
Mode		Band Edge																																																																																								
		2400-2483.5_802.11b_CH01_2412MHz																																																																																								
ANT		SISO																																																																																								
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2387.48</td><td>58.40</td><td>74.00</td><td>-15.60</td><td>50.48</td><td>32.25</td><td>7.75</td><td>32.08</td><td>100 159 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2387.48	58.40	74.00	-15.60	50.48	32.25	7.75	32.08	100 159 PEAK	Level (dBuV/m) Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>110.93</td><td>-----</td><td>-----</td><td>102.89</td><td>32.31</td><td>7.81</td><td>32.08</td><td>100 159 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.93	-----	-----	102.89	32.31	7.81	32.08	100 159 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2387.48	58.40	74.00	-15.60	50.48	32.25	7.75	32.08	100 159 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	110.93	-----	-----	102.89	32.31	7.81	32.08	100 159 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.05</td><td>52.95</td><td>54.00</td><td>-1.05</td><td>45.03</td><td>32.25</td><td>7.75</td><td>32.08</td><td>100 159 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2386.05	52.95	54.00	-1.05	45.03	32.25	7.75	32.08	100 159 AVERAGE	Level (dBuV/m) Date: 2024-05-22 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>108.29</td><td>-----</td><td>-----</td><td>100.25</td><td>32.31</td><td>7.81</td><td>32.08</td><td>100 159 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.29	-----	-----	100.25	32.31	7.81	32.08	100 159 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2386.05	52.95	54.00	-1.05	45.03	32.25	7.75	32.08	100 159 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2412.00	108.29	-----	-----	100.25	32.31	7.81	32.08	100 159 AVERAGE																																																																																	



Mode	1																																																																																																																				
	Harmonic																																																																																																																				
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																																				
ANT	SISO																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2024-05-22 PEAK_74 AVG_54 300060009000120001500018000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>54.51</td><td>74.00</td><td>-19.49</td><td>60.18</td><td>34.83</td><td>11.08</td><td>51.58</td><td>130</td><td>256</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>52.60</td><td>54.00</td><td>-1.40</td><td>58.27</td><td>34.83</td><td>11.08</td><td>51.58</td><td>130</td><td>256</td><td>Average</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	54.51	74.00	-19.49	60.18	34.83	11.08	51.58	130	256	Peak	2	4824.00	52.60	54.00	-1.40	58.27	34.83	11.08	51.58	130	256	Average	Level (dBuV/m) Date: 2024-05-22 PEAK_74 AVG_54 300060009000120001500018000 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>55.19</td><td>74.00</td><td>-18.81</td><td>60.86</td><td>34.83</td><td>11.08</td><td>51.58</td><td>206</td><td>175</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>53.11</td><td>54.00</td><td>-0.89</td><td>58.78</td><td>34.83</td><td>11.08</td><td>51.58</td><td>206</td><td>175</td><td>Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	55.19	74.00	-18.81	60.86	34.83	11.08	51.58	206	175	Peak	2	4824.00	53.11	54.00	-0.89	58.78	34.83	11.08	51.58	206	175	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4824.00	54.51	74.00	-19.49	60.18	34.83	11.08	51.58	130	256	Peak																																																																																																										
2	4824.00	52.60	54.00	-1.40	58.27	34.83	11.08	51.58	130	256	Average																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4824.00	55.19	74.00	-18.81	60.86	34.83	11.08	51.58	206	175	Peak																																																																																																										
2	4824.00	53.11	54.00	-0.89	58.78	34.83	11.08	51.58	206	175	Average																																																																																																										







Mode	2																																																																																																				
	Harmonic																																																																																																				
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																				
ANT	SISO																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>48.97</td><td>74.00</td><td>-25.03</td><td>54.60</td><td>34.85</td><td>11.10</td><td>51.58 100 112 Peak</td></tr><tr><td>2</td><td>7311.00</td><td>46.67</td><td>74.00</td><td>-27.33</td><td>48.50</td><td>36.25</td><td>13.08</td><td>51.16 --- --- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4874.00	48.97	74.00	-25.03	54.60	34.85	11.10	51.58 100 112 Peak	2	7311.00	46.67	74.00	-27.33	48.50	36.25	13.08	51.16 --- --- Peak	Level (dBuV/m) Date: 2024-05-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr><tr><td>1</td><td>4874.00</td><td>54.95</td><td>74.00</td><td>-19.05</td><td>60.58</td><td>34.85</td><td>11.10</td><td>51.58 224 162 Peak</td></tr><tr><td>2</td><td>4874.00</td><td>53.04</td><td>54.00</td><td>-0.96</td><td>58.67</td><td>34.85</td><td>11.10</td><td>51.58 224 162 Average</td></tr><tr><td>3</td><td>7311.00</td><td>50.20</td><td>74.00</td><td>-23.80</td><td>52.03</td><td>36.25</td><td>13.08</td><td>51.16 --- --- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1	4874.00	54.95	74.00	-19.05	60.58	34.85	11.10	51.58 224 162 Peak	2	4874.00	53.04	54.00	-0.96	58.67	34.85	11.10	51.58 224 162 Average	3	7311.00	50.20	74.00	-23.80	52.03	36.25	13.08	51.16 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																														
1	4874.00	48.97	74.00	-25.03	54.60	34.85	11.10	51.58 100 112 Peak																																																																																													
2	7311.00	46.67	74.00	-27.33	48.50	36.25	13.08	51.16 --- --- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																														
1	4874.00	54.95	74.00	-19.05	60.58	34.85	11.10	51.58 224 162 Peak																																																																																													
2	4874.00	53.04	54.00	-0.96	58.67	34.85	11.10	51.58 224 162 Average																																																																																													
3	7311.00	50.20	74.00	-23.80	52.03	36.25	13.08	51.16 --- --- Peak																																																																																													





Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																			
ANT	SISO																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-05-22 PEAK_BE_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2487.19</td><td>49.40</td><td>74.00</td><td>-24.60</td><td>41.15</td><td>32.47</td><td>7.88</td><td>32.10</td><td>100</td><td>263 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2487.19	49.40	74.00	-24.60	41.15	32.47	7.88	32.10	100	263 PEAK	Level (dBuV/m) Date: 2024-05-22 PEAK_74 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>95.24</td><td>-----</td><td>-----</td><td>87.05</td><td>32.42</td><td>7.86</td><td>32.09</td><td>100</td><td>263 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	95.24	-----	-----	87.05	32.42	7.86	32.09	100	263 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2487.19	49.40	74.00	-24.60	41.15	32.47	7.88	32.10	100	263 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	95.24	-----	-----	87.05	32.42	7.86	32.09	100	263 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-05-22 AVG_BE_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.66</td><td>39.66</td><td>54.00</td><td>-14.34</td><td>31.41</td><td>32.47</td><td>7.88</td><td>32.10</td><td>100</td><td>263 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2486.66	39.66	54.00	-14.34	31.41	32.47	7.88	32.10	100	263 AVERAGE	Level (dBuV/m) Date: 2024-05-22 AVG_54 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>92.60</td><td>-----</td><td>-----</td><td>84.41</td><td>32.42</td><td>7.86</td><td>32.09</td><td>100</td><td>263 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	92.60	-----	-----	84.41	32.42	7.86	32.09	100	263 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2486.66	39.66	54.00	-14.34	31.41	32.47	7.88	32.10	100	263 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	92.60	-----	-----	84.41	32.42	7.86	32.09	100	263 AVERAGE																																																																										

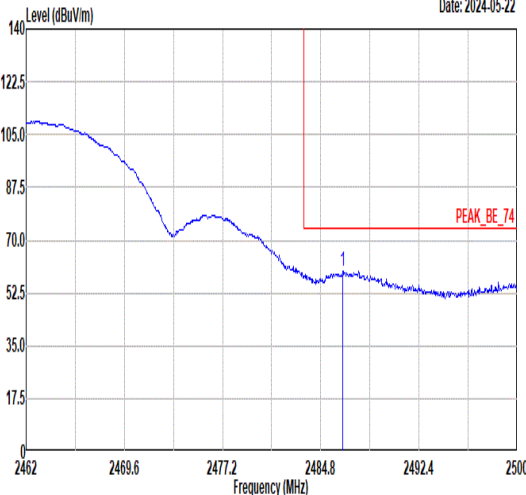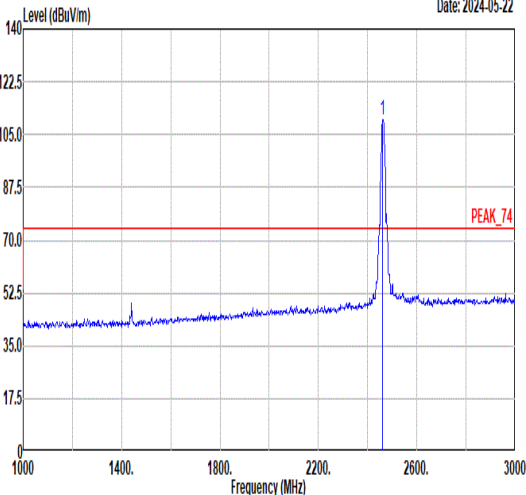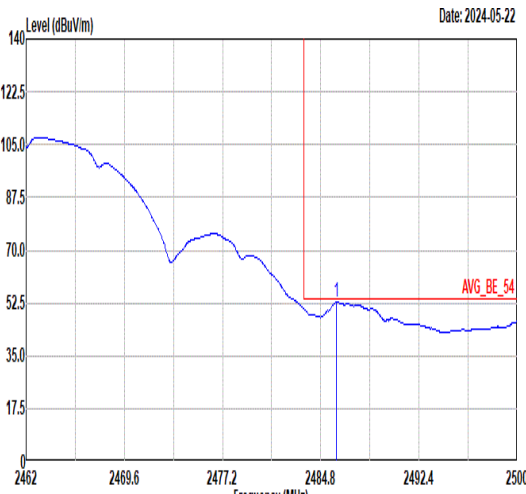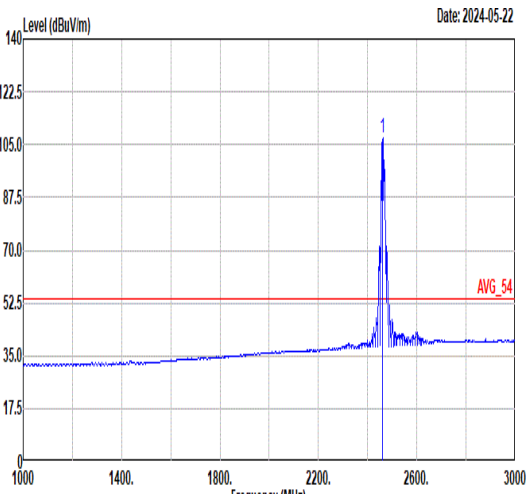

Mode	3																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Date: 2024-05-22  Level (dBuV/m) Frequency (MHz) PEAK_BE_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2486.51</td><td>59.93</td><td>74.00</td><td>-14.07</td><td>51.68</td><td>32.47</td><td>7.88</td><td>32.10</td><td>102</td><td>305 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2486.51	59.93	74.00	-14.07	51.68	32.47	7.88	32.10	102	305 PEAK	Date: 2024-05-22  Level (dBuV/m) Frequency (MHz) PEAK_74 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>109.99</td><td>-----</td><td>-----</td><td>101.80</td><td>32.42</td><td>7.86</td><td>32.09</td><td>102</td><td>305 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	109.99	-----	-----	101.80	32.42	7.86	32.09	102	305 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2486.51	59.93	74.00	-14.07	51.68	32.47	7.88	32.10	102	305 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2462.00	109.99	-----	-----	101.80	32.42	7.86	32.09	102	305 PEAK																																																																									
Avg	Date: 2024-05-22  Level (dBuV/m) Frequency (MHz) AVG_BE_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2486.02</td><td>52.68</td><td>54.00</td><td>-1.32</td><td>44.43</td><td>32.47</td><td>7.88</td><td>32.10</td><td>102</td><td>305 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2486.02	52.68	54.00	-1.32	44.43	32.47	7.88	32.10	102	305 AVERAGE	Date: 2024-05-22  Level (dBuV/m) Frequency (MHz) AVG_54 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2462.00</td><td>107.01</td><td>-----</td><td>-----</td><td>98.82</td><td>32.42</td><td>7.86</td><td>32.09</td><td>102</td><td>305 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2462.00	107.01	-----	-----	98.82	32.42	7.86	32.09	102	305 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2486.02	52.68	54.00	-1.32	44.43	32.47	7.88	32.10	102	305 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2462.00	107.01	-----	-----	98.82	32.42	7.86	32.09	102	305 AVERAGE																																																																									

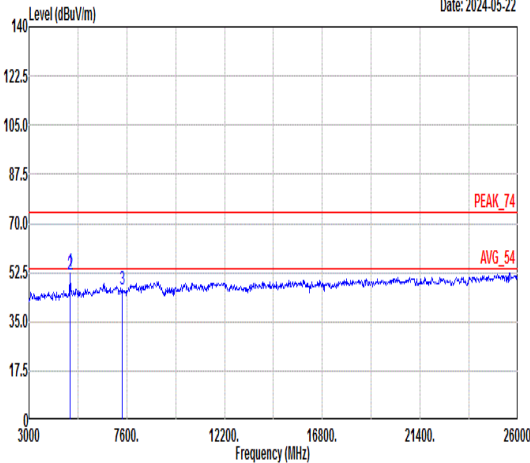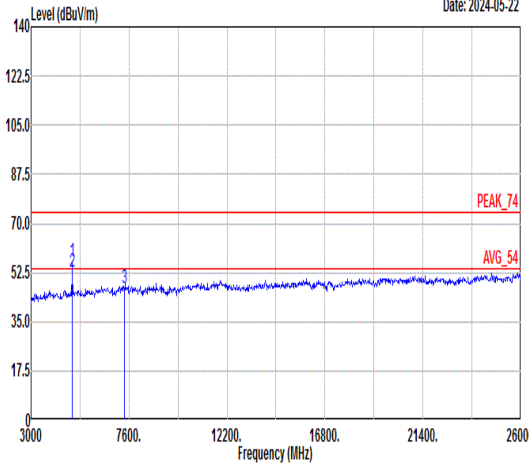

Mode	3																																																																																																																							
	Harmonic																																																																																																																							
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																							
ANT	SISO																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																	
Peak Avg	 Date: 2024-05-22						 Date: 2024-05-22																																																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>52.73</td><td>74.00</td><td>-21.27</td><td>58.32</td><td>34.87</td><td>11.12</td><td>51.58 130 256 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>51.99</td><td>54.00</td><td>-2.01</td><td>57.58</td><td>34.87</td><td>11.12</td><td>51.58 130 256 Average</td></tr><tr><td>3</td><td>7386.00</td><td>46.60</td><td>74.00</td><td>-27.40</td><td>48.46</td><td>36.19</td><td>13.13</td><td>51.18 --- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4924.00	52.73	74.00	-21.27	58.32	34.87	11.12	51.58 130 256 Peak	2	4924.00	51.99	54.00	-2.01	57.58	34.87	11.12	51.58 130 256 Average	3	7386.00	46.60	74.00	-27.40	48.46	36.19	13.13	51.18 --- --- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>56.32</td><td>74.00</td><td>-17.68</td><td>61.91</td><td>34.87</td><td>11.12</td><td>51.58 153 160 Peak</td></tr><tr><td>2</td><td>4924.00</td><td>53.06</td><td>54.00</td><td>-0.94</td><td>58.65</td><td>34.87</td><td>11.12</td><td>51.58 153 160 Average</td></tr><tr><td>3</td><td>7386.00</td><td>47.27</td><td>74.00</td><td>-26.73</td><td>49.13</td><td>36.19</td><td>13.13</td><td>51.18 --- --- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4924.00	56.32	74.00	-17.68	61.91	34.87	11.12	51.58 153 160 Peak	2	4924.00	53.06	54.00	-0.94	58.65	34.87	11.12	51.58 153 160 Average	3	7386.00	47.27	74.00	-26.73	49.13	36.19	13.13	51.18 --- --- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	4924.00	52.73	74.00	-21.27	58.32	34.87	11.12	51.58 130 256 Peak																																																																																																																
2	4924.00	51.99	54.00	-2.01	57.58	34.87	11.12	51.58 130 256 Average																																																																																																																
3	7386.00	46.60	74.00	-27.40	48.46	36.19	13.13	51.18 --- --- Peak																																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																	
1	4924.00	56.32	74.00	-17.68	61.91	34.87	11.12	51.58 153 160 Peak																																																																																																																
2	4924.00	53.06	54.00	-0.94	58.65	34.87	11.12	51.58 153 160 Average																																																																																																																
3	7386.00	47.27	74.00	-26.73	49.13	36.19	13.13	51.18 --- --- Peak																																																																																																																



Mode	4																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.30</td><td>55.22</td><td>74.00</td><td>-18.78</td><td>47.28</td><td>32.26</td><td>7.76</td><td>32.08</td><td>310</td><td>188</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2389.30	55.22	74.00	-18.78	47.28	32.26	7.76	32.08	310	188	PEAK	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>100.25</td><td>-----</td><td>-----</td><td>92.22</td><td>32.30</td><td>7.81</td><td>32.08</td><td>310</td><td>188</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	100.25	-----	-----	92.22	32.30	7.81	32.08	310	188	PEAK
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2389.30	55.22	74.00	-18.78	47.28	32.26	7.76	32.08	310	188	PEAK																																																																							
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2412.00	100.25	-----	-----	92.22	32.30	7.81	32.08	310	188	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>45.97</td><td>54.00</td><td>-8.03</td><td>38.03</td><td>32.26</td><td>7.76</td><td>32.08</td><td>310</td><td>188</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2389.95	45.97	54.00	-8.03	38.03	32.26	7.76	32.08	310	188	AVERAGE	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>93.83</td><td>-----</td><td>-----</td><td>85.80</td><td>32.30</td><td>7.81</td><td>32.08</td><td>310</td><td>188</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2412.00	93.83	-----	-----	85.80	32.30	7.81	32.08	310	188	AVERAGE
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2389.95	45.97	54.00	-8.03	38.03	32.26	7.76	32.08	310	188	AVERAGE																																																																							
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2412.00	93.83	-----	-----	85.80	32.30	7.81	32.08	310	188	AVERAGE																																																																							



Mode	4																																									
	Band Edge																																									
	2400-2483.5_802.11g_CH01_2412MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2024-05-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.69</td><td>65.65</td><td>74.00</td><td>-8.35</td><td>57.71</td><td>32.26</td><td>7.76</td><td>32.08</td><td>302</td><td>44 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.69	65.65	74.00	-8.35	57.71	32.26	7.76	32.08	302	44 PEAK	Level (dBuV/m) Date: 2024-05-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>106.31</td><td>-----</td><td>-----</td><td>98.27</td><td>32.31</td><td>7.81</td><td>32.08</td><td>302</td><td>44 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	106.31	-----	-----	98.27	32.31	7.81	32.08	302	44 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2389.69	65.65	74.00	-8.35	57.71	32.26	7.76	32.08	302	44 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	106.31	-----	-----	98.27	32.31	7.81	32.08	302	44 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-05-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.95</td><td>53.01</td><td>54.00</td><td>-0.99</td><td>45.07</td><td>32.26</td><td>7.76</td><td>32.08</td><td>302</td><td>44 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.95	53.01	54.00	-0.99	45.07	32.26	7.76	32.08	302	44 AVERAGE	Level (dBuV/m) Date: 2024-05-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>98.80</td><td>-----</td><td>-----</td><td>90.77</td><td>32.30</td><td>7.81</td><td>32.08</td><td>302</td><td>44 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	98.80	-----	-----	90.77	32.30	7.81	32.08	302	44 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2389.95	53.01	54.00	-0.99	45.07	32.26	7.76	32.08	302	44 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	98.80	-----	-----	90.77	32.30	7.81	32.08	302	44 AVERAGE																																	



Mode	4																																																																																																													
	Harmonic																																																																																																													
	2400-2483.5_802.11g_CH01_2412MHz																																																																																																													
ANT	SISO																																																																																																													
Pol.	Horizontal					Vertical																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2024-03-26 PEAK_74 AVG_54					Level (dBuV/m) Date: 2024-03-26 PEAK_74 AVG_54																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>58.85</td><td>74.00</td><td>-15.15</td><td>64.51</td><td>34.83</td><td>11.08</td><td>51.57</td><td>130</td><td>256 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>48.79</td><td>54.00</td><td>-5.21</td><td>54.45</td><td>34.83</td><td>11.08</td><td>51.57</td><td>130</td><td>256 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	58.85	74.00	-15.15	64.51	34.83	11.08	51.57	130	256 Peak	2	4824.00	48.79	54.00	-5.21	54.45	34.83	11.08	51.57	130	256 Average	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>59.48</td><td>74.00</td><td>-14.52</td><td>65.14</td><td>34.83</td><td>11.08</td><td>51.57</td><td>105</td><td>358 Peak</td></tr><tr><td>2</td><td>4824.00</td><td>49.29</td><td>54.00</td><td>-4.71</td><td>54.95</td><td>34.83</td><td>11.08</td><td>51.57</td><td>105</td><td>358 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4824.00	59.48	74.00	-14.52	65.14	34.83	11.08	51.57	105	358 Peak	2	4824.00	49.29	54.00	-4.71	54.95	34.83	11.08	51.57	105	358 Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																					
1	4824.00	58.85	74.00	-15.15	64.51	34.83	11.08	51.57	130	256 Peak																																																																																																				
2	4824.00	48.79	54.00	-5.21	54.45	34.83	11.08	51.57	130	256 Average																																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																					
1	4824.00	59.48	74.00	-14.52	65.14	34.83	11.08	51.57	105	358 Peak																																																																																																				
2	4824.00	49.29	54.00	-4.71	54.95	34.83	11.08	51.57	105	358 Average																																																																																																				



Mode	5																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11g_CH06_2437MHz																																																																																								
ANT	SISO																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz)					Level (dBuV/m) Date: 2024-05-21 Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.49</td><td>58.00</td><td>74.00</td><td>-16.00</td><td>50.07</td><td>32.25</td><td>7.76</td><td>32.08</td><td>270 200 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.49	58.00	74.00	-16.00	50.07	32.25	7.76	32.08	270 200 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>107.92</td><td>-----</td><td>-----</td><td>99.82</td><td>32.36</td><td>7.83</td><td>32.09</td><td>270 200 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	107.92	-----	-----	99.82	32.36	7.83	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2388.49	58.00	74.00	-16.00	50.07	32.25	7.76	32.08	270 200 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2437.00	107.92	-----	-----	99.82	32.36	7.83	32.09	270 200 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz)					Level (dBuV/m) Date: 2024-05-21 Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.61</td><td>44.18</td><td>54.00</td><td>-9.82</td><td>36.25</td><td>32.25</td><td>7.76</td><td>32.08</td><td>270 200 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.61	44.18	54.00	-9.82	36.25	32.25	7.76	32.08	270 200 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>101.17</td><td>-----</td><td>-----</td><td>93.07</td><td>32.36</td><td>7.83</td><td>32.09</td><td>270 200 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	101.17	-----	-----	93.07	32.36	7.83	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2388.61	44.18	54.00	-9.82	36.25	32.25	7.76	32.08	270 200 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2437.00	101.17	-----	-----	93.07	32.36	7.83	32.09	270 200 AVERAGE																																																																																



Mode	5																																												
	Band Edge - R																																												
	2400-2483.5_802.11g_CH06_2437MHz																																												
ANT	SISO																																												
Pol.	Horizontal					Fundamental																																							
Peak	Date: 2024-05-21 PEAK_BE_74					Blank																																							
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>61.11</td><td>74.00</td><td>-12.89</td><td>52.87</td><td>32.46</td><td>7.88</td><td>32.10</td><td>270</td><td>200 PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.56	61.11	74.00	-12.89
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.56	61.11	74.00	-12.89	52.87	32.46	7.88	32.10	270	200 PEAK																																			
Avg	Date: 2024-05-21 AVG_BE_54					Blank																																							
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.56</td><td>47.64</td><td>54.00</td><td>-6.36</td><td>39.40</td><td>32.46</td><td>7.88</td><td>32.10</td><td>270</td><td>200 AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.56	47.64	54.00	-6.36
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																				
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																				
1	2483.56	47.64	54.00	-6.36	39.40	32.46	7.88	32.10	270	200 AVERAGE																																			



Mode	5																																																																																								
	Band Edge - L																																																																																								
	2400-2483.5_802.11g_CH06_2437MHz																																																																																								
ANT	SISO																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-05-21					Level (dBuV/m) Date: 2024-05-21																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2386.58</td><td>61.11</td><td>74.00</td><td>-12.89</td><td>53.19</td><td>32.25</td><td>7.75</td><td>32.08</td><td>314</td><td>360 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2386.58	61.11	74.00	-12.89	53.19	32.25	7.75	32.08	314	360 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>111.88</td><td>-----</td><td>-----</td><td>103.76</td><td>32.37</td><td>7.84</td><td>32.09</td><td>314</td><td>360 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2437.00	111.88	-----	-----	103.76	32.37	7.84	32.09	314
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2386.58	61.11	74.00	-12.89	53.19	32.25	7.75	32.08	314	360 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2437.00	111.88	-----	-----	103.76	32.37	7.84	32.09	314	360 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-05-21					Level (dBuV/m) Date: 2024-05-21																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2389.12</td><td>46.37</td><td>54.00</td><td>-7.63</td><td>38.43</td><td>32.26</td><td>7.76</td><td>32.08</td><td>314</td><td>360 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2389.12	46.37	54.00	-7.63	38.43	32.26	7.76	32.08	314	360 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2437.00</td><td>104.46</td><td>-----</td><td>-----</td><td>96.36</td><td>32.36</td><td>7.83</td><td>32.09</td><td>314</td><td>360 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 2437.00	104.46	-----	-----	96.36	32.36	7.83	32.09	314
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2389.12	46.37	54.00	-7.63	38.43	32.26	7.76	32.08	314	360 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1 2437.00	104.46	-----	-----	96.36	32.36	7.83	32.09	314	360 AVERAGE																																																																																



Mode	5																																										
	Band Edge - R																																										
	2400-2483.5_802.11g_CH06_2437MHz																																										
ANT	SISO																																										
Pol.	Vertical					Fundamental																																					
Peak	Date: 2024-05-21 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2483.56</td><td>66.46</td><td>74.00</td><td>-7.54</td><td>58.22</td><td>32.46</td><td>7.88</td><td>32.10</td><td>314</td><td>360</td><td>PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.56	66.46	74.00	-7.54	58.22	32.46	7.88	32.10	314	360	PEAK	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1 2483.56	66.46	74.00	-7.54	58.22	32.46	7.88	32.10	314	360	PEAK																																	
Avg	Date: 2024-05-21 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 2483.56</td><td>52.69</td><td>54.00</td><td>-1.31</td><td>44.45</td><td>32.46</td><td>7.88</td><td>32.10</td><td>314</td><td>360</td><td>AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.56	52.69	54.00	-1.31	44.45	32.46	7.88	32.10	314	360	AVERAGE	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1 2483.56	52.69	54.00	-1.31	44.45	32.46	7.88	32.10	314	360	AVERAGE																																	



Mode	5																																																																																																																																																																																																														
	Harmonic																																																																																																																																																																																																														
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																																																																														
ANT	SISO																																																																																																																																																																																																														
Pol.	Horizontal							Vertical																																																																																																																																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-03-26 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>57.93</td><td>74.00</td><td>-16.07</td><td>63.53</td><td>34.85</td><td>11.10</td><td>51.55</td><td>130</td><td>256</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>4874.00</td><td>47.54</td><td>54.00</td><td>-6.46</td><td>53.14</td><td>34.85</td><td>11.10</td><td>51.55</td><td>130</td><td>256</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>7311.00</td><td>46.48</td><td>74.00</td><td>-27.52</td><td>48.24</td><td>36.32</td><td>13.08</td><td>51.16</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td></tr></table>									Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	4874.00	57.93	74.00	-16.07	63.53	34.85	11.10	51.55	130	256	Peak				2	4874.00	47.54	54.00	-6.46	53.14	34.85	11.10	51.55	130	256	Average				3	7311.00	46.48	74.00	-27.52	48.24	36.32	13.08	51.16	--	--	Peak				Level (dBuV/m) Date: 2024-03-26 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>58.53</td><td>74.00</td><td>-15.47</td><td>64.13</td><td>34.85</td><td>11.10</td><td>51.55</td><td>105</td><td>360</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>4874.00</td><td>48.04</td><td>54.00</td><td>-5.96</td><td>53.64</td><td>34.85</td><td>11.10</td><td>51.55</td><td>105</td><td>360</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>7311.00</td><td>58.50</td><td>74.00</td><td>-15.50</td><td>60.26</td><td>36.32</td><td>13.08</td><td>51.16</td><td>325</td><td>168</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>4</td><td>7311.00</td><td>49.20</td><td>54.00</td><td>-4.80</td><td>50.96</td><td>36.32</td><td>13.08</td><td>51.16</td><td>325</td><td>168</td><td>Average</td><td></td><td></td><td></td></tr></table>									Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor			cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	4874.00	58.53	74.00	-15.47	64.13	34.85	11.10	51.55	105	360	Peak				2	4874.00	48.04	54.00	-5.96	53.64	34.85	11.10	51.55	105	360	Average				3	7311.00	58.50	74.00	-15.50	60.26	36.32	13.08	51.16	325	168	Peak				4	7311.00	49.20	54.00	-4.80	50.96	36.32	13.08	51.16	325	168	Average			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor			cm	deg																																																																																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																				
1	4874.00	57.93	74.00	-16.07	63.53	34.85	11.10	51.55	130	256	Peak																																																																																																																																																																																																				
2	4874.00	47.54	54.00	-6.46	53.14	34.85	11.10	51.55	130	256	Average																																																																																																																																																																																																				
3	7311.00	46.48	74.00	-27.52	48.24	36.32	13.08	51.16	--	--	Peak																																																																																																																																																																																																				
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor			cm	deg																																																																																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																				
1	4874.00	58.53	74.00	-15.47	64.13	34.85	11.10	51.55	105	360	Peak																																																																																																																																																																																																				
2	4874.00	48.04	54.00	-5.96	53.64	34.85	11.10	51.55	105	360	Average																																																																																																																																																																																																				
3	7311.00	58.50	74.00	-15.50	60.26	36.32	13.08	51.16	325	168	Peak																																																																																																																																																																																																				
4	7311.00	49.20	54.00	-4.80	50.96	36.32	13.08	51.16	325	168	Average																																																																																																																																																																																																				





Mode	6																																																																																										
	Band Edge																																																																																										
	2400-2483.5_802.11g_CH11_2462MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal										Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.55</td><td>60.48</td><td>74.00</td><td>-13.52</td><td>52.24</td><td>32.46</td><td>7.88</td><td>32.10</td><td>200</td><td>193</td><td>PEAK</td></tr></tbody></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.55	60.48	74.00	-13.52	52.24	32.46	7.88	32.10	200	193	PEAK	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>98.02</td><td>-----</td><td>-----</td><td>89.83</td><td>32.42</td><td>7.86</td><td>32.09</td><td>200</td><td>193</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.02	-----	-----	89.83	32.42	7.86	32.09	200	193	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.55	60.48	74.00	-13.52	52.24	32.46	7.88	32.10	200	193	PEAK																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2462.00	98.02	-----	-----	89.83	32.42	7.86	32.09	200	193	PEAK																																																																																
Avg	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>46.17</td><td>54.00</td><td>-7.83</td><td>37.93</td><td>32.46</td><td>7.88</td><td>32.10</td><td>200</td><td>193</td><td>AVERAGE</td></tr></tbody></table>										Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2483.51	46.17	54.00	-7.83	37.93	32.46	7.88	32.10	200	193	AVERAGE	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>91.20</td><td>-----</td><td>-----</td><td>83.00</td><td>32.43</td><td>7.86</td><td>32.09</td><td>200</td><td>193</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2462.00	91.20	-----	-----	83.00	32.43	7.86	32.09	200	193	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2483.51	46.17	54.00	-7.83	37.93	32.46	7.88	32.10	200	193	AVERAGE																																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	2462.00	91.20	-----	-----	83.00	32.43	7.86	32.09	200	193	AVERAGE																																																																																



Mode	6																																																																											
	Band Edge																																																																											
	2400-2483.5_802.11g_CH11_2462MHz																																																																											
ANT	SISO																																																																											
Pol.	Vertical					Fundamental																																																																						
Peak	Level (dBuV/m) Date: 2024-05-21 PEAK_BE_74 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.55</td><td>65.82</td><td>74.00</td><td>-8.18</td><td>57.58</td><td>32.46</td><td>7.88</td><td>32.10</td><td>275</td><td>0</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.55	65.82	74.00	-8.18	57.58	32.46	7.88	32.10	275	0	PEAK	Level (dBuV/m) Date: 2024-05-21 PEAK_74 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>105.16</td><td>74.00</td><td>31.16</td><td>96.96</td><td>32.43</td><td>7.86</td><td>32.09</td><td>275</td><td>0</td><td>PEAK</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2462.00	105.16	74.00	31.16	96.96	32.43	7.86	32.09	275	0	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.55	65.82	74.00	-8.18	57.58	32.46	7.88	32.10	275	0	PEAK																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2462.00	105.16	74.00	31.16	96.96	32.43	7.86	32.09	275	0	PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-05-21 AVG_BE_54 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.55</td><td>51.74</td><td>54.00</td><td>-2.26</td><td>43.50</td><td>32.46</td><td>7.88</td><td>32.10</td><td>275</td><td>0</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2483.55	51.74	54.00	-2.26	43.50	32.46	7.88	32.10	275	0	AVERAGE	Level (dBuV/m) Date: 2024-05-21 AVG_54 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>97.30</td><td>54.00</td><td>43.30</td><td>89.11</td><td>32.42</td><td>7.86</td><td>32.09</td><td>275</td><td>0</td><td>AVERAGE</td></tr></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2462.00	97.30	54.00	43.30	89.11	32.42	7.86	32.09	275	0	AVERAGE
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2483.55	51.74	54.00	-2.26	43.50	32.46	7.88	32.10	275	0	AVERAGE																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 2462.00	97.30	54.00	43.30	89.11	32.42	7.86	32.09	275	0	AVERAGE																																																																		

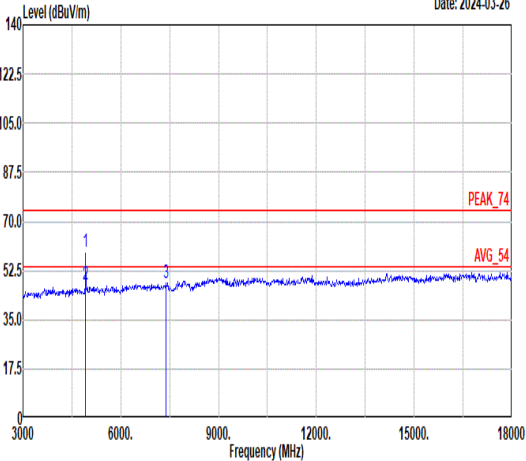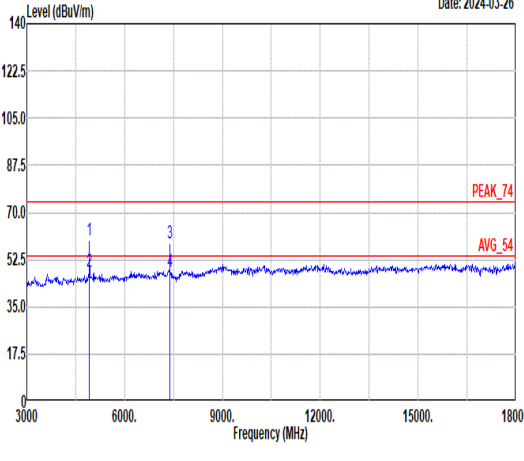

Mode	6																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																																																																							
ANT	SISO																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg																																																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>59.32</td><td>74.00</td><td>-14.68</td><td>64.86</td><td>34.87</td><td>11.12</td><td>51.53</td><td>130</td><td>255</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>47.61</td><td>54.00</td><td>-6.39</td><td>53.15</td><td>34.87</td><td>11.12</td><td>51.53</td><td>130</td><td>255</td><td>Average</td></tr><tr><td>3</td><td>7386.00</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>49.74</td><td>36.35</td><td>13.13</td><td>51.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	59.32	74.00	-14.68	64.86	34.87	11.12	51.53	130	255	Peak	2	4924.00	47.61	54.00	-6.39	53.15	34.87	11.12	51.53	130	255	Average	3	7386.00	48.04	74.00	-25.96	49.74	36.35	13.13	51.18	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>59.90</td><td>74.00</td><td>-14.10</td><td>65.44</td><td>34.87</td><td>11.12</td><td>51.53</td><td>105</td><td>358</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>48.11</td><td>54.00</td><td>-5.89</td><td>53.65</td><td>34.87</td><td>11.12</td><td>51.53</td><td>105</td><td>358</td><td>Average</td></tr><tr><td>3</td><td>7386.00</td><td>58.73</td><td>74.00</td><td>-15.27</td><td>60.43</td><td>36.35</td><td>13.13</td><td>51.18</td><td>325</td><td>168</td><td>Peak</td></tr><tr><td>4</td><td>7386.00</td><td>48.24</td><td>54.00</td><td>-5.76</td><td>49.94</td><td>36.35</td><td>13.13</td><td>51.18</td><td>325</td><td>168</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4924.00	59.90	74.00	-14.10	65.44	34.87	11.12	51.53	105	358	Peak	2	4924.00	48.11	54.00	-5.89	53.65	34.87	11.12	51.53	105	358	Average	3	7386.00	58.73	74.00	-15.27	60.43	36.35	13.13	51.18	325	168	Peak	4	7386.00	48.24	54.00	-5.76	49.94	36.35	13.13	51.18	325	168	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																															
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																														
1	4924.00	59.32	74.00	-14.68	64.86	34.87	11.12	51.53	130	255	Peak																																																																																																																																													
2	4924.00	47.61	54.00	-6.39	53.15	34.87	11.12	51.53	130	255	Average																																																																																																																																													
3	7386.00	48.04	74.00	-25.96	49.74	36.35	13.13	51.18	--	--	Peak																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																																																															
1	4924.00	59.90	74.00	-14.10	65.44	34.87	11.12	51.53	105	358	Peak																																																																																																																																													
2	4924.00	48.11	54.00	-5.89	53.65	34.87	11.12	51.53	105	358	Average																																																																																																																																													
3	7386.00	58.73	74.00	-15.27	60.43	36.35	13.13	51.18	325	168	Peak																																																																																																																																													
4	7386.00	48.24	54.00	-5.76	49.94	36.35	13.13	51.18	325	168	Average																																																																																																																																													



Mode	7																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																																																																	
ANT	SISO																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-05-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>51.94</td><td>74.00</td><td>-22.06</td><td>44.00</td><td>32.26</td><td>7.76</td><td>32.08</td><td>354 228 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	51.94	74.00	-22.06	44.00	32.26	7.76	32.08	354 228 PEAK	Level (dBuV/m) Date: 2024-05-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>96.68</td><td>-----</td><td>-----</td><td>88.64</td><td>32.31</td><td>7.81</td><td>32.08</td><td>354 228 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	96.68	-----	-----	88.64	32.31	7.81	32.08	354 228 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.95	51.94	74.00	-22.06	44.00	32.26	7.76	32.08	354 228 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	96.68	-----	-----	88.64	32.31	7.81	32.08	354 228 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-05-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.69</td><td>41.34</td><td>54.00</td><td>-12.66</td><td>33.40</td><td>32.26</td><td>7.76</td><td>32.08</td><td>354 228 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	41.34	54.00	-12.66	33.40	32.26	7.76	32.08	354 228 AVERAGE	Level (dBuV/m) Date: 2024-05-20 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>89.30</td><td>-----</td><td>-----</td><td>81.27</td><td>32.30</td><td>7.81</td><td>32.08</td><td>354 228 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	89.30	-----	-----	81.27	32.30	7.81	32.08	354 228 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2389.69	41.34	54.00	-12.66	33.40	32.26	7.76	32.08	354 228 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2412.00	89.30	-----	-----	81.27	32.30	7.81	32.08	354 228 AVERAGE																																																																									



Mode	7																																									
	Band Edge																																									
	2400-2483.5_802.11n_HT20_CH01_2412MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2024-05-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.69</td><td>63.38</td><td>74.00</td><td>-10.62</td><td>55.44</td><td>32.26</td><td>7.76</td><td>32.08</td><td>156</td><td>291 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.69	63.38	74.00	-10.62	55.44	32.26	7.76	32.08	156	291 PEAK	Level (dBuV/m) Date: 2024-05-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>107.07</td><td>-----</td><td>-----</td><td>99.03</td><td>32.31</td><td>7.81</td><td>32.08</td><td>156</td><td>291 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	107.07	-----	-----	99.03	32.31	7.81	32.08	156	291 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2389.69	63.38	74.00	-10.62	55.44	32.26	7.76	32.08	156	291 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	107.07	-----	-----	99.03	32.31	7.81	32.08	156	291 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-05-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.95</td><td>52.48</td><td>54.00</td><td>-1.52</td><td>44.54</td><td>32.26</td><td>7.76</td><td>32.08</td><td>156</td><td>291 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.95	52.48	54.00	-1.52	44.54	32.26	7.76	32.08	156	291 AVERAGE	Level (dBuV/m) Date: 2024-05-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2412.00</td><td>99.56</td><td>-----</td><td>-----</td><td>91.52</td><td>32.31</td><td>7.81</td><td>32.08</td><td>156</td><td>291 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2412.00	99.56	-----	-----	91.52	32.31	7.81	32.08	156	291 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2389.95	52.48	54.00	-1.52	44.54	32.26	7.76	32.08	156	291 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2412.00	99.56	-----	-----	91.52	32.31	7.81	32.08	156	291 AVERAGE																																	



Mode	7																																																																																																																				
	Harmonic																																																																																																																				
	2400-2483.5_802.11n HT20_CH01_2412MHz																																																																																																																				
ANT	SISO																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																														
Peak Avg	Level (dBuV/m) Date: 2024-03-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>58.67</td><td>74.00</td><td>-15.33</td><td>64.33</td><td>34.83</td><td>11.08</td><td>51.57</td><td>130</td><td>256</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>48.22</td><td>54.00</td><td>-5.78</td><td>53.88</td><td>34.83</td><td>11.08</td><td>51.57</td><td>130</td><td>256</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	58.67	74.00	-15.33	64.33	34.83	11.08	51.57	130	256	Peak	2	4824.00	48.22	54.00	-5.78	53.88	34.83	11.08	51.57	130	256	Average	Level (dBuV/m) Date: 2024-03-26 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 3000 6000 9000 12000 15000 18000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4824.00</td><td>59.50</td><td>74.00</td><td>-14.50</td><td>65.16</td><td>34.83</td><td>11.08</td><td>51.57</td><td>105</td><td>358</td><td>Peak</td></tr><tr><td>2</td><td>4824.00</td><td>48.55</td><td>54.00</td><td>-5.45</td><td>54.21</td><td>34.83</td><td>11.08</td><td>51.57</td><td>105</td><td>358</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	59.50	74.00	-14.50	65.16	34.83	11.08	51.57	105	358	Peak	2	4824.00	48.55	54.00	-5.45	54.21	34.83	11.08	51.57	105	358	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4824.00	58.67	74.00	-15.33	64.33	34.83	11.08	51.57	130	256	Peak																																																																																																										
2	4824.00	48.22	54.00	-5.78	53.88	34.83	11.08	51.57	130	256	Average																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	4824.00	59.50	74.00	-14.50	65.16	34.83	11.08	51.57	105	358	Peak																																																																																																										
2	4824.00	48.55	54.00	-5.45	54.21	34.83	11.08	51.57	105	358	Average																																																																																																										



		8																																																																																								
Mode		Band Edge - L																																																																																								
		2400-2483.5_802.11n_HT20_CH06_2437MHz																																																																																								
ANT		SISO																																																																																								
Pol.		Horizontal					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2024-05-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.63</td><td>51.77</td><td>74.00</td><td>-22.23</td><td>43.83</td><td>32.26</td><td>7.76</td><td>32.08</td><td>359 231 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.63	51.77	74.00	-22.23	43.83	32.26	7.76	32.08	359 231 PEAK	Level (dBuV/m) Date: 2024-05-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>102.54</td><td>-----</td><td>-----</td><td>94.44</td><td>32.36</td><td>7.83</td><td>32.09</td><td>359 231 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	102.54	-----	-----	94.44	32.36	7.83	32.09	359 231 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.63	51.77	74.00	-22.23	43.83	32.26	7.76	32.08	359 231 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2437.00	102.54	-----	-----	94.44	32.36	7.83	32.09	359 231 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-05-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.88</td><td>40.24</td><td>54.00</td><td>-13.76</td><td>32.30</td><td>32.26</td><td>7.76</td><td>32.08</td><td>359 231 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.88	40.24	54.00	-13.76	32.30	32.26	7.76	32.08	359 231 AVERAGE	Level (dBuV/m) Date: 2024-05-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>95.90</td><td>-----</td><td>-----</td><td>87.80</td><td>32.36</td><td>7.83</td><td>32.09</td><td>359 231 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2437.00	95.90	-----	-----	87.80	32.36	7.83	32.09	359 231 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2389.88	40.24	54.00	-13.76	32.30	32.26	7.76	32.08	359 231 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2437.00	95.90	-----	-----	87.80	32.36	7.83	32.09	359 231 AVERAGE																																																																																	



Mode	8																																										
	Band Edge - R																																										
	2400-2483.5_802.11n HT20_CH06_2437MHz																																										
ANT	SISO																																										
Pol.	Horizontal					Fundamental																																					
Peak	Date: 2024-05-20 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2490.49</td><td>54.10</td><td>74.00</td><td>-19.90</td><td>45.84</td><td>32.48</td><td>7.88</td><td>32.10</td><td>359</td><td>231 PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2490.49	54.10	74.00	-19.90	45.84	32.48	7.88	32.10	359	231 PEAK	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	2490.49	54.10	74.00	-19.90	45.84	32.48	7.88	32.10	359	231 PEAK																																	
Avg	Date: 2024-05-21 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2485.32</td><td>41.35</td><td>54.00</td><td>-12.65</td><td>33.10</td><td>32.47</td><td>7.88</td><td>32.10</td><td>359</td><td>231 AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	2485.32	41.35	54.00	-12.65	33.10	32.47	7.88	32.10	359	231 AVERAGE	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																		
1	2485.32	41.35	54.00	-12.65	33.10	32.47	7.88	32.10	359	231 AVERAGE																																	



	8																																																	
Mode	Band Edge - L																																																	
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																	
ANT	SISO																																																	
Pol.	Vertical					Fundamental																																												
Peak	Level (dBuV/m) Date: 2024-05-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.63</td><td>61.15</td><td>74.00</td><td>-12.85</td><td>53.21</td><td>32.26</td><td>7.76</td><td>32.08</td><td>158</td><td>292 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.63	61.15	74.00	-12.85	53.21	32.26	7.76	32.08	158	292 PEAK	Level (dBuV/m) Date: 2024-05-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2437.00</td><td>112.48</td><td>-----</td><td>-----</td><td>104.38</td><td>32.36</td><td>7.83</td><td>32.09</td><td>158</td><td>292 PEAK</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2437.00	112.48	-----	-----	104.38	32.36	7.83	32.09	158	292 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 2389.63	61.15	74.00	-12.85	53.21	32.26	7.76	32.08	158	292 PEAK																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																									
1 2437.00	112.48	-----	-----	104.38	32.36	7.83	32.09	158	292 PEAK																																									
Avg	Level (dBuV/m) Date: 2024-05-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.88</td><td>48.14</td><td>54.00</td><td>-5.86</td><td>40.20</td><td>32.26</td><td>7.76</td><td>32.08</td><td>158</td><td>292 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.88	48.14	54.00	-5.86	40.20	32.26	7.76	32.08	158	292 AVERAGE	Level (dBuV/m) Date: 2024-05-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2437.00</td><td>105.22</td><td>-----</td><td>-----</td><td>97.12</td><td>32.36</td><td>7.83</td><td>32.09</td><td>158</td><td>292 AVERAGE</td></tr></table>					MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2437.00	105.22	-----	-----	97.12	32.36	7.83	32.09	158	292 AVERAGE
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																								
1 2389.88	48.14	54.00	-5.86	40.20	32.26	7.76	32.08	158	292 AVERAGE																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																									
1 2437.00	105.22	-----	-----	97.12	32.36	7.83	32.09	158	292 AVERAGE																																									



Mode	8																																										
	Band Edge - R																																										
	2400-2483.5_802.11n HT20_CH06_2437MHz																																										
ANT	SISO																																										
Pol.	Vertical					Fundamental																																					
Peak	Date: 2024-05-20 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2484.25</td><td>65.39</td><td>74.00</td><td>-8.61</td><td>57.14</td><td>32.47</td><td>7.88</td><td>32.10</td><td>158</td><td>292 PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2484.25	65.39	74.00	-8.61	57.14	32.47	7.88	32.10	158	292 PEAK	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1	2484.25	65.39	74.00	-8.61	57.14	32.47	7.88	32.10	158	292 PEAK																																	
Avg	Date: 2024-05-20 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2483.81</td><td>52.99</td><td>54.00</td><td>-1.01</td><td>44.75</td><td>32.46</td><td>7.88</td><td>32.10</td><td>158</td><td>292 AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2483.81	52.99	54.00	-1.01	44.75	32.46	7.88	32.10	158	292 AVERAGE	Blank				
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																		
1	2483.81	52.99	54.00	-1.01	44.75	32.46	7.88	32.10	158	292 AVERAGE																																	







Mode	8																																																																																																																																																																																																														
	Harmonic																																																																																																																																																																																																														
	2400-2483.5_802.11n HT20_CH06_2437MHz																																																																																																																																																																																																														
ANT	SISO																																																																																																																																																																																																														
Pol.	Horizontal							Vertical																																																																																																																																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-03-26 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>58.24</td><td>74.00</td><td>-15.76</td><td>63.84</td><td>34.85</td><td>11.10</td><td>51.55</td><td>130</td><td>256</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>4874.00</td><td>47.54</td><td>54.00</td><td>-6.46</td><td>53.14</td><td>34.85</td><td>11.10</td><td>51.55</td><td>130</td><td>256</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>7311.00</td><td>46.28</td><td>74.00</td><td>-27.72</td><td>48.04</td><td>36.32</td><td>13.08</td><td>51.16</td><td>--</td><td>--</td><td>Peak</td><td></td><td></td><td></td></tr></table>									Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg				1	4874.00	58.24	74.00	-15.76	63.84	34.85	11.10	51.55	130	256	Peak				2	4874.00	47.54	54.00	-6.46	53.14	34.85	11.10	51.55	130	256	Average				3	7311.00	46.28	74.00	-27.72	48.04	36.32	13.08	51.16	--	--	Peak				Level (dBuV/m) Date: 2024-03-26 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>4874.00</td><td>59.35</td><td>74.00</td><td>-14.65</td><td>64.95</td><td>34.85</td><td>11.10</td><td>51.55</td><td>105</td><td>360</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>2</td><td>4874.00</td><td>47.64</td><td>54.00</td><td>-6.36</td><td>53.24</td><td>34.85</td><td>11.10</td><td>51.55</td><td>105</td><td>360</td><td>Average</td><td></td><td></td><td></td></tr><tr><td>3</td><td>7311.00</td><td>58.29</td><td>74.00</td><td>-15.71</td><td>60.05</td><td>36.32</td><td>13.08</td><td>51.16</td><td>325</td><td>168</td><td>Peak</td><td></td><td></td><td></td></tr><tr><td>4</td><td>7311.00</td><td>48.59</td><td>54.00</td><td>-5.41</td><td>50.35</td><td>36.32</td><td>13.08</td><td>51.16</td><td>325</td><td>168</td><td>Average</td><td></td><td></td><td></td></tr></table>									Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg				1	4874.00	59.35	74.00	-14.65	64.95	34.85	11.10	51.55	105	360	Peak				2	4874.00	47.64	54.00	-6.36	53.24	34.85	11.10	51.55	105	360	Average				3	7311.00	58.29	74.00	-15.71	60.05	36.32	13.08	51.16	325	168	Peak				4	7311.00	48.59	54.00	-5.41	50.35	36.32	13.08	51.16	325	168	Average			
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																																
	Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor																																																																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																				
1	4874.00	58.24	74.00	-15.76	63.84	34.85	11.10	51.55	130	256	Peak																																																																																																																																																																																																				
2	4874.00	47.54	54.00	-6.46	53.14	34.85	11.10	51.55	130	256	Average																																																																																																																																																																																																				
3	7311.00	46.28	74.00	-27.72	48.04	36.32	13.08	51.16	--	--	Peak																																																																																																																																																																																																				
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Level	Factor	Loss	Factor																																																																																																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																																																																																																				
1	4874.00	59.35	74.00	-14.65	64.95	34.85	11.10	51.55	105	360	Peak																																																																																																																																																																																																				
2	4874.00	47.64	54.00	-6.36	53.24	34.85	11.10	51.55	105	360	Average																																																																																																																																																																																																				
3	7311.00	58.29	74.00	-15.71	60.05	36.32	13.08	51.16	325	168	Peak																																																																																																																																																																																																				
4	7311.00	48.59	54.00	-5.41	50.35	36.32	13.08	51.16	325	168	Average																																																																																																																																																																																																				



Mode	9																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																									
ANT	SISO																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-05-20 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a signal level starting around 87.5 dBuV/m at 2462 MHz, dropping to about 52.5 dBuV/m by 2477.2 MHz, and then remaining relatively flat. A red line indicates the limit at 74 dBuV/m, labeled PEAK_BE_74. A blue line indicates the measured level at 54 dBuV/m, labeled PEAK_74. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.58</td><td>54.26</td><td>74.00</td><td>-19.74</td><td>46.02</td><td>32.46</td><td>7.88</td><td>32.10</td><td>342 228 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.58	54.26	74.00	-19.74	46.02	32.46	7.88	32.10	342 228 PEAK	Level (dBuV/m) Date: 2024-05-20 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal level starting around 40 dBuV/m at 1000 MHz, rising to about 87.5 dBuV/m at 2462 MHz, and then dropping to about 52.5 dBuV/m by 2477.2 MHz, and then remaining relatively flat. A red line indicates the limit at 74 dBuV/m, labeled PEAK_74. A blue line indicates the measured level at 54 dBuV/m, labeled PEAK_74. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>96.49</td><td>-----</td><td>-----</td><td>88.30</td><td>32.42</td><td>7.86</td><td>32.09</td><td>342 228 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	96.49	-----	-----	88.30	32.42	7.86	32.09	342 228 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.58	54.26	74.00	-19.74	46.02	32.46	7.88	32.10	342 228 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	96.49	-----	-----	88.30	32.42	7.86	32.09	342 228 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-05-20 Graph showing Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a signal level starting around 87.5 dBuV/m at 2462 MHz, dropping to about 52.5 dBuV/m by 2477.2 MHz, and then remaining relatively flat. A red line indicates the limit at 54 dBuV/m, labeled AVG_BE_54. A blue line indicates the measured level at 41.84 dBuV/m, labeled AVG_54. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>41.84</td><td>54.00</td><td>-12.16</td><td>33.60</td><td>32.46</td><td>7.88</td><td>32.10</td><td>342 228 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	41.84	54.00	-12.16	33.60	32.46	7.88	32.10	342 228 AVERAGE	Level (dBuV/m) Date: 2024-05-20 Graph showing Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal level starting around 40 dBuV/m at 1000 MHz, rising to about 87.5 dBuV/m at 2462 MHz, and then dropping to about 52.5 dBuV/m by 2477.2 MHz, and then remaining relatively flat. A red line indicates the limit at 54 dBuV/m, labeled AVG_54. A blue line indicates the measured level at 89.68 dBuV/m, labeled AVG_54. <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>89.68</td><td>-----</td><td>-----</td><td>81.49</td><td>32.42</td><td>7.86</td><td>32.09</td><td>342 228 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	89.68	-----	-----	81.49	32.42	7.86	32.09	342 228 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2483.55	41.84	54.00	-12.16	33.60	32.46	7.88	32.10	342 228 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2462.00	89.68	-----	-----	81.49	32.42	7.86	32.09	342 228 AVERAGE																																																																																	

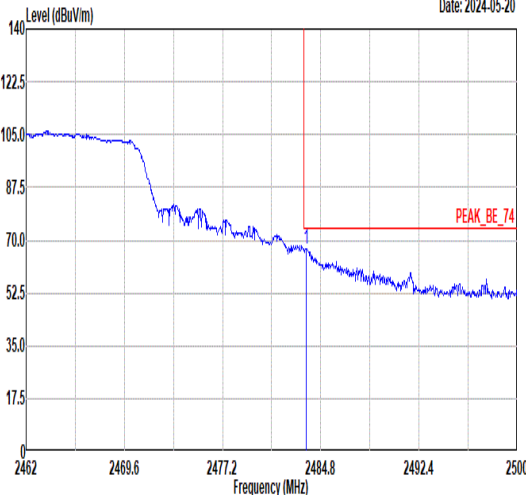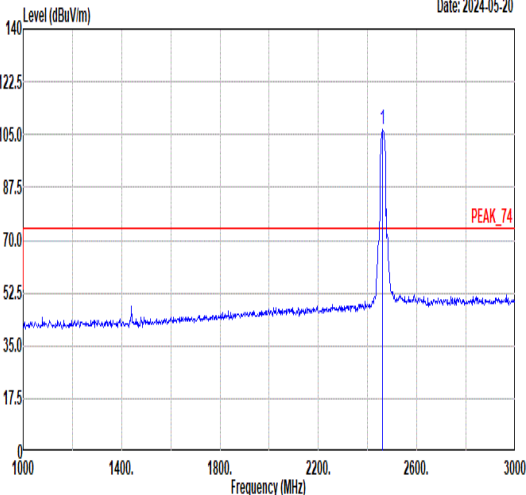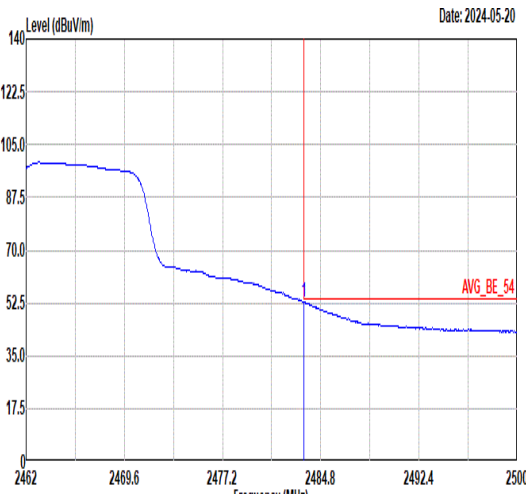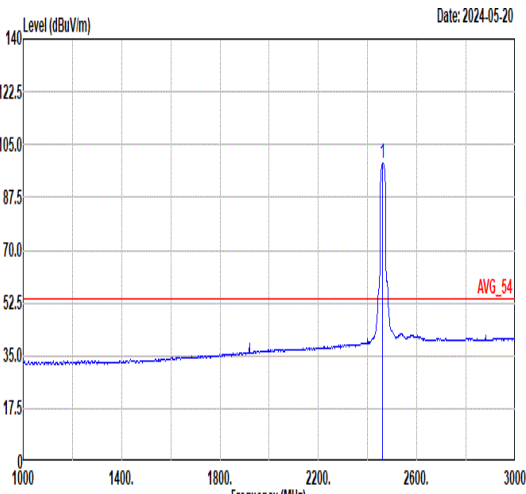

Mode	9																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11n_HT20_CH11_2462MHz																																																																																								
ANT	SISO																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.70</td><td>67.08</td><td>74.00</td><td>-6.92</td><td>58.84</td><td>32.46</td><td>7.88</td><td>32.10</td><td>175 295 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.70	67.08	74.00	-6.92	58.84	32.46	7.88	32.10	175 295 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>106.52</td><td>-----</td><td>-----</td><td>98.35</td><td>32.41</td><td>7.85</td><td>32.09</td><td>175 295 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.52	-----	-----	98.35	32.41	7.85	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.70	67.08	74.00	-6.92	58.84	32.46	7.88	32.10	175 295 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	106.52	-----	-----	98.35	32.41	7.85	32.09	175 295 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>52.77</td><td>54.00</td><td>-1.23</td><td>44.53</td><td>32.46</td><td>7.88</td><td>32.10</td><td>175 295 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	52.77	54.00	-1.23	44.53	32.46	7.88	32.10	175 295 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>98.93</td><td>-----</td><td>-----</td><td>90.74</td><td>32.42</td><td>7.86</td><td>32.09</td><td>175 295 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.93	-----	-----	90.74	32.42	7.86	32.09
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2483.51	52.77	54.00	-1.23	44.53	32.46	7.88	32.10	175 295 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2462.00	98.93	-----	-----	90.74	32.42	7.86	32.09	175 295 AVERAGE																																																																																



Mode	9																																																																																																																																																																																															
	Harmonic																																																																																																																																																																																															
	2400-2483.5_802.11n HT20_CH11_2462MHz																																																																																																																																																																																															
ANT	SISO																																																																																																																																																																																															
Pol.	Horizontal					Vertical																																																																																																																																																																																										
Peak Avg	<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>55.36</td><td>74.00</td><td>-18.64</td><td>60.90</td><td>34.87</td><td>11.12</td><td>51.53</td><td>130</td><td>255</td><td colspan="2">Peak</td><td></td></tr><tr><td>2</td><td>4924.00</td><td>44.92</td><td>54.00</td><td>-9.08</td><td>50.46</td><td>34.87</td><td>11.12</td><td>51.53</td><td>130</td><td>255</td><td colspan="2">Average</td><td></td></tr><tr><td>3</td><td>7386.00</td><td>47.89</td><td>74.00</td><td>-26.11</td><td>49.59</td><td>36.35</td><td>13.13</td><td>51.18</td><td>--</td><td>--</td><td colspan="2">Peak</td><td></td></tr></tbody></table>							Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq		Level	Line Margin	Level	Factor	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	4924.00	55.36	74.00	-18.64	60.90	34.87	11.12	51.53	130	255	Peak			2	4924.00	44.92	54.00	-9.08	50.46	34.87	11.12	51.53	130	255	Average			3	7386.00	47.89	74.00	-26.11	49.59	36.35	13.13	51.18	--	--	Peak			<table><thead><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th colspan="2">Ant</th><th colspan="2">Cable Preamp</th><th colspan="2">APos</th><th colspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th colspan="2"></th><th></th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>61.53</td><td>34.87</td><td>11.12</td><td>51.53</td><td>105</td><td>358</td><td colspan="2">Peak</td><td></td></tr><tr><td>2</td><td>4924.00</td><td>45.32</td><td>54.00</td><td>-8.68</td><td>50.86</td><td>34.87</td><td>11.12</td><td>51.53</td><td>105</td><td>358</td><td colspan="2">Average</td><td></td></tr><tr><td>3</td><td>7386.00</td><td>53.27</td><td>74.00</td><td>-20.73</td><td>54.97</td><td>36.35</td><td>13.13</td><td>51.18</td><td>325</td><td>168</td><td colspan="2">Peak</td><td></td></tr><tr><td>4</td><td>7386.00</td><td>42.14</td><td>54.00</td><td>-11.86</td><td>43.84</td><td>36.35</td><td>13.13</td><td>51.18</td><td>325</td><td>168</td><td colspan="2">Average</td><td></td></tr></tbody></table>							Limit		Read		Ant		Cable Preamp		APos		TPos		Remark	Freq		Level	Line Margin	Level	Factor	Level	Factor	Loss Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	4924.00	55.99	74.00	-18.01	61.53	34.87	11.12	51.53	105	358	Peak			2	4924.00	45.32	54.00	-8.68	50.86	34.87	11.12	51.53	105	358	Average			3	7386.00	53.27	74.00	-20.73	54.97	36.35	13.13	51.18	325	168	Peak			4	7386.00	42.14	54.00	-11.86	43.84	36.35	13.13	51.18	325	168	Average		
			Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																	
	Freq		Level	Line Margin	Level	Factor	Level	Factor	Loss Factor																																																																																																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																					
1	4924.00	55.36	74.00	-18.64	60.90	34.87	11.12	51.53	130	255	Peak																																																																																																																																																																																					
2	4924.00	44.92	54.00	-9.08	50.46	34.87	11.12	51.53	130	255	Average																																																																																																																																																																																					
3	7386.00	47.89	74.00	-26.11	49.59	36.35	13.13	51.18	--	--	Peak																																																																																																																																																																																					
		Limit		Read		Ant		Cable Preamp		APos		TPos		Remark																																																																																																																																																																																		
Freq		Level	Line Margin	Level	Factor	Level	Factor	Loss Factor																																																																																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																						
1	4924.00	55.99	74.00	-18.01	61.53	34.87	11.12	51.53	105	358	Peak																																																																																																																																																																																					
2	4924.00	45.32	54.00	-8.68	50.86	34.87	11.12	51.53	105	358	Average																																																																																																																																																																																					
3	7386.00	53.27	74.00	-20.73	54.97	36.35	13.13	51.18	325	168	Peak																																																																																																																																																																																					
4	7386.00	42.14	54.00	-11.86	43.84	36.35	13.13	51.18	325	168	Average																																																																																																																																																																																					



Mode	10																																																																																											
	Band Edge - L																																																																																											
	2400-2483.5_802.11n_HT40_CH03_2422MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2388.51</td><td>52.32</td><td>74.00</td><td>-21.68</td><td>44.39</td><td>32.25</td><td>7.76</td><td>32.08</td><td>355 228 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.51	52.32	74.00	-21.68	44.39	32.25	7.76	32.08	355 228 PEAK	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>91.52</td><td>-----</td><td>-----</td><td>83.43</td><td>32.35</td><td>7.83</td><td>32.09</td><td>355 228 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	91.52	-----	-----	83.43	32.35	7.83	32.09	355 228 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2388.51	52.32	74.00	-21.68	44.39	32.25	7.76	32.08	355 228 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2422.00	91.52	-----	-----	83.43	32.35	7.83	32.09	355 228 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.41</td><td>42.26</td><td>54.00</td><td>-11.74</td><td>34.32</td><td>32.26</td><td>7.76</td><td>32.08</td><td>355 228 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2389.41	42.26	54.00	-11.74	34.32	32.26	7.76	32.08	355 228 AVERAGE	Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>84.30</td><td>-----</td><td>-----</td><td>76.22</td><td>32.34</td><td>7.82</td><td>32.08</td><td>355 228 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2422.00	84.30	-----	-----	76.22	32.34	7.82	32.08	355 228 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2389.41	42.26	54.00	-11.74	34.32	32.26	7.76	32.08	355 228 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	2422.00	84.30	-----	-----	76.22	32.34	7.82	32.08	355 228 AVERAGE																																																																																			



Mode	10																																													
	Band Edge - R																																													
	2400-2483.5_802.11n HT40_CH03_2422MHz																																													
ANT	SISO																																													
Pol.	Horizontal					Fundamental																																								
Peak	Date: 2024-05-21 PEAK_BE_74 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2488.53</td><td>49.92</td><td>74.00</td><td>-24.08</td><td>41.67</td><td>32.47</td><td>7.88</td><td>32.10</td><td>355</td><td>228</td><td>PEAK</td></tr></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2488.53	49.92	74.00	-24.08	41.67	32.47	7.88	32.10	355	228	PEAK	Blank				
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																				
1	2488.53	49.92	74.00	-24.08	41.67	32.47	7.88	32.10	355	228	PEAK																																			
Avg	Date: 2024-05-21 AVG_BE_54 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2499.84</td><td>39.96</td><td>54.00</td><td>-14.04</td><td>31.67</td><td>32.50</td><td>7.89</td><td>32.10</td><td>355</td><td>228</td><td>AVERAGE</td></tr></table>						Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	2499.84	39.96	54.00	-14.04	31.67	32.50	7.89	32.10	355	228	AVERAGE	Blank				
		Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																		
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																				
1	2499.84	39.96	54.00	-14.04	31.67	32.50	7.89	32.10	355	228	AVERAGE																																			





Mode	10																																									
	Band Edge - L																																									
	2400-2483.5_802.11n HT40_CH03_2422MHz																																									
ANT	SISO																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2024-05-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2388.62</td><td>64.83</td><td>74.00</td><td>-9.17</td><td>56.90</td><td>32.25</td><td>7.76</td><td>32.08</td><td>151</td><td>294 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2388.62	64.83	74.00	-9.17	56.90	32.25	7.76	32.08	151	294 PEAK	Level (dBuV/m) Date: 2024-05-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2422.00</td><td>100.97</td><td>-----</td><td>-----</td><td>92.91</td><td>32.32</td><td>7.82</td><td>32.08</td><td>151</td><td>294 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2422.00	100.97	-----	-----	92.91	32.32	7.82	32.08	151	294 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																
1 2388.62	64.83	74.00	-9.17	56.90	32.25	7.76	32.08	151	294 PEAK																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2422.00	100.97	-----	-----	92.91	32.32	7.82	32.08	151	294 PEAK																																	
Avg	Level (dBuV/m) Date: 2024-05-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2389.97</td><td>53.12</td><td>54.00</td><td>-0.88</td><td>45.18</td><td>32.26</td><td>7.76</td><td>32.08</td><td>151</td><td>294 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2389.97	53.12	54.00	-0.88	45.18	32.26	7.76	32.08	151	294 AVERAGE	Level (dBuV/m) Date: 2024-05-21 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 2422.00</td><td>93.84</td><td>-----</td><td>-----</td><td>85.78</td><td>32.32</td><td>7.82</td><td>32.08</td><td>151</td><td>294 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1 2422.00	93.84	-----	-----	85.78	32.32	7.82	32.08	151	294 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2389.97	53.12	54.00	-0.88	45.18	32.26	7.76	32.08	151	294 AVERAGE																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																	
1 2422.00	93.84	-----	-----	85.78	32.32	7.82	32.08	151	294 AVERAGE																																	







Mode	10																																										
	Band Edge - R																																										
	2400-2483.5_802.11n HT40_CH03_2422MHz																																										
ANT	SISO																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2024-05-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.87</td><td>54.05</td><td>74.00</td><td>-19.95</td><td>45.80</td><td>32.47</td><td>7.88</td><td>32.10</td><td>151</td><td>294 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.87	54.05	74.00	-19.95	45.80	32.47	7.88	32.10	151	294 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																		
1	2484.87	54.05	74.00	-19.95	45.80	32.47	7.88	32.10	151	294 PEAK																																	
Avg	Date: 2024-05-21 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2484.56</td><td>44.64</td><td>54.00</td><td>-9.36</td><td>36.39</td><td>32.47</td><td>7.88</td><td>32.10</td><td>151</td><td>294 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2484.56	44.64	54.00	-9.36	36.39	32.47	7.88	32.10	151	294 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																		
1	2484.56	44.64	54.00	-9.36	36.39	32.47	7.88	32.10	151	294 AVERAGE																																	

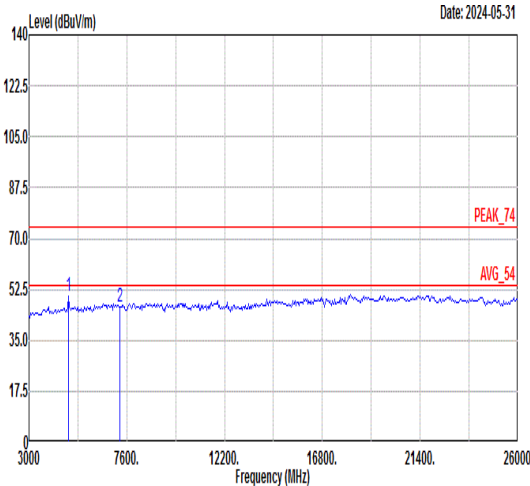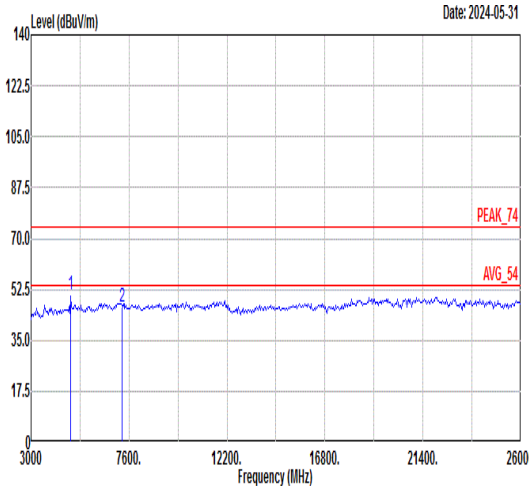

Mode	10																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_802.11n HT40_CH03_2422MHz (only the worst mode shows above 18GHz)																																																																																																																	
ANT	SISO																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4844.00</td><td>50.30</td><td>74.00</td><td>-23.70</td><td>55.95</td><td>34.84</td><td>11.09</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7266.00</td><td>46.27</td><td>74.00</td><td>-27.73</td><td>48.09</td><td>36.28</td><td>13.05</td><td>51.15</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4844.00	50.30	74.00	-23.70	55.95	34.84	11.09	51.58	---	---	Peak	2	7266.00	46.27	74.00	-27.73	48.09	36.28	13.05	51.15	---	---	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4844.00</td><td>50.64</td><td>74.00</td><td>-23.36</td><td>56.29</td><td>34.84</td><td>11.09</td><td>51.58</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>7266.00</td><td>46.56</td><td>74.00</td><td>-27.44</td><td>48.38</td><td>36.28</td><td>13.05</td><td>51.15</td><td>---</td><td>---</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4844.00	50.64	74.00	-23.36	56.29	34.84	11.09	51.58	---	---	Peak	2	7266.00	46.56	74.00	-27.44	48.38	36.28	13.05	51.15	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	4844.00	50.30	74.00	-23.70	55.95	34.84	11.09	51.58	---	---	Peak																																																																																																							
2	7266.00	46.27	74.00	-27.73	48.09	36.28	13.05	51.15	---	---	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																											
1	4844.00	50.64	74.00	-23.36	56.29	34.84	11.09	51.58	---	---	Peak																																																																																																							
2	7266.00	46.56	74.00	-27.44	48.38	36.28	13.05	51.15	---	---	Peak																																																																																																							

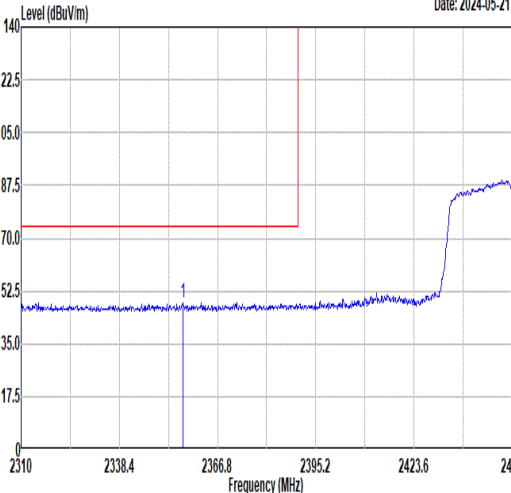
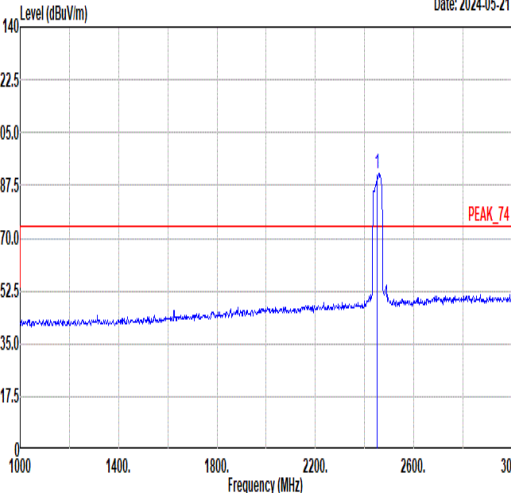
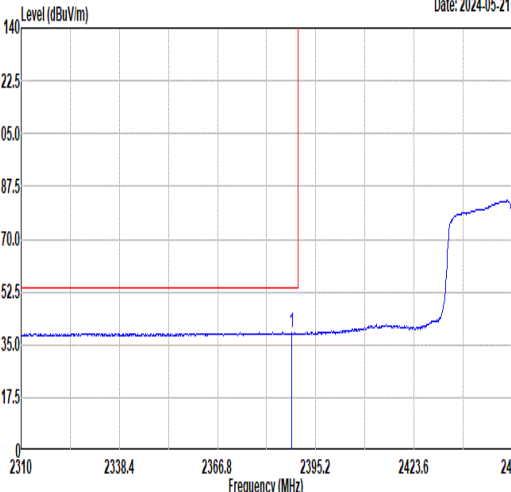
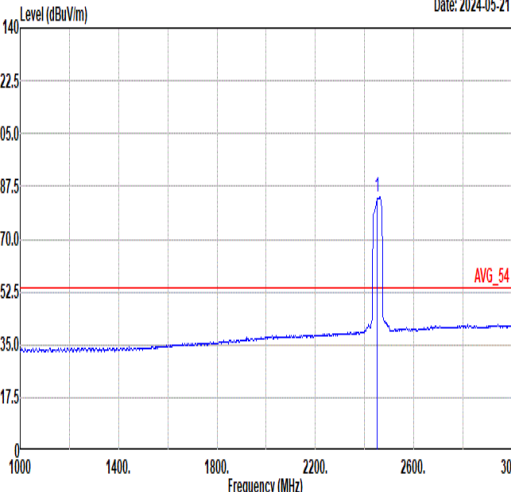


		11																																																																																							
Mode		Band Edge - L																																																																																							
		2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak	 Level (dBuV/m) Date: 2024-05-21 Frequency (MHz)					 Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) PEAK_74																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2356.72</td><td>48.54</td><td>74.00 -25.46</td><td>40.76</td><td>32.18</td><td>7.67</td><td>32.07</td><td>341</td><td>229 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2356.72	48.54	74.00 -25.46	40.76	32.18	7.67	32.07	341	229 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>91.42</td><td>-----</td><td>83.23</td><td>32.42</td><td>7.86</td><td>32.09</td><td>341</td><td>229 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2452.00	91.42	-----	83.23	32.42	7.86	32.09	341
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2356.72	48.54	74.00 -25.46	40.76	32.18	7.67	32.07	341	229 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	91.42	-----	83.23	32.42	7.86	32.09	341	229 PEAK																																																																																
Avg	 Level (dBuV/m) Date: 2024-05-21 Frequency (MHz)					 Level (dBuV/m) Date: 2024-05-21 Frequency (MHz) AVG_54																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.24</td><td>39.17</td><td>54.00 -14.83</td><td>31.24</td><td>32.25</td><td>7.76</td><td>32.08</td><td>341</td><td>229 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2388.24	39.17	54.00 -14.83	31.24	32.25	7.76	32.08	341	229 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>84.00</td><td>-----</td><td>75.81</td><td>32.42</td><td>7.86</td><td>32.09</td><td>341</td><td>229 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	2452.00	84.00	-----	75.81	32.42	7.86	32.09	341
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2388.24	39.17	54.00 -14.83	31.24	32.25	7.76	32.08	341	229 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2452.00	84.00	-----	75.81	32.42	7.86	32.09	341	229 AVERAGE																																																																																



Mode	11																																		
	Band Edge - R																																		
	2400-2483.5_802.11n HT40_CH09_2452MHz																																		
ANT	SISO																																		
Pol.	Horizontal	Fundamental																																	
Peak	Date: 2024-05-21 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2486.80</td><td>54.53</td><td>74.00</td><td>-19.47</td><td>46.28</td><td>32.47</td><td>7.88</td><td>32.10</td><td>341</td><td>229</td><td>PEAK</td></tr></table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2486.80	54.53	74.00	-19.47	46.28	32.47	7.88	32.10	341	229	PEAK	Blank
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																									
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																										
1 2486.80	54.53	74.00	-19.47	46.28	32.47	7.88	32.10	341	229	PEAK																									
Avg	Date: 2024-05-21 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2488.38</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>34.41</td><td>32.47</td><td>7.88</td><td>32.10</td><td>341</td><td>229</td><td>AVERAGE</td></tr></table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 2488.38	42.66	54.00	-11.34	34.41	32.47	7.88	32.10	341	229	AVERAGE	Blank
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																									
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																										
1 2488.38	42.66	54.00	-11.34	34.41	32.47	7.88	32.10	341	229	AVERAGE																									

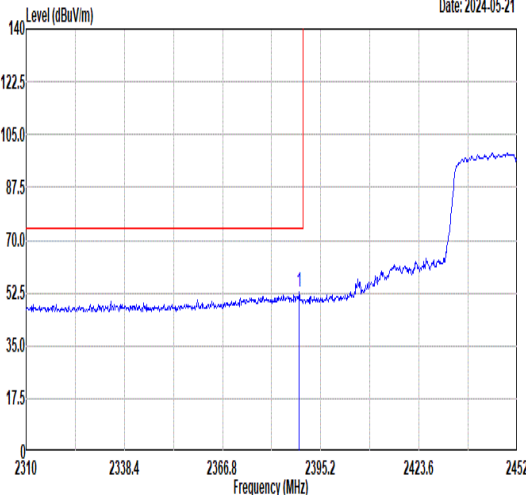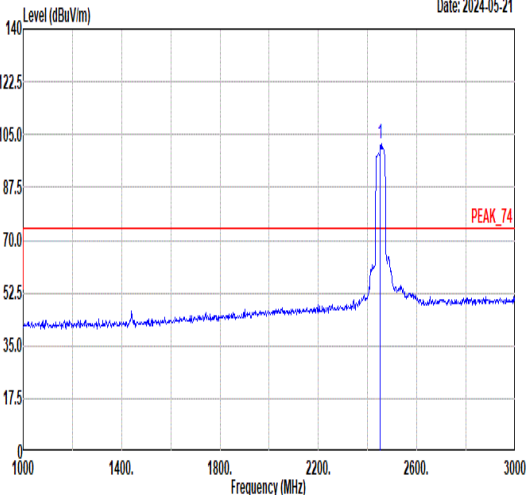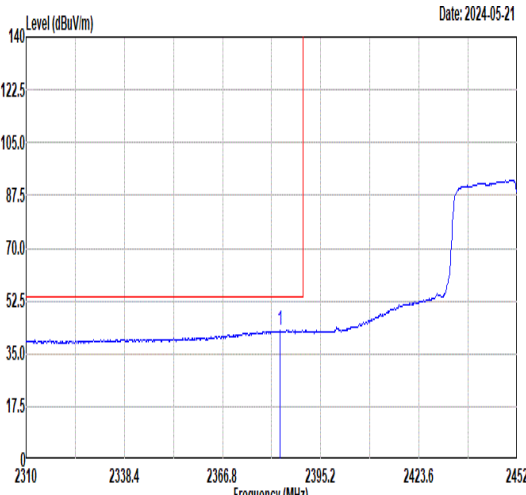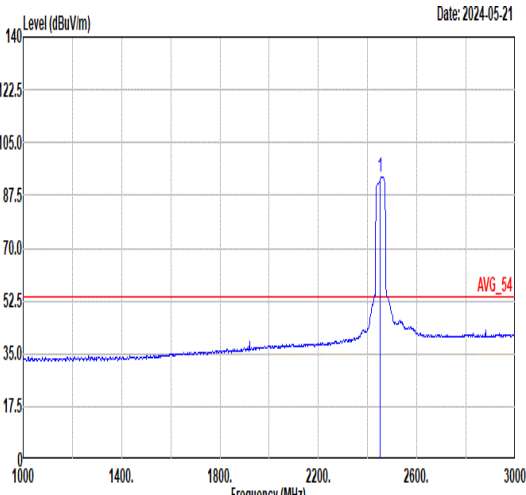

		11																																																																																							
Mode		Band Edge - L																																																																																							
		2400-2483.5_802.11n HT40_CH09_2452MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Vertical					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-05-21 					Level (dBuV/m) Date: 2024-05-21 																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.95</td><td>52.60</td><td>74.00</td><td>-21.40</td><td>44.66</td><td>32.26</td><td>7.76</td><td>32.08</td><td>175</td><td>295</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2388.95	52.60	74.00	-21.40	44.66	32.26	7.76	32.08	175	295	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>101.82</td><td>-----</td><td>-----</td><td>93.65</td><td>32.41</td><td>7.85</td><td>32.09</td><td>175</td><td>295</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	101.82	-----	-----	93.65	32.41	7.85	32.09	175	295
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2388.95	52.60	74.00	-21.40	44.66	32.26	7.76	32.08	175	295	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2452.00	101.82	-----	-----	93.65	32.41	7.85	32.09	175	295	PEAK																																																																														
Avg	Level (dBuV/m) Date: 2024-05-21 					Level (dBuV/m) Date: 2024-05-21 																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2383.41</td><td>42.70</td><td>54.00</td><td>-11.30</td><td>34.80</td><td>32.24</td><td>7.74</td><td>32.08</td><td>175</td><td>295</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2383.41	42.70	54.00	-11.30	34.80	32.24	7.74	32.08	175	295	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2452.00</td><td>93.68</td><td>-----</td><td>-----</td><td>85.52</td><td>32.40</td><td>7.85</td><td>32.09</td><td>175</td><td>295</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor				Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2452.00	93.68	-----	-----	85.52	32.40	7.85	32.09	175	295
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2383.41	42.70	54.00	-11.30	34.80	32.24	7.74	32.08	175	295	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor				Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2452.00	93.68	-----	-----	85.52	32.40	7.85	32.09	175	295	AVERAGE																																																																														







Mode	11																															
	Band Edge - R																															
	2400-2483.5_802.11n HT40_CH09_2452MHz																															
ANT	SISO																															
Pol.	Vertical	Fundamental																														
Peak	Date: 2024-05-21 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2486.90</td><td>66.68</td><td>74.00</td><td>-7.32</td><td>58.43</td><td>32.47</td><td>7.88</td><td>32.10</td><td>175</td><td>295 PEAK</td></tr></tbody></table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2486.90	66.68	74.00	-7.32	58.43	32.47	7.88	32.10	175	295 PEAK	Blank
Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 2486.90	66.68	74.00	-7.32	58.43	32.47	7.88	32.10	175	295 PEAK																							
Avg	Date: 2024-05-21 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 2486.56</td><td>53.02</td><td>54.00</td><td>-0.98</td><td>44.77</td><td>32.47</td><td>7.88</td><td>32.10</td><td>175</td><td>295 AVERAGE</td></tr></tbody></table>	Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2486.56	53.02	54.00	-0.98	44.77	32.47	7.88	32.10	175	295 AVERAGE	Blank
Freq	Level	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 2486.56	53.02	54.00	-0.98	44.77	32.47	7.88	32.10	175	295 AVERAGE																							



Mode	12																																																																																																																																																																																																																			
	LF																																																																																																																																																																																																																			
	2400-2483.5_802.11b LF_CH11_2462MHz																																																																																																																																																																																																																			
ANT	SISO																																																																																																																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																																																																																																																													
QPI/ Peak	Level (dBuV/m) Date: 2024-03-31 FCC CLASS-B -6dB Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>210.42</td><td>22.69</td><td>43.50</td><td>-20.81</td><td>35.77</td><td>15.50</td><td>2.32</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>269.59</td><td>26.67</td><td>46.00</td><td>-19.33</td><td>35.58</td><td>19.40</td><td>2.59</td><td>30.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>389.87</td><td>30.69</td><td>46.00</td><td>-15.31</td><td>36.73</td><td>21.63</td><td>3.05</td><td>30.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>419.94</td><td>31.57</td><td>46.00</td><td>-14.43</td><td>36.75</td><td>22.34</td><td>3.18</td><td>30.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>480.08</td><td>29.56</td><td>46.00</td><td>-16.44</td><td>33.43</td><td>23.42</td><td>3.41</td><td>30.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>702.21</td><td>26.73</td><td>46.00</td><td>-19.27</td><td>28.29</td><td>25.23</td><td>4.02</td><td>30.81</td><td>--</td><td>--</td><td>Peak</td></tr></table> Level (dBuV/m) Date: 2024-03-31 FCC CLASS-B -6dB Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>42.61</td><td>17.83</td><td>40.00</td><td>-22.17</td><td>30.09</td><td>17.58</td><td>1.36</td><td>31.20</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>150.28</td><td>18.62</td><td>43.50</td><td>-24.88</td><td>31.02</td><td>16.50</td><td>2.20</td><td>31.10</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>359.80</td><td>29.11</td><td>46.00</td><td>-16.89</td><td>36.18</td><td>20.77</td><td>2.94</td><td>30.78</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>480.08</td><td>30.75</td><td>46.00</td><td>-15.25</td><td>34.62</td><td>23.42</td><td>3.41</td><td>30.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>510.15</td><td>27.02</td><td>46.00</td><td>-18.98</td><td>30.32</td><td>23.95</td><td>3.51</td><td>30.76</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>838.98</td><td>29.37</td><td>46.00</td><td>-16.63</td><td>29.66</td><td>26.41</td><td>4.36</td><td>31.06</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	210.42	22.69	43.50	-20.81	35.77	15.50	2.32	30.90	--	--	Peak	2	269.59	26.67	46.00	-19.33	35.58	19.40	2.59	30.90	--	--	Peak	3	389.87	30.69	46.00	-15.31	36.73	21.63	3.05	30.72	--	--	Peak	4	419.94	31.57	46.00	-14.43	36.75	22.34	3.18	30.70	--	--	Peak	5	480.08	29.56	46.00	-16.44	33.43	23.42	3.41	30.70	--	--	Peak	6	702.21	26.73	46.00	-19.27	28.29	25.23	4.02	30.81	--	--	Peak		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	42.61	17.83	40.00	-22.17	30.09	17.58	1.36	31.20	--	--	Peak	2	150.28	18.62	43.50	-24.88	31.02	16.50	2.20	31.10	--	--	Peak	3	359.80	29.11	46.00	-16.89	36.18	20.77	2.94	30.78	--	--	Peak	4	480.08	30.75	46.00	-15.25	34.62	23.42	3.41	30.70	--	--	Peak	5	510.15	27.02	46.00	-18.98	30.32	23.95	3.51	30.76	--	--	Peak	6	838.98	29.37	46.00	-16.63	29.66	26.41	4.36	31.06	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																											
1	210.42	22.69	43.50	-20.81	35.77	15.50	2.32	30.90	--	--	Peak																																																																																																																																																																																																									
2	269.59	26.67	46.00	-19.33	35.58	19.40	2.59	30.90	--	--	Peak																																																																																																																																																																																																									
3	389.87	30.69	46.00	-15.31	36.73	21.63	3.05	30.72	--	--	Peak																																																																																																																																																																																																									
4	419.94	31.57	46.00	-14.43	36.75	22.34	3.18	30.70	--	--	Peak																																																																																																																																																																																																									
5	480.08	29.56	46.00	-16.44	33.43	23.42	3.41	30.70	--	--	Peak																																																																																																																																																																																																									
6	702.21	26.73	46.00	-19.27	28.29	25.23	4.02	30.81	--	--	Peak																																																																																																																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																																																																											
1	42.61	17.83	40.00	-22.17	30.09	17.58	1.36	31.20	--	--	Peak																																																																																																																																																																																																									
2	150.28	18.62	43.50	-24.88	31.02	16.50	2.20	31.10	--	--	Peak																																																																																																																																																																																																									
3	359.80	29.11	46.00	-16.89	36.18	20.77	2.94	30.78	--	--	Peak																																																																																																																																																																																																									
4	480.08	30.75	46.00	-15.25	34.62	23.42	3.41	30.70	--	--	Peak																																																																																																																																																																																																									
5	510.15	27.02	46.00	-18.98	30.32	23.95	3.51	30.76	--	--	Peak																																																																																																																																																																																																									
6	838.98	29.37	46.00	-16.63	29.66	26.41	4.36	31.06	--	--	Peak																																																																																																																																																																																																									

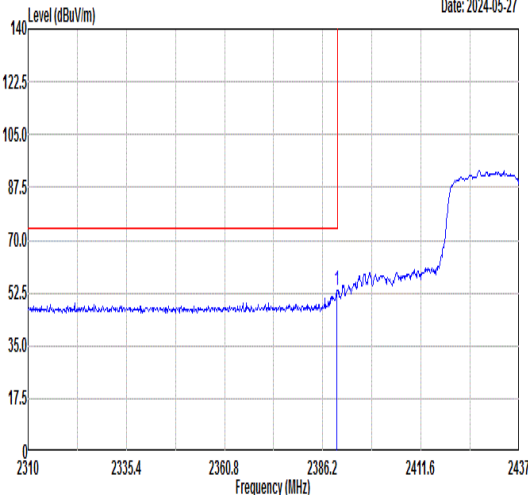
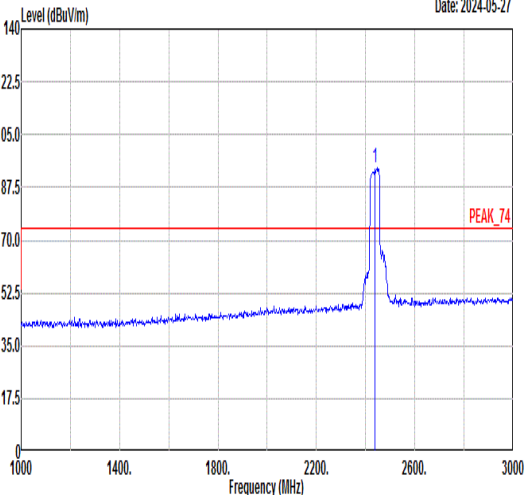
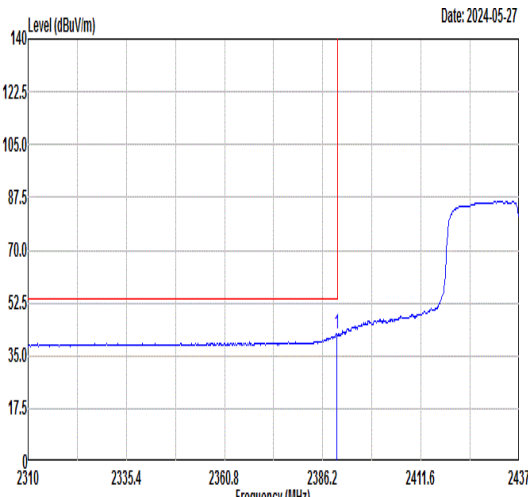
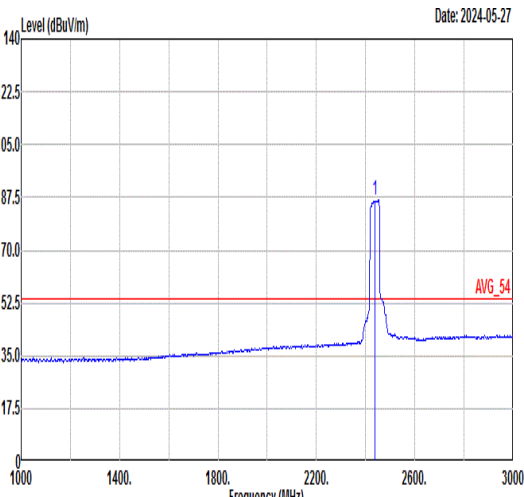


Mode	13																																																																																										
	Band Edge - L																																																																																										
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																																																										
ANT	SISO																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.76</td><td>53.11</td><td>74.00</td><td>-20.89</td><td>45.17</td><td>32.26</td><td>7.76</td><td>32.08</td><td>200</td><td>338</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.76	53.11	74.00	-20.89	45.17	32.26	7.76	32.08	200	338	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>93.92</td><td>-----</td><td>-----</td><td>85.78</td><td>32.39</td><td>7.84</td><td>32.09</td><td>200</td><td>338</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	93.92	-----	-----	85.78	32.39	7.84	32.09	200	338
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.76	53.11	74.00	-20.89	45.17	32.26	7.76	32.08	200	338	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2437.00	93.92	-----	-----	85.78	32.39	7.84	32.09	200	338	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.88</td><td>42.17</td><td>54.00</td><td>-11.83</td><td>34.23</td><td>32.26</td><td>7.76</td><td>32.08</td><td>200</td><td>338</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.88	42.17	54.00	-11.83	34.23	32.26	7.76	32.08	200	338	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2437.00</td><td>86.66</td><td>-----</td><td>-----</td><td>78.51</td><td>32.39</td><td>7.85</td><td>32.09</td><td>200</td><td>338</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2437.00	86.66	-----	-----	78.51	32.39	7.85	32.09	200	338
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2389.88	42.17	54.00	-11.83	34.23	32.26	7.76	32.08	200	338	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2437.00	86.66	-----	-----	78.51	32.39	7.85	32.09	200	338	AVERAGE																																																																																



Mode	13																																																		
	Band Edge - R																																																		
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																		
ANT	SISO																																																		
Pol.	Horizontal						Fundamental																																												
Peak	Date: 2024-05-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.87</td><td>60.35</td><td>74.00</td><td>-13.65</td><td>52.11</td><td>32.46</td><td>7.88</td><td>32.10</td><td>200</td><td>338</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.87	60.35	74.00	-13.65	52.11	32.46	7.88	32.10	200	338	PEAK	Blank				
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2483.87	60.35	74.00	-13.65	52.11	32.46	7.88	32.10	200	338	PEAK																																								
Avg	Date: 2024-05-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.56</td><td>47.20</td><td>54.00</td><td>-6.80</td><td>38.96</td><td>32.46</td><td>7.88</td><td>32.10</td><td>200</td><td>338</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.56	47.20	54.00	-6.80	38.96	32.46	7.88	32.10	200	338	AVERAGE	Blank				
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	2483.56	47.20	54.00	-6.80	38.96	32.46	7.88	32.10	200	338	AVERAGE																																								

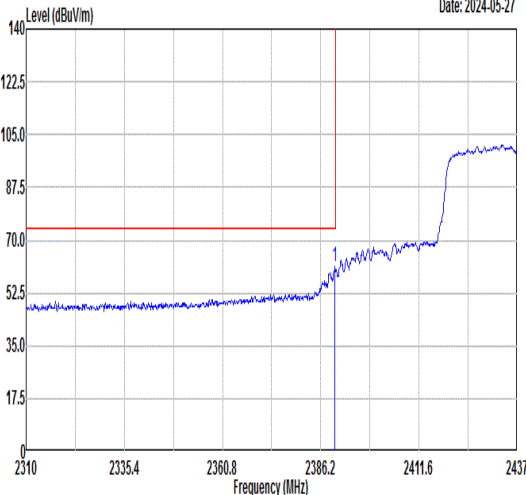
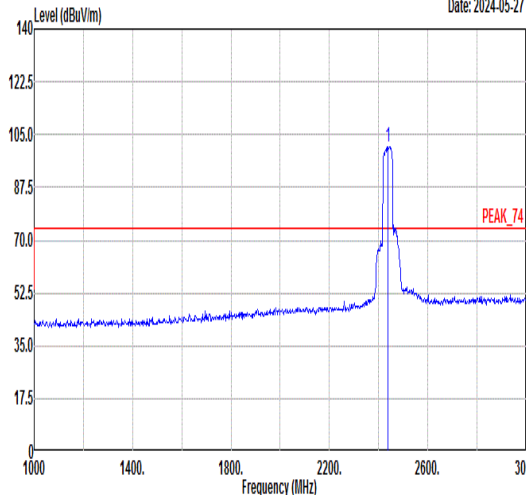
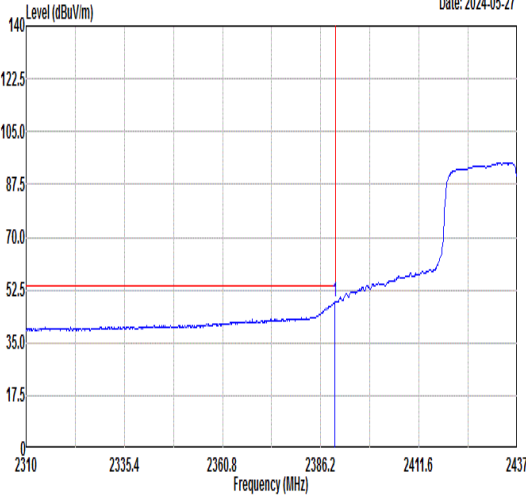
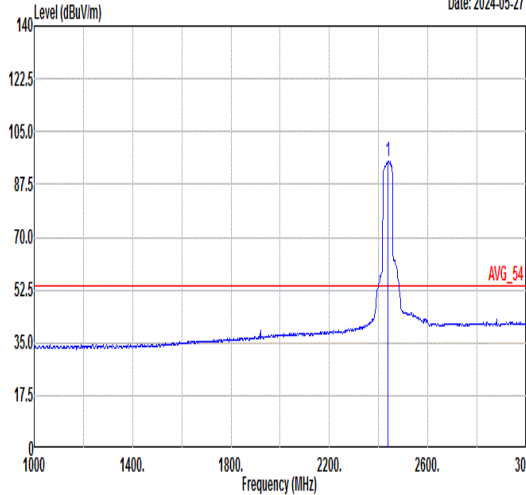


Mode	13																																																																																																										
	Band Edge - L																																																																																																										
	2400-2483.5_802.11n_HT40_CH06_2437MHz																																																																																																										
ANT	SISO																																																																																																										
Pol.	Vertical						Fundamental																																																																																																				
Peak																																																																																																											
	<table><tr><td colspan="2"></td><td colspan="2">Limit</td><td>Read</td><td>Ant</td><td>Cable</td><td>Preamp</td><td>APos</td><td>TPos</td><td colspan="2"></td></tr><tr><td>Freq</td><td>Level</td><td>Line</td><td>Margin</td><td>Level</td><td>Factor</td><td>Loss</td><td>Factor</td><td></td><td></td><td colspan="2">Remark</td></tr><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td colspan="2"></td></tr><tr><td>1</td><td>2389.88</td><td>61.22</td><td>74.00</td><td>-12.78</td><td>53.28</td><td>32.26</td><td>7.76</td><td>32.08</td><td>103</td><td>280</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2389.88	61.22	74.00	-12.78	53.28	32.26	7.76	32.08	103	280	PEAK	<table><tr><td colspan="2"></td><td colspan="2">Limit</td><td>Read</td><td>Ant</td><td>Cable</td><td>Preamp</td><td>APos</td><td>TPos</td><td colspan="2"></td></tr><tr><td>Freq</td><td>Level</td><td>Line</td><td>Margin</td><td>Level</td><td>Factor</td><td>Loss</td><td>Factor</td><td></td><td></td><td colspan="2">Remark</td></tr><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td colspan="2"></td></tr><tr><td>1</td><td>2437.00</td><td>101.10</td><td>-----</td><td>-----</td><td>92.97</td><td>32.38</td><td>7.84</td><td>32.09</td><td>103</td><td>280</td><td>PEAK</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2437.00	101.10	-----	-----	92.97	32.38	7.84	32.09	103	280
		Limit		Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2389.88	61.22	74.00	-12.78	53.28	32.26	7.76	32.08	103	280	PEAK																																																																																																
		Limit		Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2437.00	101.10	-----	-----	92.97	32.38	7.84	32.09	103	280	PEAK																																																																																																
Avg																																																																																																											
	<table><tr><td colspan="2"></td><td colspan="2">Limit</td><td>Read</td><td>Ant</td><td>Cable</td><td>Preamp</td><td>APos</td><td>TPos</td><td colspan="2"></td></tr><tr><td>Freq</td><td>Level</td><td>Line</td><td>Margin</td><td>Level</td><td>Factor</td><td>Loss</td><td>Factor</td><td></td><td></td><td colspan="2">Remark</td></tr><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td colspan="2"></td></tr><tr><td>1</td><td>2389.88</td><td>48.70</td><td>54.00</td><td>-5.30</td><td>40.76</td><td>32.26</td><td>7.76</td><td>32.08</td><td>103</td><td>280</td><td>AVERAGE</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2389.88	48.70	54.00	-5.30	40.76	32.26	7.76	32.08	103	280	AVERAGE	<table><tr><td colspan="2"></td><td colspan="2">Limit</td><td>Read</td><td>Ant</td><td>Cable</td><td>Preamp</td><td>APos</td><td>TPos</td><td colspan="2"></td></tr><tr><td>Freq</td><td>Level</td><td>Line</td><td>Margin</td><td>Level</td><td>Factor</td><td>Loss</td><td>Factor</td><td></td><td></td><td colspan="2">Remark</td></tr><tr><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>dB</td><td>cm</td><td>deg</td><td colspan="2"></td></tr><tr><td>1</td><td>2437.00</td><td>95.05</td><td>-----</td><td>-----</td><td>86.93</td><td>32.37</td><td>7.84</td><td>32.09</td><td>103</td><td>280</td><td>AVERAGE</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	2437.00	95.05	-----	-----	86.93	32.37	7.84	32.09	103	280
		Limit		Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2389.88	48.70	54.00	-5.30	40.76	32.26	7.76	32.08	103	280	AVERAGE																																																																																																
		Limit		Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor			Remark																																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	2437.00	95.05	-----	-----	86.93	32.37	7.84	32.09	103	280	AVERAGE																																																																																																



Mode	13																																																
	Band Edge - R																																																
	2400-2483.5_802.11n HT40_CH06_2437MHz																																																
ANT	SISO																																																
Pol.	Vertical										Fundamental																																						
Peak	Date: 2024-05-27 PEAK_BE_74										Blank																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.87</td><td>66.22</td><td>74.00</td><td>-7.78</td><td>57.98</td><td>32.46</td><td>7.88</td><td>32.10</td><td>103</td><td>280</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.87	66.22	74.00	-7.78	57.98	32.46	7.88	32.10	103
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																								
1	2483.87	66.22	74.00	-7.78	57.98	32.46	7.88	32.10	103	280	PEAK																																						
Avg	Date: 2024-05-27 AVG_BE_54										Blank																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.75</td><td>53.10</td><td>54.00</td><td>-0.90</td><td>44.86</td><td>32.46</td><td>7.88</td><td>32.10</td><td>103</td><td>280</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.75	53.10	54.00	-0.90	44.86	32.46	7.88	32.10	103
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																								
1	2483.75	53.10	54.00	-0.90	44.86	32.46	7.88	32.10	103	280	AVERAGE																																						

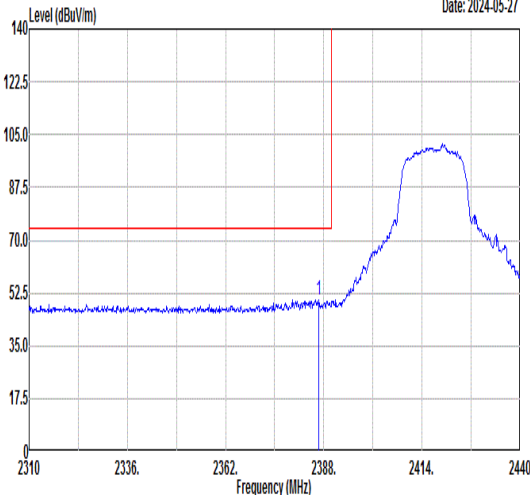
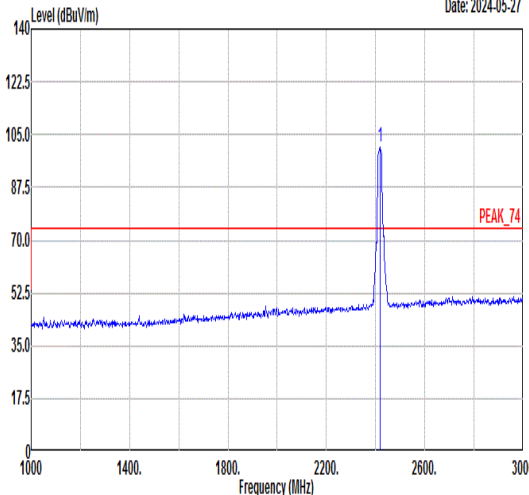
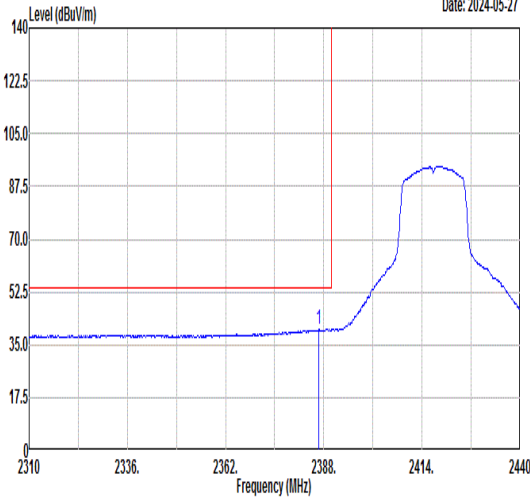
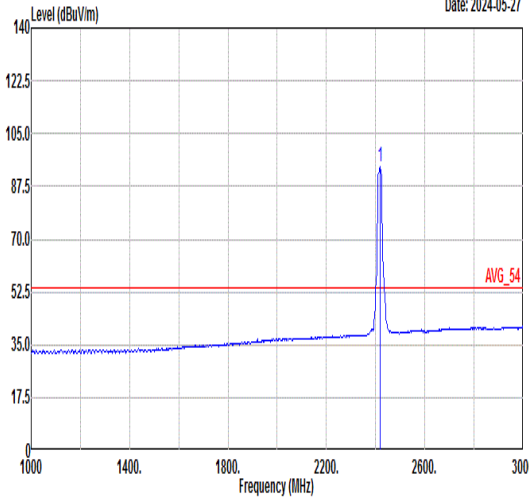


		14																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_802.11g_CH02_2417MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-05-27  Frequency (MHz)					Level (dBuV/m) Date: 2024-05-27  Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.70</td><td>50.25</td><td>74.00</td><td>-23.75</td><td>42.33</td><td>32.25</td><td>7.75</td><td>32.08</td><td>342</td><td>160</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.70	50.25	74.00	-23.75	42.33	32.25	7.75	32.08	342	160	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>100.70</td><td>-----</td><td>-----</td><td>92.64</td><td>32.32</td><td>7.82</td><td>32.08</td><td>342</td><td>160</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	100.70	-----	-----	92.64	32.32	7.82	32.08	342	160
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2386.70	50.25	74.00	-23.75	42.33	32.25	7.75	32.08	342	160	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2417.00	100.70	-----	-----	92.64	32.32	7.82	32.08	342	160	PEAK																																																																														
Avg	Level (dBuV/m) Date: 2024-05-27  Frequency (MHz)					Level (dBuV/m) Date: 2024-05-27  Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.57</td><td>40.06</td><td>54.00</td><td>-13.94</td><td>32.14</td><td>32.25</td><td>7.75</td><td>32.08</td><td>342</td><td>160</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.57	40.06	54.00	-13.94	32.14	32.25	7.75	32.08	342	160	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>93.91</td><td>-----</td><td>-----</td><td>85.86</td><td>32.32</td><td>7.81</td><td>32.08</td><td>342</td><td>160</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2417.00	93.91	-----	-----	85.86	32.32	7.81	32.08	342	160
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2386.57	40.06	54.00	-13.94	32.14	32.25	7.75	32.08	342	160	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	2417.00	93.91	-----	-----	85.86	32.32	7.81	32.08	342	160	AVERAGE																																																																														







Mode	14																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH02_2417MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-05-27 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2310 2336 2362 2388 2414 2440 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.96</td><td>63.21</td><td>74.00</td><td>-10.79</td><td>55.29</td><td>32.25</td><td>7.75</td><td>32.08</td><td>189</td><td>140</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2386.96	63.21	74.00	-10.79	55.29	32.25	7.75	32.08	189	140	PEAK	Level (dBuV/m) Date: 2024-05-27 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>110.79</td><td>-----</td><td>-----</td><td>102.73</td><td>32.32</td><td>7.82</td><td>32.08</td><td>189</td><td>140</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2417.00	110.79	-----	-----	102.73	32.32	7.82	32.08	189	140	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2386.96	63.21	74.00	-10.79	55.29	32.25	7.75	32.08	189	140	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2417.00	110.79	-----	-----	102.73	32.32	7.82	32.08	189	140	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-05-27 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 2310 2336 2362 2388 2414 2440 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.82</td><td>51.81</td><td>54.00</td><td>-2.19</td><td>43.87</td><td>32.26</td><td>7.76</td><td>32.08</td><td>189</td><td>140</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.82	51.81	54.00	-2.19	43.87	32.26	7.76	32.08	189	140	AVERAGE	Level (dBuV/m) Date: 2024-05-27 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 1400 1800 2200 2600 3000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2417.00</td><td>104.19</td><td>-----</td><td>-----</td><td>96.13</td><td>32.32</td><td>7.82</td><td>32.08</td><td>189</td><td>140</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2417.00	104.19	-----	-----	96.13	32.32	7.82	32.08	189	140	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2389.82	51.81	54.00	-2.19	43.87	32.26	7.76	32.08	189	140	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2417.00	104.19	-----	-----	96.13	32.32	7.82	32.08	189	140	AVERAGE																																																																																	

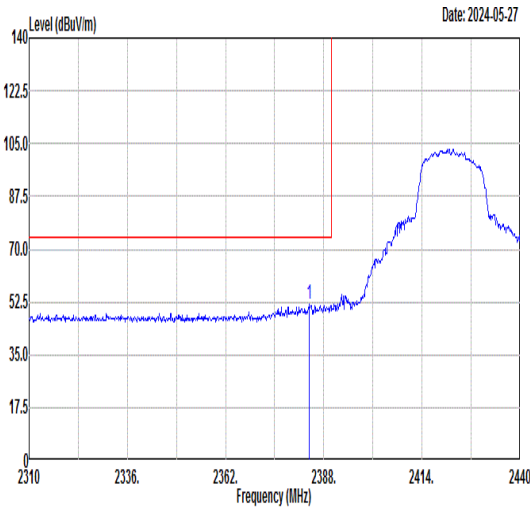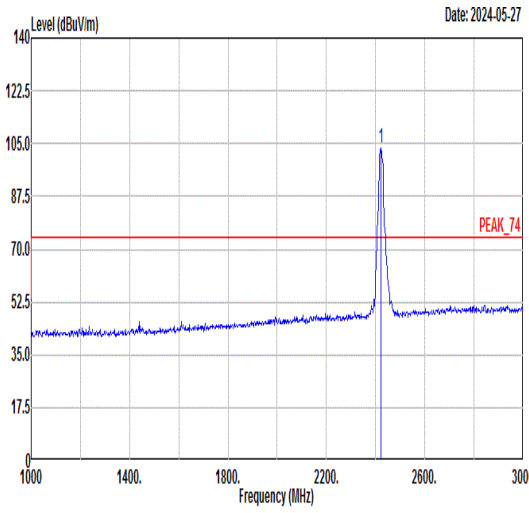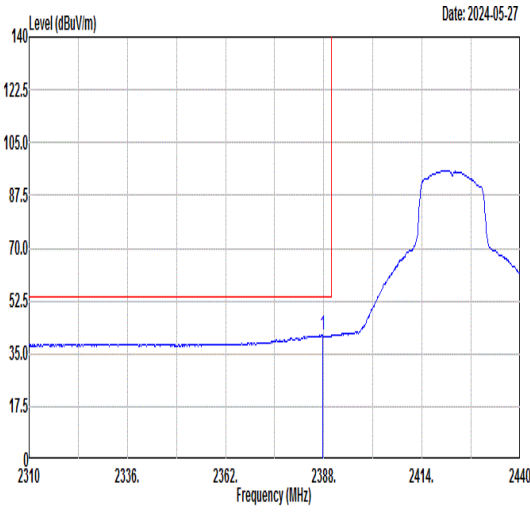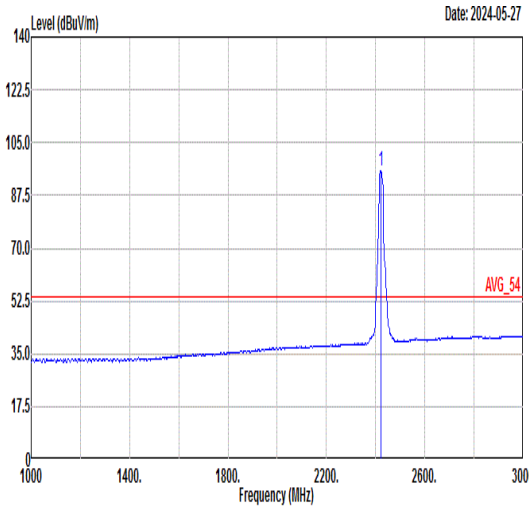

		15																																																																																							
Mode		Band Edge																																																																																							
		2400-2483.5_802.11g_CH03_2422MHz																																																																																							
ANT		SISO																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-05-27. Peak at 2384.10 MHz.					 Level (dBuV/m) vs Frequency (MHz). Date: 2024-05-27. Peak at 2422.00 MHz.																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2384.10</td><td>51.89</td><td>74.00</td><td>-22.11</td><td>43.98</td><td>32.25</td><td>7.74</td><td>32.08</td><td>342</td><td>160</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2384.10	51.89	74.00	-22.11	43.98	32.25	7.74	32.08	342	160	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>103.37</td><td>-----</td><td>-----</td><td>95.30</td><td>32.33</td><td>7.82</td><td>32.08</td><td>342</td><td>160</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2422.00	103.37	-----	-----	95.30	32.33	7.82	32.08	342	160
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2384.10	51.89	74.00	-22.11	43.98	32.25	7.74	32.08	342	160	PEAK																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2422.00	103.37	-----	-----	95.30	32.33	7.82	32.08	342	160	PEAK																																																																														
Avg	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-05-27. Peak at 2387.61 MHz.					 Level (dBuV/m) vs Frequency (MHz). Date: 2024-05-27. Peak at 2422.00 MHz.																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2387.61</td><td>41.11</td><td>54.00</td><td>-12.89</td><td>33.19</td><td>32.25</td><td>7.75</td><td>32.08</td><td>342</td><td>160</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2387.61	41.11	54.00	-12.89	33.19	32.25	7.75	32.08	342	160	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>95.67</td><td>-----</td><td>-----</td><td>87.61</td><td>32.32</td><td>7.82</td><td>32.08</td><td>342</td><td>160</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2422.00	95.67	-----	-----	87.61	32.32	7.82	32.08	342	160
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2387.61	41.11	54.00	-12.89	33.19	32.25	7.75	32.08	342	160	AVERAGE																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	2422.00	95.67	-----	-----	87.61	32.32	7.82	32.08	342	160	AVERAGE																																																																														

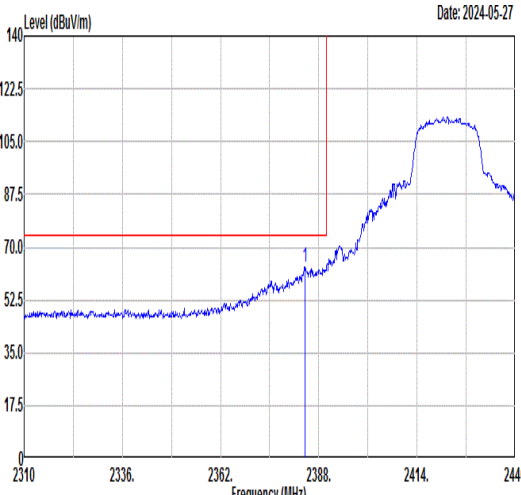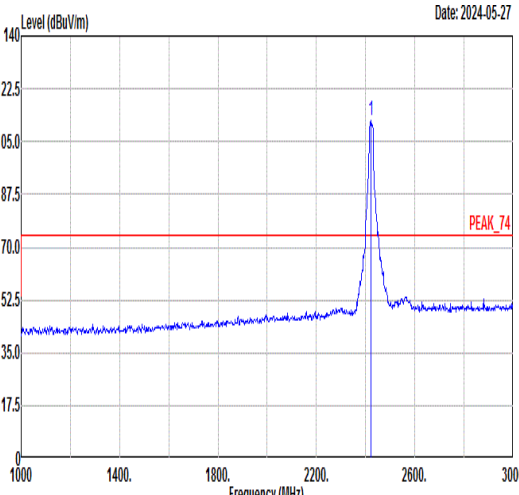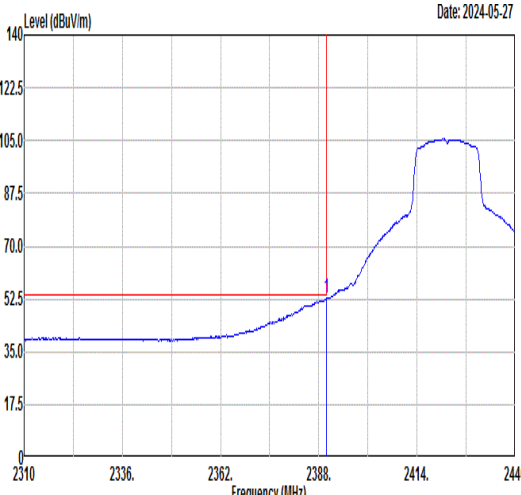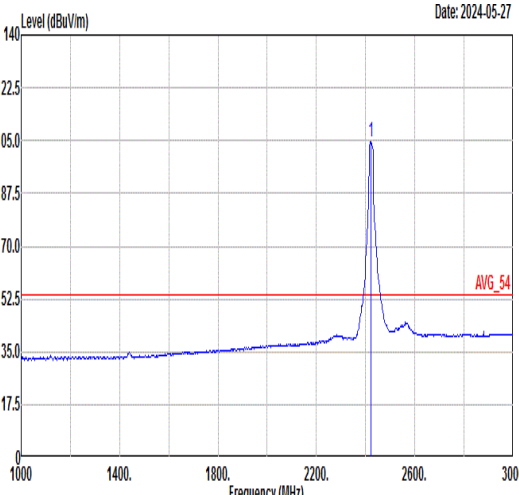

Mode	15																																																																																											
	Band Edge																																																																																											
	2400-2483.5_802.11g_CH03_2422MHz																																																																																											
ANT	SISO																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	 Date: 2024-05-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2384.36</td><td>63.35</td><td>74.00</td><td>-10.65</td><td>55.44</td><td>32.25</td><td>7.74</td><td>32.08</td><td>185</td><td>139</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2384.36	63.35	74.00	-10.65	55.44	32.25	7.74	32.08	185	139	PEAK	 Date: 2024-05-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>112.00</td><td>-----</td><td>-----</td><td>103.93</td><td>32.33</td><td>7.82</td><td>32.08</td><td>185</td><td>139</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2422.00	112.00	-----	-----	103.93	32.33	7.82	32.08	185	139	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2384.36	63.35	74.00	-10.65	55.44	32.25	7.74	32.08	185	139	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2422.00	112.00	-----	-----	103.93	32.33	7.82	32.08	185	139	PEAK																																																																																	
Avg	 Date: 2024-05-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>52.81</td><td>54.00</td><td>-1.19</td><td>44.87</td><td>32.26</td><td>7.76</td><td>32.08</td><td>185</td><td>139</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2389.95	52.81	54.00	-1.19	44.87	32.26	7.76	32.08	185	139	AVERAGE	 Date: 2024-05-27 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2422.00</td><td>104.47</td><td>-----</td><td>-----</td><td>96.41</td><td>32.32</td><td>7.82</td><td>32.08</td><td>185</td><td>139</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2422.00	104.47	-----	-----	96.41	32.32	7.82	32.08	185	139	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2389.95	52.81	54.00	-1.19	44.87	32.26	7.76	32.08	185	139	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	2422.00	104.47	-----	-----	96.41	32.32	7.82	32.08	185	139	AVERAGE																																																																																	