

FCC Part 15.407

TEST REPORT

For

Cisco Systems, Inc.

125 West Tasman Drive, San Jose, CA 95134, USA

FCC ID: LDKDVONE2597

Report Type:
Original Report

Product Type:
Cisco Catalyst 9120AX Series Wi-Fi 6 Access Points

Report Producer : Eva Kao

Report Number : RXZ220627001RF03

Report Date : 2022-7-8

Reviewed By: Andy Shih *Andy Shih*

Prepared By: Bay Area Compliance Laboratories Corp.

(New Taipei Laboratory)

70, Lane 169, Sec. 2, Datong Road, Xizhi Dist.,

New Taipei City 22183, Taiwan, R.O.C.

Tel: +886 (2) 2647 6898

Fax: +886 (2) 2647 6895

www.bacl.com.tw

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RXZ220627001	RXZ220627001RF03	2022-7-8	Original Report	Eva Kao

TABLE OF CONTENTS

1	General Information	4
1.1	Product Description for Equipment under Test (EUT).....	4
1.2	Objective.....	4
1.3	Test Methodology	4
1.4	Statement	5
1.5	Measurement Uncertainty	5
1.6	Environmental Conditions	5
1.7	Test Facility	5
2	System Test Configuration.....	6
2.1	Equipment Modifications	6
2.2	Test Mode	6
2.3	Support Equipment List and Details.....	6
2.4	External Cable List and Details	6
2.5	Block Diagram of Test Setup	7
3	Summary of Test Results.....	8
4	Test Equipment List and Details	9
5	FCC §15.407(f), § 1.1307(b)(3)(i) – RF Exposure.....	10
5.1	Applicable Standard.....	10
5.2	RF Exposure Evaluation Result.....	11
6	FCC §15.209, §15.205 , §15.407(b) – Spurious Emissions	12
6.1	Applicable Standard.....	12
6.2	EUT Setup	13
6.3	EMI Test Receiver & Spectrum Analyzer Setup.....	14
6.4	Test Procedure	14
6.5	Corrected Factor & Margin Calculation.....	14
6.6	Test Results.....	15
7	FCC §15.407(a) – Maximum Output Power.....	25
7.1	Applicable Standard.....	25
7.2	Test Procedure	26
7.3	Test Results.....	26

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Manufacturer	Cisco Systems, Inc.
	125 West Tasman Drive, San Jose, CA 95134, USA
Brand(Trade) Name	CISCO
Product (Equipment)	Cisco Catalyst 9120AX Series Wi-Fi 6 Access Points
Main Model Name	C9120AXI-B
Frequency Range	5150 ~ 5250 MHz, 5250 ~ 5350 MHz, 5470 ~ 5725 MHz, 5725 ~ 5850 MHz
Modulation Technique	OFDM , OFDMA
Power Operation (Voltage Range)	55Vdc from PoE port
Received Date	2022/6/6
Date of Test	2022/6/28 ~ 2022/6/29

*All measurement and test data in this report was gathered from production sample serial number: RXZ220627001-01 (Assigned by BACL, New Taipei Laboratory).

1.2 Objective

This report is prepared on behalf of Cisco Systems, Inc. in accordance with Part 2, Subpart J, Part 15, Subparts A, C and E of the Federal Communication Commission's rules.

Wi-Fi and Chillwave leverage original test data (FCC ID: LDKVCVER1937) in accordance with FCC KDB 484596 D01. Wi-Fi and Chillwave will be verified by spot checking output power and radiated spurious emissions.

1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

1.4 Statement

Decision Rule: No, (The test results do not include MU judgment)

It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (New Taipei Laboratory).

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.

Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

1.5 Measurement Uncertainty

Parameter		Uncertainty
RF output power, conducted		±0.93 (dB)
Emissions, radiated	30 MHz~1GHz	±5.22(dB)
	1 GHz~18 GHz	±6.12(dB)
	18 GHz~40 GHz	±4.99(dB)
Temperature		+/- 1.27 °C
Humidity		+/- 3 %

1.6 Environmental Conditions

Test Site	Test Date	Temperature (°C)	Relative Humidity (%)	ATM Pressure (hPa)	Test Engineer
Radiation Spurious Emissions	2022/6/28 ~ 2022/6/29	22.8 - 24.1	54 - 66	1010	Andy Cheng
Maximum Output Power	2022/6/28	24.3	54	1010	Boris Kao

1.7 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) to collect test data is located on

☒ 70, Lane 169, Sec. 2, Datong Road, Xizhi Dist., New Taipei City 22183, Taiwan, R.O.C.

Bay Area Compliance Laboratories Corp. (New Taipei Laboratory) is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3732) and the FCC designation No.TW3732 under the Mutual Recognition Agreement (MRA) in FCC Test.

2 System Test Configuration

2.1 Equipment Modifications

No modification was made to the EUT.

2.2 Test Mode

Mode 1: WIFI 2.4GHz XOR + WIFI 5GHz Regular + WIFI 2.4GHz Aux + BLE

Mode 2: WIFI 2.4G XOR + WIFI 5GHz Regular + WIFI 5GHz Aux + BLE

Mode 3: WIFI 5G XOR + WIFI 5GHz Regular + WIFI 2.4GHz Aux + BLE

Mode 4: WIFI 5G XOR + WIFI 5GHz Regular + WIFI 5GHz Aux + BLE

Radiated spurious emissions for Transmitting simultaneously test: Mode 1-4.

2.3 Support Equipment List and Details

Description	Manufacturer	Model Number	S/N
POE Adapter	CISCO	SB-PWR-INJ2	C18426663000003170
NB	DELL	E6410	8N7PXN1

2.4 External Cable List and Details


Cable Description	Length (m)	From	To
RJ-45 Cable	1	EUT	POE Adapter
RJ-45 to USB Serial Cable	2	EUT	NB

2.5 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

Radiation:

Below 1GHz:

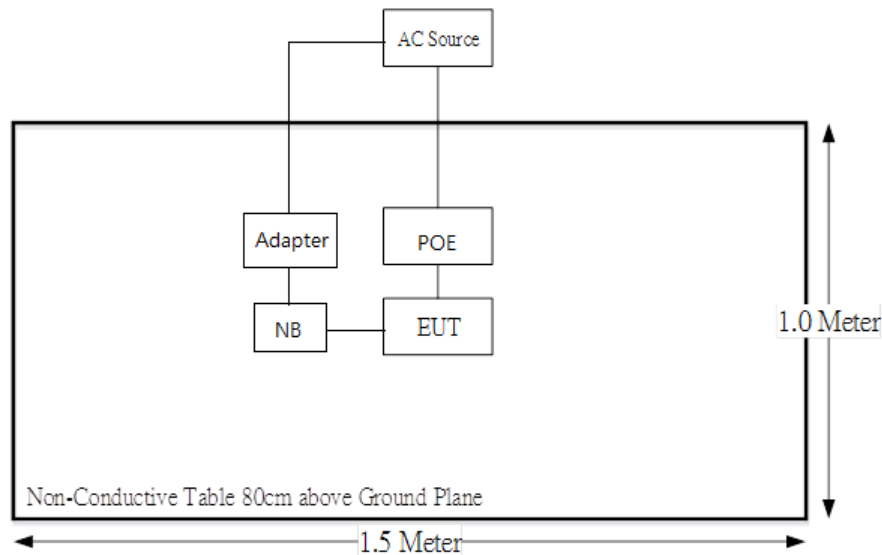

Above 1GHz:

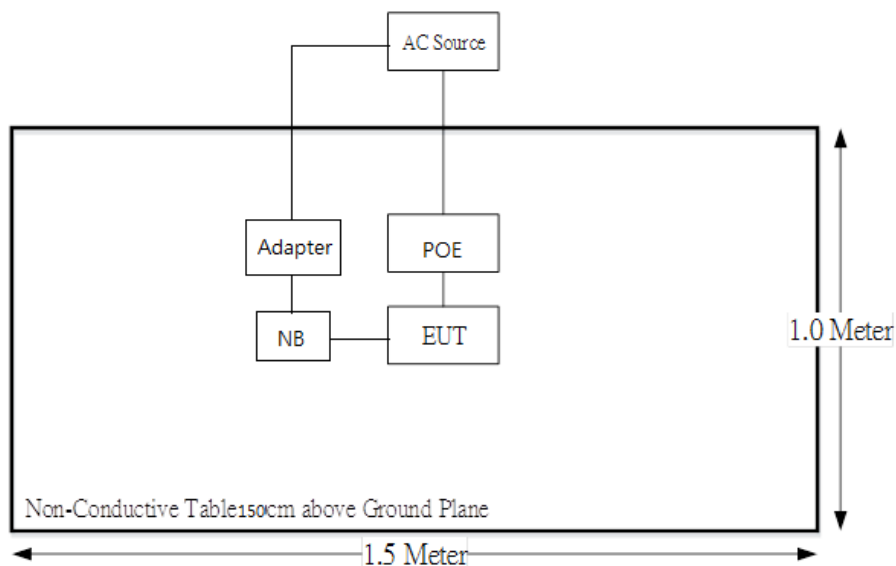

3 Summary of Test Results

FCC Rules	Description of Test	Results
§15.407(f), §1.1307(b)(3)(i)	RF Exposure	Compliance
§15.205 & §15.209 & §15.407(b)	Unwanted Emission	Compliance
§15.407(a)(1)(3)	Conducted Transmitter Output Power	Compliance

*Note: The output power for each radio and each frequency band already verified
The test report presented the worst modes and channels

4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
Radiation 3M Room (966-A)					
Bilog Antenna with 6 dB Attenuator	SUNOL SCIENCES & MINI-CIRCUITS	JB6/UNAT-6+	A050115/15542_01	2022/02/14	2023/02/13
Horn Antenna	EMCO	3115	9809-55583	2021/8/26	2022/8/25
Horn Antenna	ETS-Lindgren	3116	62638	2021/8/11	2022/8/10
Preamplifier	Sonoma	310N	130602	2022/6/8	2023/6/7
Preamplifier	A.H. system Inc.	PAM-0118P	466	2021/11/4	2022/11/3
Microwave Preamplifier	EM Electronics Corporation	EM18G40G	60656	2021/12/27	2022/12/26
Spectrum Analyzer	Rohde & Schwarz	FSV40	101435	2021/12/27	2022/12/26
EMI Test Receiver	Rohde & Schwarz	ESR7	101419	2021/11/9	2022/11/8
Micro flex Cable	UTIFLEX	UFB197C-1-2362-70U-70U	225757-001	2022/1/24	2023/1/23
Coaxial Cable	COMMATE	PEWC	8Dr	2021/12/24	2022/12/23
Coaxial Cable	UTIFLEX	UFB311A-Q-1440-300300	220490-006	2022/1/24	2023/1/23
Coaxial Cable	JUNFLON	J12J102248-00-B-5	AUG-07-15-044	2021/12/24	2022/12/23
Cable	EMC	EMC105-SM-SM-10000	201003	2022/1/24	2023/1/23
Coaxial Cable	ROSNOL	K1K50-UP0264-K1K50-450CM	160309-1	2022/1/24	2023/1/23
Coaxial Cable	ROSNOL	K1K50-UP0264-K1K50-50CM	15120-1	2022/1/18	2023/1/17
Software	Audix	e3	18621a bac1	N.C.R	N.C.R
Conducted Room					
Cable	UTIFLEX	UFA210A	9435	2021/10/5	2022/10/4
Power Sensor	KEYSIGHT	U2021XA	MY54080018	2021/1/28	2022/1/27
Attenuator	MINI-CIRCUITS	BW-S10W5+	1419	2021/1/28	2022/1/27

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirement

5 FCC §15.407(f), § 1.1307(b)(3)(i) – RF Exposure

5.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(3)(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

For single RF sources (*i.e.*, any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

(A) The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in paragraph (b)(3)(ii)(A) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

5.2 RF Exposure Evaluation Result

The EUT can be used in the following modes, selecting the worst mode for evaluation.

Mode 1: WIFI 2.4GHz XOR + WIFI 5GHz Regular + WIFI 2.4GHz Aux + BLE

Mode 2: WIFI 2.4G XOR + WIFI 5GHz Regular + WIFI 5GHz Aux + BLE

Mode 3: WIFI 5G XOR + WIFI 5GHz Regular + WIFI 2.4GHz Aux + BLE

Mode 4: WIFI 5G XOR + WIFI 5GHz Regular + WIFI 5GHz Aux + BLE

Worst case is Mode 4 :

Project info

Band	Freq (MHz)	Tune-up Power (dBm)	Ant Gain (dBi)	Distances (mm)	Duty (%)	Tune-up Power (mW)	ERP (dBm)	ERP (mW)
BLE	2480	4	3	300	100%	2.51	4.85	3.05
do0 5GHz XOR	5850	24.5	11	300	100%	281.84	33.35	2162.72
d01 5GHz Regualr	5850	24	11	300	100%	251.19	32.85	1927.52
do4 5G Aux	5850	23	5	300	100%	199.53	25.85	384.59

Option A

The available maximum time-averaged power is no more than 1 mW

Band	Freq (MHz)	Result Option A
BLE	2480	not exempt
do0 5GHz XOR	5850	not exempt
d01 5GHz Regualr	5850	not exempt
do4 5G Aux	5850	not exempt

Option B

The available maximum time-averaged power or effective radiated power (ERP), whichever is greater.

This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive).

Band	Freq (MHz)	Pth (mW)	X	ERP 20cm (mW)	Ratio	Result Option B
BLE	2480	3060.00	1.905	3060	0.00	exempt
do0 5GHz XOR	5850	3060.00	2.091	3060	0.71	exempt
d01 5GHz Regualr	5850	3060.00	2.091	3060	0.63	exempt
do4 5G Aux	5850	3060.00	2.091	3060	0.13	exempt

Simultaneous Analysis :

Band	Freq (MHz)	PSD Require	PSD (mW/cm ²)	PSD Limit (mW/cm ²)	Simultaneous TX	Ratio
BLE	2480	exempt	0.001	1.000	O	0.001
do0 5GHz XOR	5850	exempt	0.314	1.000	O	0.314
d01 5GHz Regualr	5850	exempt	0.280	1.000	O	0.280
do4 5G Aux	5850	exempt	0.056	1.000	O	0.056
Simultaneous Analysis (Limit 1)						0.651

Result: The EUT meets exemption requirement- RF exposure evaluation greater than **30cm** distance.

6 FCC §15.209, §15.205 , §15.407(b) – Spurious Emissions

6.1 Applicable Standard

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	608 – 614	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	960 – 1240	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	1300 – 1427	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1435 – 1626.5	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1645.5 – 1646.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1660 – 1710	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1718.8 – 1722.2	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	2200 – 2300	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2310 – 2390	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2483.5 – 2500	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2690 – 2900	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	3260 – 3267	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3.332 – 3.339	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3.3458 – 3.358	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3.600 – 4.400	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4		Above 38.6
13.36 – 13.41	399.9 – 410		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

Note 1: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

As per FCC Part 15.407 (b)

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level


of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge..

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.


Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.

6.2 EUT Setup

Below 1 GHz:

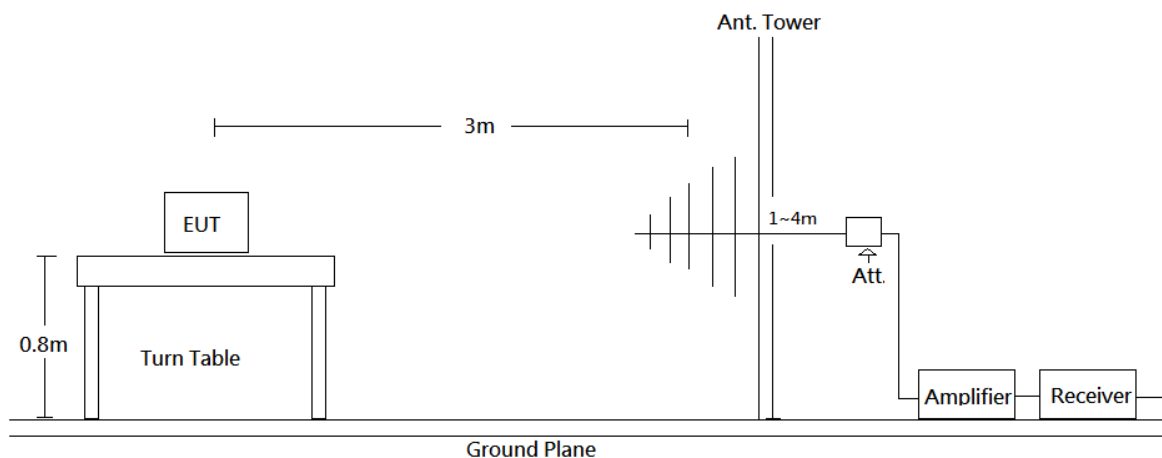

Above 1 GHz:

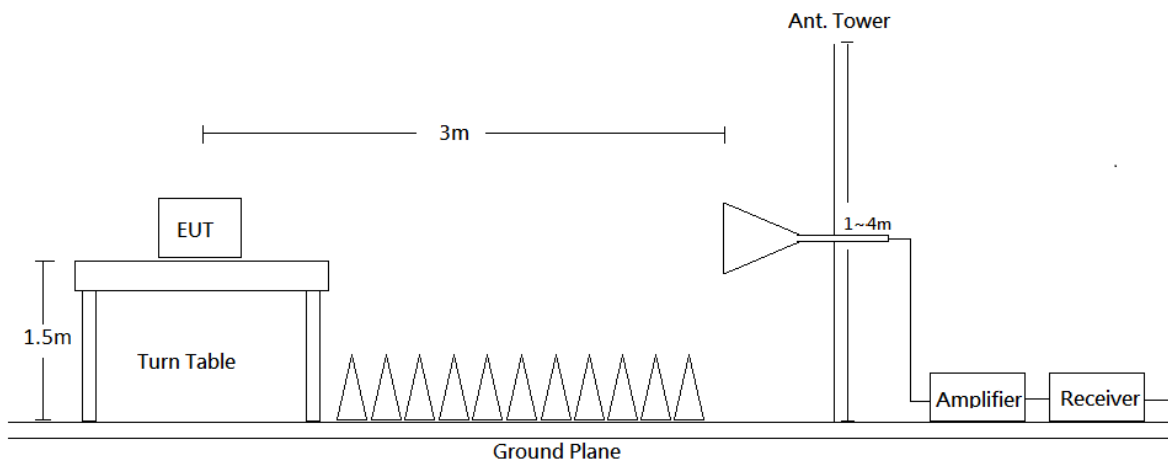

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.407 Limits.

6.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 40 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	/	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	>98%	Ave
	1 MHz	1/T	<98%	Ave

Note: T is minimum transmission duration

6.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

According to C63.10, emission shall be computed as: $E [dB\mu V/m] = EIRP[dBm] + 95.2$, for $d = 3$ meters.

All emissions under the average limit and under the noise floor have not recorded in the report

6.5 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Result} - \text{Limit}$$

6.6 Test Results

Test Mode: Transmitting

Transmitting simultaneously test:

30MHz-1GHz:

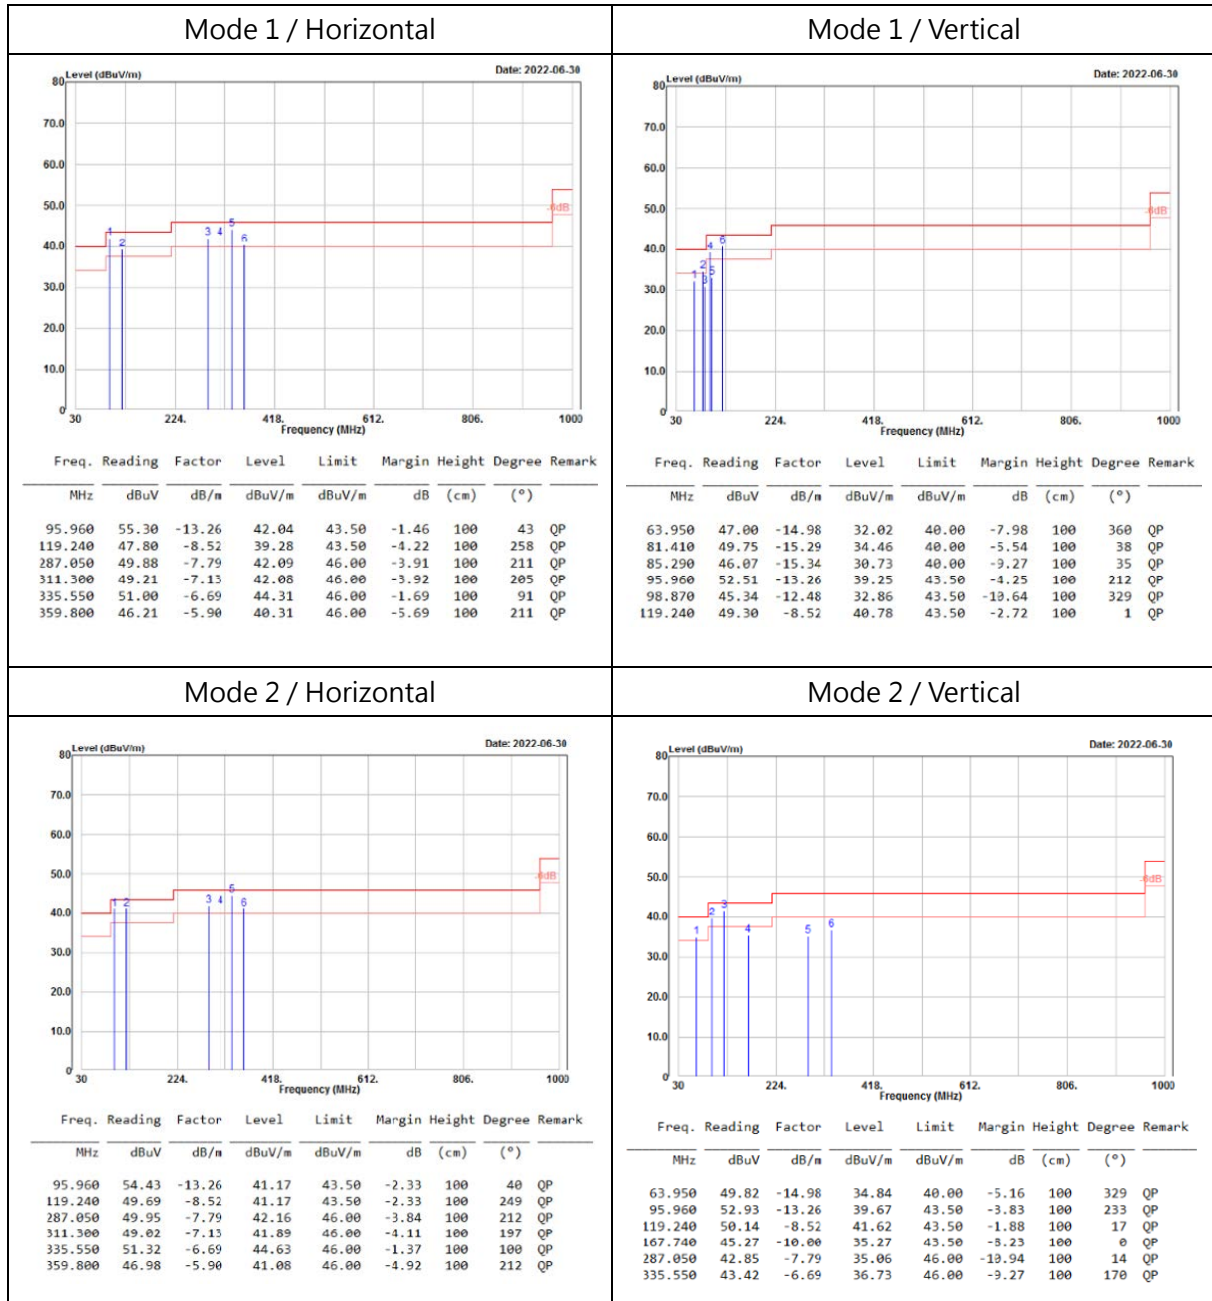


Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.


Spurious emissions more than 20 dB below the limit were not reported.

Mode 3 / Horizontal

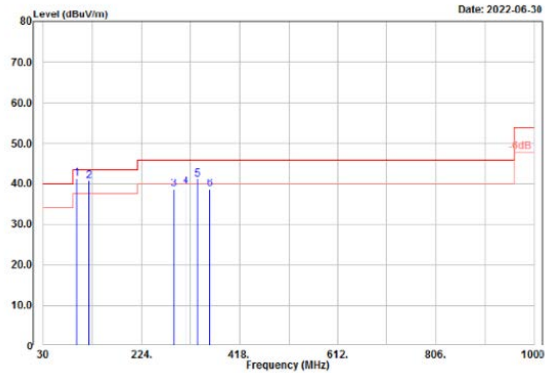


Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/n	dBuV/m	dBuV/m	dB	(cm)	(°)	
95.960	54.76	-13.26	41.50	43.50	-2.00	100	36	QP
119.240	49.36	-8.52	40.84	43.50	-2.66	100	254	QP
287.050	46.46	-7.79	38.67	46.00	-7.33	100	208	QP
311.300	46.32	-7.13	39.19	46.00	-6.81	100	201	QP
335.550	47.84	-6.69	41.15	46.00	-4.85	100	82	QP
359.800	44.53	-5.90	38.63	46.00	-7.37	100	217	QP

Mode 3 / Vertical

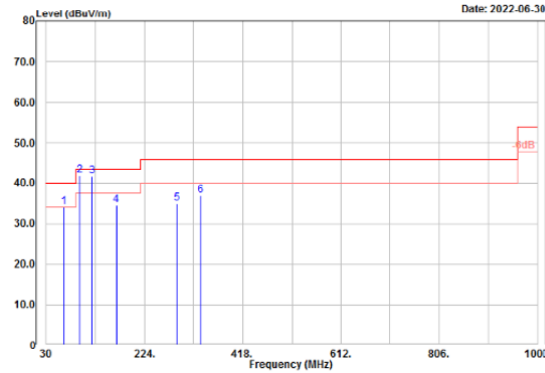


Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/n	dBuV/m	dBuV/m	dB	(cm)	(°)	
63.950	49.09	-14.98	34.11	40.00	-5.89	100	280	QP
95.960	55.28	-13.26	42.02	43.50	-1.48	100	231	QP
119.240	50.27	-8.52	41.75	43.50	-1.75	100	1	QP
167.740	44.39	-10.00	34.39	43.50	-9.11	100	358	QP
287.050	42.79	-7.79	35.00	46.00	-11.00	100	18	QP
335.550	43.64	-6.69	36.95	46.00	-9.05	100	24	QP

Mode 4 / Horizontal

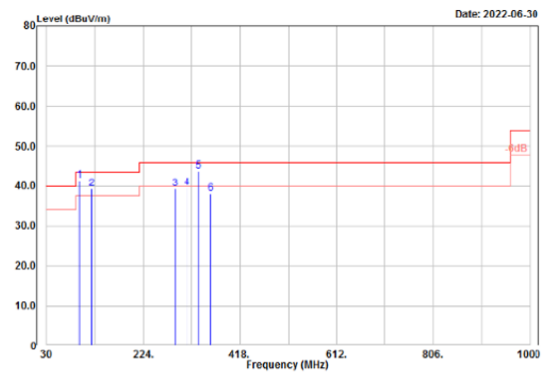

Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/n	dBuV/m	dBuV/m	dB	(cm)	(°)	
95.960	54.73	-13.26	41.47	43.50	-2.03	100	35	QP
119.240	47.82	-8.52	39.30	43.50	-4.20	100	273	QP
287.050	46.96	-7.79	39.17	46.00	-6.83	100	214	QP
311.300	46.56	-7.13	39.43	46.00	-6.57	100	193	QP
335.550	50.51	-6.69	43.82	46.00	-2.18	100	92	QP
359.800	43.86	-5.90	37.96	46.00	-8.04	100	212	QP

Mode 4 / Vertical

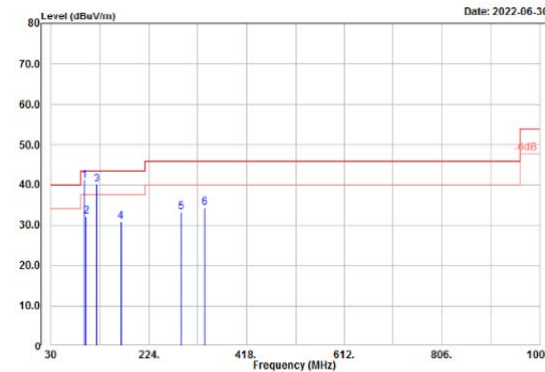

Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/n	dBuV/m	dBuV/m	dB	(cm)	(°)	
95.960	54.39	-13.26	41.13	43.50	-2.37	100	225	QP
99.840	44.24	-12.18	32.06	43.50	-11.44	100	281	QP
119.240	48.54	-8.52	40.02	43.50	-3.48	100	360	QP
167.740	40.84	-10.00	30.84	43.50	-12.66	100	8	QP
287.050	41.01	-7.79	33.22	46.00	-12.78	100	18	QP
335.550	40.90	-6.69	34.21	46.00	-11.79	100	161	QP

Level (Result) = Reading + Factor.

Margin = Level - Limit.

Factor = Antenna Factor + Cable Loss - Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Above 1GHz

Mode 1 :

Horizontal								
Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	(cm)	(°)	
4804.000	33.20	-2.47	30.73	54.00	-23.27	166	135	Average
4804.000	43.84	-2.47	41.37	74.00	-32.63	166	135	Peak
4874.000	33.10	-2.25	30.85	54.00	-23.15	193	244	Average
4874.000	43.22	-2.25	40.97	74.00	-33.03	193	244	Peak
7206.000	31.13	3.03	34.16	54.00	-19.84	204	184	Average
7206.000	41.18	3.03	44.21	74.00	-29.79	204	184	Peak
7311.000	30.49	3.34	33.83	54.00	-20.17	139	59	Average
7311.000	40.78	3.34	44.12	74.00	-29.88	139	59	Peak
10480.000	31.20	8.14	39.34	54.00	-14.66	178	315	Average
10480.000	40.15	8.14	48.29	74.00	-25.71	178	315	Peak
15720.000	32.34	11.40	43.74	54.00	-10.26	150	342	Average
15720.000	42.36	11.40	53.76	74.00	-20.24	150	342	Peak
19216.000	41.87	-0.57	41.30	54.00	-12.70	150	32	Average
19216.000	51.93	-0.57	51.36	74.00	-22.64	150	32	Peak
19496.000	41.19	0.25	41.44	54.00	-12.56	150	260	Average
19496.000	51.20	0.25	51.45	74.00	-22.55	150	260	Peak
20960.000	42.55	1.78	44.33	54.00	-9.67	150	342	Average
20960.000	48.62	1.78	50.40	74.00	-23.60	150	342	Peak

Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Vertical								
Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	(cm)	(°)	
4804.000	34.20	-2.47	31.73	54.00	-22.27	149	71	Average
4804.000	44.44	-2.47	41.97	74.00	-32.03	149	71	Peak
4874.000	34.90	-2.25	32.65	54.00	-21.35	167	338	Average
4874.000	44.90	-2.25	42.65	74.00	-31.35	167	338	Peak
7206.000	32.31	3.03	35.34	54.00	-18.66	171	56	Average
7206.000	42.24	3.03	45.27	74.00	-28.73	171	56	Peak
7311.000	30.69	3.34	34.03	54.00	-19.97	184	332	Average
7311.000	40.90	3.34	44.24	74.00	-29.76	184	332	Peak
10480.000	31.30	8.14	39.44	54.00	-14.56	153	195	Average
10480.000	40.34	8.14	48.48	74.00	-25.52	153	195	Peak
15720.000	33.41	11.40	44.81	54.00	-9.19	192	86	Average
15720.000	43.48	11.40	54.88	74.00	-19.12	192	86	Peak
19216.000	42.20	-0.57	41.63	54.00	-12.37	150	132	Average
19216.000	52.22	-0.57	51.65	74.00	-22.35	150	132	Peak
19496.000	41.60	0.25	41.85	54.00	-12.15	150	350	Average
19496.000	51.67	0.25	51.92	74.00	-22.08	150	350	Peak
20960.000	42.61	1.78	44.39	54.00	-9.61	150	289	Average
20960.000	49.63	1.78	51.41	74.00	-22.59	150	289	Peak

Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Mode 2 :

Horizontal								
Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	(cm)	(°)	
4804.000	34.23	-2.47	31.76	54.00	-22.24	177	200	Average
4804.000	45.20	-2.47	42.73	74.00	-31.27	177	200	Peak
4874.000	34.72	-2.25	32.47	54.00	-21.53	204	132	Average
4874.000	44.82	-2.25	42.57	74.00	-31.43	204	132	Peak
7206.000	30.32	3.03	33.35	54.00	-20.65	161	245	Average
7206.000	40.41	3.03	43.44	74.00	-30.56	161	245	Peak
7311.000	30.19	3.34	33.53	54.00	-20.47	193	132	Average
7311.000	40.40	3.34	43.74	74.00	-30.26	193	132	Peak
10440.000	30.67	7.97	38.64	54.00	-15.36	150	41	Average
10440.000	40.99	7.97	48.96	74.00	-25.04	150	41	Peak
10480.000	30.16	8.14	38.30	54.00	-15.70	189	41	Average
10480.000	40.91	8.14	49.05	74.00	-24.95	189	41	Peak
15660.000	32.13	11.11	43.24	54.00	-10.76	200	41	Average
15660.000	39.20	11.11	50.31	74.00	-23.69	200	41	Peak
15720.000	32.43	11.40	43.83	54.00	-10.17	149	288	Average
15720.000	42.24	11.40	53.64	74.00	-20.36	149	288	Peak
19216.000	41.18	-0.57	40.61	54.00	-13.39	150	323	Average
19216.000	51.17	-0.57	50.60	74.00	-23.40	150	323	Peak
19496.000	41.70	0.25	41.95	54.00	-12.05	150	26	Average
19496.000	51.82	0.25	52.07	74.00	-21.93	150	26	Peak
20880.000	45.31	1.85	47.16	54.00	-5.84	150	323	Average
20880.000	49.35	1.85	51.20	74.00	-22.80	150	323	Peak
20960.000	45.39	1.78	47.17	54.00	-5.83	150	90	Average
20960.000	49.22	1.78	51.00	74.00	-23.00	150	90	Peak

Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Vertical								
Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	(cm)	(°)	
4804.000	35.30	-2.47	32.83	54.00	-21.17	204	173	Average
4804.000	45.36	-2.47	42.89	74.00	-31.11	204	173	Peak
4874.000	34.80	-2.25	32.55	54.00	-21.45	179	153	Average
4874.000	44.97	-2.25	42.72	74.00	-31.28	179	153	Peak
7206.000	31.12	3.03	34.15	54.00	-19.85	144	28	Average
7206.000	41.22	3.03	44.25	74.00	-29.75	144	28	Peak
7311.000	30.59	3.34	33.93	54.00	-20.07	193	356	Average
7311.000	40.58	3.34	43.92	74.00	-30.08	193	356	Peak
10440.000	30.89	7.97	38.86	54.00	-15.14	152	35	Average
10440.000	41.00	7.97	48.97	74.00	-25.03	152	35	Peak
10480.000	30.29	8.14	38.43	54.00	-15.57	169	211	Average
10480.000	40.94	8.14	49.08	74.00	-24.92	169	211	Peak
15660.000	33.03	11.11	44.14	54.00	-9.86	140	35	Average
15660.000	43.03	11.11	54.14	74.00	-19.86	140	35	Peak
15720.000	32.59	11.40	43.99	54.00	-10.01	186	35	Average
15720.000	42.74	11.40	54.14	74.00	-19.86	186	35	Peak
19216.000	41.31	-0.57	40.74	54.00	-13.26	150	257	Average
19216.000	51.32	-0.57	50.75	74.00	-23.25	150	257	Peak
19496.000	42.12	0.25	42.37	54.00	-11.63	150	281	Average
19496.000	52.11	0.25	52.36	74.00	-21.64	150	281	Peak
20880.000	46.22	1.85	48.07	54.00	-5.93	150	189	Average
20880.000	49.52	1.85	51.37	74.00	-22.63	150	189	Peak
20960.000	45.51	1.78	47.29	54.00	-6.71	150	189	Average
20960.000	49.59	1.78	51.37	74.00	-22.63	150	189	Peak

Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Mode 3 :

Horizontal								
Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	(cm)	(°)	
4804.000	35.29	-2.47	32.82	54.00	-21.18	195	249	Average
4804.000	45.22	-2.47	42.75	74.00	-31.25	195	249	Peak
4874.000	34.62	-2.25	32.37	54.00	-21.63	163	255	Average
4874.000	44.70	-2.25	42.45	74.00	-31.55	163	255	Peak
7206.000	30.78	3.03	33.81	54.00	-20.19	151	360	Average
7206.000	40.89	3.03	43.92	74.00	-30.08	151	360	Peak
7311.000	30.42	3.34	33.76	54.00	-20.24	191	118	Average
7311.000	40.52	3.34	43.86	74.00	-30.14	191	118	Peak
10460.000	30.88	8.06	38.94	54.00	-15.06	201	56	Average
10460.000	40.92	8.06	48.98	74.00	-25.02	201	56	Peak
10480.000	30.23	8.14	38.37	54.00	-15.63	167	8	Average
10480.000	40.25	8.14	48.39	74.00	-25.61	167	8	Peak
15690.000	32.21	11.30	43.51	54.00	-10.49	174	75	Average
15690.000	41.21	11.30	52.51	74.00	-21.49	174	75	Peak
15720.000	32.78	11.40	44.18	54.00	-9.82	144	109	Average
15720.000	42.93	11.40	54.33	74.00	-19.67	144	109	Peak
19216.000	42.58	-0.57	42.01	54.00	-11.99	150	188	Average
19216.000	51.34	-0.57	50.77	74.00	-23.23	150	188	Peak
19496.000	43.23	0.25	43.48	54.00	-10.52	150	94	Average
19496.000	52.25	0.25	52.50	74.00	-21.50	150	94	Peak
20920.000	43.29	1.81	45.10	54.00	-8.90	150	354	Average
20920.000	49.14	1.81	50.95	74.00	-23.05	150	354	Peak
20960.000	43.92	1.78	45.70	54.00	-8.30	150	172	Average
20960.000	48.81	1.78	50.59	74.00	-23.41	150	172	Peak

Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Vertical								
Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	(cm)	(°)	
4804.000	35.30	-2.47	32.83	54.00	-21.17	155	170	Average
4804.000	45.30	-2.47	42.83	74.00	-31.17	155	170	Peak
4874.000	35.02	-2.25	32.77	54.00	-21.23	169	172	Average
4874.000	45.05	-2.25	42.80	74.00	-31.20	169	172	Peak
7206.000	31.24	3.03	34.27	54.00	-19.73	203	120	Average
7206.000	41.18	3.03	44.21	74.00	-29.79	203	120	Peak
7311.000	31.32	3.34	34.66	54.00	-19.34	139	336	Average
7311.000	41.52	3.34	44.86	74.00	-29.14	139	336	Peak
10460.000	31.13	8.06	39.19	54.00	-14.81	167	311	Average
10460.000	41.10	8.06	49.16	74.00	-24.84	167	311	Peak
10480.000	30.37	8.14	38.51	54.00	-15.49	204	133	Average
10480.000	40.43	8.14	48.57	74.00	-25.43	204	133	Peak
15690.000	32.74	11.30	44.04	54.00	-9.96	177	173	Average
15690.000	42.84	11.30	54.14	74.00	-19.86	177	173	Peak
15720.000	33.31	11.40	44.71	54.00	-9.29	148	282	Average
15720.000	43.40	11.40	54.80	74.00	-19.20	148	282	Peak
19216.000	42.71	-0.57	42.14	54.00	-11.86	150	98	Average
19216.000	51.77	-0.57	51.20	74.00	-22.80	150	98	Peak
19496.000	43.66	0.25	43.91	54.00	-10.09	150	95	Average
19496.000	52.17	0.25	52.42	74.00	-21.58	150	95	Peak
20920.000	44.09	1.81	45.90	54.00	-8.10	150	116	Average
20920.000	49.02	1.81	50.83	74.00	-23.17	150	116	Peak
20960.000	45.63	1.78	47.41	54.00	-5.59	150	119	Average
20960.000	49.77	1.78	51.55	74.00	-22.45	150	119	Peak

Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Mode 4 :

Horizontal								
Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	(cm)	(°)	
4804.000	33.29	-2.47	30.82	54.00	-23.18	211	21	Average
4804.000	43.49	-2.47	41.02	74.00	-32.98	211	21	Peak
7206.000	31.57	3.03	34.60	54.00	-19.40	166	136	Average
7206.000	41.54	3.03	44.57	74.00	-29.43	166	136	Peak
10440.000	32.02	7.97	39.99	54.00	-14.01	178	21	Average
10440.000	33.05	7.97	41.02	74.00	-32.98	178	21	Peak
10460.000	31.06	8.06	39.12	54.00	-14.88	149	177	Average
10460.000	41.10	8.06	49.16	74.00	-24.84	149	177	Peak
10480.000	31.11	8.14	39.25	54.00	-14.75	150	109	Average
10480.000	41.16	8.14	49.30	74.00	-24.70	150	109	Peak
15660.000	28.11	11.11	39.22	54.00	-14.78	146	21	Average
15660.000	29.91	11.11	41.02	74.00	-32.98	146	21	Peak
15690.000	32.87	11.30	44.17	54.00	-9.83	171	45	Average
15690.000	42.91	11.30	54.21	74.00	-19.79	171	45	Peak
15720.000	33.51	11.40	44.91	54.00	-9.09	169	360	Average
15720.000	43.52	11.40	54.92	74.00	-19.08	169	360	Peak
19216.000	41.70	-0.57	41.13	54.00	-12.87	150	254	Average
19216.000	51.74	-0.57	51.17	74.00	-22.83	150	254	Peak
20880.000	42.62	1.85	44.47	54.00	-9.53	150	273	Average
20880.000	49.75	1.85	51.60	74.00	-22.40	150	273	Peak
20920.000	40.17	1.81	41.98	54.00	-12.02	150	273	Average
20920.000	49.35	1.81	51.16	74.00	-22.84	150	273	Peak
20960.000	40.01	1.78	41.79	54.00	-12.21	150	13	Average
20960.000	49.49	1.78	51.27	74.00	-22.73	150	13	Peak

Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

Vertical								
Freq.	Reading	Factor	Level	Limit	Margin	Height	Degree	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	(cm)	(°)	
4804.000	35.85	-2.47	33.38	54.00	-20.62	154	188	Average
4804.000	45.95	-2.47	43.48	74.00	-30.52	154	188	Peak
7206.000	31.03	3.03	34.06	54.00	-19.94	167	62	Average
7206.000	41.07	3.03	44.10	74.00	-29.90	167	62	Peak
10440.000	31.32	7.97	39.29	54.00	-14.71	139	359	Average
10440.000	41.49	7.97	49.46	74.00	-24.54	139	359	Peak
10460.000	31.31	8.06	39.37	54.00	-14.63	189	359	Average
10460.000	41.40	8.06	49.46	74.00	-24.54	189	359	Peak
10480.000	31.26	8.14	39.40	54.00	-14.60	177	138	Average
10480.000	41.30	8.14	49.44	74.00	-24.56	177	138	Peak
15660.000	35.30	11.11	46.41	54.00	-7.59	165	359	Average
15660.000	38.35	11.11	49.46	74.00	-24.54	165	359	Peak
15690.000	33.19	11.30	44.49	54.00	-9.51	196	77	Average
15690.000	43.22	11.30	54.52	74.00	-19.48	196	77	Peak
15720.000	33.76	11.40	45.16	54.00	-8.84	210	325	Average
15720.000	43.95	11.40	55.35	74.00	-18.65	210	325	Peak
19216.000	42.42	-0.57	41.85	54.00	-12.15	150	61	Average
19216.000	52.44	-0.57	51.87	74.00	-22.13	150	61	Peak
20880.000	42.81	1.85	44.66	54.00	-9.34	150	0	Average
20880.000	49.97	1.85	51.82	74.00	-22.18	150	0	Peak
20920.000	43.71	1.81	45.52	54.00	-8.48	150	86	Average
20920.000	49.78	1.81	51.59	74.00	-22.41	150	86	Peak
20960.000	40.09	1.78	41.87	54.00	-12.13	150	0	Average
20960.000	50.04	1.78	51.82	74.00	-22.18	150	0	Peak

Level (Result) = Reading + Factor.

Margin = Level – Limit.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

7 FCC §15.407(a) – Maximum Output Power

7.1 Applicable Standard

According to FCC §15.407(a):

For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

7.2 Test Procedure

The use Power Meter

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to a Power sensor.

7.3 Test Results

Conducted output power for worst case :

Worst case mode		Output power dBm
XOR WIFI-2.4GHz	B Mode, 2437MHz	23.89
XOR WIFI-5GHz	AX40 Mode, 5230MHz	23.68
Regular WIFI-5GHz	AX20 Mode, 5240 MHz	23.68
AUX WIFI-2.4GHz	G Mode, 2437MHz	20.11
AUX WIFI-5GHz	A Mode, 5220MHz	22.38

***** END OF REPORT *****