124: Back of EUT Facing Phantom LTE FDD 17 10MHz 1RB Middle CH23780 Sensor Inactive
Date: 29/04/15
DUT: Inari 8; Type: Tablet

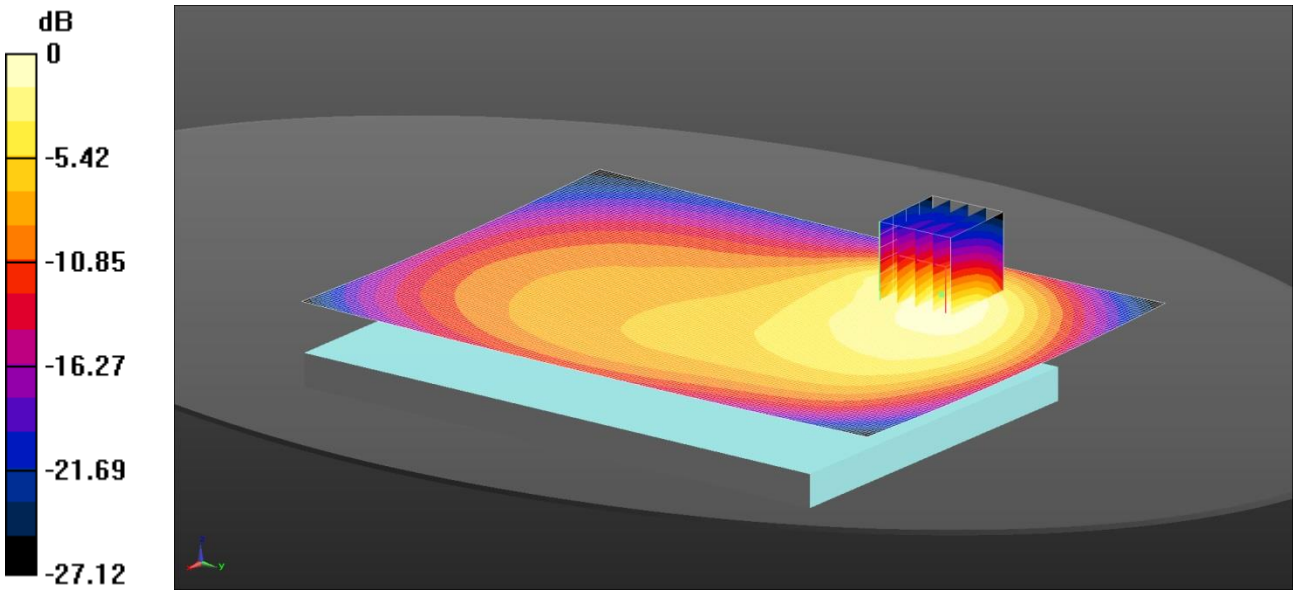

0 dB = 0.386 W/kg = -4.13 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 709 MHz;Duty Cycle: 1:1
Medium: 750 MHz HSL Medium parameters used (interpolated): f = 709 MHz; σ = 0.904 S/m; ε_r = 55.965; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3341; ConvF(6.19, 6.19, 6.19); Calibrated: 21/08/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back - Low/Area Scan (121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.386 W/kg
Configuration/Back - Low/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 20.94 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.518 W/kg
SAR(1 g) = 0.349 W/kg; SAR(10 g) = 0.231 W/kg
Maximum value of SAR (measured) = 0.382 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

125: Back of EUT Facing Phantom LTE FDD 17 10MHz 1RB Middle CH23800 Sensor Inactive
Date: 29/04/15
DUT: Inari 8; Type: Tablet

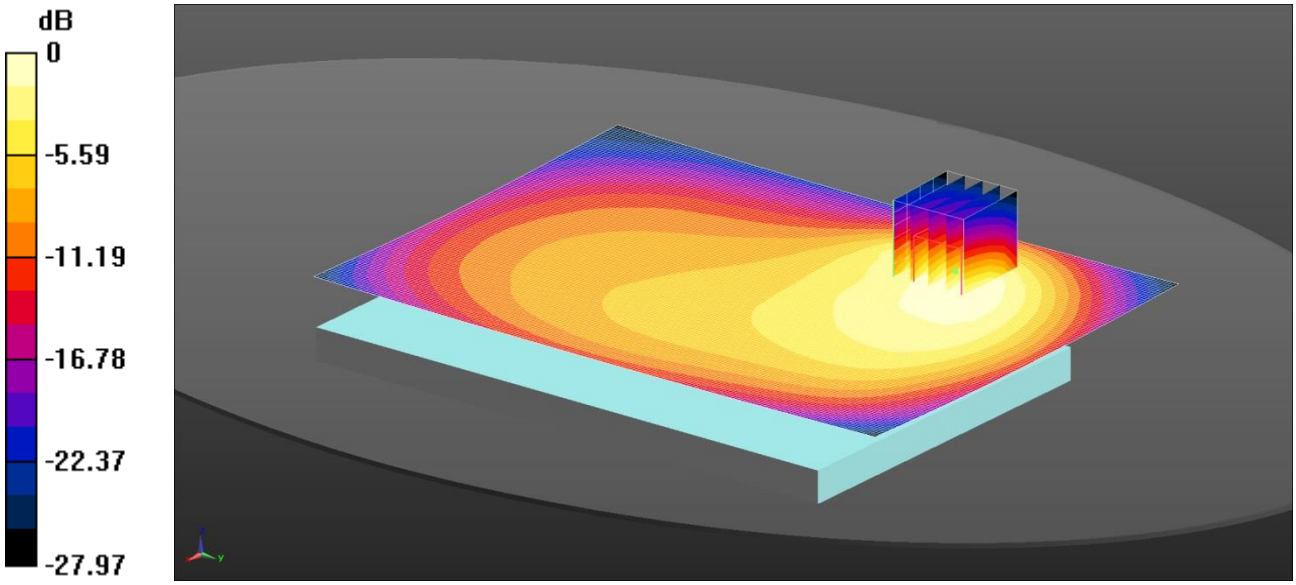

0 dB = 0.375 W/kg = -4.26 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 711 MHz;Duty Cycle: 1:1
Medium: 750 MHz HSL Medium parameters used (interpolated): f = 711 MHz; σ = 0.905 S/m; ε_r = 55.954; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3341; ConvF(6.19, 6.19, 6.19); Calibrated: 21/08/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back - High/Area Scan (121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.375 W/kg
Configuration/Back - High/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.99 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.499 W/kg
SAR(1 g) = 0.339 W/kg; SAR(10 g) = 0.227 W/kg
Maximum value of SAR (measured) = 0.371 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

126: Back of EUT Facing Phantom LTE FDD 17 10MHz 1RB Middle CH23780 Sensor Active
Date: 28/04/15
DUT: Inari 8; Type: Tablet

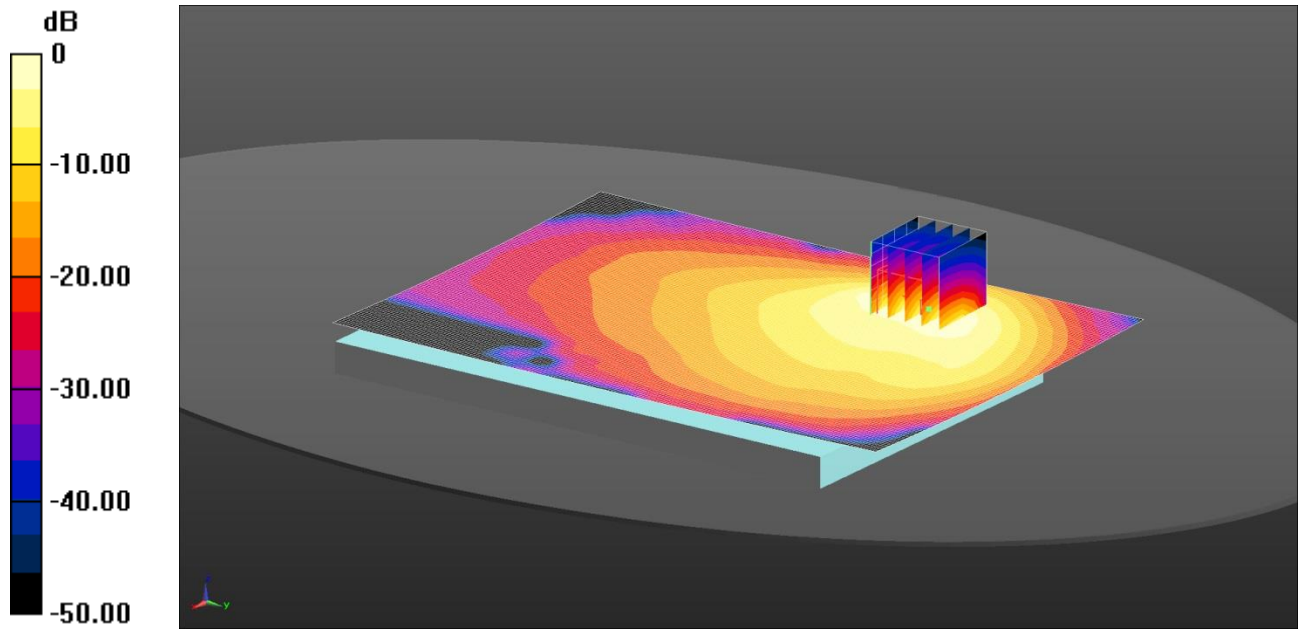

0 dB = 0.382 W/kg = -4.18 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 709 MHz;Duty Cycle: 1:1
Medium: 750 MHz HSL Medium parameters used (interpolated): f = 709 MHz; σ = 0.904 S/m; ε_r = 55.965; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3341; ConvF(6.19, 6.19, 6.19); Calibrated: 21/08/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back - Middle/Area Scan (121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.382 W/kg
Configuration/Back - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.29 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.681 W/kg
SAR(1 g) = 0.370 W/kg; SAR(10 g) = 0.204 W/kg
Maximum value of SAR (measured) = 0.427 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

127: Back of EUT Facing Phantom LTE FDD 17 10MHz 50%RB Middle CH23780 Sensor Active
Date: 28/04/15
DUT: Inari 8; Type: Tablet

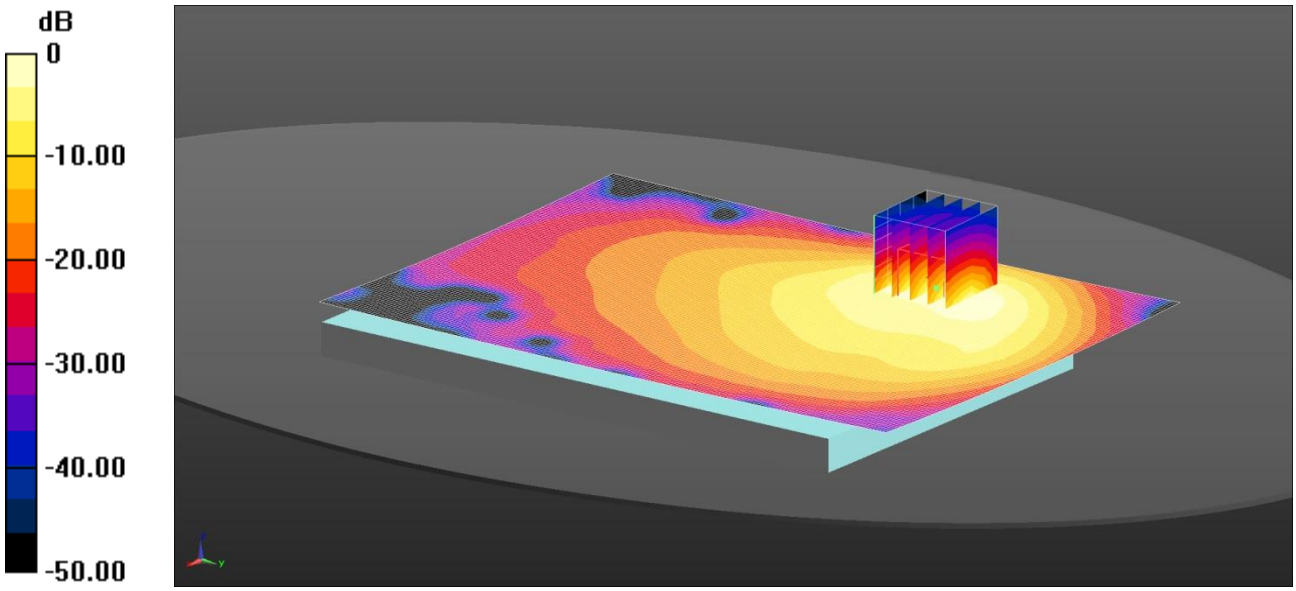

0 dB = 0.381 W/kg = -4.19 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 709 MHz;Duty Cycle: 1:1
Medium: 750 MHz HSL Medium parameters used (interpolated): f = 709 MHz; σ = 0.904 S/m; ε_r = 55.965; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3341; ConvF(6.19, 6.19, 6.19); Calibrated: 21/08/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back - Middle/Area Scan (121x171x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.381 W/kg
Configuration/Back - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.23 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.675 W/kg
SAR(1 g) = 0.367 W/kg; SAR(10 g) = 0.203 W/kg
Maximum value of SAR (measured) = 0.425 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

128: Top of EUT Facing Phantom LTE FDD 17 10MHz 1RB Middle CH23780 Sensor Active
Date: 28/04/15
DUT: Inari 8; Type: Tablet

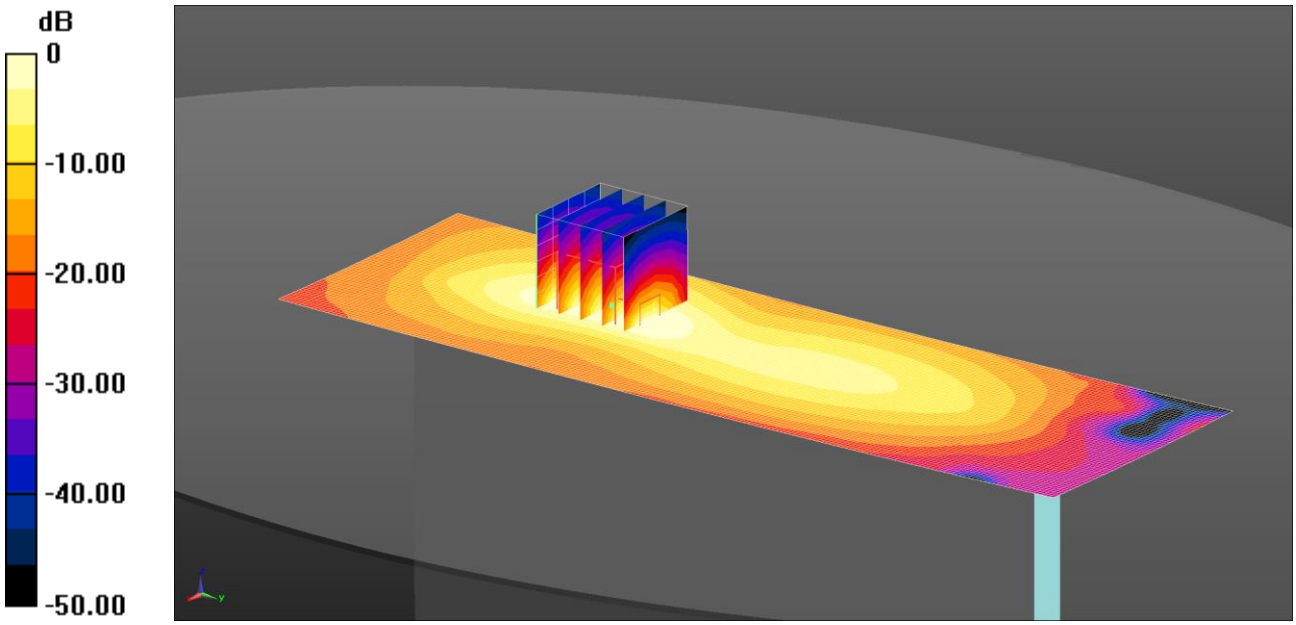

0 dB = 0.208 W/kg = -6.82 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 709 MHz;Duty Cycle: 1:1
Medium: 750 MHz HSL Medium parameters used (interpolated): f = 709 MHz; σ = 0.904 S/m; ε_r = 55.965; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3341; ConvF(6.19, 6.19, 6.19); Calibrated: 21/08/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Top - Middle/Area Scan (61x191x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.208 W/kg
Configuration/Top - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.76 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 0.406 W/kg
SAR(1 g) = 0.187 W/kg; SAR(10 g) = 0.110 W/kg
Maximum value of SAR (measured) = 0.203 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

129: Top of EUT Facing Phantom LTE FDD 17 10MHz 50%RB Middle CH23780 Sensor Active
Date: 28/04/15
DUT: Inari 8; Type: Tablet

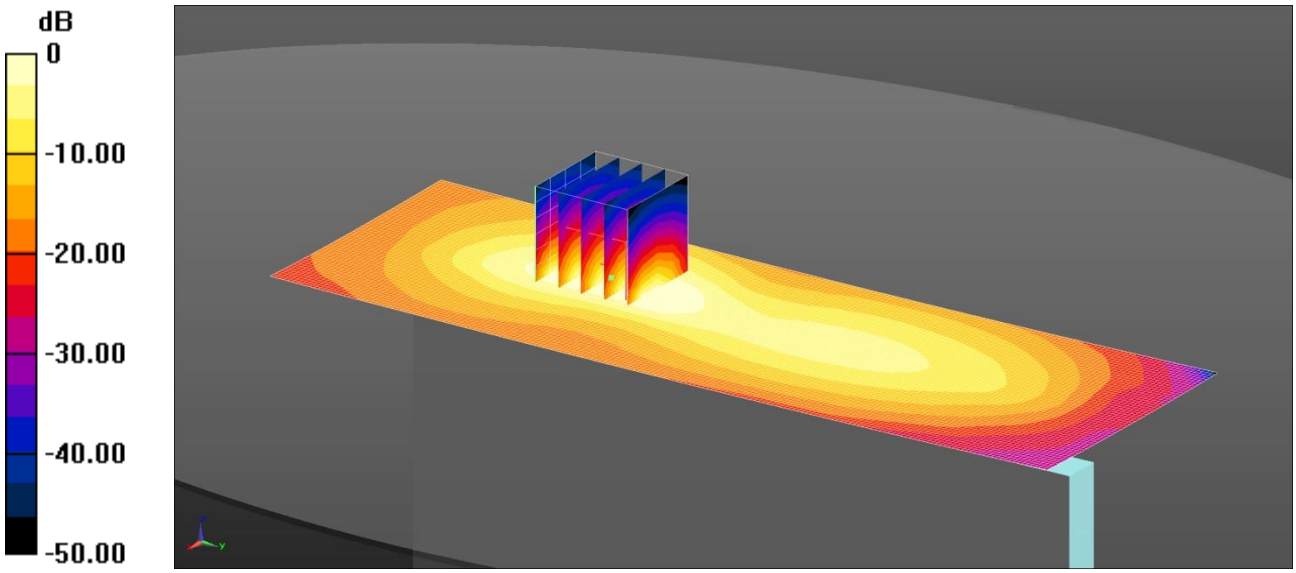

0 dB = 0.202 W/kg = -6.94 dBW/kg

Communication System: UID 0, LTE Bands - 10MHz Channel BW (0); Frequency: 709 MHz;Duty Cycle: 1:1
Medium: 750 MHz HSL Medium parameters used (interpolated): f = 709 MHz; σ = 0.904 S/m; ε_r = 55.965; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3341; ConvF(6.19, 6.19, 6.19); Calibrated: 21/08/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Top - Middle/Area Scan (61x181x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.202 W/kg
Configuration/Top - Middle/Zoom Scan (5x5x7) 2 2 (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.29 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.364 W/kg
SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.109 W/kg
Maximum value of SAR (measured) = 0.204 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

130: Back of EUT Facing Phantom LTE FDD 25 20MHz 1RB Low CH26365 Sensor Inactive
Date: 22/04/2015
DUT: Inari 8; Type: Tablet

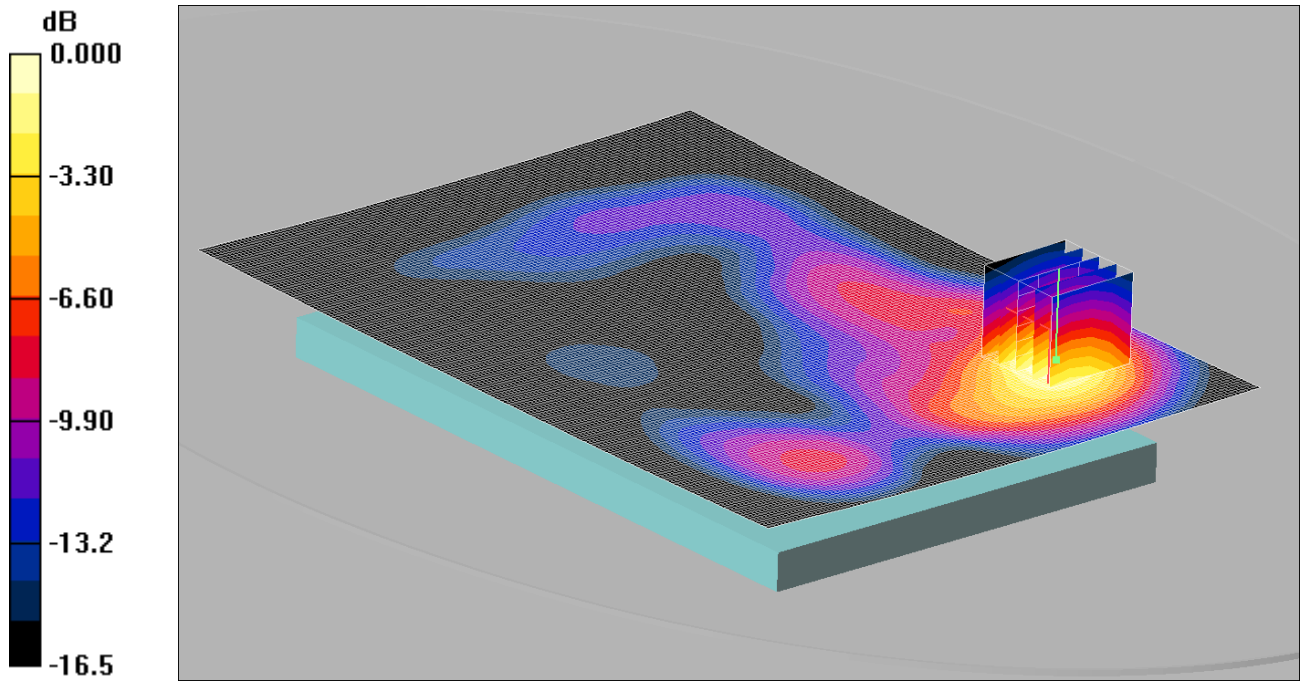

0 dB = 0.684mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.51 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back - Low/Area Scan (131x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.702 mW/g

Back - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.1 V/m; Power Drift = -0.030 dB
Peak SAR (extrapolated) = 1.03 W/kg
SAR(1 g) = 0.624 mW/g; SAR(10 g) = 0.364 mW/g
Maximum value of SAR (measured) = 0.684 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

131: Back of EUT Facing Phantom LTE FDD 25 20MHz 50%RB Low CH26365 Sensor Inactive
Date: 22/04/2015
DUT: Inari 8; Type: Tablet

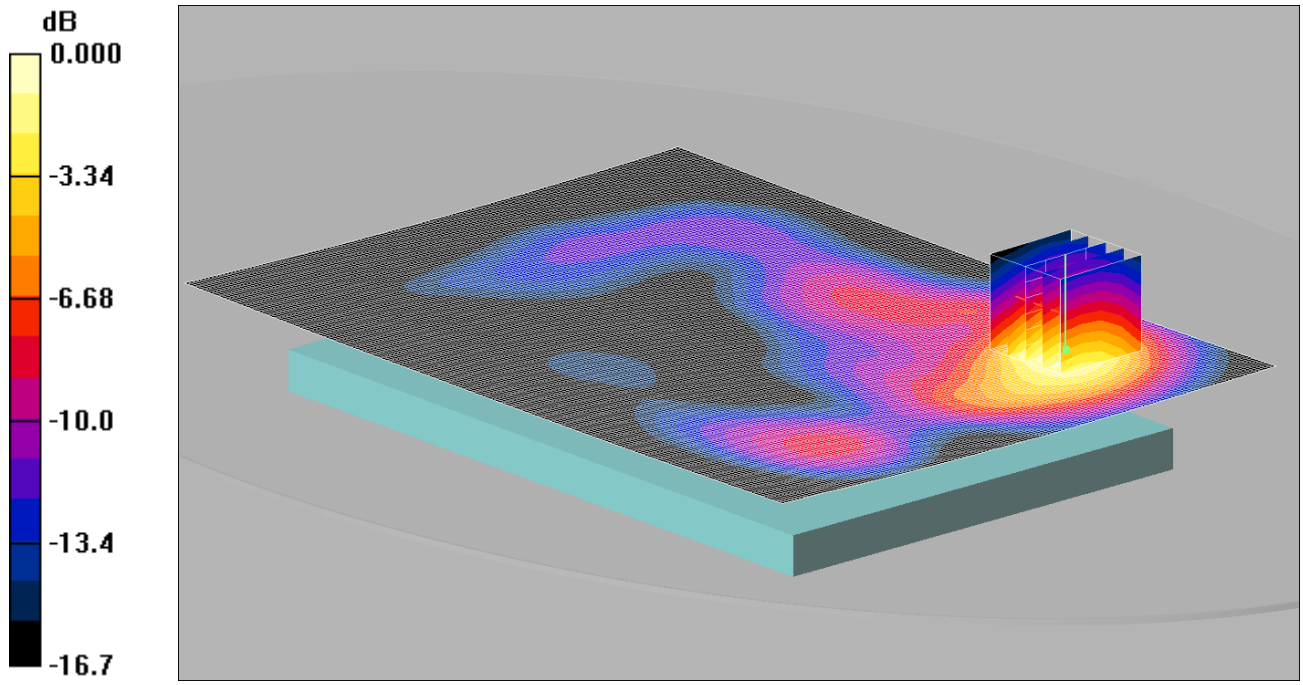

0 dB = 0.507mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.51 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back - Low/Area Scan (131x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.524 mW/g

Back - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.8 V/m; Power Drift = -0.007 dB
Peak SAR (extrapolated) = 0.761 W/kg
SAR(1 g) = 0.462 mW/g; SAR(10 g) = 0.270 mW/g
Maximum value of SAR (measured) = 0.507 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

132: Top of EUT Facing Phantom LTE FDD 25 20MHz 1RB Low CH26365 Sensor Inactive
Date: 22/04/2015
DUT: Inari 8; Type: Tablet

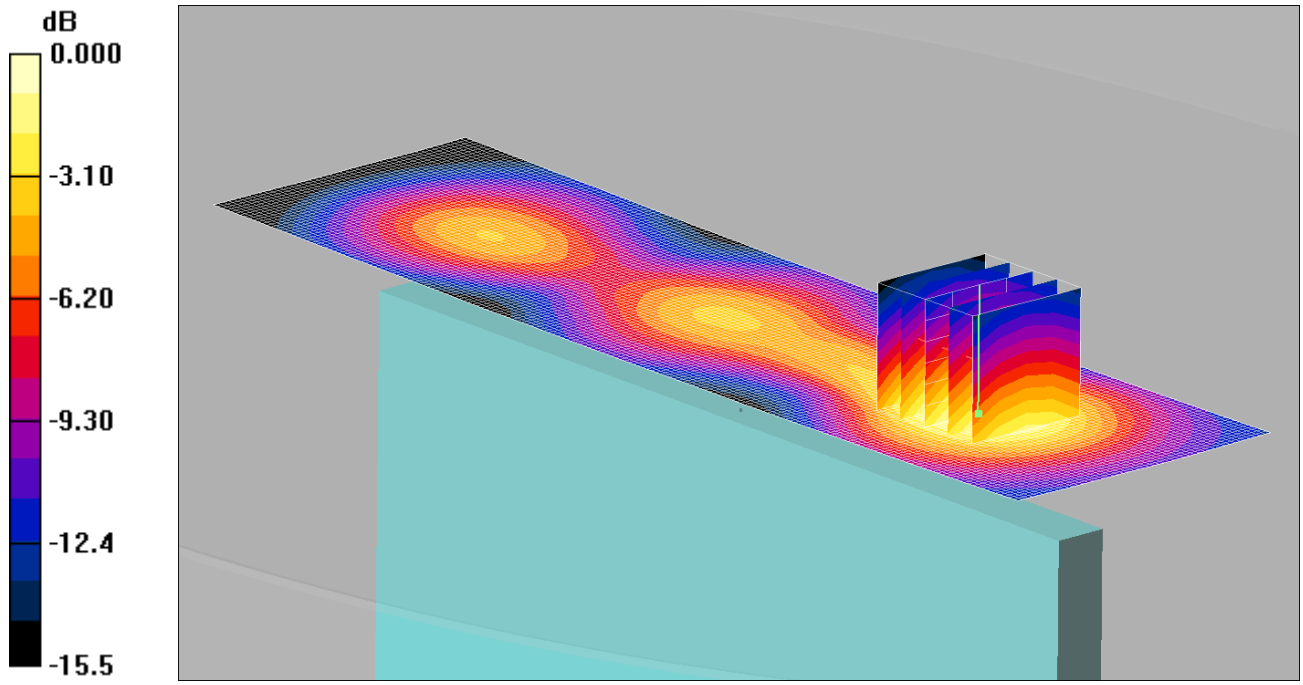

0 dB = 0.529mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.51 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top - Middle/Area Scan (51x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.558 mW/g

Top - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.2 V/m; Power Drift = -0.014 dB
Peak SAR (extrapolated) = 0.757 W/kg
SAR(1 g) = 0.489 mW/g; SAR(10 g) = 0.299 mW/g
Maximum value of SAR (measured) = 0.529 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

133: Top of EUT Facing Phantom LTE FDD 25 20MHz 50%RB Low CH26365 Sensor Inactive
Date: 22/04/2015
DUT: Inari 8; Type: Tablet

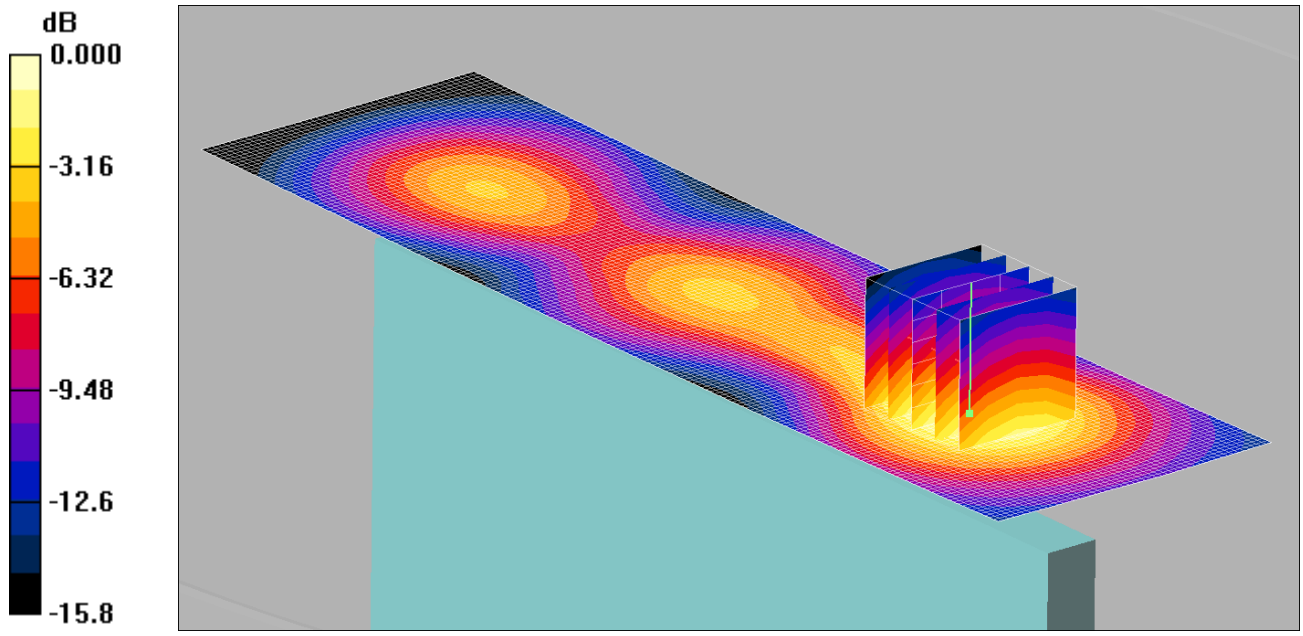

0 dB = 0.410mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.51 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top - Middle/Area Scan (51x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.424 mW/g

Top - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.7 V/m; Power Drift = 0.092 dB
Peak SAR (extrapolated) = 0.580 W/kg
SAR(1 g) = 0.375 mW/g; SAR(10 g) = 0.228 mW/g
Maximum value of SAR (measured) = 0.410 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

134: Left of EUT Facing Phantom LTE FDD 25 20MHz 1RB Low CH26365 Sensor Inactive
Date: 22/04/2015
DUT: Inari 8; Type: Tablet

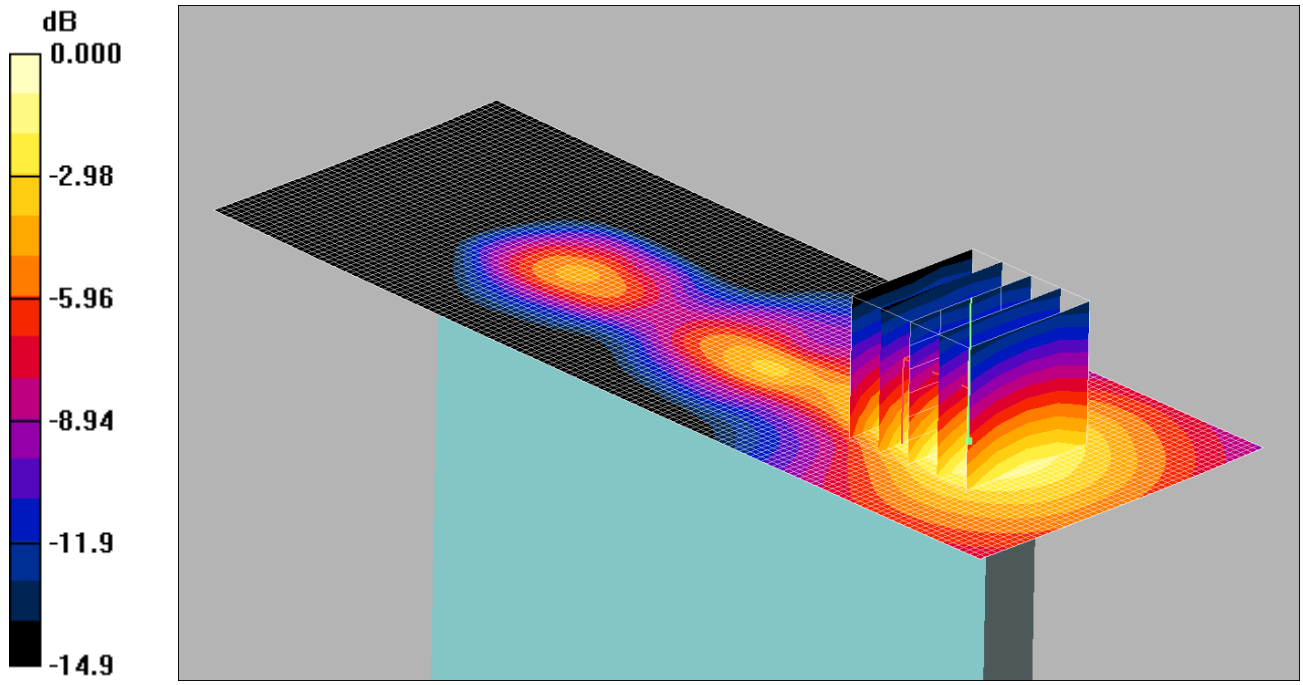

0 dB = 0.281mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.51 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left - Middle/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.270 mW/g

Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.9 V/m; Power Drift = -0.001 dB
Peak SAR (extrapolated) = 0.436 W/kg
SAR(1 g) = 0.252 mW/g; SAR(10 g) = 0.146 mW/g
Maximum value of SAR (measured) = 0.281 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

135: Left of EUT Facing Phantom LTE FDD 25 20MHz 50%RB Low CH26365 Sensor Inactive
Date: 22/04/2015
DUT: Inari 8; Type: Tablet

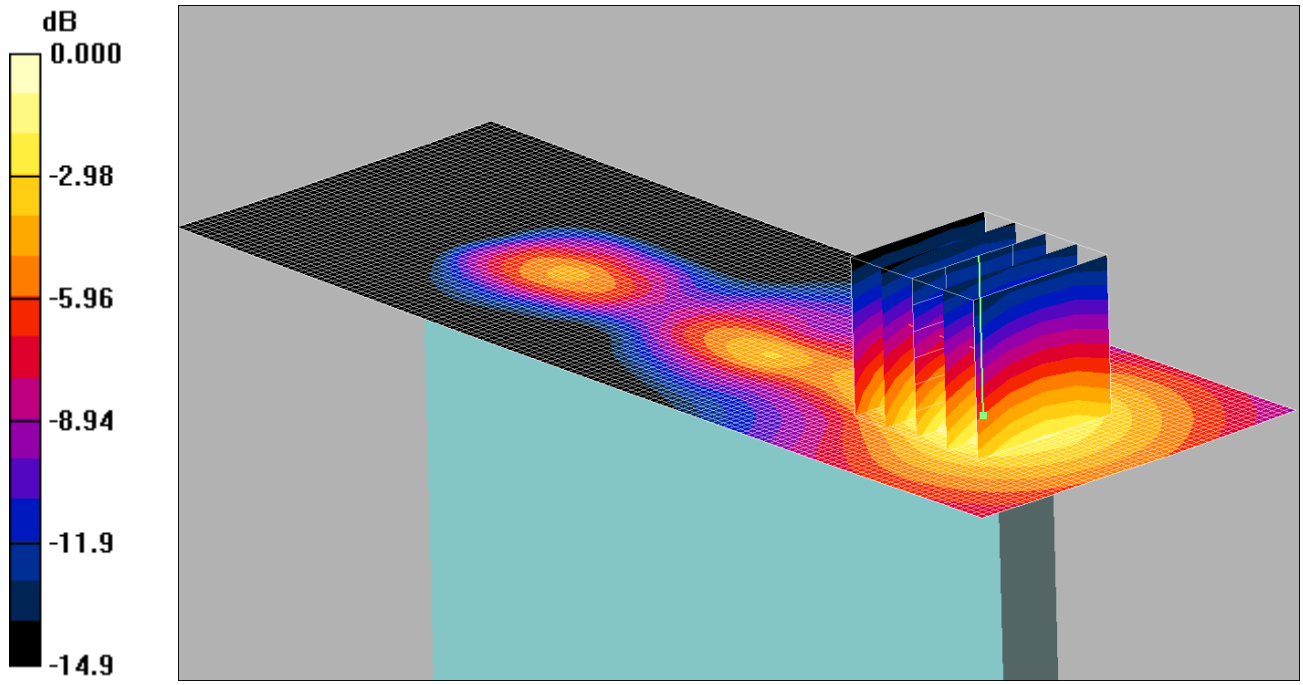

0 dB = 0.207mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.51 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Left - Middle/Area Scan (51x141x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.195 mW/g

Left - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.0 V/m; Power Drift = 0.021 dB
Peak SAR (extrapolated) = 0.324 W/kg
SAR(1 g) = 0.186 mW/g; SAR(10 g) = 0.106 mW/g
Maximum value of SAR (measured) = 0.207 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

136: Back of EUT Facing Phantom LTE FDD 25 20MHz 1RB High CH26365 Sensor Inactive
Date: 22/04/2015
DUT: Inari 8; Type: Tablet

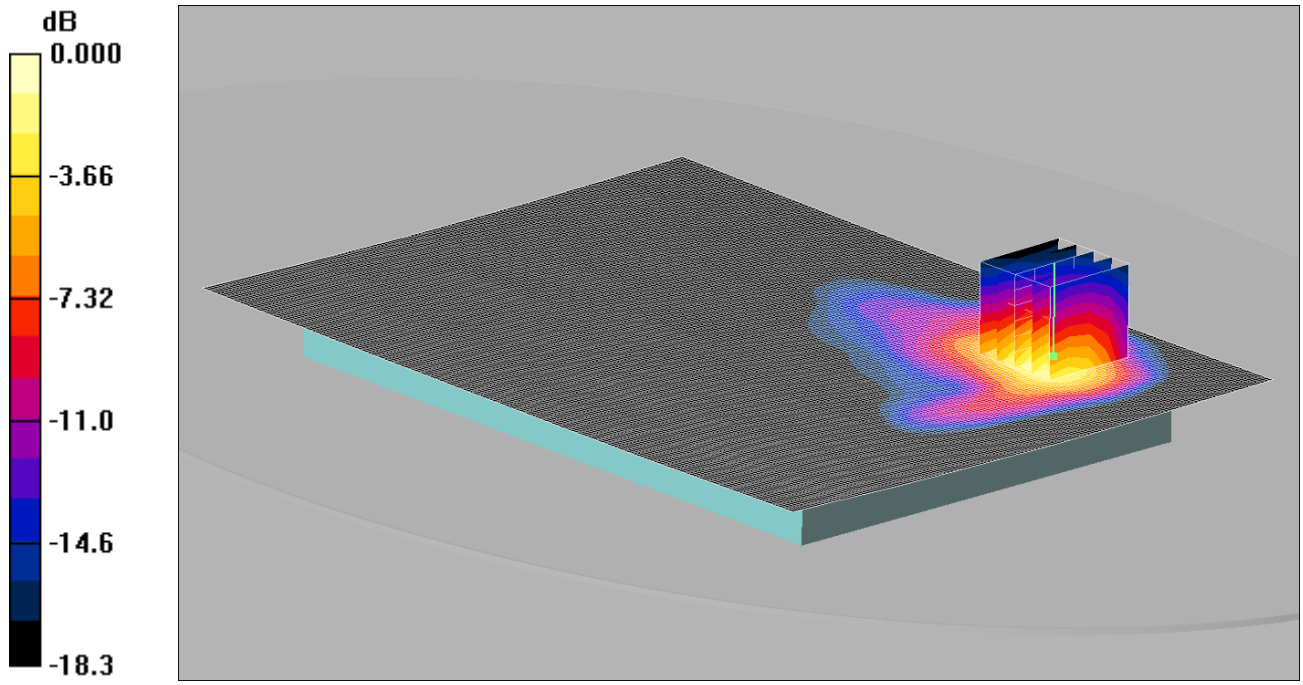

0 dB = 0.627mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.51 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186
Back - Middle/Area Scan (131x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.733 mW/g

Back - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.5 V/m; Power Drift = 0.067 dB
Peak SAR (extrapolated) = 1.20 W/kg
SAR(1 g) = 0.577 mW/g; SAR(10 g) = 0.291 mW/g
Maximum value of SAR (measured) = 0.627 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

137: Back of EUT Facing Phantom LTE FDD 25 20MHz 50%RB High CH26365 Sensor Active
Date: 22/04/2015
DUT: Inari 8; Type: Tablet

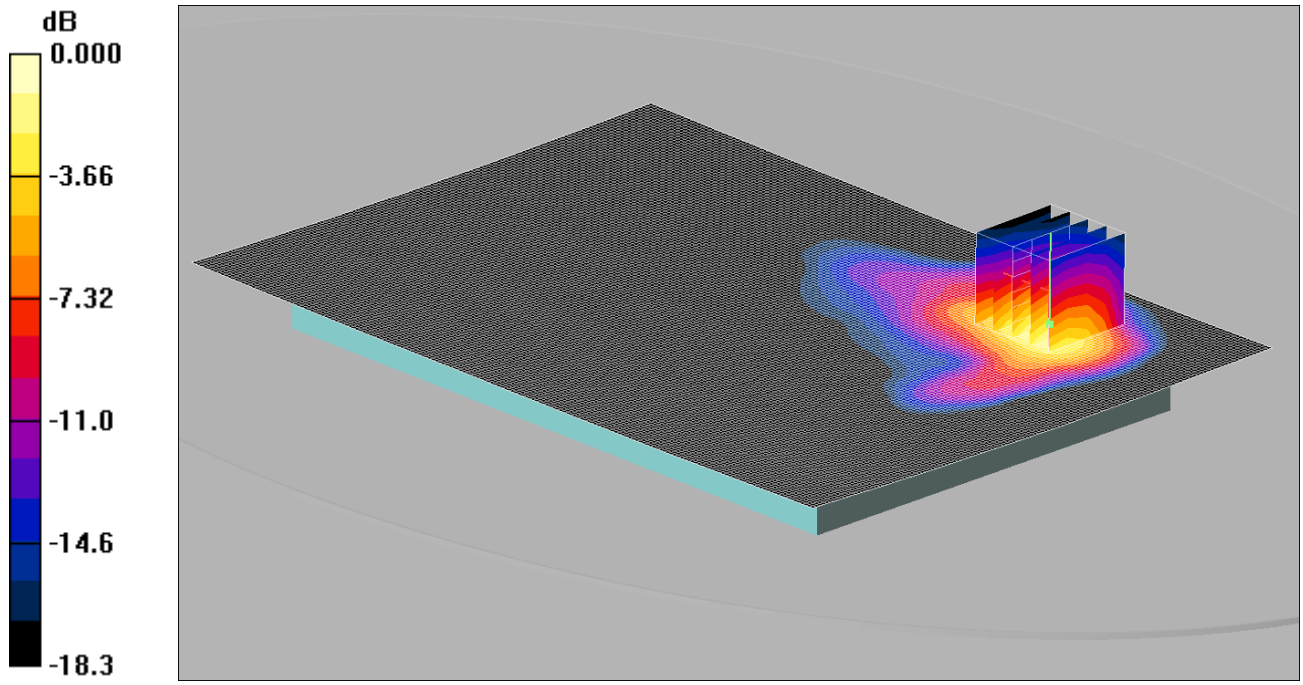

0 dB = 0.562mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.51 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186
Back - Middle/Area Scan (131x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.656 mW/g

Back - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.9 V/m; Power Drift = 0.024 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.516 mW/g; SAR(10 g) = 0.261 mW/g
Maximum value of SAR (measured) = 0.562 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

138: Top of EUT Facing Phantom LTE FDD 25 20MHz 1RB High CH26365 Sensor Active
Date: 22/04/2015
DUT: Inari 8; Type: Tablet

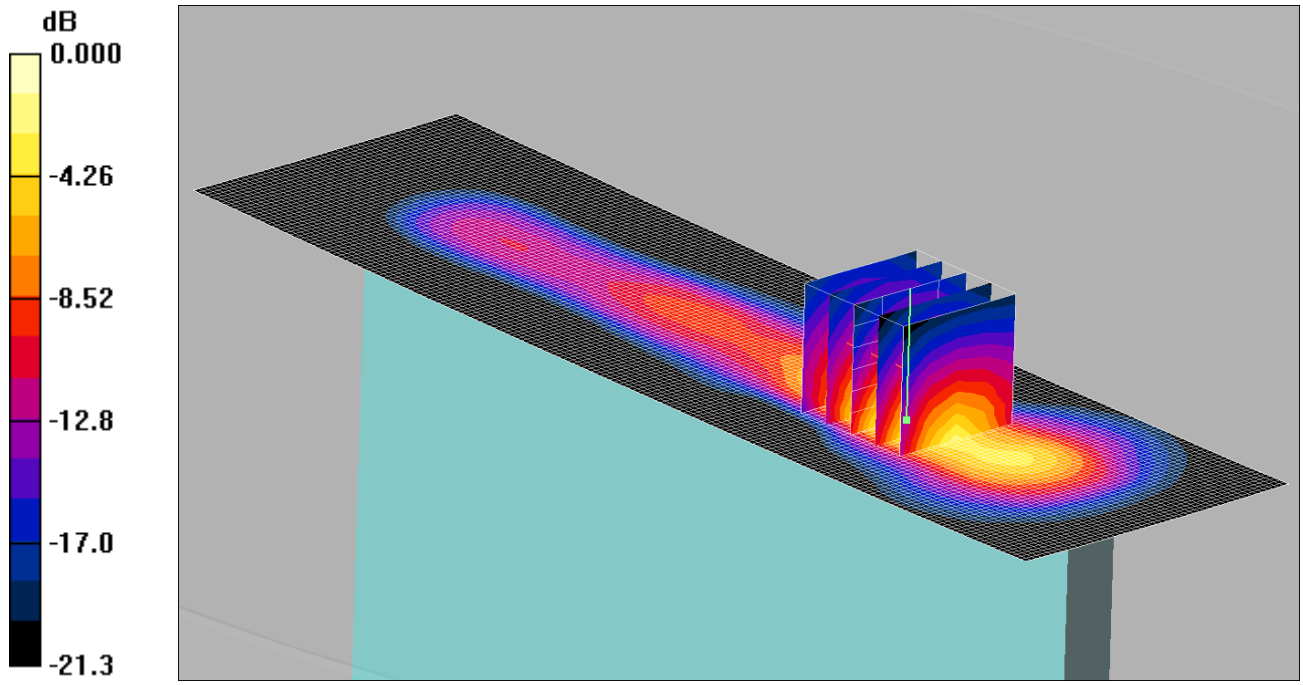

0 dB = 1.04mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.51 mho/m; ε_r = 52.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top - Middle/Area Scan (51x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.920 mW/g

Top - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.5 V/m; Power Drift = -0.038 dB
Peak SAR (extrapolated) = 2.05 W/kg
SAR(1 g) = 0.894 mW/g; SAR(10 g) = 0.373 mW/g
Maximum value of SAR (measured) = 1.04 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

139: Top of EUT Facing Phantom LTE FDD 25 20MHz 1RB High CH26140 Sensor Active
Date: 23/04/2015
DUT: Inari 8; Type: Tablet

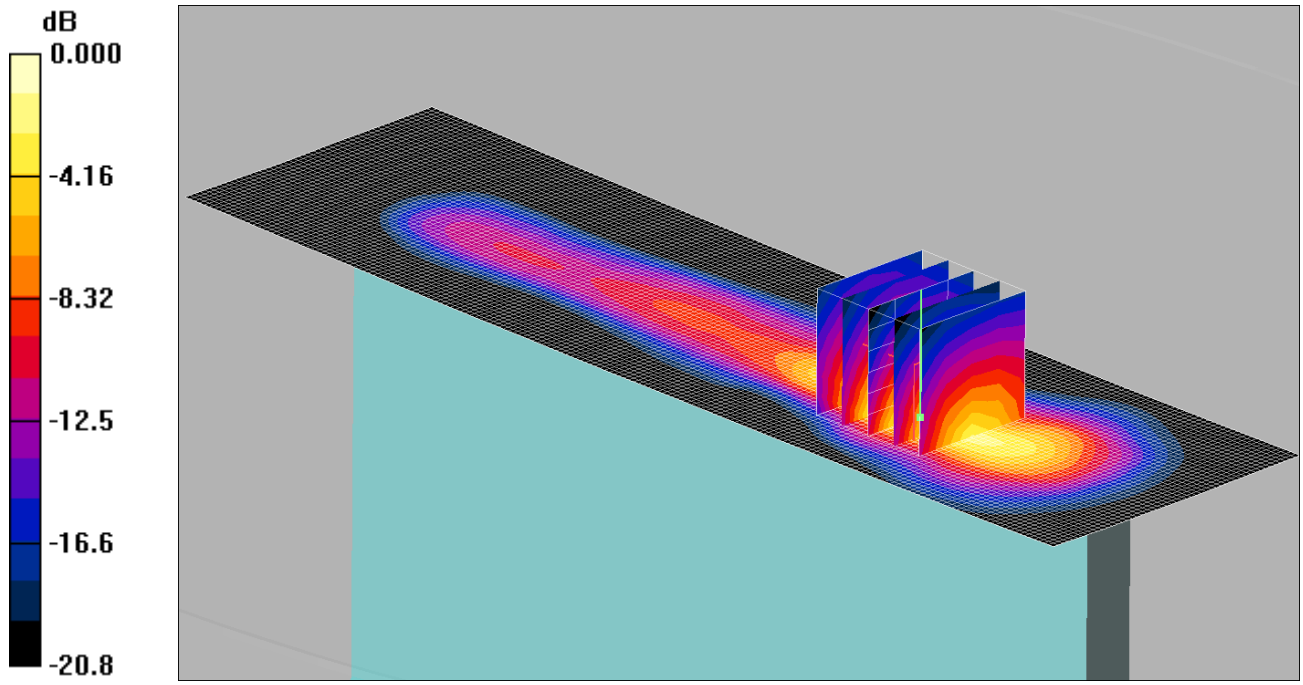

0 dB = 0.496mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1860 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1860 MHz; σ = 1.48 mho/m; ε_r = 52.7; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top - Middle/Area Scan (51x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.474 mW/g

Top - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.5 V/m; Power Drift = -0.078 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.452 mW/g; SAR(10 g) = 0.188 mW/g
Maximum value of SAR (measured) = 0.496 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

140: Top of EUT Facing Phantom LTE FDD 25 20MHz 1RB High CH26590 Sensor Active
Date: 23/04/2015
DUT: Inari 8; Type: Tablet

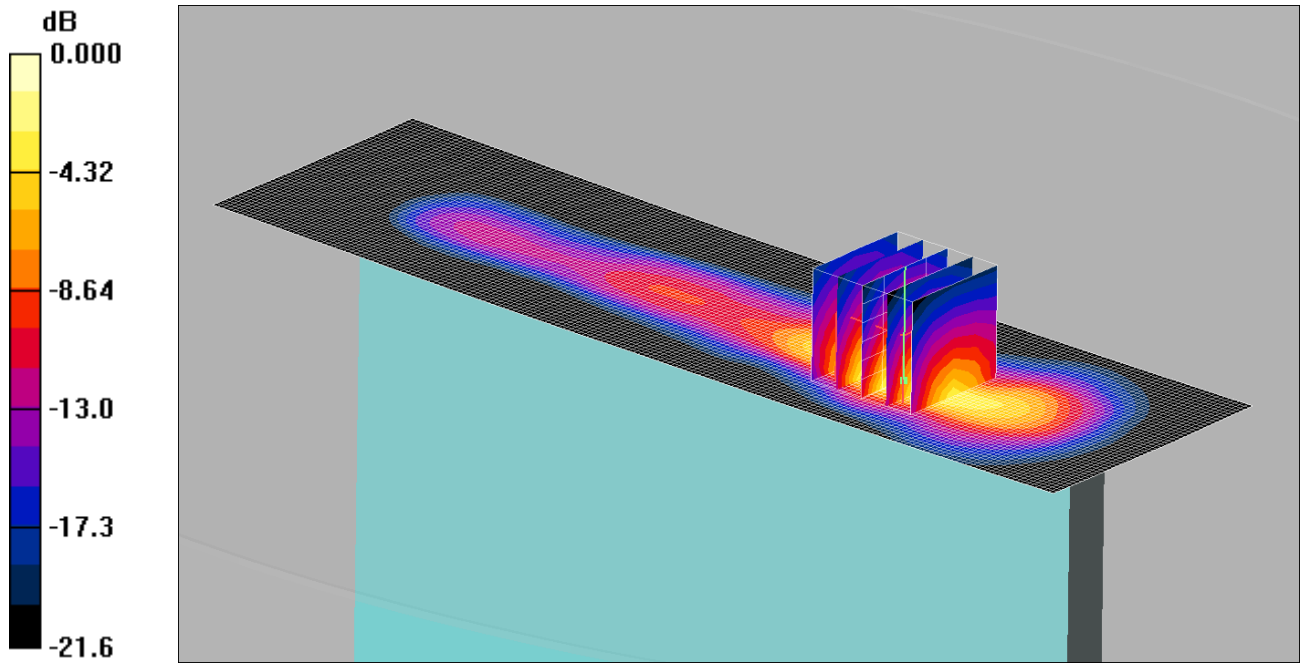

0 dB = 1.19mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1905 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1905 MHz; σ = 1.52 mho/m; ε_r = 52.6; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top - High/Area Scan (51x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 1.12 mW/g

Top - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 28.6 V/m; Power Drift = 0.024 dB
Peak SAR (extrapolated) = 2.50 W/kg
SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.439 mW/g
Maximum value of SAR (measured) = 1.19 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

141: Top of EUT Facing Phantom LTE FDD 25 20MHz 50%RB High CH26365 Sensor Active
Date: 23/04/2015
DUT: Inari 8; Type: Tablet

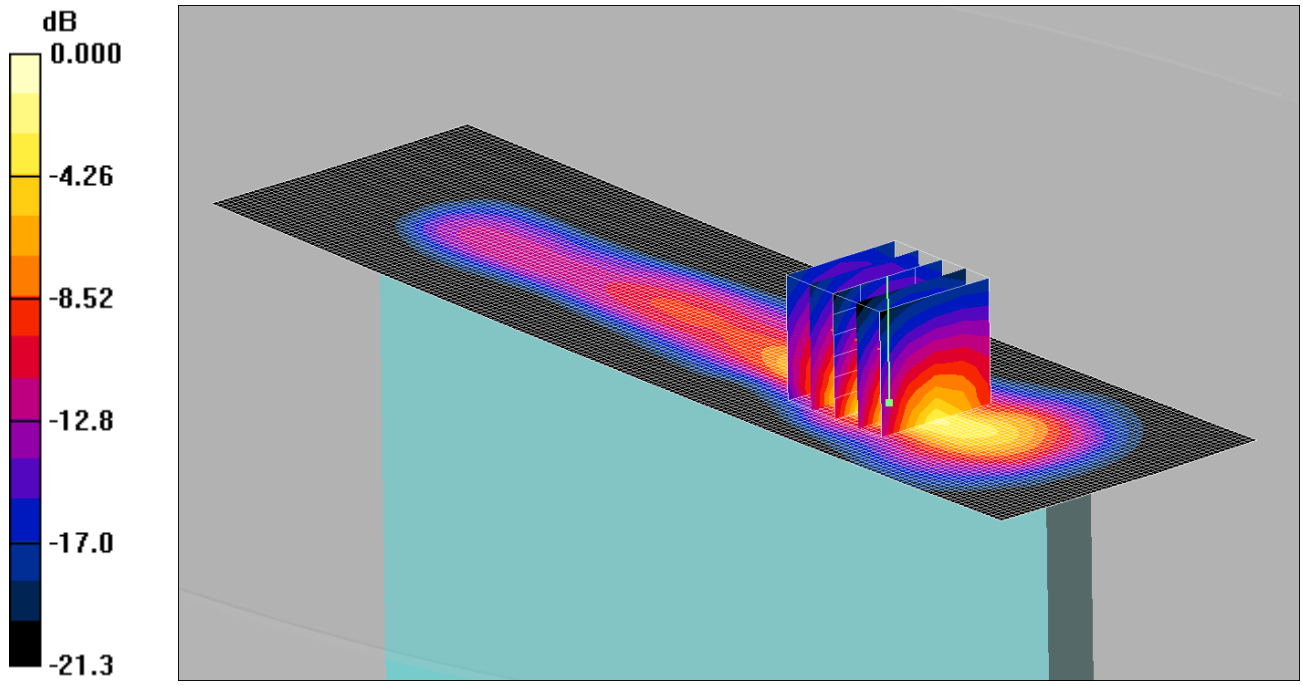

0 dB = 0.819mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.5 mho/m; ε_r = 52.6; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top - Middle/Area Scan (51x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.770 mW/g

Top - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.9 V/m; Power Drift = -0.004 dB
Peak SAR (extrapolated) = 1.73 W/kg
SAR(1 g) = 0.731 mW/g; SAR(10 g) = 0.302 mW/g
Maximum value of SAR (measured) = 0.819 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

142: Top of EUT Facing Phantom LTE FDD 25 20MHz 50%RB High CH26140 Sensor Active
Date: 23/04/2015
DUT: Inari 8; Type: Tablet

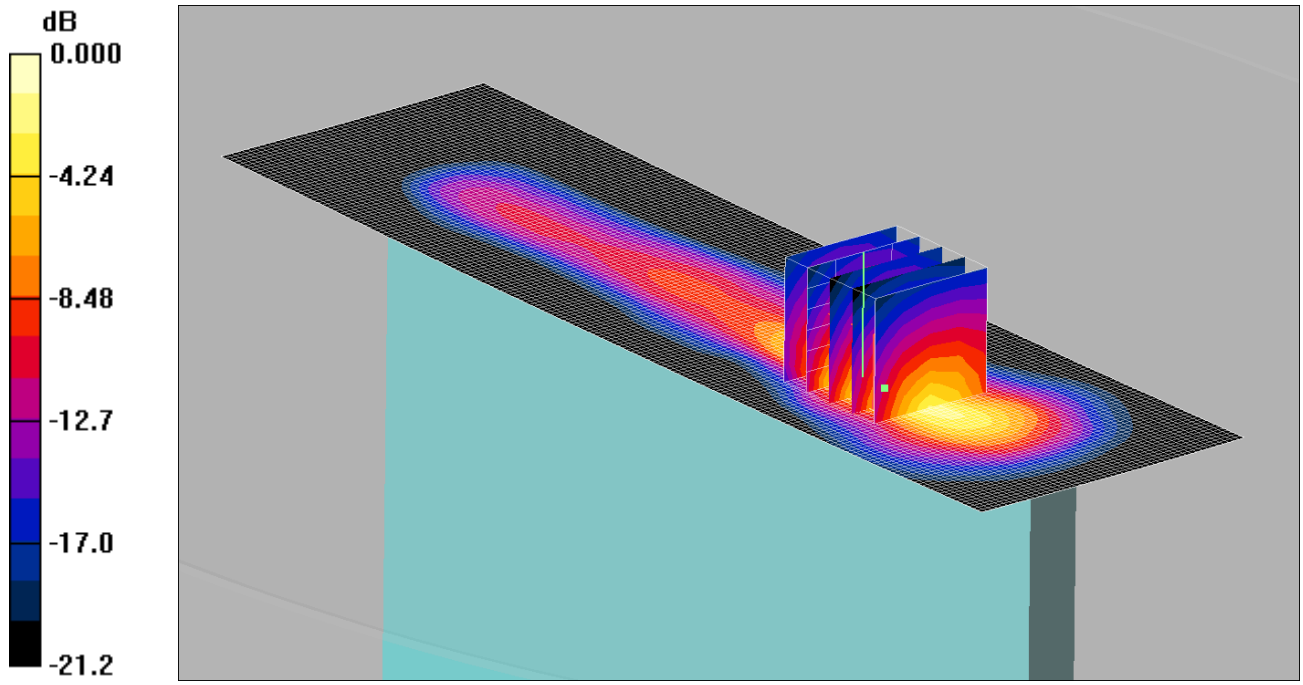

0 dB = 0.728mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1860 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1860 MHz; σ = 1.48 mho/m; ε_r = 52.7; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top - Low/Area Scan (51x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.683 mW/g

Top - Low/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.6 V/m; Power Drift = -0.001 dB
Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 0.655 mW/g; SAR(10 g) = 0.270 mW/g
Maximum value of SAR (measured) = 0.728 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

143: Top of EUT Facing Phantom LTE FDD 25 20MHz 50%RB High CH26590 Sensor Active
Date: 23/04/2015
DUT: Inari 8; Type: Tablet

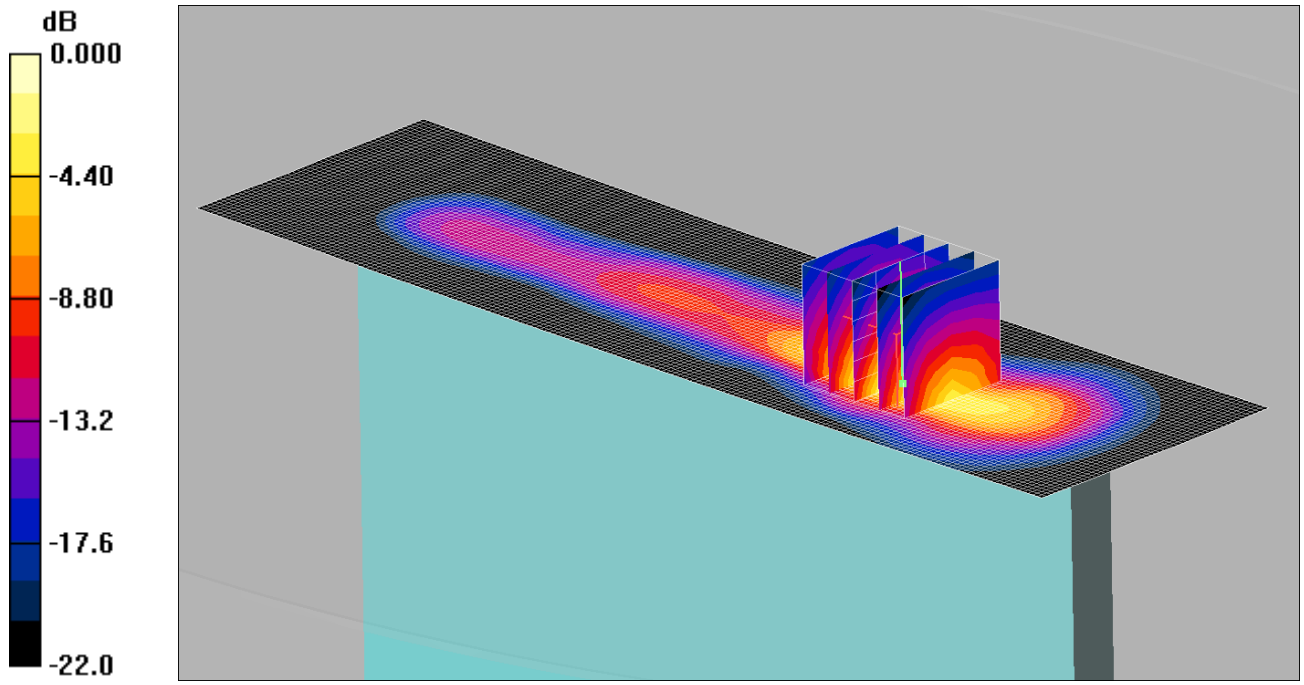

0 dB = 0.859mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1905 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1905 MHz; σ = 1.52 mho/m; ε_r = 52.6; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top - High/Area Scan (51x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.816 mW/g

Top - High/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.3 V/m; Power Drift = 0.004 dB
Peak SAR (extrapolated) = 1.80 W/kg
SAR(1 g) = 0.763 mW/g; SAR(10 g) = 0.314 mW/g
Maximum value of SAR (measured) = 0.859 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

144: Top of EUT Facing Phantom LTE FDD 25 20MHz 100%RB CH26365 Sensor Active
Date: 23/04/2015
DUT: Inari 8; Type: Tablet

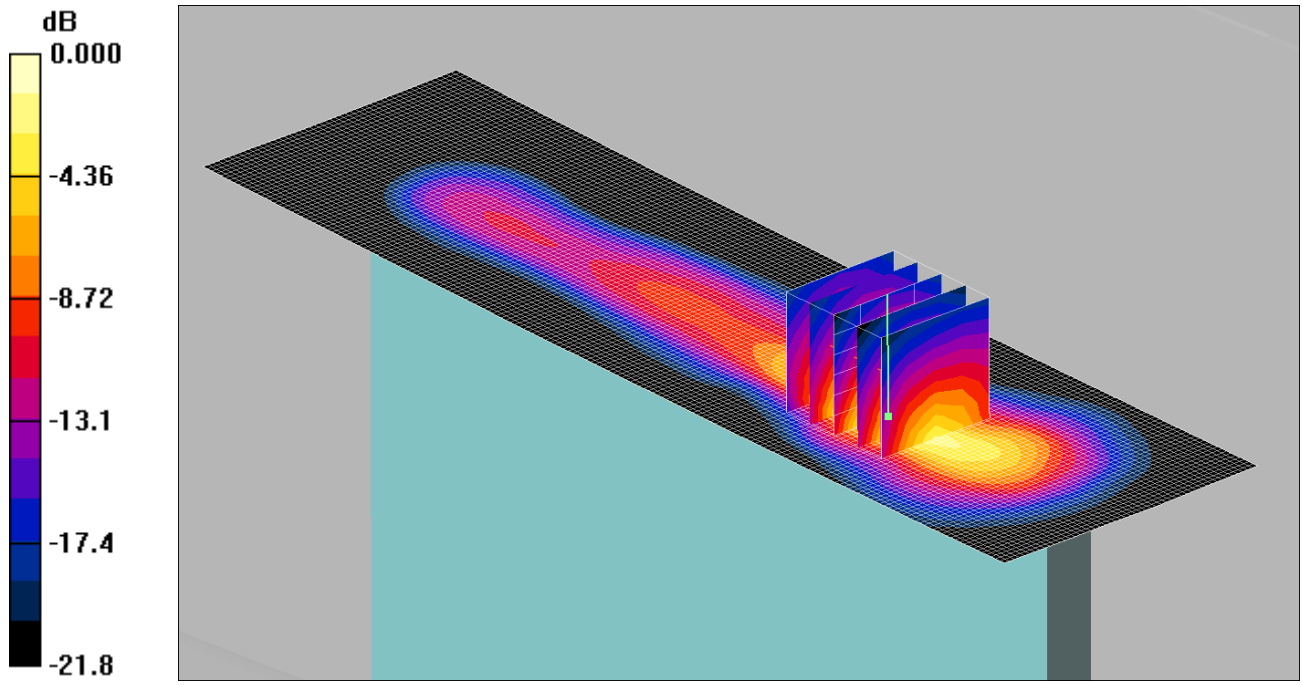

0 dB = 0.717mW/g

Communication System: LTE - Band 25 / 20MHz Channel; Frequency: 1882.5 MHz;Duty Cycle: 1:1
Medium: 1900 MHz MSL Medium parameters used (interpolated): f = 1882.5 MHz; σ = 1.5 mho/m; ε_r = 52.6; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.69, 4.69, 4.69);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Top - Middle/Area Scan (51x181x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.687 mW/g

Top - Middle/Zoom Scan (5x5x7) (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 22.5 V/m; Power Drift = 0.021 dB
Peak SAR (extrapolated) = 1.51 W/kg
SAR(1 g) = 0.639 mW/g; SAR(10 g) = 0.264 mW/g
Maximum value of SAR (measured) = 0.717 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

145: Back of EUT Facing Phantom Wi-Fi 2.4GHz 802.11b 1Mbps SISO 2A CH11
Date: 25/03/2015
DUT: Inari 8; Type: Tablet

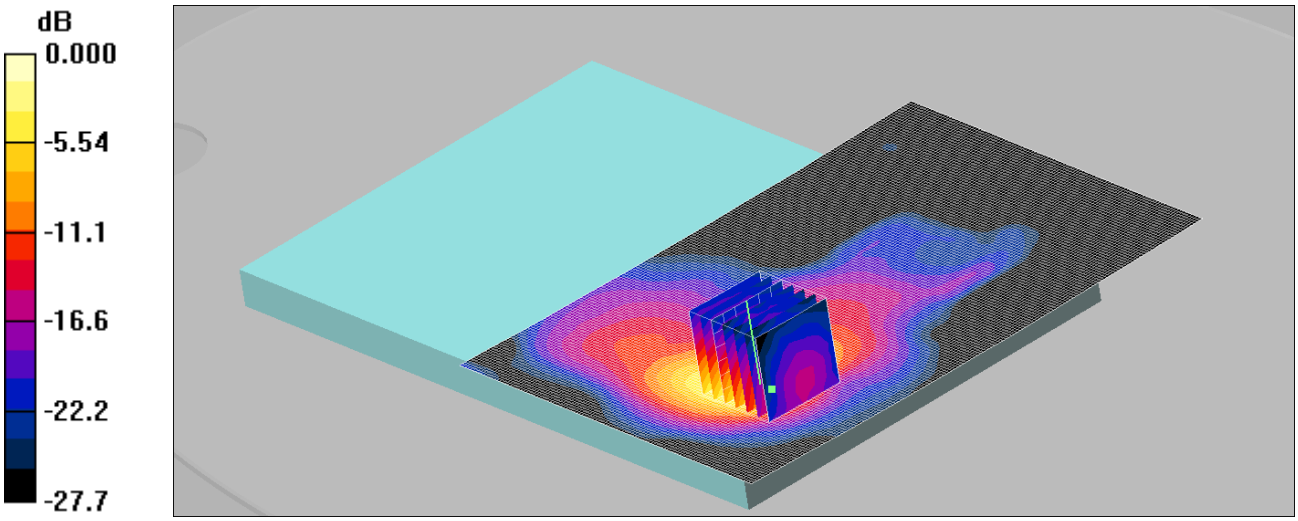

0 dB = 0.496mW/g

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2462 MHz; σ = 1.94 mho/m; ε_r = 51.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back - Middle 2 2 2/Area Scan 2 2 (161x111x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.442 mW/g
Back - Middle 2 2 2/Zoom Scan (7x7x7) 2 (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.8 V/m; Power Drift = -0.054 dB
Peak SAR (extrapolated) = 1.31 W/kg
SAR(1 g) = 0.427 mW/g; SAR(10 g) = 0.161 mW/g
Maximum value of SAR (measured) = 0.496 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

146: Right of EUT Facing Phantom Wi-Fi 2.4GHz 802.11b 1Mbps SISO 2A CH11
Date: 25/03/2015
DUT: Inari 8; Type: Tablet

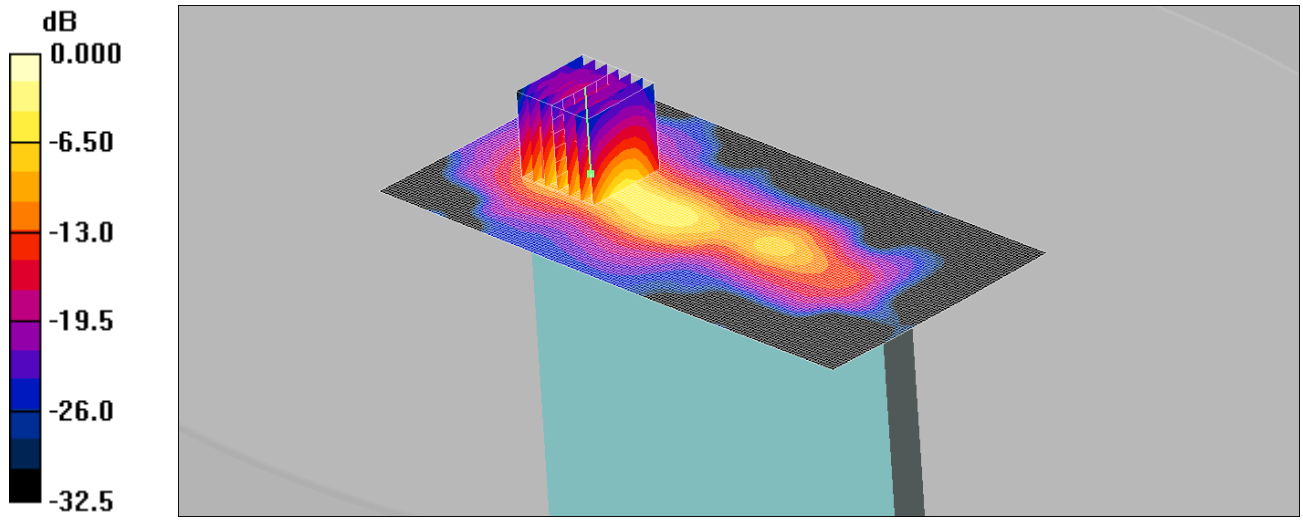

0 dB = 0.466mW/g

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2462 MHz; σ = 1.94 mho/m; ε_r = 51.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186
Back - Middle 2 2 2/Area Scan 2 3 (81x161x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.419 mW/g
Back - Middle 2 2 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.74 V/m; Power Drift = 0.073 dB
Peak SAR (extrapolated) = 1.01 W/kg
SAR(1 g) = 0.382 mW/g; SAR(10 g) = 0.133 mW/g
Maximum value of SAR (measured) = 0.466 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

147: Back of EUT Facing Phantom Wi-Fi 2.4GHz 802.11b 1Mbps SISO 2B CH11
Date: 26/03/2015
DUT: Inari 8; Type: Tablet

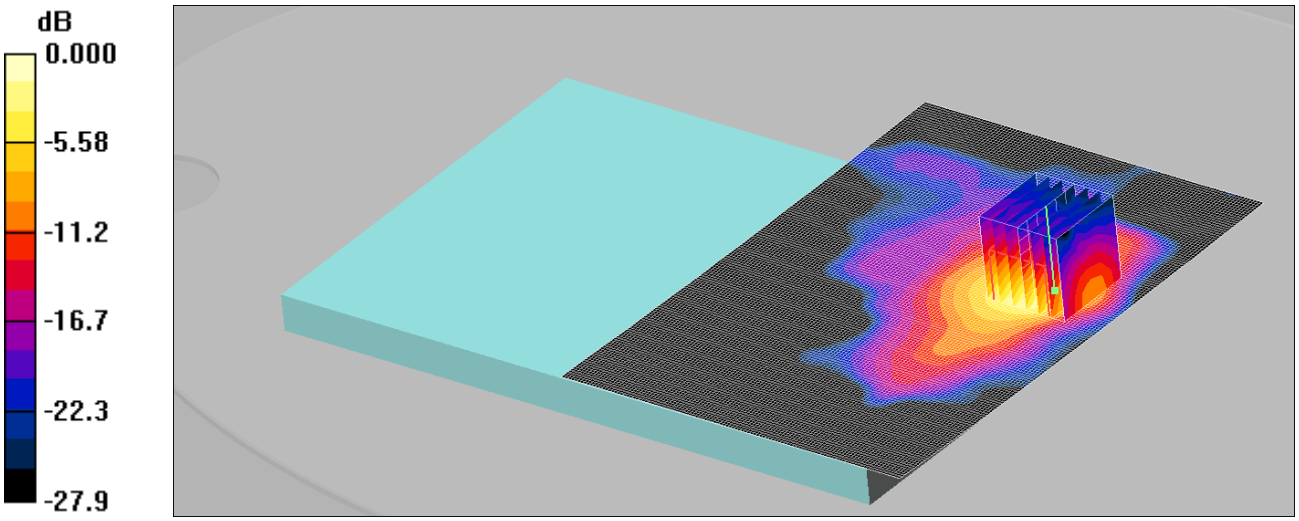

0 dB = 0.308mW/g

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2462 MHz; σ = 2.03 mho/m; ε_r = 50.3; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186
Back - Middle 2 2 2/Area Scan 2 2 (161x111x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.366 mW/g

Back - Middle 2 2 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.37 V/m; Power Drift = -0.020 dB
Peak SAR (extrapolated) = 0.772 W/kg
SAR(1 g) = 0.265 mW/g; SAR(10 g) = 0.103 mW/g
Maximum value of SAR (measured) = 0.308 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

148: Right of EUT Facing Phantom Wi-Fi 2.4GHz 802.11b 1Mbps SISO 2B CH11
Date: 26/03/2015
DUT: Inari 8; Type: Tablet

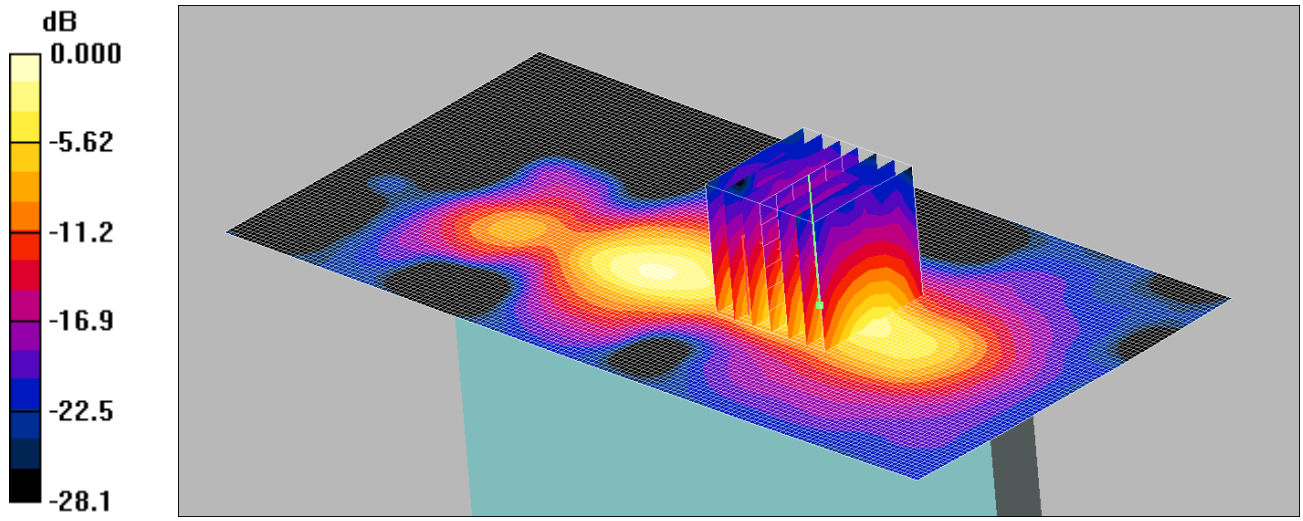

0 dB = 0.210mW/g

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2462 MHz; σ = 1.94 mho/m; ε_r = 51.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186
Right - Middle/Area Scan 2 3 (81x161x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.203 mW/g

Right - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.39 V/m; Power Drift = -0.080 dB
Peak SAR (extrapolated) = 0.433 W/kg
SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.067 mW/g
Maximum value of SAR (measured) = 0.210 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

149: Back of EUT Facing Phantom Wi-Fi 2.4GHz 802.11g CDD 6Mbps MIMO 2AB-A CH11
Date: 26/03/2015
DUT: Inari 8; Type: Tablet

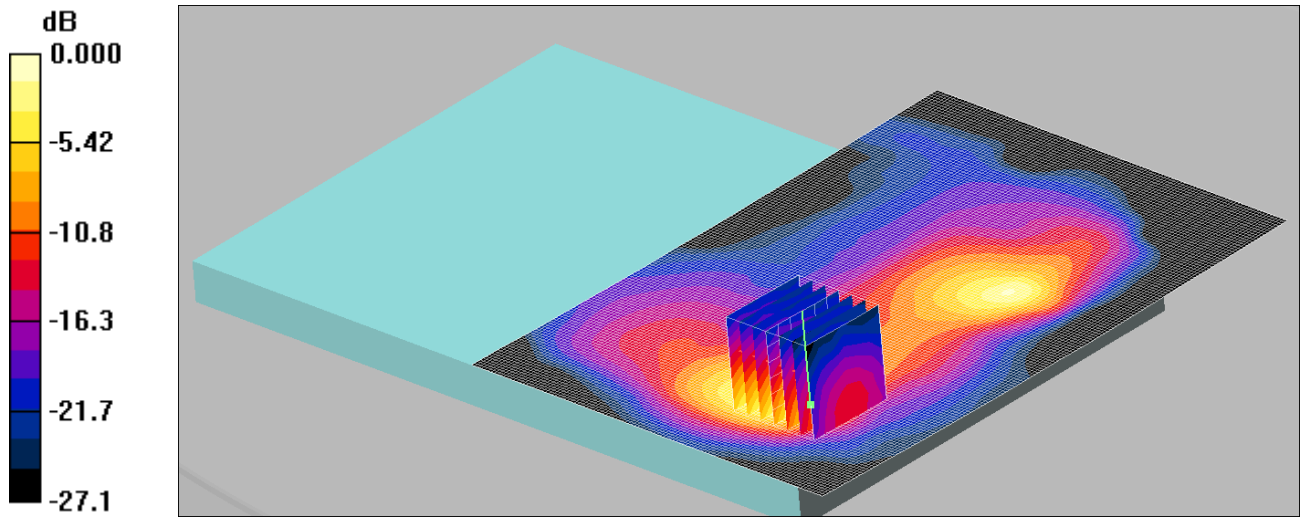

0 dB = 0.530mW/g

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2462 MHz; σ = 2.03 mho/m; ε_r = 50.3; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186
Back - Middle 2 2 2/Area Scan 2 2 (161x111x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.531 mW/g

Back - Middle 2 2 2/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 12.6 V/m; Power Drift = 0.052 dB
Peak SAR (extrapolated) = 1.30 W/kg
SAR(1 g) = 0.434 mW/g; SAR(10 g) = 0.173 mW/g
Maximum value of SAR (measured) = 0.530 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

150: Right of EUT Facing Phantom Wi-Fi 2.4GHz 802.11g CDD 6Mbps MIMO 2AB-A CH11
Date: 26/03/2015
DUT: Inari 8; Type: Tablet

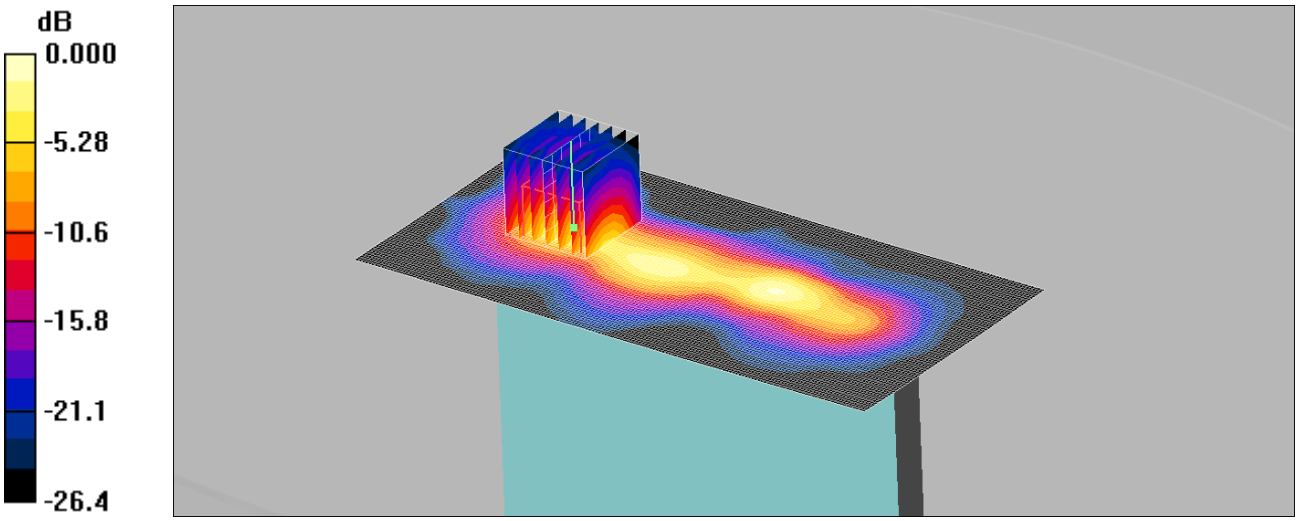

0 dB = 0.484mW/g

Communication System: WLAN; Frequency: 2462 MHz;Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2462 MHz; σ = 2.03 mho/m; ε_r = 50.3; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right - Middle/Area Scan 2 3 (81x161x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.393 mW/g

Right - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 9.04 V/m; Power Drift = 0.016 dB
Peak SAR (extrapolated) = 0.994 W/kg
SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.140 mW/g
Maximum value of SAR (measured) = 0.484 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

151: Back of EUT Facing Phantom Wi-Fi 2.4GHz 802.11g CDD 6Mbps MIMO 2AB-B CH1
Date: 17/04/2015
DUT: Inari 8; Type: Tablet

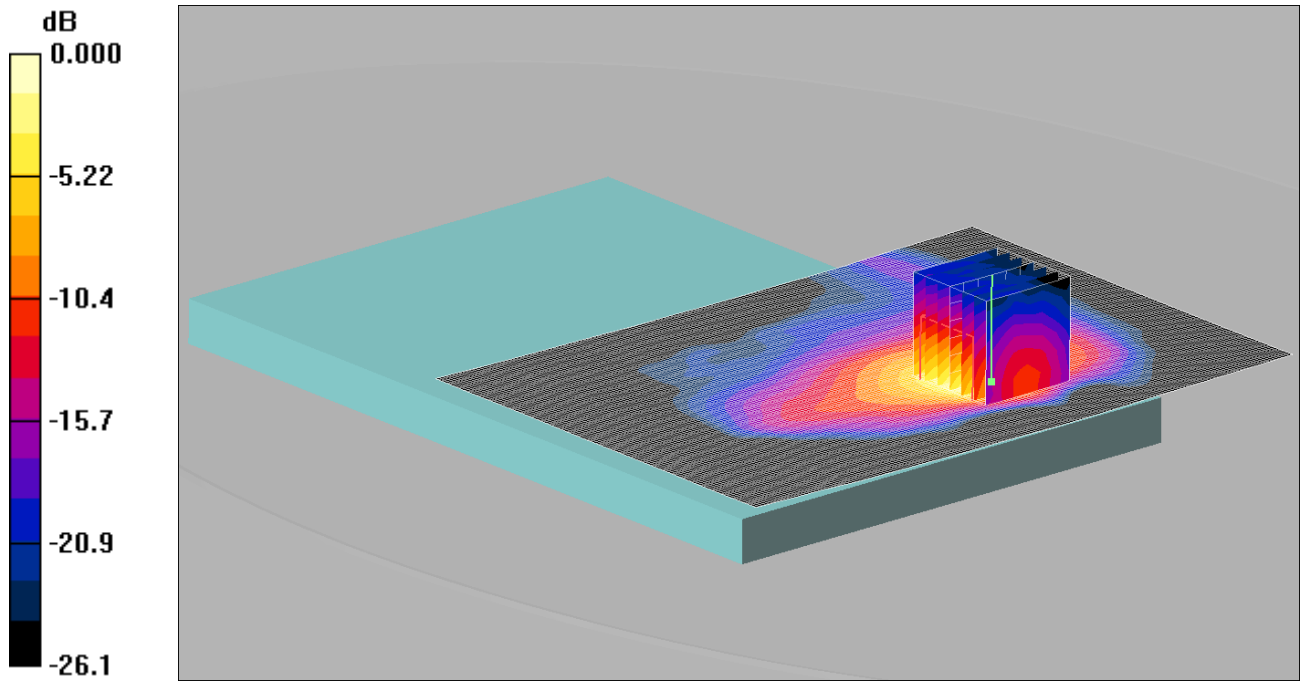

0 dB = 0.415mW/g

Communication System: WLAN; Frequency: 2412 MHz;Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2412 MHz; σ = 1.87 mho/m; ε_r = 51.3; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back - Low/Area Scan (161x111x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.474 mW/g

Back - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 13.2 V/m; Power Drift = -0.027 dB
Peak SAR (extrapolated) = 1.01 W/kg
SAR(1 g) = 0.347 mW/g; SAR(10 g) = 0.135 mW/g
Maximum value of SAR (measured) = 0.415 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

152: Back of EUT Facing Phantom Wi-Fi 2.4GHz 802.11g CDD 6Mbps MIMO 2AB-B CH6
Date: 17/04/2015
DUT: Inari 8; Type: Tablet

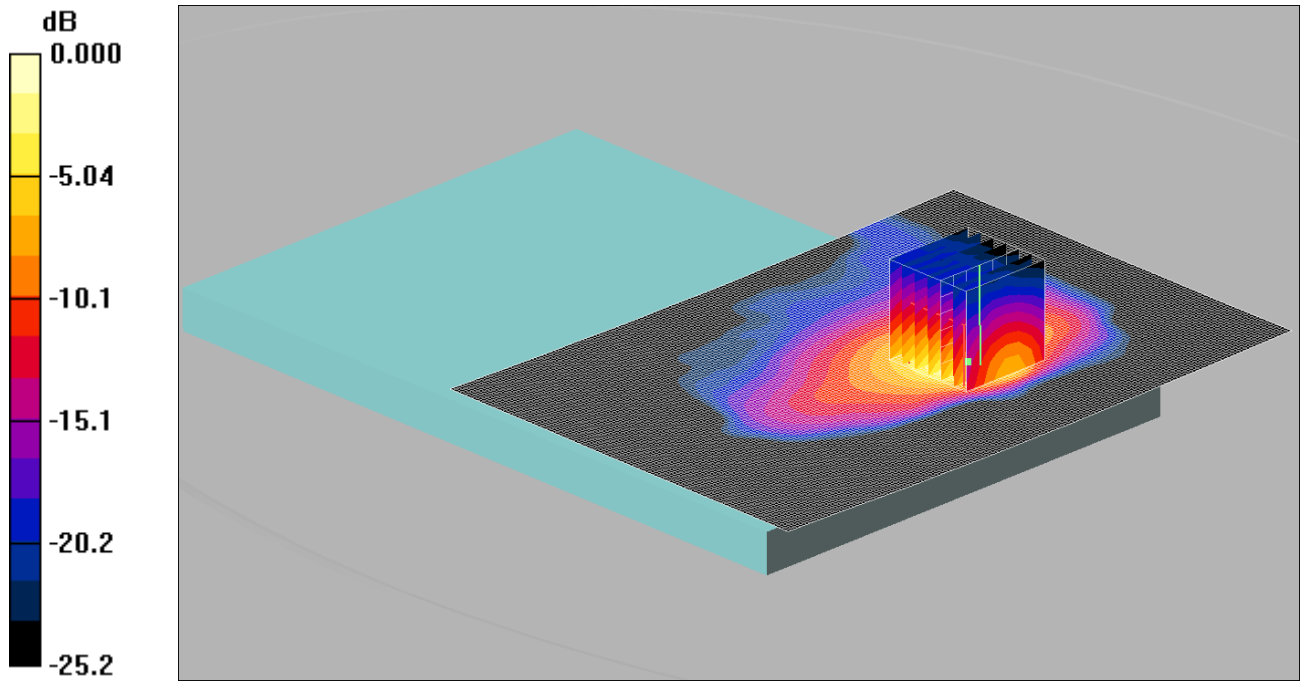

0 dB = 0.382mW/g

Communication System: WLAN; Frequency: 2437 MHz;Duty Cycle: 1:1
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2437 MHz; σ = 1.91 mho/m; ε_r = 51.3; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back - Middle/Area Scan (161x111x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.367 mW/g

Back - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 14.3 V/m; Power Drift = -0.009 dB
Peak SAR (extrapolated) = 0.979 W/kg
SAR(1 g) = 0.331 mW/g; SAR(10 g) = 0.128 mW/g
Maximum value of SAR (measured) = 0.382 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

153: Back of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH36
Date: 18/04/15
DUT: Inari 8; Type: Tablet

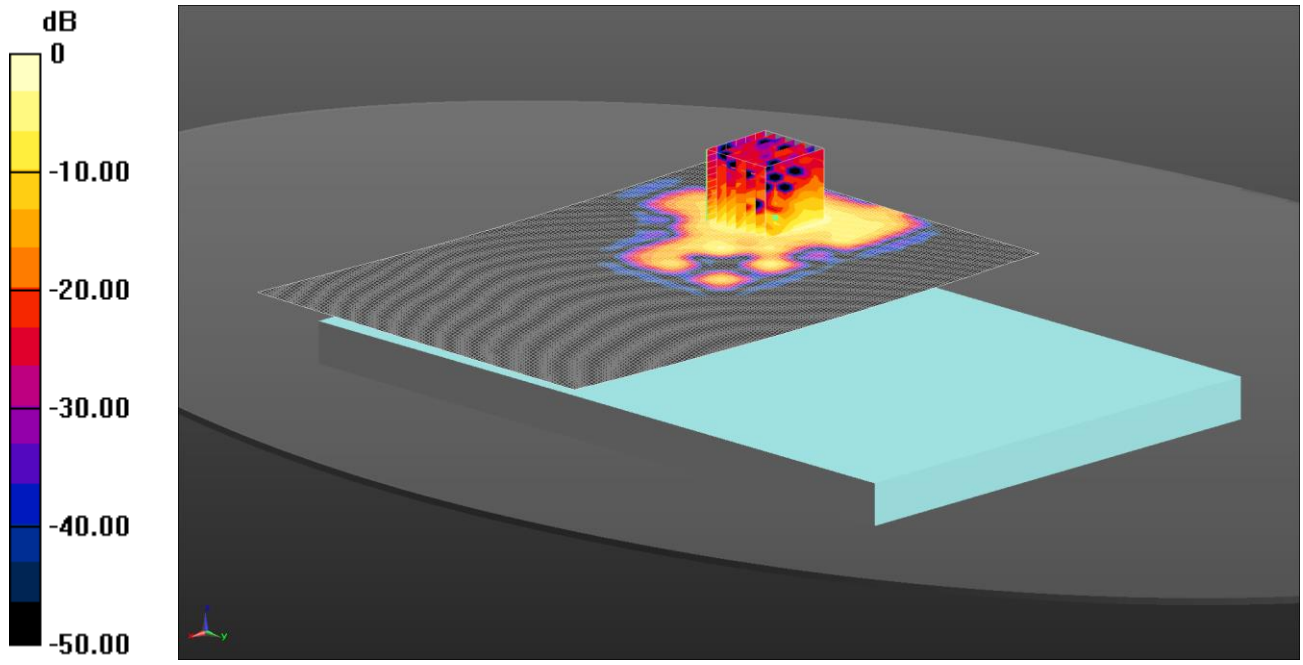

0 dB = 0.876 W/kg = -0.57 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5180 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5180 MHz; σ = 5.287 S/m; ε_r = 47.974; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.38, 4.38, 4.38); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom - Middle/Area Scan (191x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.921 W/kg
Configuration/Back of EUT Facing Phantom - Middle/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 7.405 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.99 W/kg
SAR(1 g) = 0.697 W/kg; SAR(10 g) = 0.212 W/kg
Maximum value of SAR (measured) = 0.876 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

154: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH36
Date: 17/04/15
DUT: Inari 8; Type: Tablet

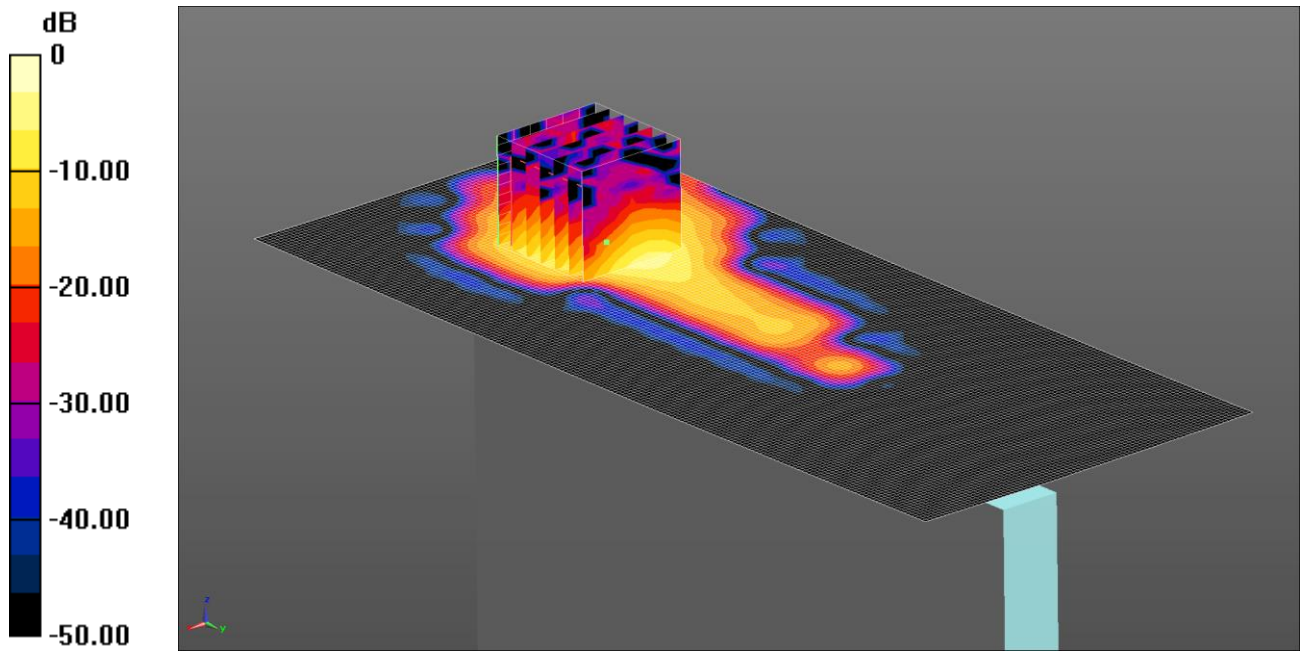

0 dB = 1.36 W/kg = 1.34 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5180 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5180 MHz; σ = 5.287 S/m; ε_r = 47.974; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.38, 4.38, 4.38); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle Sample 2 2 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.29 W/kg
Configuration/Right of EUT Facing Phantom - Middle Sample 2 2 2 2/Zoom Scan (7x7x12) (7x7x12)/Cube 0:
Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 14.81 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 3.00 W/kg
SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.284 W/kg
Maximum value of SAR (measured) = 1.36 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

155: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH48
Date: 18/04/15
DUT: Inari 8; Type: Tablet

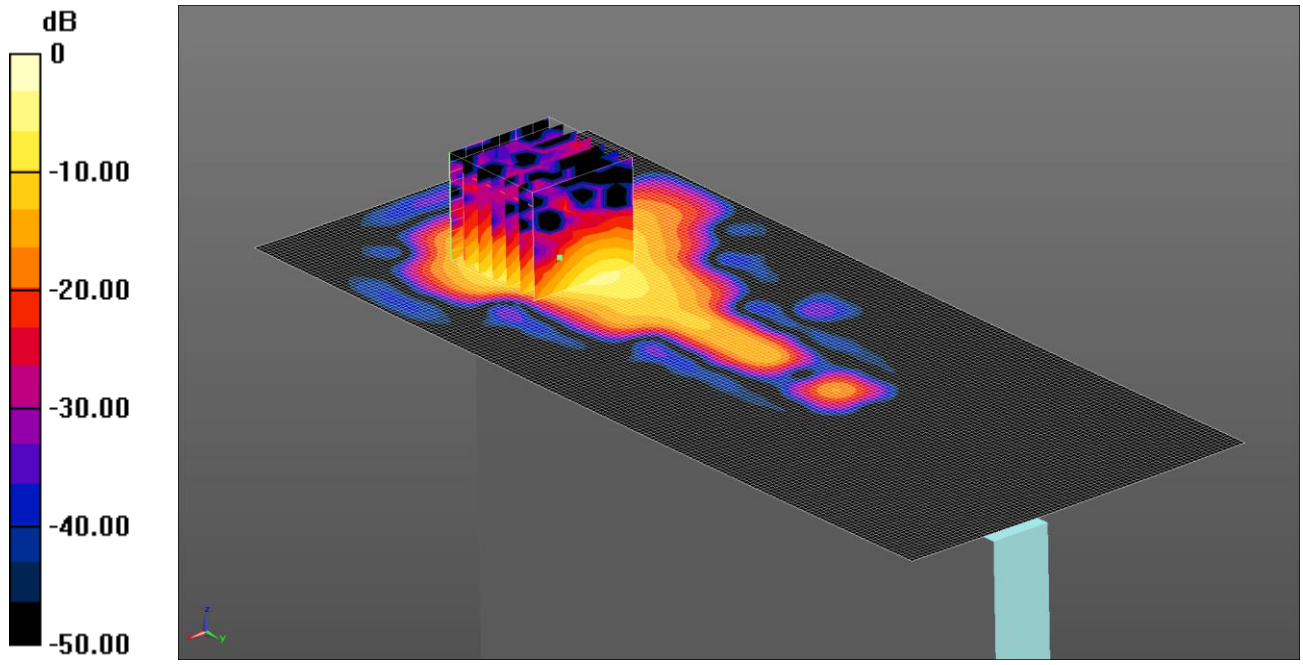

0 dB = 1.70 W/kg = 2.30 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5240 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5240 MHz; σ = 5.383 S/m; ε_r = 47.798; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.38, 4.38, 4.38); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.71 W/kg
Configuration/Right of EUT Facing Phantom - Middle 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 18.28 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 4.02 W/kg
SAR(1 g) = 1.27 W/kg; SAR(10 g) = 0.337 W/kg
Maximum value of SAR (measured) = 1.70 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

156: Top of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH36
Date: 21/04/15
DUT: Inari 8; Type: Tablet

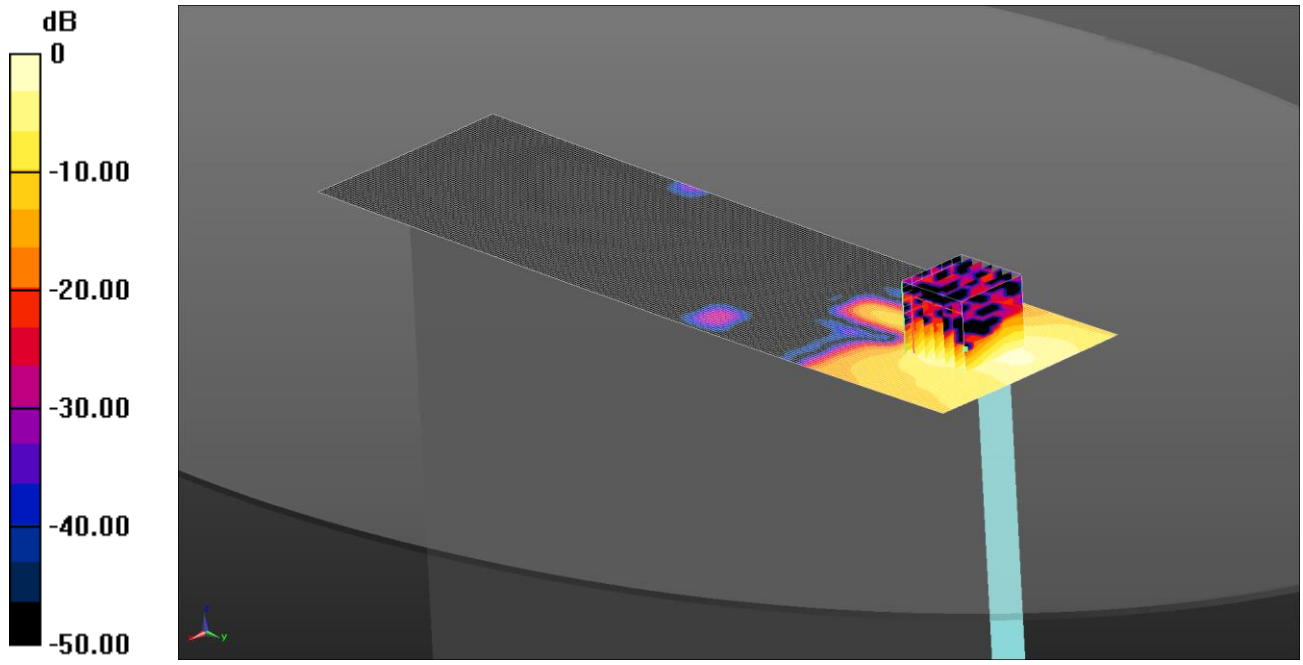

0 dB = 0.365 W/kg = -4.38 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5180 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5180 MHz; σ = 5.208 S/m; ε_r = 47.273; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.38, 4.38, 4.38); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Top of EUT Facing Phantom - Middle/Area Scan (71x251x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.340 W/kg

Configuration/Top of EUT Facing Phantom - Middle/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 7.470 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.724 W/kg
SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.074 W/kg
Maximum value of SAR (measured) = 0.365 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

157: Back of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2B CH48
Date: 21/04/15
DUT: Inari 8; Type: Tablet

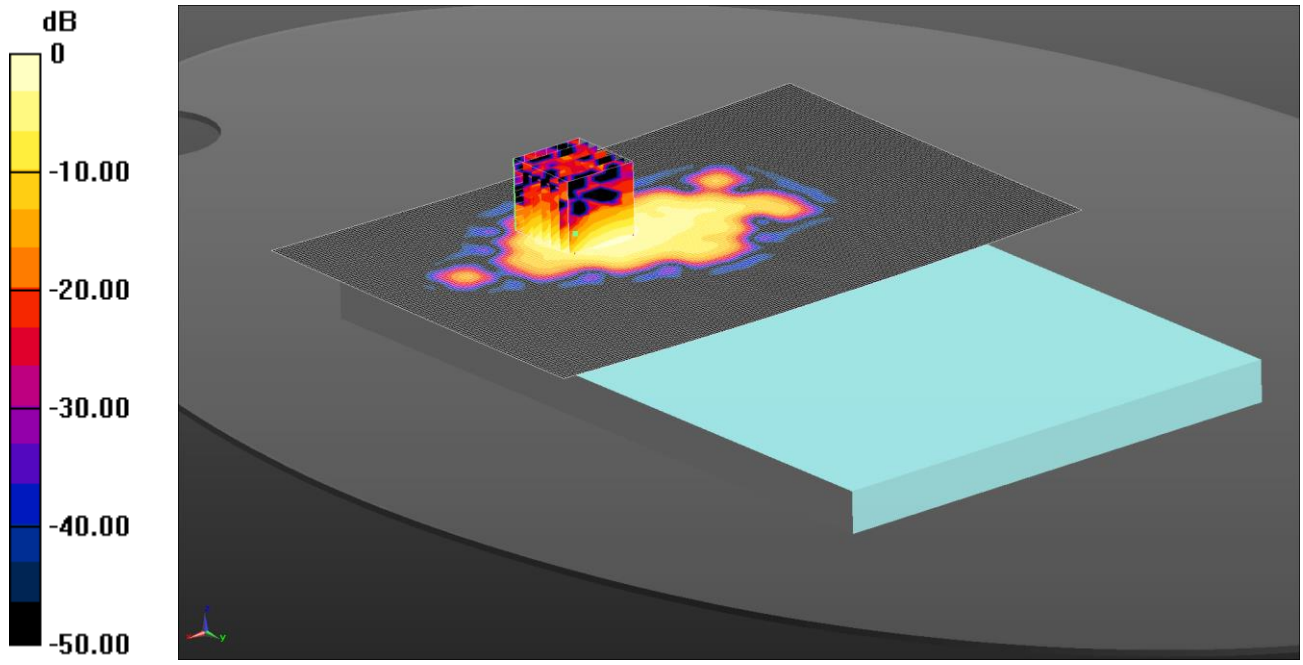

0 dB = 0.300 W/kg = -5.23 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5240 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5240 MHz; σ = 5.322 S/m; ε_r = 47.143; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.38, 4.38, 4.38); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Back of EUT Facing Phantom - Middle/Area Scan (191x131x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.326 W/kg

Configuration/Back of EUT Facing Phantom - Middle/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 7.259 V/m; Power Drift = 0.06 dB
Peak SAR (extrapolated) = 0.807 W/kg
SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.080 W/kg
Maximum value of SAR (measured) = 0.300 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

158: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2B CH48
Date: 21/04/15
DUT: Inari 8; Type: Tablet

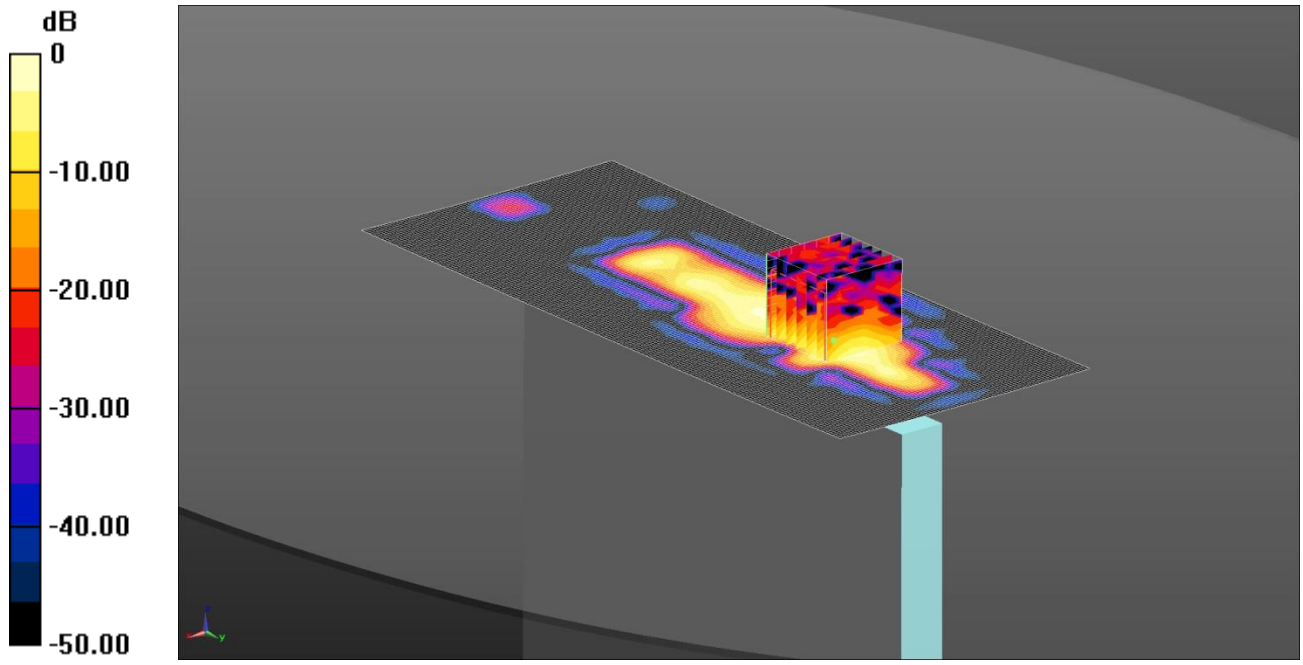

0 dB = 0.379 W/kg = -4.21 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5240 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5240 MHz; σ = 5.322 S/m; ε_r = 47.143; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.38, 4.38, 4.38); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.489 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 6.940 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.295 W/kg; SAR(10 g) = 0.082 W/kg
Maximum value of SAR (measured) = 0.379 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

159: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a CDD 6Mbps MIMO 2AB-A CH36
Date: 21/04/15
DUT: Inari 8; Type: Tablet

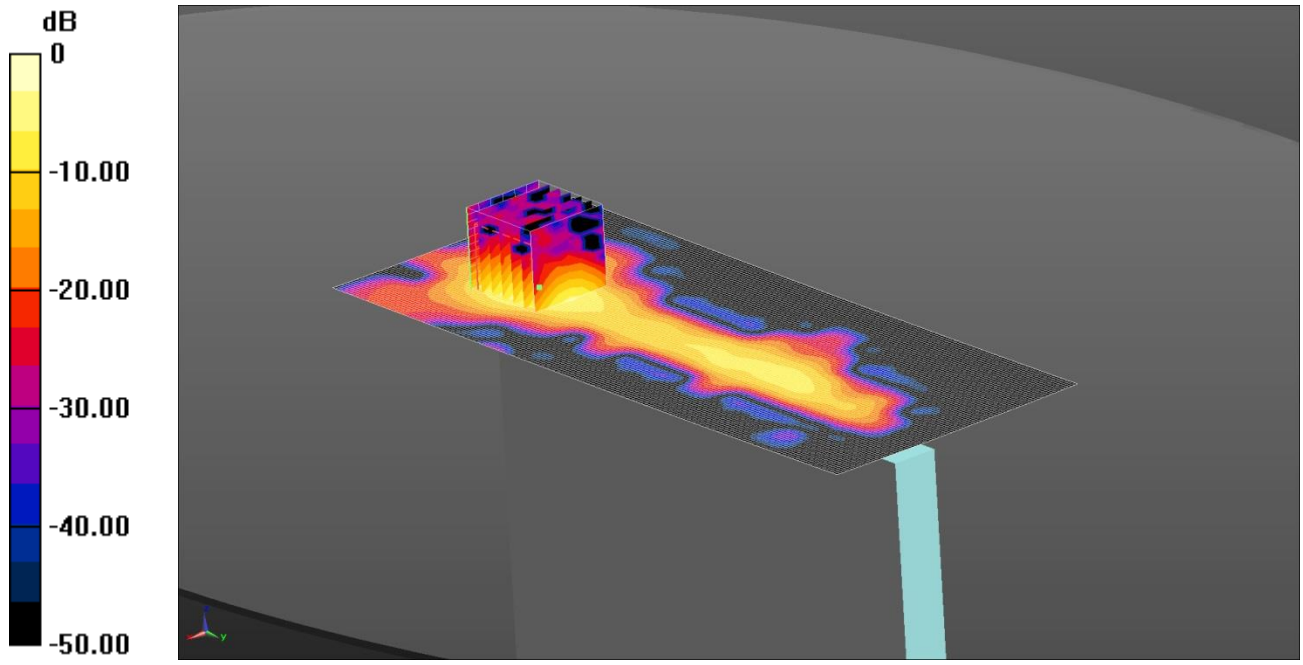

0 dB = 1.66 W/kg = 2.20 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5180 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5180 MHz; σ = 5.208 S/m; ε_r = 47.273; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.38, 4.38, 4.38); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.58 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 15.18 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 3.96 W/kg
SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.321 W/kg
Maximum value of SAR (measured) = 1.66 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

160: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a CDD 6Mbps MIMO 2AB-A CH48
Date: 21/04/15
DUT: Inari 8; Type: Tablet

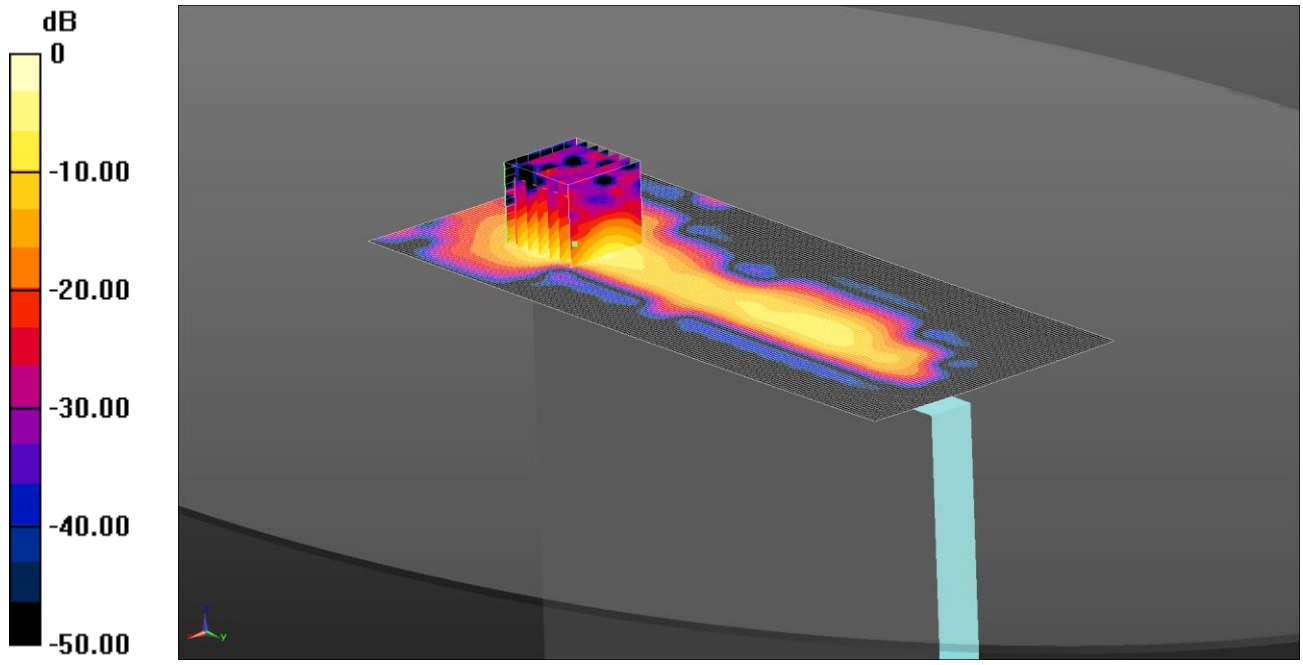

0 dB = 1.80 W/kg = 2.55 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5240 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5240 MHz; σ = 5.322 S/m; ε_r = 47.143; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.38, 4.38, 4.38); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.79 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 16.73 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 4.29 W/kg
SAR(1 g) = 1.35 W/kg; SAR(10 g) = 0.351 W/kg
Maximum value of SAR (measured) = 1.80 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

161: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH52
Date: 23/04/15
DUT: Inari 8; Type: Tablet

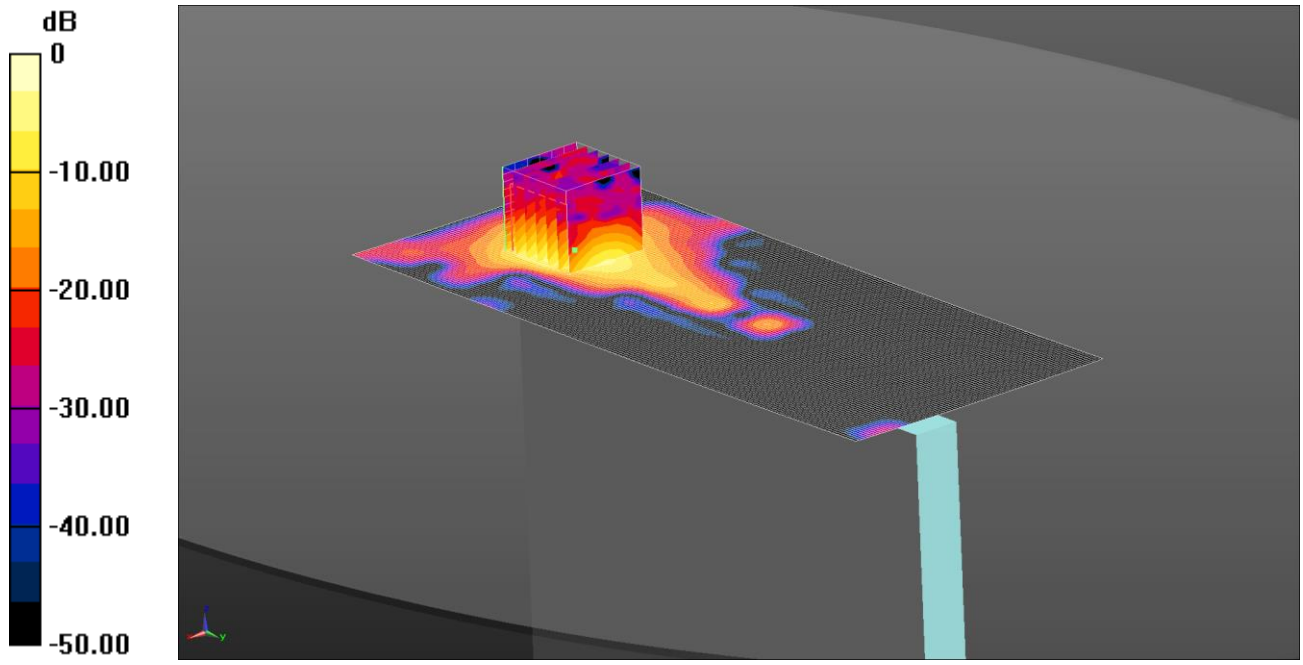

0 dB = 1.83 W/kg = 2.62 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5260 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5260 MHz; σ = 5.36 S/m; ε_r = 47.101; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.18, 4.18, 4.18); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.86 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 17.68 V/m; Power Drift = 0.20 dB
Peak SAR (extrapolated) = 4.28 W/kg
SAR(1 g) = 1.38 W/kg; SAR(10 g) = 0.369 W/kg

Maximum value of SAR (measured) = 1.83 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

162: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH64
Date: 22/04/15
DUT: Inari 8; Type: Tablet

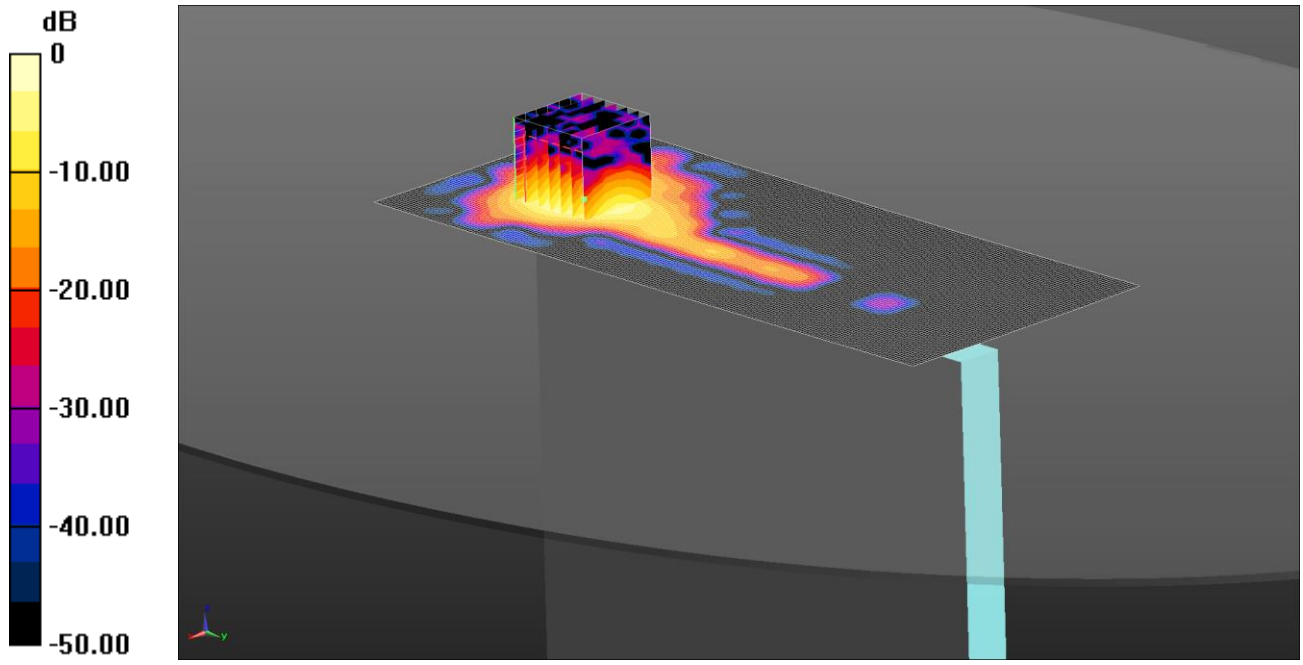

0 dB = 1.58 W/kg = 1.99 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5320 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5320 MHz; σ = 5.457 S/m; ε_r = 46.985; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.18, 4.18, 4.18); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.52 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 15.64 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 3.69 W/kg
SAR(1 g) = 1.2 W/kg; SAR(10 g) = 0.335 W/kg
Maximum value of SAR (measured) = 1.58 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

163: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2B CH64
Date: 22/04/15
DUT: Inari 8; Type: Tablet

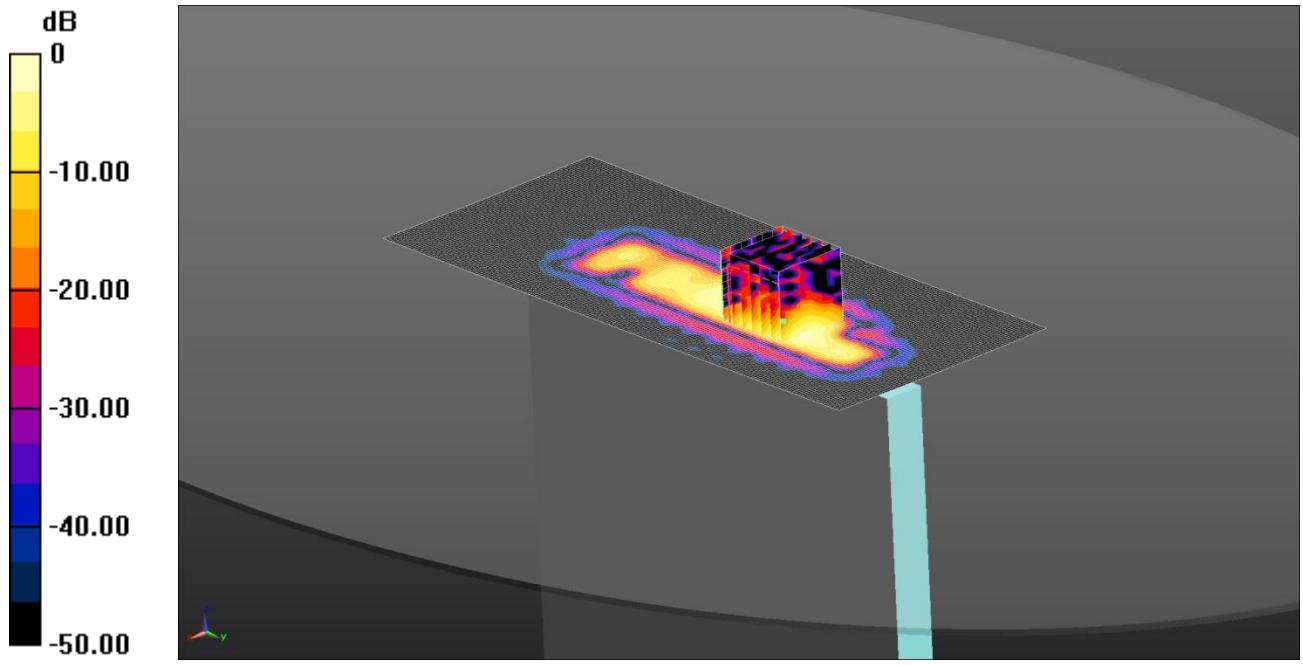

0 dB = 0.377 W/kg = -4.24 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5320 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5320 MHz; σ = 5.457 S/m; ε_r = 46.985; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.18, 4.18, 4.18); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.268 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 6.279 V/m; Power Drift = -0.12 dB
Peak SAR (extrapolated) = 0.958 W/kg
SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.073 W/kg
Maximum value of SAR (measured) = 0.377 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

164: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a CDD 6Mbps MIMO 2AB-A CH52
Date: 22/04/15
DUT: Inari 8; Type: Tablet

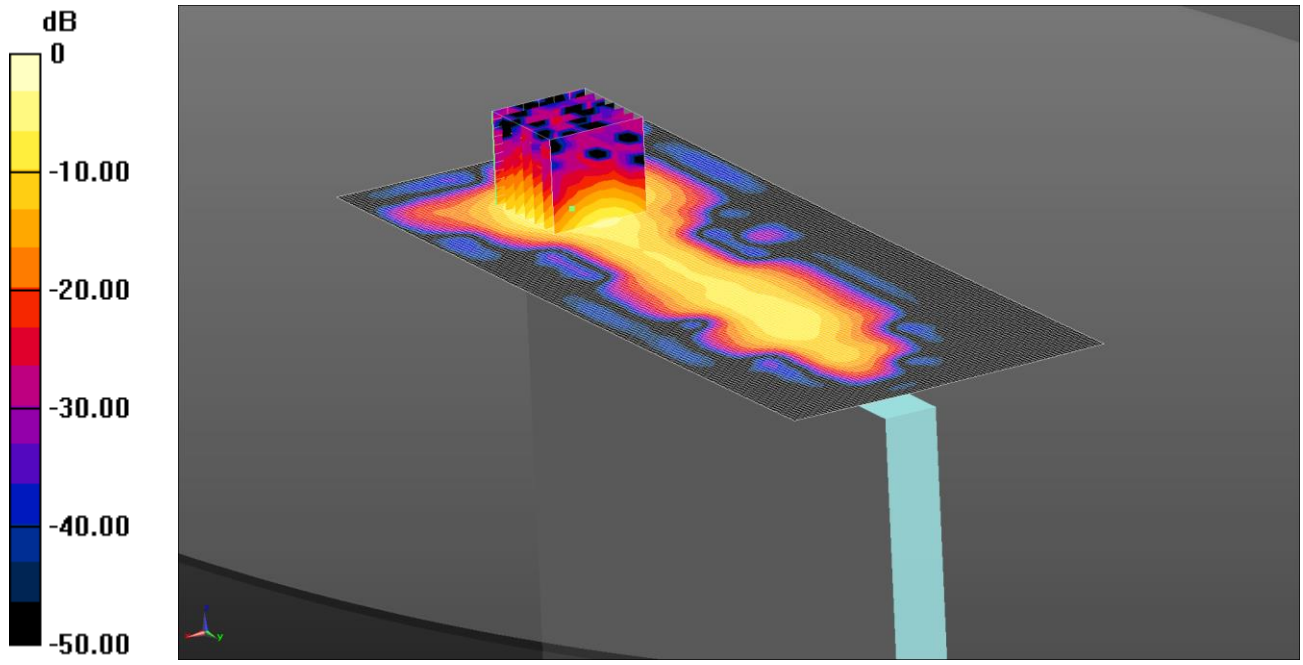

0 dB = 1.73 W/kg = 2.38 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5260 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5260 MHz; σ = 5.36 S/m; ε_r = 47.101; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.18, 4.18, 4.18); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.78 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 17.76 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 4.20 W/kg
SAR(1 g) = 1.31 W/kg; SAR(10 g) = 0.348 W/kg
Maximum value of SAR (measured) = 1.73 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

165: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a CDD 6Mbps MIMO 2AB-A CH64
Date: 22/04/15
DUT: Inari 8; Type: Tablet

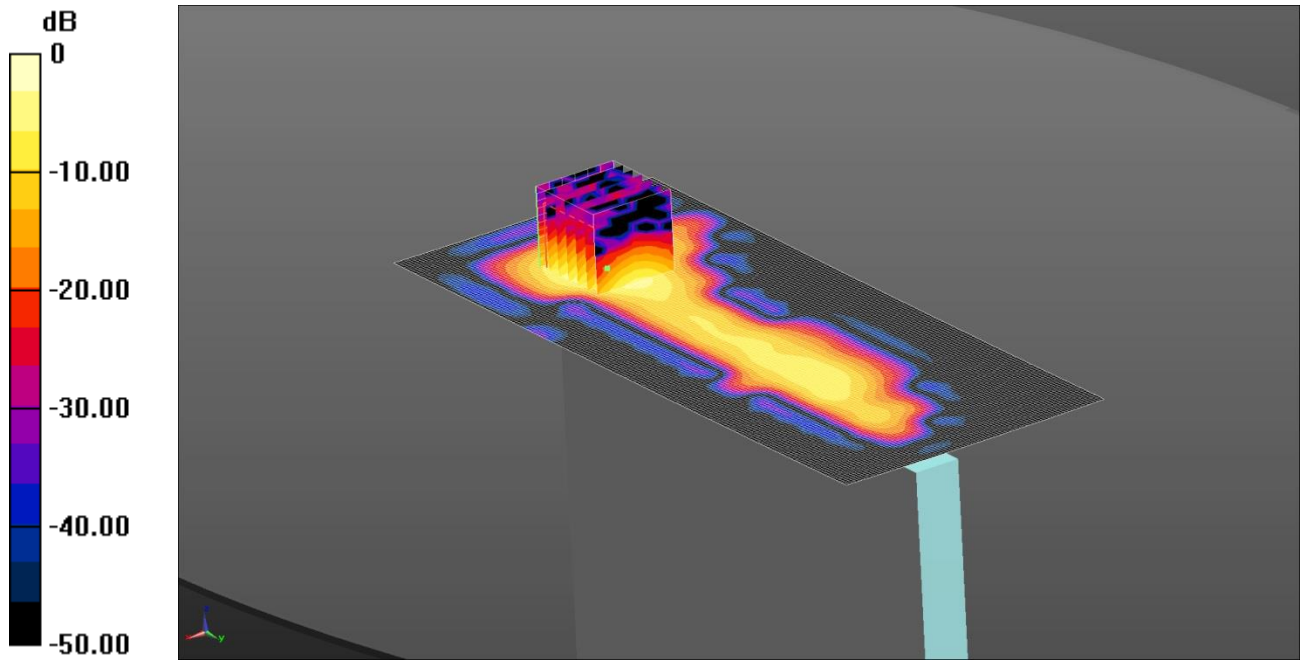

0 dB = 1.63 W/kg = 2.12 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5320 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5320 MHz; σ = 5.457 S/m; ε_r = 46.985; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.18, 4.18, 4.18); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 1.56 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 16.85 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 3.79 W/kg
SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.337 W/kg.
Maximum value of SAR (measured) = 1.63 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

166: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH104
Date: 22/04/15
DUT: Inari 8; Type: Tablet

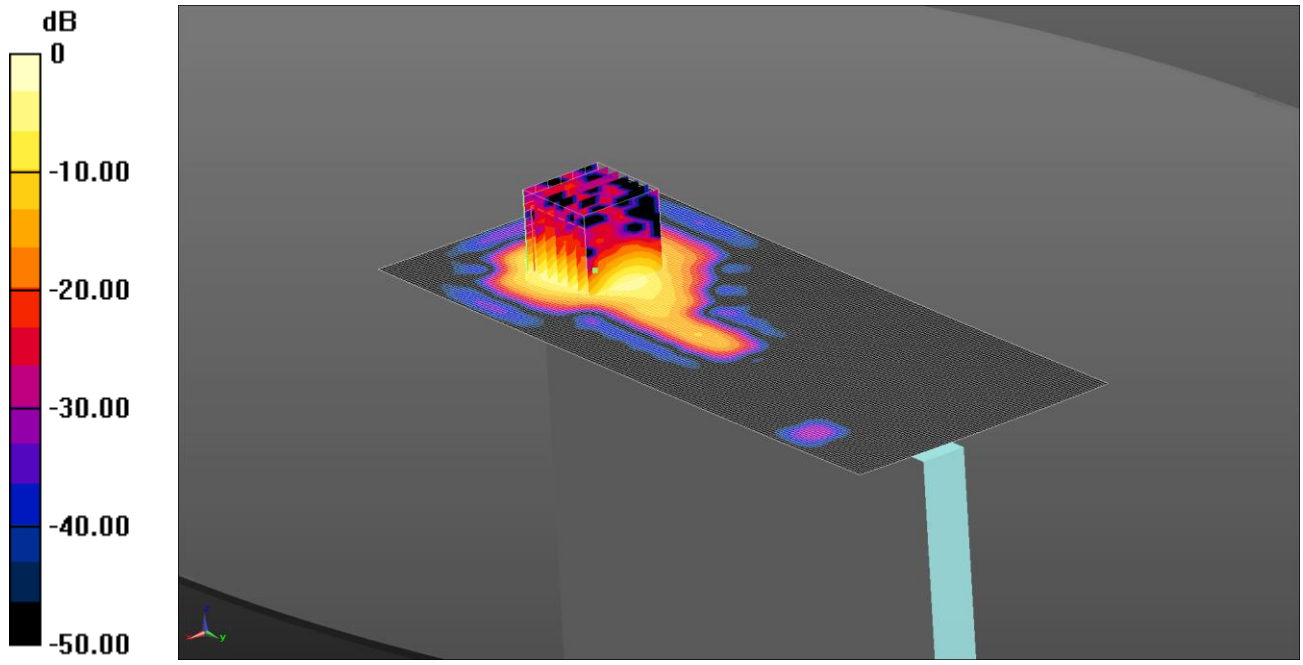

0 dB = 0.899 W/kg = -0.46 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5520 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5520 MHz; σ = 5.79 S/m; ε_r = 46.539; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(3.97, 3.97, 3.97); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.846 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 12.36 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 2.31 W/kg
SAR(1 g) = 0.700 W/kg; SAR(10 g) = 0.202 W/kg
Maximum value of SAR (measured) = 0.899 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

167: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH116
Date: 22/04/15
DUT: Inari 8; Type: Tablet

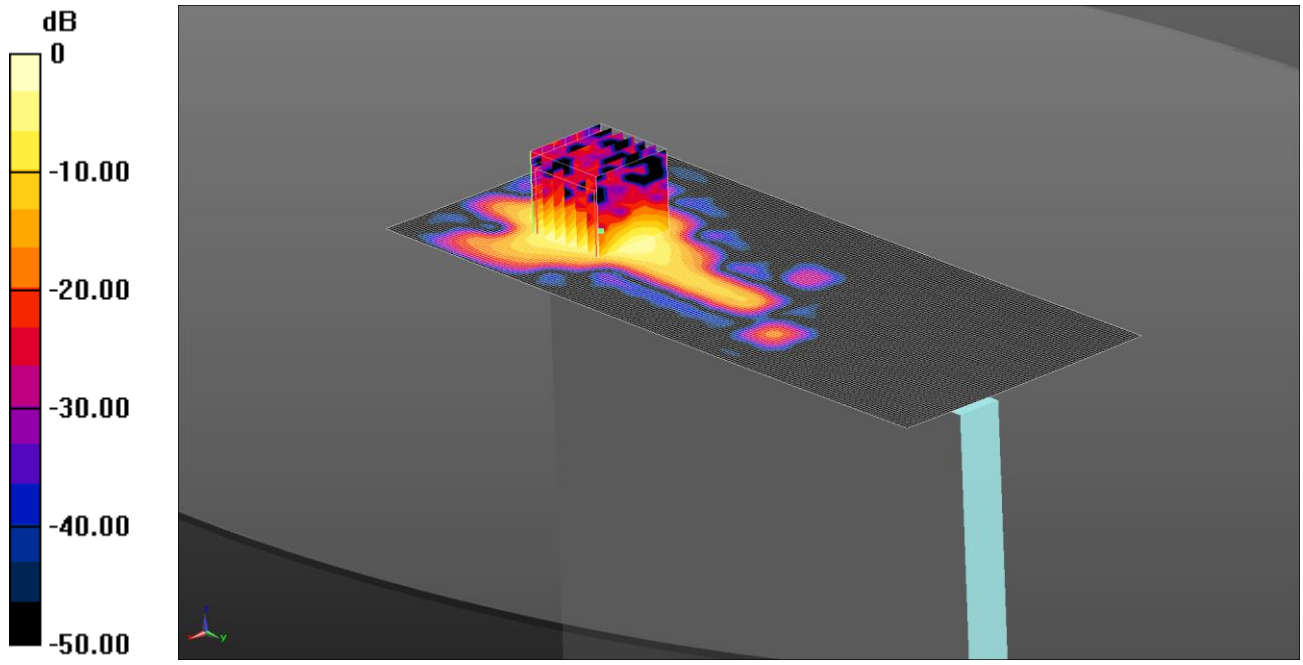

0 dB = 0.752 W/kg = -1.24 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5580 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5580 MHz; σ = 5.898 S/m; ε_r = 46.397; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(3.79, 3.79, 3.79); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.712 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 10.15 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 2.21 W/kg
SAR(1 g) = 0.611 W/kg; SAR(10 g) = 0.175 W/kg
Maximum value of SAR (measured) = 0.752 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

168: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH136
Date: 22/04/15
DUT: Inari 8; Type: Tablet

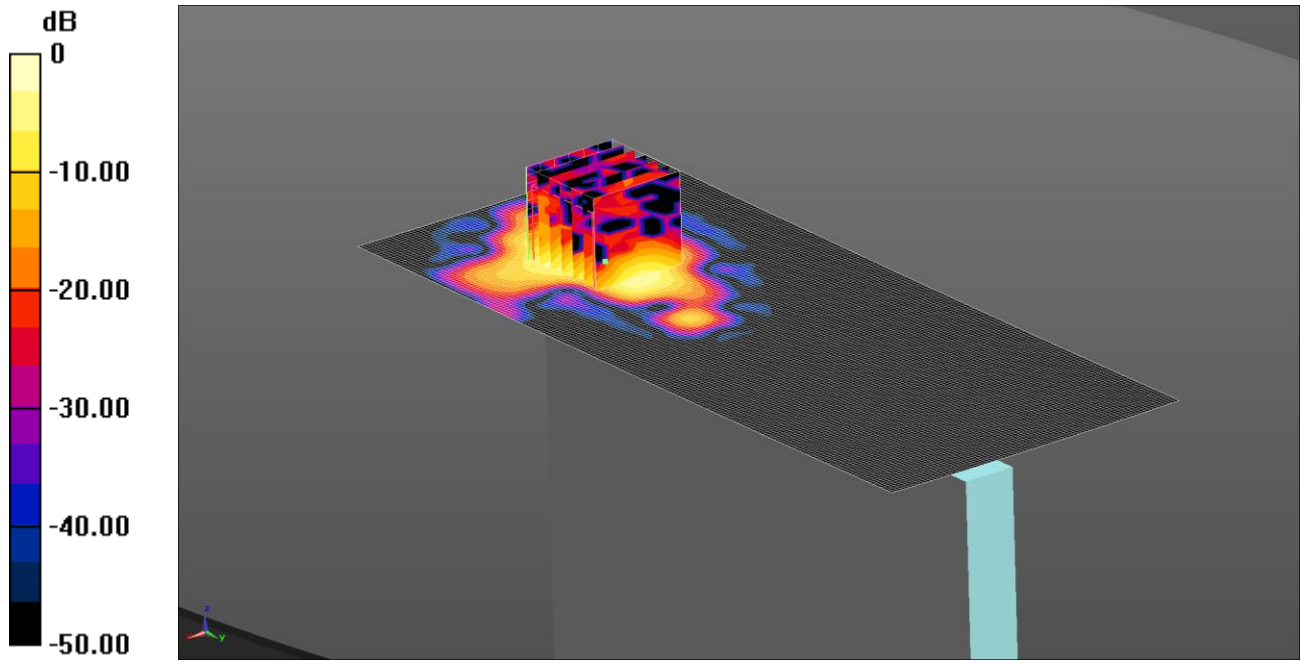

0 dB = 0.653 W/kg = -1.85 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5680 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5680 MHz; σ = 6.053 S/m; ε_r = 46.154; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.676 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 9.621 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 2.08 W/kg
SAR(1 g) = 0.540 W/kg; SAR(10 g) = 0.147 W/kg
Maximum value of SAR (measured) = 0.653 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

169: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2B CH104
Date: 22/04/15
DUT: Inari 8; Type: Tablet

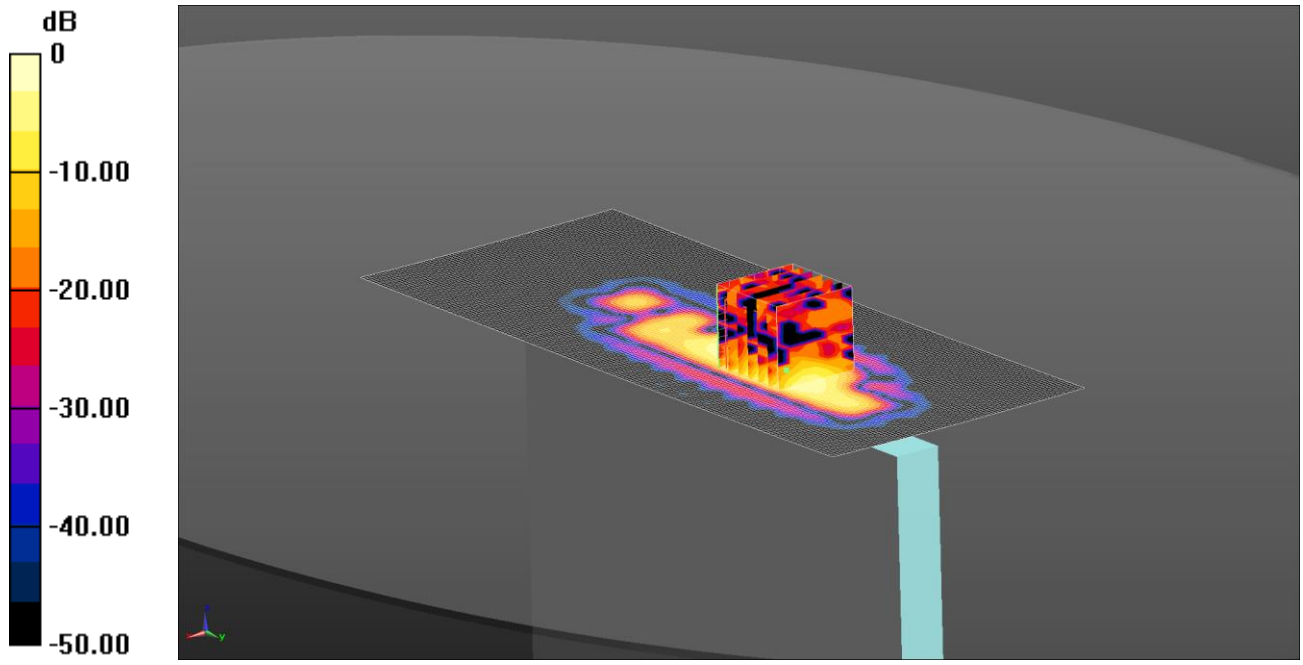

0 dB = 0.260 W/kg = -5.85 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5520 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5520 MHz; σ = 5.79 S/m; ε_r = 46.539; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(3.97, 3.97, 3.97); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.193 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 4.545 V/m; Power Drift = -0.20 dB
Peak SAR (extrapolated) = 0.745 W/kg
SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.047 W/kg
Maximum value of SAR (measured) = 0.260 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

170: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a CDD 6Mbps MIMO 2AB-A CH104
Date: 22/04/15
DUT: Inari 8; Type: Tablet

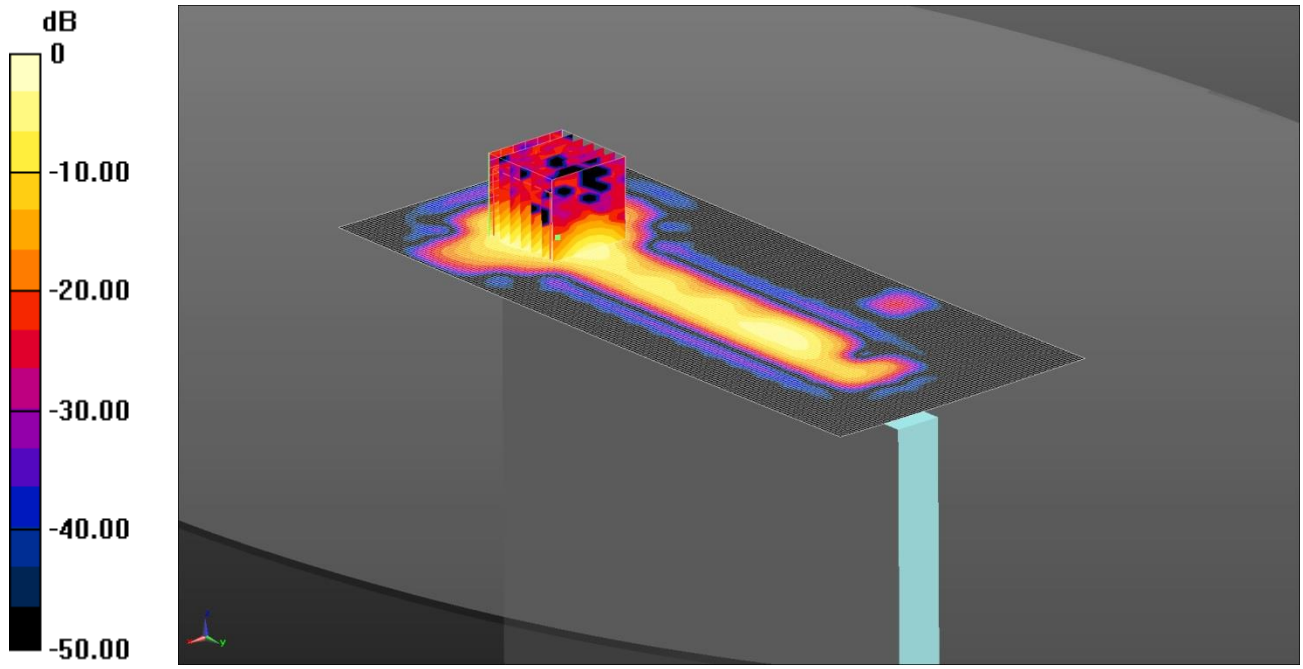

0 dB = 0.841 W/kg = -0.75 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5520 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5520 MHz; σ = 5.79 S/m; ε_r = 46.539; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(3.97, 3.97, 3.97); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.814 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 11.38 V/m; Power Drift = -0.20 dB
Peak SAR (extrapolated) = 3.25 W/kg
SAR(1 g) = 0.656 W/kg; SAR(10 g) = 0.177 W/kg
Maximum value of SAR (measured) = 0.841 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

171: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a CDD 6Mbps MIMO 2AB-A CH116
Date: 22/04/15
DUT: Inari 8; Type: Tablet

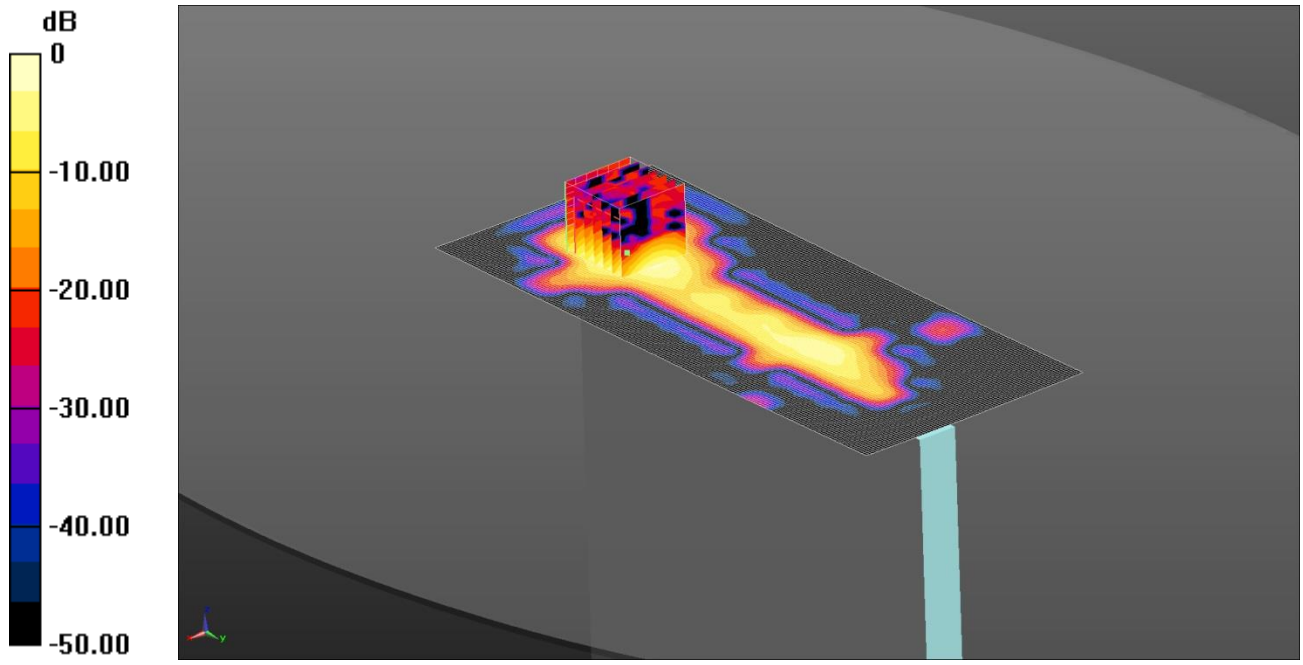

0 dB = 0.739 W/kg = -1.31 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5580 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5580 MHz; σ = 5.898 S/m; ε_r = 46.397; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(3.79, 3.79, 3.79); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.742 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 11.32 V/m; Power Drift = -0.05 dB
Peak SAR (extrapolated) = 2.17 W/kg
SAR(1 g) = 0.597 W/kg; SAR(10 g) = 0.171 W/kg
Maximum value of SAR (measured) = 0.739 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

172: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a CDD 6Mbps MIMO 2AB-A CH136
Date: 23/04/15
DUT: Inari 8; Type: Tablet

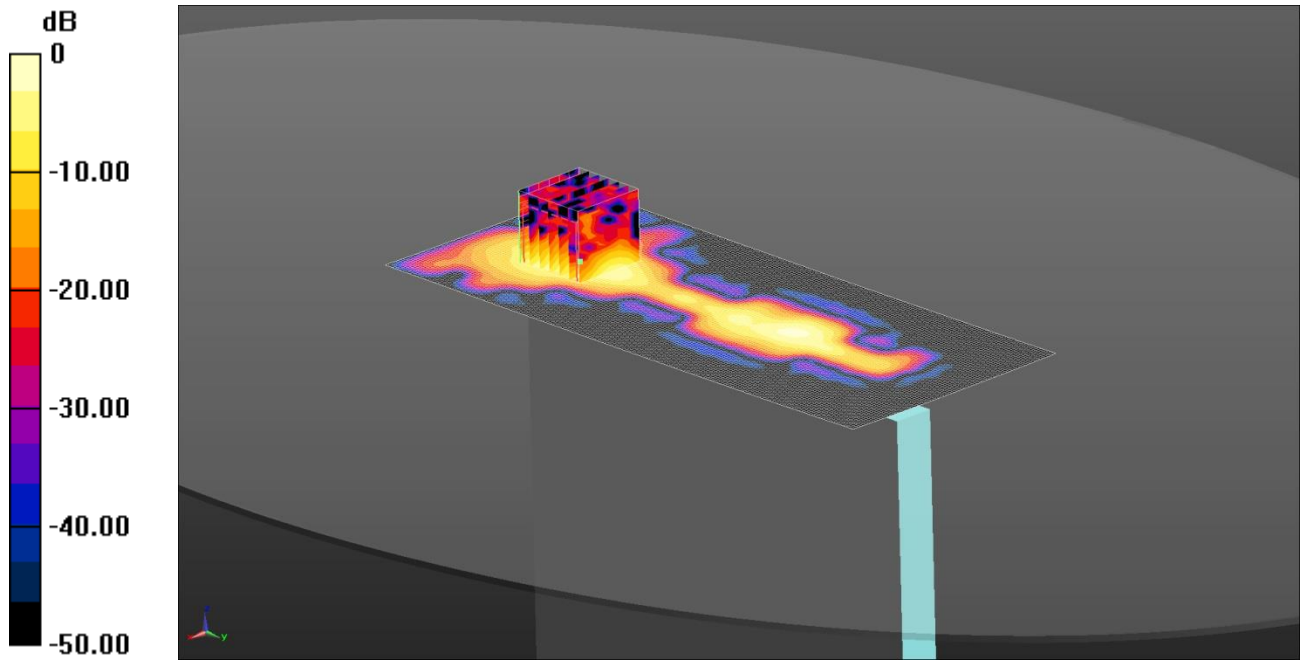

0 dB = 0.717 W/kg = -1.44 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5680 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5680 MHz; σ = 6.053 S/m; ε_r = 46.154; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.742 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 11.10 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 2.11 W/kg
SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.160 W/kg
Maximum value of SAR (measured) = 0.717 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

173: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2A CH165
Date: 23/04/15
DUT: Inari 8; Type: Tablet

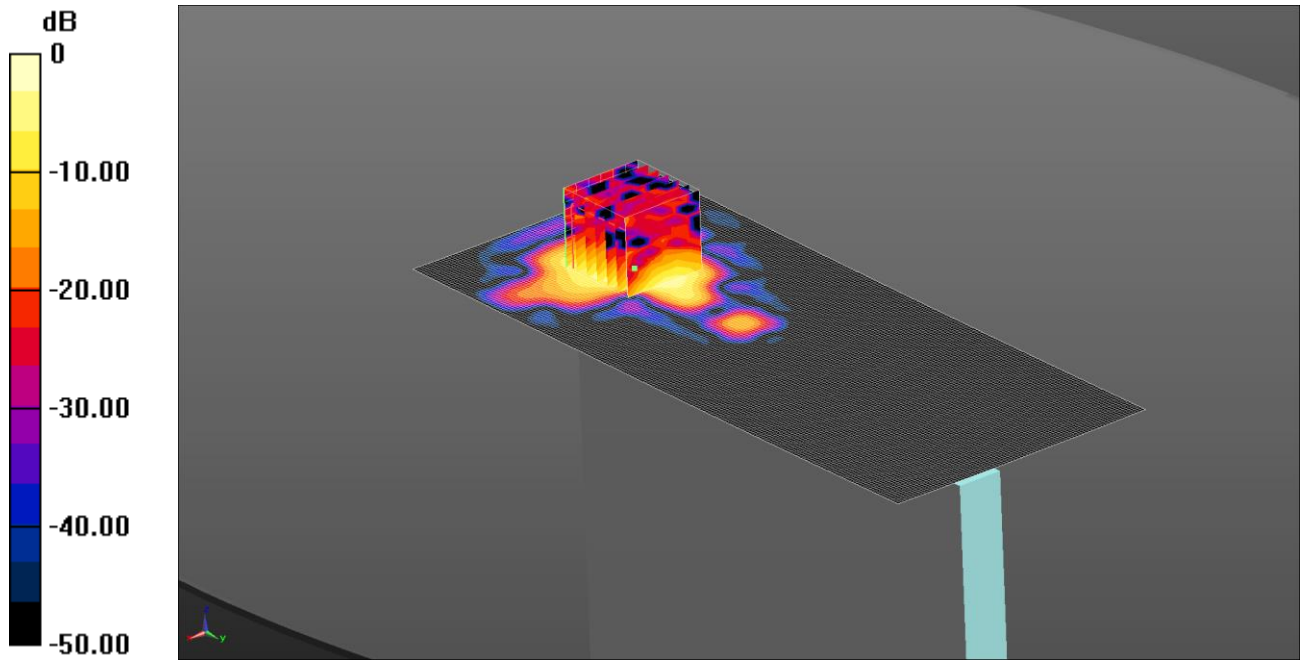

0 dB = 0.726 W/kg = -1.39 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5825 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5825 MHz; σ = 6.282 S/m; ε_r = 45.807; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.06, 4.06, 4.06); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.809 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 10.90 V/m; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 2.39 W/kg
SAR(1 g) = 0.575 W/kg; SAR(10 g) = 0.142 W/kg
Maximum value of SAR (measured) = 0.726 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

174: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a 6Mbps SISO 2B CH149
Date: 23/04/15
DUT: Inari 8; Type: Tablet

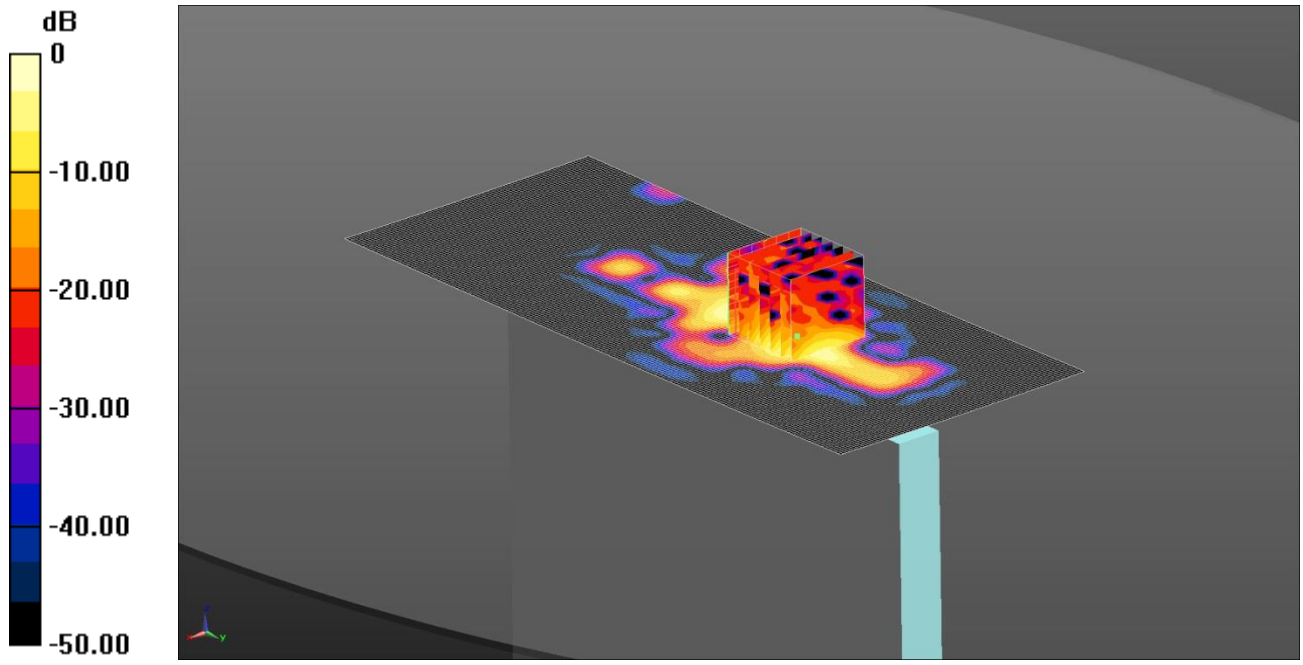

0 dB = 0.491 W/kg = -3.09 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5745 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5745 MHz; σ = 6.166 S/m; ε_r = 45.972; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.06, 4.06, 4.06); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.624 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 7.064 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 1.50 W/kg
SAR(1 g) = 0.387 W/kg; SAR(10 g) = 0.090 W/kg
Maximum value of SAR (measured) = 0.491 W/kg

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

175: Right of EUT Facing Phantom Wi-Fi 5GHz 802.11a CDD 6Mbps MIMO 2AB-BA CH165
Date: 23/04/15
DUT: Inari 8; Type: Tablet

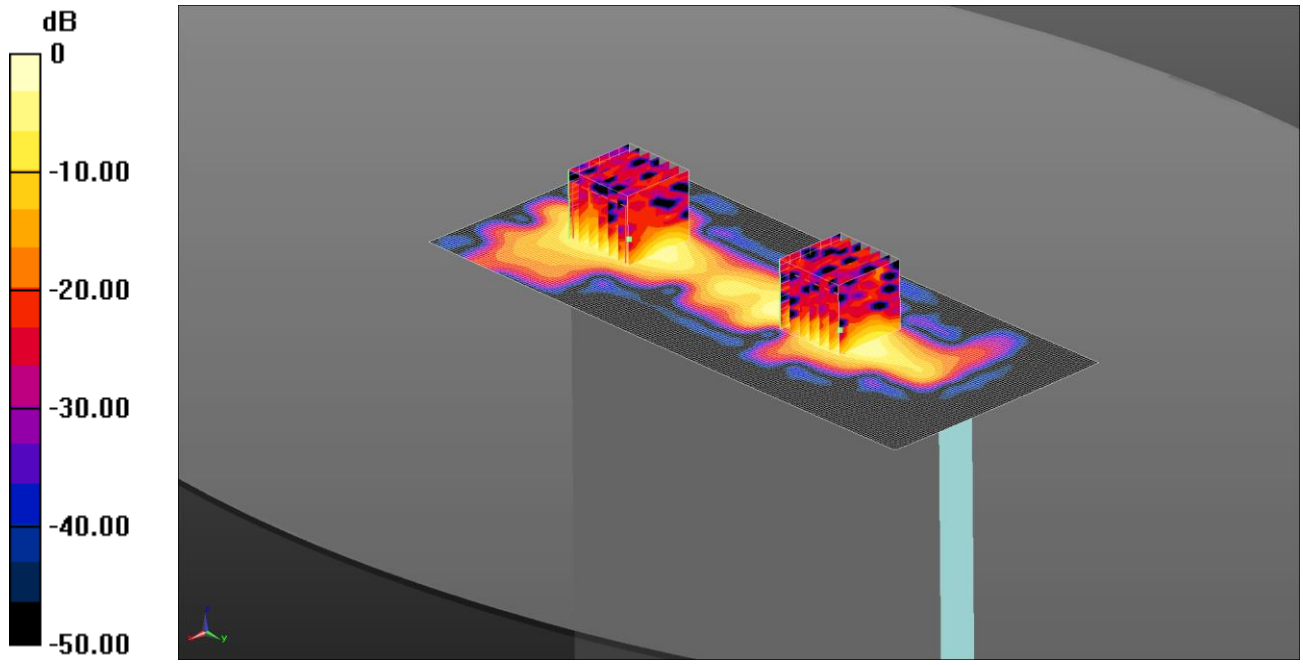

0 dB = 0.716 W/kg = -1.45 dBW/kg

Communication System: UID 0, WLAN 802.11 (0); Frequency: 5825 MHz;Duty Cycle: 1:1
Medium: 5GHz MSL Medium parameters used (interpolated): f = 5825 MHz; σ = 6.282 S/m; ε_r = 45.807; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: EX3DV4 - SN3814; ConvF(4.06, 4.06, 4.06); Calibrated: 18/09/14;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1435; Calibrated: 20/02/15
- Phantom: ELI v5.0 (30deg probe tilt); Type: QDOVA002AA; Serial: TP:xxxx
- ; SEMCAD X Version 14.6.10 (7331)

Configuration/Right of EUT Facing Phantom - Middle 2 2/Area Scan (81x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
Maximum value of SAR (interpolated) = 0.776 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 10.57 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 2.05 W/kg
SAR(1 g) = 0.526 W/kg; SAR(10 g) = 0.130 W/kg

Maximum value of SAR (measured) = 0.661 W/kg

Configuration/Right of EUT Facing Phantom - Middle 2 2/Zoom Scan (7x7x12) 2 (7x7x12)/Cube 1: Measurement grid: dx=4mm, dy=4mm, dz=2mm
Reference Value = 10.57 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 2.14 W/kg
SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.151 W/kg
Maximum value of SAR (measured) = 0.716 W/kg

Note: DASY system is configured to measure any secondary maxima that are within 2dB of the measured SAR level.

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

176: Back of EUT Facing Phantom Bluetooth CH39
Date: 17/04/2015
DUT: Inari 8; Type: Tablet

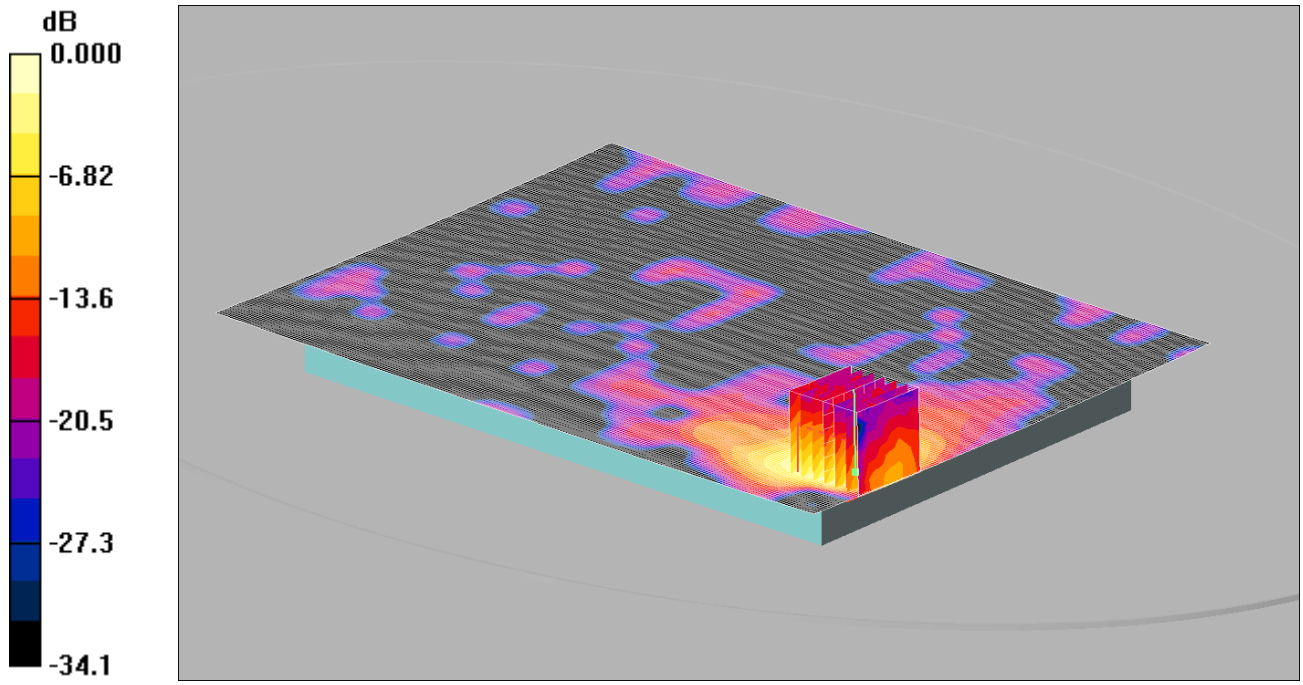

0 dB = 0.064mW/g

Communication System: Bluetooth; Frequency: 2441 MHz;Duty Cycle: 1:3.22
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2441 MHz; σ = 1.91 mho/m; ε_r = 51.3; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back - Middle/Area Scan (161x221x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.073 mW/g

Back - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.43 V/m; Power Drift = 0.114 dB
Peak SAR (extrapolated) = 0.140 W/kg
SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.022 mW/g
Maximum value of SAR (measured) = 0.064 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

177: Right of EUT Facing Phantom Bluetooth CH39
Date: 17/04/2015
DUT: Inari 8; Type: Tablet

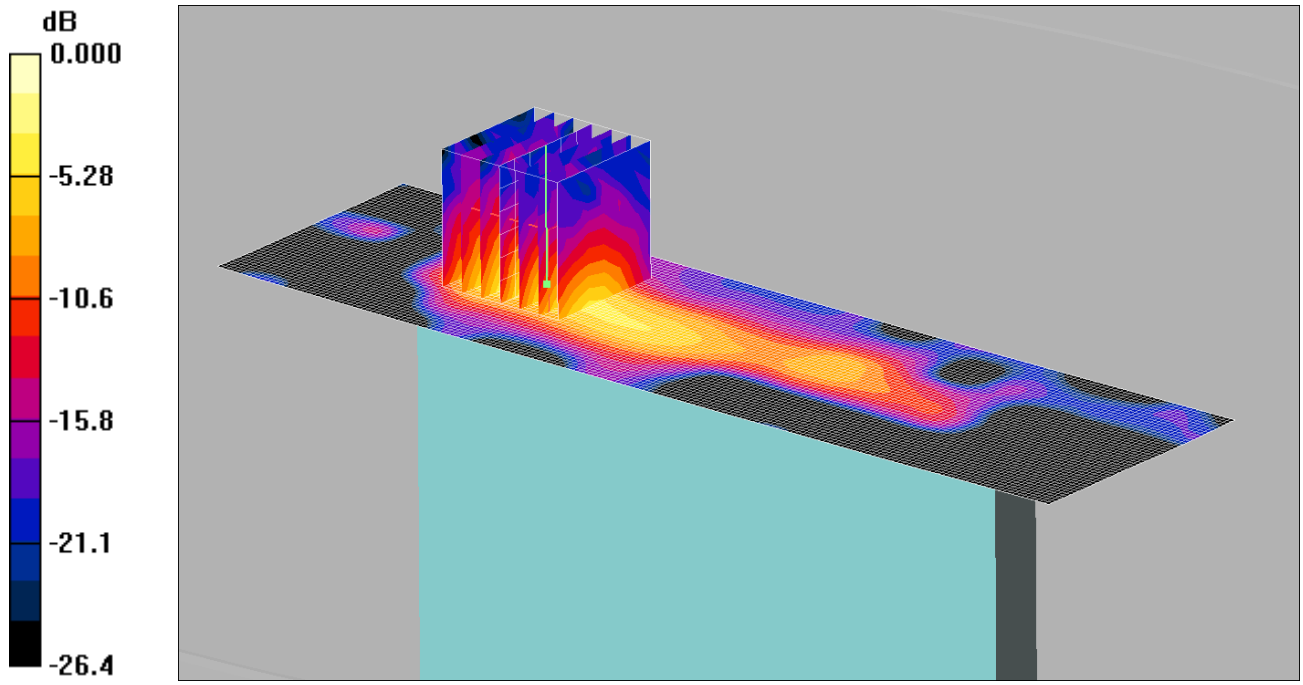

0 dB = 0.058mW/g

Communication System: Bluetooth; Frequency: 2441 MHz;Duty Cycle: 1:3.22
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2441 MHz; σ = 1.91 mho/m; ε_r = 51.3; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Right Hand Side - Middle/Area Scan (51x181x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.056 mW/g

Right Hand Side - Middle/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.77 V/m; Power Drift = 0.080 dB
Peak SAR (extrapolated) = 0.115 W/kg
SAR(1 g) = 0.046 mW/g; SAR(10 g) = 0.017 mW/g
Maximum value of SAR (measured) = 0.058 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

178: Back of EUT Facing Phantom Bluetooth CH0
Date: 17/04/2015
DUT: Inari 8; Type: Tablet

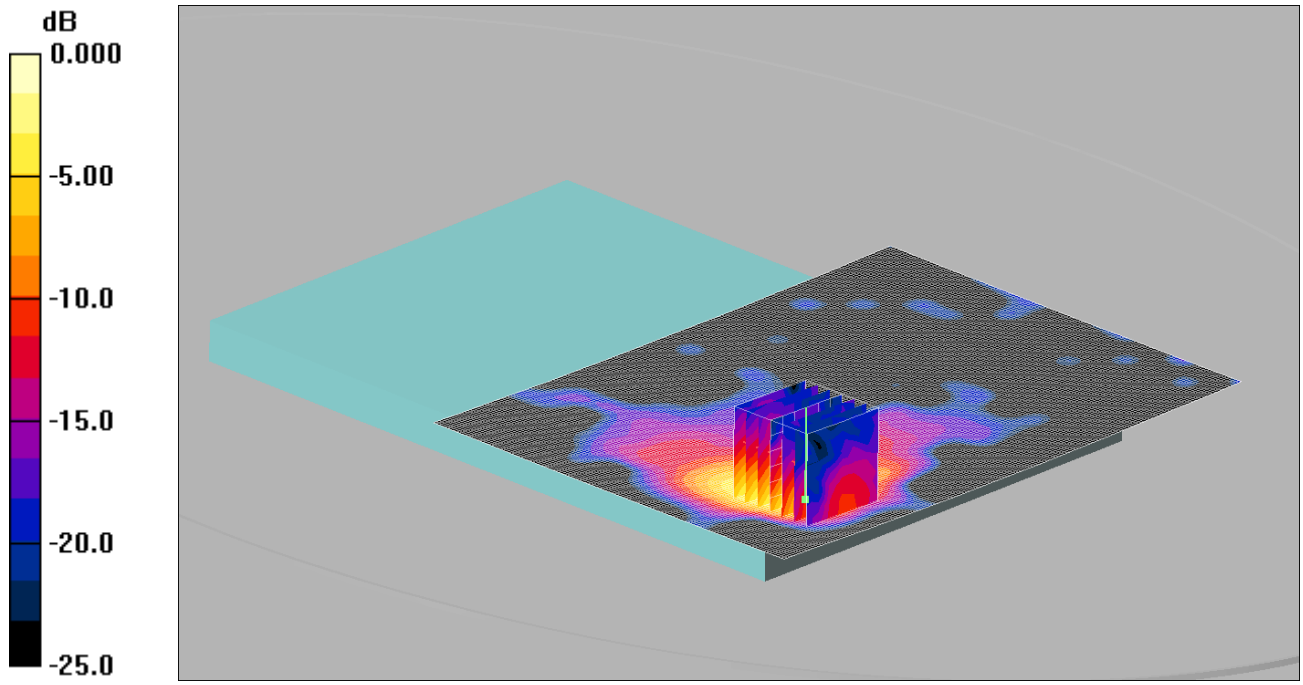

0 dB = 0.061mW/g

Communication System: Bluetooth; Frequency: 2402 MHz;Duty Cycle: 1:3.22
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2402 MHz; σ = 1.86 mho/m; ε_r = 51.4; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back - Low/Area Scan (161x121x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.066 mW/g

Back - Low/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.96 V/m; Power Drift = 0.189 dB
Peak SAR (extrapolated) = 0.141 W/kg
SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.021 mW/g
Maximum value of SAR (measured) = 0.061 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.

179: Back of EUT Facing Phantom Bluetooth CH78
Date: 17/04/2015
DUT: Inari 8; Type: Tablet

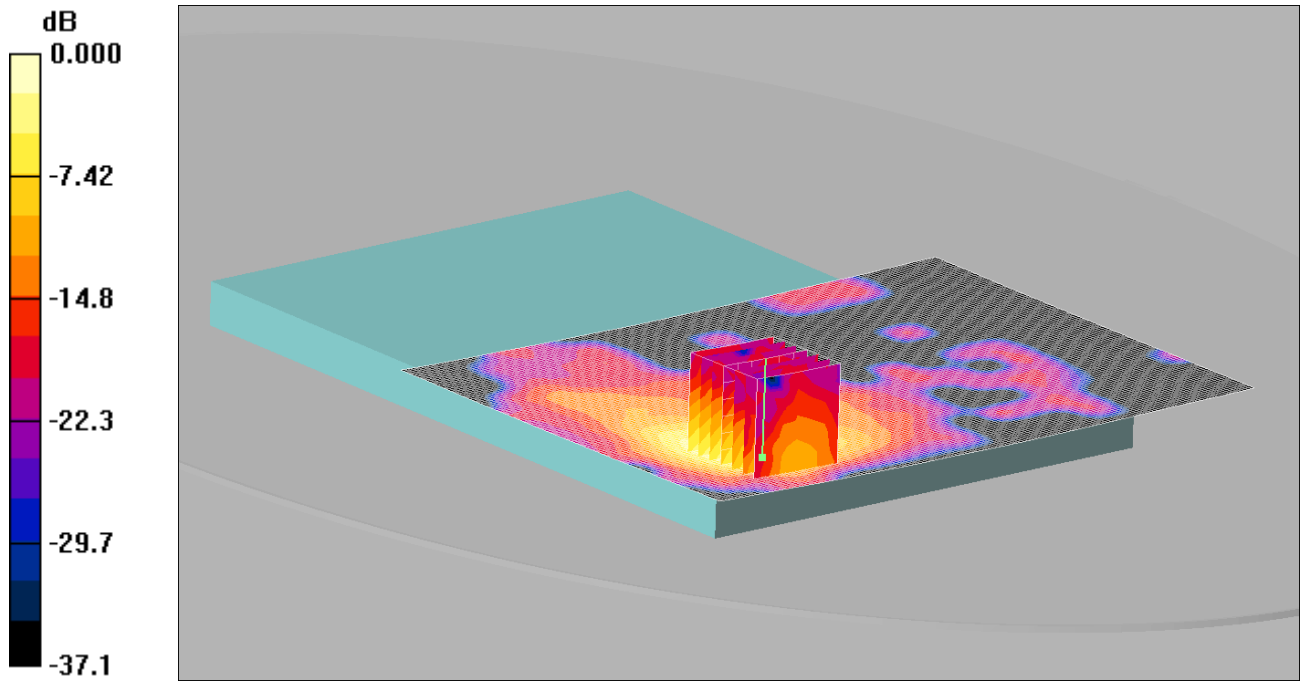

0 dB = 0.064mW/g

Communication System: Bluetooth; Frequency: 2480 MHz;Duty Cycle: 1:3.22
Medium: 2450 MHz MSL Medium parameters used (interpolated): f = 2480 MHz; σ = 1.96 mho/m; ε_r = 51.2; ρ = 1000 kg/m^3
Phantom section: Flat Section
DASY4 Configuration:
- Probe: ES3DV3 - SN3304; ConvF(4.24, 4.24, 4.24);
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn432; Calibrated: 20/08/2014
- Phantom: ELI v5.0; Type: QDOVA002AA; Serial: TP:xxxx
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Back - High/Area Scan (161x121x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.071 mW/g

Back - High/Zoom Scan (7x7x7) (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 5.56 V/m; Power Drift = -0.087 dB
Peak SAR (extrapolated) = 0.149 W/kg
SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.021 mW/g
Maximum value of SAR (measured) = 0.064 mW/g

This report shall not be reproduced except in full, without the written approval of UL VS Limited.