



802.11ax-HE80 Power Spectral Density - Ant 1


Channel 42 (5210MHz)

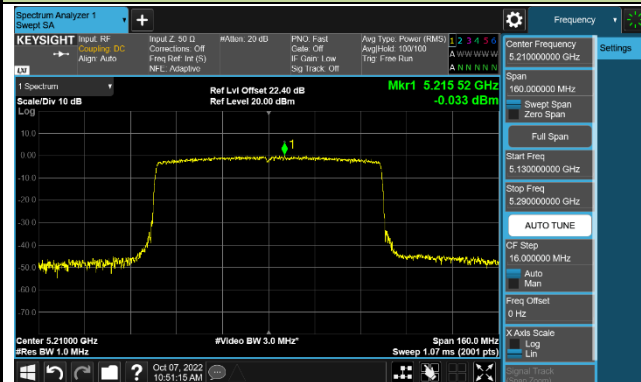


Channel 58 (5290MHz)

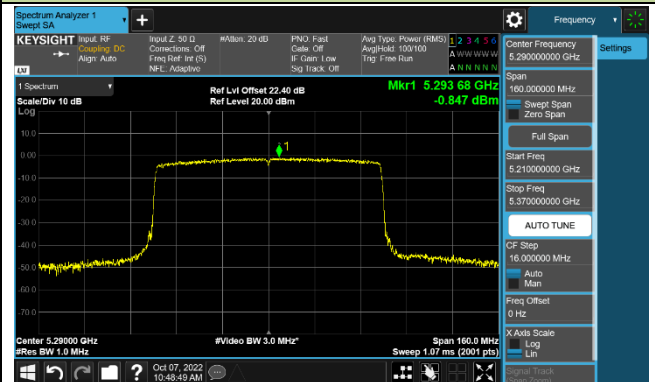


Channel 106 (5530MHz)

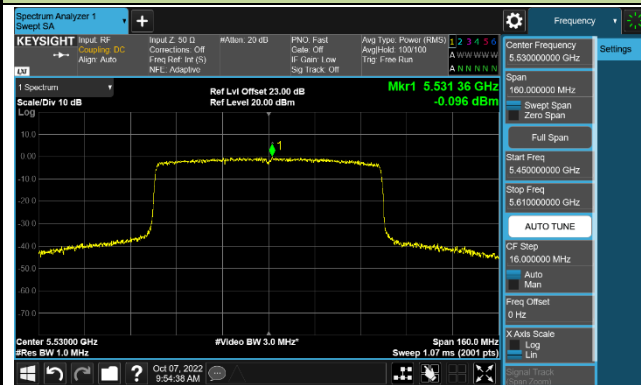


Channel 122 (5610MHz)

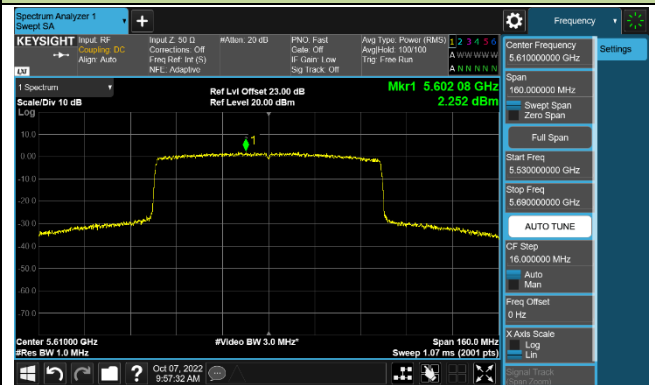

Channel 138 (5690MHz)

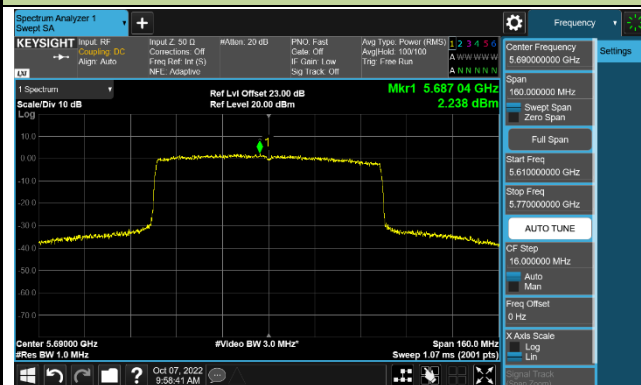


Channel 155 (5775MHz)

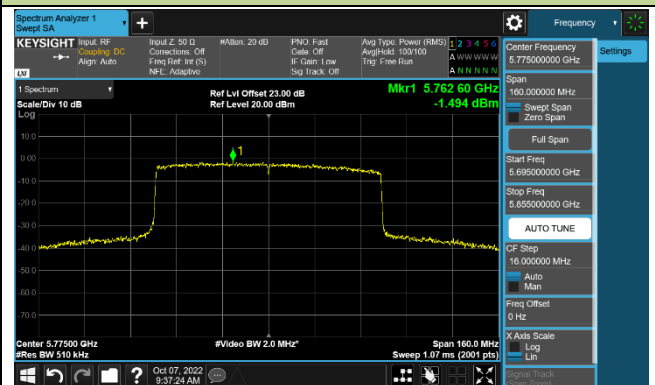


802.11ax-HE160 Power Spectral Density - Ant 1

Channel 50 (5250MHz)

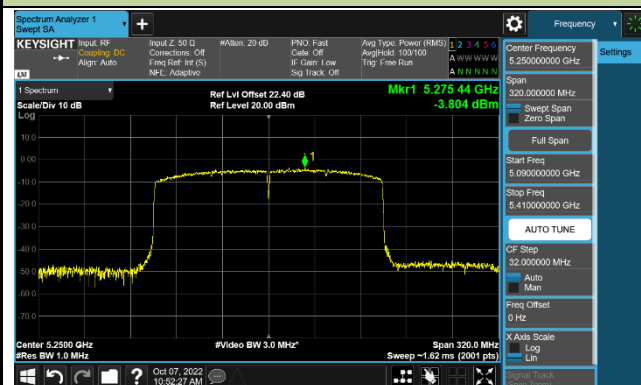

Channel 114 (5570MHz)

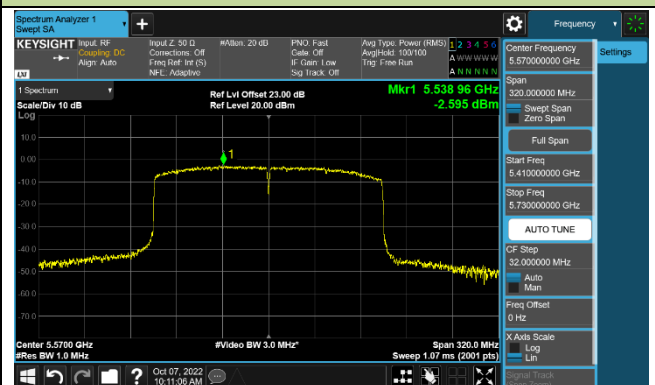

7.7. Frequency Stability Measurement

7.7.1. Test Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.7.2. Test Limit

Frequency Stability Under Temperature Variations:


The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to highest. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C decreased per stage until the lowest temperature reached.

Frequency Stability Under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.

Reduce the input voltage to specify extreme voltage variation ($\pm 15\%$) and endpoint, record the maximum frequency change.

7.7.3. Test Setup

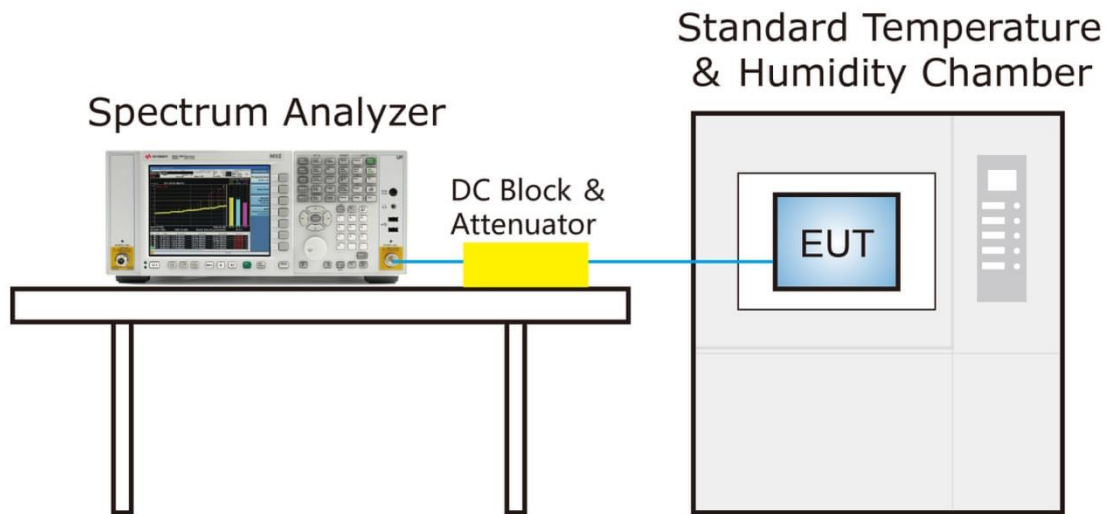

7.7.4. Test Result

Grantee ensure that the product meets e-CFR Title 47 section 15.407(g) and KDB 789033 D02v02r01 frequency stability such that the emissions are maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

7.8. Radiated Spurious Emission Measurement

7.8.1. Test Limit

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.8.2. Test Procedure Used

KDB 789033 D02v02r01- Section II)G

7.8.3. Test Setting

Table 1 - RBW as a function of frequency

Frequency	RBW
9 ~ 150 kHz	200 ~ 300 Hz
0.15 ~ 30 MHz	9 ~ 10 kHz
30 ~ 1000 MHz	100 ~ 120 kHz
>1000 MHz	1 MHz

Quasi-Peak Measurements below 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. Span was set greater than 1MHz
3. RBW = as specified in Table 1
4. Detector = CISPR quasi-peak
5. Sweep time = auto couple
6. Trace was allowed to stabilize

Peak Measurements above 1GHz


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set VBW = 10 Hz.
If the EUT duty cycle is $< 98\%$, set VBW $\geq 1/T$. T is the minimum transmission duration.
4. Detector = Peak
5. Sweep time = auto
6. Trace mode = max hold
7. Trace was allowed to stabilize

7.8.4.Test Setup

Below 1GHz Test Setup:

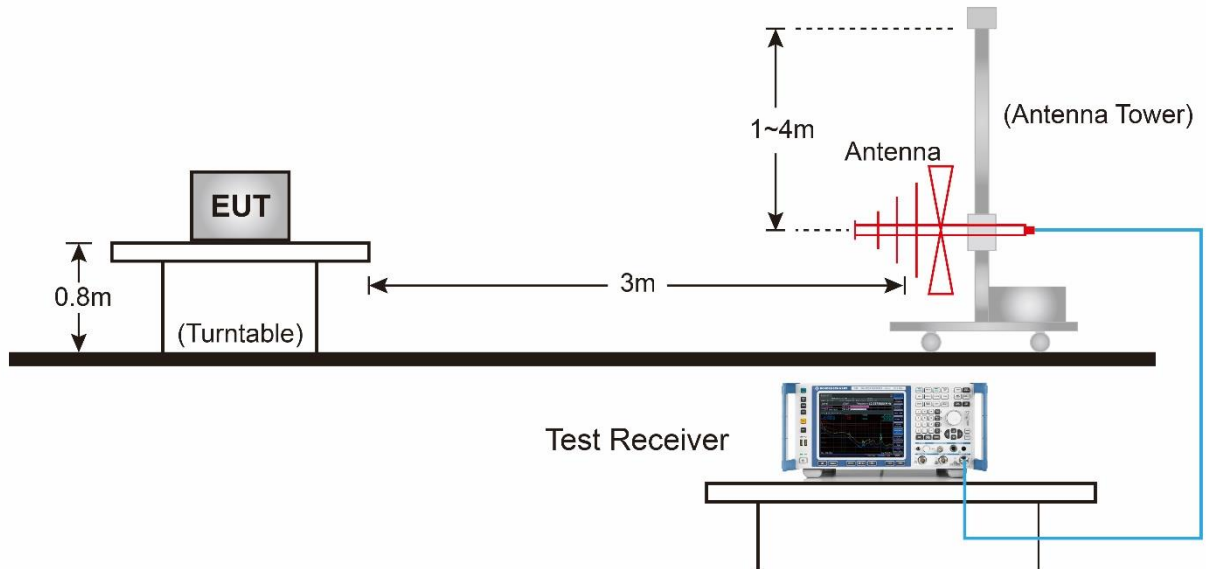


Above 1GHz Test Setup:

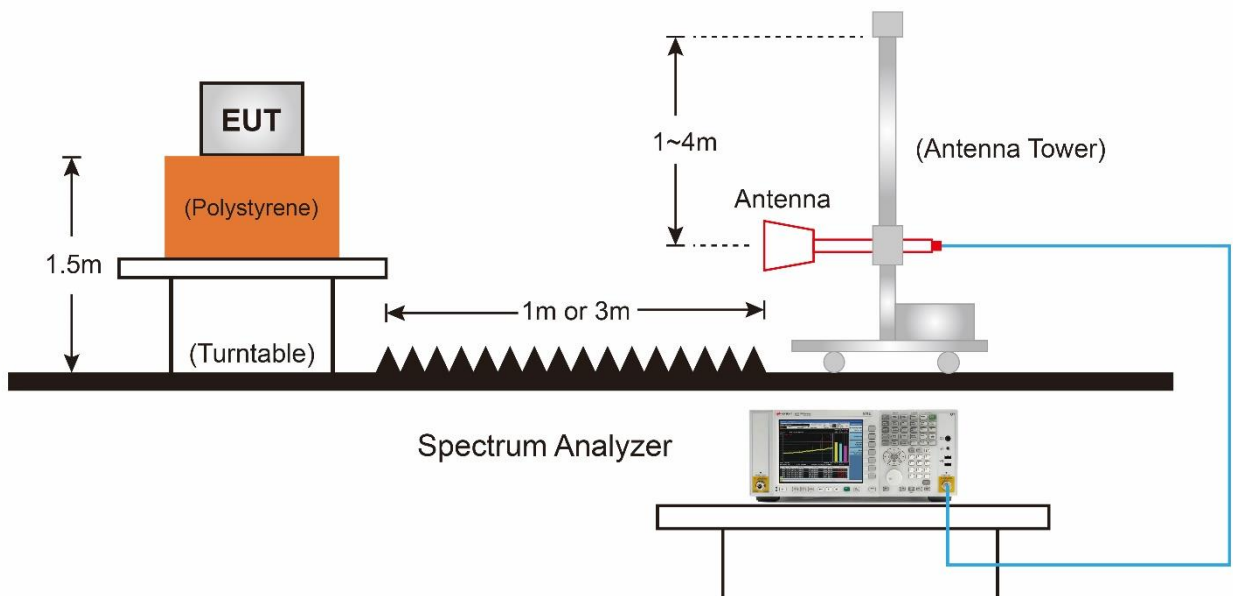

7.8.5. Test Result

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

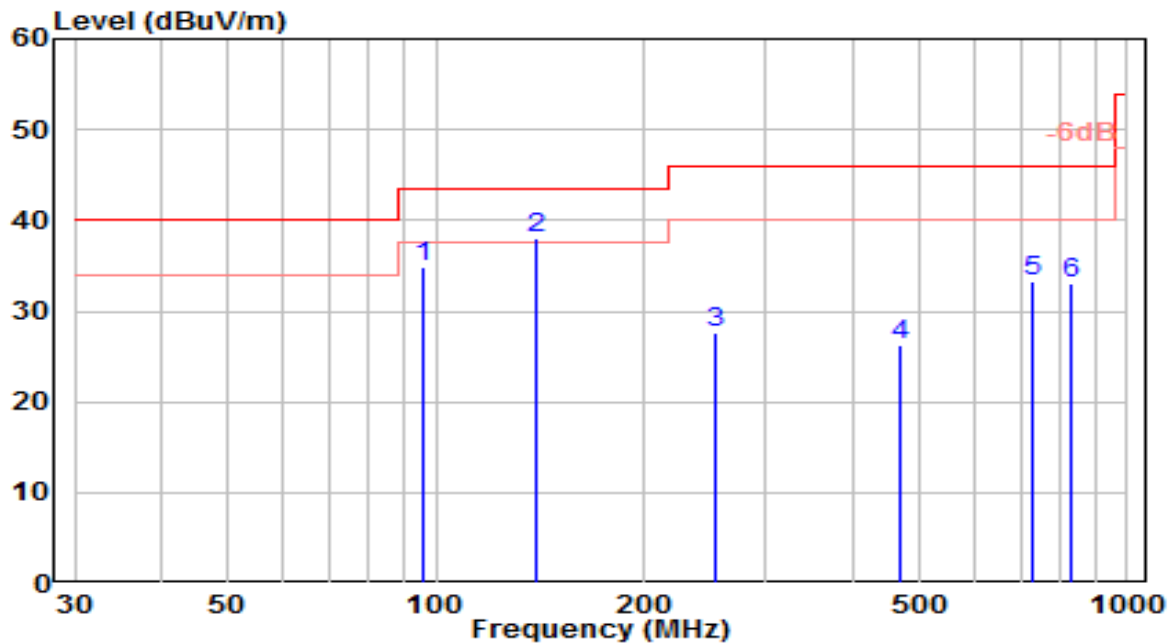


No	Frequency (MHz)	Reading (dBuA)	C.F (dB/m)	Measurement (dBuA/m)	Margin (dB)	Limit (dBuA/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	95.710	16.30	18.57	34.87	-8.63	43.50	200	115	QP
2	* 139.530	22.53	15.57	38.10	-5.40	43.50	200	280	QP
3	253.230	6.72	20.81	27.52	-18.48	46.00	200	240	QP
4	469.390	1.34	24.93	26.27	-19.73	46.00	100	20	QP
5	726.820	3.93	29.29	33.22	-12.78	46.00	200	210	QP
6	826.000	2.59	30.42	33.01	-12.99	46.00	200	195	QP

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
- Measurement (dBuA/m) = Reading(dBuA) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	VULB 9162	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

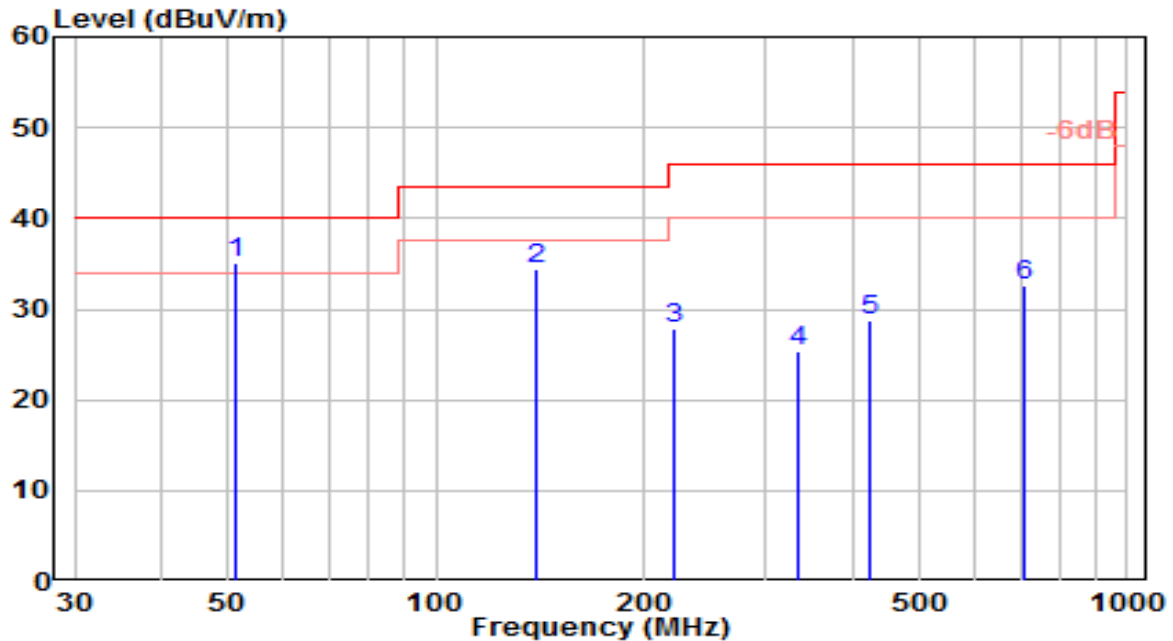


No		Frequency (MHz)	Reading (dBuA)	C.F (dB/m)	Measurement (dBuA/m)	Margin (dB)	Limit (dBuA/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	51.090	13.59	21.43	35.02	-4.98	40.00	100	235	QP
2		139.530	18.95	15.57	34.53	-8.97	43.50	100	65	QP
3		221.220	8.67	19.15	27.82	-18.18	46.00	100	15	QP
4		333.590	2.97	22.43	25.39	-20.61	46.00	200	15	QP
5		425.150	4.57	24.24	28.80	-17.20	46.00	100	65	QP
6		712.510	3.54	29.09	32.63	-13.37	46.00	200	140	QP

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuA/m) = Reading(dBuA) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

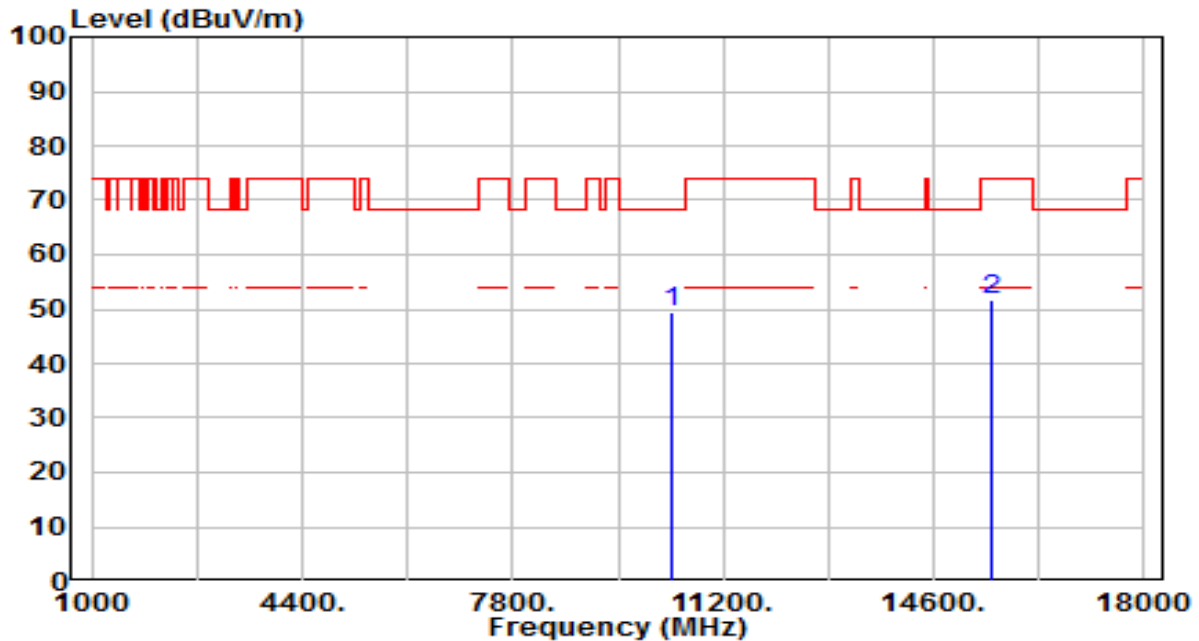


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	44.01	5.29	49.30	-18.90	68.20	100	295	Peak
2		15540.000	45.14	6.41	51.54	-22.46	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

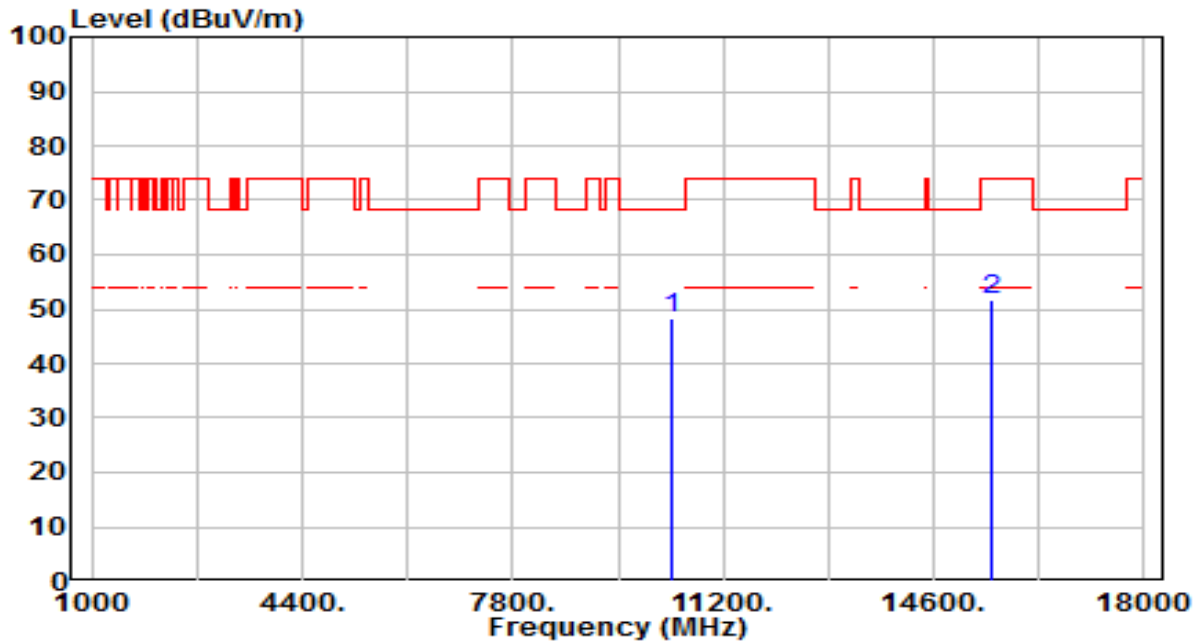


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.98	5.29	48.27	-19.93	68.20	140	360	Peak
2		15540.000	45.42	6.41	51.83	-22.17	74.00	200	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

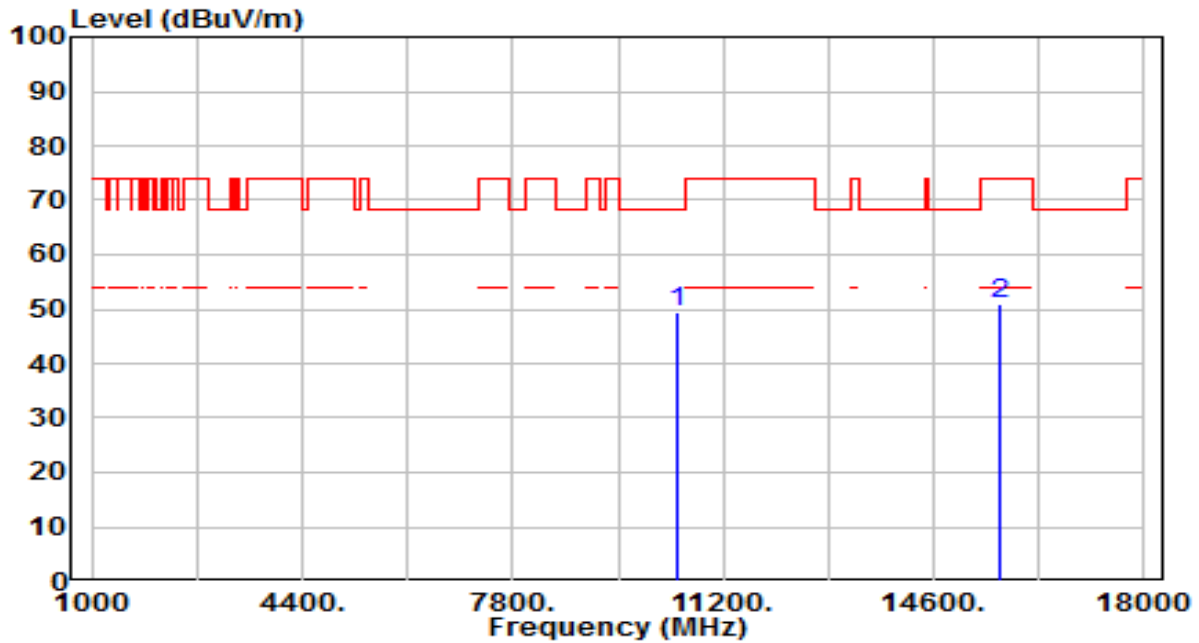


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	44.33	5.28	49.60	-18.60	68.20	100	285	Peak
2		15660.000	44.47	6.56	51.03	-22.97	74.00	100	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

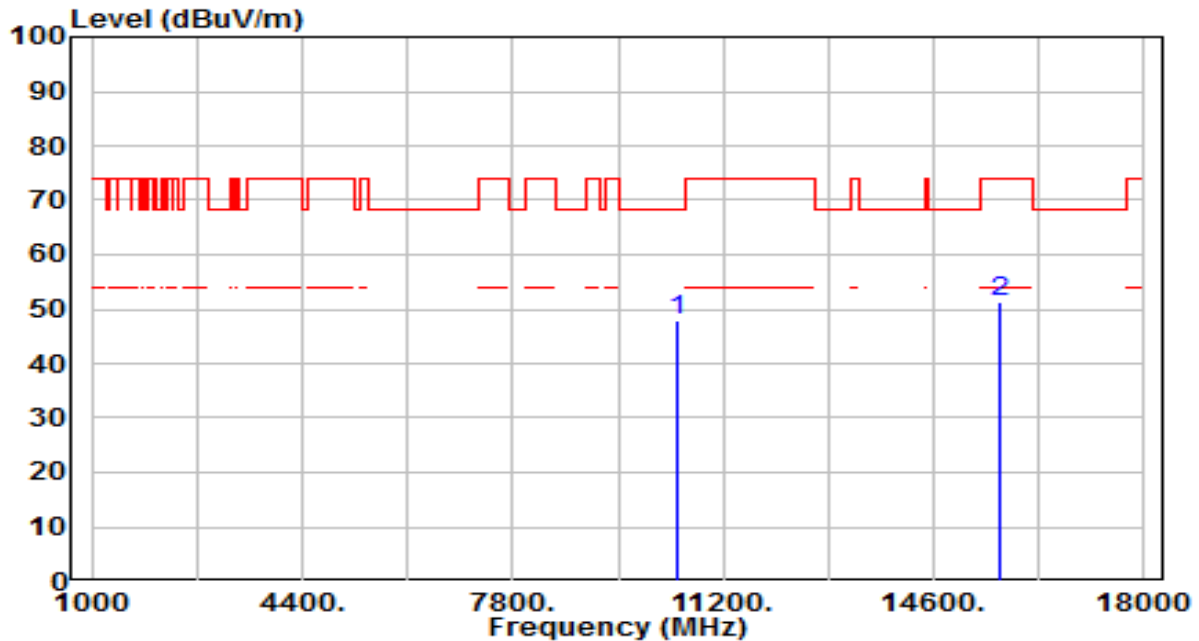


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	42.68	5.28	47.95	-20.25	68.20	100	325	Peak
2		15660.000	44.64	6.56	51.20	-22.80	74.00	100	10	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

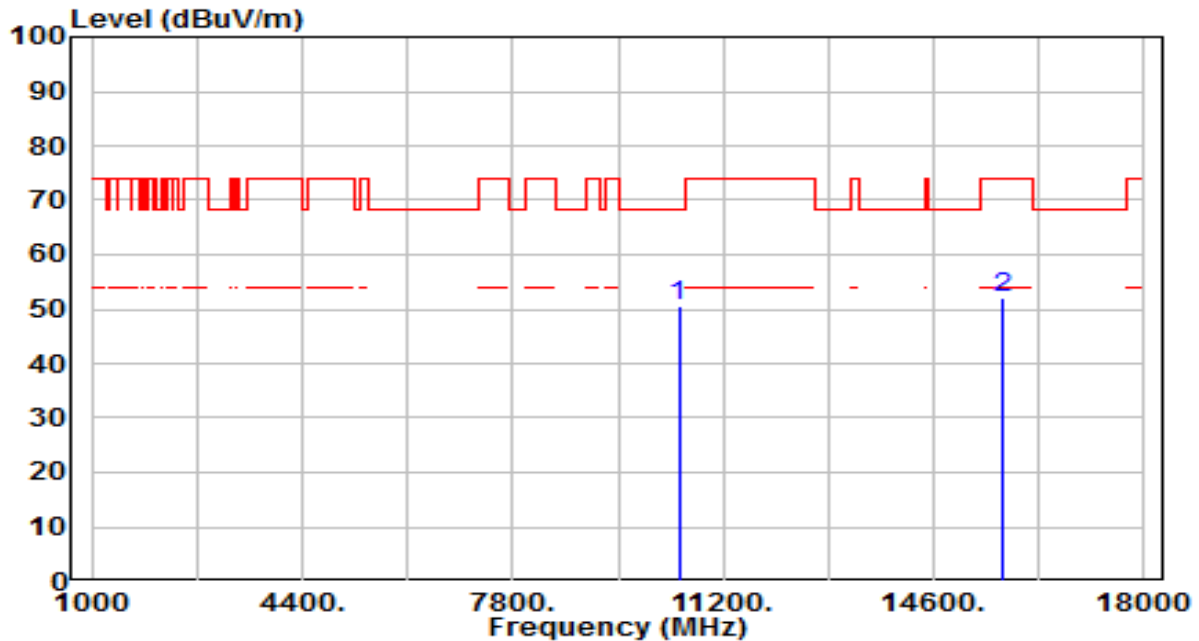


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	45.12	5.26	50.38	-17.82	68.20	100	320	Peak
2		15720.000	45.26	6.69	51.96	-22.04	74.00	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 48_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

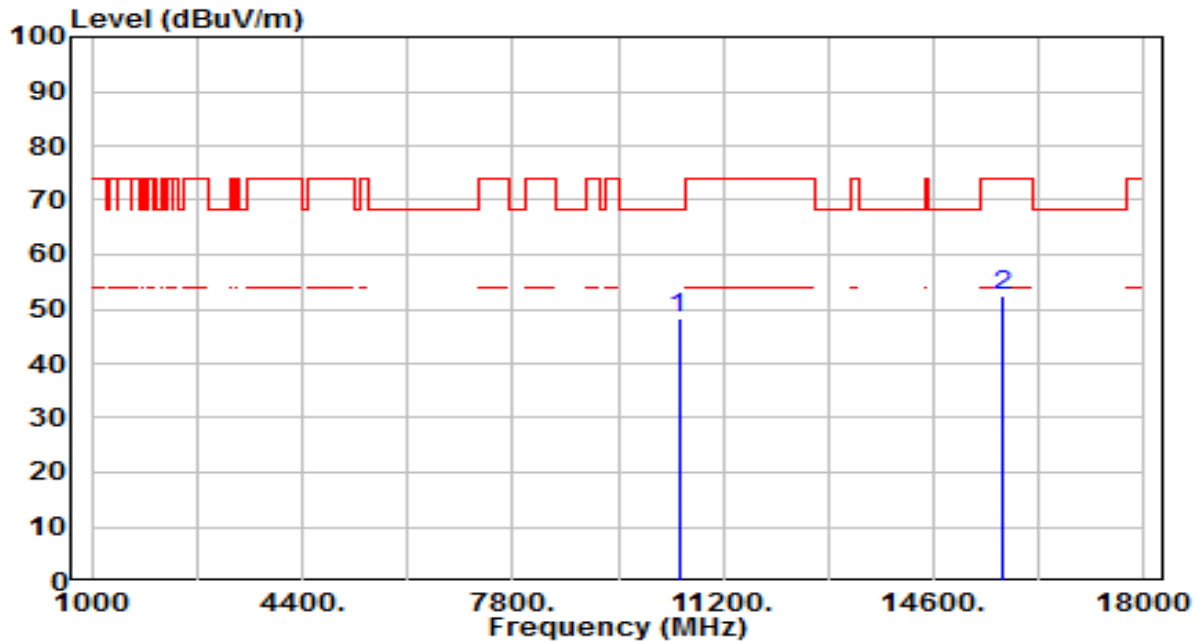


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	43.22	5.26	48.48	-19.72	68.20	100	260	Peak
2		15720.000	45.93	6.69	52.63	-21.37	74.00	100	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

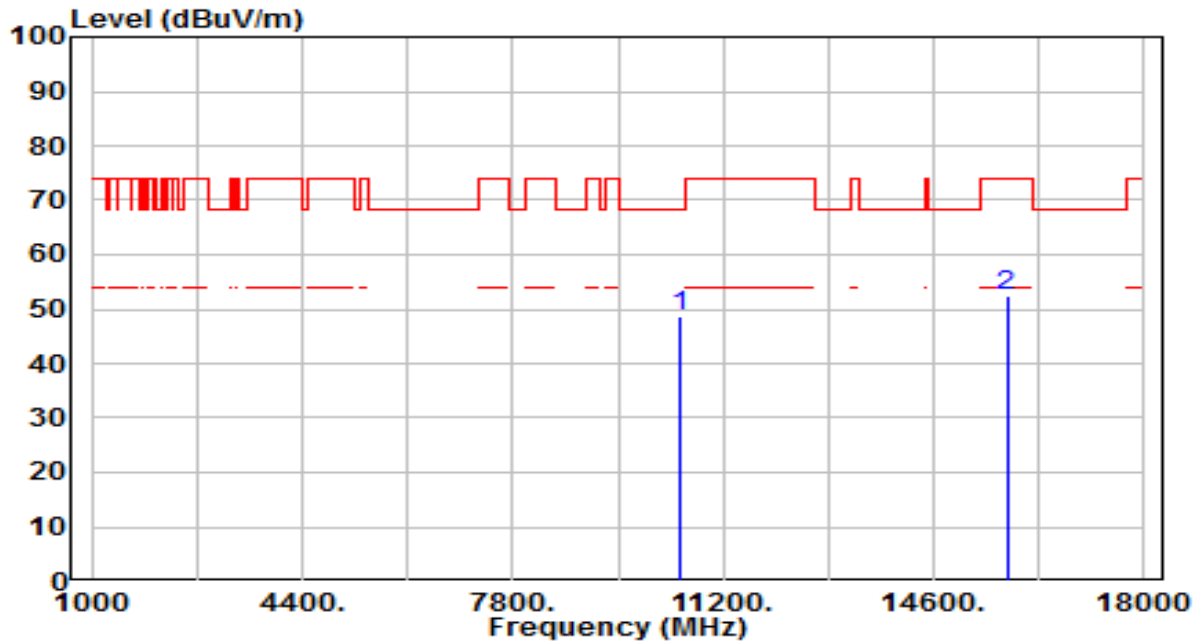


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	43.61	5.25	48.86	-19.34	68.20	100	90	Peak
2		15780.000	45.50	6.83	52.33	-21.67	74.00	100	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 52_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

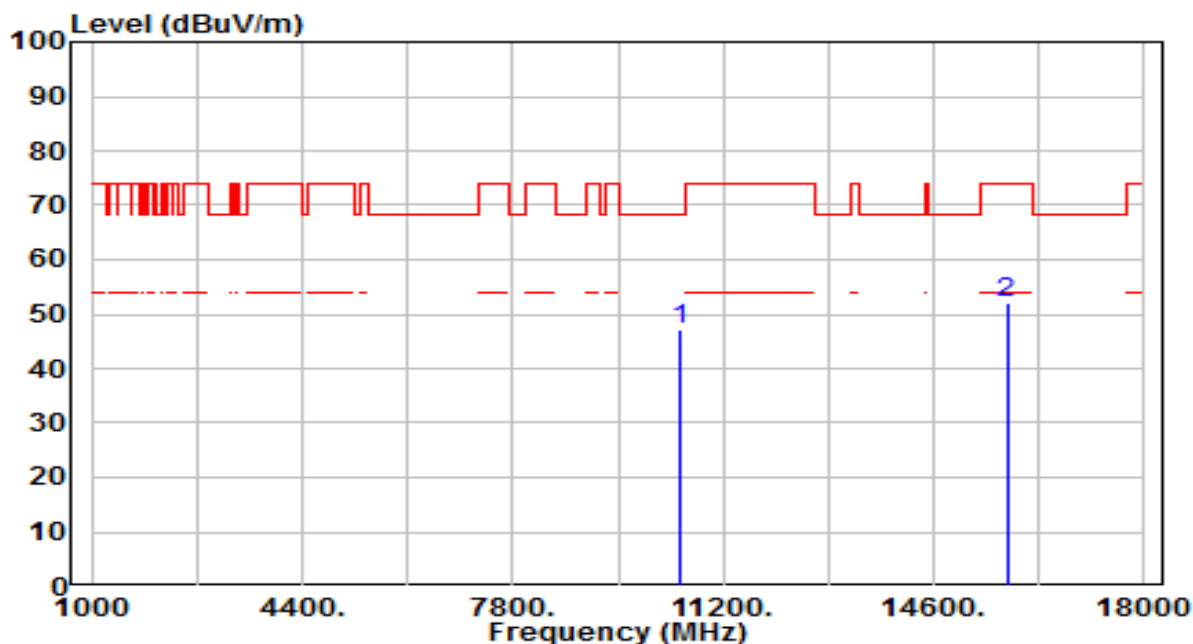


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	41.86	5.25	47.11	-21.09	68.20	100	240	Peak
2		15780.000	45.29	6.83	52.12	-21.88	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

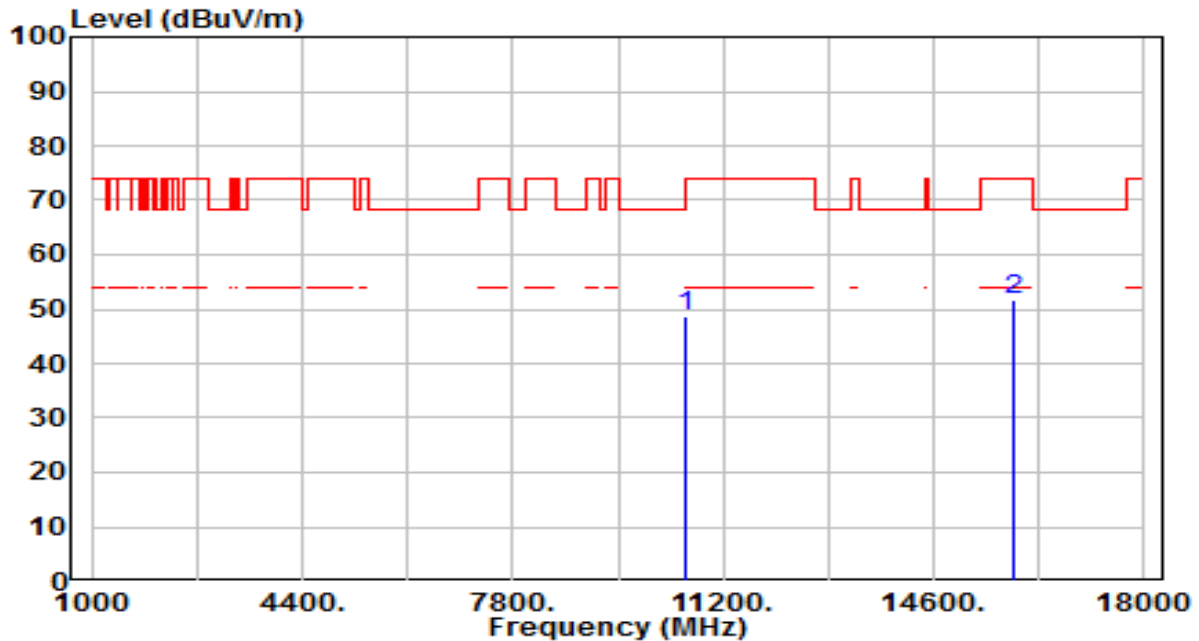


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	43.57	5.25	48.82	-19.38	68.20	100	95	Peak
2		15900.000	44.56	6.95	51.51	-22.49	74.00	100	205	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 60_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

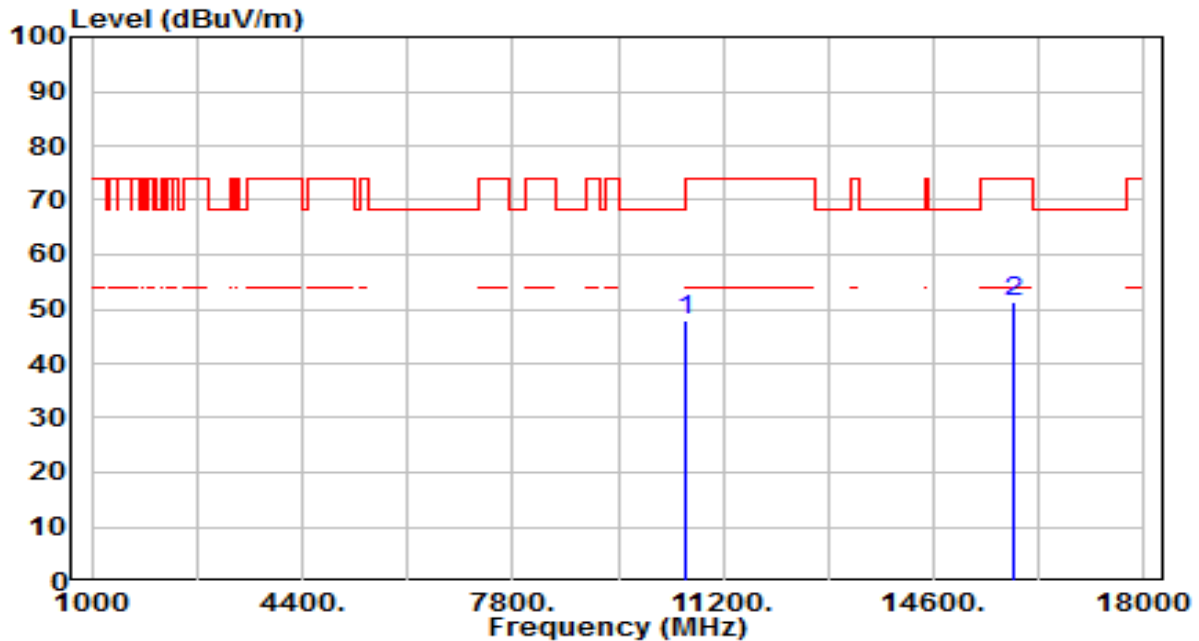


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.79	5.25	48.04	-20.16	68.20	100	340	Peak
2		15900.000	44.49	6.95	51.45	-22.55	74.00	100	195	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

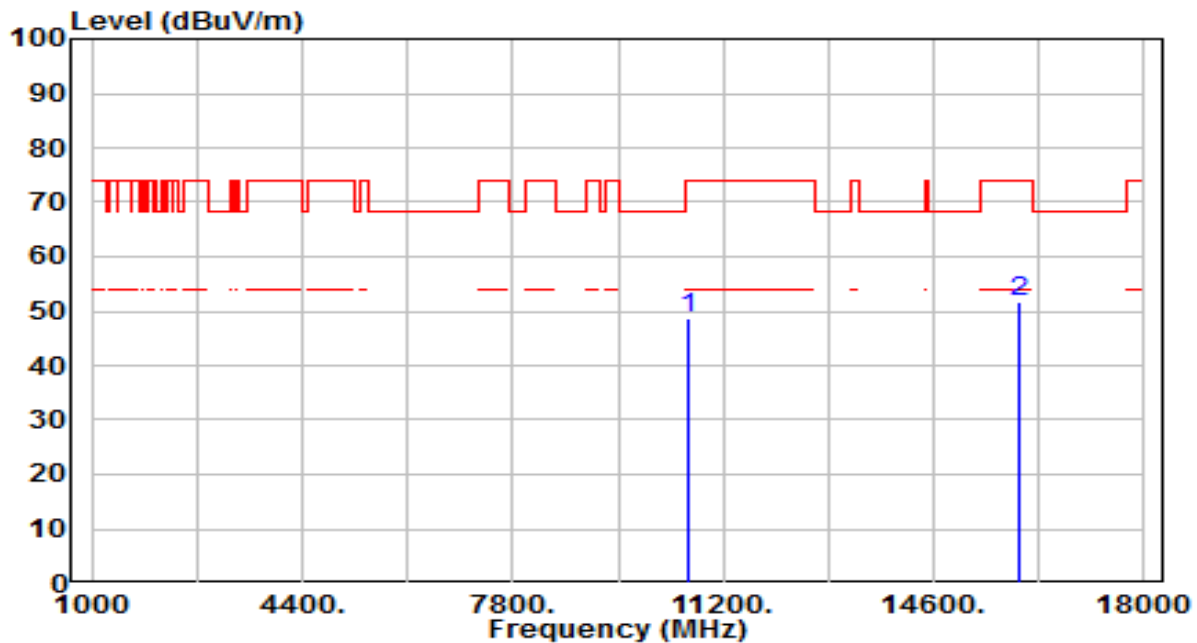


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	43.34	5.27	48.61	-25.39	74.00	100	285	Peak
2	* 15960.000	44.78	7.00	51.78	-22.22	74.00	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

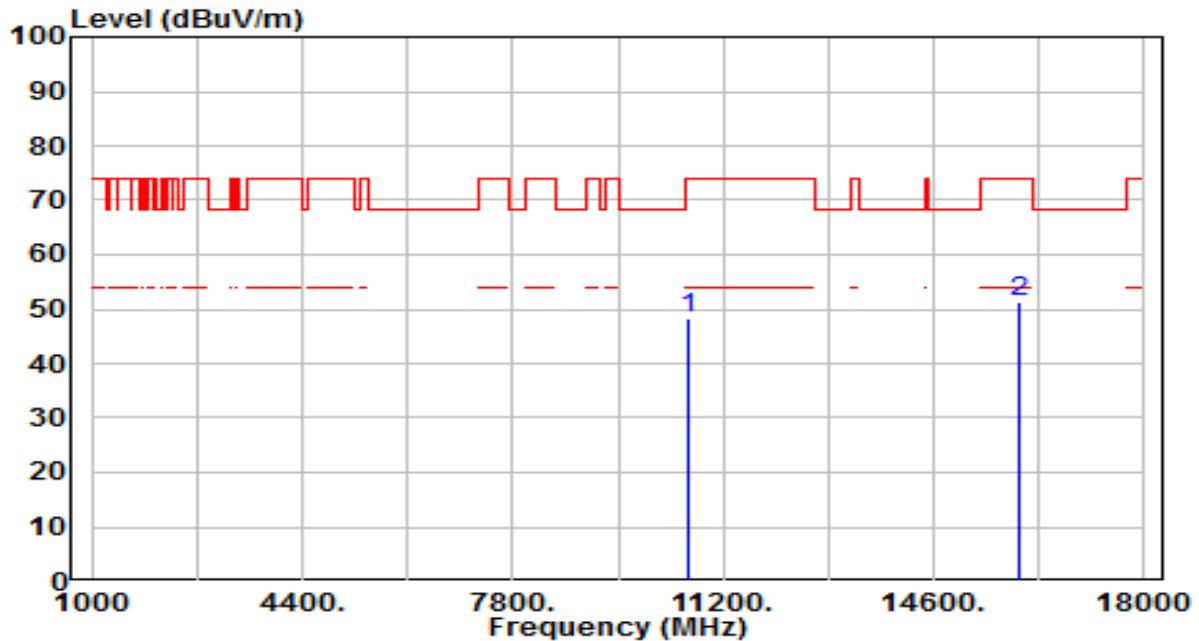


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	42.87	5.27	48.15	-25.85	74.00	100	140	Peak
2	* 15960.000	44.37	7.00	51.37	-22.63	74.00	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

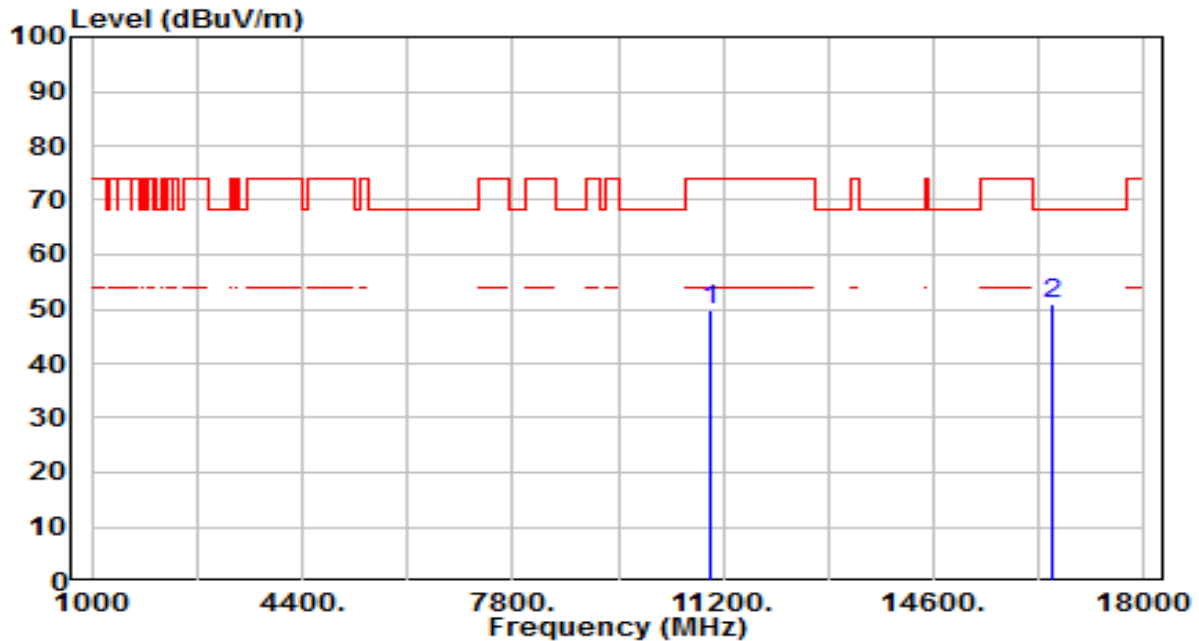


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	44.11	5.56	49.67	-24.33	74.00	100	160	Peak
2	*	16500.000	43.45	7.34	50.80	-17.40	68.20	100	15	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

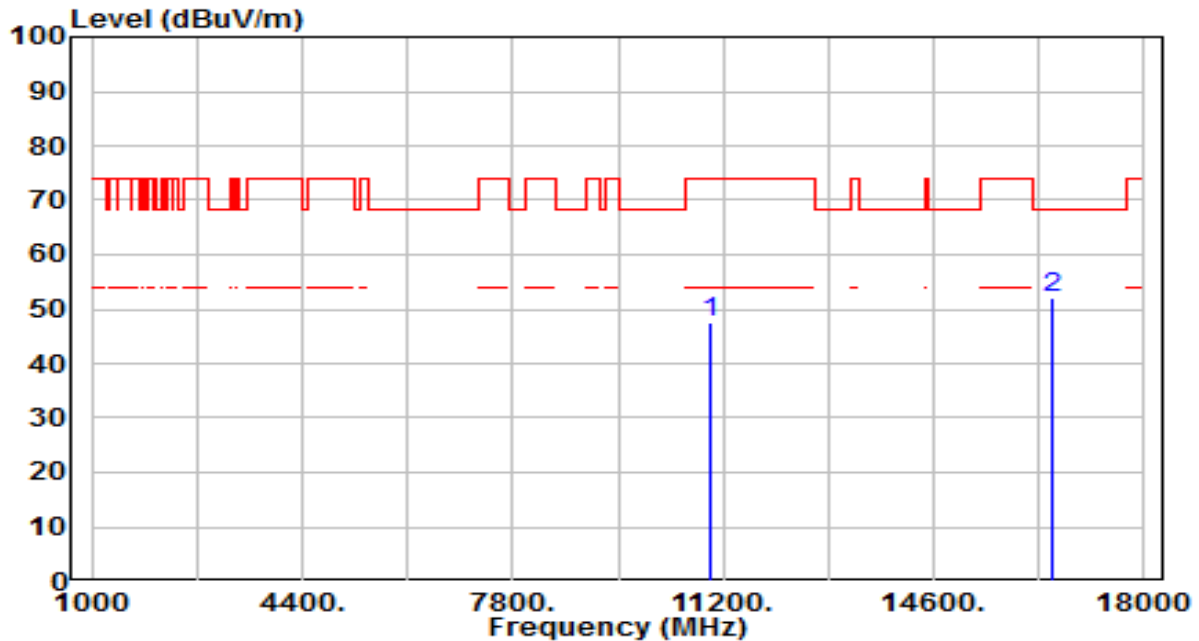


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	41.86	5.56	47.42	-26.58	74.00	100	10	Peak
2	* 16500.000	44.83	7.34	52.18	-16.02	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

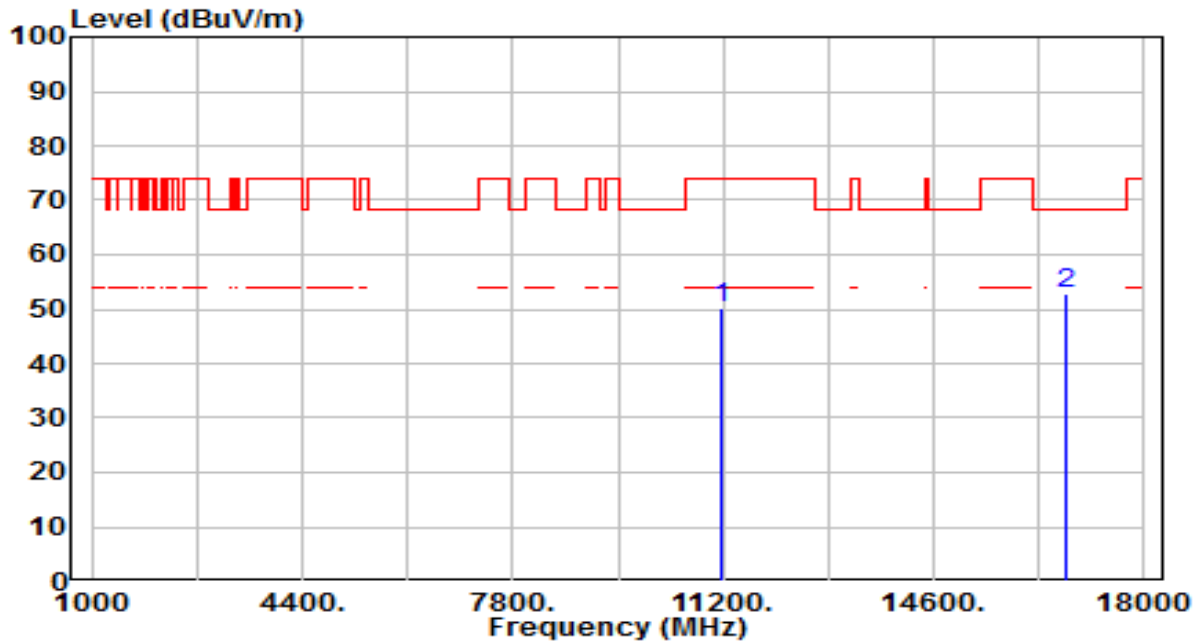


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	44.44	5.73	50.17	-23.83	74.00	100	310	Peak
2	* 16740.000	45.06	7.72	52.78	-15.42	68.20	100	275	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 116_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

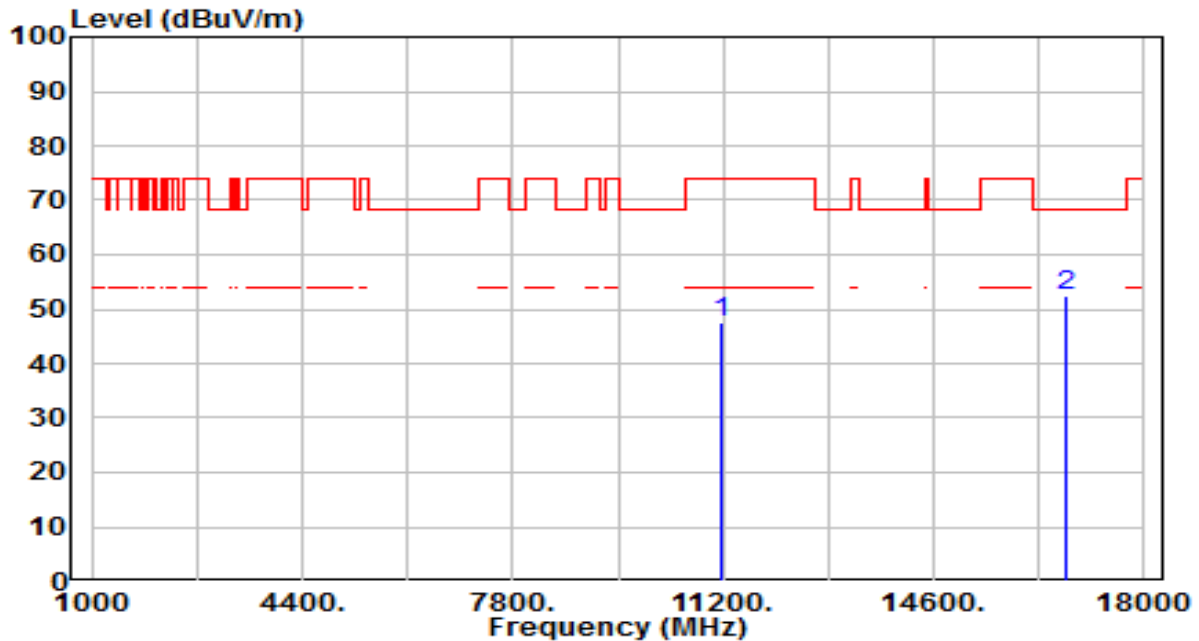


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.00	5.73	47.73	-26.27	74.00	100	45	Peak
2	* 16740.000	44.73	7.72	52.44	-15.76	68.20	100	300	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

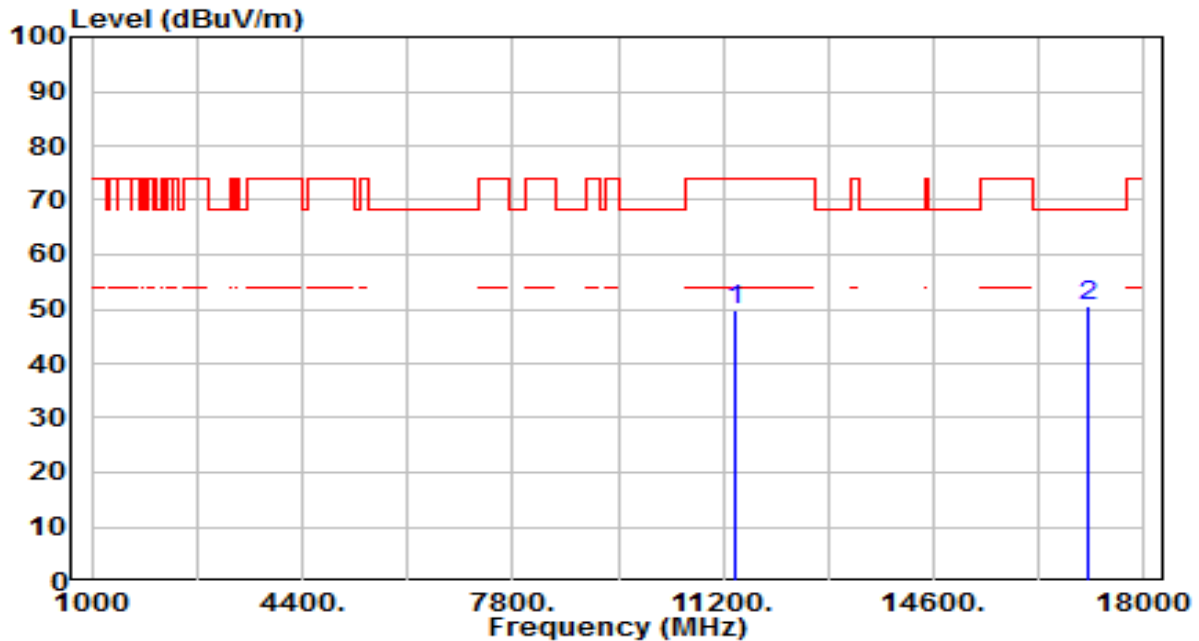


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	43.72	5.98	49.70	-24.30	74.00	100	245	Peak
2	* 17100.000	44.34	6.16	50.50	-17.70	68.20	100	355	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

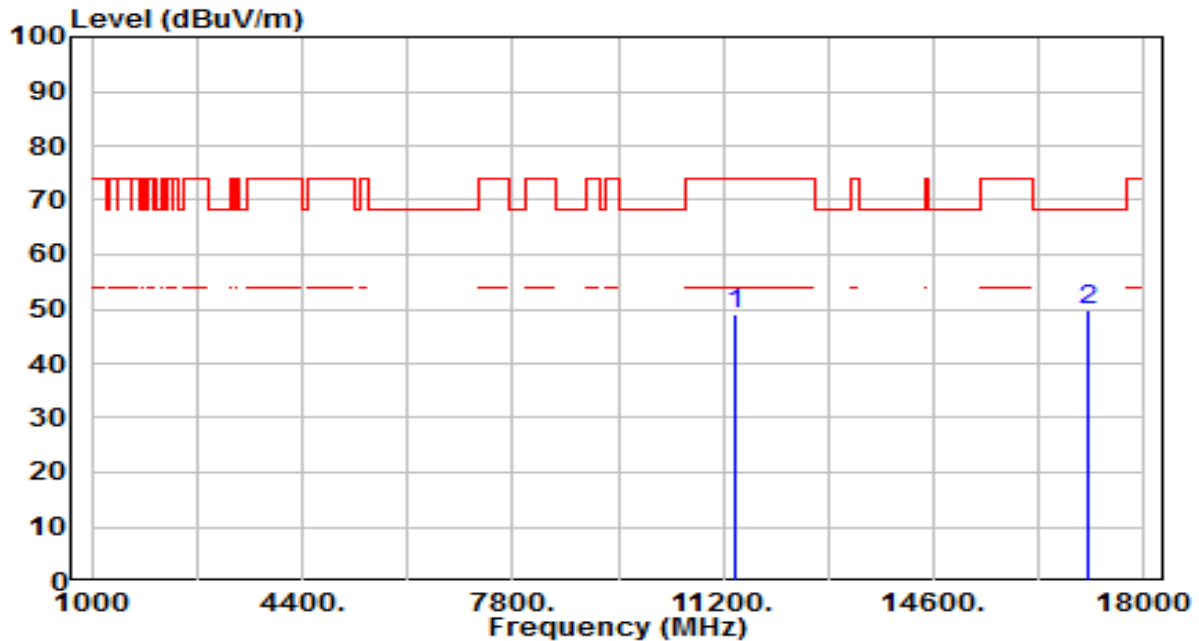


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.92	5.98	48.91	-25.09	74.00	100	225	Peak
2	* 17100.000	43.77	6.16	49.93	-18.27	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

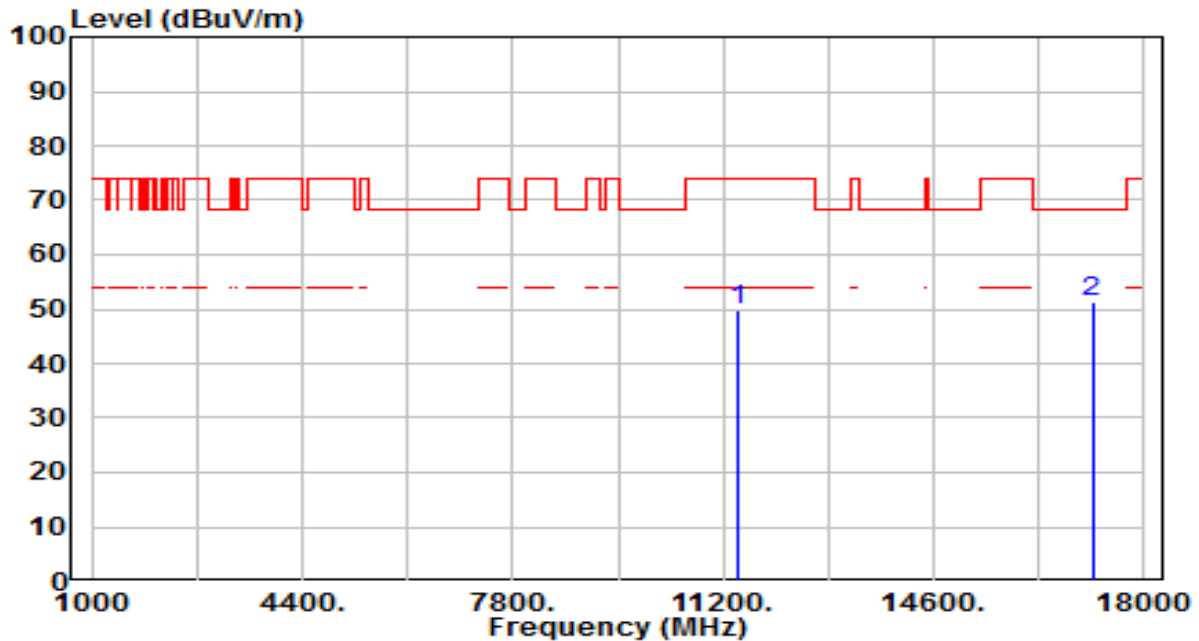


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	43.96	5.97	49.93	-24.07	74.00	100	315	Peak
2	* 17160.000	45.20	5.98	51.18	-17.02	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 144_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

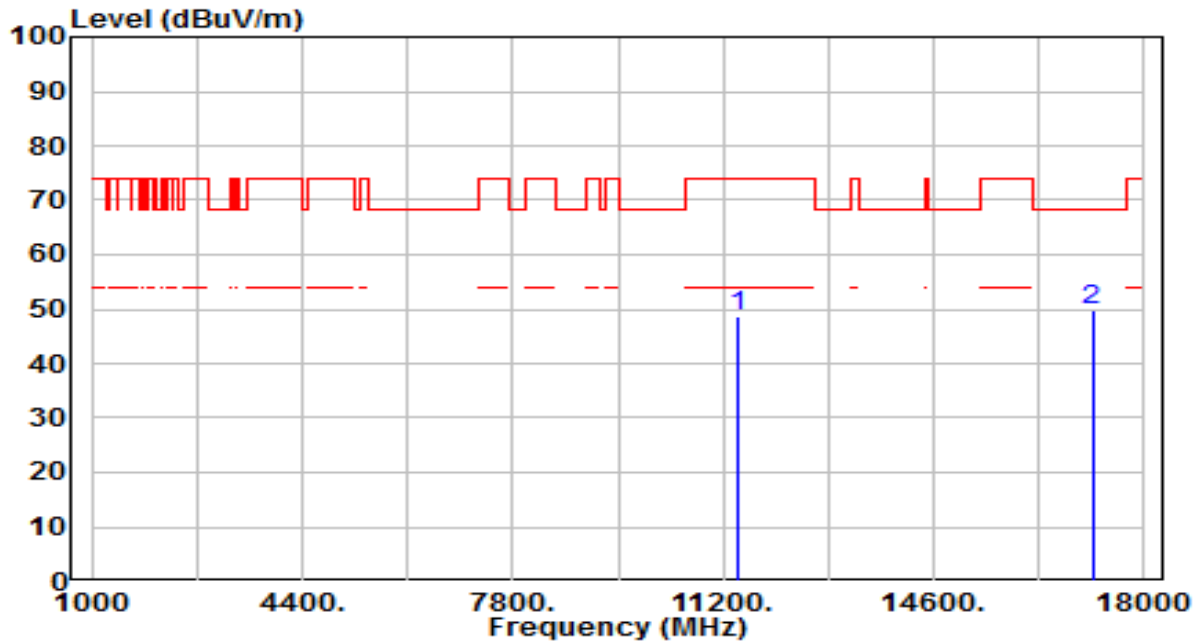


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.69	5.97	48.66	-25.34	74.00	100	285	Peak
2	* 17160.000	43.93	5.98	49.91	-18.29	68.20	100	55	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

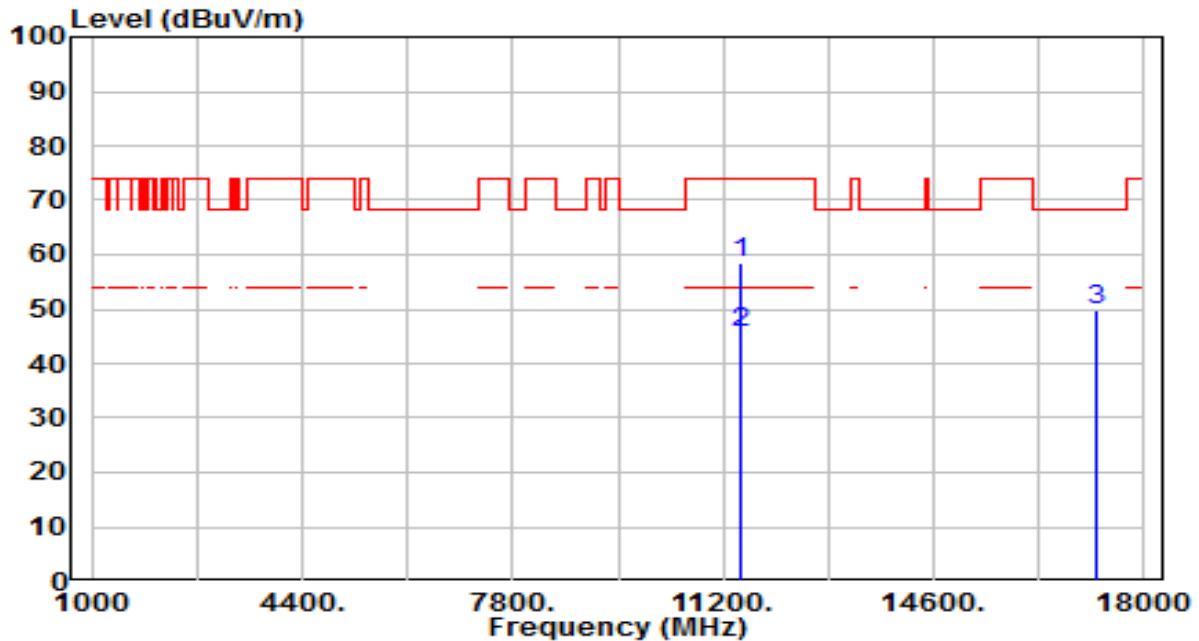


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11490.000	52.40	5.94	58.34	-15.66	74.00	100	85	Peak
2	*	11490.000	39.85	5.94	45.79	-8.21	54.00	100	85	Average
3		17235.000	44.13	5.78	49.92	-18.28	68.20	100	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

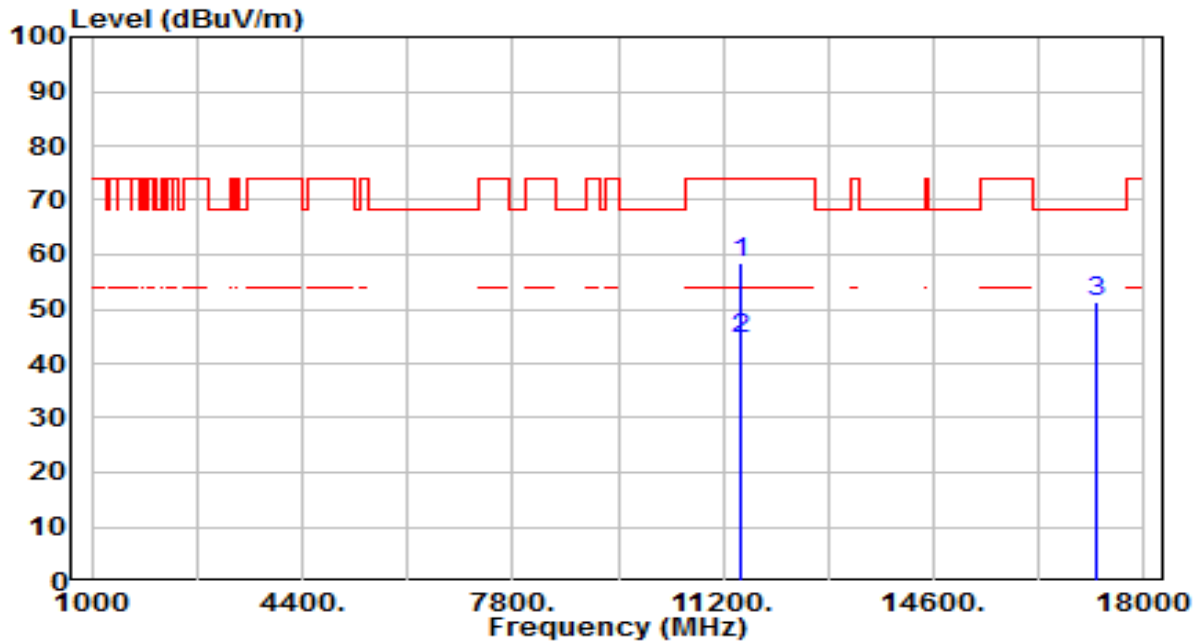


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11490.000	52.56	5.94	58.50	-15.50	74.00	110	310	Peak
2	*	11490.000	38.73	5.94	44.67	-9.33	54.00	110	310	Average
3		17235.000	45.63	5.78	51.42	-16.78	68.20	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

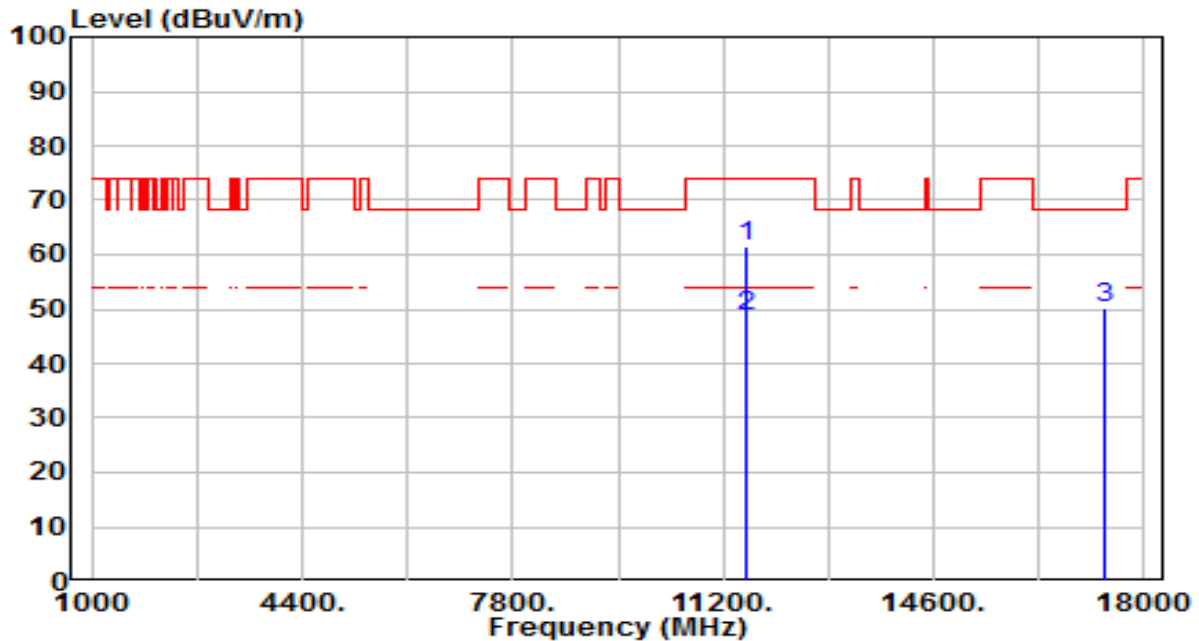


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11570.000	55.49	5.91	61.40	-12.60	74.00	125	310	Peak
2	*	11570.000	42.62	5.91	48.53	-5.47	54.00	125	310	Average
3		17355.000	44.67	5.54	50.21	-17.99	68.20	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 157_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

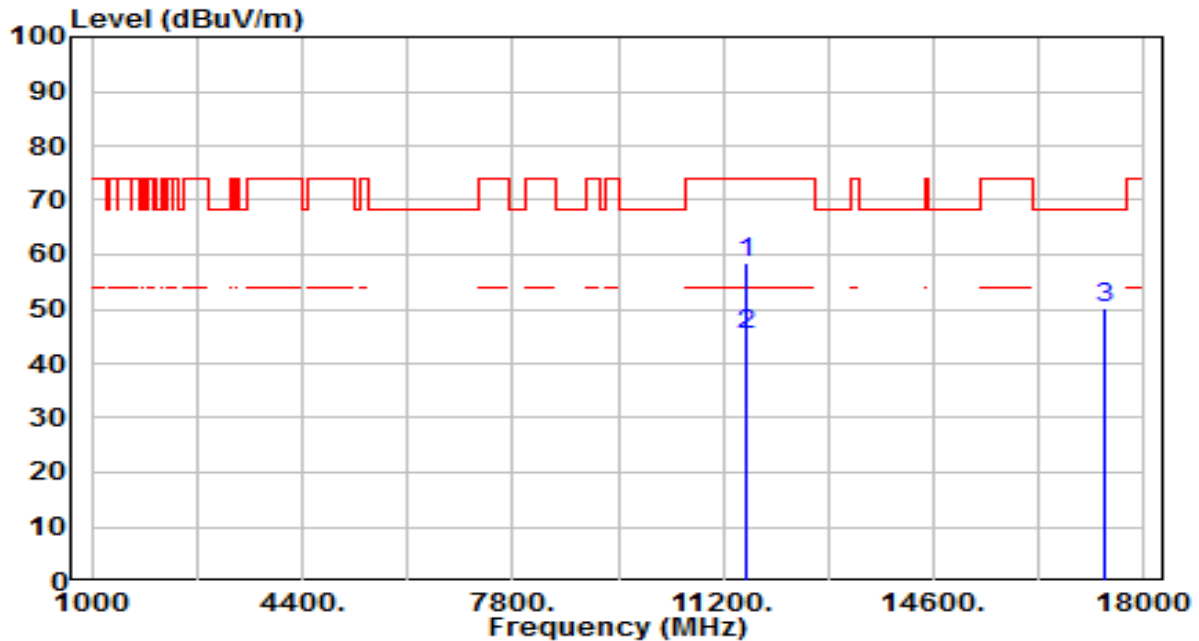


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11570.000	52.51	5.91	58.42	-15.58	74.00	115	310	Peak
2	*	11570.000	39.23	5.91	45.14	-8.86	54.00	115	310	Average
3		17355.000	44.51	5.54	50.04	-18.16	68.20	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

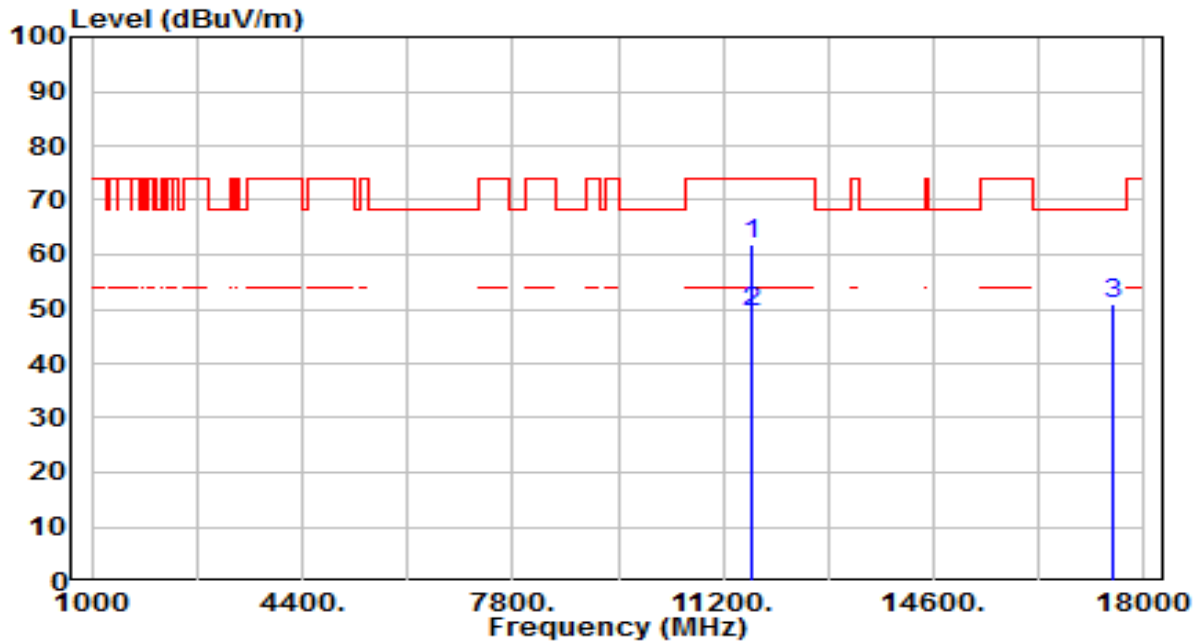


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11650.000	55.96	5.86	61.82	-12.19	74.00	115	315	Peak
2	*	11650.000	43.49	5.86	49.35	-4.65	54.00	115	315	Average
3		17475.000	45.38	5.44	50.82	-17.38	68.20	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

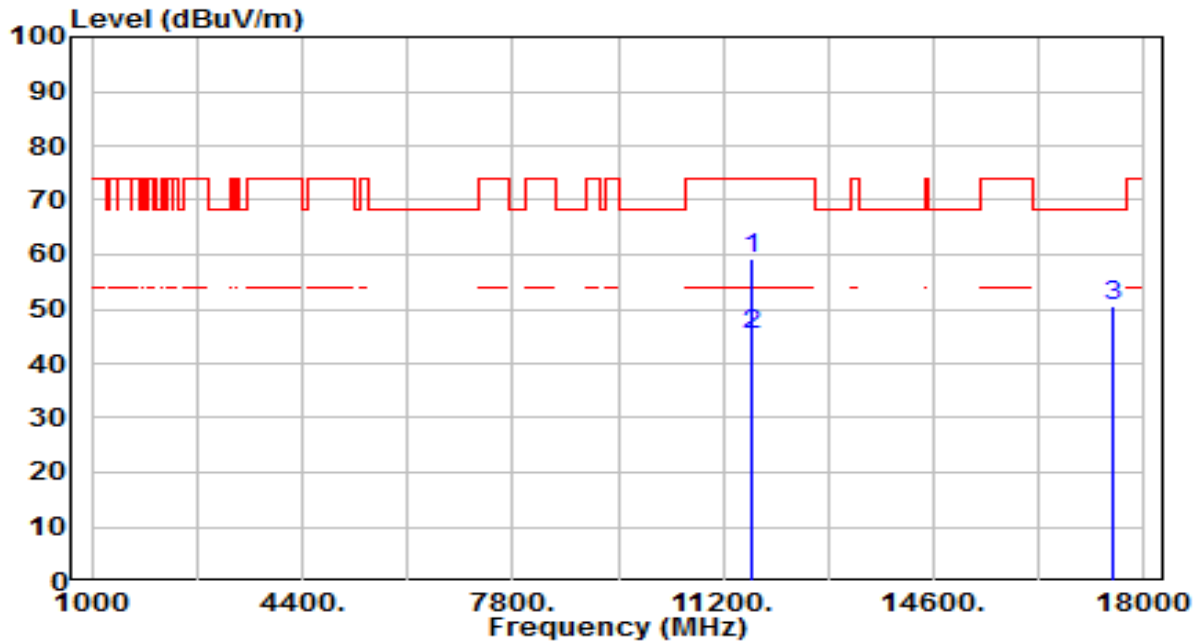


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11650.000	53.28	5.86	59.14	-14.87	74.00	115	310	Peak
2	*	11650.000	39.39	5.86	45.25	-8.76	54.00	115	310	Average
3		17475.000	44.94	5.44	50.38	-17.82	68.20	100	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

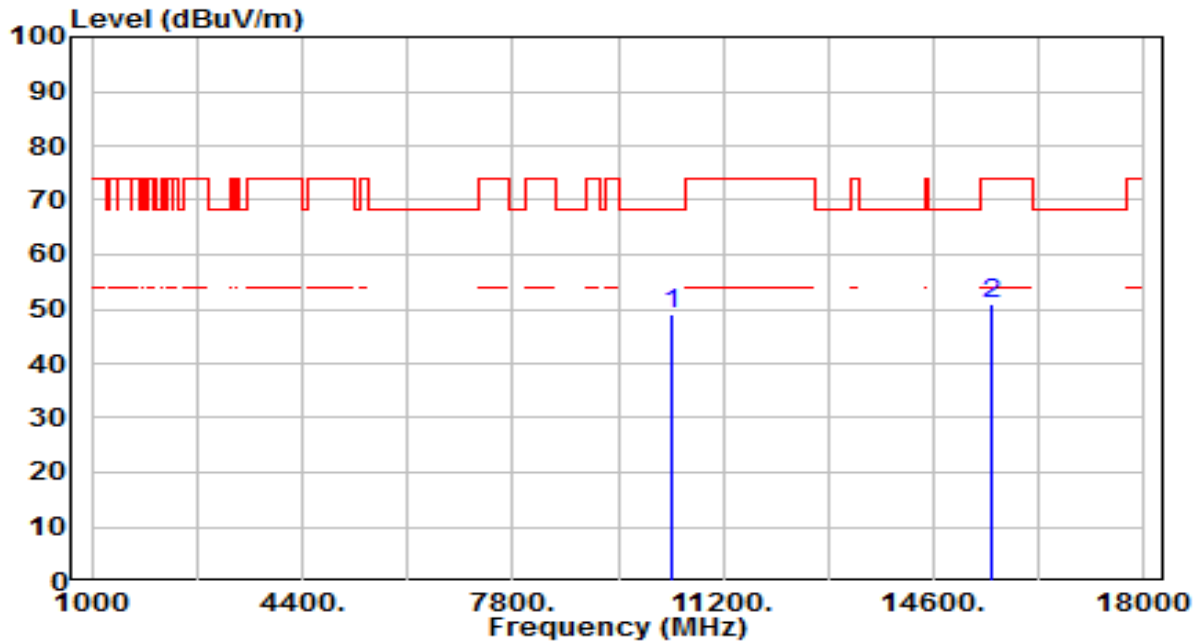


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	43.85	5.29	49.15	-19.05	68.20	100	290	Peak
2		15540.000	44.70	6.41	51.11	-22.89	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

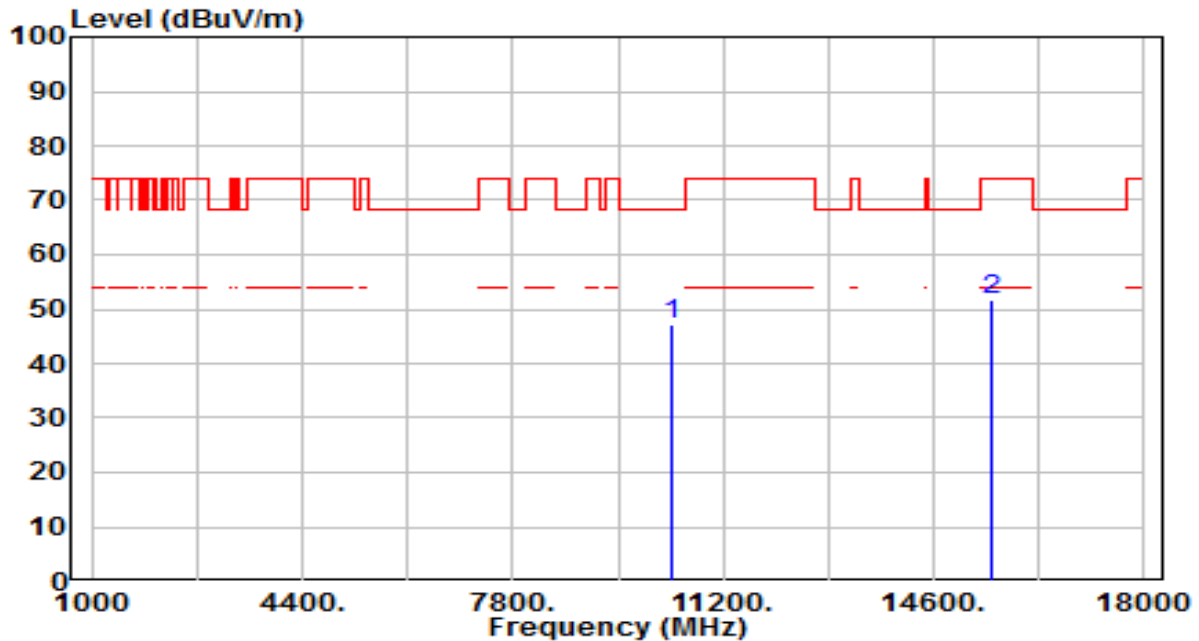


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.02	5.29	47.32	-20.88	68.20	100	330	Peak
2		15540.000	45.27	6.41	51.68	-22.32	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

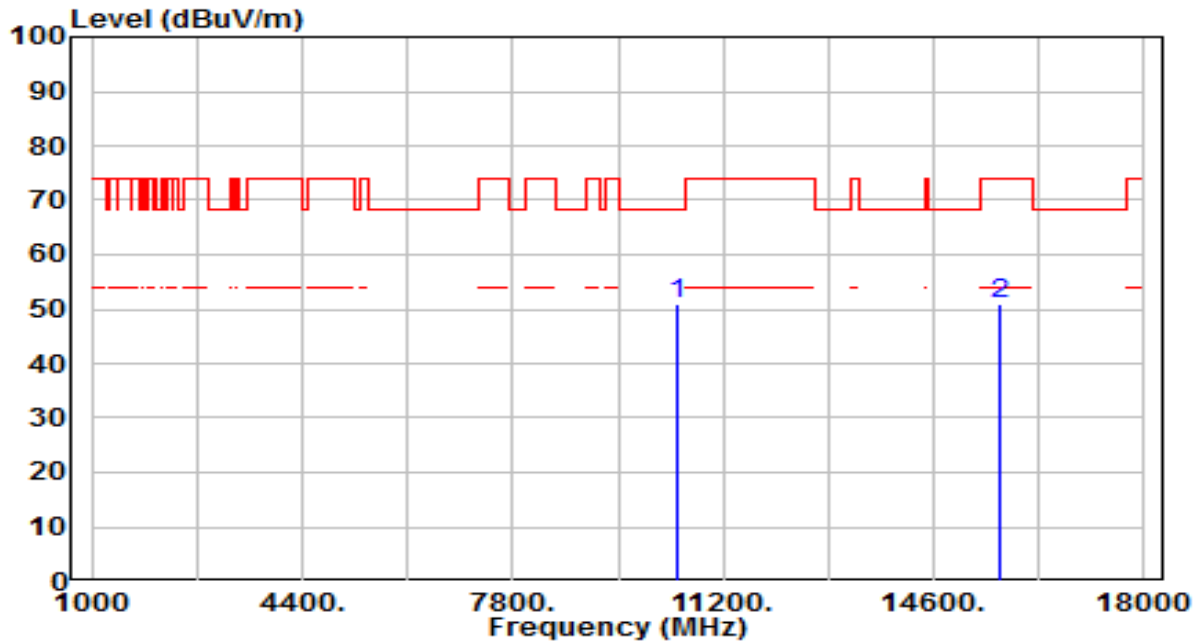


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	45.67	5.28	50.95	-17.25	68.20	100	305	Peak
2		15660.000	44.50	6.56	51.06	-22.94	74.00	100	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

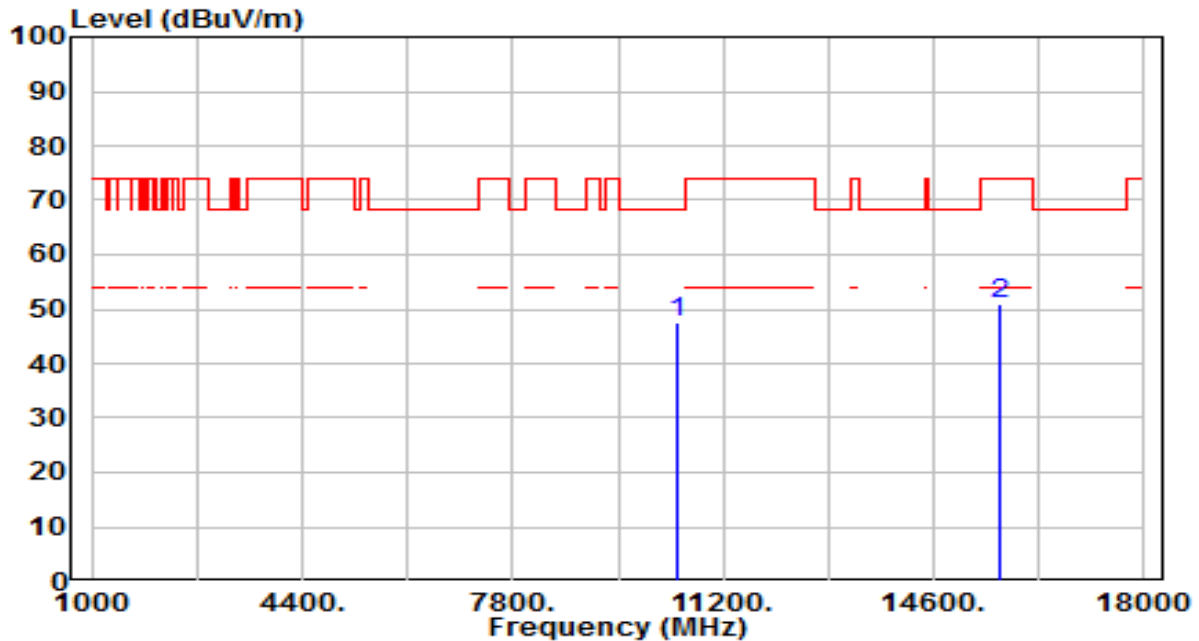


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	42.11	5.28	47.39	-20.81	68.20	100	160	Peak
2		15660.000	44.57	6.56	51.13	-22.87	74.00	100	230	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

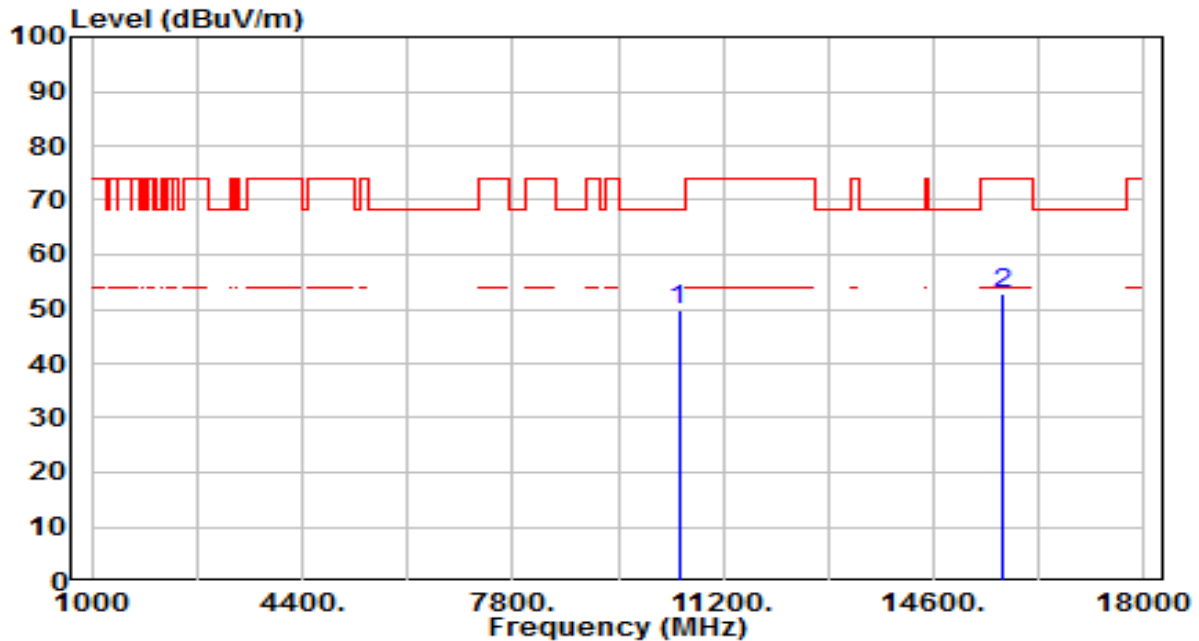


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	44.37	5.26	49.63	-18.57	68.20	100	295	Peak
2		15720.000	45.95	6.69	52.64	-21.36	74.00	100	285	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 48_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

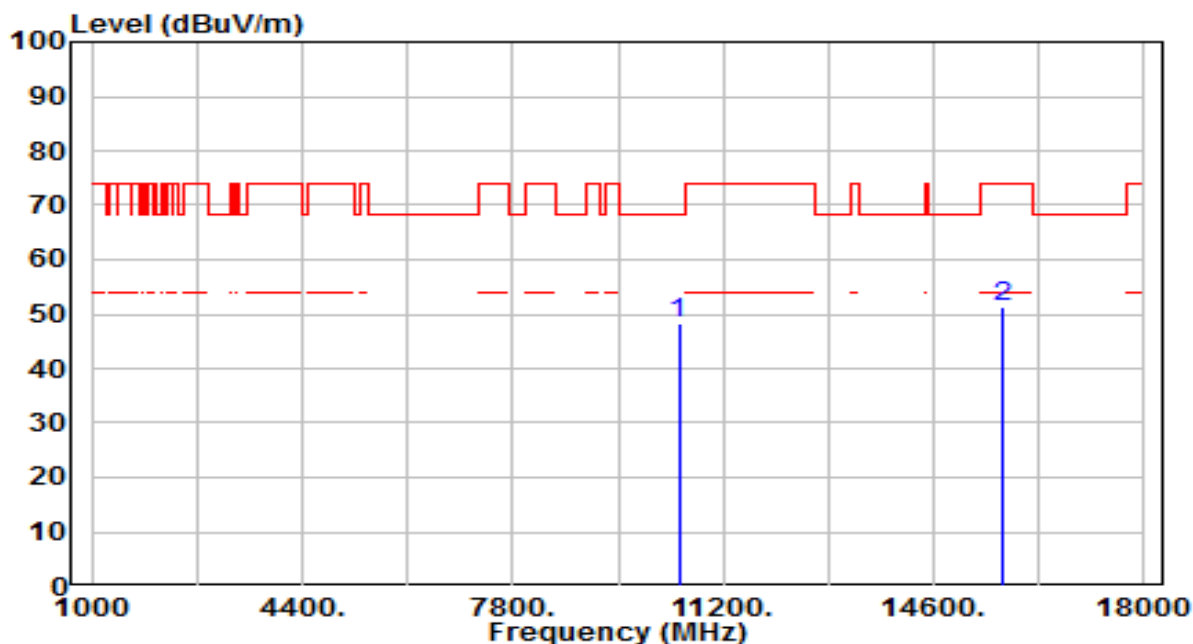


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	42.98	5.26	48.24	-19.96	68.20	100	35	Peak
2		15720.000	44.69	6.69	51.39	-22.61	74.00	100	65	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

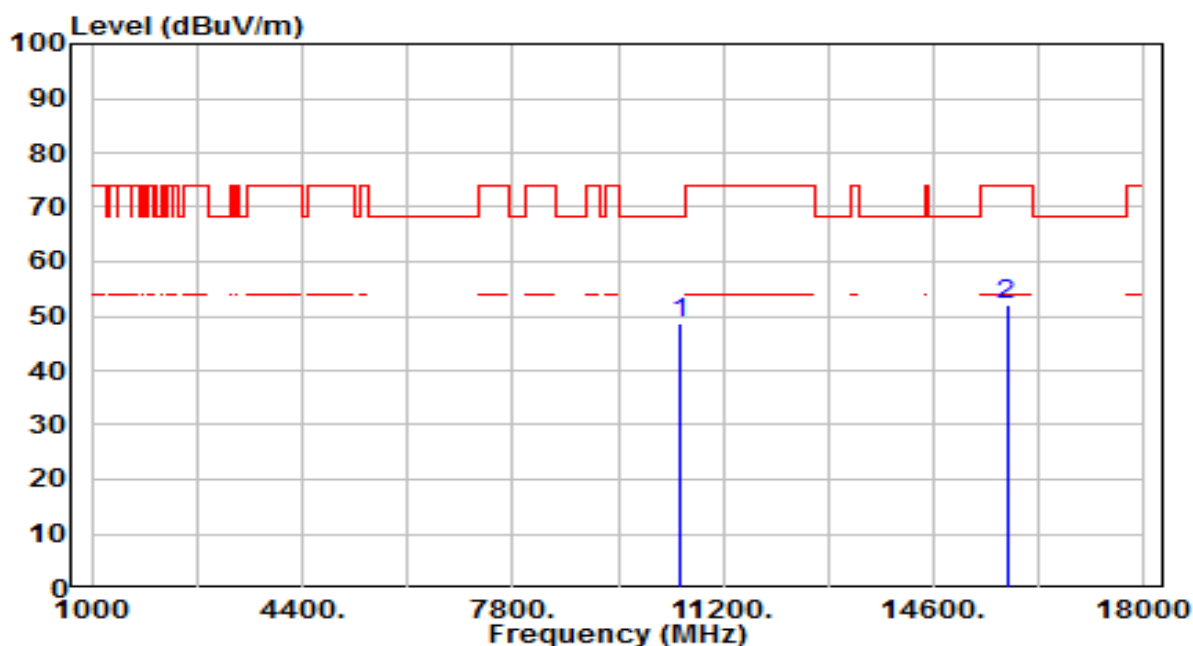


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	43.50	5.25	48.75	-19.45	68.20	100	160	Peak
2		15780.000	45.13	6.83	51.96	-22.04	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 52_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

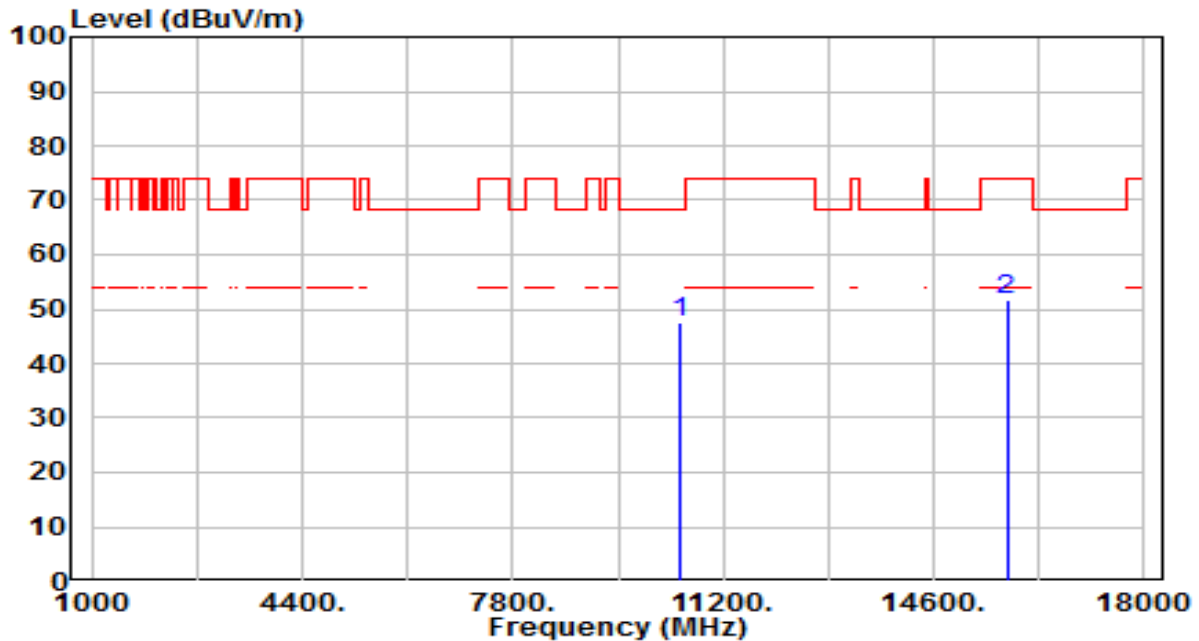


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.25	5.25	47.50	-20.70	68.20	100	190	Peak
2		15780.000	44.86	6.83	51.69	-22.31	74.00	100	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

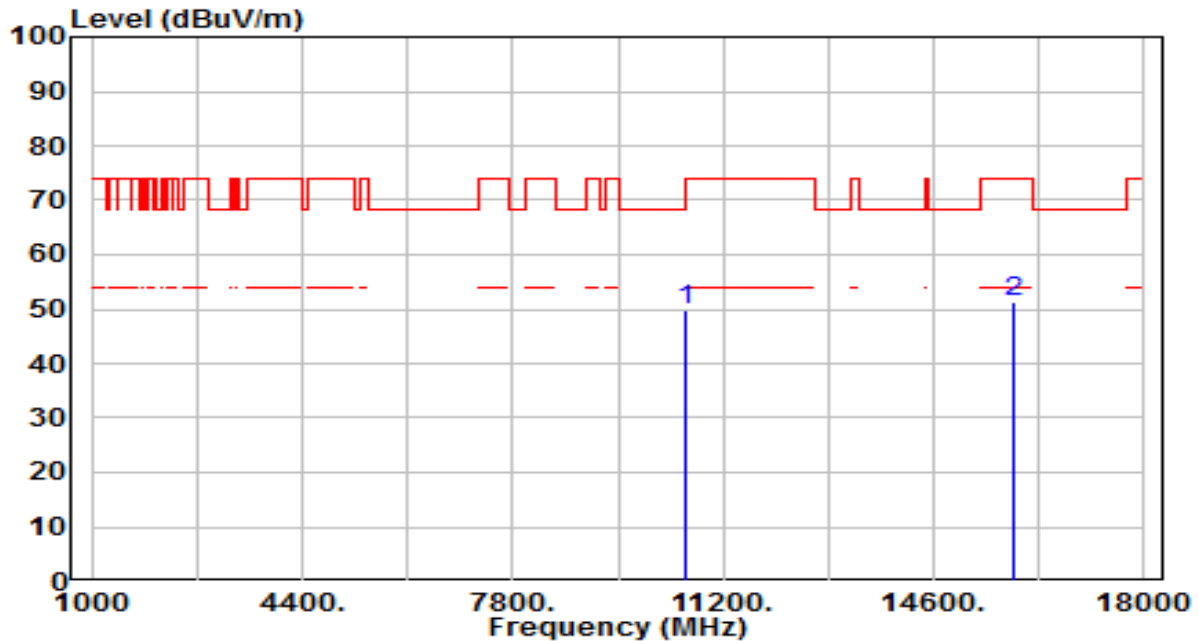


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	44.53	5.25	49.78	-18.42	68.20	100	145	Peak
2		15900.000	44.41	6.95	51.36	-22.64	74.00	100	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 60_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

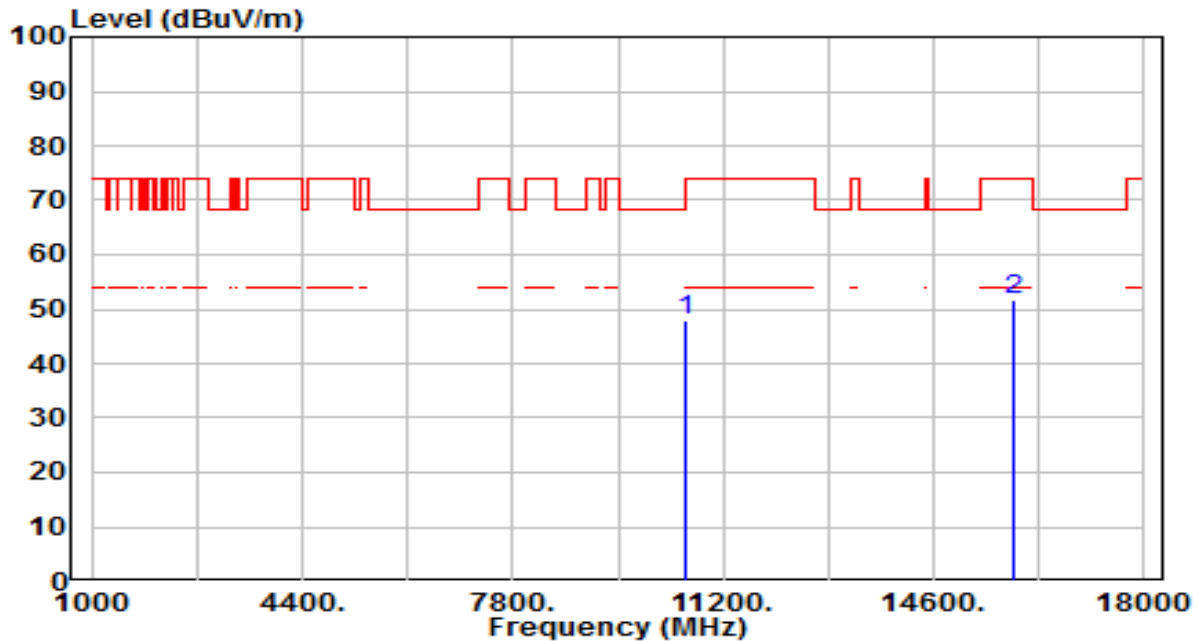


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	42.63	5.25	47.88	-20.32	68.20	100	330	Peak
2		15900.000	44.74	6.95	51.69	-22.31	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

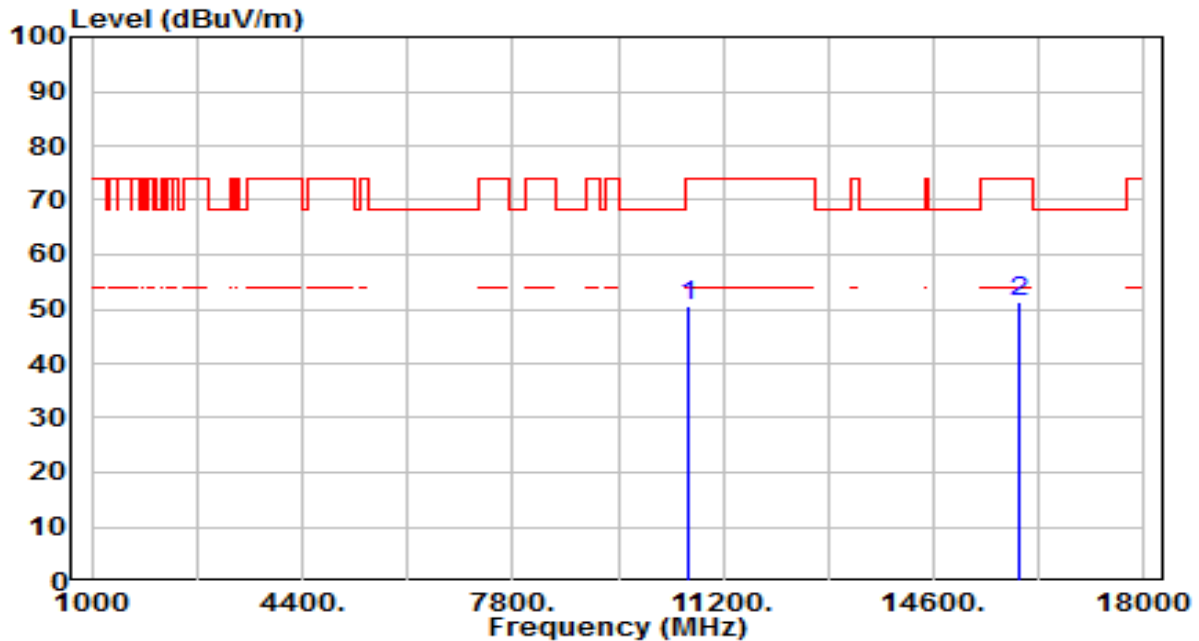


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	45.37	5.27	50.64	-23.36	74.00	100	185	Peak
2	* 15960.000	44.14	7.00	51.14	-22.86	74.00	100	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

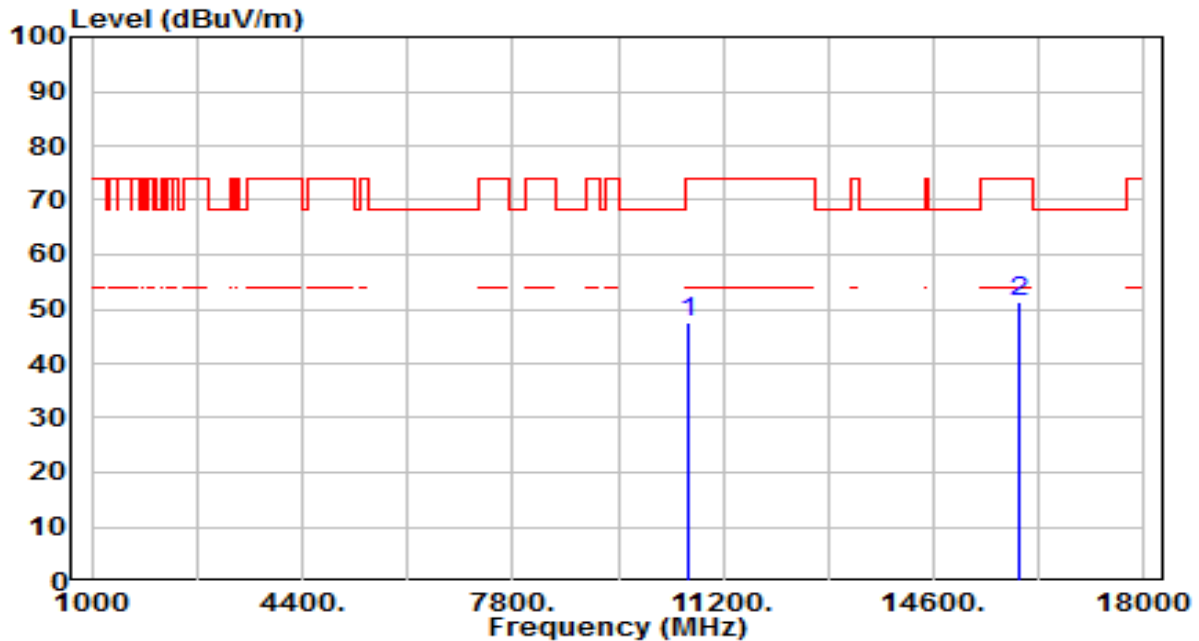


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	42.11	5.27	47.39	-26.61	74.00	100	335	Peak
2	* 15960.000	44.25	7.00	51.24	-22.76	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

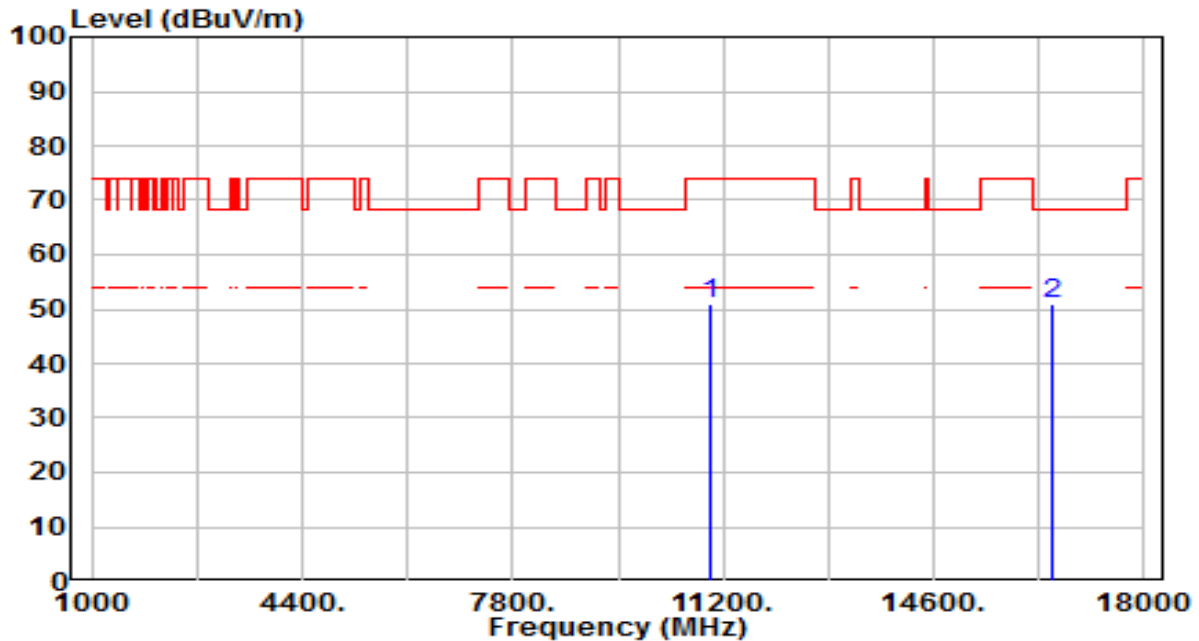


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	45.25	5.56	50.81	-23.19	74.00	100	180	Peak
2	*	16500.000	43.42	7.34	50.76	-17.44	68.20	100	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

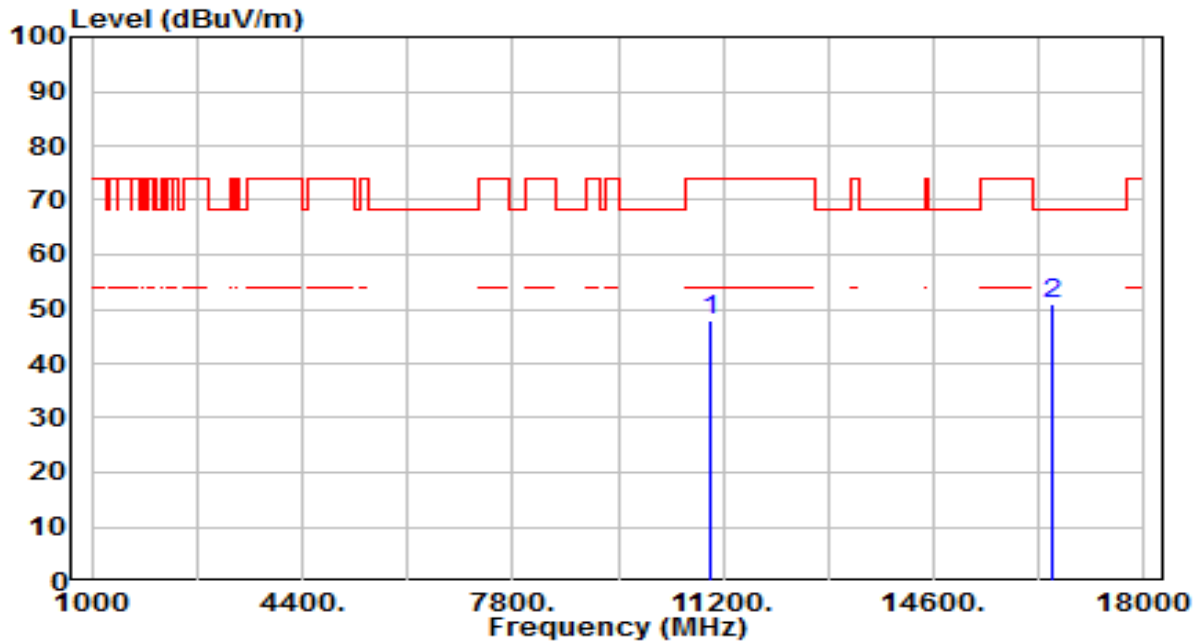


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11000.000	42.55	5.56	48.11	-25.89	74.00	100	45	Peak
2	*	16500.000	43.77	7.34	51.12	-17.08	68.20	100	235	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

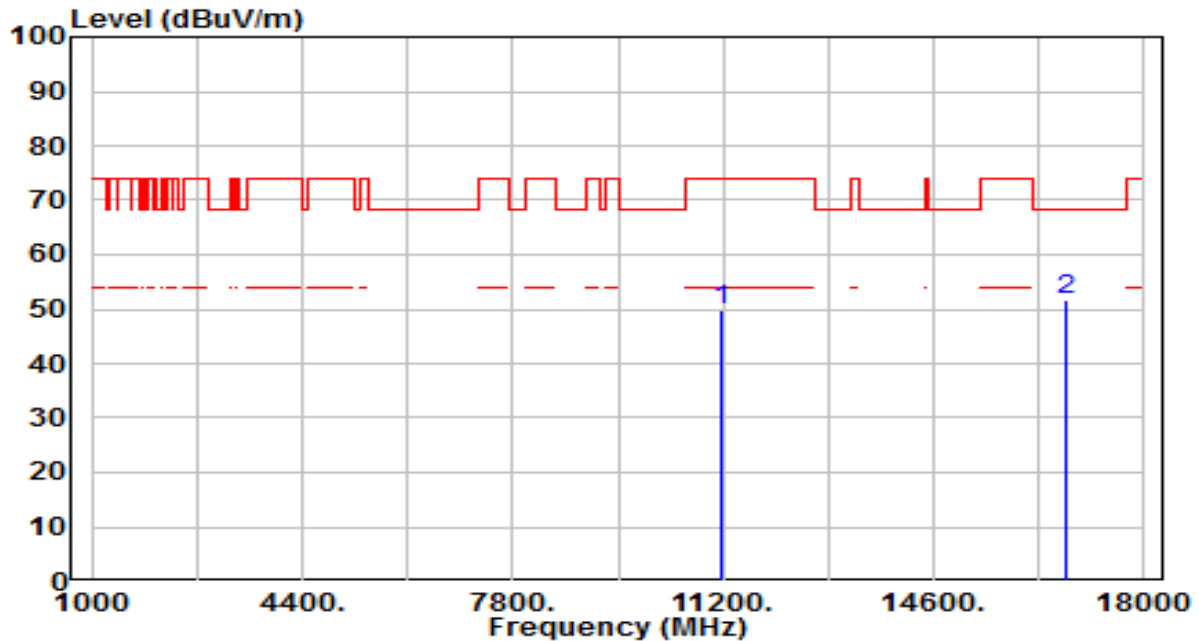


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	44.19	5.73	49.92	-24.08	74.00	100	65	Peak
2	* 16740.000	43.99	7.72	51.71	-16.49	68.20	100	265	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 116_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

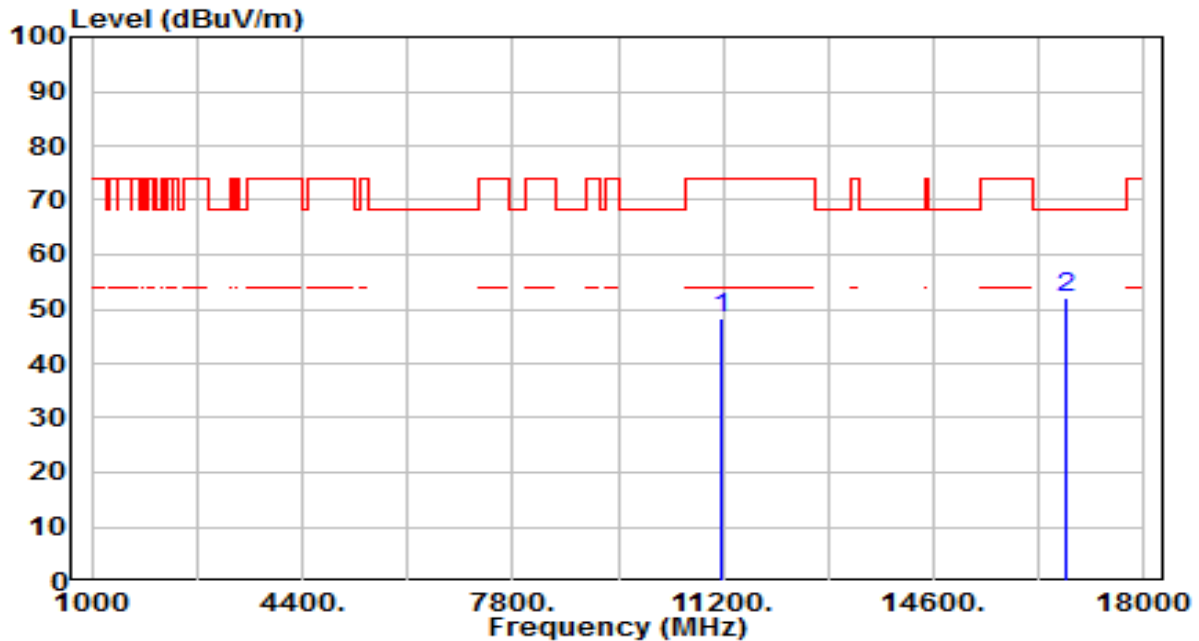


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	42.58	5.73	48.31	-25.69	74.00	100	195	Peak
2	* 16740.000	44.36	7.72	52.08	-16.12	68.20	100	55	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

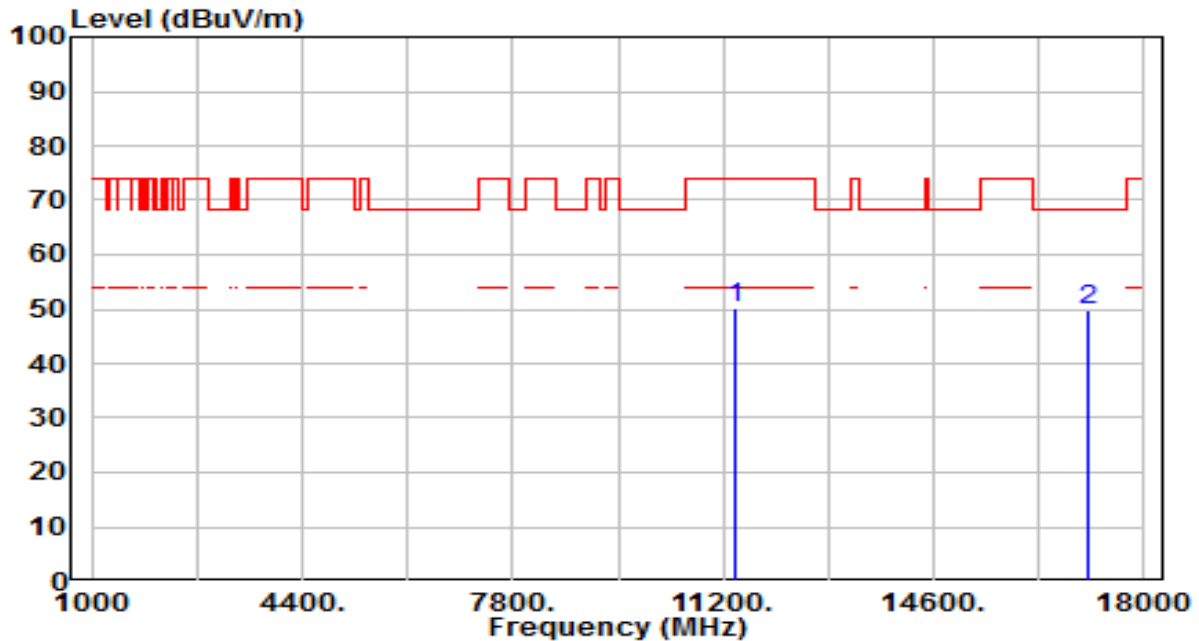


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	44.04	5.98	50.02	-23.98	74.00	100	130	Peak
2	*	17100.000	43.51	6.16	49.67	-18.53	68.20	100	350	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

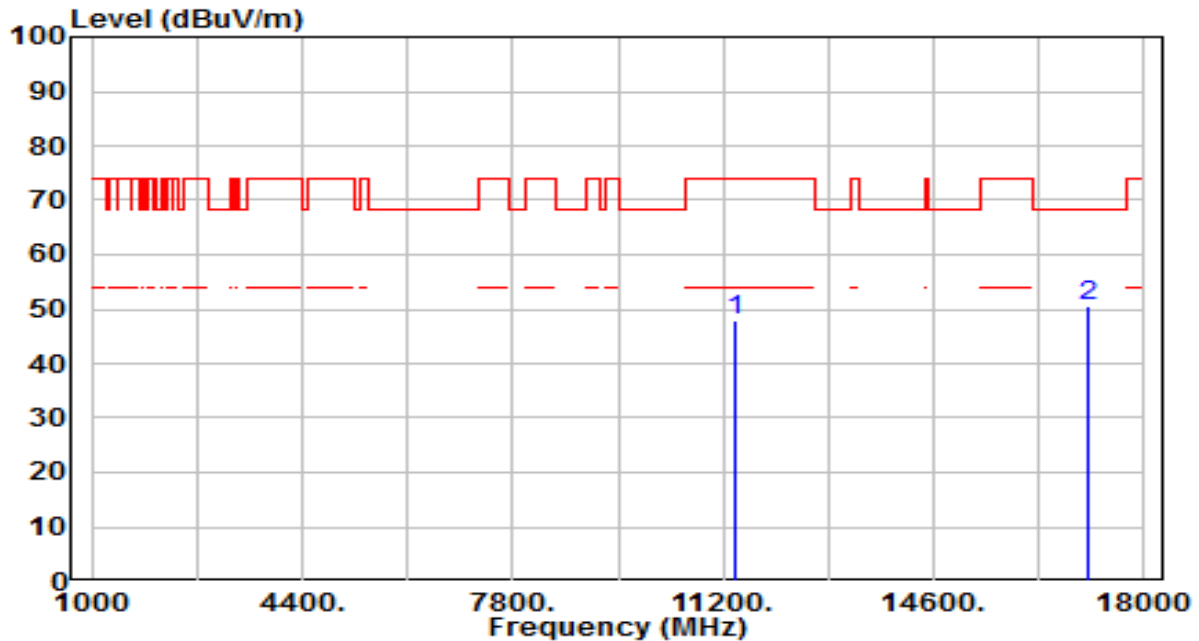


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	41.81	5.98	47.80	-26.20	74.00	100	230	Peak
2	* 17100.000	44.24	6.16	50.41	-17.79	68.20	100	60	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

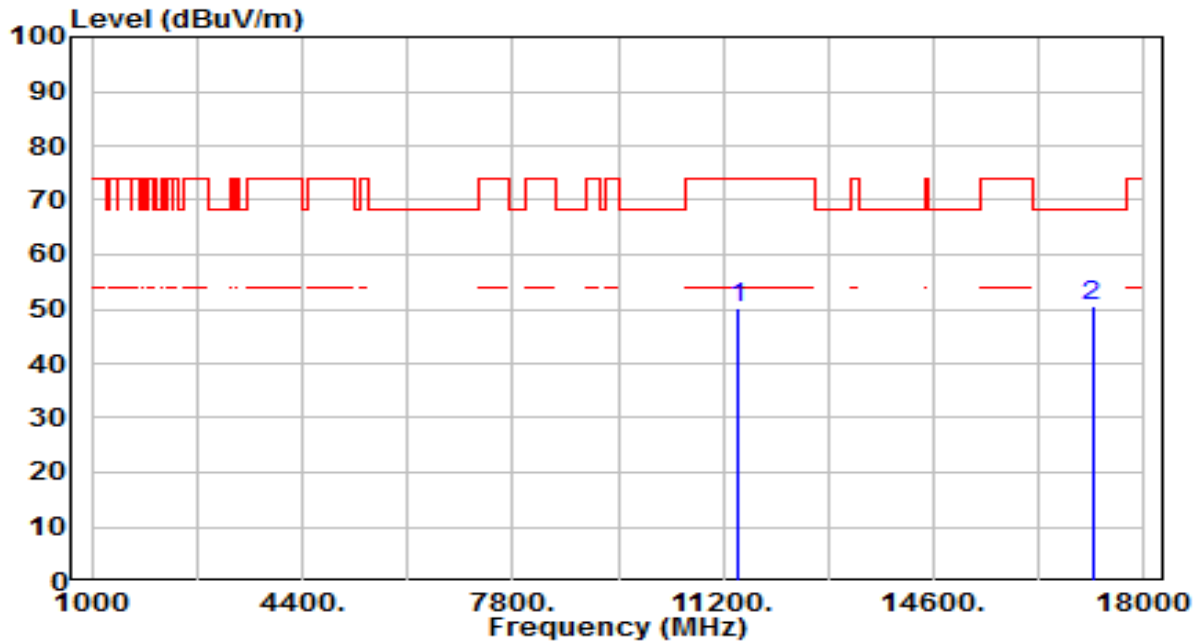


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	44.26	5.97	50.23	-23.77	74.00	100	120	Peak
2	*	17160.000	44.43	5.98	50.41	-17.79	68.20	100	330	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 144_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

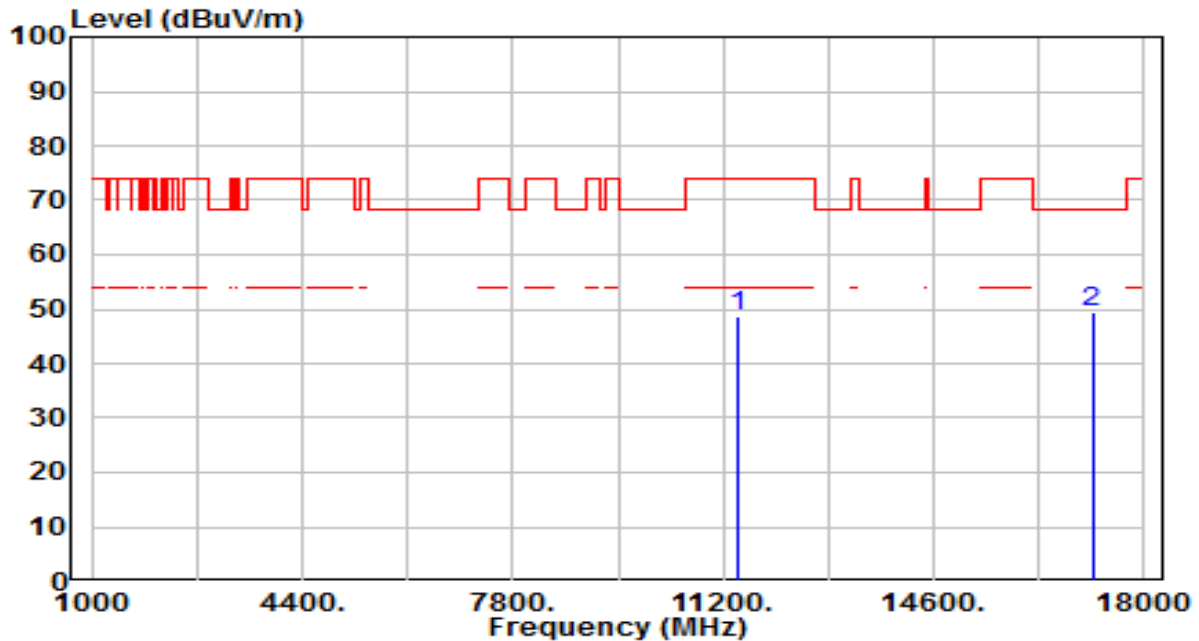


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11440.000	42.69	5.97	48.66	-25.34	74.00	100	235	Peak
2	* 17160.000	43.58	5.98	49.56	-18.64	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

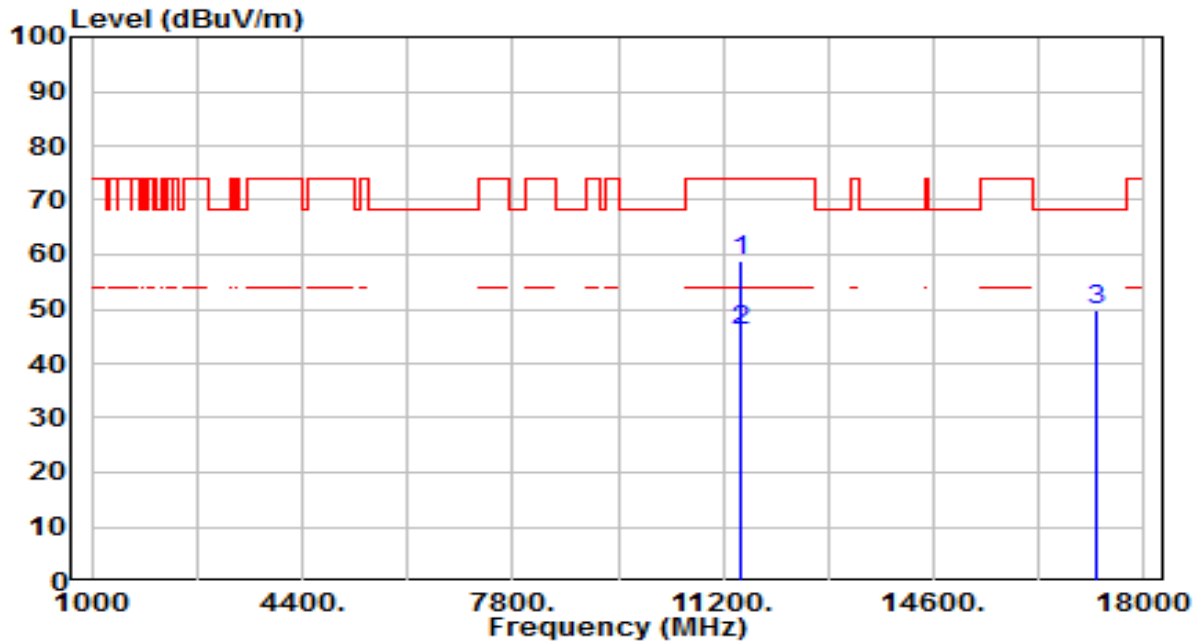


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11490.000	53.05	5.94	58.99	-15.01	74.00	105	95	Peak
2	*	11490.000	39.97	5.94	45.91	-8.09	54.00	105	95	Average
3		17235.000	44.20	5.78	49.98	-18.22	68.20	100	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

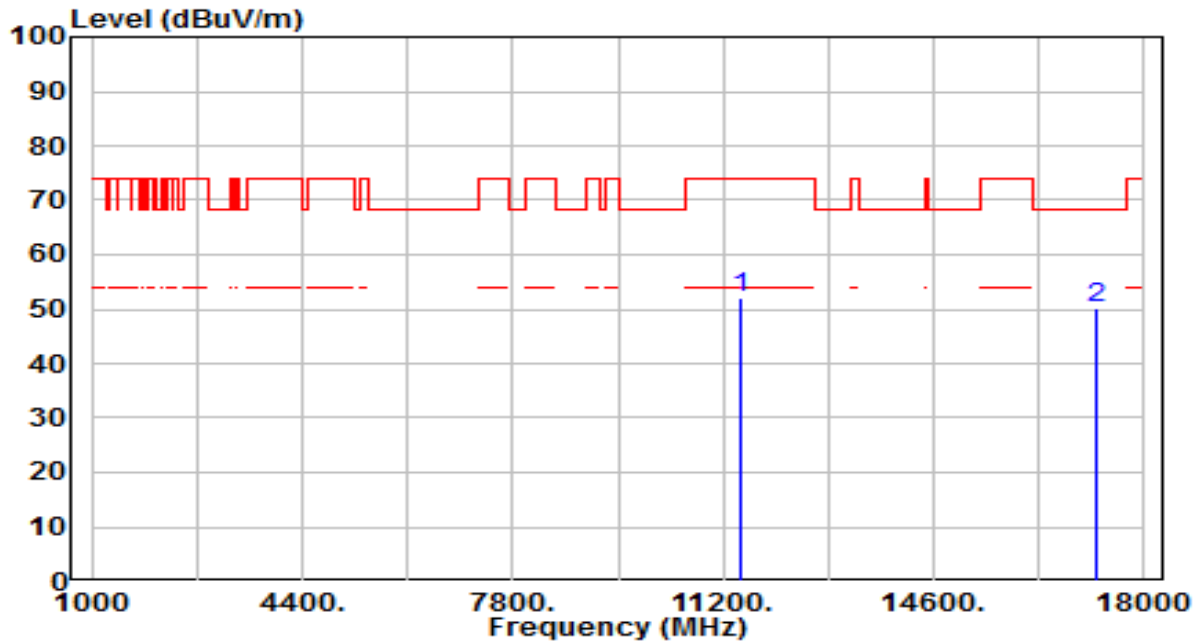


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11490.000	46.20	5.94	52.15	-21.85	74.00	100	320	Peak
2	* 17235.000	44.24	5.78	50.02	-18.18	68.20	100	130	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

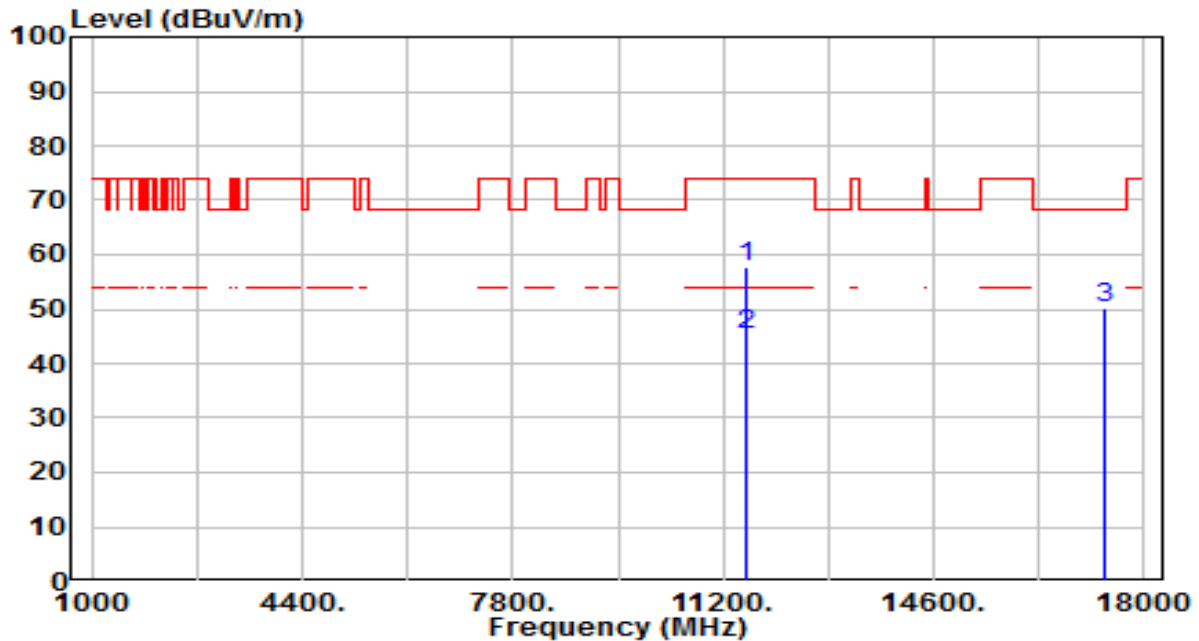


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11570.000	51.92	5.91	57.83	-16.17	74.00	100	90	Peak
2	*	11570.000	39.48	5.91	45.39	-8.61	54.00	100	90	Average
3		17355.000	44.75	5.54	50.28	-17.92	68.20	100	285	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 157_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

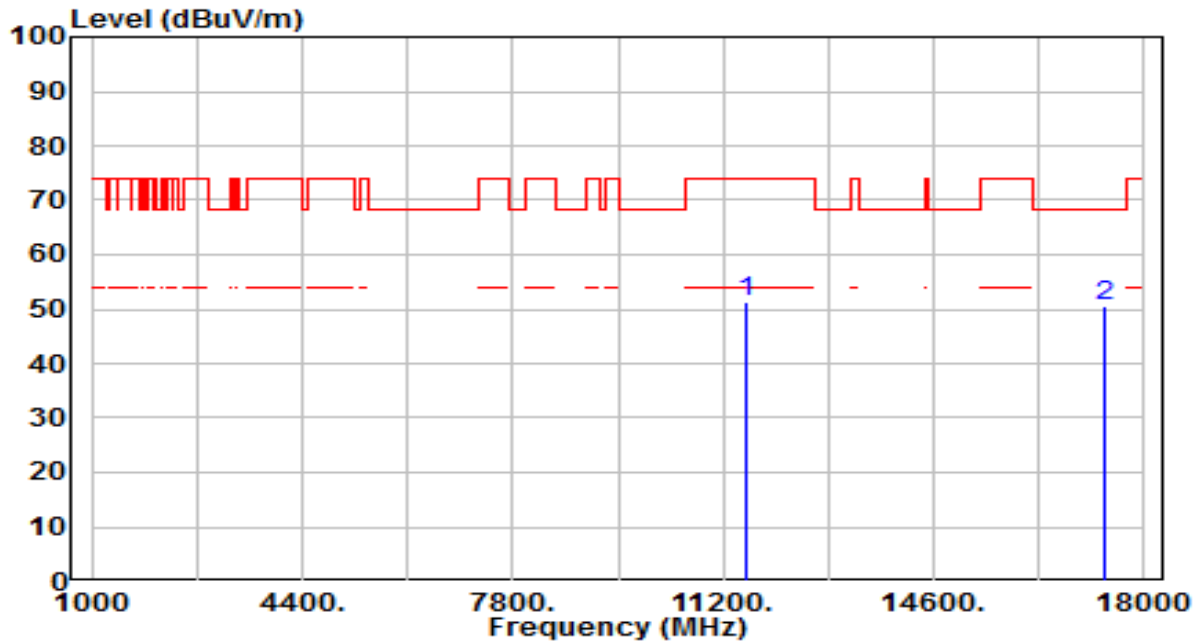


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	45.36	5.91	51.27	-22.73	74.00	100	325	Peak
2	* 17355.000	45.11	5.54	50.65	-17.55	68.20	100	120	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

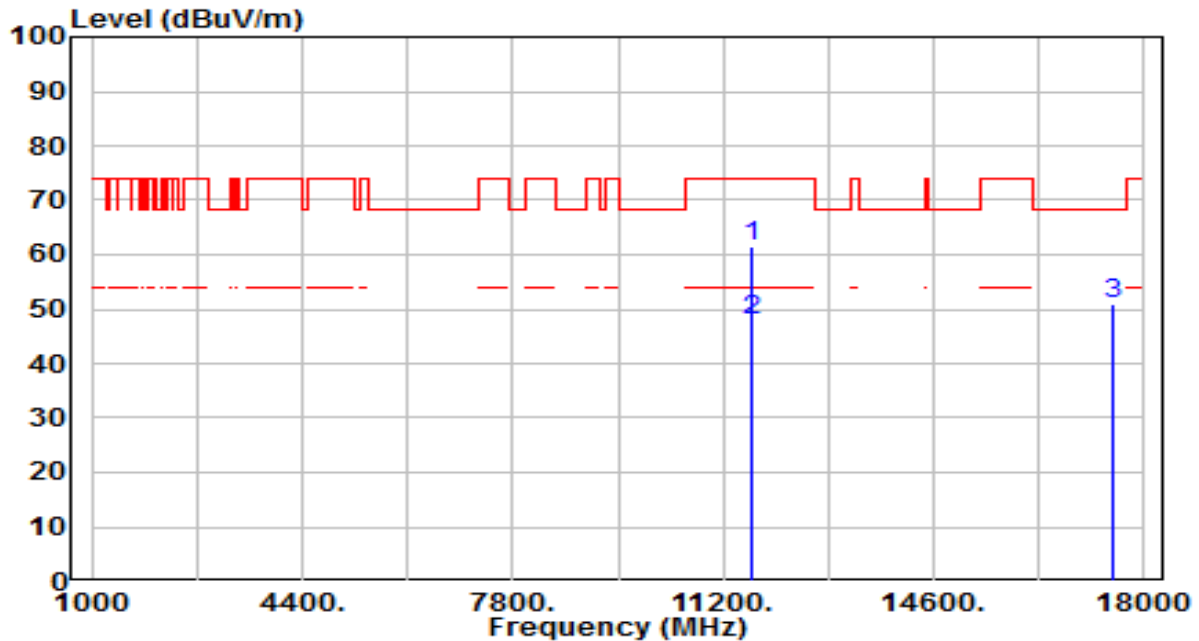


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11650.000	55.57	5.86	61.43	-12.58	74.00	130	320	Peak
2	*	11650.000	42.22	5.86	48.08	-5.92	54.00	130	320	Average
3		17475.000	45.60	5.44	51.04	-17.16	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

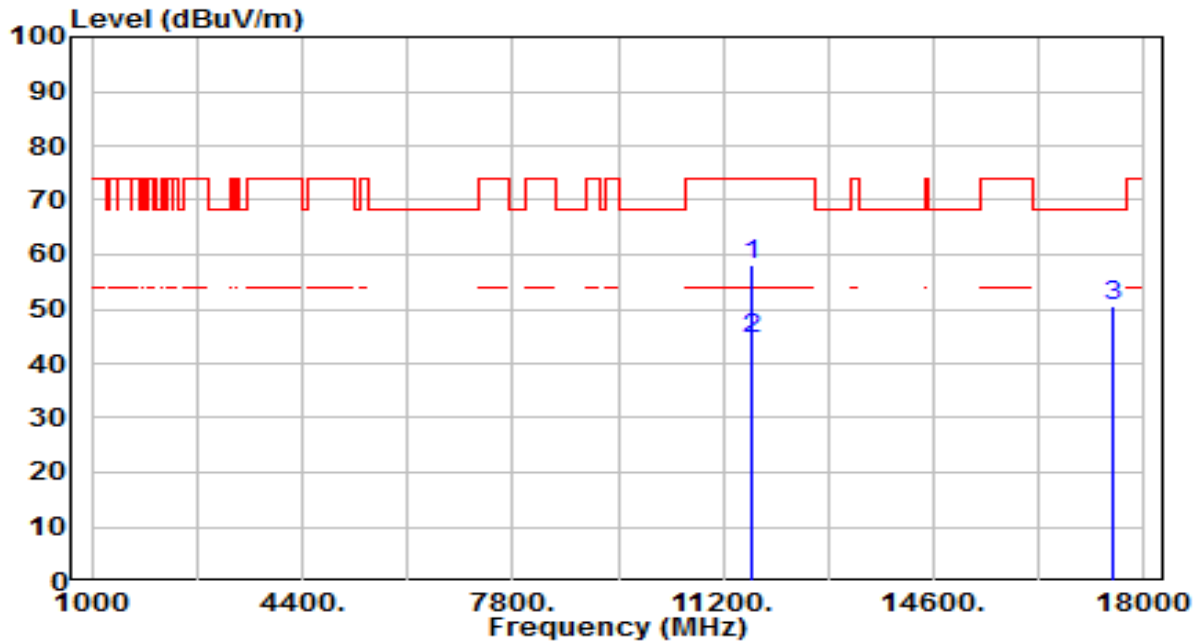


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11650.000	52.29	5.86	58.15	-15.86	74.00	120	310	Peak
2	*	11650.000	38.69	5.86	44.55	-9.46	54.00	120	310	Average
3		17475.000	45.23	5.44	50.66	-17.54	68.20	100	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

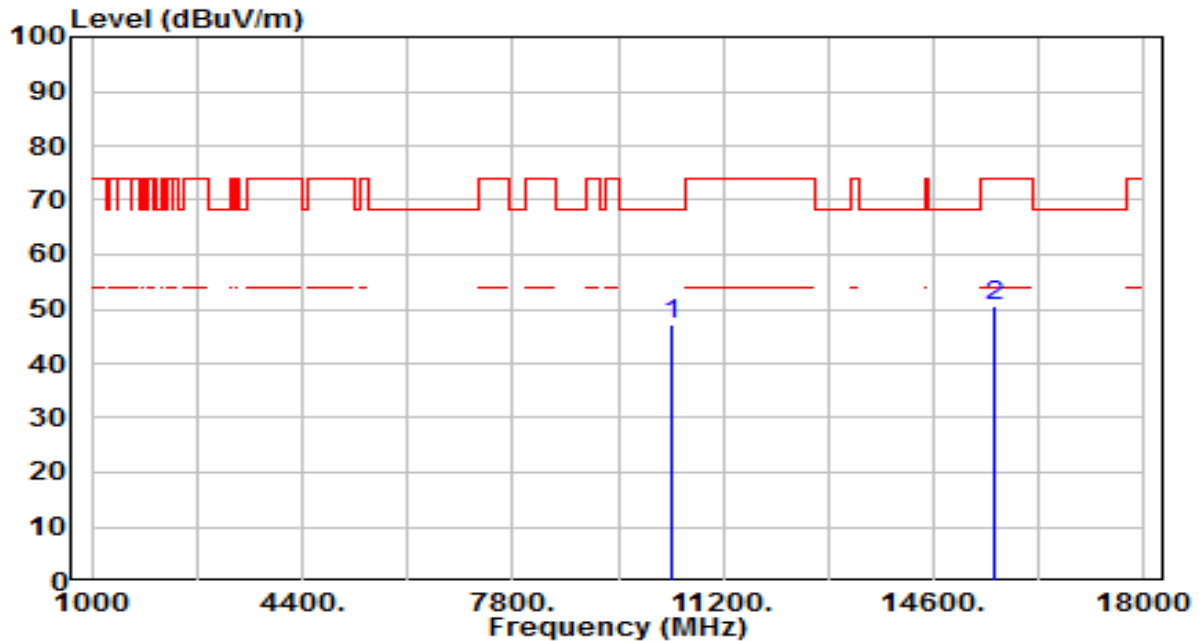


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.94	5.30	47.24	-20.96	68.20	100	340	Peak
2		15570.000	44.31	6.41	50.72	-23.28	74.00	100	150	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

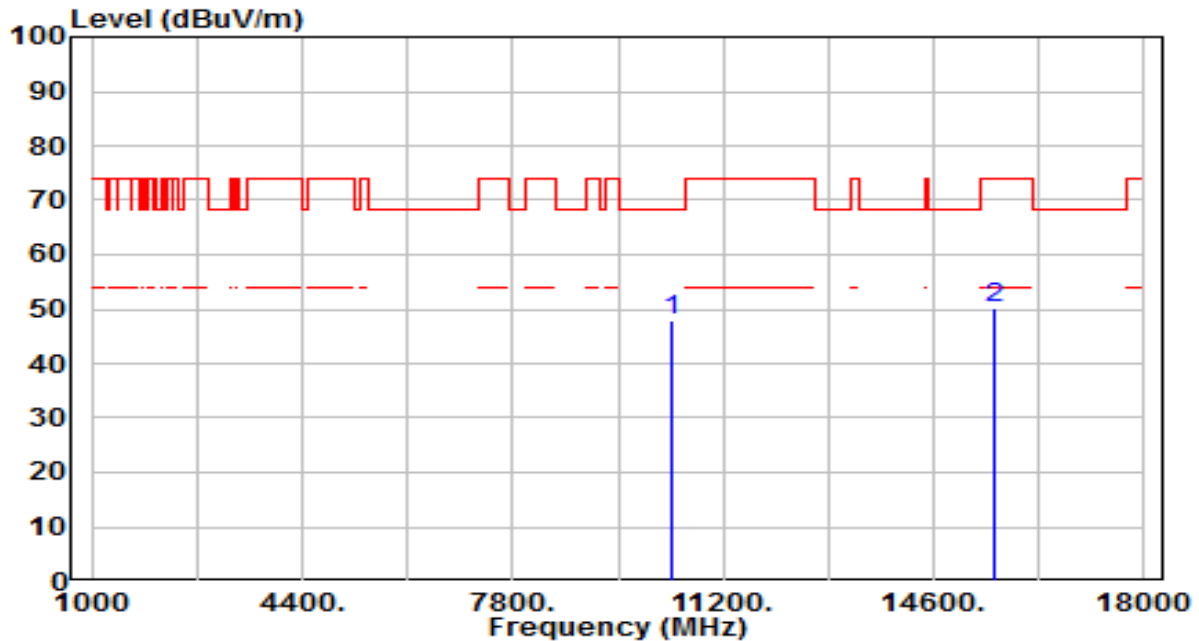


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	42.64	5.30	47.94	-20.26	68.20	100	105	Peak
2		15570.000	43.80	6.41	50.21	-23.79	74.00	100	315	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

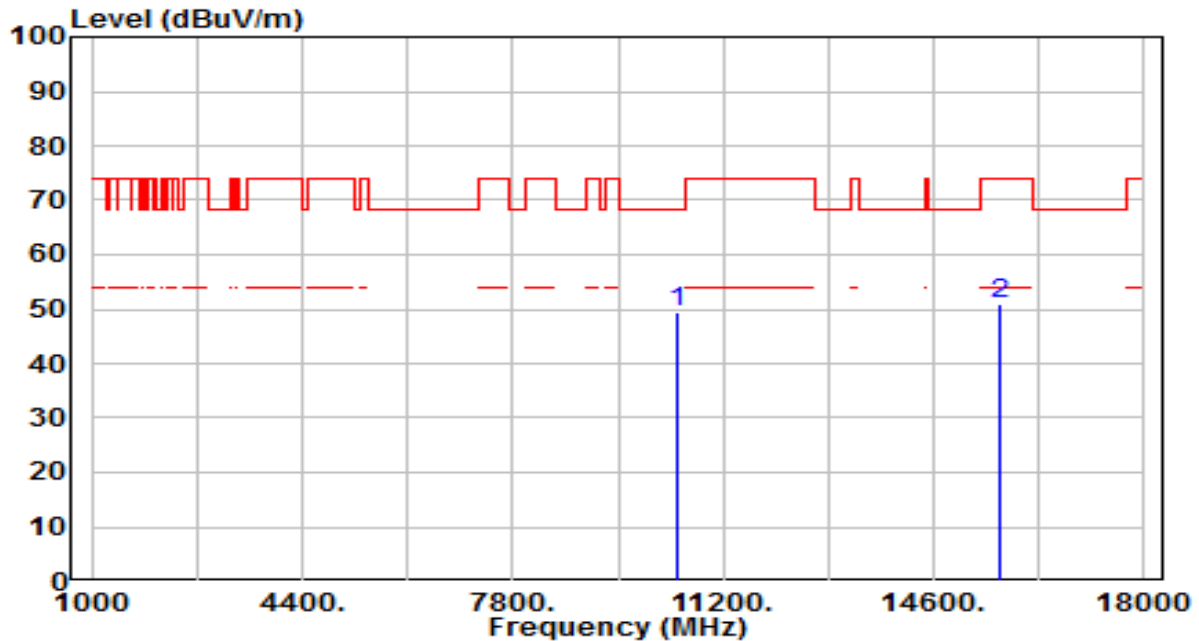


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	44.27	5.27	49.54	-18.66	68.20	100	315	Peak
2		15690.000	44.13	6.63	50.76	-23.24	74.00	100	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band1_CH 46_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

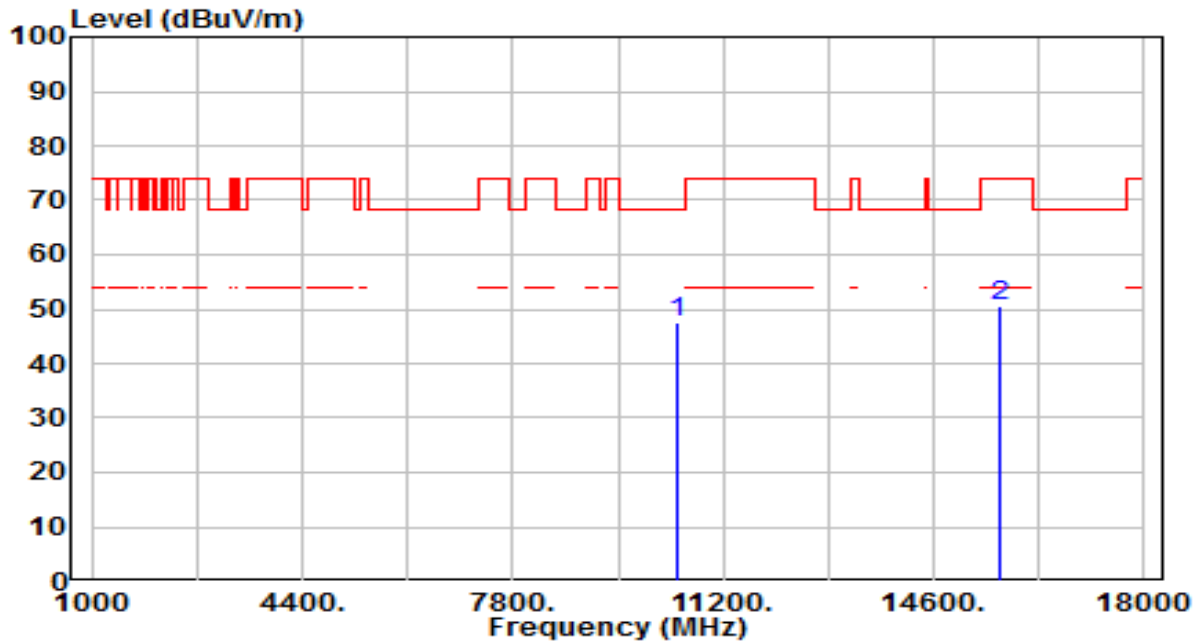


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	42.17	5.27	47.44	-20.76	68.20	100	75	Peak
2		15690.000	43.96	6.63	50.59	-23.41	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

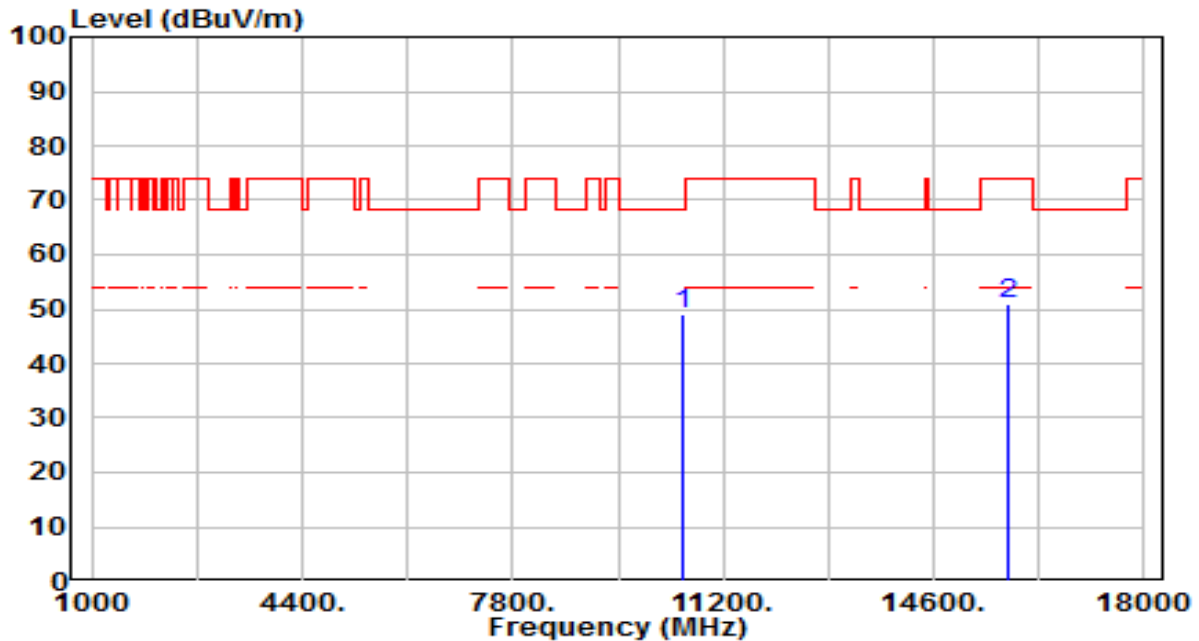


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	43.65	5.25	48.91	-19.29	68.20	100	130	Peak
2		15810.000	44.25	6.88	51.13	-22.87	74.00	100	55	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band2_CH 54_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

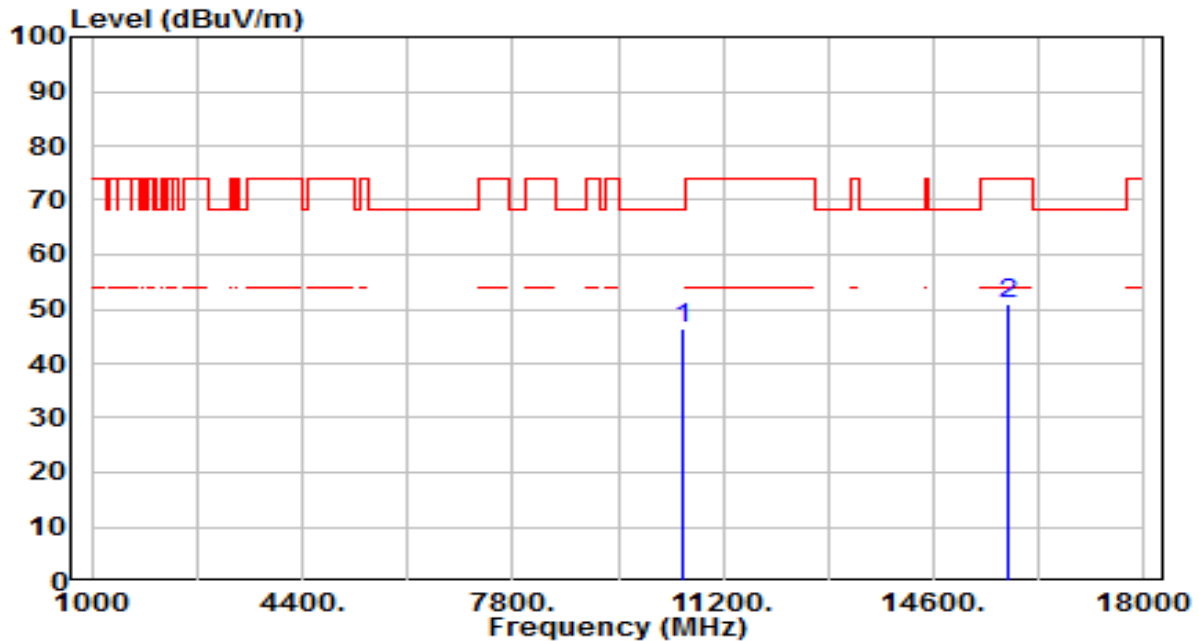


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	41.24	5.25	46.50	-21.70	68.20	100	260	Peak
2		15810.000	43.95	6.88	50.84	-23.16	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

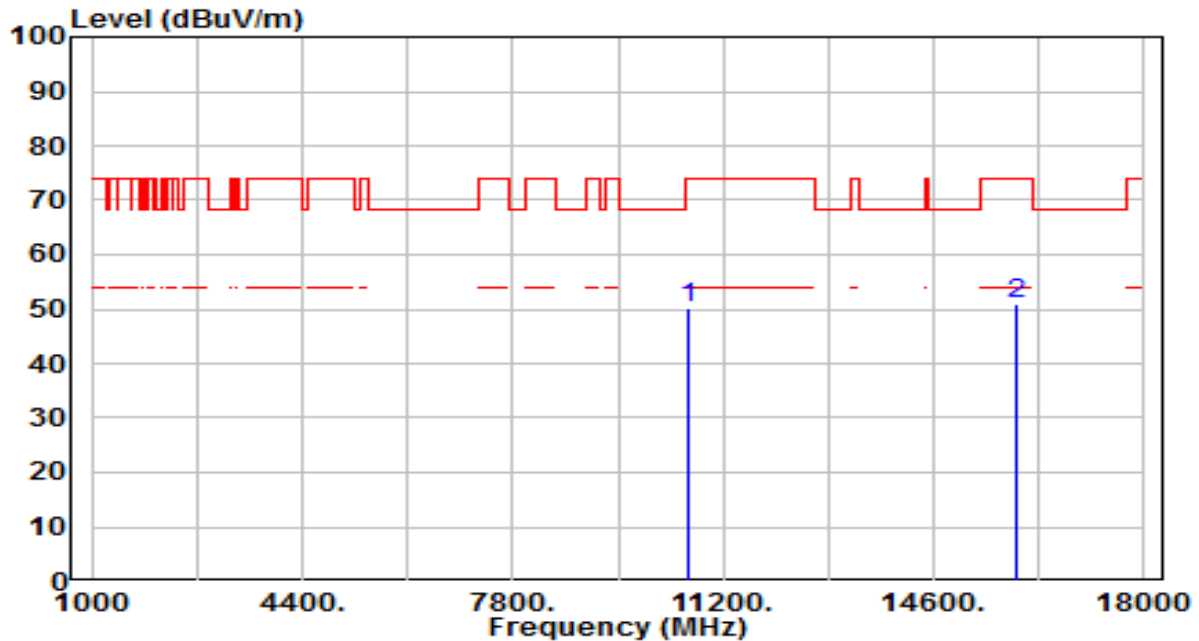


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	45.07	5.26	50.33	-23.67	74.00	100	165	Peak
2	* 15930.000	44.00	6.98	50.97	-23.03	74.00	100	165	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

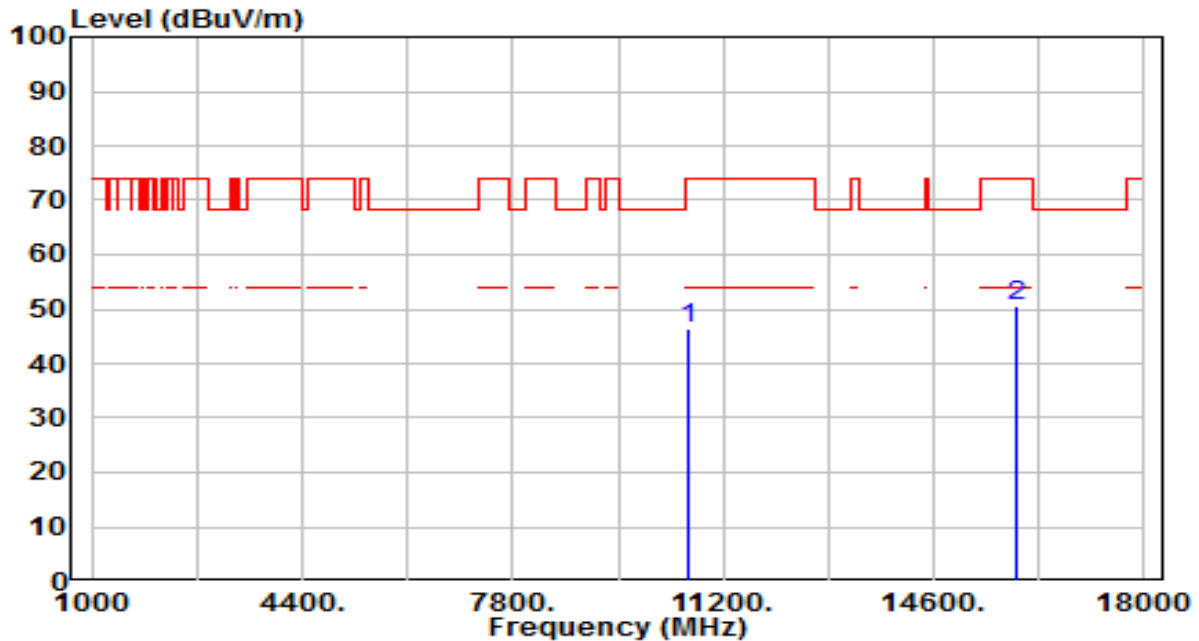


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	41.27	5.26	46.53	-27.47	74.00	100	115	Peak
2	* 15930.000	43.75	6.98	50.72	-23.28	74.00	100	200	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

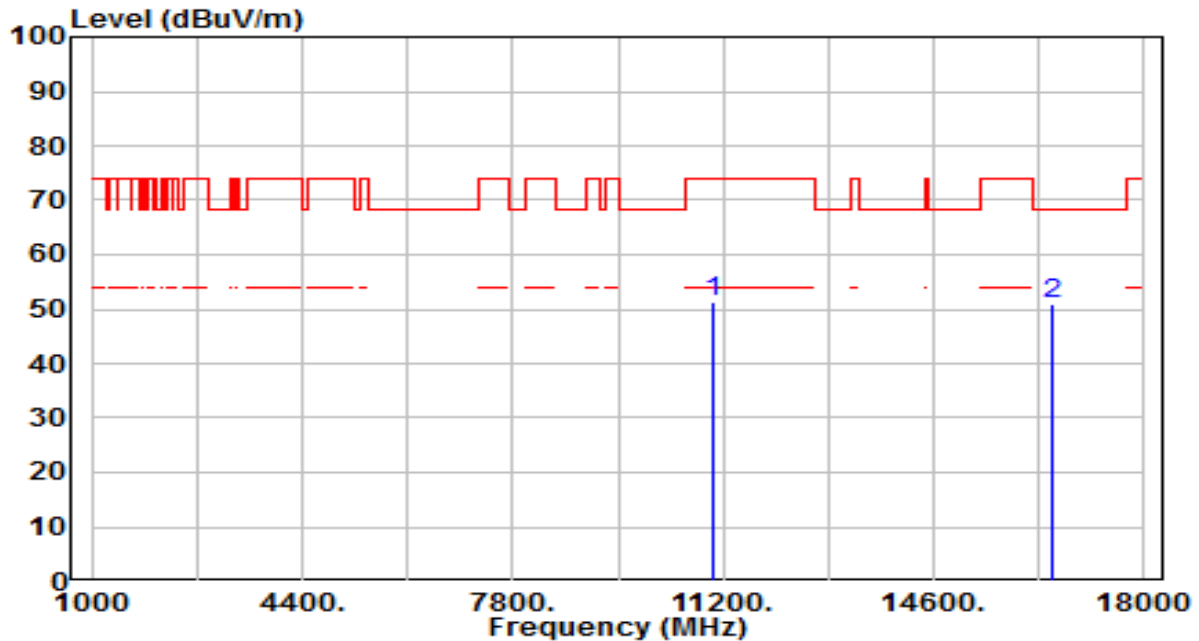


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11020.000	45.76	5.58	51.34	-22.66	74.00	100	175	Peak
2	* 16530.000	43.59	7.39	50.98	-17.22	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

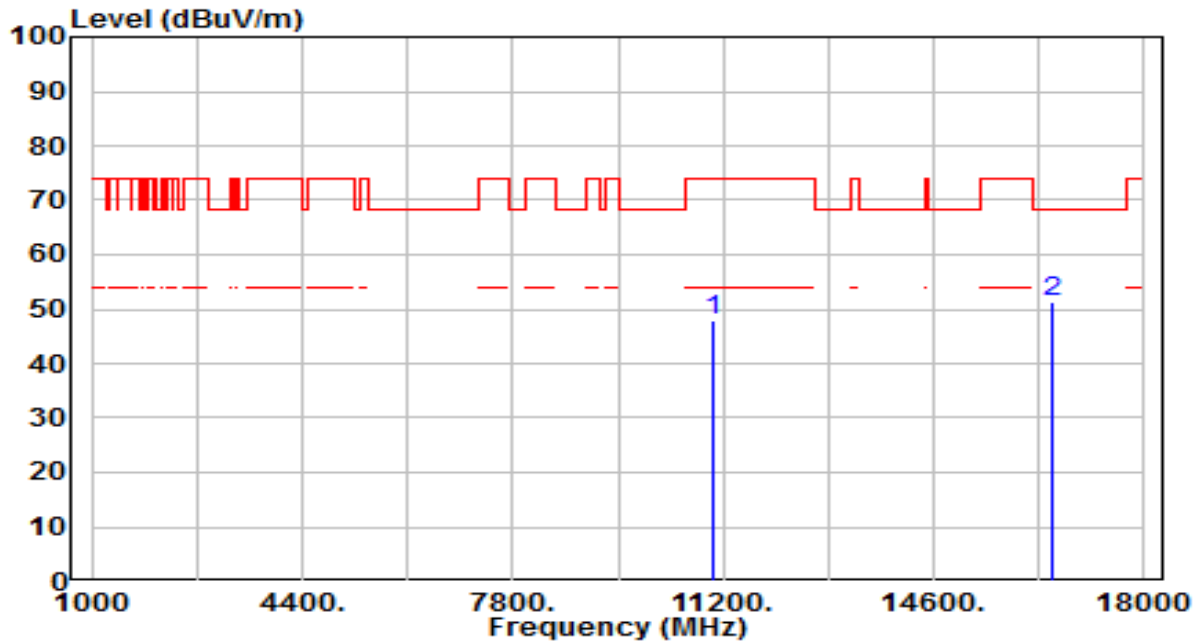


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	42.31	5.58	47.89	-26.11	74.00	100	115	Peak
2	*	16530.000	43.80	7.39	51.19	-17.01	68.20	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

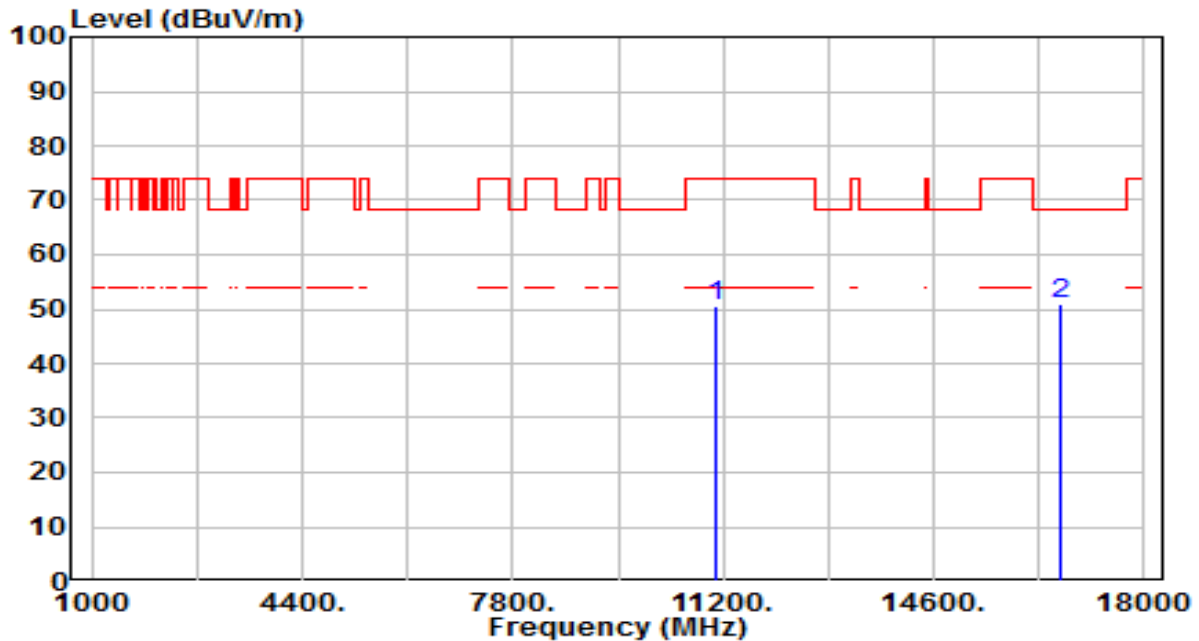


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	44.75	5.67	50.41	-23.59	74.00	100	120	Peak
2	*	16650.000	43.40	7.58	50.98	-17.22	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 110_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

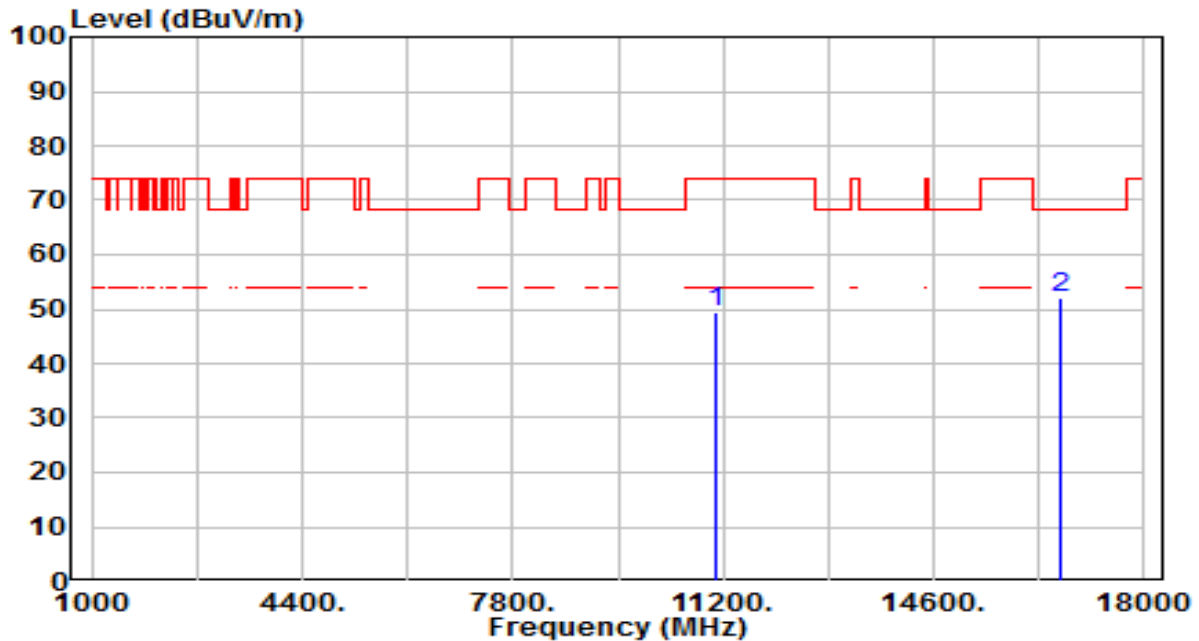


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11100.000	43.90	5.67	49.57	-24.43	74.00	100	330	Peak
2	* 16650.000	44.39	7.58	51.97	-16.23	68.20	100	120	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

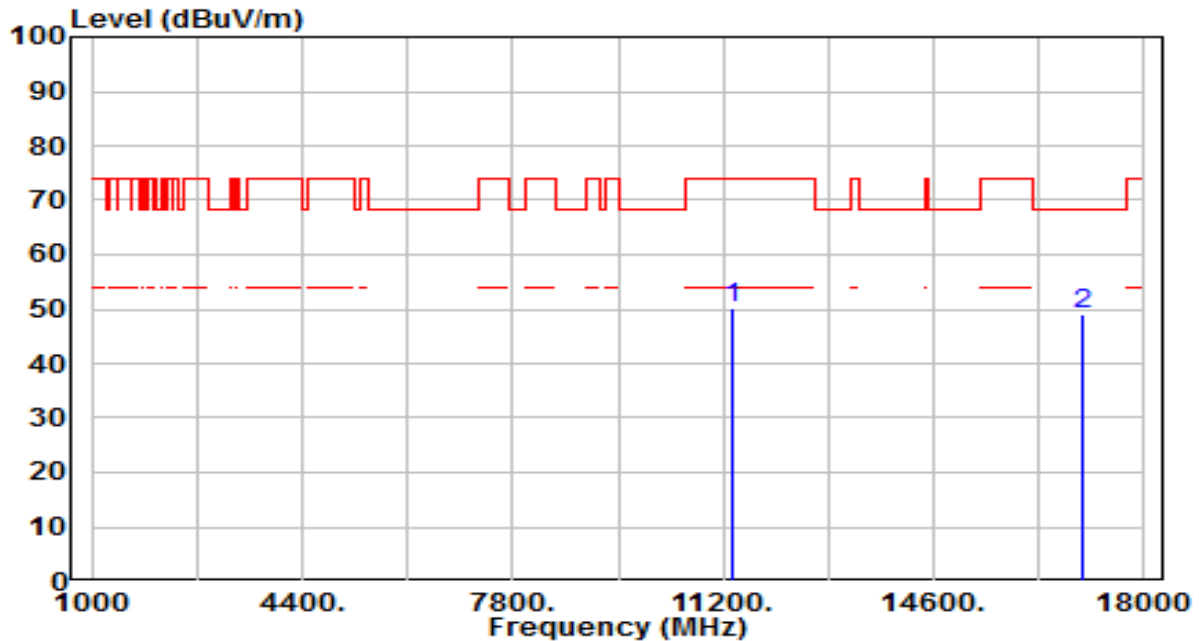


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	44.31	5.92	50.23	-23.77	74.00	100	130	Peak
2	* 17010.000	42.78	6.44	49.22	-18.98	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

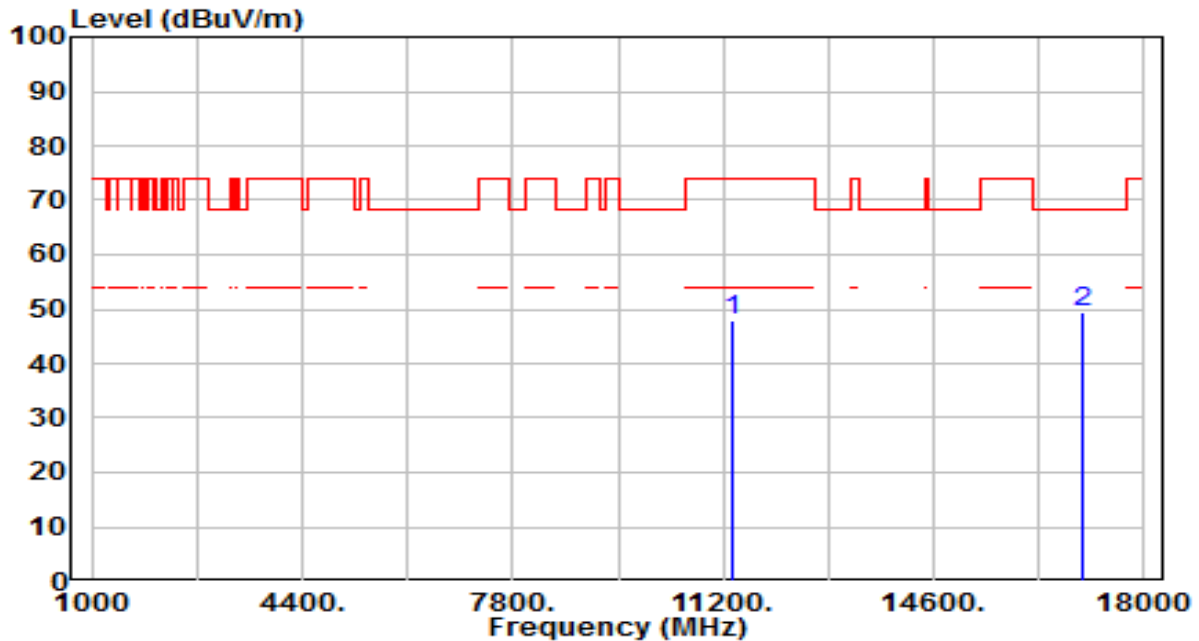


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	41.91	5.92	47.83	-26.17	74.00	100	305	Peak
2	* 17010.000	42.96	6.44	49.39	-18.81	68.20	100	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

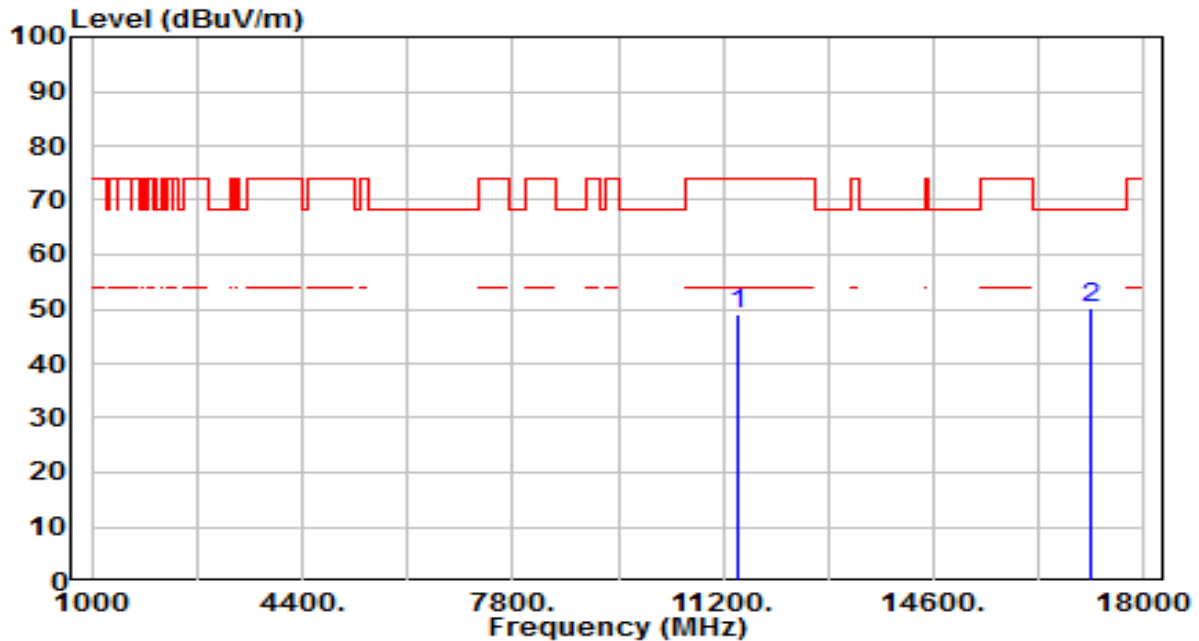


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	43.19	5.98	49.16	-24.84	74.00	100	265	Peak
2	* 17130.000	44.07	6.07	50.14	-18.06	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 142_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

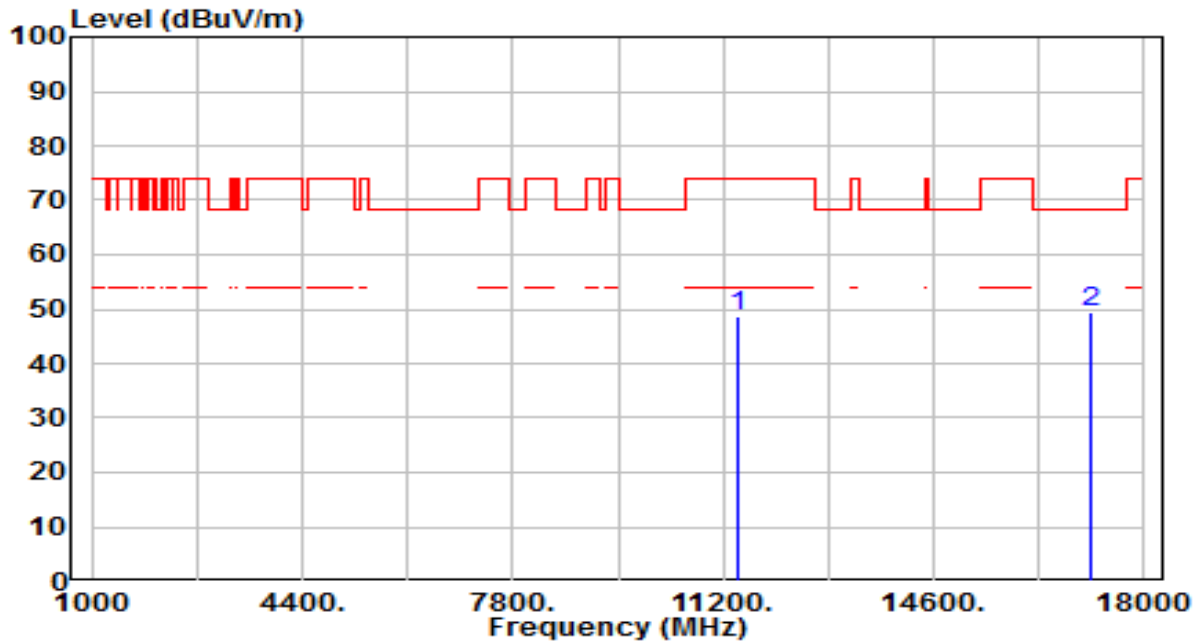


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.79	5.98	48.76	-25.24	74.00	100	180	Peak
2	* 17130.000	43.33	6.07	49.40	-18.80	68.20	100	170	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

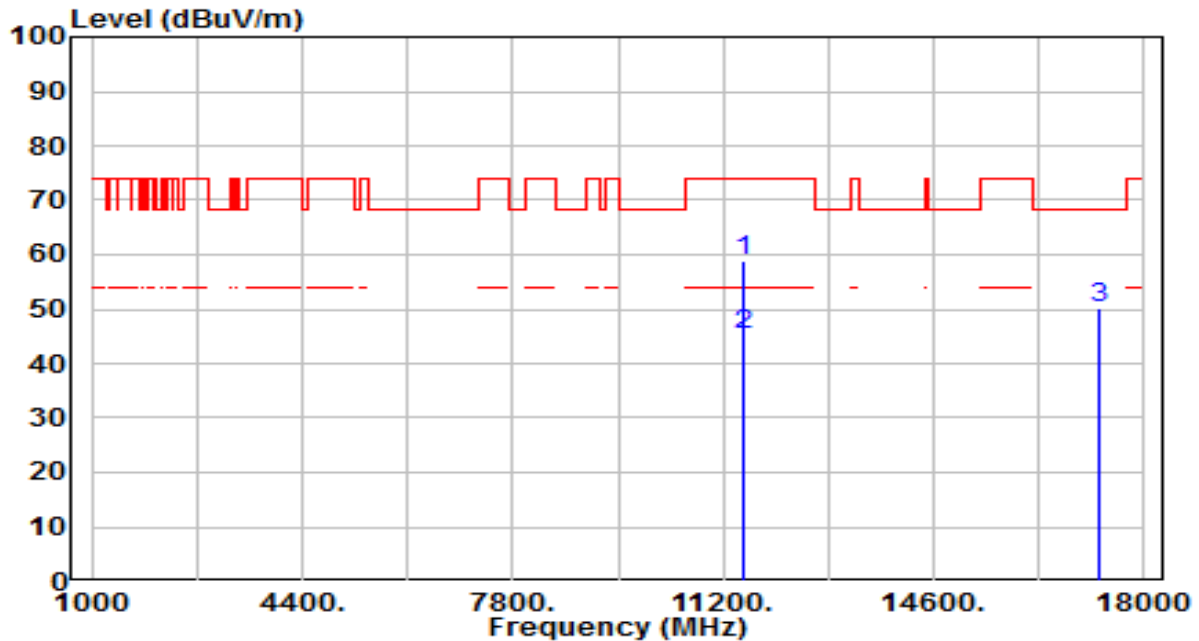


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11510.000	52.96	5.94	58.90	-15.10	74.00	105	310	Peak
2	*	11510.000	39.33	5.94	45.27	-8.73	54.00	105	310	Average
3		17265.000	44.32	5.72	50.04	-18.16	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

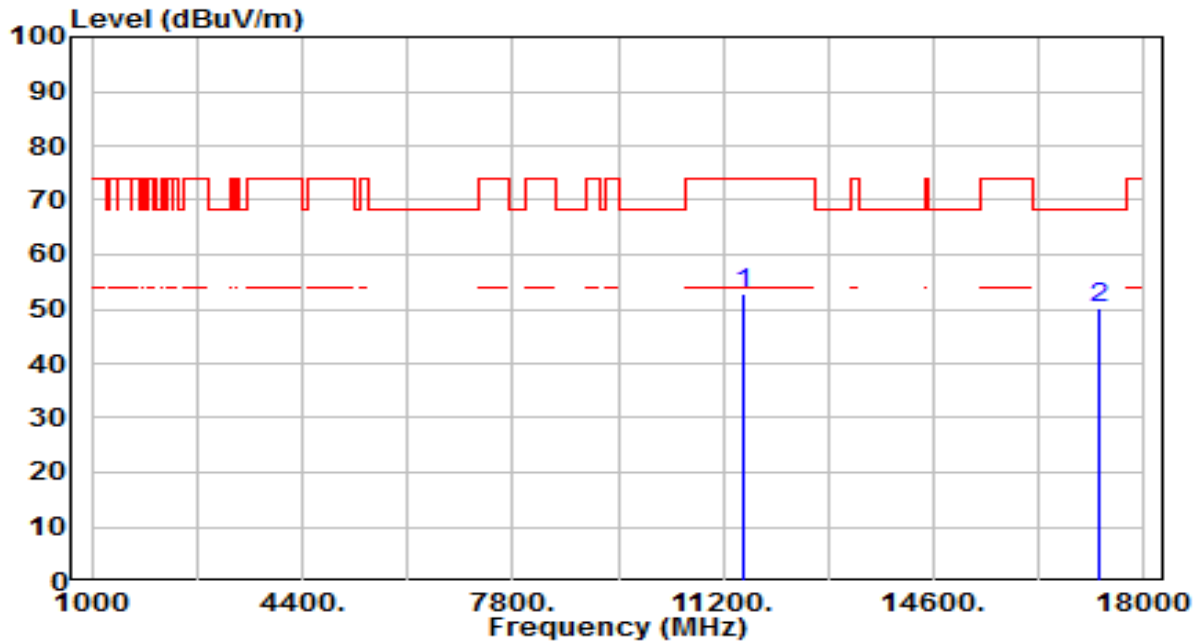


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	46.72	5.94	52.65	-21.35	74.00	100	280	Peak
2	* 17265.000	44.41	5.72	50.13	-18.07	68.20	100	320	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

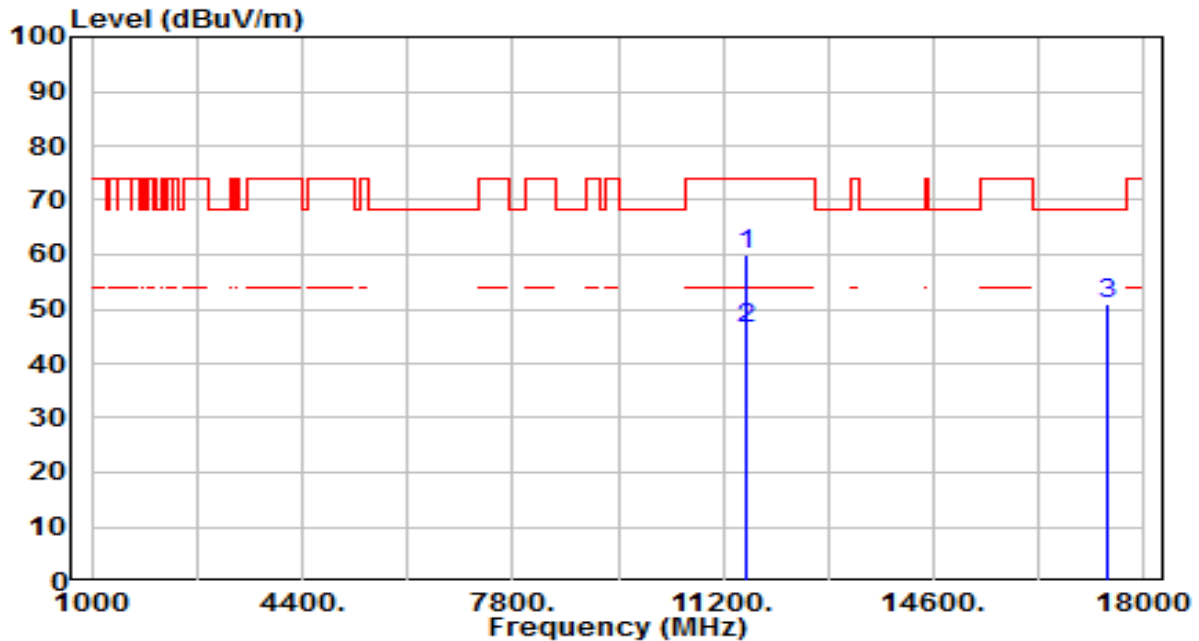


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11590.000	54.06	5.90	59.96	-14.04	74.00	100	310	Peak
2	*	11590.000	40.47	5.90	46.37	-7.63	54.00	100	310	Average
3		17385.000	45.57	5.47	51.05	-17.15	68.20	100	255	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

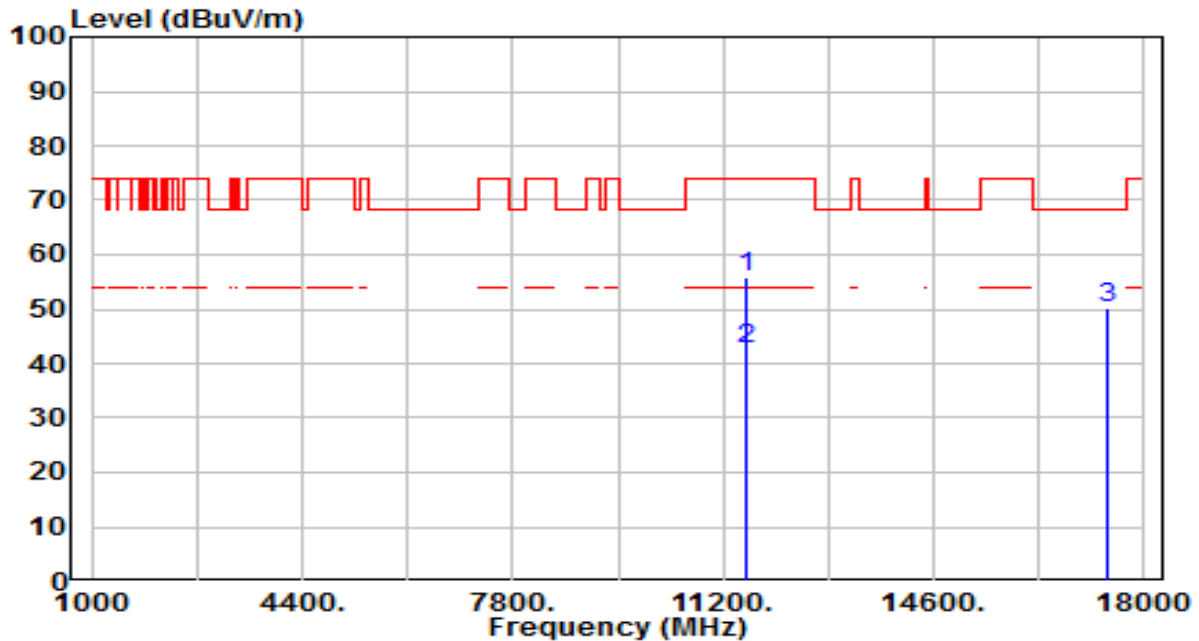


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11590.000	49.96	5.90	55.86	-18.14	74.00	100	290	Peak
2	*	11590.000	36.57	5.90	42.47	-11.53	54.00	100	290	Average
3		17385.000	44.87	5.47	50.35	-17.85	68.20	100	35	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

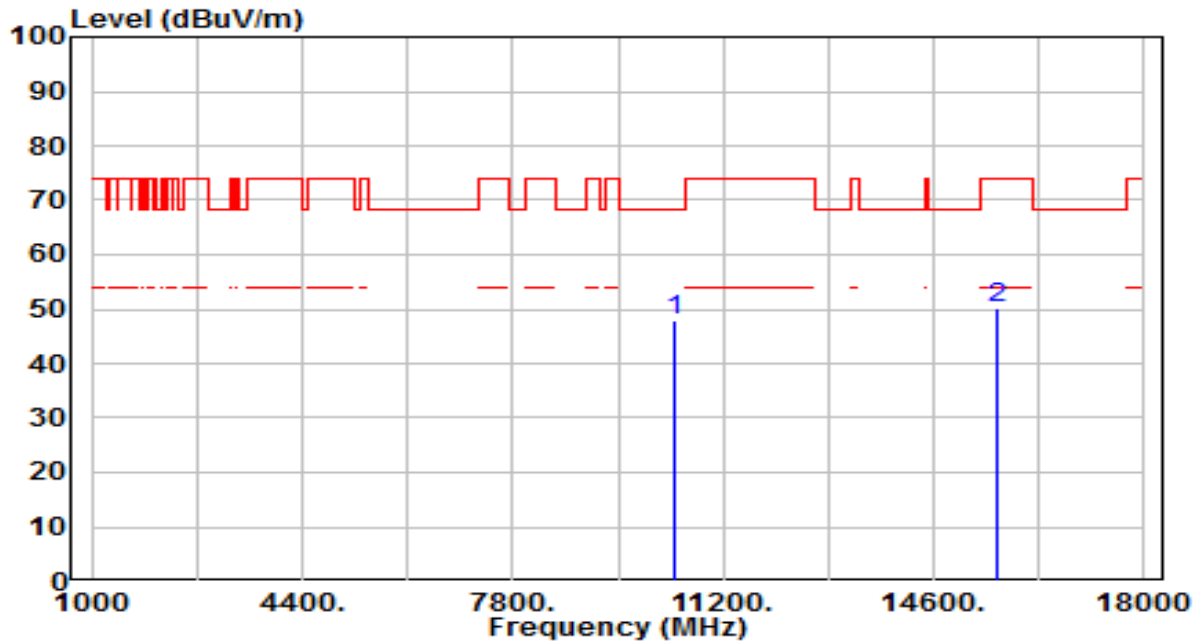


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.83	5.29	48.11	-20.09	68.20	100	100	Peak
2		15630.000	43.74	6.49	50.23	-23.77	74.00	100	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

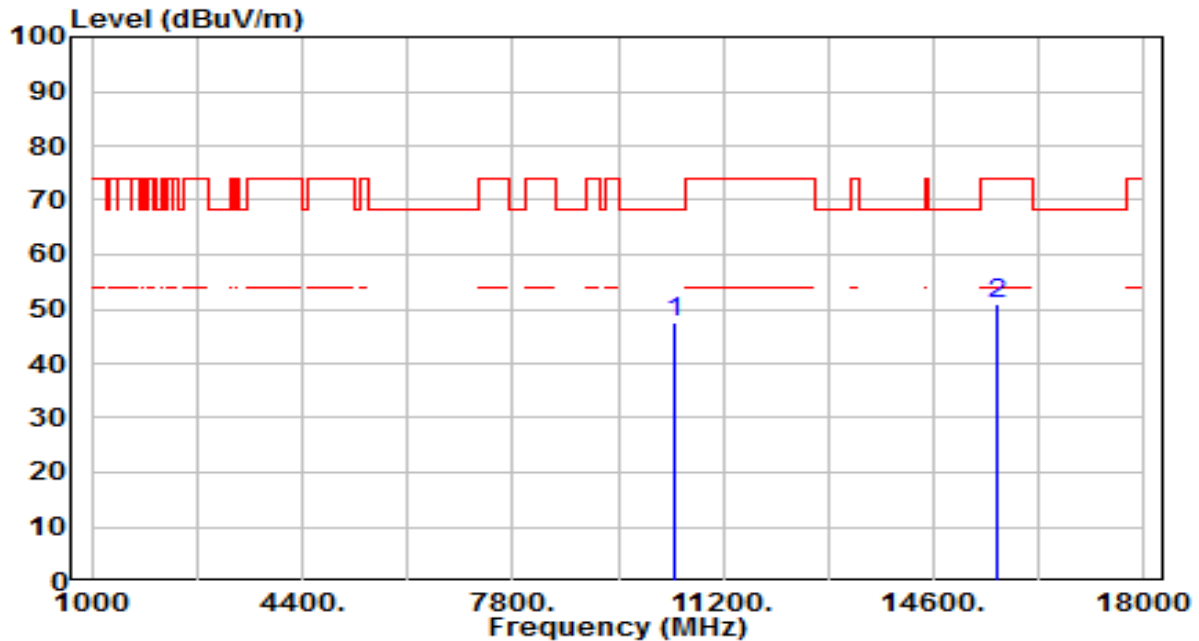


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.34	5.29	47.62	-20.58	68.20	100	45	Peak
2		15630.000	44.61	6.49	51.10	-22.90	74.00	100	335	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

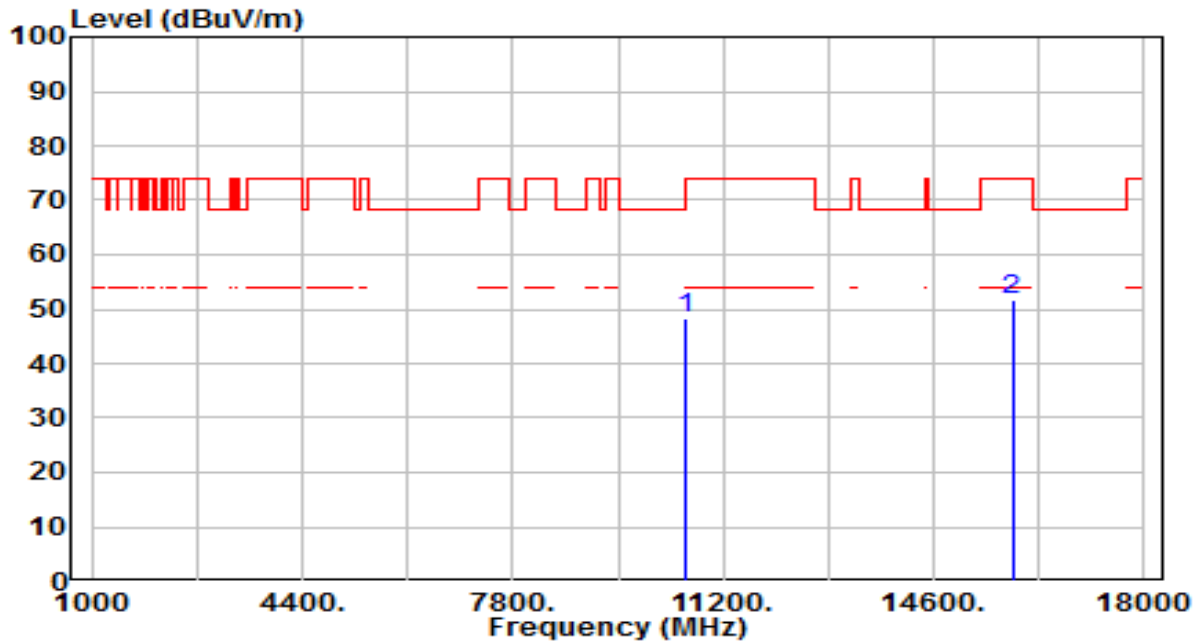


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	43.15	5.25	48.40	-19.80	68.20	100	170	Peak
2		15870.000	44.60	6.93	51.53	-22.47	74.00	100	80	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

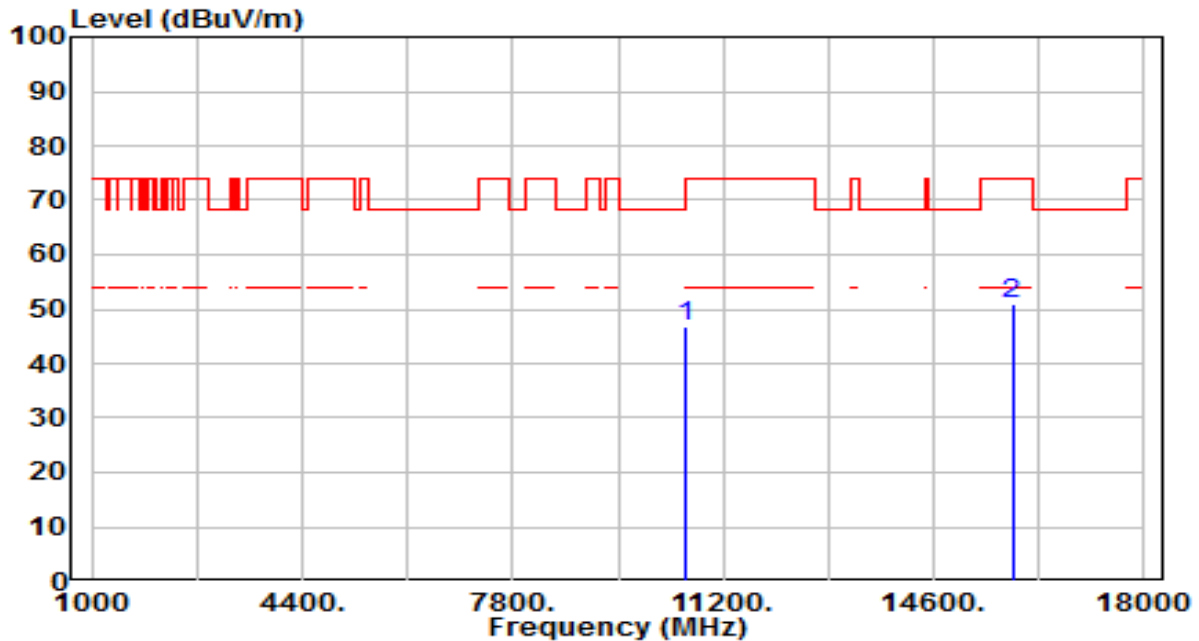


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.61	5.25	46.86	-21.34	68.20	100	345	Peak
2		15870.000	43.93	6.93	50.86	-23.14	74.00	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

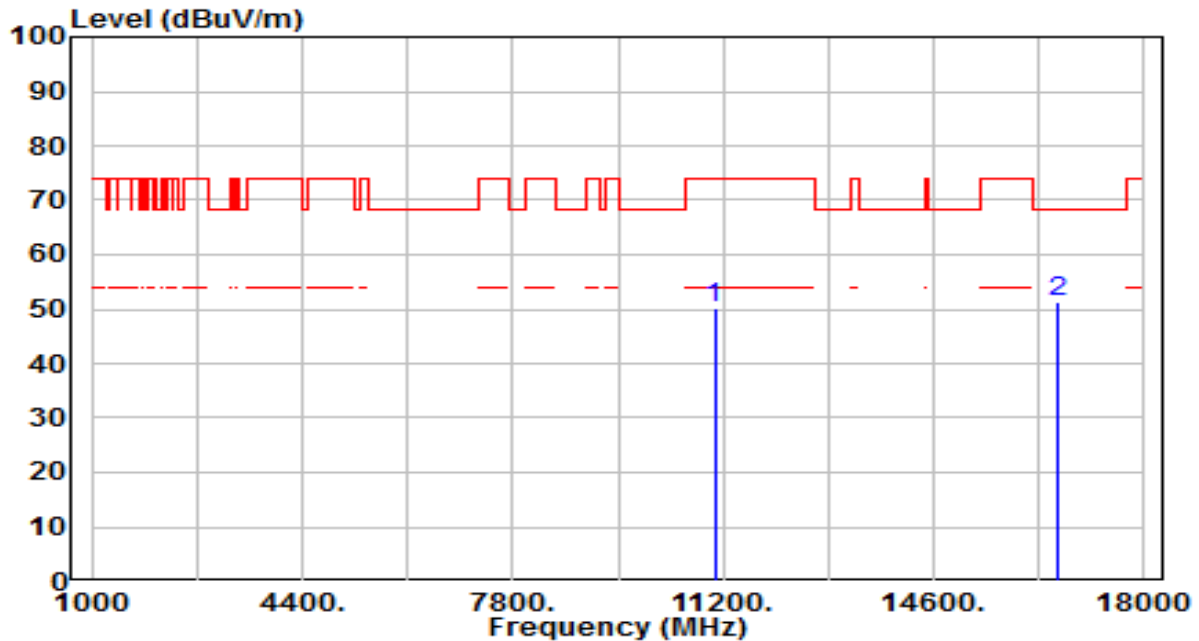


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	44.71	5.62	50.34	-23.66	74.00	100	155	Peak
2	* 16590.000	43.69	7.48	51.17	-17.03	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

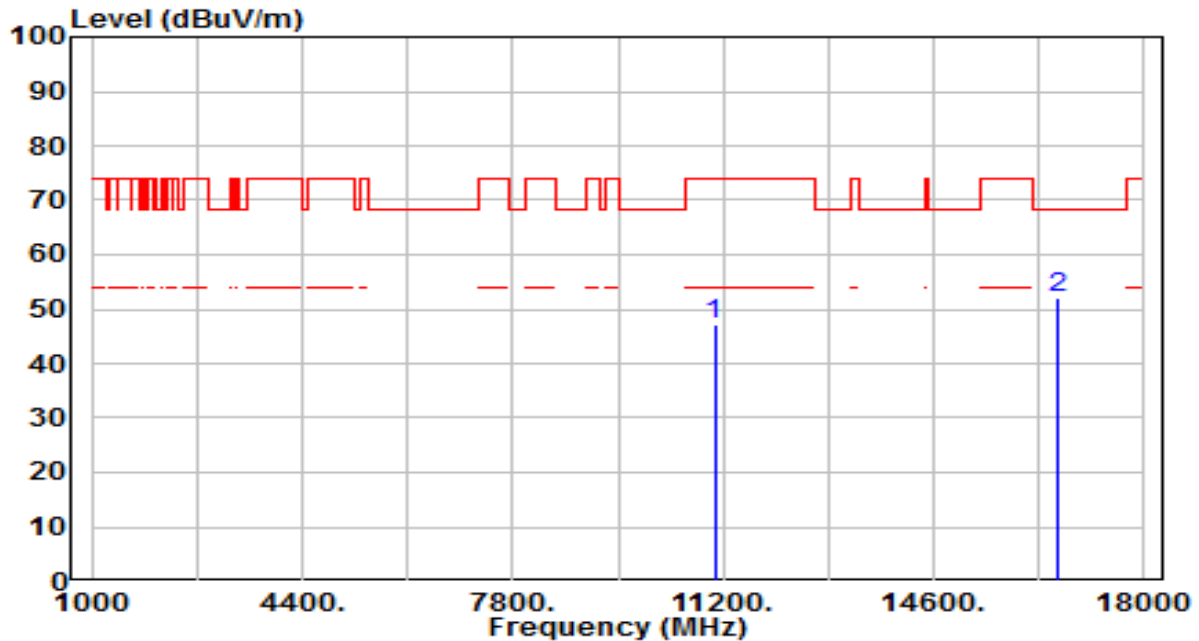


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.43	5.62	47.06	-26.94	74.00	100	170	Peak
2	* 16590.000	44.43	7.48	51.91	-16.29	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

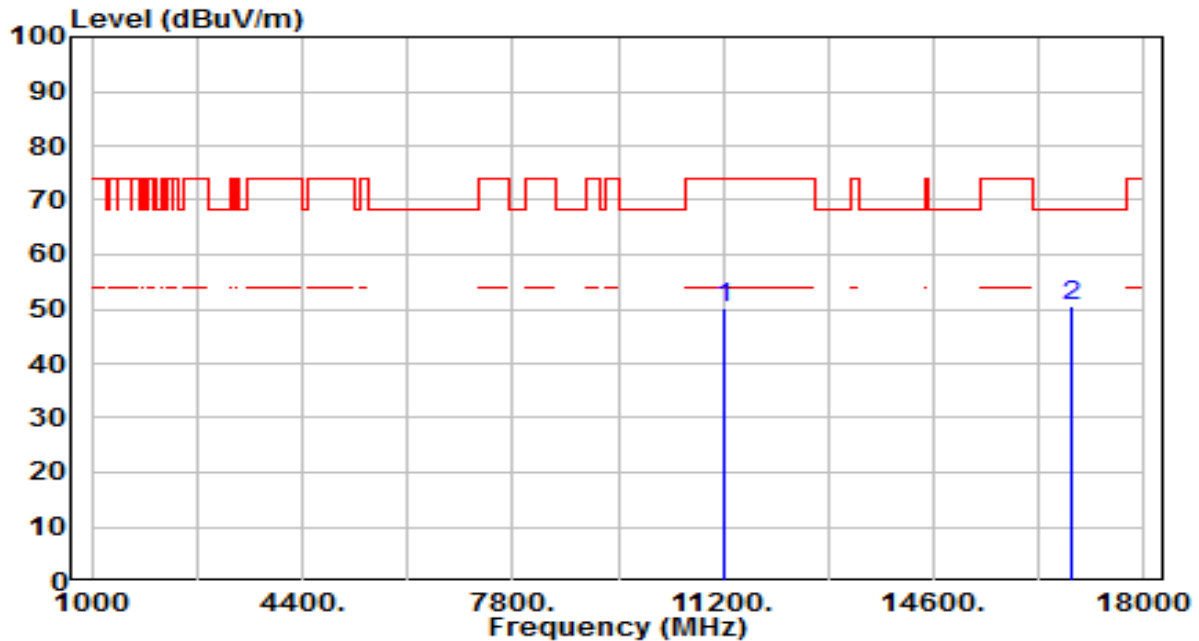


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	44.37	5.79	50.16	-23.84	74.00	100	175	Peak
2	*	16830.000	43.51	7.17	50.69	-17.51	68.20	100	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 122_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

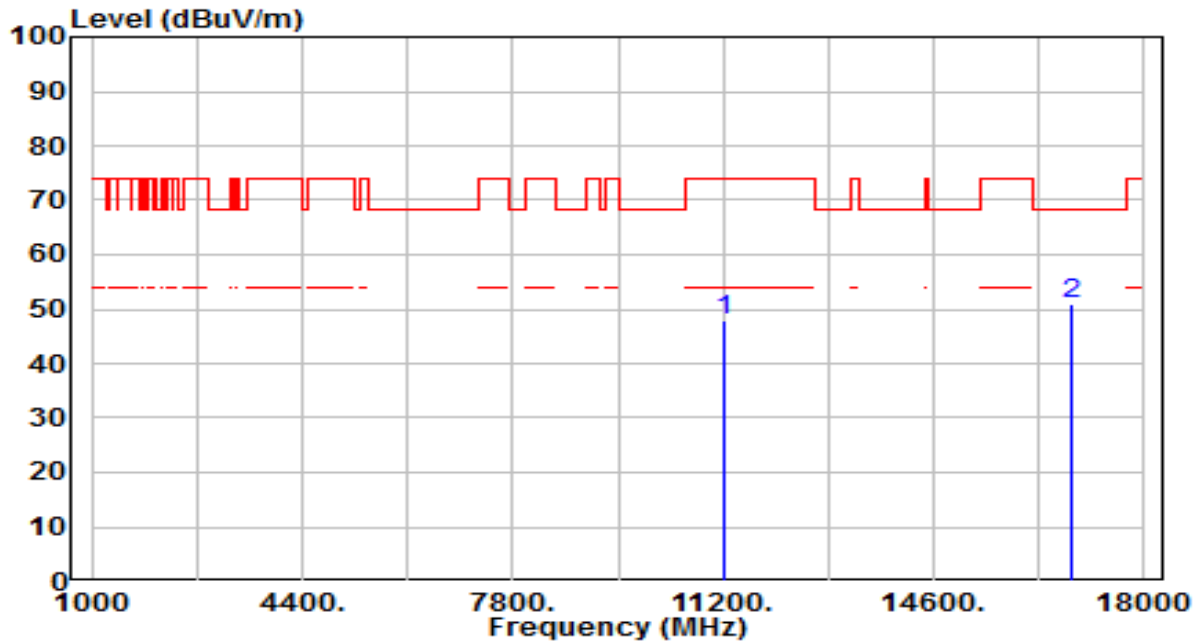


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11220.000	42.02	5.79	47.81	-26.19	74.00	100	300	Peak
2	*	16830.000	43.70	7.17	50.87	-17.33	68.20	100	20	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

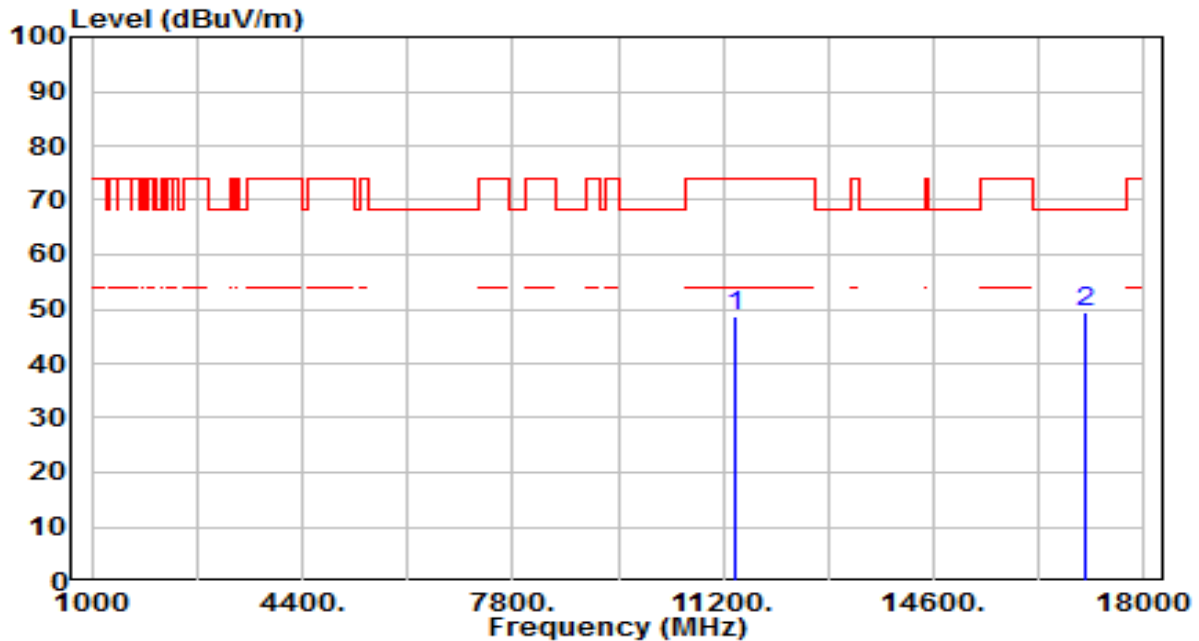


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.66	5.96	48.62	-25.38	74.00	100	85	Peak
2	* 17070.000	43.28	6.26	49.54	-18.66	68.20	100	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 138_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

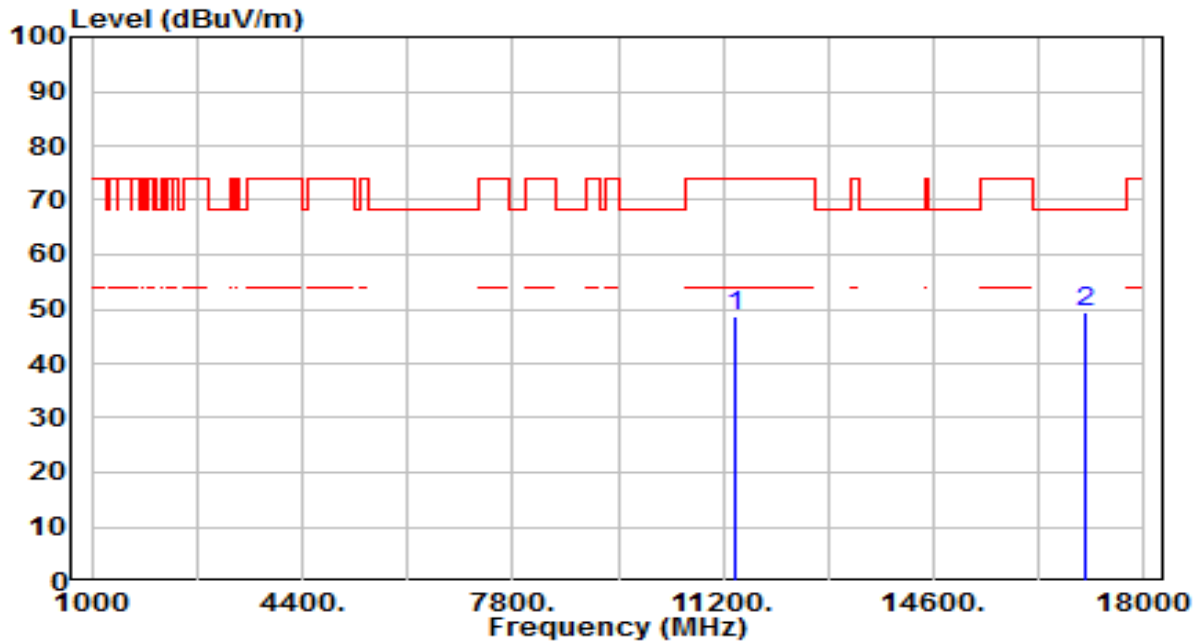


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.79	5.96	48.75	-25.25	74.00	100	360	Peak
2	* 17070.000	42.99	6.26	49.25	-18.95	68.20	100	50	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

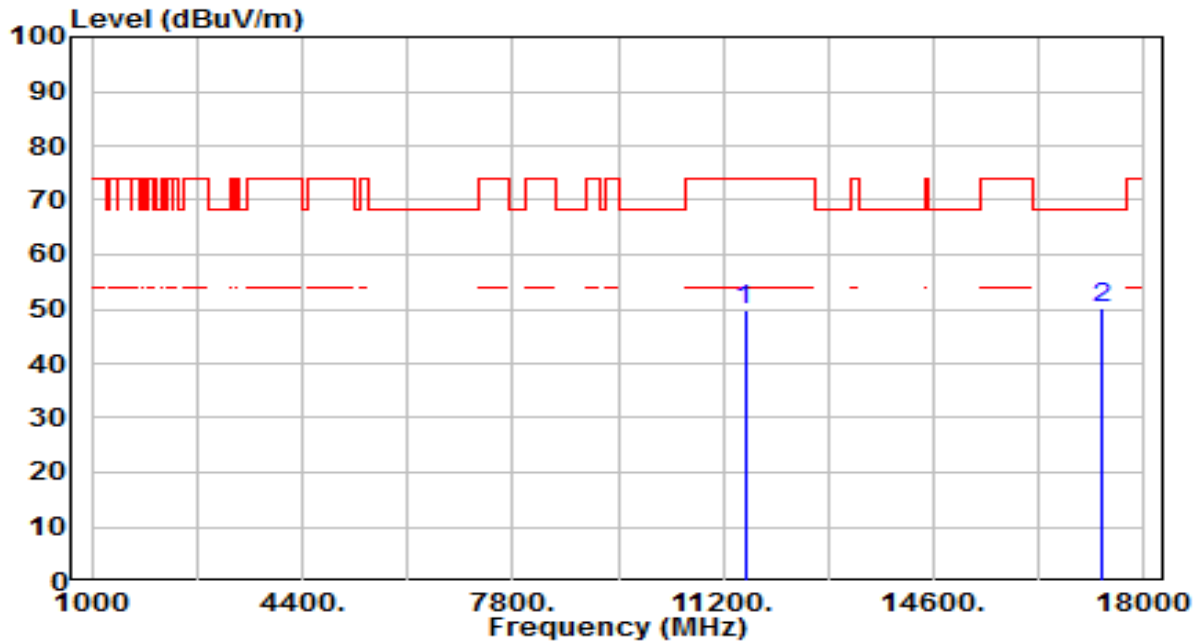


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	43.87	5.92	49.79	-24.21	74.00	100	0	Peak
2	* 17325.000	44.47	5.60	50.07	-18.13	68.20	100	80	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

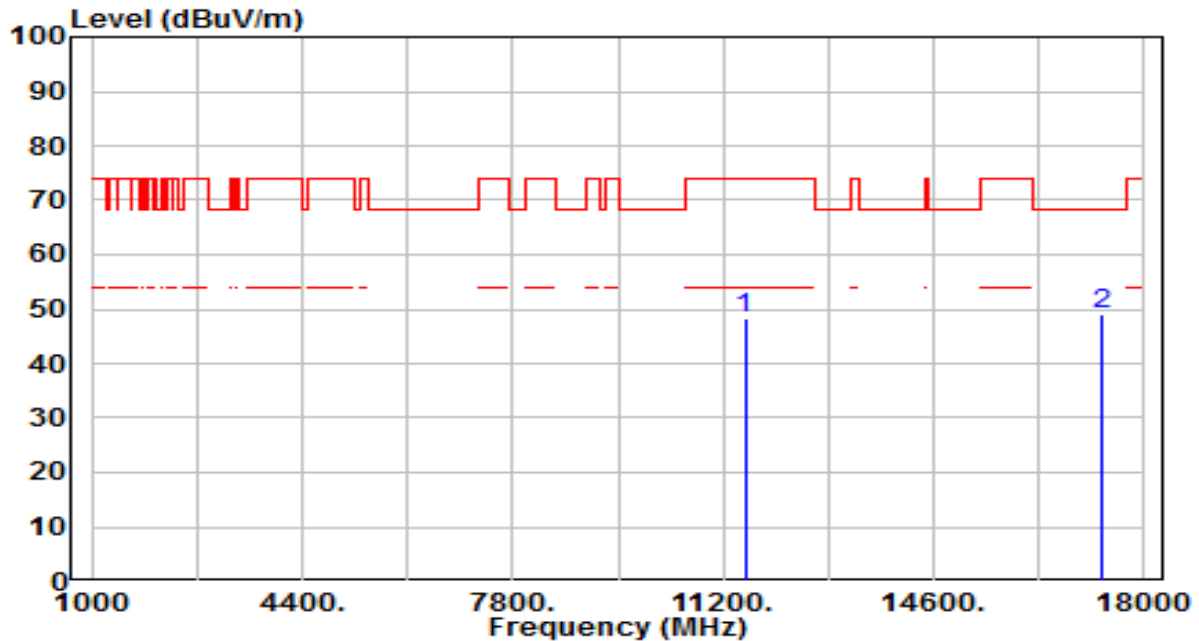


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.28	5.92	48.20	-25.80	74.00	100	280	Peak
2	* 17325.000	43.64	5.60	49.23	-18.97	68.20	100	5	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

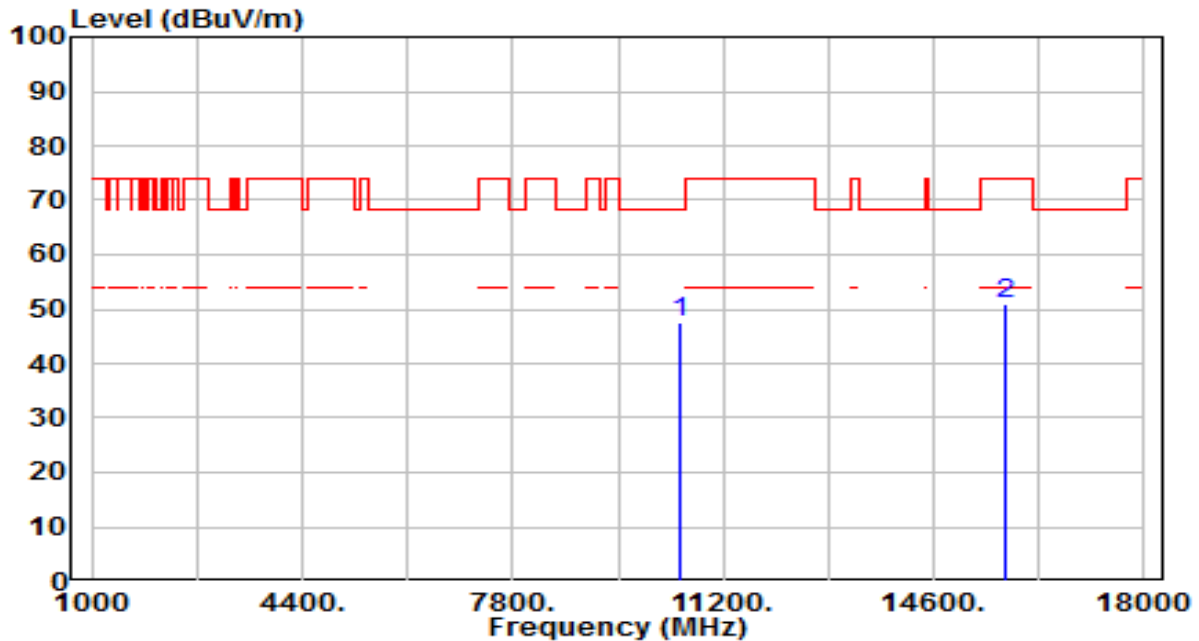


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	42.20	5.25	47.45	-20.75	68.20	100	145	Peak
2		15750.000	44.35	6.76	51.11	-22.89	74.00	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

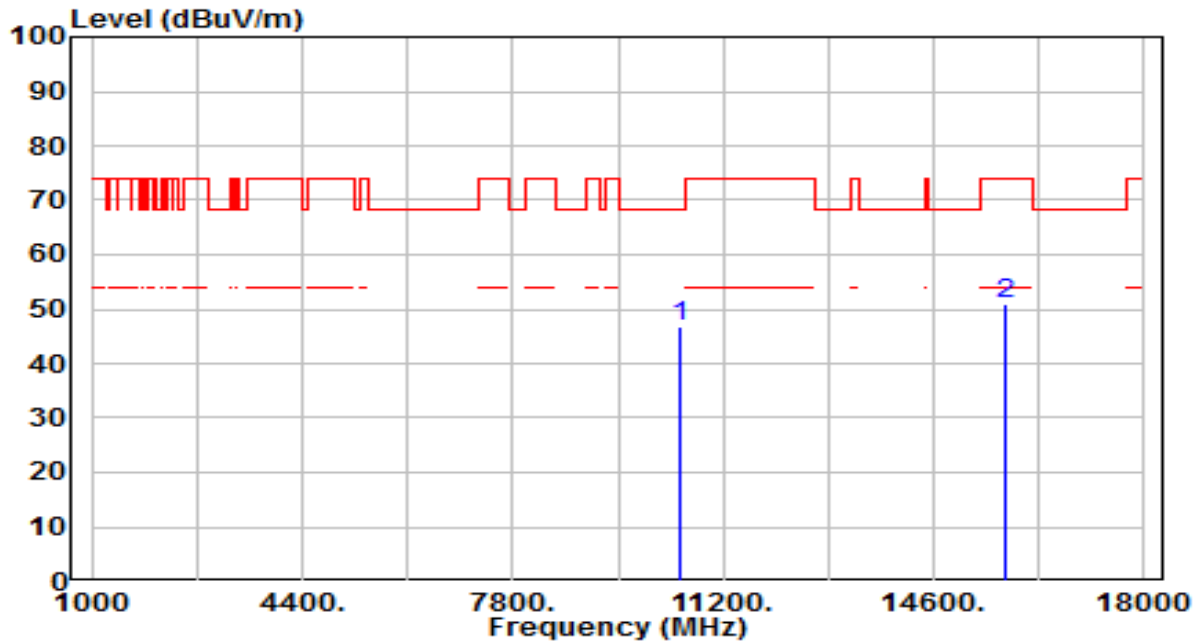


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.43	5.25	46.68	-21.52	68.20	100	205	Peak
2		15750.000	44.12	6.76	50.88	-23.12	74.00	100	325	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

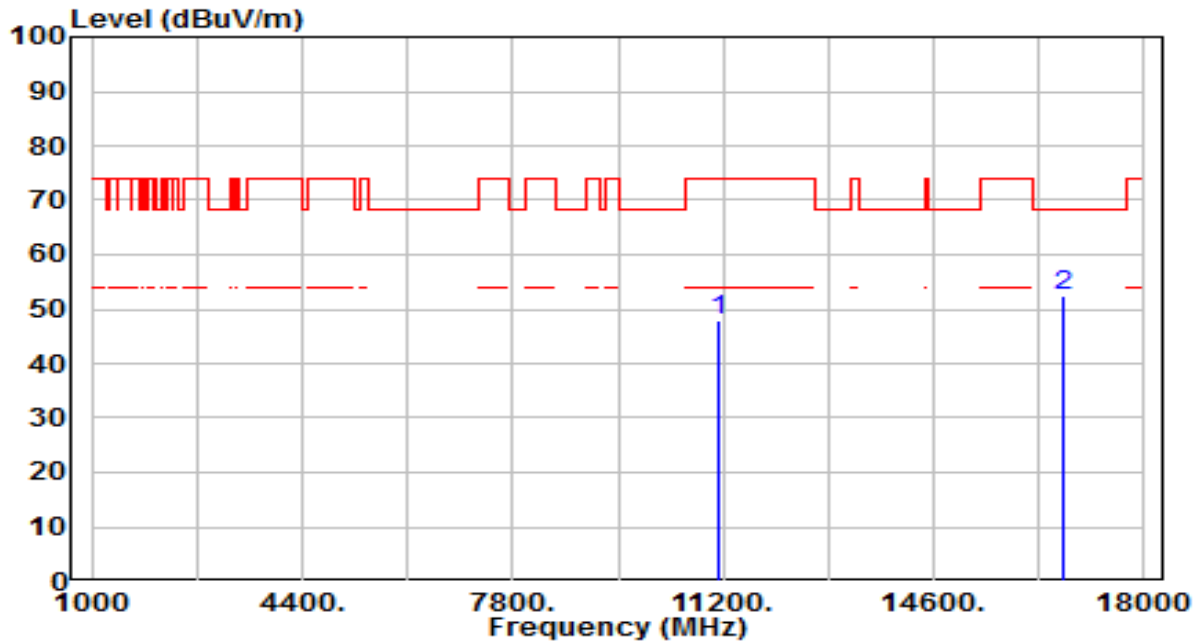


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	42.36	5.71	48.06	-25.94	74.00	100	205	Peak
2	* 16710.000	44.67	7.67	52.34	-15.86	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

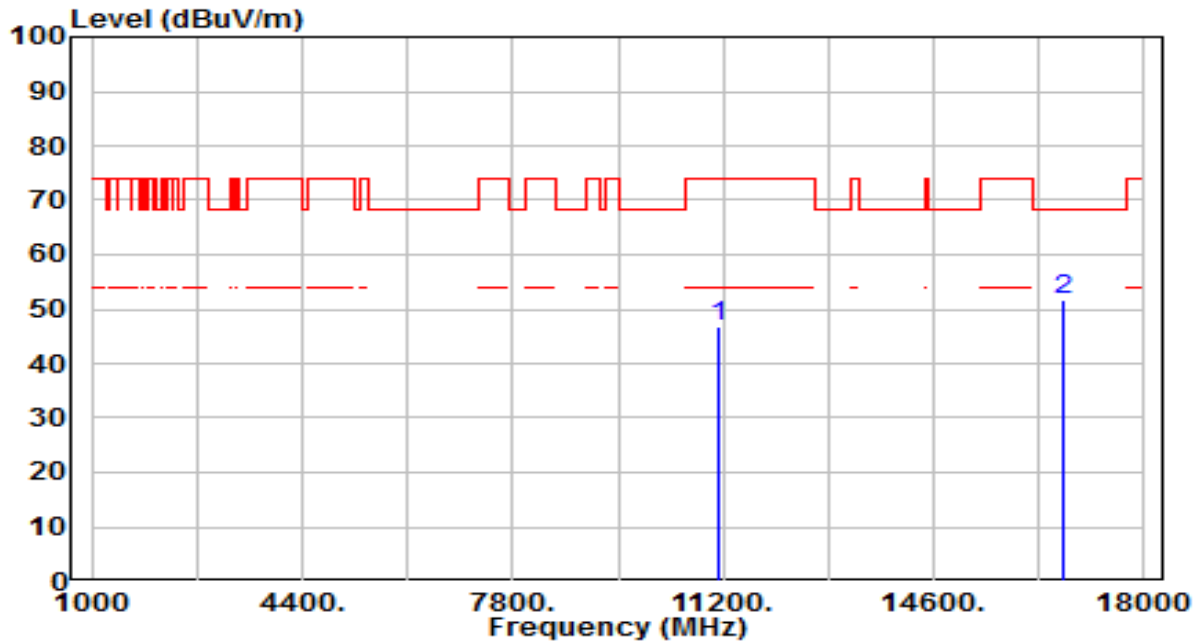


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.26	5.71	46.97	-27.03	74.00	100	255	Peak
2	* 16710.000	44.14	7.67	51.81	-16.39	68.20	100	160	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

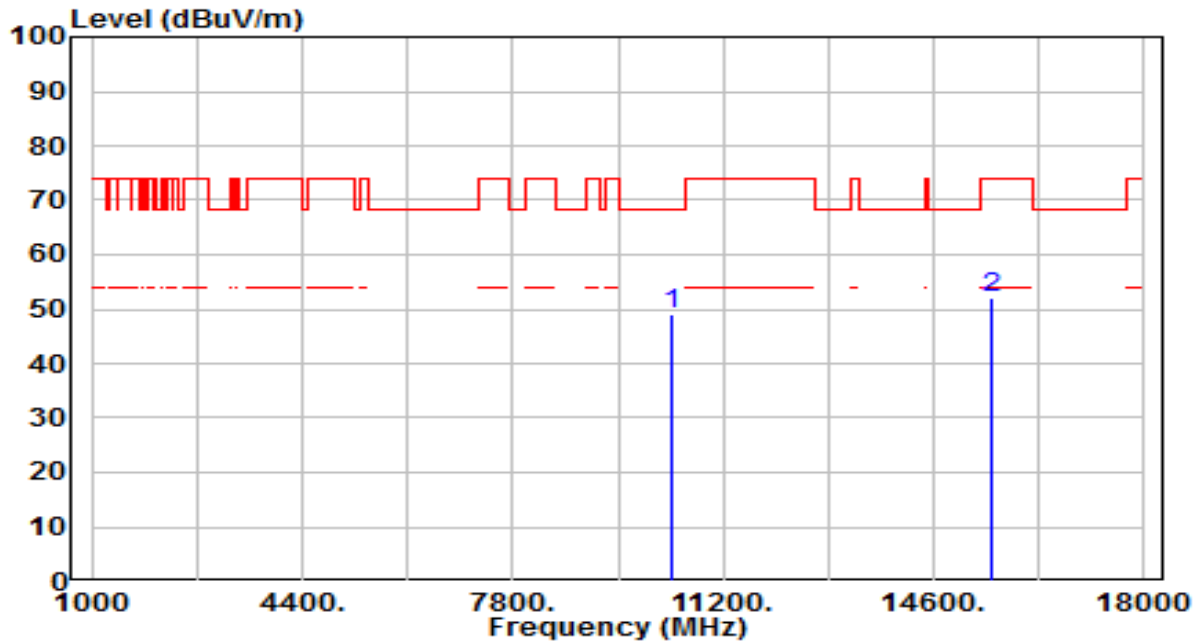


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	43.65	5.29	48.94	-19.26	68.20	100	40	Peak
2		15540.000	45.72	6.41	52.12	-21.88	74.00	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

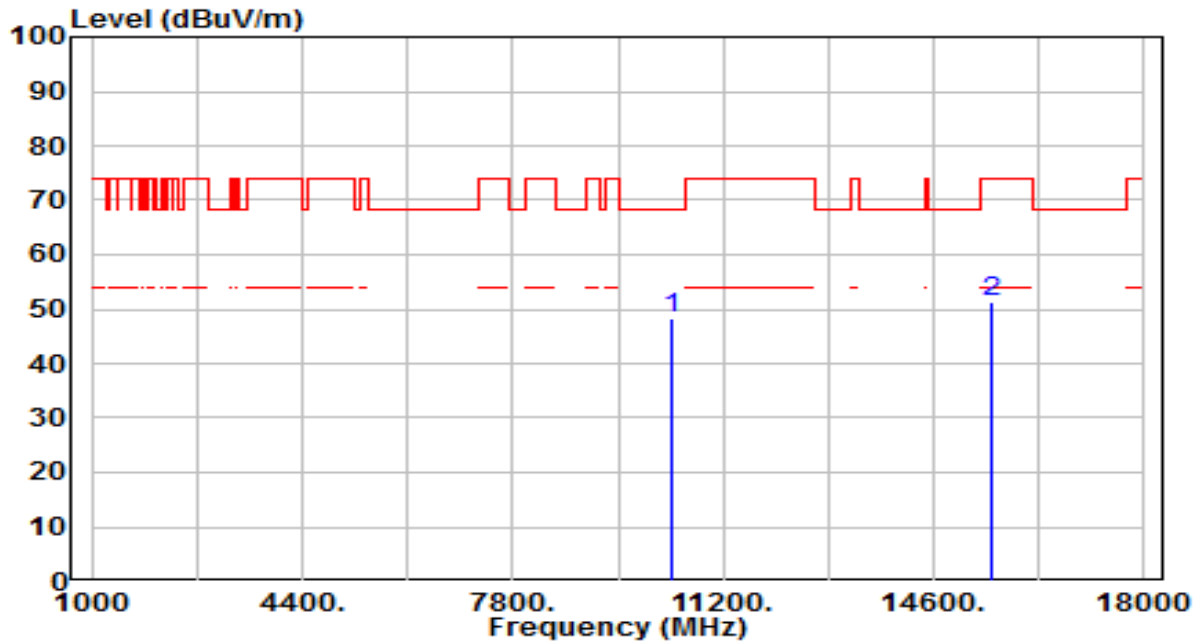


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10360.000	42.92	5.29	48.21	-19.99	68.20	100	315	Peak
2		15540.000	44.97	6.41	51.37	-22.63	74.00	100	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

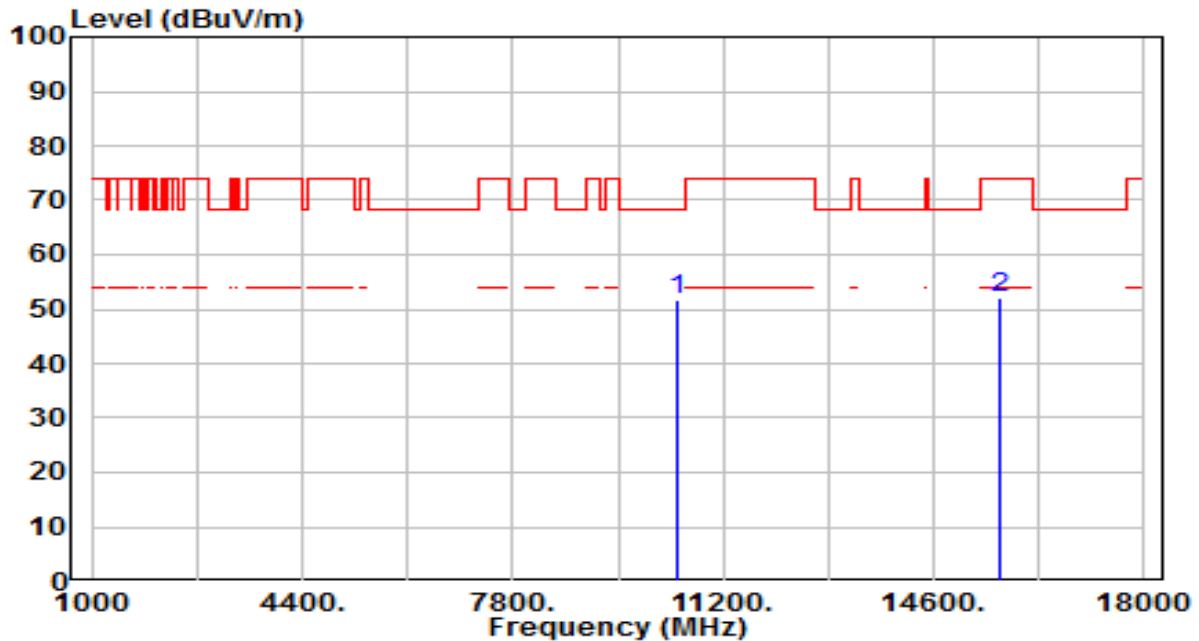


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	46.35	5.28	51.63	-16.57	68.20	100	300	Peak
2		15660.000	45.45	6.56	52.01	-21.99	74.00	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

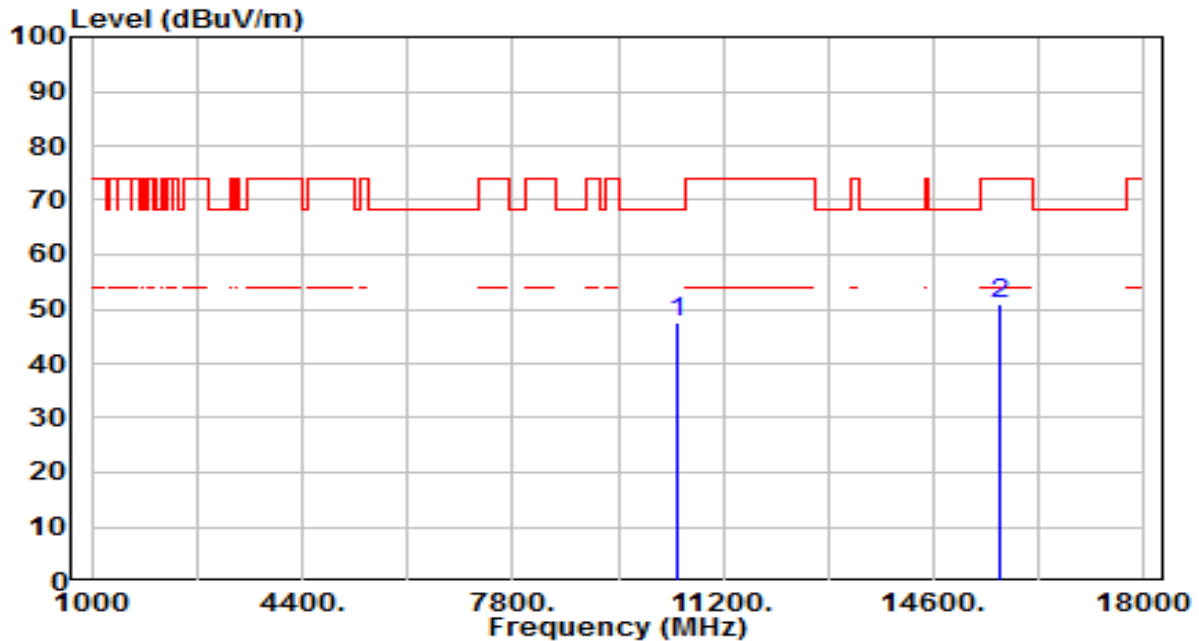


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10440.000	42.45	5.28	47.73	-20.47	68.20	100	330	Peak
2		15660.000	44.27	6.56	50.83	-23.17	74.00	100	220	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

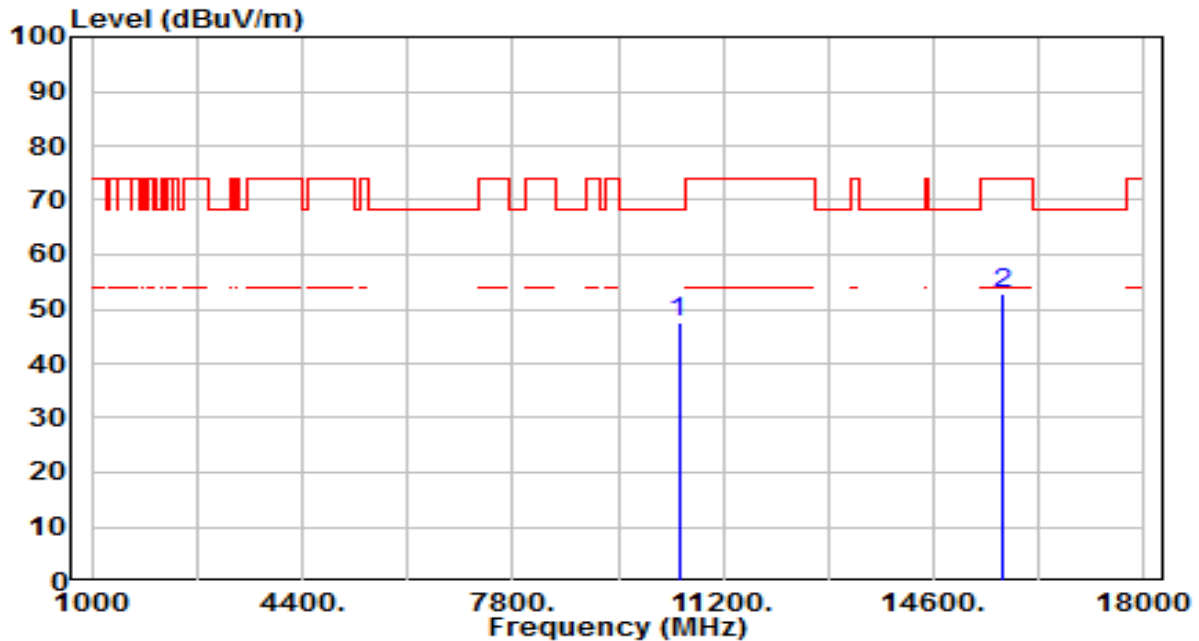


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	42.35	5.26	47.61	-20.59	68.20	100	360	Peak
2		15720.000	45.99	6.69	52.68	-21.32	74.00	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 48_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

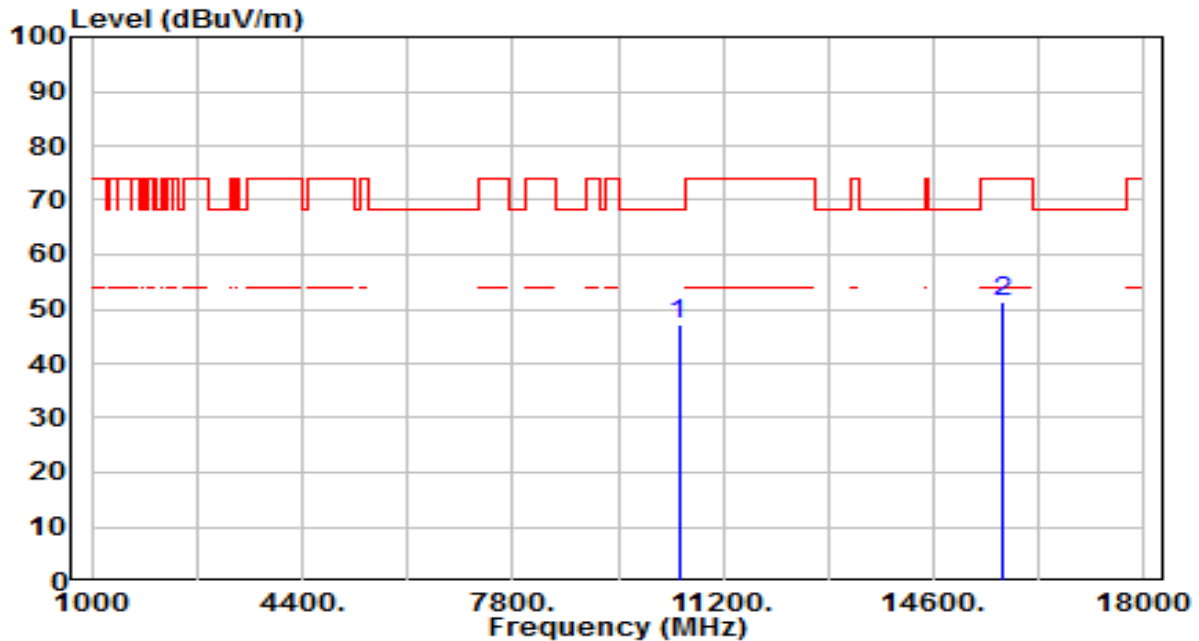


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10480.000	41.97	5.26	47.22	-20.98	68.20	100	265	Peak
2		15720.000	44.75	6.69	51.45	-22.55	74.00	100	340	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

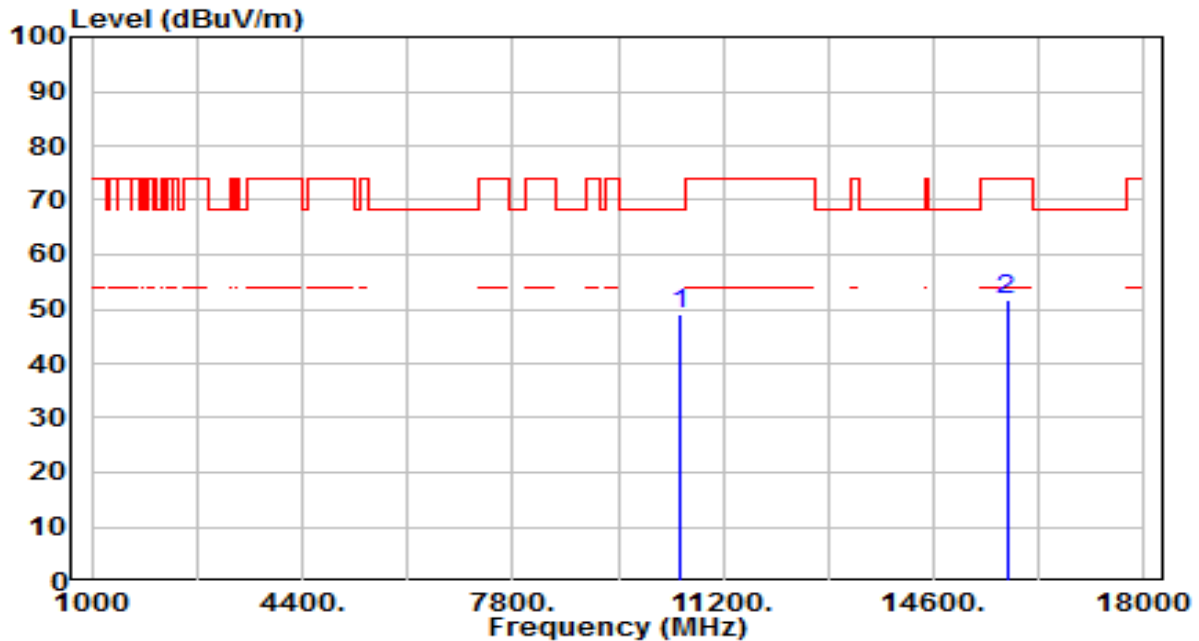


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	43.62	5.25	48.87	-19.33	68.20	100	290	Peak
2		15780.000	44.91	6.83	51.74	-22.26	74.00	100	320	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 52_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

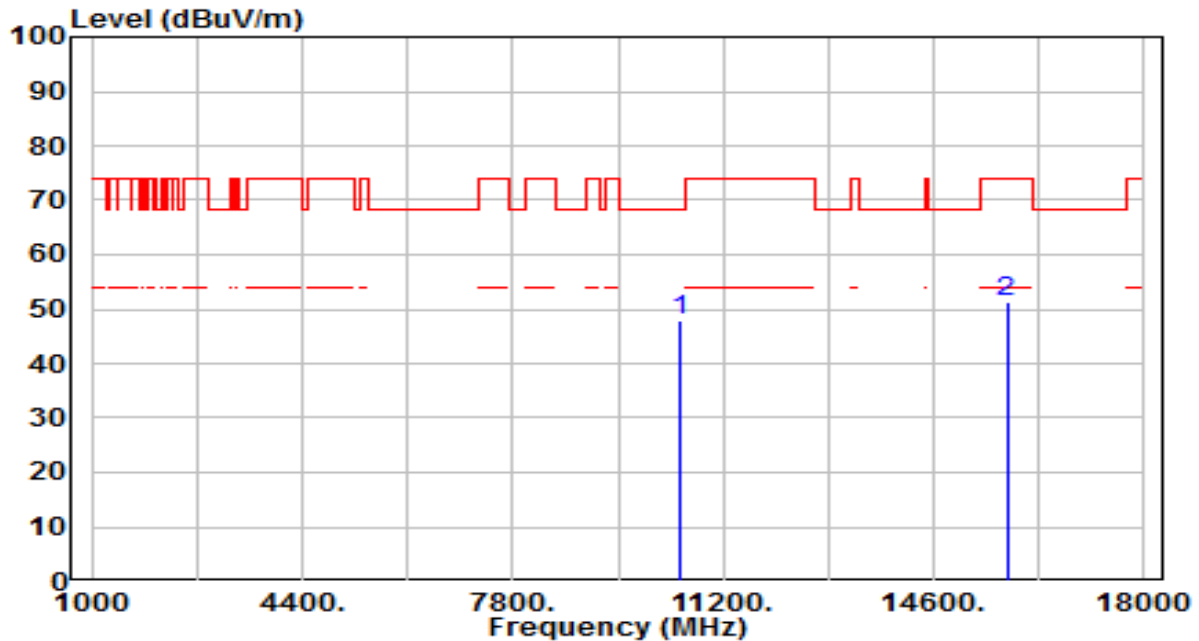


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10520.000	42.49	5.25	47.74	-20.46	68.20	100	55	Peak
2		15780.000	44.51	6.83	51.34	-22.66	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

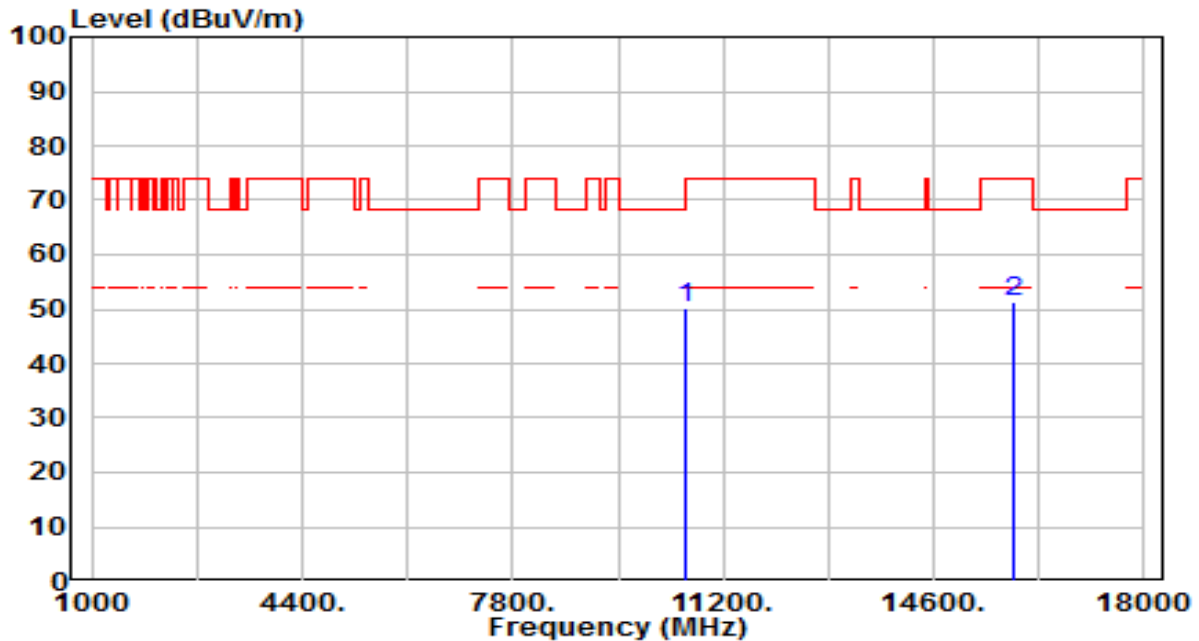


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	45.08	5.25	50.33	-17.87	68.20	100	140	Peak
2		15900.000	44.47	6.95	51.42	-22.58	74.00	100	275	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 60_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

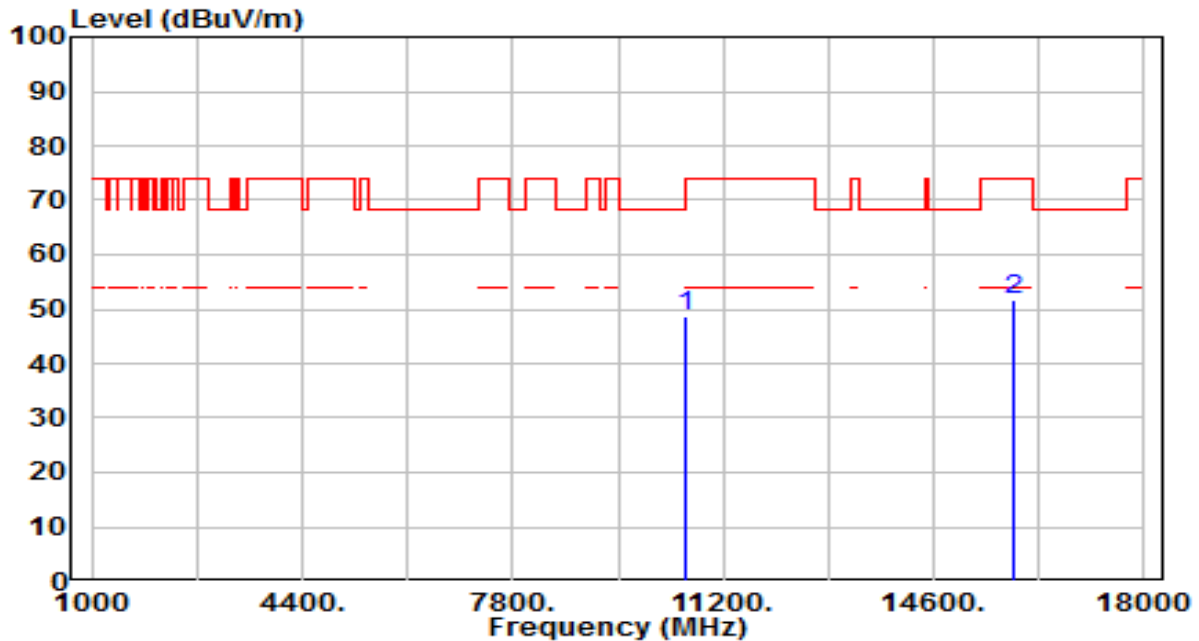


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10600.000	43.45	5.25	48.70	-19.50	68.20	100	155	Peak
2		15900.000	44.66	6.95	51.61	-22.39	74.00	100	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

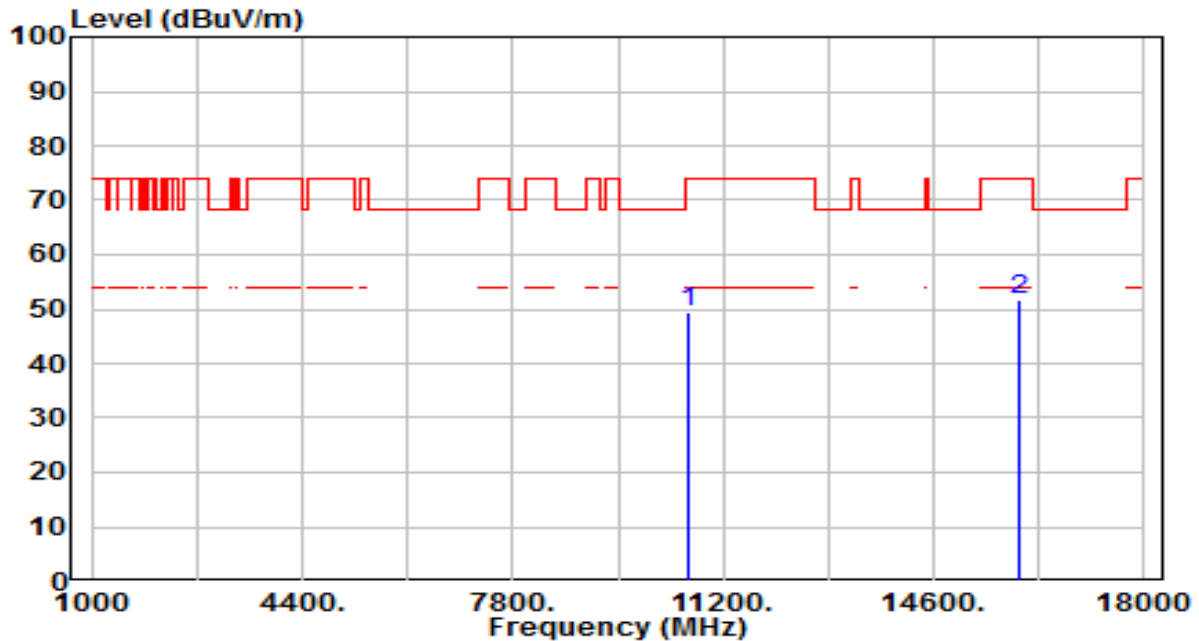


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	43.99	5.27	49.26	-24.74	74.00	100	290	Peak
2	* 15960.000	44.52	7.00	51.52	-22.48	74.00	100	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

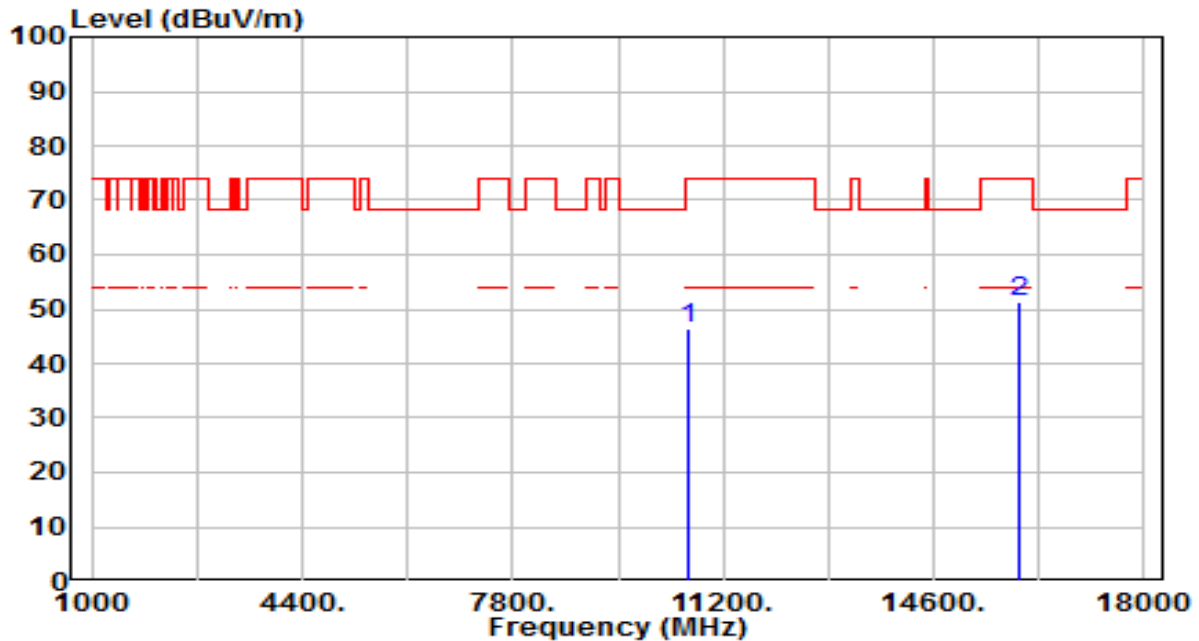


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10640.000	41.24	5.27	46.51	-27.49	74.00	100	30	Peak
2	* 15960.000	44.47	7.00	51.47	-22.53	74.00	100	310	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

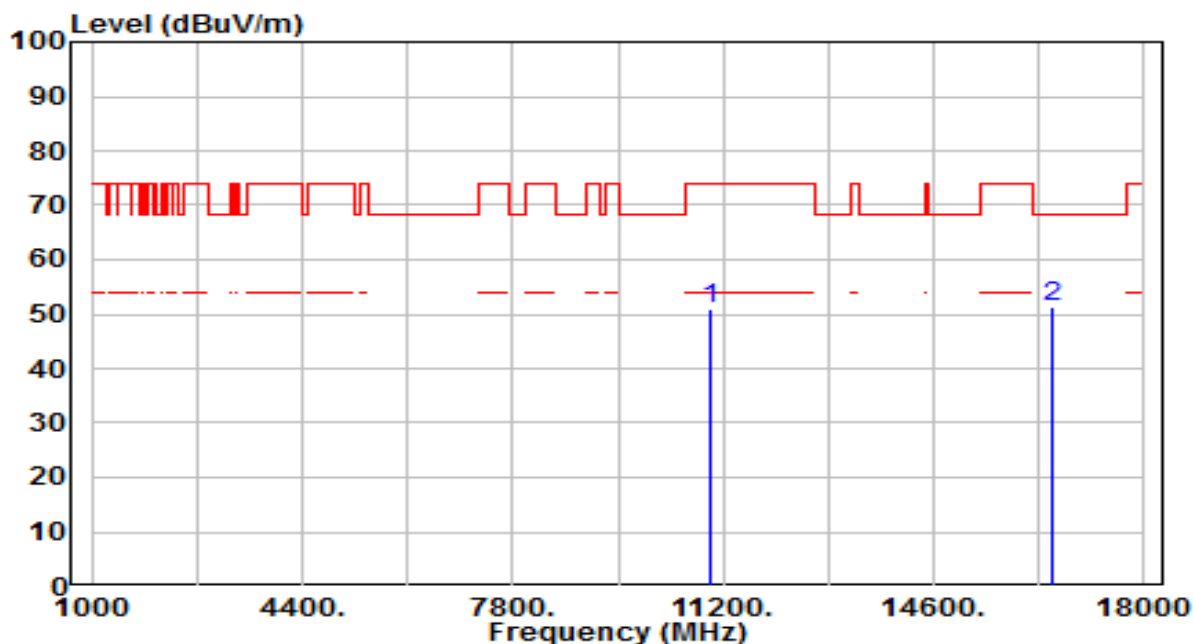


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	45.20	5.56	50.76	-23.24	74.00	100	120	Peak
2	* 16500.000	43.82	7.34	51.16	-17.04	68.20	100	25	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

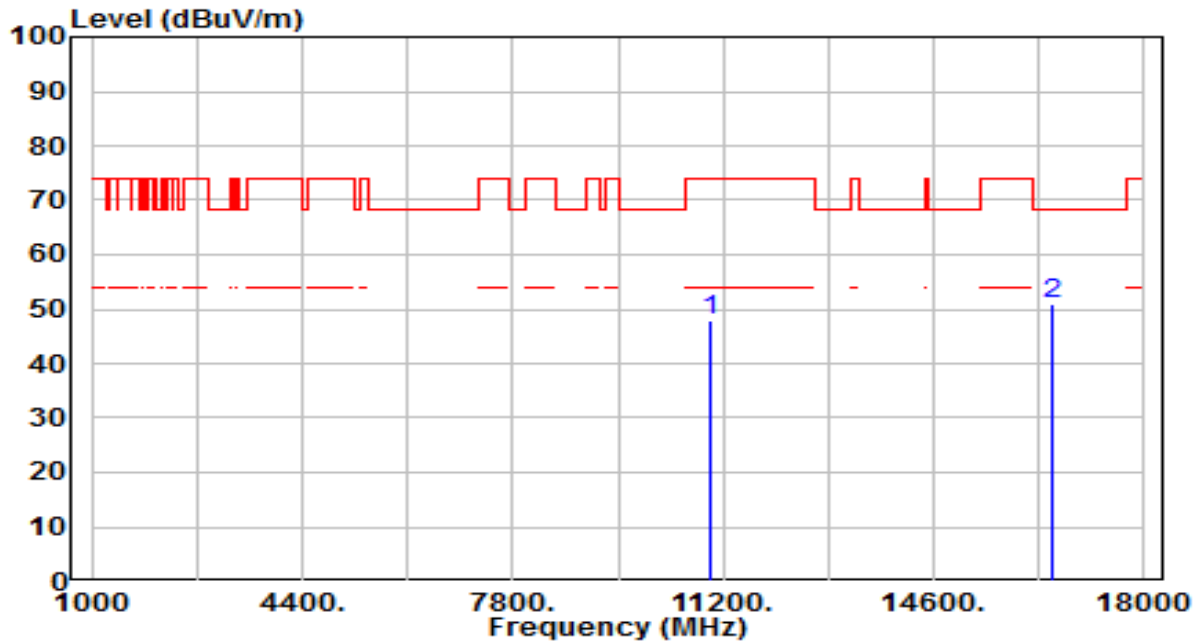


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11000.000	42.45	5.56	48.01	-25.99	74.00	100	20	Peak
2	* 16500.000	43.67	7.34	51.02	-17.18	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

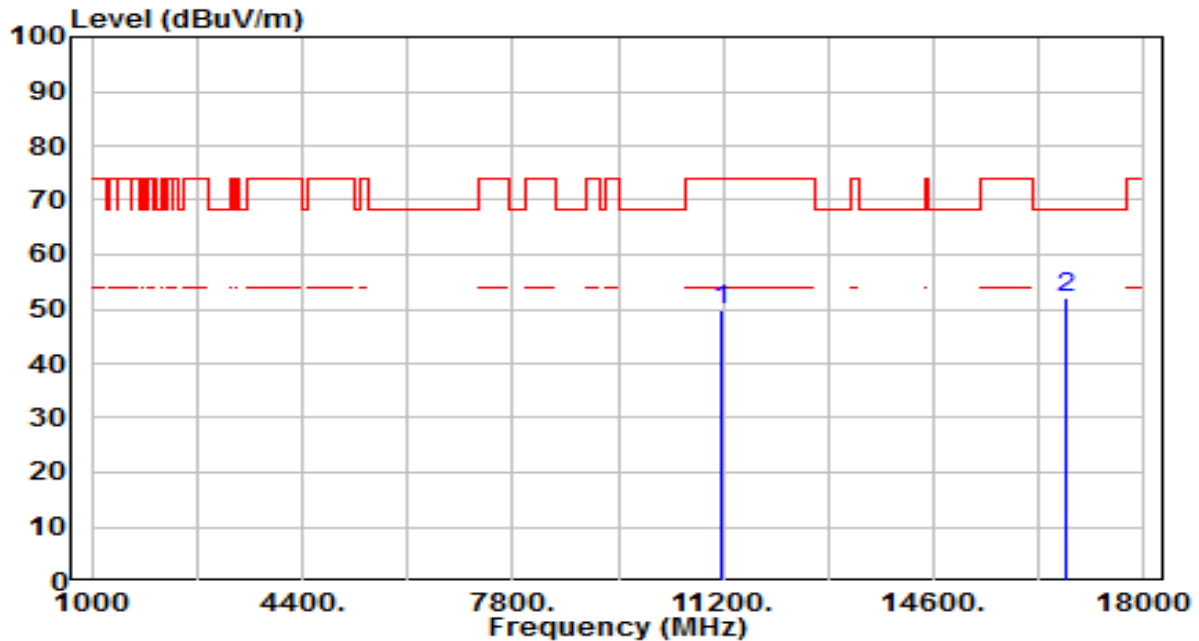


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11160.000	44.07	5.73	49.80	-24.20	74.00	100	65	Peak
2	* 16740.000	44.41	7.72	52.13	-16.07	68.20	100	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 116_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

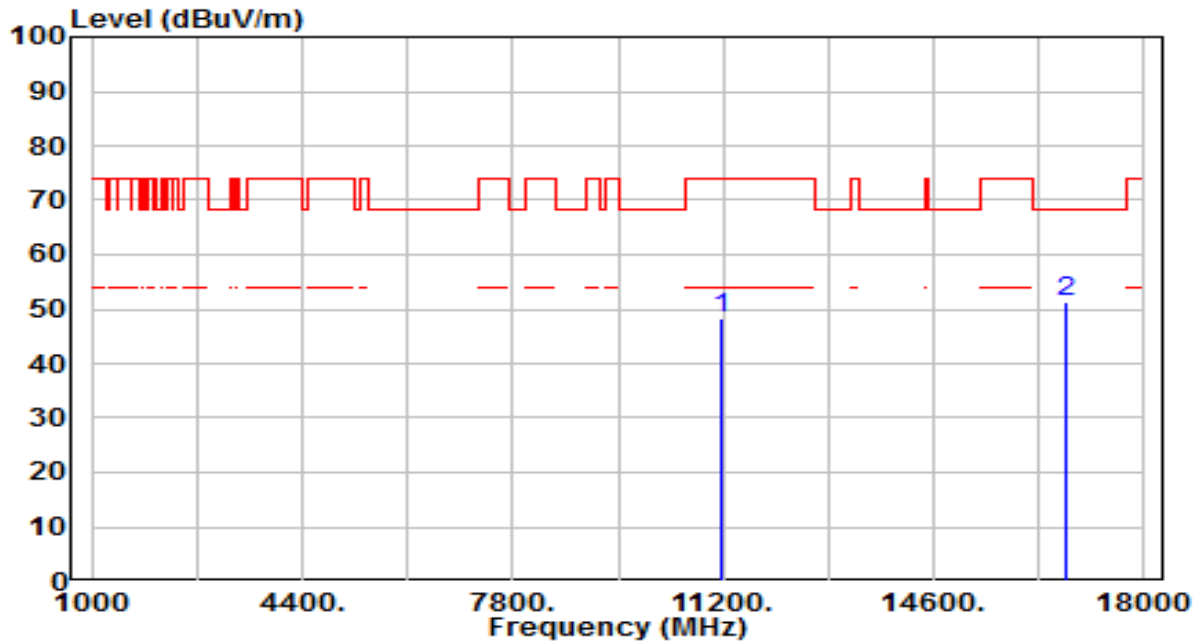


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11160.000	42.62	5.73	48.34	-25.66	74.00	100	35	Peak
2	*	16740.000	43.78	7.72	51.49	-16.71	68.20	100	260	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

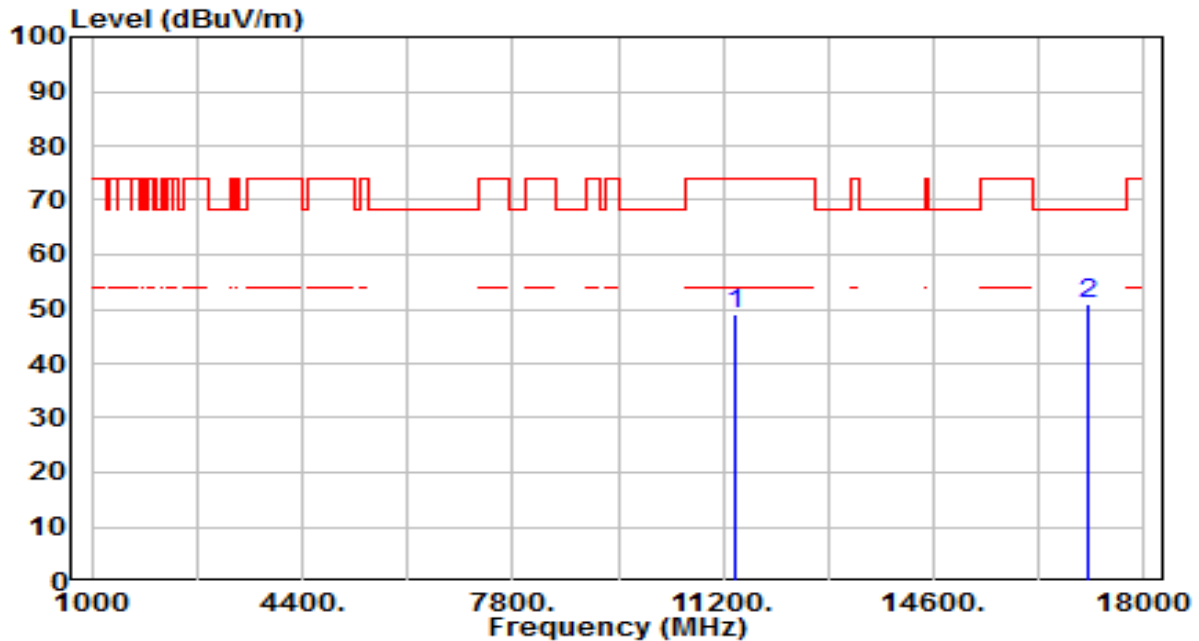


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11400.000	43.11	5.98	49.09	-24.91	74.00	100	65	Peak
2	*	17100.000	44.71	6.16	50.87	-17.33	68.20	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

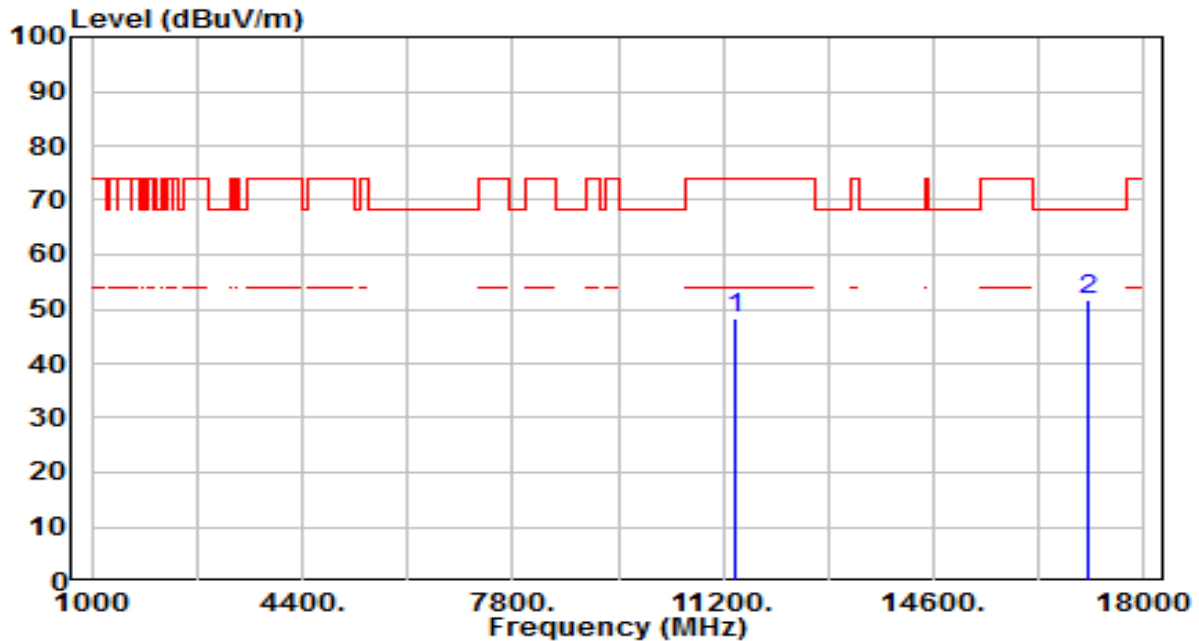


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11400.000	42.32	5.98	48.30	-25.70	74.00	100	350	Peak
2	* 17100.000	45.46	6.16	51.62	-16.58	68.20	100	60	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

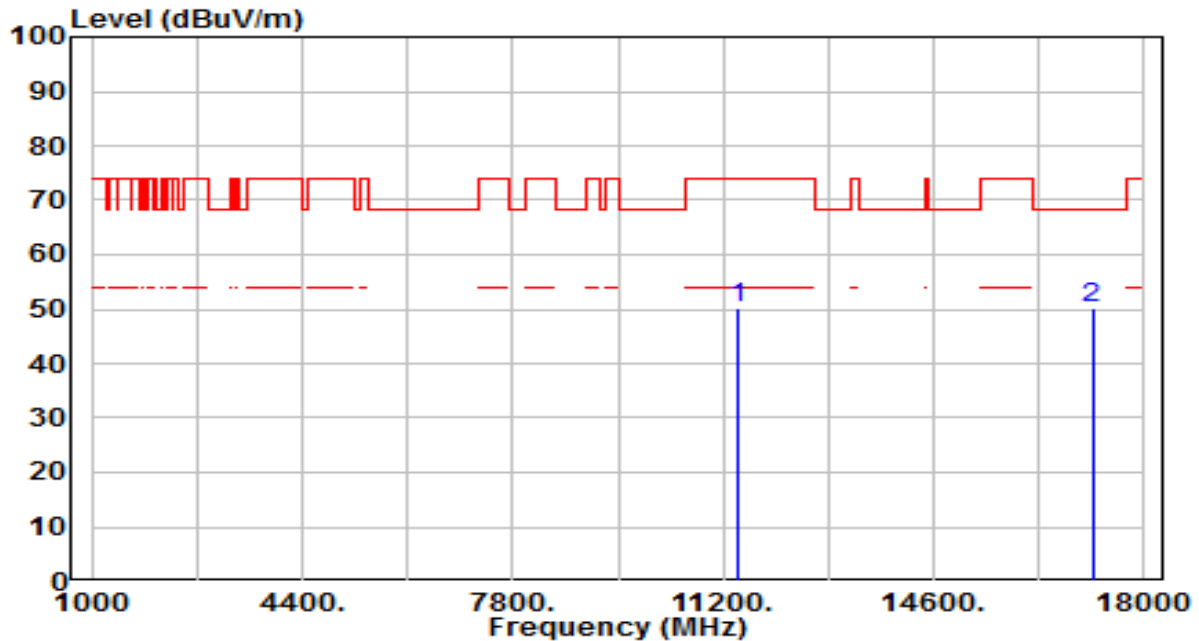


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	44.18	5.97	50.14	-23.86	74.00	100	95	Peak
2	*	17160.000	44.17	5.98	50.15	-18.05	68.20	100	280	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 144_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

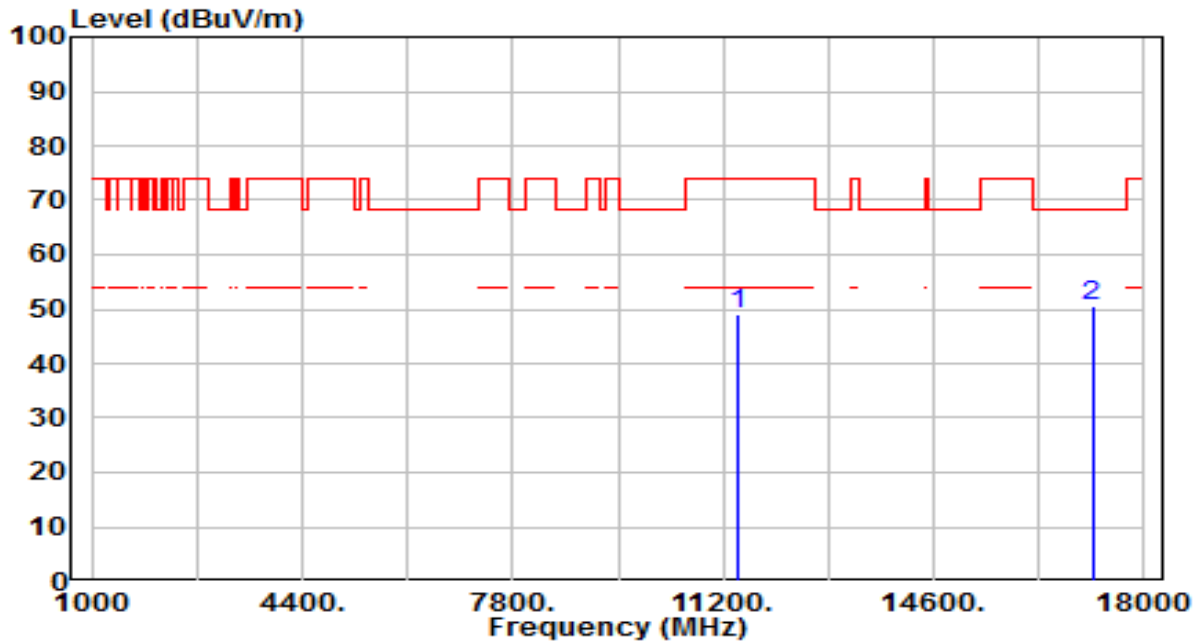


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11440.000	43.01	5.97	48.98	-25.02	74.00	100	260	Peak
2	*	17160.000	44.66	5.98	50.63	-17.57	68.20	100	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

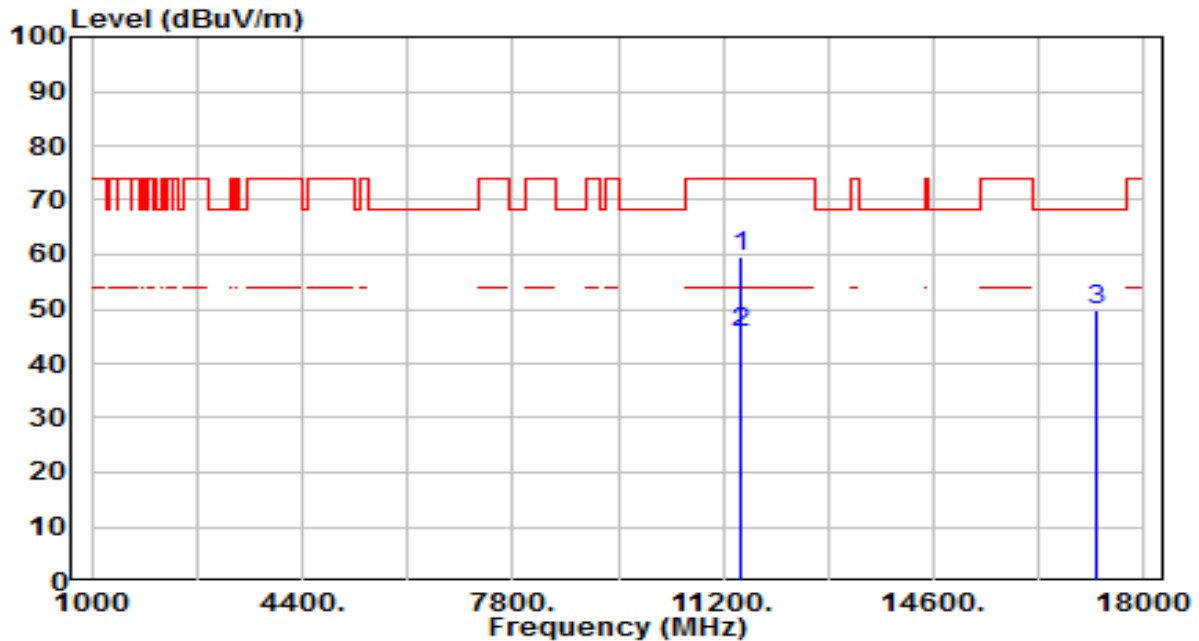


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11490.000	53.62	5.94	59.56	-14.44	74.00	105	95	Peak
2	*	11490.000	39.73	5.94	45.67	-8.33	54.00	105	95	Average
3		17235.000	44.14	5.78	49.92	-18.28	68.20	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

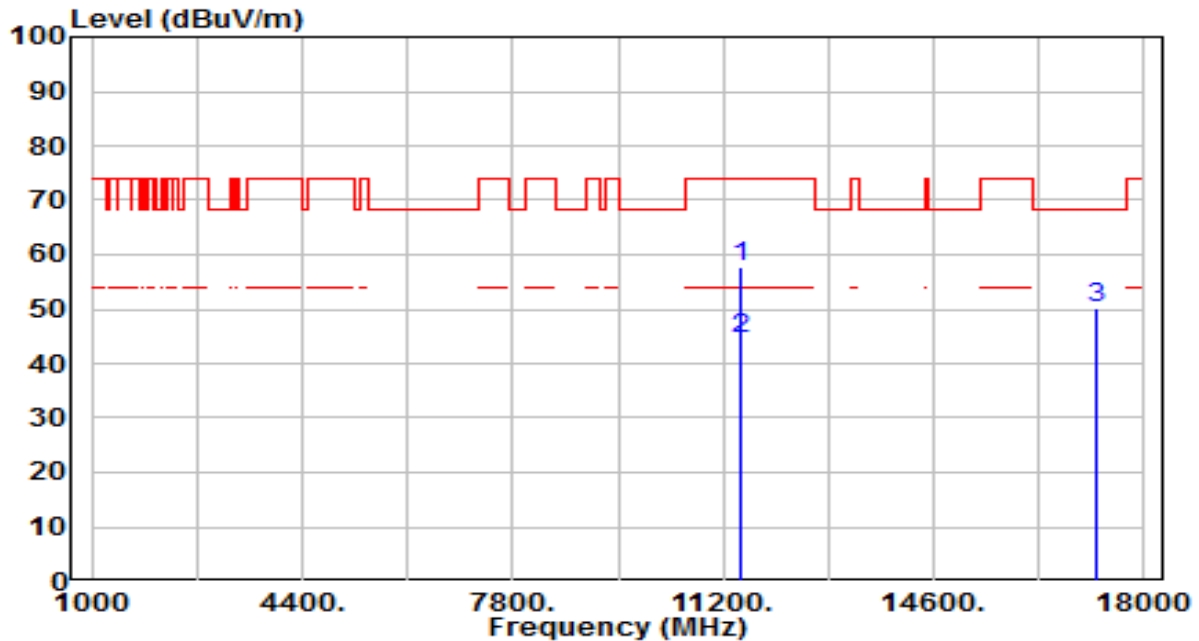


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11490.000	51.67	5.94	57.61	-16.39	74.00	130	315	Peak
2	*	11490.000	38.54	5.94	44.48	-9.52	54.00	130	315	Average
3		17235.000	44.40	5.78	50.18	-18.02	68.20	100	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

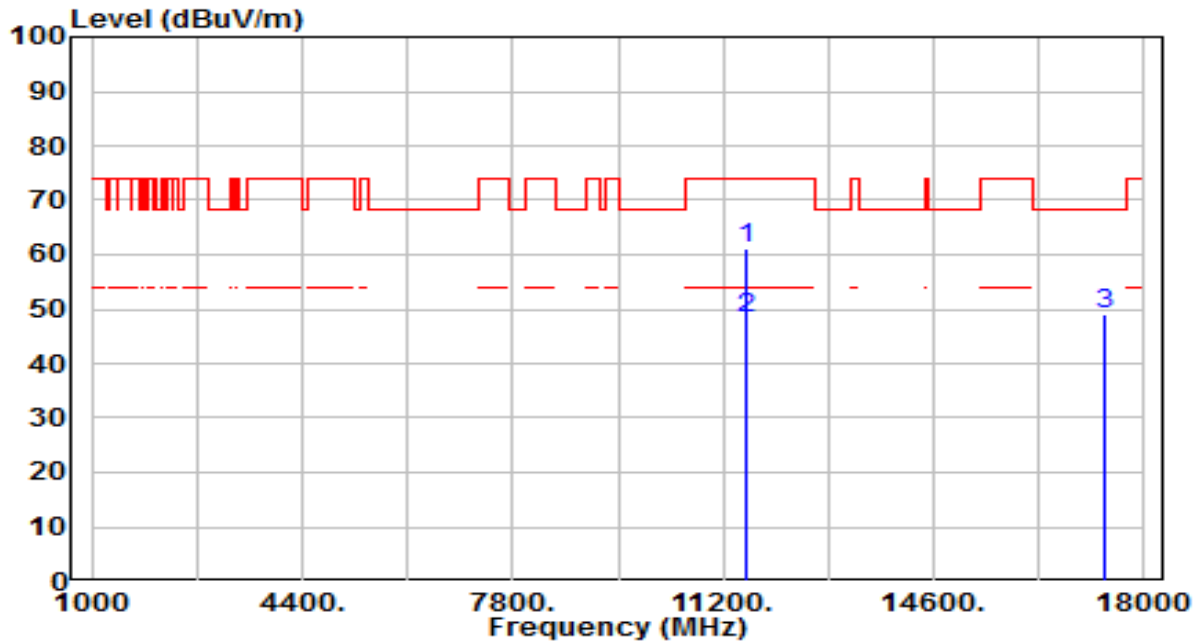


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11570.000	55.21	5.91	61.12	-12.88	74.00	100	310	Peak
2	*	11570.000	42.35	5.91	48.26	-5.74	54.00	100	310	Average
3		17355.000	43.70	5.54	49.24	-18.96	68.20	100	130	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 157_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

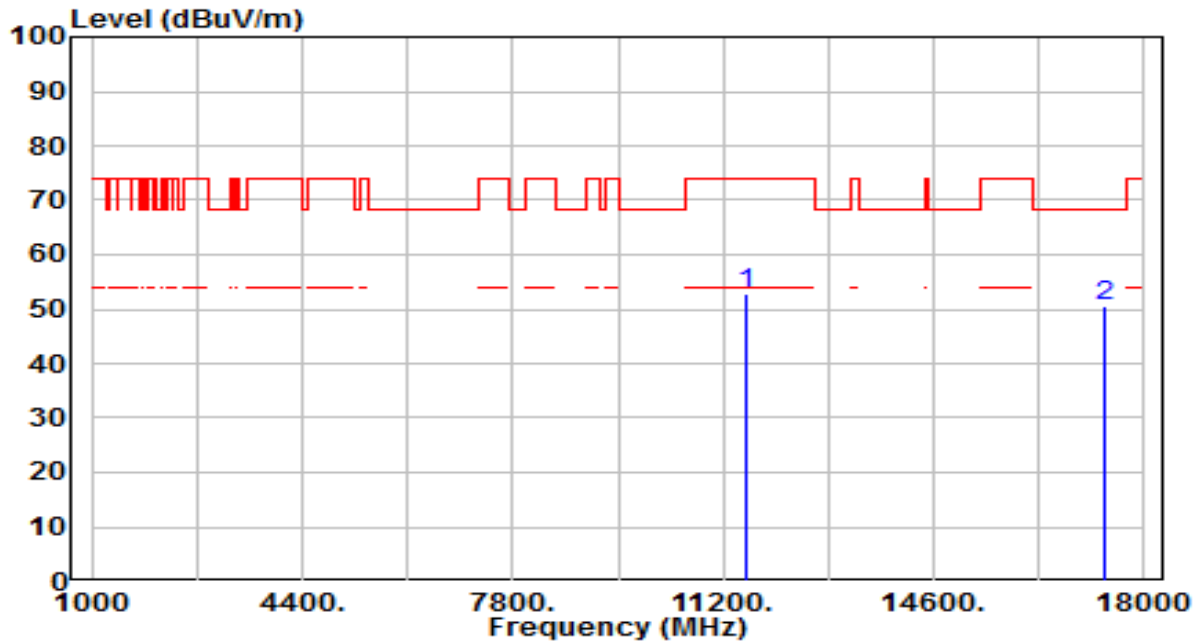


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11570.000	46.93	5.91	52.84	-21.16	74.00	100	285	Peak
2	* 17355.000	44.86	5.54	50.39	-17.81	68.20	100	130	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

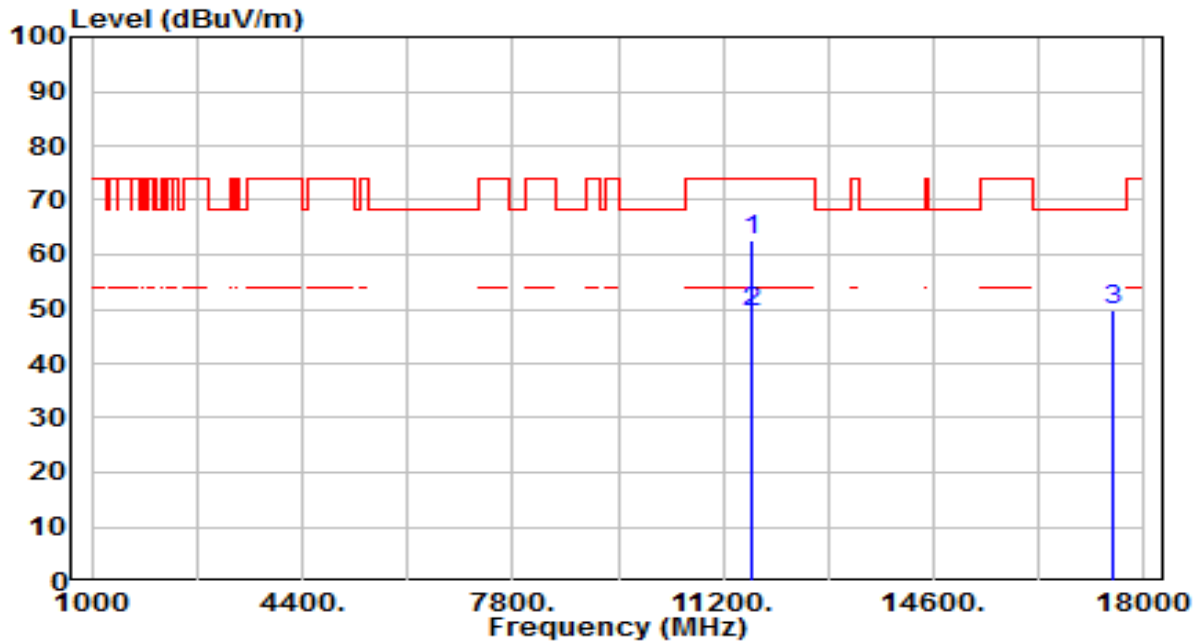


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11650.000	56.71	5.86	62.57	-11.44	74.00	100	310	Peak
2	*	11650.000	43.56	5.86	49.42	-4.58	54.00	100	310	Average
3		17475.000	44.21	5.44	49.65	-18.55	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

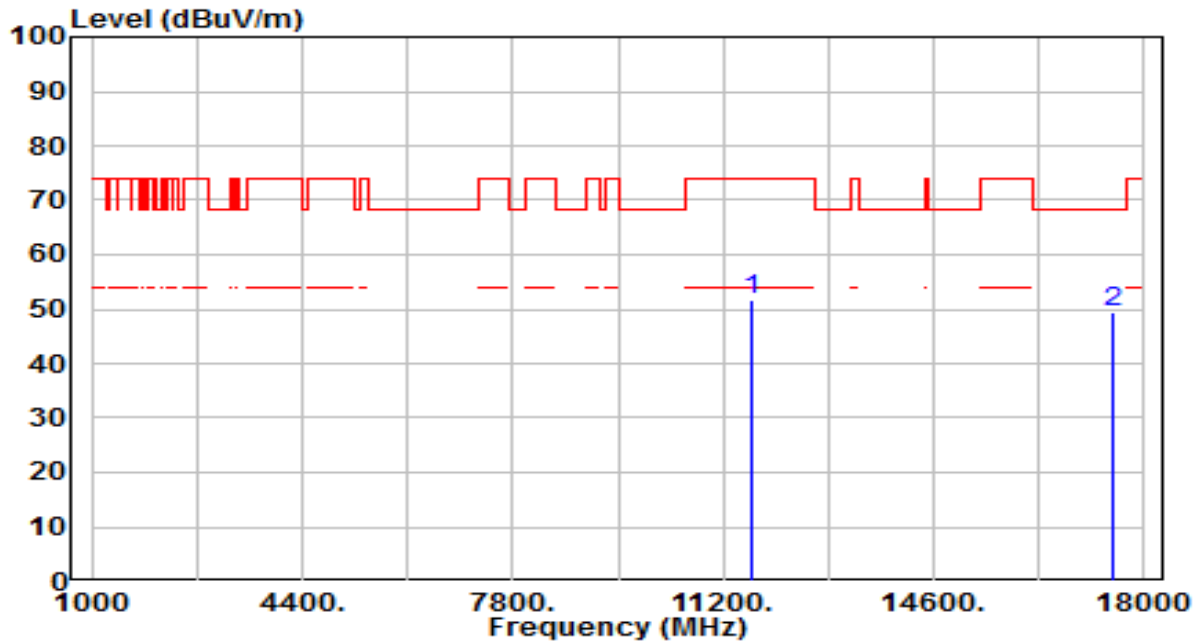


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11650.000	45.82	5.86	51.68	-22.32	74.00	100	295	Peak
2	* 17475.000	43.91	5.44	49.34	-18.86	68.20	100	45	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

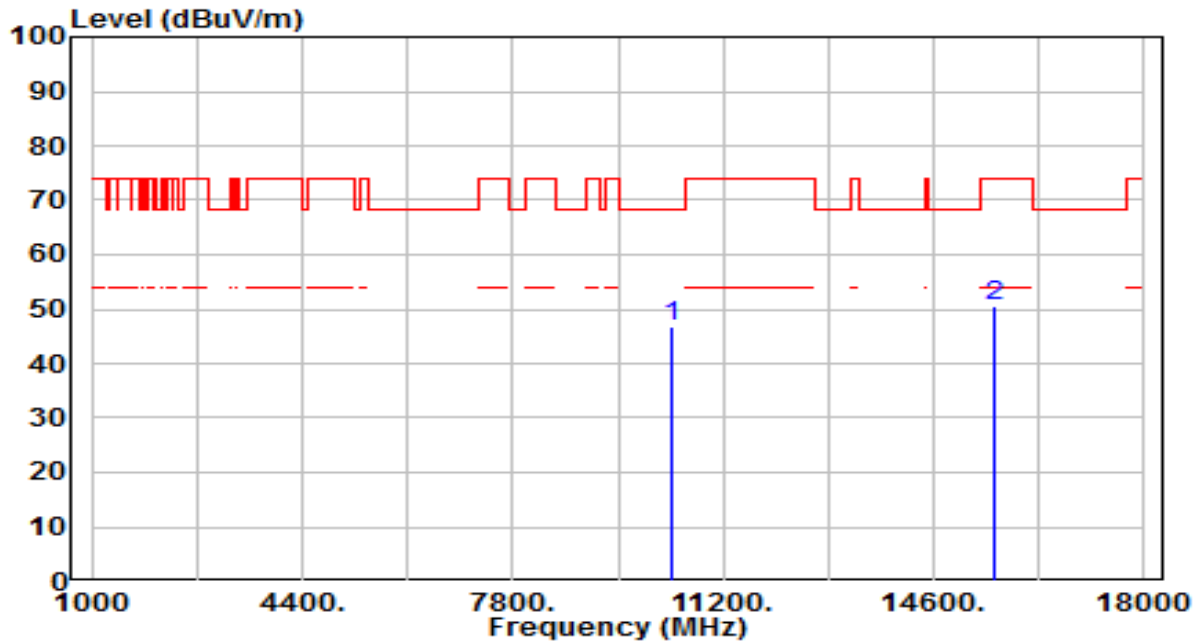


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.53	5.30	46.83	-21.37	68.20	100	15	Peak
2		15570.000	44.05	6.41	50.46	-23.54	74.00	100	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

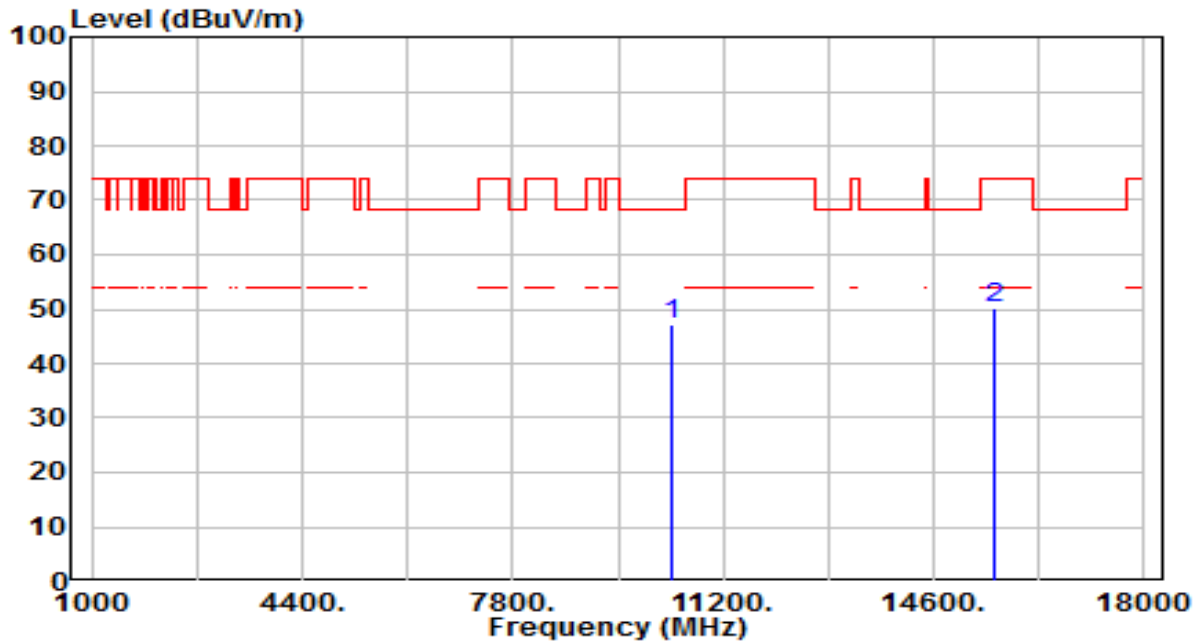


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10380.000	41.98	5.30	47.28	-20.92	68.20	100	280	Peak
2		15570.000	43.90	6.41	50.32	-23.68	74.00	100	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

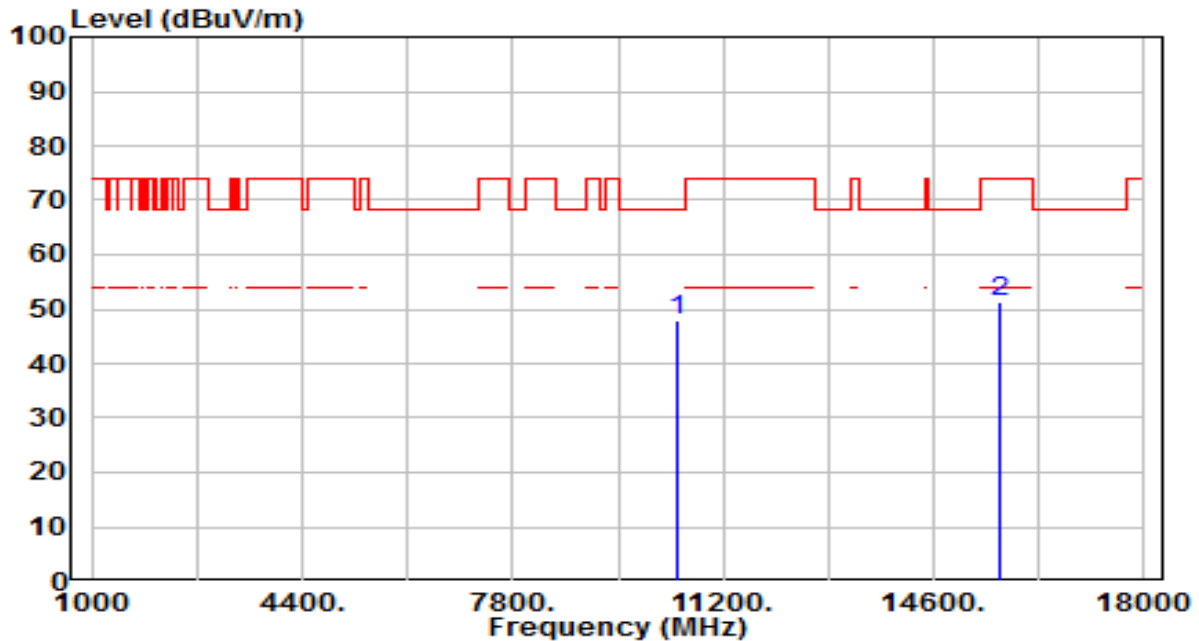


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	42.79	5.27	48.06	-20.14	68.20	100	345	Peak
2		15690.000	44.65	6.63	51.28	-22.72	74.00	100	25	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band1_CH 46_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

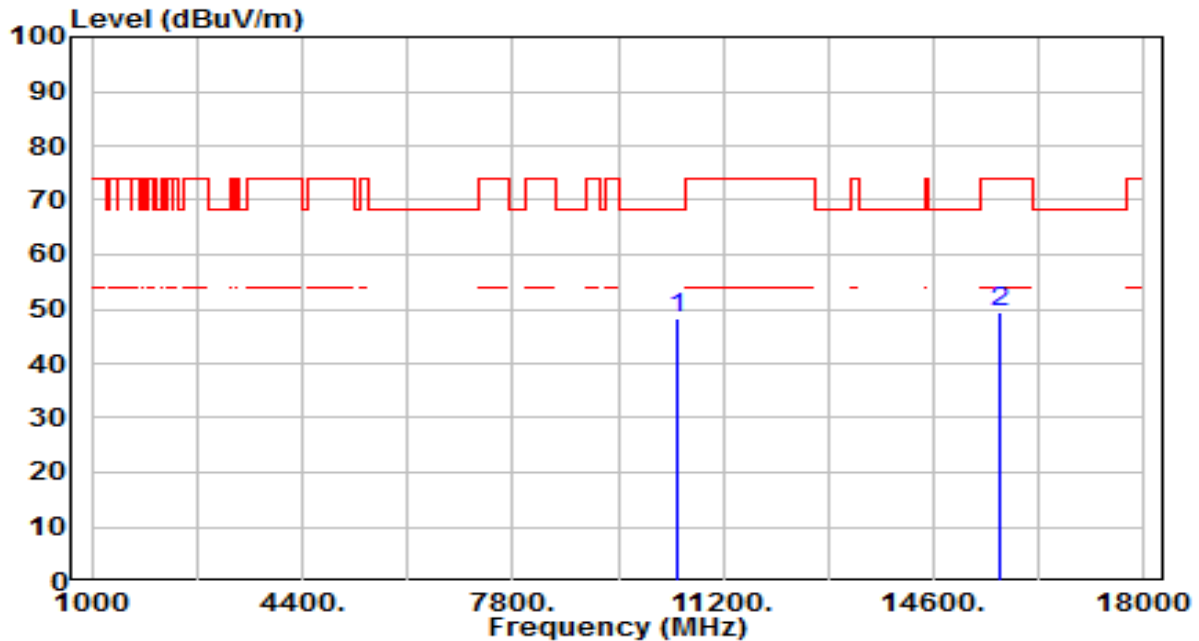


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10460.000	42.93	5.27	48.20	-20.00	68.20	100	90	Peak
2		15690.000	42.72	6.63	49.35	-24.65	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

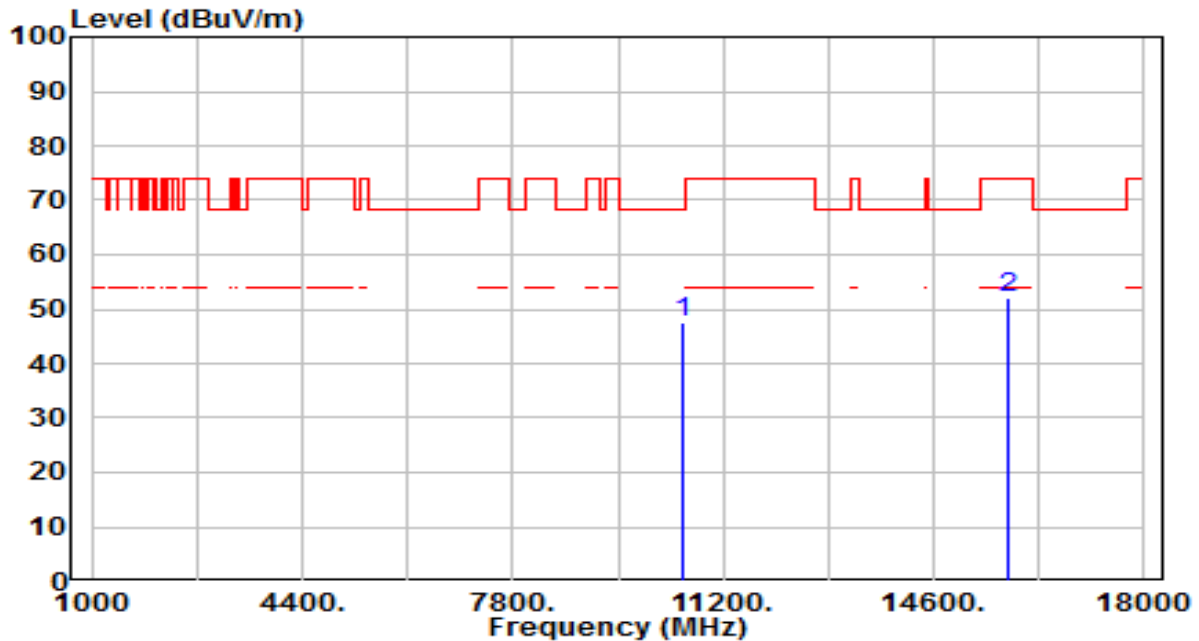


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	42.41	5.25	47.67	-20.53	68.20	100	145	Peak
2		15810.000	45.01	6.88	51.89	-22.11	74.00	100	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band2_CH 54_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

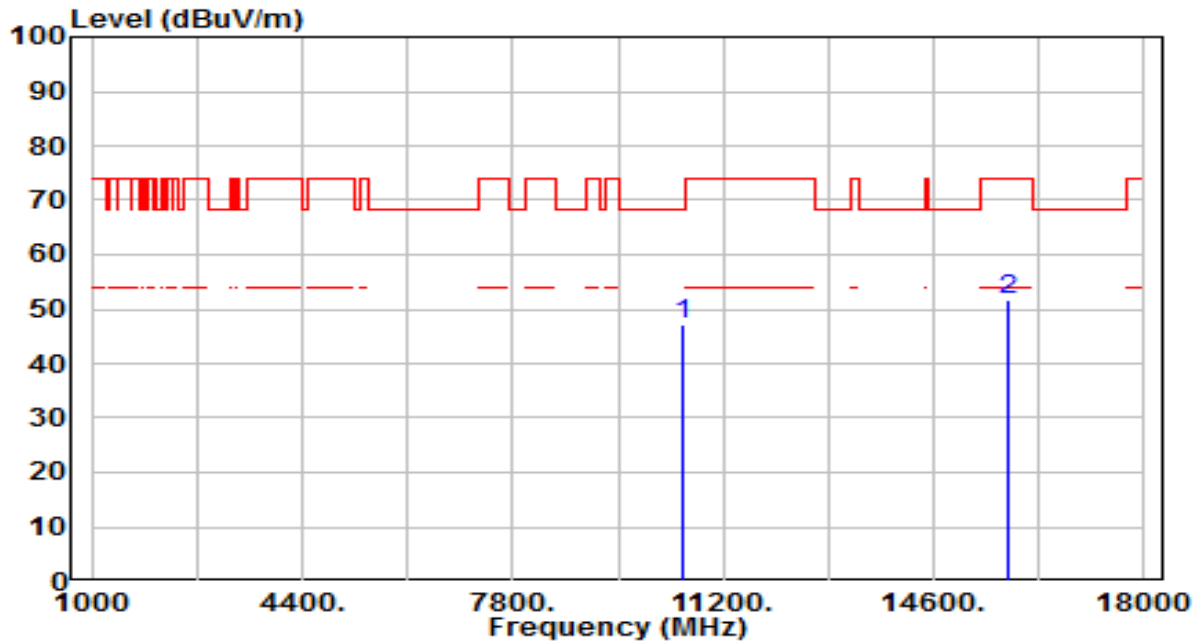


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10540.000	42.00	5.25	47.26	-20.94	68.20	100	275	Peak
2		15810.000	44.71	6.88	51.60	-22.40	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

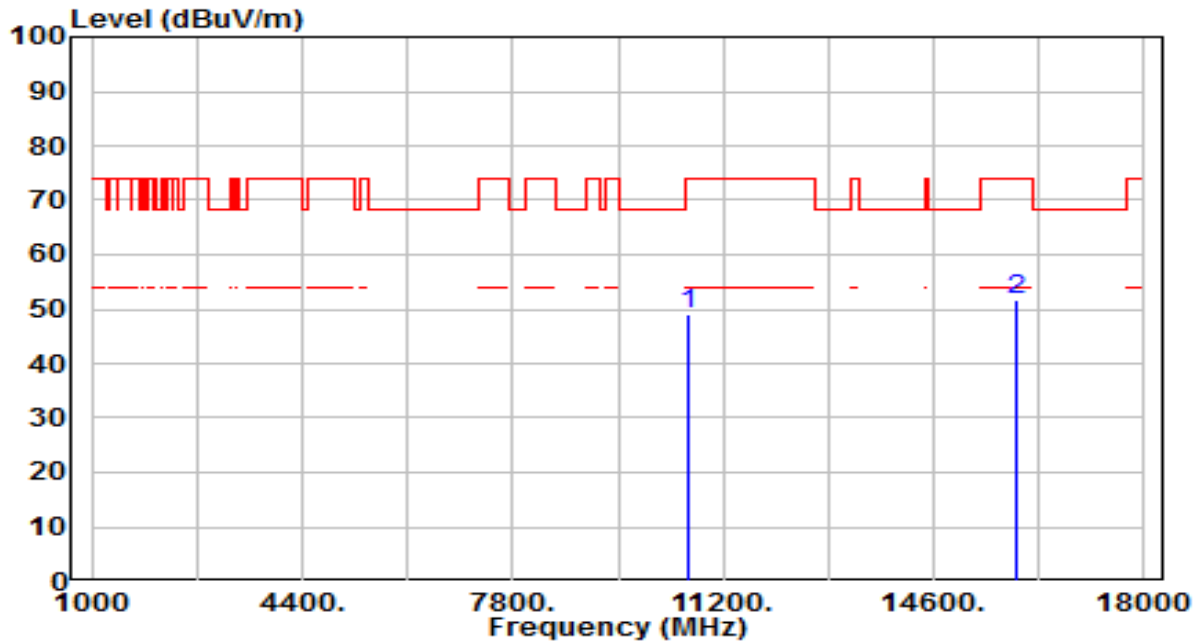


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	43.83	5.26	49.09	-24.91	74.00	100	180	Peak
2	* 15930.000	44.76	6.98	51.73	-22.27	74.00	100	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

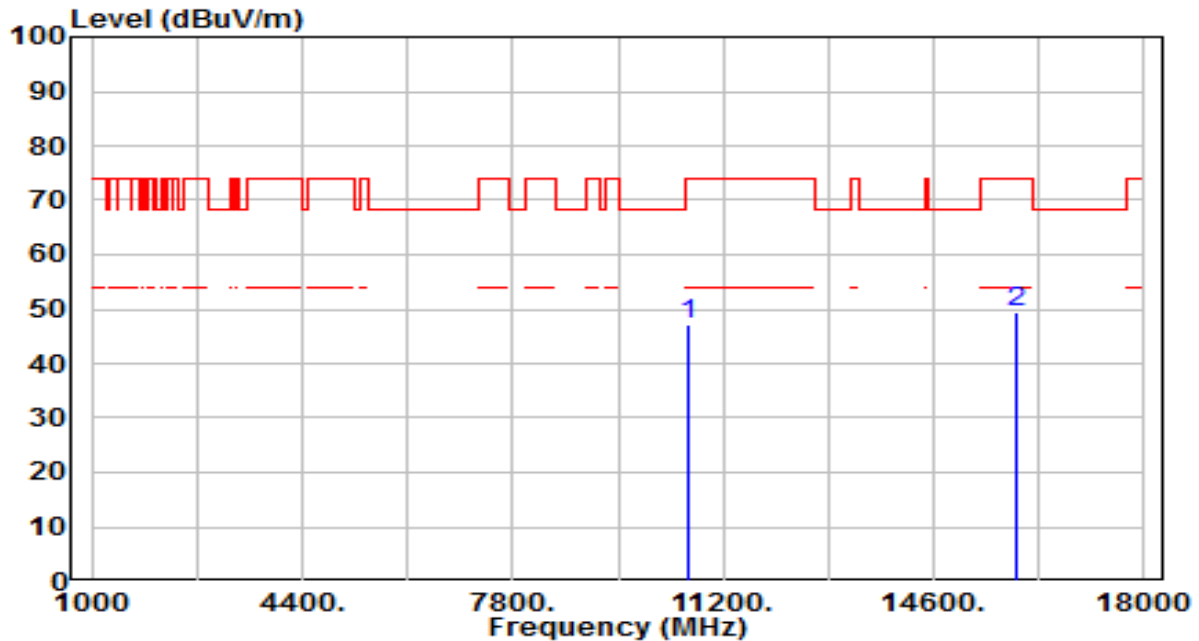


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	10620.000	42.03	5.26	47.29	-26.71	74.00	100	130	Peak
2	* 15930.000	42.51	6.98	49.48	-24.52	74.00	100	215	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

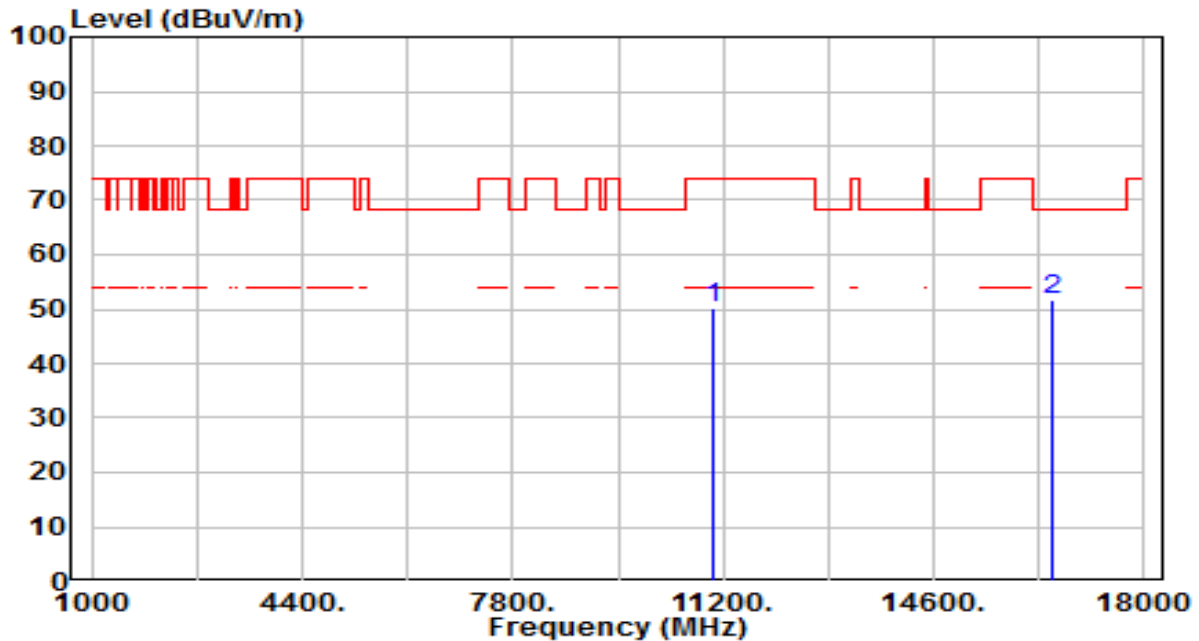


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	44.52	5.58	50.10	-23.90	74.00	100	190	Peak
2	*	16530.000	44.35	7.39	51.74	-16.46	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

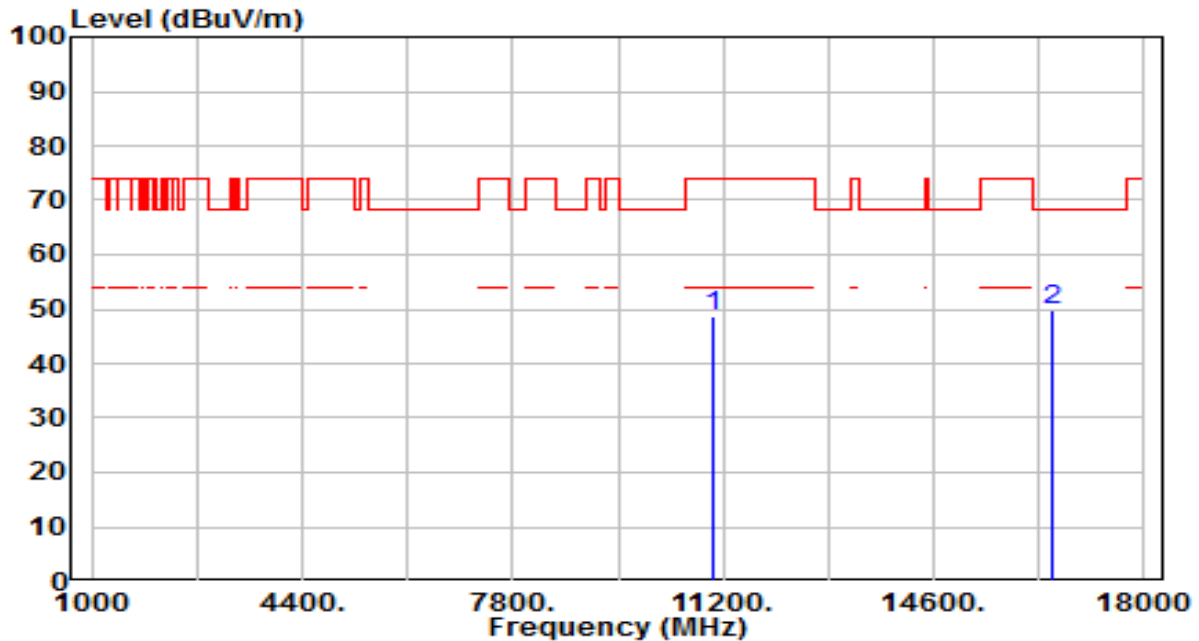


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11020.000	43.07	5.58	48.65	-25.35	74.00	100	130	Peak
2	*	16530.000	42.56	7.39	49.95	-18.25	68.20	100	85	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

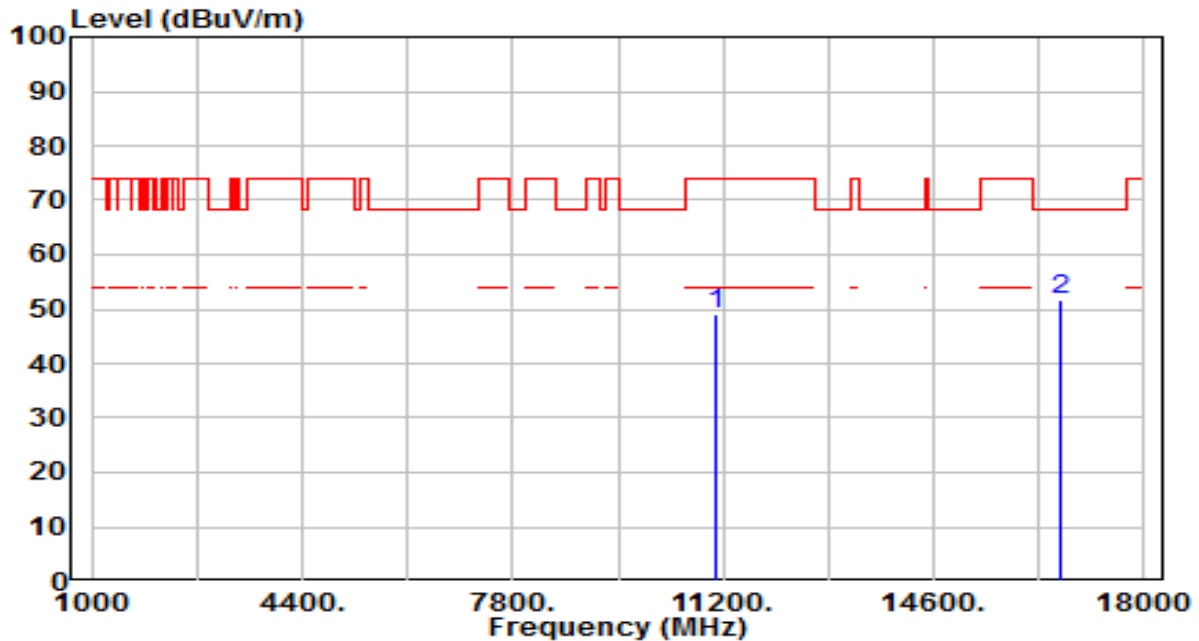


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	43.51	5.67	49.17	-24.83	74.00	100	135	Peak
2	*	16650.000	44.16	7.58	51.74	-16.46	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 110_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

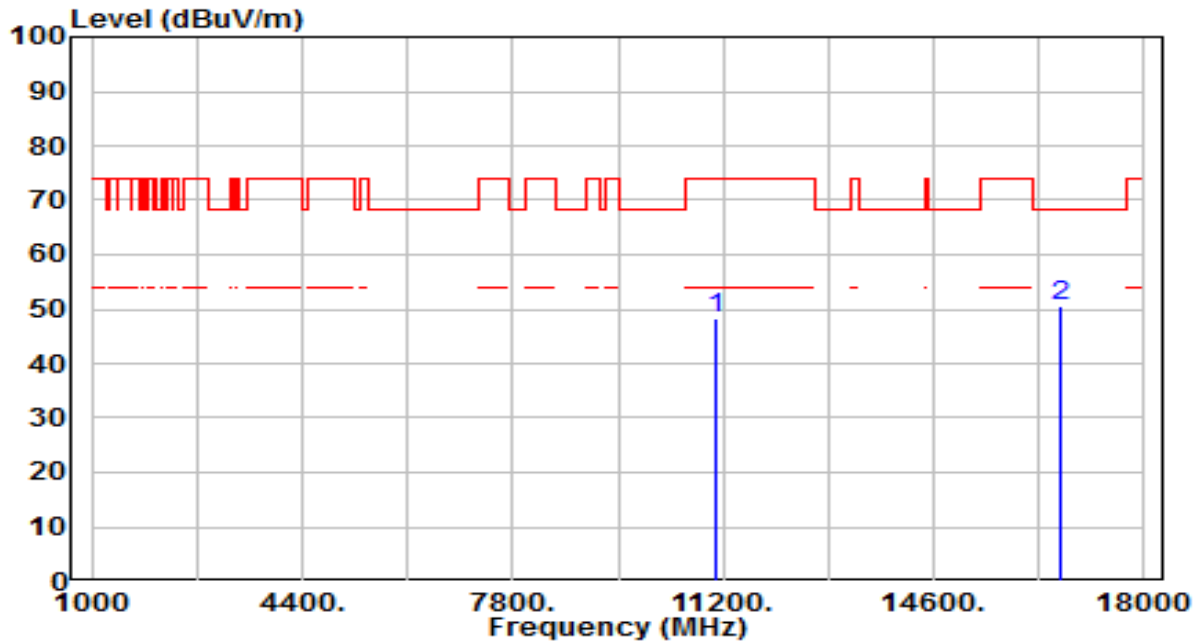


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11100.000	42.66	5.67	48.33	-25.67	74.00	100	345	Peak
2	*	16650.000	43.15	7.58	50.73	-17.47	68.20	100	135	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

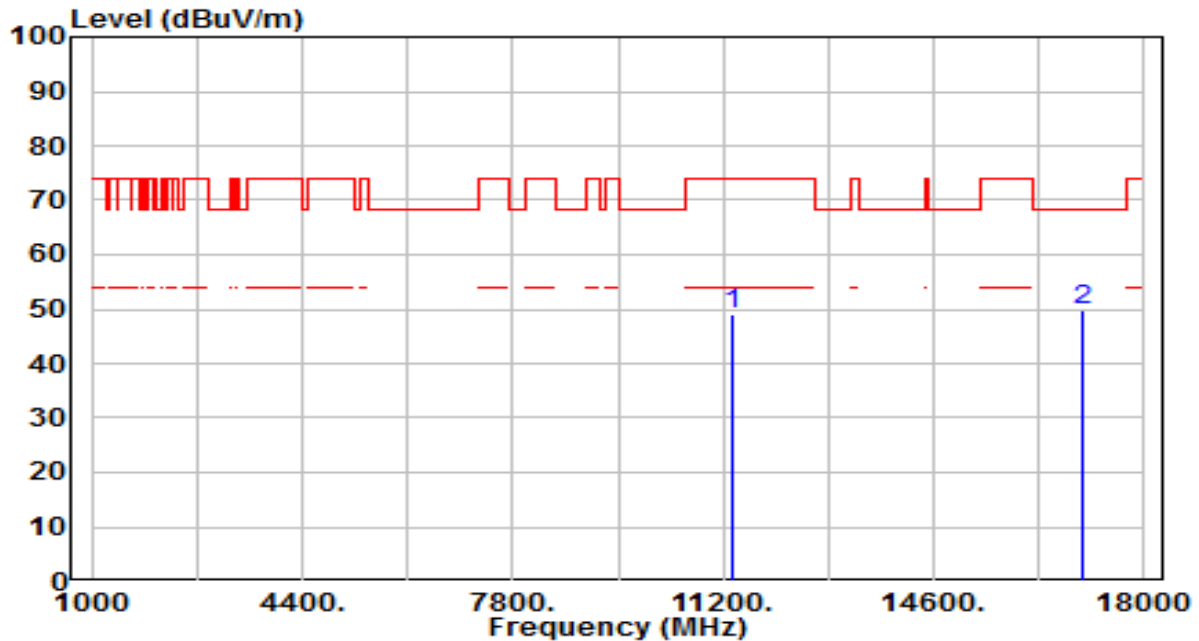


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11340.000	43.07	5.92	48.99	-25.01	74.00	100	145	Peak
2	*	17010.000	43.54	6.44	49.98	-18.22	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

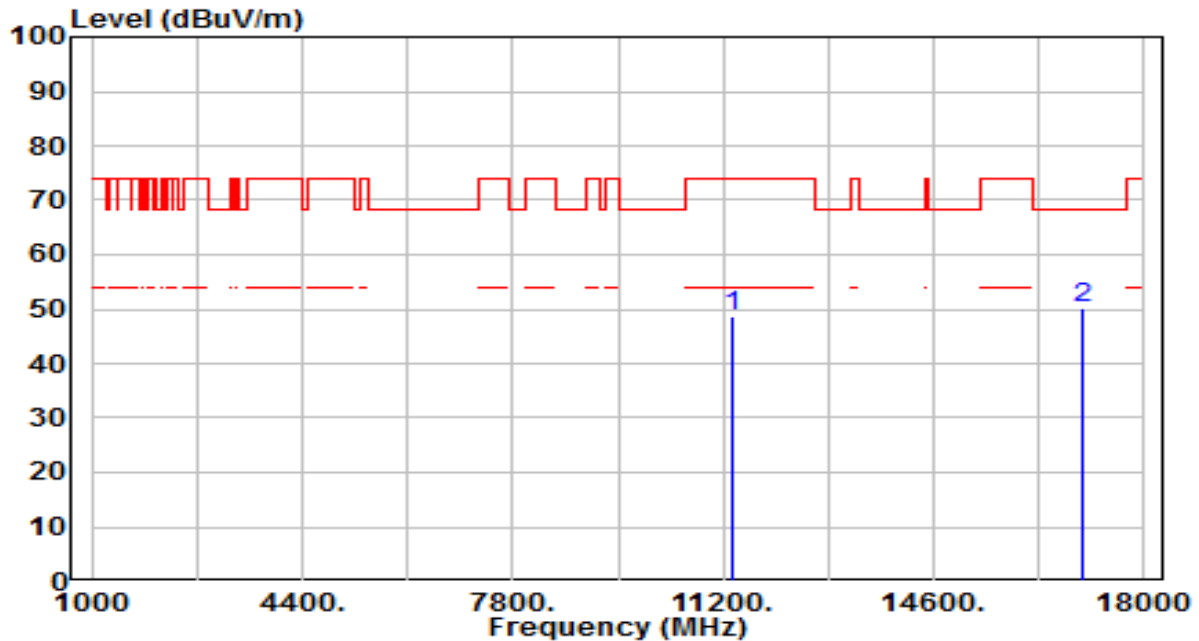


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11340.000	42.67	5.92	48.59	-25.41	74.00	100	320	Peak
2	* 17010.000	43.72	6.44	50.15	-18.05	68.20	100	230	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

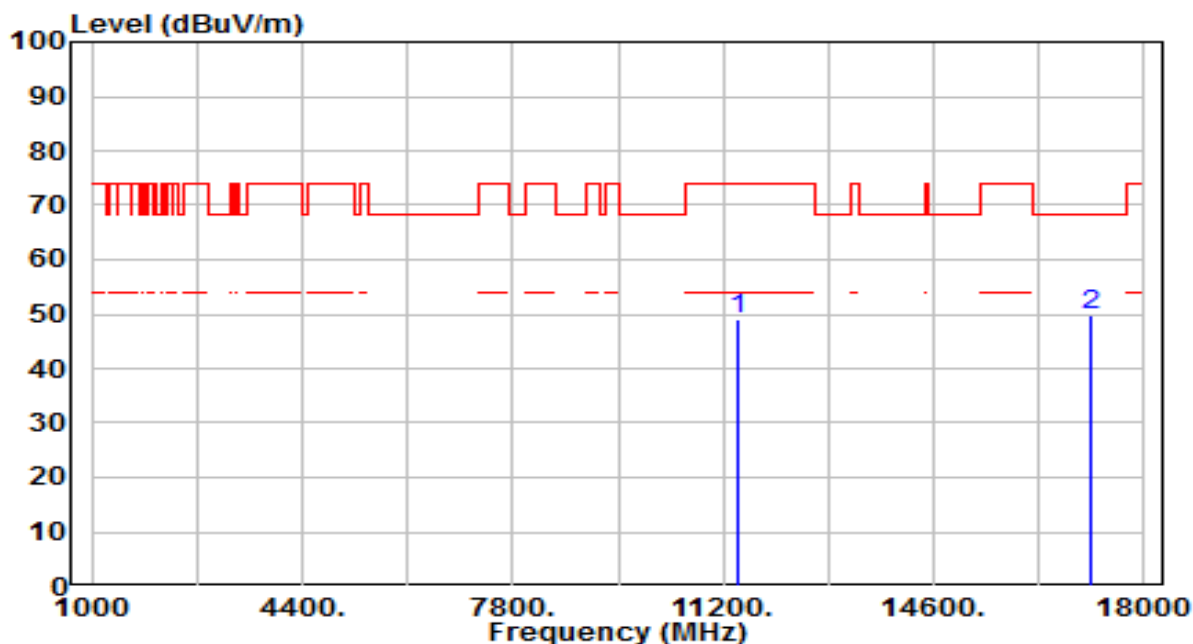


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.95	5.98	48.92	-25.08	74.00	100	280	Peak
2	* 17130.000	43.83	6.07	49.90	-18.30	68.20	100	15	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 142_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

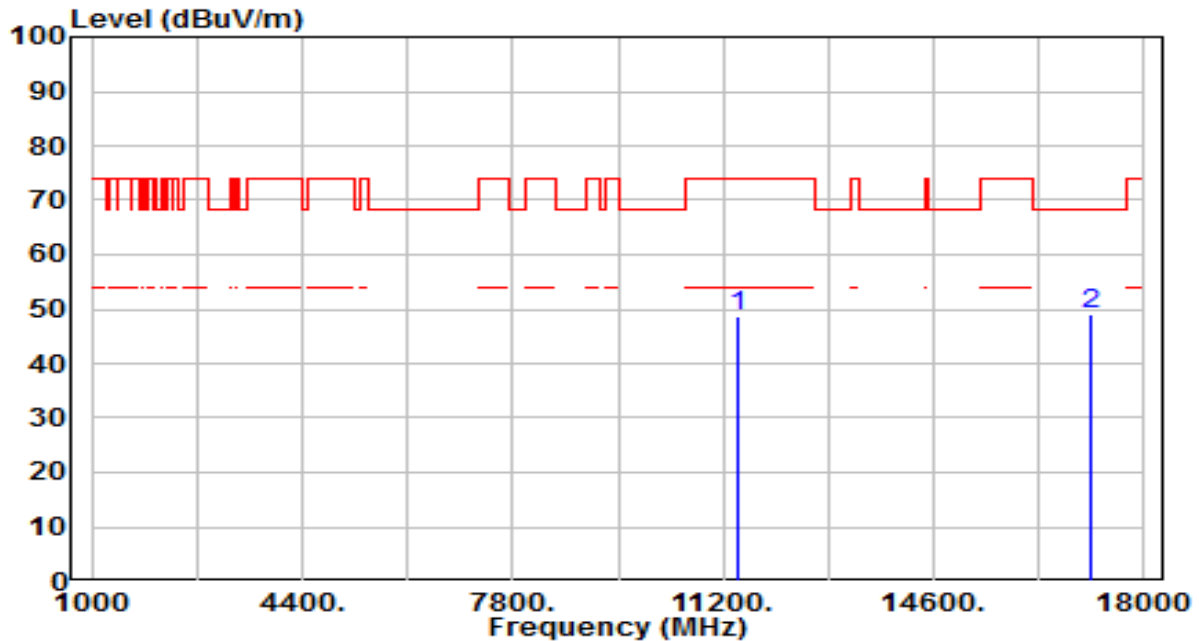


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11420.000	42.55	5.98	48.52	-25.48	74.00	100	195	Peak
2	* 17130.000	43.09	6.07	49.16	-19.04	68.20	100	185	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

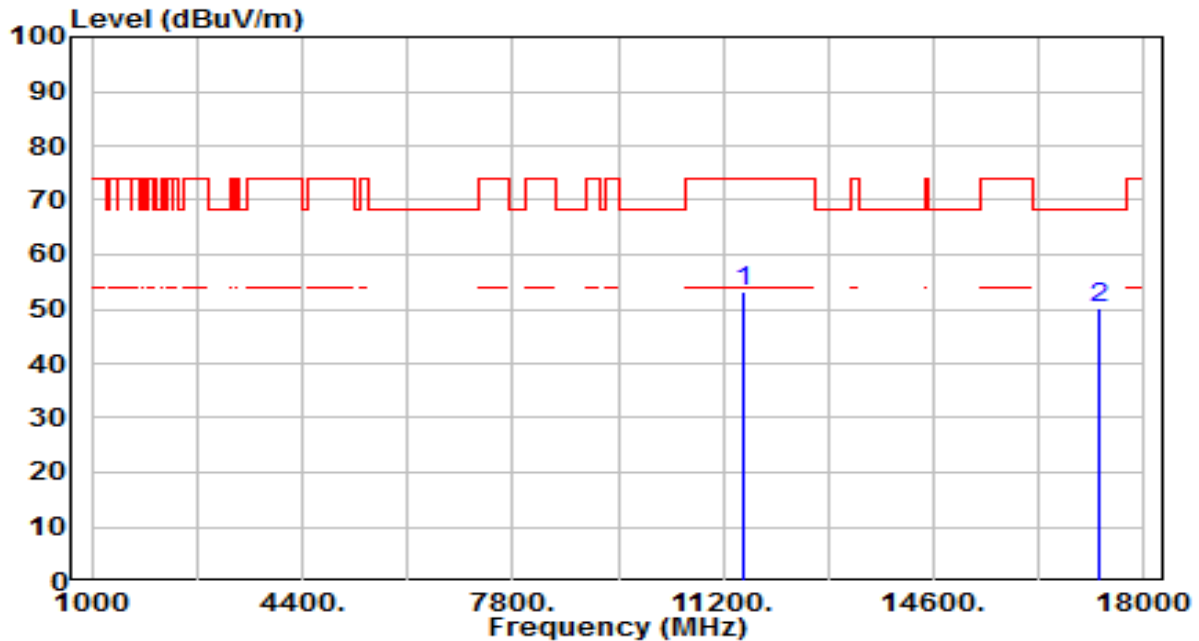


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	47.30	5.94	53.24	-20.76	74.00	100	305	Peak
2	* 17265.000	44.53	5.72	50.25	-17.95	68.20	100	190	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

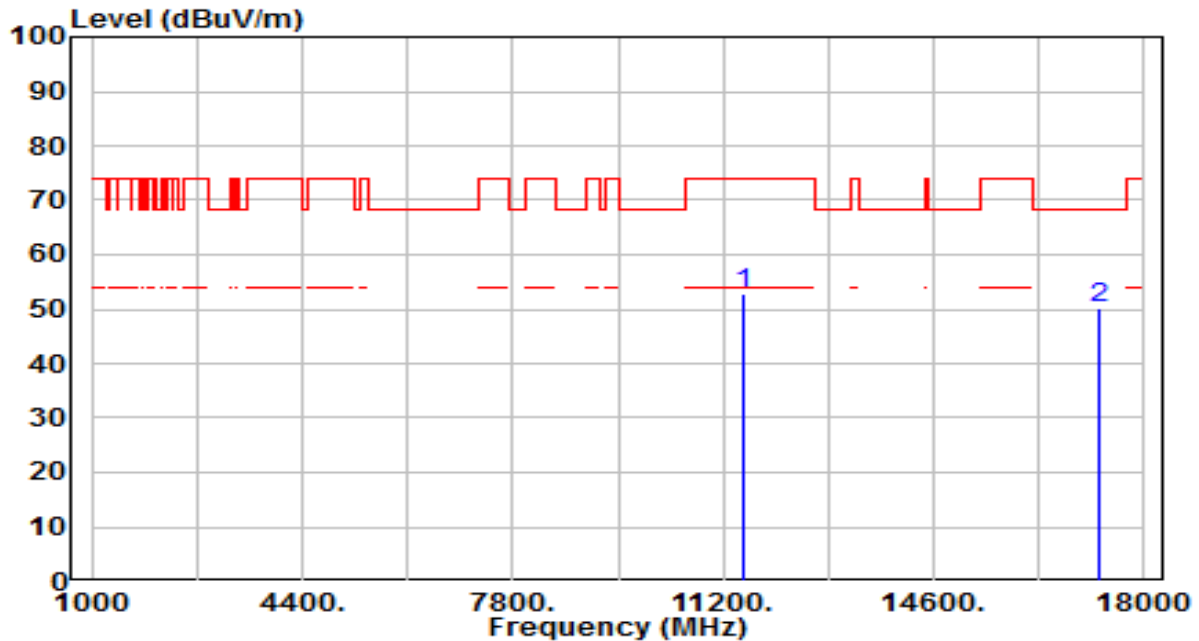


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11510.000	46.75	5.94	52.68	-21.32	74.00	100	290	Peak
2	* 17265.000	44.48	5.72	50.20	-18.00	68.20	100	0	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

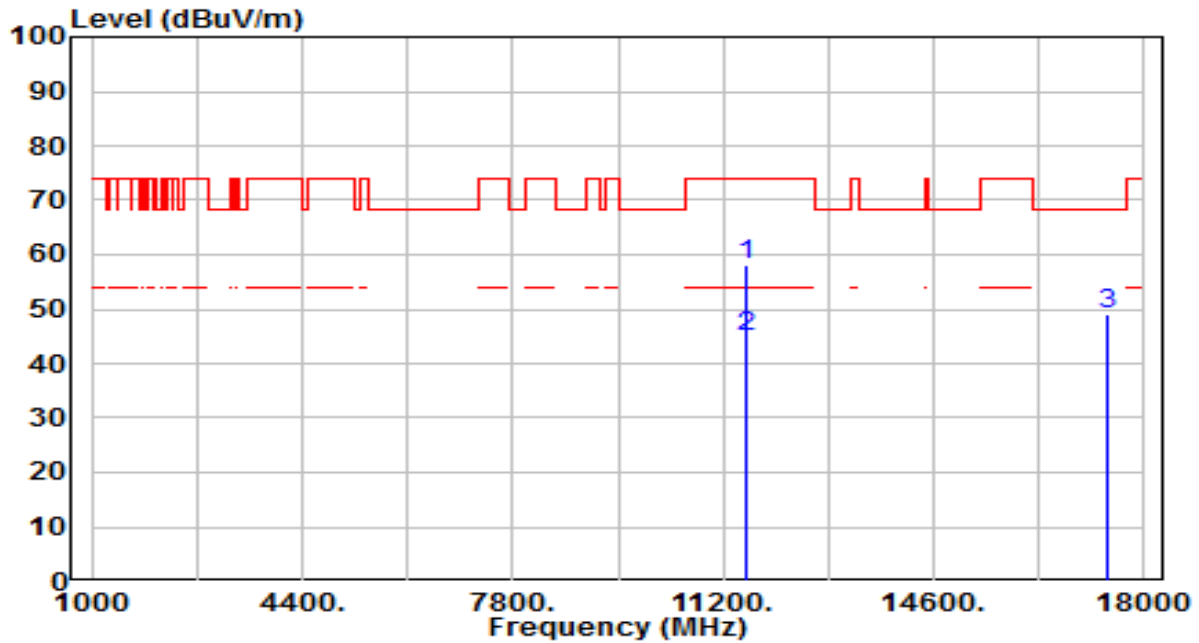


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	11590.000	52.19	5.90	58.09	-15.91	74.00	100	310	Peak
2	*	11590.000	39.06	5.90	44.96	-9.04	54.00	100	310	Average
3		17385.000	43.64	5.47	49.11	-19.09	68.20	100	305	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

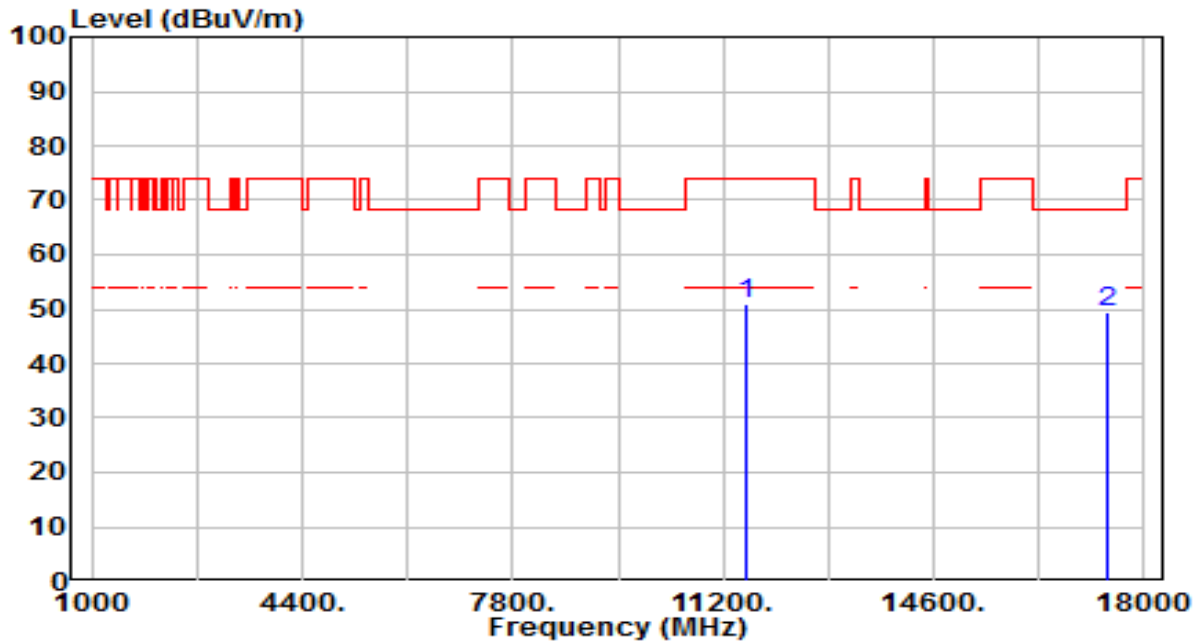


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11590.000	45.19	5.90	51.10	-22.90	74.00	100	280	Peak
2	* 17385.000	43.79	5.47	49.26	-18.94	68.20	100	25	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

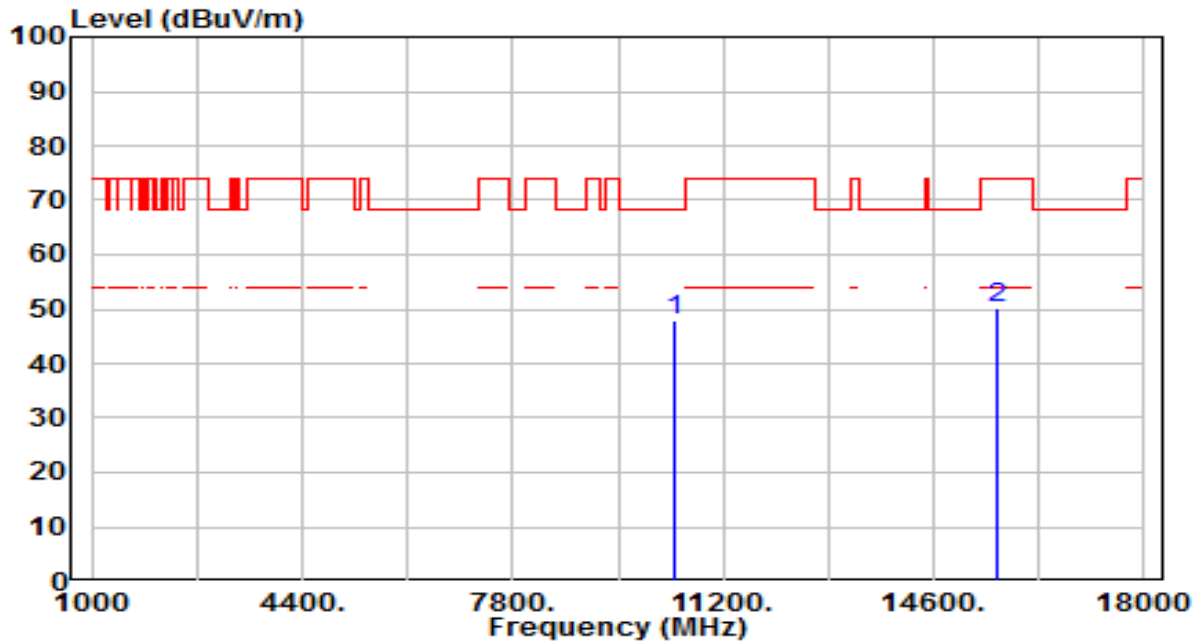


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.49	5.29	47.77	-20.43	68.20	100	115	Peak
2		15630.000	43.60	6.49	50.09	-23.91	74.00	100	140	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

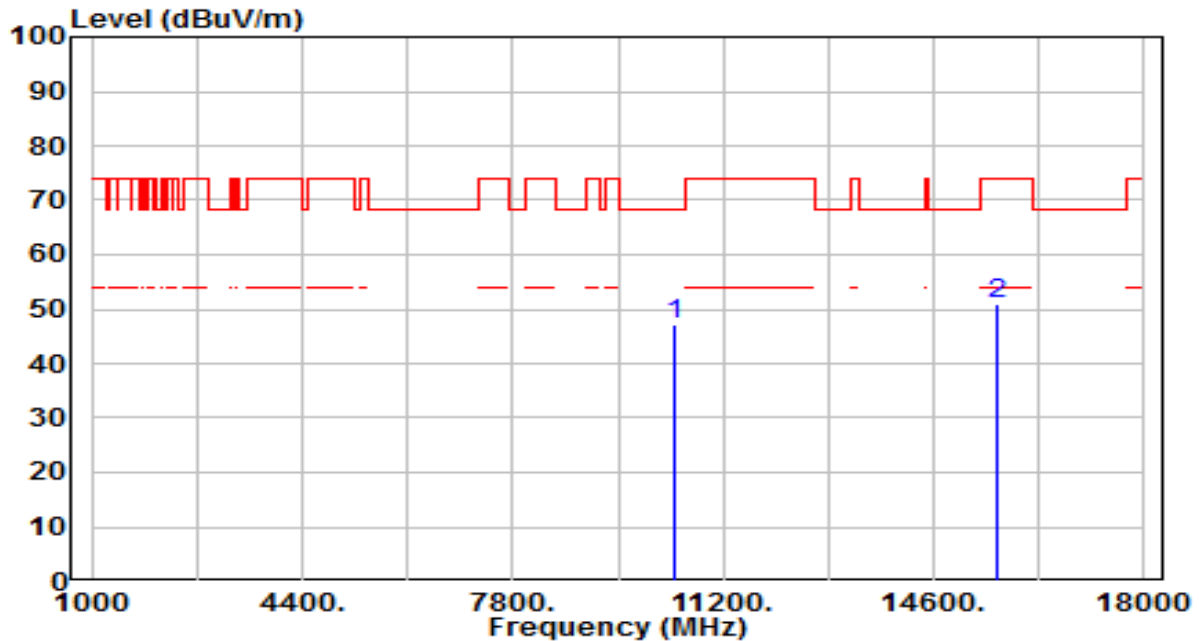


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10420.000	42.00	5.29	47.28	-20.92	68.20	100	60	Peak
2		15630.000	44.27	6.49	50.76	-23.24	74.00	100	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

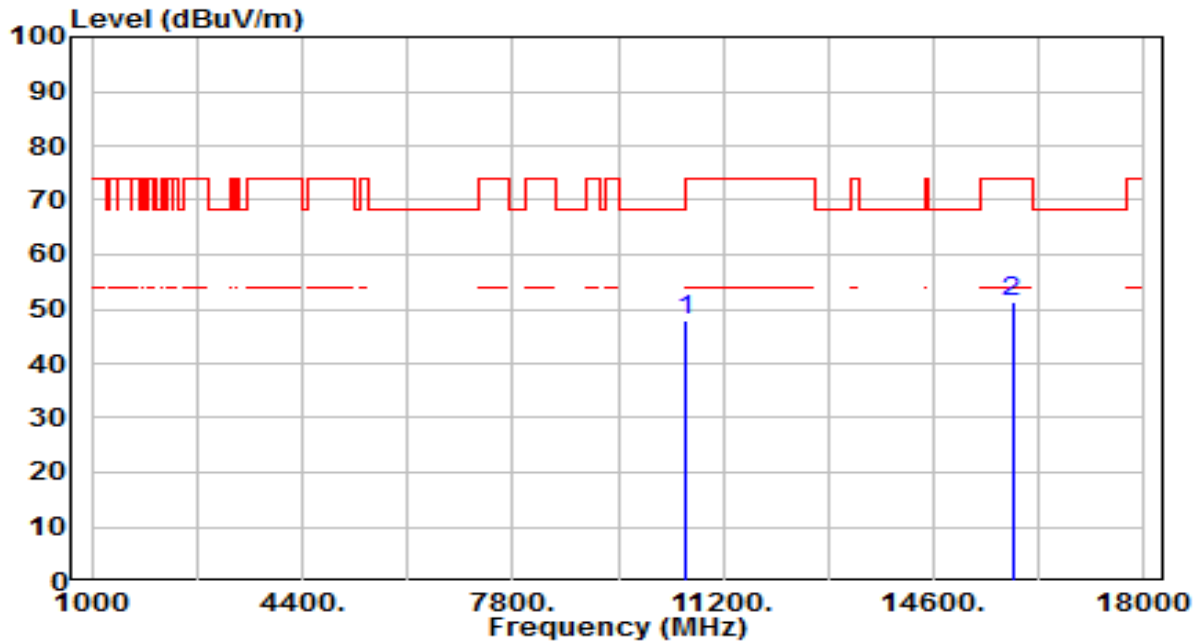


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	42.51	5.25	47.76	-20.44	68.20	100	185	Peak
2		15870.000	44.46	6.93	51.39	-22.61	74.00	100	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

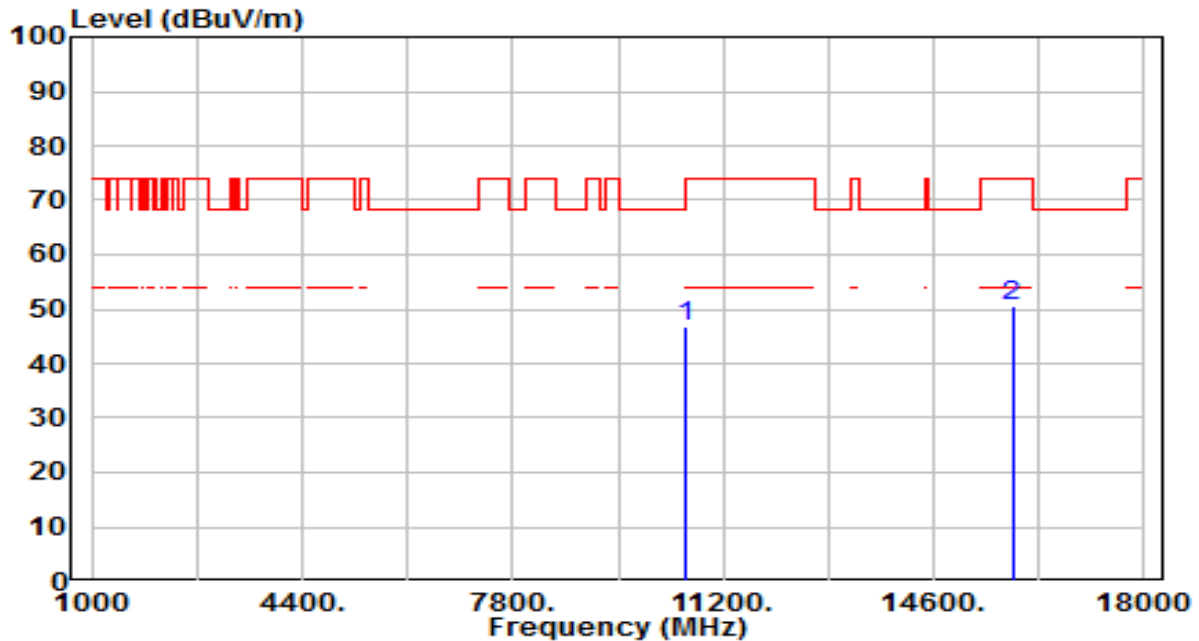


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10580.000	41.47	5.25	46.72	-21.48	68.20	100	360	Peak
2		15870.000	43.79	6.93	50.72	-23.28	74.00	100	85	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

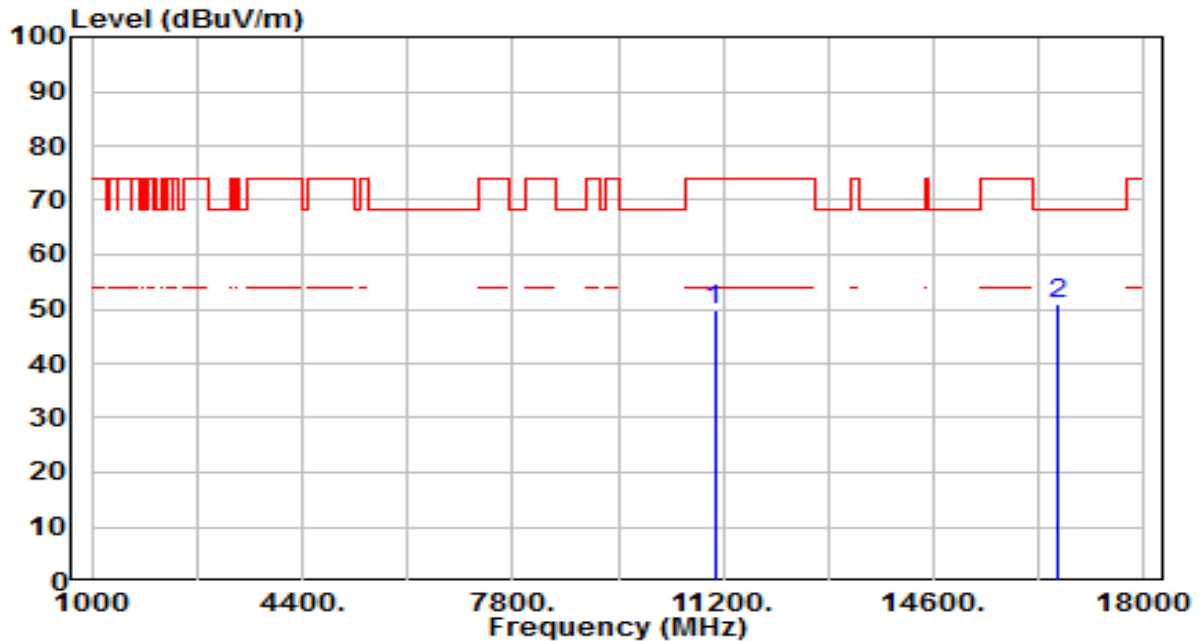


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11060.000	44.37	5.62	50.00	-24.00	74.00	100	170	Peak
2	*	16590.000	43.55	7.48	51.03	-17.17	68.20	100	15	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

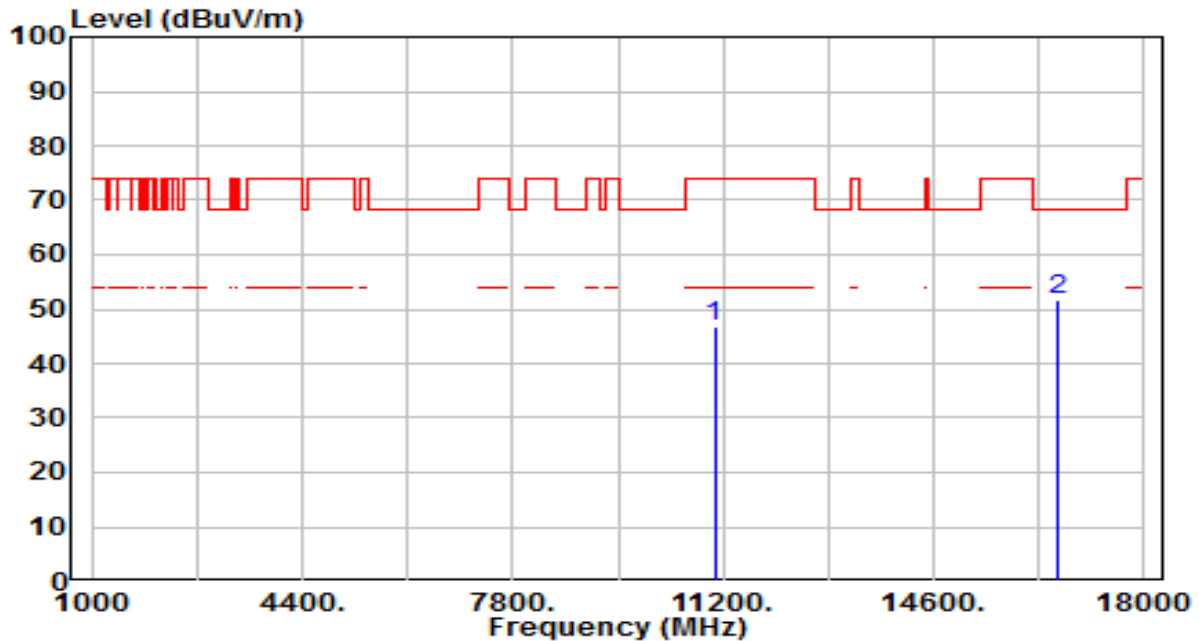


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11060.000	41.29	5.62	46.92	-27.08	74.00	100	185	Peak
2	* 16590.000	44.09	7.48	51.57	-16.63	68.20	100	15	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

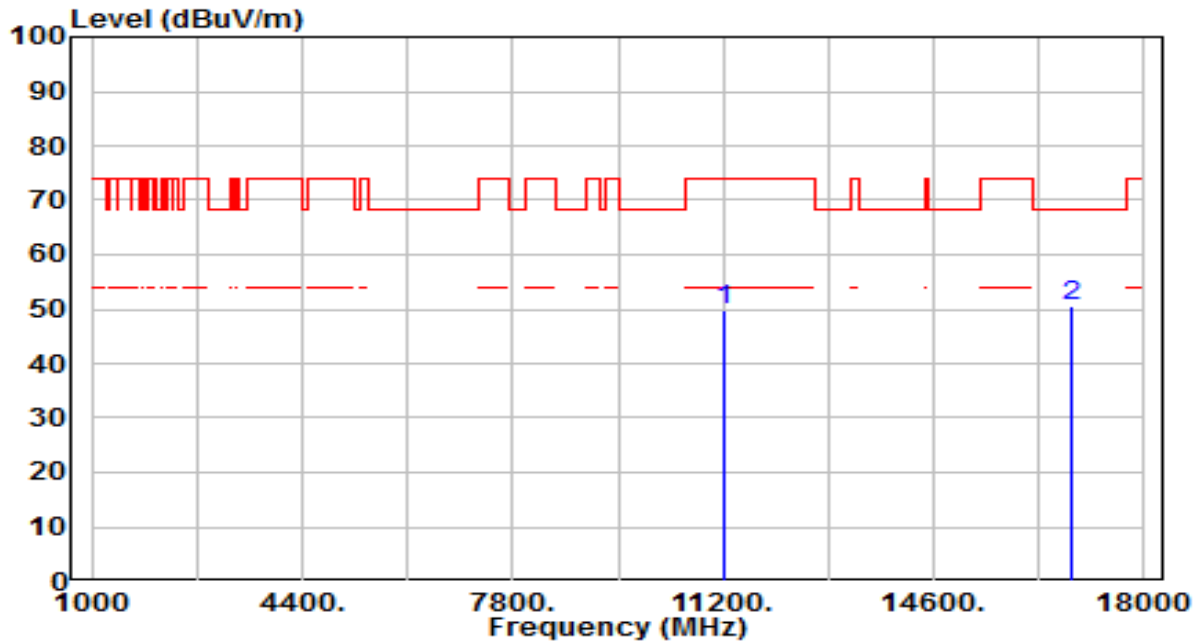


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	44.03	5.79	49.82	-24.18	74.00	100	190	Peak
2	* 16830.000	43.37	7.17	50.55	-17.65	68.20	100	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 122_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

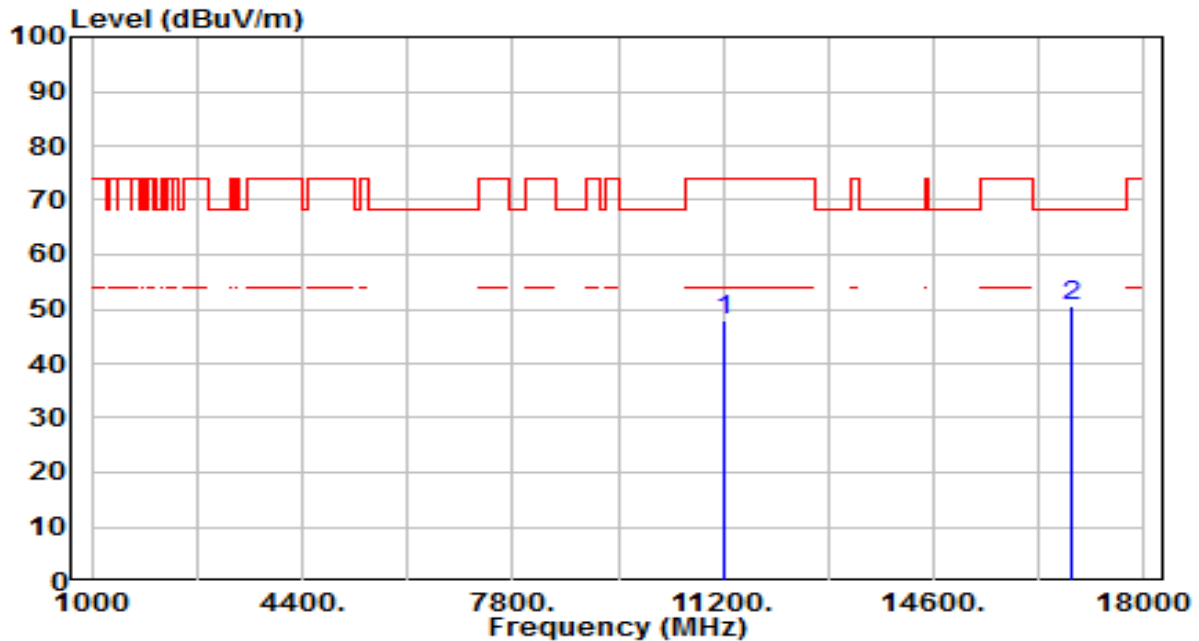


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11220.000	41.98	5.79	47.77	-26.23	74.00	100	315	Peak
2	* 16830.000	43.56	7.17	50.73	-17.47	68.20	100	35	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

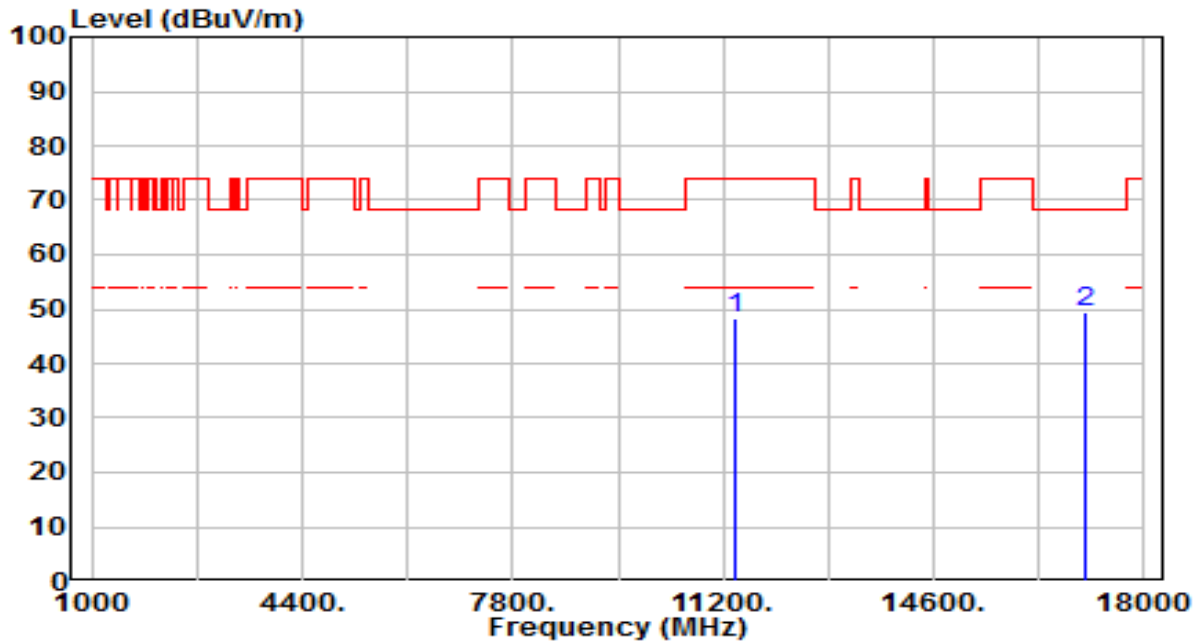


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.52	5.96	48.48	-25.52	74.00	100	100	Peak
2	* 17070.000	43.14	6.26	49.40	-18.80	68.20	100	225	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 138_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

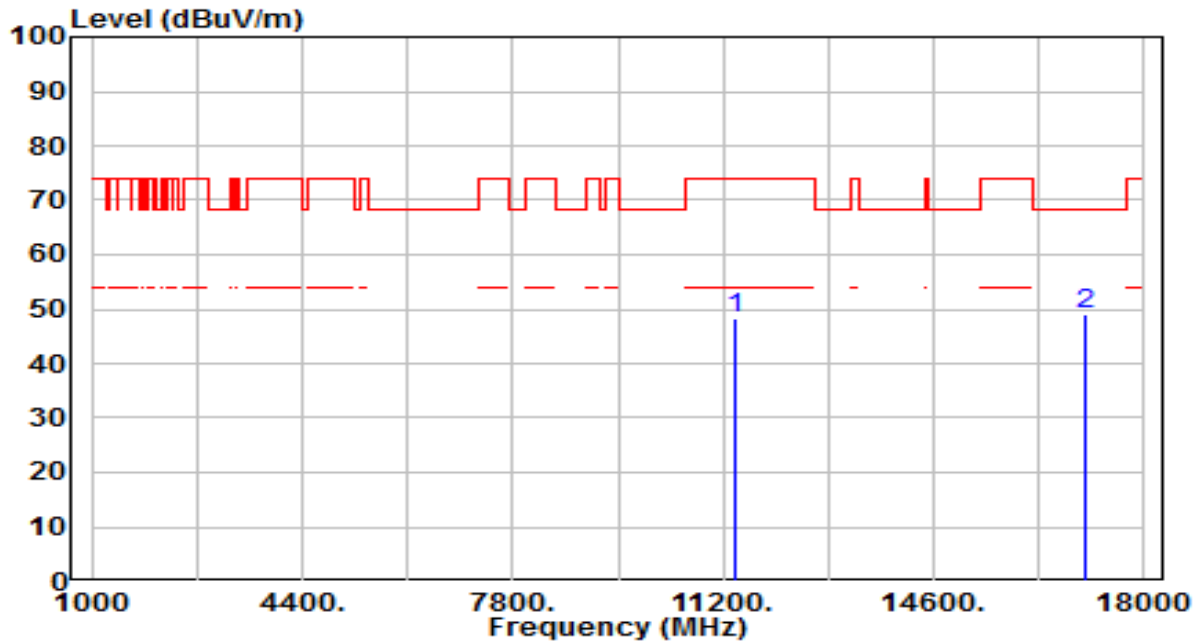


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11380.000	42.45	5.96	48.41	-25.59	74.00	100	15	Peak
2	* 17070.000	42.85	6.26	49.11	-19.09	68.20	100	65	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

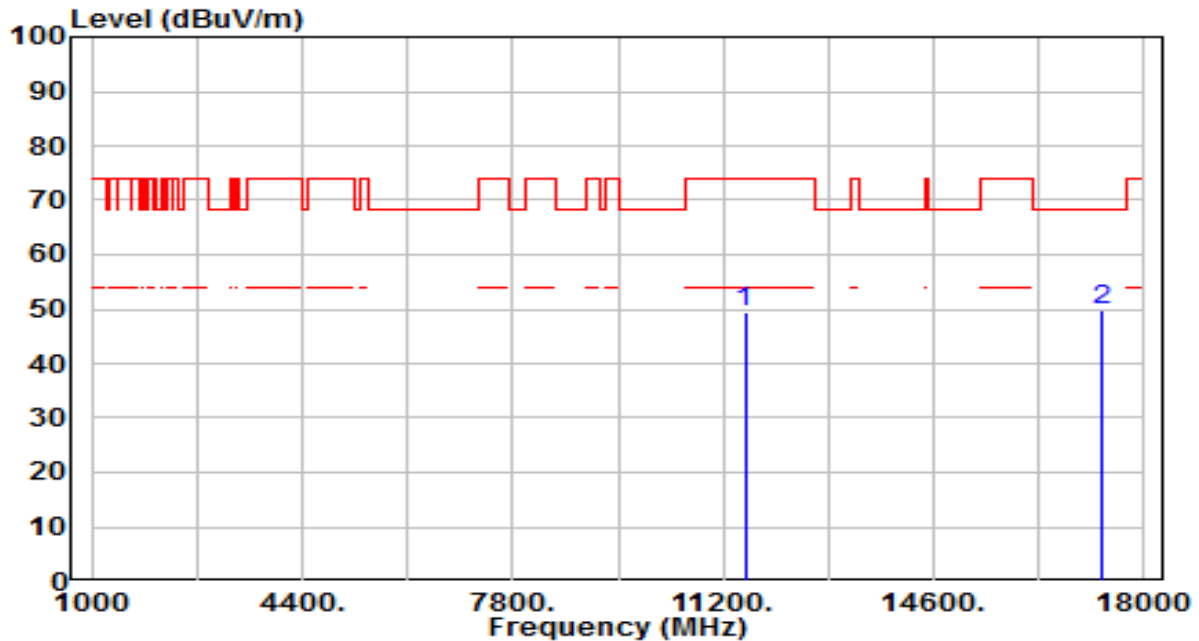


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	43.44	5.92	49.36	-24.64	74.00	100	300	Peak
2	* 17325.000	44.36	5.60	49.96	-18.24	68.20	100	300	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

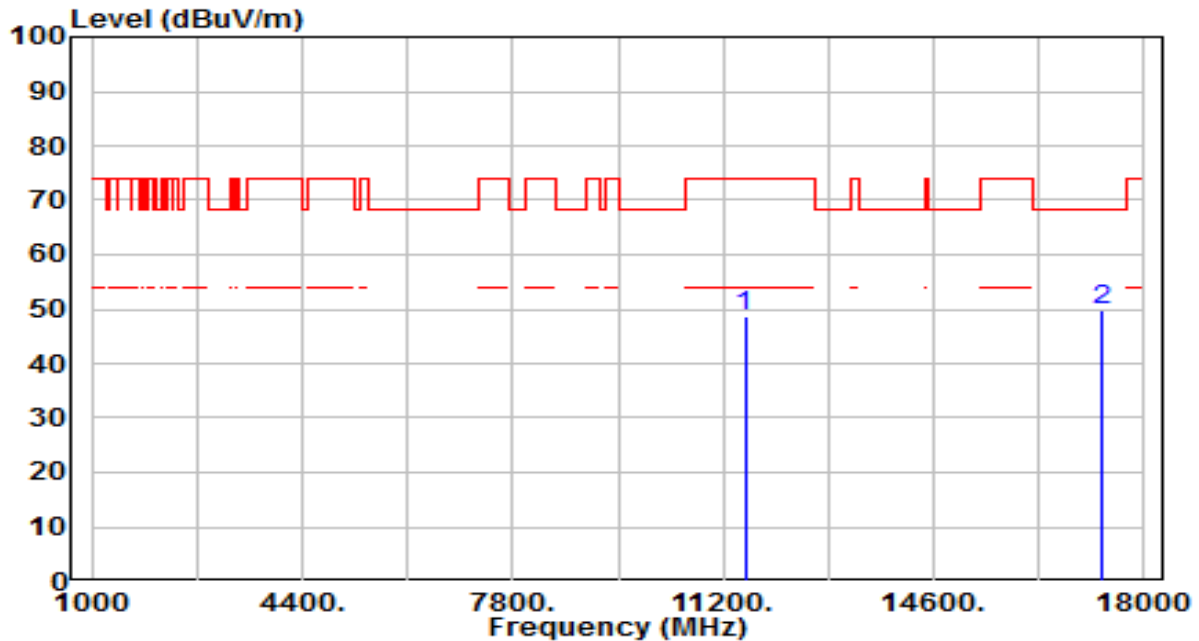


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11550.000	42.67	5.92	48.59	-25.41	74.00	100	95	Peak
2	* 17325.000	44.09	5.60	49.69	-18.51	68.20	100	245	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

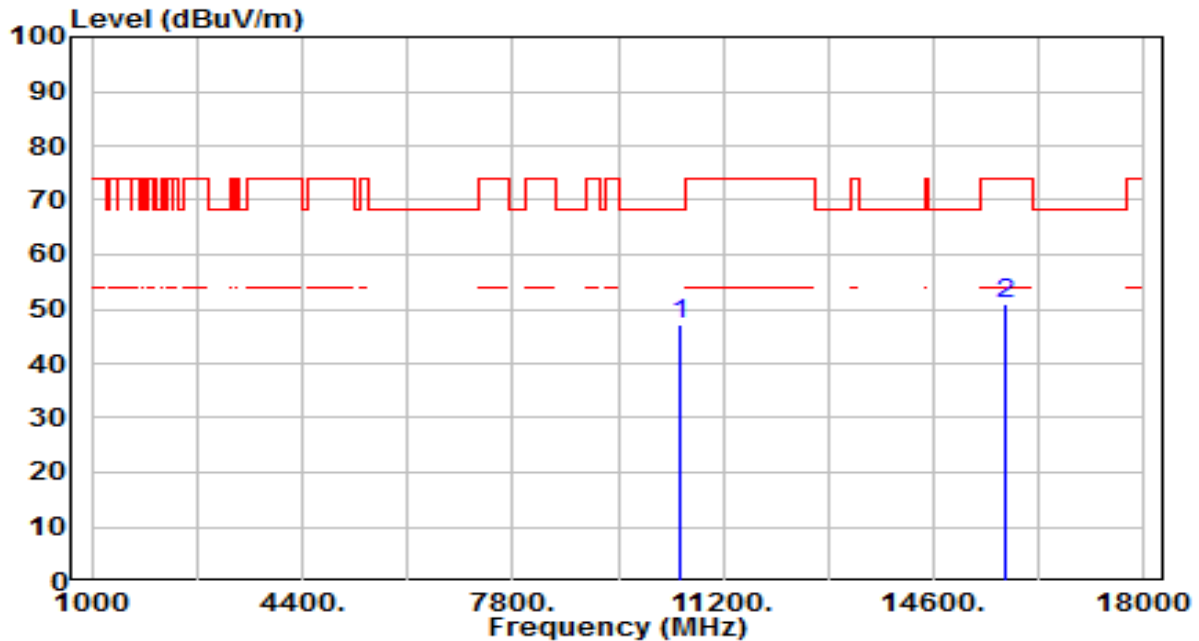


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	42.06	5.25	47.31	-20.89	68.20	100	160	Peak
2		15750.000	44.21	6.76	50.97	-23.03	74.00	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

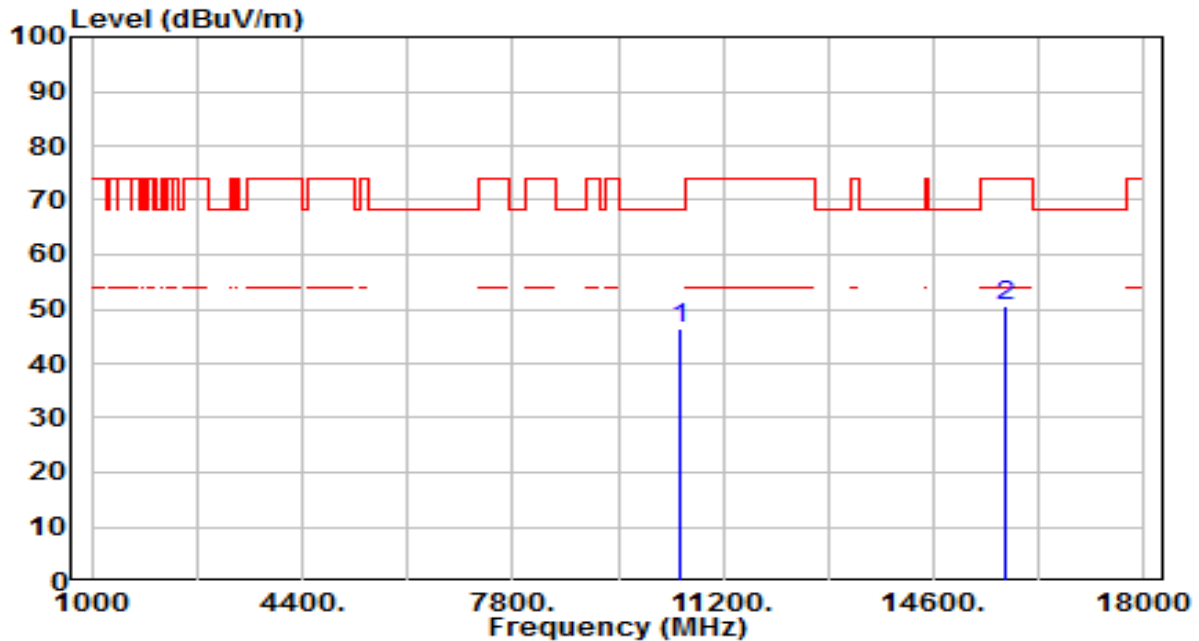


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	10500.000	41.29	5.25	46.54	-21.66	68.20	100	220	Peak
2		15750.000	43.98	6.76	50.74	-23.26	74.00	100	340	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

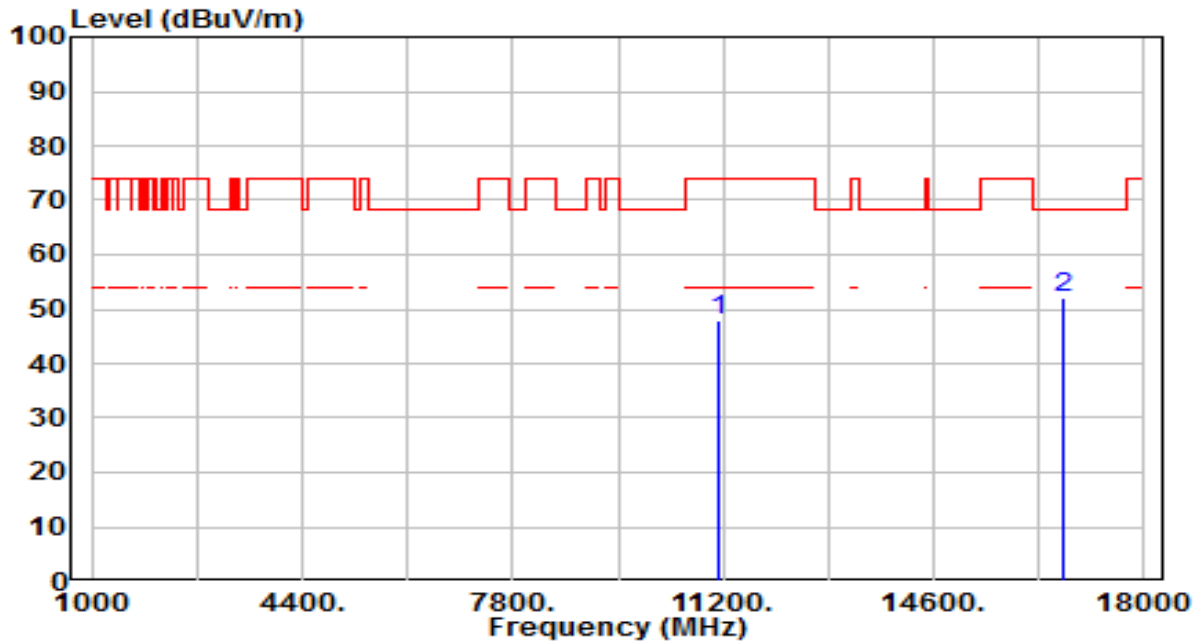


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		11140.000	42.22	5.71	47.92	-26.08	74.00	100	220	Peak
2	*	16710.000	44.23	7.67	51.90	-16.30	68.20	100	15	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

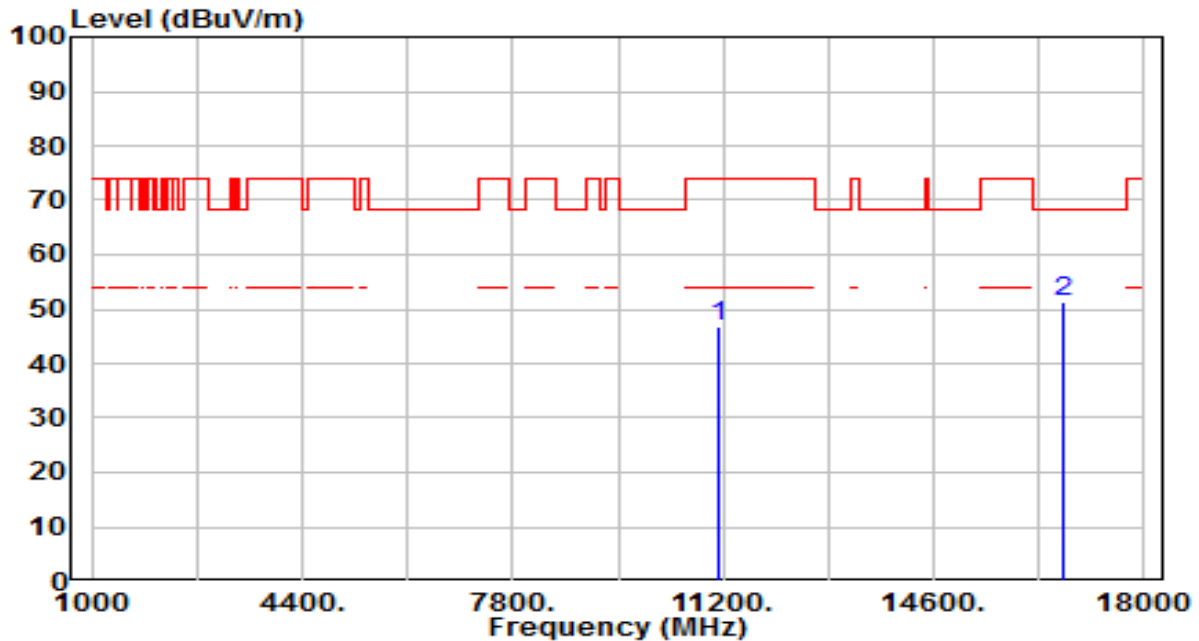


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	11140.000	41.12	5.71	46.83	-27.17	74.00	100	270	Peak
2	* 16710.000	43.80	7.67	51.47	-16.73	68.20	100	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

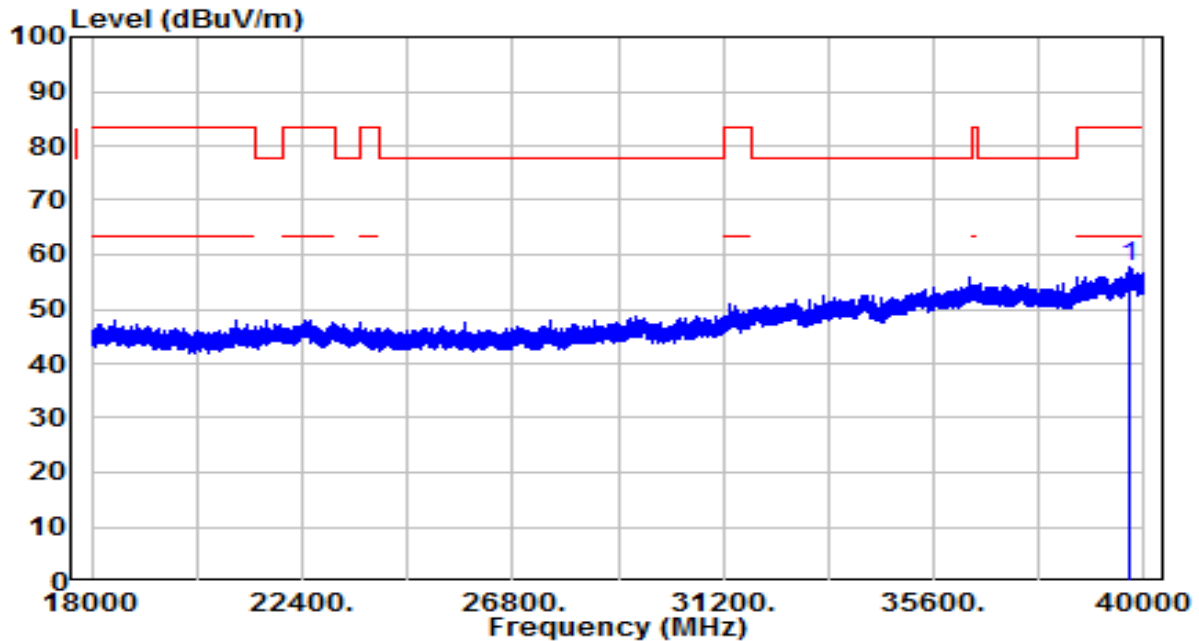


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39716.060	33.72	23.99	57.71	-25.79	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	BBHA 9170	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Ares
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

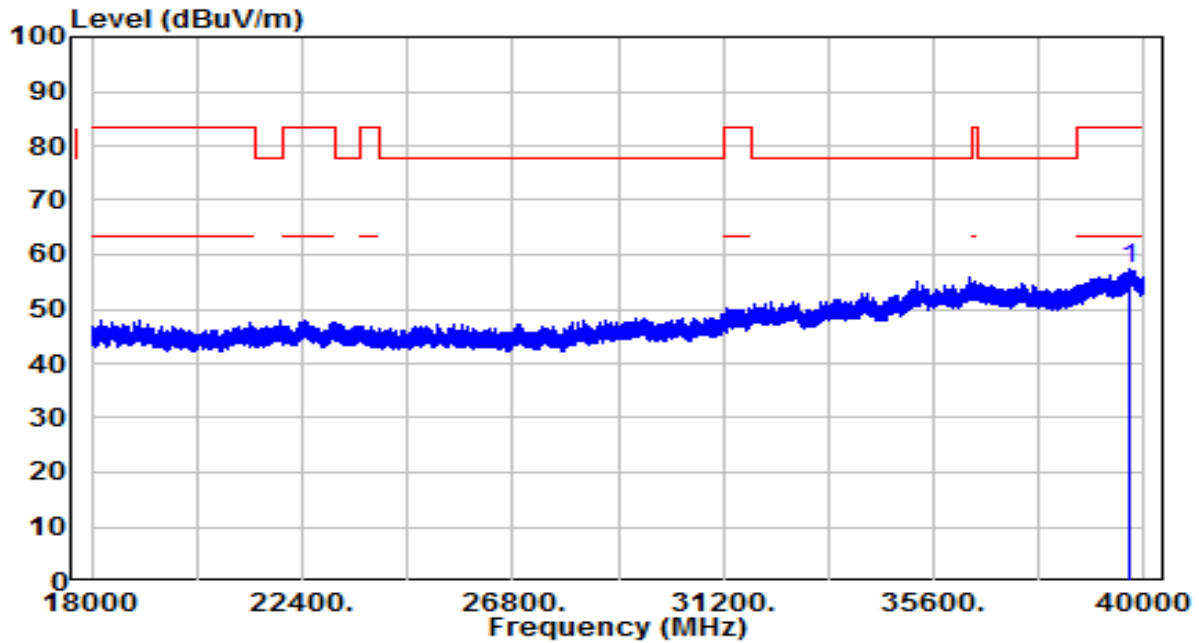

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	39673.440	33.47	23.94	57.41	-26.09	83.50	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.9. Radiated Restricted Band Edge Measurement

7.9.1. Test Limit

For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

Frequency (MHz)	Frequency (MHz)	Frequency (MHz)	Frequency (GHz)
0.090 - 0.110	16.42-16.423	399.9 - 410	4.5-5.15
¹ 0.495 - 0.505	16.69475-16.69525	608 - 614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960 - 1240	7.25-7.75
4.125-4.128	25.5 -25.67	1300 - 1427	8.025 - 8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660 - 1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123 - 138	2200 - 2300	14.47-14.5
8.291-8.294	149.9-150.05	2310 - 2390	15.35-16.2
8.362-8.366	156.52475-156.525	2483.5 - 2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690 - 2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260 - 3267	23.6-24.0
12.29-12.293	167.72-173.2	3332 - 3339	31.2-31.8
12.51975-12.52025	240 - 285	3345.8 - 3358	36.43-36.5
12.57675-12.57725	322-335.4	3600 - 4400	(²)
13.36-13.41	--	--	--

For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing

linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

FCC Part 15 Subpart C Paragraph 15.209		
Frequency [MHz]	Field Strength [uV/m]	Measured Distance [Meters]
0.009 - 0.490	2400/F (kHz)	300
0.490 - 1.705	24000/F (kHz)	30
1.705 - 30	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

7.9.2.Test Procedure Used

KDB 789033 D02v02r01- Section II)G

7.9.3.Test Setting


Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW; If the EUT is configured to transmit with duty cycle $\geq 98\%$, set $VBW \leq RBW/100$ (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is $< 98\%$, set $VBW \geq 1/T$.
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of $1/x$, where x is the duty cycle.

7.9.4. Test Setup

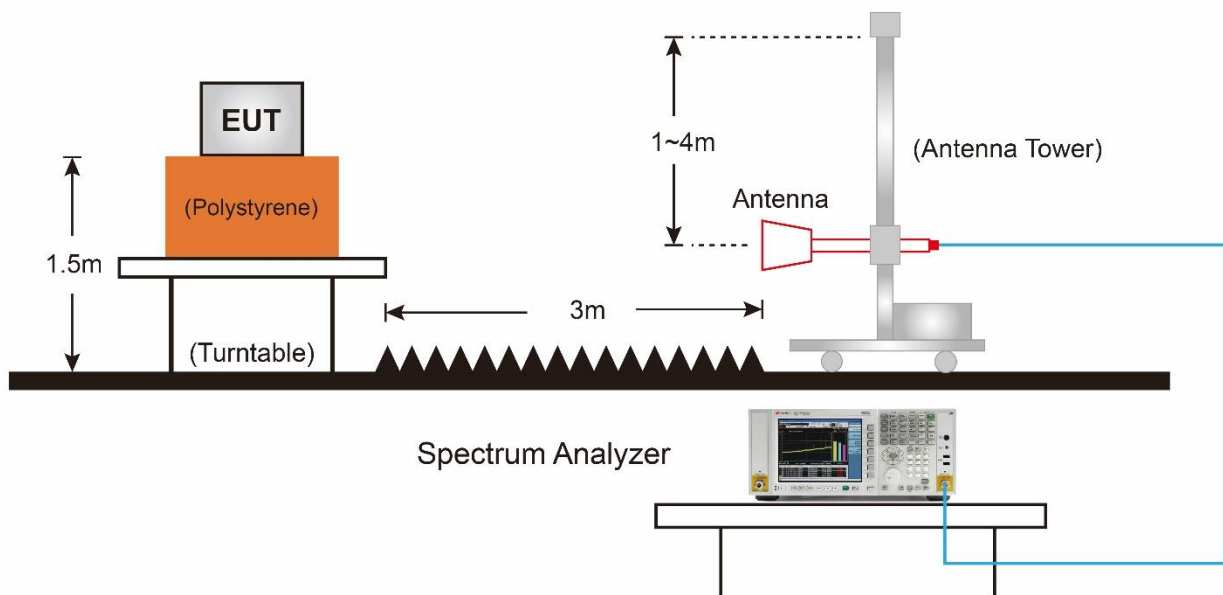

7.9.5. Test Result

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

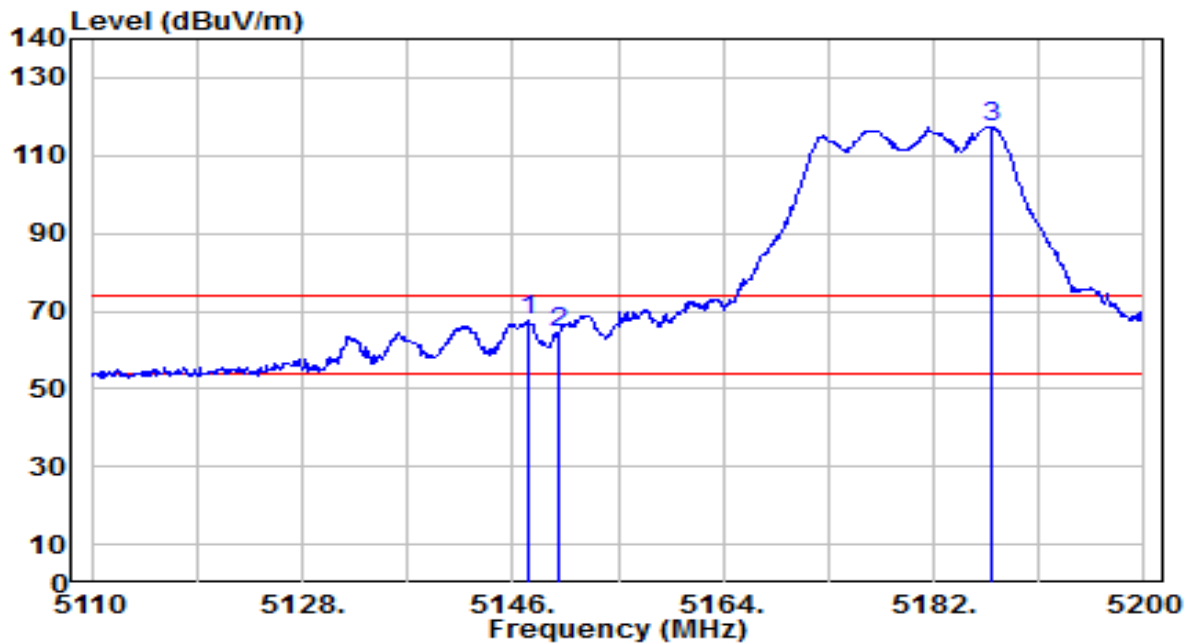


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.350	66.74	0.79	67.53	-6.47	74.00	150	175	Peak
2		5150.000	63.59	0.80	64.38	-9.62	74.00	150	175	Peak
3		5186.950	116.51	0.84	117.36	N/A	N/A	150	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

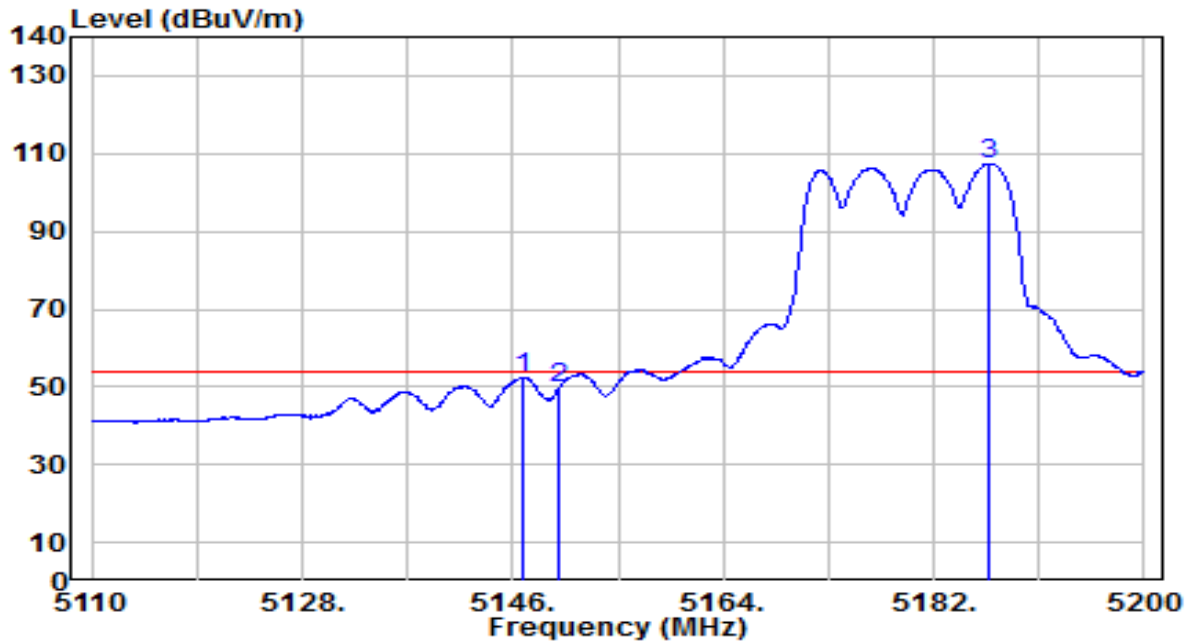


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.900	51.69	0.79	52.48	-1.52	54.00	150	175	Average
2		5150.000	48.85	0.80	49.65	-4.35	54.00	150	175	Average
3		5186.680	106.56	0.84	107.40	N/A	N/A	150	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

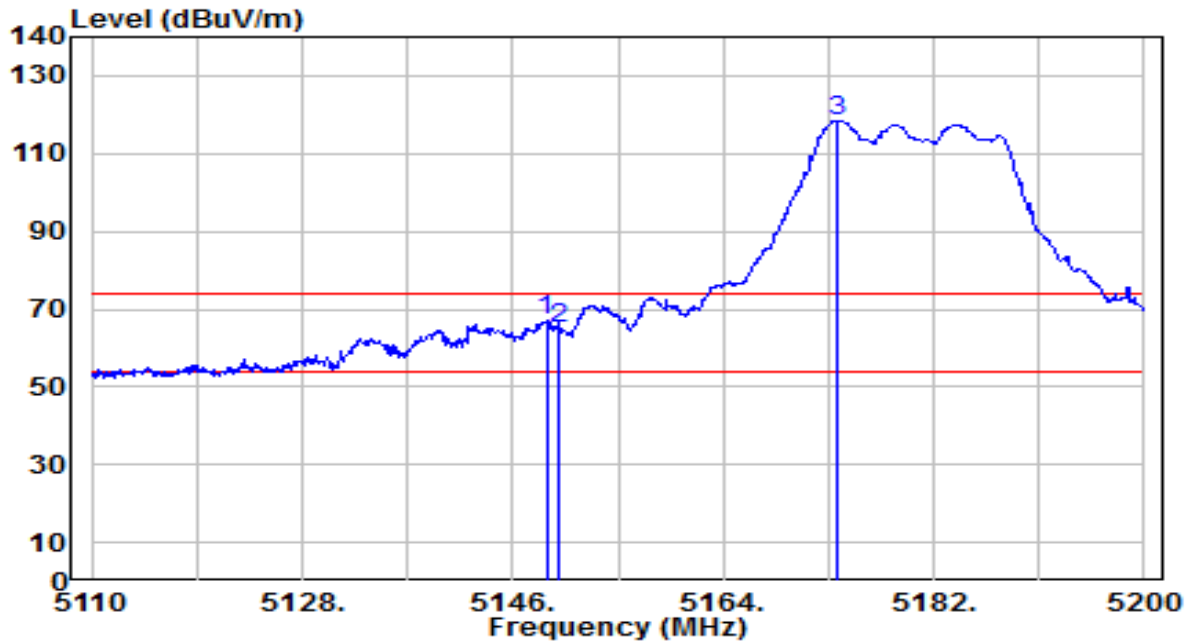


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.880	66.05	0.79	66.85	-7.15	74.00	200	60	Peak
2		5150.000	63.97	0.80	64.76	-9.24	74.00	200	60	Peak
3		5173.720	117.62	0.83	118.44	N/A	N/A	200	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

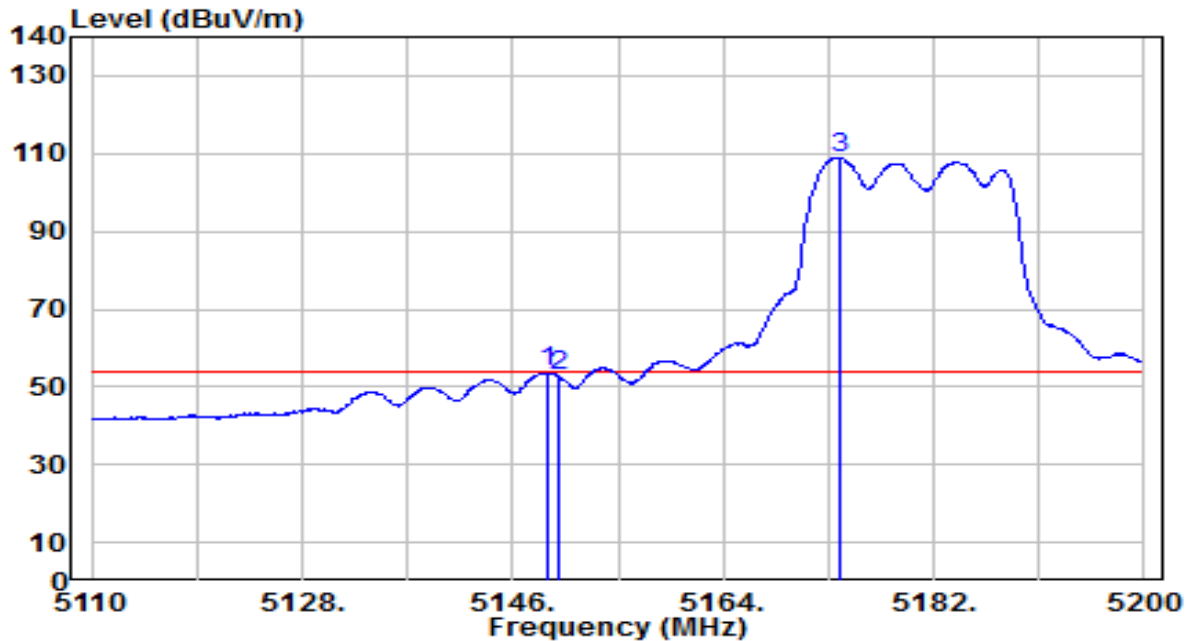


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.970	53.03	0.79	53.83	-0.17	54.00	200	60	Average
2		5150.000	51.98	0.80	52.77	-1.23	54.00	200	60	Average
3		5173.990	108.03	0.83	108.85	N/A	N/A	200	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

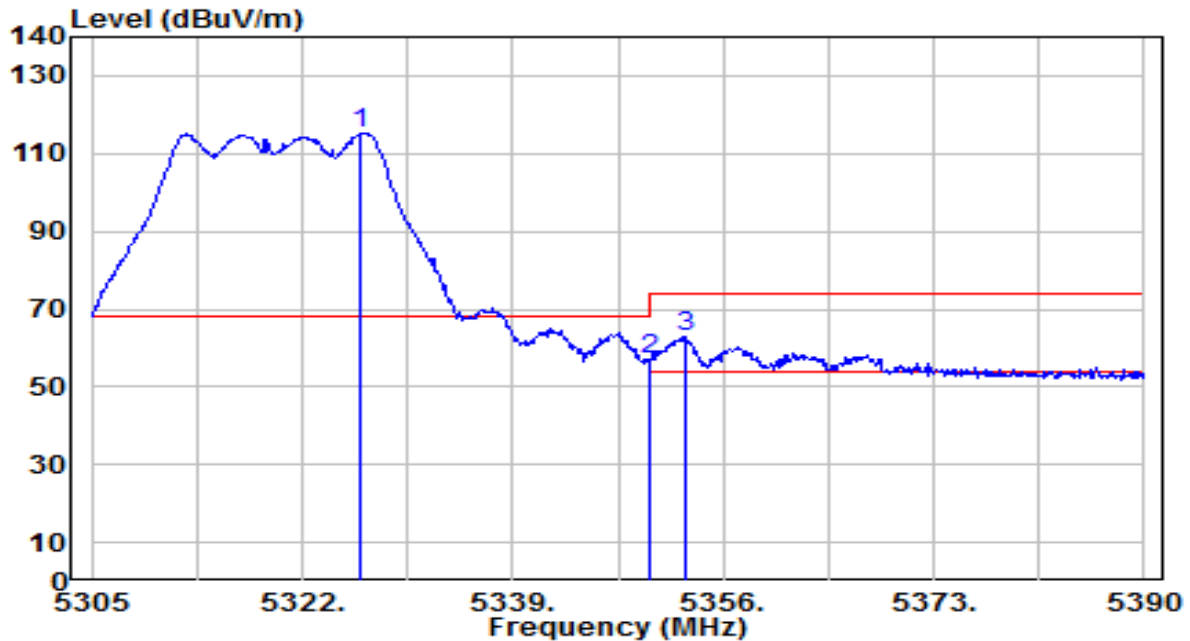


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5326.675	114.75	0.64	115.39	N/A	N/A	125	175	Peak
2	5350.000	56.25	0.59	56.84	-17.16	74.00	125	175	Peak
3	* 5352.855	62.47	0.59	63.06	-10.94	74.00	125	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

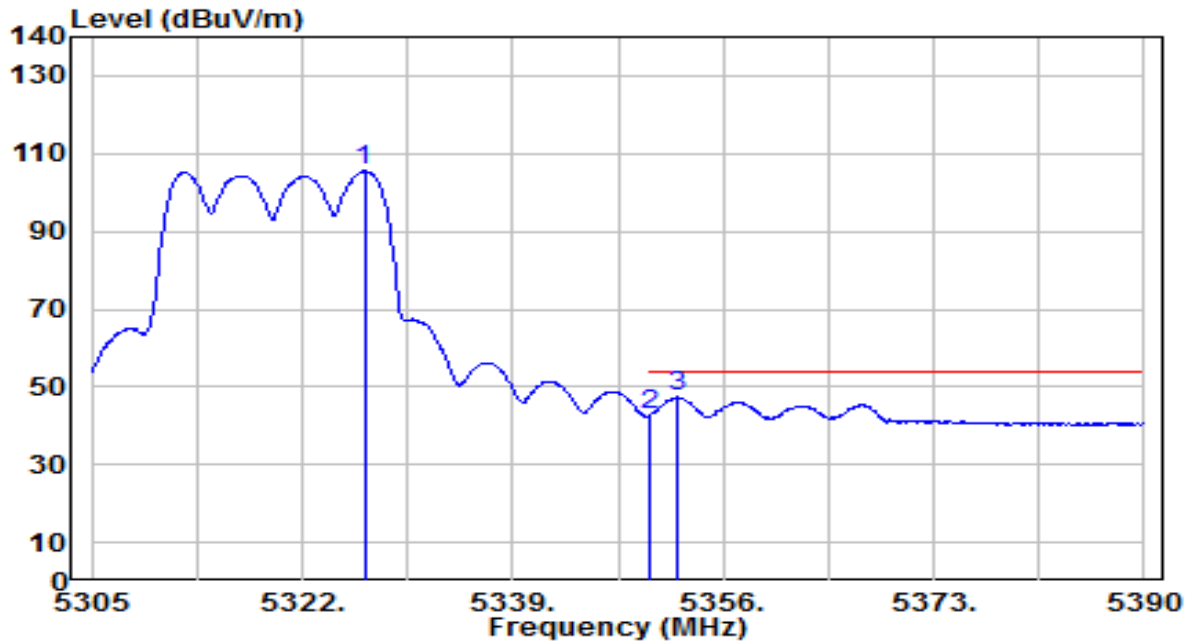


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.015	104.83	0.63	105.46	N/A	N/A	125	175	Average
2	5350.000	42.15	0.59	42.74	-11.26	54.00	125	175	Average
3	* 5352.345	46.73	0.59	47.31	-6.69	54.00	125	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

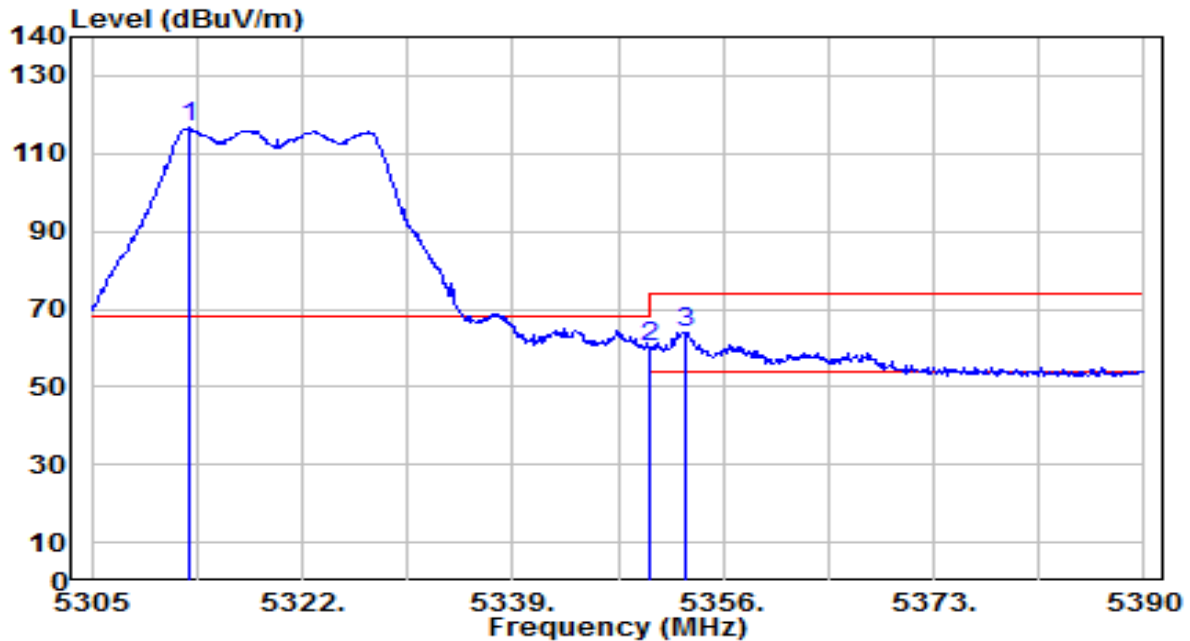


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.905	115.95	0.66	116.60	N/A	N/A	200	100	Peak
2	5350.000	59.82	0.59	60.42	-13.58	74.00	200	100	Peak
3	* 5352.855	63.46	0.59	64.05	-9.95	74.00	200	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

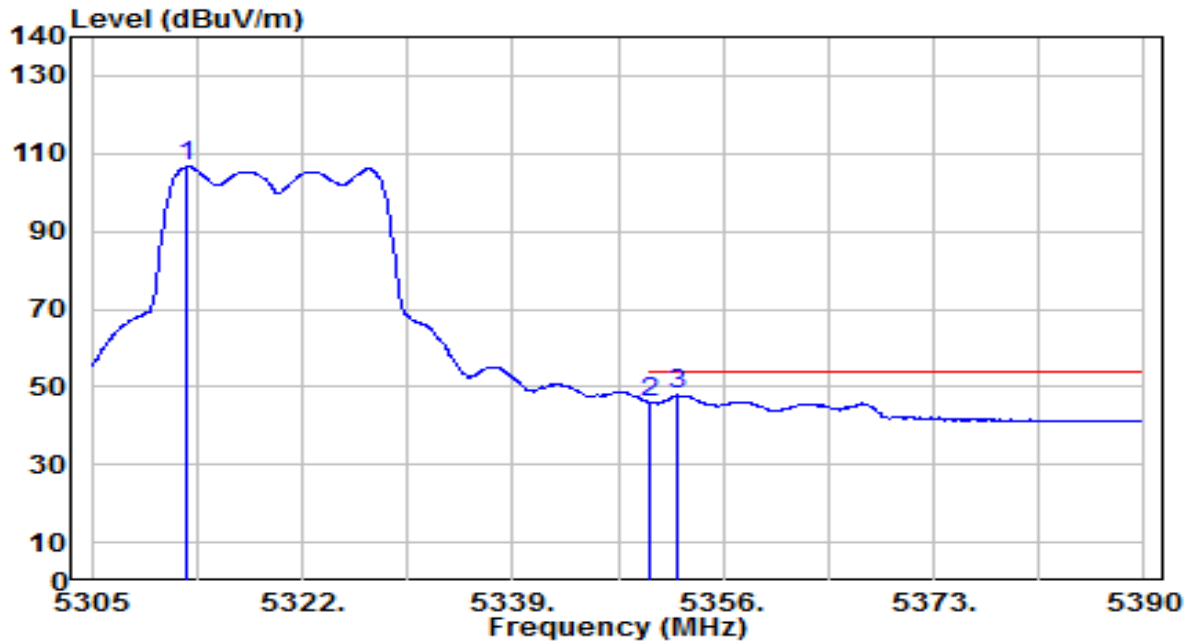


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5312.735	105.95	0.66	106.61	N/A	N/A	200	100	Average
2	5350.000	45.60	0.59	46.20	-7.80	54.00	200	100	Average
3	* 5352.345	47.38	0.59	47.97	-6.03	54.00	200	100	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

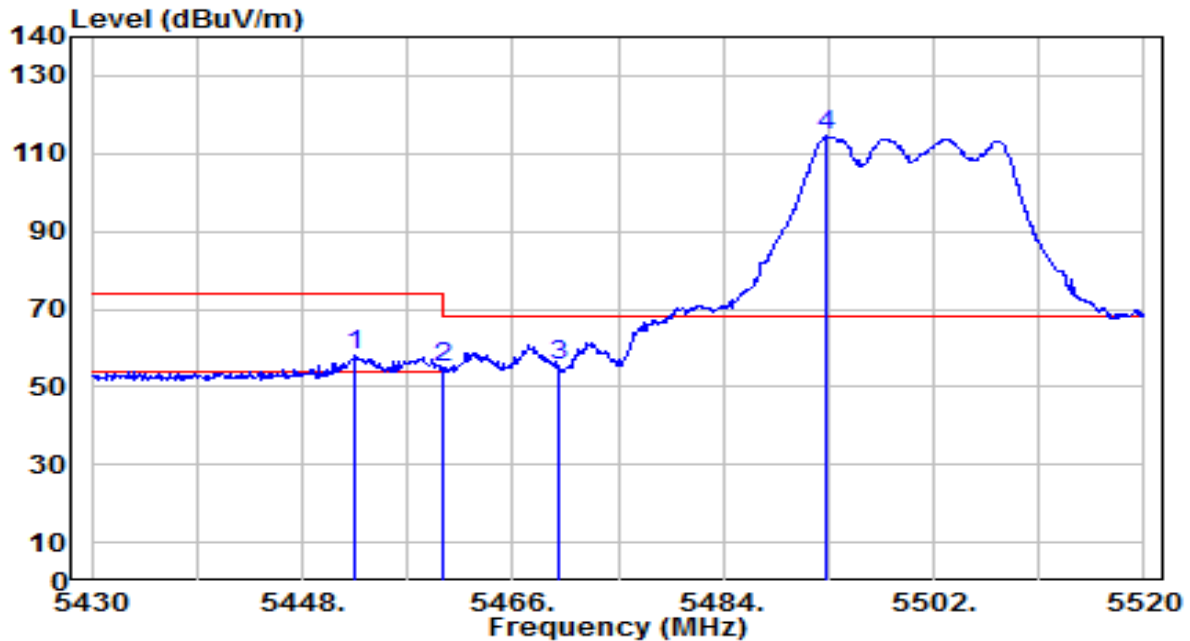


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.590	57.36	0.73	58.09	-15.91	74.00	185	165	Peak
2	5460.000	54.25	0.76	55.01	-18.99	74.00	185	165	Peak
3	* 5470.000	54.89	0.80	55.69	-12.51	68.20	185	165	Peak
4	5492.910	113.55	0.90	114.45	N/A	N/A	185	165	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

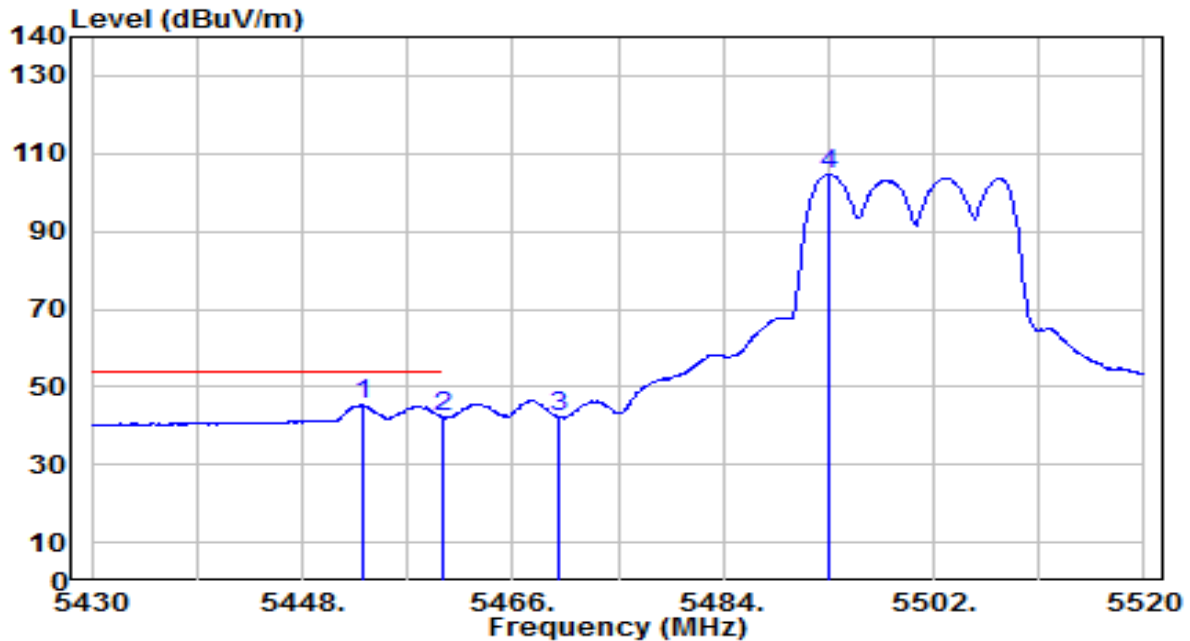


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.130	44.95	0.73	45.68	-8.32	54.00	185	165	Average
2		5460.000	41.65	0.76	42.41	-11.59	54.00	185	165	Average
3		5470.000	41.64	0.80	42.44	N/A	N/A	185	165	Average
4		5493.090	103.76	0.90	104.66	N/A	N/A	185	165	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

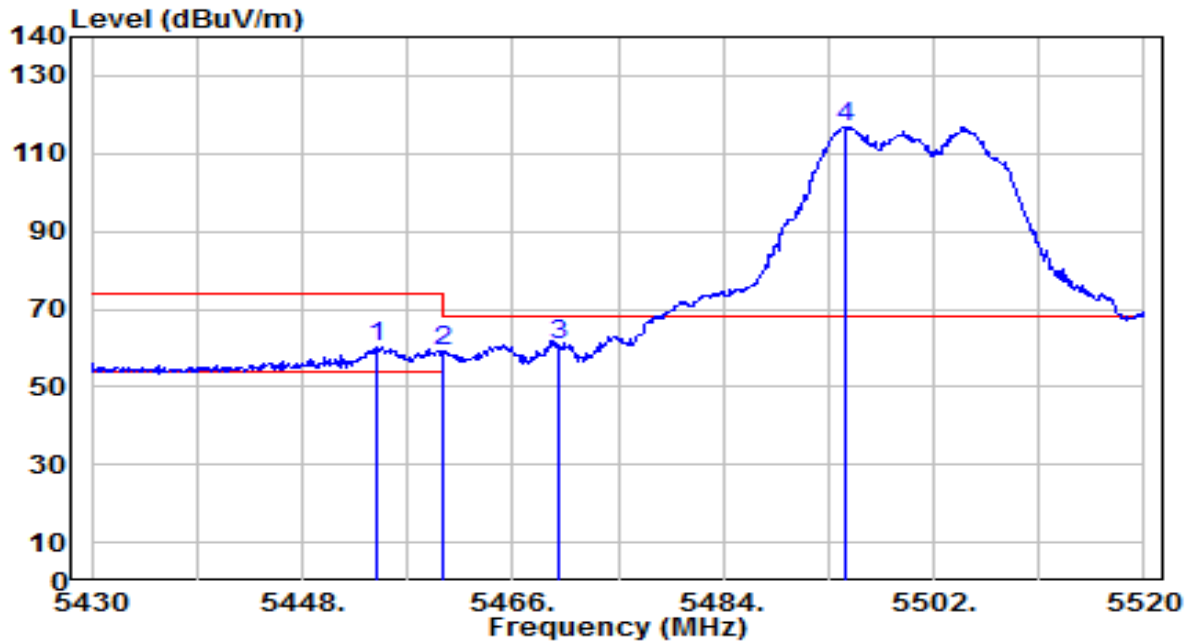


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.300	59.36	0.74	60.10	-13.90	74.00	175	355	Peak
2	5460.000	58.22	0.76	58.98	-15.02	74.00	175	355	Peak
3	* 5470.000	59.96	0.80	60.76	-7.44	68.20	175	355	Peak
4	5494.350	115.76	0.91	116.67	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

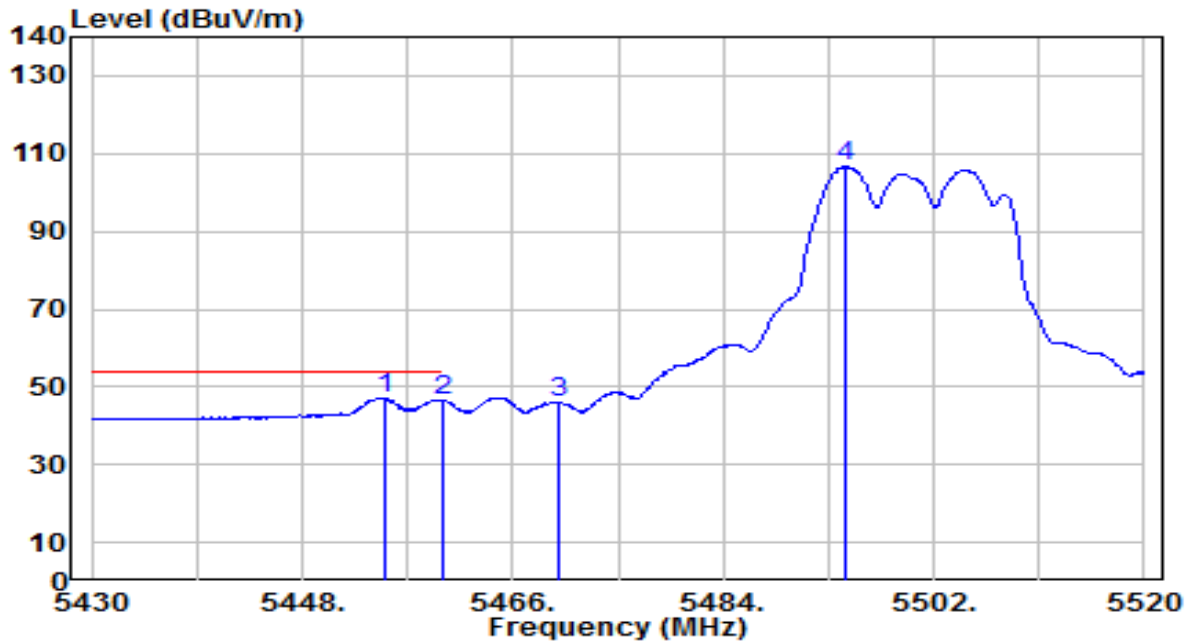


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.020	46.51	0.74	47.25	-6.75	54.00	175	355	Average
2		5460.000	45.61	0.76	46.37	-7.63	54.00	175	355	Average
3		5470.000	44.93	0.80	45.73	N/A	N/A	175	355	Average
4		5494.440	105.59	0.91	106.50	N/A	N/A	175	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

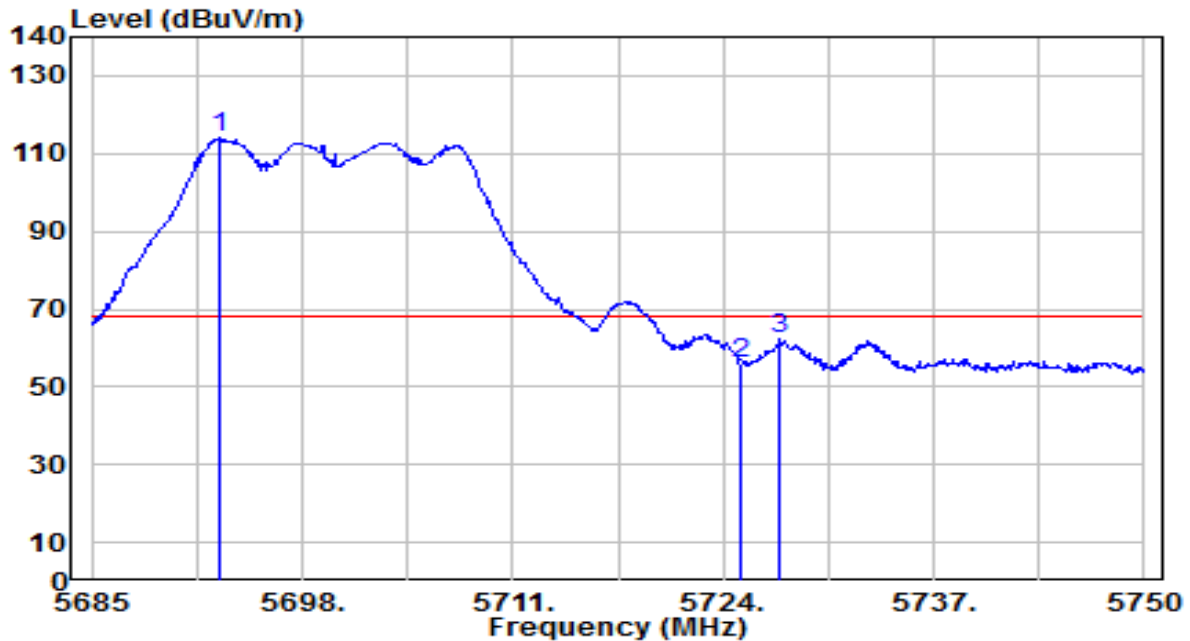


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5692.865	112.26	1.76	114.02	N/A	N/A	180	170	Peak
2	5725.000	54.28	1.89	56.17	-12.03	68.20	180	170	Peak
3	* 5727.445	60.33	1.90	62.23	-5.97	68.20	180	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

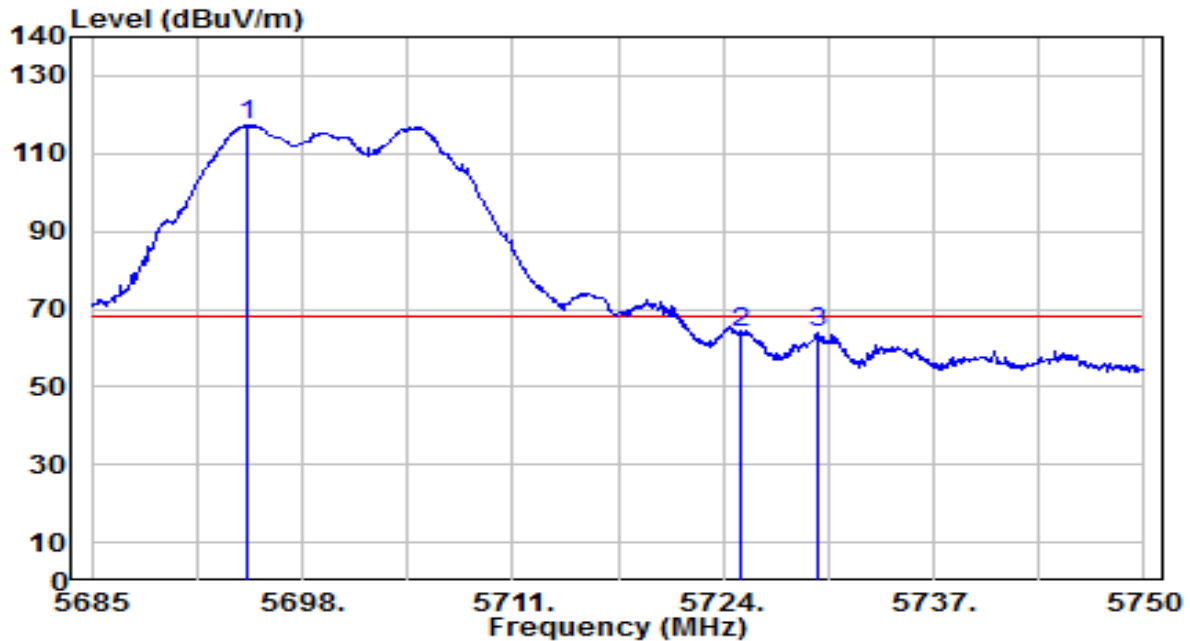


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5694.620	115.73	1.77	117.50	N/A	N/A	160	355	Peak
2	*	5725.000	62.07	1.89	63.96	-4.24	68.20	160	355	Peak
3		5729.915	61.88	1.91	63.78	-4.42	68.20	160	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

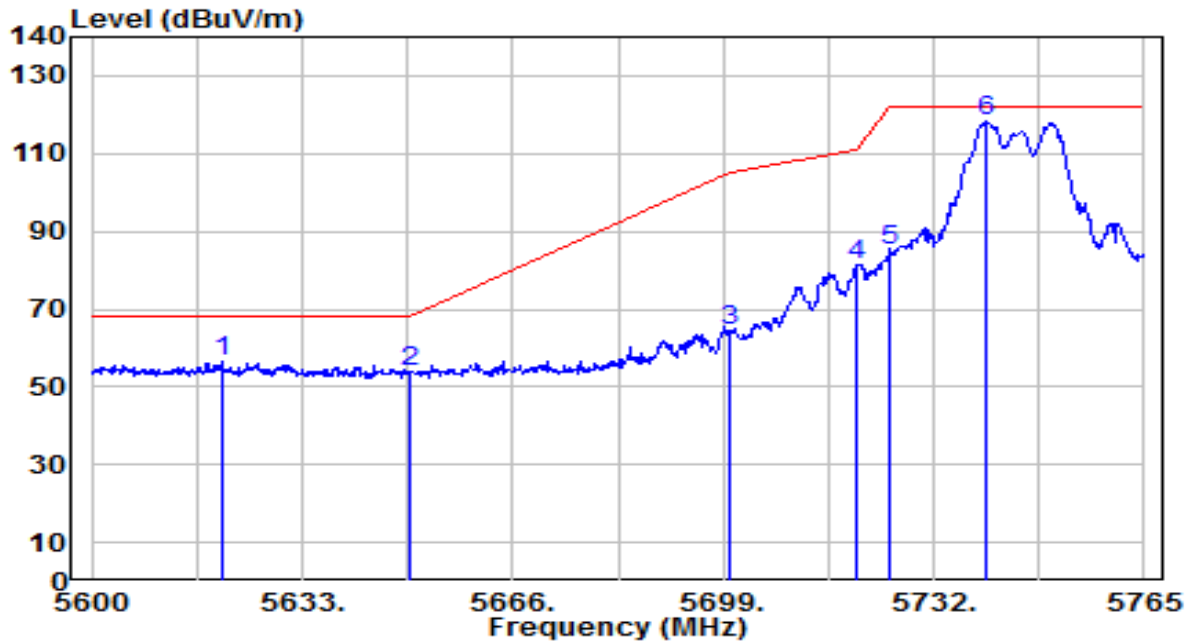


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5620.295	54.87	1.47	56.33	-11.87	68.20	175	175	Peak
2		5650.000	52.54	1.59	54.13	-14.07	68.20	175	175	Peak
3		5700.000	62.43	1.79	64.22	-40.98	105.20	175	175	Peak
4		5720.000	79.33	1.87	81.20	-29.60	110.80	175	175	Peak
5		5725.000	83.06	1.89	84.95	-37.25	122.20	175	175	Peak
6		5740.250	116.15	1.95	118.10	N/A	N/A	175	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

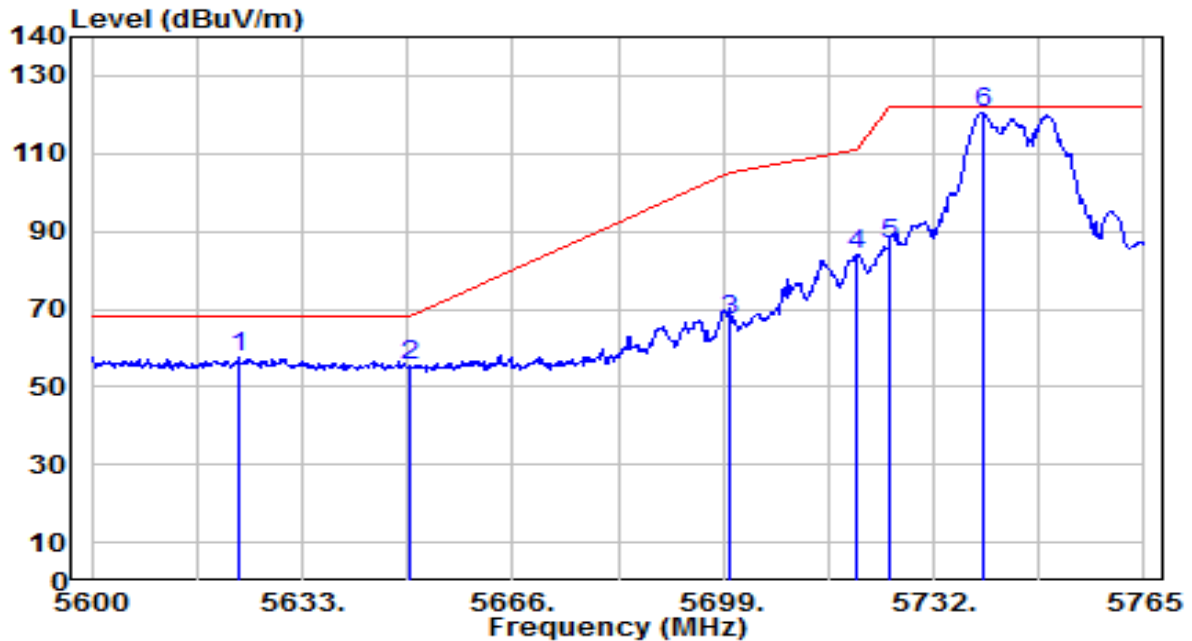


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5622.935	56.06	1.48	57.53	-10.67	68.20	170	355	Peak
2		5650.000	53.90	1.59	55.49	-12.71	68.20	170	355	Peak
3		5700.000	65.20	1.79	66.99	-38.21	105.20	170	355	Peak
4		5720.000	82.13	1.87	83.99	-26.81	110.80	170	355	Peak
5		5725.000	84.94	1.89	86.83	-35.37	122.20	170	355	Peak
6		5739.590	118.66	1.95	120.61	N/A	N/A	170	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

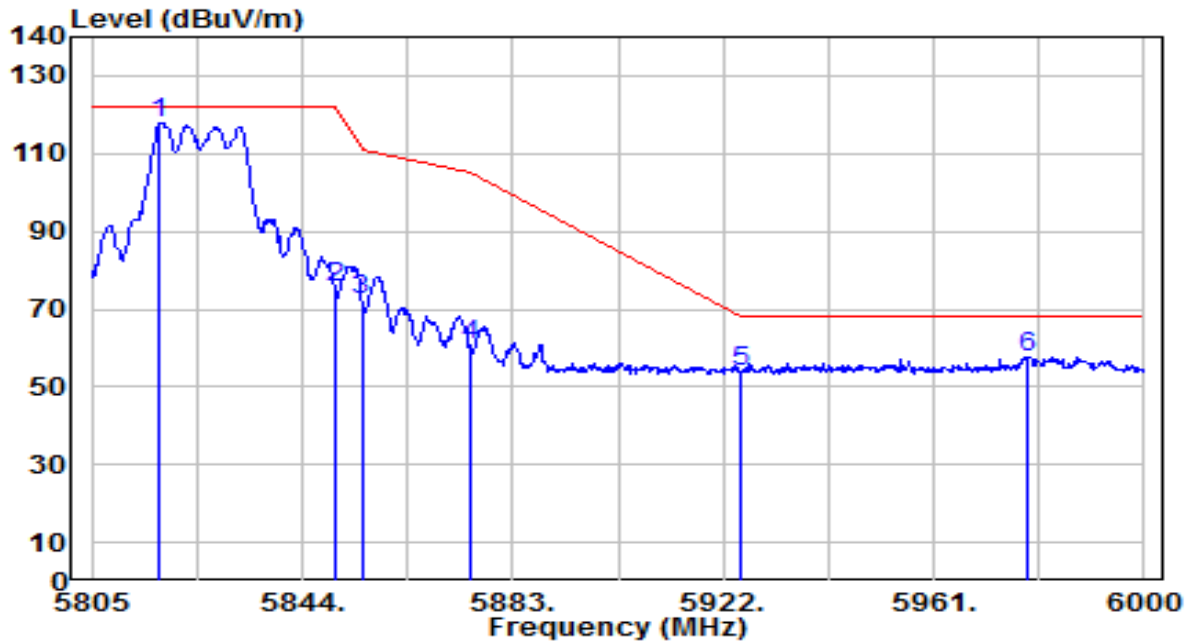


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5817.675	115.67	2.22	117.89	N/A	N/A	165	170	Peak
2	5850.000	73.33	2.27	75.60	-46.60	122.20	165	170	Peak
3	5855.000	70.00	2.28	72.27	-38.53	110.80	165	170	Peak
4	5875.000	58.61	2.31	60.92	-44.28	105.20	165	170	Peak
5	5925.000	51.27	2.38	53.65	-14.55	68.20	165	170	Peak
6	* 5978.550	55.35	2.47	57.81	-10.39	68.20	165	170	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11a_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

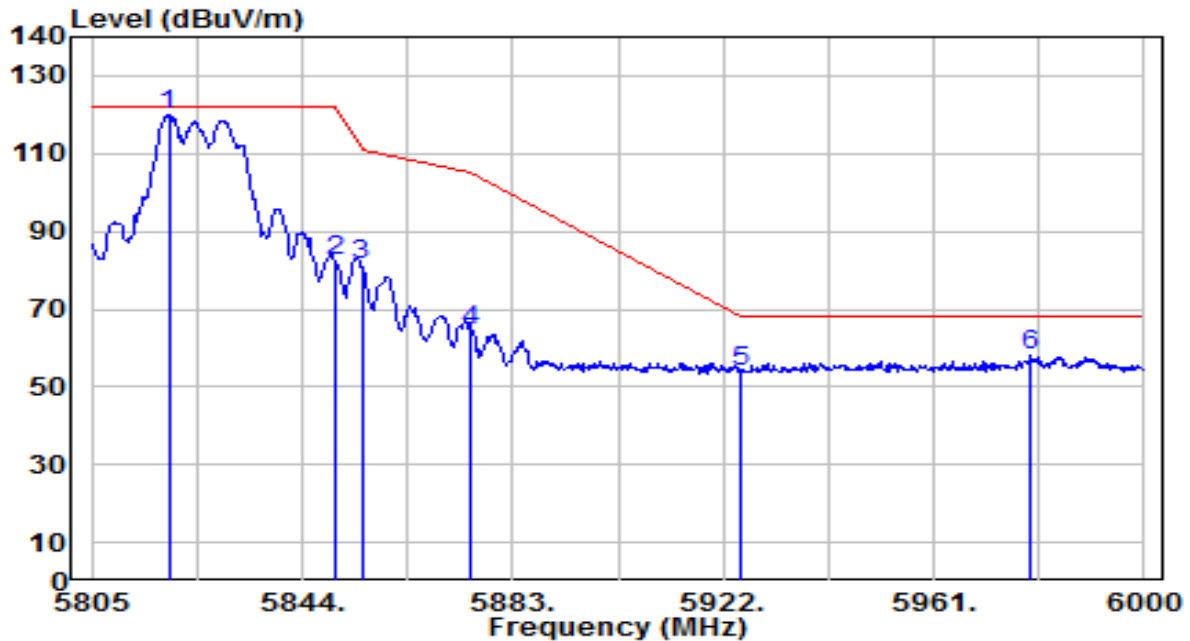


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5819.235	117.54	2.22	119.76	N/A	N/A	160	350	Peak
2	5850.000	80.04	2.27	82.31	-39.89	122.20	160	350	Peak
3	5855.000	79.31	2.28	81.59	-29.21	110.80	160	350	Peak
4	5875.000	61.99	2.31	64.30	-40.90	105.20	160	350	Peak
5	5925.000	51.71	2.38	54.10	-14.10	68.20	160	350	Peak
6	* 5978.940	55.78	2.47	58.25	-9.95	68.20	160	350	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

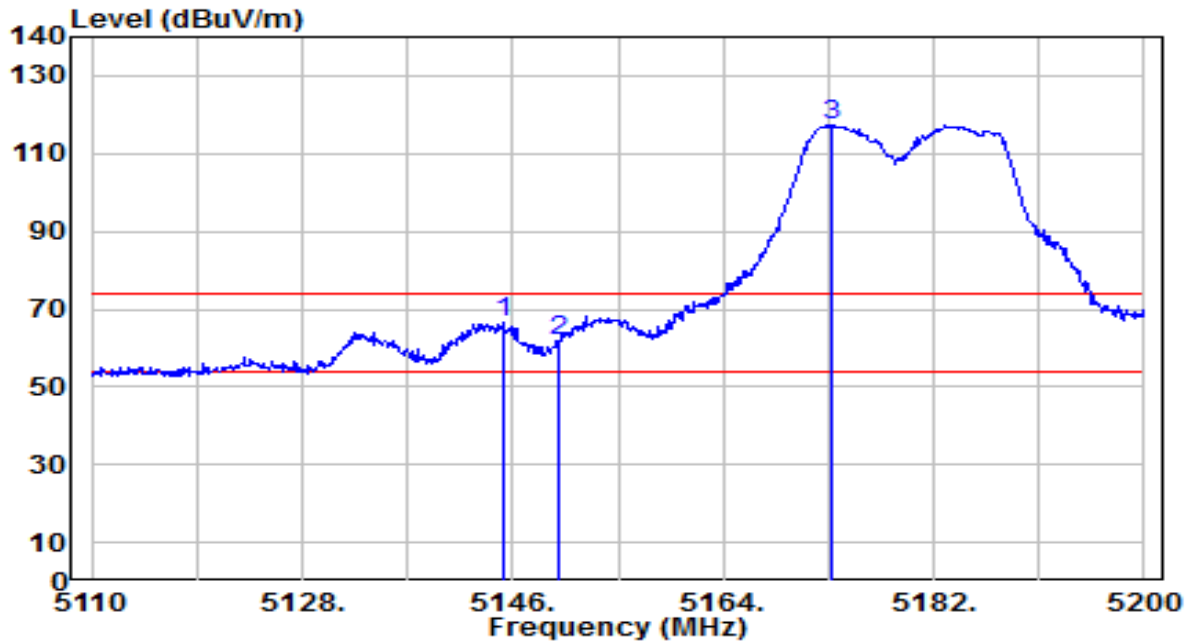


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.190	65.58	0.79	66.37	-7.63	74.00	150	175	Peak
2		5150.000	60.95	0.80	61.74	-12.26	74.00	150	175	Peak
3		5173.270	116.42	0.82	117.24	N/A	N/A	150	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

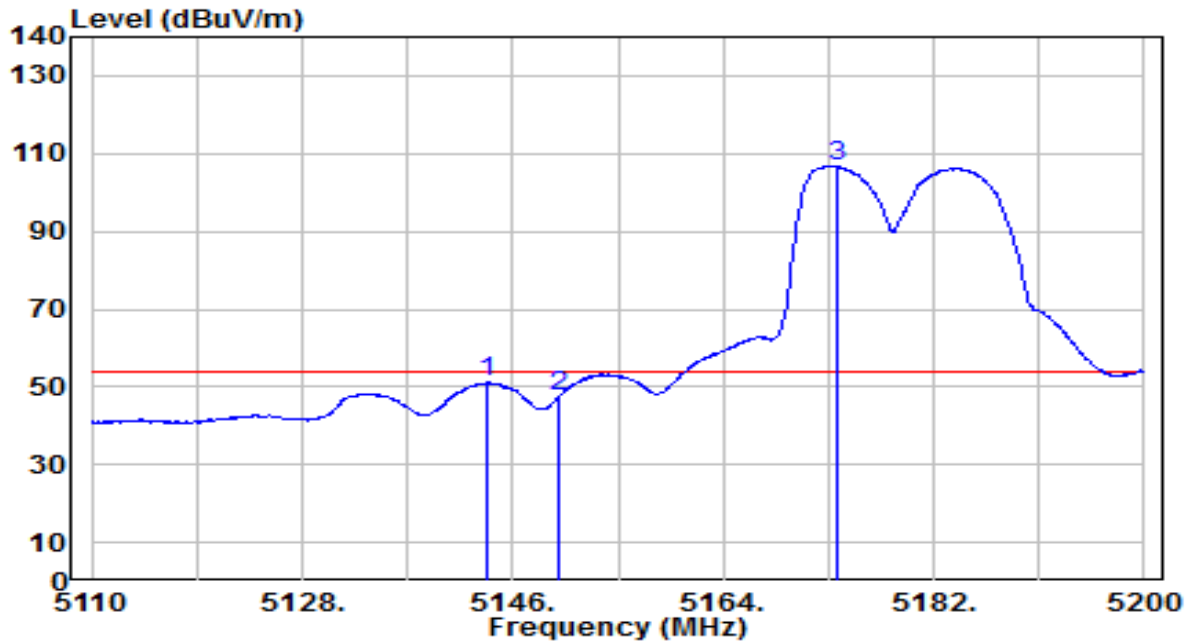


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.750	50.40	0.79	51.19	-2.81	54.00	150	175	Average
2		5150.000	46.65	0.80	47.45	-6.55	54.00	150	175	Average
3		5173.810	106.02	0.83	106.85	N/A	N/A	150	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

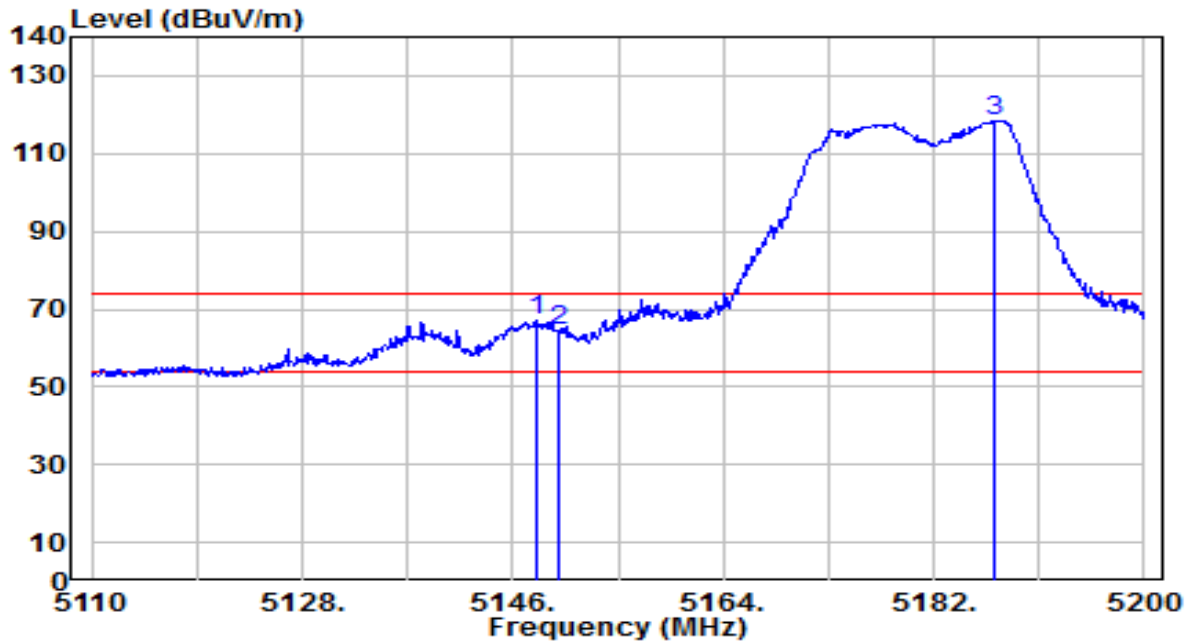


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.070	66.07	0.79	66.86	-7.14	74.00	215	70	Peak
2		5150.000	63.53	0.80	64.33	-9.67	74.00	215	70	Peak
3		5187.130	117.72	0.84	118.56	N/A	N/A	215	70	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

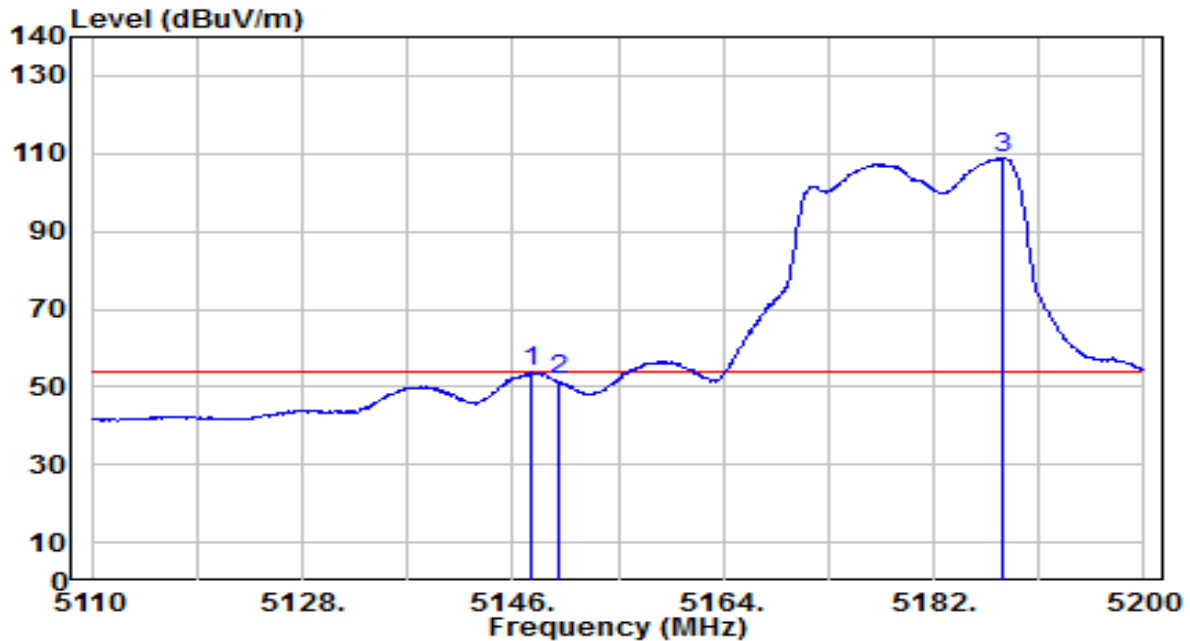


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.530	53.02	0.79	53.82	-0.18	54.00	215	70	Average
2		5150.000	50.81	0.80	51.60	-2.40	54.00	215	70	Average
3		5187.940	108.11	0.84	108.95	N/A	N/A	215	70	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

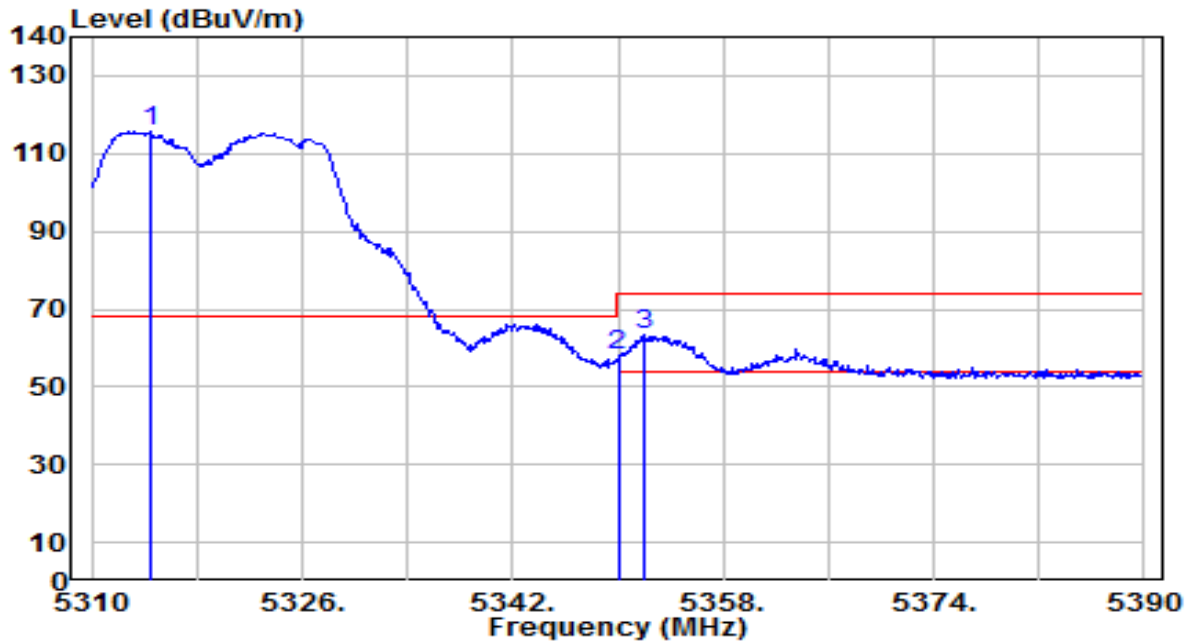


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.400	115.10	0.66	115.75	N/A	N/A	135	180	Peak
2	5350.000	57.43	0.59	58.02	-15.98	74.00	135	180	Peak
3	* 5351.920	62.60	0.59	63.19	-10.81	74.00	135	180	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

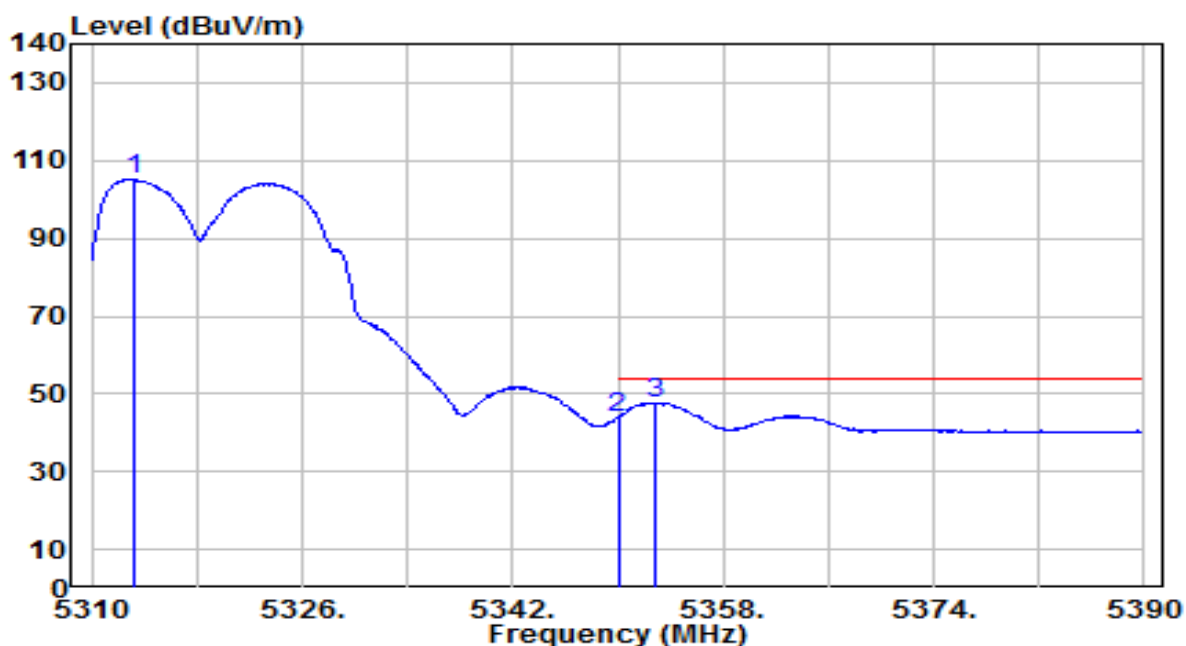


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.280	104.47	0.66	105.13	N/A	N/A	135	180	Average
2	5350.000	43.37	0.59	43.97	-10.03	54.00	135	180	Average
3	* 5352.880	47.21	0.59	47.80	-6.20	54.00	135	180	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

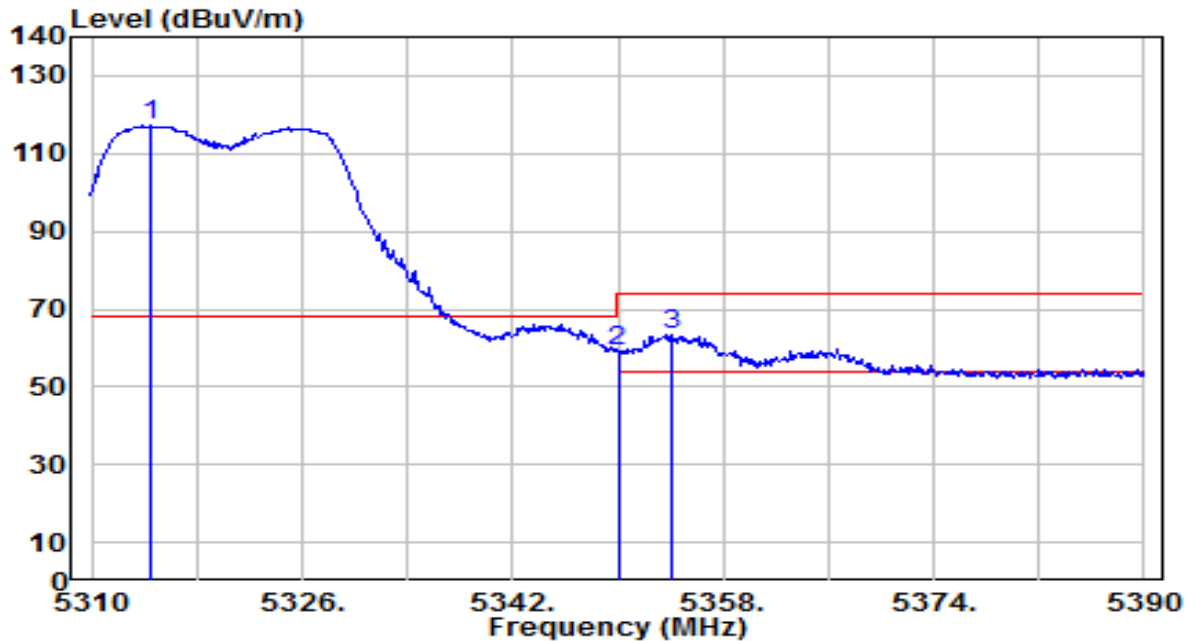


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.500	116.43	0.66	117.08	N/A	N/A	190	95	Peak
2	5350.000	58.37	0.59	58.96	-15.04	74.00	190	95	Peak
3	* 5354.100	62.91	0.59	63.49	-10.51	74.00	190	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

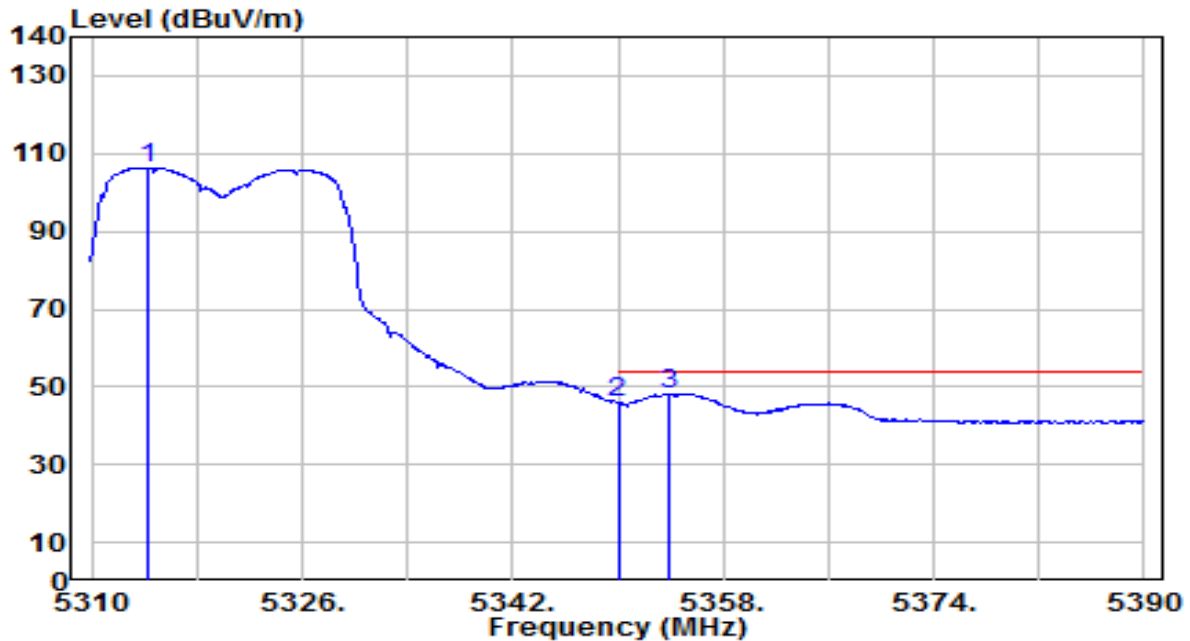


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.200	105.80	0.66	106.45	N/A	N/A	190	95	Average
2	5350.000	45.34	0.59	45.94	-8.06	54.00	190	95	Average
3	* 5353.900	47.67	0.59	48.26	-5.74	54.00	190	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

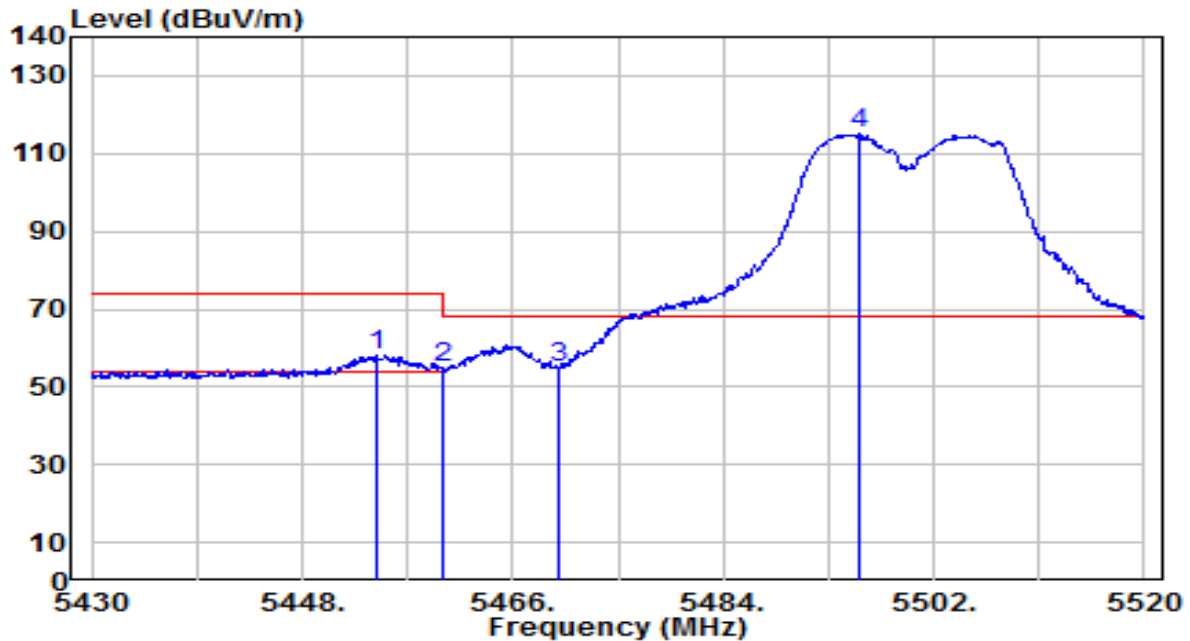


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.390	57.35	0.74	58.09	-15.91	74.00	205	170	Peak
2	5460.000	53.99	0.76	54.75	-19.25	74.00	205	170	Peak
3	* 5470.000	53.95	0.80	54.75	-13.45	68.20	205	170	Peak
4	5495.610	114.01	0.91	114.93	N/A	N/A	205	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

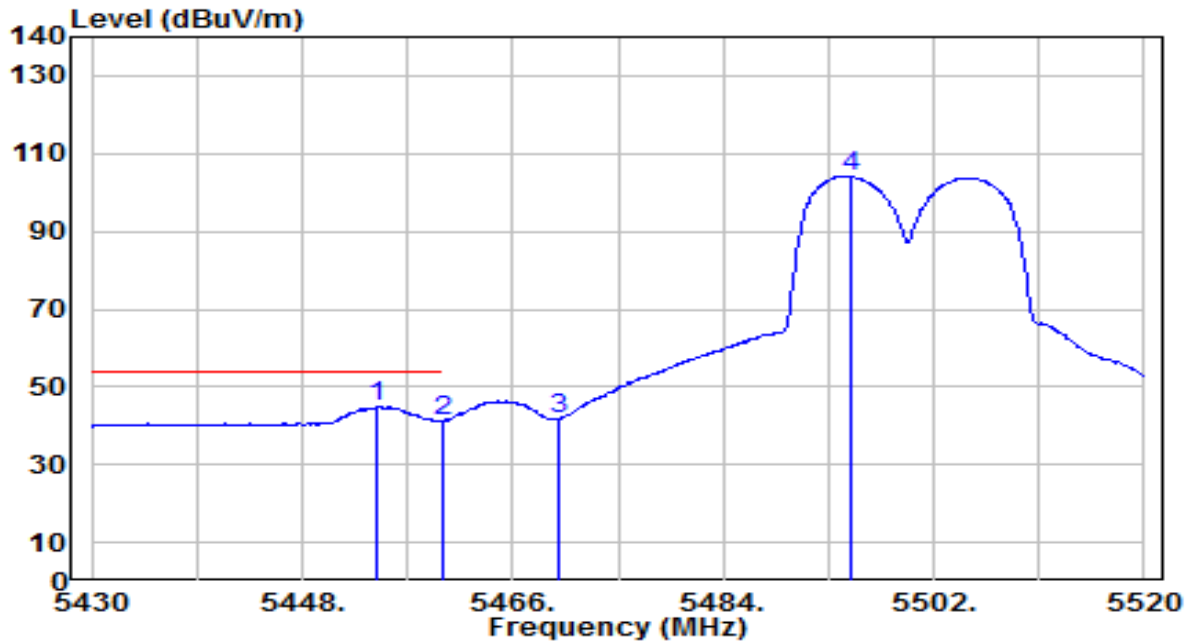


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.480	44.01	0.74	44.74	-9.26	54.00	205	170	Average
2		5460.000	40.63	0.76	41.39	-12.61	54.00	205	170	Average
3		5470.000	41.05	0.80	41.86	N/A	N/A	205	170	Average
4		5494.890	103.20	0.91	104.11	N/A	N/A	205	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

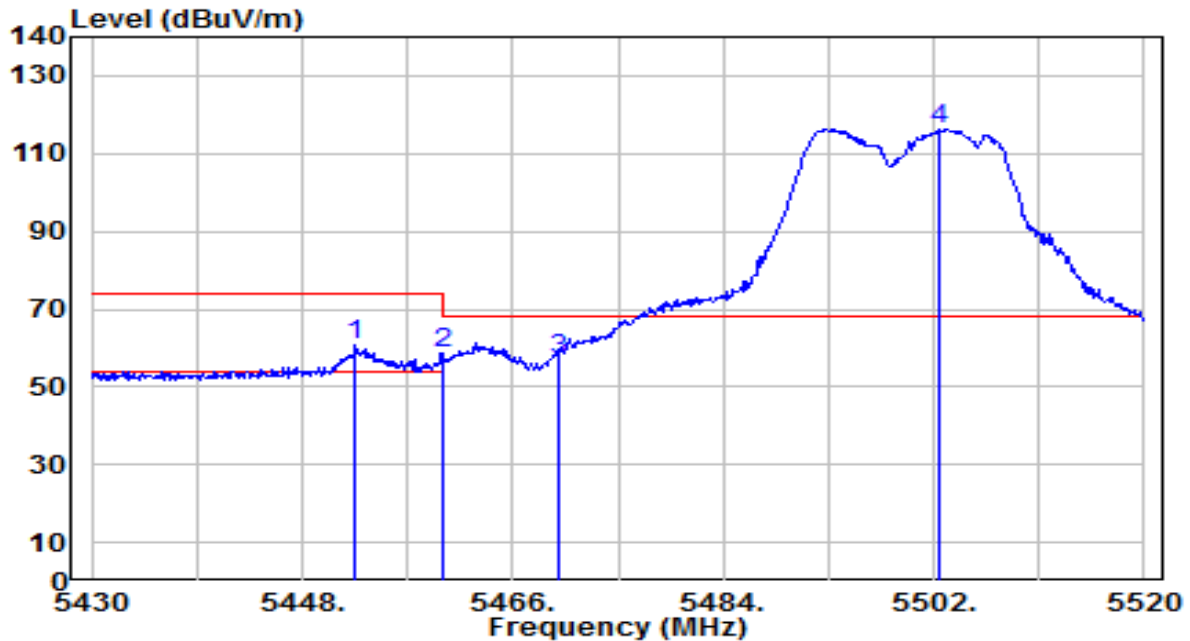


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.590	60.11	0.73	60.84	-13.16	74.00	205	155	Peak
2	5460.000	57.96	0.76	58.72	-15.28	74.00	205	155	Peak
3	* 5470.000	56.16	0.80	56.96	-11.24	68.20	205	155	Peak
4	5502.360	115.33	0.94	116.27	N/A	N/A	205	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

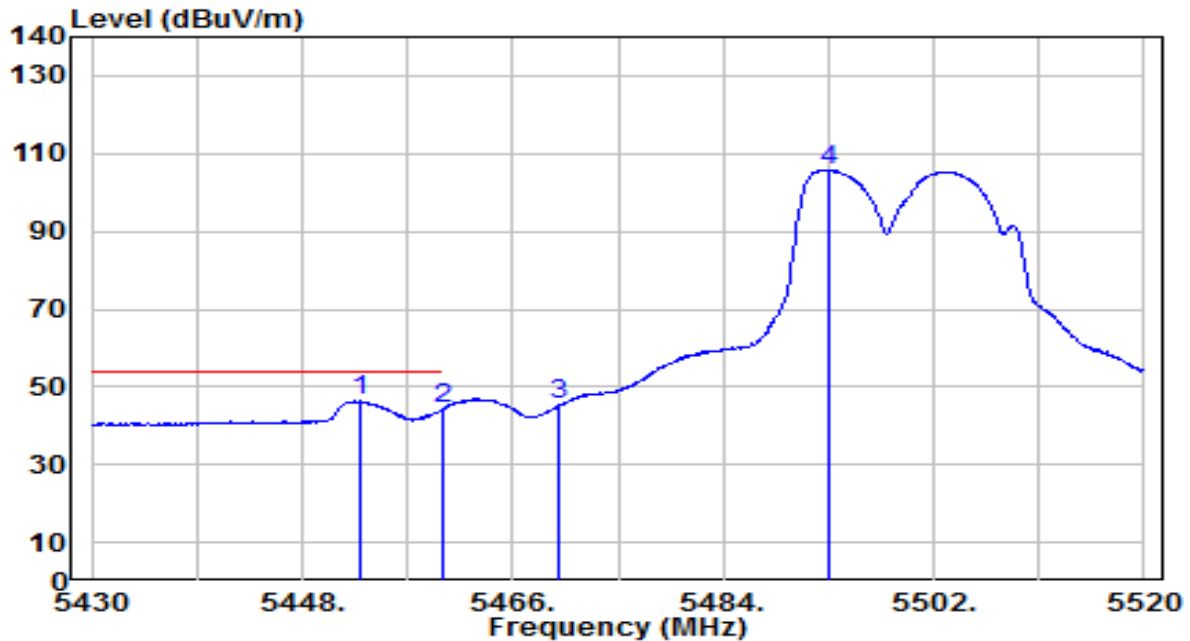


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.040	45.60	0.73	46.33	-7.67	54.00	205	155	Average
2		5460.000	43.37	0.76	44.13	-9.87	54.00	205	155	Average
3		5470.000	44.47	0.80	45.27	N/A	N/A	205	155	Average
4		5493.090	104.99	0.90	105.89	N/A	N/A	205	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

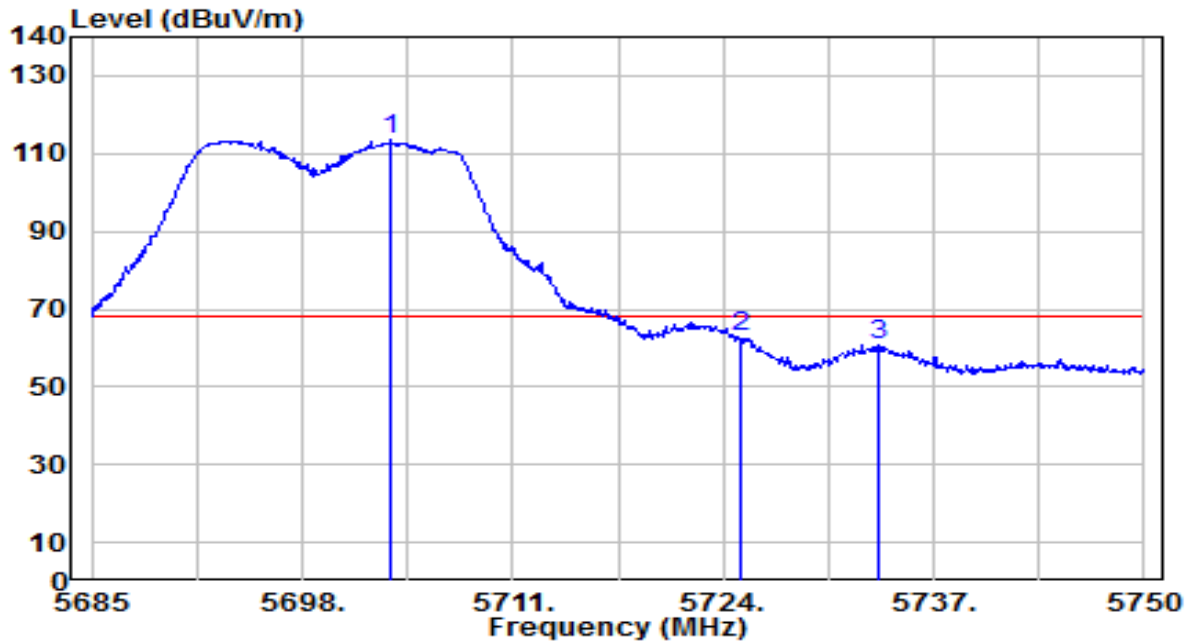


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5703.460	111.56	1.80	113.36	N/A	N/A	180	180	Peak
2	*	5725.000	60.89	1.89	62.78	-5.42	68.20	180	180	Peak
3		5733.555	58.99	1.92	60.92	-7.28	68.20	180	180	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

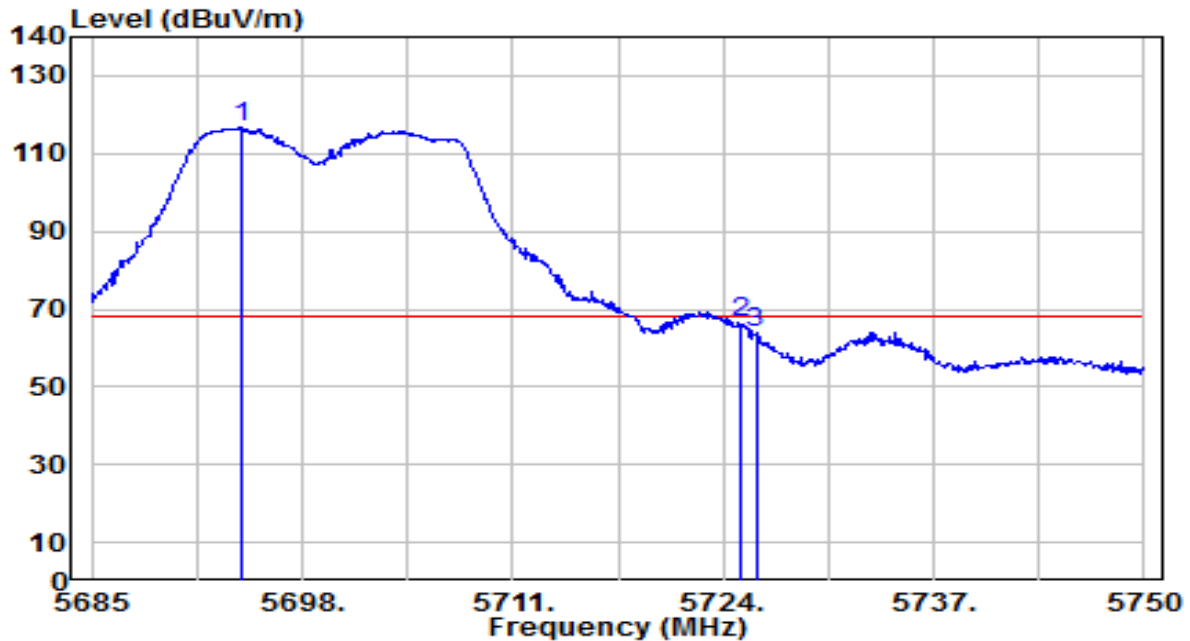


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5694.295	115.09	1.76	116.86	N/A	N/A	190	160	Peak
2	* 5725.000	64.59	1.89	66.48	-1.72	68.20	190	160	Peak
3	5726.015	62.12	1.89	64.01	-4.19	68.20	190	160	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

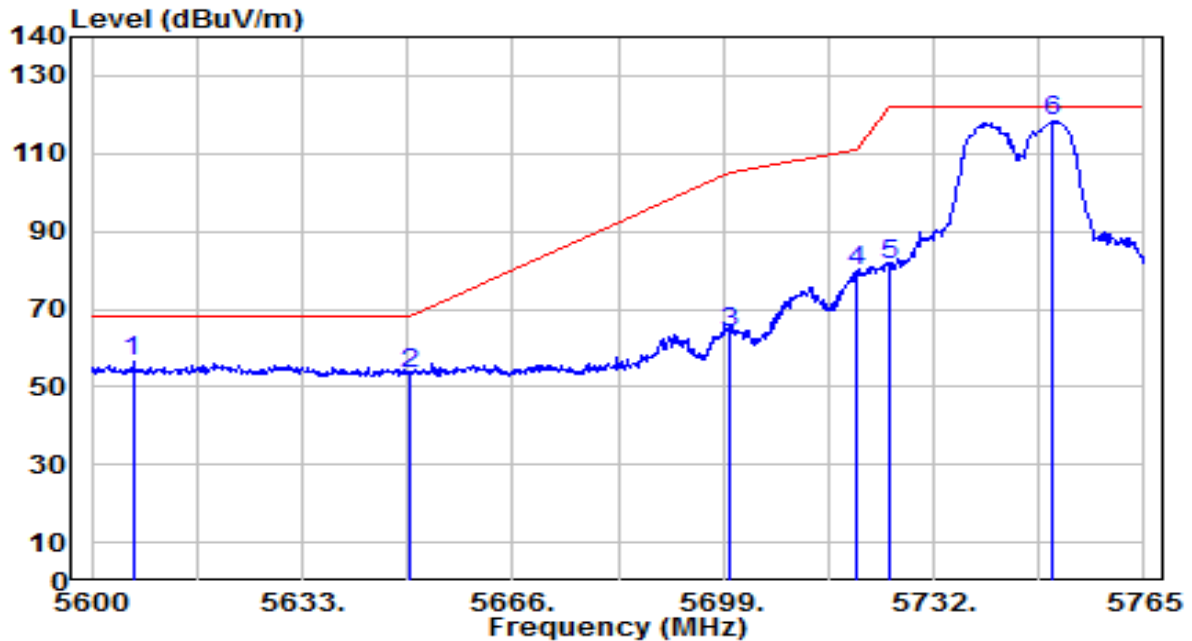


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.435	54.89	1.41	56.30	-11.90	68.20	175	175	Peak
2		5650.000	51.94	1.59	53.52	-14.68	68.20	175	175	Peak
3		5700.000	62.38	1.79	64.16	-41.04	105.20	175	175	Peak
4		5720.000	77.88	1.87	79.74	-31.06	110.80	175	175	Peak
5		5725.000	79.64	1.89	81.53	-40.67	122.20	175	175	Peak
6		5750.645	116.26	1.99	118.26	N/A	N/A	175	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

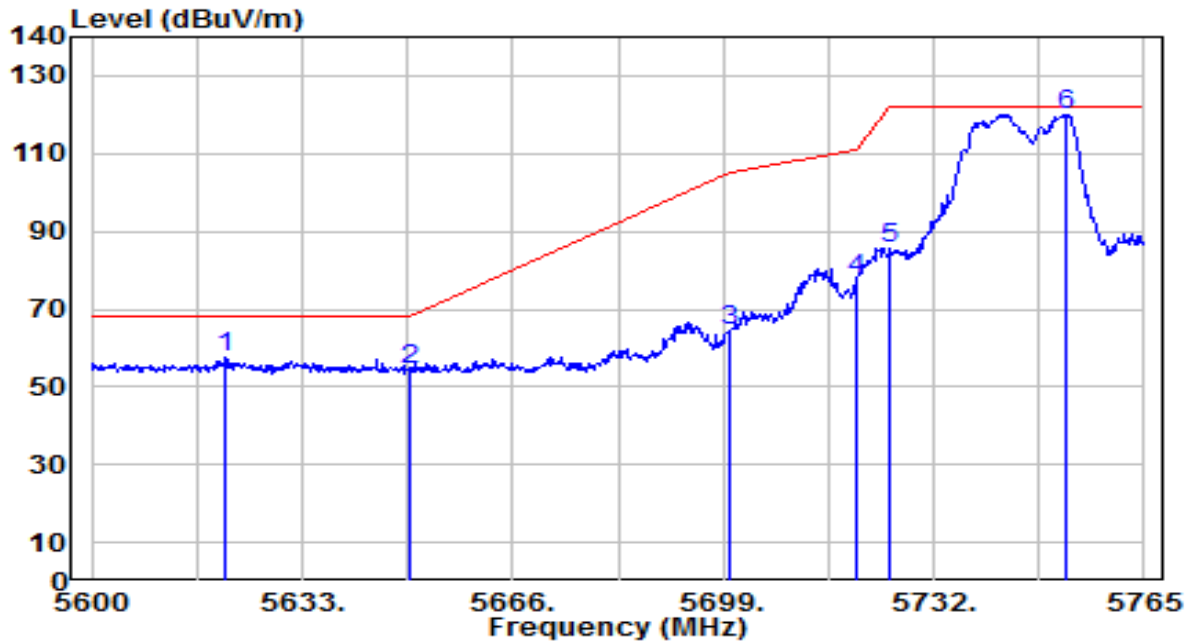


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5621.120	55.92	1.47	57.39	-10.81	68.20	170	350	Peak
2		5650.000	52.90	1.59	54.49	-13.71	68.20	170	350	Peak
3		5700.000	62.71	1.79	64.50	-40.70	105.20	170	350	Peak
4		5720.000	75.93	1.87	77.79	-33.01	110.80	170	350	Peak
5		5725.000	83.57	1.89	85.46	-36.74	122.20	170	350	Peak
6		5752.955	118.09	2.00	120.09	N/A	N/A	170	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

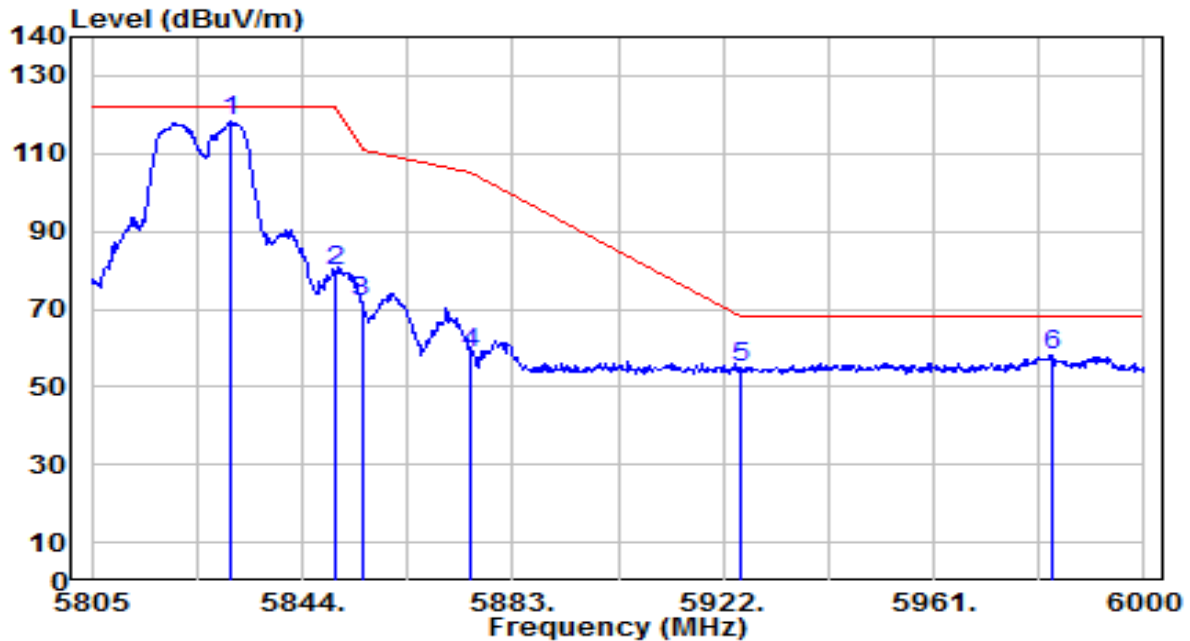


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5830.935	116.24	2.24	118.48	N/A	N/A	165	170	Peak
2	5850.000	77.50	2.27	79.76	-42.44	122.20	165	170	Peak
3	5855.000	69.80	2.28	72.08	-38.72	110.80	165	170	Peak
4	5875.000	56.33	2.31	58.64	-46.56	105.20	165	170	Peak
5	5925.000	52.68	2.38	55.06	-13.14	68.20	165	170	Peak
6	* 5982.840	55.79	2.47	58.27	-9.93	68.20	165	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-20MHz_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

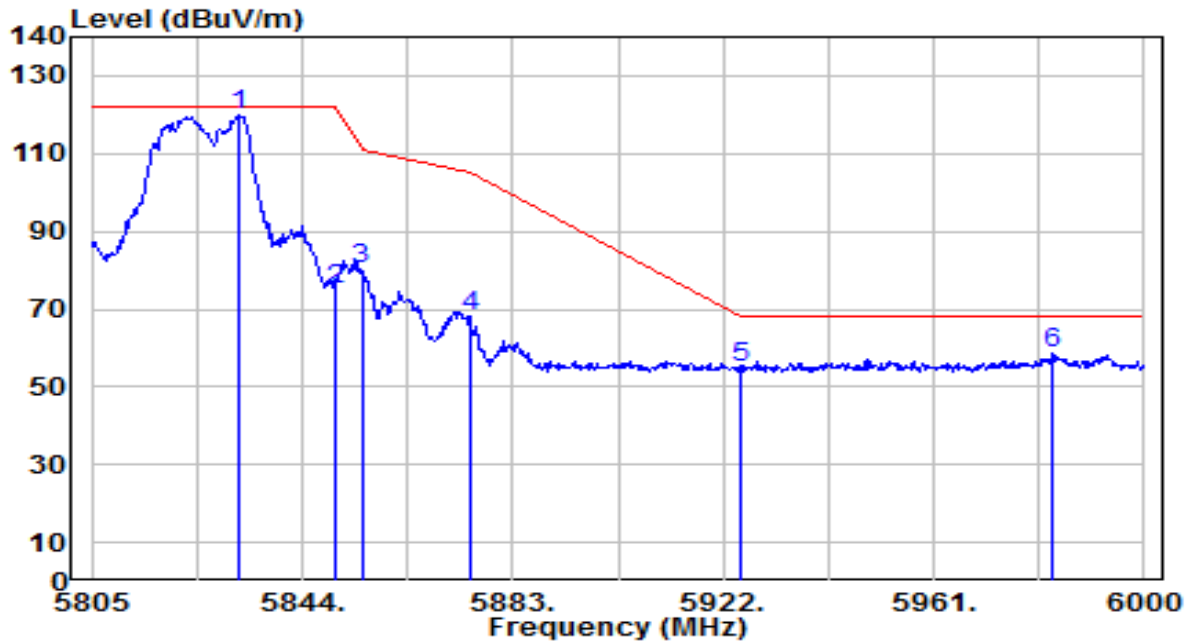


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5832.495	117.43	2.24	119.67	N/A	N/A	170	350	Peak
2	5850.000	73.01	2.27	75.28	-46.92	122.20	170	350	Peak
3	5855.000	78.02	2.28	80.29	-30.51	110.80	170	350	Peak
4	5875.000	65.60	2.31	67.91	-37.29	105.20	170	350	Peak
5	5925.000	52.64	2.38	55.03	-13.17	68.20	170	350	Peak
6	* 5983.035	56.12	2.47	58.60	-9.60	68.20	170	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

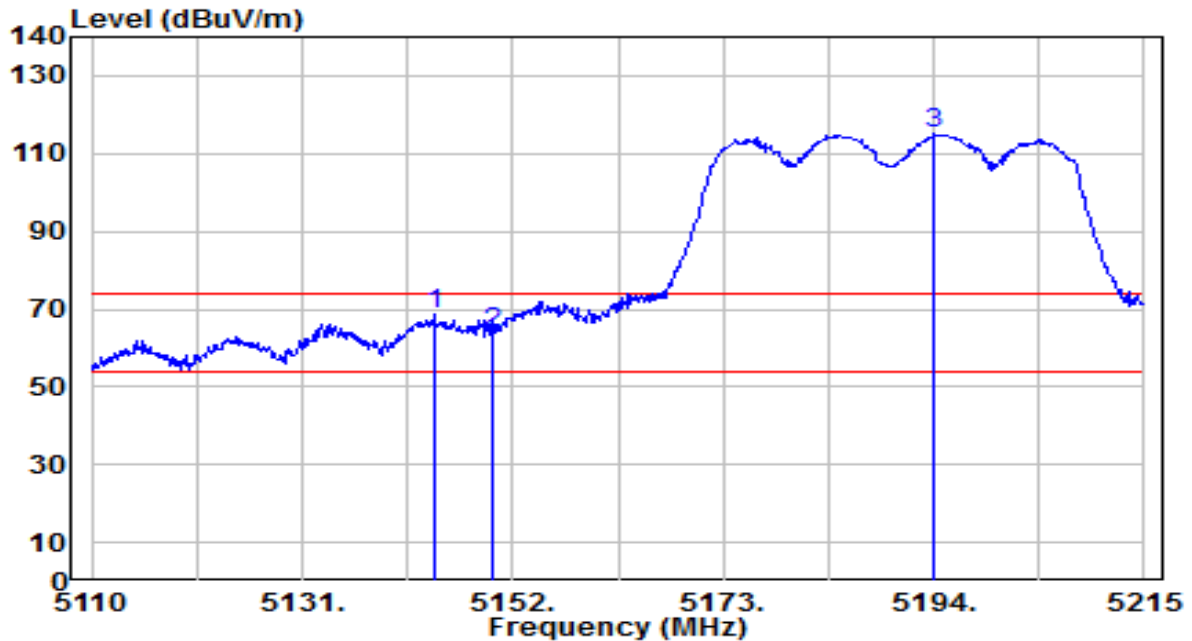


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.230	67.63	0.79	68.42	-5.58	74.00	135	170	Peak
2		5150.000	63.19	0.80	63.98	-10.02	74.00	135	170	Peak
3		5194.105	114.44	0.85	115.29	N/A	N/A	135	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

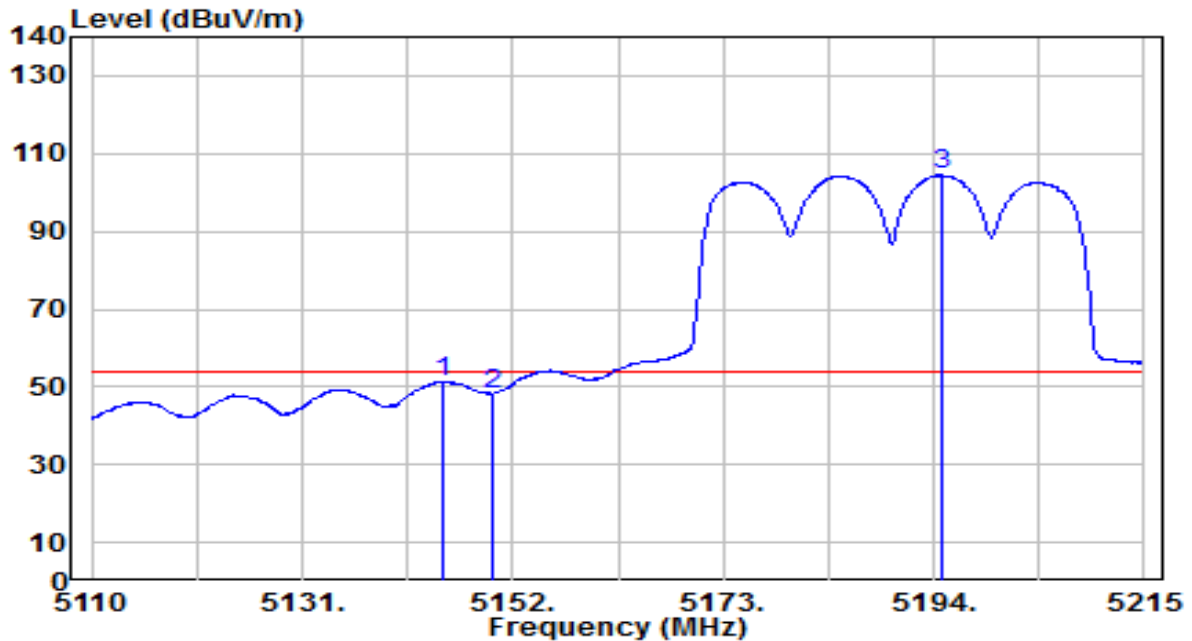


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.965	50.50	0.79	51.29	-2.71	54.00	135	170	Average
2		5150.000	47.52	0.80	48.31	-5.69	54.00	135	170	Average
3		5194.840	103.62	0.85	104.47	N/A	N/A	135	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

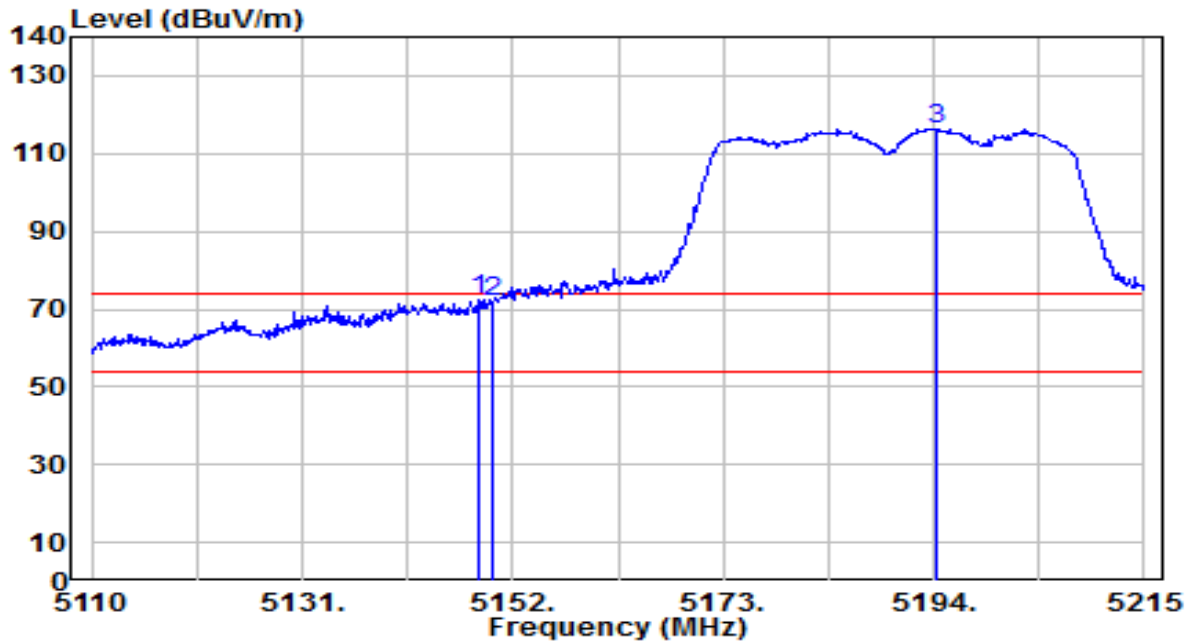


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.745	71.33	0.79	72.12	-1.88	74.00	200	105	Peak
2		5150.000	70.94	0.80	71.74	-2.26	74.00	200	105	Peak
3		5194.210	115.46	0.85	116.31	N/A	N/A	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

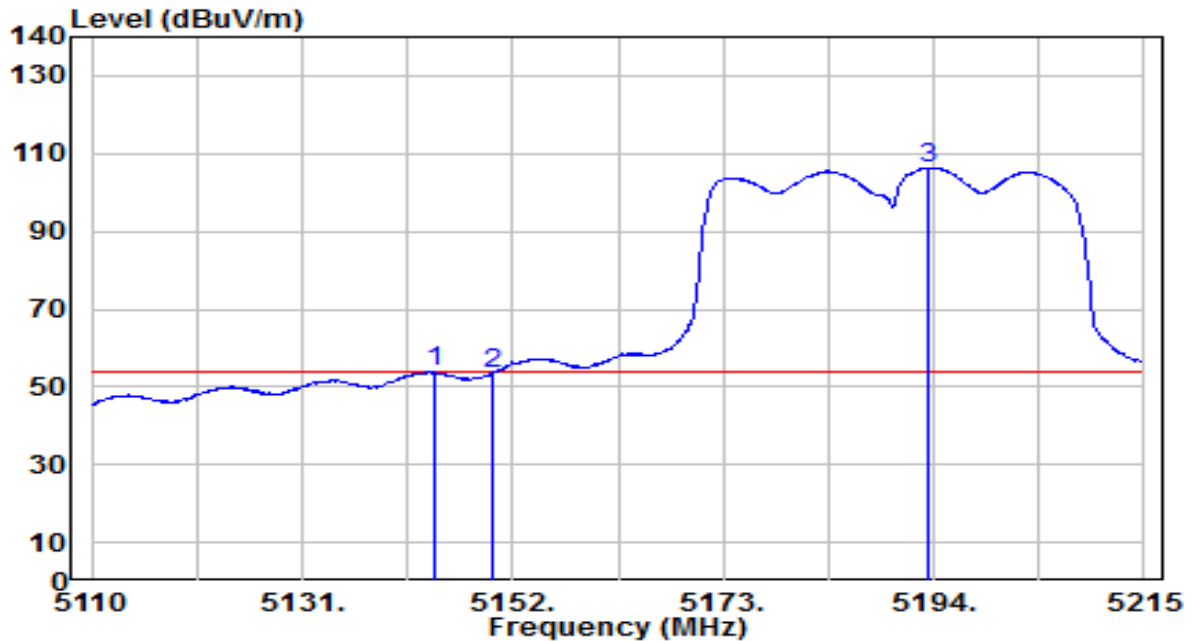


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.230	53.10	0.79	53.89	-0.11	54.00	200	105	Average
2		5150.000	52.82	0.80	53.62	-0.38	54.00	200	105	Average
3		5193.475	105.38	0.85	106.23	N/A	N/A	200	105	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

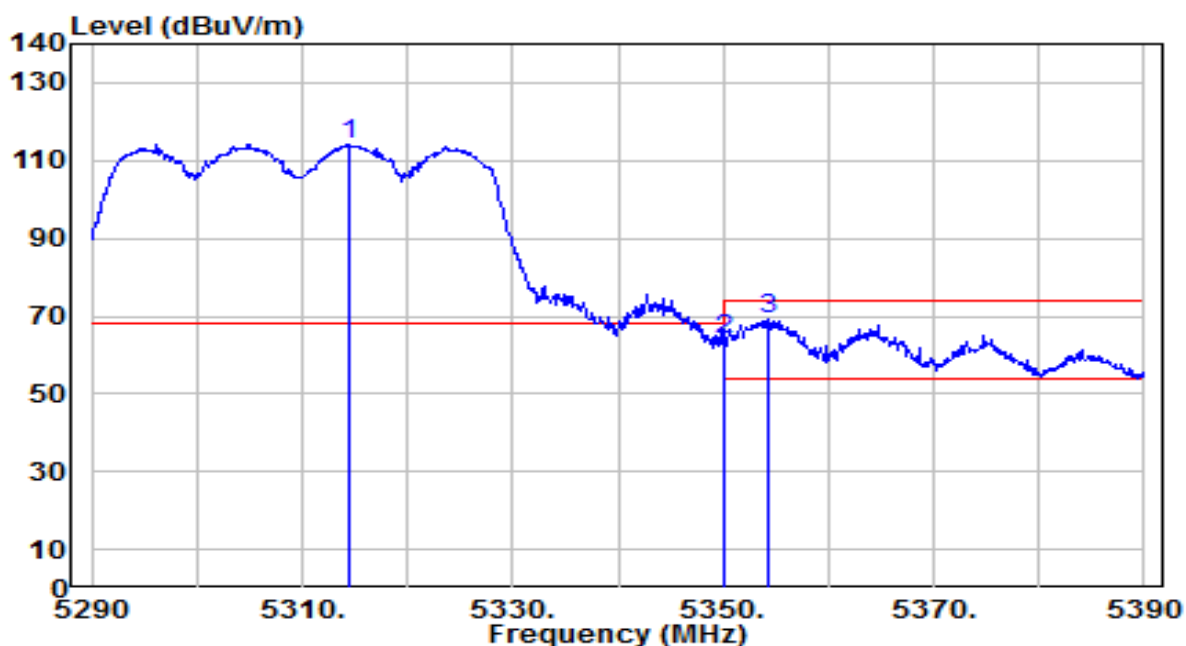


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.500	113.63	0.66	114.28	N/A	N/A	130	170	Peak
2	5350.000	63.12	0.59	63.71	-10.29	74.00	130	170	Peak
3	* 5354.200	68.76	0.59	69.34	-4.66	74.00	130	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

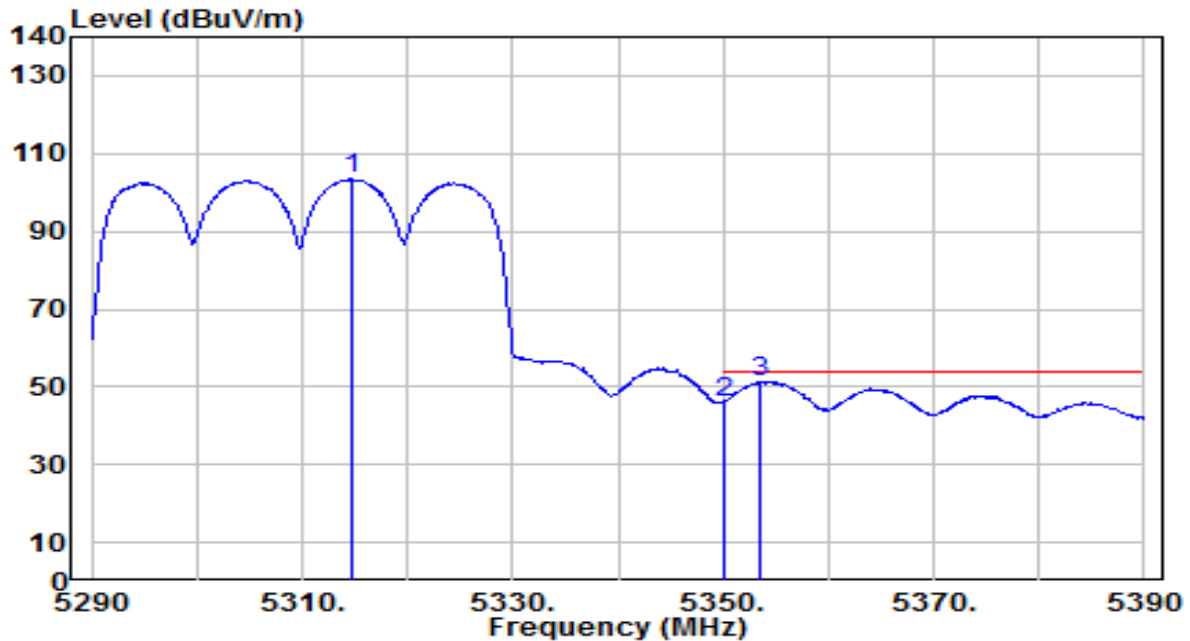


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.700	102.75	0.66	103.41	N/A	N/A	130	170	Average
2	5350.000	45.59	0.59	46.18	-7.82	54.00	130	170	Average
3	* 5353.400	50.84	0.59	51.43	-2.57	54.00	130	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

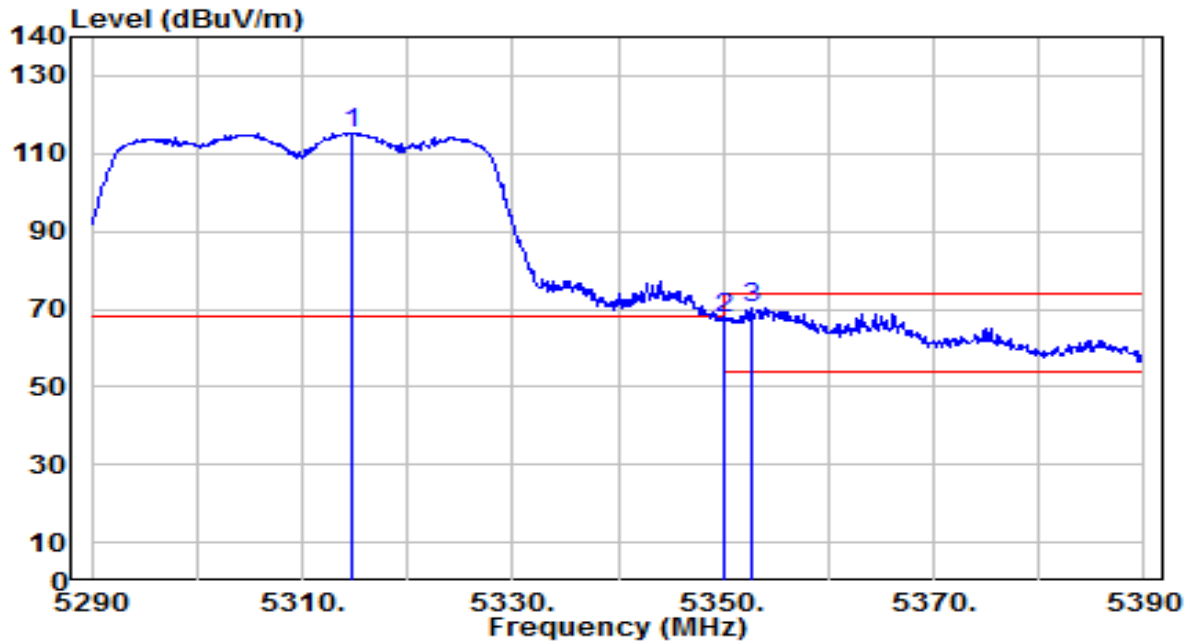


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.800	114.60	0.66	115.26	N/A	N/A	185	95	Peak
2	5350.000	67.03	0.59	67.62	-6.38	74.00	185	95	Peak
3	* 5352.600	69.59	0.59	70.18	-3.82	74.00	185	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

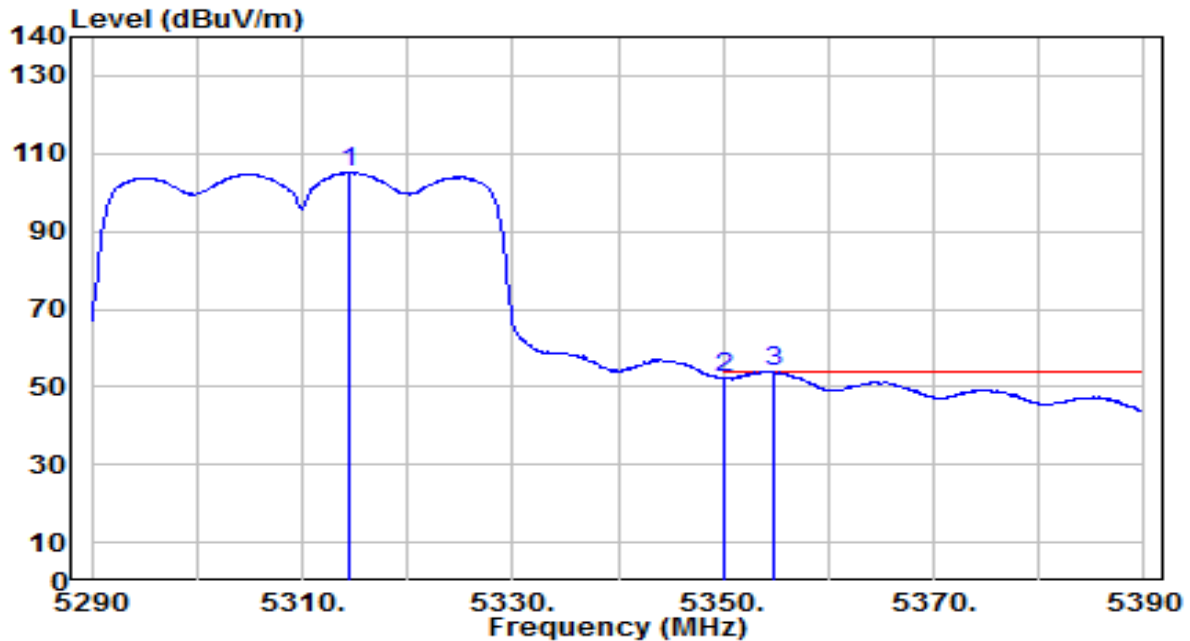


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.500	104.53	0.66	105.18	N/A	N/A	185	95	Average
2	5350.000	51.52	0.59	52.12	-1.88	54.00	185	95	Average
3	* 5354.700	53.24	0.59	53.83	-0.17	54.00	185	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

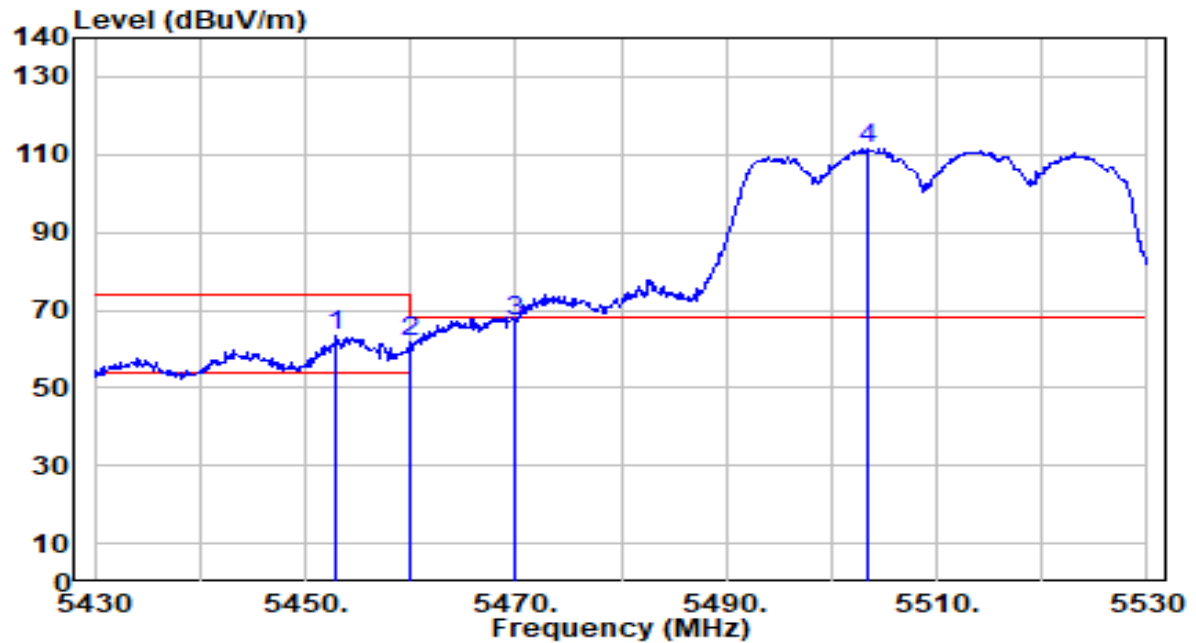


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.900	62.60	0.73	63.33	-10.67	74.00	210	225	Peak
2	5460.000	61.09	0.76	61.85	-12.15	74.00	210	225	Peak
3	* 5470.000	66.44	0.80	67.24	-0.96	68.20	210	225	Peak
4	5503.400	110.53	0.95	111.48	N/A	N/A	210	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

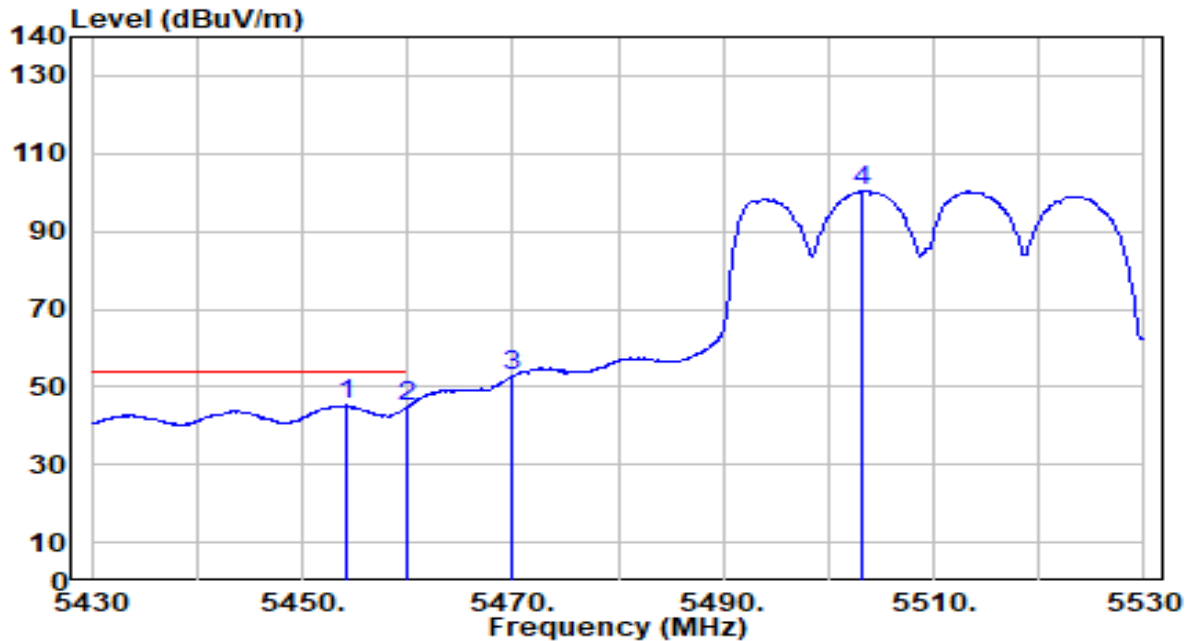


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5454.100	44.56	0.74	45.29	-8.71	54.00	210	225	Average
2		5460.000	44.07	0.76	44.83	-9.17	54.00	210	225	Average
3		5470.000	52.06	0.80	52.86	N/A	N/A	210	225	Average
4		5503.200	99.56	0.94	100.51	N/A	N/A	210	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

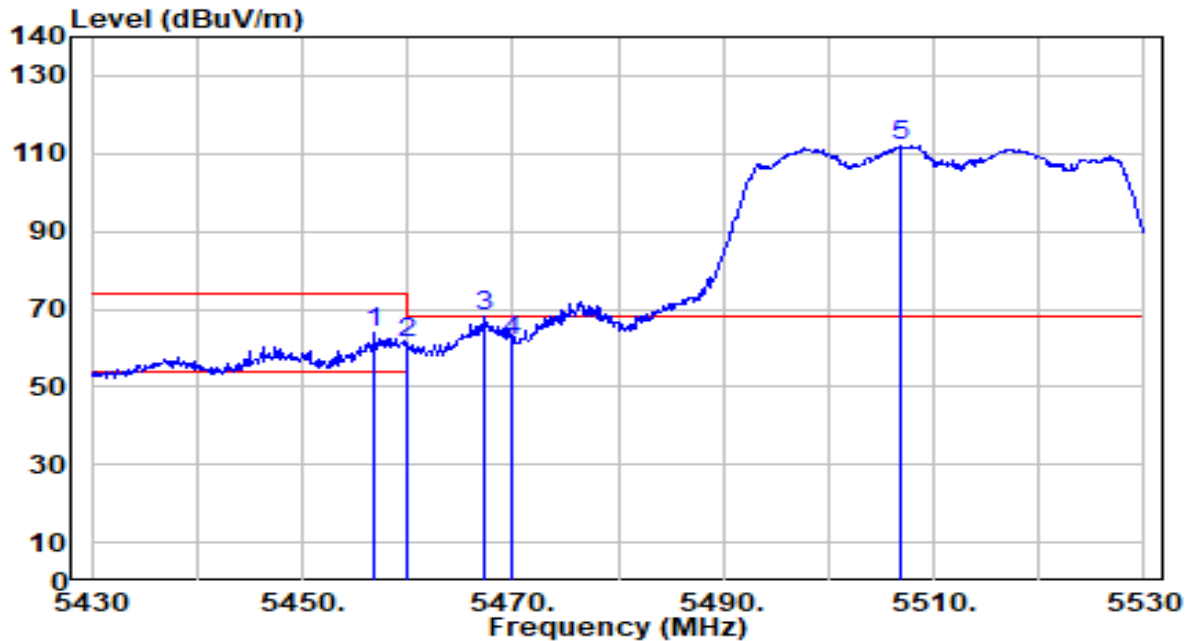


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.900	62.93	0.75	63.68	-10.32	74.00	210	145	Peak
2	5460.000	60.78	0.76	61.54	-12.46	74.00	210	145	Peak
3	* 5467.200	67.29	0.79	68.08	-0.12	68.20	210	145	Peak
4	5470.000	60.90	0.80	61.71	-6.49	68.20	210	145	Peak
5	5506.800	110.96	0.96	111.92	N/A	N/A	210	145	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 102_ ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

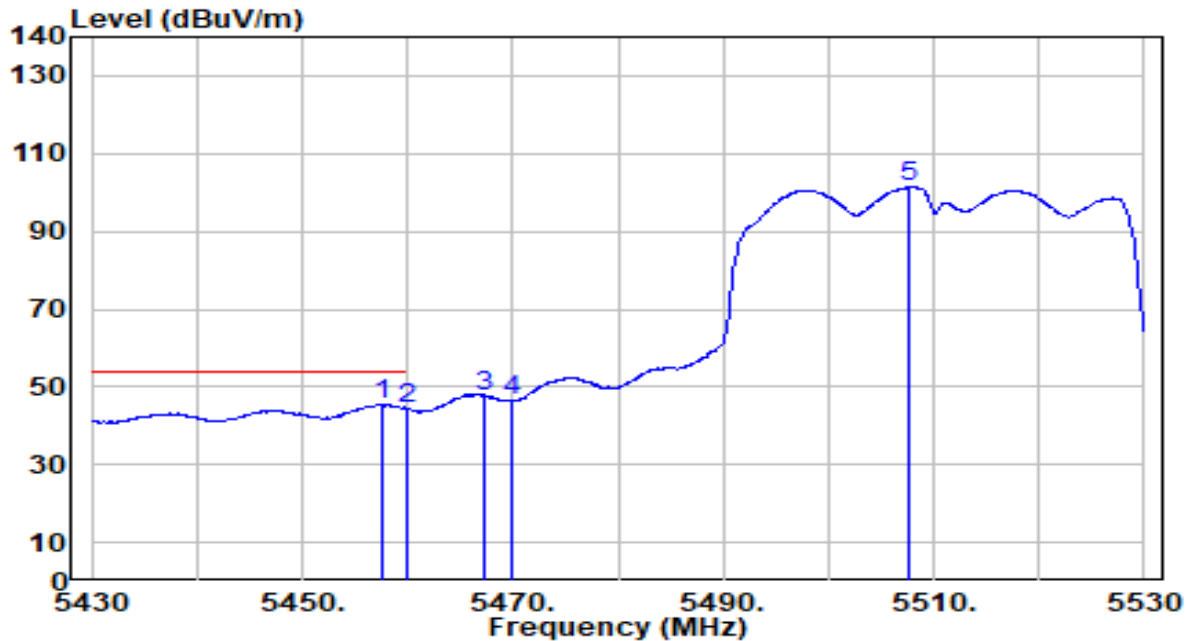


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5457.500	44.58	0.75	45.33	-8.67	54.00	210	145	Average
2		5460.000	43.39	0.76	44.15	-9.85	54.00	210	145	Average
3		5467.200	47.01	0.79	47.80	N/A	N/A	210	145	Average
4		5470.000	45.50	0.80	46.31	N/A	N/A	210	145	Average
5		5507.700	100.46	0.96	101.43	N/A	N/A	210	145	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

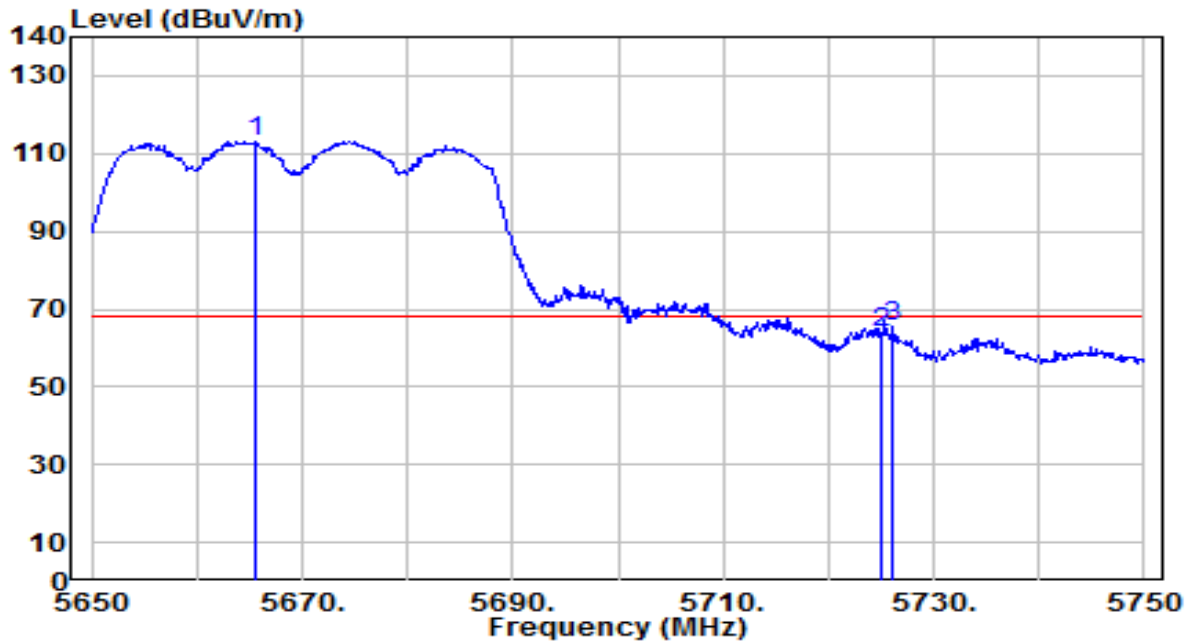


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5665.500	111.66	1.65	113.31	N/A	N/A	195	355	Peak
2	5725.000	61.87	1.89	63.76	-4.44	68.20	195	355	Peak
3	* 5726.100	63.37	1.89	65.26	-2.94	68.20	195	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

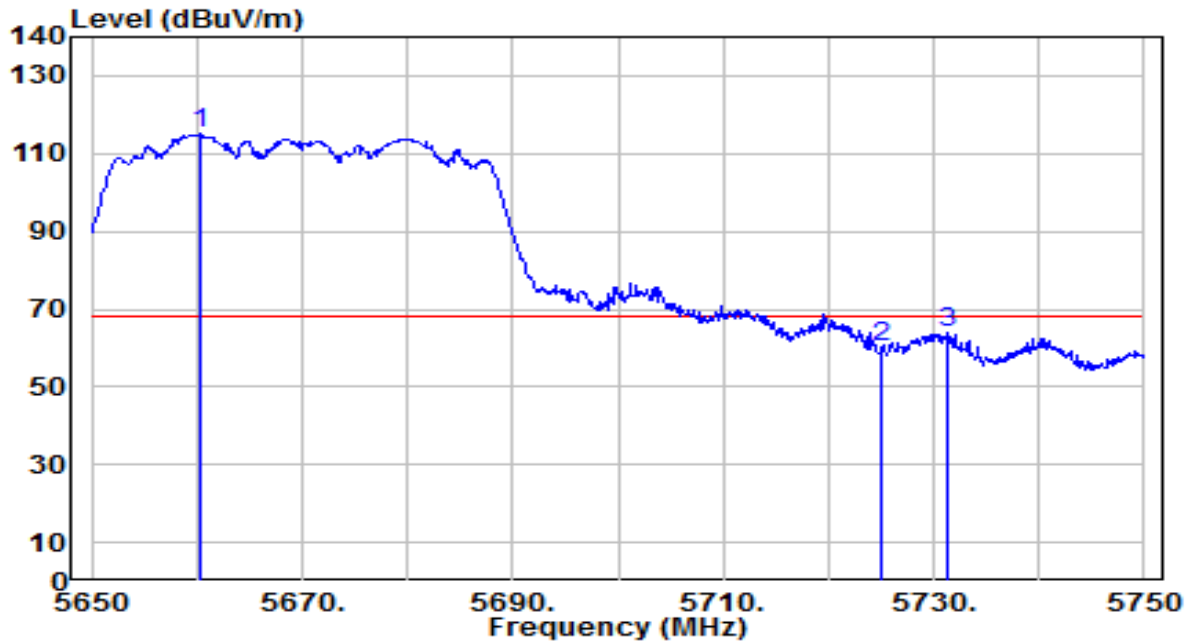


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5660.200	113.30	1.63	114.93	N/A	N/A	150	355	Peak
2	5725.000	58.27	1.89	60.16	-8.04	68.20	150	355	Peak
3	* 5731.200	61.81	1.91	63.72	-4.48	68.20	150	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

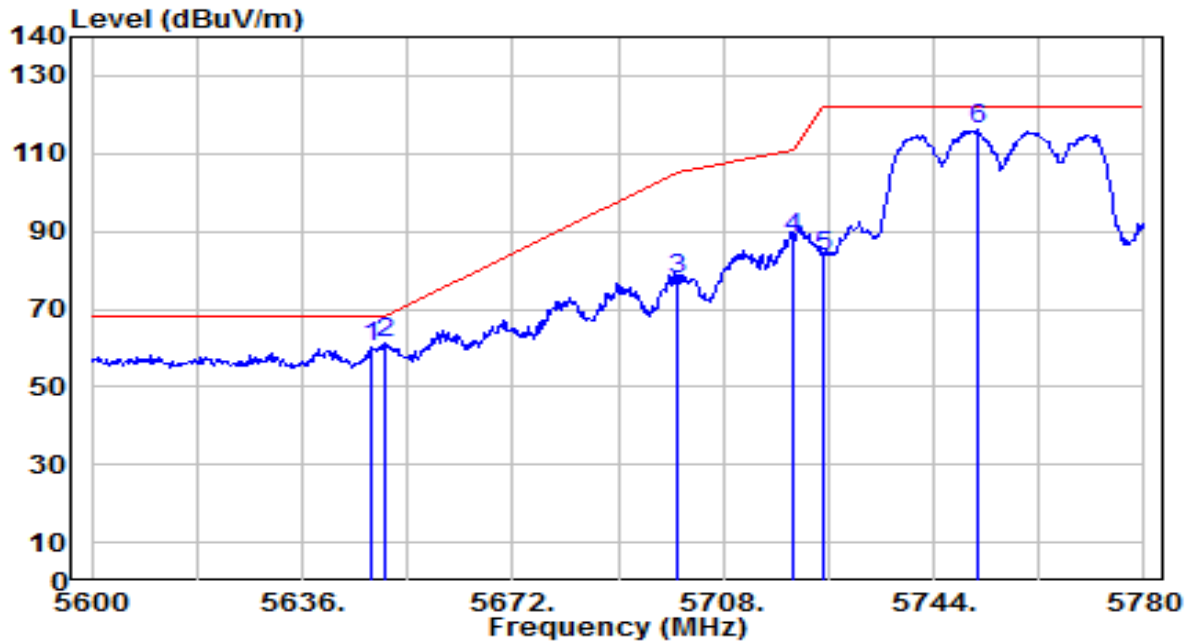


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5647.700	58.48	1.58	60.06	-8.14	68.20	170	175	Peak
2	*	5650.000	59.76	1.59	61.35	-6.85	68.20	170	175	Peak
3		5700.000	75.86	1.79	77.64	-27.56	105.20	170	175	Peak
4		5720.000	86.36	1.87	88.23	-22.57	110.80	170	175	Peak
5		5725.000	81.74	1.89	83.63	-38.57	122.20	170	175	Peak
6		5751.560	113.99	2.00	115.98	N/A	N/A	170	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

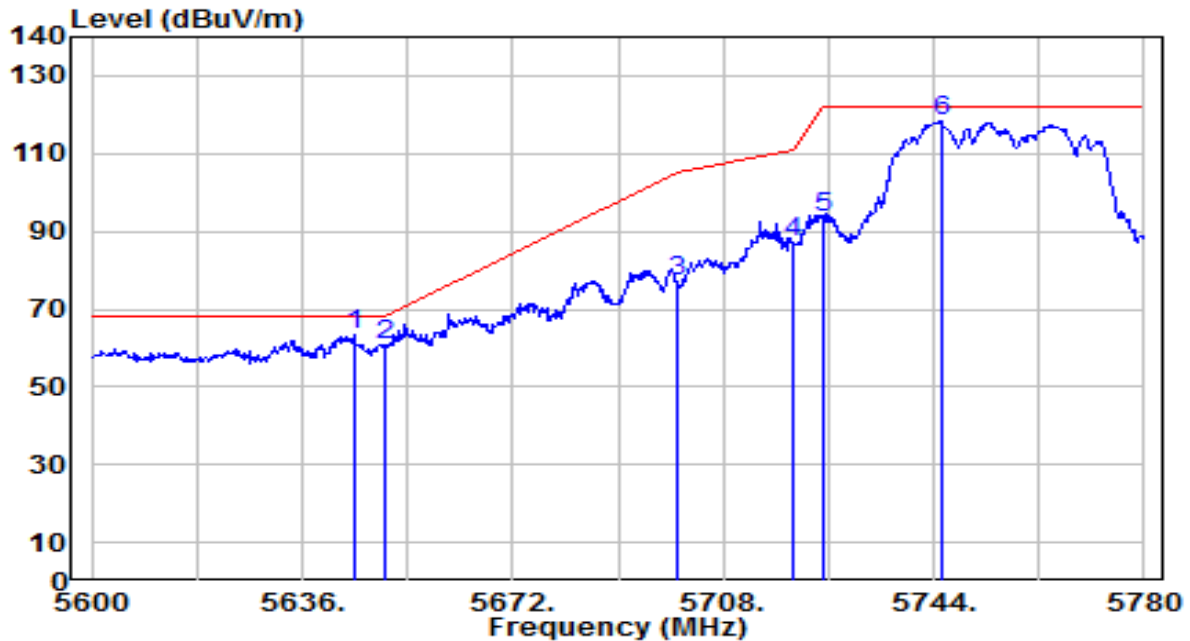


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.000	61.57	1.57	63.13	-5.07	68.20	175	355	Peak
2		5650.000	58.92	1.59	60.50	-7.70	68.20	175	355	Peak
3		5700.000	75.36	1.79	77.14	-28.06	105.20	175	355	Peak
4		5720.000	85.18	1.87	87.05	-23.75	110.80	175	355	Peak
5		5725.000	91.74	1.89	93.63	-28.57	122.20	175	355	Peak
6		5745.260	116.23	1.97	118.20	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

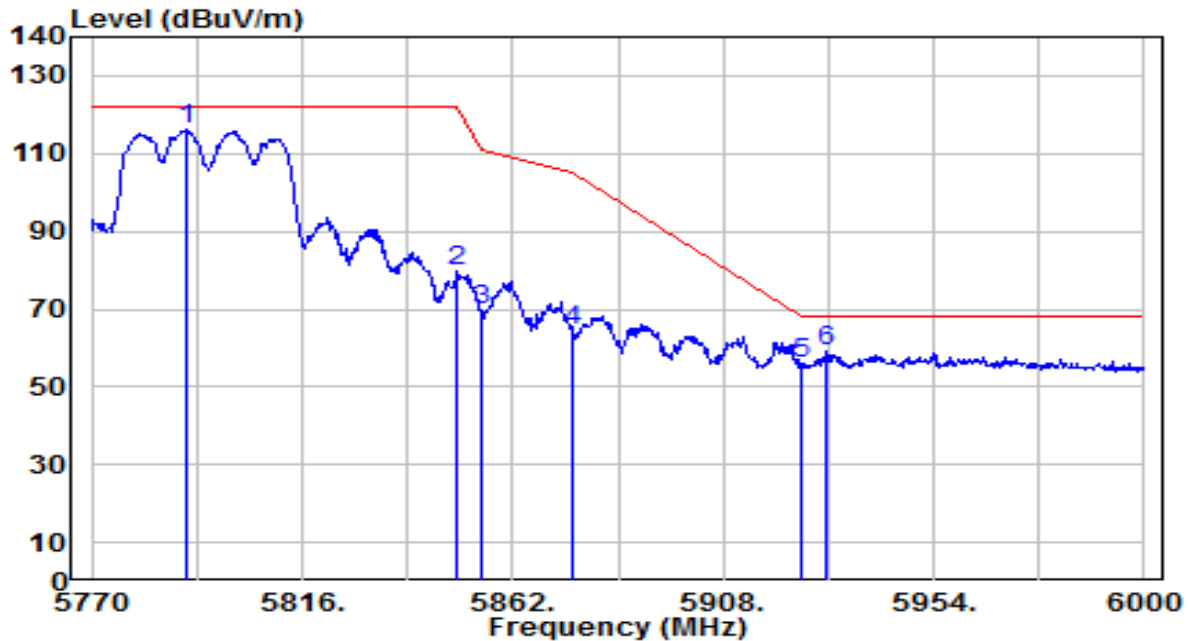


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.930	113.95	2.16	116.10	N/A	N/A	100	0	Peak
2	5850.000	77.25	2.27	79.52	-42.68	122.20	100	0	Peak
3	5855.000	67.52	2.28	69.80	-41.00	110.80	100	0	Peak
4	5875.000	62.17	2.31	64.47	-40.73	105.20	100	0	Peak
5	5925.000	53.35	2.38	55.74	-12.46	68.20	100	0	Peak
6	* 5930.770	56.65	2.39	59.05	-9.15	68.20	100	0	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

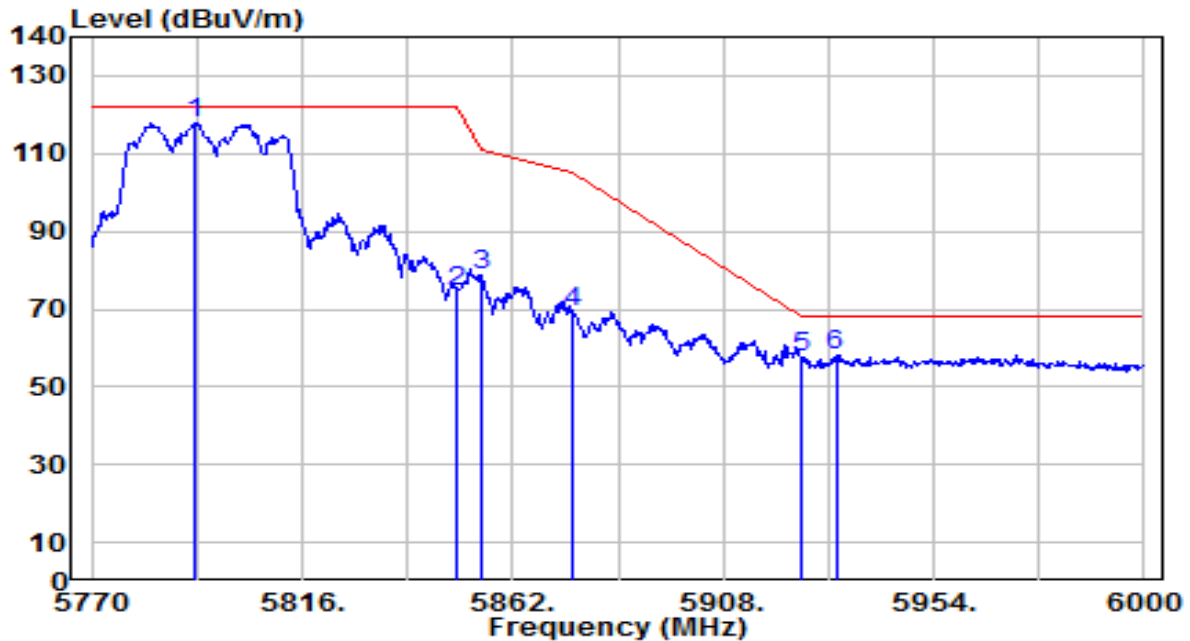


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5792.770	115.64	2.16	117.80	N/A	N/A	175	350	Peak
2	5850.000	72.15	2.27	74.42	-47.78	122.20	175	350	Peak
3	5855.000	76.25	2.28	78.53	-32.27	110.80	175	350	Peak
4	5875.000	66.94	2.31	69.25	-35.95	105.20	175	350	Peak
5	5925.000	55.23	2.38	57.62	-10.58	68.20	175	350	Peak
6	* 5932.610	55.88	2.40	58.28	-9.92	68.20	175	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

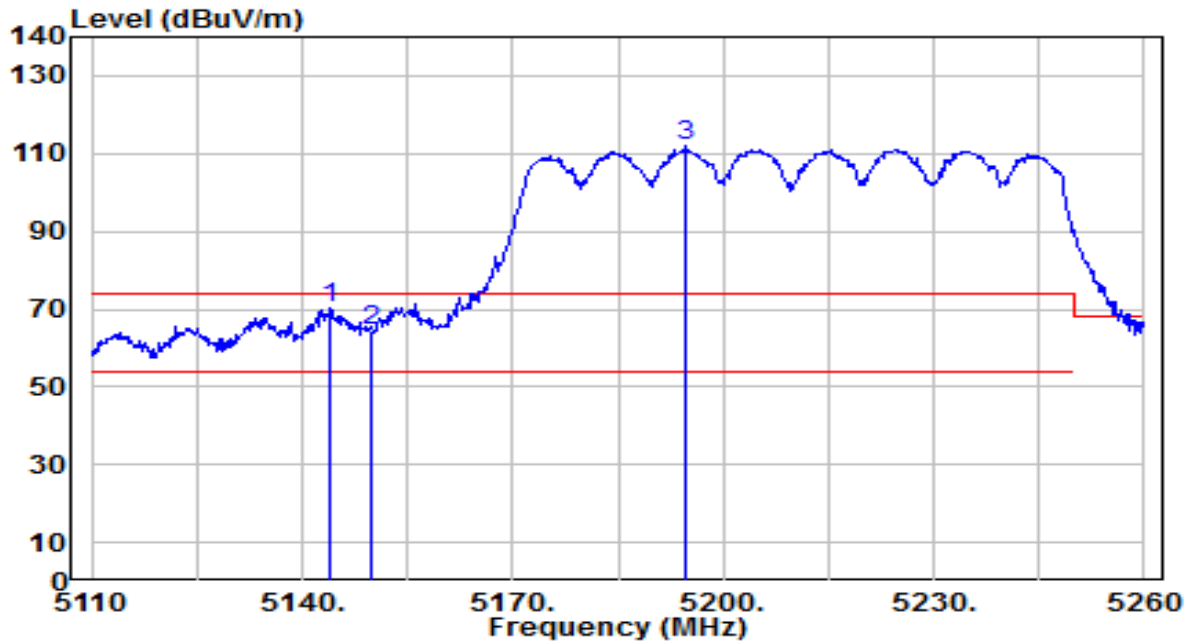


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.900	69.36	0.79	70.15	-3.85	74.00	145	170	Peak
2		5150.000	63.61	0.80	64.40	-9.60	74.00	145	170	Peak
3		5194.450	111.09	0.85	111.94	N/A	N/A	145	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

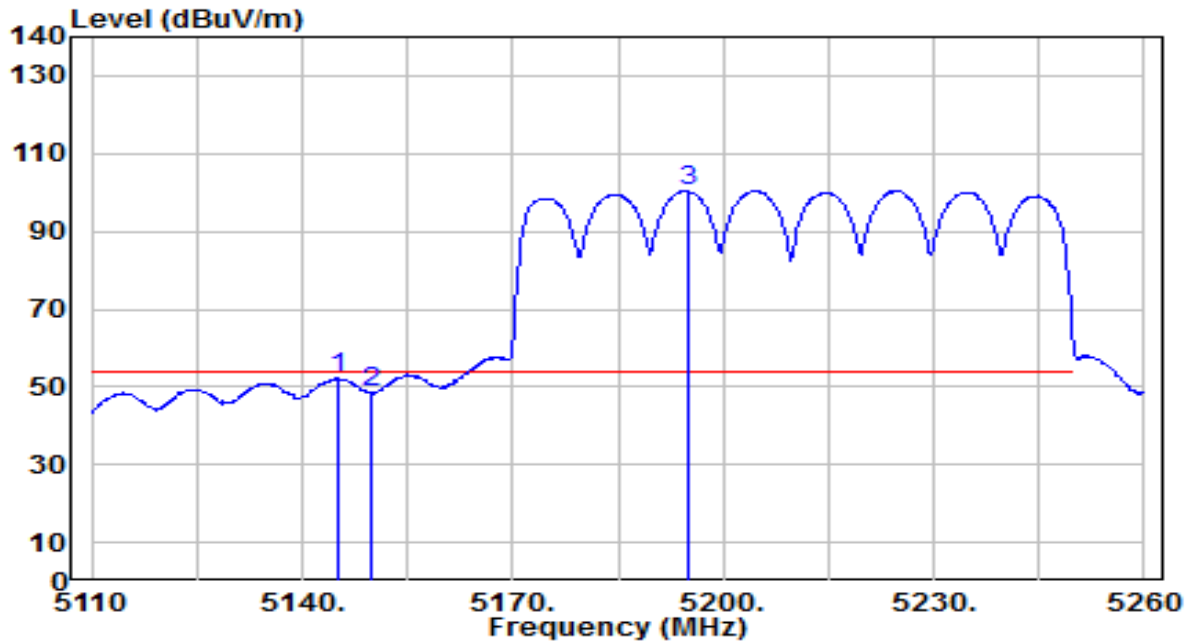


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.100	51.27	0.79	52.06	-1.94	54.00	145	170	Average
2		5150.000	47.58	0.80	48.37	-5.63	54.00	145	170	Average
3		5194.900	99.64	0.85	100.49	N/A	N/A	145	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

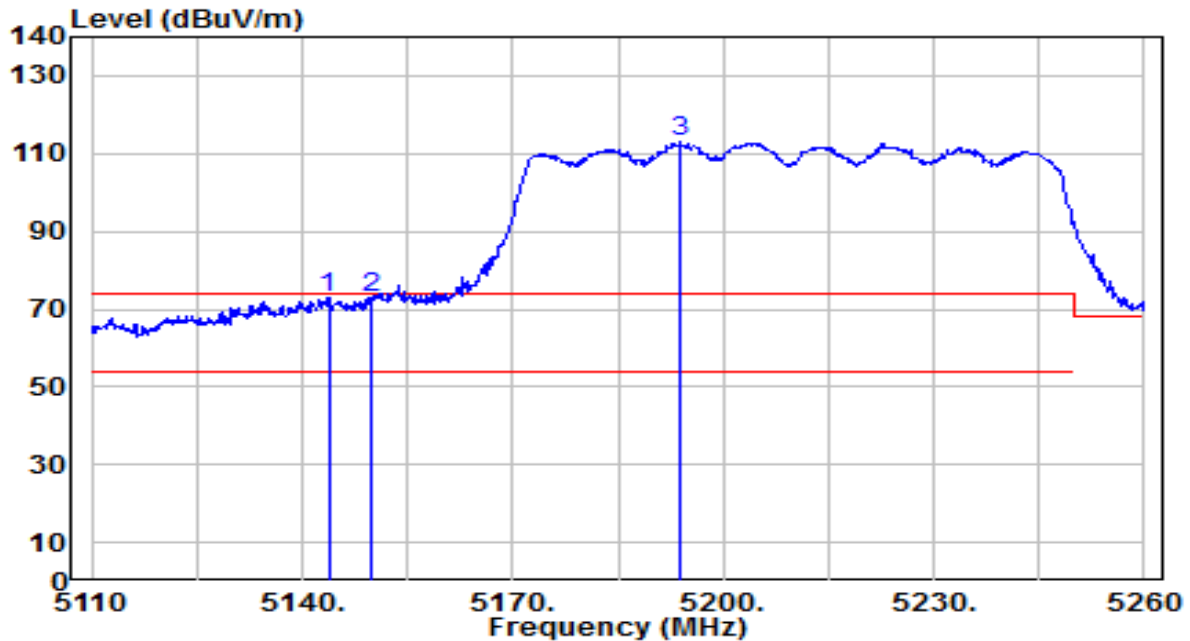


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.750	72.38	0.79	73.17	-0.83	74.00	200	105	Peak
2		5150.000	72.25	0.80	73.04	-0.96	74.00	200	105	Peak
3		5193.850	111.95	0.85	112.80	N/A	N/A	200	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

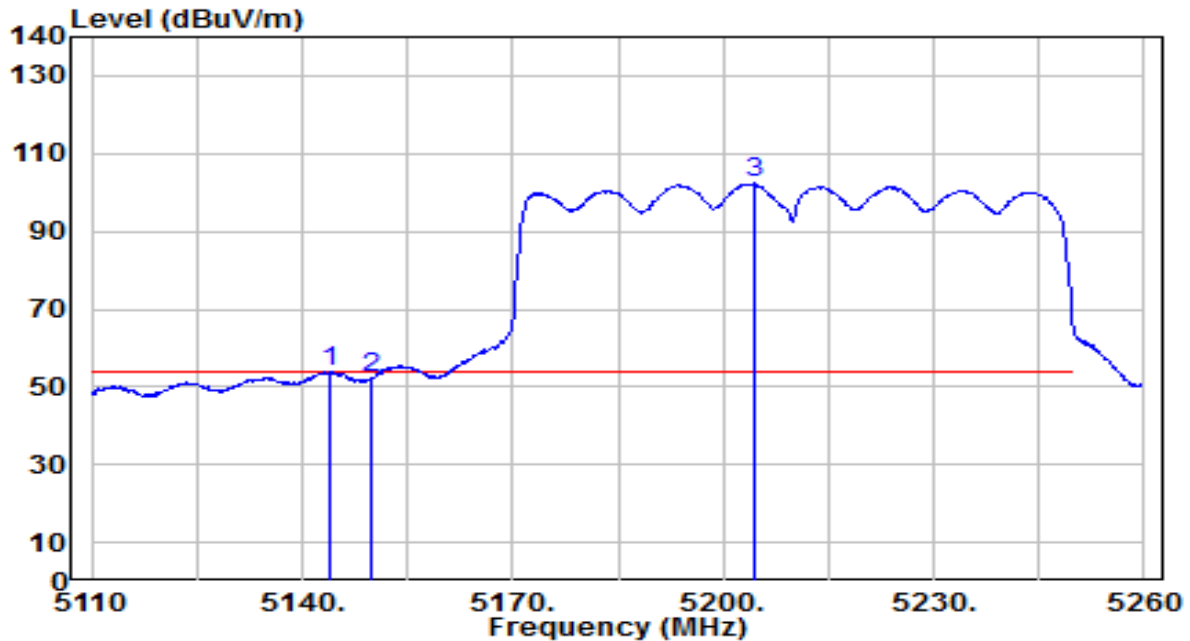


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.900	53.05	0.79	53.84	-0.16	54.00	200	105	Average
2		5150.000	51.46	0.80	52.25	-1.75	54.00	200	105	Average
3		5204.350	101.38	0.85	102.23	N/A	N/A	200	105	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

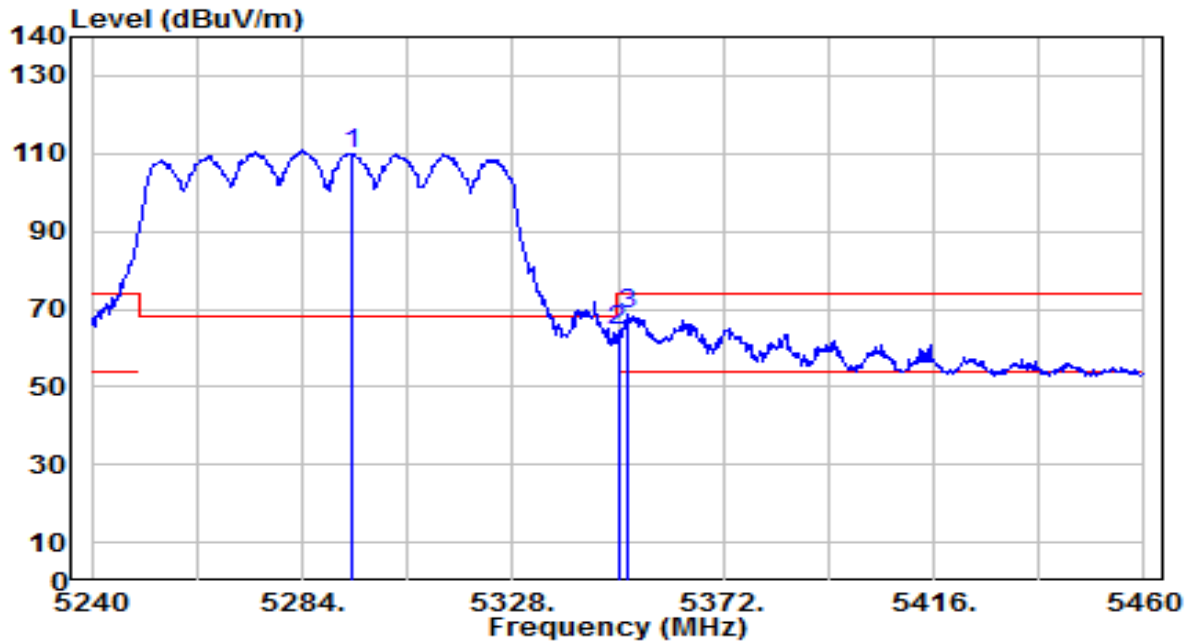


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.340	109.32	0.69	110.01	N/A	N/A	135	175	Peak
2	5350.000	63.92	0.59	64.51	-9.49	74.00	135	175	Peak
3	* 5351.760	67.83	0.59	68.42	-5.58	74.00	135	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

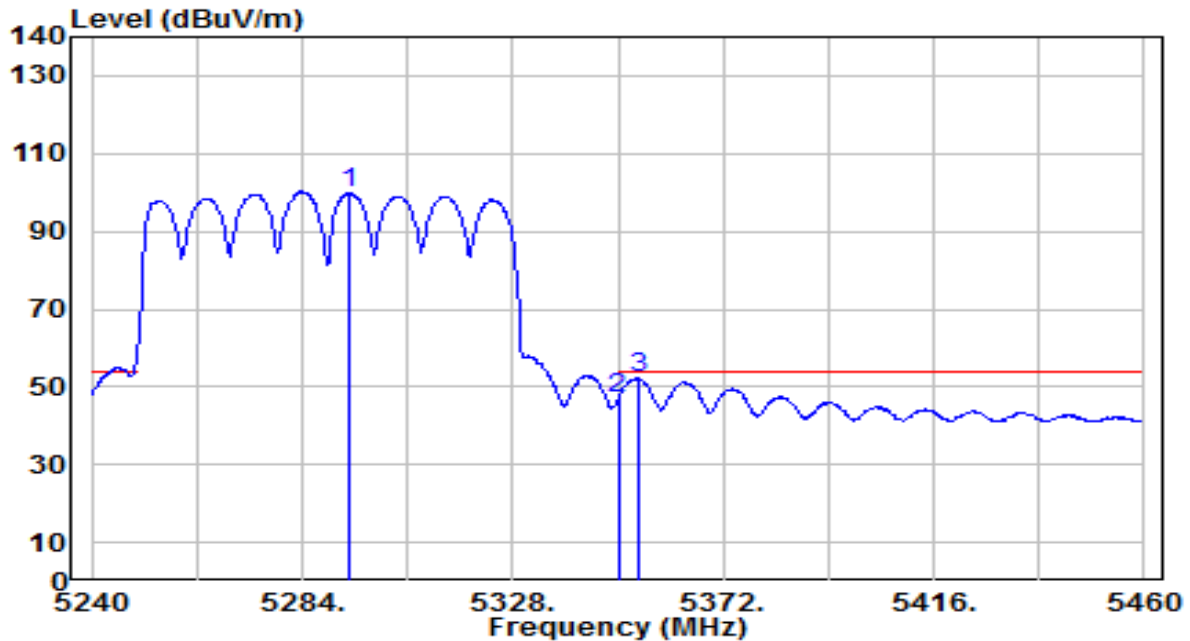


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5293.680	99.08	0.69	99.77	N/A	N/A	135	175	Average
2	5350.000	46.17	0.59	46.77	-7.23	54.00	135	175	Average
3	* 5354.180	51.53	0.59	52.12	-1.88	54.00	135	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

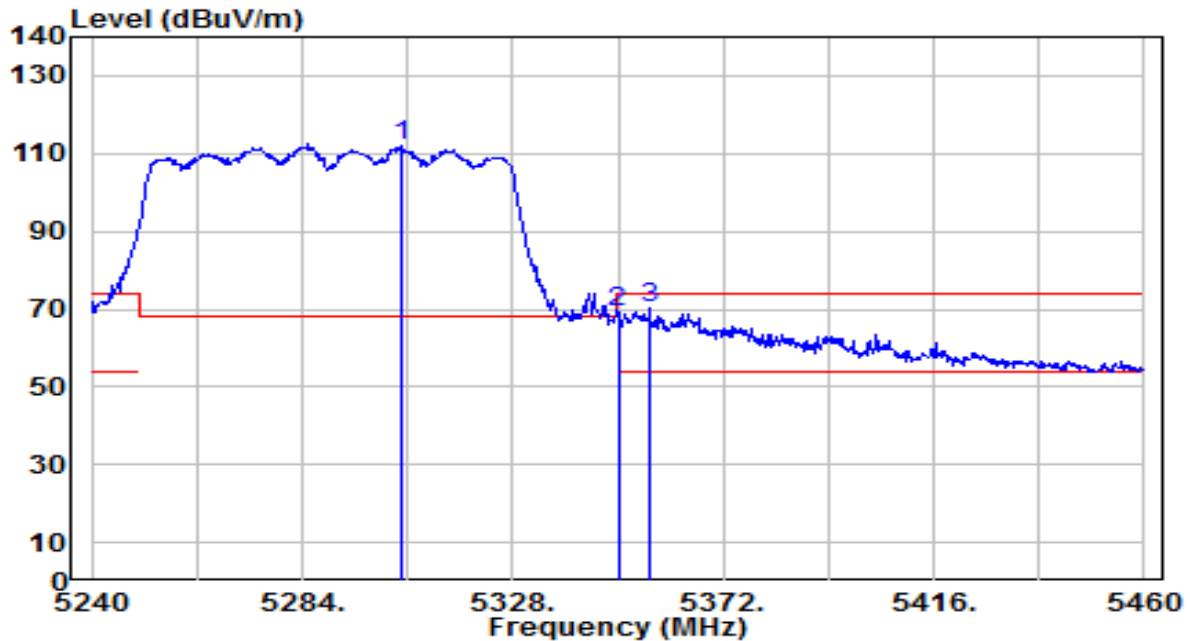


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.680	111.08	0.67	111.75	N/A	N/A	195	95	Peak
2	5350.000	68.82	0.59	69.41	-4.59	74.00	195	95	Peak
3	* 5356.600	69.90	0.58	70.48	-3.52	74.00	195	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

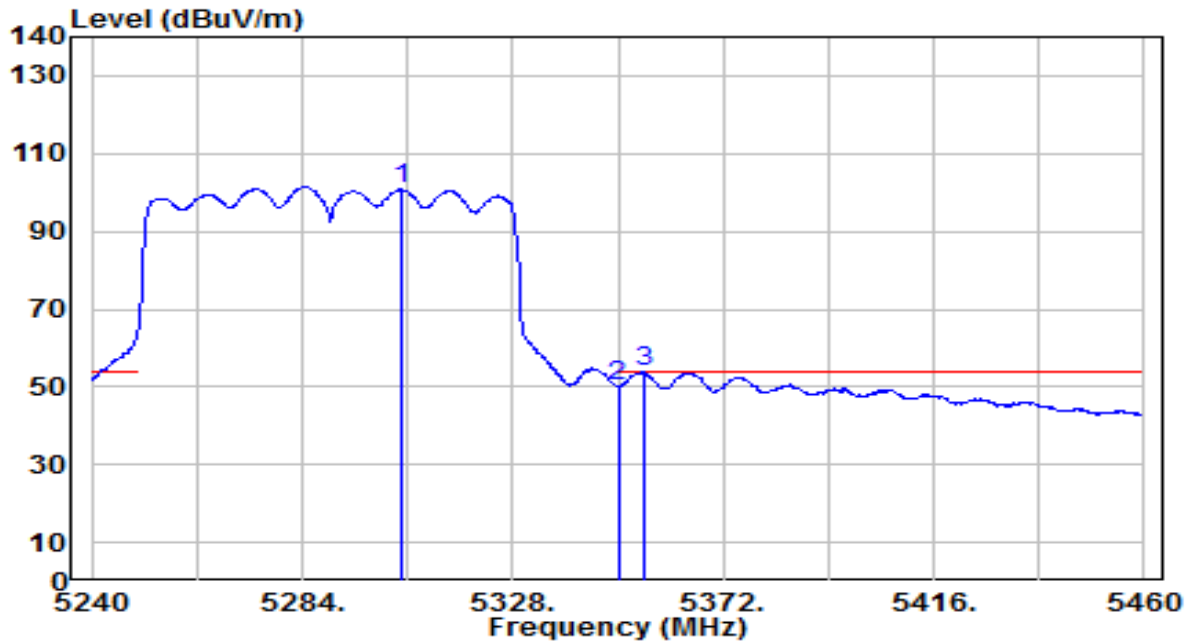


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5304.680	100.07	0.67	100.74	N/A	N/A	195	95	Average
2	5350.000	49.50	0.59	50.09	-3.91	54.00	195	95	Average
3	* 5355.280	53.22	0.58	53.81	-0.19	54.00	195	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

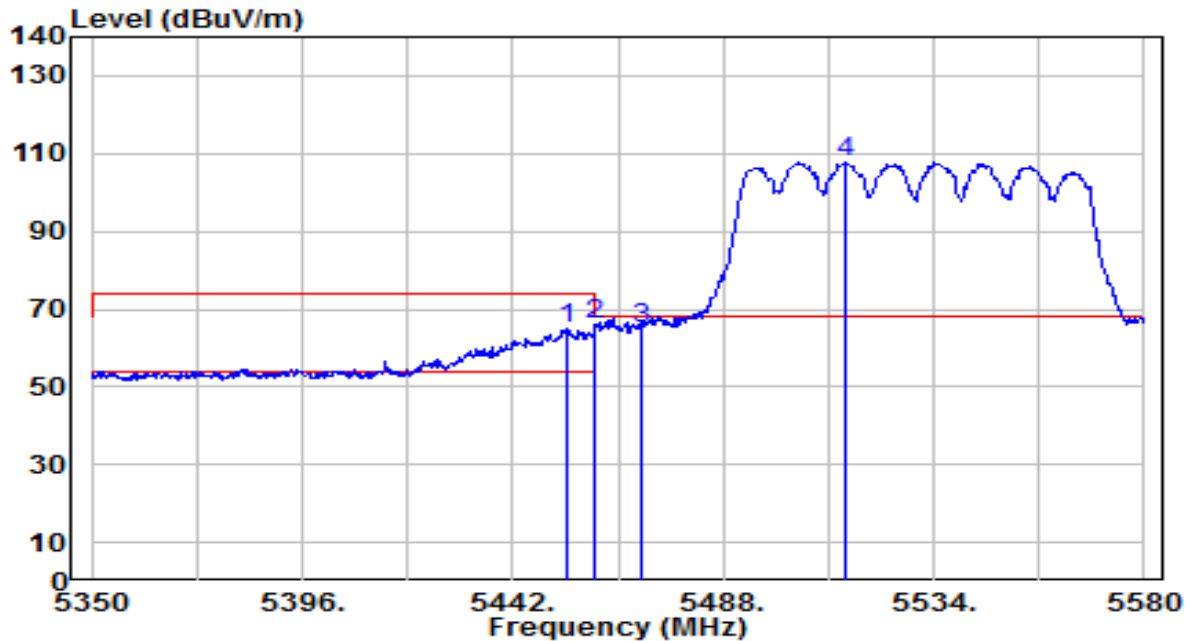


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.960	64.45	0.73	65.18	-8.82	74.00	200	170	Peak
2	5460.000	65.25	0.76	66.01	-7.99	74.00	200	170	Peak
3	* 5470.000	64.18	0.80	64.98	-3.22	68.20	200	170	Peak
4	5514.680	106.68	1.00	107.68	N/A	N/A	200	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

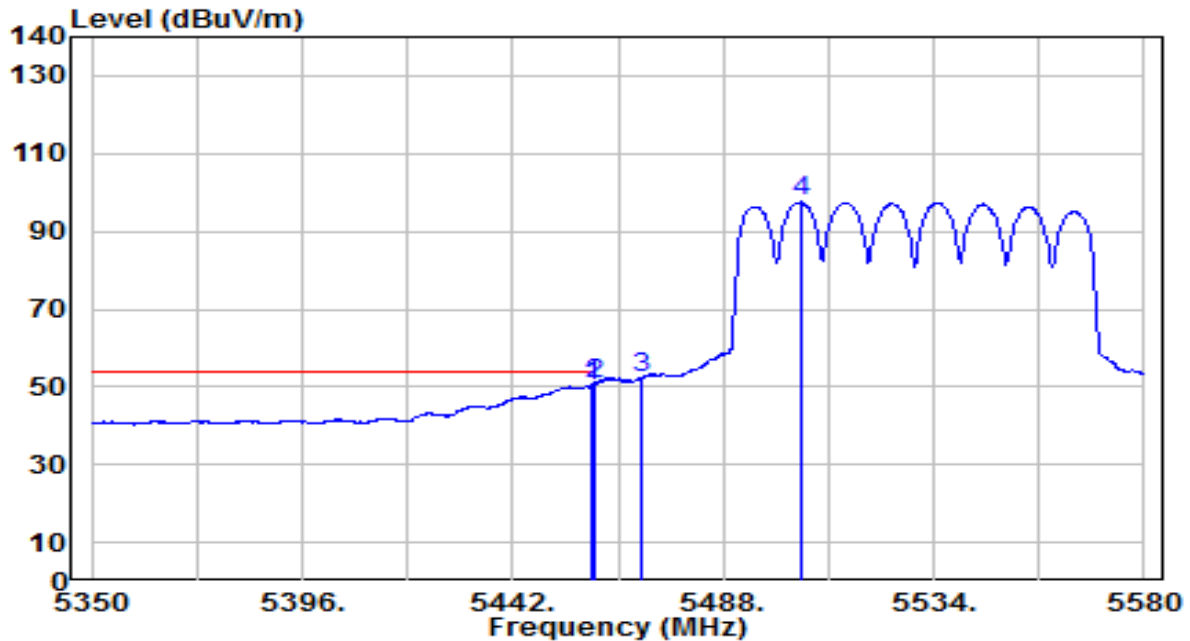


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5459.020	49.49	0.76	50.25	-3.75	54.00	200	170	Average
2	*	5460.000	50.03	0.76	50.79	-3.21	54.00	200	170	Average
3		5470.000	51.65	0.80	52.45	N/A	N/A	200	170	Average
4		5505.020	96.60	0.95	97.56	N/A	N/A	200	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

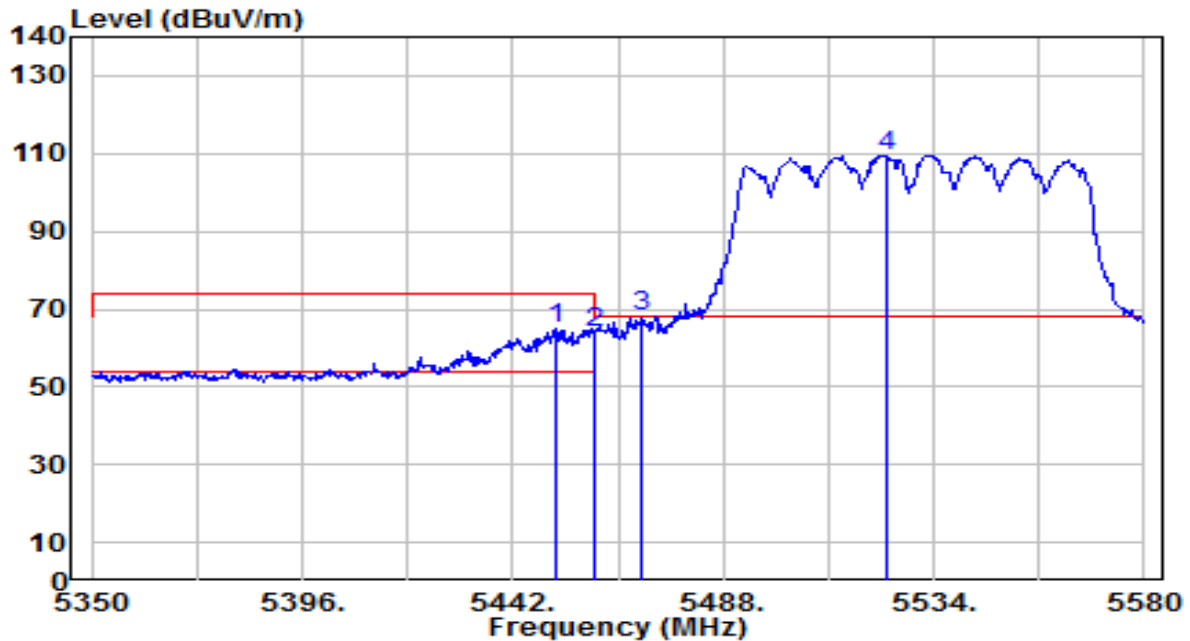


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5451.430	64.31	0.72	65.03	-8.97	74.00	190	155	Peak
2	5460.000	63.36	0.76	64.12	-9.88	74.00	190	155	Peak
3	* 5470.000	67.29	0.80	68.09	-0.11	68.20	190	155	Peak
4	5523.650	108.49	1.04	109.53	N/A	N/A	190	155	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

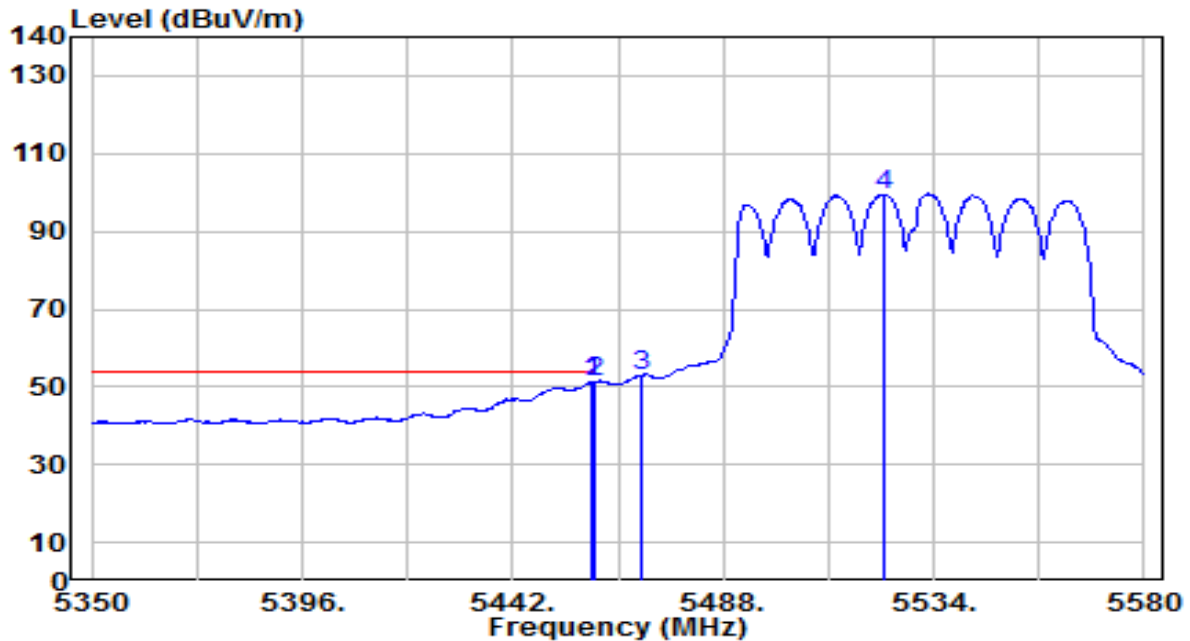


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5459.020	50.63	0.76	51.38	-2.62	54.00	190	155	Average
2	*	5460.000	50.68	0.76	51.44	-2.56	54.00	190	155	Average
3		5470.000	52.16	0.80	52.96	N/A	N/A	190	155	Average
4		5523.190	98.45	1.04	99.49	N/A	N/A	190	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

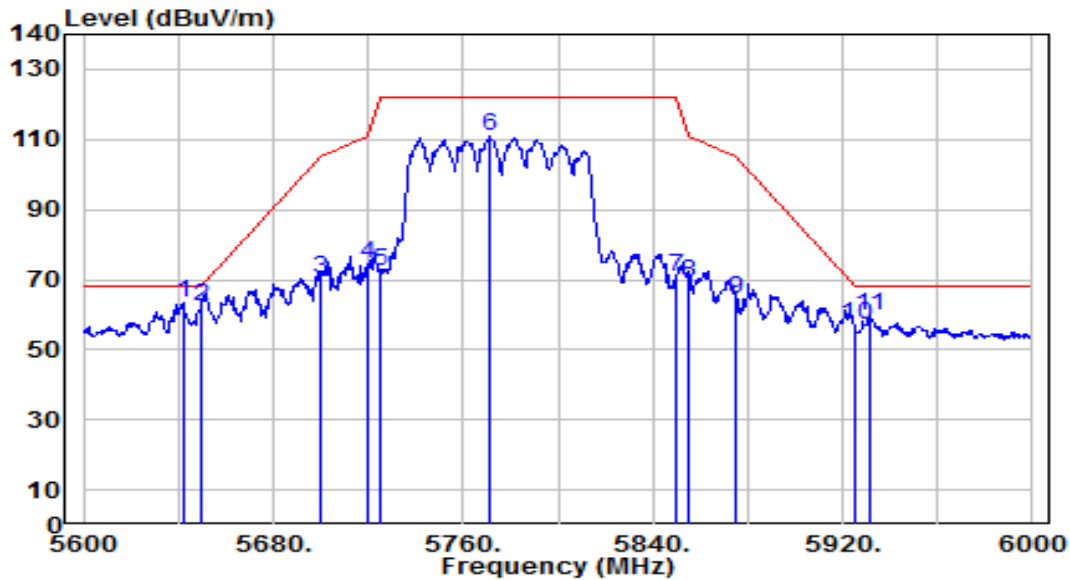


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.000	61.63	1.55	63.18	-5.02	68.20	160	170	Peak
2		5650.000	61.00	1.59	62.59	-5.61	68.20	160	170	Peak
3		5700.000	68.70	1.79	70.49	-34.71	105.20	160	170	Peak
4		5720.000	72.87	1.87	74.74	-36.06	110.80	160	170	Peak
5		5725.000	70.29	1.89	72.18	-50.02	122.20	160	170	Peak
6		5771.200	108.75	2.08	110.83	N/A	N/A	160	170	Peak
7		5850.000	68.27	2.27	70.54	-51.66	122.20	160	170	Peak
8		5855.000	66.77	2.28	69.05	-41.75	110.80	160	170	Peak
9		5875.000	61.93	2.31	64.24	-40.96	105.20	160	170	Peak
10		5925.000	54.72	2.38	57.11	-11.09	68.20	160	170	Peak
11		5931.200	57.10	2.39	59.49	-8.71	68.20	160	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

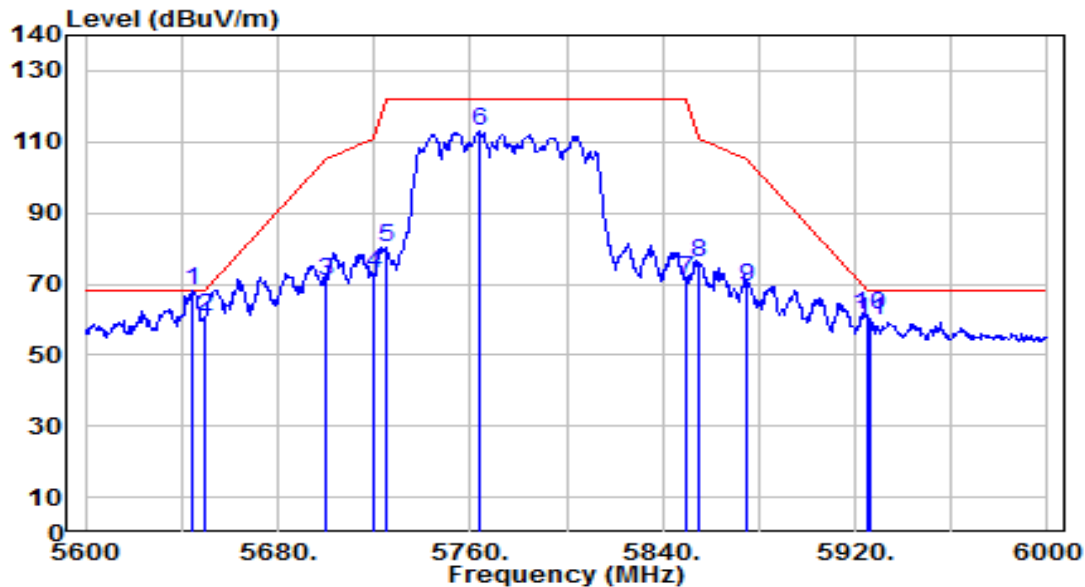


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.000	66.45	1.56	68.01	-0.19	68.20	165	355	Peak
2		5650.000	59.07	1.59	60.66	-7.54	68.20	165	355	Peak
3		5700.000	69.27	1.79	71.05	-34.15	105.20	165	355	Peak
4		5720.000	71.01	1.87	72.88	-37.92	110.80	165	355	Peak
5		5725.000	78.21	1.89	80.10	-42.10	122.20	165	355	Peak
6		5764.000	110.95	2.05	113.00	N/A	N/A	165	355	Peak
7		5850.000	69.09	2.27	71.36	-50.84	122.20	165	355	Peak
8		5855.000	73.59	2.28	75.87	-34.93	110.80	165	355	Peak
9		5875.000	67.16	2.31	69.47	-35.73	105.20	165	355	Peak
10		5925.000	58.93	2.38	61.31	-6.89	68.20	165	355	Peak
11		5926.400	57.05	2.39	59.44	-8.76	68.20	165	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

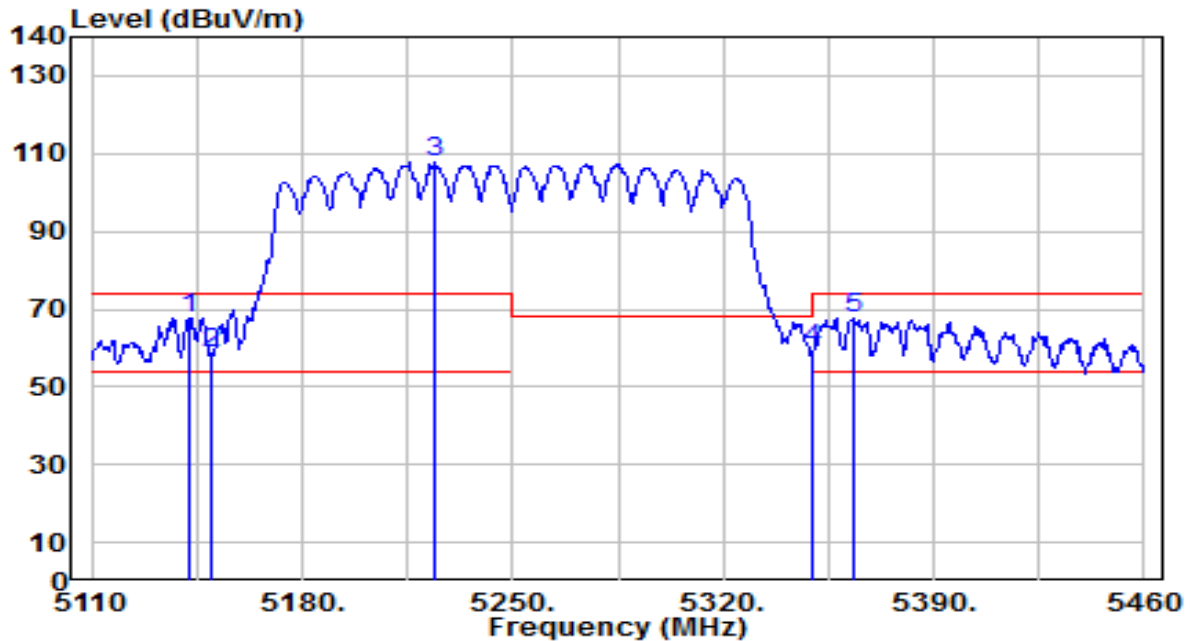


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5142.550	67.05	0.79	67.84	-6.16	74.00	125	175	Peak
2	5150.000	57.98	0.80	58.78	-15.22	74.00	125	175	Peak
3	5224.450	106.95	0.81	107.76	N/A	N/A	125	175	Peak
4	5350.000	59.18	0.59	59.78	-14.22	74.00	125	175	Peak
5	* 5363.050	67.31	0.57	67.88	-6.12	74.00	125	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

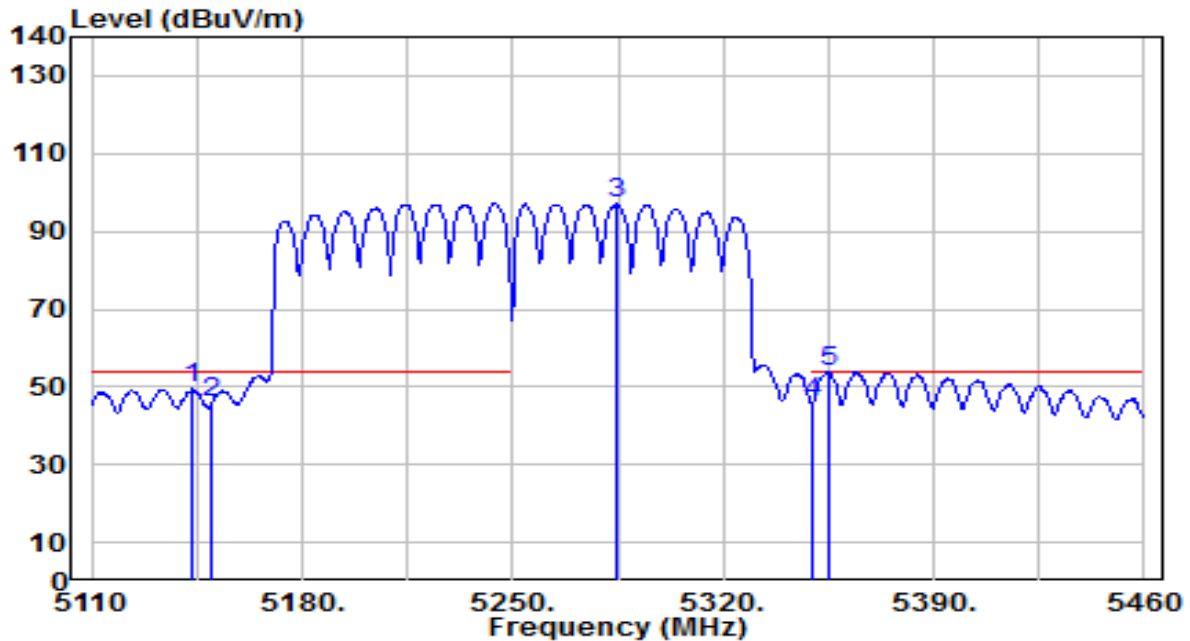


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.250	48.73	0.79	49.52	-4.48	54.00	125	175	Average
2	5150.000	45.40	0.80	46.20	-7.80	54.00	125	175	Average
3	5284.650	96.35	0.71	97.06	N/A	N/A	125	175	Average
4	5350.000	45.52	0.59	46.11	-7.89	54.00	125	175	Average
5	* 5355.000	53.32	0.59	53.90	-0.10	54.00	125	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

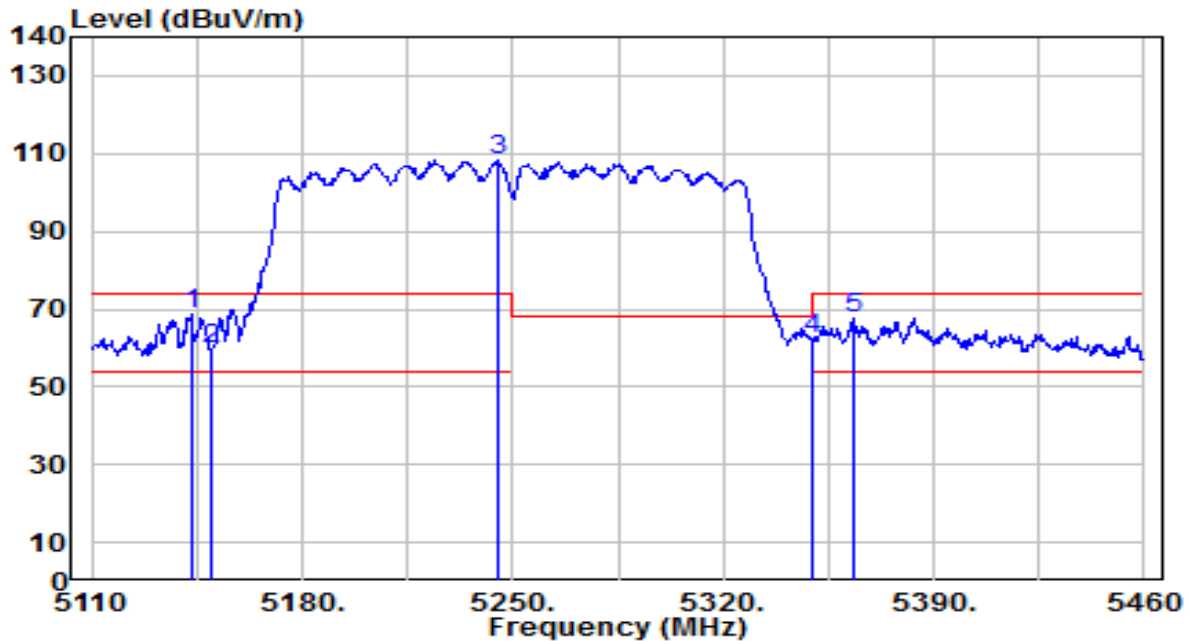


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.250	67.85	0.79	68.64	-5.36	74.00	185	115	Peak
2		5150.000	58.68	0.80	59.47	-14.53	74.00	185	115	Peak
3		5245.100	107.57	0.78	108.35	N/A	N/A	185	115	Peak
4		5350.000	61.79	0.59	62.38	-11.62	74.00	185	115	Peak
5		5363.050	67.03	0.57	67.61	-6.39	74.00	185	115	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

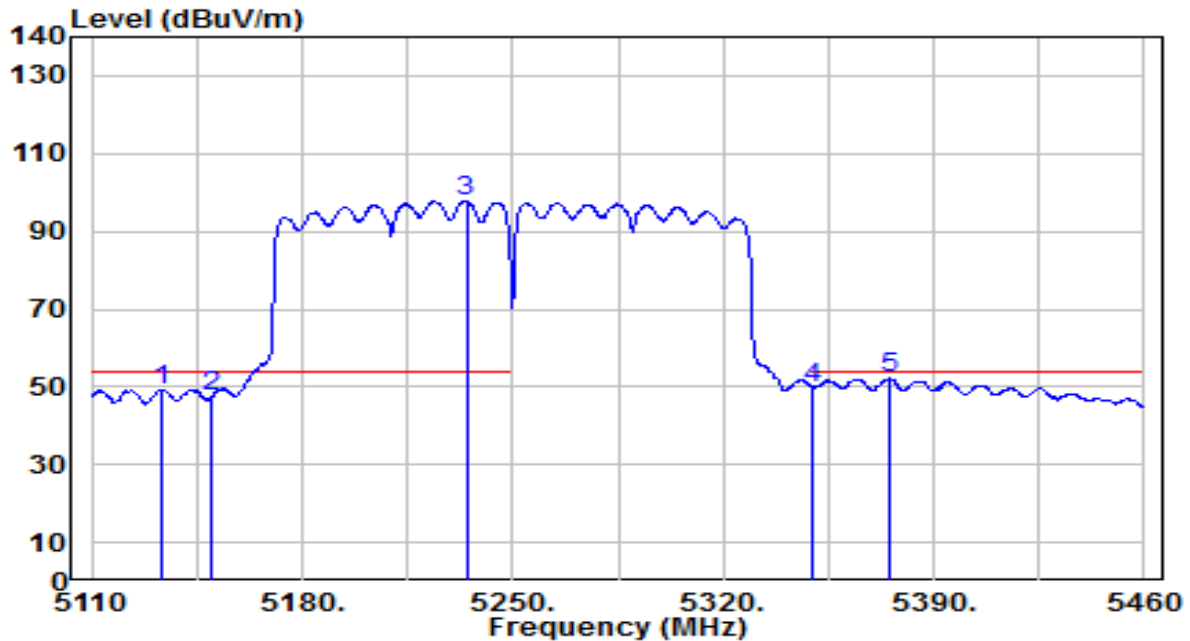


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5133.450	48.50	0.78	49.27	-4.73	54.00	185	115	Average
2	5150.000	46.51	0.80	47.30	-6.70	54.00	185	115	Average
3	5234.600	97.13	0.80	97.93	N/A	N/A	185	115	Average
4	5350.000	49.10	0.59	49.69	-4.31	54.00	185	115	Average
5	* 5374.950	51.56	0.55	52.11	-1.89	54.00	185	115	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

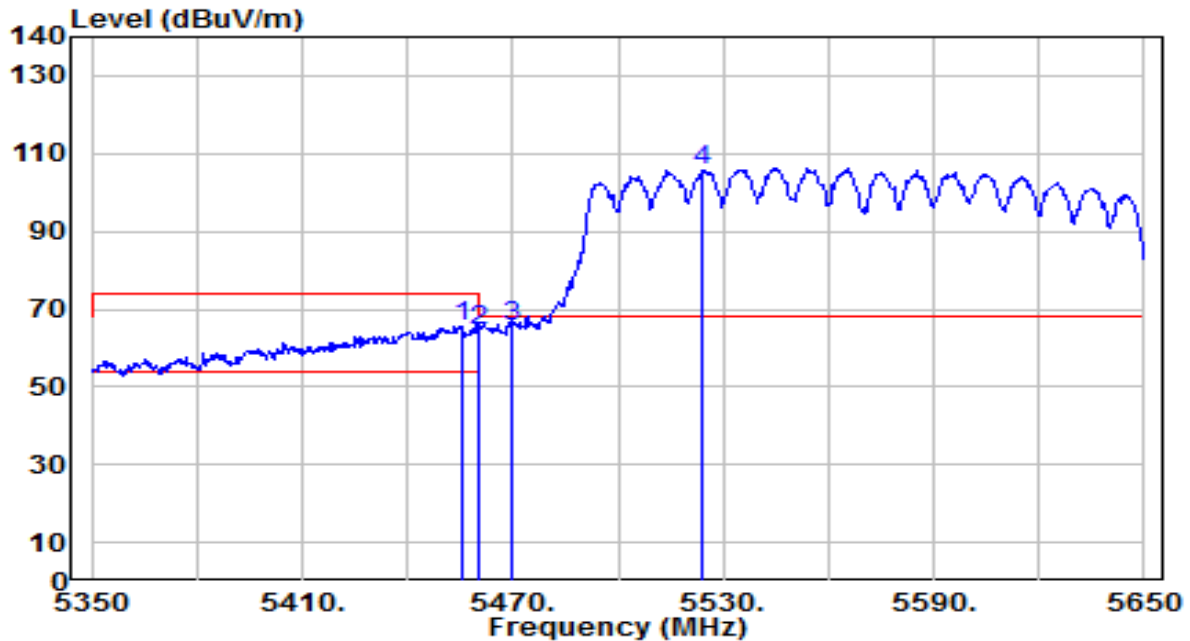


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5455.600	64.93	0.74	65.67	-8.33	74.00	185	175	Peak
2	5460.000	63.63	0.76	64.39	-9.61	74.00	185	175	Peak
3	* 5470.000	64.69	0.80	65.49	-2.71	68.20	185	175	Peak
4	5524.300	104.85	1.04	105.89	N/A	N/A	185	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

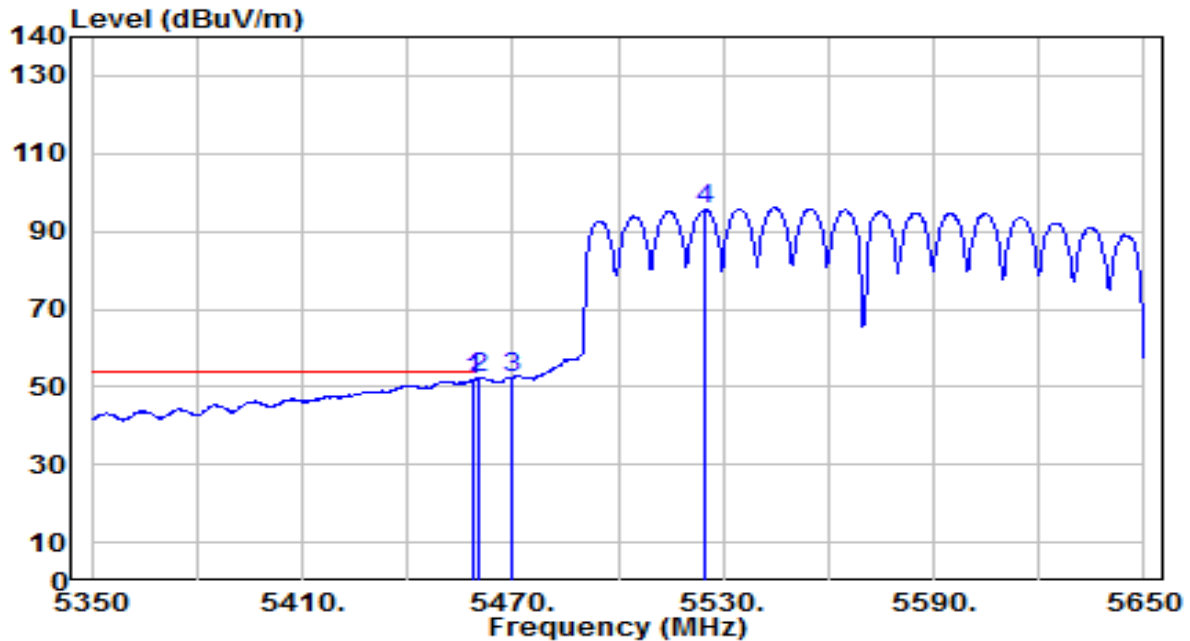


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.600	51.06	0.75	51.81	-2.19	54.00	185	175	Average
2	*	5460.000	51.44	0.76	52.21	-1.79	54.00	185	175	Average
3		5470.000	51.64	0.80	52.45	N/A	N/A	185	175	Average
4		5524.900	94.35	1.04	95.39	N/A	N/A	185	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

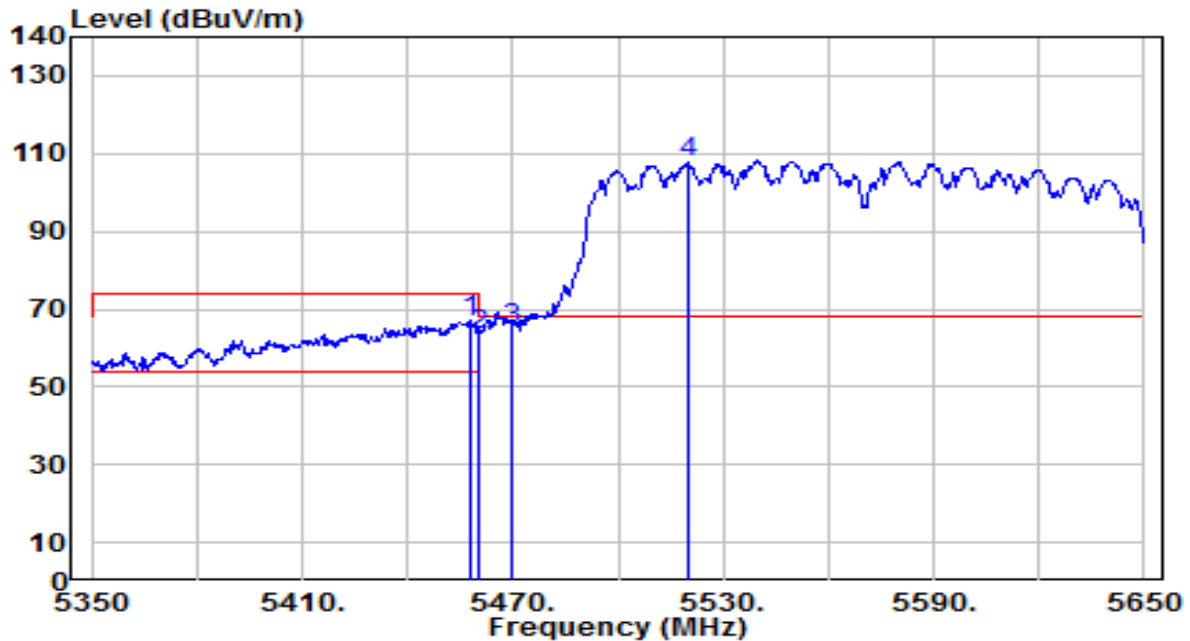


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.000	66.21	0.75	66.97	-7.03	74.00	180	360	Peak
2	5460.000	62.75	0.76	63.51	-10.49	74.00	180	360	Peak
3	* 5470.000	64.33	0.80	65.13	-3.07	68.20	180	360	Peak
4	5520.100	106.62	1.02	107.64	N/A	N/A	180	360	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

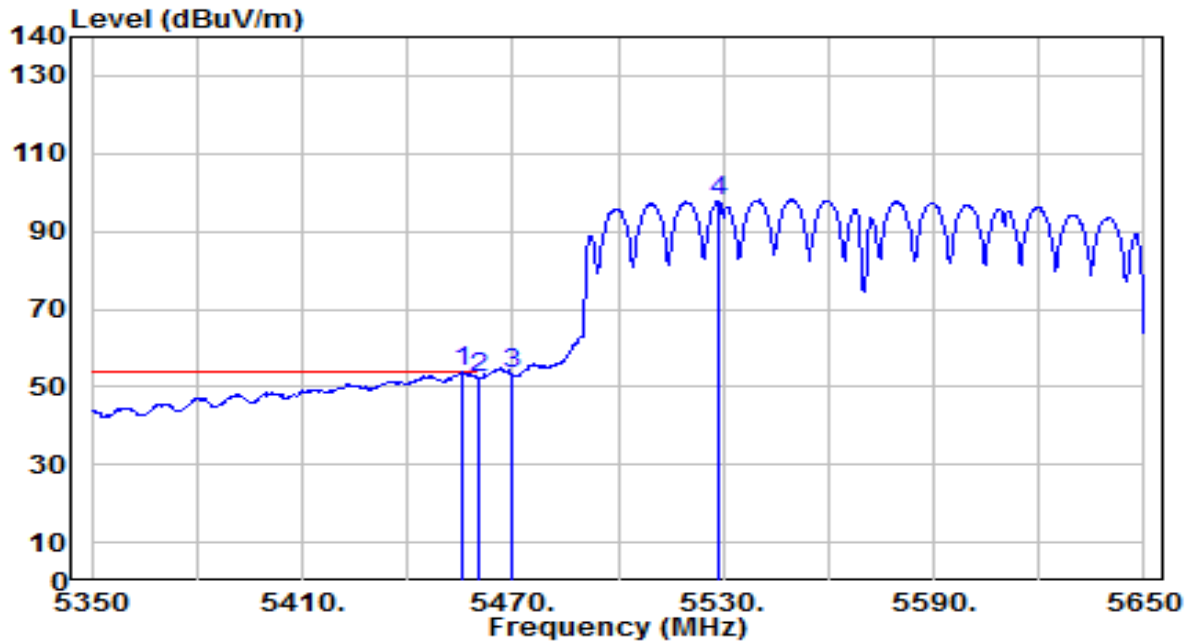


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.900	53.07	0.74	53.81	-0.19	54.00	180	360	Average
2		5460.000	51.43	0.76	52.19	-1.81	54.00	180	360	Average
3		5470.000	52.40	0.80	53.20	N/A	N/A	180	360	Average
4		5528.800	96.55	1.06	97.61	N/A	N/A	180	360	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

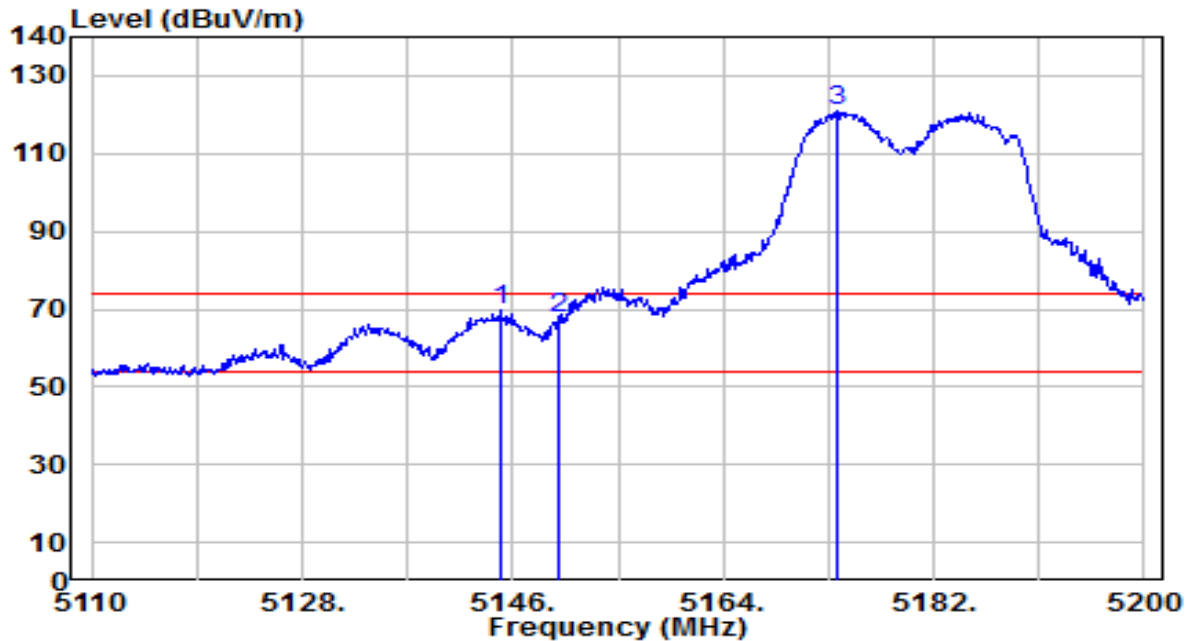


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.920	68.73	0.79	69.52	-4.48	74.00	145	170	Peak
2		5150.000	66.67	0.80	67.47	-6.53	74.00	145	170	Peak
3		5173.810	120.12	0.83	120.94	N/A	N/A	145	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

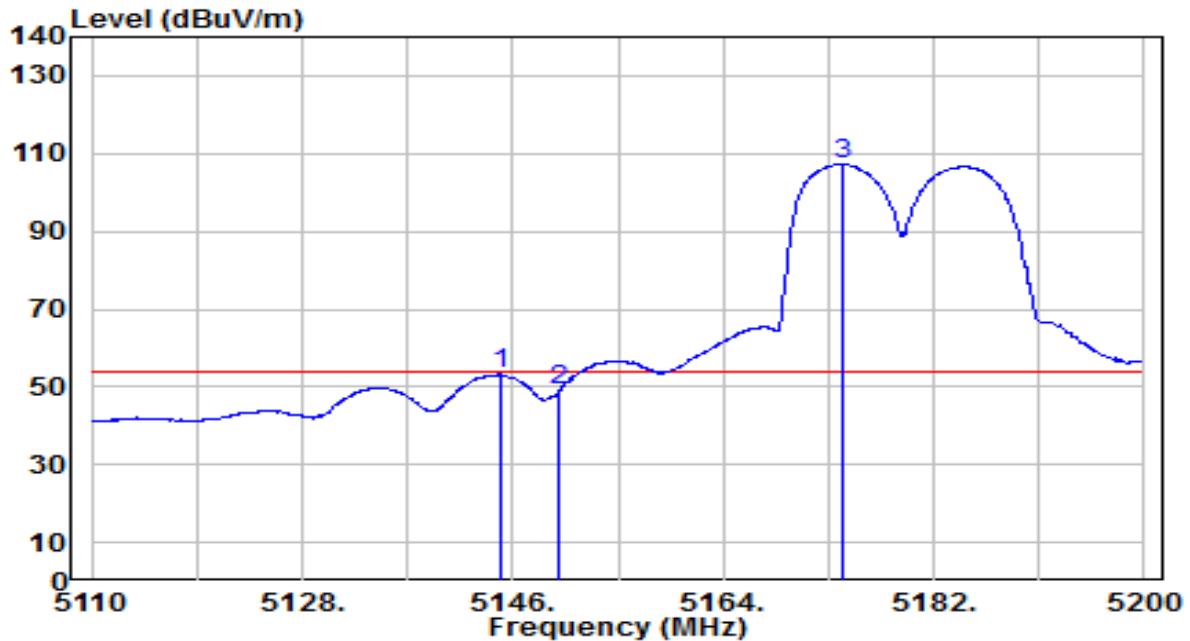


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.920	52.44	0.79	53.23	-0.77	54.00	145	170	Average
2		5150.000	48.23	0.80	49.03	-4.97	54.00	145	170	Average
3		5174.170	106.37	0.83	107.20	N/A	N/A	145	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

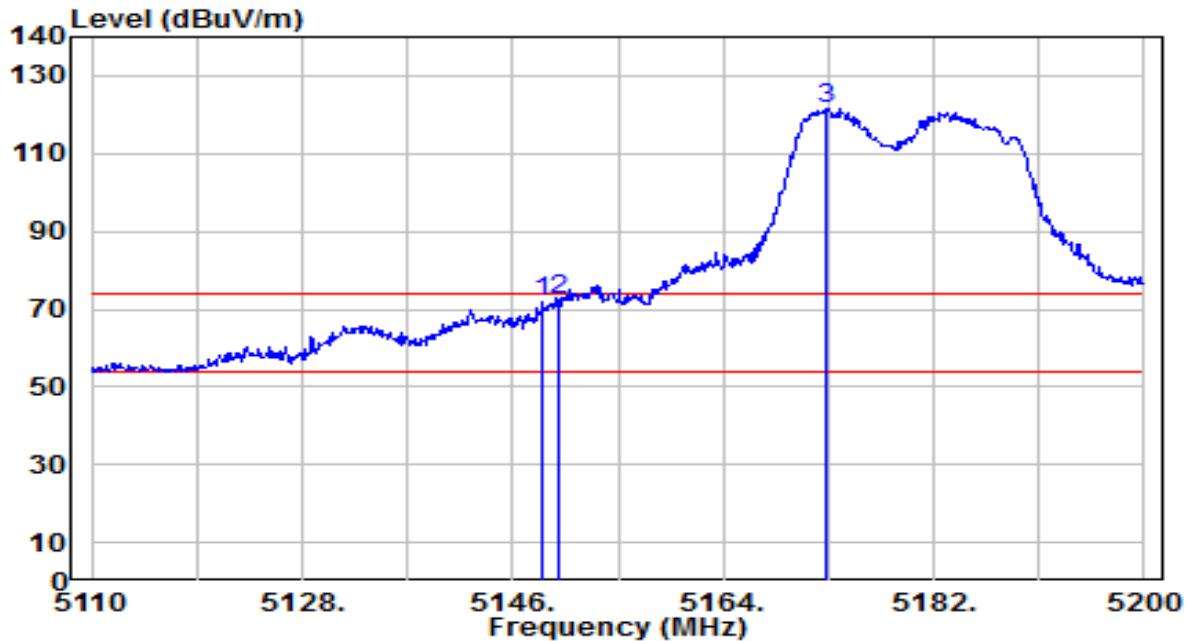


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5148.520	70.86	0.79	71.65	-2.35	74.00	220	110	Peak
2	*	5150.000	71.84	0.80	72.63	-1.37	74.00	220	110	Peak
3		5172.730	120.68	0.82	121.51	N/A	N/A	220	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

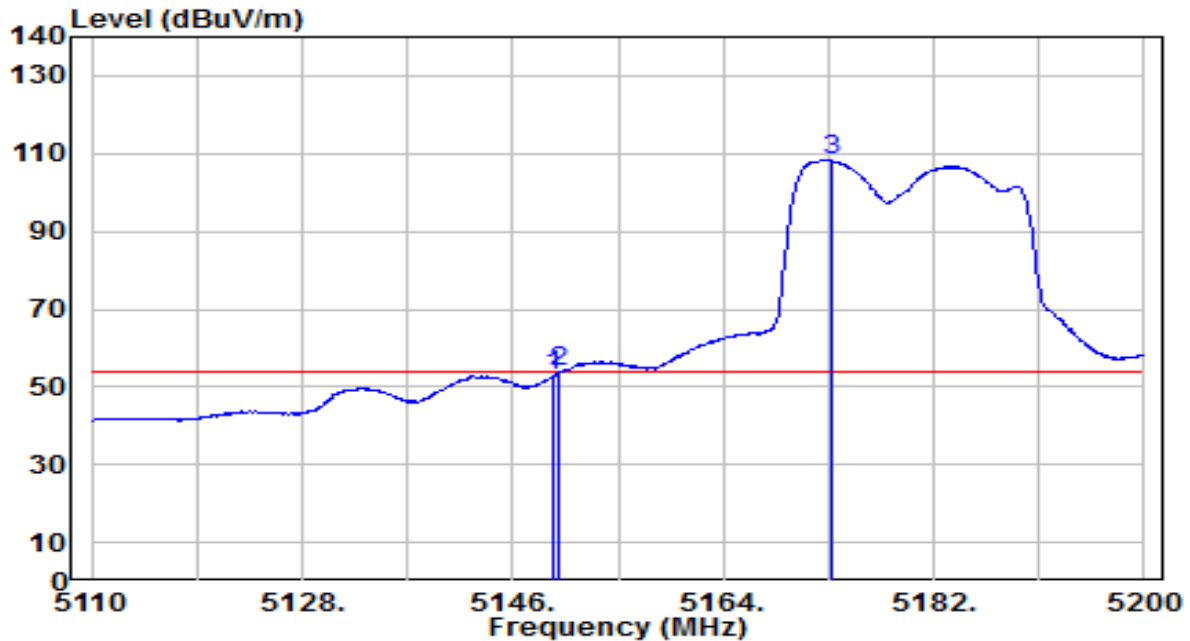


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	52.06	0.80	52.85	-1.15	54.00	220	110	Average
2	*	5150.000	53.10	0.80	53.90	-0.10	54.00	220	110	Average
3		5173.180	107.46	0.82	108.29	N/A	N/A	220	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

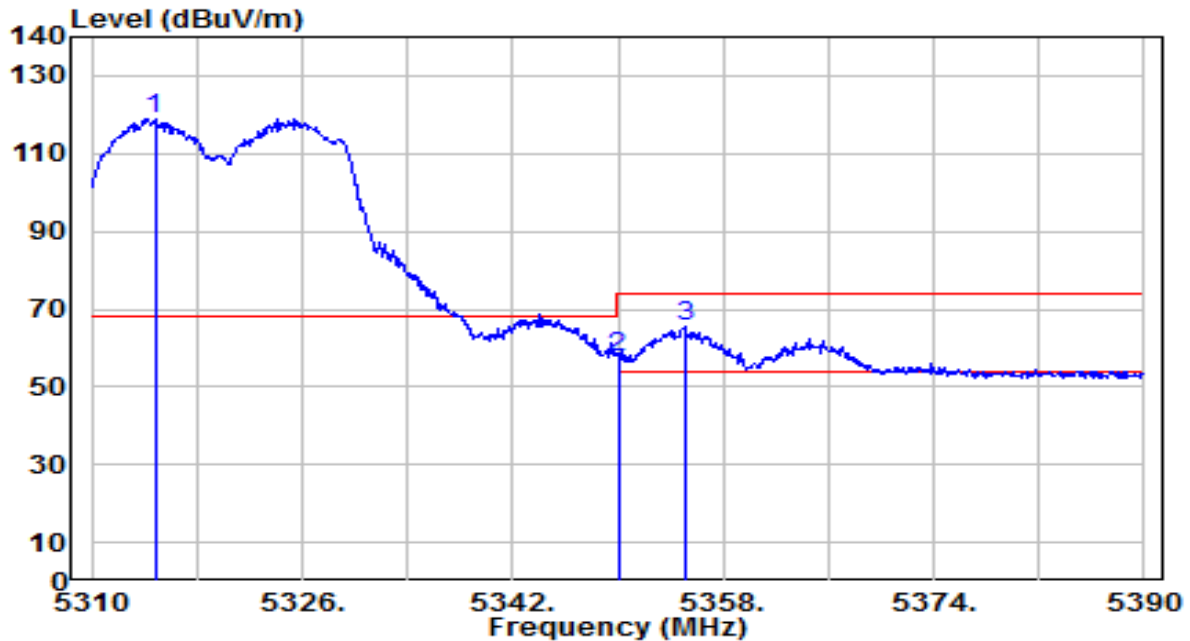


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.800	118.21	0.66	118.86	N/A	N/A	125	170	Peak
2	5350.000	56.97	0.59	57.57	-16.43	74.00	125	170	Peak
3	* 5355.040	65.17	0.59	65.75	-8.25	74.00	125	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

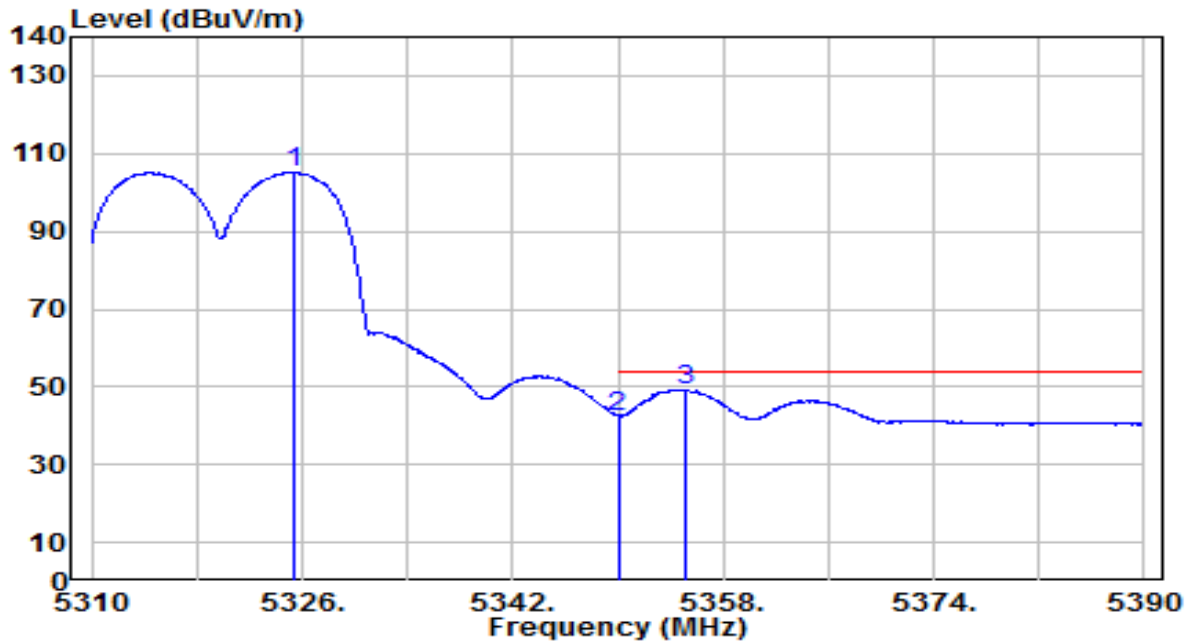


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.360	104.47	0.64	105.10	N/A	N/A	125	170	Average
2	5350.000	41.86	0.59	42.46	-11.54	54.00	125	170	Average
3	* 5355.200	48.69	0.58	49.27	-4.73	54.00	125	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

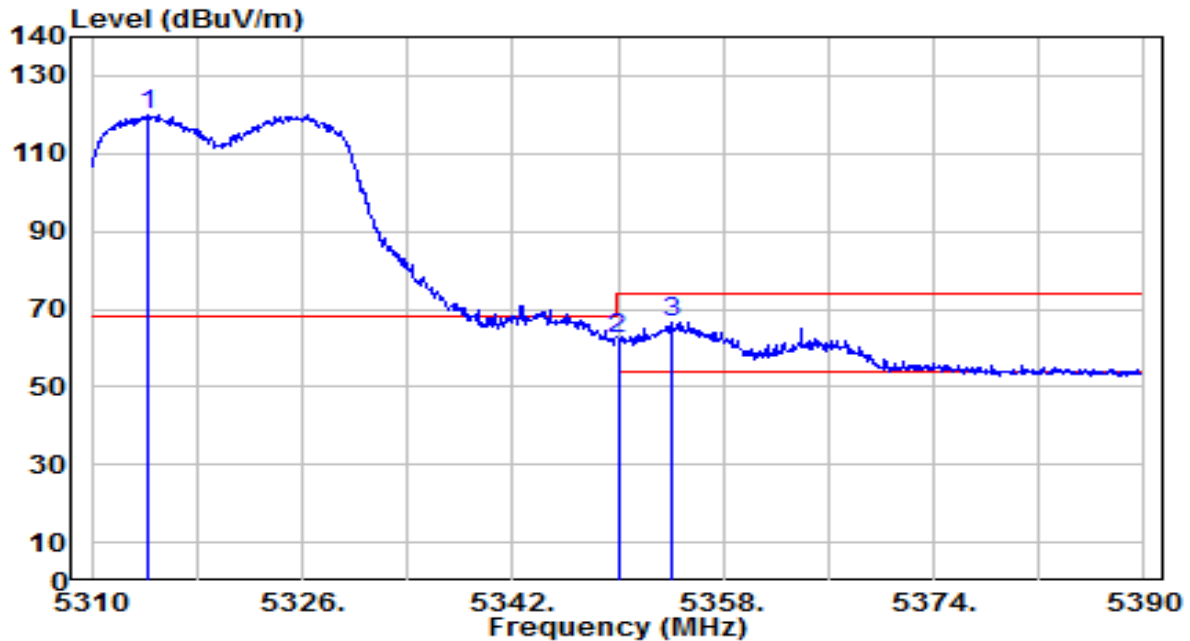


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.240	119.25	0.66	119.91	N/A	N/A	190	95	Peak
2	5350.000	61.70	0.59	62.30	-11.70	74.00	190	95	Peak
3	* 5354.080	65.97	0.59	66.56	-7.44	74.00	190	95	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

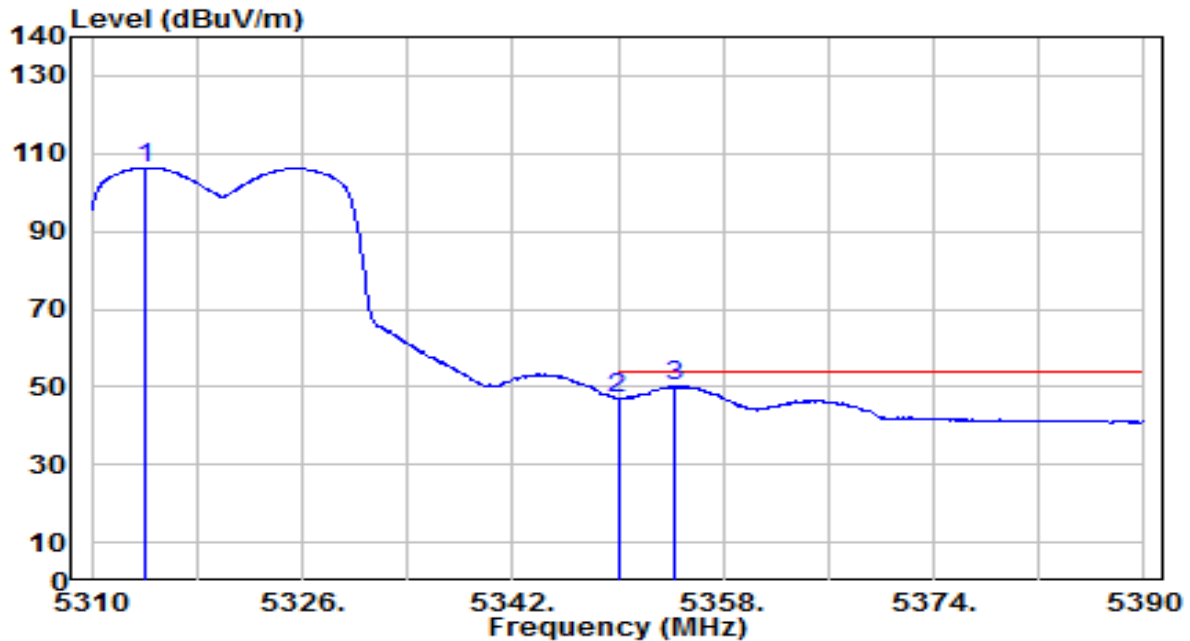


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.080	105.77	0.66	106.42	N/A	N/A	190	95	Average
2	5350.000	46.40	0.59	46.99	-7.01	54.00	190	95	Average
3	* 5354.400	49.67	0.59	50.25	-3.75	54.00	190	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

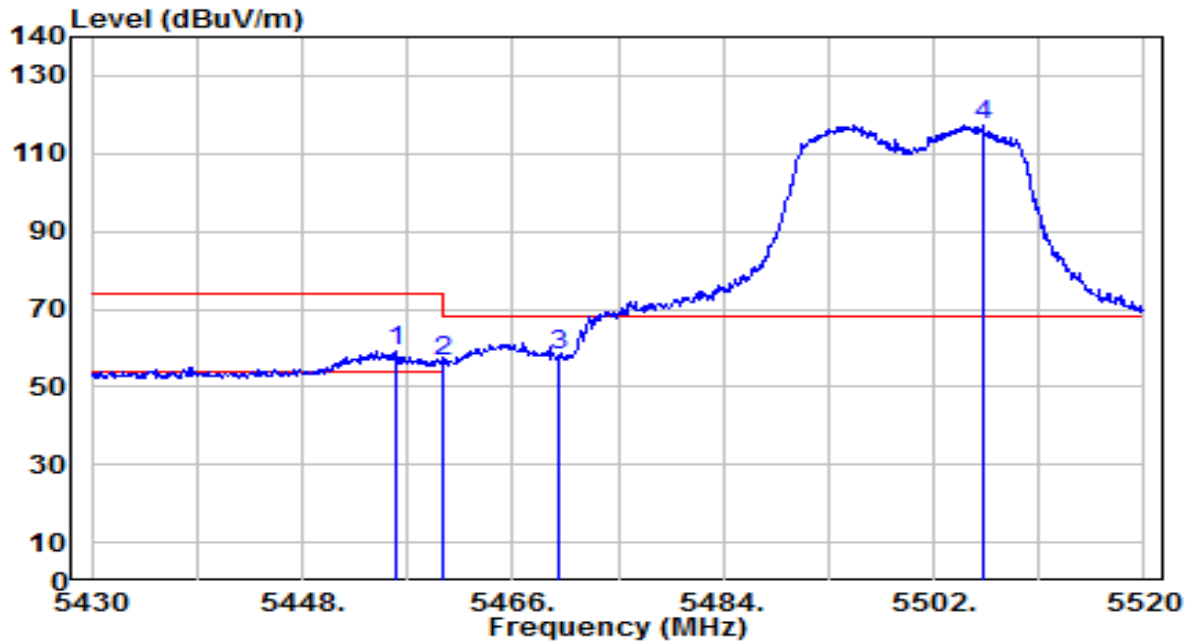


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.100	58.26	0.74	59.01	-14.99	74.00	200	170	Peak
2	5460.000	55.69	0.76	56.45	-17.55	74.00	200	170	Peak
3	* 5470.000	57.25	0.80	58.05	-10.15	68.20	200	170	Peak
4	5506.140	116.45	0.96	117.41	N/A	N/A	200	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

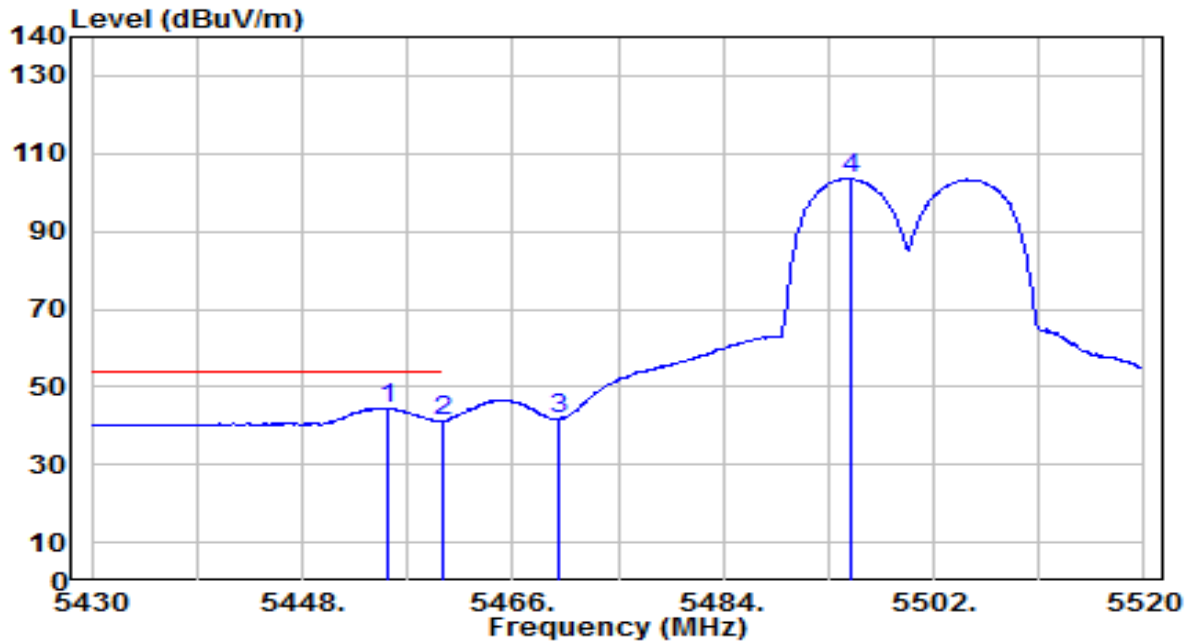


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.380	43.79	0.74	44.53	-9.47	54.00	200	170	Average
2		5460.000	40.55	0.76	41.31	-12.69	54.00	200	170	Average
3		5470.000	40.89	0.80	41.69	N/A	N/A	200	170	Average
4		5494.980	102.66	0.91	103.56	N/A	N/A	200	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

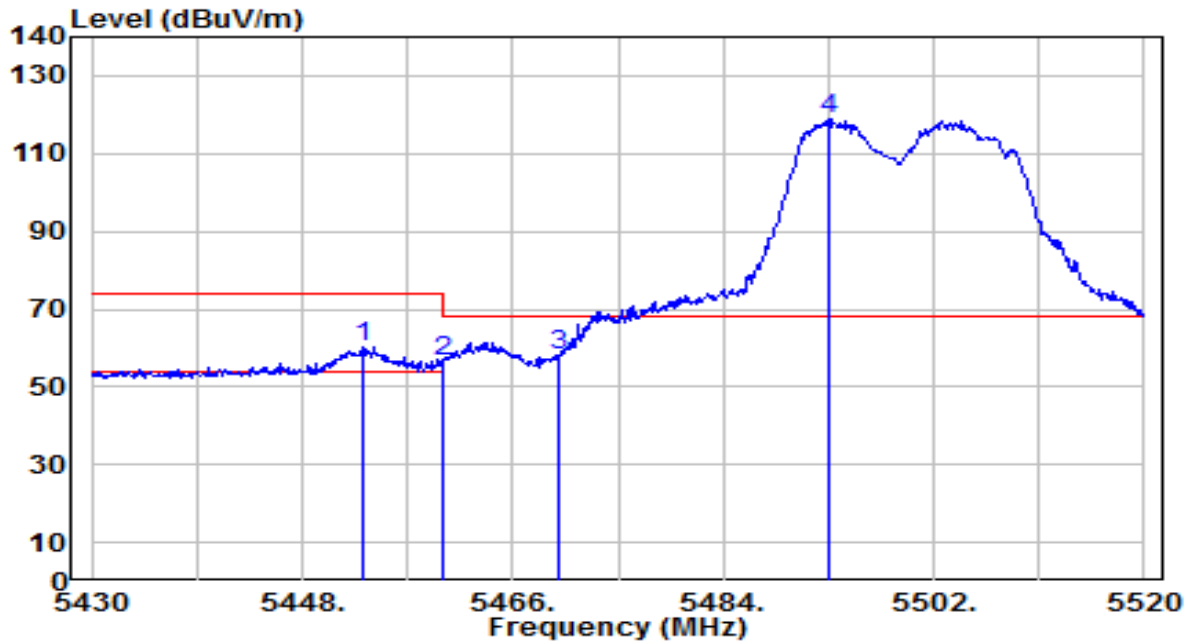


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.130	59.63	0.73	60.37	-13.63	74.00	195	155	Peak
2	5460.000	55.98	0.76	56.74	-17.26	74.00	195	155	Peak
3	* 5470.000	57.15	0.80	57.95	-10.25	68.20	195	155	Peak
4	5493.090	118.05	0.90	118.95	N/A	N/A	195	155	Peak

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

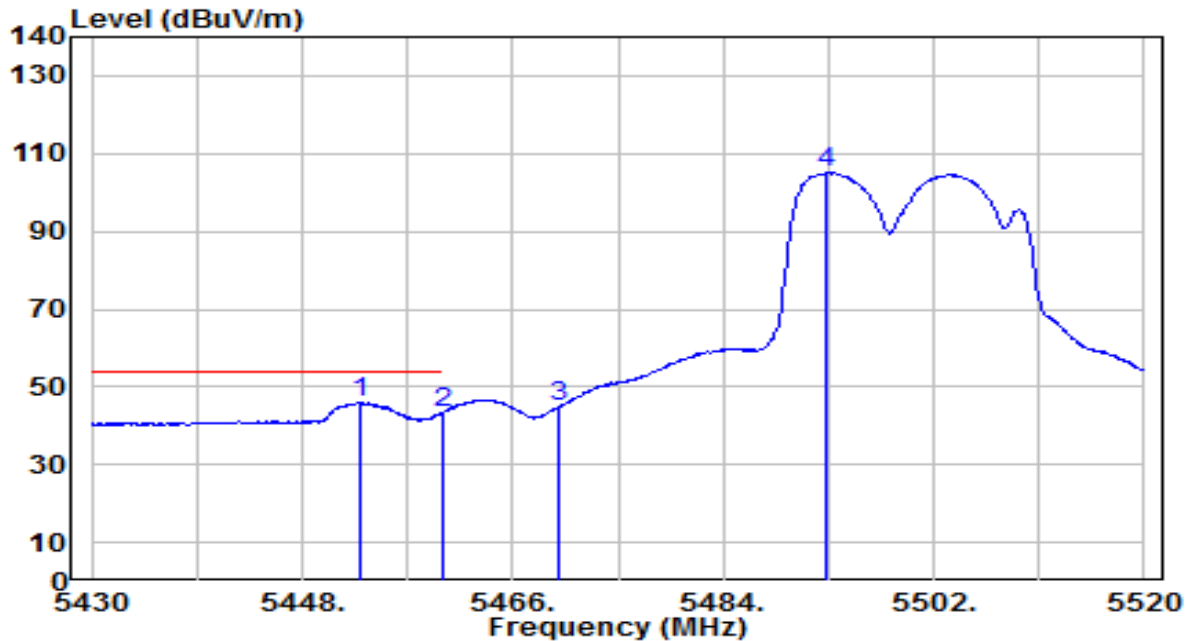


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5452.860	45.11	0.73	45.84	-8.16	54.00	195	155	Average
2		5460.000	42.77	0.76	43.53	-10.47	54.00	195	155	Average
3		5470.000	43.96	0.80	44.76	N/A	N/A	195	155	Average
4		5492.820	104.13	0.90	105.03	N/A	N/A	195	155	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

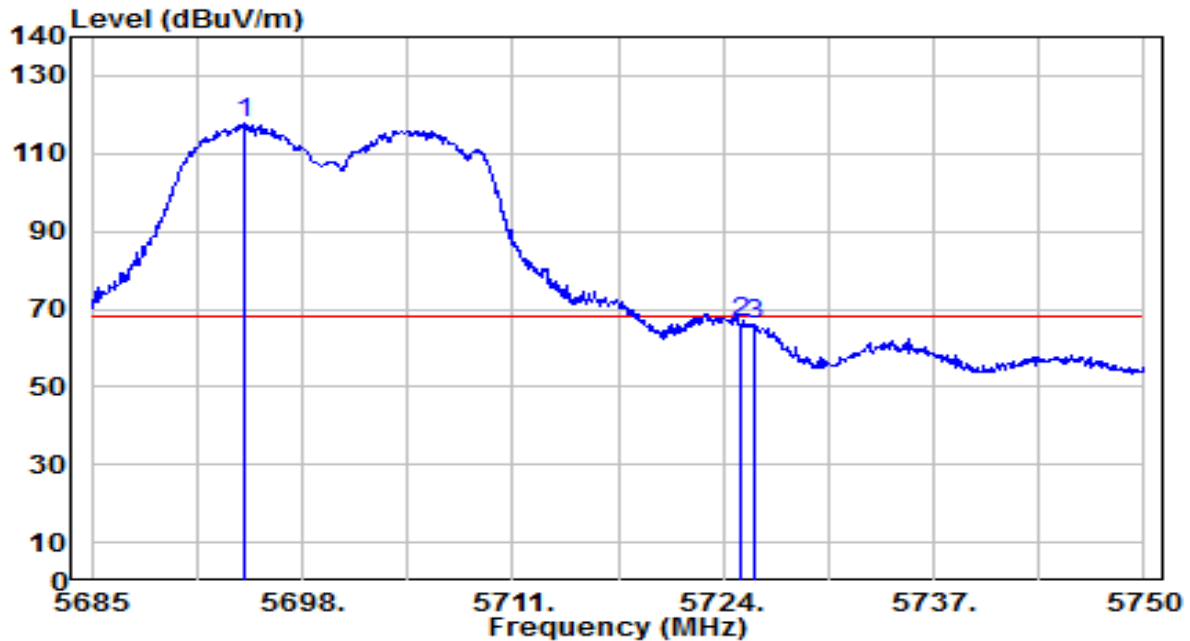


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5694.425	116.07	1.77	117.84	N/A	N/A	190	350	Peak
2	*	5725.000	64.43	1.89	66.32	-1.88	68.20	190	350	Peak
3		5725.950	63.88	1.89	65.78	-2.42	68.20	190	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

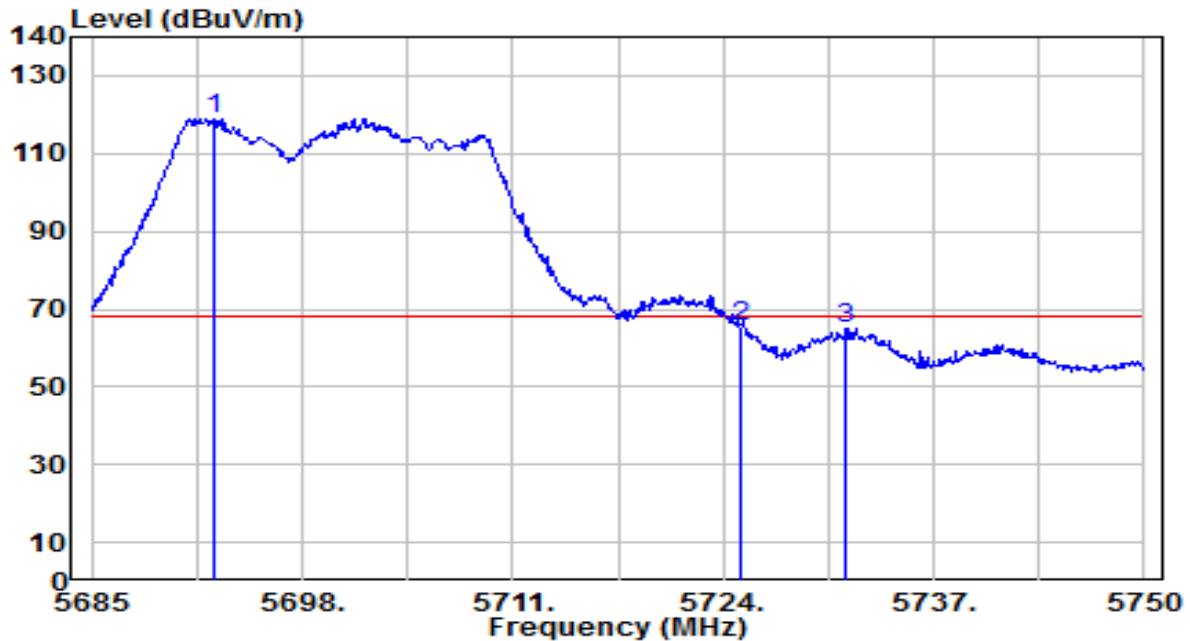


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5692.540	117.29	1.76	119.05	N/A	N/A	150	360	Peak
2	*	5725.000	63.58	1.89	65.47	-2.73	68.20	150	360	Peak
3		5731.605	62.87	1.92	64.79	-3.41	68.20	150	360	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

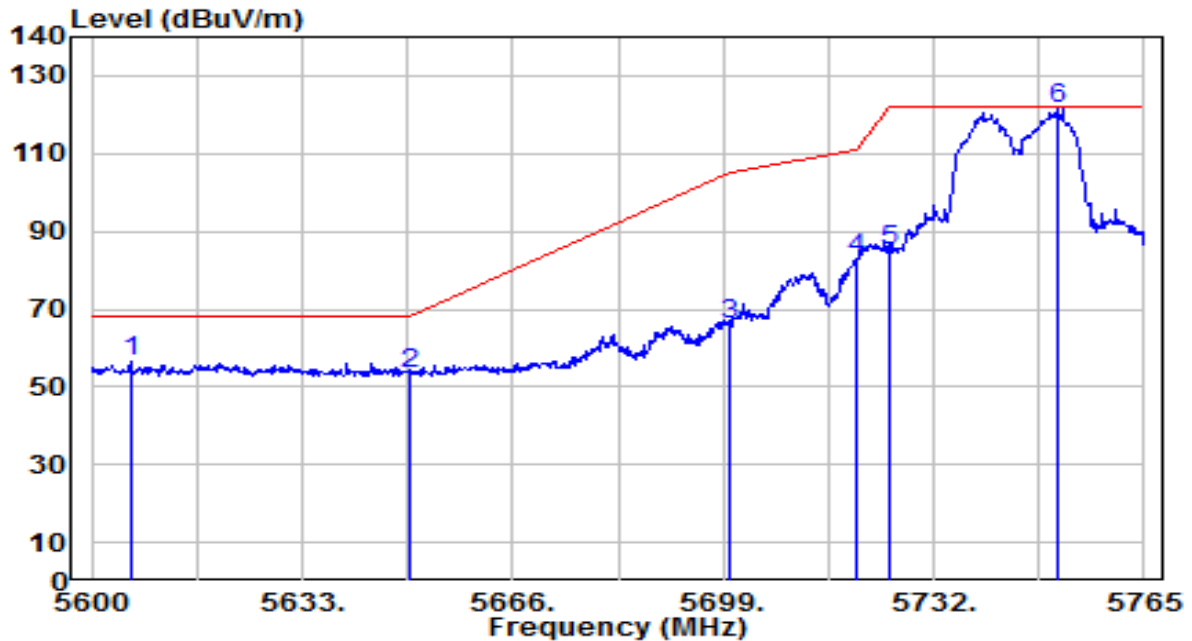


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5606.105	54.90	1.41	56.31	-11.89	68.20	175	170	Peak
2		5650.000	52.03	1.59	53.62	-14.58	68.20	175	170	Peak
3		5700.000	64.26	1.79	66.05	-39.15	105.20	175	170	Peak
4		5720.000	81.16	1.87	83.03	-27.77	110.80	175	170	Peak
5		5725.000	83.25	1.89	85.13	-37.07	122.20	175	170	Peak
6		5751.470	119.29	2.00	121.28	N/A	N/A	175	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

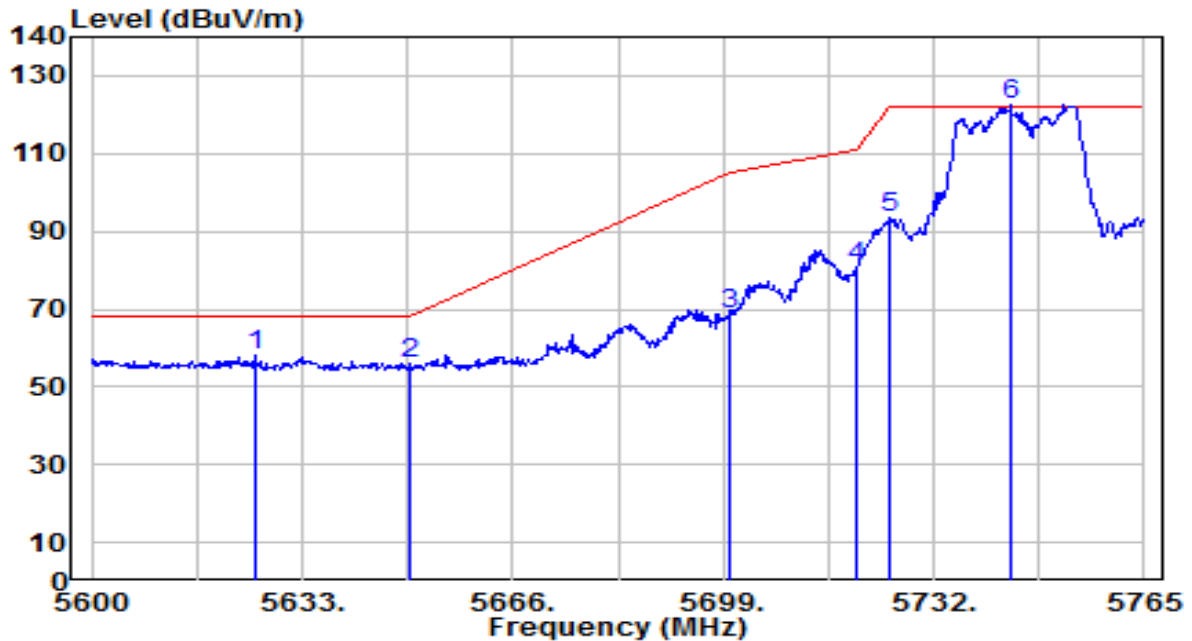


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5625.575	56.73	1.49	58.22	-9.98	68.20	175	355	Peak
2		5650.000	54.61	1.59	56.19	-12.01	68.20	175	355	Peak
3		5700.000	66.94	1.79	68.73	-36.47	105.20	175	355	Peak
4		5720.000	79.12	1.87	80.99	-29.81	110.80	175	355	Peak
5		5725.000	91.42	1.89	93.31	-28.89	122.20	175	355	Peak
6		5744.045	120.66	1.97	122.62	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

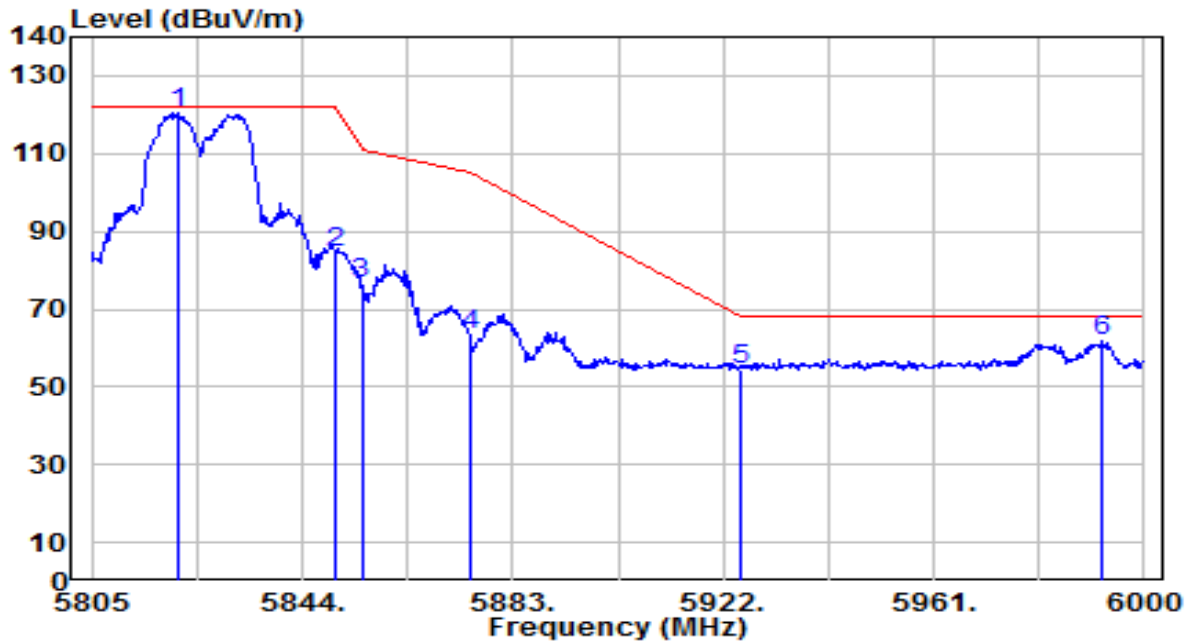


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.990	118.24	2.22	120.46	N/A	N/A	165	175	Peak
2	5850.000	82.28	2.27	84.55	-37.65	122.20	165	175	Peak
3	5855.000	74.29	2.28	76.57	-34.23	110.80	165	175	Peak
4	5875.000	60.87	2.31	63.17	-42.03	105.20	165	175	Peak
5	5925.000	52.23	2.38	54.61	-13.59	68.20	165	175	Peak
6	* 5992.200	59.40	2.49	61.89	-6.31	68.20	165	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

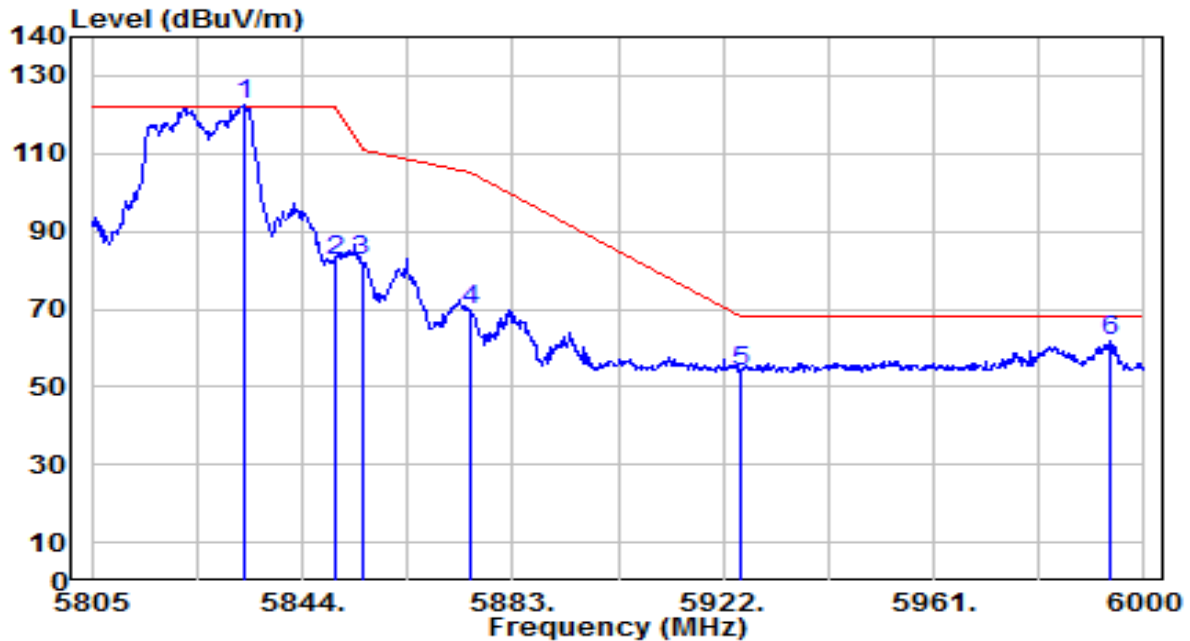


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5833.275	120.50	2.24	122.74	N/A	N/A	165	350	Peak
2	5850.000	79.98	2.27	82.25	-39.95	122.20	165	350	Peak
3	5855.000	79.99	2.28	82.26	-28.54	110.80	165	350	Peak
4	5875.000	67.68	2.31	69.99	-35.21	105.20	165	350	Peak
5	5925.000	51.56	2.38	53.94	-14.26	68.20	165	350	Peak
6	* 5993.565	59.23	2.49	61.72	-6.48	68.20	165	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

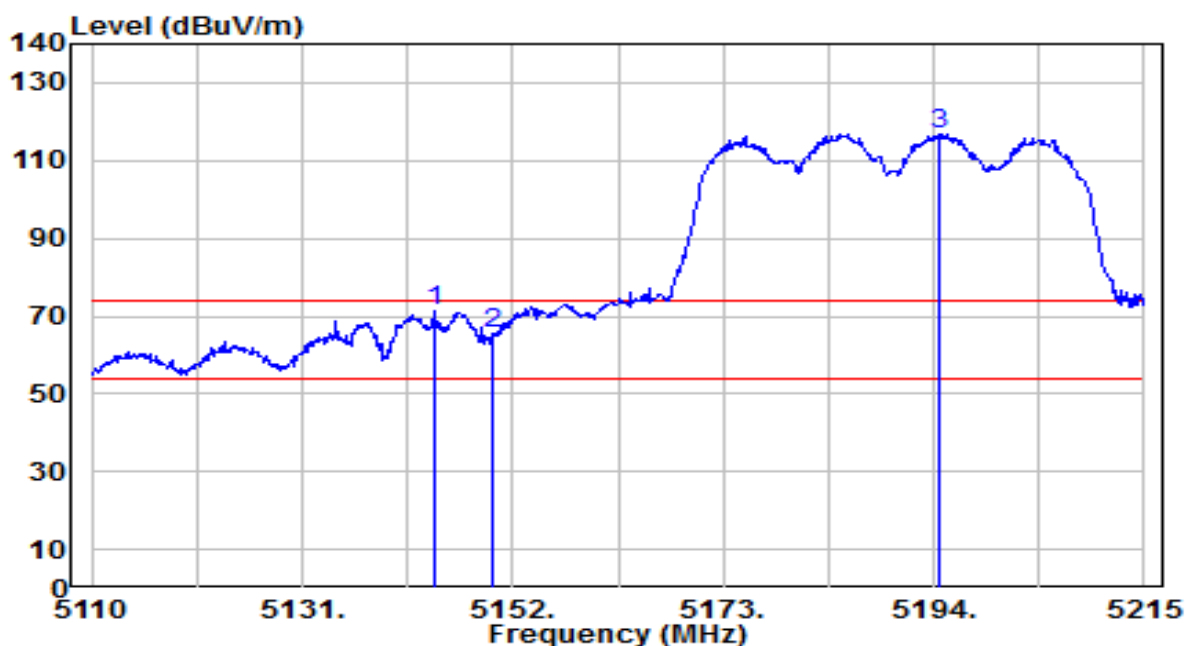


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.335	70.51	0.79	71.30	-2.70	74.00	135	170	Peak
2		5150.000	64.59	0.80	65.38	-8.62	74.00	135	170	Peak
3		5194.630	116.14	0.85	117.00	N/A	N/A	135	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

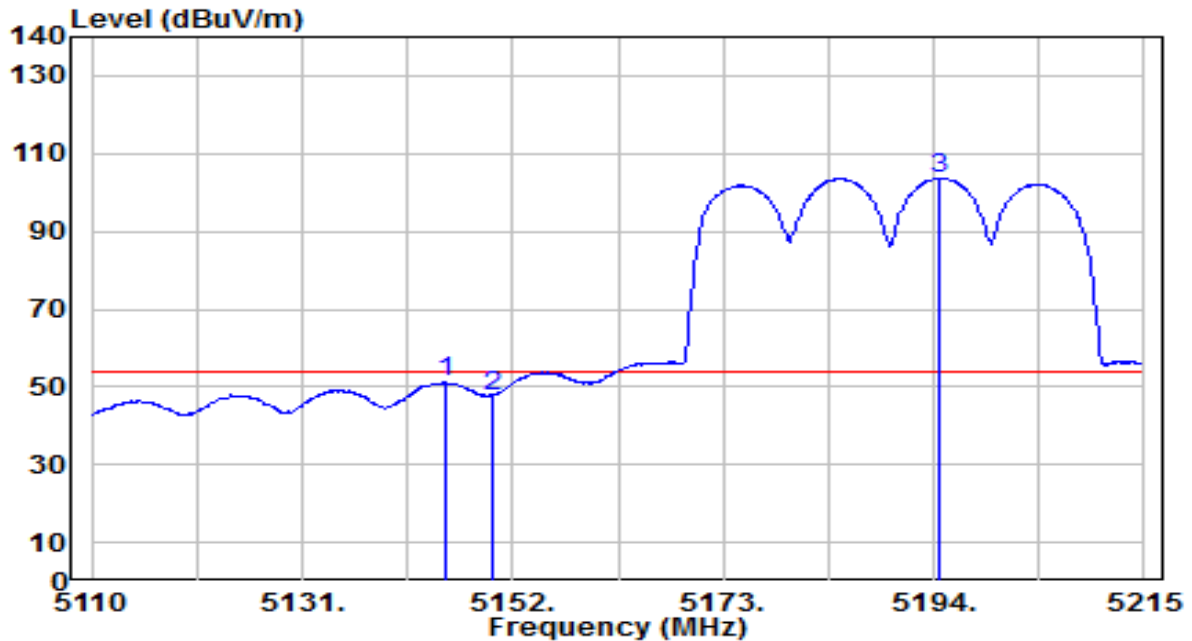


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5145.280	50.38	0.79	51.17	-2.83	54.00	135	170	Average
2		5150.000	46.76	0.80	47.55	-6.45	54.00	135	170	Average
3		5194.525	102.76	0.85	103.61	N/A	N/A	135	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

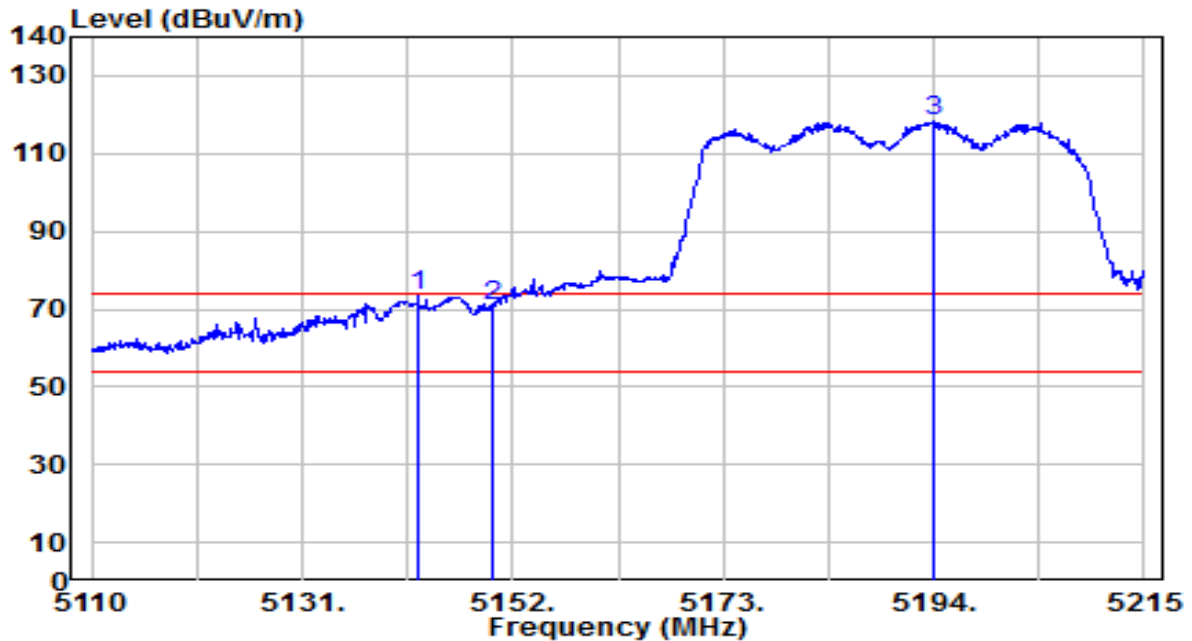


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5142.550	72.43	0.79	73.22	-0.78	74.00	195	105	Peak
2		5150.000	70.16	0.80	70.96	-3.04	74.00	195	105	Peak
3		5193.895	117.73	0.85	118.58	N/A	N/A	195	105	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

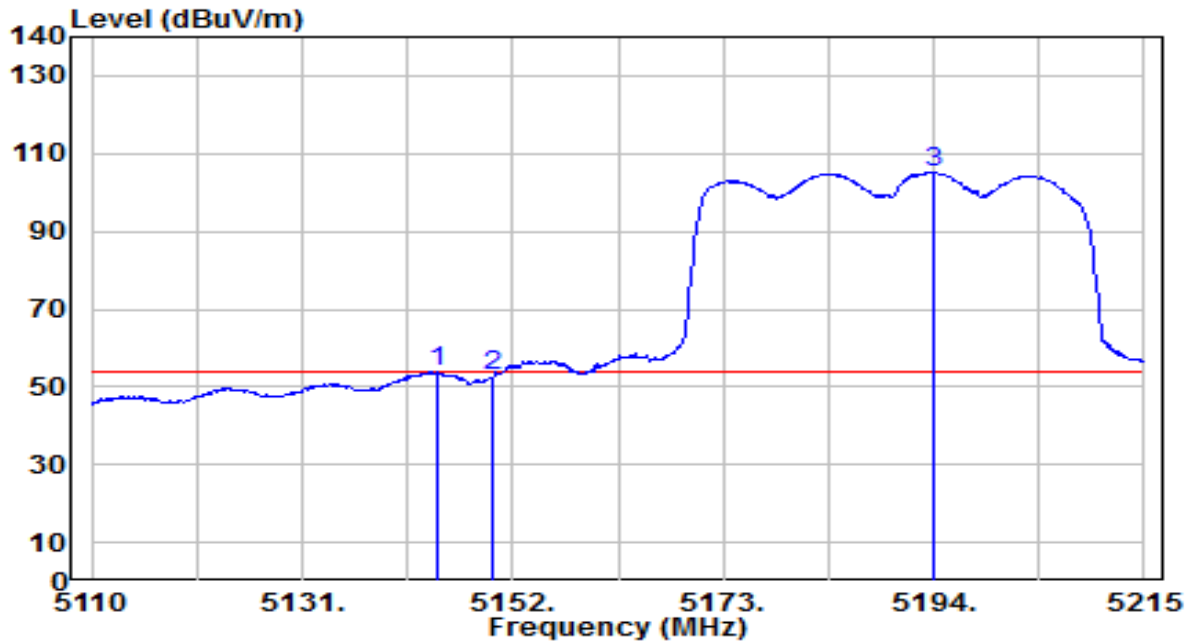


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.545	53.03	0.79	53.82	-0.18	54.00	195	105	Average
2		5150.000	52.11	0.80	52.90	-1.10	54.00	195	105	Average
3		5194.105	104.21	0.85	105.06	N/A	N/A	195	105	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

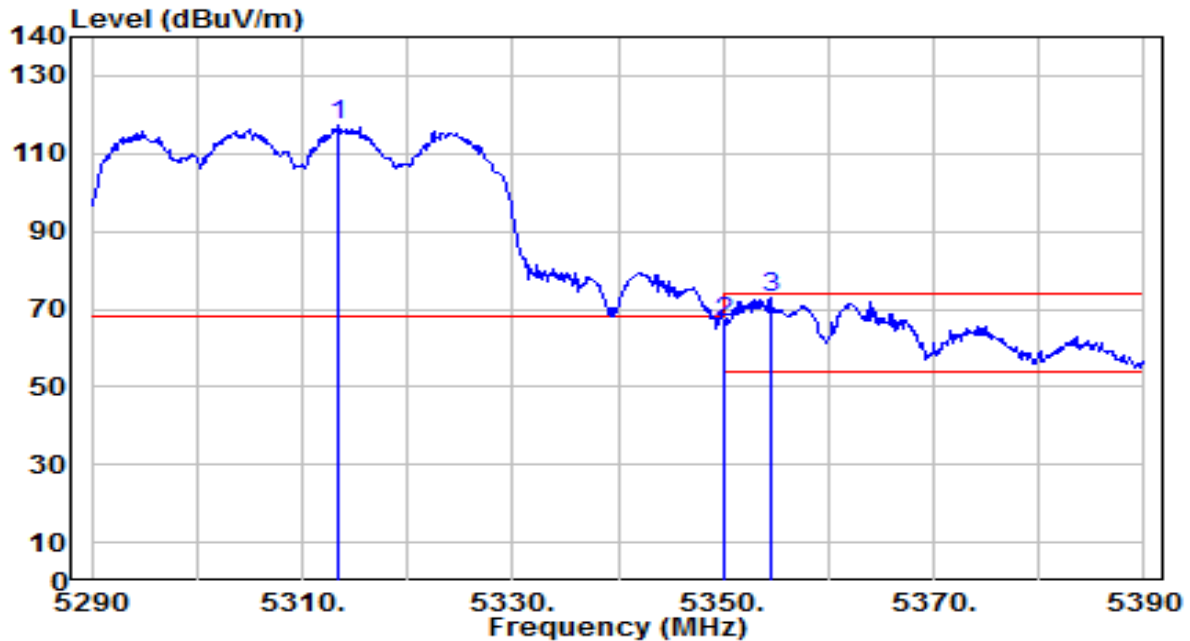


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.400	116.61	0.66	117.27	N/A	N/A	135	175	Peak
2	5350.000	65.78	0.59	66.37	-7.63	74.00	135	175	Peak
3	* 5354.500	72.22	0.59	72.80	-1.20	74.00	135	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

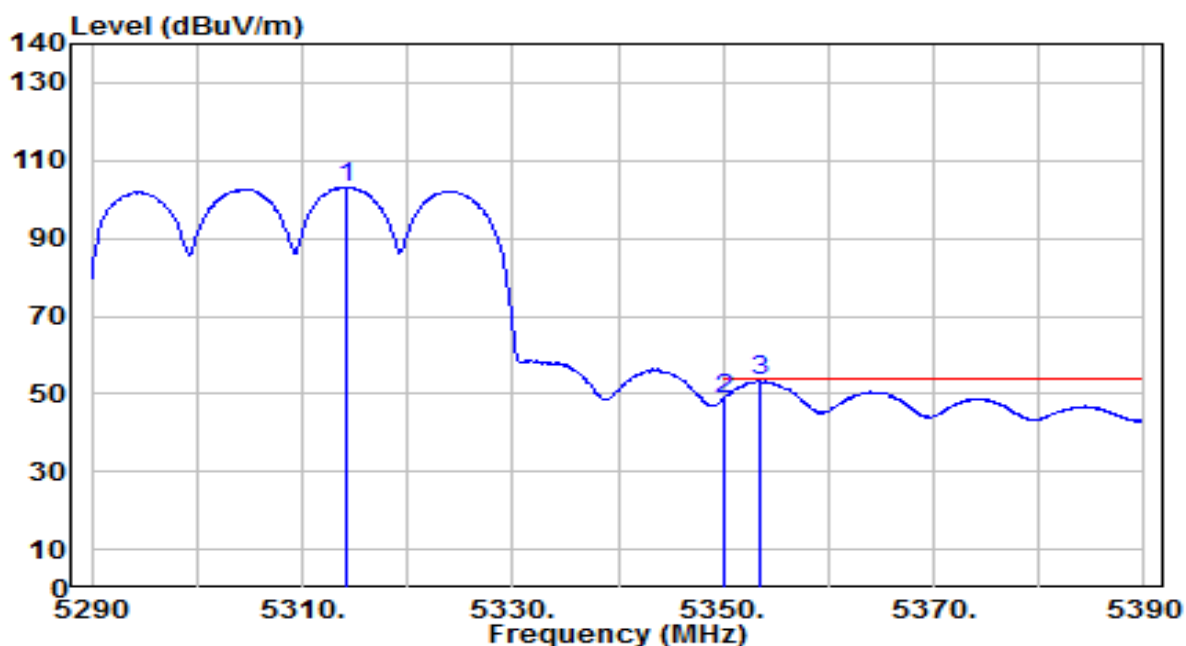


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.200	102.44	0.66	103.10	N/A	N/A	135	175	Average
2	5350.000	47.77	0.59	48.37	-5.63	54.00	135	175	Average
3	* 5353.400	52.77	0.59	53.36	-0.64	54.00	135	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

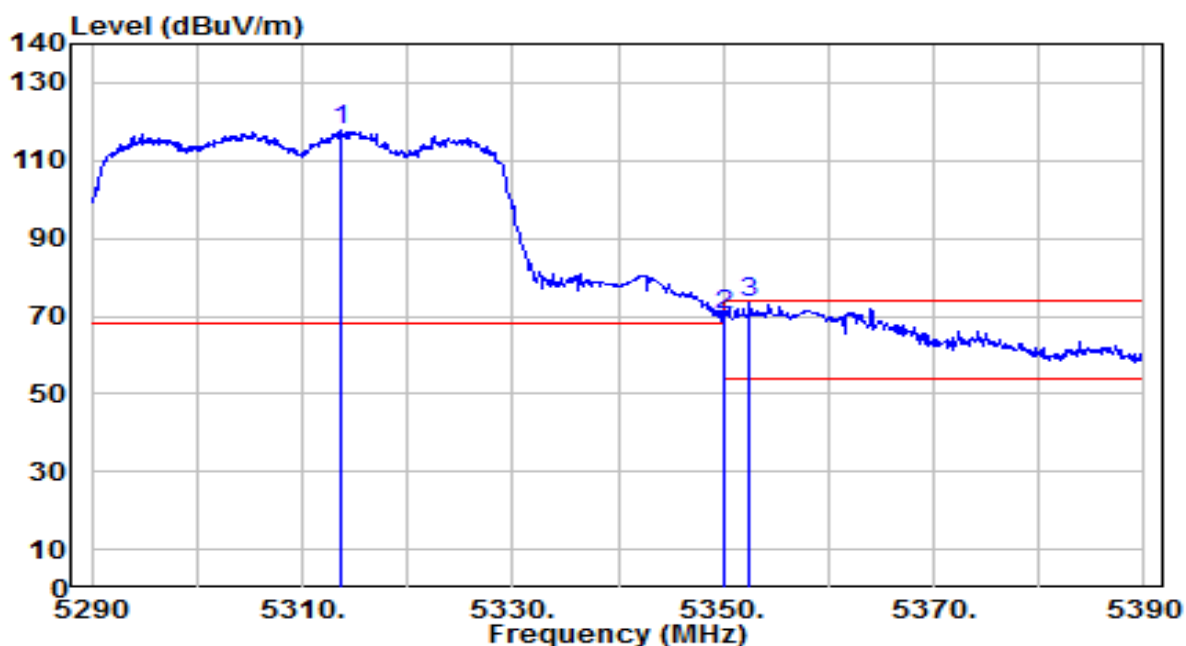


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5313.800	117.09	0.66	117.75	N/A	N/A	190	95	Peak
2	5350.000	69.54	0.59	70.14	-3.86	74.00	190	95	Peak
3	* 5352.500	72.64	0.59	73.23	-0.77	74.00	190	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

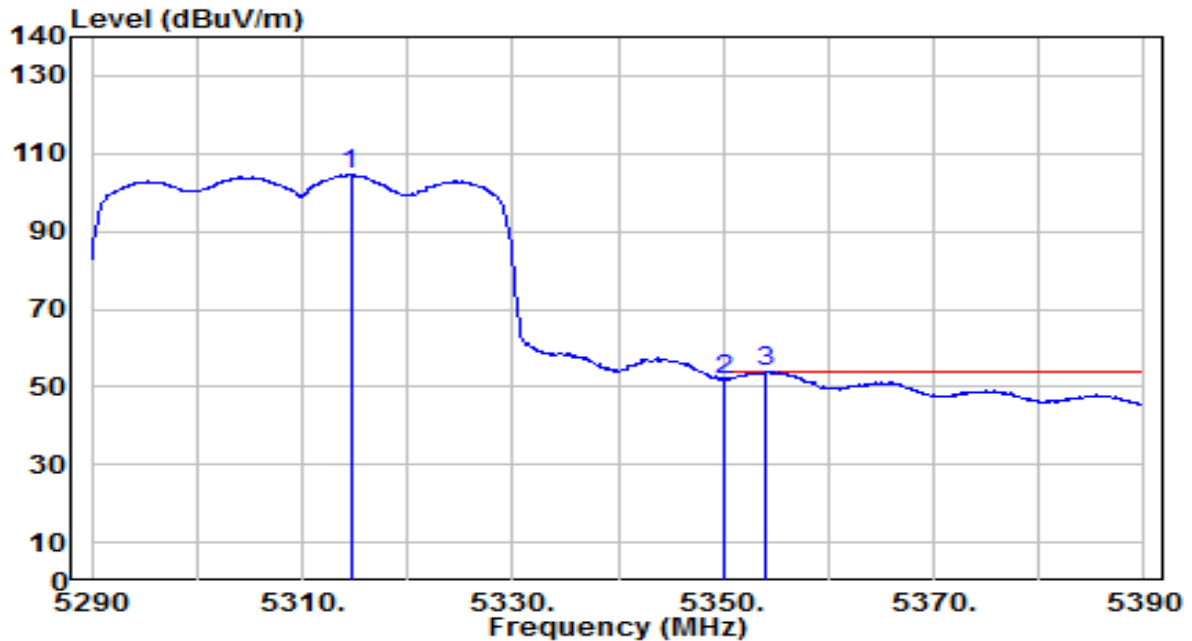


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5314.600	103.86	0.66	104.51	N/A	N/A	190	95	Average
2	5350.000	51.06	0.59	51.66	-2.34	54.00	190	95	Average
3	* 5354.100	53.29	0.59	53.88	-0.12	54.00	190	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

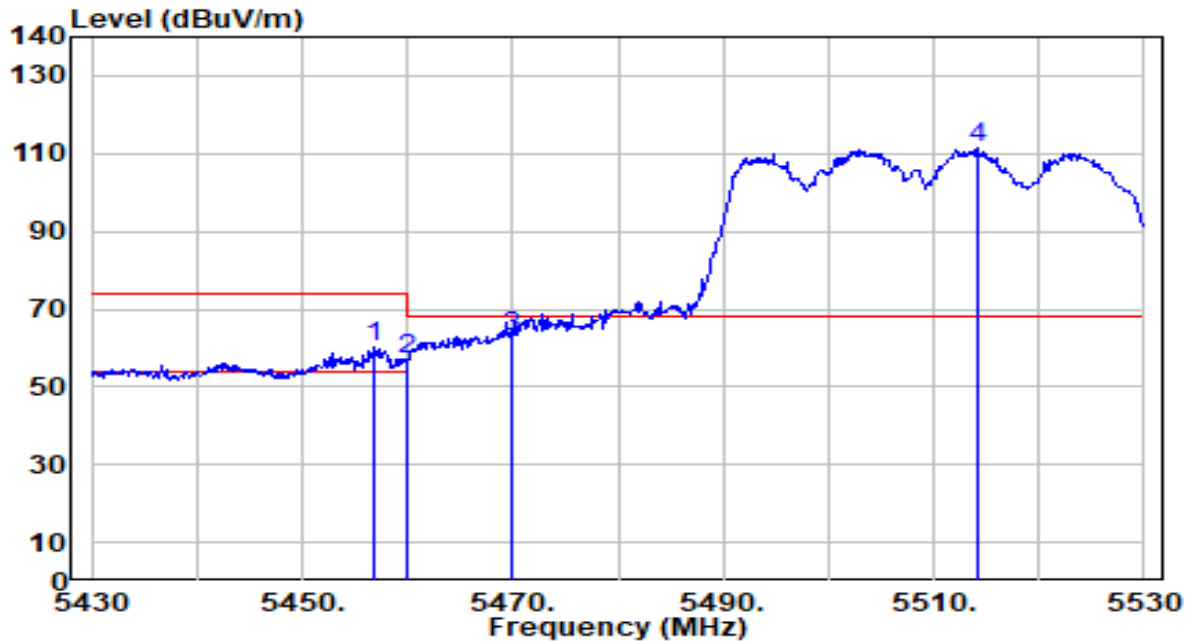


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.800	59.29	0.75	60.04	-13.96	74.00	205	225	Peak
2	5460.000	56.08	0.76	56.84	-17.16	74.00	205	225	Peak
3	* 5470.000	62.23	0.80	63.03	-5.17	68.20	205	225	Peak
4	5514.200	110.50	0.99	111.50	N/A	N/A	205	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

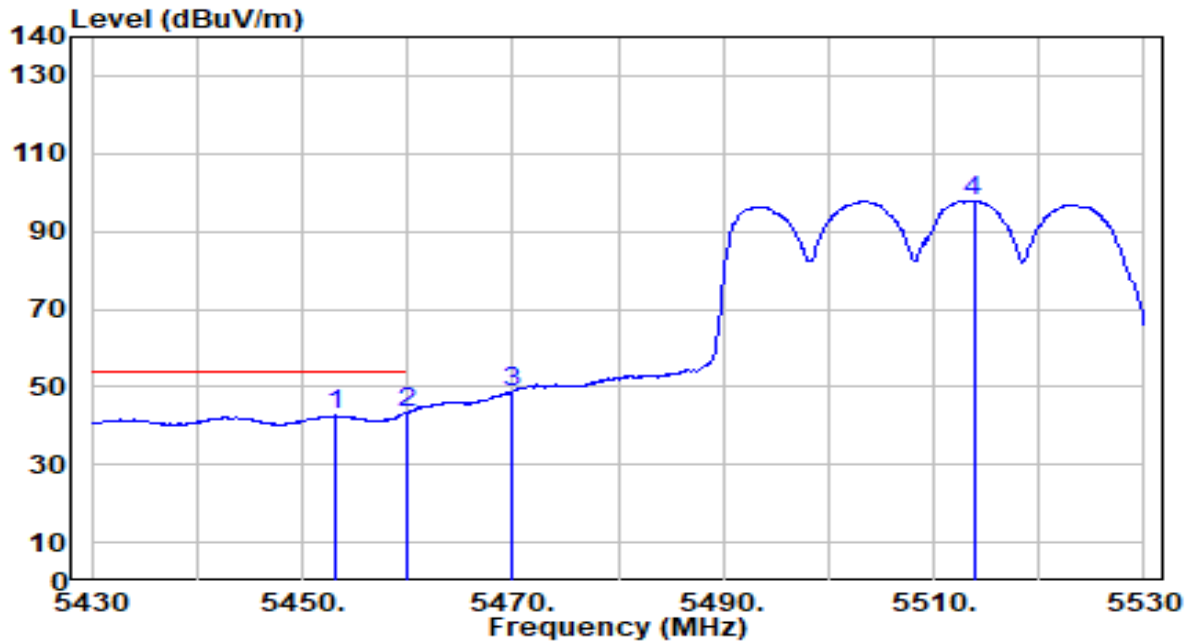


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.200	41.81	0.73	42.54	-11.46	54.00	205	225	Average
2	* 5460.000	42.80	0.76	43.56	-10.44	54.00	205	225	Average
3	5470.000	48.00	0.80	48.81	N/A	N/A	205	225	Average
4	5513.800	97.00	0.99	97.99	N/A	N/A	205	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

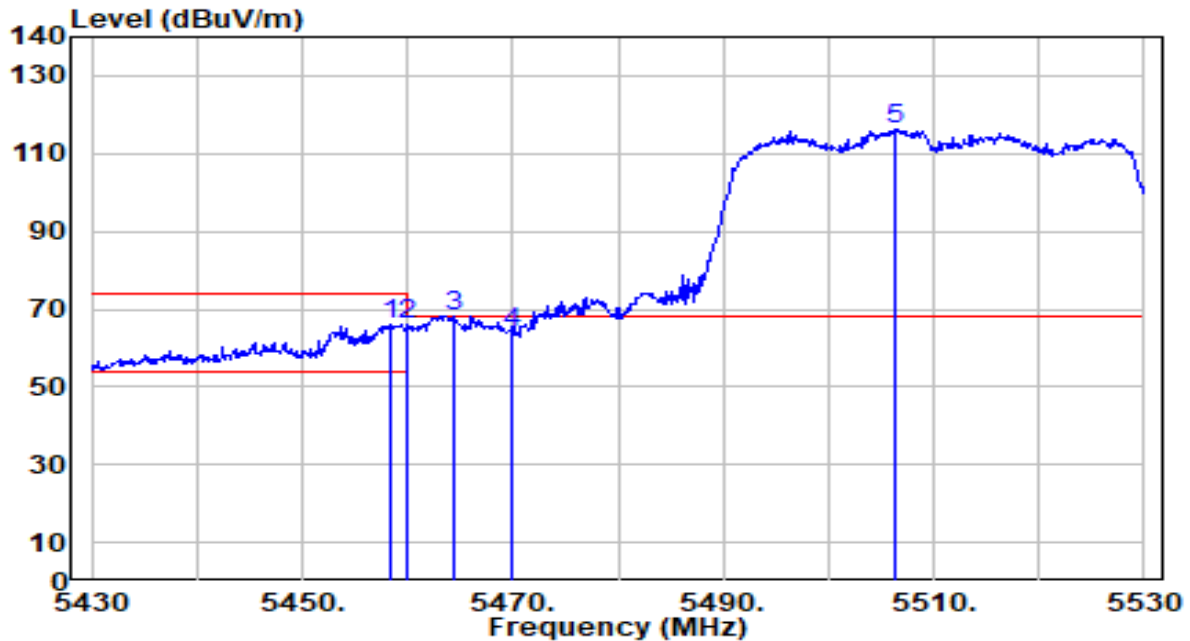


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.400	65.22	0.75	65.97	-8.03	74.00	215	95	Peak
2	5460.000	65.06	0.76	65.82	-8.18	74.00	215	95	Peak
3	* 5464.300	67.38	0.78	68.15	-0.05	68.20	215	95	Peak
4	5470.000	63.15	0.80	63.95	-4.25	68.20	215	95	Peak
5	5506.300	115.44	0.96	116.40	N/A	N/A	215	95	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

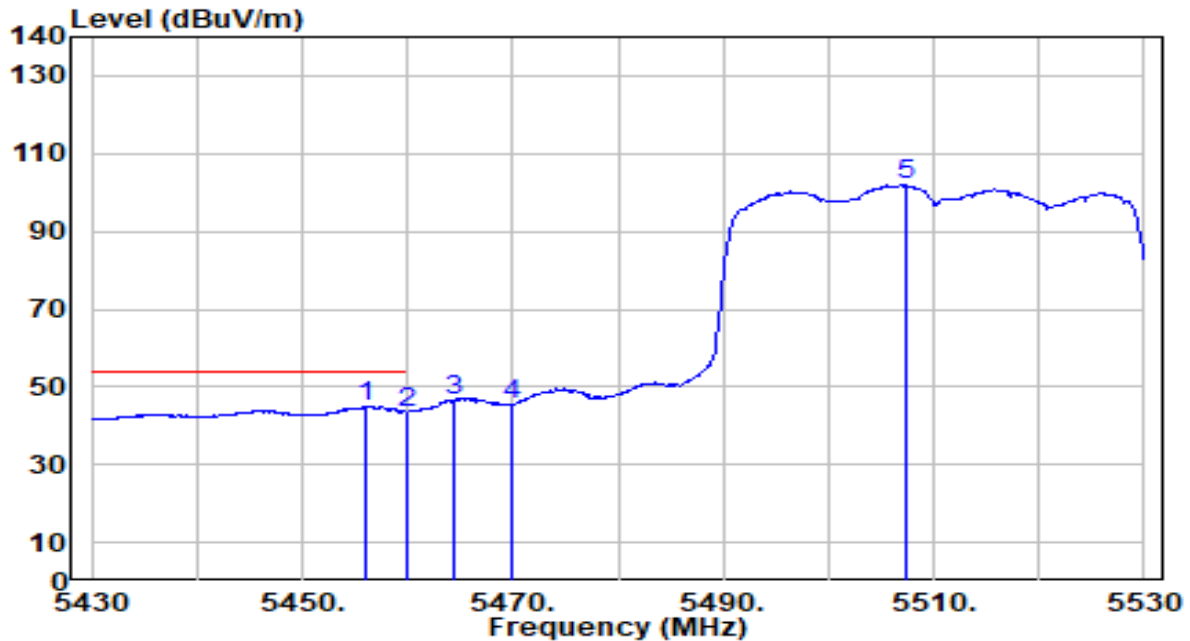


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.100	44.07	0.74	44.81	-9.19	54.00	215	95	Average
2		5460.000	42.80	0.76	43.56	-10.44	54.00	215	95	Average
3		5464.300	45.63	0.78	46.40	N/A	N/A	215	95	Average
4		5470.000	44.76	0.80	45.56	N/A	N/A	215	95	Average
5		5507.500	100.88	0.96	101.84	N/A	N/A	215	95	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

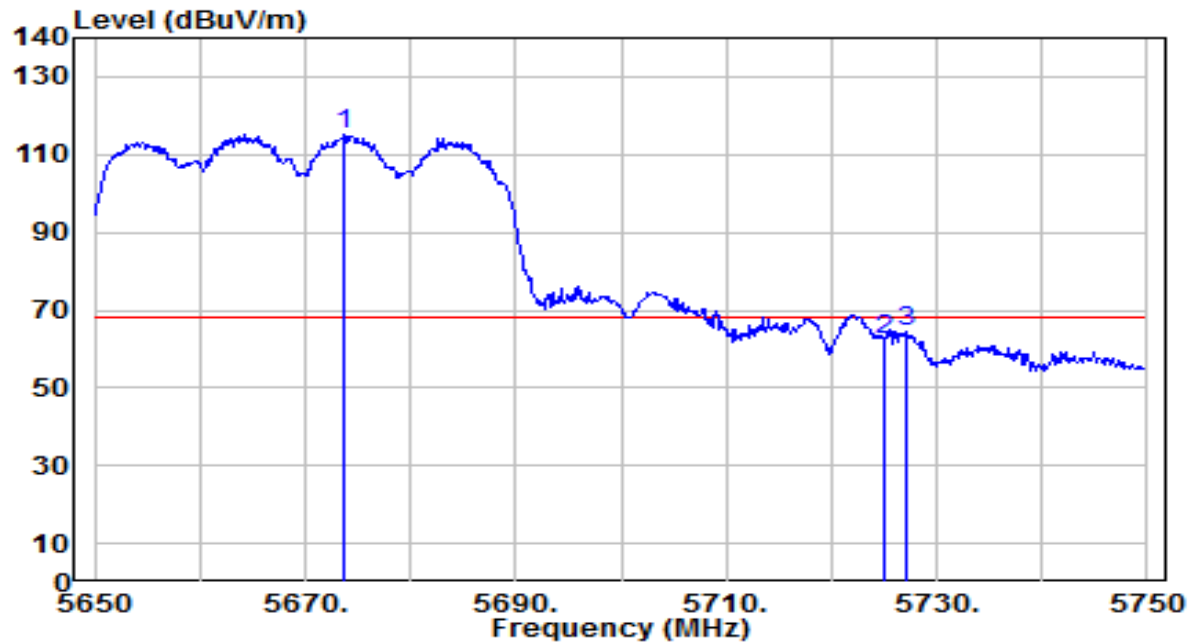


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5673.700	113.57	1.68	115.25	N/A	N/A	195	350	Peak
2	5725.000	60.47	1.89	62.36	-5.84	68.20	195	350	Peak
3	* 5727.100	62.73	1.90	64.63	-3.57	68.20	195	350	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

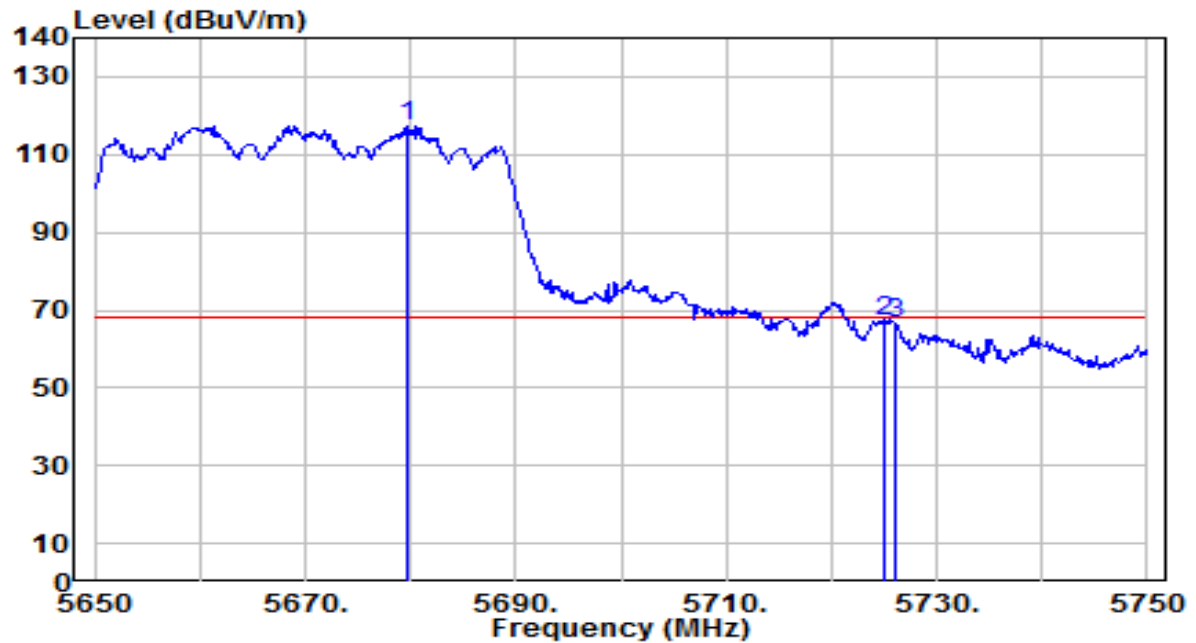


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5679.800	115.68	1.71	117.38	N/A	N/A	155	355	Peak
2	*	5725.000	65.12	1.89	67.01	-1.19	68.20	155	355	Peak
3		5726.000	64.51	1.89	66.40	-1.80	68.20	155	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

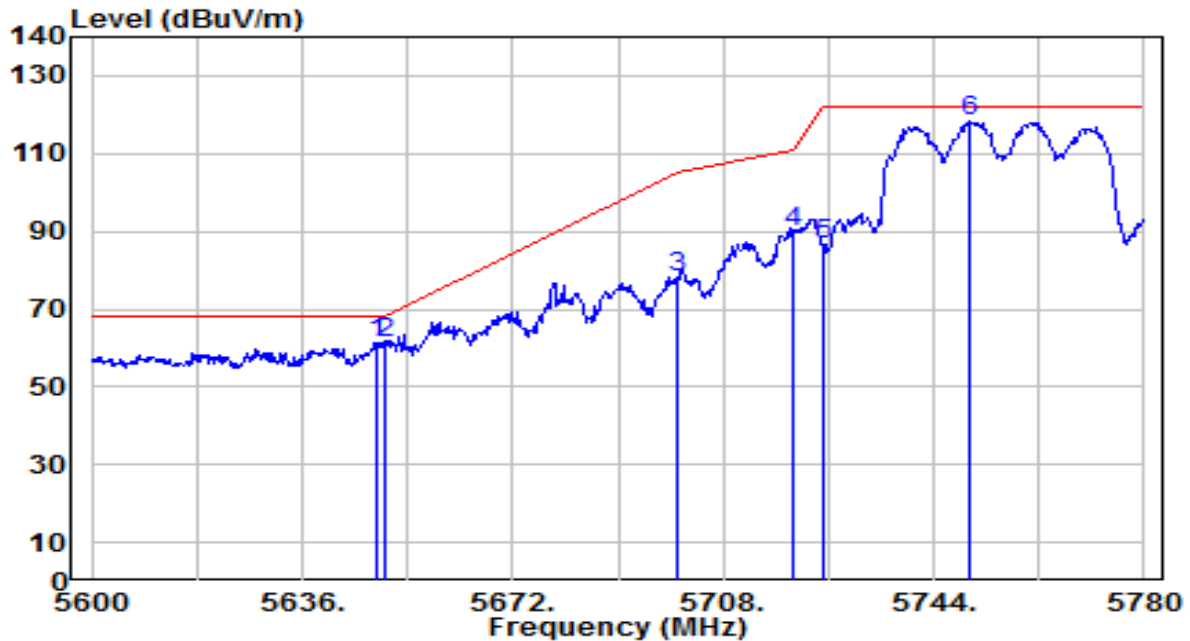


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5648.960	59.61	1.58	61.19	-7.01	68.20	175	175	Peak
2	*	5650.000	59.71	1.59	61.30	-6.90	68.20	175	175	Peak
3		5700.000	76.29	1.79	78.08	-27.12	105.20	175	175	Peak
4		5720.000	88.12	1.87	89.99	-20.81	110.80	175	175	Peak
5		5725.000	84.65	1.89	86.53	-35.67	122.20	175	175	Peak
6		5750.300	116.10	1.99	118.09	N/A	N/A	175	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

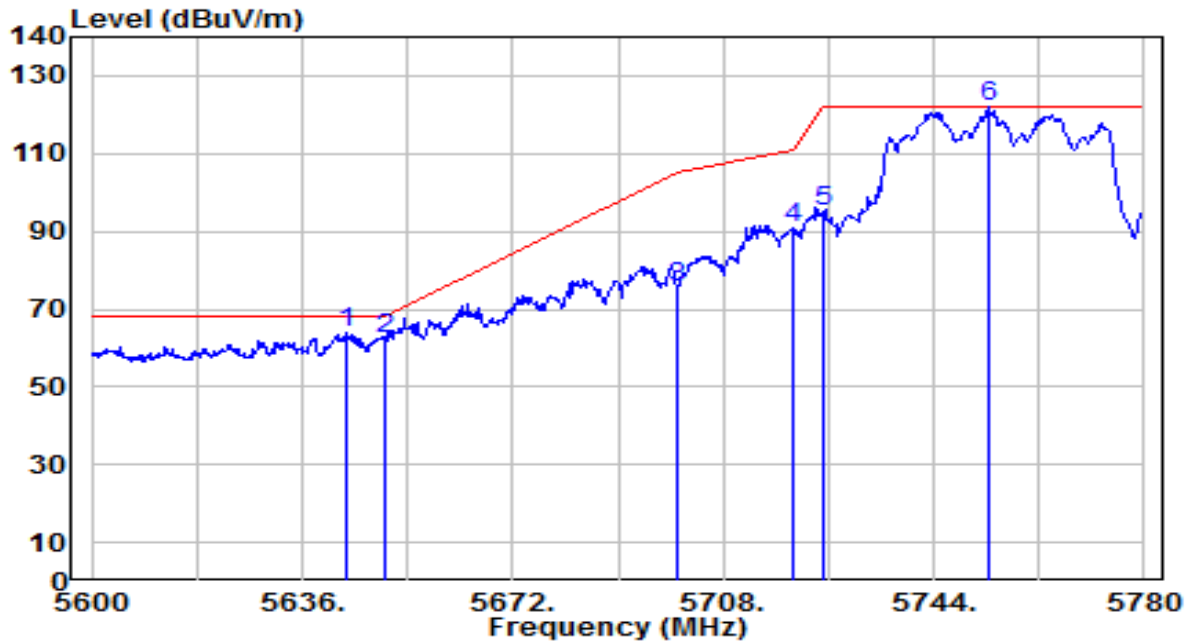


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.560	62.22	1.56	63.78	-4.42	68.20	175	355	Peak
2		5650.000	60.71	1.59	62.29	-5.91	68.20	175	355	Peak
3		5700.000	73.86	1.79	75.64	-29.56	105.20	175	355	Peak
4		5720.000	88.90	1.87	90.77	-20.03	110.80	175	355	Peak
5		5725.000	93.41	1.89	95.30	-26.90	122.20	175	355	Peak
6		5753.360	119.99	2.00	122.00	N/A	N/A	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

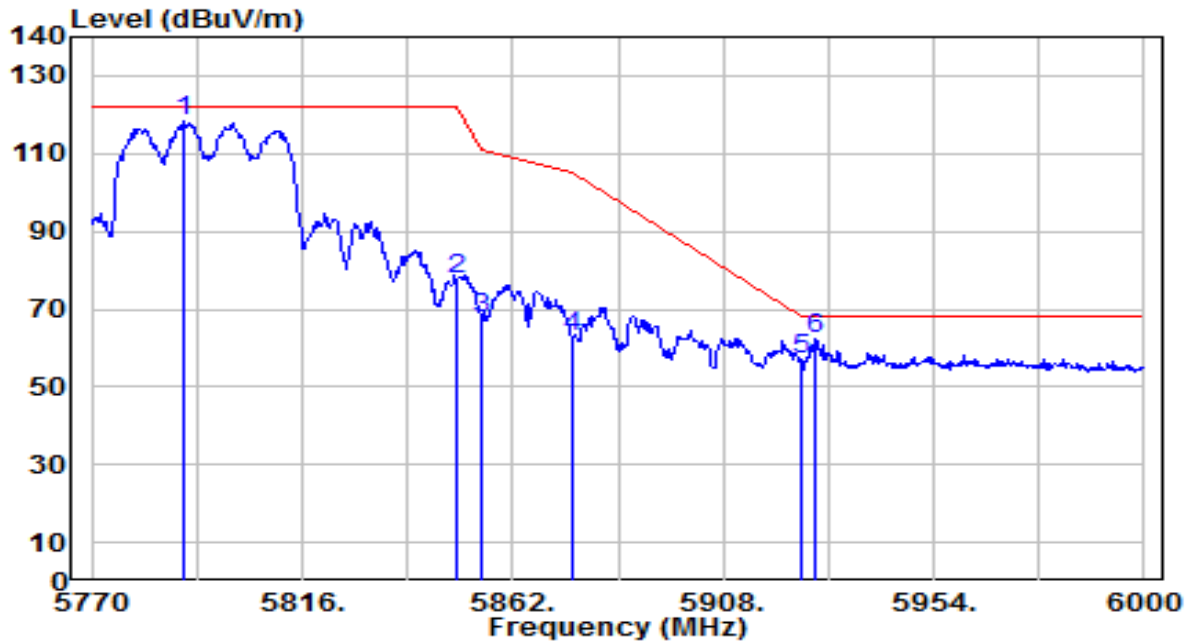


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5790.240	116.15	2.15	118.30	N/A	N/A	170	175	Peak
2	5850.000	75.28	2.27	77.55	-44.65	122.20	170	175	Peak
3	5855.000	65.45	2.28	67.73	-43.07	110.80	170	175	Peak
4	5875.000	60.54	2.31	62.84	-42.36	105.20	170	175	Peak
5	5925.000	54.74	2.38	57.12	-11.08	68.20	170	175	Peak
6	* 5928.010	59.70	2.39	62.09	-6.11	68.20	170	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

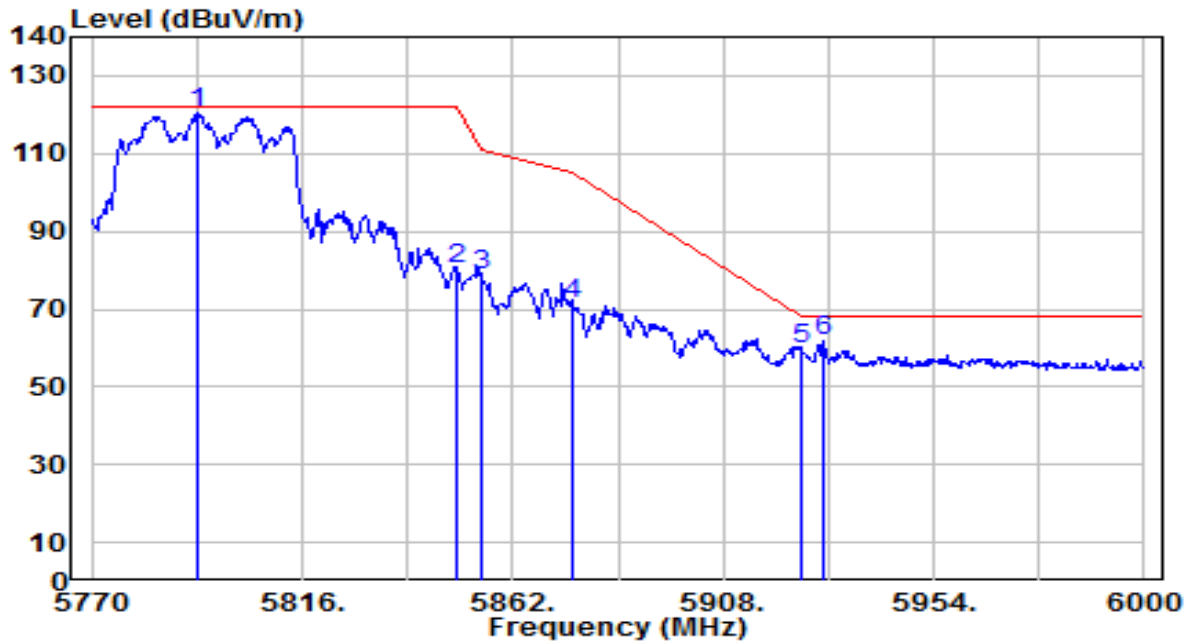


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5793.000	118.31	2.16	120.47	N/A	N/A	175	355	Peak
2	5850.000	77.78	2.27	80.04	-42.16	122.20	175	355	Peak
3	5855.000	76.30	2.28	78.57	-32.23	110.80	175	355	Peak
4	5875.000	69.04	2.31	71.35	-33.85	105.20	175	355	Peak
5	5925.000	57.31	2.38	59.69	-8.51	68.20	175	355	Peak
6	* 5929.620	59.40	2.39	61.79	-6.41	68.20	175	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

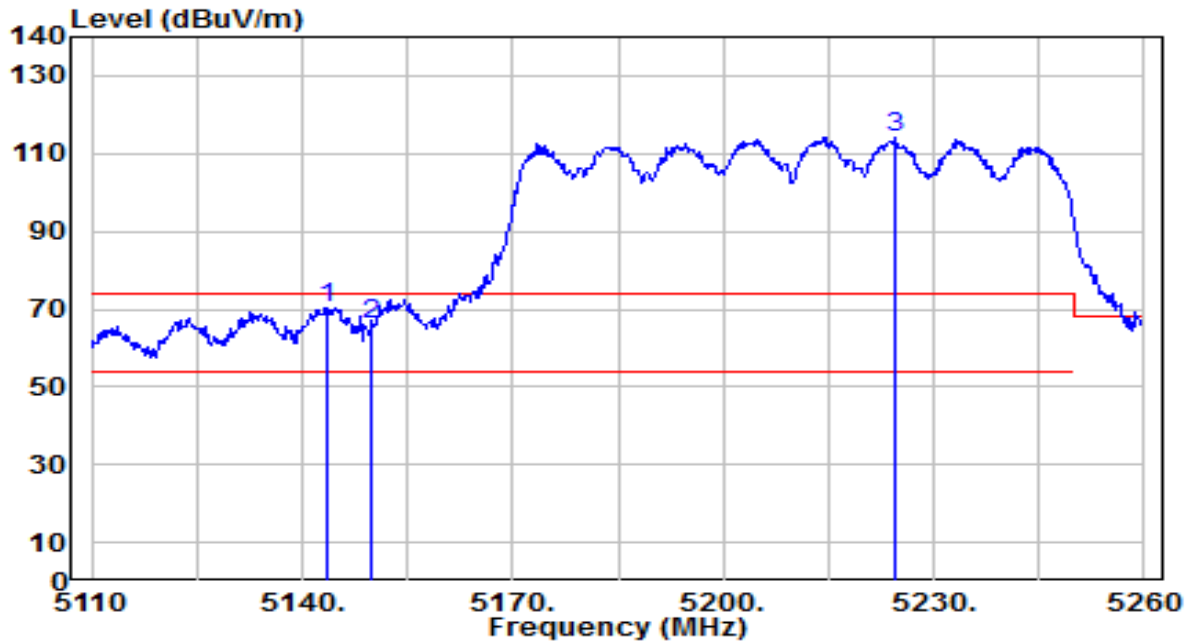


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.450	69.61	0.79	70.39	-3.61	74.00	130	175	Peak
2		5150.000	65.21	0.80	66.00	-8.00	74.00	130	175	Peak
3		5224.600	113.42	0.81	114.24	N/A	N/A	130	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

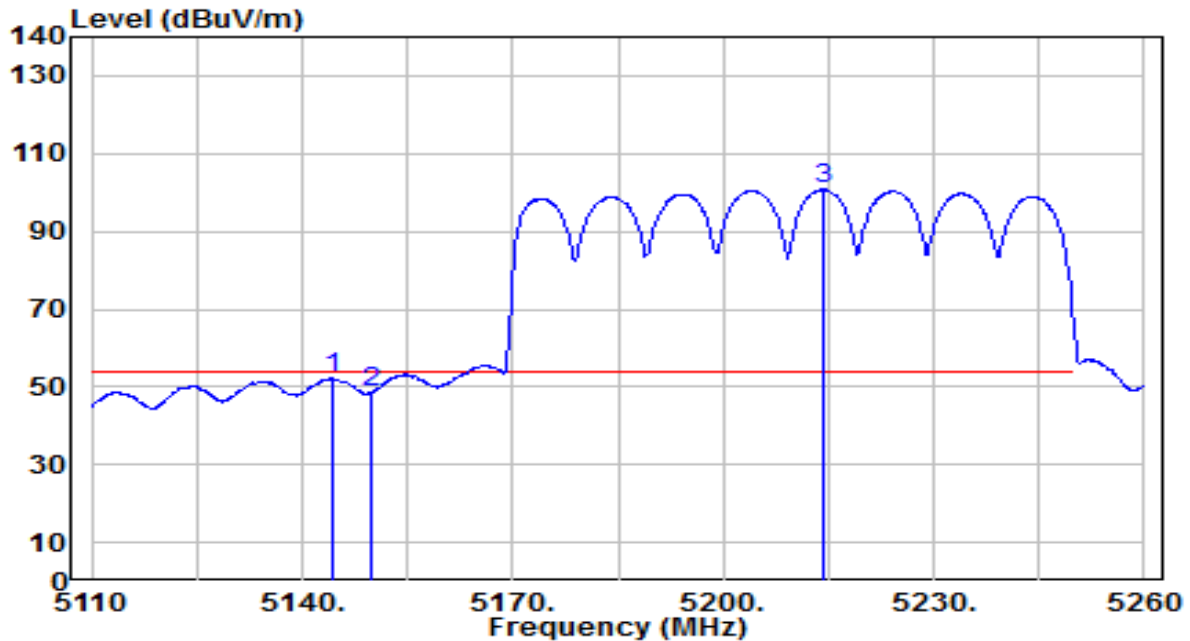


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.350	51.39	0.79	52.18	-1.82	54.00	130	175	Average
2		5150.000	47.94	0.80	48.74	-5.26	54.00	130	175	Average
3		5214.400	99.98	0.83	100.81	N/A	N/A	130	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

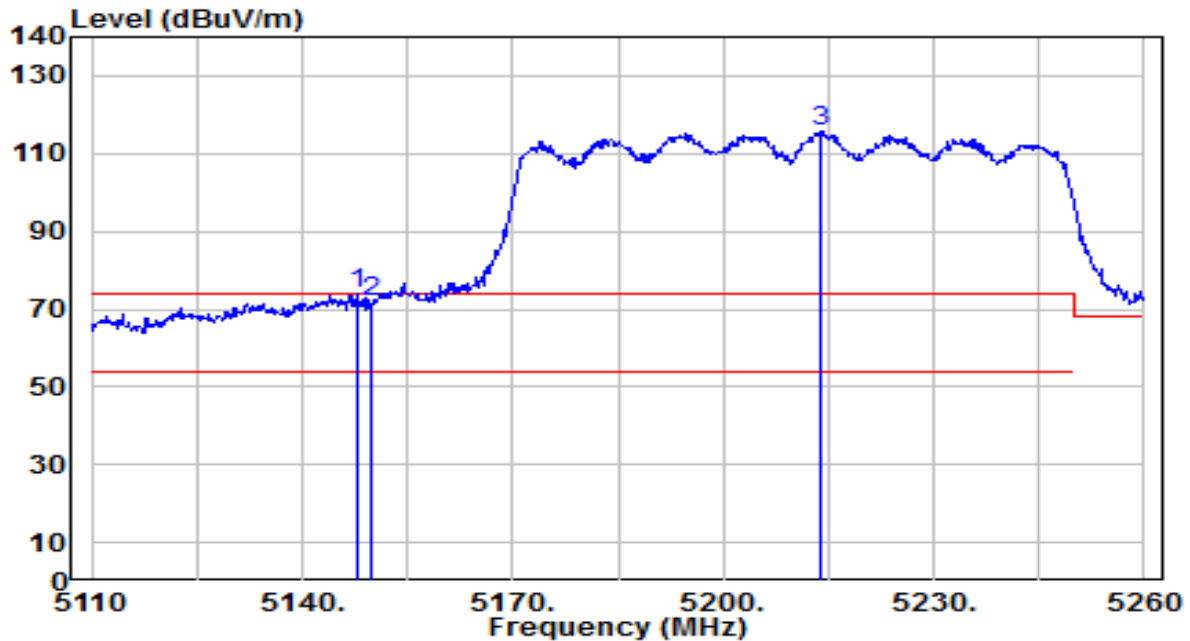


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	72.91	0.79	73.70	-0.30	74.00	195	110	Peak
2		5150.000	70.85	0.80	71.65	-2.35	74.00	195	110	Peak
3		5213.800	114.91	0.83	115.74	N/A	N/A	195	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

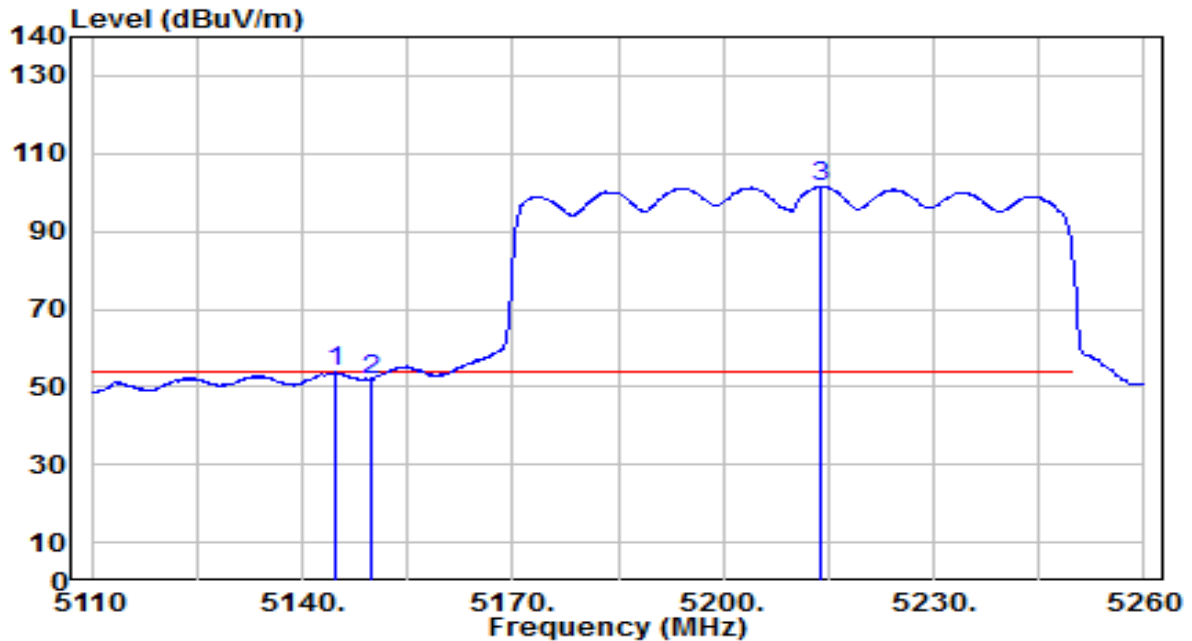


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.800	53.09	0.79	53.88	-0.12	54.00	195	110	Average
2		5150.000	51.09	0.80	51.89	-2.11	54.00	195	110	Average
3		5213.800	100.70	0.83	101.54	N/A	N/A	195	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

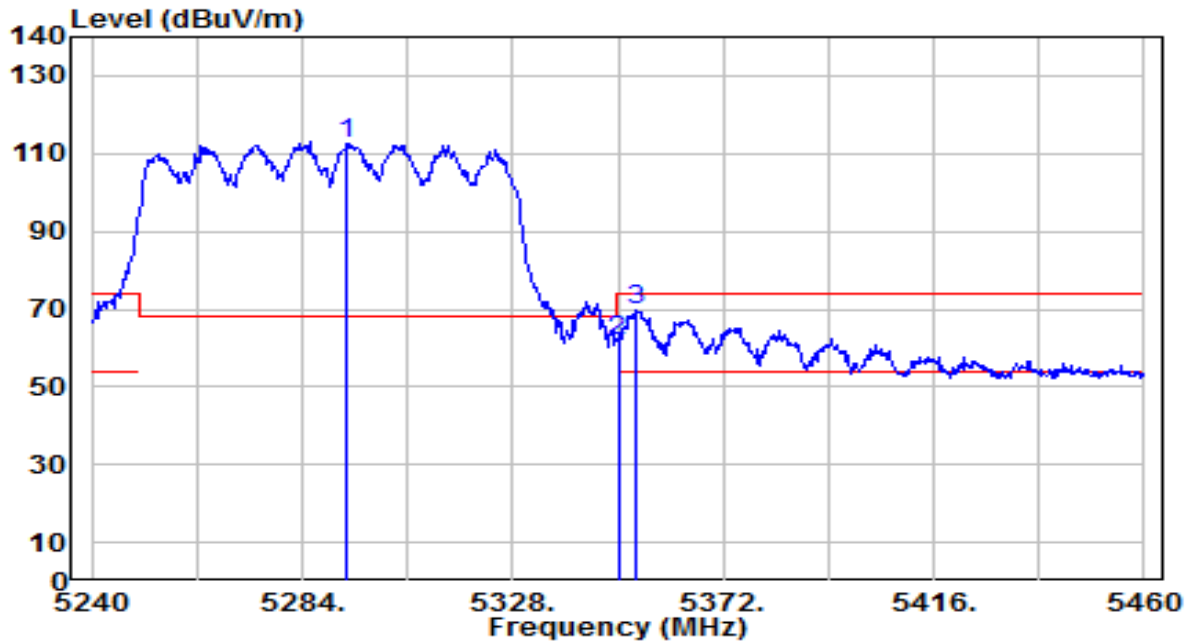


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5293.240	111.66	0.69	112.35	N/A	N/A	135	175	Peak
2	5350.000	61.36	0.59	61.96	-12.04	74.00	135	175	Peak
3	* 5353.960	69.02	0.59	69.61	-4.39	74.00	135	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

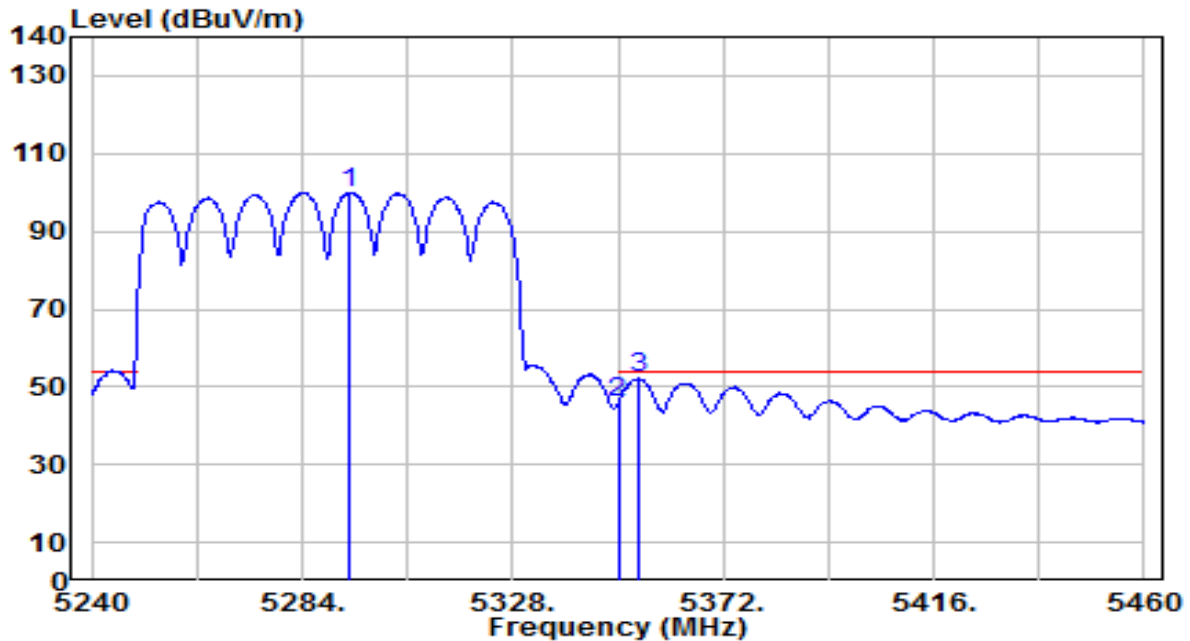


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5293.900	99.36	0.69	100.05	N/A	N/A	135	175	Average
2	5350.000	45.38	0.59	45.97	-8.03	54.00	135	175	Average
3	* 5354.180	51.48	0.59	52.07	-1.93	54.00	135	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

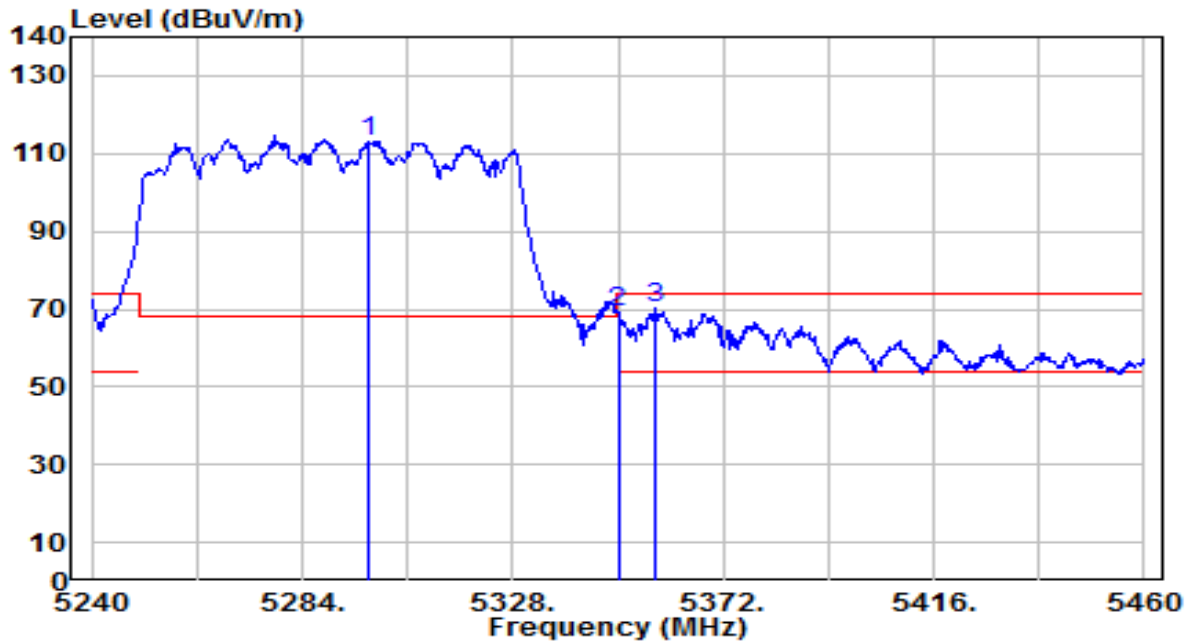


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.080	112.63	0.69	113.32	N/A	N/A	190	355	Peak
2	5350.000	68.56	0.59	69.16	-4.84	74.00	190	355	Peak
3	* 5357.700	69.77	0.58	70.35	-3.65	74.00	190	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

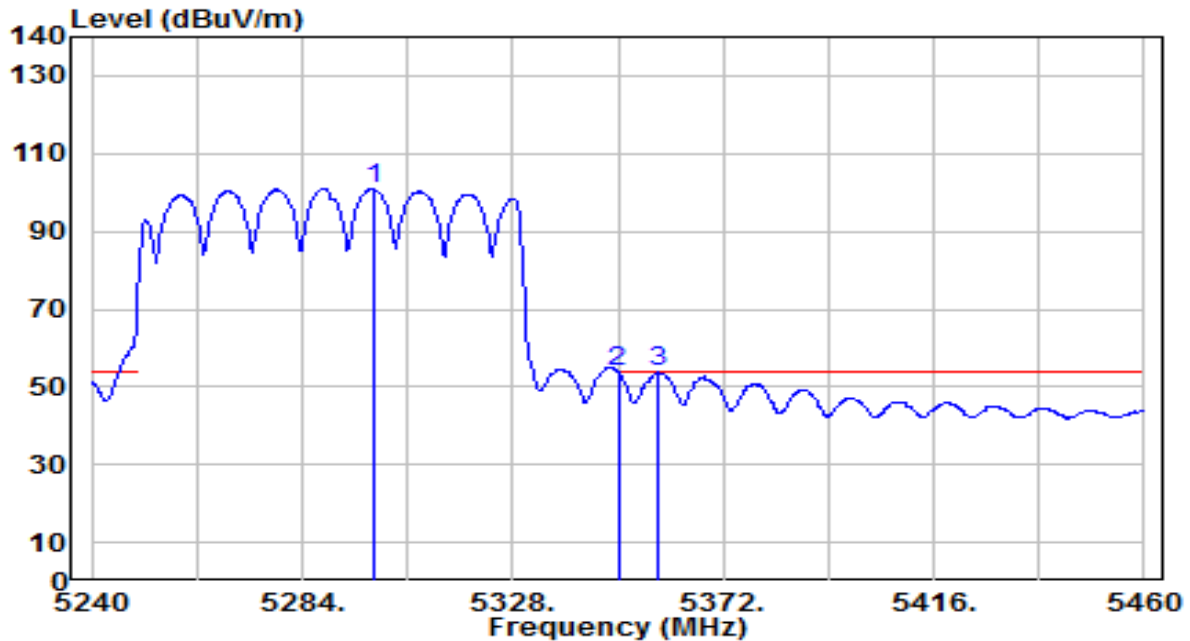


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5298.960	100.15	0.68	100.84	N/A	N/A	190	355	Average
2	5350.000	53.09	0.59	53.68	-0.32	54.00	190	355	Average
3	* 5358.360	53.26	0.58	53.84	-0.16	54.00	190	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

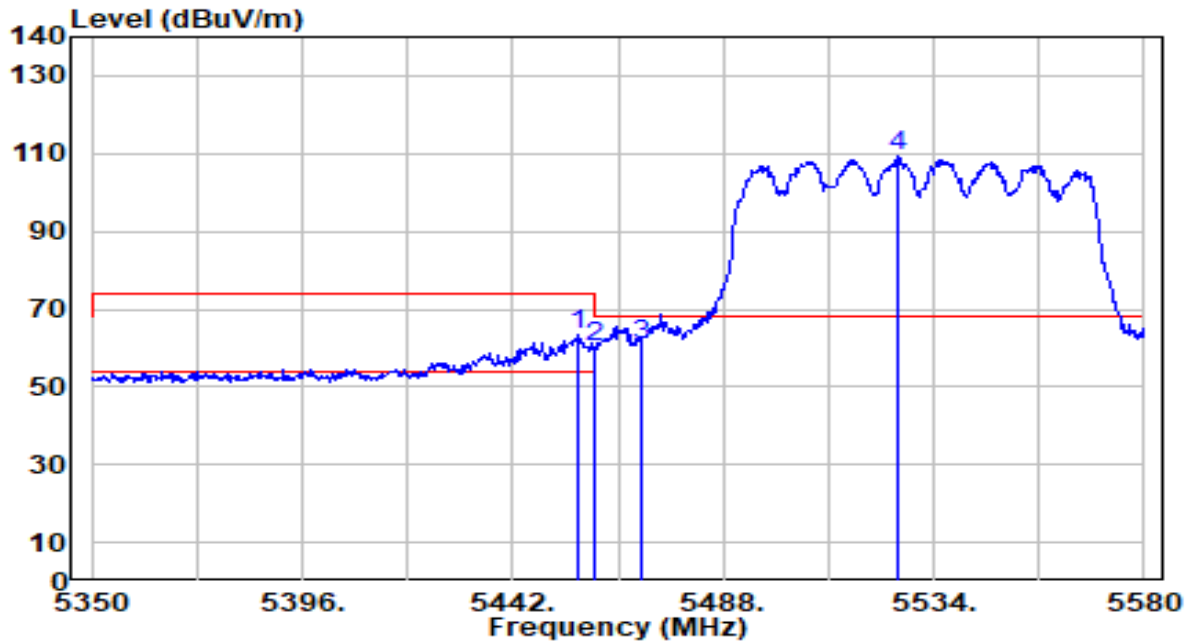


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.260	62.70	0.74	63.44	-10.56	74.00	105	170	Peak
2	5460.000	59.71	0.76	60.47	-13.53	74.00	105	170	Peak
3	* 5470.000	60.15	0.80	60.95	-7.25	68.20	105	170	Peak
4	5525.950	108.53	1.05	109.58	N/A	N/A	105	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

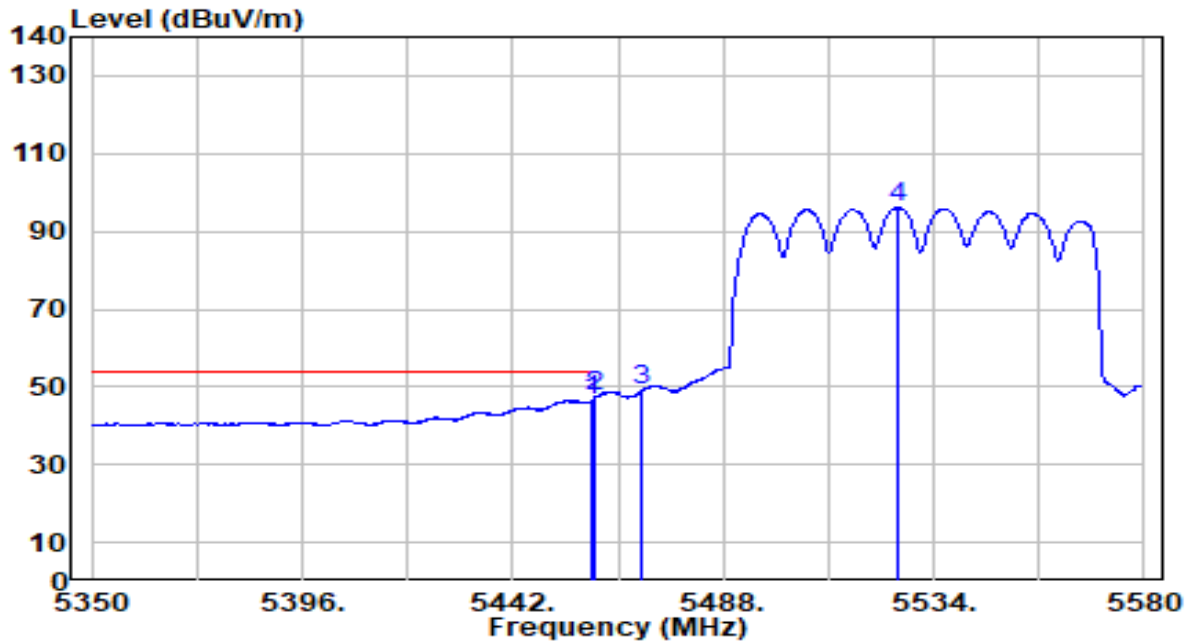


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5459.020	45.72	0.76	46.47	-7.53	54.00	105	170	Average
2	*	5460.000	46.55	0.76	47.31	-6.69	54.00	105	170	Average
3		5470.000	48.09	0.80	48.89	N/A	N/A	105	170	Average
4		5526.180	95.04	1.05	96.09	N/A	N/A	105	170	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

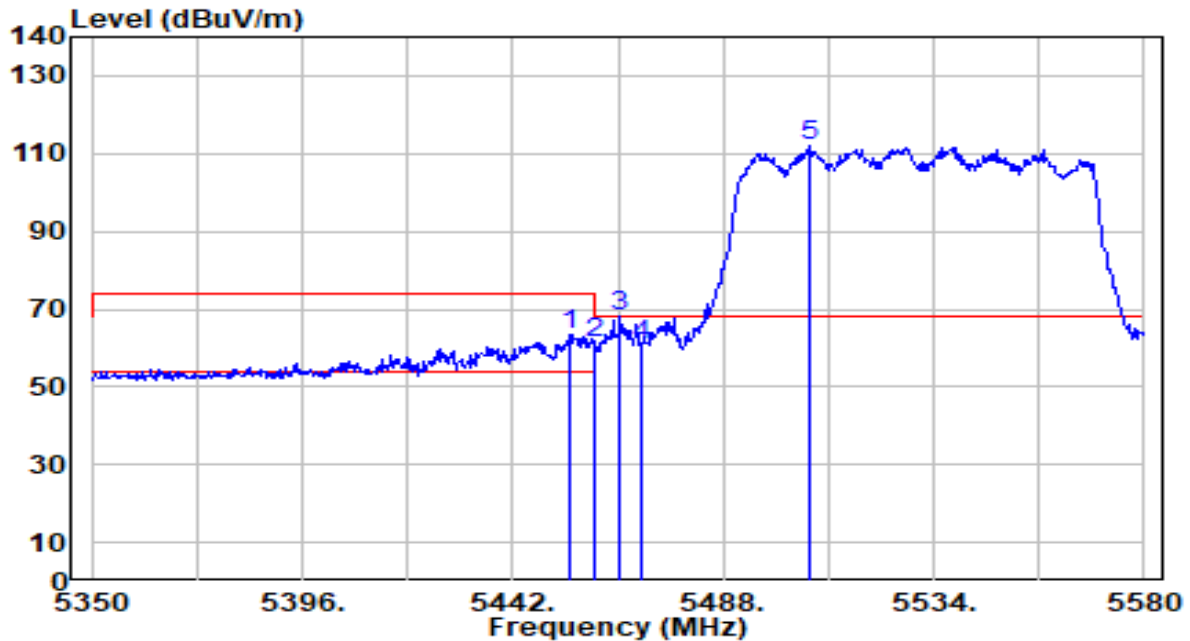


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5454.420	62.61	0.74	63.35	-10.65	74.00	215	100	Peak
2	5460.000	60.50	0.76	61.26	-12.74	74.00	215	100	Peak
3	* 5465.460	67.23	0.78	68.01	-0.19	68.20	215	100	Peak
4	5470.000	60.18	0.80	60.98	-7.22	68.20	215	100	Peak
5	5507.090	110.86	0.96	111.82	N/A	N/A	215	100	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

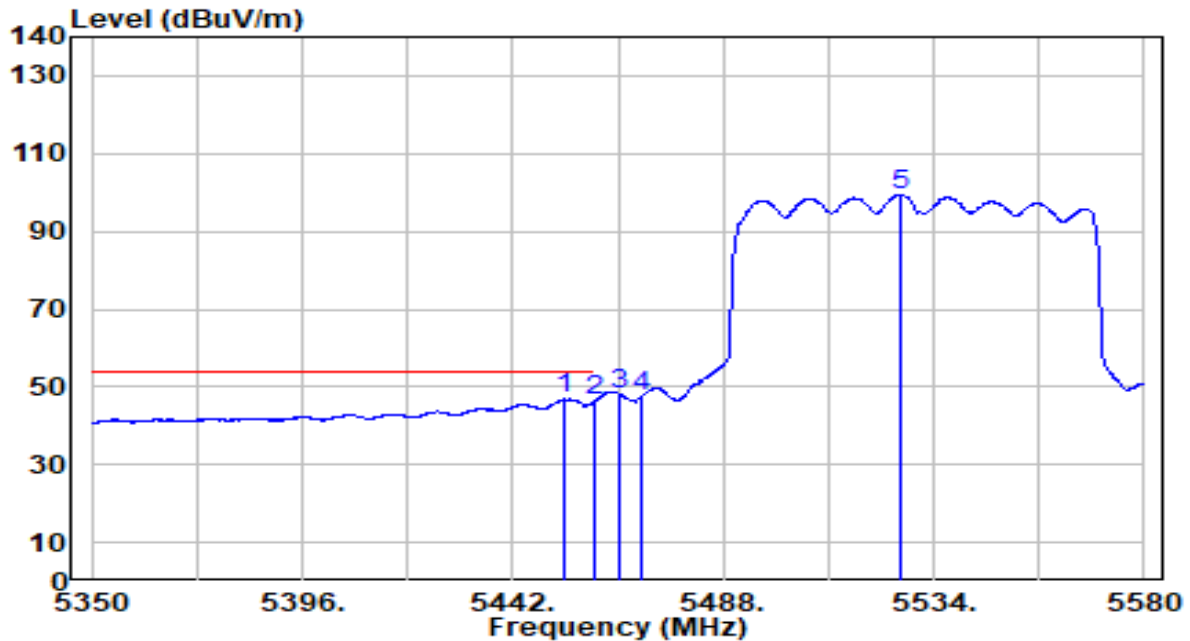


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5453.040	46.17	0.73	46.90	-7.10	54.00	215	100	Average
2		5460.000	45.58	0.76	46.34	-7.66	54.00	215	100	Average
3		5465.460	47.29	0.78	48.08	N/A	N/A	215	100	Average
4		5470.000	46.59	0.80	47.39	N/A	N/A	215	100	Average
5		5526.640	98.42	1.05	99.47	N/A	N/A	215	100	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

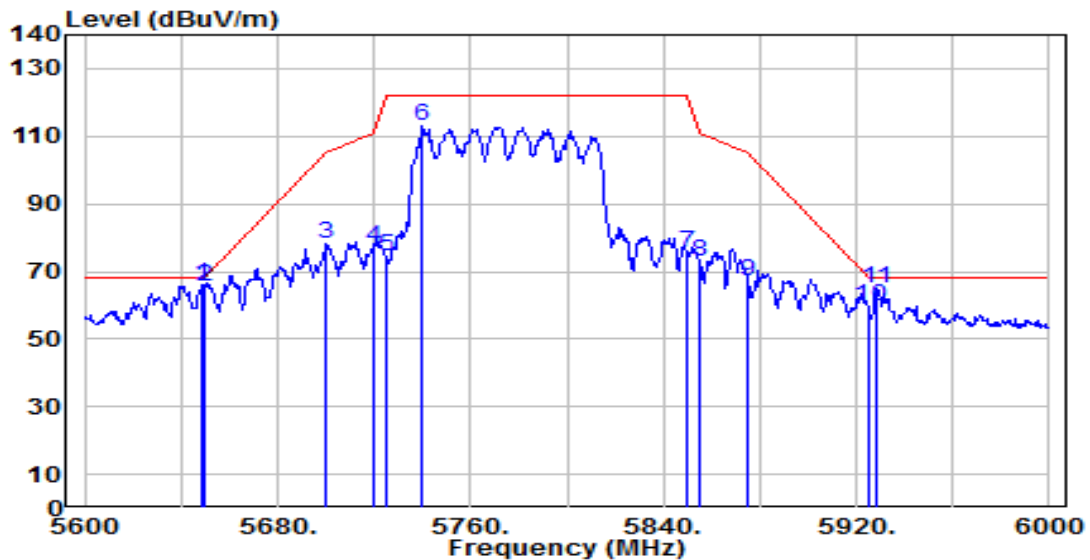


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.800	64.34	1.58	65.92	-2.28	68.20	160	170	Peak
2		5650.000	63.84	1.59	65.43	-2.77	68.20	160	170	Peak
3		5700.000	76.27	1.79	78.05	-27.15	105.20	160	170	Peak
4		5720.000	75.40	1.87	77.27	-33.53	110.80	160	170	Peak
5		5725.000	72.43	1.89	74.32	-47.88	122.20	160	170	Peak
6		5740.000	111.05	1.95	113.00	N/A	N/A	160	170	Peak
7		5850.000	73.09	2.27	75.36	-46.84	122.20	160	170	Peak
8		5855.000	70.54	2.28	72.81	-37.99	110.80	160	170	Peak
9		5875.000	64.66	2.31	66.97	-38.23	105.20	160	170	Peak
10		5925.000	57.33	2.38	59.71	-8.49	68.20	160	170	Peak
11		5928.400	62.55	2.39	64.94	-3.26	68.20	160	170	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

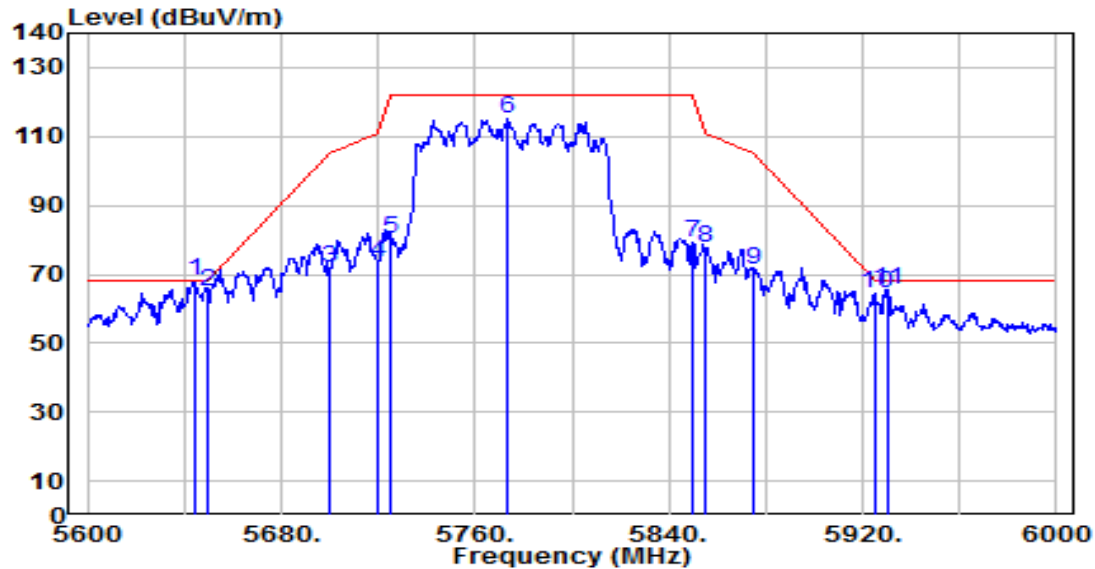


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5644.400	66.47	1.56	68.03	-0.17	68.20	160	355	Peak
2		5650.000	63.44	1.59	65.03	-3.17	68.20	160	355	Peak
3		5700.000	69.83	1.79	71.62	-33.58	105.20	160	355	Peak
4		5720.000	71.74	1.87	73.61	-37.19	110.80	160	355	Peak
5		5725.000	78.51	1.89	80.40	-41.80	122.20	160	355	Peak
6		5773.600	113.11	2.09	115.19	N/A	N/A	160	355	Peak
7		5850.000	76.79	2.27	79.06	-43.14	122.20	160	355	Peak
8		5855.000	75.44	2.28	77.72	-33.08	110.80	160	355	Peak
9		5875.000	68.85	2.31	71.16	-34.04	105.20	160	355	Peak
10		5925.000	62.33	2.38	64.71	-3.49	68.20	160	355	Peak
11		5930.400	63.30	2.39	65.69	-2.51	68.20	160	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

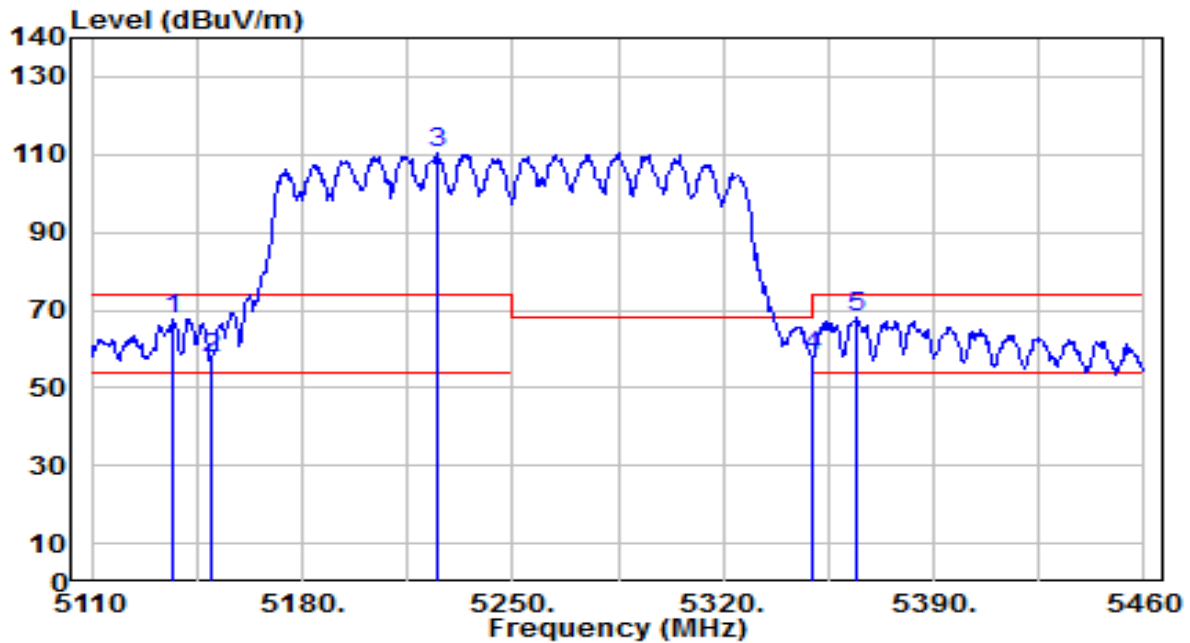


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5137.300	67.08	0.78	67.86	-6.14	74.00	130	175	Peak
2	5150.000	56.96	0.80	57.75	-16.25	74.00	130	175	Peak
3	5224.800	109.46	0.81	110.28	N/A	N/A	130	175	Peak
4	5350.000	57.63	0.59	58.22	-15.78	74.00	130	175	Peak
5	* 5364.450	67.47	0.57	68.04	-5.96	74.00	130	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

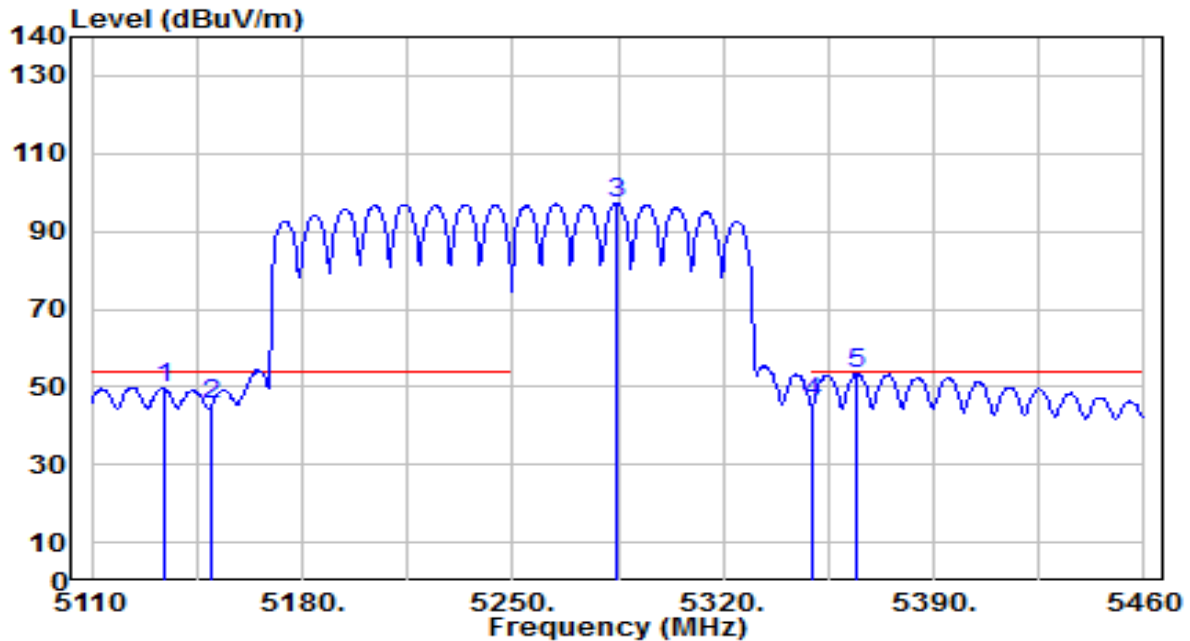


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5133.800	49.09	0.78	49.87	-4.13	54.00	130	175	Average
2	5150.000	44.84	0.80	45.64	-8.36	54.00	130	175	Average
3	5284.650	96.45	0.71	97.16	N/A	N/A	130	175	Average
4	5350.000	45.35	0.59	45.94	-8.06	54.00	130	175	Average
5	* 5364.100	52.91	0.57	53.48	-0.52	54.00	130	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

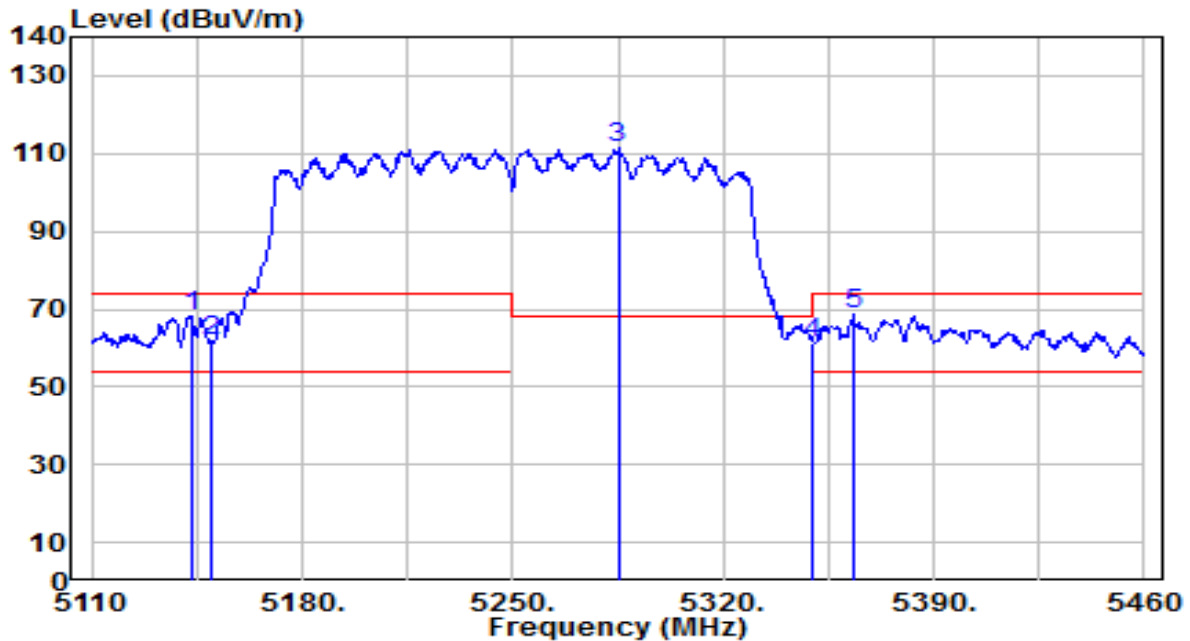


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.250	67.29	0.79	68.08	-5.92	74.00	190	110	Peak
2	5150.000	61.12	0.80	61.91	-12.09	74.00	190	110	Peak
3	5285.000	110.52	0.71	111.22	N/A	N/A	190	110	Peak
4	5350.000	60.63	0.59	61.23	-12.77	74.00	190	110	Peak
5	* 5363.050	67.92	0.57	68.49	-5.51	74.00	190	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

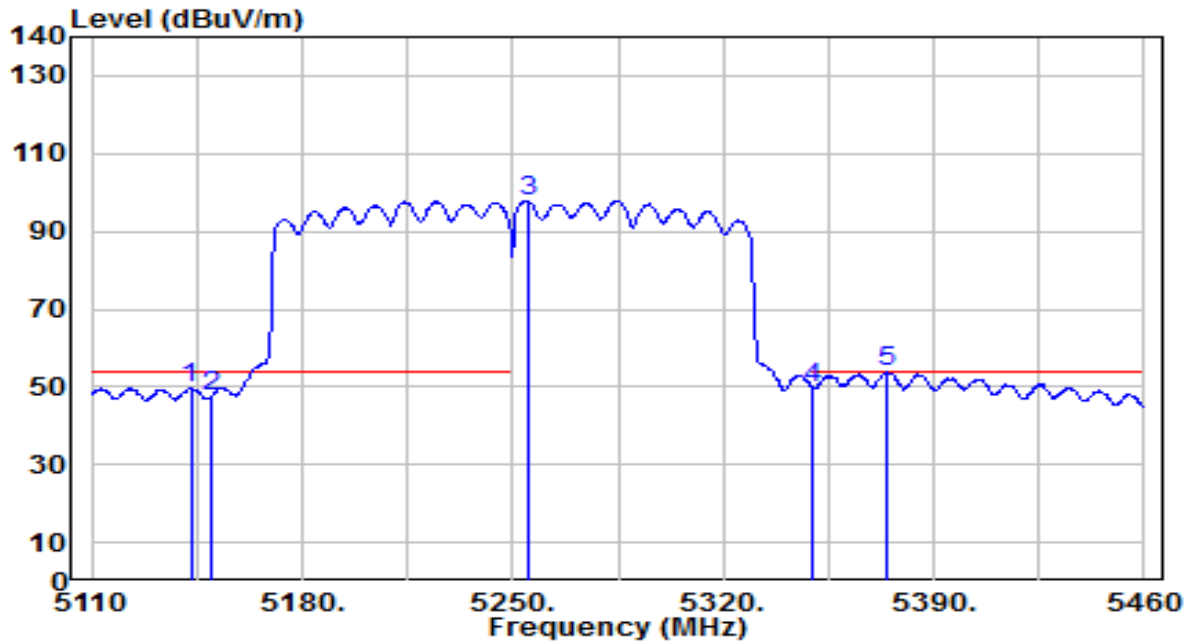


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5142.900	48.85	0.79	49.64	-4.36	54.00	190	110	Average
2	5150.000	46.86	0.80	47.66	-6.34	54.00	190	110	Average
3	5254.900	97.15	0.76	97.91	N/A	N/A	190	110	Average
4	5350.000	49.02	0.59	49.62	-4.38	54.00	190	110	Average
5	* 5374.600	53.29	0.55	53.84	-0.16	54.00	190	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

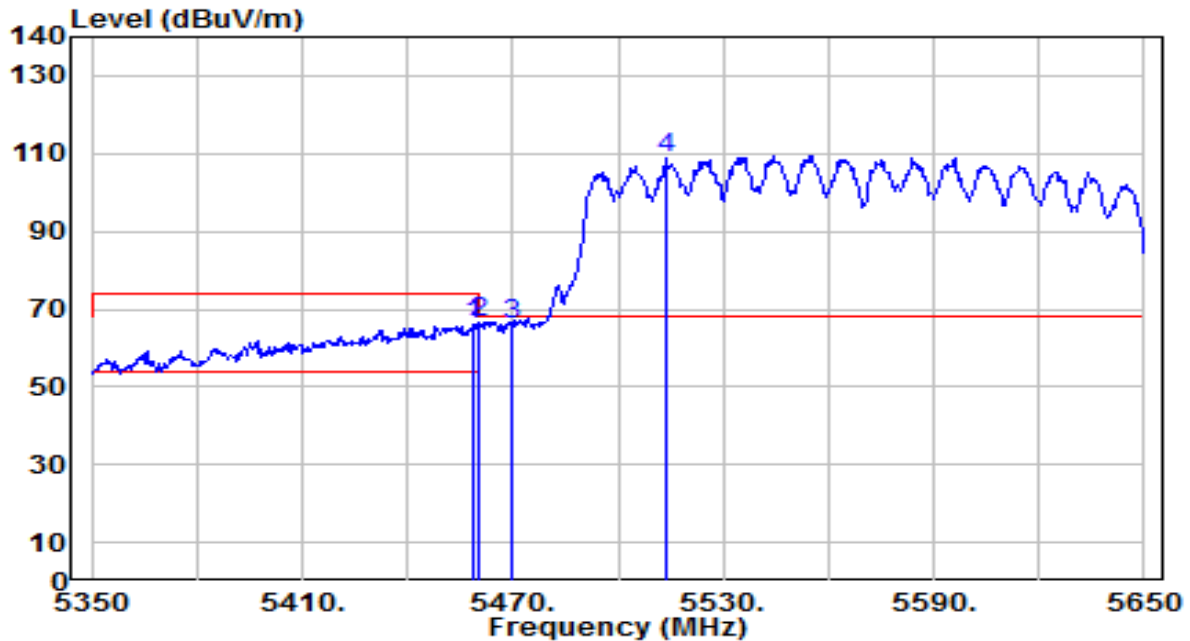


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.900	65.32	0.76	66.07	-7.93	74.00	180	175	Peak
2	5460.000	65.62	0.76	66.38	-7.62	74.00	180	175	Peak
3	* 5470.000	65.17	0.80	65.97	-2.23	68.20	180	175	Peak
4	5513.500	107.59	0.99	108.58	N/A	N/A	180	175	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Horizontal	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

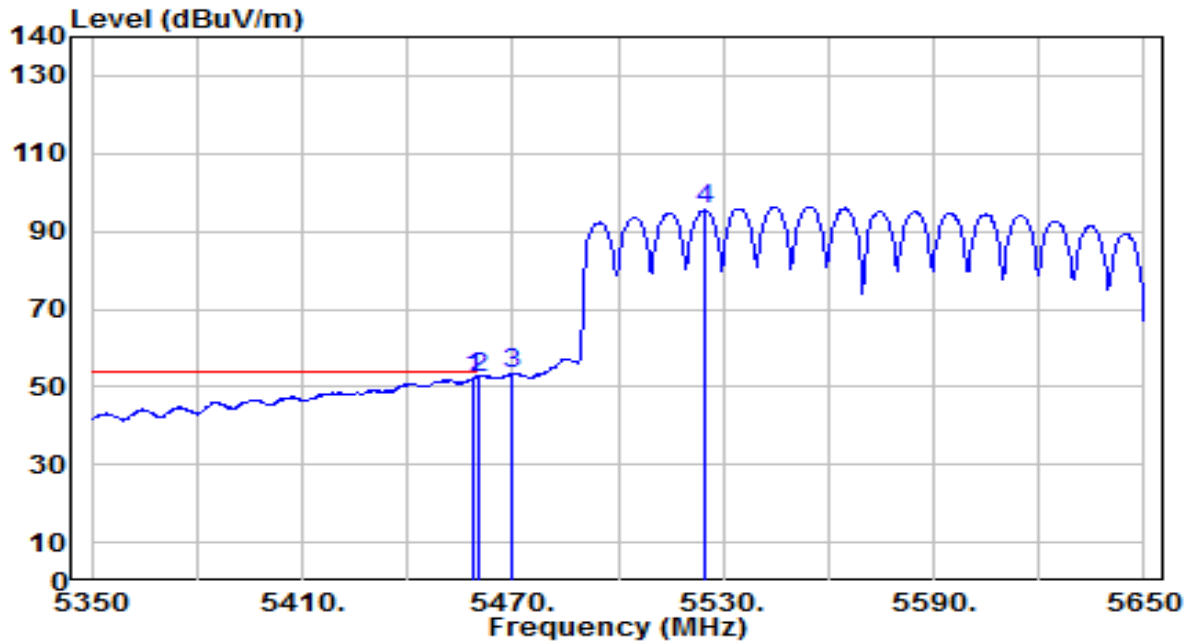


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5458.900	51.29	0.76	52.04	-1.96	54.00	180	175	Average
2	*	5460.000	51.80	0.76	52.56	-1.44	54.00	180	175	Average
3		5470.000	52.67	0.80	53.47	N/A	N/A	180	175	Average
4		5524.600	94.40	1.04	95.44	N/A	N/A	180	175	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

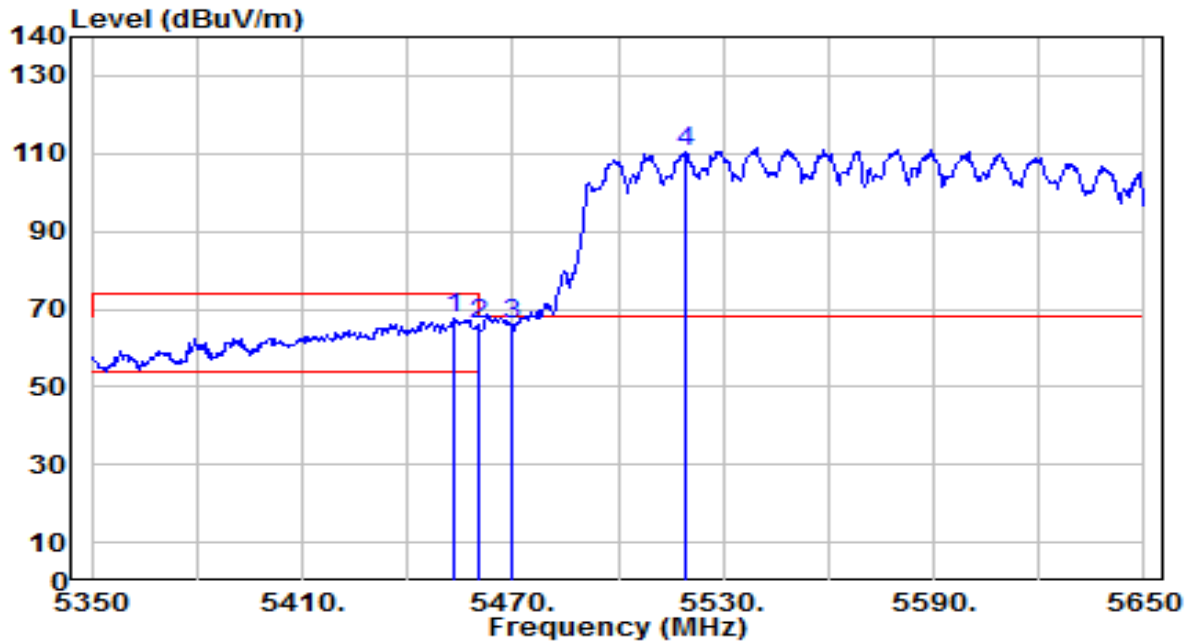


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5453.500	66.77	0.73	67.51	-6.49	74.00	185	355	Peak
2	5460.000	65.13	0.76	65.89	-8.11	74.00	185	355	Peak
3	* 5470.000	65.03	0.80	65.83	-2.37	68.20	185	355	Peak
4	5519.200	109.48	1.02	110.50	N/A	N/A	185	355	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-14
Factor	DRH18-E	Temp. / Humidity	24°C /63%
Polarity	Vertical	Site / Test Engineer	AC2 / Xuan
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1(Vertical Ant)	Test Voltage	AC 120V/60Hz

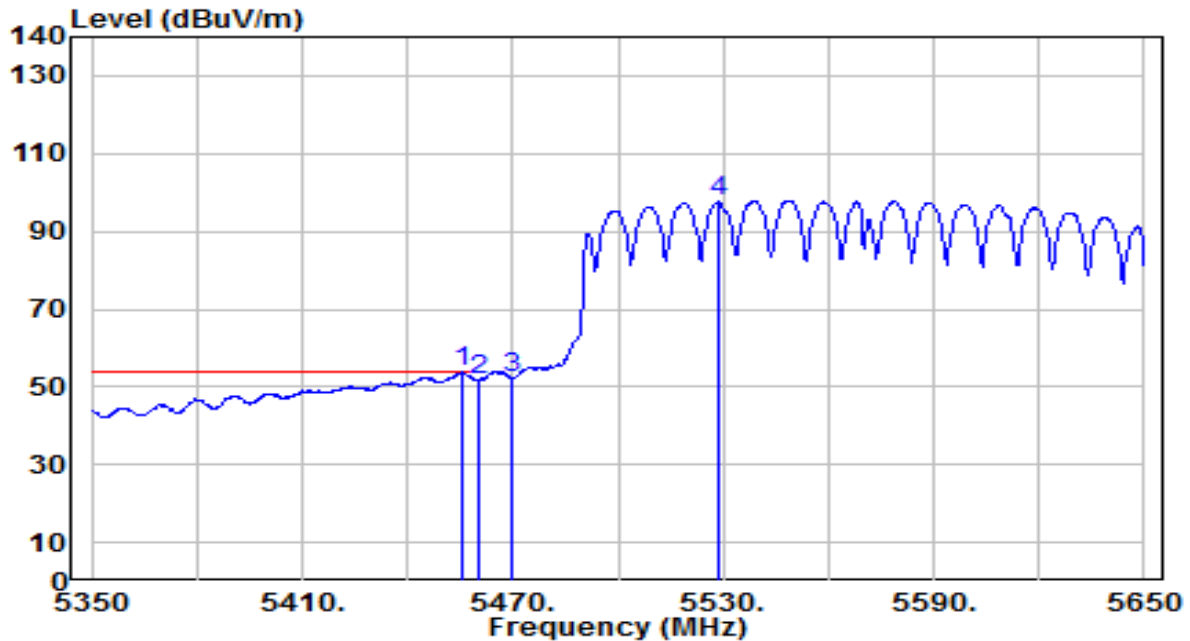

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5455.300	53.10	0.74	53.85	-0.15	54.00	185	355	Average
2		5460.000	51.11	0.76	51.87	-2.13	54.00	185	355	Average
3		5470.000	51.41	0.80	52.22	N/A	N/A	185	355	Average
4		5528.800	96.46	1.06	97.52	N/A	N/A	185	355	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement


7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.10.2.Test Setup

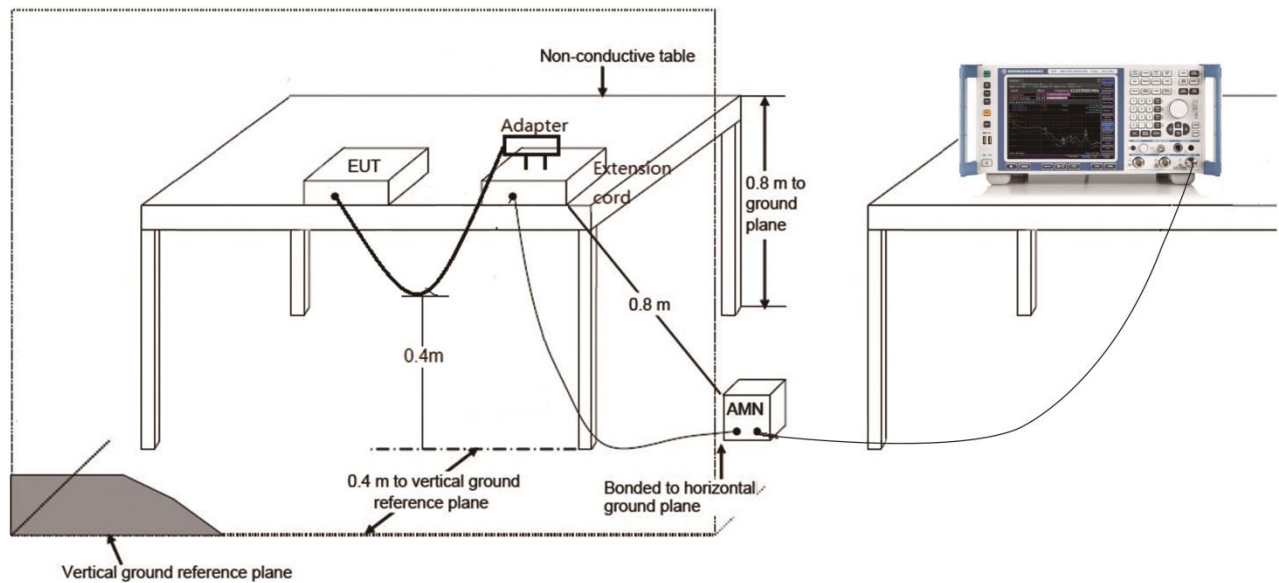

7.10.3.Test Result

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-11
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.1°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

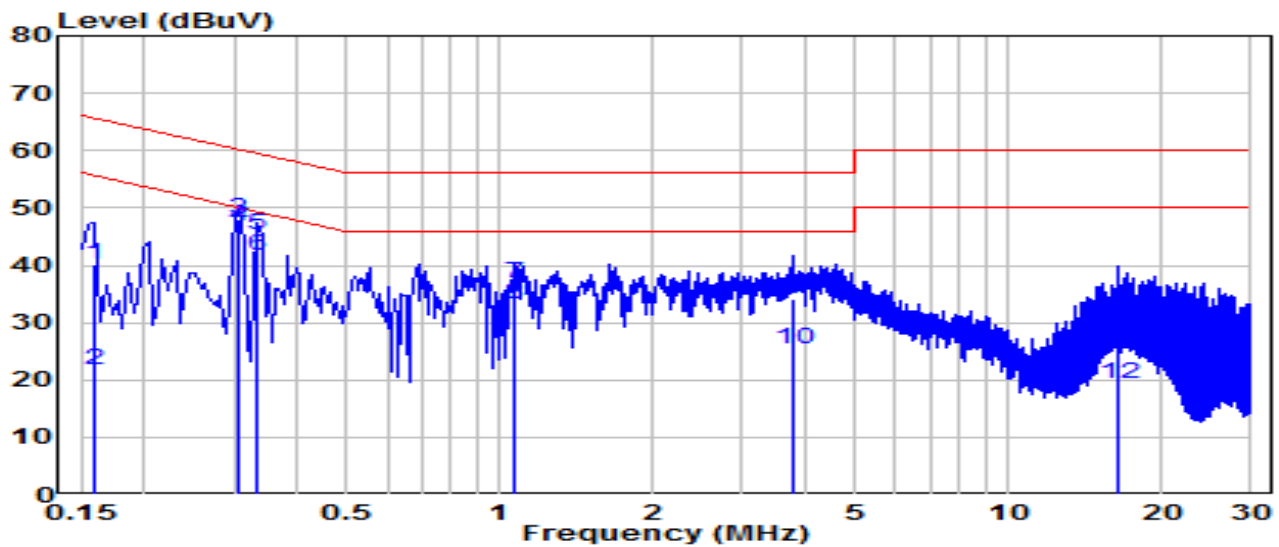


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.159	30.38	9.62	40.00	-25.51	65.52	QP
2	0.159	12.25	9.62	21.87	-33.64	55.52	Average
3	* 0.307	38.36	9.63	47.99	-12.05	60.04	QP
4	* 0.307	37.14	9.63	46.77	-3.27	50.04	Average
5	0.334	35.69	9.63	45.32	-14.02	59.34	QP
6	0.334	32.08	9.63	41.71	-7.63	49.34	Average
7	1.072	27.04	9.67	36.71	-19.29	56.00	QP
8	1.072	23.44	9.67	33.11	-12.89	46.00	Average
9	3.777	24.49	9.73	34.22	-21.78	56.00	QP
10	3.777	15.72	9.73	25.45	-20.55	46.00	Average
11	16.506	17.11	9.90	27.02	-32.98	60.00	QP
12	16.506	9.38	9.90	19.28	-30.72	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-11
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.1°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 120V/60Hz

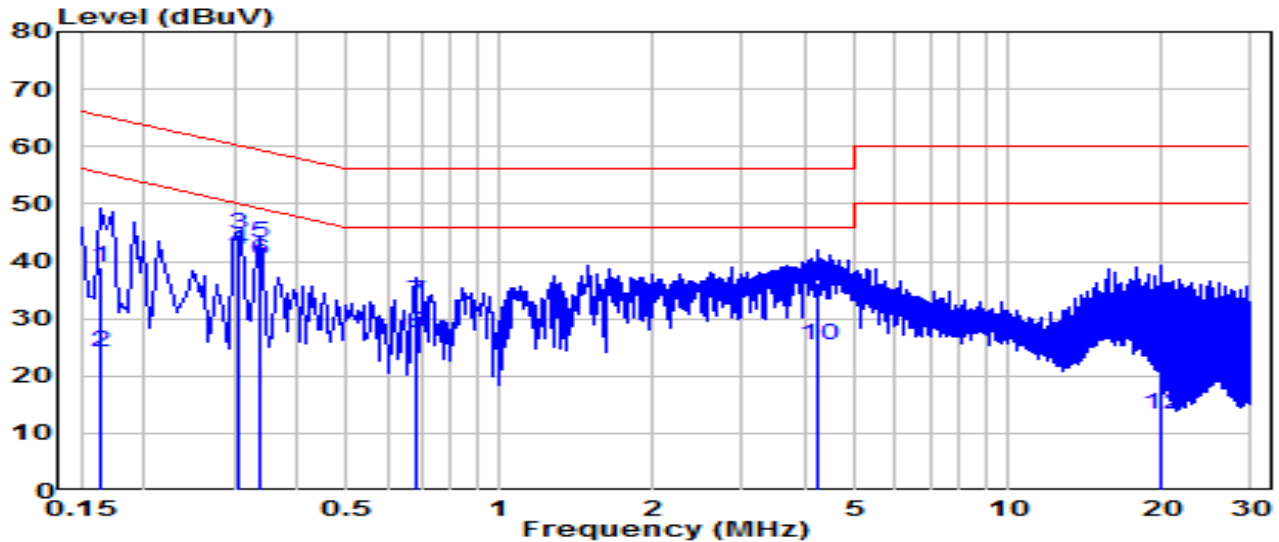


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.163	29.47	9.62	39.09	-26.20	65.28	QP
2	0.163	14.62	9.62	24.24	-31.05	55.28	Average
3	* 0.307	35.08	9.63	44.71	-15.33	60.04	QP
4	* 0.307	32.21	9.63	41.84	-8.20	50.04	Average
5	0.339	33.53	9.63	43.16	-16.06	59.23	QP
6	0.339	30.51	9.63	40.14	-9.08	49.23	Average
7	0.681	23.21	9.65	32.86	-23.14	56.00	QP
8	0.681	17.95	9.65	27.61	-18.39	46.00	Average
9	4.204	26.63	9.73	36.37	-19.63	56.00	QP
10	4.204	15.48	9.73	25.21	-20.79	46.00	Average
11	19.899	15.40	10.00	25.39	-34.61	60.00	QP
12	19.899	3.36	10.00	13.36	-36.64	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-11
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	23.1°C /57%
Polarity	Line1	Site / Test Engineer	SR2 / Dio
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

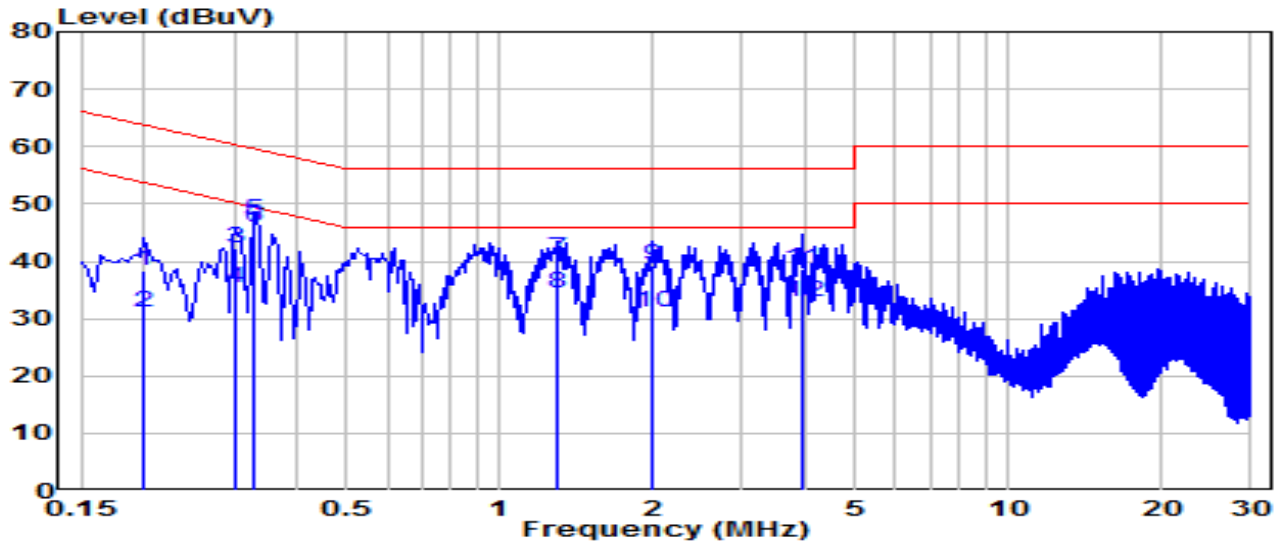


No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.199	28.70	9.62	38.33	-25.31	63.63	QP
2	0.199	21.58	9.62	31.20	-22.43	53.63	Average
3	0.303	32.67	9.63	42.30	-17.86	60.16	QP
4	0.303	25.80	9.63	35.43	-14.73	50.16	Average
5	* 0.330	37.43	9.63	47.06	-12.39	59.45	QP
6	* 0.330	36.39	9.63	46.02	-3.43	49.45	Average
7	1.288	30.81	9.68	40.49	-15.51	56.00	QP
8	1.288	24.63	9.68	34.31	-11.69	46.00	Average
9	1.999	29.65	9.69	39.34	-16.66	56.00	QP
10	1.999	21.30	9.69	30.99	-15.01	46.00	Average
11	3.934	28.90	9.73	38.63	-17.37	56.00	QP
12	3.934	23.14	9.73	32.87	-13.13	46.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

EUT	AX3000 Indoor/Outdoor Wi-Fi 6 Access Point	Date of Test	2022-10-11
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	23.1°C /57%
Polarity	Neutral	Site / Test Engineer	SR2 / Dio
Test Mode	802.11ac-20MHz_TX_Band1_CH 44_ANT 0+1	Test Voltage	AC 240V/60Hz

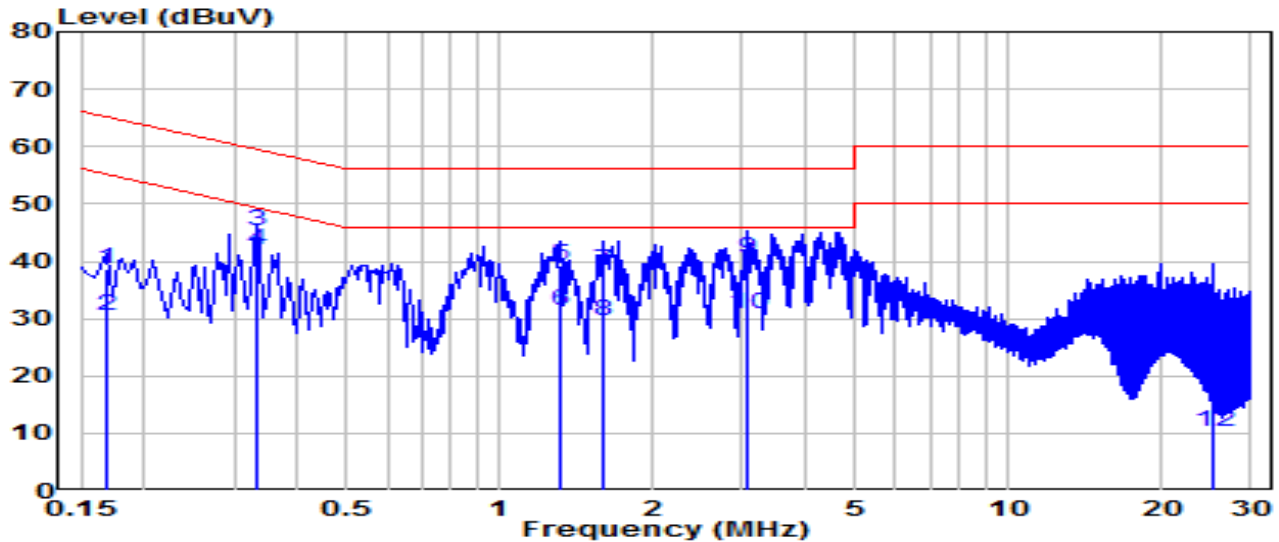

No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.168	28.90	9.62	38.53	-26.53	65.06	QP
2	0.168	20.95	9.62	30.57	-24.49	55.06	Average
3	* 0.334	35.78	9.63	45.41	-13.93	59.34	QP
4	* 0.334	32.35	9.63	41.98	-7.36	49.34	Average
5	1.311	29.51	9.68	39.18	-16.82	56.00	QP
6	1.311	21.57	9.68	31.25	-14.75	46.00	Average
7	1.594	28.80	9.68	38.48	-17.52	56.00	QP
8	1.594	19.98	9.68	29.67	-16.33	46.00	Average
9	3.084	30.66	9.71	40.37	-15.63	56.00	QP
10	3.084	21.00	9.71	30.71	-15.29	46.00	Average
11	25.176	13.31	10.02	23.32	-36.68	60.00	QP
12	25.176	0.32	10.02	10.34	-39.66	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

The End

Appendix A : Test Setup Photograph

Refer to “2209TW0101-Setup Photo” file.

Appendix B : External Photograph

Refer to “2209TW0101-External Photo” file.

Appendix C : Internal Photograph

Refer to “2209TW0101-Internal Photo” file.