

Test Laboratory: Compliance Certification Services

## Cell Band - LCD Edge Position- Primary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 837$  MHz;  $\sigma = 0.971$  mho/m;  $\epsilon_r = 54.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**GPRS M ch - MC8765/Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.193 mW/g

**GPRS M ch - MC8765/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.14 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 0.425 W/kg

**SAR(1 g) = 0.183 mW/g; SAR(10 g) = 0.091 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.187 mW/g

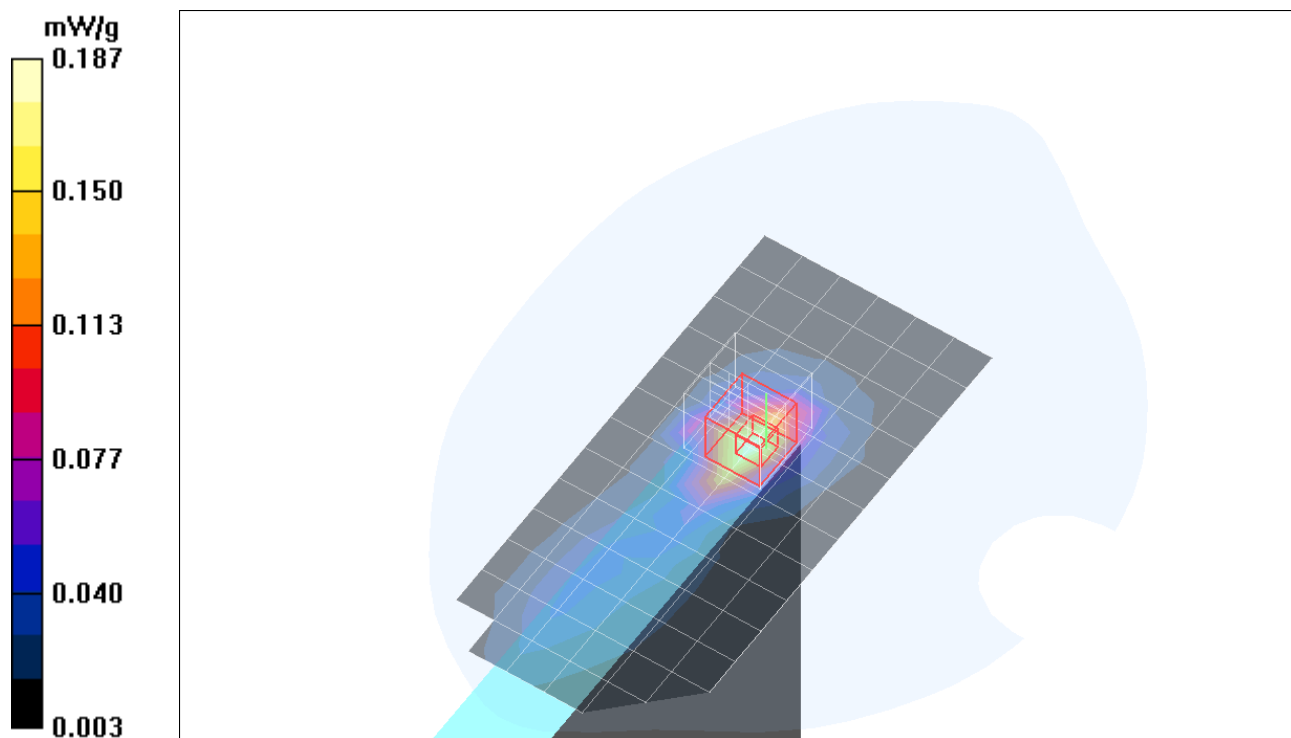

Test Laboratory: Compliance Certification Services

## Cell Band - LCD Edge Position- Primary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 837 \text{ MHz}$ ;  $\sigma = 0.971 \text{ mho/m}$ ;  $\epsilon_r = 54.4$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**EGPRS M ch - MC8765/Area Scan (7x8x1):** Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.049 mW/g

**EGPRS M ch - MC8765/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=7.5\text{mm}$ ,  $dy=7.5\text{mm}$ ,  $dz=5\text{mm}$


Reference Value = 5.04 V/m; Power Drift = 0.139 dB

Peak SAR (extrapolated) = 0.131 W/kg

**SAR(1 g) = 0.058 mW/g; SAR(10 g) = 0.029 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.059 mW/g

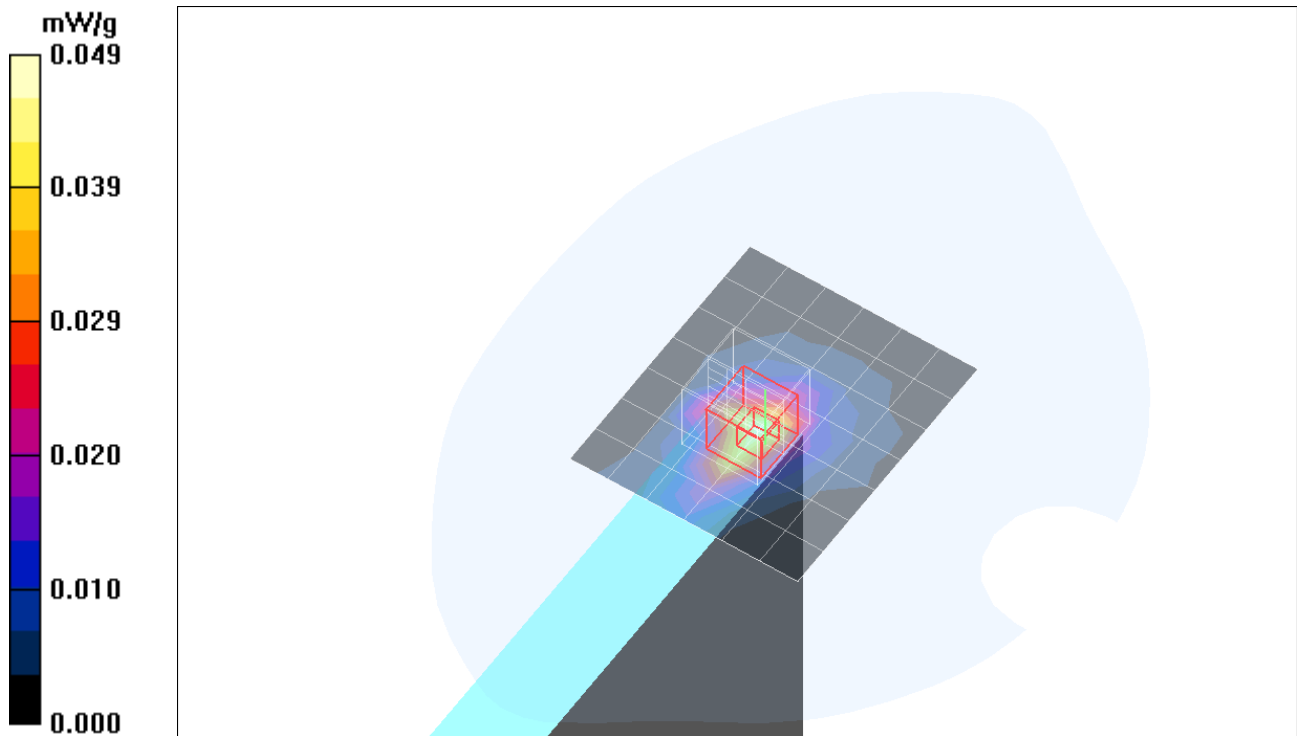

Test Laboratory: Compliance Certification Services

## Cell Band - LCD Edge Position- Primary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.971$  mho/m;  $\epsilon_r = 54.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**WCDMA M ch - MC8765/Area Scan (7x8x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.073 mW/g

**WCDMA M ch - MC8765/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 5.82 V/m; Power Drift = 0.014 dB

Peak SAR (extrapolated) = 0.220 W/kg

**SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.030 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.069 mW/g

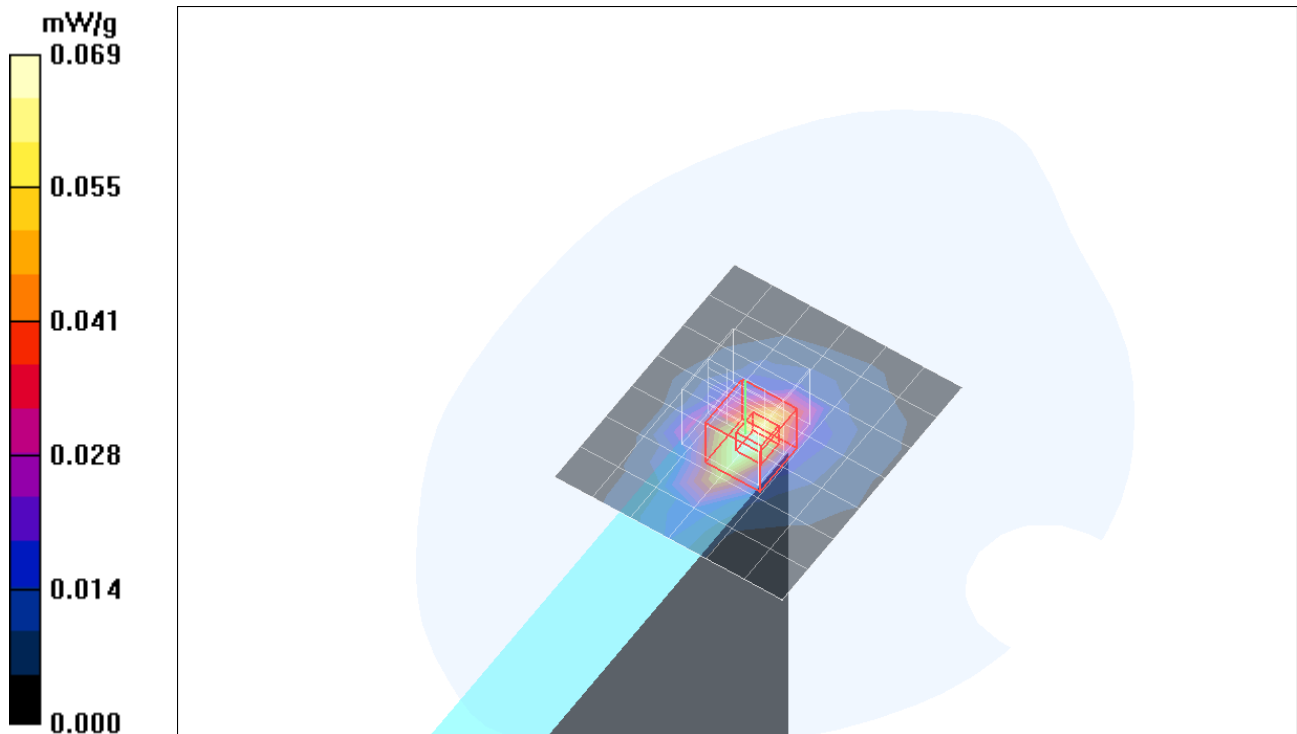

Test Laboratory: Compliance Certification Services

## Cell Band - LCD Edge Position -Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.95$  mho/m;  $\epsilon_r = 53.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**GPRS L ch/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.234 mW/g

**GPRS L ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.85 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 0.360 W/kg

**SAR(1 g) = 0.226 mW/g; SAR(10 g) = 0.148 mW/g**

Maximum value of SAR (measured) = 0.243 mW/g


**GPRS L ch/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.85 V/m; Power Drift = -0.180 dB

Peak SAR (extrapolated) = 0.629 W/kg

**SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.147 mW/g**

Maximum value of SAR (measured) = 0.219 mW/g

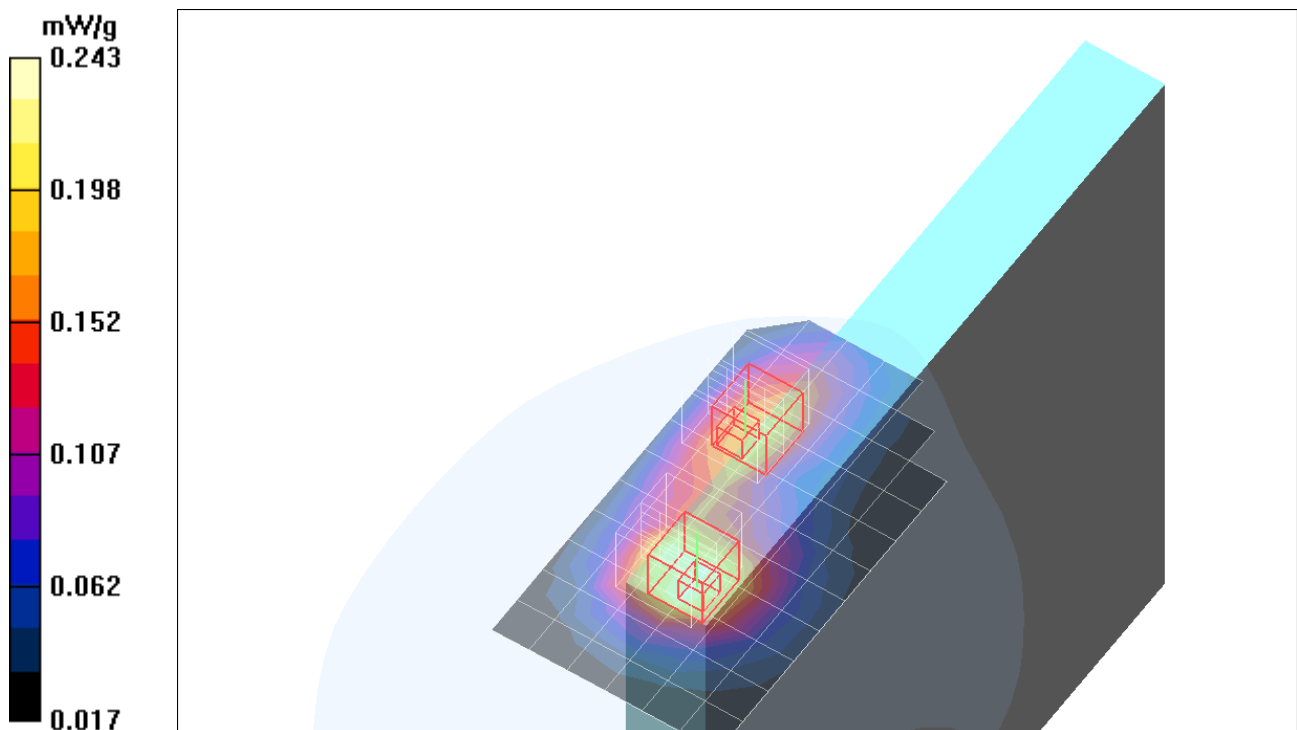

Test Laboratory: Compliance Certification Services


## Cell Band - LCD Edge Position -Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 824.2 MHz;Duty Cycle: 1:4

**GPRS L ch/Z Scan (1x1x41):** Measurement grid: dx=20mm, dy=20mm, dz=2.5mm

Maximum value of SAR (measured) = 0.139 mW/g

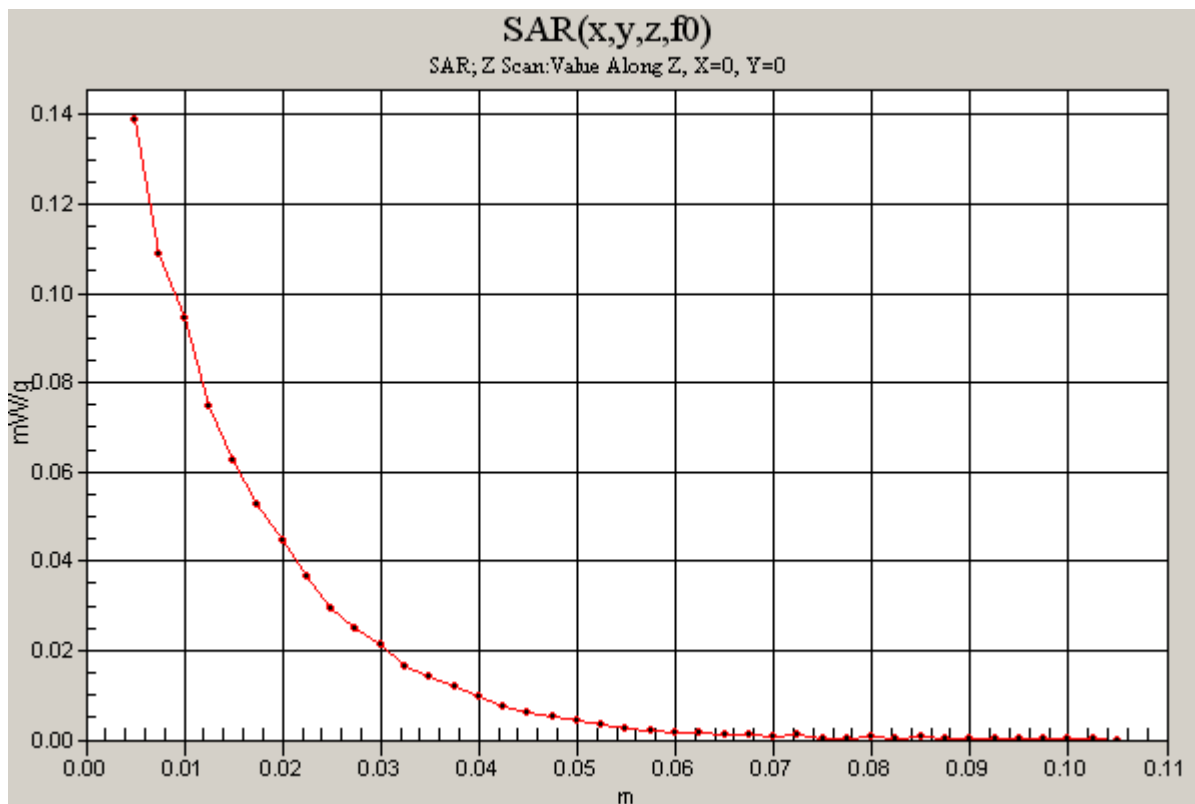

Test Laboratory: Compliance Certification Services

## Cell Band - LCD Edge Position -Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 837$  MHz;  $\sigma = 0.962$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**GPRS M ch/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.194 mW/g

**GPRS M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.04 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.322 W/kg

**SAR(1 g) = 0.195 mW/g; SAR(10 g) = 0.125 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.212 mW/g

**GPRS M ch/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.04 V/m; Power Drift = -0.074 dB

Peak SAR (extrapolated) = 0.342 W/kg

**SAR(1 g) = 0.160 mW/g; SAR(10 g) = 0.080 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.175 mW/g

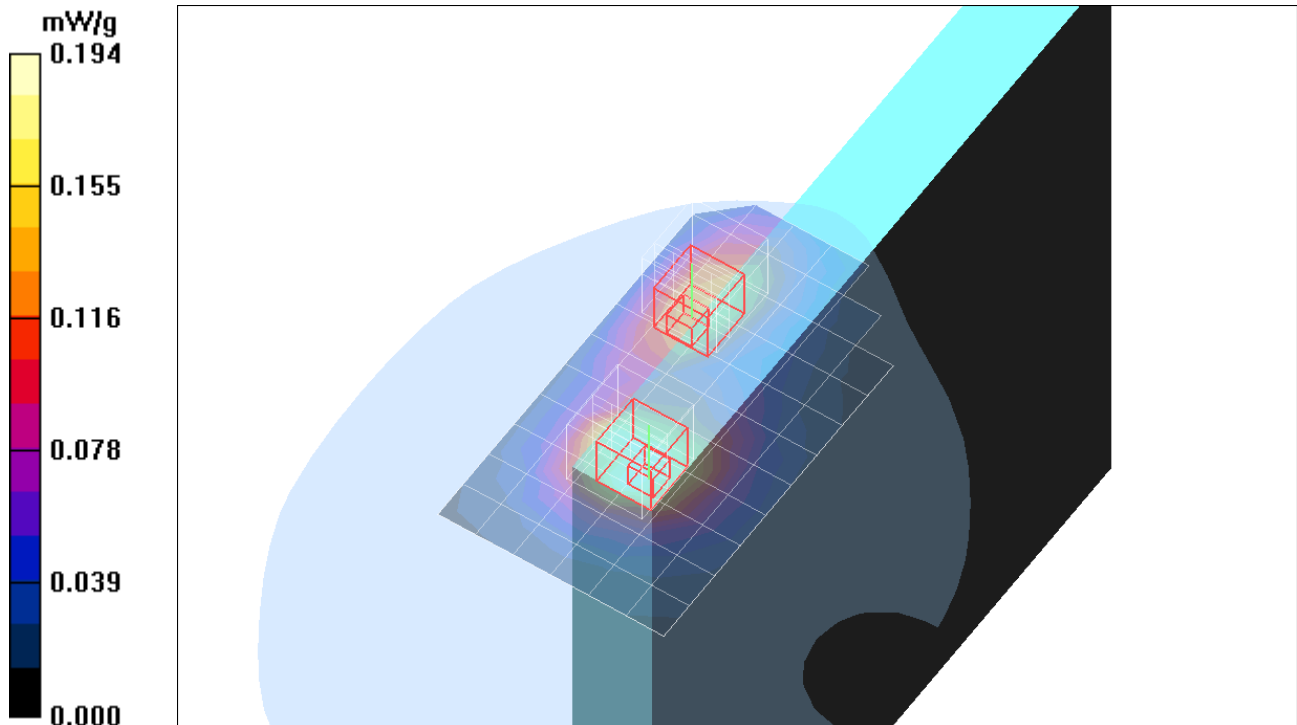

Test Laboratory: Compliance Certification Services

## Cell Band - LCD Edge Position -Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 848.8$  MHz;  $\sigma = 0.973$  mho/m;  $\epsilon_r = 53.7$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**GPRS H ch/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.146 mW/g

**GPRS H ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.15 V/m; Power Drift = 0.158 dB

Peak SAR (extrapolated) = 0.220 W/kg

**SAR(1 g) = 0.139 mW/g; SAR(10 g) = 0.088 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.148 mW/g

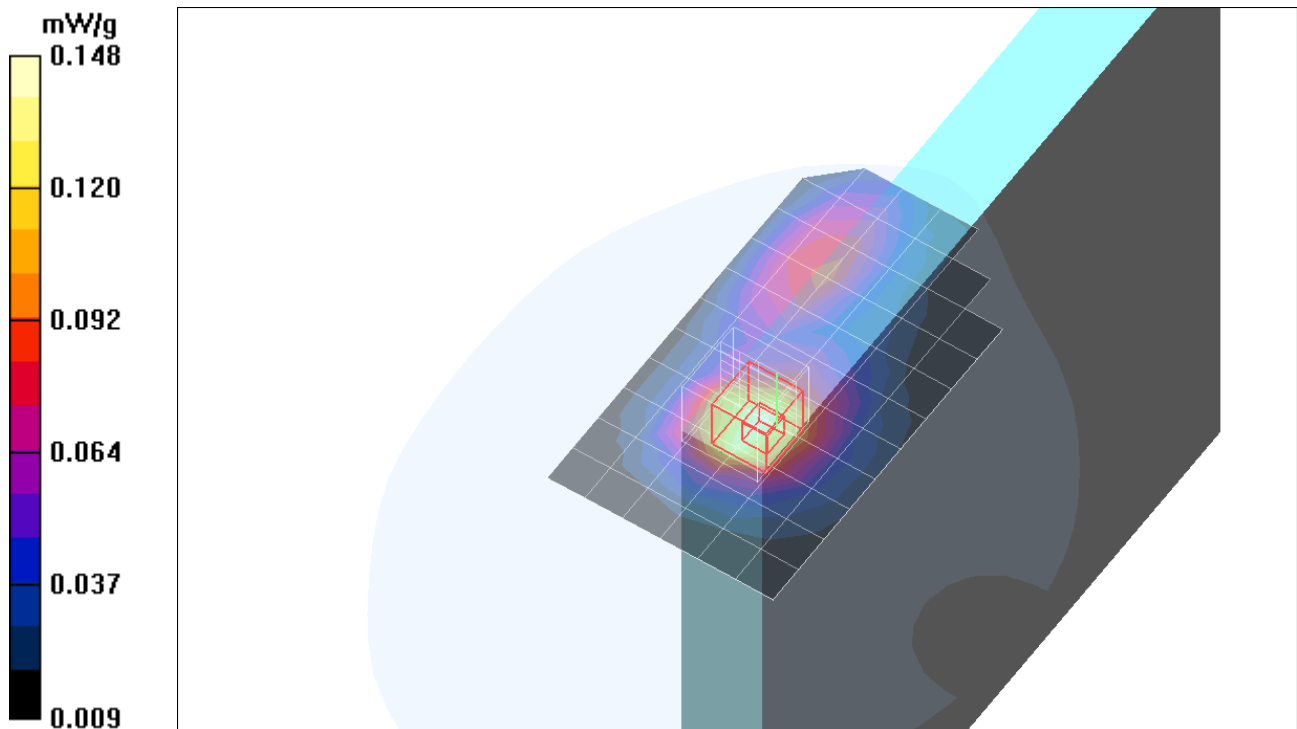

Test Laboratory: Compliance Certification Services

## Cell Band - LCD Edge Position -Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz;Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 837$  MHz;  $\sigma = 0.962$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**EGPRS M ch/Area Scan (7x13x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.070 mW/g

**EGPRS M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 7.70 V/m; Power Drift = 0.179 dB

Peak SAR (extrapolated) = 0.105 W/kg

**SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.044 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.071 mW/g

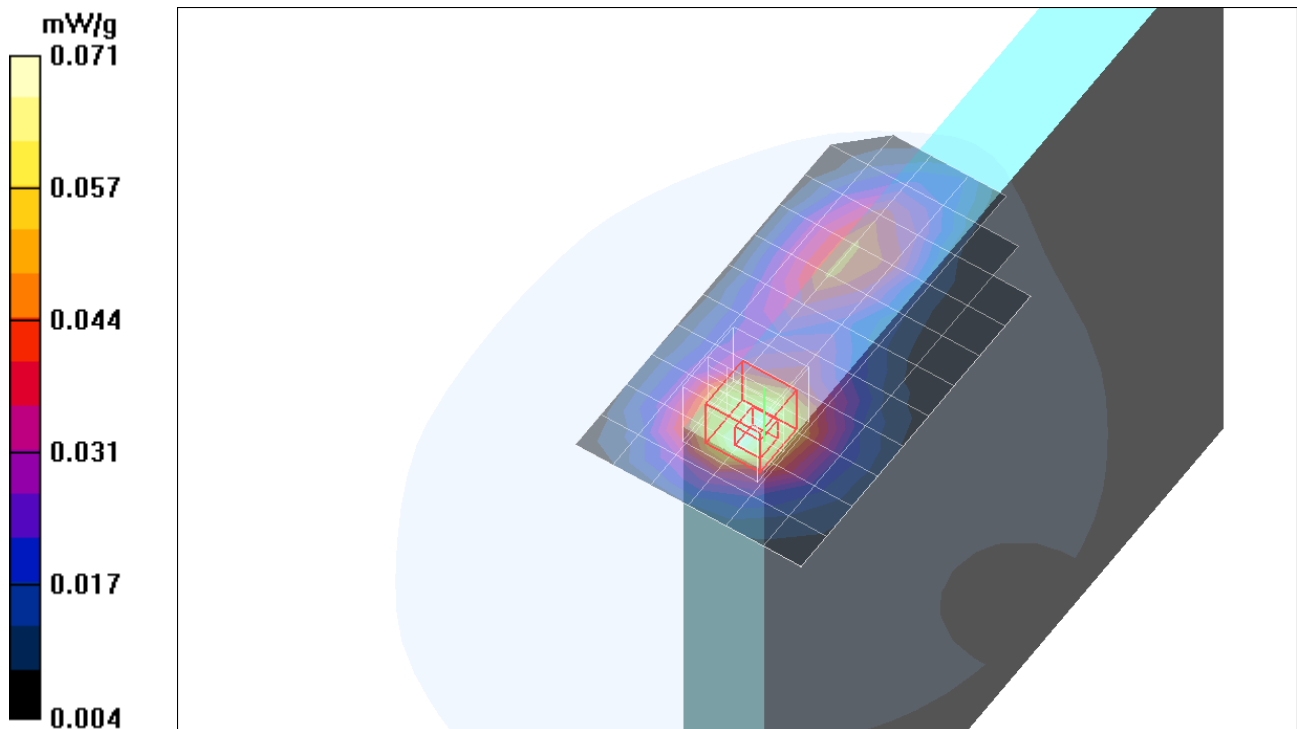



Test Laboratory: Compliance Certification Services

## Cell Band - LCD Edge Position -Secondary Portrait

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.961$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**WCDMA M ch/Area Scan (7x15x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.097 mW/g

**WCDMA M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 9.04 V/m; Power Drift = 0.169 dB

Peak SAR (extrapolated) = 0.150 W/kg

**SAR(1 g) = 0.096 mW/g; SAR(10 g) = 0.062 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.103 mW/g

**WCDMA M ch/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 9.04 V/m; Power Drift = 0.169 dB

Peak SAR (extrapolated) = 0.144 W/kg

**SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.035 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.073 mW/g

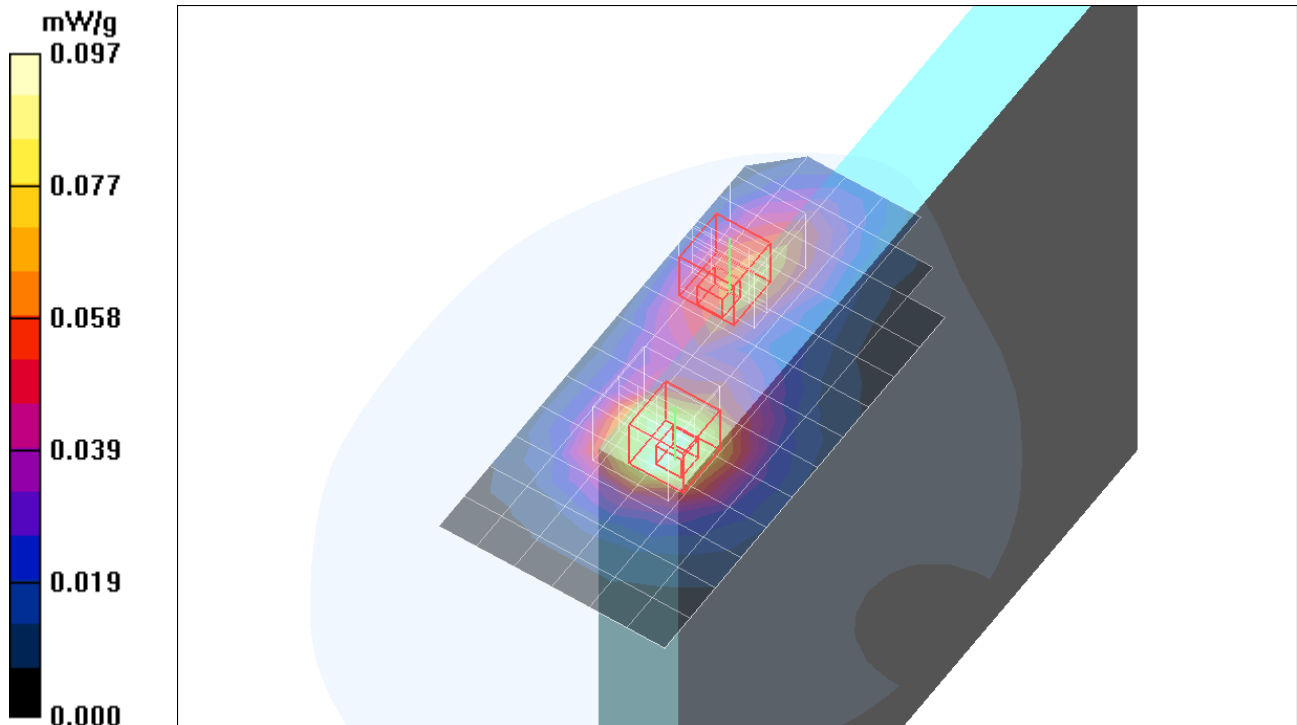

Test Laboratory: Compliance Certification Services

## Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 837$  MHz;  $\sigma = 0.962$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**GPRS M ch/Area Scan (10x21x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.125 mW/g

**GPRS M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 8.48 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 0.154 W/kg

**SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.088 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

**GPRS M ch/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm


Reference Value = 8.48 V/m; Power Drift = -0.131 dB

Peak SAR (extrapolated) = 0.137 W/kg

**SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.059 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.099 mW/g

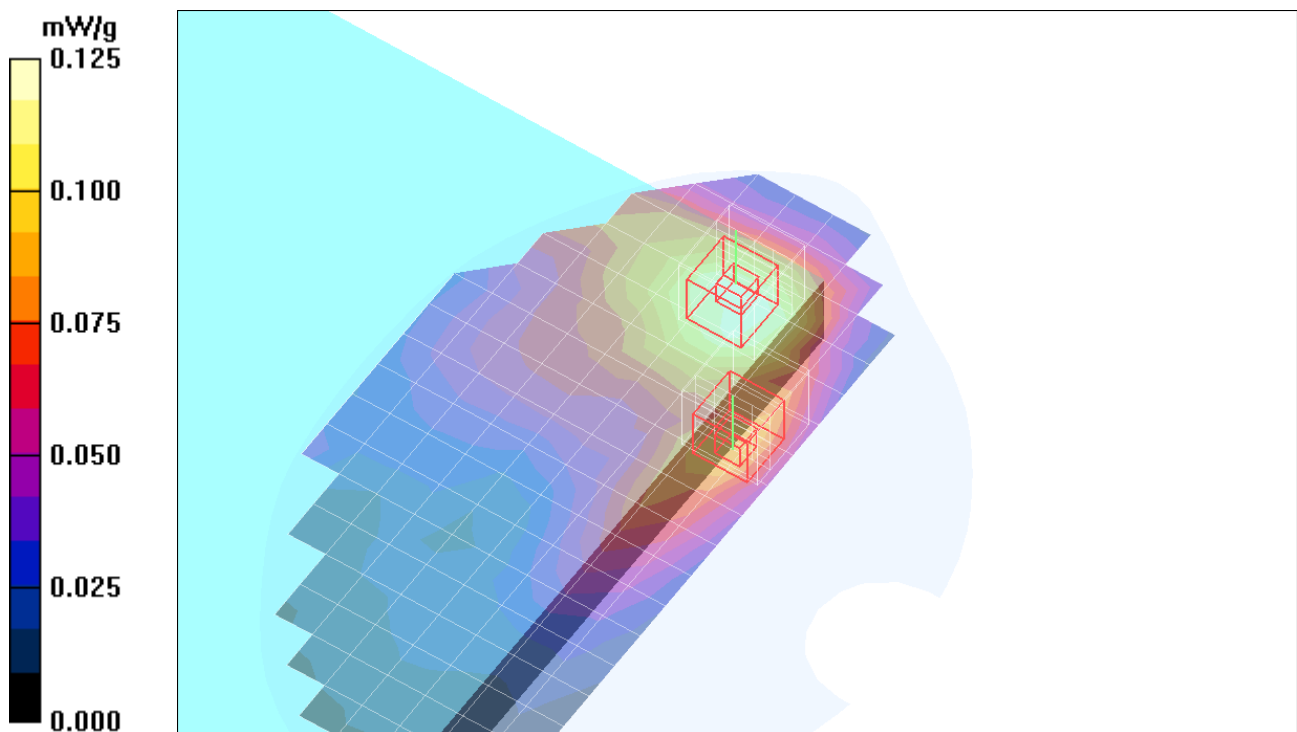

Test Laboratory: Compliance Certification Services

## Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 837 MHz; Duty Cycle: 1:4

Medium parameters used (interpolated):  $f = 837$  MHz;  $\sigma = 0.962$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**EGPRS M ch/Area Scan (9x10x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.034 mW/g

**EGPRS M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.68 V/m; Power Drift = -0.268 dB

Peak SAR (extrapolated) = 0.051 W/kg

**SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.022 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.035 mW/g


**EGPRS M ch/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 4.68 V/m; Power Drift = -0.268 dB

Peak SAR (extrapolated) = 0.044 W/kg

**SAR(1 g) = 0.033 mW/g; SAR(10 g) = 0.024 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

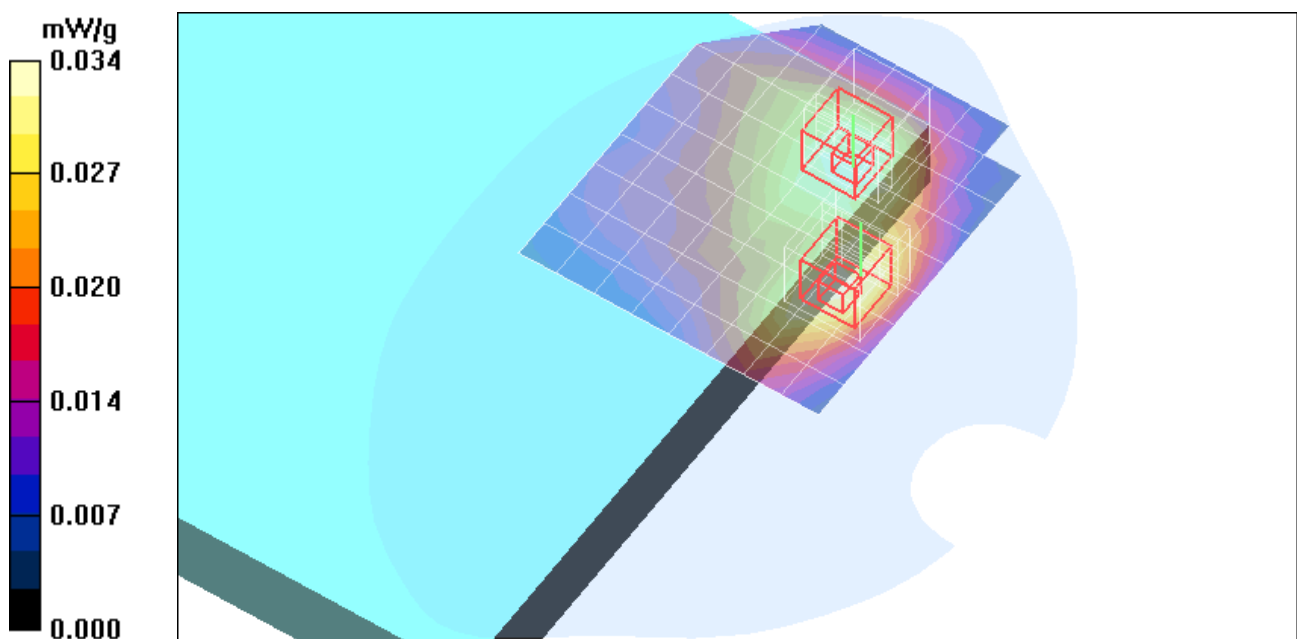

Test Laboratory: Compliance Certification Services

## Cell Band - Lap Held Position

DUT: DL Note Tablet; Type: Laptop; Serial: N/A

Communication System: GSM850; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 836.4$  MHz;  $\sigma = 0.961$  mho/m;  $\epsilon_r = 53.8$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Room Ambient Temperature: 23.0deg. C; Liquid Temperature: 22.0 deg. C

DASY4 Configuration:

- Area Scan setting - Find Secondary Maximum Within: 2.0 dB and with a peak SAR value greater than 0.0012W/kg
- Probe: EX3DV4 - SN3552; ConvF(9.57, 9.57, 9.57); Calibrated: 5/30/2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN558; Calibrated: 1/20/2006
- Phantom: SAM 1; Type: SAM 1; Serial: 1185
- Measurement SW: DASY4, V4.7 Build 44; Postprocessing SW: SEMCAD, V1.8 Build 171

**WCDMA M ch/Area Scan (9x10x1):** Measurement grid: dx=15mm, dy=15mm

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.059 mW/g

**WCDMA M ch/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.10 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.073 W/kg

**SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.040 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.058 mW/g

**WCDMA M ch/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 5.10 V/m; Power Drift = -0.013 dB

Peak SAR (extrapolated) = 0.102 W/kg

**SAR(1 g) = 0.055 mW/g; SAR(10 g) = 0.029 mW/g**

[Info: Interpolated medium parameters used for SAR evaluation.](#)

Maximum value of SAR (measured) = 0.045 mW/g

