


9 20DB Occupy Bandwidth Test

9.1 Test Standard

Test Standard	FCC Part15 C Section 15.247 (a)(1)
---------------	------------------------------------

9.2 Test Setup



9.3 Test Procedure

Using the following spectrum analyzer settings:

1. Span= approximately 2 to 3 times the 20dB bandwidth, centered on a hopping channel.
2. Set the RBW = 30 kHz.
3. Set the VBW = 100 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

9.4 Test Data

Test Item	:	20dB BW	Test Mode	:	CH Low ~ CH High
Test Voltage	:	3.7V	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH



L:

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.954	2401.442	2402.396	---	---
DH5	Ant1	2441	0.963	2440.436	2441.399	---	---
DH5	Ant1	2480	0.957	2479.439	2480.396	---	---
2DH5	Ant1	2402	1.284	2401.274	2402.558	---	---
2DH5	Ant1	2441	1.281	2440.277	2441.558	---	---
2DH5	Ant1	2480	1.326	2479.247	2480.573	---	---
3DH5	Ant1	2402	1.269	2401.271	2402.540	---	---
3DH5	Ant1	2441	1.275	2440.274	2441.549	---	---
3DH5	Ant1	2480	1.263	2479.271	2480.534	---	---

R:

TestMode	Antenna	Frequency[MHz]	20db EBW[MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
DH5	Ant1	2402	0.963	2401.439	2402.402	---	---
DH5	Ant1	2441	0.954	2440.436	2441.390	---	---
DH5	Ant1	2480	0.954	2479.442	2480.396	---	---
2DH5	Ant1	2402	1.266	2401.286	2402.552	---	---
2DH5	Ant1	2441	1.284	2440.274	2441.558	---	---
2DH5	Ant1	2480	1.371	2479.220	2480.591	---	---
3DH5	Ant1	2402	1.293	2401.259	2402.552	---	---
3DH5	Ant1	2441	1.290	2440.262	2441.552	---	---
3DH5	Ant1	2480	1.290	2479.259	2480.549	---	---



Test Graphs:

L:

DH5-Ant1-2402



DH5-Ant1-2441



DH5-Ant1-2480



2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480



R:

DH5-Ant1-2402





DH5-Ant1-2441



DH5-Ant1-2480



2DH5-Ant1-2402



2DH5-Ant1-2441



2DH5-Ant1-2480



3DH5-Ant1-2402



3DH5-Ant1-2441



3DH5-Ant1-2480






10 Carrier Frequency Separation Test

10.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>25KHz or >two-thirds of the 20 dB bandwidth

10.2 Test Setup



10.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer settings:

1. Span= Wide enough to capture the peaks of two adjacent channels
2. Set the RBW = 300 kHz.
3. Set the VBW = 300 kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.

10.4 Test Data

Test Item	:	Frequency Separation	Test Mode	:	CH Low ~ CH High
Test Voltage	:	3.7V	Temperature	:	24.5°C
Test Result	:	PASS	Humidity	:	55%RH



Report No.: PTC25032714609E-FC01

L:


TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	1.006	≥ 0.642	PASS
2DH5	Ant1	Hop	1.302	≥ 0.884	PASS
3DH5	Ant1	Hop	1	≥ 0.850	PASS

R:

TestMode	Antenna	Frequency[MHz]	Result[MHz]	Limit[MHz]	Verdict
DH5	Ant1	Hop	0.97	≥ 0.642	PASS
2DH5	Ant1	Hop	1.014	≥ 0.914	PASS
3DH5	Ant1	Hop	0.956	≥ 0.862	PASS

Test Graphs:

L:

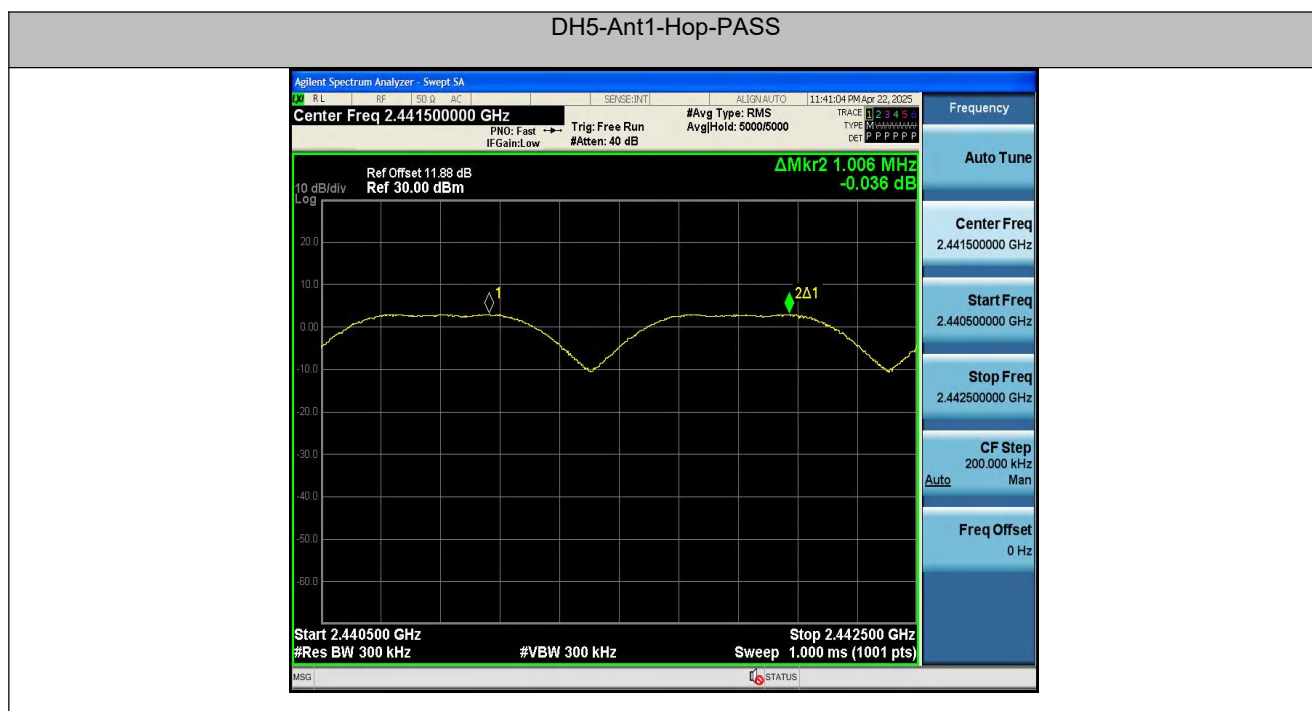



2DH5-Ant1-Hop-PASS



3DH5-Ant1-Hop-PASS





R:

DH5-Ant1-Hop-PASS



2DH5-Ant1-Hop-PASS



3DH5-Ant1-Hop-PASS






11 Number of Hopping Channel Test

11.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	>15 channels

11.2 Test Setup



11.3 Test Procedure

The EUT must have its hopping function enabled. Using the following spectrum analyzer setting:

1. Span= the frequency band of operation
2. Set the RBW = 300kHz.
3. Set the VBW = 300kHz.
4. Sweep time = auto couple.
5. Detector function = peak.
6. Trace mode = max hold.
7. Allow trace to fully stabilize.



11.4 Test Data

Test Item	: Number of Hopping Frequency	Test Mode	: CH Low ~ CH High
Test Voltage	: 3.7V	Temperature	: 24.5°C
Test Result	: PASS	Humidity	: 55%RH

L:


TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS

R:

TestMode	Antenna	Frequency[MHz]	Result[Num]	Limit[Num]	Verdict
DH5	Ant1	Hop	79	≥15	PASS
2DH5	Ant1	Hop	79	≥15	PASS
3DH5	Ant1	Hop	79	≥15	PASS


Test Graphs:

L:

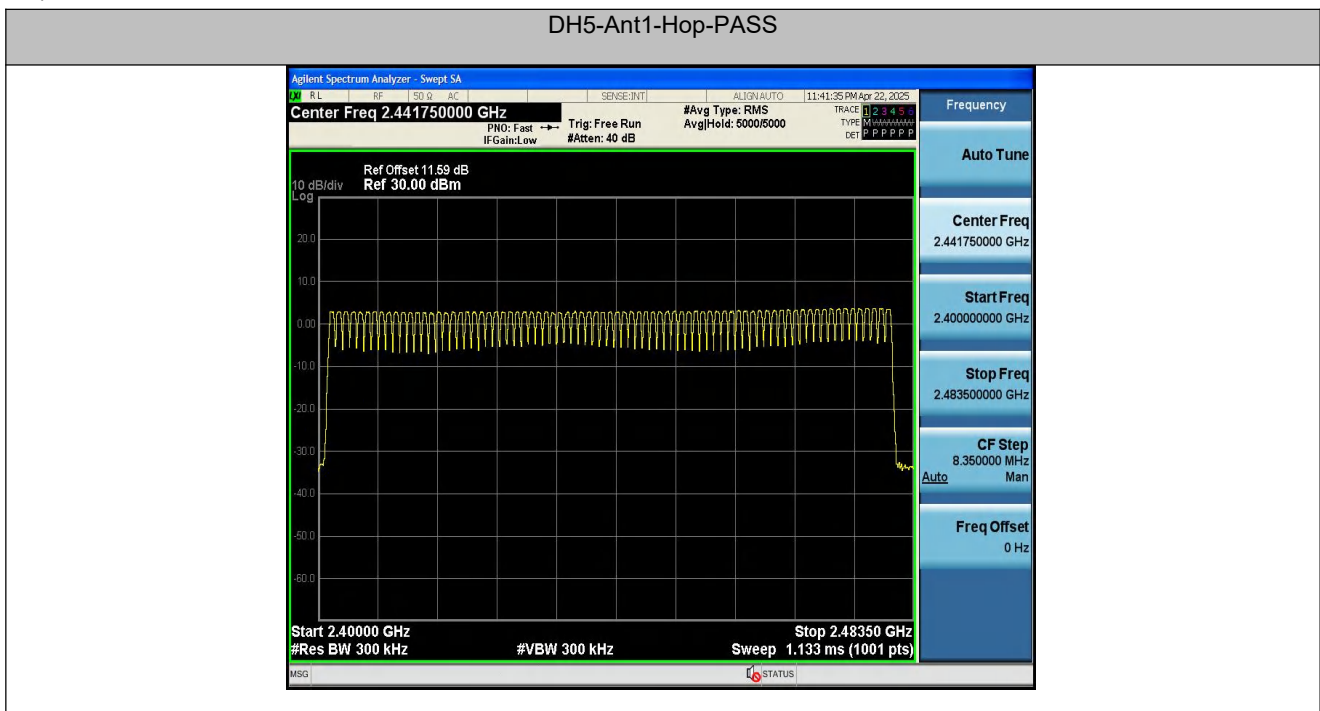




2DH5-Ant1-Hop-PASS

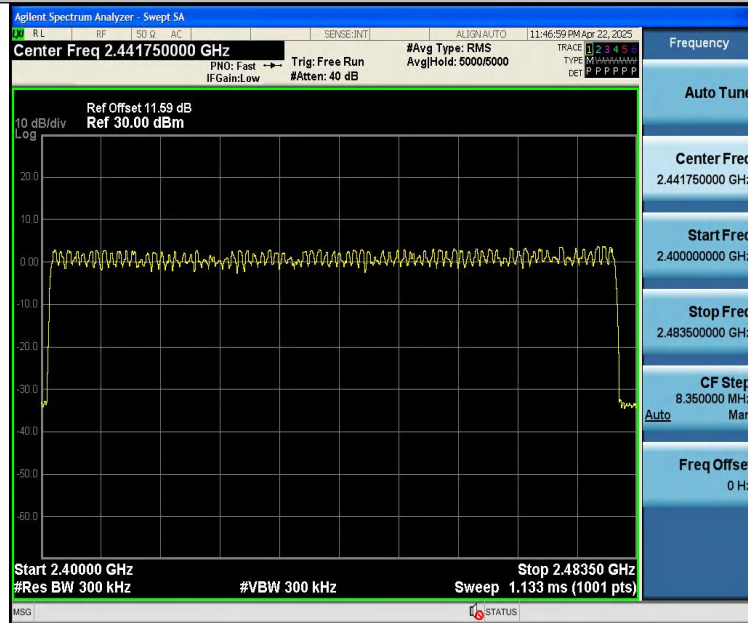

3DH5-Ant1-Hop-PASS

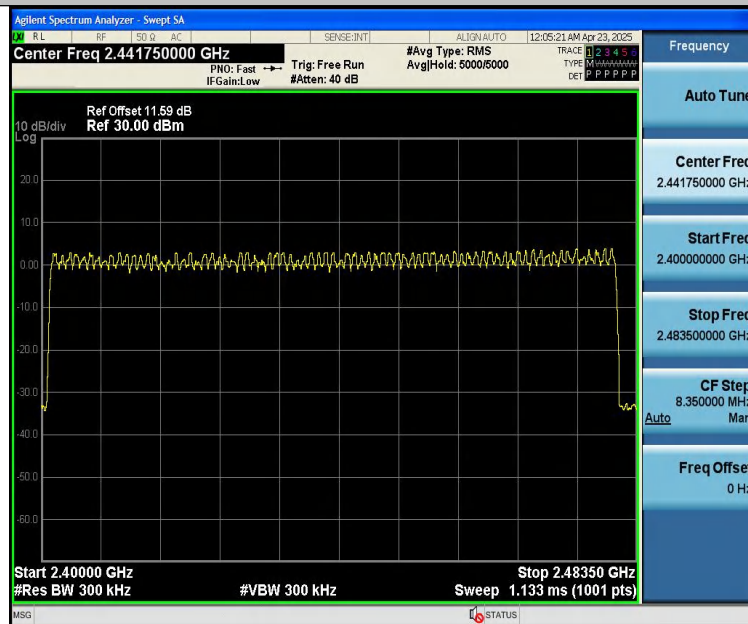




R:


DH5-Ant1-Hop-PASS



2DH5-Ant1-Hop-PASS

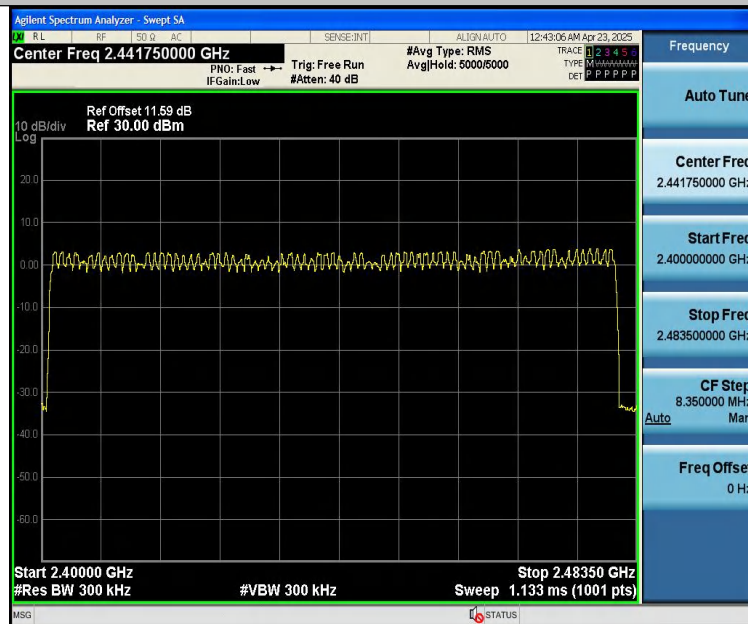

3DH5-Ant1-Hop-PASS

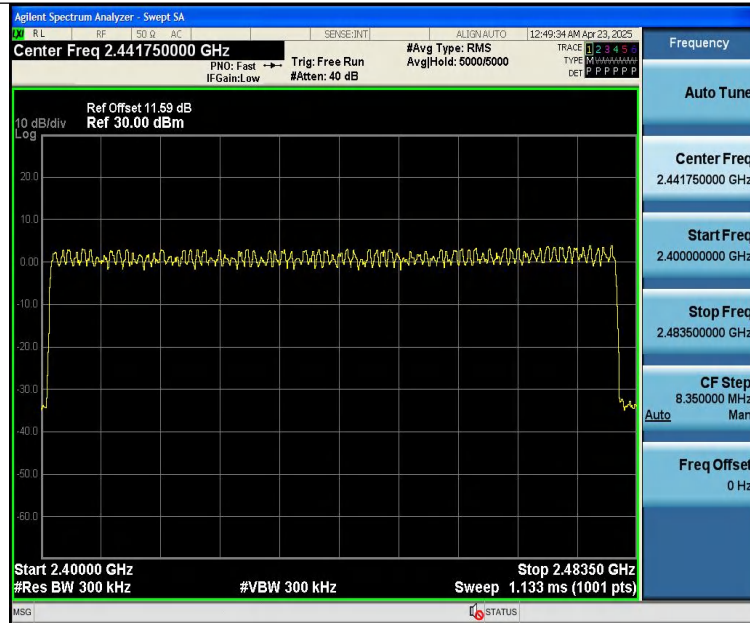




12 Dwell Time Test

12.1 Test Standard and Limit

Test Standard	FCC Part15 C Section 15.247 (a)(1)
Test Limit	0.4 sec

12.2 Test Setup



12.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

1. Span= zero span, centered on a hopping channel
2. Set the RBW = 1 MHz.
3. Set the VBW = 3 MHz.
4. Sweep time = as necessary to capture the entire dwell time per hopping channel.
5. Detector function = peak.
6. Trace mode = clear write.
7. Allow trace to fully stabilize.



12.4 Test Data

Test Item : Time of Occupancy
Test Voltage : 3.7V
Test Result : PASS

Test Mode : CH Low ~ CH High
Temperature : 24.5°C
Humidity : 55%RH

L:

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.910	106.67	0.31	≤0.4	PASS
2DH5	Ant1	Hop	2.914	106.67	0.311	≤0.4	PASS
3DH5	Ant1	Hop	2.918	106.67	0.311	≤0.4	PASS
DH1	Ant1	Hop	0.404	320	0.129	≤0.4	PASS
2DH1	Ant1	Hop	0.415	320	0.133	≤0.4	PASS
3DH1	Ant1	Hop	0.418	320	0.134	≤0.4	PASS
DH3	Ant1	Hop	1.662	160	0.266	≤0.4	PASS
2DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS
3DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS

R:

TestMode	Antenna	Frequency[MHz]	BurstWidth [ms]	TotalHops [Num]	Result[s]	Limit[s]	Verdict
DH5	Ant1	Hop	2.910	106.67	0.31	≤0.4	PASS
2DH5	Ant1	Hop	2.911	106.67	0.311	≤0.4	PASS
3DH5	Ant1	Hop	2.918	106.67	0.311	≤0.4	PASS
DH1	Ant1	Hop	0.405	320	0.13	≤0.4	PASS
2DH1	Ant1	Hop	0.415	320	0.133	≤0.4	PASS
3DH1	Ant1	Hop	0.417	320	0.133	≤0.4	PASS
DH3	Ant1	Hop	1.662	160	0.266	≤0.4	PASS
2DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS
3DH3	Ant1	Hop	1.667	160	0.267	≤0.4	PASS

Note:


- 1.DH1/2DH1/3DH1 Dwell Time: Reading * (1600/2)*31.6/(channel number).
- 2.DH3/2DH3/3DH3 Dwell Time: Reading * (1600/4)*31.6/(channel number).
- 3.DH5/2DH5/3DH5 Dwell Time: Reading * (1600/6)*31.6/(channel number).



Test Graphs:

L:

DH5-Ant1-Hop-PASS

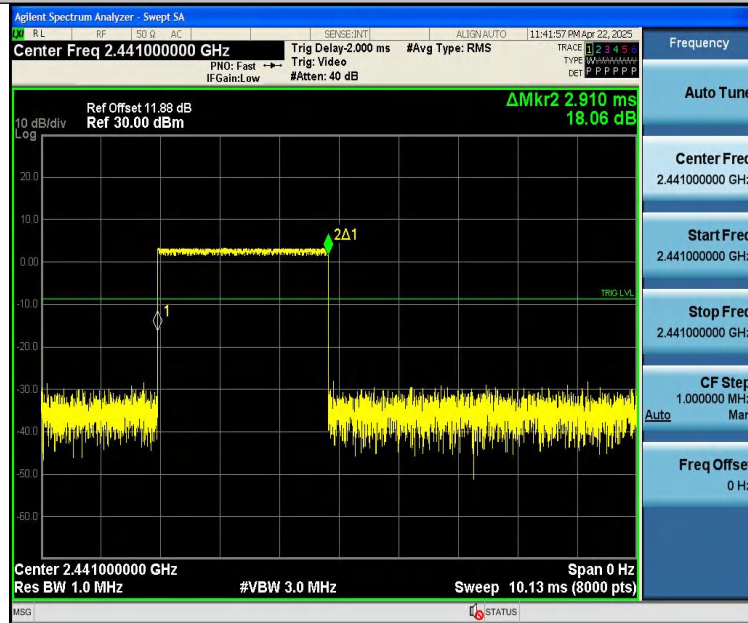

2DH5-Ant1-Hop-PASS




3DH5-Ant1-Hop-PASS




DH1-Ant1-Hop-PASS




2DH1-Ant1-Hop-PASS

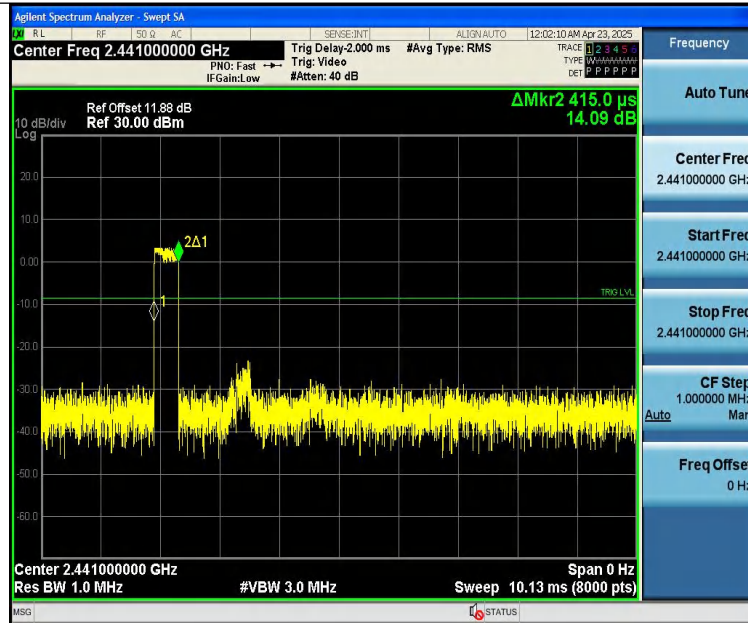

3DH1-Ant1-Hop-PASS

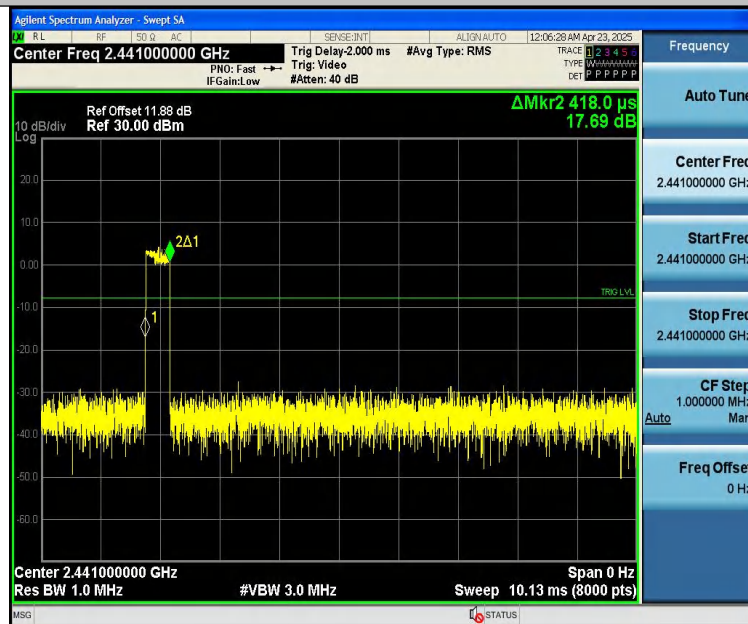

DH3-Ant1-Hop-PASS

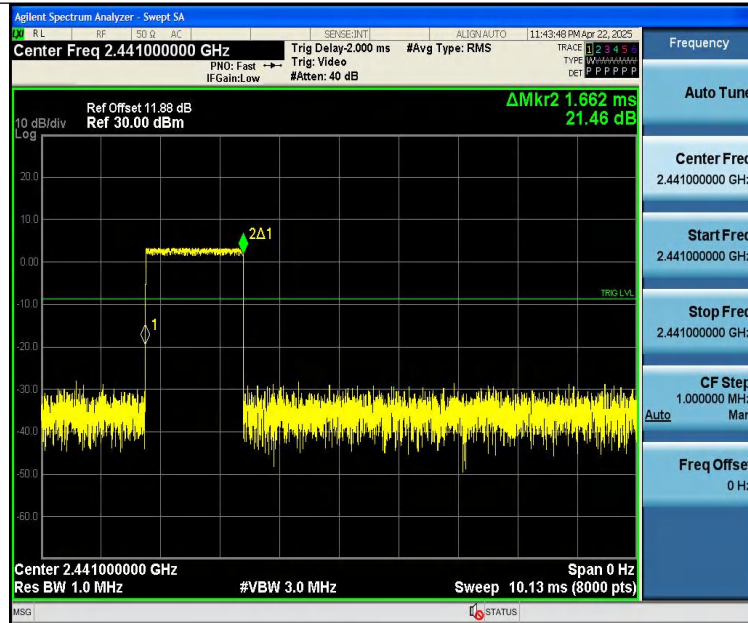


2DH3-Ant1-Hop-PASS



3DH3-Ant1-Hop-PASS



Report No.: PTC25032714609E-FC01

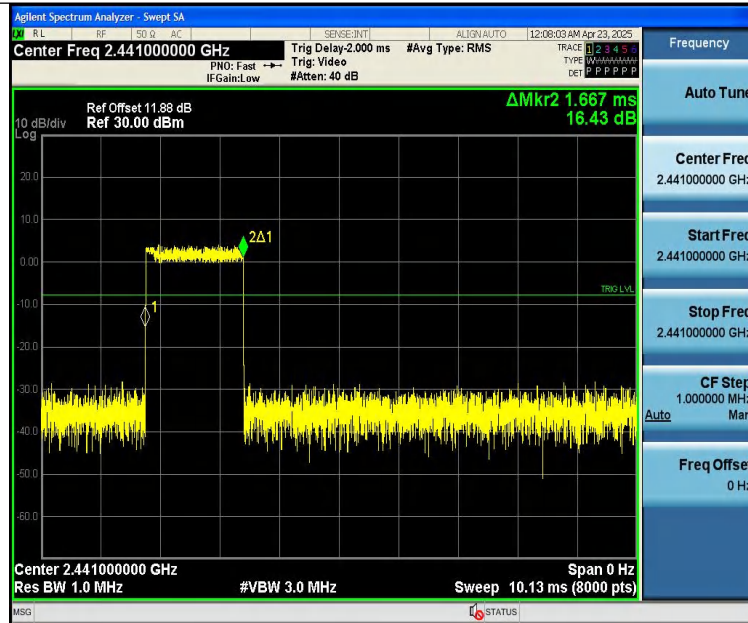

R:


DH5-Ant1-Hop-PASS




2DH5-Ant1-Hop-PASS




3DH5-Ant1-Hop-PASS

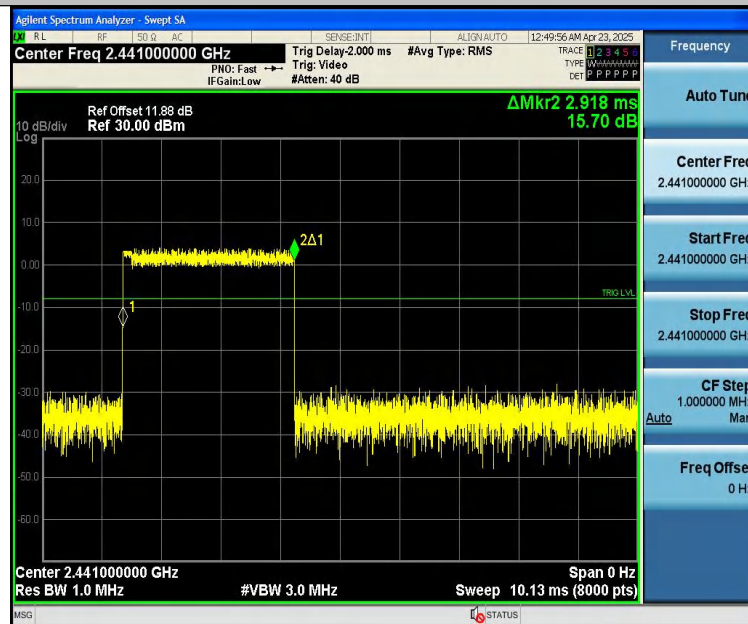


DH1-Ant1-Hop-PASS

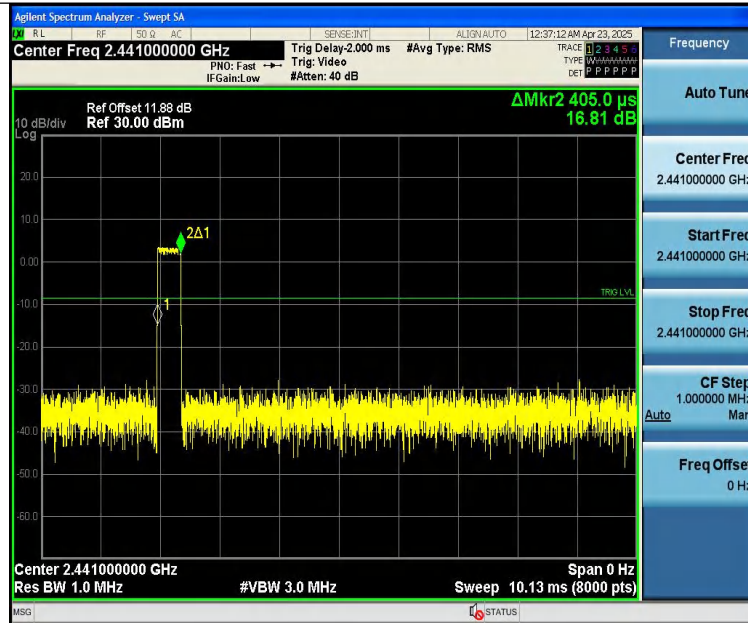

2DH1-Ant1-Hop-PASS

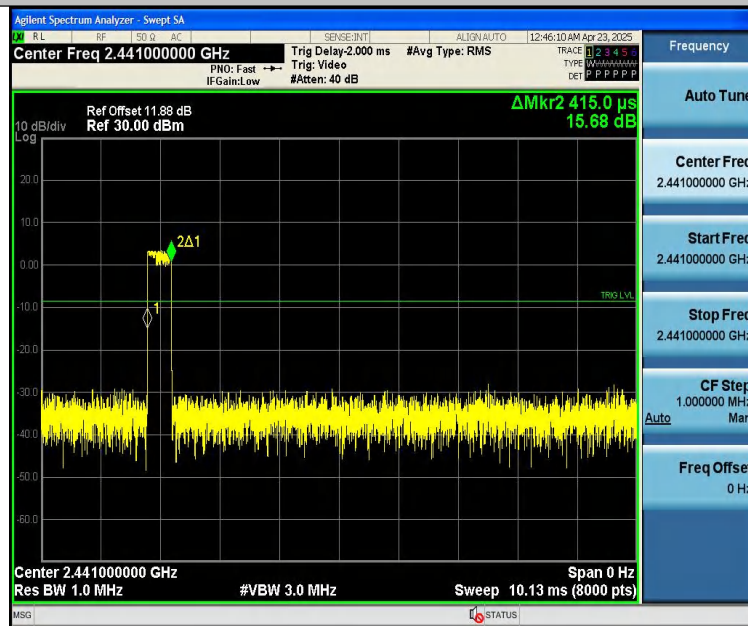

3DH1-Ant1-Hop-PASS

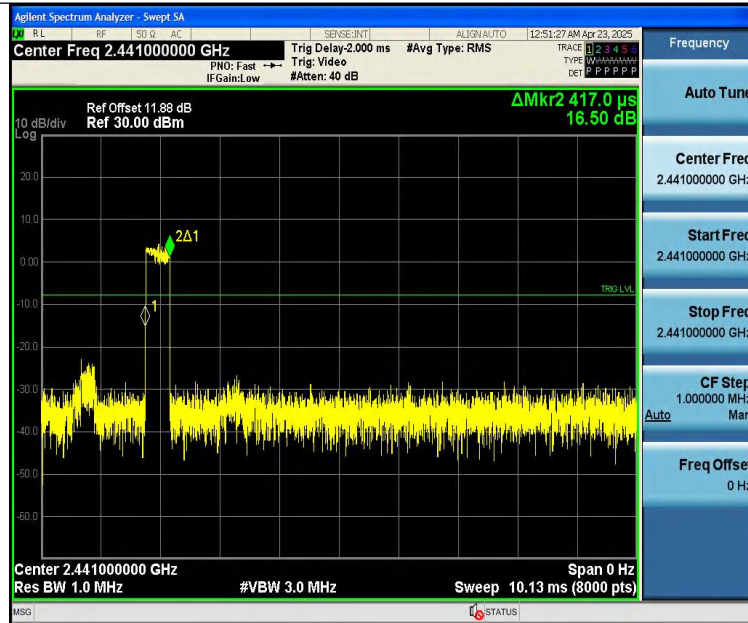

DH3-Ant1-Hop-PASS



2DH3-Ant1-Hop-PASS



3DH3-Ant1-Hop-PASS

