

FCC PART 15B



TEST REPORT

For

Motic China Group Co., Ltd

Motic BLDG, TORCH HI-TECH INDUSTRIAL DEV ZONE, XIAMEN FUJIAN, CHINA,
361006

FCC ID: PVEMOTICAM-XPRO

Report Type: Original Report	Product Type: Digital camera
Test Engineer:	Gerry Xing 
Report Number:	RXM191014059-00A
Report Date:	2020-03-09
Reviewed By:	Oscar Ye EMC Manager 
Prepared By:	Bay Area Compliance Laboratories Corp. (Kunshan) No.248 Chenghu Road, Kunshan, Jiangsu province, China Tel: +86-0512-86175000 Fax: +86-0512-88934268 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
JUSTIFICATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF RADIATED TEST SETUP.....	6
SUMMARY OF TEST RESULTS	7
FCC §15.107 – CONDUCTED EMISSIONS	8
APPLICABLE STANDARD	8
MEASUREMENT UNCERTAINTY.....	8
EUT SETUP	8
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	9
TEST EQUIPMENT LIST AND DETAILS.....	9
FACTOR & OVER LIMIT CALCULATION.....	9
TEST DATA	10
FCC §15.109 - RADIATED EMISSIONS	12
APPLICABLE STANDARD	12
MEASUREMENT UNCERTAINTY.....	12
EUT SETUP	12
EMI TEST RECEIVER SETUP.....	13
TEST PROCEDURE	13
TEST EQUIPMENT LIST AND DETAILS.....	14
FACTOR & OVER LIMIT CALCULATION - BELOW 1GHZ.....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION - ABOVE 1GHZ	15
TEST DATA	15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Applicant	Motic China Group Co., Ltd
Test Model	MoticamX Pro
Product	Digital camera
Rate Voltage	DC 5V from Adapter
Highest Operation Frequency	2462MHz

Adapter information:

Model: ICP12-050-2000B

Input: AC 100-240V, 50/60Hz, 0.3A

Output: DC 5V, 2000mA

** All measurement and test data in this report was gathered from production sample serial number: 20191014059. (Assigned by BACL, Kunshan). The EUT supplied by the applicant was received on 2019-10-14.*

Objective

This report is prepared on behalf of *Motic China Group Co., Ltd.* in accordance with Part 2-Subpart J, and Part 15-Subparts A and B of the Federal Communication Commission's rules.

The objective of the manufacturer is to determine the compliance of EUT with FCC Part 15, Class B devices.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DTS Submittal with FCC ID: PVEMOTICAM-XPRO

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All radiated and conducted emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Kunshan). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Kunshan) to collect test data is located on the No.248 Chenghu Road, Kunshan, Jiangsu province, China.

Bay Area Compliance Laboratories Corp. (Kunshan) Lab is accredited to ISO/IEC 17025 by A2LA (Lab code: 4323.01) and the FCC designation No. CN1185 under the FCC KDB 974614 D01 and CAB identifier CN0004 under the ISED requirement. The facility also complies with the radiated and AC line conducted test site criteria set forth in ANSI C63.4-2014.

SYSTEM TEST CONFIGURATION

Justification

The system was configured for testing in a typical fashion (as normally used by a typical user).

Test Mode 1:LAN port Link

EUT Exercise Software

No exercise software.

Special Accessories

No special accessory was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
HP	Notebook	4441s	2CE3130VWY

External I/O Cable

Cable Description	Length (m)	From/Port	To
LAN Cable	5.0	EUT	Notebook
Power Cable 1	1.5	EUT	Adapter
Power Cable 2	1.0	Adapter	AC Source

Block Diagram of Radiated Test Setup

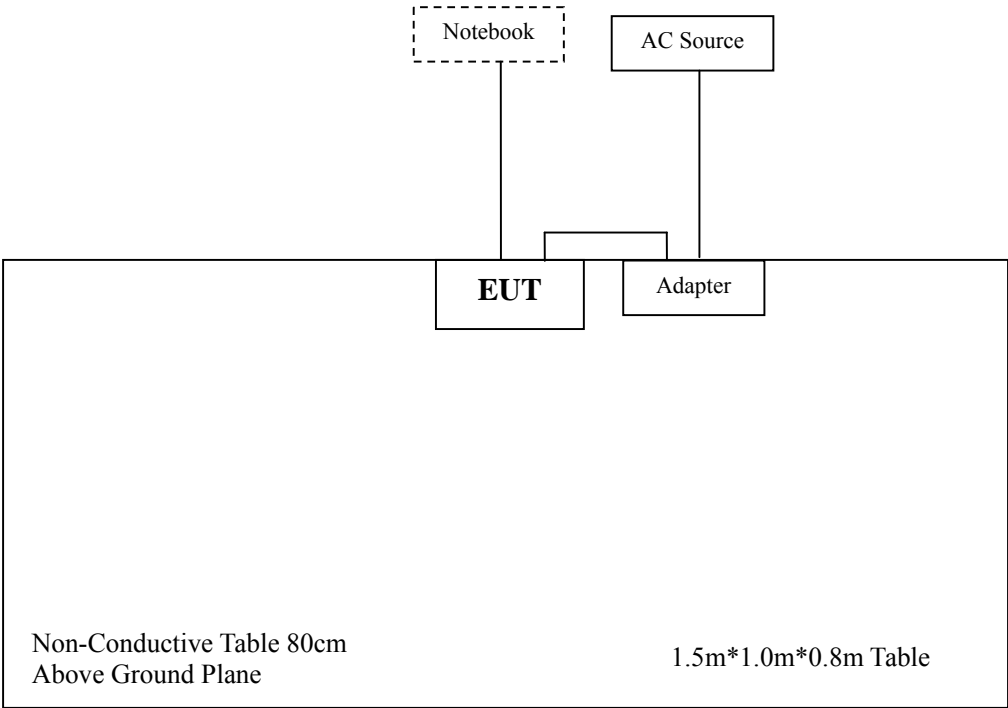

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	Conducted Emissions	Compliant
§15.109	Radiated Emissions	Compliant

FCC §15.107 – CONDUCTED EMISSIONS

Applicable Standard

According to FCC§15.107


Measurement Uncertainty

Input quantities to be considered for conducted disturbance measurements maybe receiver reading, attenuation of the connection between LISN and receiver, LISN voltage division factor, LISN VDF frequency interpolation and receiver related input quantities, etc.

Item		Measurement Uncertainty	U_{cispr}
AMN	150kHz~30MHz	3.19 dB	3.4 dB

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

EUT Setup

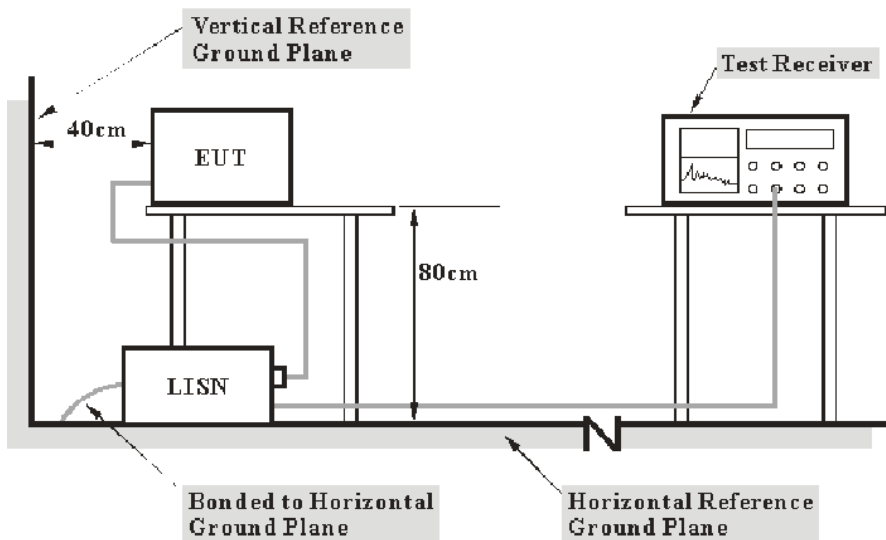

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B Limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Rohde & Schwarz	EMI Test receiver	ESR	1316.3003K03-101746-zn	2019-06-25	2020-06-24
Rohde & Schwarz	LISN	ENV216	3560655016	2019-11-30	2020-11-29
Audix	Test Software	e3	V9	--	--
MICRO-COAX	Coaxial Cable	Cable-15	015	2019-08-15	2020-08-14

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Factor & Over Limit Calculation

The Factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuator. The basic equation is as follows:

$$\text{Factor (dB)} = \text{LISN VDF (dB)} + \text{Cable Loss (dB)} + \text{Transient Limiter Attenuator (dB)}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$


Test Data**Environmental Conditions**

Temperature:	24°C
Relative Humidity:	49%
ATM Pressure:	101.0kPa

The testing was performed by Gerry Xing on 2020-01-17.

Test Mode : LAN port Link:


AC 120V/60 Hz, Line

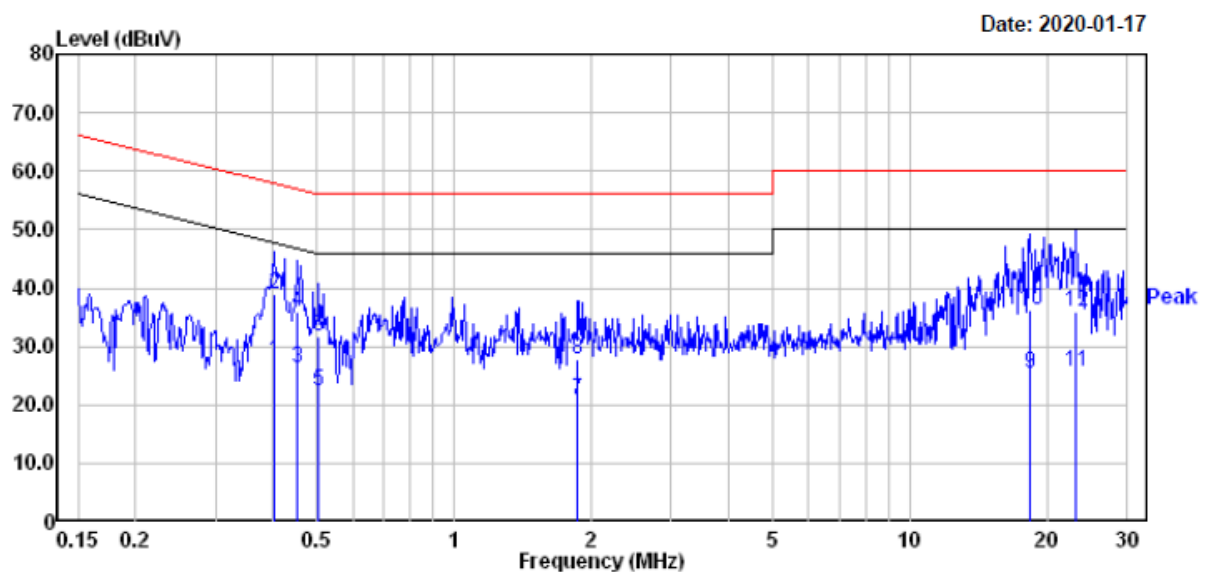

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.402	7.80	19.74	27.54	47.81	-20.27	Average
2	0.402	19.20	19.74	38.94	57.81	-18.87	QP
3	0.454	6.40	19.75	26.15	46.80	-20.65	Average
4	0.454	16.30	19.75	36.05	56.80	-20.75	QP
5	0.505	2.60	19.76	22.36	46.00	-23.64	Average
6	0.505	11.90	19.76	31.66	56.00	-24.34	QP
7	1.868	1.10	19.83	20.93	46.00	-25.07	Average
8	1.868	8.00	19.83	27.83	56.00	-28.17	QP
9	18.328	5.40	19.86	25.26	50.00	-24.74	Average
10	18.328	16.50	19.86	36.36	60.00	-23.64	QP
11	23.140	5.99	19.79	25.78	50.00	-24.22	Average
12	23.140	15.99	19.79	35.78	60.00	-24.22	QP

AC 120V/60 Hz, Neutral

Date: 2020-01-17

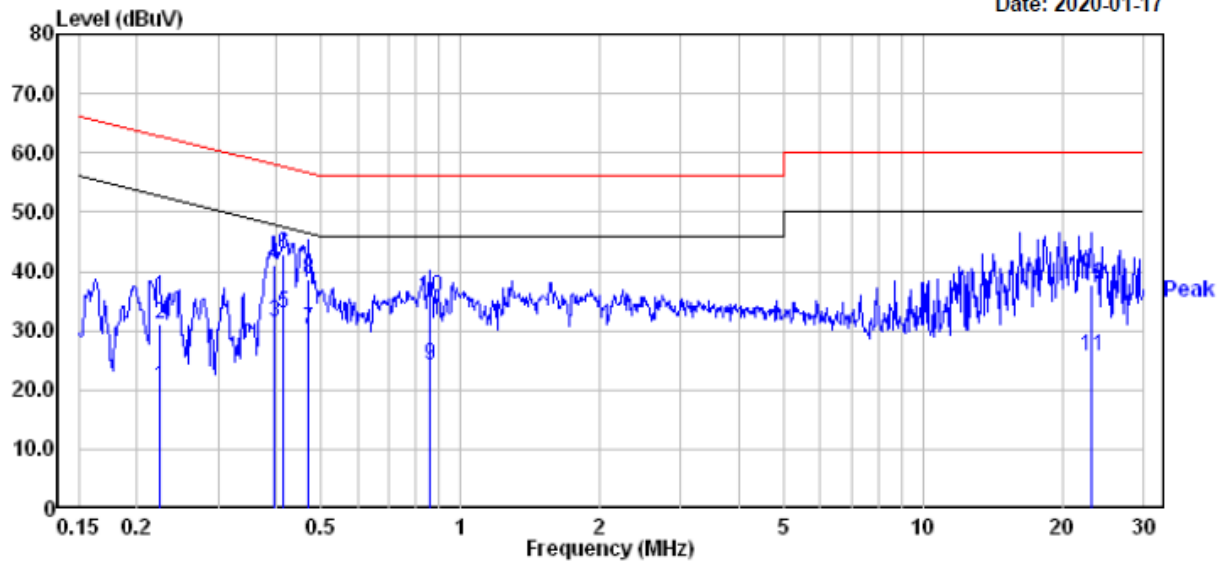

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	
1	0.223	0.80	19.82	20.62	52.70	-32.08	Average
2	0.223	11.30	19.82	31.12	62.70	-31.58	QP
3	0.396	11.69	19.75	31.44	47.95	-16.51	Average
4	0.396	21.29	19.75	41.04	57.95	-16.91	QP
5	0.415	13.30	19.74	33.04	47.55	-14.51	Average
6	0.415	23.20	19.74	42.94	57.55	-14.61	QP
7	0.469	10.51	19.75	30.26	46.54	-16.28	Average
8	0.469	19.01	19.75	38.76	56.54	-17.78	QP
9	0.862	4.40	19.72	24.12	46.00	-21.88	Average
10	0.862	15.80	19.72	35.52	56.00	-20.48	QP
11	23.140	5.99	19.79	25.78	50.00	-24.22	Average
12	23.140	17.99	19.79	37.78	60.00	-22.22	QP

Note:

1) Factor (dB) = LISN VDF (dB) + Cable Loss (dB) + Transient Limiter Attenuator (dB)

2) Over Limit (dB) = Read level (dBuV) + Factor (dB) - Limit (dBuV)

FCC §15.109 - RADIATED EMISSIONS

Applicable Standard

FCC §15.109

Measurement Uncertainty


All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Item		Measurement Uncertainty	U_{cispr}
Radiated Emission	30MHz~1GHz	6.11dB	6.3 dB
	1GHz~6GHz	4.45dB	5.2 dB
	6 GHz ~18 GHz	5.23dB	5.5 dB


Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

EUT Setup

Below 1GHz:

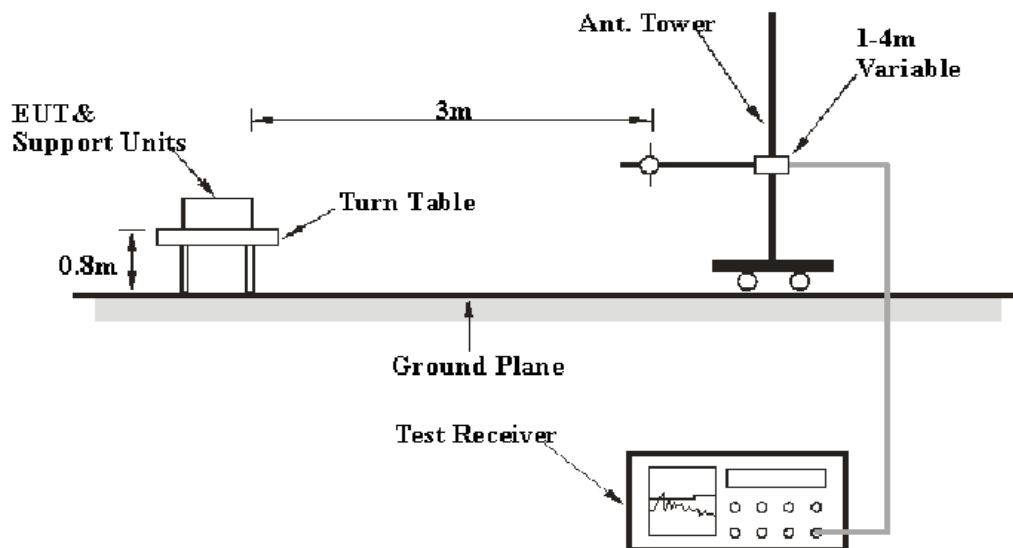

Above 1GHz:

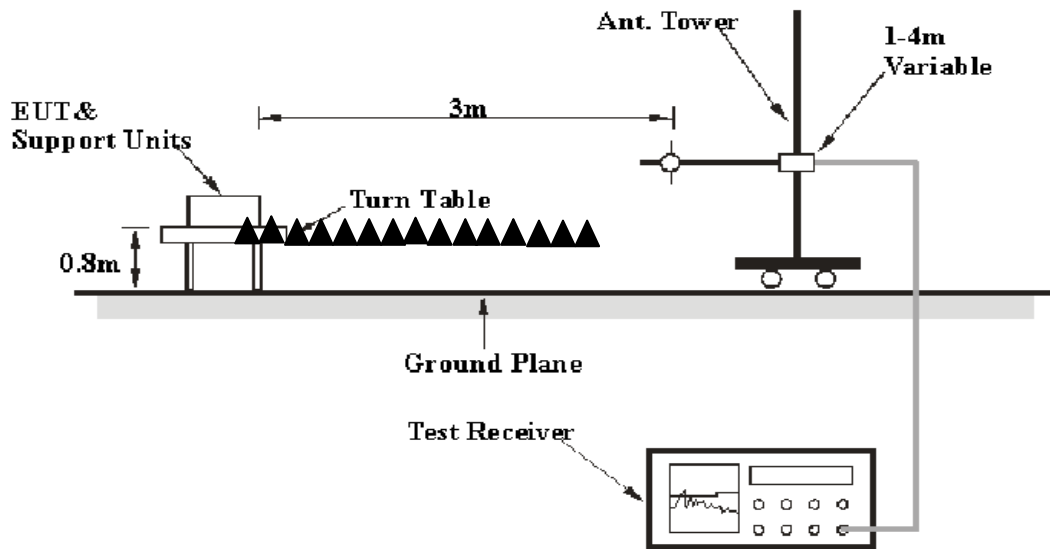

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 18 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector Type
30MHz – 1000 MHz	120 kHz	300 kHz	120kHz	QP
Above 1 GHz	1MHz	3 MHz	/	Peak
	1MHz	3 MHz	1MHz	AVG

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz, Peak and average detection mode above 1 GHz.

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sonoma Instrument	Amplifier	310N	185700	2019-08-14	2020-08-13
Rohde & Schwarz	EMI Test Receiver	ESR	1316.3003K03-101746-zn	2019-07-11	2020-07-10
Rohde & Schwarz	EMI Test Receiver	ESCI	100195	2019-08-14	2020-08-13
Sunol Sciences	Broadband Antenna	JB3	A090413-1	2019-12-26	2022-12-25
Champrotek	Chamber	Chamber A	T-KSEMC049	-	-
Champrotek	Chamber	Chamber B	T-KSEMC080	-	-
Audix	Test Software	e3	V9	-	-
Rohde & Schwarz	Auto test Software	EMC32	100361	-	-
ETS	Horn Antenna	3115	6229	2019-12-12	2022-12-11
Rohde & Schwarz	EMI Receiver	ESU40	100207	2019-08-27	2020-08-26
A.H.Systems, inc	Amplifier	2641-1	491	2019-02-20	2020-02-19
MICRO-COAX	Coaxial Cable	Cable-8	008	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-9	009	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-10	010	2019-08-15	2020-08-14
MICRO-COAX	Coaxial Cable	Cable-4	004	2019-12-12	2020-12-11
MICRO-COAX	Coaxial Cable	Cable-5	005	2019-12-12	2020-12-11

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Kunshan) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

Factor & Over Limit Calculation - Below 1GHz

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Over Limit**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an Over Limit of 7 dB means the emission is 7 dB above the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit (dB)} = \text{Read level (dB}\mu\text{V)} + \text{Factor (dB)} - \text{Limit (dB}\mu\text{V)}$$

Corrected Amplitude & Margin Calculation - Above 1GHz

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data**Environmental Conditions**


Temperature:	23.2 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Gerry Xing on 2020-01-16.

Test Mode : LAN port Link:

Below 1GHz:


Horizontal

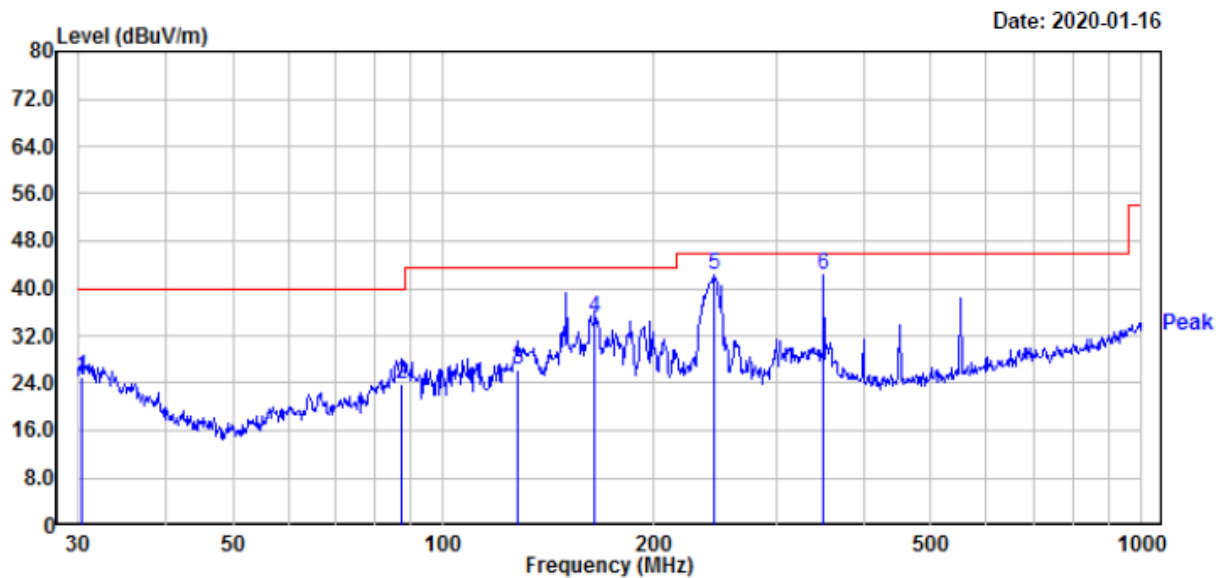

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	30.42	28.50	-3.48	25.02	40.00	-14.98	200	293	QP
2	87.42	41.20	-17.23	23.97	40.00	-16.03	200	256	QP
3	127.67	37.50	-11.09	26.41	43.50	-17.09	200	122	QP
4	164.91	47.21	-12.29	34.92	43.50	-8.58	200	287	QP
5	245.09	54.61	-12.44	42.17	46.00	-3.83	100	360	QP
6	350.48	51.34	-9.05	42.29	46.00	-3.71	100	270	QP

Vertical


Date: 2020-01-16

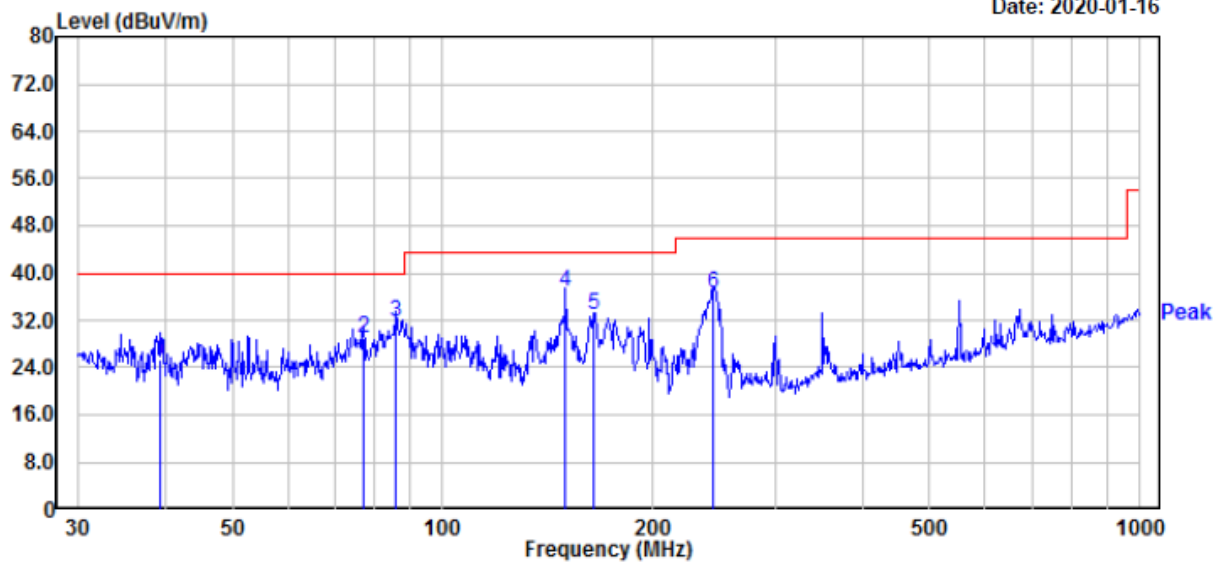

	Freq	Read Level	Factor	Level	Limit Line	Over Limit	APos	TPos	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	cm	deg	
1	39.44	36.29	-10.97	25.32	40.00	-14.68	100	156	QP
2	77.05	46.10	-17.09	29.01	40.00	-10.99	100	306	QP
3	85.90	48.90	-17.22	31.68	40.00	-8.32	100	93	QP
4	150.01	48.70	-11.89	36.81	43.50	-6.69	100	261	QP
5	164.33	45.31	-12.26	33.05	43.50	-10.45	100	68	QP
6	244.23	48.99	-12.48	36.51	46.00	-9.49	100	105	QP

Above 1 GHz:

Full Spectrum

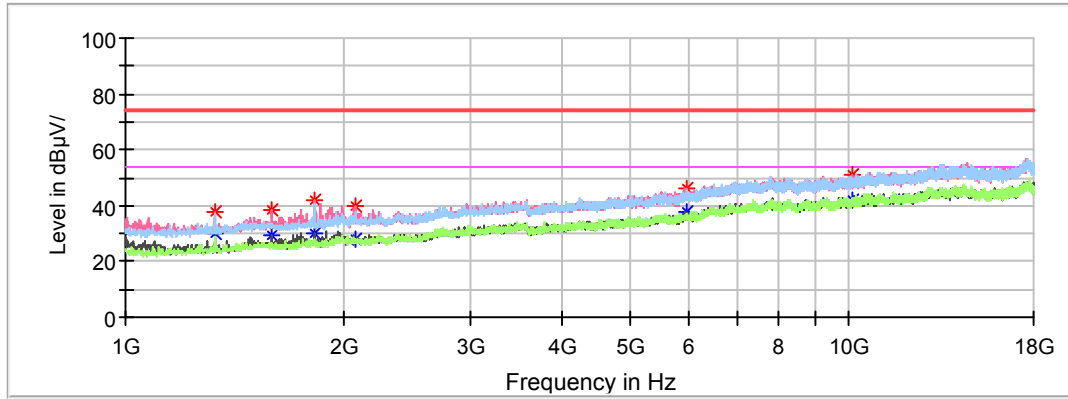

Frequency (MHz)	Max Peak (dB µ V/m)	Average (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1326.400000	38.04	---	74.00	35.96	200.0	V	188.0	-10.9
1326.400000	---	30.08	54.00	23.92	200.0	V	188.0	-10.9
1591.600000	---	29.05	54.00	24.95	200.0	V	167.0	-9.6
1591.600000	38.58	---	74.00	35.42	200.0	V	167.0	-9.6
1824.500000	42.30	---	74.00	31.70	100.0	V	10.0	-8.8
1824.500000	---	30.39	54.00	23.61	100.0	V	10.0	-8.8
2077.800000	---	28.31	54.00	25.69	100.0	V	150.0	-8.0
2077.800000	40.10	---	74.00	33.90	100.0	V	150.0	-8.0
5984.400000	---	37.46	54.00	16.54	200.0	V	126.0	2.3
5984.400000	46.36	---	74.00	27.64	200.0	V	126.0	2.3
10105.200000	---	41.84	54.00	12.16	100.0	V	322.0	8.4
10105.200000	51.31	---	74.00	22.69	100.0	V	322.0	8.4

*****END OF REPORT*****