


Prüfbericht-Nr.: Test Report No.:	50147136 001	Auftrags-Nr.: Order No.:	144184117	Seite 1 von 14 Page 1 of 14	
Kunden-Referenz-Nr.: Client Reference No.:	N/A	Auftragsdatum: Order date:	16.05.2018		
Auftraggeber: Client:	Guangdong Songyang Plastic Toys Co. Ltd				
Prüfgegenstand: Test item:	R/C HELICOPTER				
Bezeichnung / Typ-Nr.: Identification / Type No.:	SY.8088-27,SY.8088-40S,SY.8088-57,SY.8088-58,SY.8088-42,SY.8088-43, SY.8088-64,SY.8088-65				
Auftrags-Inhalt: Order content:	FCC Certification				
Prüfgrundlage: Test specification:	FCC Part 15 Subpart C ANSI C63.10-2013				
Wareneingangsdatum: Date of receipt:	14.05.2018				
Prüfmuster-Nr.: Test sample No.:	A000739907-005~007				
Prüfzeitraum: Testing period:	22.05.2018 - 23.05.2018				
Ort der Prüfung: Place of testing:	TÜV Rheinland Hong Kong Ltd.				
Prüflaboratorium: Testing laboratory:	TÜV Rheinland Hong Kong Ltd.				
Prüfergebnis*: Test result*:	Pass				
geprüft von / tested by:		kontrolliert von / reviewed by:			
24.05.2018	David Cheng Test Engineer		24.05.2018	Benny Lau Senior Project Manager	
Datum Date	Name / Stellung Name / Position	Unterschrift Signature	Datum Date	Name / Stellung Name / Position	Unterschrift Signature
Sonstiges / Other: FCC ID: 2AEXV12345678					
Zustand des Prüfgegenstandes bei Anlieferung: Condition of the test item at delivery:		Prüfmuster vollständig und unbeschädigt Test item complete and undamaged			
* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested					
Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i>					

Table of Content

	Page
Cover Page	1
Table of Content	2
Product information	4
Manufacturers declarations	4
Product function and intended use	4
Submitted documents.....	4
Independent Operation Modes	4
Related Submittal(s) Grants	4
Remark	4
Test Set-up and Operation Mode	5
Principle of Configuration Selection	5
Test Operation and Test Software.....	5
Special Accessories and Auxiliary Equipment.....	5
Countermeasures to achieve EMC Compliance.....	5
Test Methodology	6
Radiated Emission	6
Field Strength Calculation.....	6
Test Setup Diagram	7
Test Facility	8
Test Laboratory Information	8
List of Test and Measurement Instruments	9
Measurement Uncertainty	10
Results FCC Part 15 – Subpart C / RSS-210 Issue 8	11
FCC 15.203 – Antenna Requirement 1.....	Pass..... 11
FCC 15.204 – Antenna Requirement 2.....	Pass..... 11
FCC 15.207 – Conducted Emission on AC Mains	N/A..... 11
Subclause 15.215 (c) – 20 dB Bandwidth.....	Pass..... 11
Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics.....	Pass..... 12
Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission	Pass..... 14
Appendix 1 – Test protocols	3 pages
Appendix 2 – Test setup	2 pages

Appendix 3 – EUT External Photos	3 pages
Appendix 4 – EUT Internal Photos	3 pages
Appendix 5 – RF exposure information.....	2 pages

Product information

Manufacturers declarations

	Transmitter
Operating frequency range	2405 - 2475MHz
Type of modulation	GFSK
Number of channels	64
Type of antenna	Wire Antenna
Power level	fix
Connection to public utility power line	No
Nominal voltage	V _{nor} : 6.0 VDC (4 x 1.5V AA batteries)

Product function and intended use

The equipment under test (EUT) is a radio control toy transmitter operating at 2.4GHz. It is powered by battery only.

FCC ID: 2AEXV12345678

Models	Product description
SY.8088-27,SY.8088-40S,SY.8088-57,SY.8088-58,SY.8088-42,SY.8088-43,SY.8088-64,SY.8088-65	R/C HELICOPTER

Submitted documents

Circuit Diagram
Block Diagram
Technical Description
User manual
Label

Independent Operation Modes

The basic operation modes are:

- Transmitting mode.

For further information refer to User Manual

Related Submittal(s) Grants

This is a single application for certification of the transmitter.

Remark

The test results in this test report are only relevant to the tested sample and does not involve any assessment in the production.

Test Set-up and Operation Mode

Principle of Configuration Selection

Emission: The equipment under test (EUT) was configured to measure its highest possible radiation level. The test modes were adapted accordingly in reference to the instructions for use.

Test Operation and Test Software

Test operation should refer to test methodology.

- Test mode samples with maximum RF output power and duty cycle provided by the applicant are used for the testing.

Special Accessories and Auxiliary Equipment

- Nil

Countermeasures to achieve EMC Compliance

- Nil

Test Methodology

Radiated Emission

The radiated emission measurements of the transmitter part were performed according to the procedures in ANSI C63.10-2013.

For measurement below 1GHz - the equipment under test (EUT) was placed at the middle of the 80 cm height turntable. For measurement above 1GHz - the EUT was placed at the middle of the 1.5 m height turntable and RF absorbing material was placed on ground plane between turntable and measuring antenna. During the testing, the EUT was operated standalone and arranged for maximum emissions. The EUT was tested in three orthogonal planes.

The investigation is performed with the EUT rotated 360°, the antenna height scanned between 1m and 4m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations. Repeat the measurement steps until the maximum emissions were obtained.

All radiated tests were performed at an antenna to EUT with 3 meters distance, unless stated otherwise in particular parts of this test report.

Field Strength Calculation

The field strength at 3 m was established by adding the meter reading of the spectrum analyzer to the factors associated with antenna correction factor, cable loss, preamplifiers and filter attenuation.

The equation is expressed as follow:


$$FS = R + AF + CF + FA - PA$$

Where FS = Field Strength in dBuV/m at 3 meters.
R = Reading of Spectrum Analyzer in dBuV.
AF = Antenna Factor in dB.
CF = Cable Attenuation Factor in dB.
FA = Filter Attenuation Factor in dB.
PA = Preamplifier Factor in dB.

FA and PA are only be used for the measuring frequency above 1 GHz.


Test Setup Diagram

Diagram of Measurement Configuration for Radiation Test

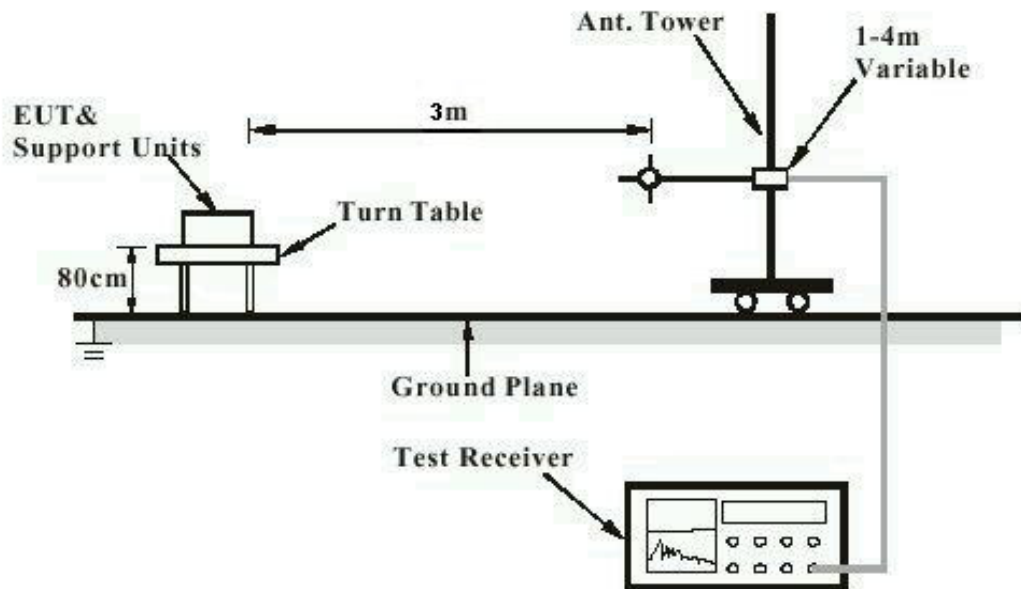

Note: Measurements above 1 GHz are done with a table height of 1.5m. In addition, there is RF absorbing material on the floor of the test site for above 1GHz measurement.

Diagram of Measurement Equipment Configuration for Mains Conduction Measurement (if applicable)

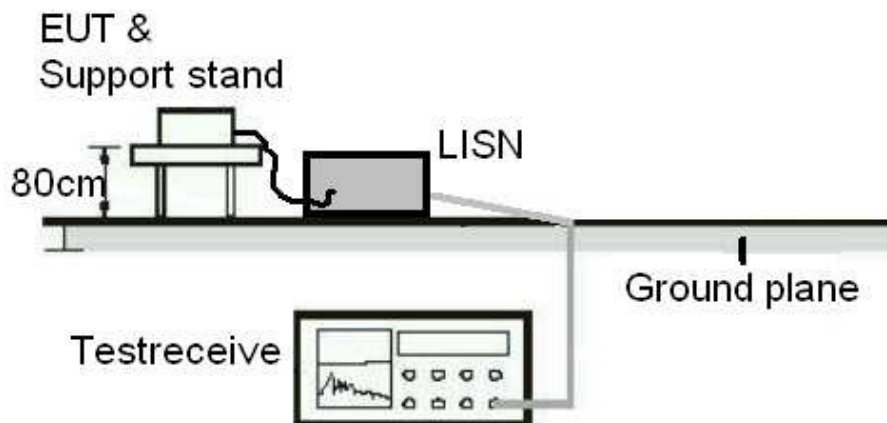

Test Facility

Test Laboratory Information

TÜV Rheinland Hong Kong Ltd.

Address: 3-4, 11/F., Fou Wah Industrial Building, 10-16 Pun Shan Street, Tsuen Wan, N.T., Hong Kong

Tel.: +852 2192 1000

Fax: +852 2192 1001

Email service-gc@tuv.com

Web: www.tuv.com

The test facility is recognized or accredited by the following organizations:

FCC

Type	: Accredited Test Firm
Designation Number	: HK0013
Test Firm Registration Number	: 371735
Scope	: Intentional Radiators

List of Test and Measurement Instruments

TÜV Rheinland Hong Kong Ltd

Radiated Emission

Equipment	Manufacturer	Type	Cal. Date	Due Date
Semi-anechoic Chamber	Frankonia	Nil	23-Apr-18	23-Apr-19
Test Receiver	R & S	ESU40	7-Sep-17	7-Sep-18
Active Loop Antenna	EMCO	6502	30-Oct-17	30-Oct-18
Bi-conical Antenna	R & S	HK116	7-Jun-16	7-Jun-18
Log Periodic Antenna	R & S	HL223	31-May-16	31-May-18
Horn Antenna	EMCO	3115	28-Mar-18	28-Mar-20
Double-Ridged Waveguide Horn	EMCO	3116	17-Jun-16	17-Jun-18
Double-Ridged Waveguide Horn	EMCO	3117	22-Jun-16	22-Jun-18
Coaxial cable	Harbour	LL335	10-Jun-14	10-Jun-16
High Frequency Cable	Pasternack	PE3VNA4001-3M	27-Jan-17	27-Jan-18
Microwave amplifier 0.5-26.5GHz, 25dB gain	HP	83017A	18-Jul-16	18-Jul-18
Preamplifier 18GHz to 40GHz with cable	A.H. Systems, Inc.	PAM-1840VH	27-Jan-17	27-Jan-18
High Pass Filter (cutoff freq. =1000MHz)	Trilithic	23042	30-Oct-17	30-Oct-19

Radio Test

Equipment	Manufacturer	Type	Cal. Date	Due Date
Spectrum Analyzer	R & S	FSP30	03-May-18	02-May-19

Measurement Uncertainty

The estimated combined standard uncertainty for power-line conducted emissions measurements is $\pm 2.42\text{dB}$.

The estimated combined standard uncertainty for radiated emissions measurements is $\pm 4.81\text{dB}$ (9kHz to 30MHz) and $\pm 4.62\text{dB}$ (30MHz to 200MHz) and $\pm 5.67\text{dB}$ (200MHz to 1000MHz) and is $\pm 5.07\text{dB}$ (1GHz to 8.2GHz) and $\pm 4.58\text{dB}$ (8.2GHz to 12.4GHz) and $\pm 4.78\text{dB}$ (12.4GHz to 18GHz)

The reported expanded uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor of $k=2$, which for the level of confidence is approximately 95%.

Results FCC Part 15 – Subpart C / RSS-210 Issue 8

FCC 15.203 – Antenna Requirement 1		Pass
FCC Requirement:	No antenna other than that furnished by the responsible party shall be used with the device	
Results:	a) Antenna type: Fixed Integral antenna b) Manufacturer and model no: N/A c) Peak Gain: N/A	
Verdict:	Pass	

FCC 15.204 – Antenna Requirement 2		Pass
FCC Requirement:	An intentional radiator may be operated only with the antenna with which it is authorized. If an antenna is marketed with the intentional radiator, it shall be of a type which is authorized with the intentional radiator.	
Results:	Only one integral antenna can be used.	
Verdict:	N/A	

FCC 15.207 – Conducted Emission on AC Mains		N/A
There is no AC power input or output ports on the EUT.		

Subclause 15.215 (c) – 20 dB Bandwidth		Pass		
Test Specification : ANSI C63.10 – 2013 Test date : 23.05.2018 Mode of operation : Tx mode Port of testing : Antenna port Supply voltage : 6.0 VDC (4 x 1.5V AA batteries) Temperature : 23°C Humidity : 50%				
Requirement:	The intentional radiators must be designed to ensure that the 20dB bandwidth of the emission, is contained within the frequency band designated in the rule section under which the equipment is operated.			
Results:	Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations and packet types. For test protocols refer to Appendix 1.			
Frequency (MHz)	20 dB left (MHz)	Limit (MHz)	20 dB right (MHz)	Limit (MHz)
2405	2403.700	> 2400	2406.692	< 2483.5
2445	2444.748	> 2400	2445.492	< 2483.5
2475	2474.824	> 2400	2475.258	< 2483.5

Subclause 15.249 (a) – Field Strength of Fundamental and Harmonics			Pass
Test Specification : ANSI C63.10 – 2013 Test Specification : 22.05.2018 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz Supply voltage : 6.0 VDC (4 x 1.5V AA batteries) Temperature : 23°C Humidity : 50%			
Requirement: The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following limit.			
Results: PASS.			
Fundamental Frequency: 2405MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2405.051	86.2	114.0 / PK	
2405.051	74.6	94.0 / AV	
Fundamental Frequency: 2405MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2405.051	85.2	114.0 / PK	
2405.051	73.6	94.0 / AV	
Harmonics: 2405MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4810.102	57.1	74.0 / PK	
4810.102	44.7	54.0 / AV	
7215.153	67.6	74.0 / PK	
7215.153	50.2	54.0 / AV	
Harmonics: 2405MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
4810.102	58.4	74.0 / PK	
4810.102	45.6	54.0 / AV	
7215.153	65.8	74.0 / PK	
7215.153	49.3	54.0 / AV	
Fundamental Frequency: 2445MHz		Vertical Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2445.051	86.0	114.0 / PK	
2445.051	74.6	94.0 / AV	
Fundamental Frequency: 2445MHz		Horizontal Polarization	
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	
2445.048	85.3	114.0 / PK	
2445.048	74.0	94.0 / AV	

Harmonics: 2445MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4890.102	59.7	74.0 / PK	4890.102	47.2	54.0 / AV
7335.153	67.5	74.0 / PK	7335.153	50.6	54.0 / AV
Harmonics: 2445MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4890.096	61.3	74.0 / PK	4890.096	49.0	54.0 / AV
7335.153	67.3	74.0 / PK	7335.153	50.6	54.0 / AV
Fundamental Frequency: 2475MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2475.067	86.1	114.0 / PK	2475.067	74.9	94.0 / AV
Fundamental Frequency: 2475MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2475.072	86.2	114.0 / PK	2475.072	74.9	94.0 / AV
Harmonics: 2475MHz			Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4950.131	57.7	74.0 / PK	4950.131	45.4	54.0 / AV
7425.198	67.5	74.0 / PK	7425.198	50.7	54.0 / AV
Harmonics: 2475MHz			Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m	Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
4950.136	57.8	74.0 / PK	4950.136	45.4	54.0 / AV
7425.200	67.1	74.0 / PK	7425.200	50.5	54.0 / AV

Subclause 15.249 (d), 15.205 – Out Of Band Radiated Emission		Pass
Test Specification : ANSI C63.10 – 2013 Test Specification : 22.05.2018 Mode of operation : Tx mode Port of testing : Enclosure Frequency range : 9kHz – 25GHz Supply voltage : 6.0 VDC (4 x 1.5V AA batteries) Temperature : 23°C Humidity : 50%		
Requirement: Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.		
Results: All three transmit frequency modes comply with the field strength limit of section 15.209. There is no spurious found below 30MHz.		
Tx frequency: 2405 MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	60.0	74.0 / PK
2400.000	32.5	54.0 / AV
Tx frequency: 2405 MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2400.000	55.3	74.0 / PK
2400.000	32.2	54.0 / AV
Tx frequency: 2445 MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Tx frequency: 2445 MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
No peak found	---	74.0 / PK
No peak found	---	54.0 / AV
Tx frequency: 2475 MHz Vertical Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	53.9	74.0 / PK
2483.500	32.2	54.0 / AV
Tx frequency: 2475 MHz Horizontal Polarization		
Freq MHz	Level dBuV/m	Limit/ Detector dBuV/m
2483.500	54.1	74.0 / PK
2483.500	32.2	54.0 / AV