

Powercore Technology Co., Ltd.

RF TEST REPORT

Report Type:

FCC Part 15.225 & ISED RSS-210 RF report

MODEL:

LDC001ABCD-E

REPORT NUMBER:

240300347SHA-001

ISSUE DATE:

July 8, 2024

DOCUMENT CONTROL NUMBER:

TTRF15.225_V1 © 2018 Intertek



Applicant: Powercore Technology Co., Ltd.
4th Floor, Jiangsu Science and Technology Finance Building, No.21 Andemen
Street, Yuhuatai District, Nanjing City, Jiangsu Province, P.R. China

Manufacturer: Powercore Technology Co., Ltd.
4th Floor, Jiangsu Science and Technology Finance Building, No.21 Andemen
Street, Yuhuatai District, Nanjing City, Jiangsu Province, P.R. China

Factory: Powercore Technology Co., Ltd.
Zone A, No.1 Yuansi Road, Jiangbei New District, Nanjing City, Jiangsu
Province, P.R. China

FCC ID: 2A98K-LDC001

IC: 30675-LDC001

SUMMARY:

The equipment complies with the requirements according to the following standard(s) or Specification:

47CFR Part 15 (2023): Radio Frequency Devices (Subpart C)

ANSI C63.10 (2020): American National Standard of Procedures for Compliance Testing of Unlicensed
Wireless Devices

RSS-210 Issue 10 (December 2019): Licence-Exempt Radio Apparatus: Category I Equipment

RSS-Gen Issue 5, Amendment 1 (March 2019): General Requirements for Compliance of Radio Apparatus

PREPARED BY:



Project Engineer
Sky Yang

REVIEWED BY:



Reviewer
Eric Li

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Content

REVISION HISTORY.....	4
MEASUREMENT RESULT SUMMARY	5
1 GENERAL INFORMATION	6
1.1 DESCRIPTION OF EQUIPMENT UNDER TEST (EUT)	6
1.2 TECHNICAL SPECIFICATION.....	7
1.3 DESCRIPTION OF TEST FACILITY.....	8
2 TEST SPECIFICATIONS.....	9
2.1 STANDARDS OR SPECIFICATION	9
2.2 MODE OF OPERATION DURING THE TEST	9
2.3 TEST SOFTWARE LIST	9
2.4 TEST PERIPHERALS LIST.....	9
2.5 TEST ENVIRONMENT CONDITION:.....	9
2.6 INSTRUMENT LIST	10
2.7 MEASUREMENT UNCERTAINTY.....	11
3 FUNDAMENTAL EMISSION	12
3.1 LIMIT	12
3.2 MEASUREMENT PROCEDURE	12
3.3 TEST CONFIGURATION	13
3.4 TEST RESULTS OF FUNDAMENTAL EMISSIONS	14
4 SPURIOUS EMISSION	15
4.1 LIMIT	15
4.2 MEASUREMENT PROCEDURE	15
4.3 TEST RESULTS OF RADIATED EMISSIONS	17
5 FREQUENCY STABILITY (TEMPERATURE VARIATION)	20
5.1 TEST LIMIT	20
5.2 TEST CONFIGURATION	20
5.3 TEST PROCEDURE AND TEST SETUP	21
5.4 TEST PROTOCOL.....	21
6 FREQUENCY STABILITY (VOLTAGE VARIATION)	22
6.1 TEST LIMIT	22
6.2 TEST CONFIGURATION	22
6.3 TEST PROCEDURE AND TEST SETUP	22
6.4 TEST PROTOCOL.....	23
7 CONDUCTED EMISSIONS	24
7.1 LIMIT	24
7.2 TEST CONFIGURATION	24
7.3 MEASUREMENT PROCEDURE	25
7.4 TEST RESULTS OF CONDUCTED EMISSIONS.....	26
8 20DB BANDWIDTH	29
8.1 LIMIT.....	29
8.2 TEST CONFIGURATION	29
8.3 TEST PROCEDURE AND TEST SET UP	30
8.4 TEST PROTOCOL	31
9 ANTENNA REQUIREMENT.....	32

Revision History

Report No.	Version	Description	Issued Date
240300347SHA-001	Rev. 01	Initial issue of report	July 8, 2024

Measurement result summary

TEST ITEM	FCC REFERENCE	IC REFERENCE	RESULT
Fundamental emission	15.225(a) (b) (c)	RSS 210 B.6	Pass
Spurious emission	15.225(d)	RSS 210 B.6	Pass
Frequency stability	15.225(e)	RSS 210 B.6	Pass
Conducted emissions	15.207	RSS-Gen Issue 5 Clause 8.8	Pass
99% and 20dB Bandwidth	15.215(c)	RSS-Gen Issue 5 Clause 6.6	Pass
Antenna requirement	15.203	RSS-GEN 6.8	Pass

Notes: 1: NA =Not Applicable

2: Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

1 GENERAL INFORMATION

1.1 Description of Equipment Under Test (EUT)

Product name:	DC Electric Vehicle Charging Station
Type/Model:	<p>LDC001<u>A</u><u>B</u><u>C</u><u>D</u>-<u>E</u></p> <p><u>A</u> may be C1 or NACS, denotes to one of the output connector interface type, C1:CCS1</p> <p><u>B</u> may be 120, 150, 175, 180, denotes to one of the output rating, 120:120kW, 150:150kW, 175:175kW, 180:180kW</p> <p><u>C</u> may be C1 or NACS, denotes to the other of the output connector interface type, C1:CCS1</p> <p><u>D</u> may be 120, 150, 175, 180, denotes to the other of the output rating, 120:120kW, 150:150kW, 175:175kW, 180:180kW</p> <p><u>E</u> may be NC or LC, denotes to the type of the cooling, NC: Natural Cooling, LC: Liquid Cooling</p> <p>LDC001C1120C1120-LC, LDC001C1120NACS120-LC, LDC001NACS120NACS120-LC, LDC001C1150C1120-LC, LDC001C1150NACS120-LC, LDC001NACS150NACS120-LC, LDC001C1150C1150-LC, LDC001C1150NACS150-LC, LDC001NACS150NACS150-LC, LDC001C1180C1150-LC, LDC001C1180NACS150-LC, LDC001NACS180NACS150-LC, LDC001C1175C1175-LC, LDC001C1175NACS175-LC, LDC001NACS175NACS175-LC, LDC001C1180C1180-LC, LDC001C1180NACS180-LC, LDC001NACS180NACS180-LC, LDC001C1120C1120-NC, LDC001C1120NACS120-NC, LDC001NACS120NACS120-NC, LDC001C1150C1120-NC, LDC001C1150NACS120-NC, LDC001NACS150NACS120-NC, LDC001C1150C1150-NC, LDC001C1150NACS150-NC, LDC001NACS150NACS150-NC, LDC001C1180C1150-NC, LDC001C1180NACS150-NC, LDC001NACS180NACS150-NC, LDC001C1175C1175-NC, LDC001C1175NACS175-NC, LDC001NACS175NACS175-NC, LDC001C1180C1180-NC, LDC001C1180NACS180-NC, LDC001NACS180NACS180-NC</p>
Description of EUT:	<p>The EUT is electric vehicle DC charger. It contains two certified modules, the WIFI/Bluetooth module FCC ID is 2AC7Z-ESPWROOM32UE(grant date:01/25/2022), the LTE module FCC ID is XMR201903EG25G, the WIFI/Bluetooth module IC is 21098-ESPWROOMUE(grant date:01/27/2022), the LTE module IC is 10224A-201903EG25G. We test LDC001C1180NACS180-LC as representative and list the result in this report.</p>
Rating:	<p>LDC001<u>A</u>120<u>C</u>120-LC: Input: 480VAC±10%, 50/60Hz, 304A Max Output: 150-1000VDC, 500A Max, 240kW Max</p> <p>LDC001<u>A</u>150<u>C</u>120-LC: Input: 480VAC±10%, 50/60Hz, 342A Max Output: 150-1000VDC, 500A Max, 270kW Max</p> <p>LDC001<u>A</u>150<u>C</u>150-LC: Input: 480VAC±10%, 50/60Hz, 380A Max Output: 150-1000VDC, 500A Max, 300kW Max</p> <p>LDC001<u>A</u>180<u>C</u>150-LC: Input: 480VAC±10%, 50/60Hz, 418A Max Output: 150-1000VDC, 500A Max, 330kW Max</p> <p>LDC001<u>A</u>175<u>C</u>175-LC: Input: 480VAC±10%, 50/60Hz, 443A Max Output: 150-1000VDC, 500A Max, 350kW Max</p> <p>LDC001<u>A</u>180<u>C</u>180-LC: Input: 480VAC±10%, 50/60Hz, 456A Max Output: 150-1000VDC, 500A Max, 360kW Max</p>

TEST REPORT

	<p>LDC001A120C120-NC: Input: 480VAC\pm10%, 50/60Hz, 304A Max Output: 150-1000VDC, 300A Max, 240kW Max</p> <p>LDC001A150C120-NC: Input: 480VAC\pm10%, 50/60Hz, 342A Max Output: 150-1000VDC, 300A Max, 270kW Max</p> <p>LDC001A150C150-NC: Input: 480VAC\pm10%, 50/60Hz, 380A Max Output: 150-1000VDC, 300A Max, 300kW Max</p> <p>LDC001A180C150-NC: Input: 480VAC\pm10%, 50/60Hz, 418A Max Output: 150-1000VDC, 300A Max, 330kW Max</p> <p>LDC001A175C175-NC: Input: 480VAC\pm10%, 50/60Hz, 443A Max Output: 150-1000VDC, 300A Max, 350kW Max</p> <p>LDC001A180C180-NC: Input: 480VAC\pm10%, 50/60Hz, 456A Max Output: 150-1000VDC, 300A Max, 360kW Max</p>
Category of EUT:	Class A
EUT type:	<input type="checkbox"/> Table top <input checked="" type="checkbox"/> Floor standing
Software Version:	-
Hardware Version:	-
Serial numbers:	A240508-40
Sample received date:	May 8, 2024
Date of test:	May 9, 2024~ May 14, 2024

1.2 Technical Specification

Frequency Range:	13.56 MHz ~ 13.56 MHz
Modulation:	ASK
Antenna:	PCB antenna

TEST REPORT

1.3 Description of Test Facility

Name:	Intertek Testing Services Shanghai
Address:	Building 86, No. 1198 Qinzhou Road(North), Shanghai 200233, P.R. China
Telephone:	86 21 61278200
Telefax:	86 21 54262353

The test facility is recognized, certified, or accredited by these organizations:	CNAS Accreditation Lab Registration No. CNAS L0139
	FCC Accredited Lab Designation Number: CN0175
	IC Registration Lab CAB identifier.: CN0014
	VCCI Registration Lab Member No.: 3598 (Registration No.: R-14243, G-10845, C-14723, T-12252)
	A2LA Accreditation Lab Certificate Number: 3309.02

Spurious emission and Conducted emissions tests were sub-contracted.

Name:	Shenzhen Academy of Metrology and Quality Inspection
Address:	NETC Building, No.4 Tongfa Road Xili, Nanshan, Shenzhen, Guangdong, China
Telephone:	+86-13600419320
The test facility is recognized, certified, or accredited by these organizations:	FCC Accredited Lab Designation Number: CN1165
	IC Registration Lab CAB identifier.: CN0009

2 TEST SPECIFICATIONS

2.1 Standards or specification

47CFR Part 15 (2023)

ANSI C63.10 (2020)

RSS-210 Issue 10 (December 2019)

RSS-Gen Issue 5, Amendment 1 (March 2019)

2.2 Mode of operation during the test

While testing, the internal modulation and continuously transmission was applied.

2.3 Test software list

Test Items	Software	Manufacturer	Version
Conducted emission	SKET Auto EMC Test Software	Keleto	V3.0
Radiated emission	SKET Auto EMC Test Software	Keleto	V3.0

2.4 Test peripherals list

Item No	Description	Band and Model	S/No

2.5 Test environment condition:

Test items	Temperature	Humidity
Radiated emission	26°C	53% RH
Power line conducted emission	27°C	53% RH

TEST REPORT

2.6 Instrument list

Used	Equipment	Manufacturer	Type	Internal no.	Due date
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESW8	SB21192	2024-07-25
<input checked="" type="checkbox"/>	LISN	schwarzbeck	NNLK8130	SB21542	2025-04-15
<input checked="" type="checkbox"/>	Test Receiver	R&S	ESI26	SB3436	2024-10-17
<input checked="" type="checkbox"/>	Loop Antenna	Schwarzbeck	FMZB1519B	SB19178	2024-11-29
<input checked="" type="checkbox"/>	Broadband Antenna	Schwarzbeck	VULB9163	SB19658/01	2024-08-06
<input checked="" type="checkbox"/>	Active loop antenna	Schwarzbeck	FMZB1519	EC 5345	2024-07-16
<input checked="" type="checkbox"/>	Spectrum Analyzer	Keysight	N9030B	EC 6078	2025-06-14
<input checked="" type="checkbox"/>	Climate chamber	GWS	MT3065	EC 6021	2025-03-06
<input checked="" type="checkbox"/>	Thermo-Hygrograph	Testo	175h1	EC 6640	2024-08-28

TEST REPORT

2.7 Measurement uncertainty

The measurement uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Frequency	Expanded Uncertainty ($k=2$)
Conducted emission at mains ports	9kHz ~ 150kHz	3.52 dB
	150kHz ~ 30MHz	3.19 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	3.06 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.02 dB
	6GHz ~ 18GHz	5.28 dB

3 Fundamental Emission

Test result: Pass

3.1 Limit


Frequencies (MHz)	Limit at 30m (dBuV/m)	Limit at 3m (dBuV/m)
13.110 – 13.410	40.50	80.50
13.410 – 13.553	50.50	90.50
13.553 – 13.567	84.00	124.00
13.567 – 13.710	50.50	90.50
13.710 – 14.010	40.50	80.50

3.2 Measurement Procedure


- The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to PK Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

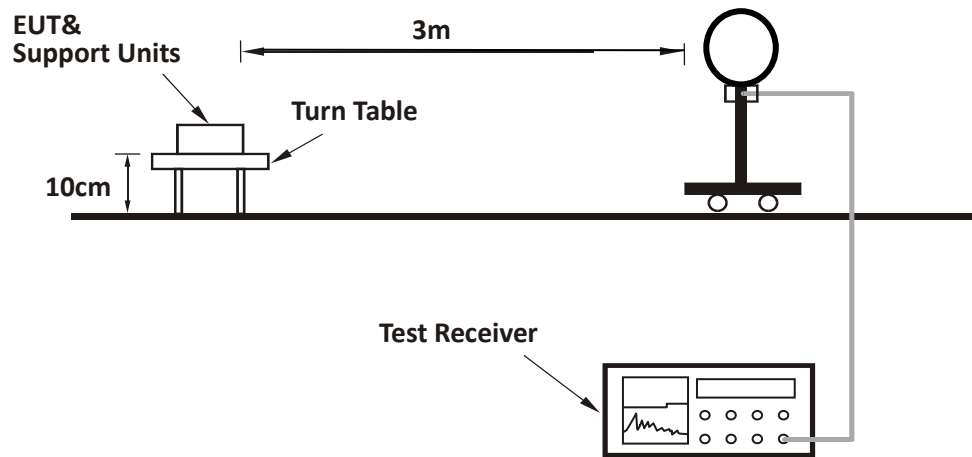TEST REPORT**3.3 Test Configuration**

3.4 Test Results of Fundamental Emissions

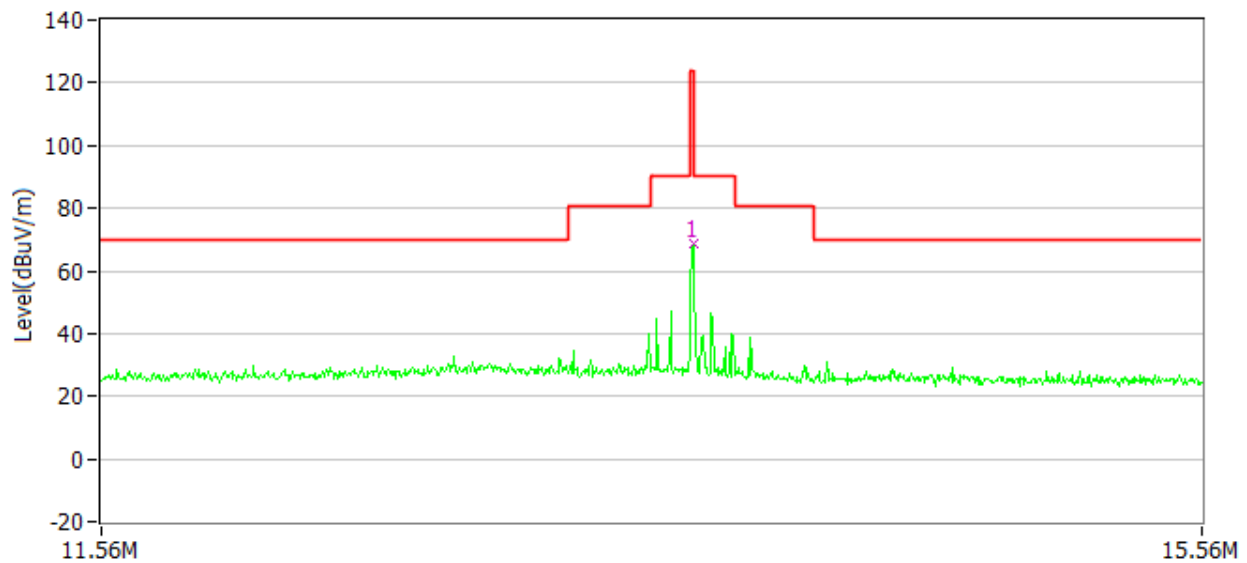

Antenna Polarization	Frequency (MHz)	Corrected Reading (dBuV/m)	Limit (dBuV/m)	Margin	Detector
X	13.56	68.4	124.00	55.6	PK
Y	13.56	66.1	124.00	57.9	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Corrected Reading = Original Receiver Reading + Correct Factor

3. Margin = Limit - Corrected Reading

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB, Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV, Limit = 40.00dBuV/m.

Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;

Corrected Reading = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;

Margin = $40.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.

4 Spurious Emission

Test result: Pass

4.1 Limit

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

4.2 Measurement Procedure

For Radiated emission below 30MHz:

- The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- Both X and Y axes of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

NOTE:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz:

- The EUT was placed on a 0.1m plank above the ground at a 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

TEST REPORT

- d) For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e) The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f) The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
- 3. All modes of operation were evaluated and the worst-case emissions were reported

4.3 Test Results of Radiated Emissions


The EUT has been tested in all two orthogonal planes.

Frequency (MHz)	Limit (dBuV/m)	Level (dBuV/m)	Delta (dB)	Detector	Polarity
0.021	121.32	54.1	67.2	PK	X
1.586	63.63	39.2	24.4	PK	X
2.184	69.50	36.5	33.0	PK	X
3.859	69.50	35.6	33.9	PK	X
11.157	69.50	31.3	38.2	PK	X
16.002	69.50	30.0	39.5	PK	X
1.586	63.63	38.5	25.1	PK	Y
2.184	69.50	36.9	32.6	PK	Y
3.739	69.50	36.8	32.7	PK	Y
6.491	69.50	35.1	34.4	PK	Y
15.643	69.50	39.3	30.2	PK	Y
26.830	69.50	37.7	31.8	PK	Y


Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.
2. Level = Original Receiver Reading + Correct Factor
3. Delta = Limit - Level

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,
Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,
Limit = 40.00dBuV/m.
Then Correct Factor = 30.20 + 2.00 – 32.00 = 0.20dB/m;
Level = 10dBuV + 0.20dB/m = 10.20dBuV/m;
Delta = 44.00dBuV/m - 10.20dBuV/m = 29.80dB.

H

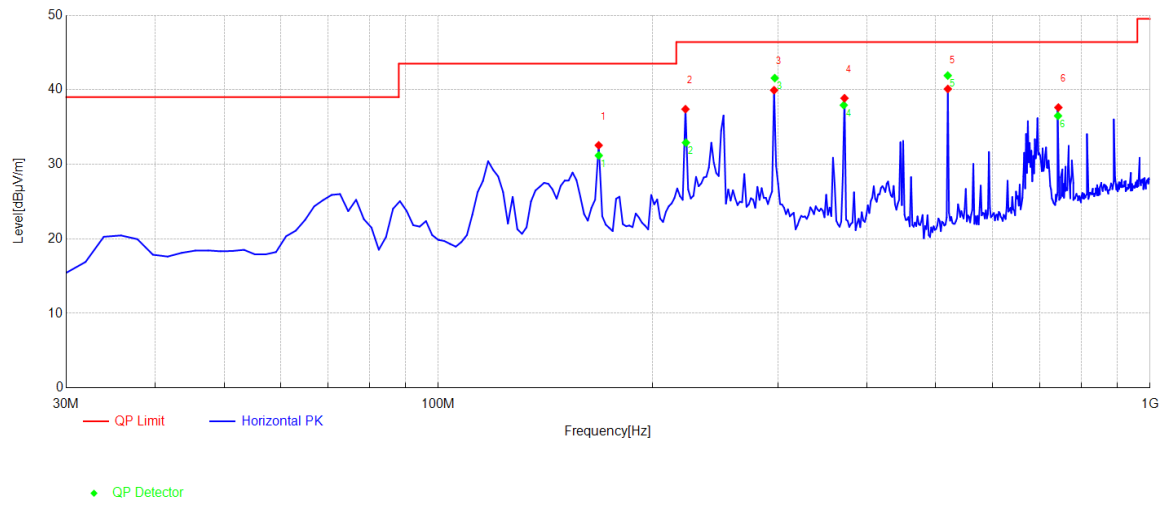

V

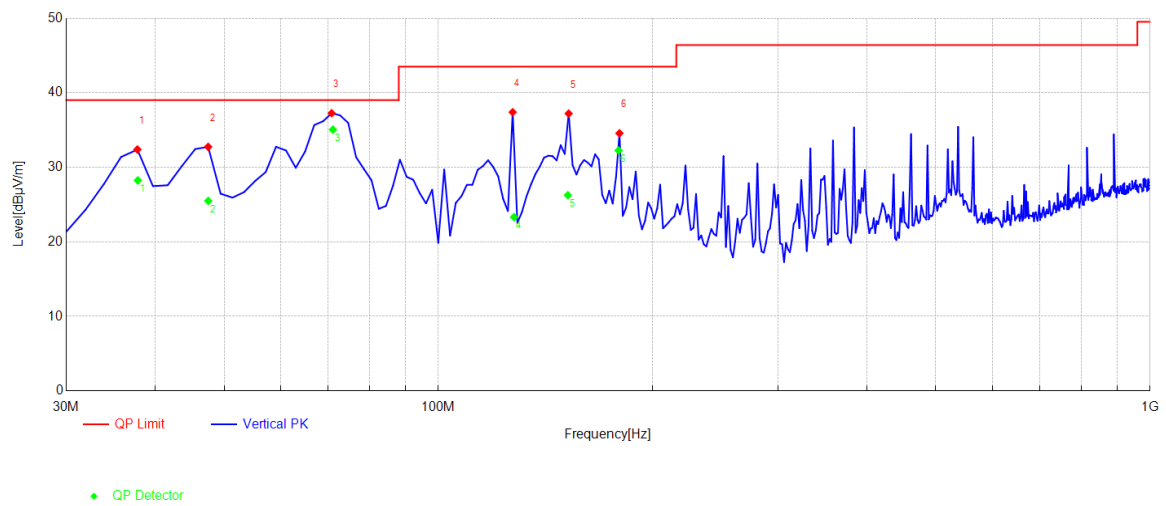

TEST REPORT

Test data from 30MHz to 1000MHz:

Antenna Polarization	Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Delta (dB)	Detector
H	168.045	31.2	43.50	12.3	QP
H	222.786	32.9	46.40	13.5	PK
H	296.993	41.6	46.40	4.8	PK
H	371.263	37.9	46.40	8.5	PK
H	519.750	41.9	46.40	4.5	PK
H	742.491	36.5	46.40	9.9	PK
V	37.833	28.2	39.00	10.8	PK
V	47.509	25.5	39.00	13.5	PK
V	71.113	35.1	39.00	4.0	PK
V	127.749	23.3	43.50	20.2	PK
V	152.060	26.3	43.50	17.3	PK
V	179.191	32.3	43.50	11.3	PK

Remark: 1. Correct Factor = Antenna Factor + Cable Loss (+ Amplifier, for higher than 1GHz), the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Limit - Level

Example: Assuming Antenna Factor = 30.20dB/m, Cable Loss = 2.00dB,

Gain of Preamplifier = 32.00dB, Original Receiver Reading = 10.00dBuV,

Limit = 40.00dBuV/m.

Then Correct Factor = $30.20 + 2.00 - 32.00 = 0.20\text{dB/m}$;

Level = $10\text{dBuV} + 0.20\text{dB/m} = 10.20\text{dBuV/m}$;

Delta = $44.00\text{dBuV/m} - 10.20\text{dBuV/m} = 29.80\text{dB}$.


5 Frequency Stability (Temperature Variation)

Test result: PASS

5.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ of the operating frequency over a temperature variation of -30 degrees to $+50$ degrees C at normal supply voltage.

5.2 Test Configuration

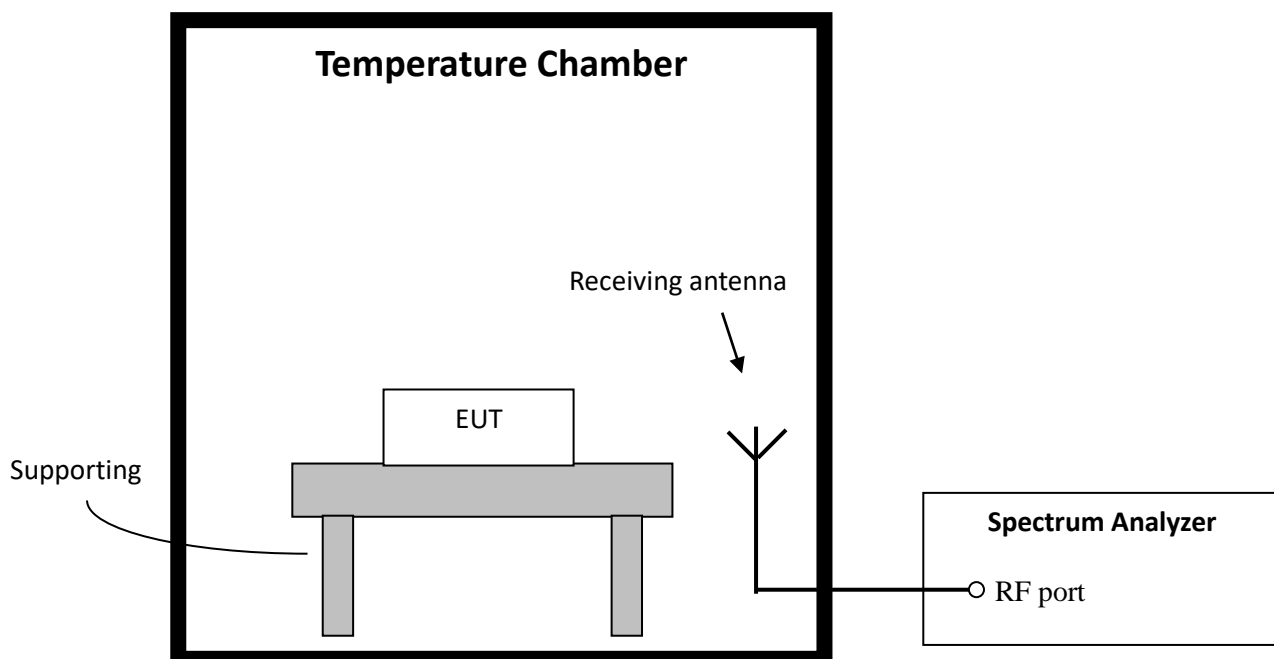

TEST REPORT

5.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.1.

5.4 Test protocol

Voltage (V)	Temp (°C)	Freq measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
480	-30	13.5596	13.56	-0.003	±0.01
	-20	13.5598		-0.001	
	-10	13.5602		0.001	
	0	13.5601		0.0007	
	10	13.5601		0.0007	
	20	13.5600		0	
	30	13.5600		0	
	40	13.5603		0.002	
	50	13.5599		-0.0007	


6 Frequency Stability (Voltage Variation)

Test result: PASS

6.1 Test limit

The frequency tolerance of the carrier signal shall be maintained within $\pm 0.01\%$ for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.

6.2 Test Configuration

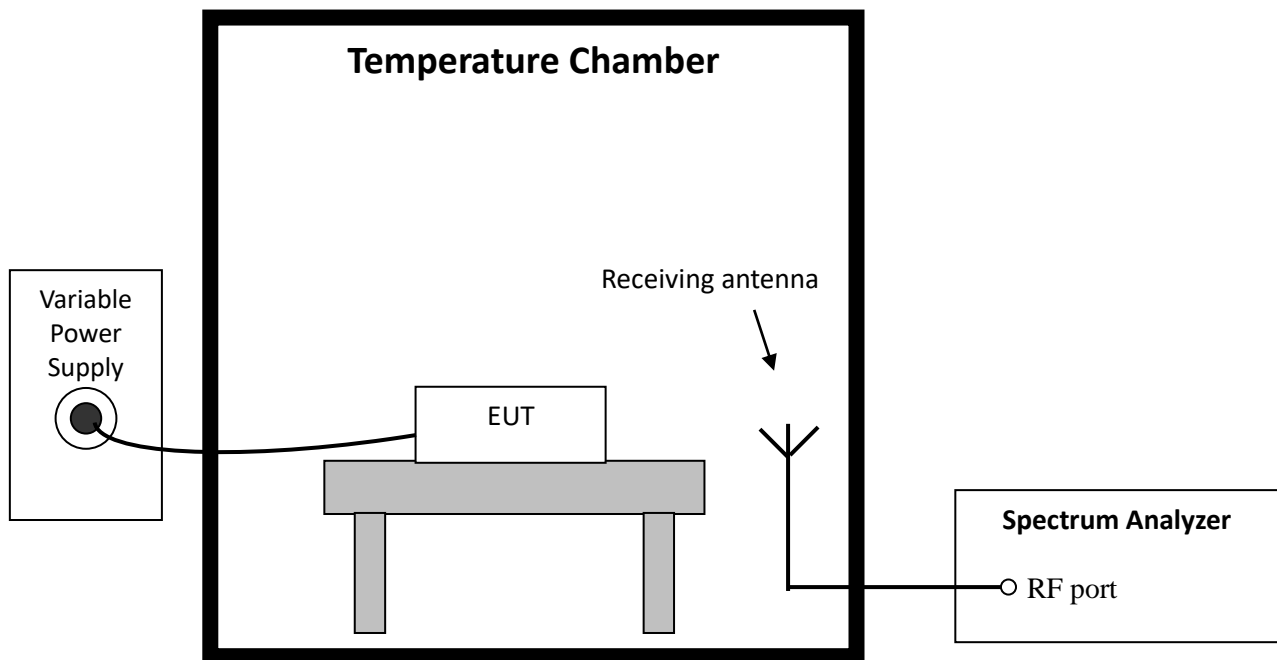

6.3 Test procedure and test setup

Test Procedure as per ANSI 63.10 clause 6.8.2.

6.4 Test protocol

Temp (°C)	Voltage (V)	Freq Measured (MHz)	Freq nominal (MHz)	Tolerance (%)	Limit (%)
20	408	13.5602	13.56	0.001	±0.01
	480	13.5600		0	
	552	13.5603		0.002	


7 Conducted emissions

Test result: Pass

7.1 Limit

Frequency range (MHz)	Limits dB(μV)	
	Quasi-peak	Average
0.15 ~ 0.5	79	66
0.5 ~ 30	73	60

7.2 Test Configuration

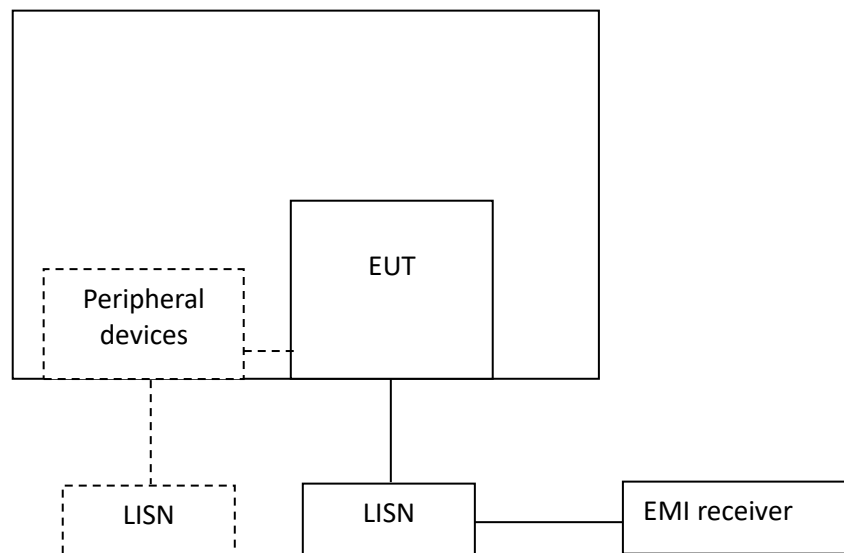

TEST REPORT**7.3 Measurement Procedure**


Measured levels of ac power-line conducted emission shall be the emission voltages from the voltage probe, where permitted, or across the 50 Ω LISN port (to which the EUT is connected), where permitted, terminated into a 50 Ω measuring instrument. All emission voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord by the use of mating plugs and receptacles on the LISN, if used. Equipment shall be tested with power cords that are normally supplied or recommended by the manufacturer and that have electrical and shielding characteristics that are the same as those cords normally supplied or recommended by the manufacturer. For those measurements using a LISN, the 50 Ω measuring port is terminated by a measuring instrument having 50 Ω input impedance. All other ports are terminated in 50 Ω loads.

Tabletop devices shall be placed on a platform of nominal size 1 m by 1.5 m, raised 80 cm above the reference ground plane. The vertical conducting plane or wall of an RF-shielded (screened) room shall be located 40 cm to the rear of the EUT. Floor-standing devices shall be placed either directly on the reference ground-plane or on insulating material as described in ANSI C63.4. All other surfaces of tabletop or floor-standing EUTs shall be at least 80 cm from any other grounded conducting surface, including the case or cases of one or more LISNs.

The bandwidth of the test receiver is set at 9 kHz.

7.4 Test Results of Conducted Emissions

Test Voltage: 480VAC/60Hz

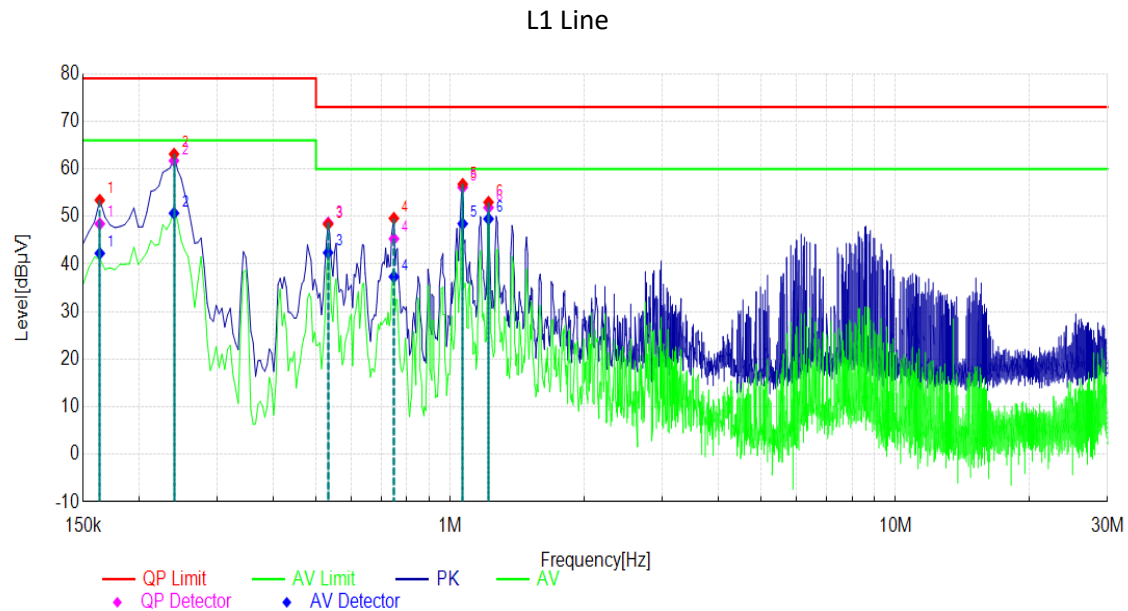

Test Data:

NO.	Freq. [MHz]	Level [dBμV]	Limit [dBμV]	Delta [dB]	Detector	Verdict
1	0.1635	48.46	79.00	30.54	QP	PASS
2	0.1635	42.27	66.00	23.73	AV	PASS
3	0.2400	61.73	79.00	17.27	QP	PASS
4	0.2400	50.69	66.00	15.31	AV	PASS
5	0.5325	48.64	73.00	24.36	QP	PASS
6	0.5325	42.40	60.00	17.60	AV	PASS
7	0.7485	45.32	73.00	27.68	QP	PASS
8	0.7485	37.35	60.00	22.65	AV	PASS
9	1.0680	56.12	73.00	16.88	QP	PASS
10	1.0680	48.49	60.00	11.51	AV	PASS
11	1.2210	51.88	73.00	21.12	QP	PASS
12	1.2210	49.49	60.00	10.51	AV	PASS


Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Limit - Level

4. If the PK Level is lower than AV limit, the AV test can be elided.

L2 Line

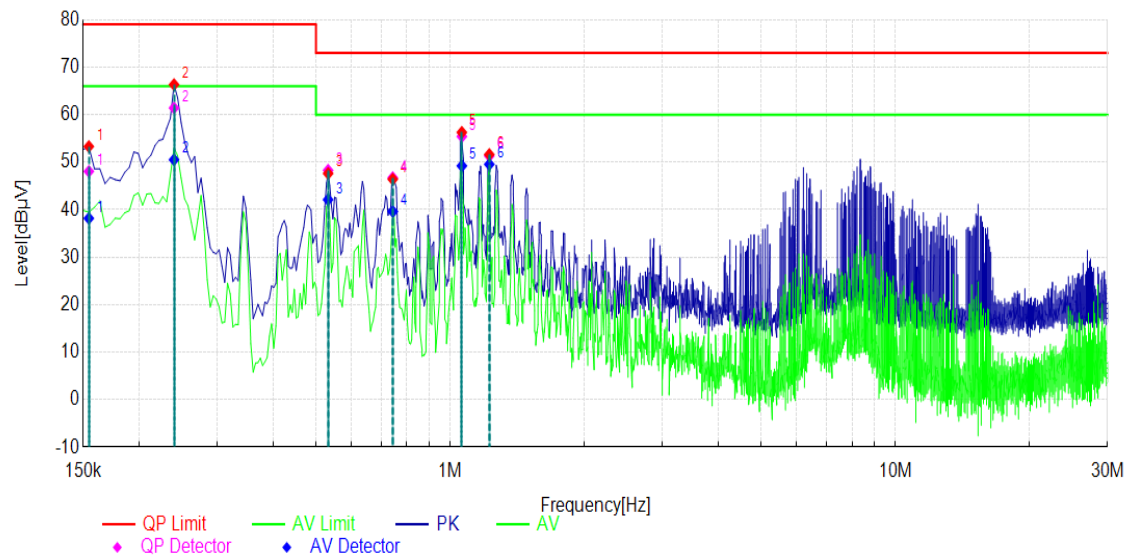

Test Data:

NO.	Freq. [MHz]	Level [dBμV]	Limit [dBμV]	Delta [dB]	Detector	Verdict
1	0.1545	48.06	79.00	30.94	QP	PASS
2	0.1545	38.19	66.00	27.81	AV	PASS
3	0.2400	61.42	79.00	17.58	QP	PASS
4	0.2400	50.53	66.00	15.47	AV	PASS
5	0.5325	48.30	73.00	24.70	QP	PASS
6	0.5325	42.11	60.00	17.89	AV	PASS
7	0.7440	46.75	73.00	26.25	QP	PASS
8	0.7440	39.62	60.00	20.38	AV	PASS
9	1.0635	55.42	73.00	17.58	QP	PASS
10	1.0635	49.23	60.00	10.77	AV	PASS
11	1.2255	51.31	73.00	21.69	QP	PASS
12	1.2255	49.56	60.00	10.44	AV	PASS


Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Limit - Level

4. If the PK Level is lower than AV limit, the AV test can be elided.

L3 Line

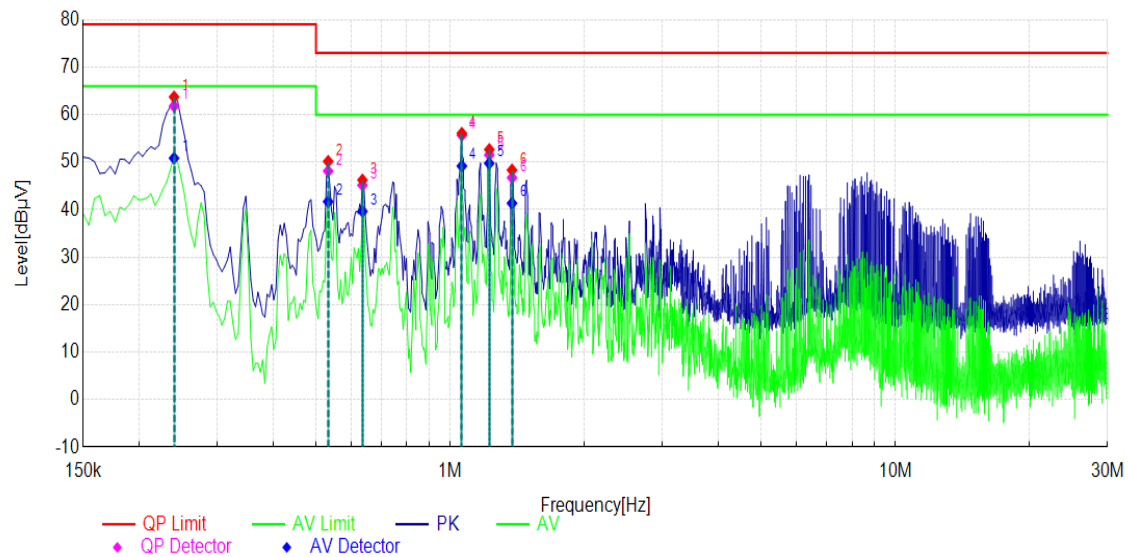

Test Data:

NO.	Freq. [MHz]	Level [dBμV]	Limit [dBμV]	Delta [dB]	Detector	Verdict
1	0.2400	61.82	79.00	17.18	QP	PASS
2	0.2400	50.85	66.00	15.15	AV	PASS
3	0.5325	48.14	73.00	24.86	QP	PASS
4	0.5325	41.70	60.00	18.30	AV	PASS
5	0.6360	45.17	73.00	27.83	QP	PASS
6	0.6360	39.65	60.00	20.35	AV	PASS
7	1.0635	55.67	73.00	17.33	QP	PASS
8	1.0635	49.20	60.00	10.80	AV	PASS
9	1.2255	51.53	73.00	21.47	QP	PASS
10	1.2255	49.77	60.00	10.23	AV	PASS
11	1.3785	46.73	73.00	26.27	QP	PASS
12	1.3785	41.36	60.00	18.64	AV	PASS

Remark: 1. Correct Factor = LISN Factor + Cable Loss, the value was added to Original Receiver Reading by the software automatically.

2. Level = Original Receiver Reading + Correct Factor

3. Delta = Limit - Level

4. If the PK Level is lower than AV limit, the AV test can be elided.


8 20dB Bandwidth

Test result: Pass

8.1 Limit

The 20dB bandwidth should be fallen in the allocated operating frequency range.
No limit for 99% bandwidth.

8.2 Test configuration

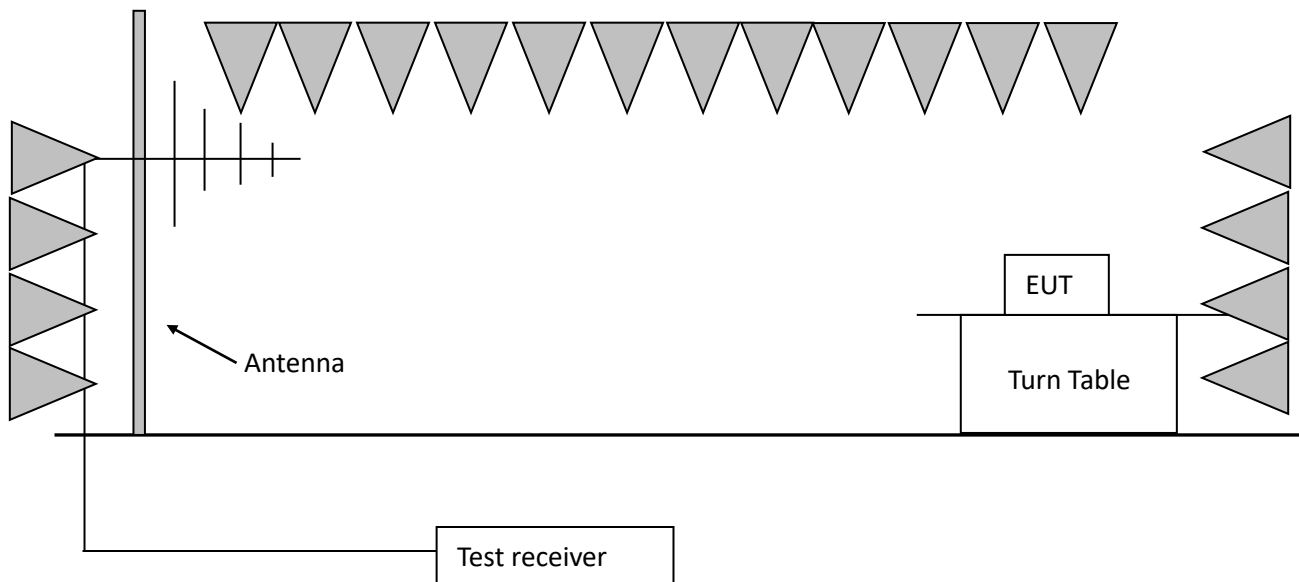

8.3 Test procedure and test set up

The measurement was applied in a 3m semi-anechoic chamber.


The center of the loop antenna shall be 1 m above the horizontal metal ground plane.

The following procedure shall be used for measuring (99 %) power bandwidth:

1. Set center frequency to the nominal EUT channel center frequency.
2. Set RBW = 1 % to 5 % of the OBW
3. Set VBW $\geq 3 \cdot$ RBW
4. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
5. Use the 99 % power bandwidth function of the instrument (if available).
6. the 20dB bandwidth is also measured with the same setting.

8.4 Test protocol

	Lower point (MHz)	Higher point (MHz)	Bandwidth (kHz)	Allocated bandwidth (MHz)
20dB Bandwidth	13.560198	13.560658	0.460	13.553 ~ 13.567
Occupied bandwidth	13.559244	13.561524	2.281	13.553 ~ 13.567

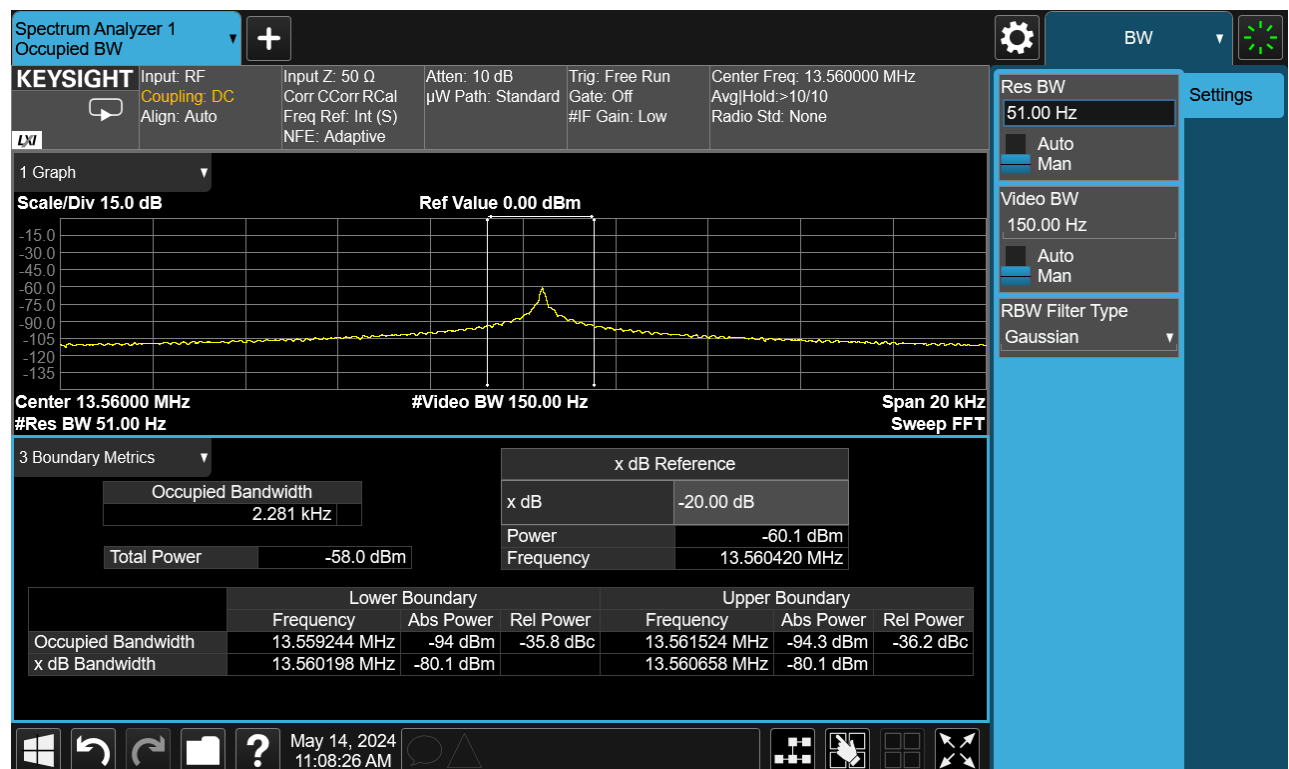

9 Antenna requirement

Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

Result:

EUT uses permanently attached antenna to the intentional radiator, so it can comply with the provisions of this section.

***** END *****