



# TEST REPORT

**Report Reference No.** .....: **TRE1703001301** R/C.....:20663

**FCC ID** .....: **2AJ55HOLYSTONES01**

**Applicant's name**.....: **Xiamen Huoshiquan Import & Export CO., LTD**

Address.....: Room 703,No. 813-2 Xiahe Road,Siming District,Xiamen, China

Manufacturer.....: Xiamen Huoshiquan Import & Export CO., LTD

Address.....: Room 703,No. 813-2 Xiahe Road,Siming District,Xiamen, China

**Test item description**.....: **quadcopter wifi camera**

Trade Mark.....: Holy Stone

Model/Type reference.....: HS200

Listed Model(s) .....: See Annex

**Standard**.....: **FCC CFR Title 47 Part 15 Subpart C Section 15.247**

Date of receipt of test sample.....: Mar. 03,2017

Date of testing.....: Mar. 03,2017 - Mar. 22,2017

Date of issue.....: Mar. 22,2017

**Result**.....: **PASS**

Compiled by  
( position+printedname+signature) ...: File administrators Becky Liang

Supervised by  
(position+printedname+signature) ...: Project Engineer Jeff Sun

Approved by  
(position+printedname+signature) ...: RF Manager Hans Hu

**Testing Laboratory Name**.....: **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address.....: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

## Contents

<b>1.</b>	<b><u>TEST STANDARDS AND REPORT VERSION</u></b>	<b>3</b>
1.1.	Applicable Standards	3
1.2.	Report version	3
<b>2.</b>	<b><u>TEST DESCRIPTION</u></b>	<b>4</b>
<b>3.</b>	<b><u>SUMMARY</u></b>	<b>5</b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT configuration	6
3.5.	Modifications	6
<b>4.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>7</b>
4.1.	Address of the test laboratory	7
4.2.	Test Facility	7
4.3.	Equipments Used during the Test	8
4.4.	Environmental conditions	9
4.5.	Statement of the measurement uncertainty	9
<b>5.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>10</b>
5.1.	Antenna requirement	10
5.2.	Conducted Emission (AC Main)	11
5.3.	Conducted Peak Output Power	14
5.4.	Power Spectral Density	15
5.5.	6dB bandwidth	18
5.6.	Restricted band	21
5.7.	Band edge and Spurious Emission (conducted)	23
5.8.	Spurious Emission (radiated)	27
<b>6.</b>	<b><u>TEST SETUP PHOTOS OF THE EUT</u></b>	<b>37</b>
<b>7.</b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u></b>	<b>39</b>

# 1. Test standards and Report version

## 1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

[ANSI C63.10:2013](#):American National Standard for Testing Unlicensed Wireless Devices

[KDB558074 D01 DTS Meas Guidance v03r05](#):Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating under § 15.247

## 1.2. Report version

Version No.	Date of issue	Description
00	Mar. 22,2017	Original

Annex:

HS110,HS120,HS130,HS140,HS150,HS160,HS170,HS200,HS110W,HS120W,HS130W,HS140W,HS150W,HS160W,HS170W,HS200W,HS100D,HS110D,HS120D,HS130D,HS140D,HS150D,HS160D,HS200D

## 2. Test Description

Test Item	Section in CFR 47	Result
Antenna requirement	15.203/15.247 (c)	Pass
Line Conducted Emission (AC Main)	15.207	Pass
Conducted Peak Output Power	15.247 (b)(3)	Pass
Power Spectral Density	15.247 (e)	Pass
6dB Bandwidth	15.247 (a)(2)	Pass
Restricted band	15.247(d)/15.205	Pass
Spurious Emission	15.247(d)/15.209	Pass

Note: The measurement uncertainty is not included in the test result.  
The "N/A" is not application for measurement.

### 3. Summary

#### 3.1. Client Information

Applicant:	Xiamen Huoshiquan Import & Export CO., LTD
Address:	Room 703, No. 813-2 Xiahe Road, Siming District, Xiamen, China
Manufacturer:	Xiamen Huoshiquan Import & Export CO., LTD
Address:	Room 703, No. 813-2 Xiahe Road, Siming District, Xiamen, China

#### 3.2. Product Description

Name of EUT:	quadcopter wifi camera		
Trade Mark:	Holy Stone		
Model No.:	HS200		
Listed Model(s):	See Annex		
Power supply:	DC 3.7V for internal battery		
Adapter information:	-		
<b>WiFi</b>			
Supported type:	<input checked="" type="checkbox"/> 802.11b	<input checked="" type="checkbox"/> 802.11g	<input checked="" type="checkbox"/> 802.11n(H20)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(H20)		
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(H20)		
Channel number:	11 for 802.11b/802.11g/802.11n(H20)		
Channel separation:	5MHz		
Antenna type:	Integral Antenna		
Antenna gain:	3.0dBi		

### 3.3. Operation state

#### ➤ **Test frequency list**

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channel which were tested. the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the above gray bottom.

802.11b/g/n(H20)	
Channel	Frequency (MHz)
01	2412
02	2417
03	2422
04	2427
05	2432
06	2437
07	2442
08	2447
09	2452
10	2457
11	2462

#### ➤ **Test mode**

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit(dutycycle>98%).
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For RF test axis
EUT in each of three orthogonal axis emissions had been tested ,but only the worst case (X axis) data Recorded in the report.

### 3.4. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

<input type="radio"/>	Computer	Manufacturer :	DELL
		Model No. :	7X1CS12
		Manufacturer :	/
		Model No. :	/

### 3.5. Modifications

No modifications were implemented to meet testing criteria.

## **4. Test Environment**

### **4.1. Address of the test laboratory**

Laboratory:Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

Phone: 86-755-26748019 Fax: 86-755-26748089

### **4.2. Test Facility**

The test facility is recognized, certified, or accredited by the following organizations:

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories(identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories, Date of Registration: February 28, 2015. Valid time is until February 27, 2018.

#### **A2LA-Lab Cert. No.: 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing. Valid time is until March 31, 2017.

#### **FCC-Registration No.: 317478**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Registration 317478, Renewal date Jul. 18, 2014, valid time is until Jul. 18, 2017.

#### **IC-Registration No.: 5377B**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 5377B on Dec.03, 2014, valid time is until Dec.03, 2017.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

### 4.3. Equipments Used during the Test

Line Conducted Emission (AC Main)					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	R&S	ESCI	101247	2016/11/13
2	Artificial Mains	Shwarzbeck	NNLK 8121	573	2016/11/13
3	Pulse Limiter	R&S	ESH3-Z2	101488	2016/11/13
4	Test Software	R&S	ES-K1	N/A	N/A
5	Test cable	ENVIROFLEX	3651	1101902	2016/11/13

Maximum Peak Output Power / Power Spectral Density / 6dB Bandwidth / Band Edge Compliance of RF Emission / Spurious RF Conducted Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal
1	Spectrum Analyzer	Rohde&Schwarz	FSP	1164.4391.40	2016/11/13
2	Power Meter	Anritsu	ML2480B	100798	2016/11/13
3	Power Sensor	Anritsu	MA2411B	100258	2016/11/13
4	Test cable	FARPU	MCX-J	N/A	2016/11/13
5	Temporary antenna connector	D-LENP	NJ-SMAK	N/A	2016/11/13

NOTE: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emission					
Item	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal.
1	EMI Test Receiver	Rohde&Schwarz	ESI 26	100009	2016/11/13
2	RF Test Panel	Rohde&Schwarz	TS / RSP	335015/0017	N/A
3	EMI Test Software	Rohde&Schwarz	ESK1	N/A	N/A
4	Loop Antenna	Rohde&Schwarz	HZ-9	838622\013	2016/11/13
5	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	2016/11/13
6	Horn Antenna	ShwarzBeck	9120D	1011	2016/11/13
7	Broadband Horn Antenna	Shwarzbeck	BBHA9170	BBHA917047 2	2016/11/13
8	Preamplifier	Shwarzbeck	BBV9742	9742-196	2016/11/13
9	Broadband Preamplifier	Shwarzbeck	BBV 9721	9721-102	2016/11/13
10	Broadband Preamplifier	Shwarzbeck	BBV 9718	9718-247	2016/11/13
11	Turn Table	MATURO	TT2.0	/	N/A
12	Antenna Mast	MATURO	TAM-4.0-P	/	N/A
13	EMI Test Software	Audix	E3	N/A	N/A
14	Test Software	R&S	ES-K1	N/A	N/A
15	Test cable	Siva Cables Italy	RG 58A/U	W14.02	2016/11/13

The Cal.Interval was one year

#### 4.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15~35°C
Relative Humidity:	30~60 %
Air Pressure:	950~1050mbar

#### 4.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report according to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system according to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-40 GHz	1.60 dB	(1)
Radiated spurious emission 9KHz-40 GHz	2.20 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emission 1~18GHz	5.16 dB	(1)
Radiated Emission 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 5. Test Conditions and Results

### 5.1. Antenna requirement

#### REQUIREMENT:

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### TEST RESULTS

**Passed**       **Not Applicable**

The antenna is integral antenna, the best case gain of the antenna is 3.0dBi, please refer to the below antenna photo.

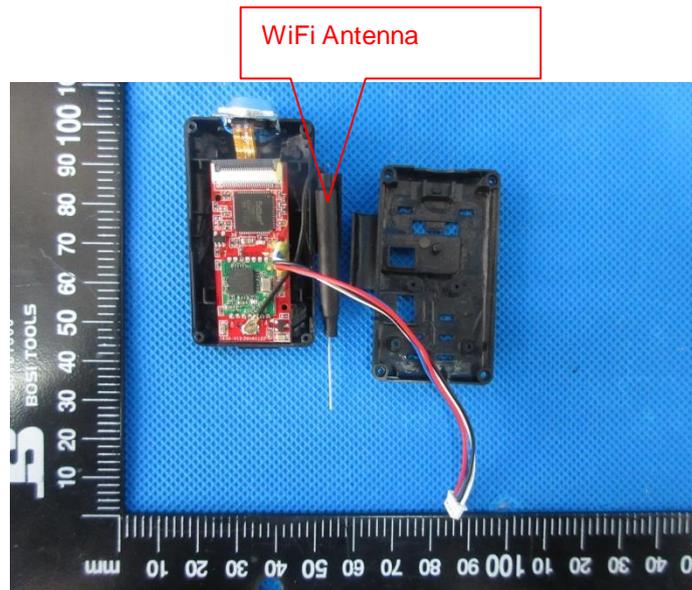

## 5.2. Conducted Emission (AC Main)


### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.207:

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

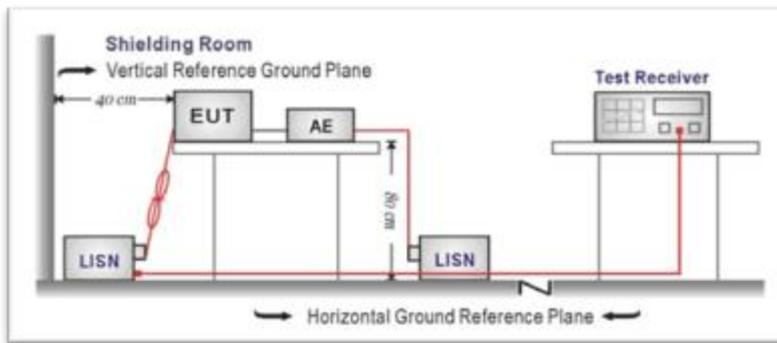

### TEST PROCEDURE


1. The EUT was setup according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.


### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable

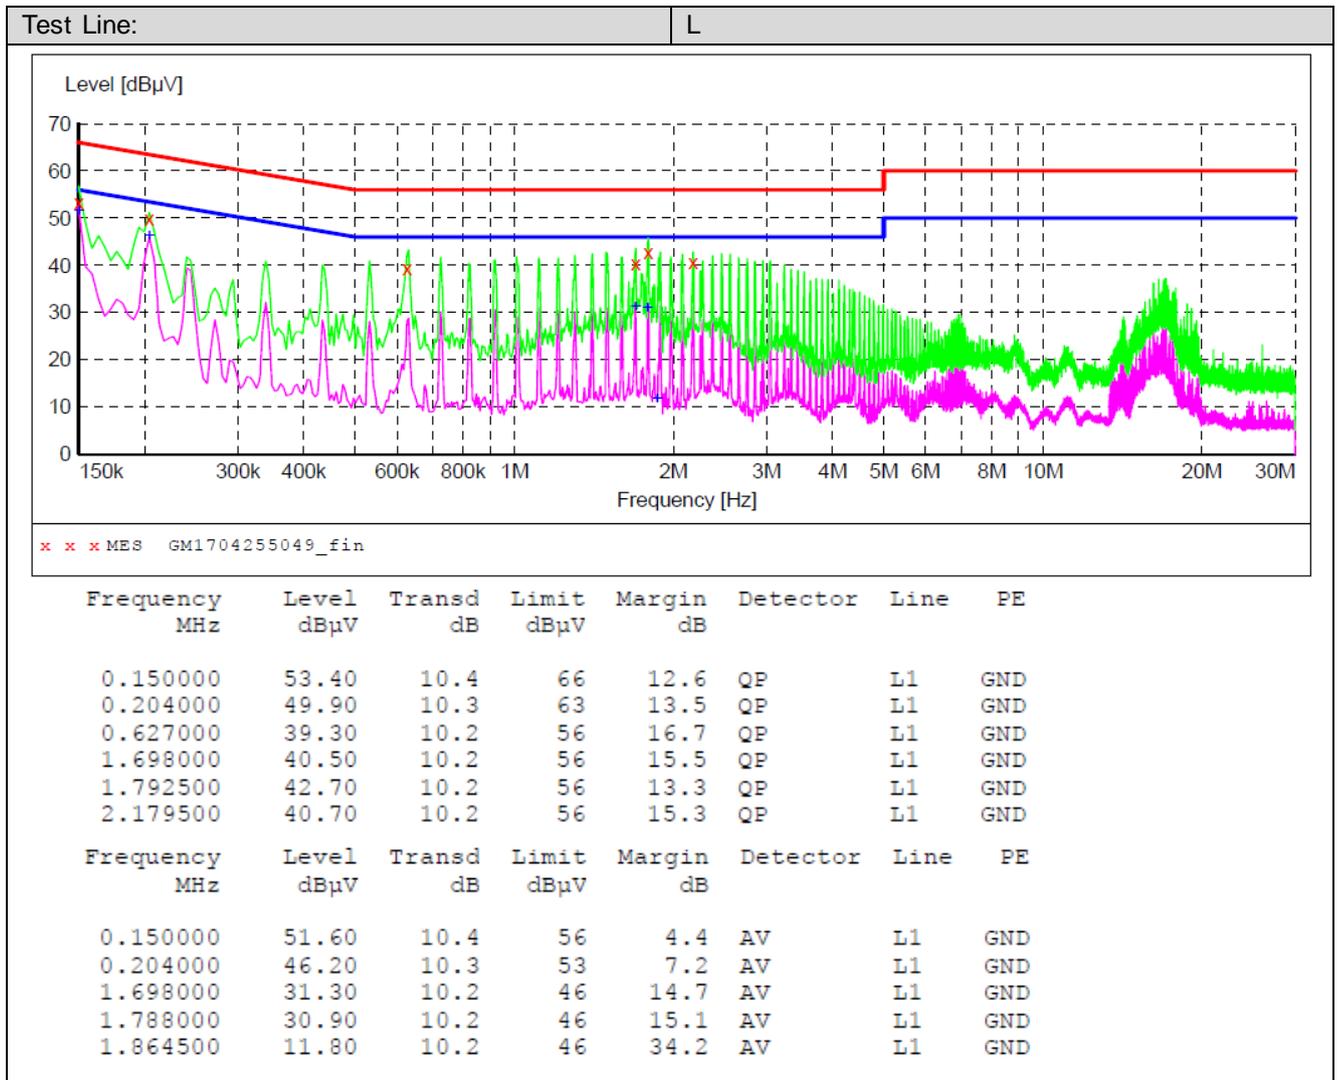

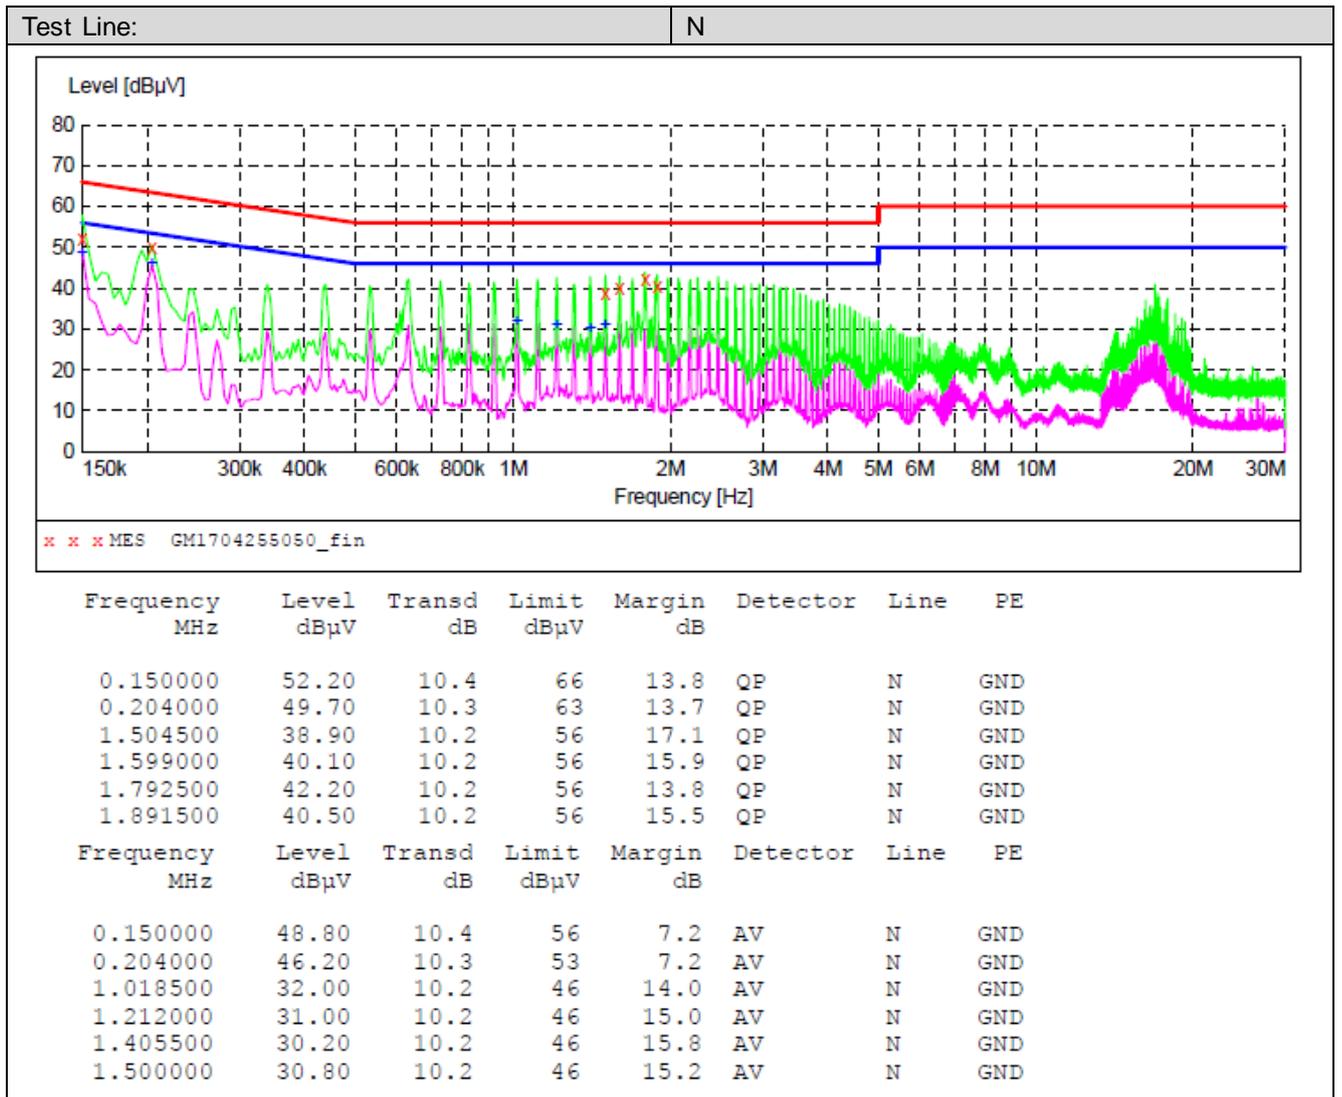


### 5.3. Conducted Peak Output Power

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): **30dBm**:

#### TEST CONFIGURATION

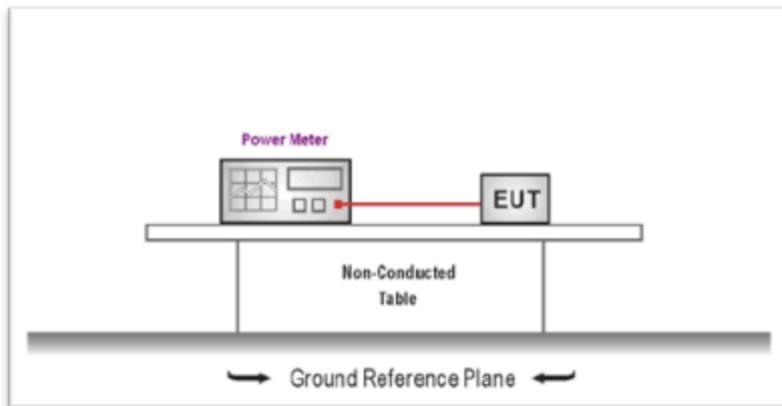

#### TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10: 2013 and KDB 558074 D01 for compliance to FCC 47CFR 15.247 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector
4. Record the measurement data.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

**Passed**       **Not Applicable**

Type	Channel	Output power (dBm)	Limit (dBm)	Result
802.11b	01	14.46	30.00	Pass
	06	13.95		
	11	14.00		
802.11g	01	14.95	30.00	Pass
	06	14.29		
	11	14.30		
802.11n(H20)	01	14.76	30.00	Pass
	06	14.36		
	11	13.98		


### 5.4. Power Spectral Density

#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

#### TEST CONFIGURATION

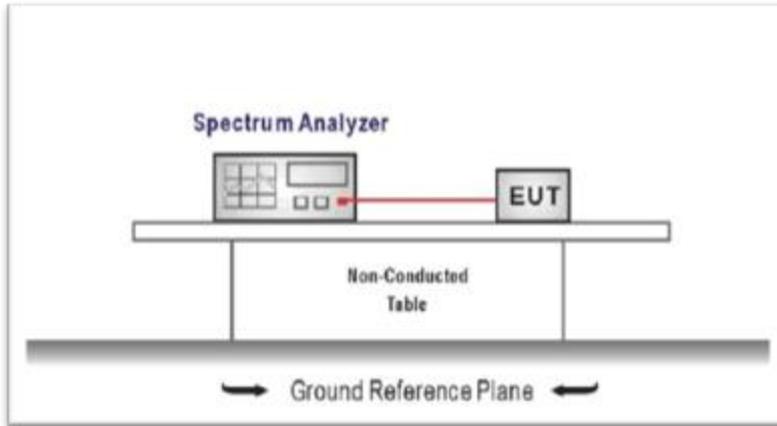

#### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:  
*Center frequency = DTS channel center frequency*  
*Span = 1.5 times the DTS bandwidth*  
*RBW = 3 kHz ≤ RBW ≤ 100 kHz, VBW ≥ 3 × RBW*  
*Sweep time = auto couple*  
*Detector = peak*  
*Trace mode = max hold*
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

#### TEST MODE:

Please refer to the clause 3.3


#### TEST RESULTS

Passed       Not Applicable


Type	Channel	Power Spectral Density (dBm/3KHz)	Limit (dBm/3KHz)	Result
802.11b	01	-15.75	8.00	Pass
	06	-16.09		
	11	-15.15		
802.11g	01	-19.48	8.00	Pass
	06	-19.42		
	11	-21.19		
802.11n(H20)	01	-19.47	8.00	Pass
	06	-20.15		
	11	-20.67		

Test plot as follows:


802.11b

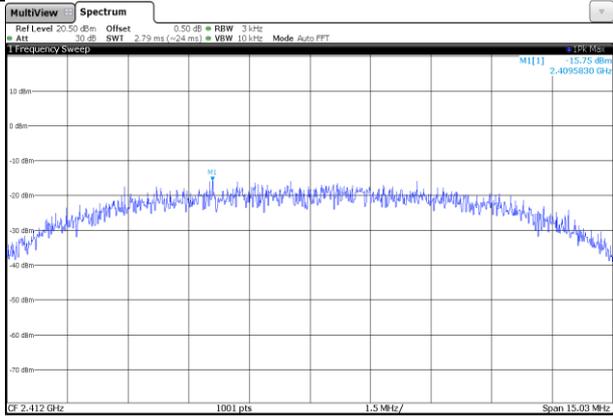

CH01

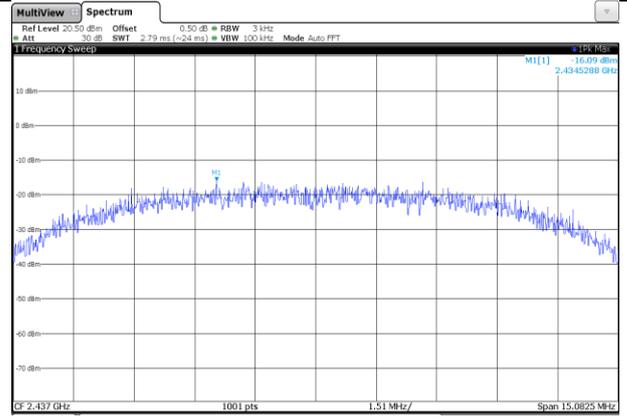


CH06

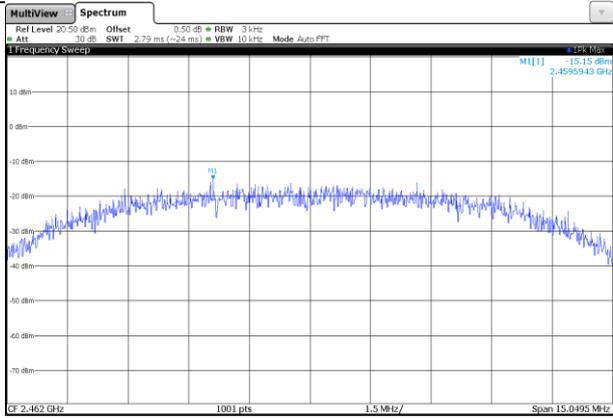


CH11

No Plot


802.11g

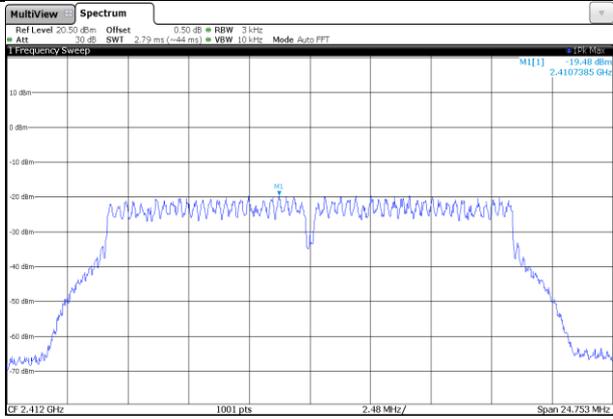

CH01

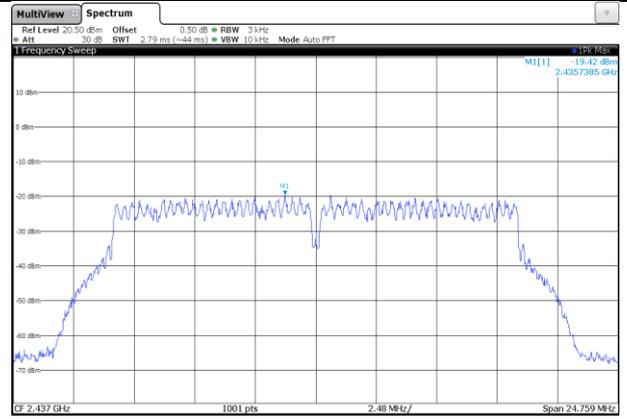


CH06

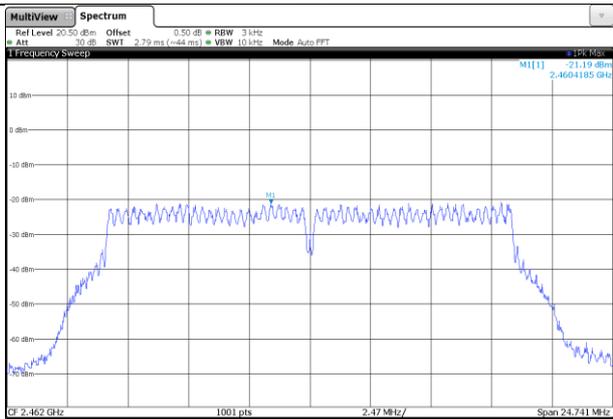


CH11

No Plot


802.11n(H20)

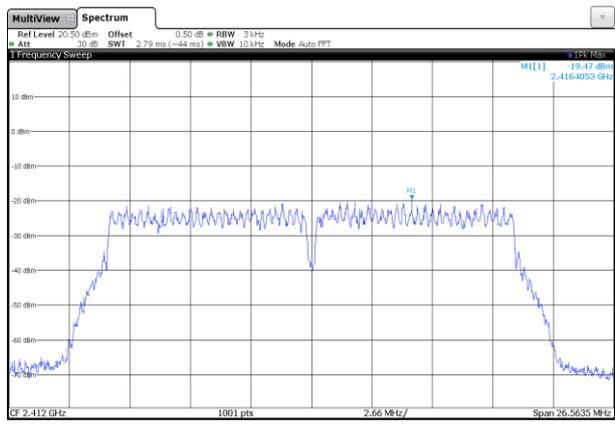

CH01

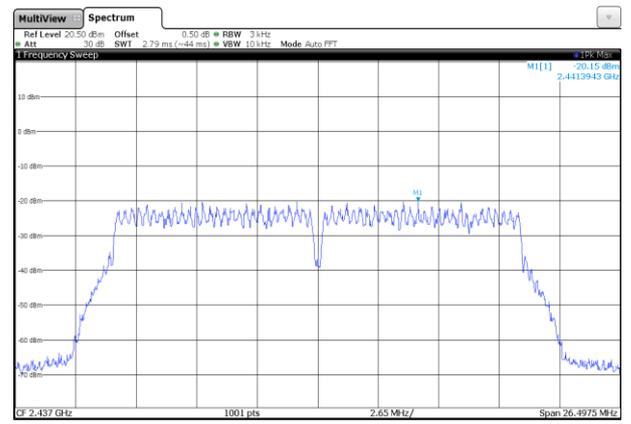

CH06

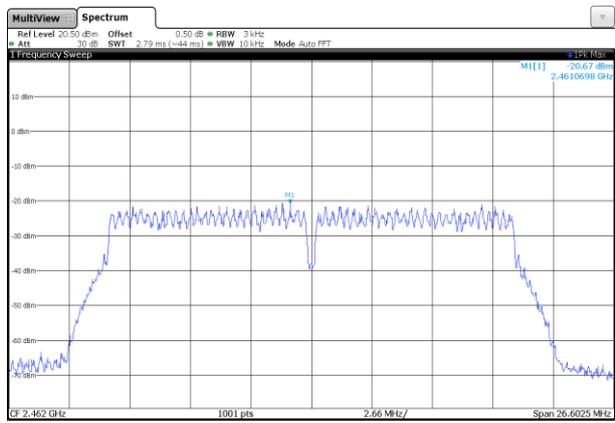

CH11

No Plot

-


**5.5. 6dB bandwidthand**

**LIMIT**

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):**

*For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.*

**TEST CONFIGURATION**

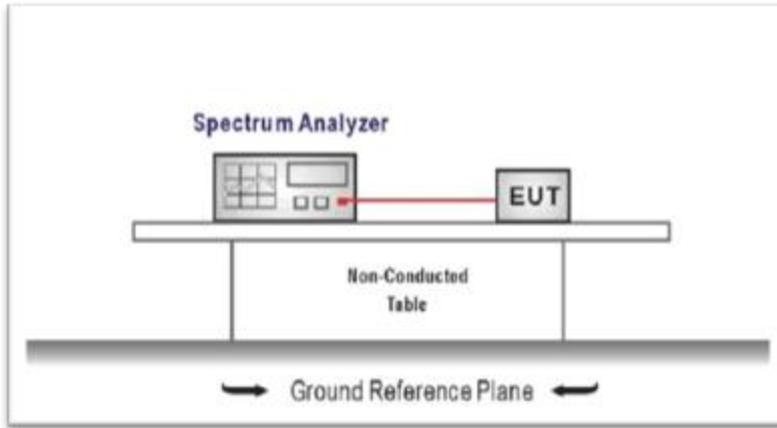

**TEST PROCEDURE**

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
 Center Frequency =DTS channel center frequency  
 Span=2 x DTS bandwidth  
 RBW = 100 kHz, VBW ≥ 3 x RBW  
 Sweep time= auto couple  
 Detector = Peak  
 Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

**TEST MODE:**

Please refer to the clause 3.3


**TEST RESULTS**

**Passed**       **Not Applicable**


Type	Channel	6dB Bandwidth (MHz)	Limit (kHz)	Result
802.11b	01	10.02	≥500	Pass
	06	10.06		
	11	10.03		
802.11g	01	16.50	≥500	Pass
	06	16.51		
	11	16.49		
802.11n(H20)	01	17.71	≥500	Pass
	06	17.67		
	11	17.74		

Test plot as follows:


802.11b

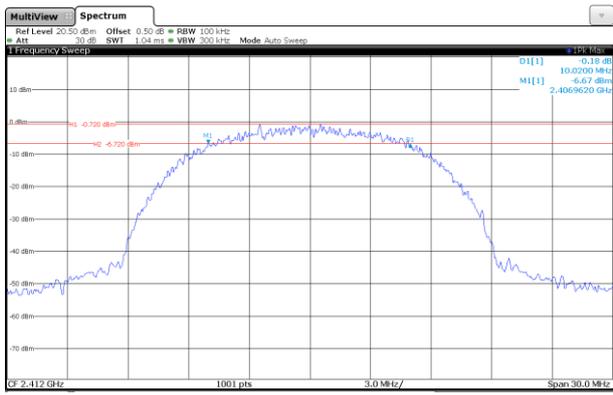

CH01

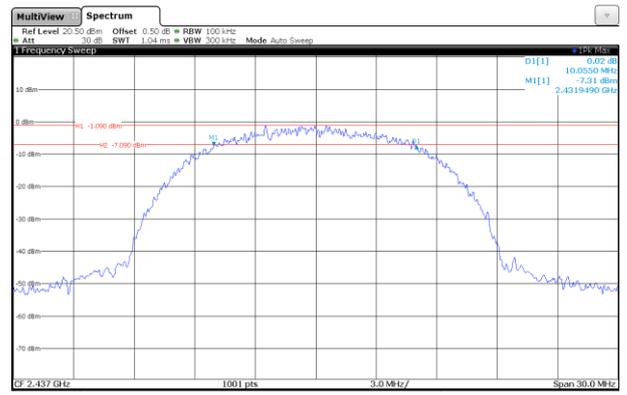


CH06

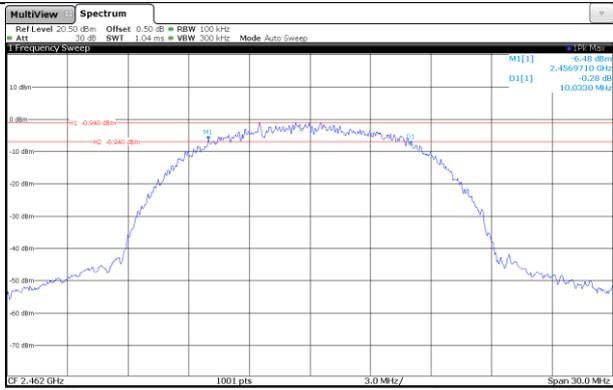


CH11

No Plot


802.11g

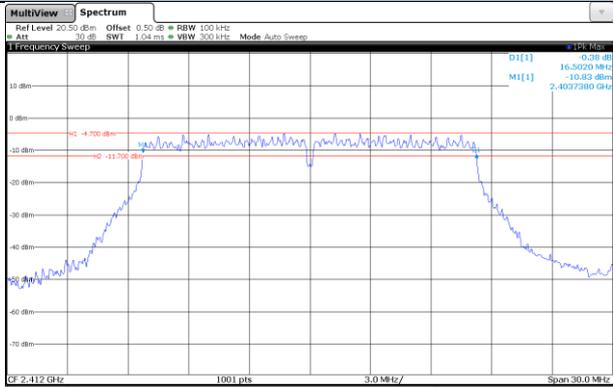

CH01

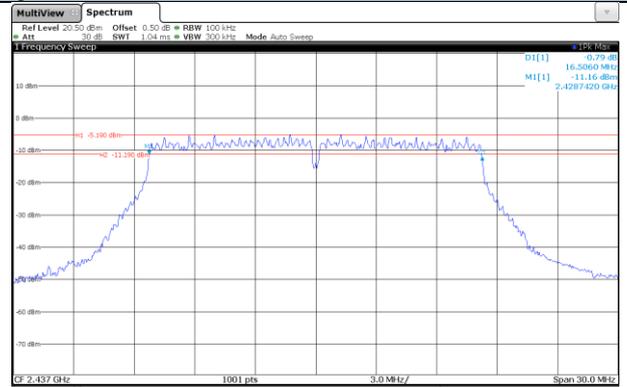


CH06

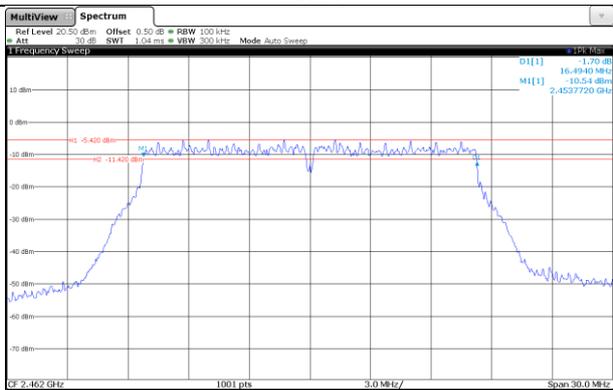


CH11

No Plot


802.11n(H20)

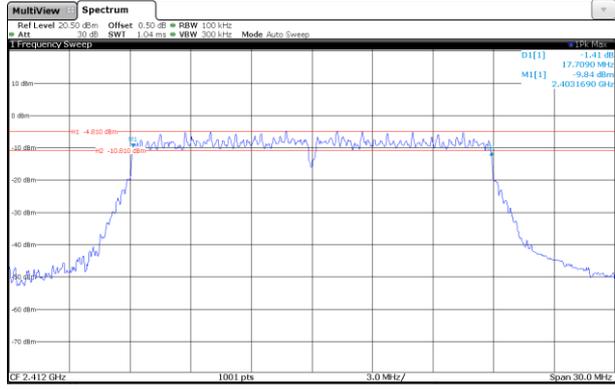

CH01

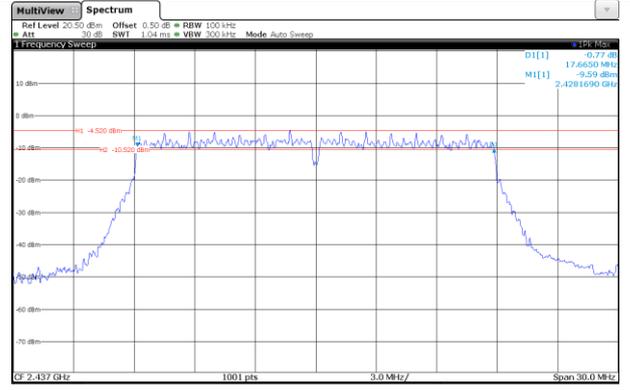

CH06

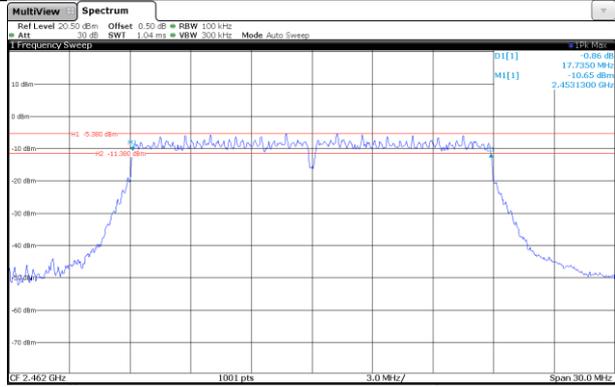

CH11

No Plot


## 5.6. Restricted band

### LIMIT

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### TEST CONFIGURATION

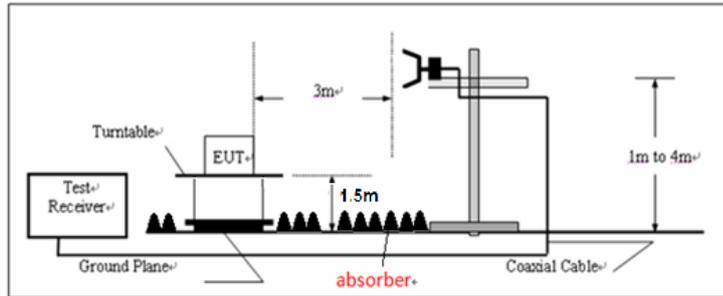

### TEST PROCEDURE

- 1) The EUT was setup and tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
- 2) The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
- 3) The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
- 4) The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10:2013 on radiated measurement.
- 5) The receiver set as follow:  
 RBW=1MHz, VBW=3MHz Peak detector for Peak value  
 RBW=1MHz, VBW=3MHz RMS detector for Average value.

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

**Passed**       **Not Applicable**

Note:

- 1)  $Final\ level = Read\ level + Antenna\ Factor + Cable\ Loss - Preamp\ Factor$

802.11b						CH01			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2388.66	54.42	27.53	6.81	37.45	51.31	74.00	-22.69	Vertical	Peak
2388.48	53.74	27.53	6.81	37.45	50.63	74.00	-23.37	Horizontal	
2389.45	45.56	27.53	6.81	37.45	42.45	54.00	-11.55	Vertical	Average
2389.53	44.34	27.53	6.81	37.45	41.23	54.00	-12.77	Horizontal	

802.11b						CH11			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2484.42	57.24	27.85	6.96	37.57	54.48	74.00	-19.52	Vertical	Peak
2484.58	56.54	27.85	6.96	37.57	53.78	74.00	-20.22	Horizontal	
2484.58	46.36	27.85	6.96	37.57	43.60	54.00	-10.40	Vertical	Average
2484.76	46.15	27.85	6.96	37.57	43.39	54.00	-10.61	Horizontal	

802.11g						CH01			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2386.74	52.56	27.53	6.81	37.92	48.98	74.00	-25.02	Vertical	Peak
2386.73	53.25	27.53	6.81	37.92	49.67	74.00	-24.33	Horizontal	
2386.46	45.16	27.53	6.81	37.92	41.58	54.00	-12.42	Vertical	Average
2386.25	42.56	27.53	6.81	37.99	38.91	54.00	-15.09	Horizontal	

802.11g						CH11			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2484.66	54.26	27.85	6.96	37.60	51.47	74.00	-22.53	Vertical	Peak
2484.47	53.54	27.85	6.96	37.60	50.75	74.00	-23.25	Horizontal	
2484.84	44.56	27.85	6.96	37.60	41.77	54.00	-12.23	Vertical	Average
2484.36	44.12	27.85	6.96	37.60	41.33	54.00	-12.67	Horizontal	

802.11n(H20)						CH01			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2389.26	51.64	27.53	6.81	37.58	48.40	74.00	-25.60	Vertical	Peak
2389.31	50.52	27.53	6.81	37.58	47.28	74.00	-26.72	Horizontal	
2389.26	43.01	27.53	6.81	37.58	39.77	54.00	-14.23	Vertical	Average
2389.47	42.25	27.53	6.81	37.58	39.01	54.00	-14.99	Horizontal	

802.11n(H20)						CH11			
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2484.64	53.15	27.85	6.96	37.67	50.29	74.00	-23.71	Vertical	Peak
2484.63	52.25	27.85	6.96	37.67	49.39	74.00	-24.61	Horizontal	
2484.58	44.65	27.85	6.96	37.67	41.79	54.00	-12.21	Vertical	Average
2484.67	42.99	27.85	6.96	37.67	40.13	54.00	-13.87	Horizontal	


## 5.7. Band edge and Spurious Emission (conducted)

### LIMIT

#### **FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

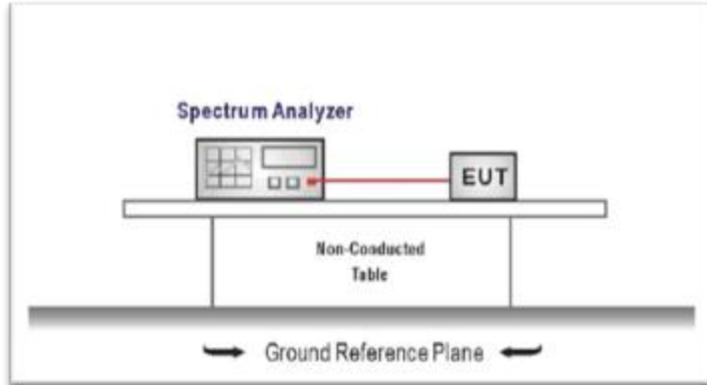

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure  
*Center frequency=DTS channel center frequency*  
*The span = 1.5 times the DTS bandwidth.*  
*RBW = 100 kHz, VBW ≥ 3 x RBW*  
*Detector = peak, Sweep time = auto couple, Trace mode = max hold*  
*Allow trace to fully stabilize*  
*Use the peak marker function to determine the maximum PSD level*

Note: the channel found to contain the maximum PSD level can be used to establish the reference level.

3. Emission level measurement  
Set the center frequency and span to encompass frequency range to be measured  
RBW = 100 kHz, VBW ≥ 3 x RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emissions relative to the limit.


### TEST MODE:

Please refer to the clause 3.3


### TEST RESULTS

**Passed**       **Not Applicable**


802.11b

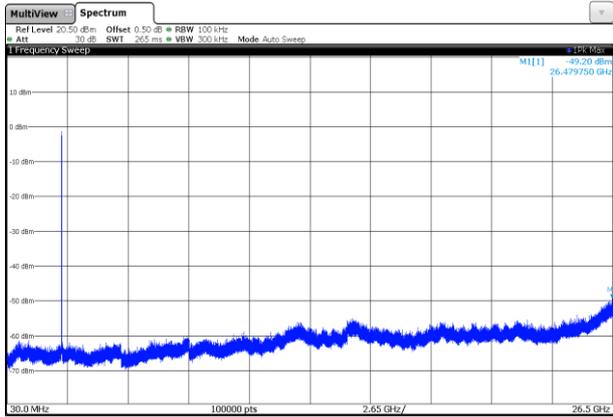

CH01-SE

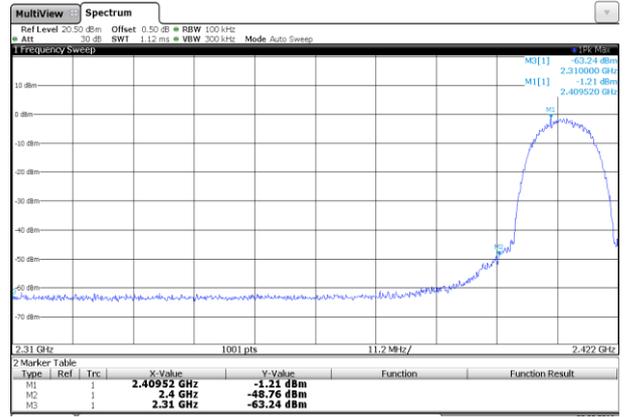


CH01-Bandedge

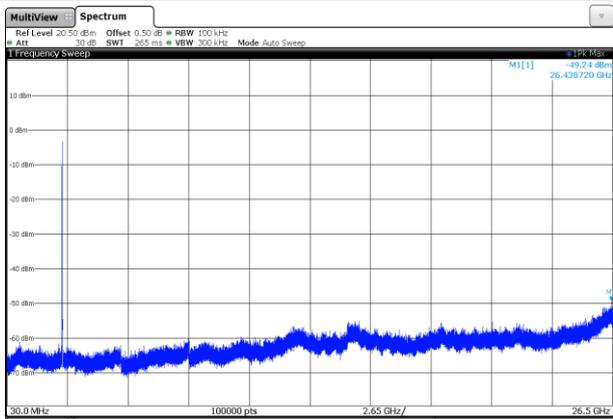


CH06-SE

No Plot

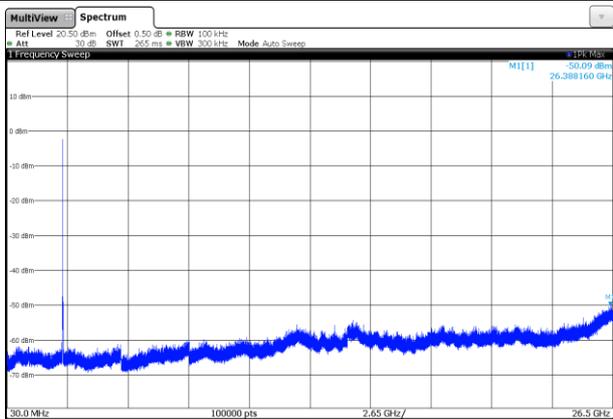


CH11-SE

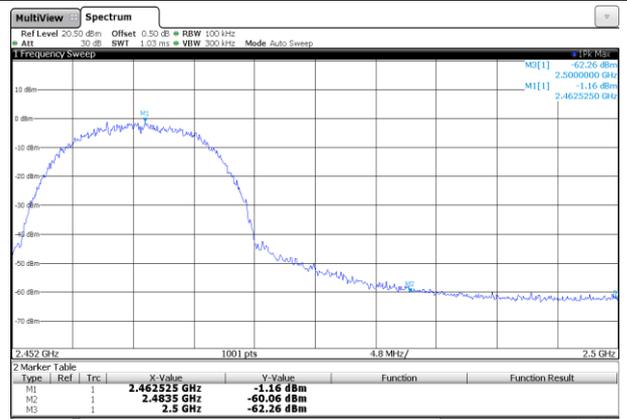


CH11-Bandedge


802.11g

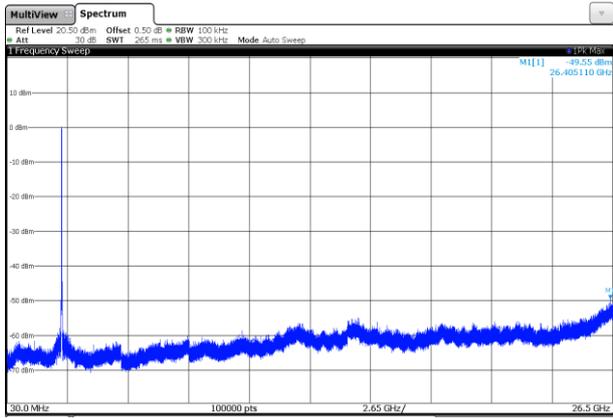

CH01-SE

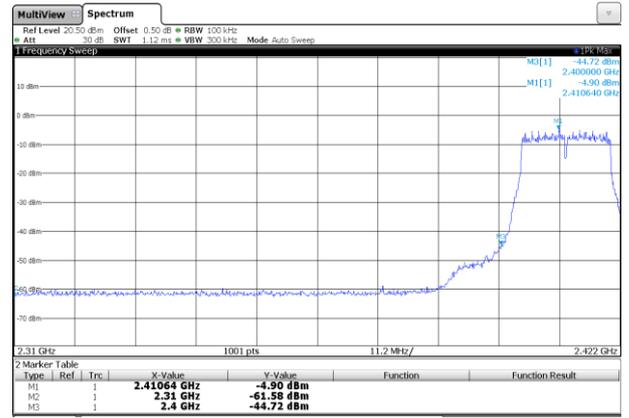


CH01-Bandedge

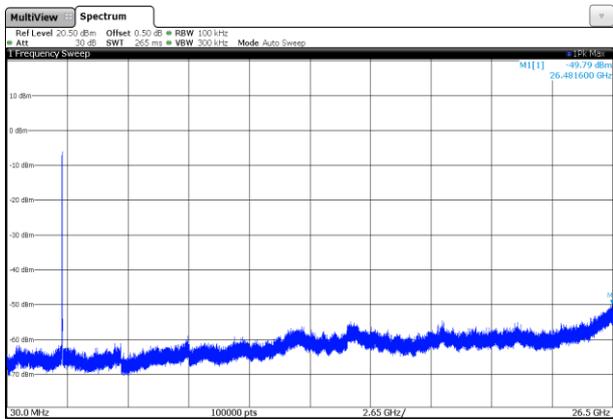


CH06

No Plot

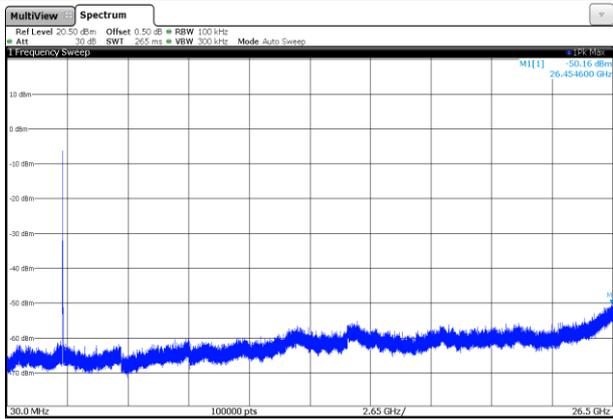


CH11-SE

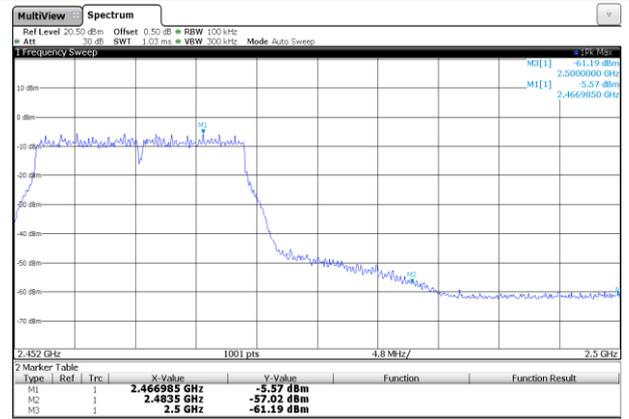


CH11-Bandedge


802.11n (H20)

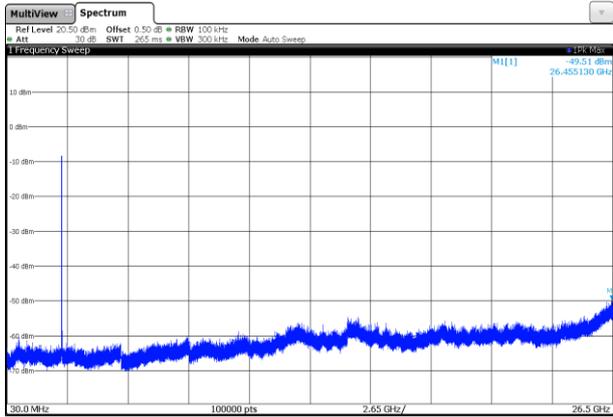

CH01-SE

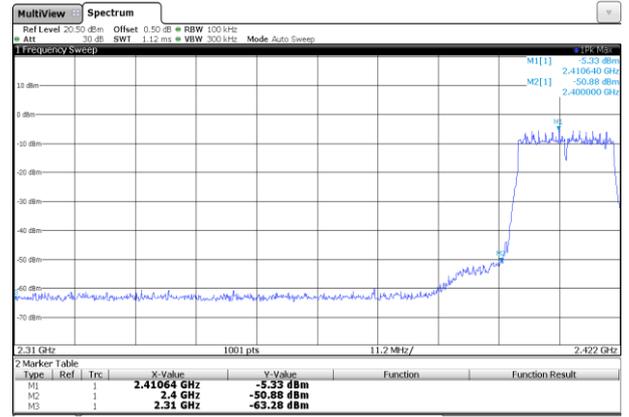


CH01-Bandedge

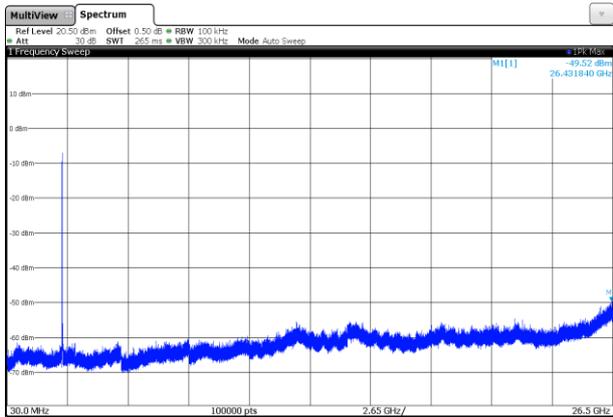


CH06

No Plot

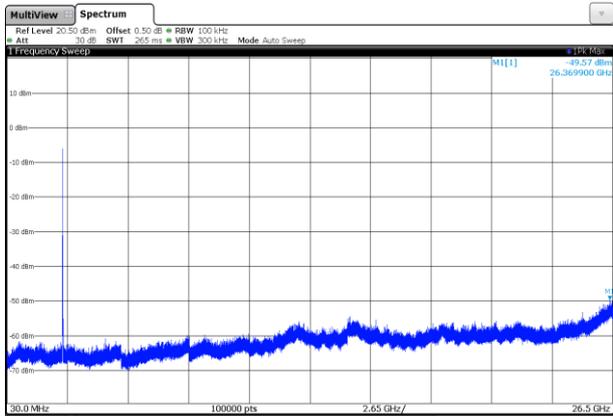

CH11-SE

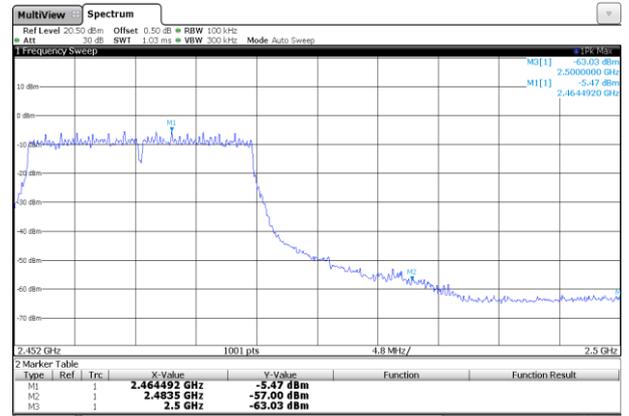

CH11-Bandedge

### 5.8. Spurious Emission (radiated)


#### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209


Frequency	Limit (dBuV/m @3m)	Value
30MHz-88MHz	40.00	Quasi-peak
88MHz-216MHz	43.50	Quasi-peak
216MHz-960MHz	46.00	Quasi-peak
960MHz-1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

#### TEST CONFIGURATION


➤ 9KHz ~30MHz

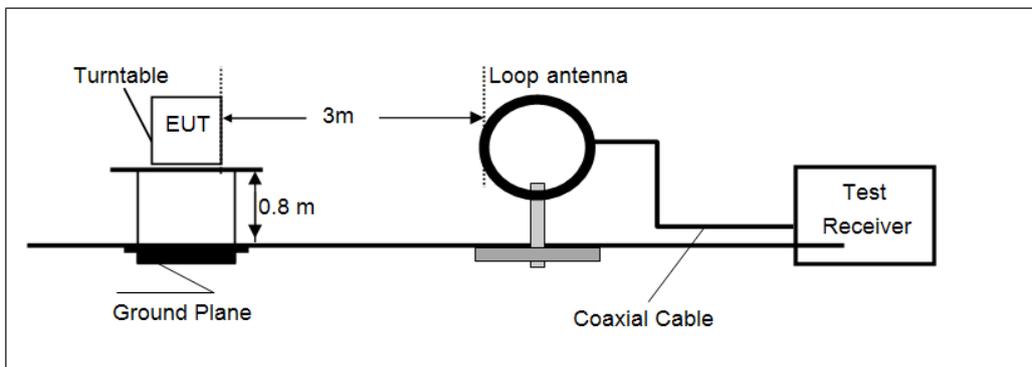

➤ 30MHz ~ 1GHz

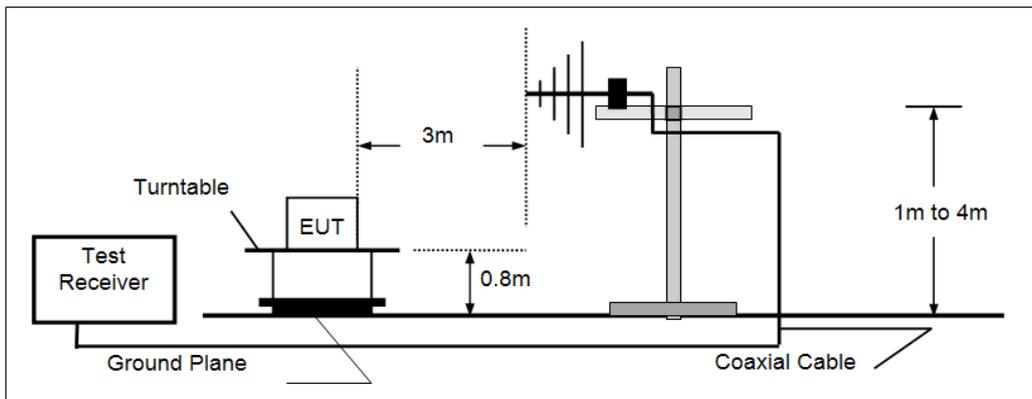

➤ Above 1GHz

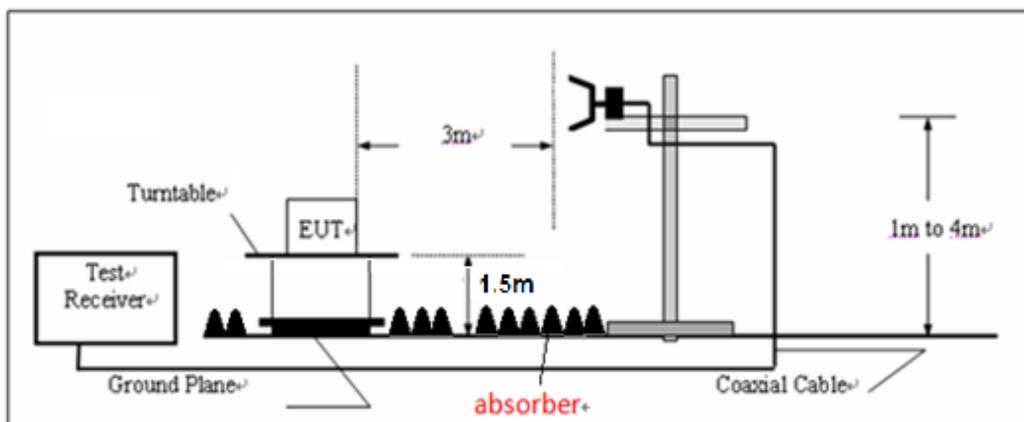

## TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10:2013 for compliance to FCC 47CFR 15.247 requirements.
2. The EUT is placed on a turn table which is 0.8 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna.
5. Use the following spectrum analyzer settings
  - (1) Span shall be wide enough to fully capture the emission being measured;
  - (2) Below 1GHz, RBW=120KHz, VBW=300KHz, Sweep=auto, Detector function=peak, Trace=max hold;  
*If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.*
  - (3) Above 1GHz, RBW=1MHz, VBW=3MHz Peak detector for Peak value  
RBW=1MHz, VBW=3MHz RMS detector for Average value.

## TEST MODE:

Please refer to the clause 3.3

## TEST RESULTS

**Passed**       **Not Applicable**

Note:


- 1) *Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor*
- 2) *“\*\*”, means this data is too weak instrument of signal is unable to test.*
- 3) *The emission levels of other frequencies are very lower than the limit and not show in test report.*

### ➤ **9kHz ~ 30MHz**

The EUT was pre-scanned the frequency band (9KHz~30MHz), found the radiated level lower than the limit, so don't show on the report.


➤ **30MHz ~ 1GHz**

Polarization: Vertical

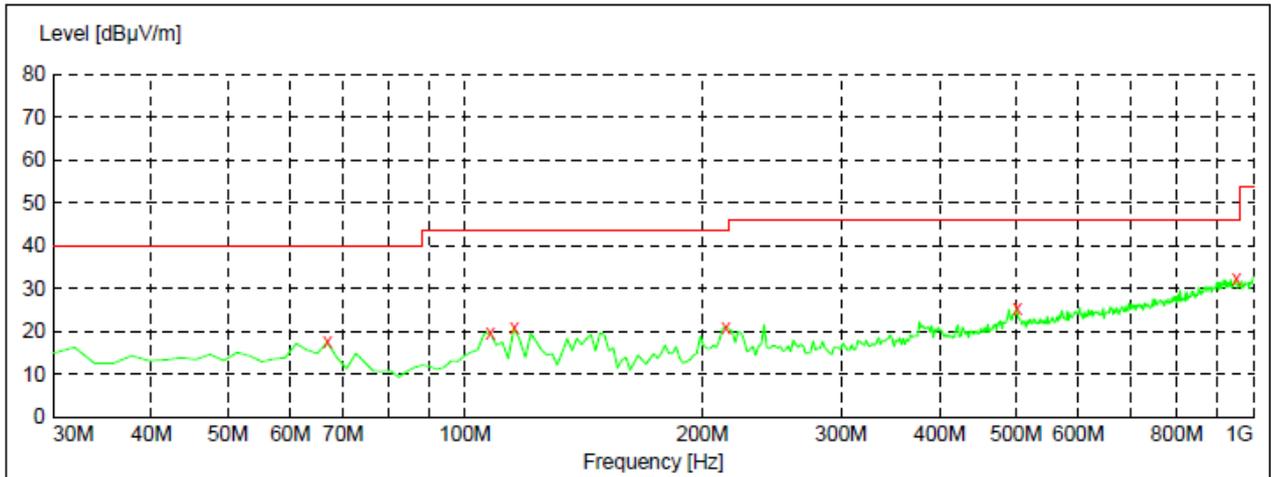

x x x MES GM1611246067\_red

Frequency MHz	Level dBµV/m	Transd dB	Limit dBµV/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization
66.860000	17.40	-18.4	40.0	22.6	QP	100.0	0.00	VERTICAL
107.600000	19.80	-17.7	43.5	23.7	QP	100.0	264.00	VERTICAL
115.360000	20.70	-18.1	43.5	22.8	QP	100.0	139.00	VERTICAL
214.300000	21.00	-15.5	43.5	22.5	QP	100.0	72.00	VERTICAL
501.420000	25.30	-7.7	46.0	20.7	QP	100.0	168.00	VERTICAL
951.500000	32.20	1.6	46.0	13.8	QP	100.0	72.00	VERTICAL

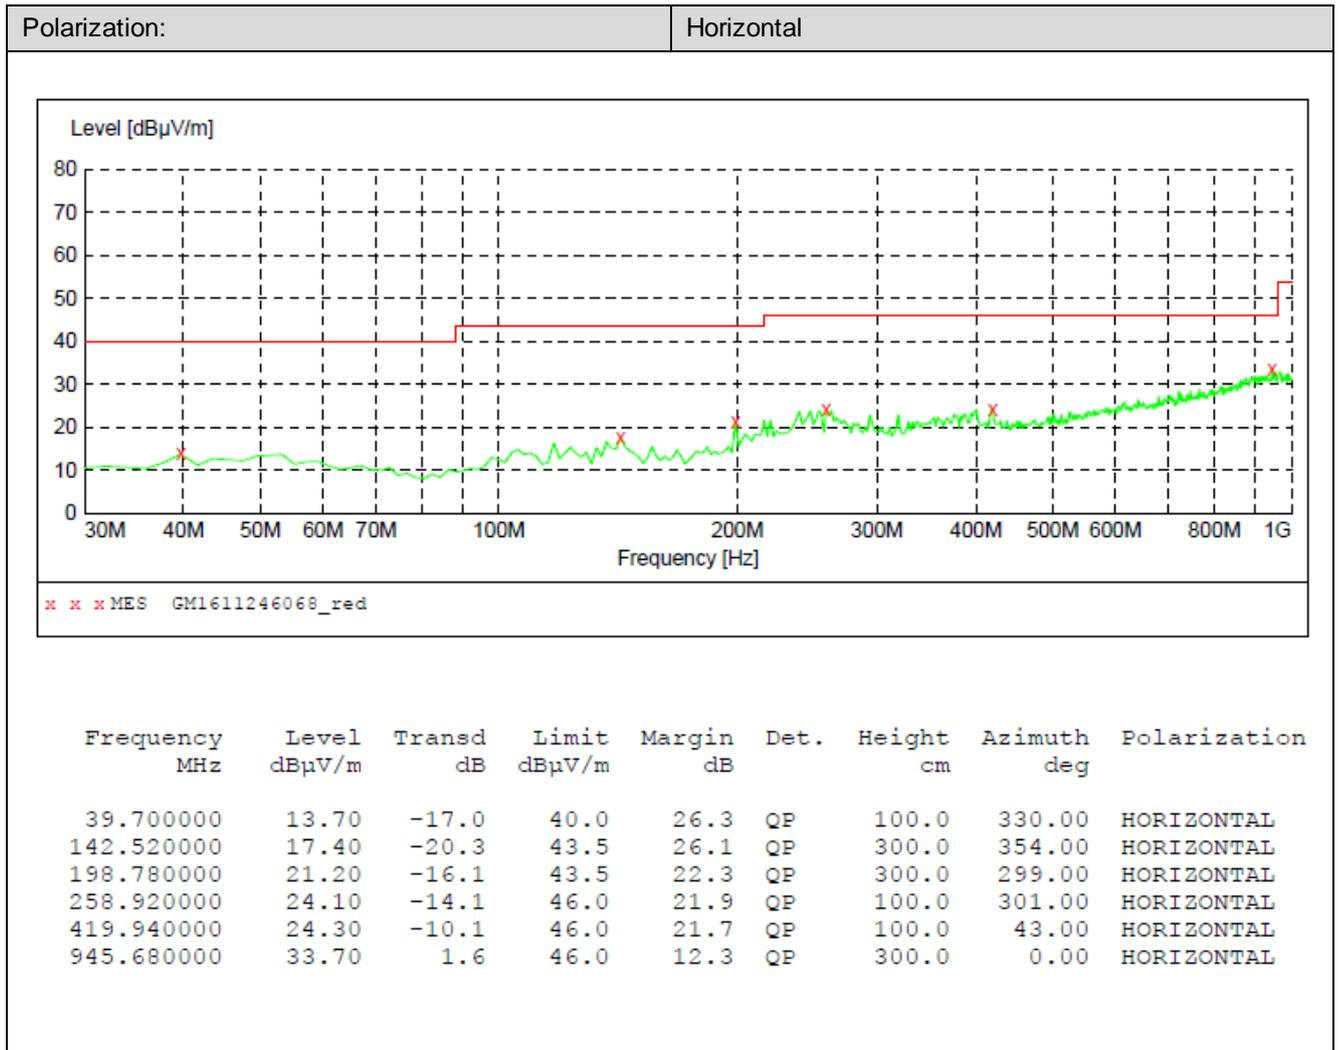

## ➤ Above 1GHz

802.11b					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1182.34	36.39	24.41	4.49	36.49	28.80	74.00	-45.20	Vertical	Peak
1746.83	36.19	25.44	5.69	37.05	30.27	74.00	-43.73	Vertical	
2595.57	36.48	28.02	7.21	37.73	33.98	74.00	-40.02	Vertical	
3024.64	40.57	28.51	8.21	37.99	39.30	74.00	-34.70	Vertical	
4986.69	38.95	31.19	9.33	38.64	40.83	74.00	-33.17	Vertical	
8342.26	31.99	37.06	11.25	38.14	42.16	74.00	-31.84	Vertical	
1770.79	36.39	25.51	5.75	37.08	30.57	74.00	-43.43	Horizontal	
2997.63	42.59	28.50	8.17	37.99	41.27	74.00	-32.73	Horizontal	
3504.49	41.58	28.72	8.80	37.99	41.11	74.00	-32.89	Horizontal	
3991.61	43.75	29.48	8.61	37.99	43.85	74.00	-30.15	Horizontal	
4986.45	40.00	31.19	9.33	38.64	41.88	74.00	-32.12	Horizontal	
5983.36	34.99	33.17	9.76	37.91	40.01	74.00	-33.99	Horizontal	

802.11b					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1175.56	36.39	24.40	4.47	36.48	28.78	74.00	-45.22	Vertical	Peak
1569.22	36.38	24.92	5.33	36.90	29.73	74.00	-44.27	Vertical	
2130.82	35.96	26.61	6.39	37.37	31.59	74.00	-42.41	Vertical	
2998.77	45.03	28.50	8.17	37.99	43.71	74.00	-30.29	Vertical	
3991.80	43.96	29.48	8.61	37.99	44.06	74.00	-29.94	Vertical	
6000.76	36.11	33.20	9.76	37.90	41.17	74.00	-32.83	Vertical	
1278.08	36.87	24.50	4.71	36.60	29.48	74.00	-44.52	Horizontal	
2999.00	41.67	28.50	8.17	37.99	40.35	74.00	-33.65	Horizontal	
3484.96	41.79	28.70	8.79	37.99	41.29	74.00	-32.71	Horizontal	
4002.91	40.15	29.50	8.61	37.99	40.27	74.00	-33.73	Horizontal	
5001.84	38.92	31.20	9.34	38.65	40.81	74.00	-33.19	Horizontal	
5983.88	36.00	33.17	9.76	37.91	41.02	74.00	-32.98	Horizontal	

802.11b					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1198.09	37.64	24.43	4.53	36.51	30.09	74.00	-43.91	Vertical	Peak
1817.26	36.29	25.64	5.83	37.11	30.65	74.00	-43.35	Vertical	
2107.62	36.63	26.52	6.35	37.35	32.15	74.00	-41.85	Vertical	
3504.21	38.76	28.72	8.80	37.99	38.29	74.00	-35.71	Vertical	
3990.79	41.36	29.48	8.61	37.99	41.46	74.00	-32.54	Vertical	
5002.05	37.72	31.20	9.34	38.65	39.61	74.00	-34.39	Vertical	
1426.65	36.86	24.64	5.03	36.76	29.77	74.00	-44.23	Horizontal	
1710.79	37.76	25.34	5.63	37.03	31.70	74.00	-42.30	Horizontal	
2998.67	42.42	28.50	8.17	37.99	41.10	74.00	-32.90	Horizontal	
4003.18	44.64	29.50	8.61	37.99	44.76	74.00	-29.24	Horizontal	
4987.59	37.94	31.19	9.33	38.64	39.82	74.00	-34.18	Horizontal	
5999.82	36.29	33.20	9.76	37.90	41.35	74.00	-32.65	Horizontal	

## Remark:

1. *Final Level=Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor*
2. *The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.*
3. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

802.11g					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1520.28	35.66	24.77	5.22	36.85	28.80	74.00	-45.20	Vertical	Peak
1817.41	36.54	25.64	5.83	37.11	30.90	74.00	-43.10	Vertical	
2997.91	43.22	28.50	8.17	37.99	41.90	74.00	-32.10	Vertical	
4986.58	37.43	31.19	9.33	38.64	39.31	74.00	-34.69	Vertical	
5983.70	34.16	33.17	9.76	37.91	39.18	74.00	-34.82	Vertical	
8687.71	32.74	37.48	11.42	38.04	43.60	74.00	-30.40	Vertical	
1330.50	36.05	24.55	4.83	36.66	28.77	74.00	-45.23	Horizontal	
1751.37	37.47	25.46	5.70	37.06	31.57	74.00	-42.43	Horizontal	
2150.23	36.24	26.68	6.42	37.38	31.96	74.00	-42.04	Horizontal	
3024.99	42.53	28.51	8.21	37.99	41.26	74.00	-32.74	Horizontal	
4987.66	38.45	31.19	9.33	38.64	40.33	74.00	-33.67	Horizontal	
9231.07	32.90	37.99	11.84	38.00	44.73	74.00	-29.27	Horizontal	

802.11g					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1141.78	35.67	24.36	4.38	36.44	27.97	74.00	-46.03	Vertical	Peak
1813.51	35.38	25.62	5.82	37.11	29.71	74.00	-44.29	Vertical	
3991.23	39.04	29.48	8.61	37.99	39.14	74.00	-34.86	Vertical	
6736.47	31.79	35.44	10.55	38.02	39.76	74.00	-34.24	Vertical	
9071.71	31.55	37.93	11.73	37.97	43.24	74.00	-30.76	Vertical	
13677.20	32.16	40.49	14.09	37.95	48.79	74.00	-25.21	Vertical	
1360.70	36.17	24.58	4.90	36.70	28.95	74.00	-45.05	Horizontal	
2082.77	34.60	26.43	6.30	37.32	30.01	74.00	-43.99	Horizontal	
3176.07	39.26	28.58	8.41	37.99	38.26	74.00	-35.74	Horizontal	
3980.83	41.60	29.47	8.62	37.99	41.70	74.00	-32.30	Horizontal	
4987.10	38.36	31.19	9.33	38.64	40.24	74.00	-33.76	Horizontal	
5966.63	35.14	33.15	9.75	37.92	40.12	74.00	-33.88	Horizontal	

802.11g					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1292.89	35.64	24.52	4.75	36.62	28.29	74.00	-45.71	Vertical	Peak
1726.47	36.93	25.39	5.66	37.04	30.94	74.00	-43.06	Vertical	
3659.73	37.46	28.97	8.74	37.99	37.18	74.00	-36.82	Vertical	
5002.49	38.36	31.20	9.34	38.65	40.25	74.00	-33.75	Vertical	
7717.18	30.33	36.43	11.09	38.20	39.65	74.00	-34.35	Vertical	
10948.70	29.45	39.14	13.19	38.14	43.64	74.00	-30.36	Vertical	
1278.39	36.30	24.50	4.71	36.60	28.91	74.00	-45.09	Horizontal	
1681.88	36.91	25.26	5.57	37.00	30.74	74.00	-43.26	Horizontal	
3167.03	39.64	28.57	8.39	37.99	38.61	74.00	-35.39	Horizontal	
5000.90	37.62	31.20	9.34	38.65	39.51	74.00	-34.49	Horizontal	
8082.45	31.06	36.80	11.24	38.22	40.88	74.00	-33.12	Horizontal	
12396.78	28.41	39.18	13.87	37.85	43.61	74.00	-30.39	Horizontal	

## Remark:

1. Final Level=Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n(H20)					CH01				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1144.14	38.11	24.37	4.39	36.45	30.42	74.00	-43.58	Vertical	Peak
1342.79	36.69	24.56	4.86	36.67	29.44	74.00	-44.56	Vertical	
3086.38	41.68	28.54	8.29	37.99	40.52	74.00	-33.48	Vertical	
3980.45	39.61	29.47	8.62	37.99	39.71	74.00	-34.29	Vertical	
4987.70	36.46	31.19	9.33	38.64	38.34	74.00	-35.66	Vertical	
9641.14	31.35	38.18	12.14	38.07	43.60	74.00	-30.40	Vertical	
1643.74	35.86	25.15	5.49	36.97	29.53	74.00	-44.47	Horizontal	
2997.42	43.16	28.50	8.17	37.99	41.84	74.00	-32.16	Horizontal	
3713.95	43.55	29.06	8.71	37.99	43.33	74.00	-30.67	Horizontal	
3992.26	44.55	29.48	8.61	37.99	44.65	74.00	-29.35	Horizontal	
5002.29	36.72	31.20	9.34	38.65	38.61	74.00	-35.39	Horizontal	
5965.18	37.28	33.15	9.75	37.92	42.26	74.00	-31.74	Horizontal	

802.11n(H20)					CH06				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
1361.98	35.55	24.58	4.90	36.70	28.33	74.00	-45.67	Vertical	Peak
2997.36	45.49	28.50	8.17	37.99	44.17	74.00	-29.83	Vertical	
3991.59	44.69	29.48	8.61	37.99	44.79	74.00	-29.21	Vertical	
4973.45	37.06	31.18	9.32	38.63	38.93	74.00	-35.07	Vertical	
5982.99	35.88	33.17	9.76	37.91	40.90	74.00	-33.10	Vertical	
8562.91	32.74	37.31	11.30	38.07	43.28	74.00	-30.72	Vertical	
2119.62	34.91	26.57	6.36	37.36	30.48	74.00	-43.52	Horizontal	
2997.91	41.71	28.50	8.17	37.99	40.39	74.00	-33.61	Horizontal	
3980.19	44.52	29.47	8.62	37.99	44.62	74.00	-29.38	Horizontal	
5002.02	36.81	31.20	9.34	38.65	38.70	74.00	-35.30	Horizontal	
5999.85	36.22	33.20	9.76	37.90	41.28	74.00	-32.72	Horizontal	
8994.60	30.61	37.90	11.67	37.95	42.23	74.00	-31.77	Horizontal	

802.11n(H20)					CH11				
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Margin Limit (dB)	Polarization	Test value
2132.04	38.99	26.61	6.39	37.37	34.62	74.00	-39.38	Vertical	Peak
3990.96	44.03	29.48	8.61	37.99	44.13	74.00	-29.87	Vertical	
5001.11	38.45	31.20	9.34	38.65	40.34	74.00	-33.66	Vertical	
6000.24	35.57	33.20	9.76	37.90	40.63	74.00	-33.37	Vertical	
9613.34	32.26	38.17	12.11	38.07	44.47	74.00	-29.53	Vertical	
10822.45	33.31	39.01	13.11	38.14	47.29	74.00	-26.71	Vertical	
1194.78	36.61	24.42	4.52	36.51	29.04	74.00	-44.96	Horizontal	
1721.57	35.98	25.37	5.65	37.03	29.97	74.00	-44.03	Horizontal	
2449.70	40.07	27.74	6.90	37.62	37.09	74.00	-36.91	Horizontal	
4986.19	38.39	31.19	9.33	38.64	40.27	74.00	-33.73	Horizontal	
7519.02	31.91	36.22	10.98	38.16	40.95	74.00	-33.05	Horizontal	
9836.60	31.59	38.30	12.33	38.11	44.11	74.00	-29.89	Horizontal	

## Remark:

1. Final Level=Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor
2. The peak level is lower than average limit(54 dBuV/m), this data is the too weak instrument of signal is unable to test.
3. The emission levels of other frequencies are very lower than the limit and not show in test report.


## 6. Test Setup Photos of the EUT

Conducted Emission




Radiated Emission




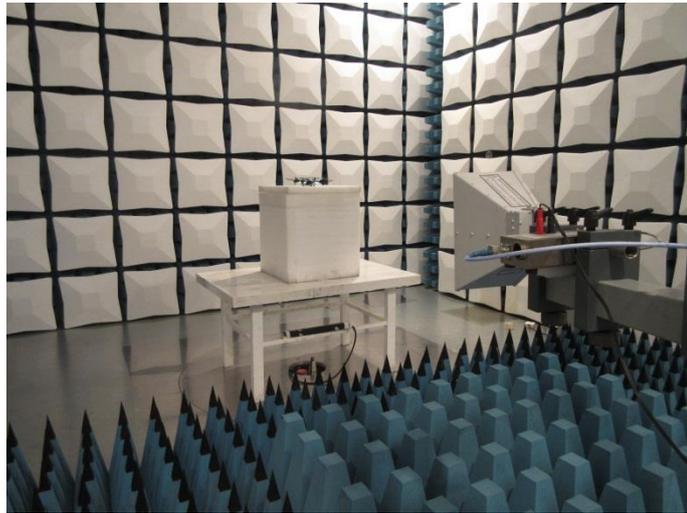

## 7. External and Internal Photos of the EUT

### External photos


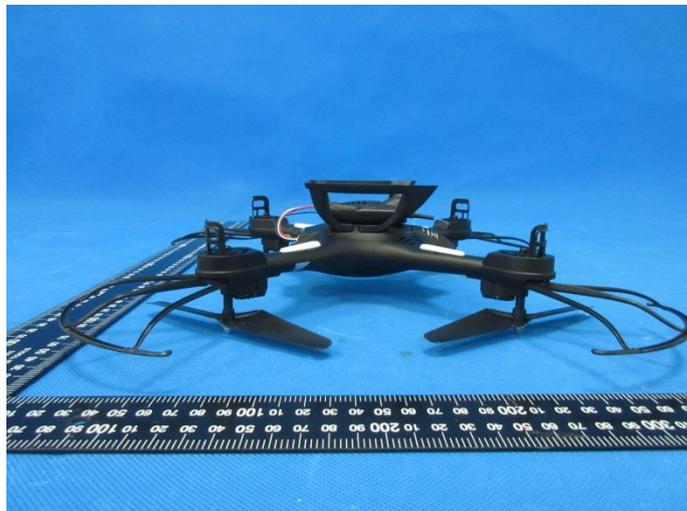



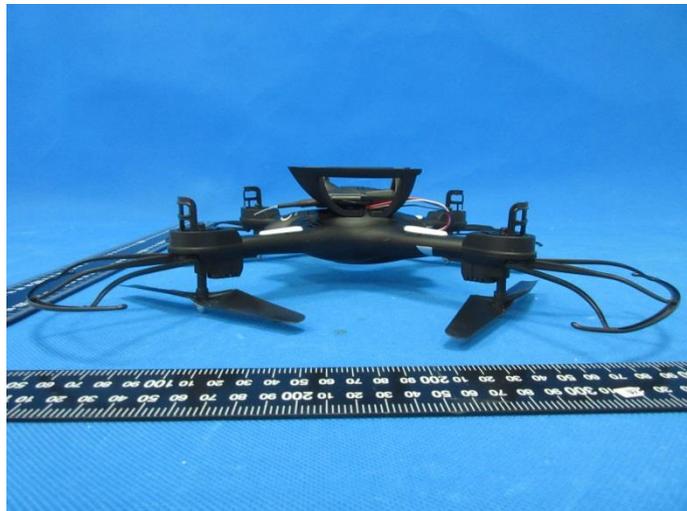








## Internal photos



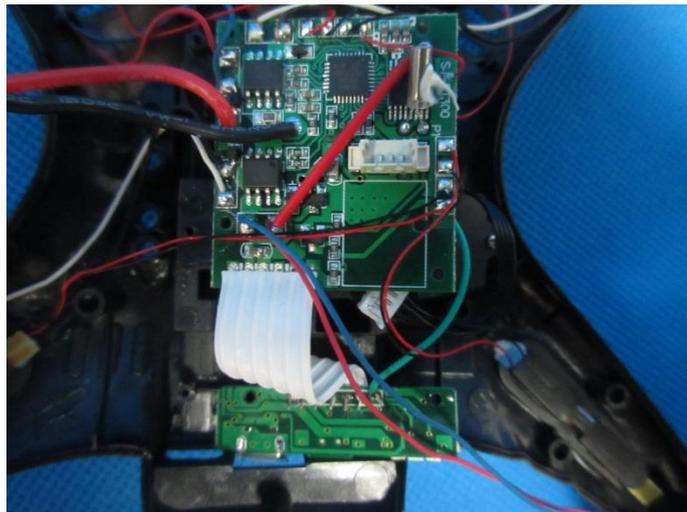
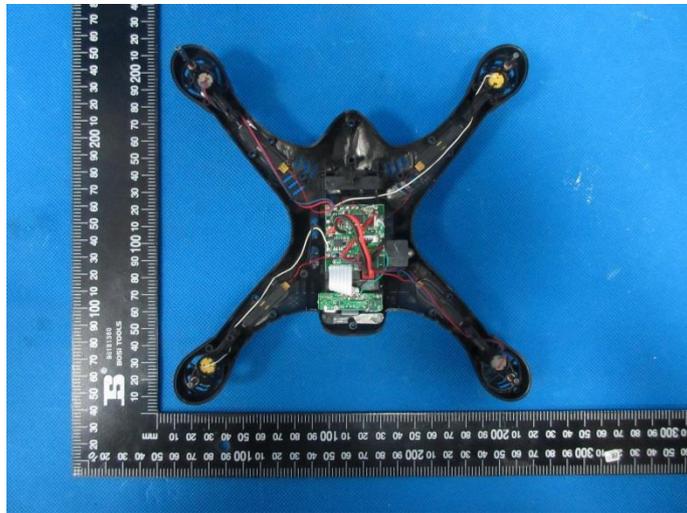


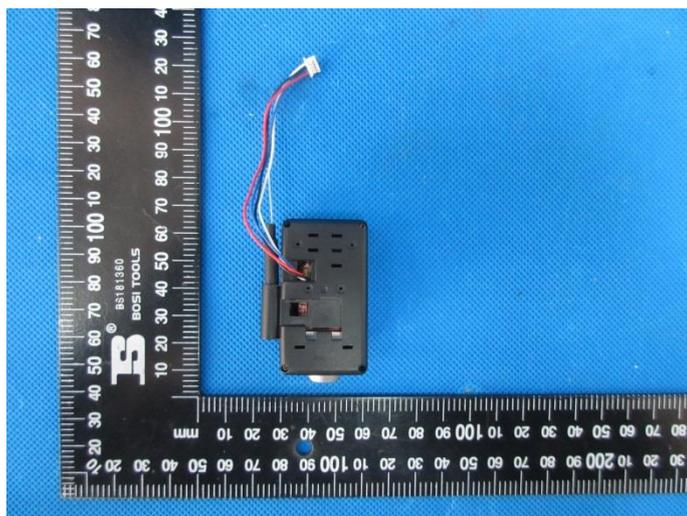
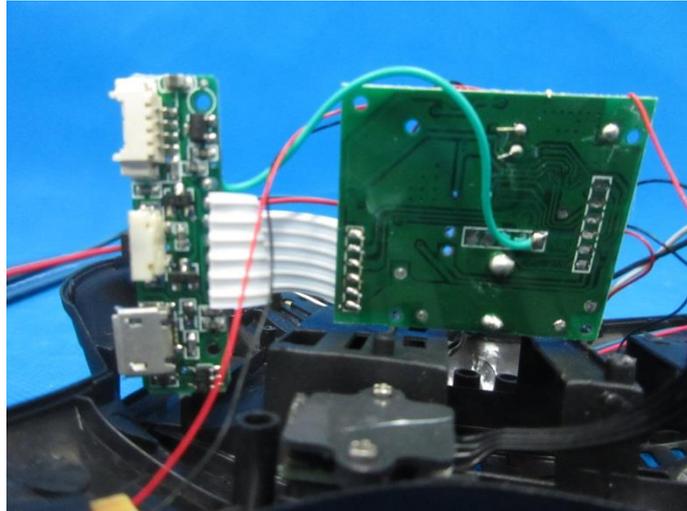


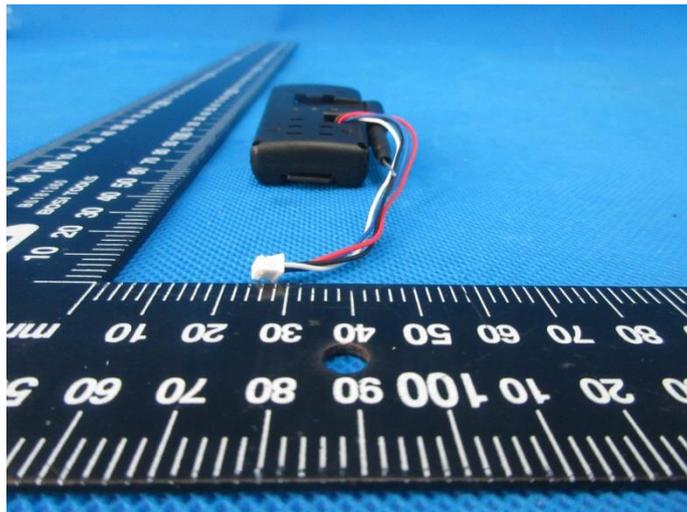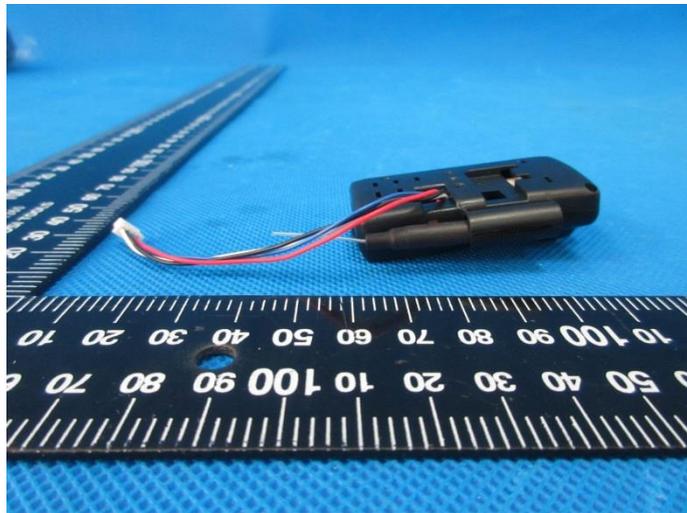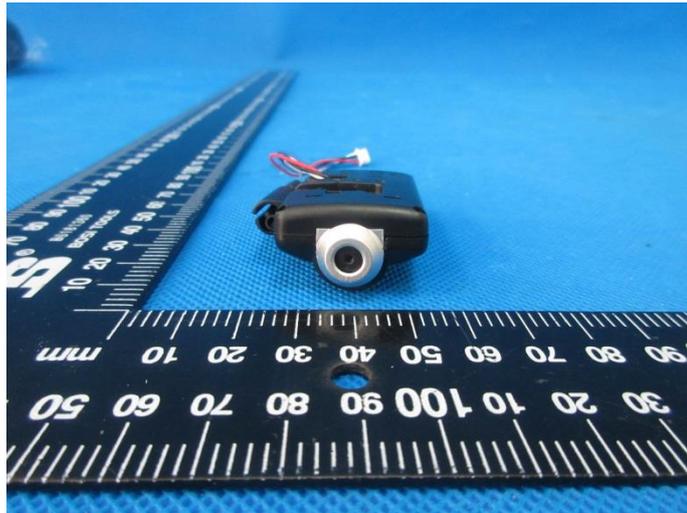

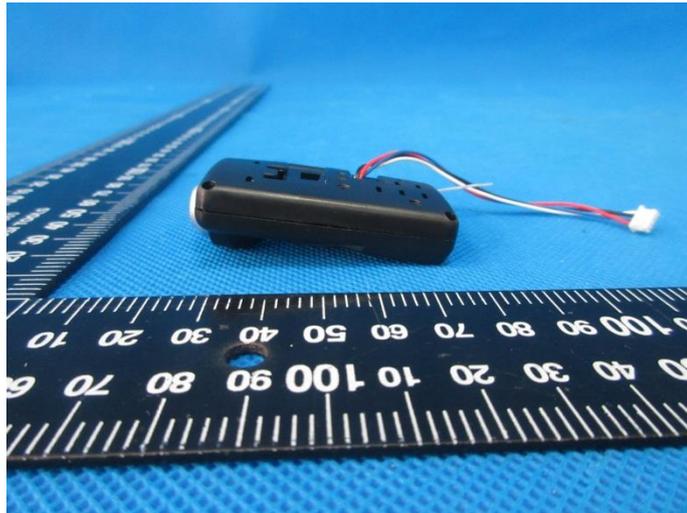


WiFi Antenna

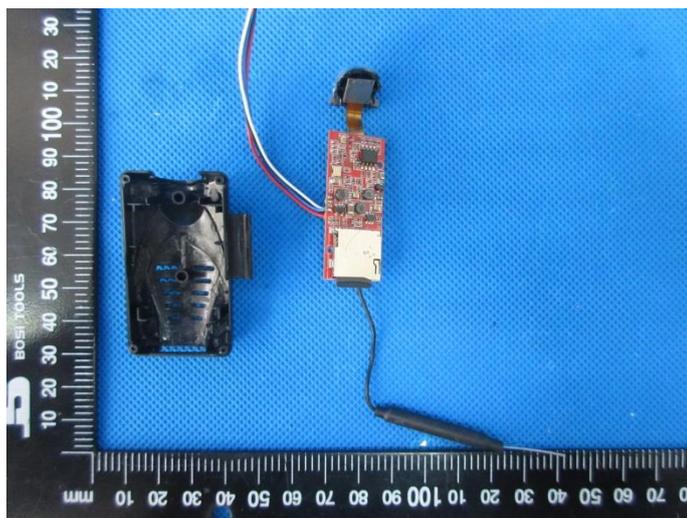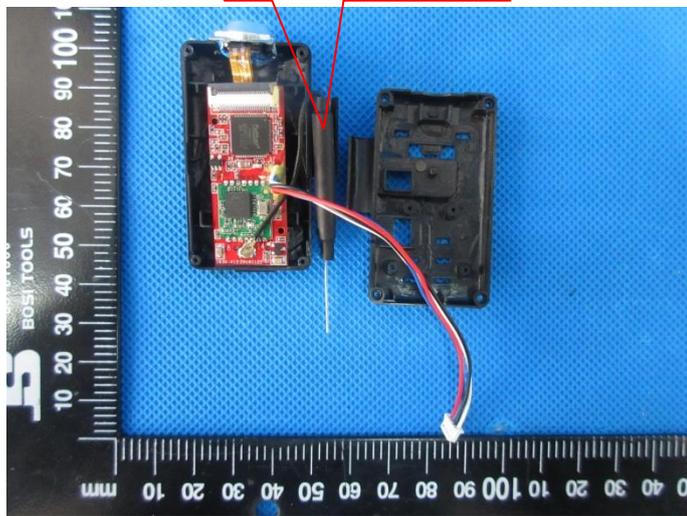

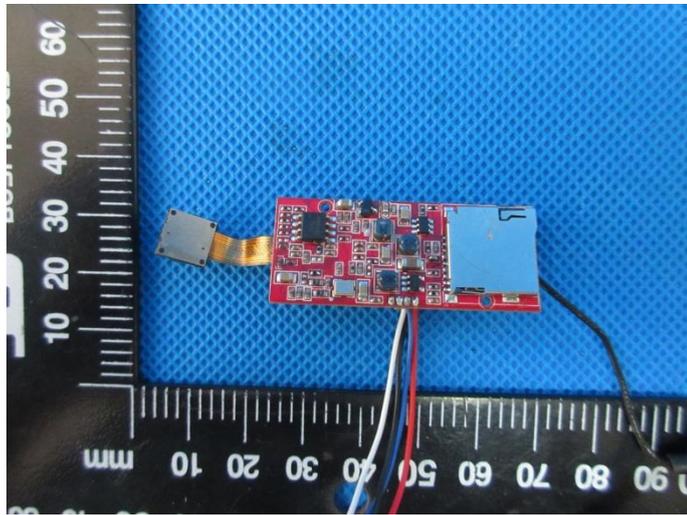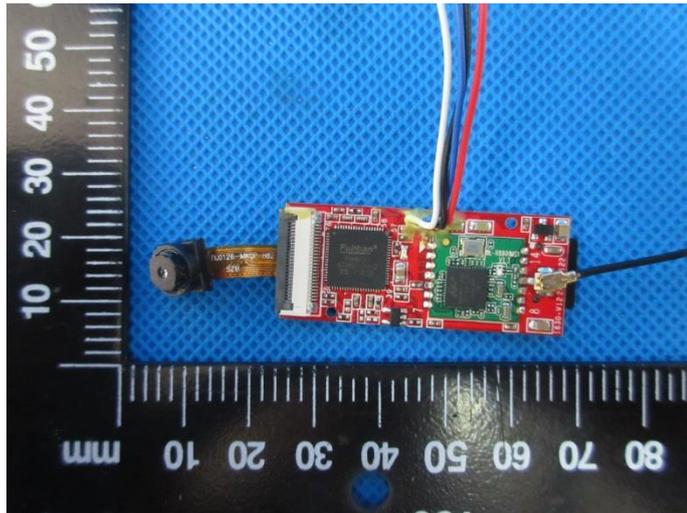

Model:FXJ0126-MKQP-H62

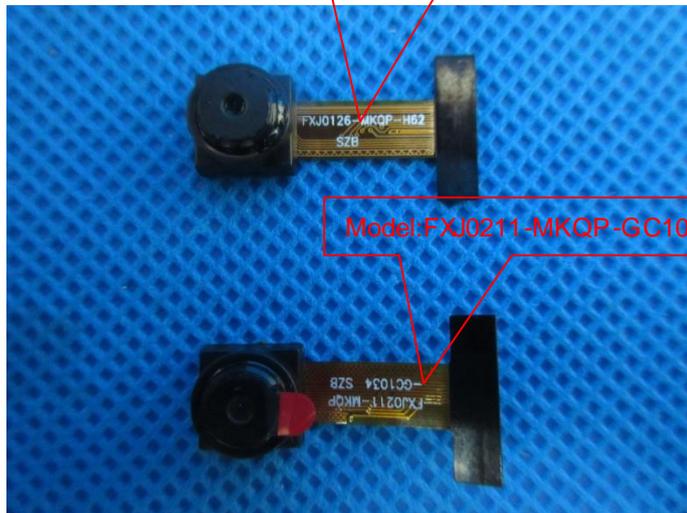

Model:FXJ0211-MKQP-GC1034



There are two kinds of product specifications of the camera.

***.....End of Report.....***