


SKU Listing Info:	93120082 NPI C by GE 5857626 Q3
Version# (date) PA:	3 (10-25-19) CN
Bar Code Spec:	☐ 100% No BWR ☐ 80% No BWR ☒ N/A
Insert (if shared):	None
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102799-1



Lighting Graphics Approval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spelling

☐ Website

☐ Proof against TDS request

☐ Graphics Printability

PC93120082 QUICK GUIDE

This art is supplied at 100% size. Do not resize, reshape or alter in any way.

FRONT

4.25"

Let's illuminate what your Smart Switch can do:

①

Turn off your lights when you're away from home.

Go to **C by GE app** and toggle the switch to off.

②

Automate your lights to turn on when you come home.

Go to **C by GE app** and schedule times to turn lights on and off under **create an automation**.

③

Control other C by GE bulbs in the room with your switch.

Go to **C by GE app**. Add bulbs and switches to a room under **create a room**. (sold separately)

PK-00102799-1

3.25"

BACK

4.25"

Connect to your Alexa or Google Assistant device to control your lights with your voice.

Try these voice commands:

Amazon Alexa

Alexa, turn off the living room.

Alexa, good morning.

Google Assistant

Hey Google, turn on the lights.

Hey Google, I'm leaving.

Touch Controls

Toggle

On/Off

Toggle up or down turns lights on or off

Reset Button

Remove wall plate, use pin to press reset button

LED Indicator Light

Paddle


LED Indicator Light

Reset Button

Remove wall plate, use pin to press reset button

On/Off

Pressing the bottom of the paddle turns lights on or off

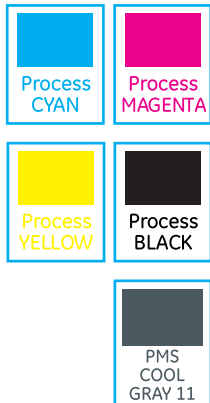

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1



Lighting Graphics Approval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading - Spelling

☐ Website

☐ Proof against TDS request

☐ Graphics Printability



Smart Wall Switch Installation Guide

On/Off Switch

Models
CSWONBLWFINN
CSWONBLPWFINN
CSWONBLTWFINN

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

4.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Compatibility Requirements

- Rating 120V AC 60Hz

Neutral wire is not required (Wire is usually white or grey and is not required)

Ground wire is required (Wire is usually green, green with a yellow stripe, or copper) ⚡

Wi-Fi 802.11 b/g/n @ 2.4 GHZ is required
- Works with halogen, incandescent and LED bulbs, including C by GE Smart Bulbs.

LED up to 1.25 amps

Incandescent/halogen up to 5 amps

4.25"

! IMPORTANT NOTE ON 3-WAY WIRING:
Some lights have one wall switch, while others are controlled by two or more wall switches (such as stair lights, which have a switch at both the top and bottom of the stairs). If your lights have more than one switch (called a 3-way), we’ve created instructions for how to install and enable the capability.

Visit cbyge.com/switch-support for 3-way installation instructions and how-to-videos.

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Let's Do It

INCLUDED

On/Off Switch

Wall Plate

4 Wire Nuts

Bulb Adaptor

2 Phillips Face Plate Screws

Line/Load Line/Load Ground

Wire Labels

Phillips Screwdriver

Needle Nose Pliers
(recommended)

Voltage Tester
(recommended)

Approximately
30 minutes of your day
to install and setup
the switch

4.25"

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig

☐ Website

☐ Proof against TDS request

☐ Graphics Printability

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE

PACKAGING GRAPHICS

☐ Proof Reading – Spellig

☐ Website

☐ Proof against TDS request

☐ Graphics Printability

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

You Got This!

And we're here to help.
For in-depth instructional videos and a
guided tour through the installation, go to
cbyge.com/switch-support.

8

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE


4.25"

BEFORE YOU DO ANYTHING: Step 1
Turn Off The Power!

Turn off the power for the
switch location at the circuit
breaker box.

Test existing switch by toggling
switch on/off, ensuring lights do
not turn on.

Now, follow these setup steps
for a single gang switch.

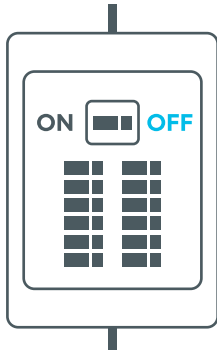

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

9

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

IF APPLICABLE

Install adaptor onto
C by GE smart or
non-dimmable LED bulbs


C by GE smart switches and dimmers are compatible with C by GE smart bulbs. To keep your C by GE bulbs always available and connected, the included bulb adaptor should be used to have full control of C by GE bulbs on the same circuit as the switch.

NOTE: Only one bulb adaptor is needed per switch, even if there are multiple C by GE bulbs on the circuit.

4.25"

Simply twist the bulb adaptor onto the base of one C by GE smart bulb and Screw into the fixture.

NOTE: Keep your bulb adaptor handy. Even if you don't have C by GE bulbs, the bulb adaptor can be used to improve the performance of some traditional LED bulbs if you begin experiencing any performance issues. If installing in a recessed can application, you may need to adjust the depth of the recessed can to ensure the bulb is flush. Go to: cbyge.com/switch-support for more helpful tips on when to use the bulb adaptor.

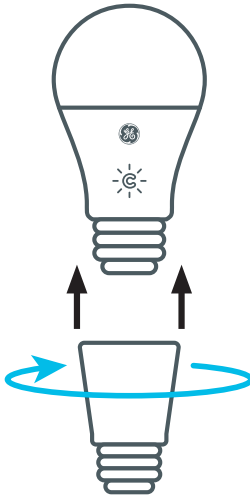

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

- STEP 2
- Remove Your Old Switch
1. Remove the existing wall plate and switch from the wall.


2. Use voltage tester on the black wires to confirm power to the switch is off (recommended).

3. Before disconnecting the wires from the wall, label each with the provided wire labels.

⚠ Ground wire is required. If you don't have this wire, the C by GE switch is not compatible.

4. Disconnect wires and remove existing switch.

4.25"

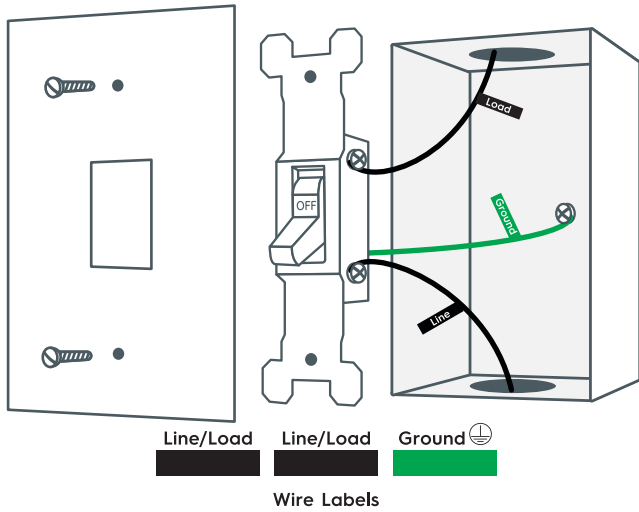

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabiljt		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabiljt		

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

STEP 3

Connect The Wires

NOTE: Both black wires on the switch are interchangeable and can be connected to either the load or line wire from the wall.

1. Connect the first line/load (black) wire on the switch to the line or load (black label) wire from the wall.
2. Connect the second line/load (black) wire on the switch to the line or load (black label) wire from the wall.

3. Connect the ground (⊕)(green) wire on the switch with the ground (green label) wire from the wall.

4. Cap the 3-way/multi-way traveler wire (if applicable).
For 3-way switch setup, visit cbyge.com/switch-support


⚠Attention: Incorrectly connecting the Ground wire from the wall to the Ground wire on the switch will damage the product.

5. Cap the neutral wire from the wall (if applicable). Neutral wire is not required to operate this switch.

14


For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

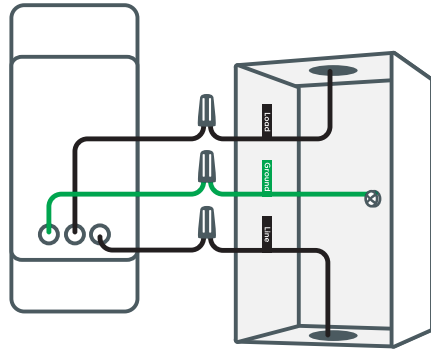

USING WIRE NUTS

1. Insert wires into wire nut.
2. Turn wire nut clockwise.
3. Pull gently on wires to test connection.



For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

15

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

STEP 4
Fit Wires Into
Wall Box

Neatly push the wires back into the box, rotating the switch so it's oriented according to the image.

16 For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE 17

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

STEP 5


Secure The Switch

Using a Phillips screwdriver and the screws provided, secure the switch to the wall until level and flush. Then snap the faceplate cover onto the bracket.

18

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

4.25"

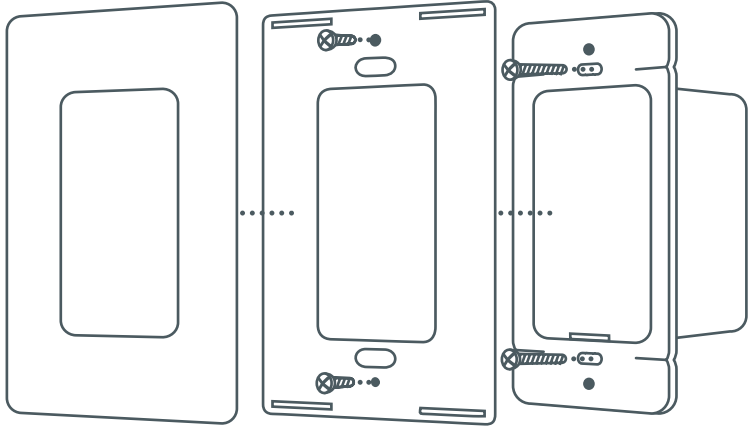

For Help, Go To: cbyge.com/switch-support or call 1-844-30C-BYGE

19

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS#quest ☐ Graphics Printabilijt		

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.


3.25"

STEP 6

Turn The Power
Back On

After the switch is secured and faceplate mounted, turn the power back on at the circuit breaker box.

At the switch, LED indicator light or light ring will flash blue indicating the device is wired correctly and the device is in setup mode. Press any button on the switch to enable setup mode if setup mode times out.

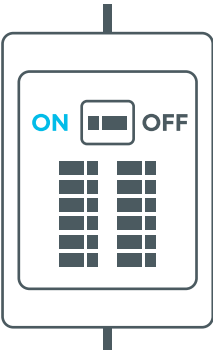

4.25"

LED indicator light or light ring will flash blue until the switch is added to the C by GE app.

LED indicator light or light ring will flash red if the circuit is overloaded. Max load rating 1.25 amps for LED and 5 amps for incandescent/halogen.

LED indicator light or light ring will not illuminate if wired incorrectly.

IF LIGHTS DON'T TURN ON:

1. Check that power to the switch is on at the breaker.
2. Turn power off at the breaker, return to the switch to confirm the wires are securely and properly wired according to the installation guide.
3. Go to cbyge.com/switch-support for more troubleshooting.

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

Process
CYAN

Process
MAGENTA

Process
YELLOW

Process
BLACK

PMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1

Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS
☐ Proof Reading – Spellig ☐ Website ☐ Proof against TDS request ☐ Graphics Printability		

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

Additional Information and Warnings

FCC Compliance Statement Compliance Notice:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

4.25"

This device complies with Part 15 of the FCC Rules and Industry Canada license-exempt RSS standard(s). Operation is subject to the following two conditions:

1. This device may not cause harmful interference.
2. This device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications that are not expressly approved by the manufacturer could void the user's authority to operate the equipment.

RF Exposure Information:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 8 inches during normal operation.

RF Exposure Statement:

This equipment complies with IC RSS-102 radiation exposure limits set forth for an uncontrolled environment. This transmitter must be installed to provide a separation distance of at least 8 inches from all persons and must not be collocated or operating in conjunction with any other antenna or transmitter.

4.25"

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"



Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS

☐ Proof Reading – Spelling

☐ Website

☐ Proof against TDS request

☐ Graphics Printability



Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED DATE	SIGNATURE	PACKAGING GRAPHICS

☐ Proof Reading – Spelling

☐ Website

☐ Proof against TDS request

☐ Graphics Printability

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

4.25" 4.25"

Process
CYANProcess
MAGENTAProcess
YELLOWProcess
BLACKPMS
COOL
GRAY 11

Job#/Project Name:	93120082 NPI C by GE 5857626 Q3
Version# (date)	7 (10-31-19) CN
Bar Code:	N/A
Insert:	NONE
Supplier Project#:	N/A
Print Method:	☐ Offset/Litho ☐ Flexo (direct)
GE DIE#:	NOT CONTROLLED
PK#:	PK-00102798-1



Lighting Graphics App roval

Approvals designate all items on checklist have been reviewed & are correct in addition to other organizational responsibilities.

REVIEWED
DATE

SIGNATURE


PACKAGING GRAPHICS

☐ Proof Reading - Spelling☐ Website☐ Proof against TDS request☐ Graphics Printability

PC93120082 INS

This art is supplied at 100% size.
Do not resize, reshape or alter in any way.

3.25"

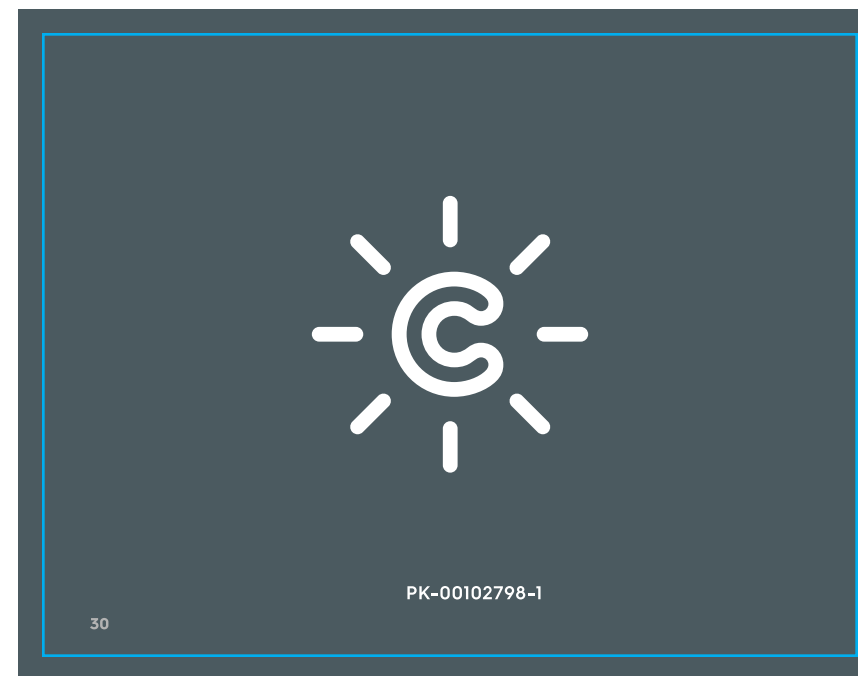

4.25"