

FCC RADIO TEST REPORT

FCC ID: 2A4A7-PTM-102

Sample : Automatic Pet Feeder

Trade Mark : N/A

Main Model : PTM-102

Additional Model : PTM-202, PTM-302, PTM-402, PTM-502, M12

Report No. : UNIA24072507ER-61

Prepared for

Shenzhen Ipetmon Creative Technology Co., Ltd.

101, No. 93 Boguang Second Road, Shangcun Community, Gongming Street,
Guangming District, Shenzhen

Prepared by

Shenzhen United Testing Technology Co., Ltd.

D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community,
Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China

TEST RESULT CERTIFICATION

Applicant.....: Shenzhen Ipetmon Creative Technology Co., Ltd.
Address.....: 101, No. 93 Boguang Second Road, Shangcun Community,
Gongming Street, Guangming District, Shenzhen
Manufacturer.....: Shenzhen Ipetmon Creative Technology Co., Ltd.
Address.....: 101, No. 93 Boguang Second Road, Shangcun Community,
Gongming Street, Guangming District, Shenzhen

Product description

Product.....: Automatic Pet Feeder
Trade Mark.....: N/A
Model Name.....: PTM-102, PTM-202, PTM-302, PTM-402, PTM-502, M12
Test Methods.....: FCC Rules and Regulations Part 15 Subpart C Section 15.247
ANSI C63.10: 2013

This device described above has been tested by Shenzhen United Testing Technology Co., Ltd., and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
This report shall not be reproduced except in full, without the written approval, this document may be altered or revised by Shenzhen United Testing Technology Co., Ltd., personnel only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests.....: July 26, 2024 ~ Aug. 08, 2024
Date of Issue.....: Aug. 08, 2024
Test Result.....: Pass

Prepared by:




Jason Ye/Editor

Reviewer:



Kelly Cheng/Supervisor

Approved & Authorized Signer:



Liuze/Manager

Table of Contents	Page
1 TEST SUMMARY	5
TEST PROCEDURES AND RESULTS	5
TEST FACILITY	6
MEASUREMENT UNCERTAINTY	7
ENVIRONMENTAL CONDITIONS	7
2 GENERAL INFORMATION	8
GENERAL DESCRIPTION OF EUT	8
CARRIER FREQUENCY OF CHANNELS	9
TEST MODE	9
DESCRIPTION OF THE TEST MODES	9
TEST SETUP	10
DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	10
MEASUREMENT INSTRUMENTS LIST	11
3 CONDUCTED EMISSION	12
TEST LIMIT	12
TEST SETUP	12
TEST PROCEDURE	13
TEST RESULT	13
4 RADIATED EMISSION	16
TEST LIMIT	16
TEST SETUP	17
TEST PROCEDURE	18
TEST RESULT	18
5 6dB & 99% OCCUPIED BANDWIDTH	36
TEST LIMIT	36
TEST PROCEDURE	36
TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	36
MEASUREMENT EQUIPMENT USED	36
TEST RESULT	36
6 POWER SPECTRAL DENSITY	37
TEST LIMIT	37
TEST PROCEDURE	37
TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	37
EQUIPMENT USED	37
TEST RESULT	37

Table of Contents	Page
7 AVERAGE OUTPUT POWER	38
TEST LIMIT	38
TEST PROCEDURE	38
TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	38
EQUIPMENT USED	38
TEST RESULT	38
8 OUT OF BAND EMISSIONS	39
TEST LIMIT	39
TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	39
TEST PROCEDURE	39
MEASUREMENT EQUIPMENT USED	39
TEST RESULT	39
9 ANTENNA REQUIREMENT	40
10 PHOTO OF TEST	41
11 EUT Constructional Details	43
12 Appendix	44

1 TEST SUMMARY

TEST PROCEDURES AND RESULTS

Item	FCC Rules	Description Of Test	Result
1	FCC Part 15.207	Conducted Emission	Pass
2	FCC Part 15.209(a)	Radiated Emission	Pass
3	FCC Part 15.247(a)(2)	6dB&99%Occupied Bandwidth	Pass
4	FCC Part 15.247(e)	Power Spectral Density	Pass
5	FCC Part 15.247(b)	Average Output Power	Pass
6	FCC Part 15.247(d)	Out Of Band Emissions	Pass
7	FCC Part 15.247(d)	Conducted Spurious Emission	Pass
8	FCC Part 15.203	Antenna Requirement	Pass

Note:

“N/A” denotes test is not applicable in this Test Report.

Test Firm : Shenzhen United Testing Technology Co., Ltd.
Address : D101&D401, No. 107, Kaicheng High-Tech Park, Taoyuan Community,
Dalang Sub-District, Longhua District, Shenzhen, Guangdong, China

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19. The testing quality system of our laboratory meets with ISO/IEC-17025 requirements. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

A2LA Certificate Number: 4747.01

The EMC Laboratory has been accredited by A2LA, and in compliance with ISO/IEC 17025:2017 General Requirements for testing Laboratories.

FCC Registration Number: 674885

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission.

IC Registration Number: 31584

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada.

MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

A. Conducted Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
UNI	ANSI	9kHz ~ 150kHz	2.96
		150kHz ~ 30MHz	2.44

B. Radiated Measurement:

Test Site	Method	Measurement Frequency Range	U, (dB)
UNI	ANSI	9kHz ~ 30MHz	2.50
		30MHz ~ 1000MHz	4.80
		1000MHz ~ 18000MHz	4.13

C. RF Conducted Method:

Item	Measurement Uncertainty
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$

ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

	NORMAL CONDITIONS	EXTREME CONDITIONS
Temperature range (°C)	15 - 35	-20 - 50
Relative humidity range	20 % - 75 %	20 % - 75 %
Pressure range (kPa)	86 - 106	86 - 106

Note: The Extreme Temperature and Extreme Voltages declared by the manufacturer.

2 GENERAL INFORMATION

GENERAL DESCRIPTION OF EUT

Product:	Automatic Pet Feeder
Trade Mark:	N/A
Main Model:	PTM-102
Additional Model:	PTM-202, PTM-302, PTM-402, PTM-502, M12
Model Difference:	All model's the function, software and electric circuit are the same, only with a product color, capacity, and model named different. Test sample model: PTM-102
FCC ID:	2A4A7-PTM-102
Operation Frequency:	802.11b/g/n20: 2412~2462MHz
Number of Channels:	802.11b/g/n20: 11CH
Average Conducted Output Power:	21.189dBm
Modulation Type:	CCK, OFDM, DBPSK, DAPSK
Antenna Type:	FPC Antenna
Antenna Gain:	2.96 dBi
Battery:	DC 6V
Adapter:	MODEL:YMK-10W050200 INPUT:100-240VAC 50/60Hz 0.3A MAX OUTPUT:5V DC 2000mA
Power Source:	DC 5.0V from adapter or DC 6V from Li-battery

CARRIER FREQUENCY OF CHANNELS

Channel List for 802.11b/g/n(HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

TEST MODE

The EUT was programmed to be in continuously transmitting mode.

Channel List for 802.11b/g/n((HT20)		
Test Channel	EUT Channel	Test Frequency (MHz)
Low	CH01	2412
Middle	CH06	2437
High	CH11	2462

DESCRIPTION OF THE TEST MODES


During the measurement the environmental conditions were within the listed ranges:

Voltage	Normal Voltage	DC 6V
	High Voltage	DC 6.6V
	Low Voltage	DC 5.4V
Other	Normal Temperature	24°C
	Relative Humidity	55 %
	Air Pressure	989 hPa


Note: All modes were test at Normal Voltage, High Voltage, and Low Voltage, only the worst results of Normal Voltage was reported in the test report.

TEST SETUP

Operation of EUT during Conducted and Radiation testing:



Operation of EUT during RF Conducted testing:

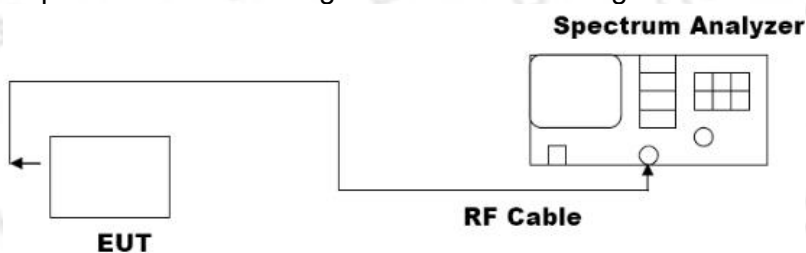

DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Cable Length(m)	Note
1	Monitor pet feeder	PTM-102	--	EUT
2	Adapter	MDY-11-EX	--	AE

Note:

1. The support equipment was authorized by Declaration of Confirmation.
2. All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

MEASUREMENT INSTRUMENTS LIST

Item	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
Conduction Emissions Measurement					
1	Conducted Emission Test Software	EZ-EMC	Ver.CCS-3A1-CE	N/A	N/A
2	AMN	Schwarzbeck	NNLK8121	8121370	2025.06.11
3	AAN	TESEQ	T8-Cat6	38888	2025.06.11
4	Pulse Limiter	CYBRTEK	EM5010	E115010056	2025.06.11
5	EMI Test Receiver	Rohde&Schwarz	ESCI	101210	2025.06.11
Radiated Emissions Measurement					
1	Radiated Emission Test Software	EZ-EMC	Ver.CCS-03A1	N/A	N/A
2	Horn Antenna	Sunol	DRH-118	A101415	2025.07.14
3	Broadband Hybrid Antenna	Sunol	JB1	A090215	2025.07.28
4	PREAMP	HP	8449B	3008A00160	2025.06.11
5	PREAMP	HP	8447D	2944A07999	2025.06.11
6	EMI TEST RECEIVER	Rohde&Schwarz	ESR3	101891	2025.06.11
7	VECTOR Signal Generator	Rohde&Schwarz	SMU200A	101521	2025.06.11
8	Signal Generator	Agilent	E4421B	MY4335105	2025.06.11
9	MXA Signal Analyzer	Agilent	N9020A	MY50510140	2025.06.11
10	MXA Signal Analyzer	Keysight	N9020A	MY51110104	2025.06.11
11	RF Power sensor	DARE	RPR3006W	15I00041SNO88	2025.06.11
12	RF Power sensor	DARE	RPR3006W	15I00041SNO89	2025.06.11
13	RF power divider	Anritsu	K241B	992289	2025.06.11
14	Wideband radio communication tester	Rohde&Schwarz	CMW500	154987	2025.06.11
15	Active Loop Antenna	Com-Power	AL-130R	10160009	2025.06.11
16	Broadband Hybrid Antennas	Schwarzbeck	VULB9163	VULB9163#958	2024.09.22
17	Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1680	2025.07.14
18	Horn Antenna	A-INFOMW	LB-180400-KF	J211060660	2024.07.14
19	Microwave Broadband Preamplifier	Schwarzbeck	BBV 9721	100472	2024.09.22
20	Signal Generator	Agilent	N5183A	MY47420153	2024.09.22
21	Spectrum Analyzer	Rohde&Schwarz	FSP 40	100501	2024.09.22
22	Power Meter	KEYSIGHT	N1911A	MY50520168	2024.09.22
23	Frequency Meter	VICTOR	VC2000	997406086	2024.09.22
24	DC Power Source	HYELEC	HY5020E	055161818	2024.09.22

TEST LIMIT

Frequency (MHz)	Maximum RF Line Voltage (dBμV)			
	CLASS A		CLASS B	
	Q.P.	Ave.	Q.P.	Ave.
0.15~0.50	79	66	66~56*	56~46*
0.50~5.00	73	60	56	46
5.00~30.0	73	60	60	50

For intentional device, according to §15.207(a) Line Conducted Emission Limit is same as above table.

The diagram illustrates the experimental setup for EMI measurements. It features two tables. The left table has a G.R.P. (Grounded Reference Plane) and a table height of 0.8m. A LISN (Line Impedance Stabilization Network) is connected between the two tables. The distance from the EUT to the LISN is 0.4m, and the distance from the EUT to the table edge is 0.8m. The right table has a RECEIVER connected to the LISN. The receiver is a computer system consisting of a monitor, a tower unit, and a keyboard.

TEST PROCEDURE

1. The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. The EUT is placed on a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10: 2013.
2. Support equipment, if needed, was placed as per ANSI C63.10: 2013.
3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10: 2013.
4. If a EUT received DC power from the USB Port of Notebook PC, the PC's adapter received AC120V/60Hz power through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
5. All support equipments received AC power from a second LISN, if any.
6. The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.


TEST RESULT

PASS

Remark:

1. All modes were tested at AC 120V and 240V, only the worst result of AC 120V was reported.
2. All modes were test at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported.


Temperature:	26°C	Relative Humidity:	60%
Test Date:	July 26, 2024	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Line
Test Mode:	Transmitting mode of 802.11b 2412MHz		

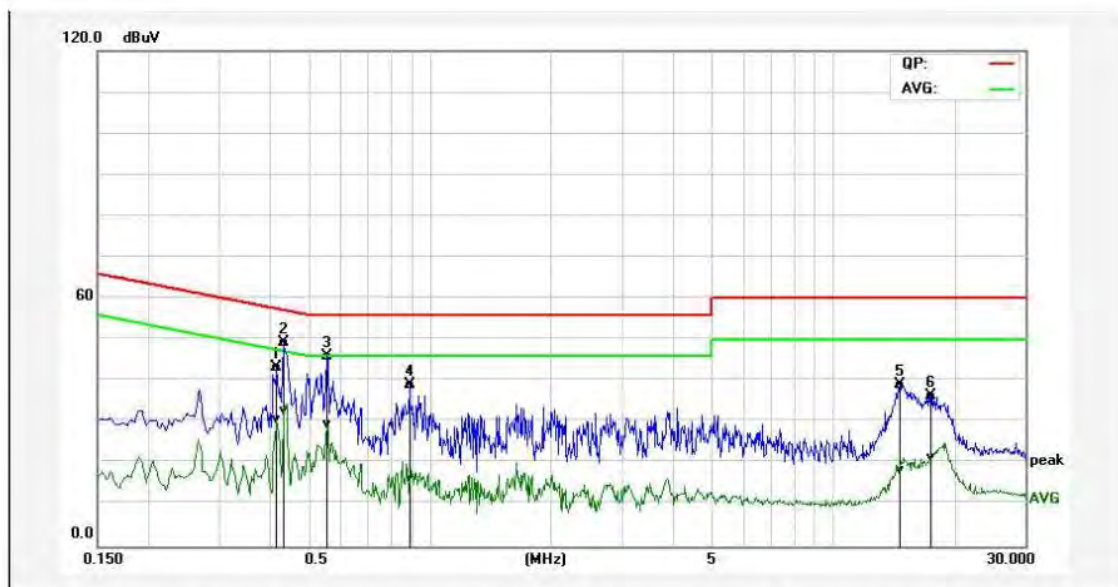

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.4180	32.50	19.96	10.80	43.30	30.76	57.49	47.49	-14.19	-16.73	Pass
2*	0.4340	38.53	22.02	10.80	49.33	32.82	57.18	47.18	-7.85	-14.36	Pass
3P	0.5580	35.20	18.61	10.83	46.03	29.44	56.00	46.00	-9.97	-16.56	Pass
4P	0.8940	28.29	5.82	10.89	39.18	16.71	56.00	46.00	-16.82	-29.29	Pass
5P	14.6620	22.99	2.38	16.03	39.02	18.41	60.00	50.00	-20.98	-31.59	Pass
6P	17.5220	20.68	5.68	15.86	36.54	21.54	60.00	50.00	-23.46	-28.46	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

Temperature:	26°C	Relative Humidity:	60%
Test Date:	July 26, 2024	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Neutral
Test Mode:	Transmitting mode of 802.11b 2412MHz		

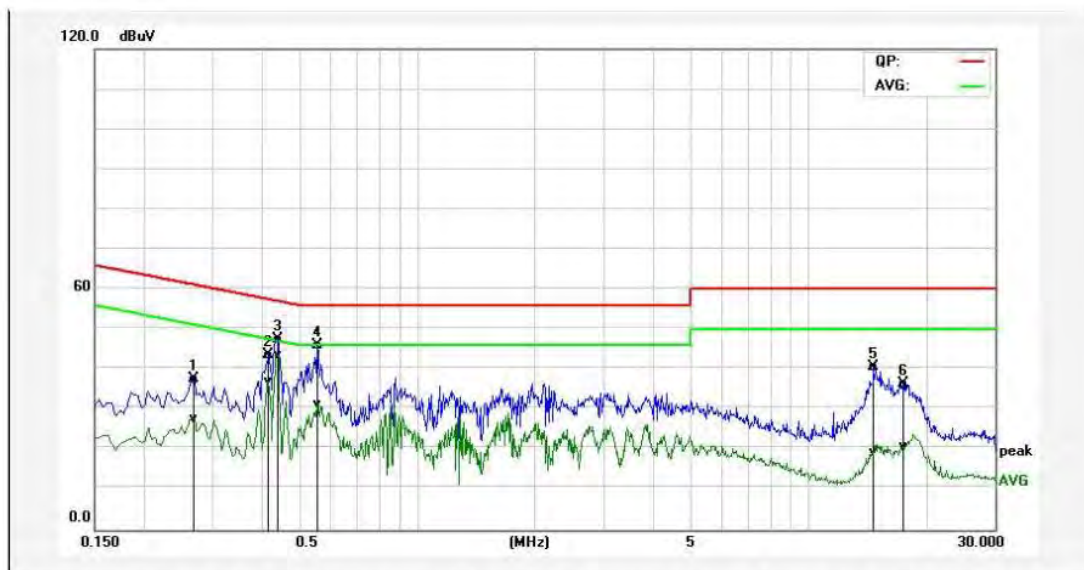

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1P	0.2700	27.01	17.00	10.77	37.78	27.77	61.12	51.12	-23.34	-23.35	Pass
2P	0.4180	32.74	26.18	10.80	43.54	36.98	57.49	47.49	-13.95	-10.51	Pass
3*	0.4420	36.81	32.78	10.81	47.62	43.59	57.02	47.02	-9.40	-3.43	Pass
4P	0.5580	35.29	20.46	10.83	46.12	31.29	56.00	46.00	-9.88	-14.71	Pass
5P	14.7260	24.56	3.24	16.06	40.62	19.30	60.00	50.00	-19.38	-30.70	Pass
6P	17.4900	20.72	4.97	15.86	36.58	20.83	60.00	50.00	-23.42	-29.17	Pass

Remark: Factor = Insertion Loss + Cable Loss, Result = Reading + Factor, Margin = Result – Limit.

4 RADIATED EMISSION

TEST LIMIT

For unintentional device, according to §15.209(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	Quasi-peak	300
0.490MHz-1.705MHz	24000/F (kHz)	-	Quasi-peak	30
1.705MHz-30MHz	30	-	Quasi-peak	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3
		74.0	Peak	3


Limit calculation and transfer to 3m distance as showed in the following table:

Frequency (MHz)	Limit (dBuV/m)	Distance (m)
0.009-0.490	$20\log(2400/F(KHz))+40\log(300/3)$	3
0.490-1.705	$20\log(24000/F(KHz))+40\log(30/3)$	3
1.705-30.0	69.5	3
30-88	40.0	3
88-216	43.5	3
216-960	46.0	3
Above 960	54.0	3


For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

TEST SETUP


1. Radiated Emission Test-Up Frequency Below 30MHz

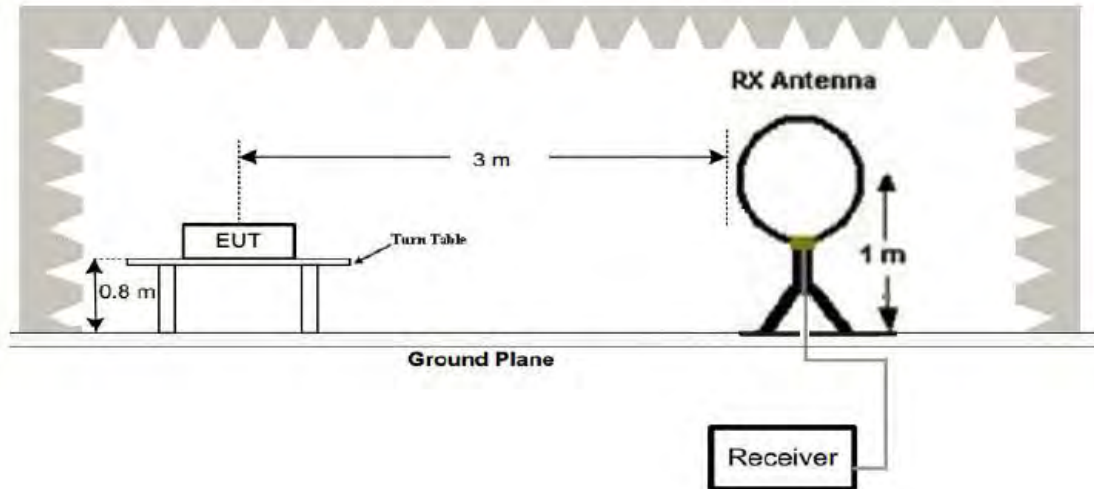

2. Radiated Emission Test-Up Frequency 30MHz~1GHz

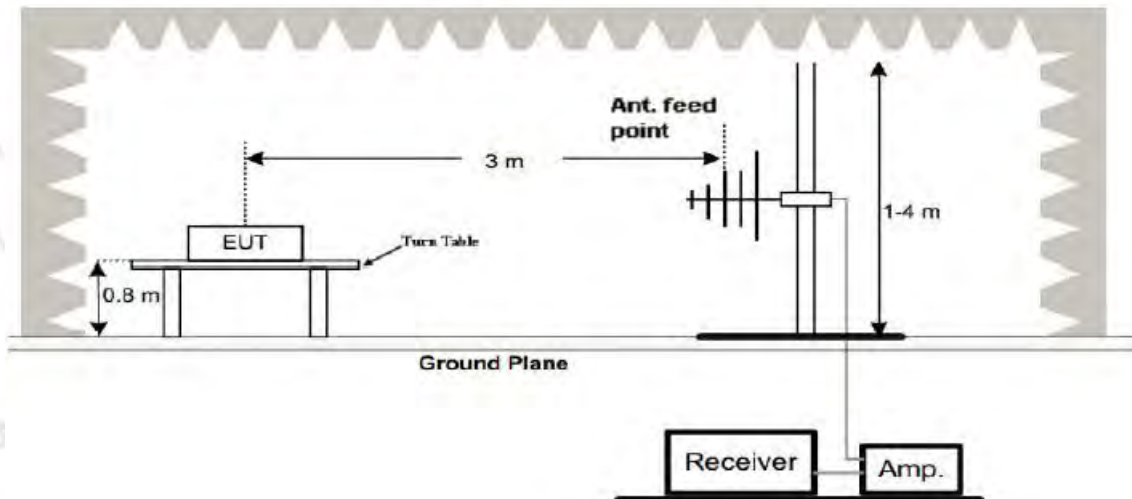

3. Radiated Emission Test-Up Frequency Above 1GHz

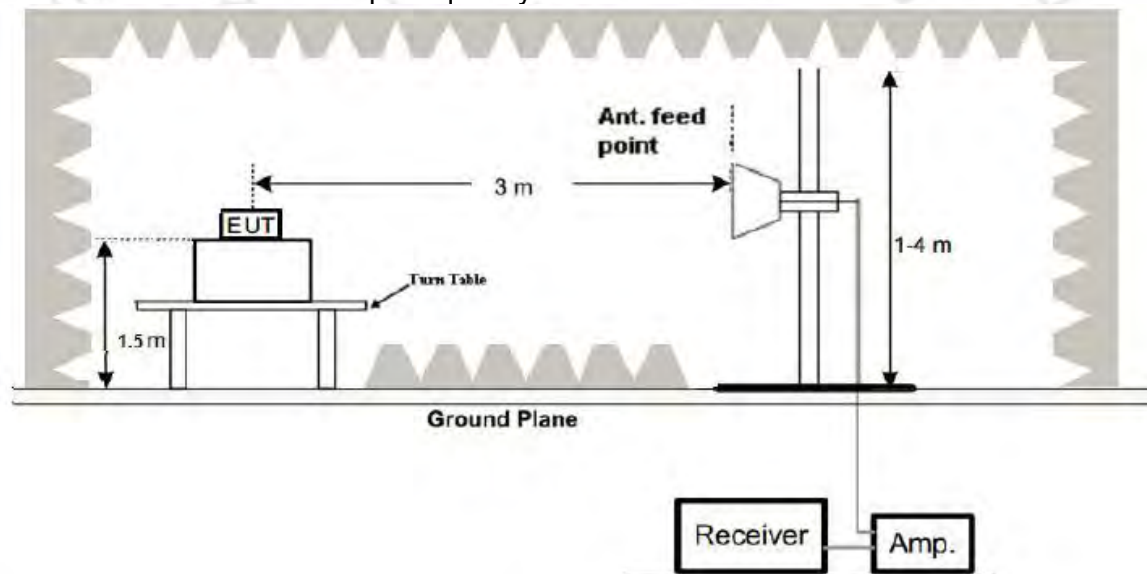

TEST PROCEDURE

1. Below 1GHz measurement the EUT is placed on turntable which is 0.8m above ground plane. And above 1GHz measurement EUT was placed on low permittivity and low tangent turn table which is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The test frequency range from 9kHz to 25GHz per FCC PART 15.33(a).

Note: For battery operated equipment, the equipment tests shall be performed using a new battery.

TEST RESULT


PASS

Remark:

1. All modes were test at Low, Middle, and High channel, only the worst result of 802.11b Low Channel was reported for below 1GHz test.
2. By preliminary testing and verifying three axis (X, Y and Z) position of EUT transmitted status, it was found that "X axis" position was the worst, and test data recorded in this report.

Below 1GHz Test Results:


Temperature:	25°C	Relative Humidity:	60%
Test Date:	July 26, 2024	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Horizontal
Test Mode:	Transmitting mode of 802.11b 2412MHz		

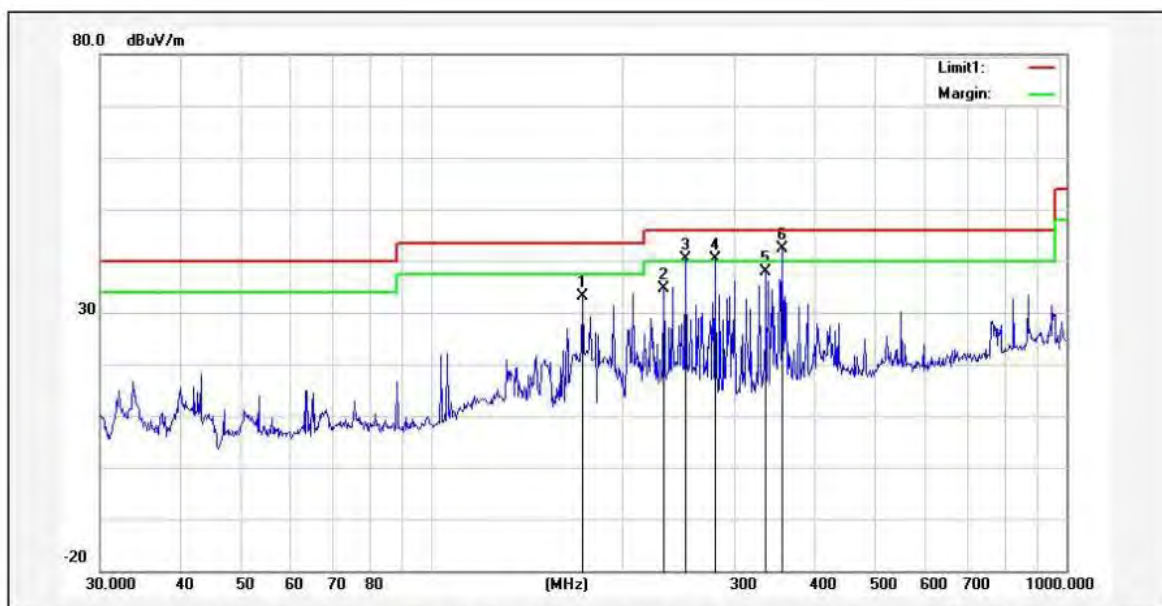

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1	172.5988	47.85	-14.84	33.01	43.50	-10.49			peak
2	231.7179	48.79	-14.05	34.74	46.00	-11.26			peak
3!	251.1804	53.96	-13.51	40.45	46.00	-5.55			peak
4!	279.0436	52.34	-12.06	40.28	46.00	-5.72			peak
5	336.0352	49.25	-11.48	37.77	46.00	-8.23			peak
6*	356.6758	53.65	-11.21	42.44	46.00	-3.56			peak

Remark: Result = Reading Level + Factor, Margin = Result – Limit
Factor = Ant. Factor + Cable Loss – Pre-amplifier

Temperature:	25°C	Relative Humidity:	60%
Test Date:	July 26, 2024	Pressure:	1010hPa
Test Voltage:	AC 120V, 60Hz	Phase:	Vertical
Test Mode:	Transmitting mode of 802.11b 2412MHz		

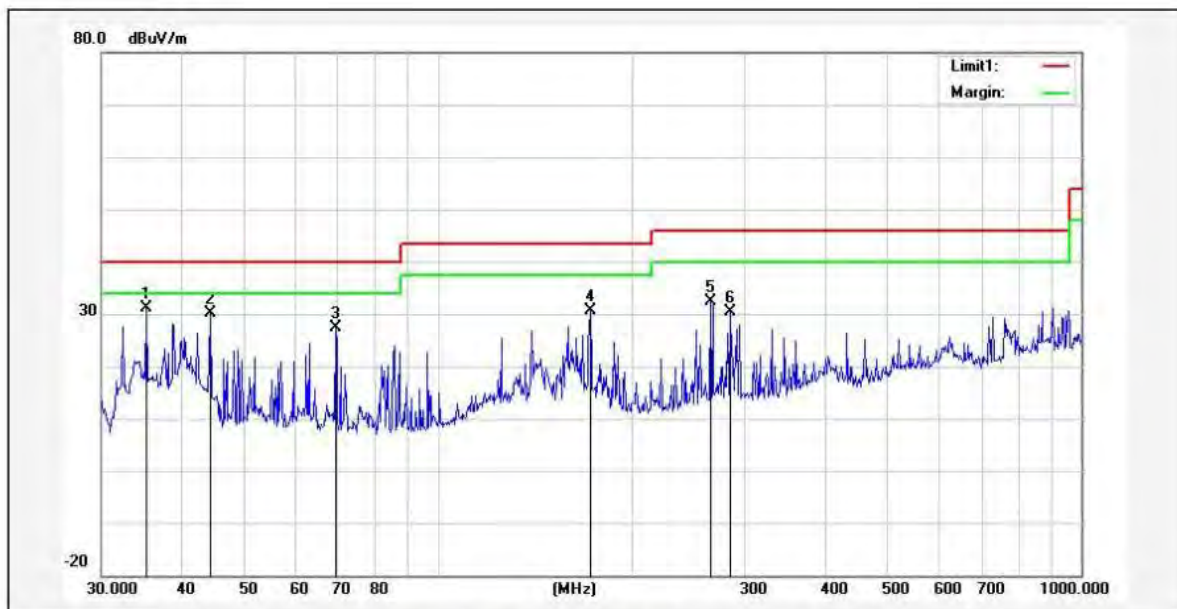

No.	Frequency (MHz)	Reading (dBuV)	Correction factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (deg.)	Height (cm)	Remark
1*	35.2512	52.80	-21.71	31.09	40.00	-8.91			peak
2	44.2752	47.74	-17.57	30.17	40.00	-9.83			peak
3	69.3568	47.42	-20.10	27.32	40.00	-12.68			peak
4	172.5988	45.43	-14.84	30.59	43.50	-12.91			peak
5	265.6757	44.92	-12.58	32.34	46.00	-13.66			peak
6	284.9767	42.10	-11.84	30.26	46.00	-15.74			peak

Remark: Result = Reading Level + Factor, Margin = Result – Limit
Factor = Ant. Factor + Cable Loss – Pre-amplifier

Remark:

1. Radiated emission test from 9KHz to 10th harmonic of fundamental was verified, emission from 9kHz to 30MHz are more than 20dB below the limit, so it was not recorded in this report.
2. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
3. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1MHz for measuring above 1GHz, below 30MHz was 10kHz.

Above 1 GHz Test Results:

CH01 of 802.11b Mode (2412MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.72	-3.64	59.08	74	-14.92	PK
4824	50.62	-3.64	46.98	54	-7.02	AV
7236	58.65	-0.95	57.7	74	-16.3	PK
7236	46.94	-0.95	45.99	54	-8.01	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.13	-3.64	58.49	74	-15.51	PK
4824	50.23	-3.64	46.59	54	-7.41	AV
7236	58.21	-0.95	57.26	74	-16.74	PK
7236	46.63	-0.95	45.68	54	-8.32	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH06 of 802.11b Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.32	-3.51	58.81	74	-15.19	PK
4874	46.35	-3.51	42.84	54	-11.16	AV
7311	59.34	-0.82	58.52	74	-15.48	PK
7311	46.38	-0.82	45.56	54	-8.44	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.92	-3.51	58.41	74	-15.59	PK
4874	49.75	-3.51	46.24	54	-7.76	AV
7311	58.79	-0.82	57.97	74	-16.03	PK
7311	46.89	-0.82	46.07	54	-7.93	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH11 of 802.11b Mode (2462MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.32	-3.43	58.89	74	-15.11	PK
4924	52.32	-3.43	48.89	54	-5.11	AV
7386	58.62	-0.75	57.87	74	-16.13	PK
7386	48.23	-0.75	47.48	54	-6.52	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	62.55	-3.43	59.12	74	-14.88	PK
4924	49.67	-3.43	46.24	54	-7.76	AV
7386	58.68	-0.75	57.93	74	-16.07	PK
7386	46.74	-0.75	45.99	54	-8.01	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH01 of 802.11g Mode (2412MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	62.23	-3.64	58.59	74	-15.41	PK
4824	50.21	-3.64	46.57	54	-7.43	AV
7236	56.93	-0.95	55.98	74	-18.02	PK
7236	46.92	-0.95	45.97	54	-8.03	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	60.92	-3.64	57.28	74	-16.72	PK
4824	49.46	-3.64	45.82	54	-8.18	AV
7236	57.07	-0.95	56.12	74	-17.88	PK
7236	46.76	-0.95	45.81	54	-8.19	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH06 of 802.11g Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.44	-3.51	57.93	74	-16.07	PK
4874	49.78	-3.51	46.27	54	-7.73	AV
7311	57.5	-0.82	56.68	74	-17.32	PK
7311	46.51	-0.82	45.69	54	-8.31	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.35	-3.51	57.84	74	-16.16	PK
4874	49.11	-3.51	45.6	54	-8.4	AV
7311	57.54	-0.82	56.72	74	-17.28	PK
7311	46.62	-0.82	45.8	54	-8.2	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH11 of 802.11g Mode (2462MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	61.23	-3.43	57.8	74	-16.2	PK
4924	48.93	-3.43	45.5	54	-8.5	AV
7386	57.52	-0.75	56.77	74	-17.23	PK
7386	46.31	-0.75	45.56	54	-8.44	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	61.61	-3.43	58.18	74	-15.82	PK
4924	49.15	-3.43	45.72	54	-8.28	AV
7386	57.16	-0.75	56.41	74	-17.59	PK
7386	46.36	-0.75	45.61	54	-8.39	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

CH01 of 802.11n/HT20 Mode (2412MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.68	-3.64	58.04	74	-15.96	PK
4824	49.47	-3.64	45.83	54	-8.17	AV
7236	57.87	-0.95	56.92	74	-17.08	PK
7236	46.65	-0.95	45.7	54	-8.3	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	61.49	-3.64	57.85	74	-16.15	PK
4824	49.39	-3.64	45.75	54	-8.25	AV
7236	57.79	-0.95	56.84	74	-17.16	PK
7236	46.55	-0.95	45.6	54	-8.4	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH06 of 802.11n/HT20 Mode (2437MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	60.68	-3.51	57.17	74	-16.83	PK
4874	49.44	-3.51	45.93	54	-8.07	AV
7311	56.99	-0.82	56.17	74	-17.83	PK
7311	46.86	-0.82	46.04	54	-7.96	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	61.09	-3.51	57.58	74	-16.42	PK
4874	49.39	-3.51	45.88	54	-8.12	AV
7311	58	-0.82	57.18	74	-16.82	PK
7311	46.46	-0.82	45.64	54	-8.36	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

CH11of 802.11n/HT20 Mode (2462MHz):

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	61.23	-3.43	57.8	74	-16.2	PK
4924	49.36	-3.43	45.93	54	-8.07	AV
7386	57.46	-0.75	56.71	74	-17.29	PK
7386	46.32	-0.75	45.57	54	-8.43	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4924	61.29	-3.43	57.86	74	-16.14	PK
4924	49.31	-3.43	45.88	54	-8.12	AV
7386	57.16	-0.75	56.41	74	-17.59	PK
7386	46.58	-0.75	45.83	54	-8.17	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Remark:

1. Measuring frequencies from 1GHz to the 25GHz.
2. “F” denotes fundamental frequency; “H” denotes spurious frequency. “E” denotes band edge frequency.
3. * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
4. The emissions are attenuated more than 20dB below the permissible limits are not recorded in the report.
5. The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120kHz, 1 MHz for measuring above 1GHz, below 30MHz was 10kHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz for peak measurement with peak detector at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 10Hz for Average measurement with peak detection at frequency above 1GHz.
6. When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20dBuV/m(PK Value) <54dBuV/m(AV Limit), the Average Detected not need to completed.
7. All modes of operation were investigated and the worst-case emissions are reported.

Operation Mode: CH01 of 802.11b Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	58.05	-5.81	52.24	74	-21.76	PK
2310	/	-5.81	/	54	/	AV
2390	66.27	-5.84	60.43	74	-13.57	PK
2390	48.73	-5.84	42.89	54	-11.11	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	58.62	-5.81	52.81	74	-21.19	PK
2310	/	-5.81	/	54	/	AV
2390	65.94	-5.84	60.1	74	-13.9	PK
2390	49.35	-5.84	43.51	54	-10.49	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Operation Mode: CH11 of 802.11b Mode (2462MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	58.62	-5.81	52.81	74	-21.19	PK
2483.5	/	-5.81	/	54	/	AV
2500	65.94	-5.84	60.1	74	-13.9	PK
2500	49.35	-5.84	43.51	54	-10.49	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.74	-5.65	52.09	74	-21.91	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.96	-5.72	52.24	74	-21.76	PK
2500	/	-5.72	/	54	/	AV
Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit						

Operation Mode: CH01 of 802.11g Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.74	-5.65	52.09	74	-21.91	PK
2310	/	-5.65	/	54	/	AV
2390	57.96	-5.72	52.24	74	-21.76	PK
2390	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	57.62	-5.81	51.81	74	-22.19	PK
2310	/	-5.81	/	54	/	AV
2390	66.23	-5.84	60.39	74	-13.61	PK
2390	48.06	-5.84	42.22	54	-11.78	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Operation Mode: CH11 of 802.11g Mode (2462MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.15	-5.65	51.5	74	-22.5	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.23	-5.72	51.51	74	-22.49	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	57.26	-5.65	51.61	74	-22.39	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.28	-5.72	51.56	74	-22.44	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Operation Mode: CH01 of 802.11n/HT20 Mode (2412MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	56.38	-5.81	50.57	74	-23.43	PK
2310	/	-5.81	/	54	/	AV
2390	66.31	-5.84	60.47	74	-13.53	PK
2390	48.94	-5.84	43.1	54	-10.9	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2310	58.63	-5.81	52.82	74	-21.18	PK
2310	/	-5.81	/	54	/	AV
2390	66.04	-5.84	60.2	74	-13.8	PK
2390	48.29	-5.84	42.45	54	-11.55	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Operation Mode: CH11 of 802.11n/HT20 Mode (2462MHz)

Horizontal:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	58.63	-5.81	52.82	74	-21.18	PK
2483.5	/	-5.81	/	54	/	AV
2500	66.04	-5.84	60.2	74	-13.8	PK
2500	48.29	-5.84	42.45	54	-11.55	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

Vertical:

Frequency (MHz)	Reading Result (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
2483.5	58.26	-5.65	52.61	74	-21.39	PK
2483.5	/	-5.65	/	54	/	AV
2500	57.77	-5.72	52.05	74	-21.95	PK
2500	/	-5.72	/	54	/	AV

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Margin = Absolute Level – Limit

5 6dB &99% OCCUPIED BANDWIDTH

TEST LIMIT

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS
63.10-11.2(c)		N/A (99% OCCUPIED BANDWIDTH)	2400-2483.5	PASS

TEST PROCEDURE


6dB BANDWIDTH MEASUREMENT PROCEDURE

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 KHz, VBW $\geq 3 \times$ RBW.
4. Set SPA Trace 1 Max hold, then View.

99% OCCUPIED BANDWIDTH

1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Set Span = approximately 1.5 to 5 times the OBW, centered on a nominal channel
The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
4. Set SPA Trace 1 Max hold, then View.

TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

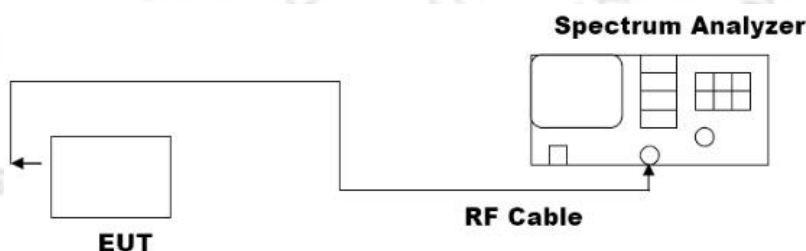

MEASUREMENT EQUIPMENT USED

The same as described in section 2.7.

TEST RESULT

Please Refer to Appendix 2.4G WIFI RF Test data for Details

6 POWER SPECTRAL DENSITY

TEST LIMIT


FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3kHz)	2400-2483.5	PASS

TEST PROCEDURE

- (1) Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2) Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3) Set SPA Trace 1 Max hold, then View.

Note: The method of AVGPSD-1 in the ANSI C63.10 (2013) item 11.10 was used in this testing.

TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

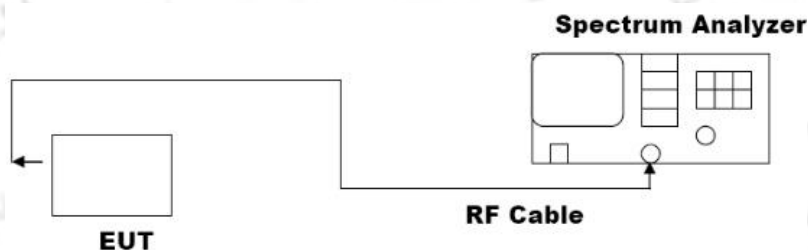

EQUIPMENT USED

The same as described in section 2.7.

TEST RESULT

Please Refer to Appendix 2.4G WIFI RF Test data for Details

7 AVERAGE OUTPUT POWER

TEST LIMIT

FCC Part15(15.247), Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Average Output Power	1 watt or 30dBm	2400-2483.5	PASS


TEST PROCEDURE

For average power test:

1. Connect EUT RF output port to Spectrum Analyzer.
2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
3. Record the average output power from the software.

Note: The EUT was tested according to ANSI C63.10 (2013) for compliance to FCC 47CFR 15.247 requirements.

TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

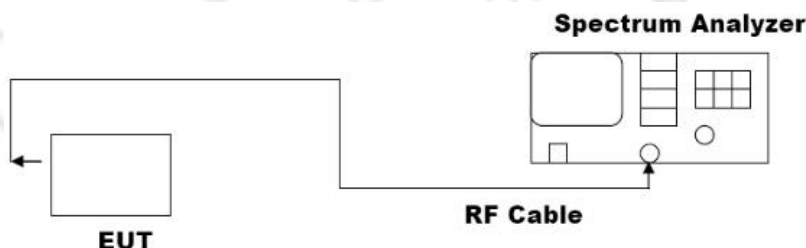

EQUIPMENT USED

The same as described in section 2.7.

TEST RESULT

Please Refer to Appendix 2.4G WIFI RF Test data for Details

8 OUT OF BAND EMISSIONS

TEST LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)



TEST PROCEDURE

1. The EUT was placed on a turn table which is 0.8m above ground plane.
2. Set EUT as TX operation and connect directly to the spectrum analyzer.
3. Based on FCC Part15 C Section 15.247: RBW=100kHz, VBW=300kHz.
4. Set detected by the spectrum analyzer with peak detector.

MEASUREMENT EQUIPMENT USED

The same as described in section 2.7.

TEST RESULT

Please Refer to Appendix 2.4G WIFI RF Test data for Details


9 ANTENNA REQUIREMENT

Standard Applicable:

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


Antenna Connected Construction

The antenna used in this product is a FPC Antenna, The directional gains of antenna used for transmitting is 2.96dBi.

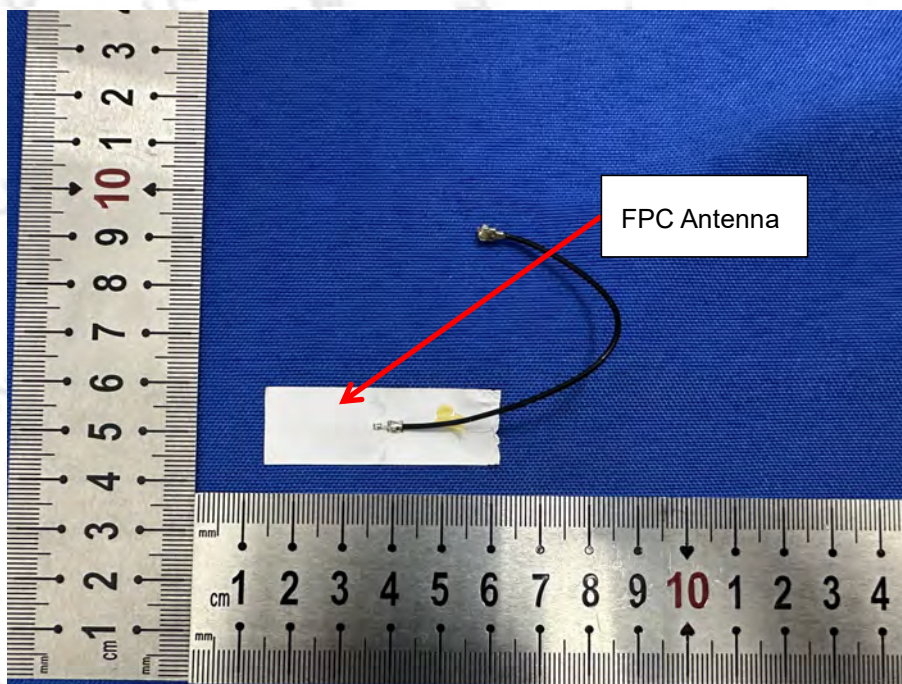


10 PHOTO OF TEST

RADIATED EMISSION

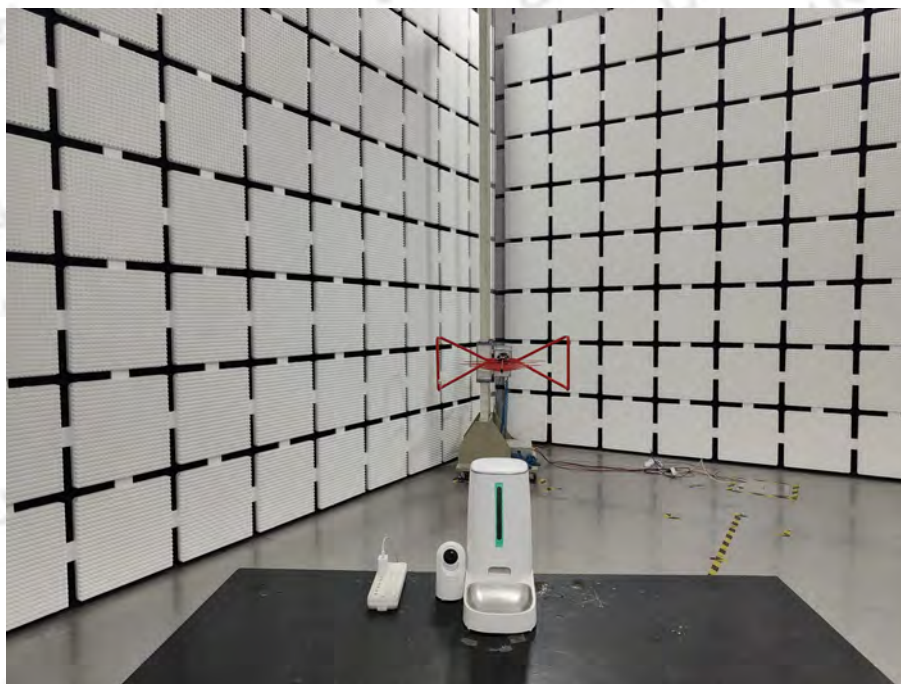

30MHz-1000MHz

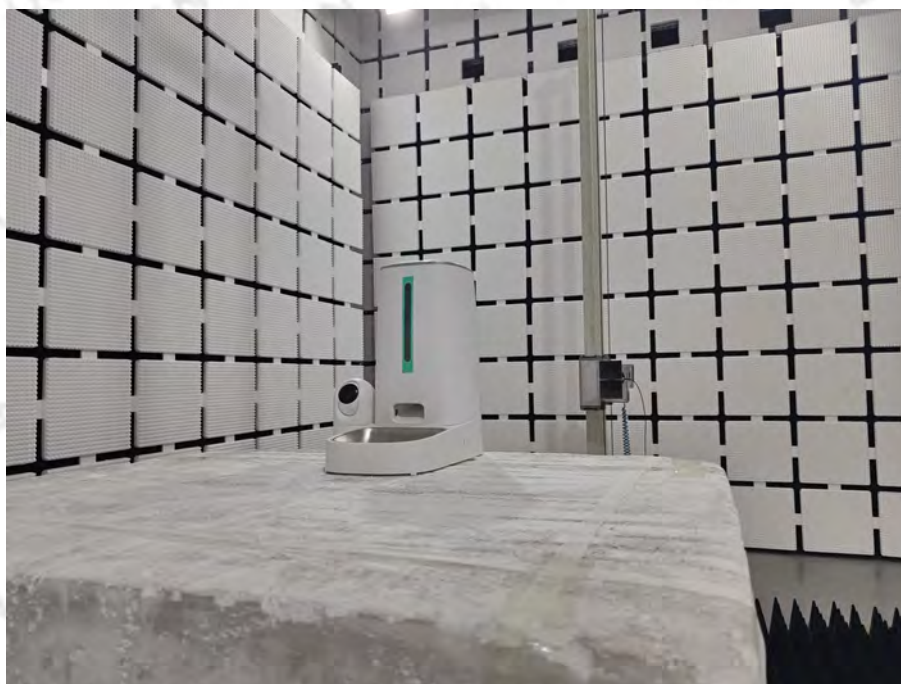


Above 1GHz

CONDUCTED EMISSION



RF CONDUCTED

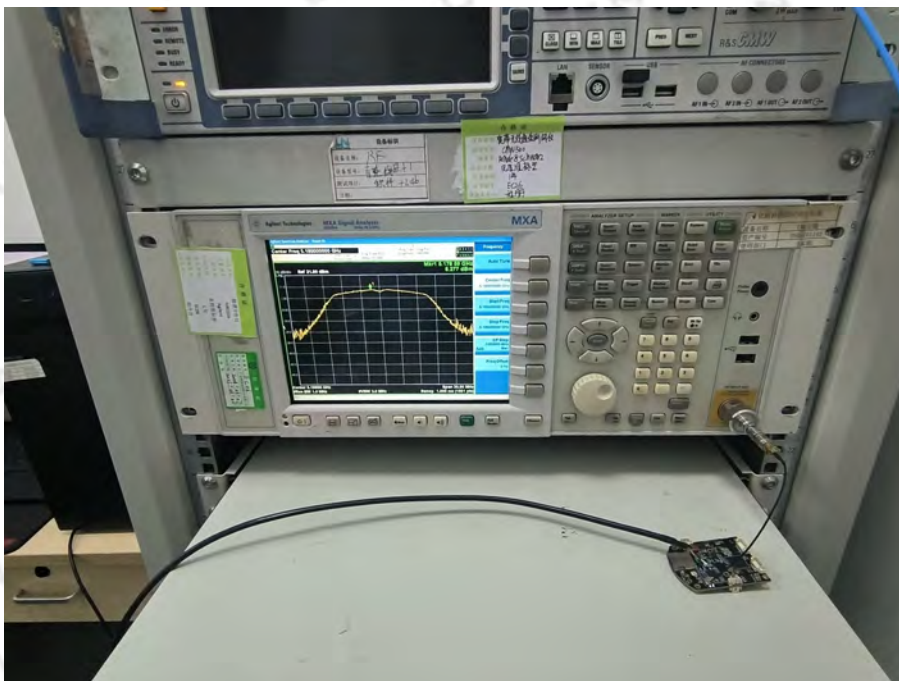

11 EUT Constructional Details


Reference to the External Photos and Internal Photos for details.

12 Appendix


Duty Cycle

Condition	Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor (dB)
NVNT	802.11b	2412	99.94	0
NVNT	802.11b	2437	99.76	0
NVNT	802.11b	2462	99.94	0
NVNT	802.11g	2412	73.12	1.36
NVNT	802.11g	2437	73.12	1.36
NVNT	802.11g	2462	73.12	1.36
NVNT	802.11n(HT20)	2412	71.75	1.44
NVNT	802.11n(HT20)	2437	71.75	1.44
NVNT	802.11n(HT20)	2462	71.91	1.43


Duty Cycle NVNT 802.11b 2412MHz

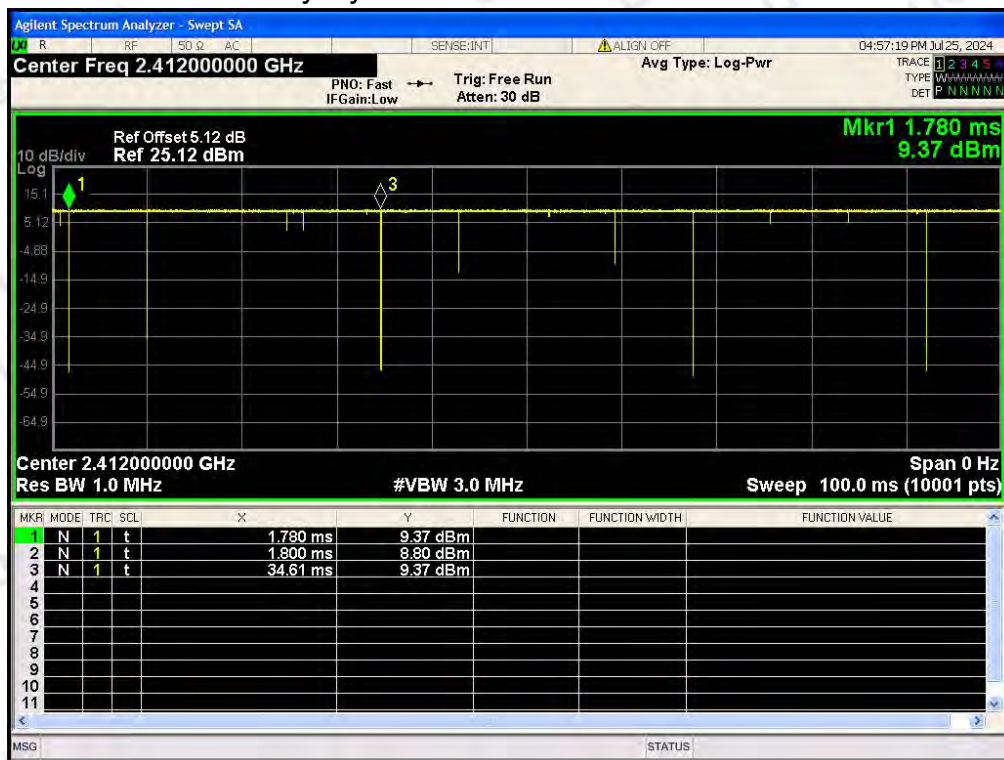


Duty Cycle NVNT 802.11b 2437MHz

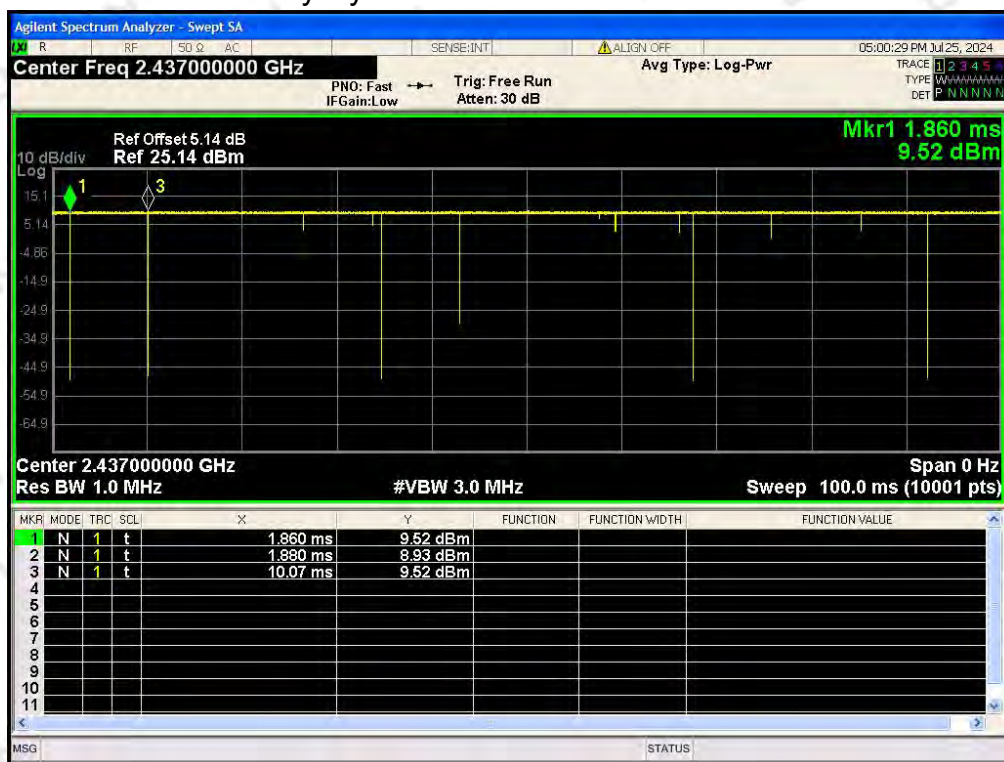


Duty Cycle NVNT 802.11b 2462MHz

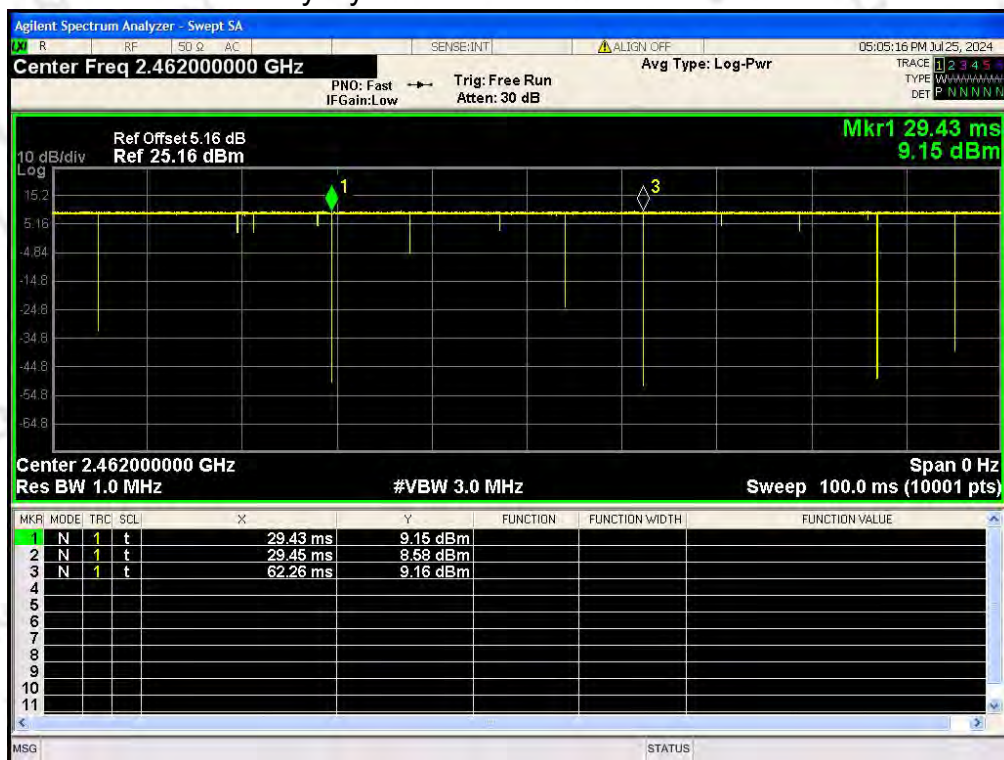


Duty Cycle NVNT 802.11g 2412MHz

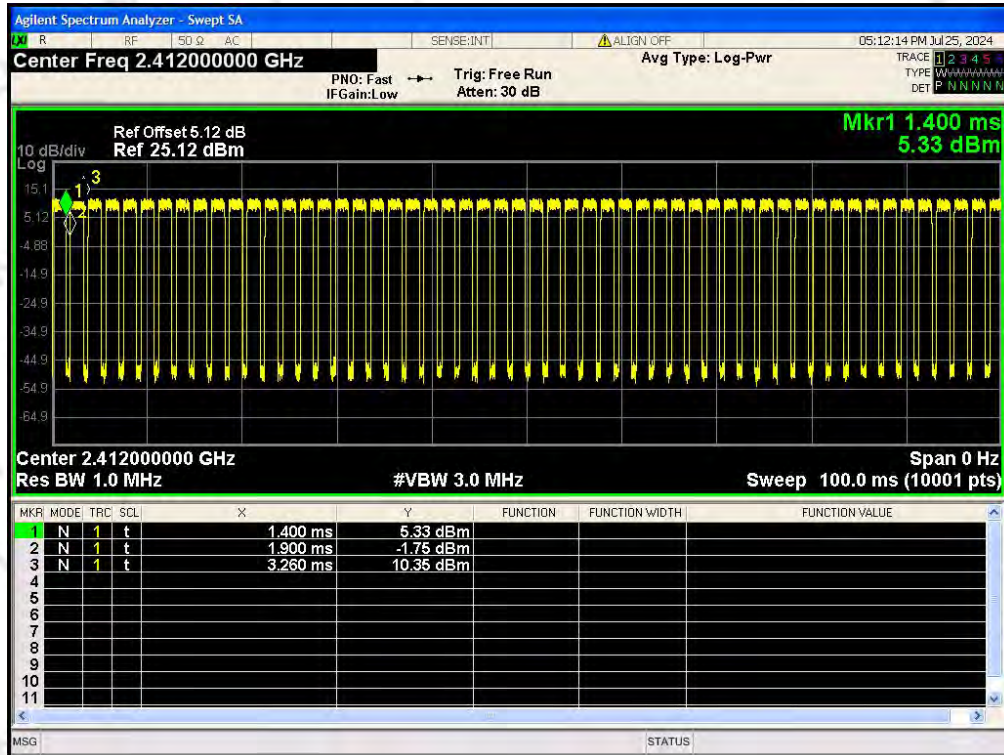


Duty Cycle NVNT 802.11g 2437MHz

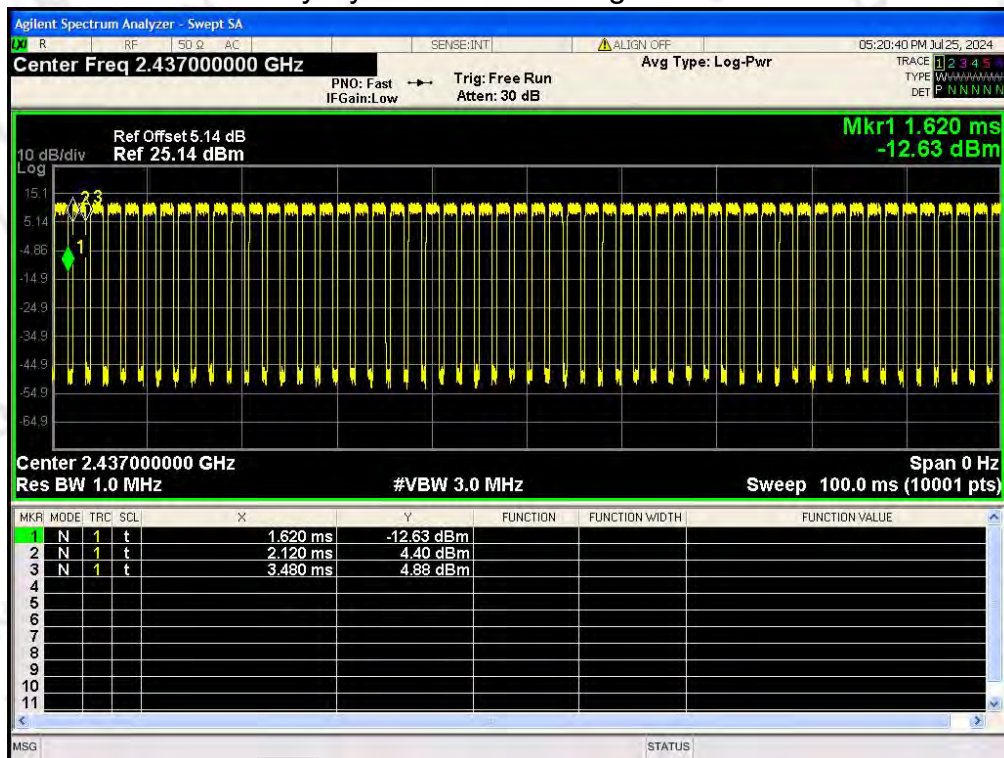


Duty Cycle NVNT 802.11g 2462MHz

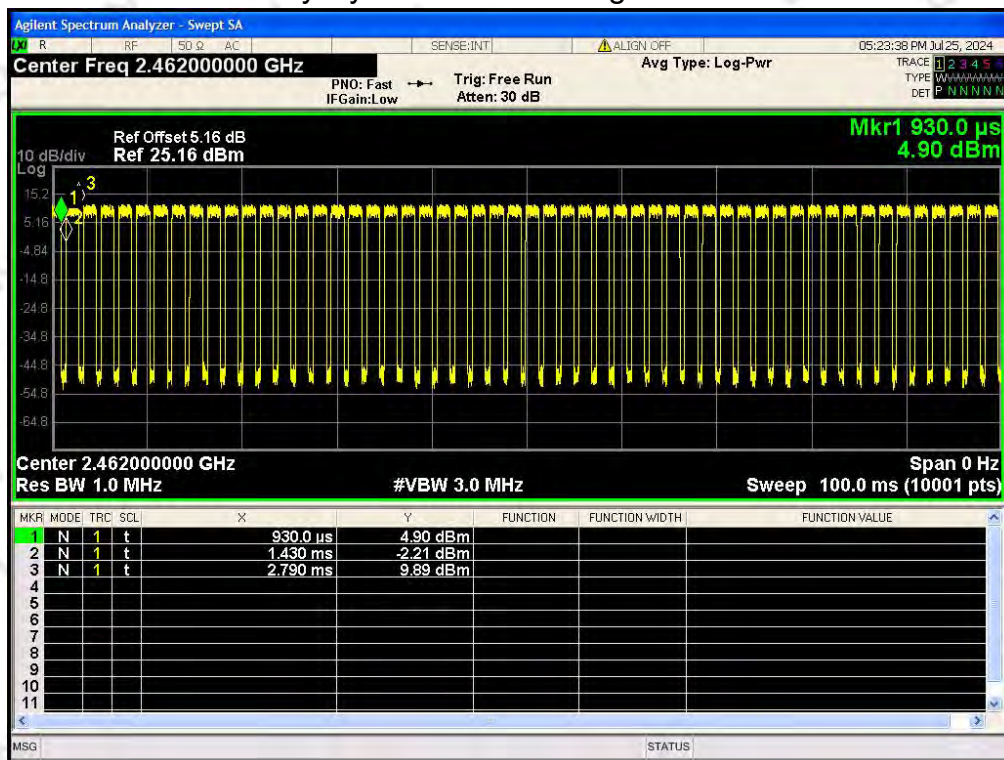


Duty Cycle NVNT 802.11n(HT20) 2412MHz

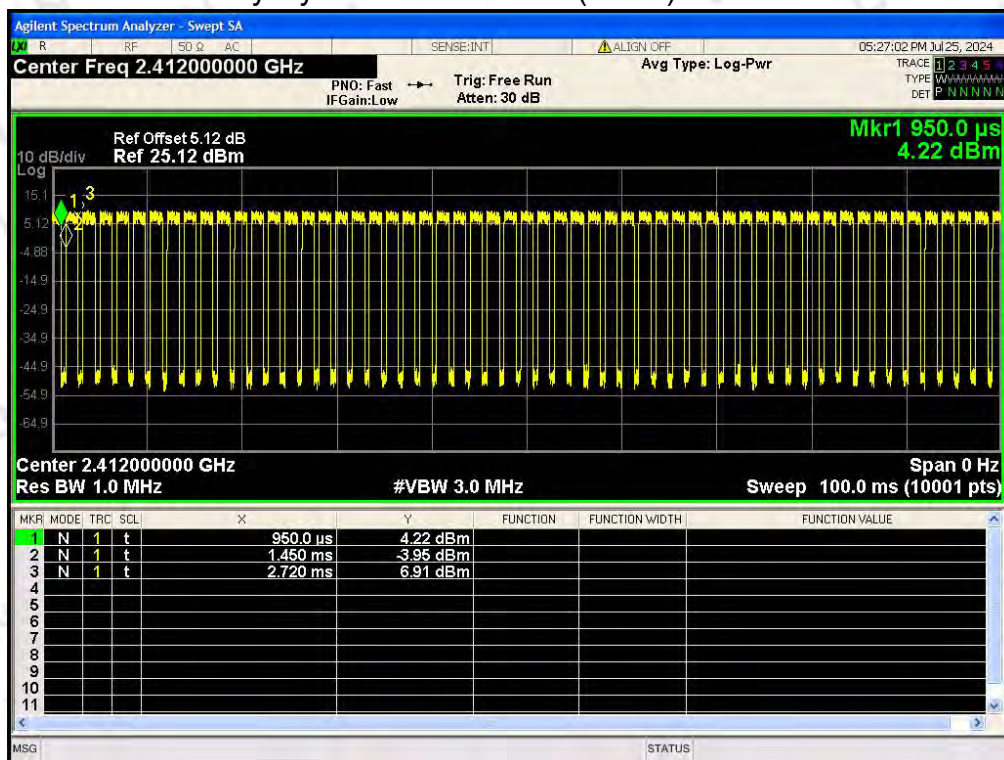

Duty Cycle NVNT 802.11n(HT20) 2437MHz

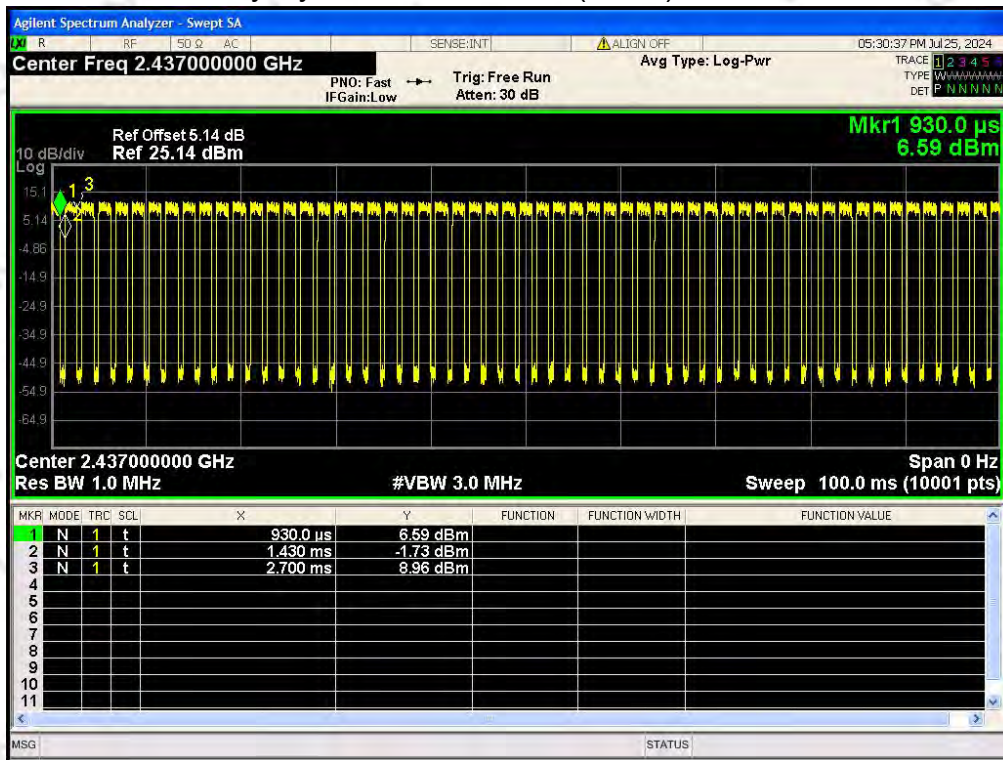


Duty Cycle NVNT 802.11n(HT20) 2462MHz

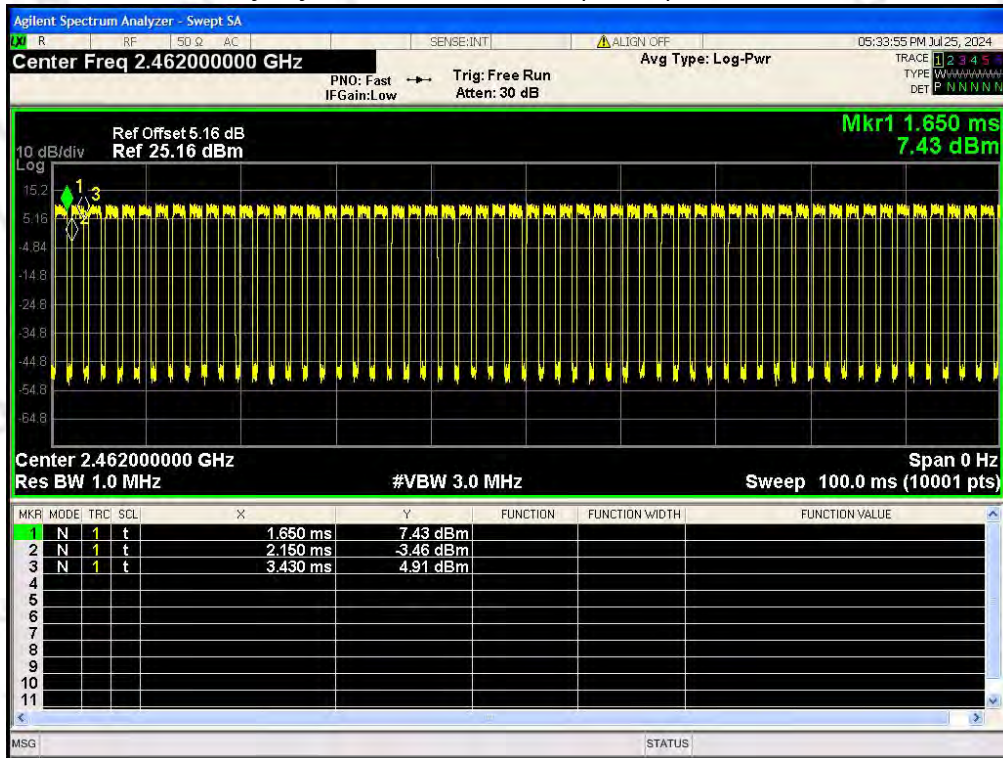


Maximum Conducted Output Average Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	802.11b	2412	16.029	0	16.029	30	Pass
NVNT	802.11b	2437	16.068	0	16.068	30	Pass
NVNT	802.11b	2462	15.791	0	15.791	30	Pass
NVNT	802.11g	2412	19.734	1.36	21.094	30	Pass
NVNT	802.11g	2437	19.829	1.36	21.189	30	Pass
NVNT	802.11g	2462	17.584	1.36	18.944	30	Pass
NVNT	802.11n(HT20)	2412	17.573	1.44	19.013	30	Pass
NVNT	802.11n(HT20)	2437	17.335	1.44	18.775	30	Pass
NVNT	802.11n(HT20)	2462	18.229	1.43	19.659	30	Pass


Power NVNT 802.11b 2412MHz Ant1

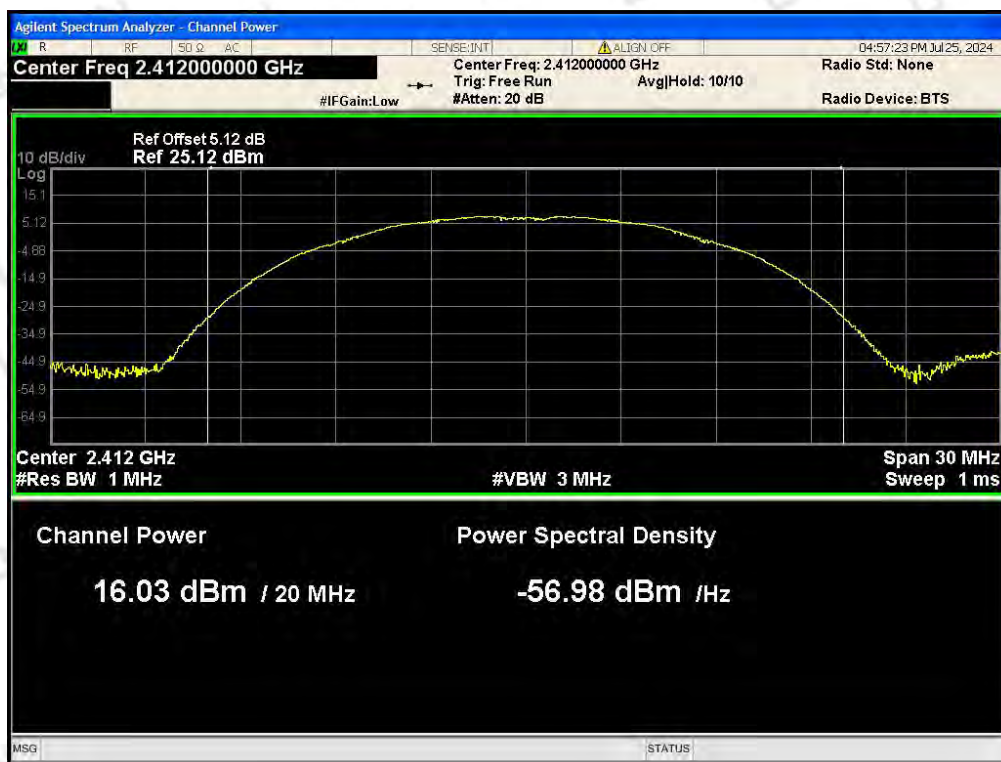


Power NVNT 802.11b 2437MHz Ant1

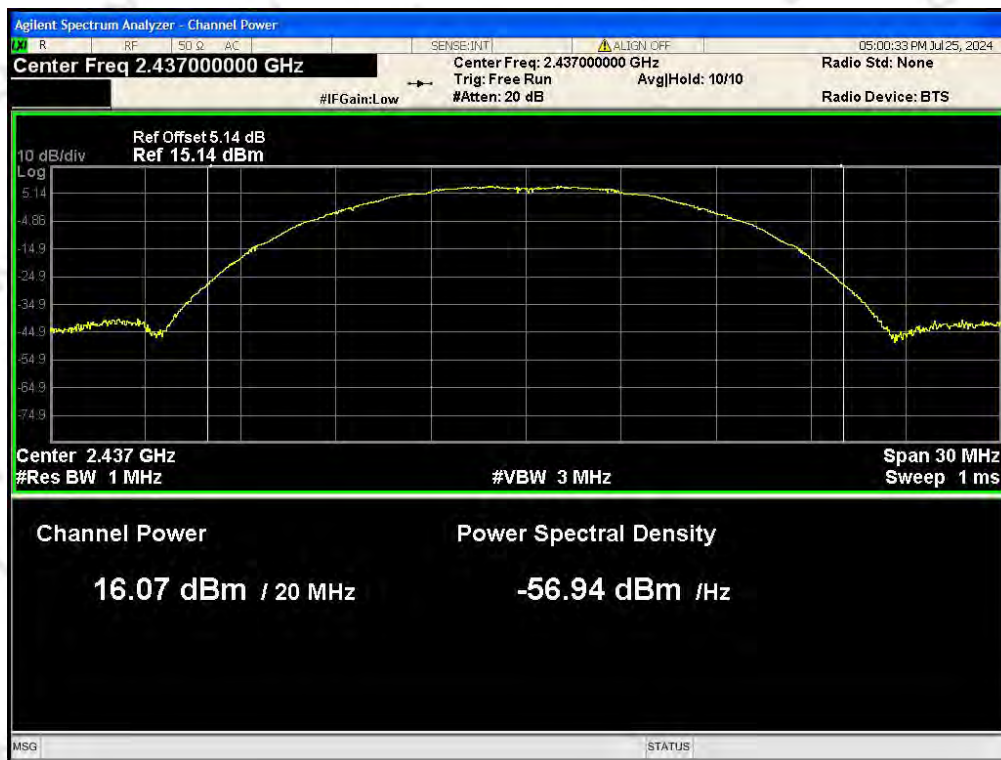


Power NVNT 802.11b 2462MHz Ant1

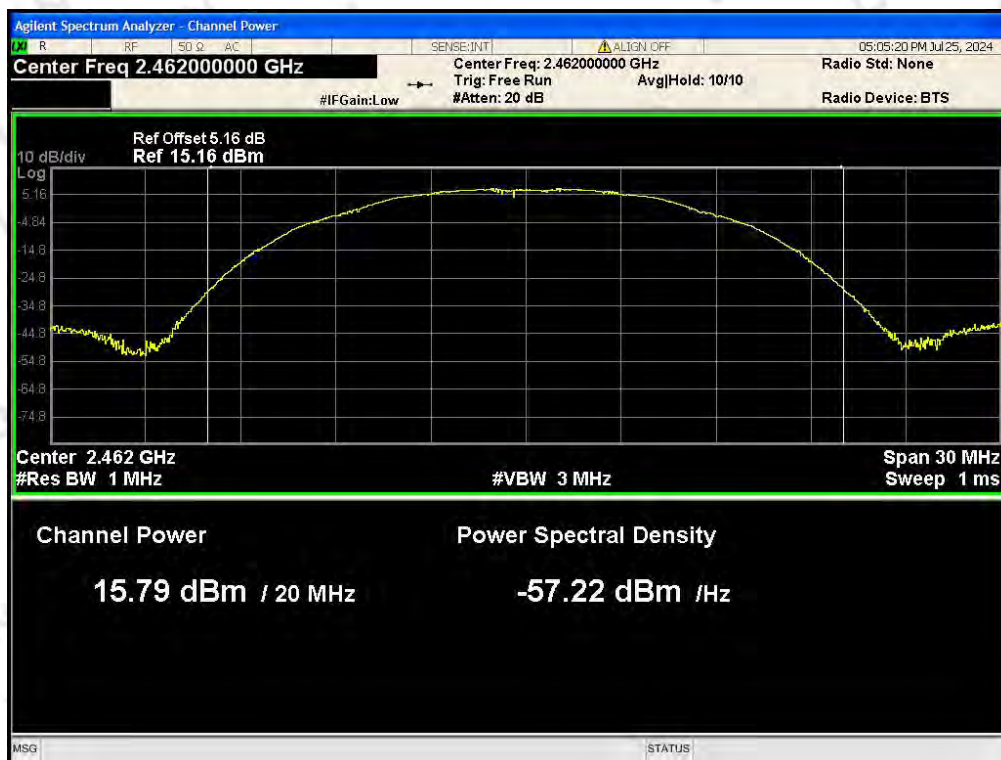


Power NVNT 802.11g 2412MHz Ant1

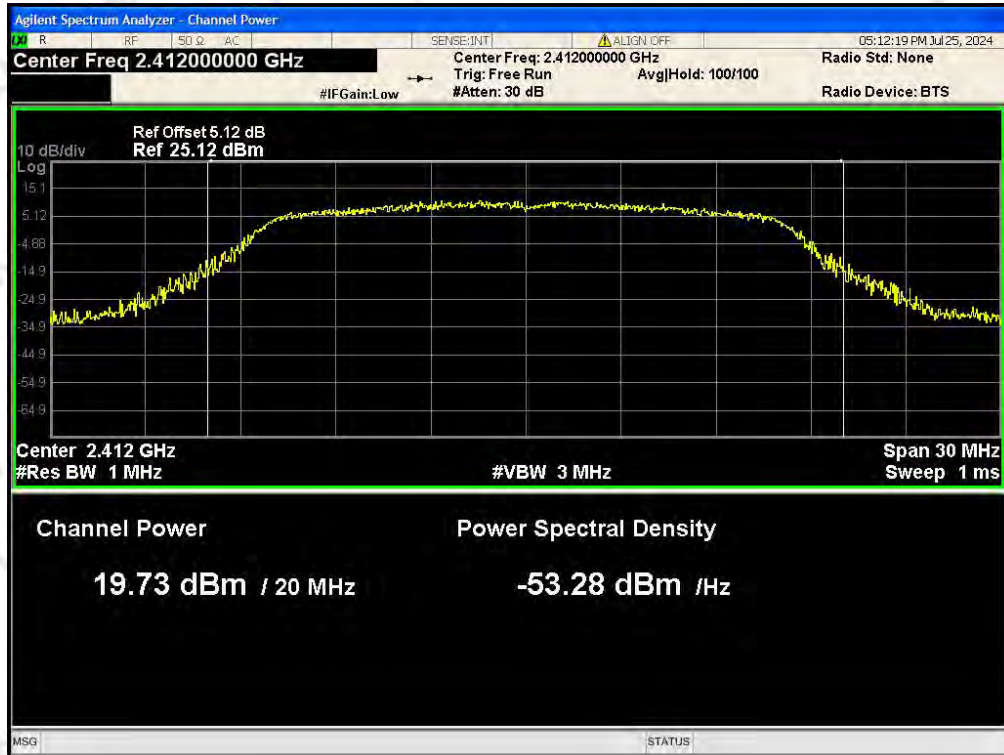


Power NVNT 802.11g 2437MHz Ant1

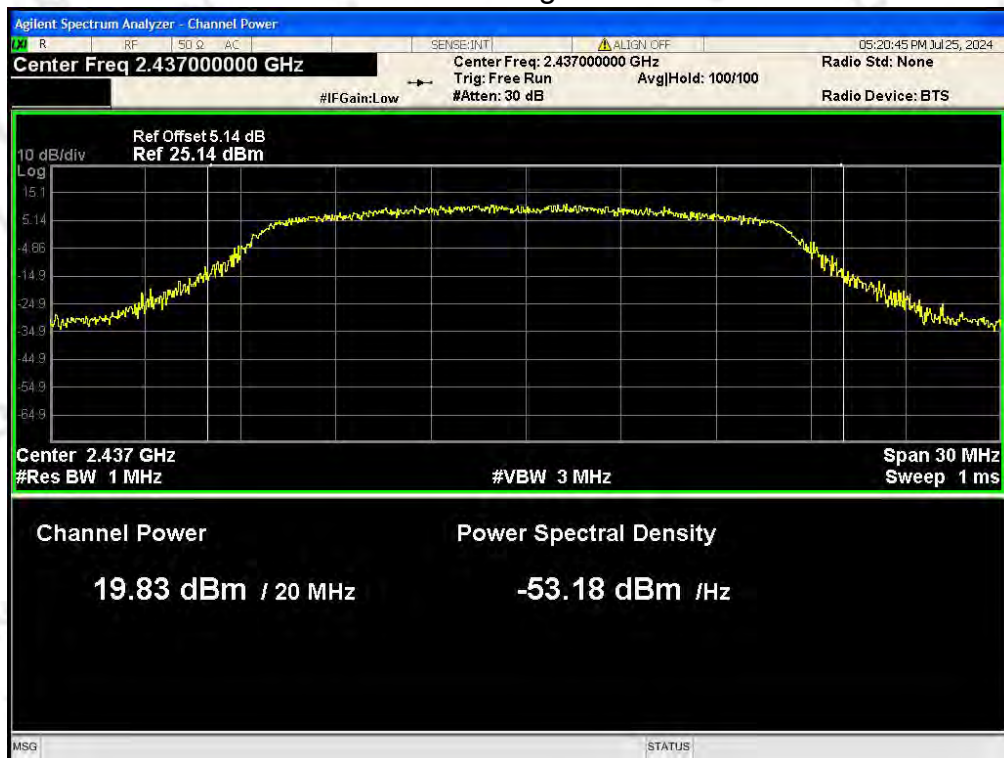


Power NVNT 802.11g 2462MHz Ant1

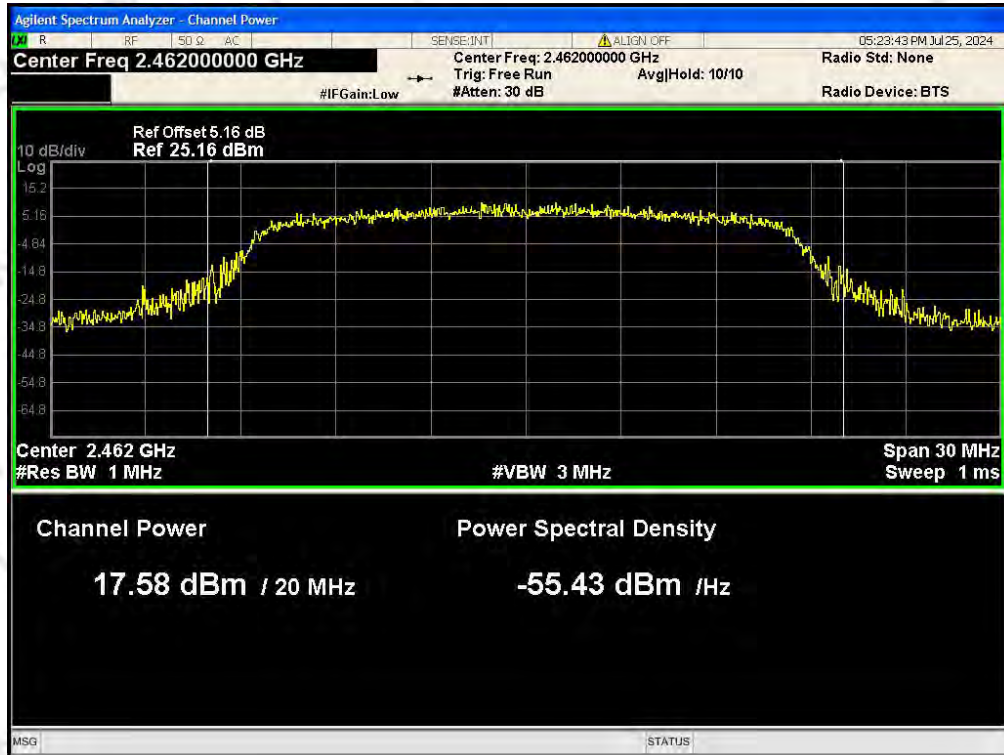


Power NVNT 802.11n(HT20) 2412MHz Ant1

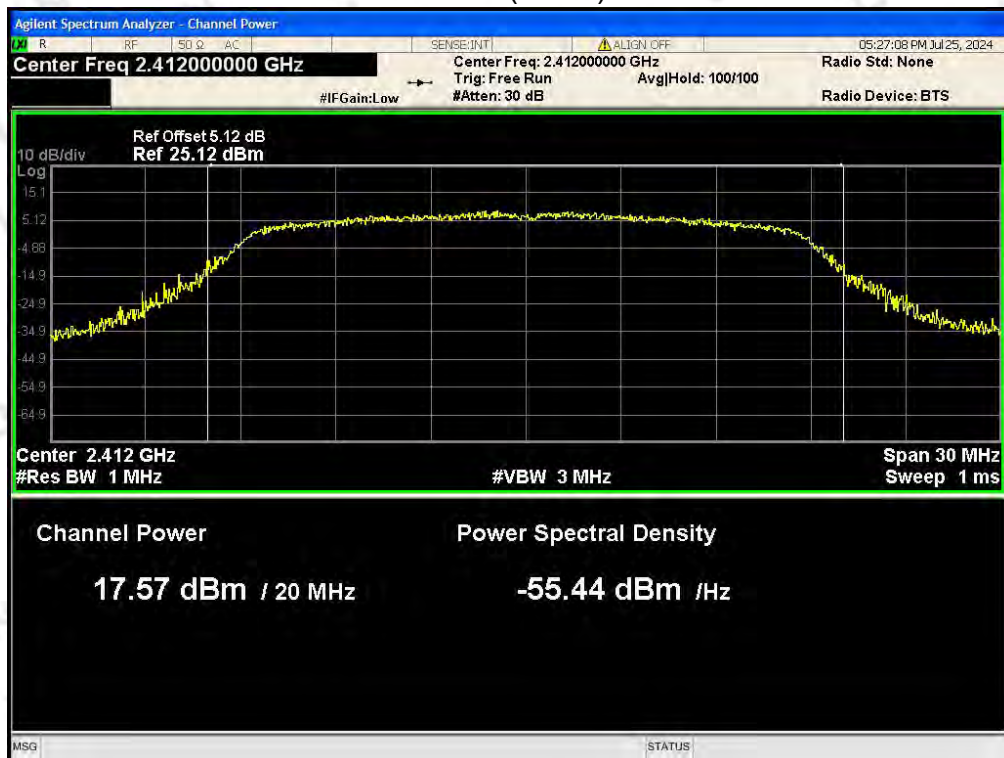

Power NVNT 802.11n(HT20) 2437MHz Ant1

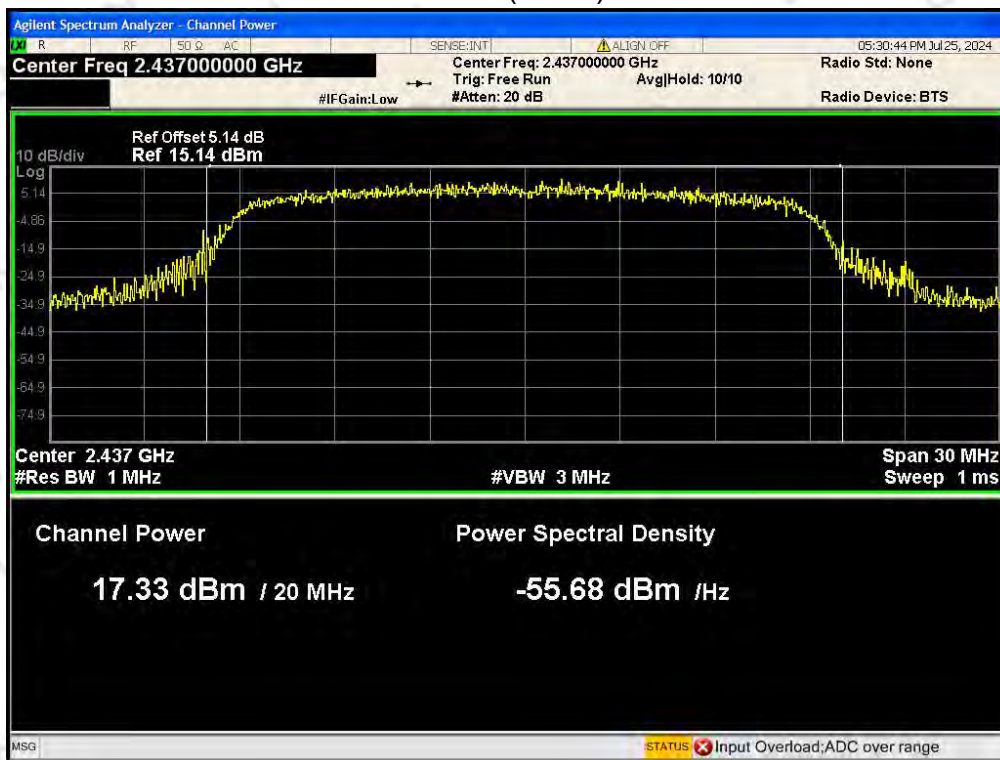


Power NVNT 802.11n(HT20) 2462MHz Ant1

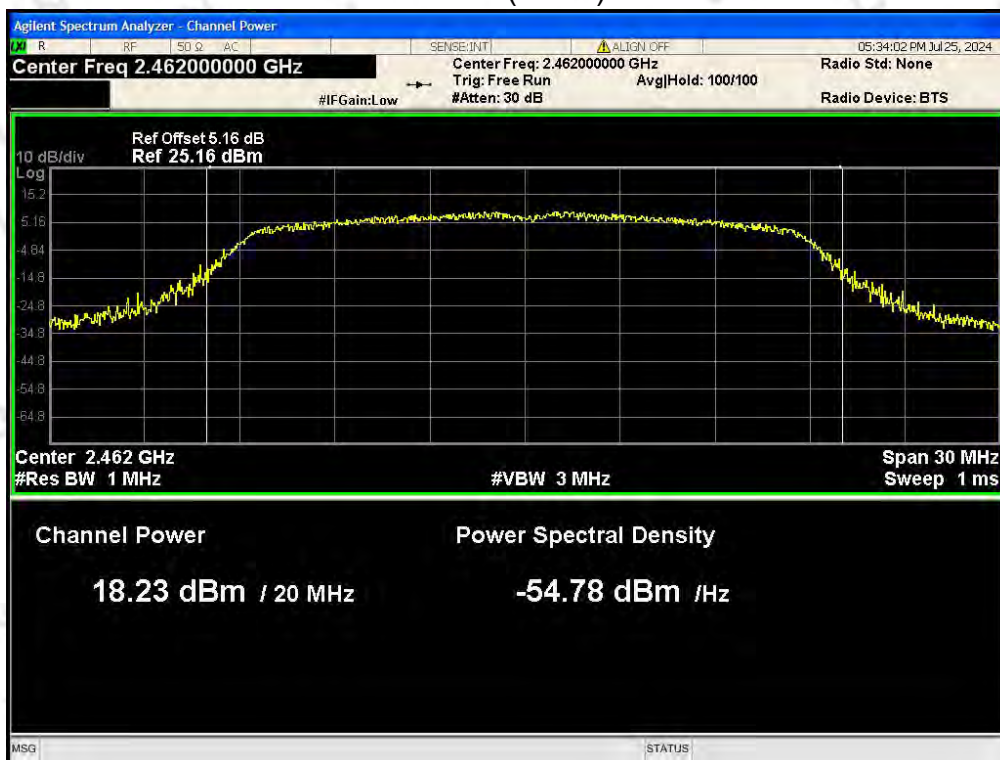


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	99% OBW (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	802.11b	2412	13.9373	9.1442	0.5	Pass
NVNT	802.11b	2437	13.933	9.4531	0.5	Pass
NVNT	802.11b	2462	13.7689	9.0833	0.5	Pass
NVNT	802.11g	2412	16.2094	15.5411	0.5	Pass
NVNT	802.11g	2437	16.2283	14.7456	0.5	Pass
NVNT	802.11g	2462	16.2464	12.0836	0.5	Pass
NVNT	802.11n(HT20)	2412	17.383	16.075	0.5	Pass
NVNT	802.11n(HT20)	2437	17.3275	11.8632	0.5	Pass
NVNT	802.11n(HT20)	2462	17.3871	15.367	0.5	Pass


OBW NVNT 802.11b 2412MHz Ant1

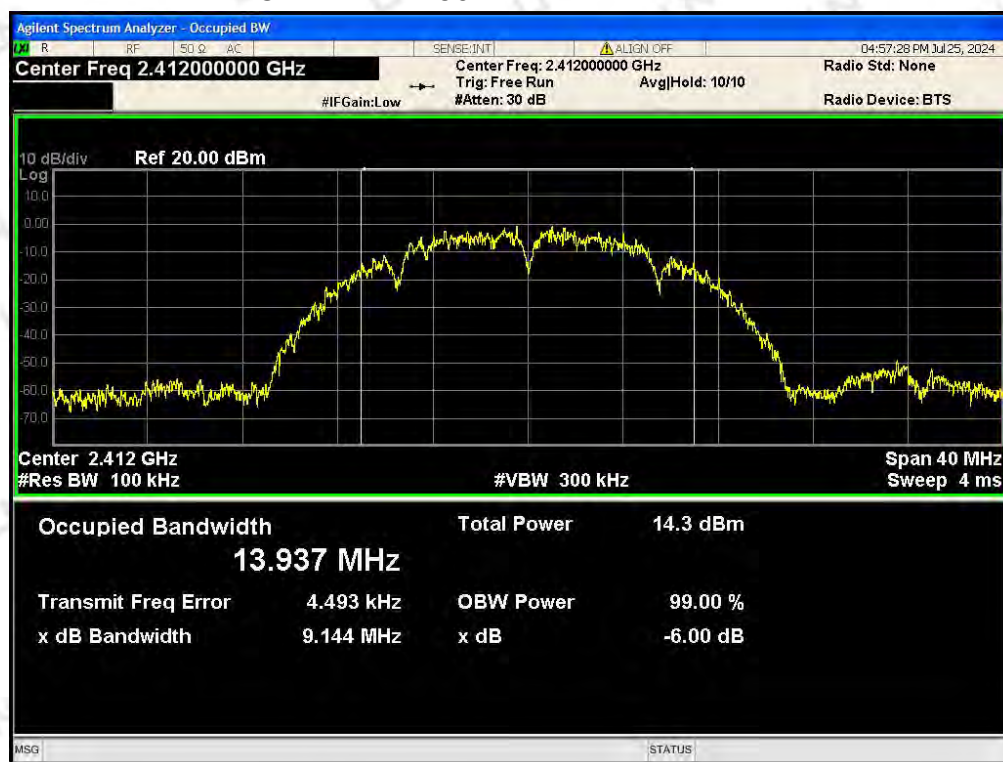


OBW NVNT 802.11b 2437MHz Ant1

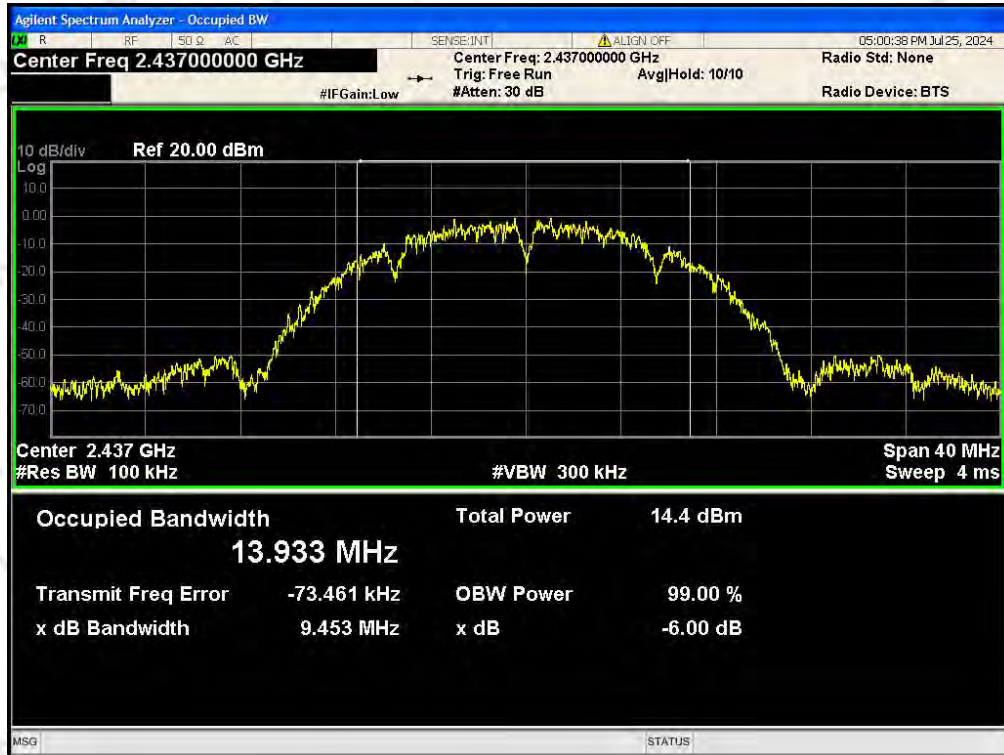


OBW NVNT 802.11b 2462MHz Ant1

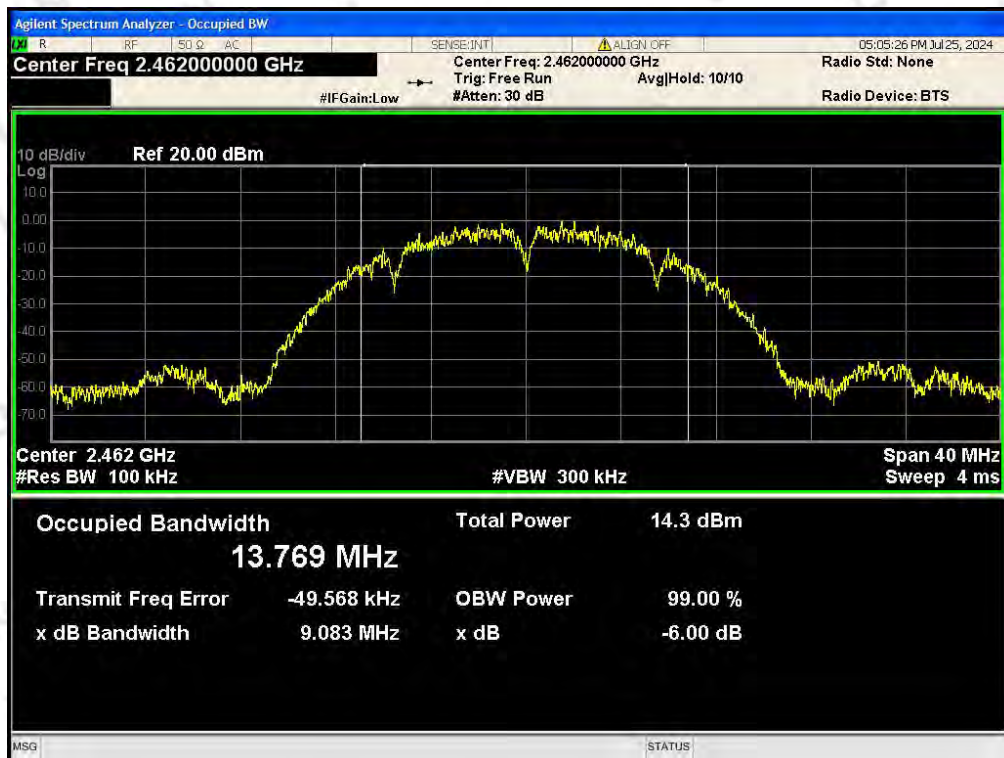


OBW NVNT 802.11g 2412MHz Ant1

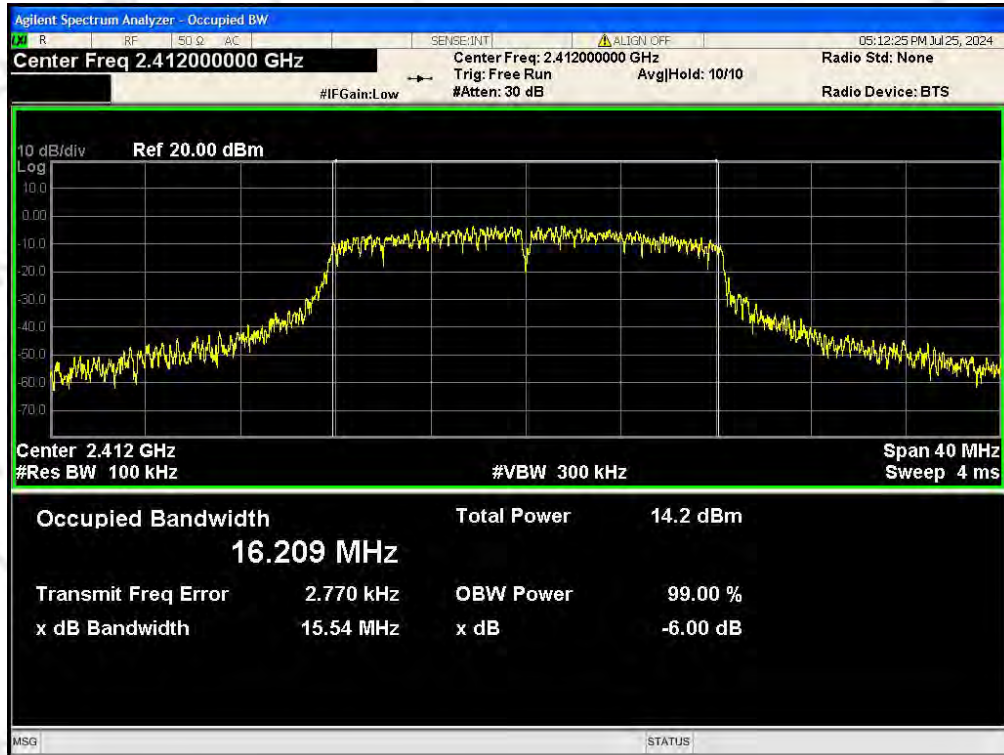


OBW NVNT 802.11g 2437MHz Ant1

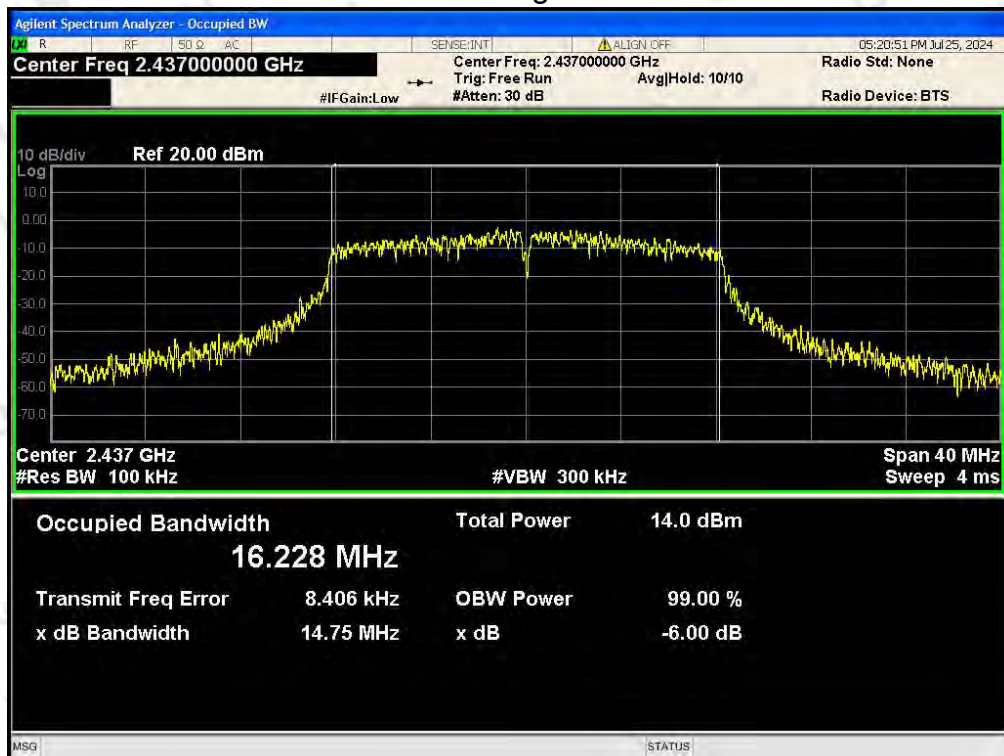


OBW NVNT 802.11g 2462MHz Ant1

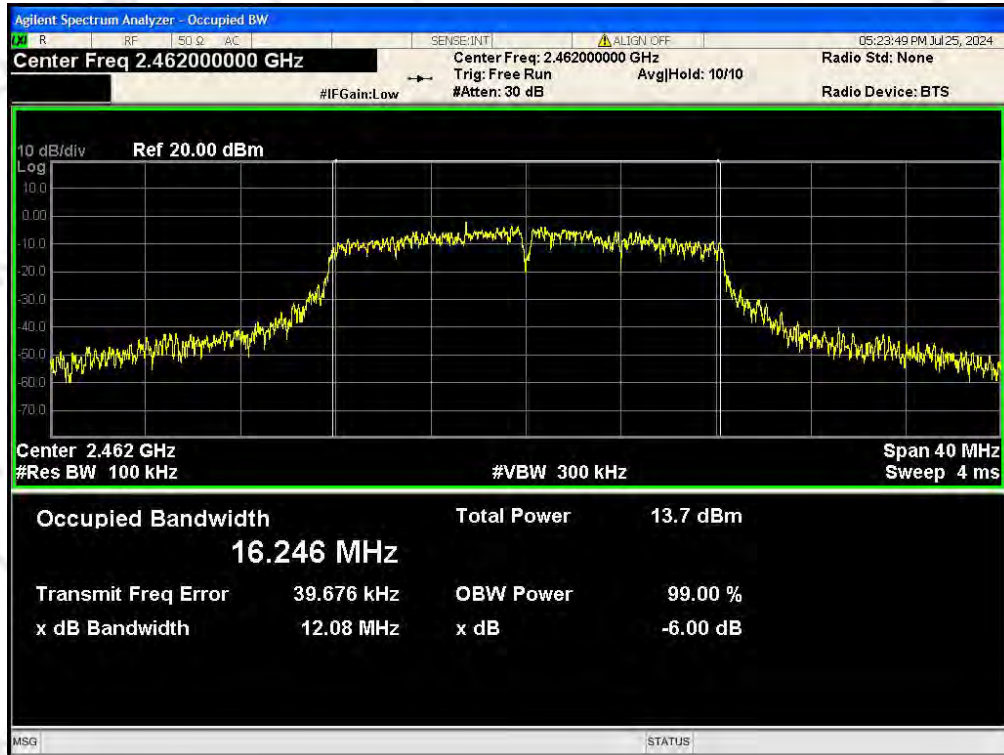

OBW NVNT 802.11n(HT20) 2412MHz Ant1

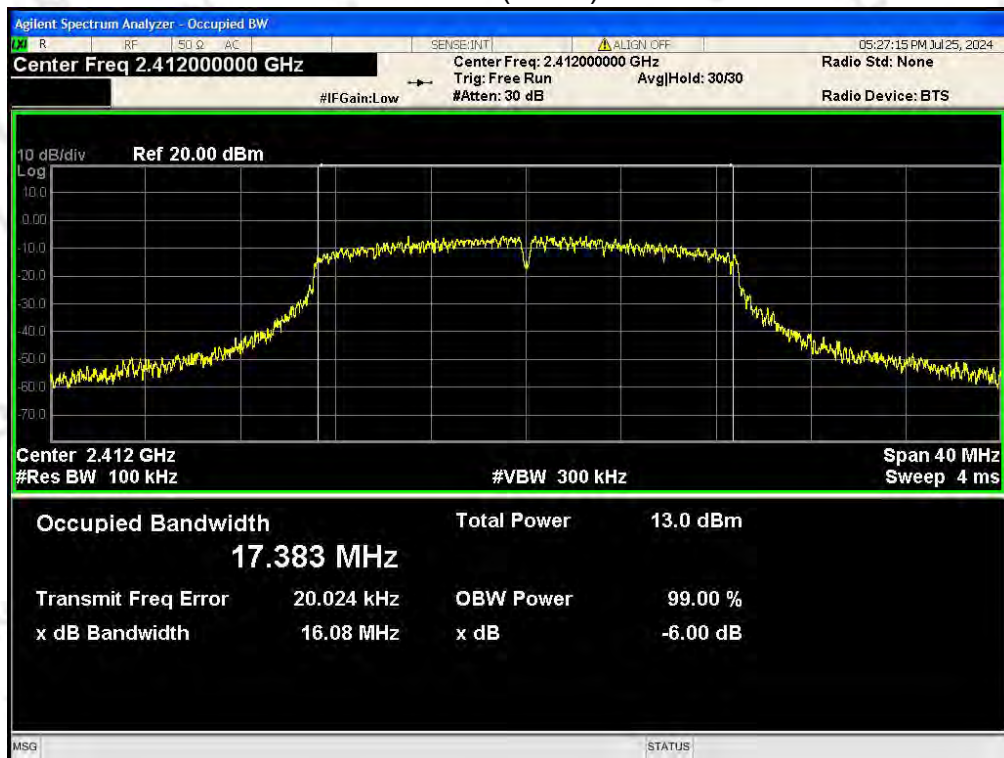

OBW NVNT 802.11n(HT20) 2437MHz Ant1

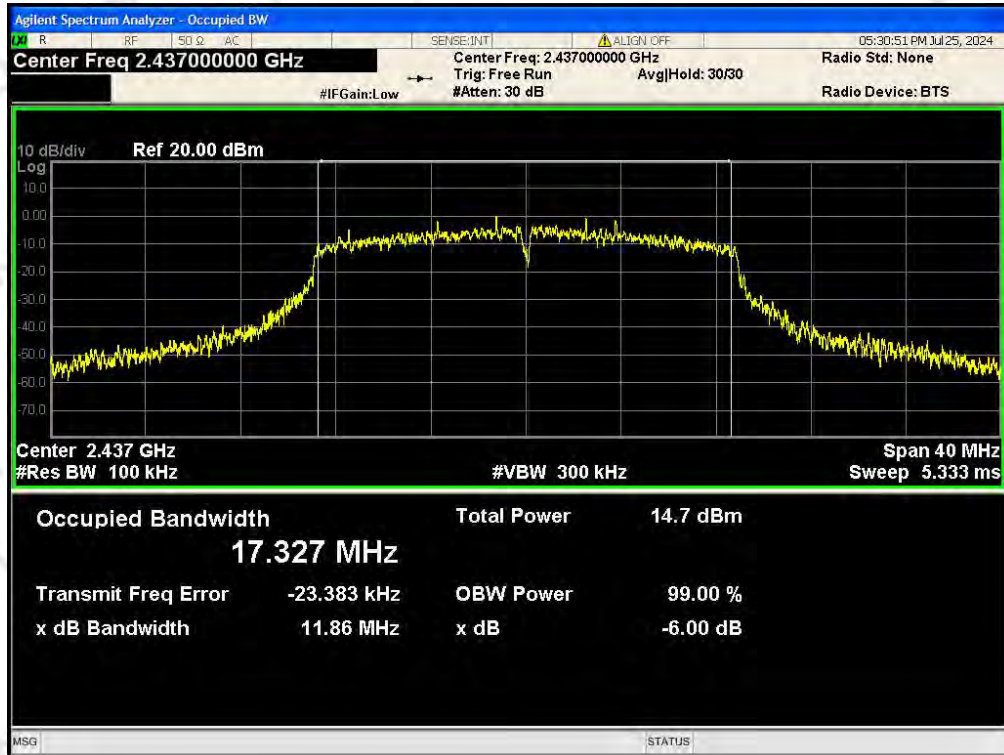

OBW NVNT 802.11n(HT20) 2462MHz Ant1




Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	802.11b	2412	Ant 1	-6.787	8	Pass
NVNT	802.11b	2437	Ant 1	-6.839	8	Pass
NVNT	802.11b	2462	Ant 1	-7.152	8	Pass
NVNT	802.11g	2412	Ant 1	-7.011	8	Pass
NVNT	802.11g	2437	Ant 1	-7.068	8	Pass
NVNT	802.11g	2462	Ant 1	-8.406	8	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-8.391	8	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-7.149	8	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-7.674	8	Pass

PSD NVNT 802.11b 2412MHz Ant1




PSD NVNT 802.11b 2437MHz Ant1

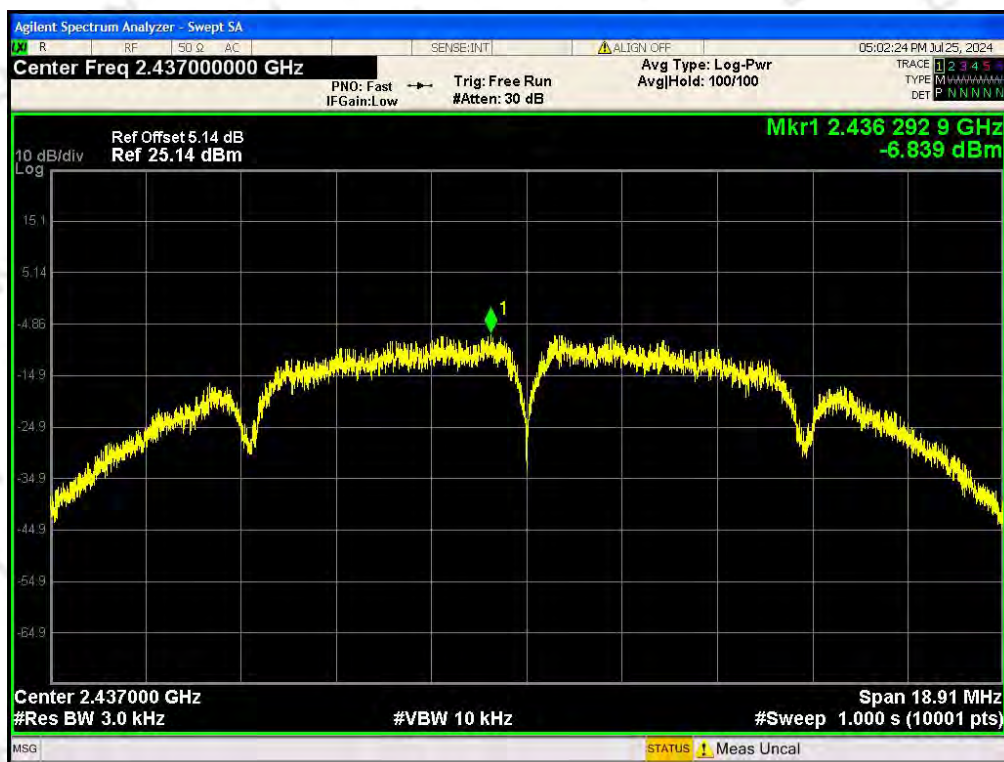


PSD NVNT 802.11b 2462MHz Ant1




PSD NVNT 802.11g 2412MHz Ant1

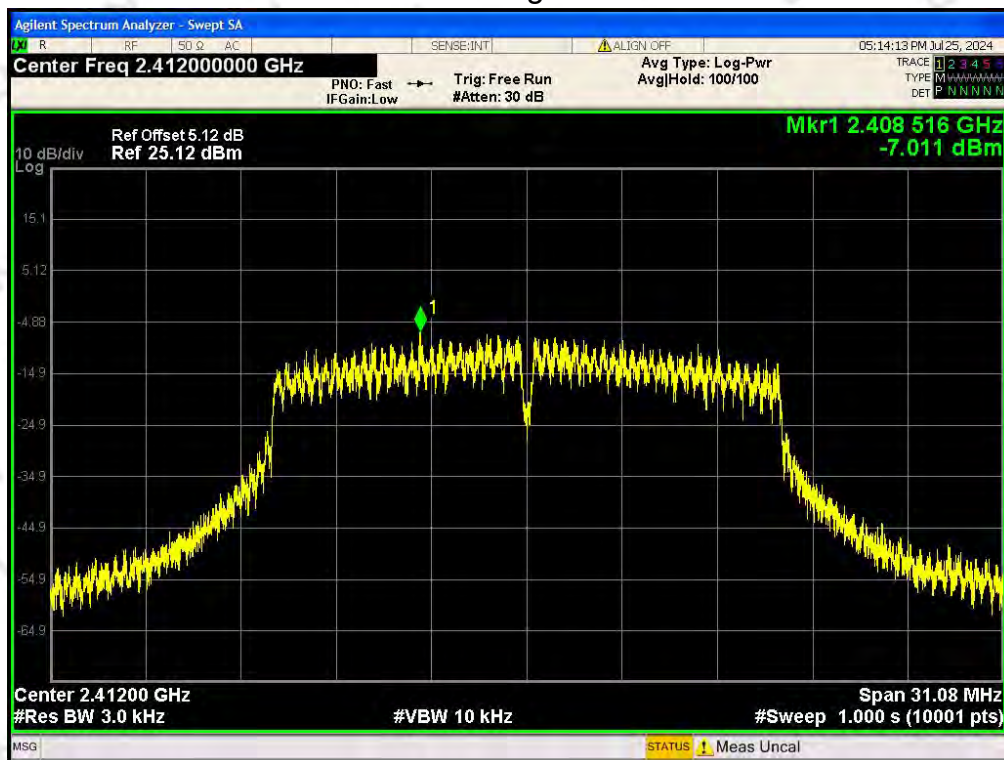


PSD NVNT 802.11g 2437MHz Ant1

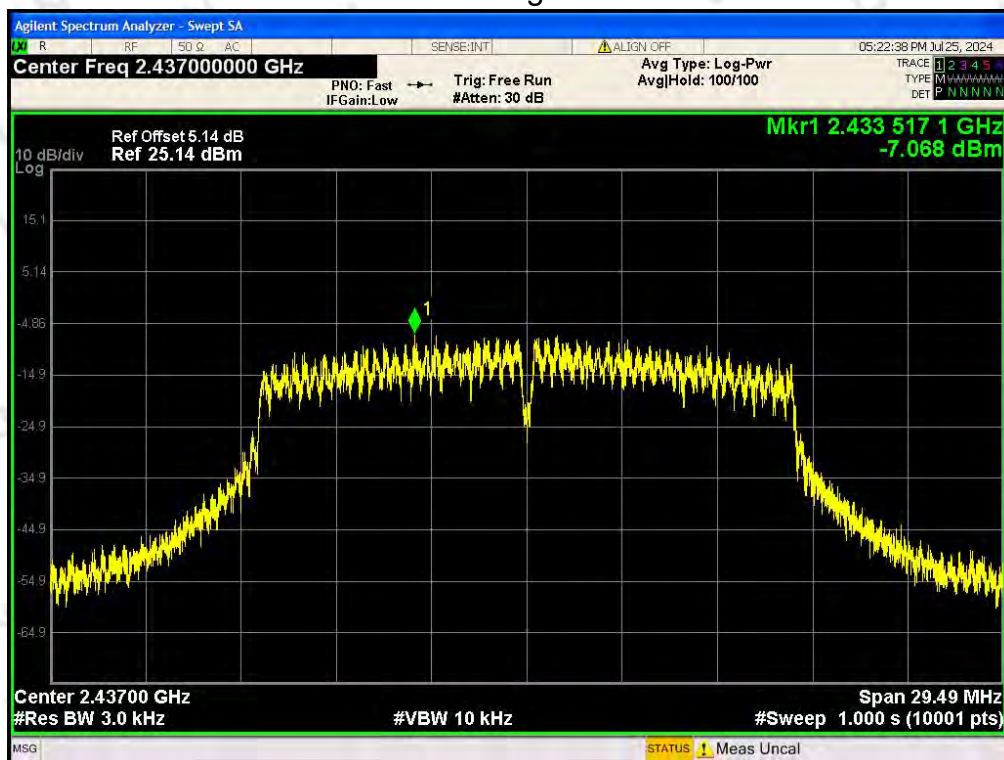


PSD NVNT 802.11g 2462MHz Ant1

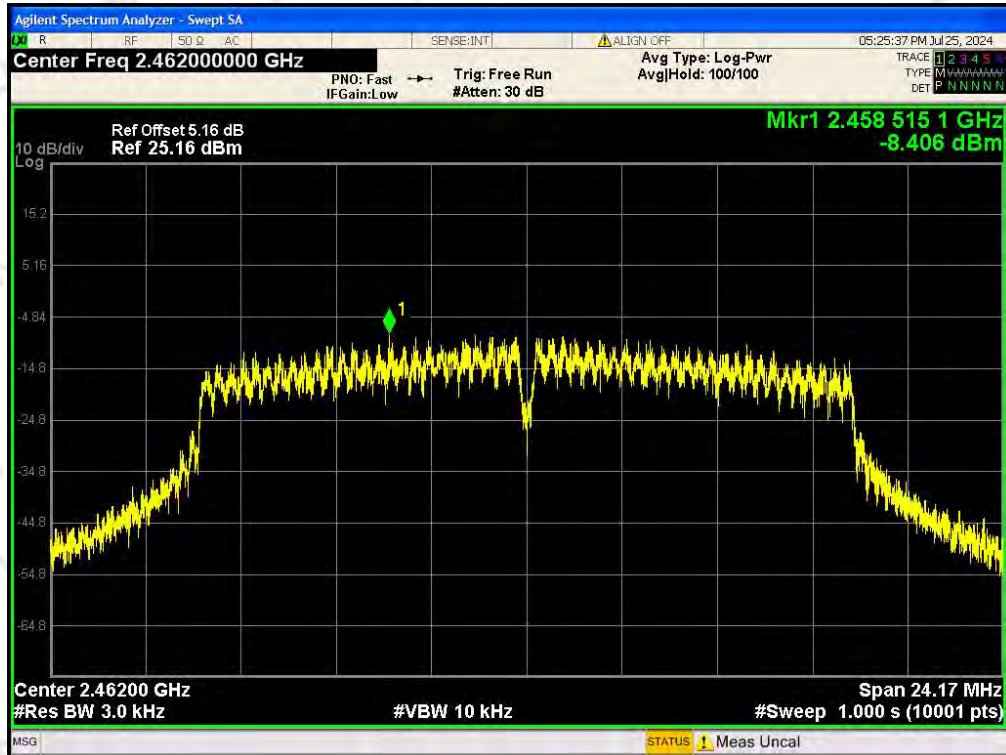


PSD NVNT 802.11n(HT20) 2412MHz Ant1

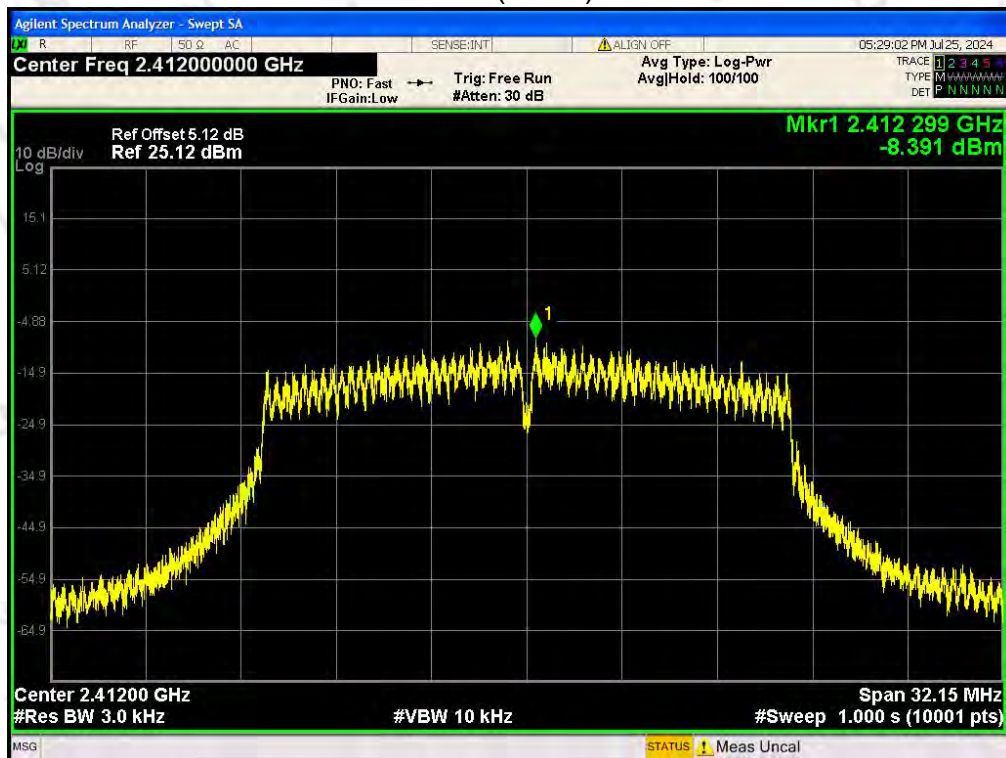

PSD NVNT 802.11n(HT20) 2437MHz Ant1

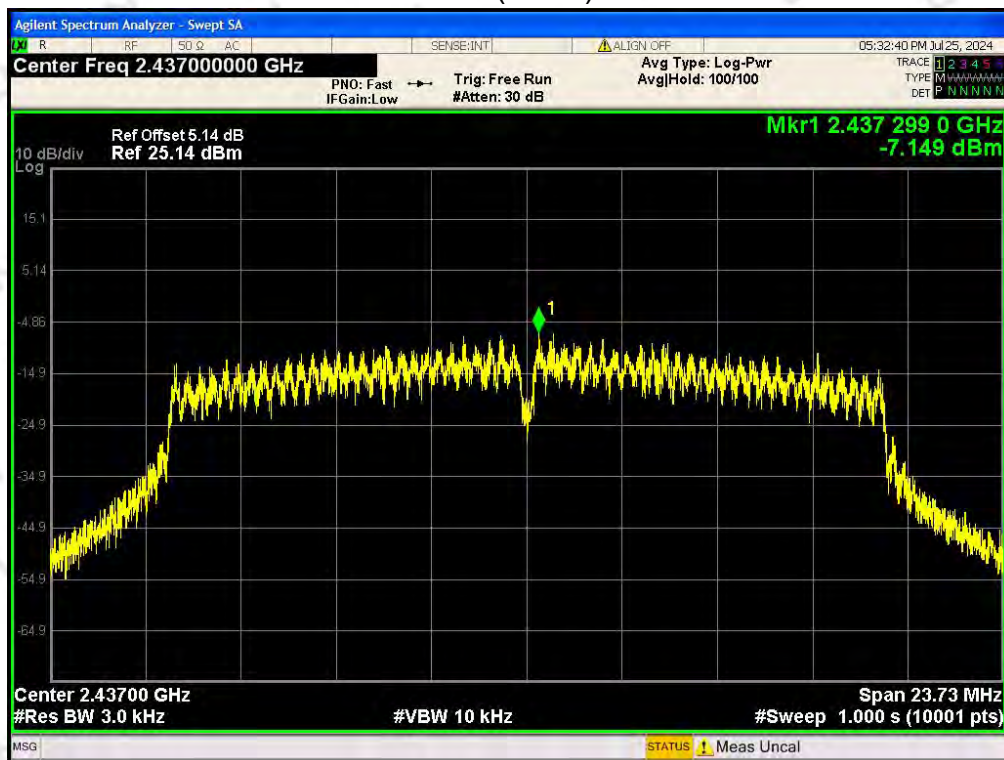

PSD NVNT 802.11n(HT20) 2462MHz Ant1

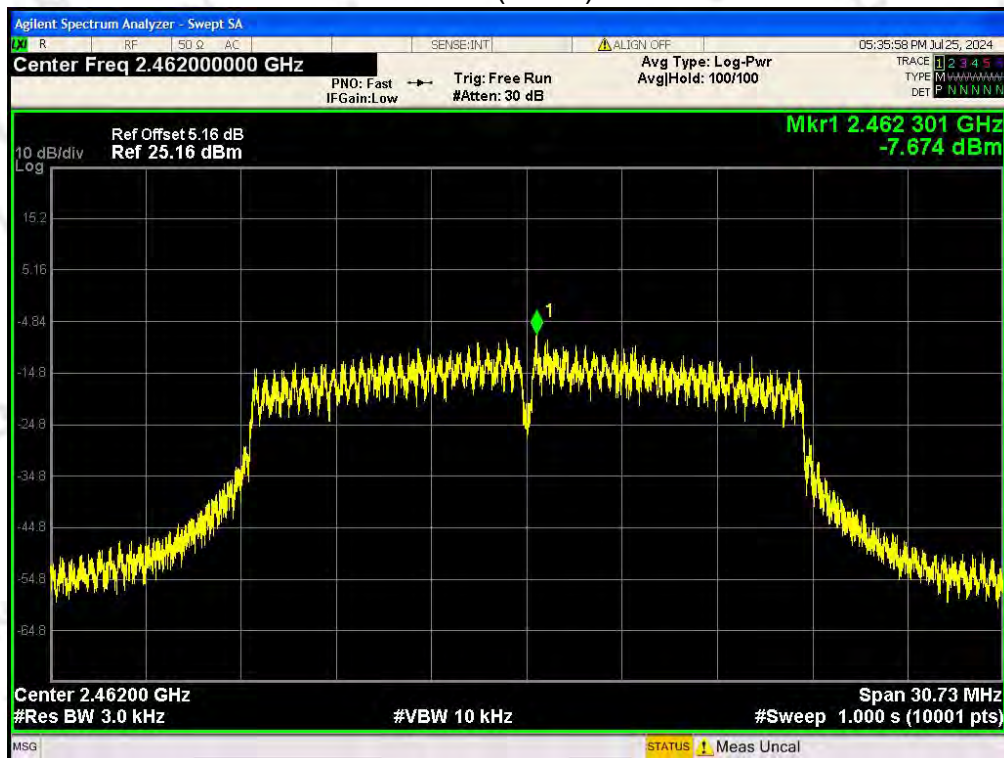


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b	2412	Ant 1	-56.767	-30	Pass
NVNT	802.11b	2462	Ant 1	-57.265	-30	Pass
NVNT	802.11g	2412	Ant 1	-54.456	-30	Pass
NVNT	802.11g	2462	Ant 1	-51.807	-30	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-53.79	-30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-52.907	-30	Pass

Band Edge NVNT 802.11b 2412MHz Ant1 Ref



Band Edge NVNT 802.11b 2412MHz Ant1 Emission

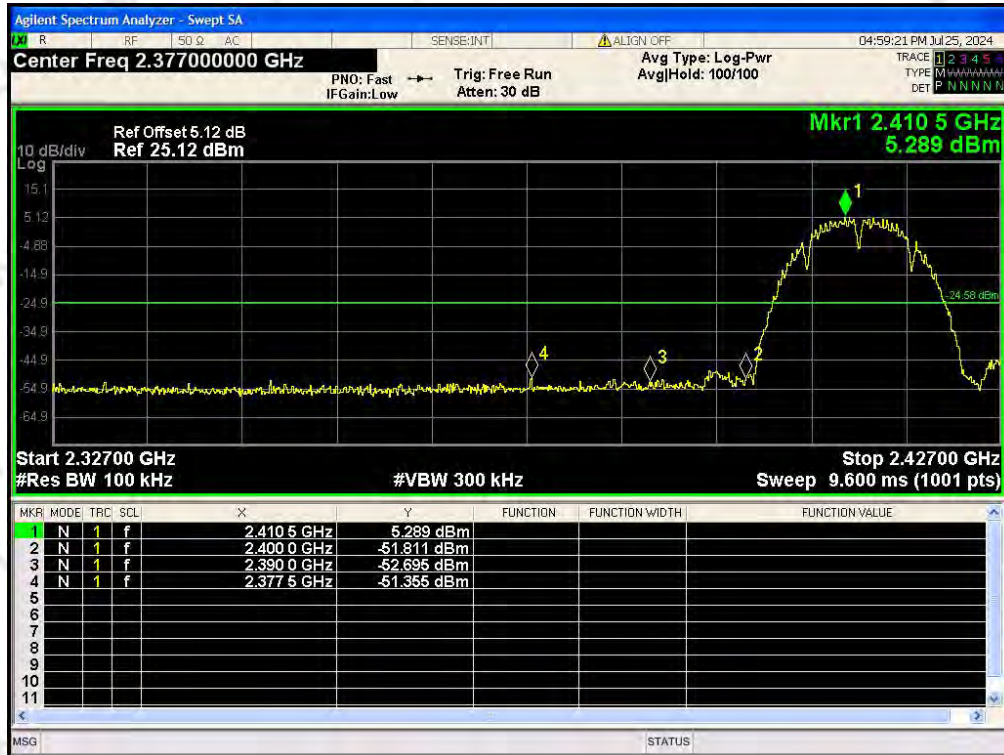


Band Edge NVNT 802.11b 2462MHz Ant1 Ref



Band Edge NVNT 802.11b 2462MHz Ant1 Emission



Band Edge NVNT 802.11g 2412MHz Ant1 Ref

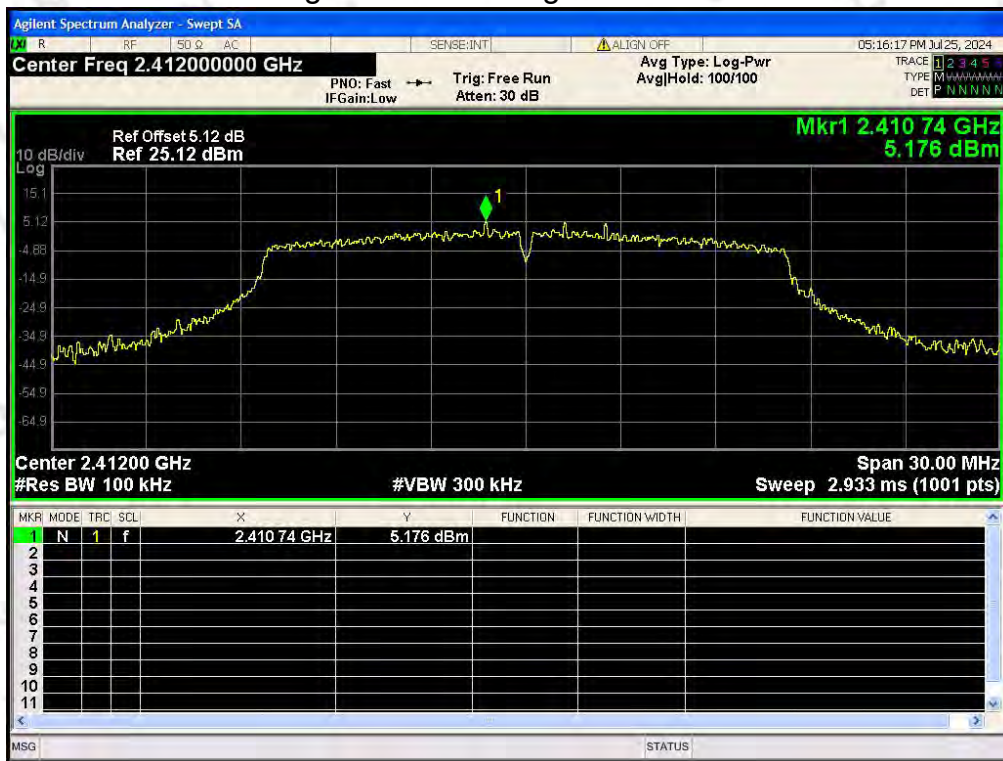

Band Edge NVNT 802.11g 2412MHz Ant1 Emission



Band Edge NVNT 802.11g 2462MHz Ant1 Ref




Band Edge NVNT 802.11g 2462MHz Ant1 Emission



Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Ref




Band Edge NVNT 802.11n(HT20) 2412MHz Ant1 Emission

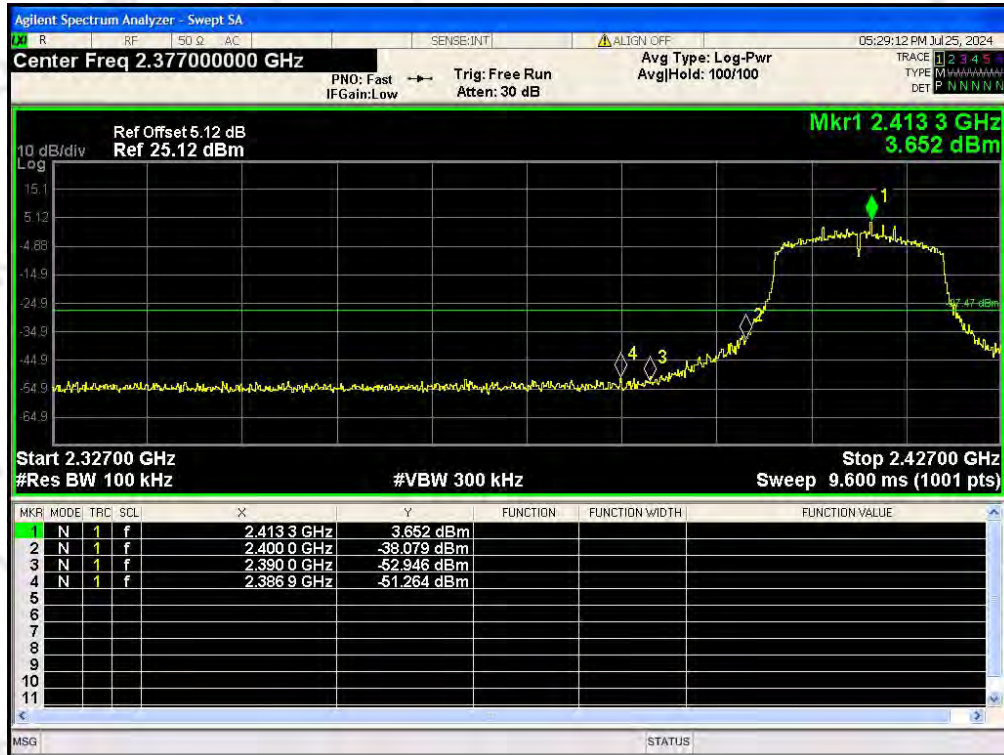

Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Ref



Band Edge NVNT 802.11n(HT20) 2462MHz Ant1 Emission

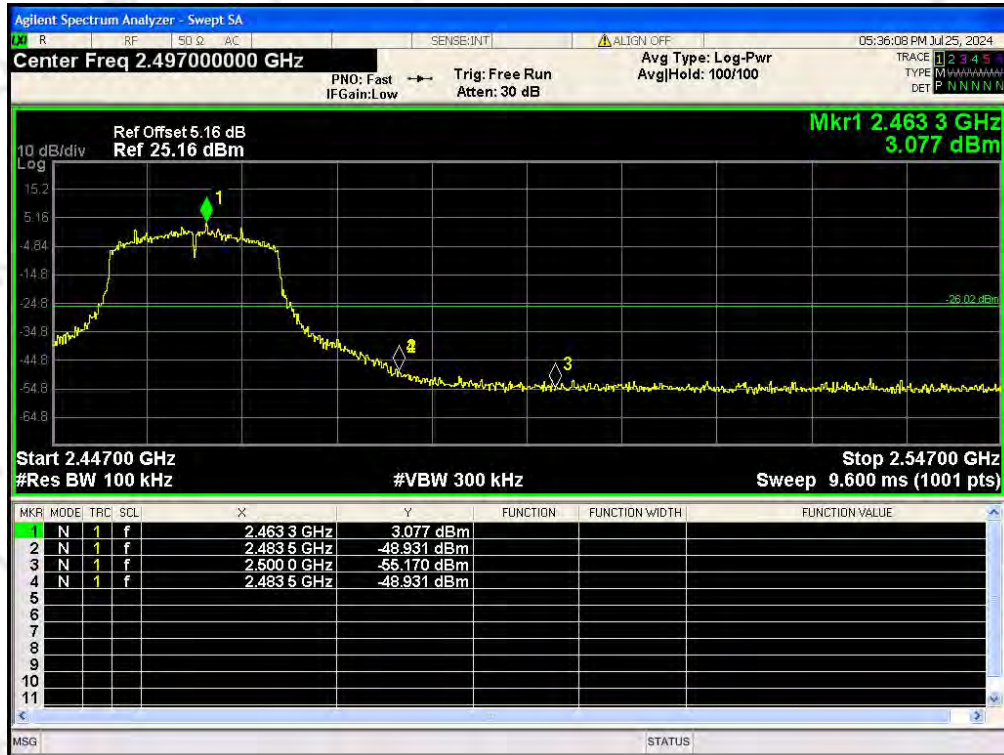


Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	802.11b	2412	Ant 1	-46.357	-30	Pass
NVNT	802.11b	2437	Ant 1	-47.111	-30	Pass
NVNT	802.11b	2462	Ant 1	-46.966	-30	Pass
NVNT	802.11g	2412	Ant 1	-41.203	-30	Pass
NVNT	802.11g	2437	Ant 1	-42.975	-30	Pass
NVNT	802.11g	2462	Ant 1	-42.016	-30	Pass
NVNT	802.11n(HT20)	2412	Ant 1	-40.119	-20	Pass
NVNT	802.11n(HT20)	2437	Ant 1	-42.348	-30	Pass
NVNT	802.11n(HT20)	2462	Ant 1	-42.381	-30	Pass

Tx. Spurious NVNT 802.11b 2412MHz Ant1 Ref




Tx. Spurious NVNT 802.11b 2412MHz Ant1 Emission

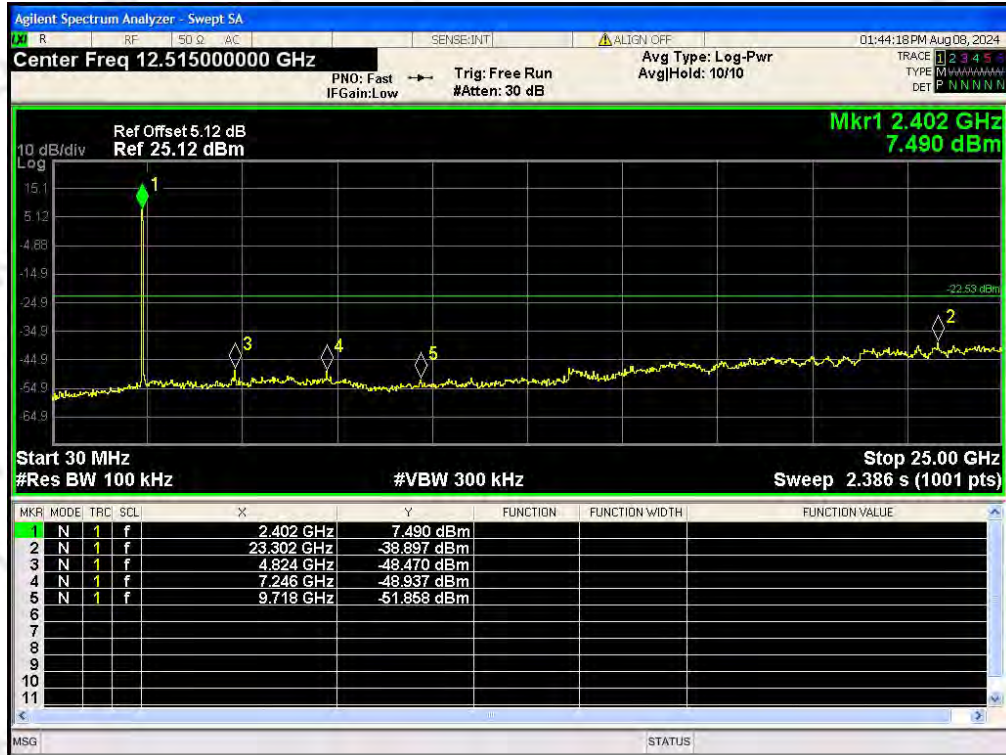

Tx. Spurious NVNT 802.11b 2437MHz Ant1 Ref




Tx. Spurious NVNT 802.11b 2437MHz Ant1 Emission

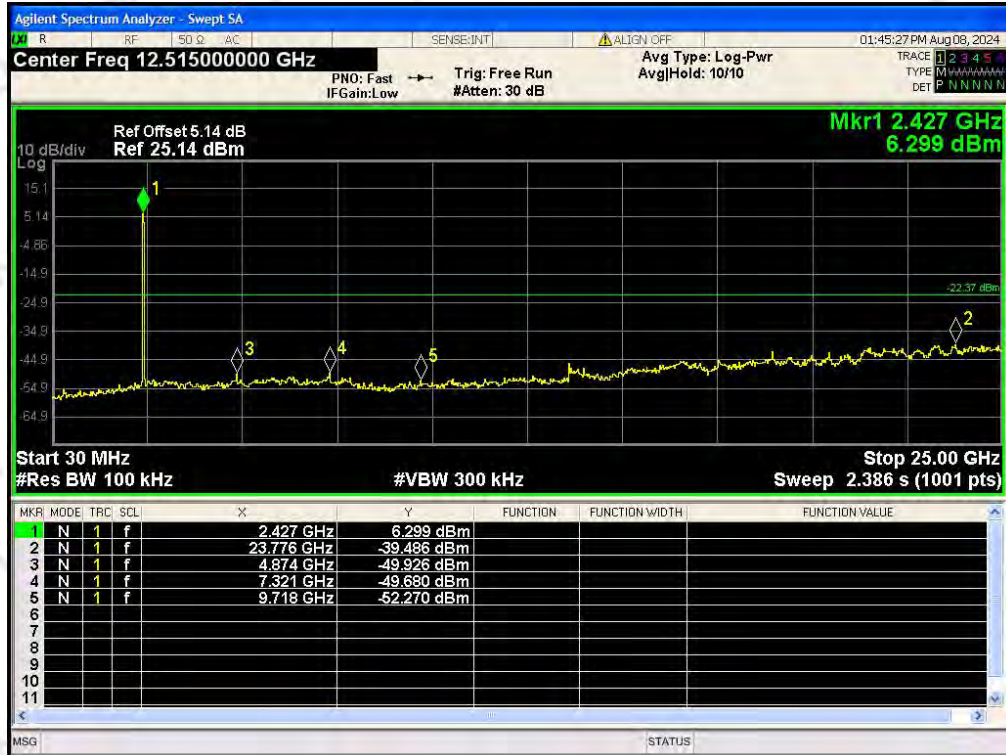

Tx. Spurious NVNT 802.11b 2462MHz Ant1 Ref




Tx. Spurious NVNT 802.11b 2462MHz Ant1 Emission

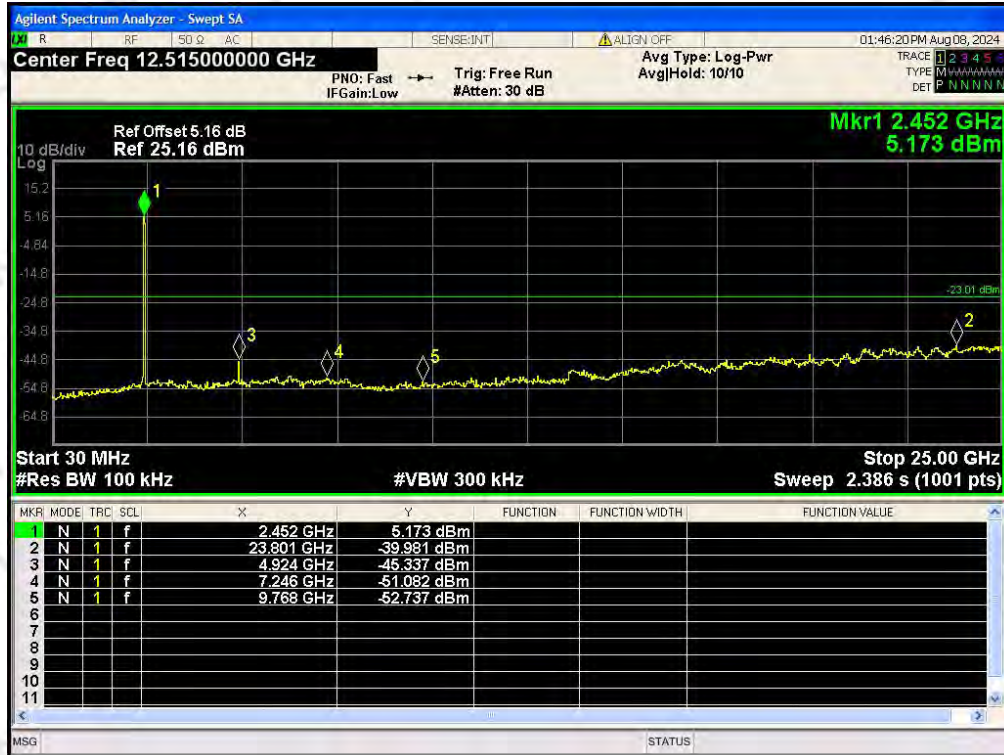

Tx. Spurious NVNT 802.11g 2412MHz Ant1 Ref




Tx. Spurious NVNT 802.11g 2412MHz Ant1 Emission

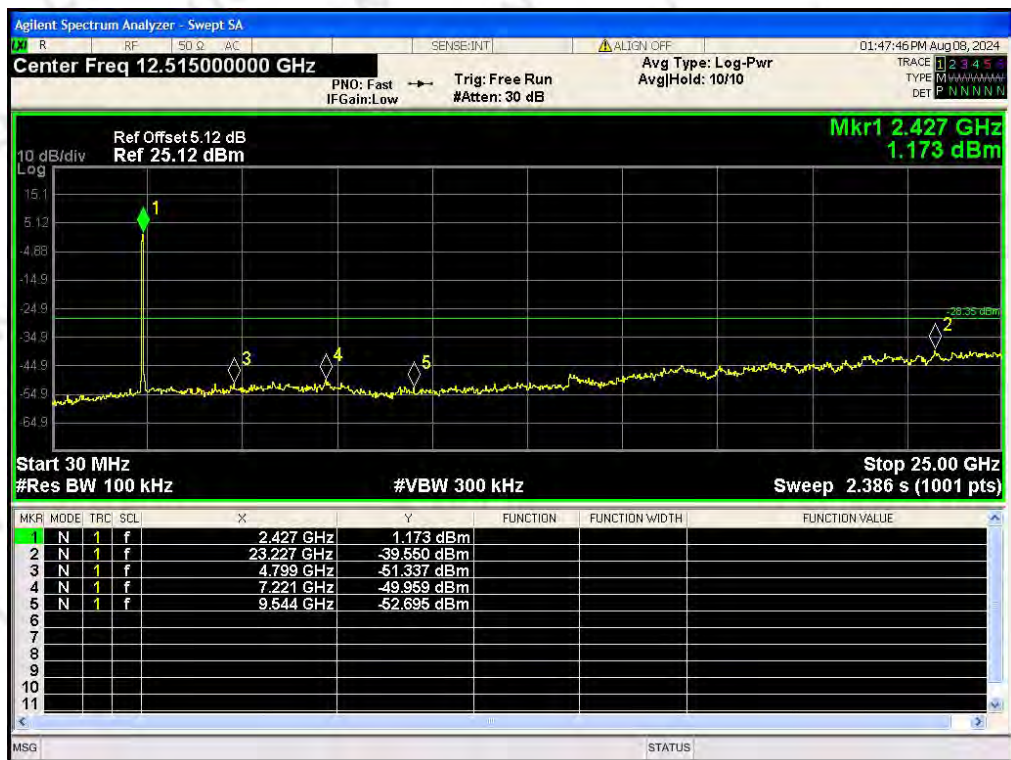

Tx. Spurious NVNT 802.11g 2437MHz Ant1 Ref




Tx. Spurious NVNT 802.11g 2437MHz Ant1 Emission

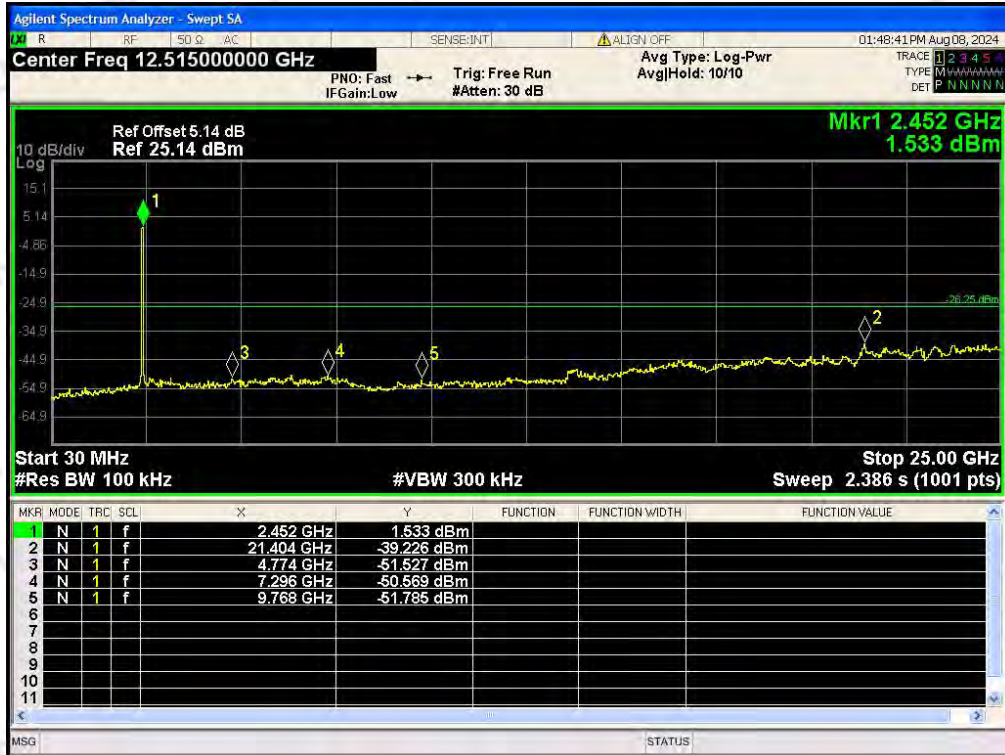

Tx. Spurious NVNT 802.11g 2462MHz Ant1 Ref




Tx. Spurious NVNT 802.11g 2462MHz Ant1 Emission

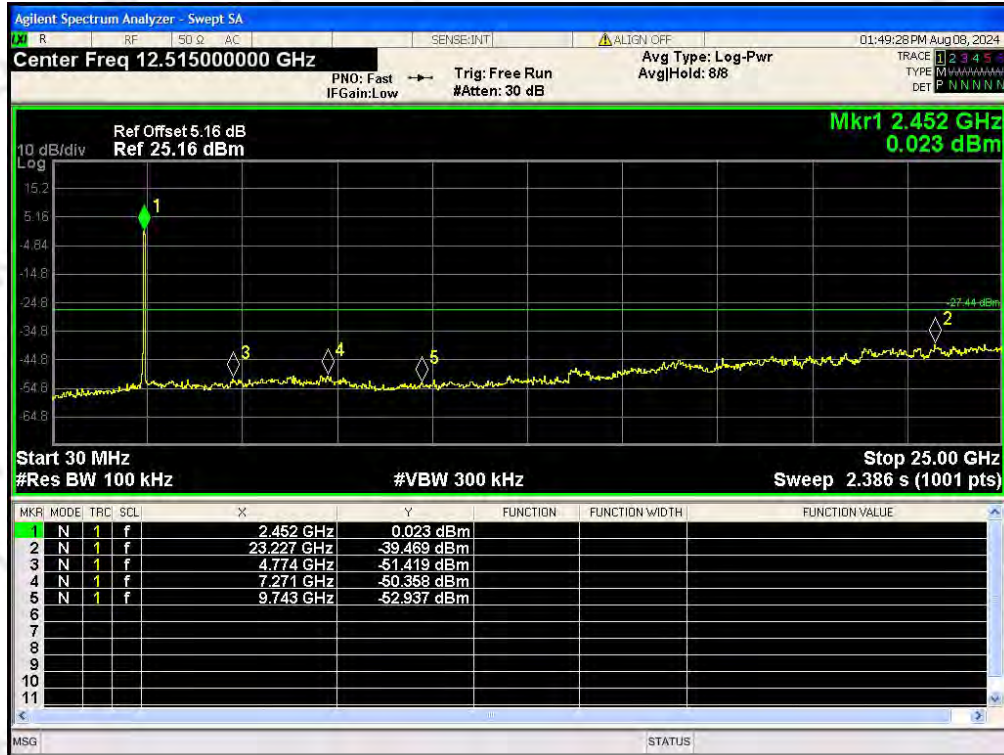

Tx. Spurious NVNT 802.11n(HT20) 2412MHz Ant1 Ref




Tx. Spurious NVNT 802.11n(HT20) 2412MHz Ant1 Emission

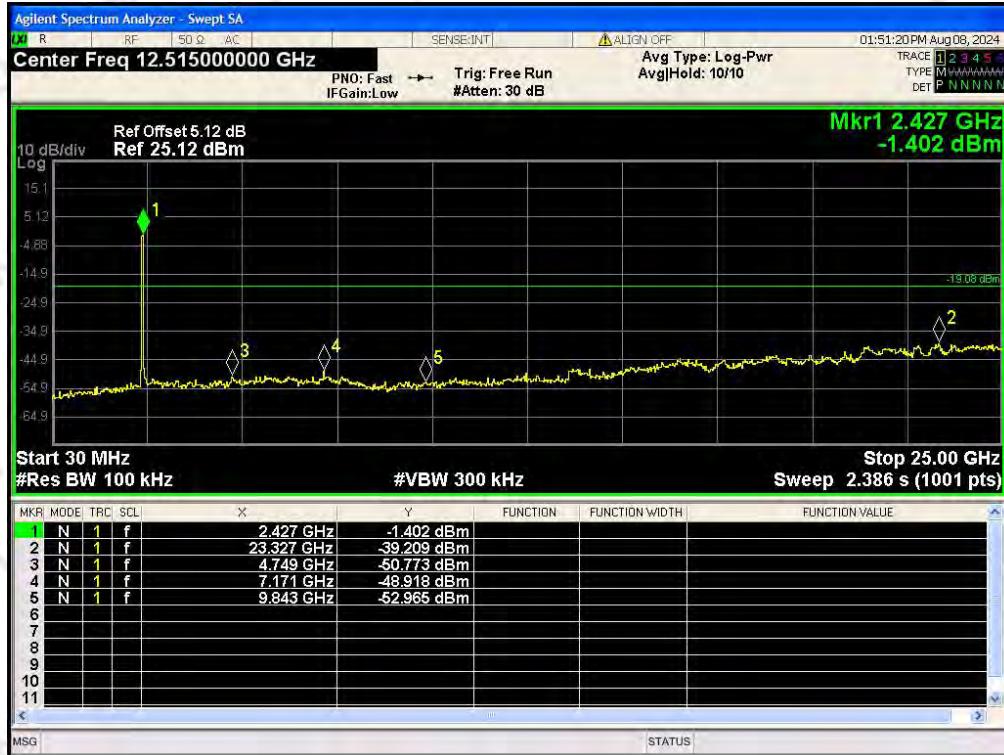

Tx. Spurious NVNT 802.11n(HT20) 2437MHz Ant1 Ref




Tx. Spurious NVNT 802.11n(HT20) 2437MHz Ant1 Emission

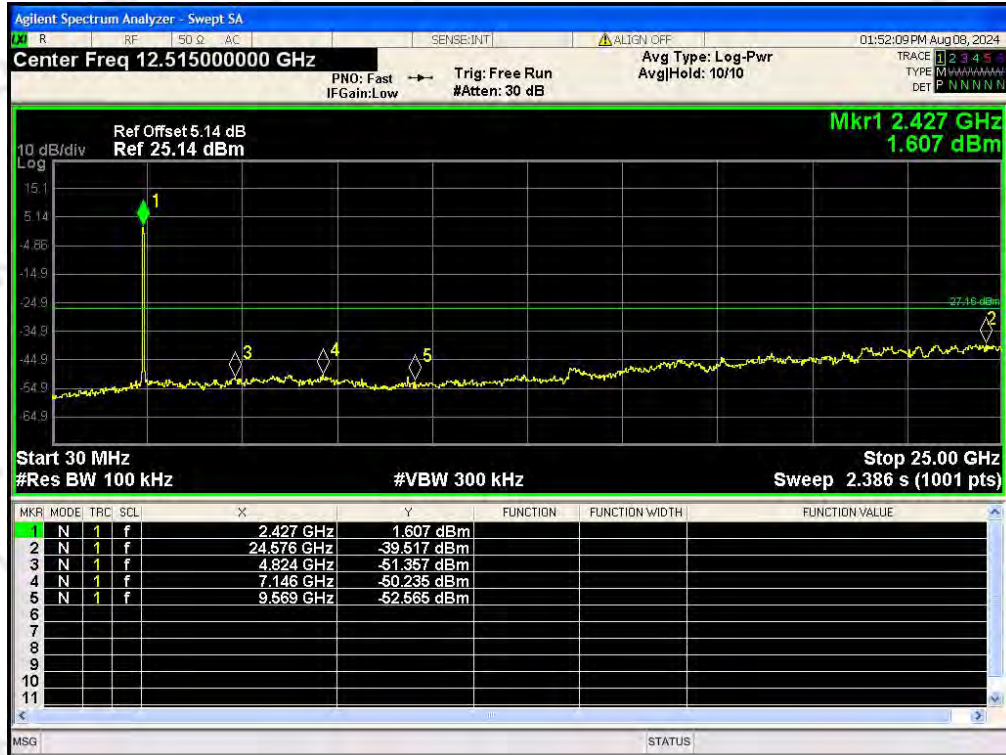

Tx. Spurious NVNT 802.11n(HT20) 2462MHz Ant1 Ref



Tx. Spurious NVNT 802.11n(HT20) 2462MHz Ant1 Emission

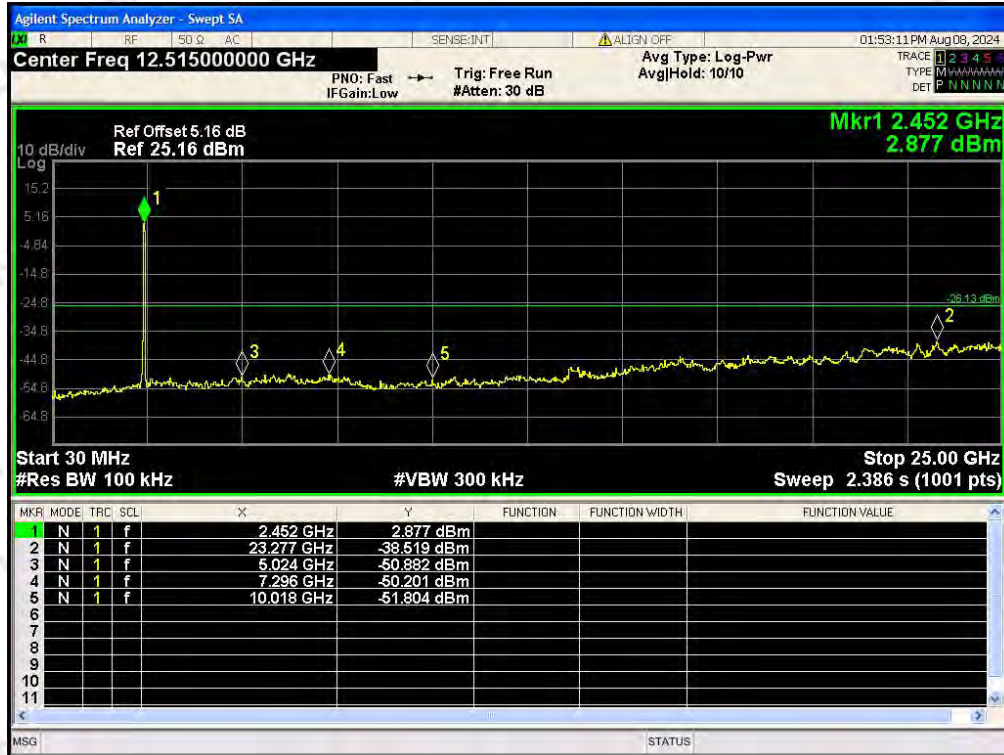

End of Report