

ATTACHMENT O – SAR TEST PLOTS (1 of 3)

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 1013 / Antenna : in
Liquid Temperature : 21.6°C
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.863 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 1.24 mW/g

Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 29.3 V/m; Power Drift = -0.055 dB
Peak SAR (extrapolated) = 1.81 W/kg
SAR(1 g) = 1.16 mW/g; SAR(10 g) = 0.728 mW/g
Maximum value of SAR (measured) = 1.27 mW/g

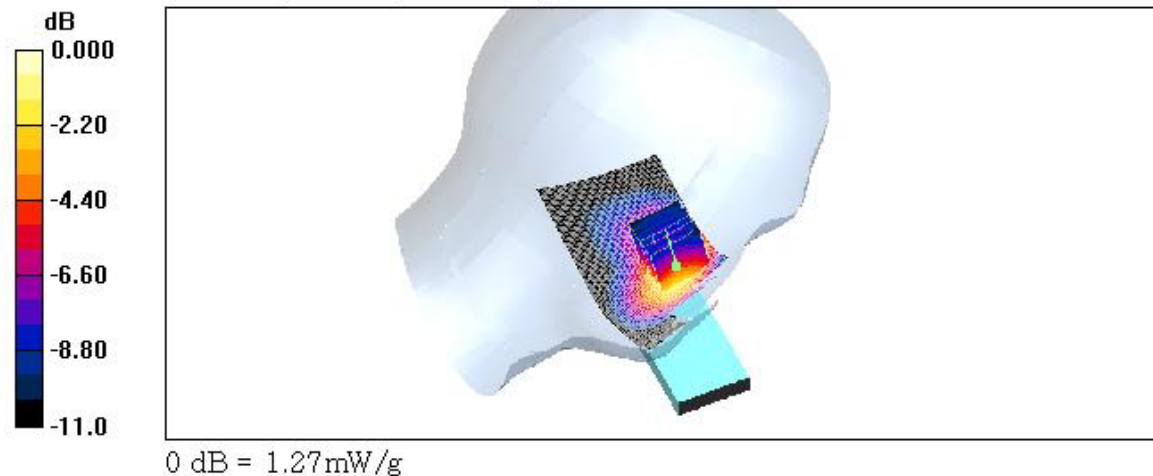

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 1013 / Antenna : out
Liquid Temperature : 21.6°C
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.863$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 0.777 mW/g

Left touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 22.5 V/m; Power Drift = 0.031 dB
Peak SAR (extrapolated) = 1.10 W/kg
SAR(1 g) = 0.728 mW/g; SAR(10 g) = 0.462 mW/g
Maximum value of SAR (measured) = 0.790 mW/g

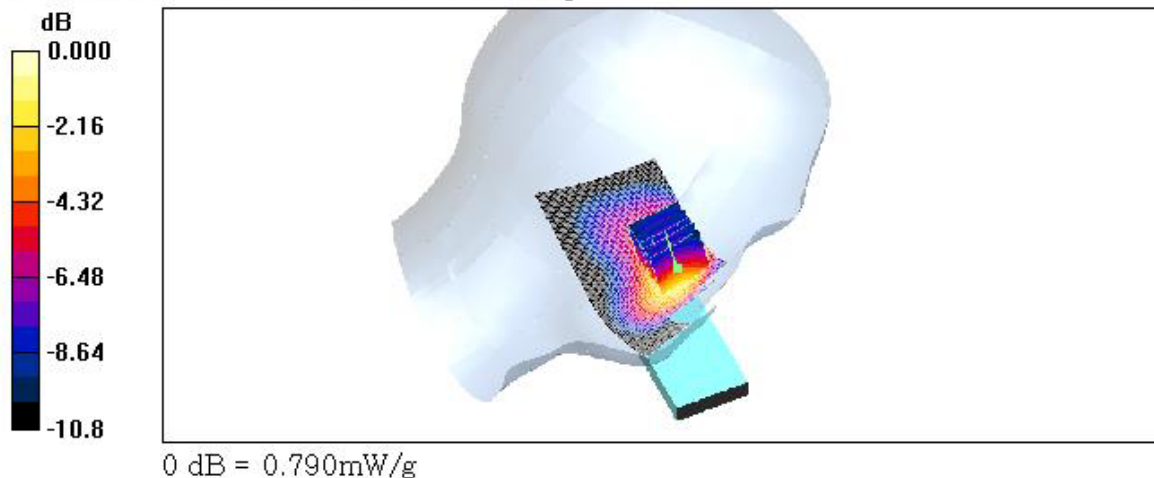

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 384 / Antenna : in
Liquid Temperature : 21.6 °C
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 384/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.32 mW/g

Left touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 29.7 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 1.89 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.777 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.34 mW/g

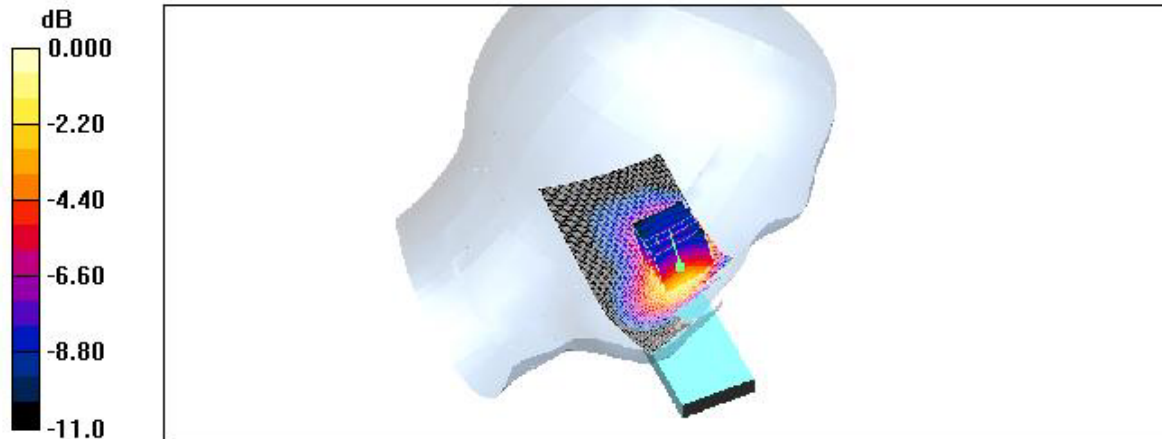

0 dB = 1.34mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Channel : 384 / Antenna : out

Liquid Temperature : 21.6℃

Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 384/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.918 mW/g

Left touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$


Reference Value = 23.9 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.864 mW/g; SAR(10 g) = 0.550 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.936 mW/g

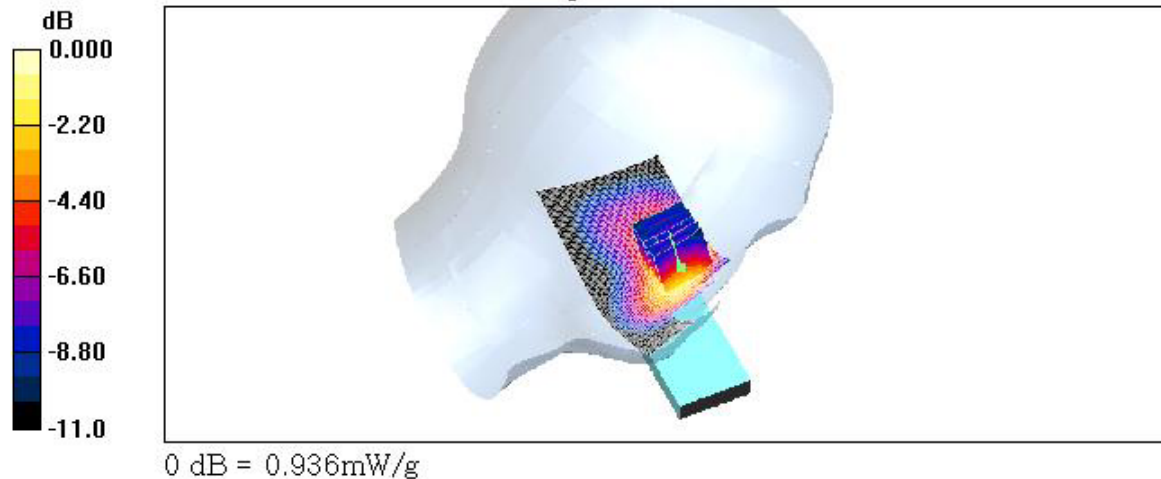

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 777 / Antenna : in
Liquid Temperature : 21.6℃
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.885 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.11 mW/g


Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 27.5 V/m; Power Drift = -0.075 dB

Peak SAR (extrapolated) = 1.62 W/kg

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.650 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.14 mW/g

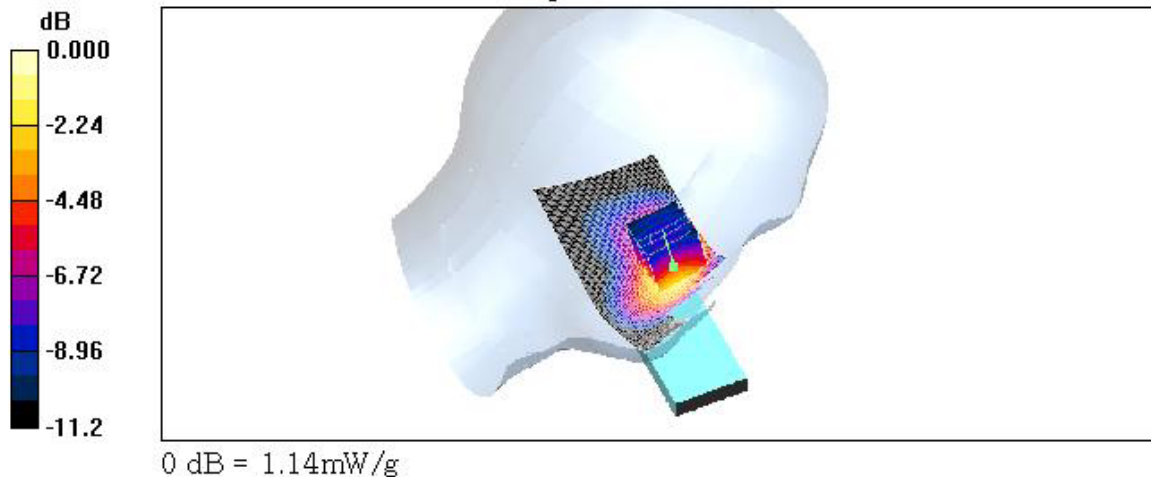

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 777 / Antenna : out
Liquid Temperature : 21.6℃
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.885 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Left touch 777/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.06 mW/g

Left touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$


Reference Value = 26.1 V/m; Power Drift = -0.082 dB

Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 1 mW/g; SAR(10 g) = 0.631 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.10 mW/g

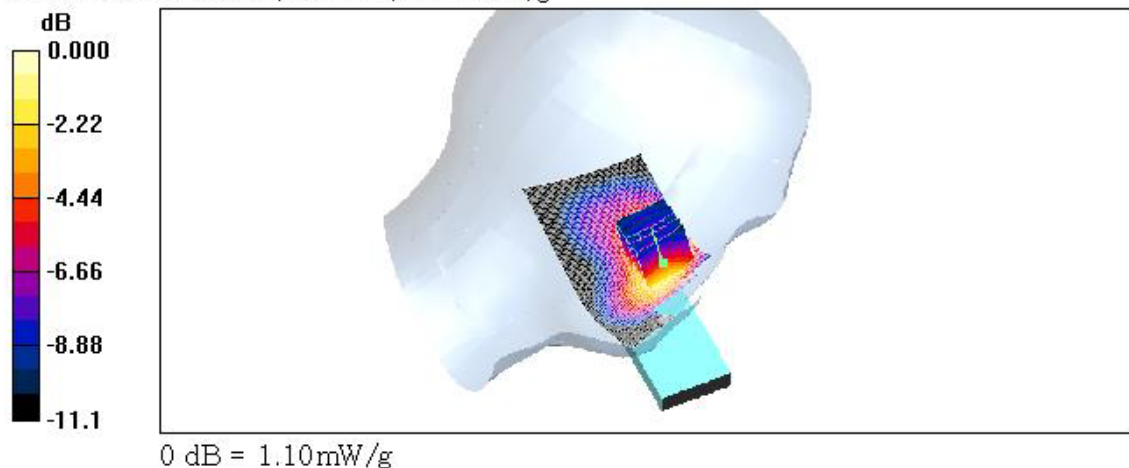

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 1013 / Antenna : in
Liquid Temperature : 21.6 °C
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825$ MHz; $\sigma = 0.863$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (interpolated) = 1.51 mW/g

Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 35.9 V/m; Power Drift = -0.125 dB
Peak SAR (extrapolated) = 2.14 W/kg
SAR(1 g) = 1.36 mW/g; SAR(10 g) = 0.852 mW/g
Maximum value of SAR (measured) = 1.49 mW/g

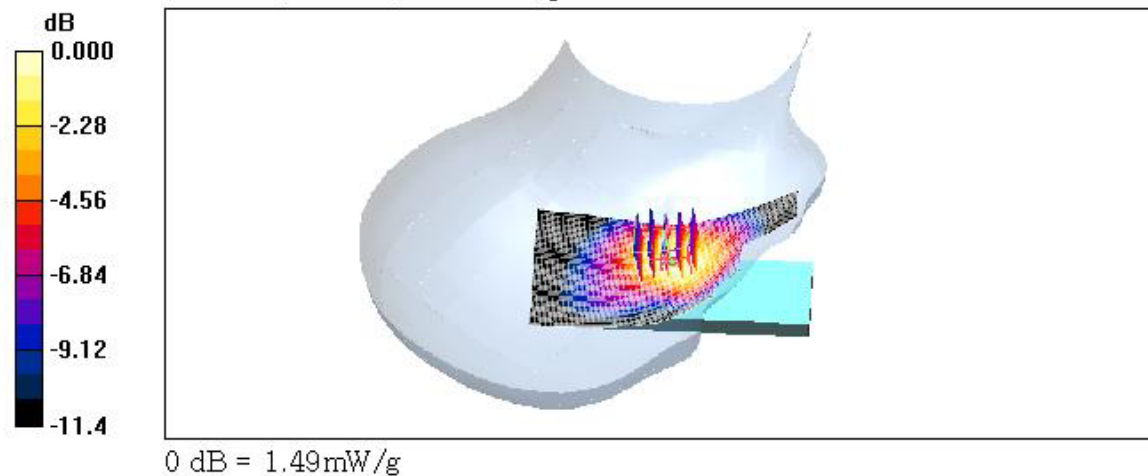

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 1013 / Antenna : iout
Liquid Temperature : 21.6℃
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1


Communication System: CDMA 835MHz FCC; Frequency: 824.7 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 825 \text{ MHz}$; $\sigma = 0.863 \text{ mho/m}$; $\epsilon_r = 40.8$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 1013/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (interpolated) = 0.891 mW/g

Right touch 1013/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 27.2 V/m; Power Drift = 0.036 dB
Peak SAR (extrapolated) = 1.25 W/kg
SAR(1 g) = 0.811 mW/g; SAR(10 g) = 0.512 mW/g
Maximum value of SAR (measured) = 0.888 mW/g

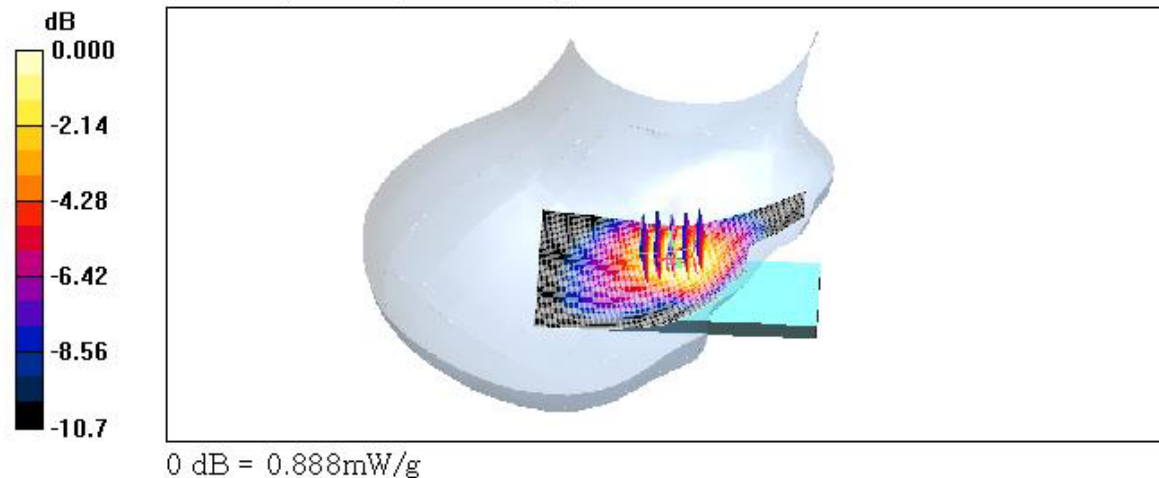

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 384 / Antenna : in
Liquid Temperature : 21.6°C
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:


- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 384/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 1.58 mW/g

Right touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$
Reference Value = 35.8 V/m; Power Drift = -0.121 dB
Peak SAR (extrapolated) = 2.26 W/kg
SAR(1 g) = 1.43 mW/g; SAR(10 g) = 0.893 mW/g

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (measured) = 1.58 mW/g

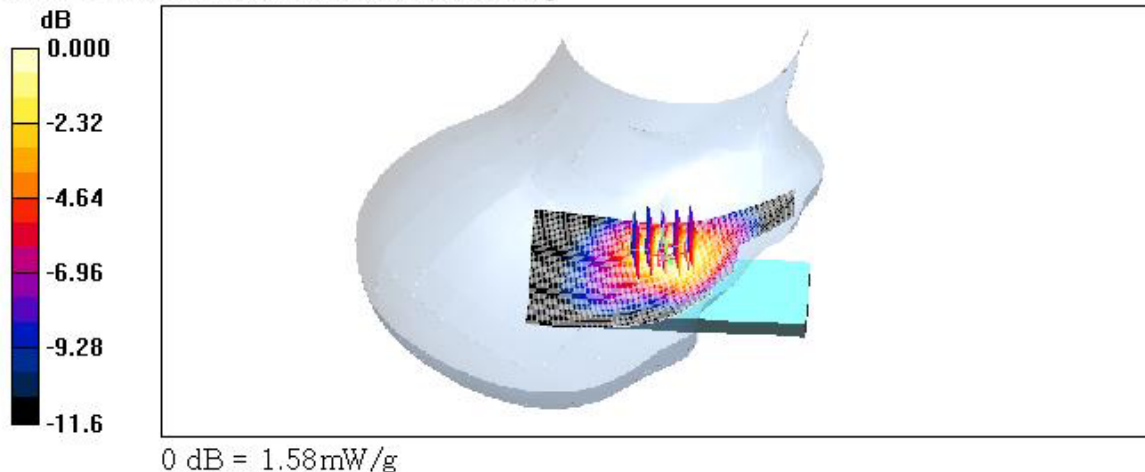

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835(E-battery) / Channel : 384 / Antenna : in
Liquid Temperature : 21.6°C
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 384/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.53 mW/g

Right touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 33.2 V/m; Power Drift = -0.041 dB

Peak SAR (extrapolated) = 2.24 W/kg

SAR(1 g) = 1.4 mW/g; SAR(10 g) = 0.872 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.53 mW/g

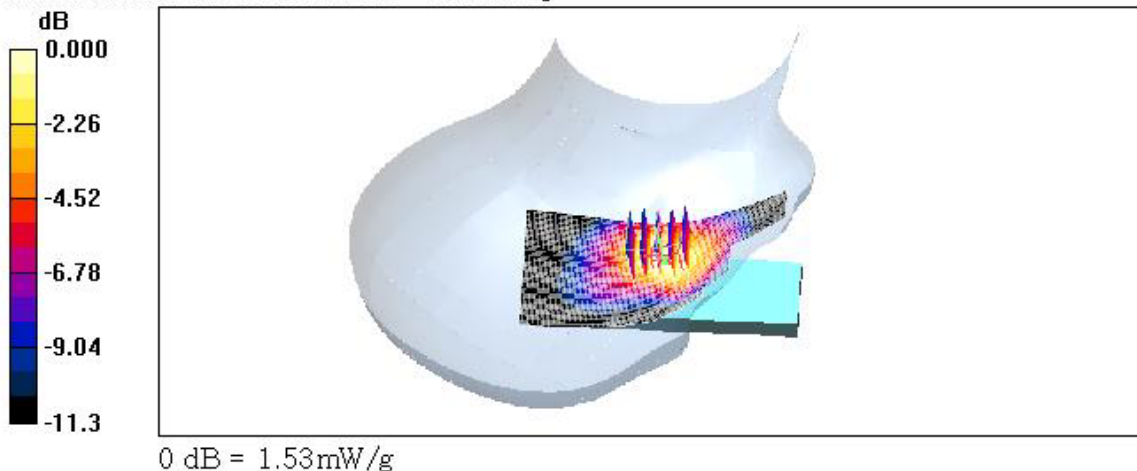

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 384 / Antenna : out
Liquid Temperature : 21.6°C
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 384/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.04 mW/g

Right touch 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 29.1 V/m; Power Drift = -0.056 dB

Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.950 mW/g; SAR(10 g) = 0.597 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.04 mW/g

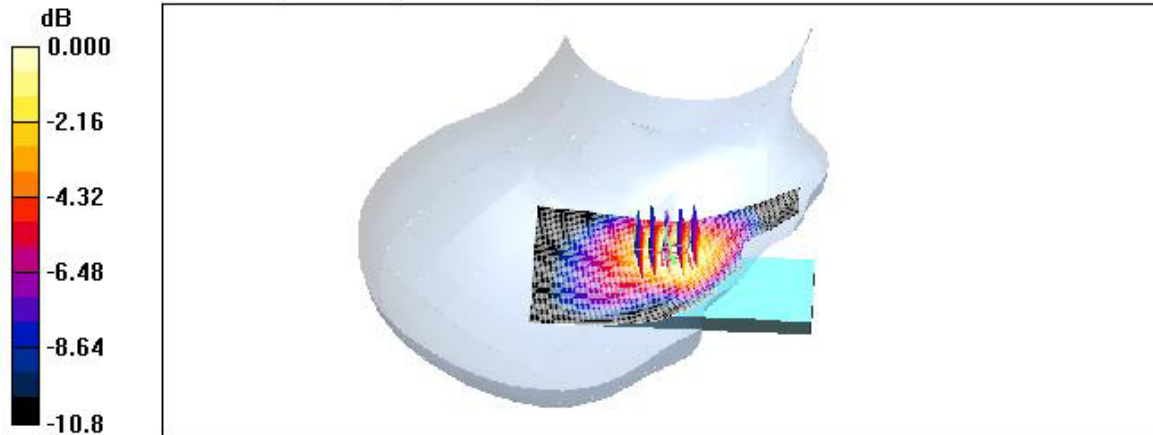

0 dB = 1.04mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 777 / Antenna : in
Liquid Temperature : 21.6 °C
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31$ MHz; $\sigma = 0.885$ mho/m; $\epsilon_r = 40.6$; $\rho = 1000$ kg/m³
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $\Delta x = 15$ mm, $\Delta y = 15$ mm

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.34 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8$ mm, $\Delta y = 8$ mm, $\Delta z = 5$ mm


Reference Value = 32.4 V/m; Power Drift = -0.176 dB

Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 1.23 mW/g; SAR(10 g) = 0.757 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.34 mW/g

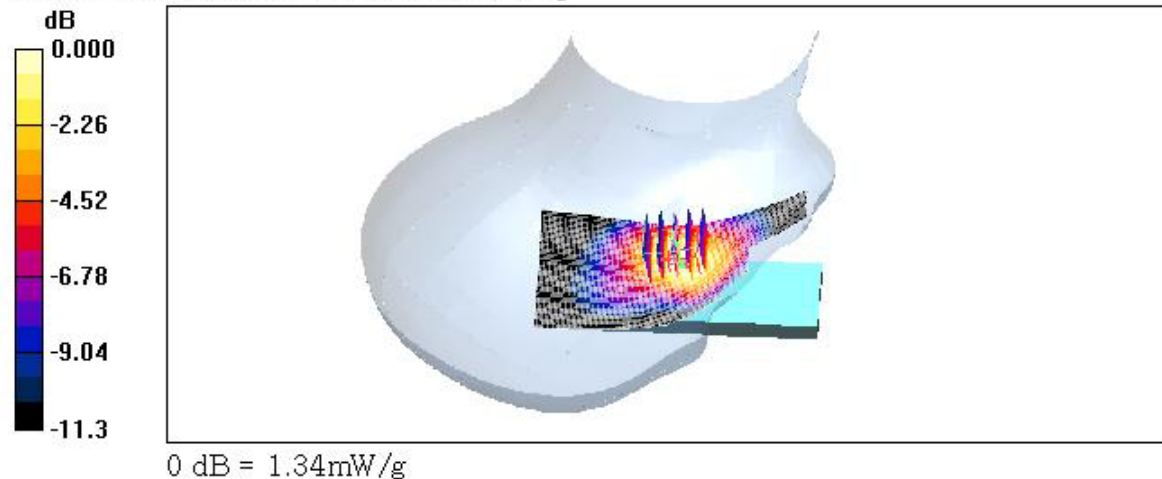

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 777 / Antenna : out
Liquid Temperature : 21.6°C
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 848.31 \text{ MHz}$; $\sigma = 0.885 \text{ mho/m}$; $\epsilon_r = 40.6$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right touch 777/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 1.26 mW/g

Right touch 777/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 31.4 V/m; Power Drift = -0.063 dB

Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.714 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 1.27 mW/g

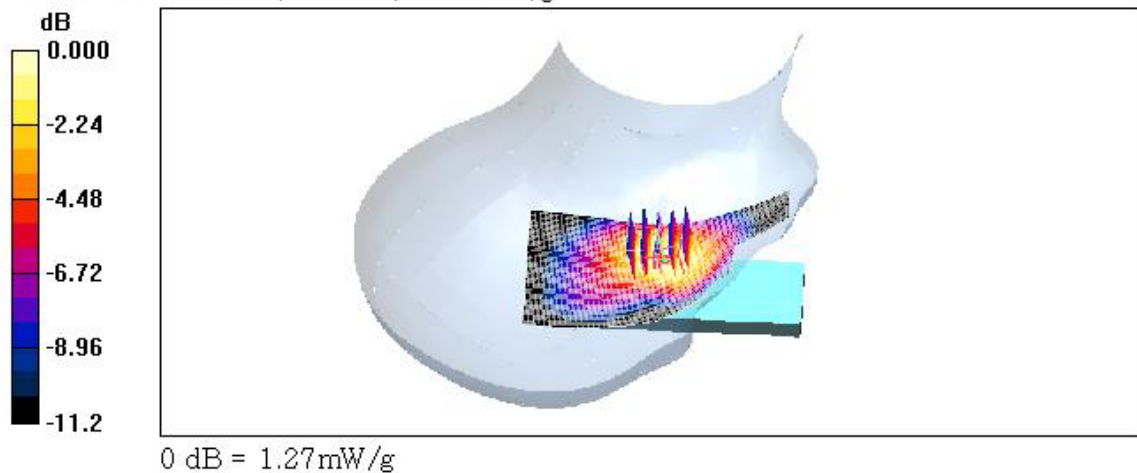

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Channel :384 / Antenna : in

Liquid Temperature : 21.6℃

Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Left tilt 384/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.374 mW/g

Left tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$


Reference Value = 18.0 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.462 W/kg

SAR(1 g) = 0.349 mW/g; SAR(10 g) = 0.253 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.370 mW/g

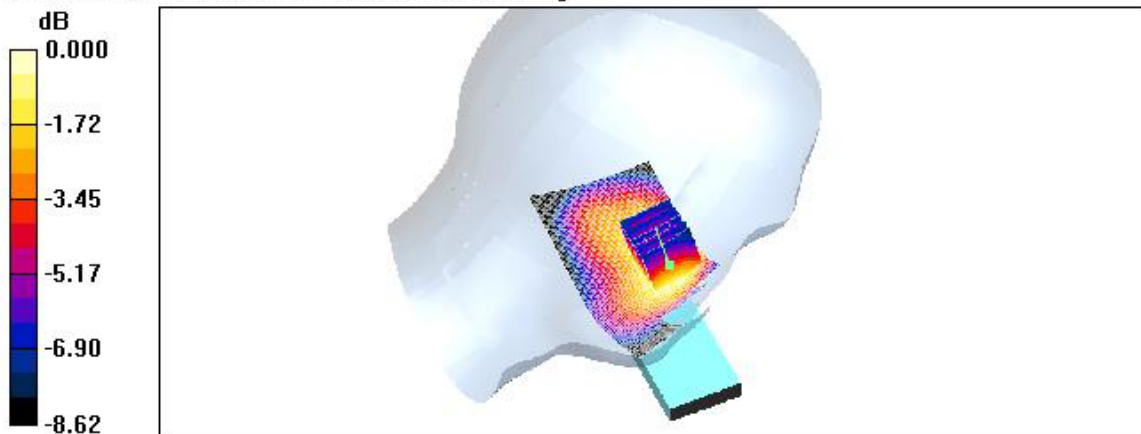

0 dB = 0.370mW/g

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 384 / Antenna : out
Liquid Temperature : 21.6℃
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC, Frequency: 836.52 MHz, Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM


Left tilt 384/Area Scan (51x101x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.
Maximum value of SAR (interpolated) = 0.266 mW/g

Left tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.5 V/m; Power Drift = 0.034 dB
Peak SAR (extrapolated) = 0.328 W/kg
SAR(1 g) = 0.249 mW/g; SAR(10 g) = 0.181 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.264 mW/g

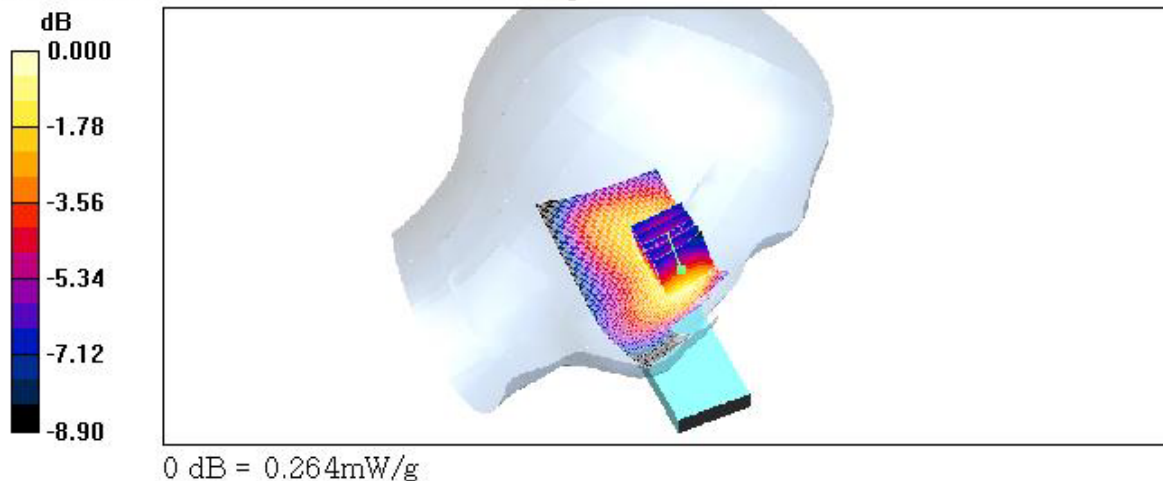

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.

Mode : CDMA835 / Channel : 384 / Antenna : in

Liquid Temperature : 21.6 °C

Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn446; Calibrated: 2006-03-17

- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 384/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.385 mW/g

Right tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$


Reference Value = 19.1 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 0.467 W/kg

SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.263 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.380 mW/g

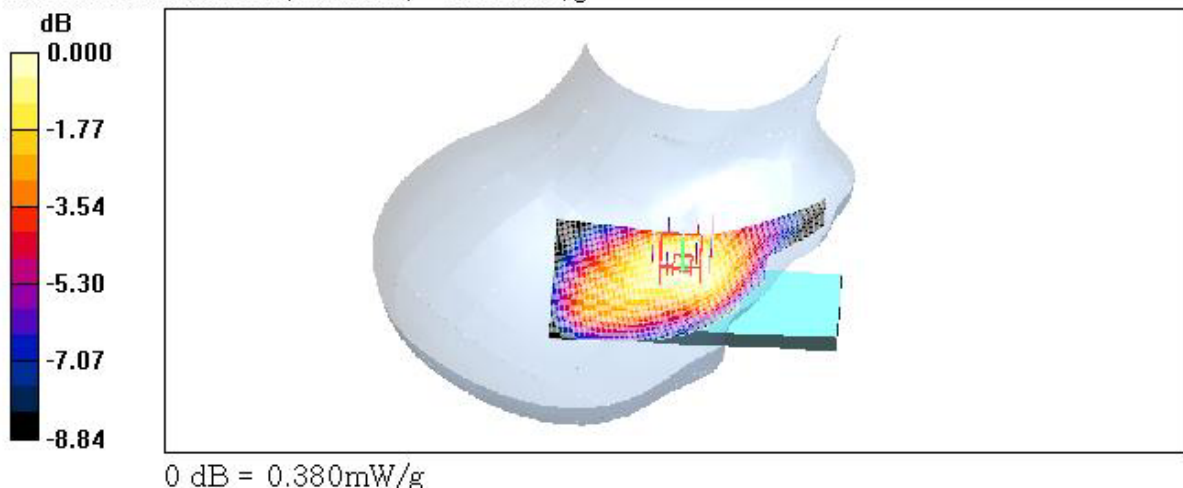

Test Laboratory: HCT

Company : PANTECH&CURITEL COMMUNICATIONS, INC.
Mode : CDMA835 / Channel : 384/ Antenna : out
Liquid Temperature : 21.6℃
Date Tested : October 10, 2006

DUT: PN-310; Type: Folder; Serial: #1

Communication System: CDMA 835MHz FCC; Frequency: 836.52 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 836.52 \text{ MHz}$; $\sigma = 0.873 \text{ mho/m}$; $\epsilon_r = 40.7$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Right Section ; Measurement SW: DASY4, V4.7 Build 44

DASY4 Configuration:

- Probe: ET3DV6 - SN1798; ConvF(6.73, 6.73, 6.73); Calibrated: 2006-08-25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn446; Calibrated: 2006-03-17
- Phantom: SAM 835/900 MHz; Type: SAM

Right tilt 384/Area Scan (51x101x1): Measurement grid: $\Delta x = 15\text{mm}$, $\Delta y = 15\text{mm}$

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (interpolated) = 0.271 mW/g

Right tilt 384/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $\Delta x = 8\text{mm}$, $\Delta y = 8\text{mm}$, $\Delta z = 5\text{mm}$

Reference Value = 15.3 V/m; Power Drift = 0.090 dB

Peak SAR (extrapolated) = 0.331 W/kg

SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.187 mW/g

Info: Interpolated medium parameters used for SAR evaluation.

Maximum value of SAR (measured) = 0.271 mW/g

