

FCC Test Report

Report No.: AGC13853230203FE02

FCC ID	:	2BACS-UDFINE
APPLICATION PURPOSE	:	Original Equipment
PRODUCT DESIGNATION	:	Udfine Watch Starry
BRAND NAME	:	UDFINE
MODEL NAME	:	Udfine Starry
APPLICANT	:	Shanghai Udfine Technology Co., Limited
DATE OF ISSUE	:	Mar. 06, 2023
STANDARD(S)	:	FCC Part 15.247
REPORT VERSION	:	V1.0
<u>Attestation of (</u>	<u>71c</u>	obal compliance (Shenzhen) Co., Ltd





REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Mar. 06, 2023	Valid	Initial Release



TABLE OF CONTENTS

1. VERIFICATION OF COMPLIANCE	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RELATED SUBMITTAL(S)/GRANT(S)	7
2.4. TEST METHODOLOGY	7
2.5. SPECIAL ACCESSORIES	7
2.6. EQUIPMENT MODIFICATIONS	
2.7. ANTENNA REQUIREMENT	7
3. MEASUREMENT UNCERTAINTY	
4. DESCRIPTION OF TEST MODES	
5. SYSTEM TEST CONFIGURATION	
5.1. CONFIGURATION OF TESTED SYSTEM	
5.2. EQUIPMENT USED IN TESTED SYSTEM	
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	11
7. PEAK OUTPUT POWER	
7.1. MEASUREMENT PROCEDURE	
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
7.3. LIMITS AND MEASUREMENT RESULT	
8. BANDWIDTH	
8.1. MEASUREMENT PROCEDURE	
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
8.3. LIMITS AND MEASUREMENT RESULTS	
9. CONDUCTED SPURIOUS EMISSION	24
9.1. MEASUREMENT PROCEDURE	
9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	
9.3. MEASUREMENT EQUIPMENT USED	
9.4. LIMITS AND MEASUREMENT RESULT	24
10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY	
10.1. MEASUREMENT PROCEDURE	
10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	



10.3. MEASUREMENT EQUIPMENT USED	36
10.4. LIMITS AND MEASUREMENT RESULT	36
11. RADIATED EMISSION	40
11.1. MEASUREMENT PROCEDURE	40
11.2. TEST SETUP	41
11.3. LIMITS AND MEASUREMENT RESULT	42
11.4. TEST RESULT	42
12. LINE CONDUCTED EMISSION TEST	52
12.1. LIMITS OF LINE CONDUCTED EMISSION TEST	56
12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	56
12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	57
12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	57
12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	58
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	60
APPENDIX B: PHOTOGRAPHS OF EUT	60



1. VERIFICATION OF COMPLIANCE

Applicant	Shanghai Udfine Technology Co., Limited	
Address	1st Floor, Building 2, No. 1876, ChenqiaoRoad, Fengxian District, Shanghai	
Manufacturer	Shanghai Udfine Technology Co., Limited	
Address	1st Floor, Building 2, No. 1876, ChenqiaoRoad, Fengxian District, Shanghai	
Factory	Shenzhen DO Intelligent Technology Co., Ltd.	
Address	1F, 2F, west of 3F, 4F, 1st Building and 10~11F, 3rd Building, Changyi Industrial Park, No.1 Lirong Road, Xinshi Community, Dalang Sub-district, Longhua District, Shenzhen City, Guangdong Province, P.R. China	
Product Designation	Udfine Watch Starry	
Brand Name	UDFINE	
Test Model	Udfine Starry	
Date of receipt of test item	Feb. 23,2023	
Date of test	Feb. 23,2023 to Mar. 06,2023	
Deviation	No any deviation from the test method	
Condition of Test Sample	Normal	
Test Result	Pass	
Report Template	AGCRT-US-BLE/RF	

We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.247.

Prepared By

(an Duan

Alan Duan (Project Engineer)

Mar. 06, 2023

Reviewed By

vin Lin

Calvin Liu (Reviewer)

Mar. 06, 2023

Approved By

Max Zhang

Max Zhang (Authorized Officer)

Mar. 06, 2023



2. GENERAL INFORMATION

2.1. PRODUCT DESCRIPTION

The EUT is designed as a "Udfine Watch Starry". It is designed by way of utilizing the GFSK technology to achieve the system operation.

A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480GHz	
RF Output Power	GFSK 1M :-0.555dBm (Max) GFSK 2M :-0.555dBm (Max)	
Bluetooth Version	V5.3	
Modulation	BR □GFSK, EDR □π /4-DQPSK, □8DPSK BLE ⊠GFSK 1Mbps ⊠GFSK 2Mbps	
Number of channels	40 Channel	
Antenna Designation	PIFA Antenna (Comply with requirements of the FCC part 15.203)	
Antenna Gain	-0.18dBi	
Hardware Version	V1.1	
Software Version	V1.00.05	
Power Supply	DC 3.8V by battery	

2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency	
	0	2402 MHz	
	1	2404 MHz	
2400~2483.5MHz	:	:	
	38	2478 MHz	
	39	2480 MHz	



2.3. RELATED SUBMITTAL(S)/GRANT(S)

This submittal(s) (test report) is intended for **FCC ID: 2BACS-UDFINE** filing to comply with the FCC Part 15.247 requirements.

2.4. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

2.5. SPECIAL ACCESSORIES

Refer to section 5.2.

2.6. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

2.7. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device. For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.



3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y $\pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_{c} = \pm 2.7 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$



4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION	
1	Low channel TX_2402MHz_GFSK_1Mbps	
2	Middle channel TX_2440MHz_GFSK_1Mbps	
3	High channel TX_2480MHz_GFSK_1Mbps	
4	Low channel TX_2402MHz_GFSK_2Mbps	
5	Middle channel TX_2440MHz_GFSK_2Mbps	
6	High channel TX_2480MHz_GFSK_2Mbps	

Note:

1. Only the result of the worst case was recorded in the report, if no other cases.

2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.

3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

· 目示建项目 -▶ ■打开・ **全部选择** T 到 复制到 Actions BT FCC Tool V2. 24 - COM COM4 - 115200 SOLUTION ATS3 CC_V2.24 RF Channel Hopping Mode Norm fixed Packet Type DHE -Payload Type PRBS9 TX Gain Index RX Gain Index ess Code Ox AbDdE34125888888 AGC Mode ntinue T ingle Packet TX acket RX

Software Setting



5. SYSTEM TEST CONFIGURATION

5.1. CONFIGURATION OF TESTED SYSTEM

Radiated Emission Configure:

EUT

Conducted Emission Configure:

EUT	AE

5.2. EQUIPMENT USED IN TESTED SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Udfine Watch Starry	Udfine Starry	2BACS-UDFINE	EUT
2	Control Box	N/A	USB-TTL	AE

5.3. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(3)	Peak Output Power	Compliant
15.247 (a)(2)	6 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.247 (e)	Maximum Conducted Output Power Density	Compliant
15.209	Radiated Emission	Compliant
15.207	Conducted Emission	Compliant



6. TEST FACILITY

Test software

Test Site	Attestation of C	Attestation of Global Compliance (Shenzhen) Co., Ltd							
Location		1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Community, Fuhai Street, Bao'an District, Shenzhen, Guangdong, China							
Designation Number	CN1259								
FCC Test Firm Registration Number	975832	975832							
A2LA Cert. No.	5054.02	5054.02							
Description	Attestation of C	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA							
TEST EQUIPMENT OF	CONDUCTED E	MISSION TEST							
Equipment	Manufacturer	Manufacturer Model S/N Cal. Date Cal. Due							
TEST RECEIVER	R&S	R&S ESPI 101206 Mar. 28, 2022 Mar. 27, 2023							
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023				

ES-K1(Ver.V1.71)

N/A

N/A

N/A

TEST EQUIPMENT OF RADIATED EMISSION TEST

R&S

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Aug. 04, 2022	Aug. 03, 2023
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 22, 2022	Mar. 21, 2024
Attenuator	ZHINAN	E-002	N/A	Aug. 04, 2022	Aug. 03, 2024
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 11, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 02, 2022	Sep. 01, 2024
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 05, 2023	Jan. 04, 2025
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A



7. PEAK OUTPUT POWER


7.1. MEASUREMENT PROCEDURE

For peak power test:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. RBW≥DTS bandwidth
- 3. VBW≥3*RBW.
- 4. SPAN≥VBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION) PEAK POWER TEST SETUP

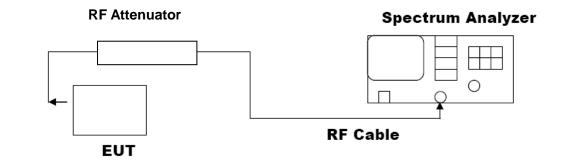




7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power							
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail			
	2402	-1.688	≪30	Pass			
GFSK 1M	2440	-1.061	≪30	Pass			
	2480	-0.555	≪30	Pass			
	2402	-1.541	≪30	Pass			
GFSK 2M	2440	-1.160	≪30	Pass			
	2480	-0.555	≤30	Pass			


Test Graphs of Conducted Output Power





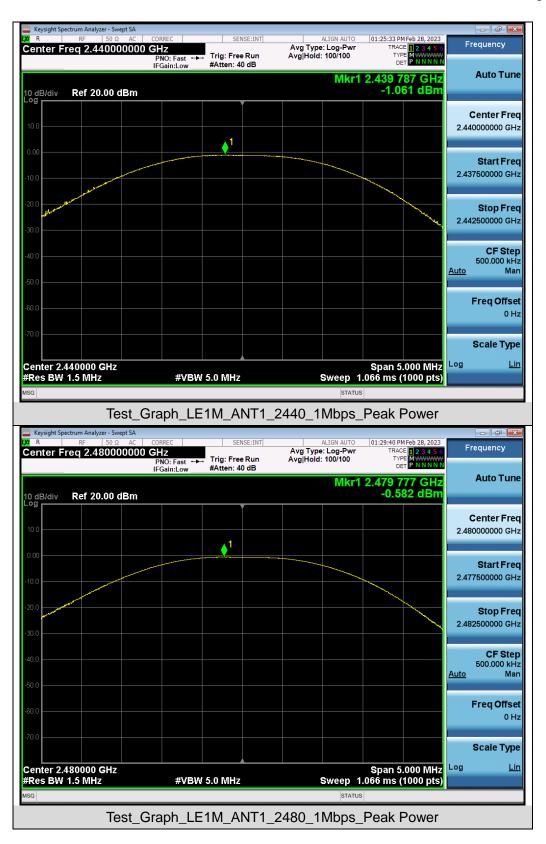



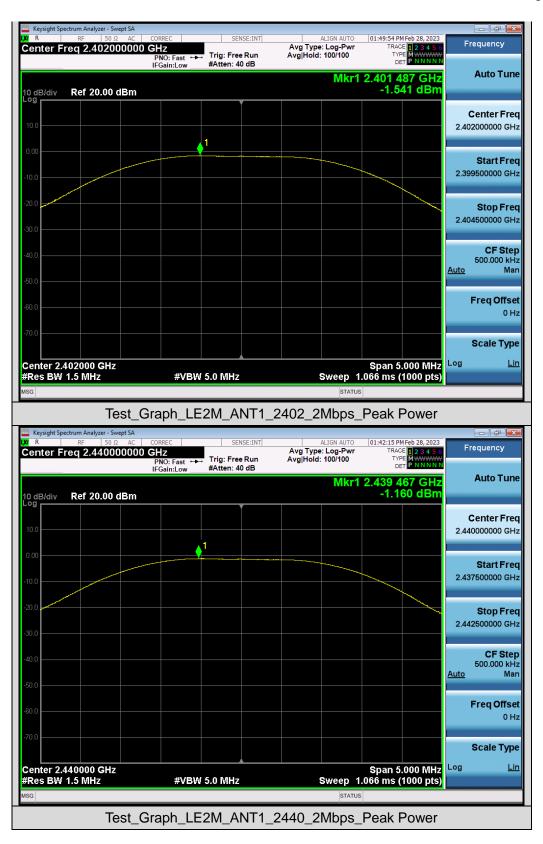



R enter F	RF 50 Ω AC req 2.480000000	PNO: Fast +	Trig: Free		ALIGN AUTO e: Log-Pwr : 100/100	TRAC TYP	M Feb 28, 2023 E 1 2 3 4 5 6 PE MWWWWW F P N N N N N	Frequency
dB/div	Ref 20.00 dBm	IFGain:Low	#Atten: 4	0 dB	Mkr1	2.479 5	27 GHz 55 dBm	Auto Tur
			1					Center Fre 2.480000000 GF
.00 3.0								Start Fre 2.477500000 GF
0.0 0.0								Stop Fre 2.482500000 GF
D.0								CF Ste 500.000 kł Auto Ma
).0								Freq Offs 0 I
	480000 GHz					Span 5	.000 MHz	Scale Typ
Res BW	1.5 MHz	#VB	W 5.0 MHz		Sweep 1. STATUS	.066 ms (1000 pts)	



8. BANDWIDTH

8.1. MEASUREMENT PROCEDURE

6dB bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Centre Frequency = Operation Frequency, RBW= 100 kHz, VBW \ge 3×RBW.
- 4. Set SPA Trace 1 Max hold, then View.

Occupied bandwidth:

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak

4. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 7.2.


Test Data of Occupied Bandwidth and DTS Bandwidth							
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-6dB Bandwidth (MHz)	Limits (MHz)	Pass or Fail		
GFSK 1M	2402	1.017	0.506	≥0.5	Pass		
	2440	1.019	0.505	≥0.5	Pass		
	2480	2.036	0.852	≥0.5	Pass		
GFSK 2M	2402	2.032	0.851	≥0.5	Pass		
	2440	2.034	0.853	≥0.5	Pass		
	2480	2.036	0.852	≥0.5	Pass		

8.3. LIMITS AND MEASUREMENT RESULTS






Test Graphs of Occupied Bandwidth

















Test Graphs of DTS Bandwidth











9. CONDUCTED SPURIOUS EMISSION

9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set SPA Trace 1 Max hold, then View.

Note: The EUT was tested according to ANSI C63.10 for compliance to FCC PART 15.247 requirements.

9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)


The same as described in section 7.2.

9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6.

9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT						
Angliaghta Limita	Measurement Result					
Applicable Limits	Test Data	Criteria				
In any 100 kHz Bandwidth Outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produce by the intentional radiator shall be at least 20 dB below that in 100KHz bandwidth within the band that contains the highest level of the desired power.	At least -20dBc than the reference level	PASS				








Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands(GFSK_1M)








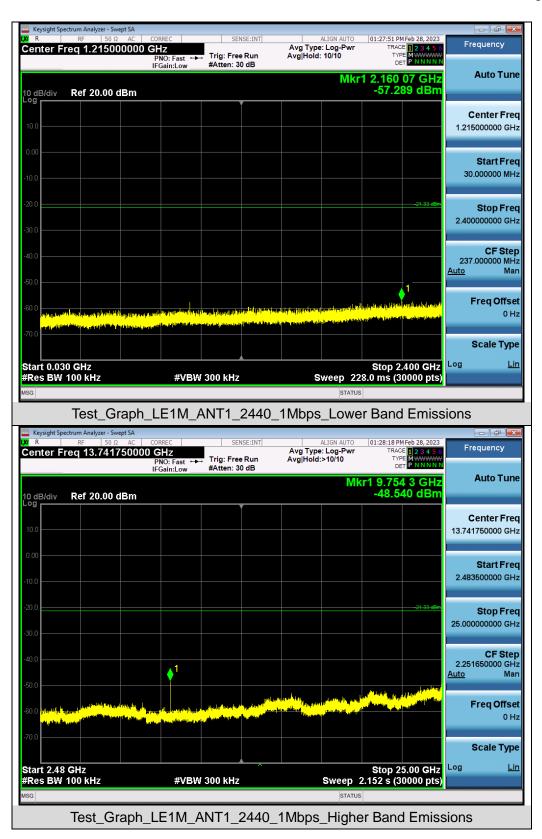








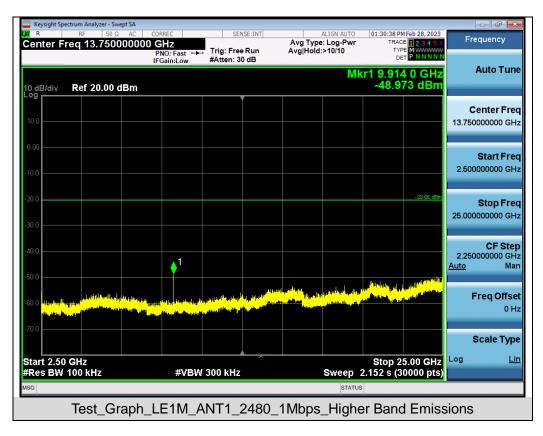

Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands(GFSK_2M)





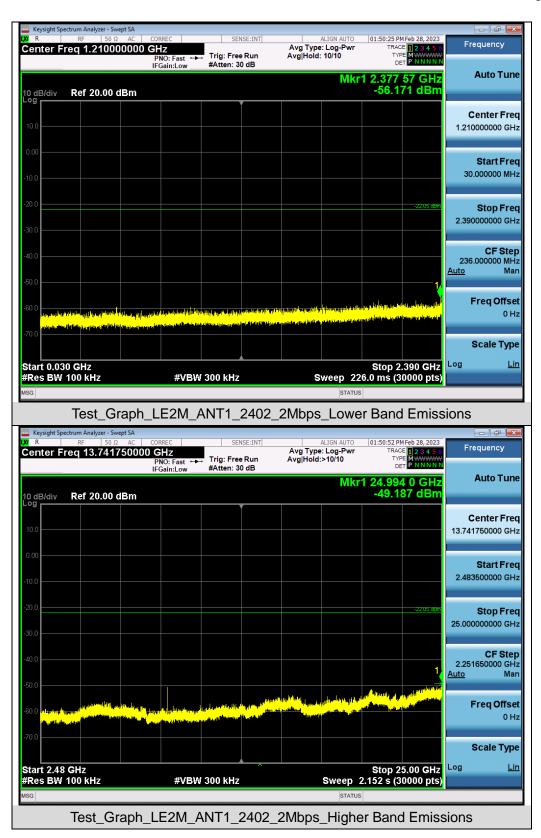












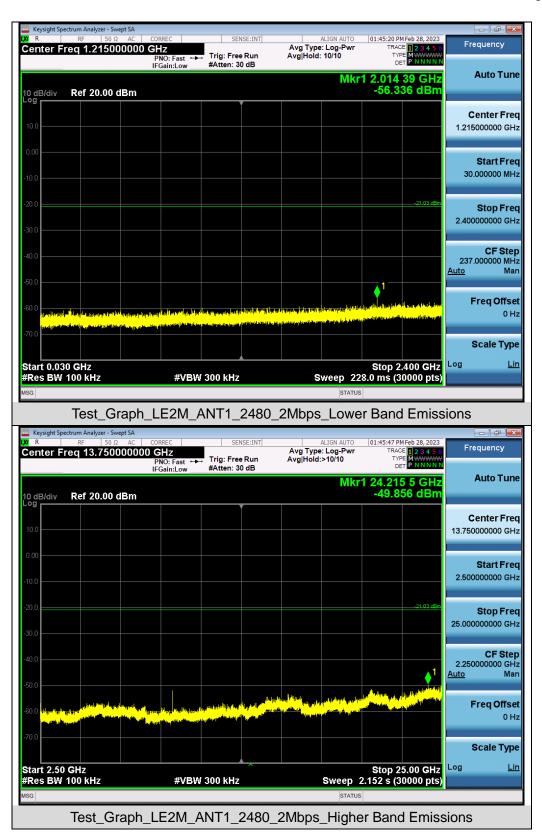





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands(GFSK_1M)





Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands(GFSK_2M)



10. MAXIMUM CONDUCTED OUTPUT POWER SPECTRAL DENSITY

10.1. MEASUREMENT PROCEDURE

- (1). Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- (2). Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- (3). Set the SPA Trace 1 Max hold, then View.

Note: The method of PKPSD in the KDB 558074 item 8.4 was used in this testing.

10.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

Refer to Section 7.2.

10.3. MEASUREMENT EQUIPMENT USED

Refer to Section 6.


10.4. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power Spectral Density							
Test Mode	Test Channel Power density		Limit	Pass or Fail			
	2402	-19.946	≪8	Pass			
GFSK 1M	2440	-19.524	≪8	Pass			
	2480	-21.307	≪8	Pass			
	2402	-22.375	≪8	Pass			
GFSK 2M	2440	-22.011	≪8	Pass			
	2480	-21.307	≪8	Pass			


Test Graphs of Conducted Output Power Spectral Density






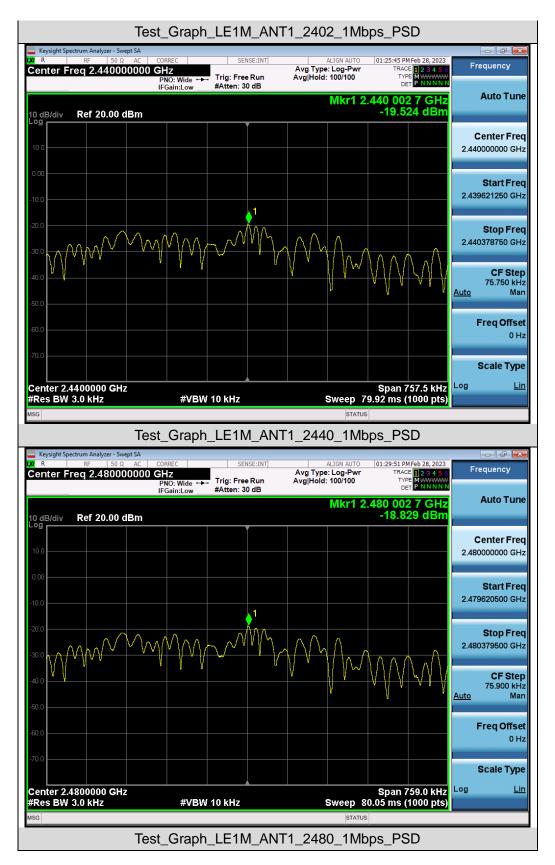



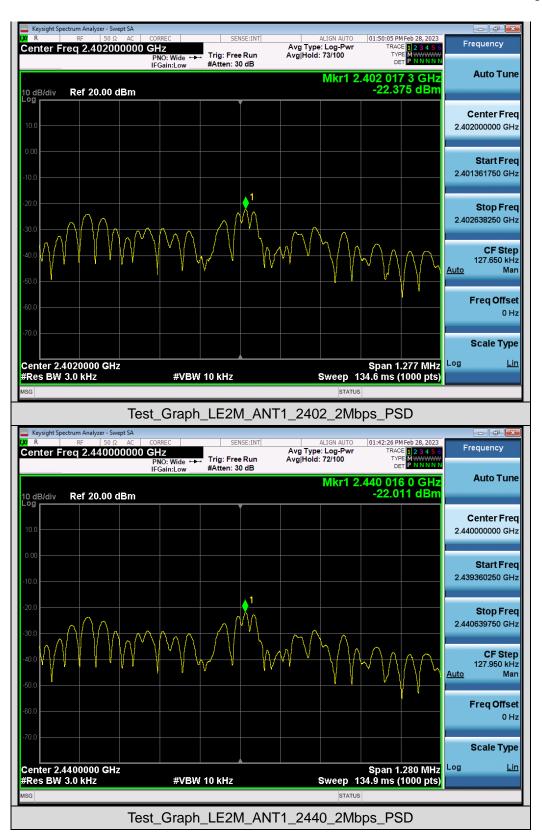



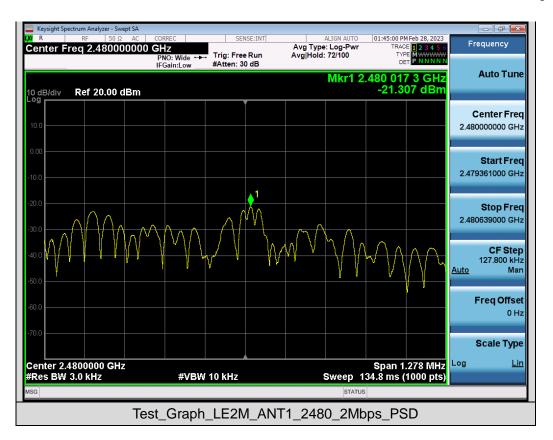




11. RADIATED EMISSION

11.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



11.2. TEST SETUP

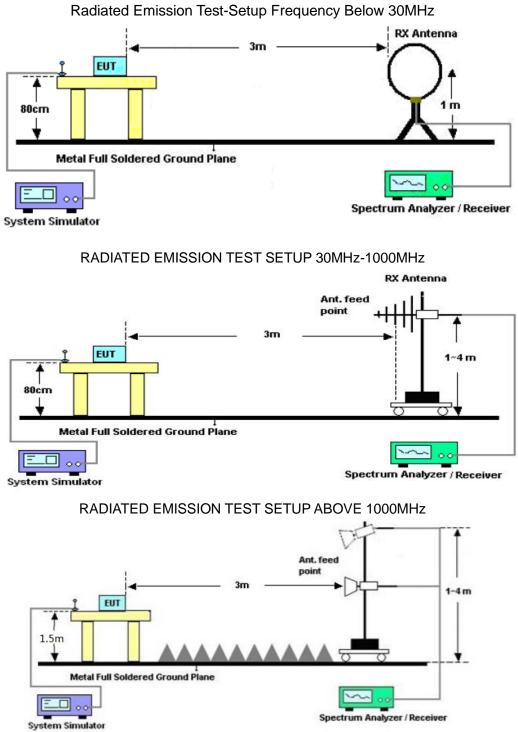



11.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

11.4. TEST RESULT


Radiated emission below 30MHz

The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



EUT	Udfine Watch Starry	Model Name	Udfine Starry			
Temperature	25° C	Relative Humidity	55.4%			
Pressure	960hPa	Test Voltage	Normal Voltage			
Test Mode	Mode 3	Antenna	Horizontal			

Radiated emission from 30MHz to 1000MHz

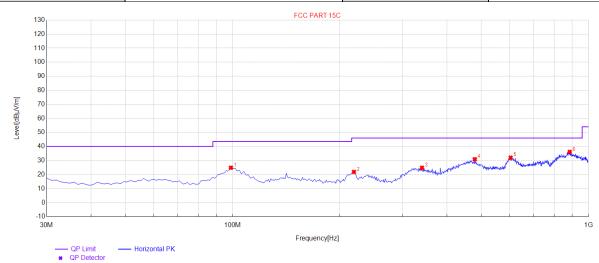


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	98.87	24.89	20.81	43.50	18.61	100	200	Horizontal
2	219.15	21.88	14.14	46.00	24.12	100	40	Horizontal
3	340.4	24.85	20.81	46.00	21.15	100	190	Horizontal
4	479.11	30.93	25.83	46.00	15.07	100	320	Horizontal
5	604.24	32.04	28.57	46.00	13.96	100	140	Horizontal
6	885.54	36.15	32.82	46.00	9.85	100	170	Horizontal

RESULT: PASS



EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

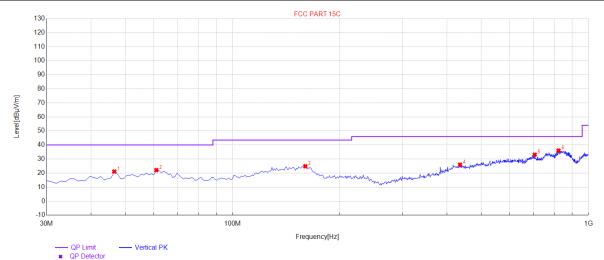

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	46.49	21.08	12.77	40.00	18.92	100	0	Vertical
2	61.04	22.13	14.77	40.00	17.87	100	20	Vertical
3	159.98	24.86	21.94	43.50	18.64	100	340	Vertical
4	435.46	25.95	21.90	46.00	20.05	100	150	Vertical
5	706.09	33.08	28.56	46.00	12.92	100	80	Vertical
6	823.46	36.02	31.75	46.00	9.98	100	230	Vertical

RESULT: PASS Note:

1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been tested. The mode 3 is the worst case and recorded in the report.



Radiated emission above 1GHz

EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

	Factor	Emission Level	Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
43.63	0.08	43.71	74	-30.29	peak
35.89	0.08	35.97	54	-18.03	AVG
38.67	2.21	40.88	74	-33.12	peak
31.39	2.21	33.6	54	-20.4	AVG
· · · ·	43.63 35.89 38.67 31.39	43.63 0.08 35.89 0.08 38.67 2.21 31.39 2.21	43.63 0.08 43.71 35.89 0.08 35.97 38.67 2.21 40.88	43.63 0.08 43.71 74 35.89 0.08 35.97 54 38.67 2.21 40.88 74 31.39 2.21 33.6 54	43.63 0.08 43.71 74 -30.29 35.89 0.08 35.97 54 -18.03 38.67 2.21 40.88 74 -33.12 31.39 2.21 33.6 54 -20.4

EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	44.76	0.08	44.84	74	-29.16	peak
4804.000	34.86	0.08	34.94	54	-19.06	AVG
7206.000	38.95	2.21	41.16	74	-32.84	peak
7206.000	30.69	2.21	32.9	54	-21.1	AVG
Remark:						
	na Fastar I Cabl		omplifier			
actor = Anter	nna Factor + Cable	e Loss – Pre-	ampillier.			



EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4880.000	44.77	0.14	44.91	74	-29.09	peak	
4880.000	35.86	0.14	36	54	-18	AVG	
7320.000	39.66	2.36	42.02	74	-31.98	peak	
7320.000	31.43	2.36	33.79	54	-20.21	AVG	
Remark:							
Factor = Antenna Factor + Cable Loss – Pre-amplifier.							

EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 2	Antenna	Vertical

Value Type peak
peak
AVG
peak
AVG



EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

N Value Type	Margin	Limits	Emission Level	Factor	Meter Reading	Frequency	
value Type	(dB)	(dBµV/m)	(dBµV/m)	(dB)	(dBµV)	(MHz)	
) peak	-28.99	74	45.01	0.22	44.79	4960.000	
AVG	-18.09	54	35.91	0.22	35.69	4960.000	
l peak	-32.54	74	41.46	2.64	38.82	7440.000	
3 AVG	-21.63	54	32.37	2.64	29.73	7440.000	
						(emark:	
		UT			na Factor + Cabl	Remark:	

EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	42.96	0.22	43.18	74	-30.82	peak
4960.000	34.16	0.22	34.38	54	-19.62	AVG
7440.000	38.39	2.64	41.03	74	-32.97	peak
7440.000	29.69	2.64	32.33	54	-21.67	AVG
lemark:						
actor = Anter	nna Factor + Cable	Loss – Pre-	amplifier.			

RESULT: PASS

Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.


The "Factor" value can be calculated automatically by software of measurement system.




EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Horizontal

Test result for band edge emission at restricted bands(GFSK_1M)

Test Graph for Peak Measurement

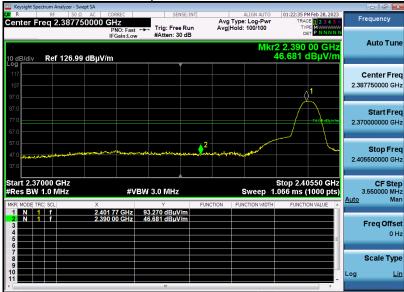


Test Graph for Average Measurement

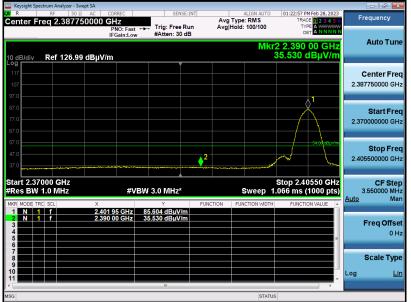


RESULT: PASS



EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 1	Antenna	Vertical

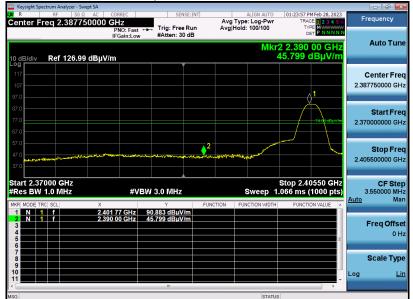


Test Graph for Average Measurement

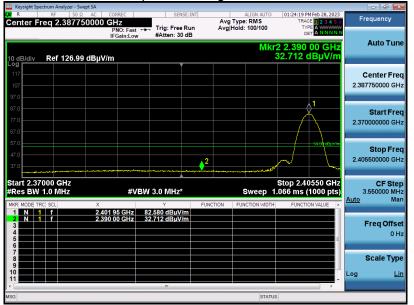


RESULT: PASS



EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Horizontal

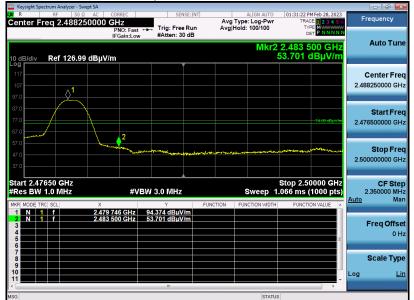


Test Graph for Average Measurement

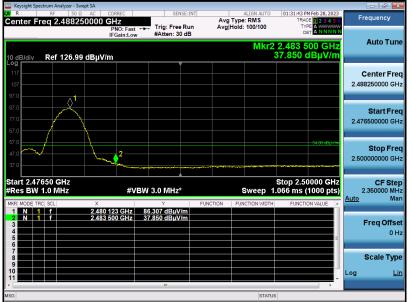


RESULT: PASS



EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 3	Antenna	Vertical

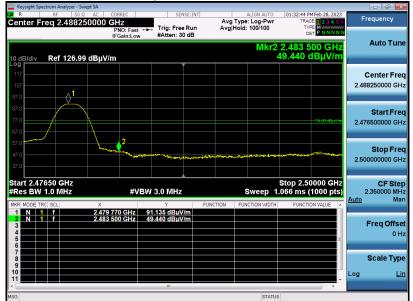

Test Graph for Average Measurement

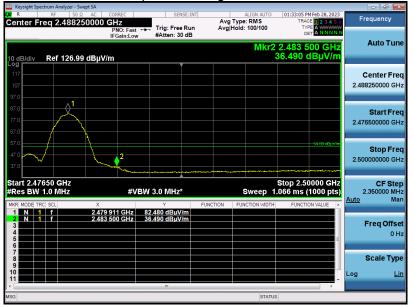

RESULT: PASS


Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.




EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Horizontal

Test result for band edge emission at restricted bands(GFSK_2M)

Test Graph for Peak Measurement

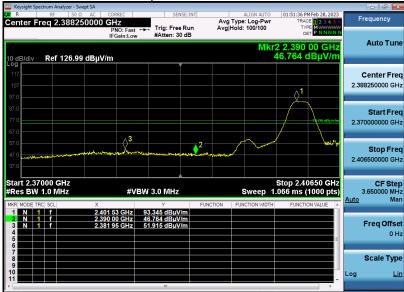


Test Graph for Average Measurement

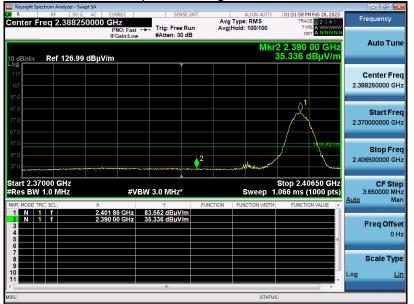

RESULT: PASS



EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 4	Antenna	Vertical

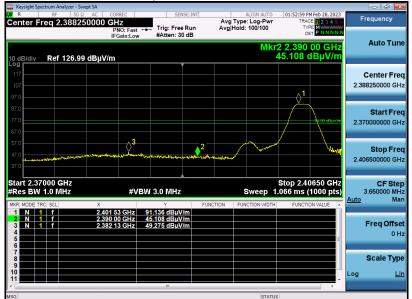

Test Graph for Average Measurement




RESULT: PASS




Report No.: AGC13853230203FE02 Page 54 of 60

EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Horizontal

Test Graph for Peak Measurement

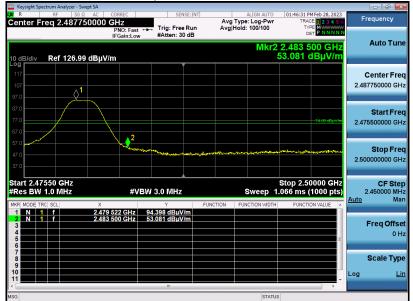


Test Graph for Average Measurement

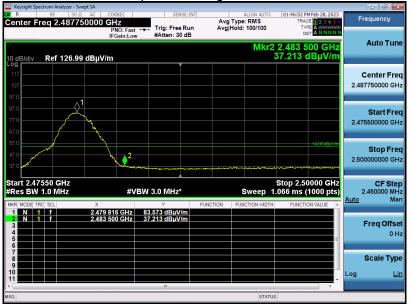


RESULT: PASS



EUT	Udfine Watch Starry	Model Name	Udfine Starry
Temperature	25° C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 6	Antenna	Vertical

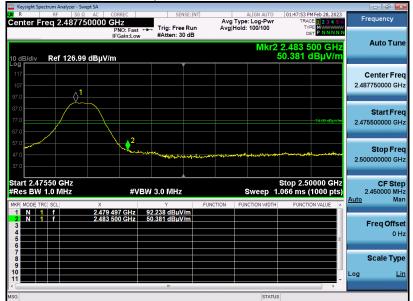

Test Graph for Average Measurement

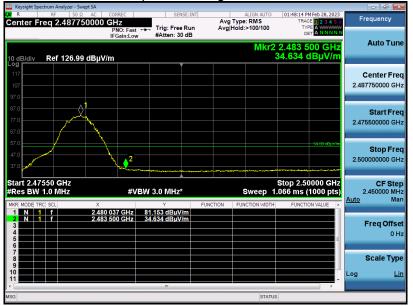

RESULT: PASS

Note: The factor had been edited in the "Input Correction" of the Spectrum Analyzer.



12. LINE CONDUCTED EMISSION TEST


12.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage				
Frequency	Q.P.(dBuV)	Average(dBuV)			
150kHz~500kHz	66-56	56-46			
500kHz~5MHz	56	46			
5MHz~30MHz	60	50			

Note:

- 1. The lower limit shall apply at the transition frequency.
- 2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

12.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST

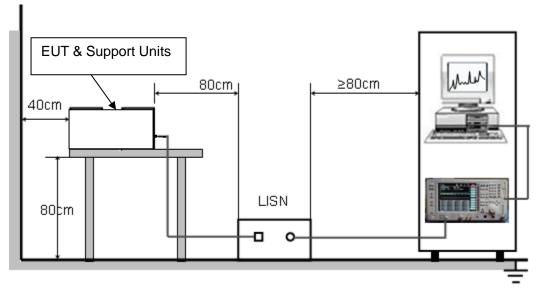



12.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.10 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2. Support equipment, if needed, was placed as per ANSI C63.10.
- 3. All I/O cables were positioned to simulate typical actual usage as per ANSI C63.10.
- 4. All support equipment received AC120V/60Hz power from a LISN, if any.
- 5. The EUT received DC 5V power from adapter which received AC120V/60Hz power from a LISN.
- 6. The test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7. Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- 8. During the above scans, the emissions were maximized by cable manipulation.
- 9. The test mode(s) were scanned during the preliminary test.

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.


12.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

- 1. EUT and support equipment was set up on the test bench as per step 2 of the preliminary test.
- A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less – 2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.
- 3. The test data of the worst case condition(s) was reported on the Summary Data page.



12.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST

Line Conducted Emission Test Line 1-L

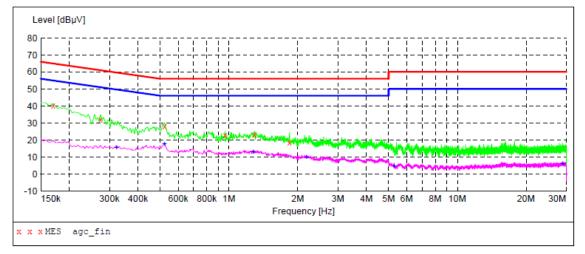

MEASUREMENT RESULT: "agc fin"

2023/3/1 14:22


Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.170000 0.274000 0.522000 0.962000 1.294000 1.842000	40.20 31.90 27.90 22.80 23.10 18.60	6.8 6.1 5.4 5.4 5.8 6.4	65 61 56 56 56	24.8 29.1 28.1 33.2 32.9 37.4	QP QP	L1 L1 L1 L1 L1 L1

MEASUREMENT RESULT: "agc fin2"

2023/3/1 14:20 Frequency MHz		Transd dB	Limit dBµV	Margin dB	Detector	Line
0.322000 0.522000 1.278000 2.186000 5.282000 28.954000	15.60 17.70 13.00 9.90 4.70 6.00	5.9 5.4 5.8 6.5 6.6 9.5	50 46 46 50 50		AV AV AV	L1 L1 L1 L1 L1 L1





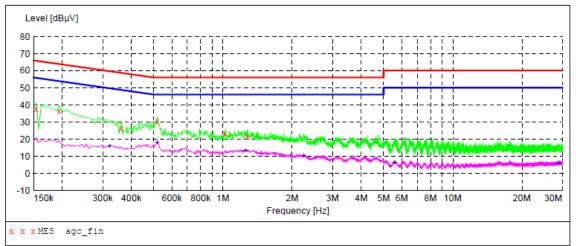

MEASUREMENT RESULT: "agc fin"

2023/3/1 14:17

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
0.154000 0.194000 0.362000 0.518000 1.022000 1.274000	37.70 36.30 26.30 30.20 23.20 21.50	6.9 6.6 5.8 5.4 5.5 5.8	66 64 59 56 56	28.1 27.6 32.4 25.8 32.8 34.5	QP QP QP QP	N N N N N

MEASUREMENT RESULT: "agc fin2"

14:16 cy Level Hz dBµV	Transd dB	Limit dBµV	Margin dB	Detector	Line
15.70	5.9	50			N
0 13.10	5.4	46			N N
	6.5	46			N N
0 6.00	9.5	50	43.0	AV	N
	Ey Level Iz dBµV 00 15.70 00 18.10 00 13.10 00 10.40 00 6.20	Level Transd Iz dBµV dB 00 15.70 5.9 00 18.10 5.4 00 13.10 5.8 00 10.40 6.5 00 6.20 6.6	Level Transd Limit Iz dBµV dB dBµV 00 15.70 5.9 50 00 18.10 5.4 46 00 13.10 5.8 46 00 10.40 6.5 46 00 6.20 6.6 50	LevelTransdLimitMarginHzdBµVdBdBµVdB0015.705.95034.00018.105.44627.90013.105.84632.90010.406.54635.6006.206.65043.8	Level Transd Limit Margin Detector Iz dBµV dB dBµV dB dB 00 15.70 5.9 50 34.0 AV 00 15.70 5.4 46 27.9 AV 00 13.10 5.8 46 32.9 AV 00 10.40 6.5 46 35.6 AV 00 6.20 6.6 50 43.8 AV

RESULT: PASS

Note: All test modes had been pre-tested. The mode 8 is the worst case and recorded in the report.



APPENDIX A: PHOTOGRAPHS OF TEST SETUP

Refer to the Report No.: AGC13853230203AP02

APPENDIX B: PHOTOGRAPHS OF EUT

Refer to the Report No.: AGC13853230203AP03

----END OF REPORT----



Conditions of Issuance of Test Reports

1. All samples and goods are accepted by the Attestation of Global Compliance (Shenzhen) Co., Ltd (the "Company") solely for testing and reporting in accordance with the following terms and conditions. The company provides its services on the basis that such terms and conditions constitute express agreement between the company and any person, firm or company requesting its services (the "Clients").

2. Any report issued by Company as a result of this application for testing services (the "Report") shall be issued in confidence to the Clients and the Report will be strictly treated as such by the Company. It may not be reproduced either in its entirety or in part and it may not be used for advertising or other unauthorized purposes without the written consent of the Company. The Clients to whom the Report is issued may, however, show or send it, or a certified copy thereof prepared by the Company to its customer, supplier or other persons directly concerned. The Company will not, without the consent of the Clients, enter into any discussion or correspondence with any third party concerning the contents of the Report, unless required by the relevant governmental authorities, laws or court orders.

3. The Company shall not be called or be liable to be called to give evidence or testimony on the Report in a court of law without its prior written consent, unless required by the relevant governmental authorities, laws or court orders.

4. In the event of the improper use of the report as determined by the Company, the Company reserves the right to withdraw it, and to adopt any other additional remedies which may be appropriate.

5. Samples submitted for testing are accepted on the understanding that the Report issued cannot form the basis of, or be the instrument for, any legal action against the Company.

6. The Company will not be liable for or accept responsibility for any loss or damage however arising from the use of information contained in any of its Reports or in any communication whatsoever about its said tests or investigations.

7. Clients wishing to use the Report in court proceedings or arbitration shall inform the Company to that effect prior to submitting the sample for testing.

8. The Company is not responsible for recalling the electronic version of the original report when any revision is made to them. The Client assumes the responsibility to providing the revised version to any interested party who uses them.

9. Subject to the variable length of retention time for test data and report stored hereinto as otherwise specifically required by individual accreditation authorities, the Company will only keep the supporting test data and information of the test report for a period of six years. The data and information will be disposed of after the aforementioned retention period has elapsed. Under no circumstances shall we provide any data and information which has been disposed of after retention period. Under no circumstances shall we be liable for damage of any kind, including (but not limited to) compensatory damages, lost profits, lost data, or any form of special, incidental, indirect, consequential or punitive damages of any kind, whether based on breach of contract of warranty, tort (including negligence), product liability or otherwise, even if we are informed in advance of the possibility of such damages.