

FCC TEST REPORT

according to

FCC Rules and Regulations

Part 15 Subpart C

| | |
|------------|---|
| Applicant | SerComm Corporation |
| Address | 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C. |
| Equipment | 3 in 1 AP |
| Model No. | IP802SM V2 |
| FCC ID | P27IP802SMV2 |
| Trade Name | Sercomm |

Laboratory accreditation



1332

- The test result refers exclusively to the test presented test model / sample.,
- Without written approval of **Exclusive Certification Corp.** the test report shall not be reproduced except in full.
- The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

Contents

| | | |
|-------|---|---------|
| 1. | Report of Measurements and Examinations | 4 |
| 1.1. | List of Measurements and Examinations | 4 |
| 2. | Test Configuration of Equipment under Test..... | 5 |
| 2.1. | Test Mode and Test Software..... | 5 |
| 2.2. | Description of Test System | 5 |
| 2.3. | Connection Diagram of Test System | 6 |
| 2.4. | Feature of Equipment under Test | 7 |
| 2.5. | RF Module Specifications | 7 |
| 2.6. | History of this test report | 7 |
| 3. | General Information of Test..... | 8 |
| 4. | Antenna Requirements..... | 9 |
| 4.1. | Standard Applicable | 9 |
| 4.2. | Antenna Construction and Directional Gain | 9 |
| 5. | Test of Conducted Emission..... | 10 |
| 5.1. | Test Procedures..... | 10 |
| | Typical Test Setup Layout of Conducted Emission | 11 |
| 5.2. | Conducted Emission Requirement | 11 |
| 5.3. | Test Result and Data..... | 12 |
| 6. | Test of Radiated Emission..... | 38 |
| 6.1. | Test Procedures..... | 38 |
| 6.2. | Typical Test Setup Layout of Radiated Emission | 38 |
| 6.3. | Test Result of Radiated emission | 39 |
| 6.4. | 6dB Bandwidth Measurement Data..... | 55 |
| 6.5. | Test Procedure | 55 |
| 6.6. | Test Setup Layout | 55 |
| 6.7. | Test Result and Data..... | 55 |
| 7. | Maximum Peak Output Power..... | 59 |
| 7.1. | Test Procedure | 59 |
| 7.2. | Test Setup Layout | 59 |
| 7.3. | Test Result and Data..... | 59 |
| 8. | Band Edges Measurement..... | 63 |
| 8.1. | Test Procedure | 63 |
| 8.2. | Test Result and Data..... | 63 |
| 8.3. | Restrict band emission Measurement Data..... | 68 |
| 9. | Power Spectral Density..... | 69 |
| 9.1. | Test Procedure | 69 |
| 9.2. | Test Setup Layout | 69 |
| 9.3. | Test Result and Data..... | 69 |
| 10. | Restricted Bands of Operation..... | 73 |
| 10.1. | Labeling Requirement | 73 |
| 11. | RF Exposure..... | 74 |
| 11.1. | Limit For Maximum Permissible Exposure (MPE)..... | 74 |
| 11.2. | MPE Calculations | 75 |
| 11.3. | FCC Radiation Exposure Statement | 75 |
| 12. | List of Measuring Equipment Used..... | 76 |
| | Appendix A. Photographs of EUT..... | A1 ~ A8 |

CERTIFICATE OF COMPLIANCE

according to

FCC Rules and Regulations

Part 15 Subpart C

| | |
|-----------|---|
| Applicant | SerComm Corporation |
| Address | 8F, No. 3-1, YuanQu St., NanKang, Taipei 115, Taiwan, R.O.C. |
| Equipment | 3 in 1 AP |
| Model No. | IP802SM V2 |
| FCC ID | P27IP802SMV2 |

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4** The equipment was **passed** the test performed according to **FCC Rules and Regulations Part 15 Subpart C (2003)**. The test was carried out on Mar. 10, 2005 at *Exclusive Certification Corp.*

Signature


Anson Chou / Manager

1. Report of Measurements and Examinations

1.1. List of Measurements and Examinations

| FCC Rule | Description of Test | Result |
|--------------------------------------|--|--------|
| 15.203 | . Antenna Requirement | Pass |
| 15.207 | . Conducted Emission | Pass |
| 15.209 | . Radiated Emission | Pass |
| 15.247(a)(2) | . 6dB Bandwidth | Pass |
| 15.247(b) | . Maximum Peak Output Power | Pass |
| 15.247(c) | . 100kHz Bandwidth of Frequency Band Edges | Pass |
| 15.247(d) | . Power Spectral Density | Pass |
| 1.1307 1.1310 2.1091 2.1093 | . RF Exposure Compliance | Pass |

Test by: Jerry

2. Test Configuration of Equipment under Test

2.1. Test Mode and Test Software

The following test mode and test software was performed for conduction and radiation test:

- 802.11b (CH LO: 2412MHz) • 802.11b (CH MID: 2437MHz) • 802.11b (CH HI: 2462MHz)
- 802.11g (CH LO: 2412MHz) • 802.11g (CH MID: 2437MHz) • 802.11g (CH HI: 2462MHz)
- An executive programs, "DUTAPIDLL" Application under WIN XP.

The test mode including two kind of type for radiated and conduction test:

- Test mode 1: Transmit/ Receive (DC 5V from adapter)
- Test mode 2: Transmit/ Receive (DC 5V from pc system)

2.2. Description of Test System

| Device | Manufacturer | Model No. | Description |
|----------|--------------|-------------|--|
| PC | IBM | IGV | Power Cable, Unshielding 1.8 m |
| Monitor | SlimAGE | 510A | Power Cable, Adapter Unshielding 1.8 m Data Cable, VGA shielding 1.35 m |
| Keyboard | IBM | KB-0225 | Data Cable, PS2, shielding 1.85 m |
| Mouse | IBM | MO28VO | Data Cable, USB shielding 1.85 m |
| Modem | ACEXX | DM-1414 | Power Cable, Adapter Unshielding 1.8 m Data Cable, RS232 shielding 1.35 m |
| Printer | HP | Desk Jet400 | Power Cable, Adapter Unshielding 1.8 m Data Cable, PRINT shielding 1.6 m |

Use Cable:

EMI

| Cable | Description |
|-------|-----------------|
| USB | Shielding, 0.6m |
| RJ-45 | Unshielding, 1m |


EMS

| Cable | Description |
|-------|-----------------|
| USB | Shielding, 0.6m |
| RJ-45 | Unshielding, 3m |

2.3. Connection Diagram of Test System


The test setup including two kind of mode:

Test mode 1: Transmit/ Receive (DC 5V from adapter)

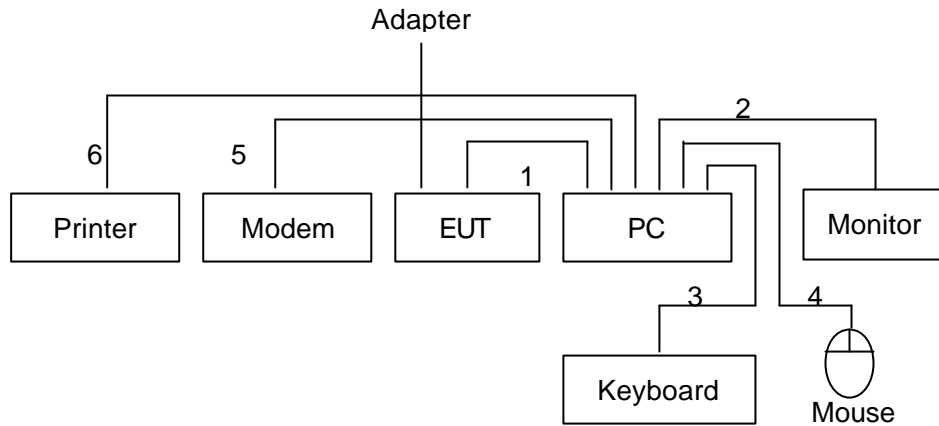

1. The RJ45 cable is connected form PC to the EUT.
2. The I/O cable is connected from PC to the Monitor.
3. The I/O cable is connected from PC to the Keyboard.
4. The I/O cable is connected from PC to the Mouse.
5. The I/O cable is connected from PC to the MODEM
6. The I/O cable is connected from PC to the Printer.

Test mode 2: Transmit/ Receive (DC 5V from pc system)

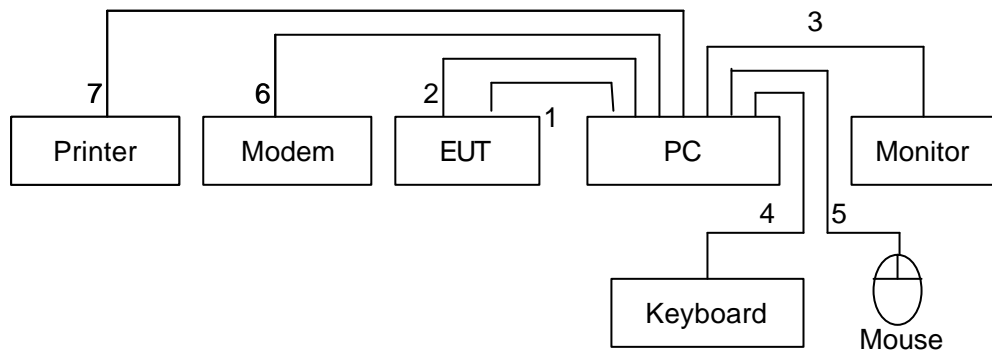

1. The RJ45 cable is connected form PC to the EUT.
2. The USB cable is connected form PC to the EUT.
3. The I/O cable is connected from PC to the Monitor.
4. The I/O cable is connected from PC to the Keyboard.
5. The I/O cable is connected from PC to the Mouse.
6. The I/O cable is connected from PC to the MODEM
7. The I/O cable is connected from PC to the Printer.

2.4. Feature of Equipment under Test

| | |
|-----------------------|--|
| Model | Wireless 3-in-1 Companion |
| Dimensions | 70 mm (W) * 105 mm(D) * 22 mm (H) |
| Operating Temperature | 0°C to 40°C |
| Storage Temperature | -10°C to 70°C |
| Network Protocol: | TCP/IP |
| Network Interface: | 1 * 10/100BaseT Ethernet 1 * Wireless Interface |
| LEDs | 3 |
| Power Adapter | 5 V DC External |

2.5. RF Module Specifications

| | |
|----------------------|--|
| Standards | IEEE802.11g WLAN, JEIDA 4.2, roaming support |
| Frequency | 2.4 to 2.4835GHz (Industrial Scientific Medical Band) |
| Channels | Maximum 14 Channels, depending on regulatory authorities |
| Modulation | DSSS BPSK/QPSK/CCK, OFDM/CCK |
| Data Rate | Up to 54 Mbps |
| Coverage Area | Indoors : 10m @54Mbps, 80m @6Mbps or lower Outdoors : 30m @54Mbps, 200m @6Mbps or lower |
| Security | WEP 64Bit, WEP 128Bit, WPA-PSK |
| Output Power | 15 dBm (typical) |
| Receiver Sensitivity | -80 dBm Min. |

2.6. History of this test report

ORIGINAL.

3. General Information of Test

| | |
|--------------------------------|--|
| Test Site: | Exclusive Certification Corp. 4F-2, No. 28, Lane 78, Xing-Ai Rd. Nei-hu, Taipei City 114 Taiwan R.O.C. |
| Test Site Location (OATS1-SD): | No.68-1, Shihbachongsi, shihding Township, Taipei County 223, Taiwan, R.O.C. |
| Test Voltage: | AC 110V/ 60Hz |
| Test in Compliance with: | ANSI C63.4-2003 FCC Part 15 Subpart C |
| Frequency Range Investigated: | Conducted: from 150kHz to 30 MHz Radiation: from 30 MHz to 24620MHz |
| Test Distance: | The test distance of radiated emission from antenna to EUT is 3 M. |

4. Antenna Requirements

4.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.2. Antenna Construction and Directional Gain

Antenna type: Integral PIFA Antenna

Antenna Gain: 1 dBi.


5. Test of Conducted Emission

Conducted Emissions were measured from 150 kHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-2003 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in section 1.3.1. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.1. Test Procedures

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connecting to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 micro-henry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 kHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Typical Test Setup Layout of Conducted Emission

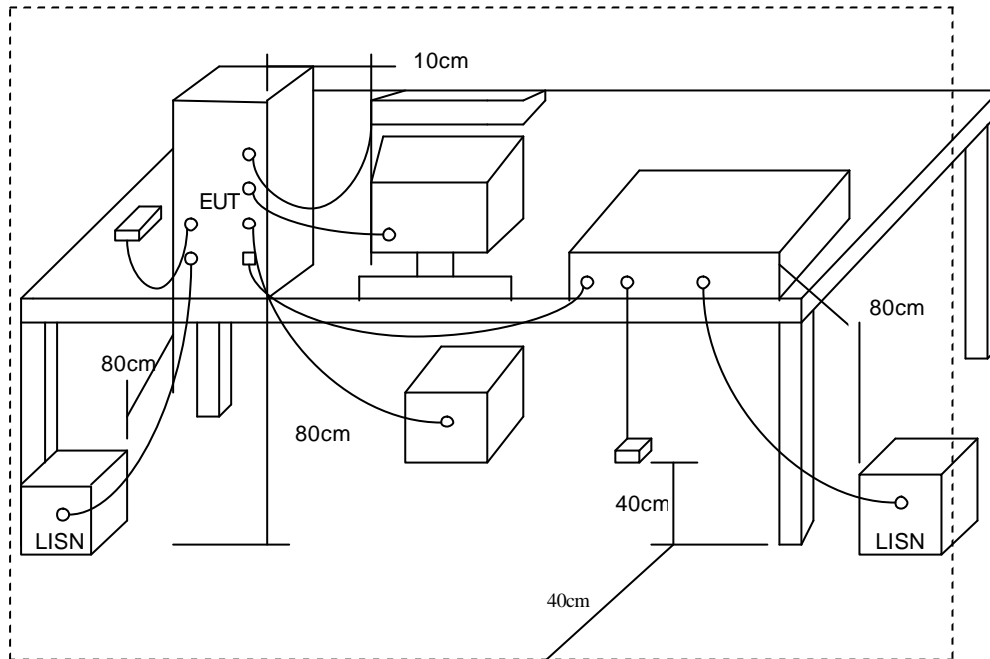

5.2. Conducted Emission Requirement

Except for A digital devices, for equipment that is designed to be connected to the public utility (AC) power line on any frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150KHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the Radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the band edges.

| Frequency (MHz) | Quasi Peak (dB μ V) | Average (dB μ V) |
|-----------------|-------------------------|----------------------|
| 0.15 – 0.5 | 66-56* | 56-46* |
| 0.5 – 5.0 | 56 | 46 |
| 5.0 – 30.0 | 60 | 50 |