




MIMO_Port 2

NR band 77/78 Low Band

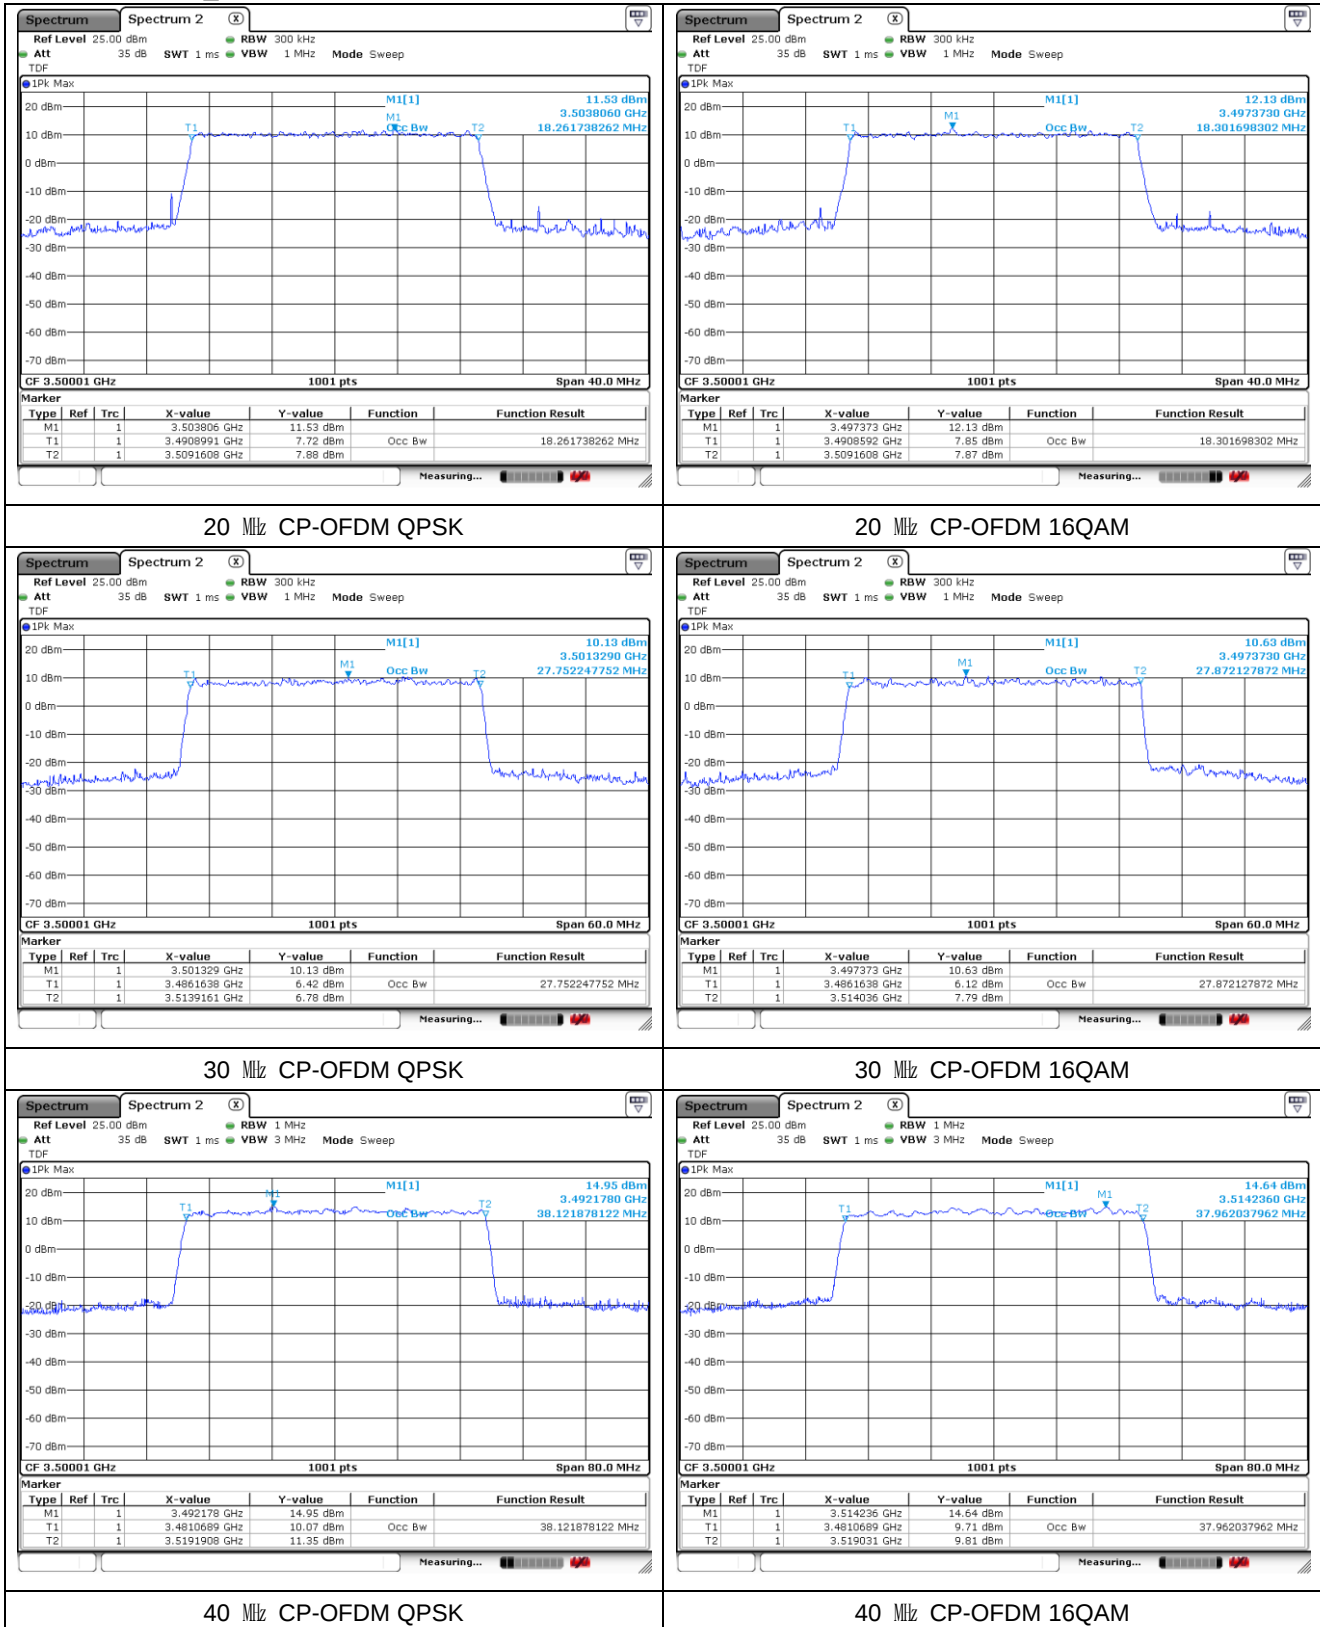


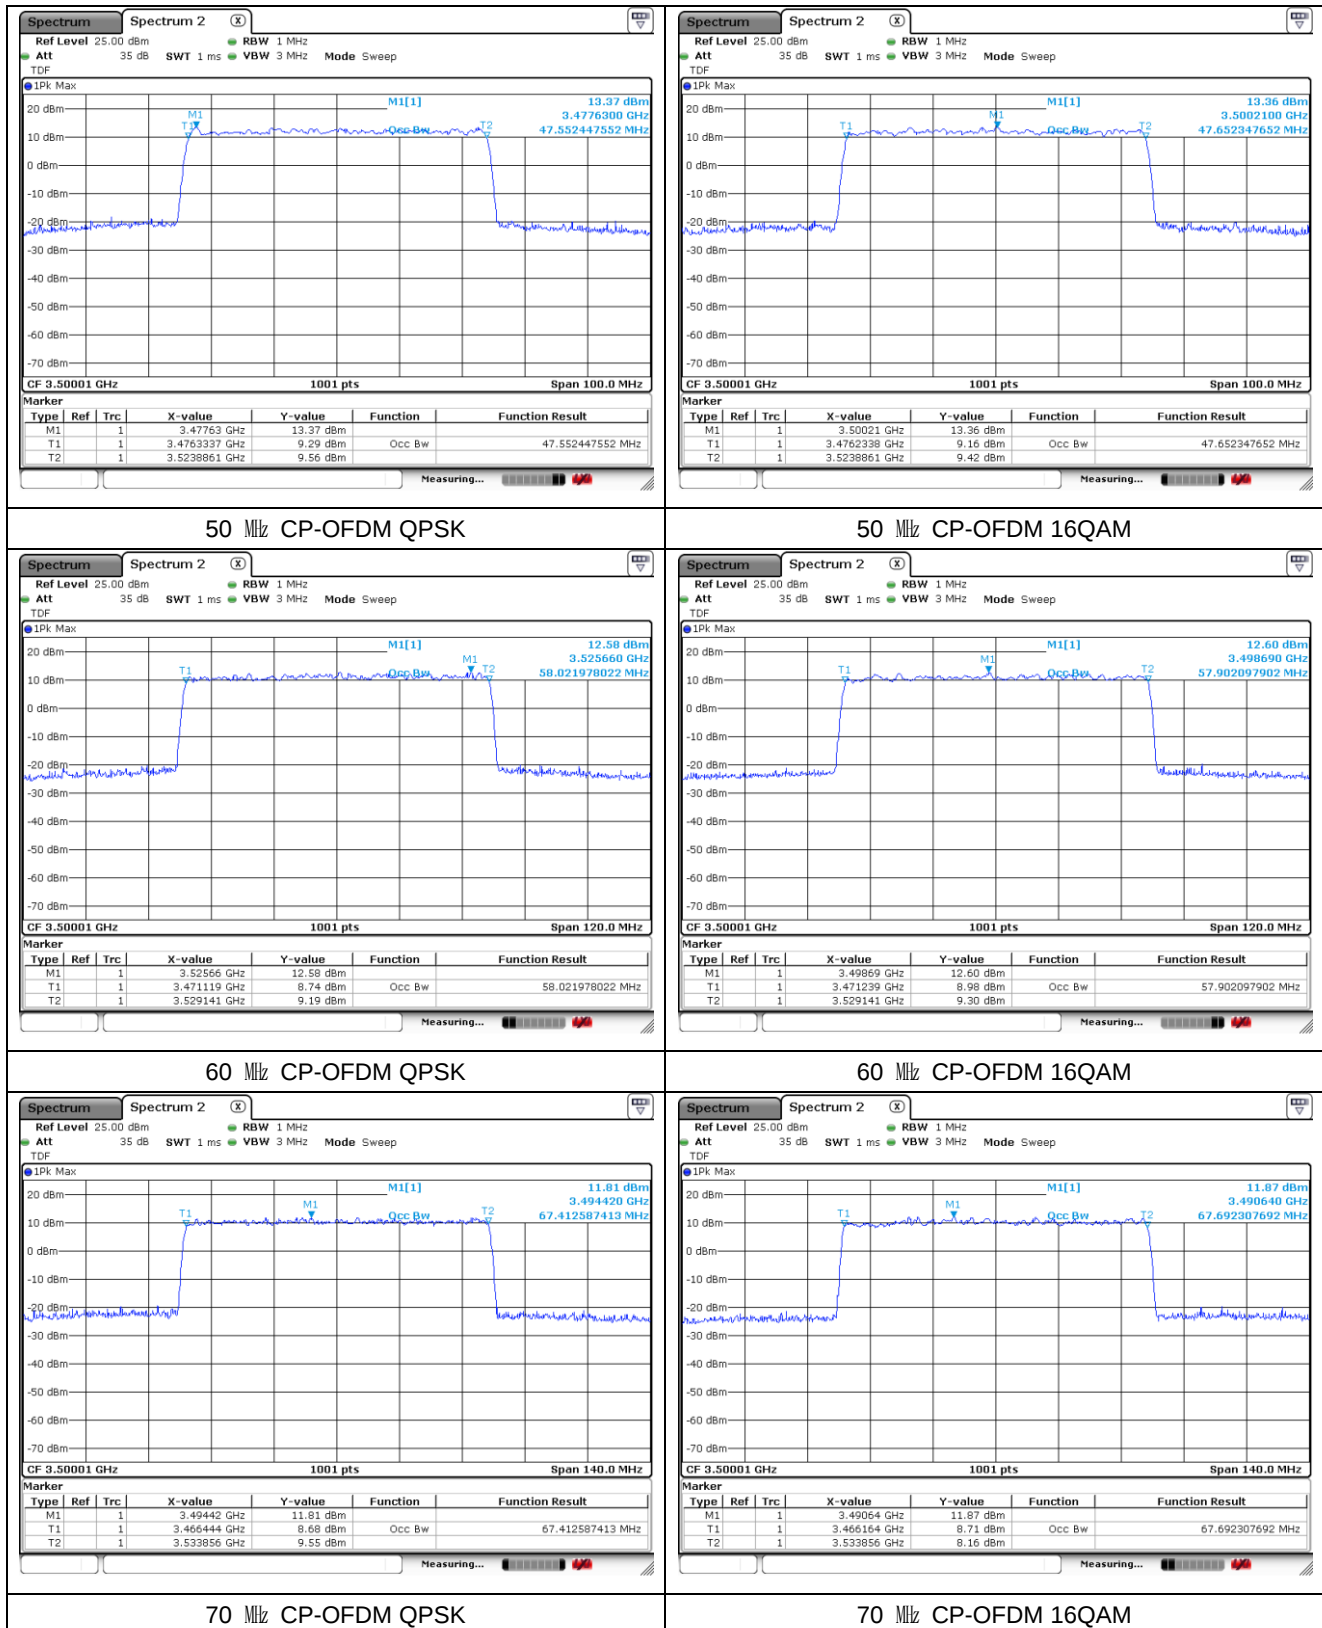


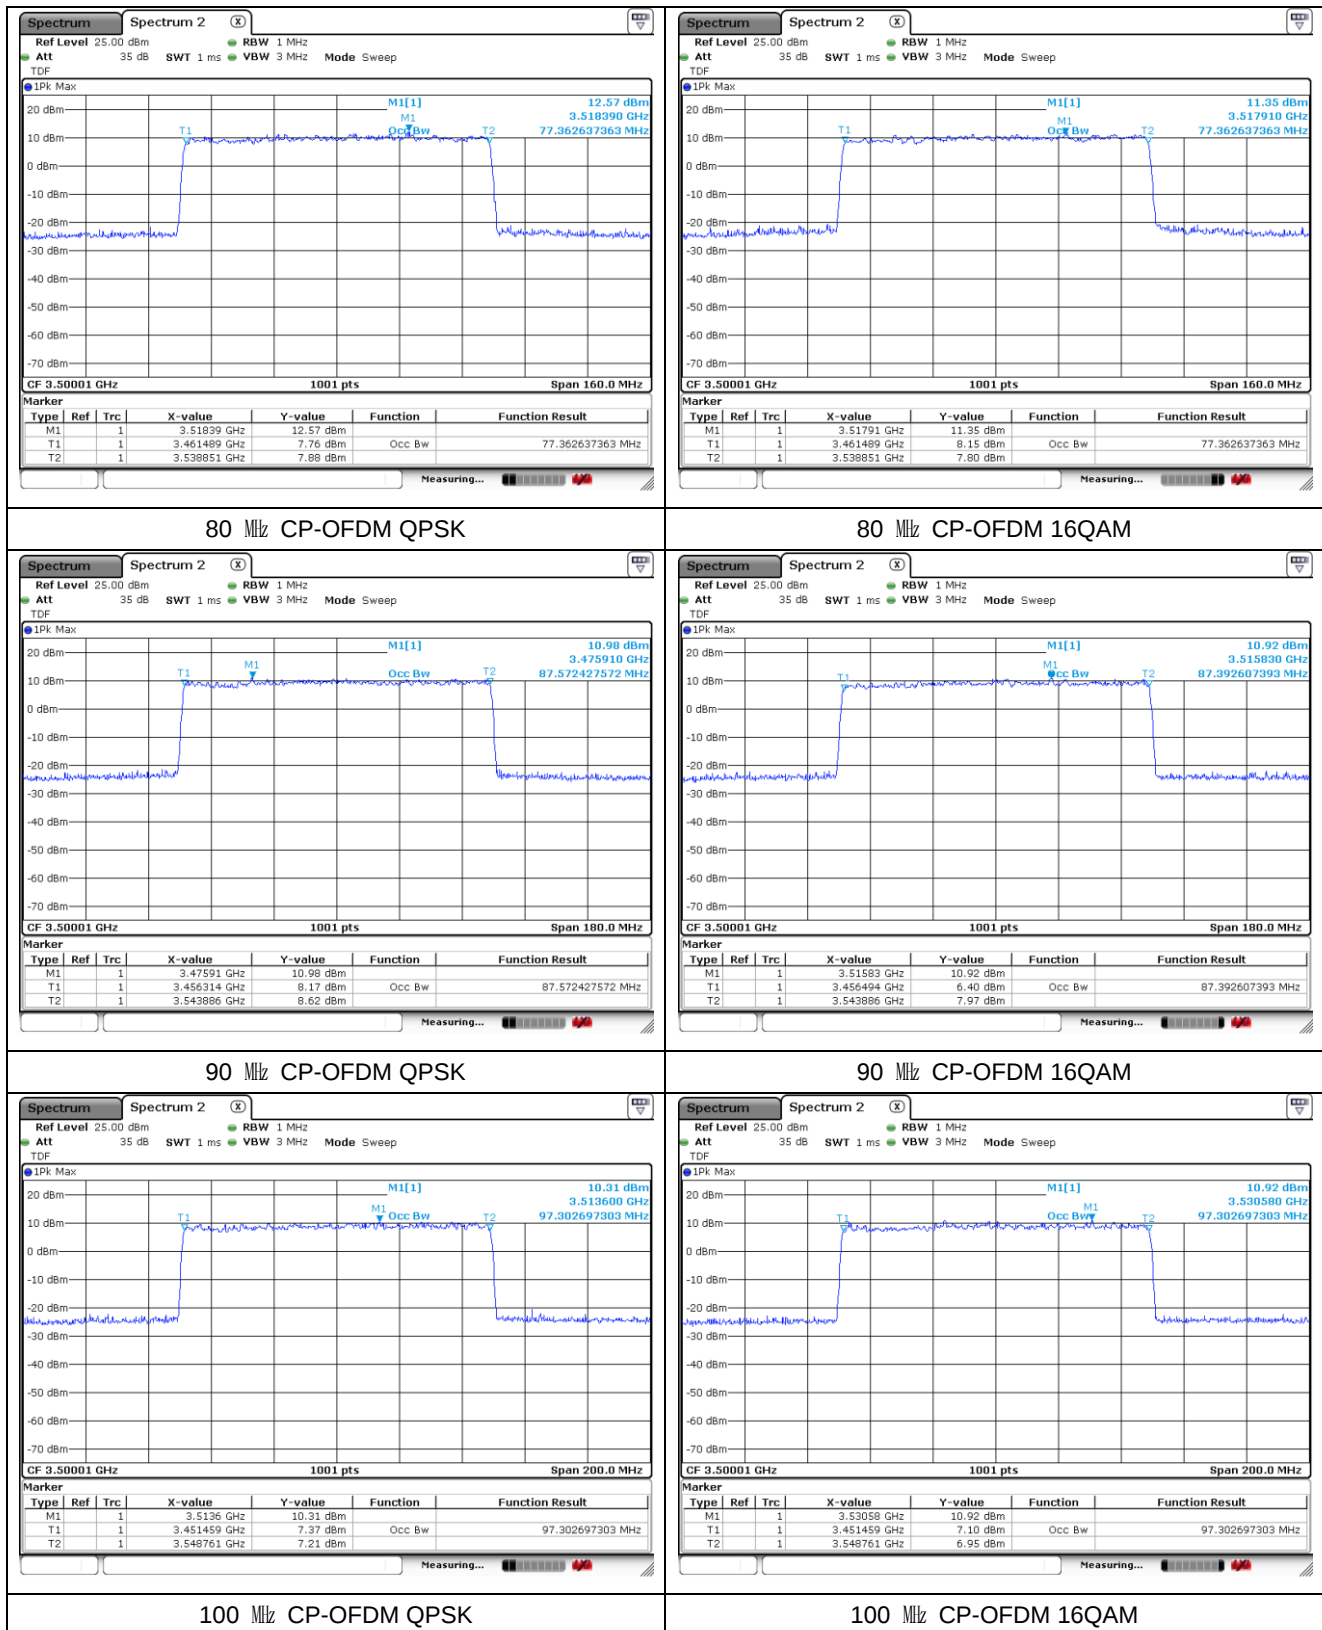


MIMO_Port 1


NR band 77/78_High Band

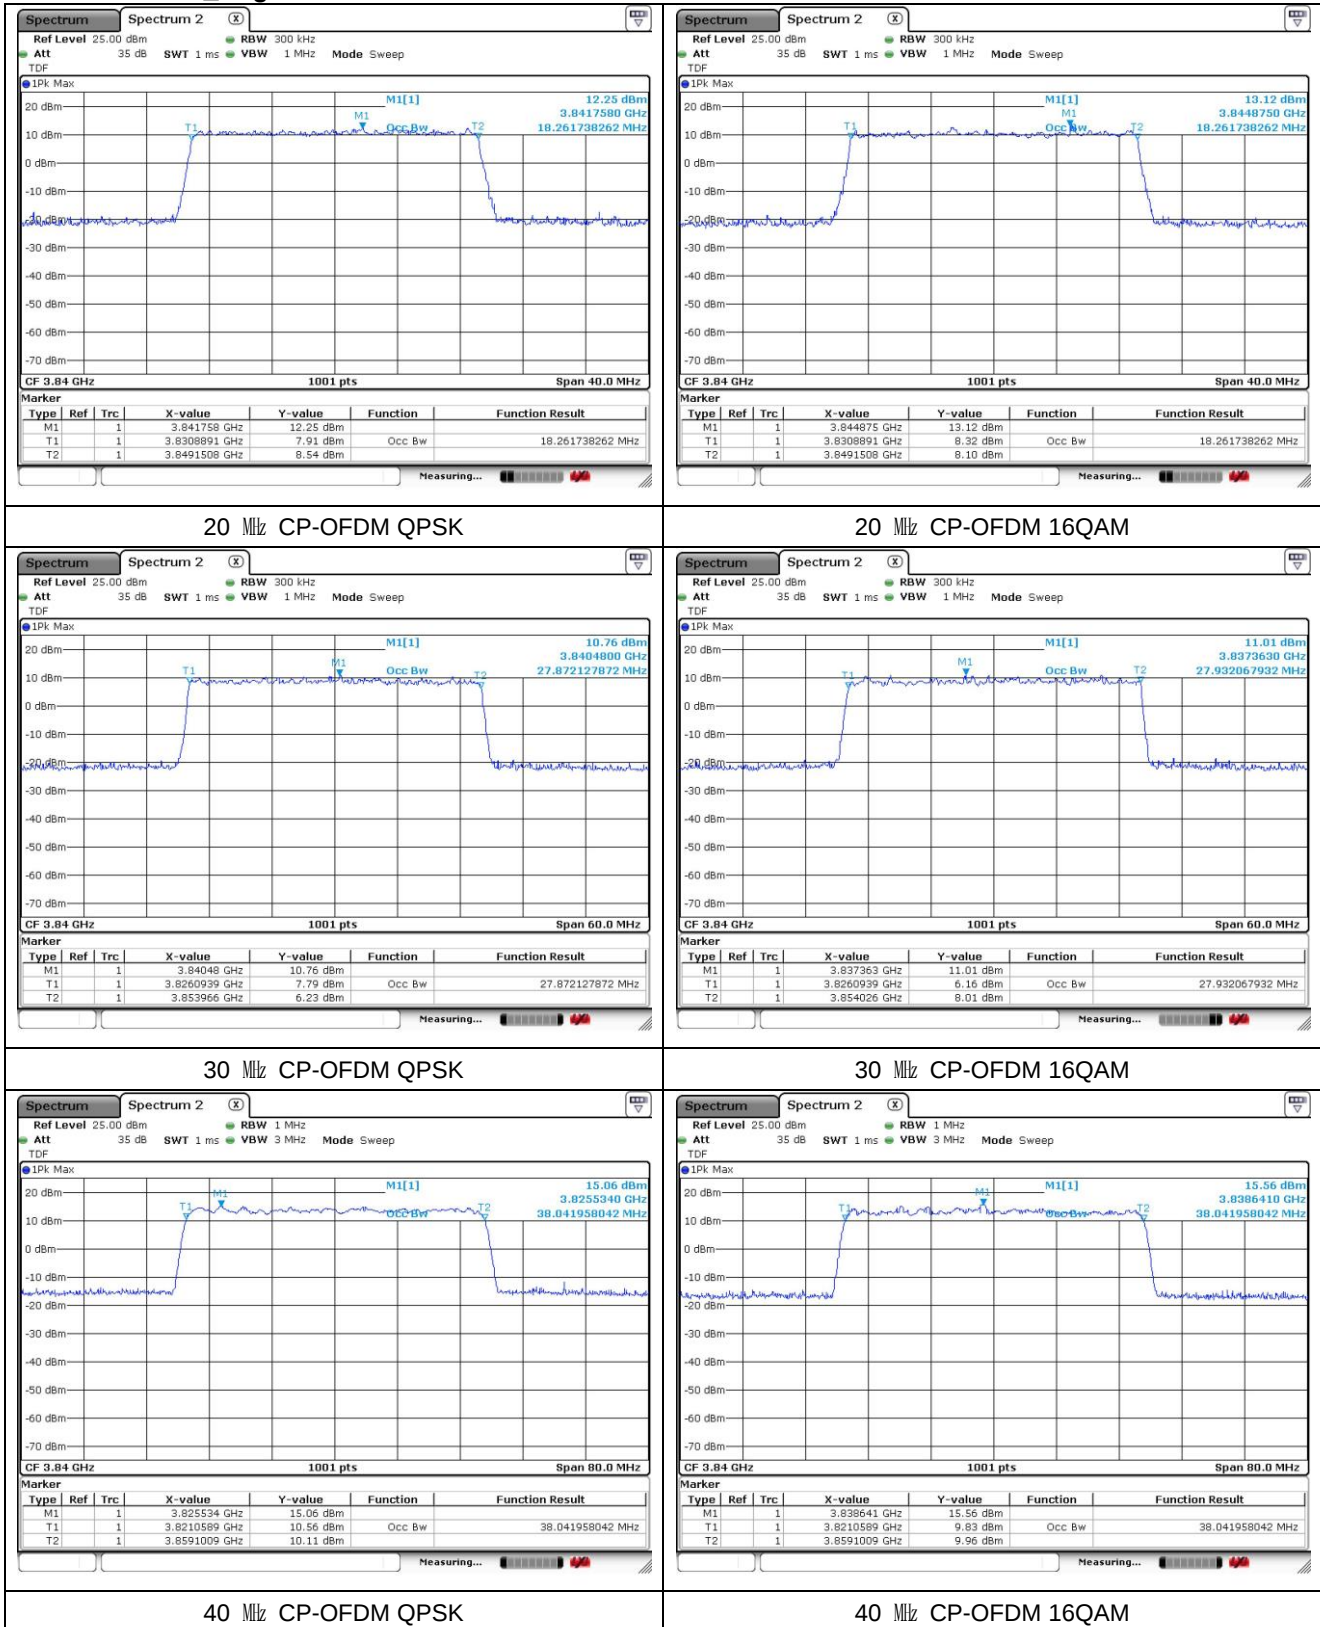

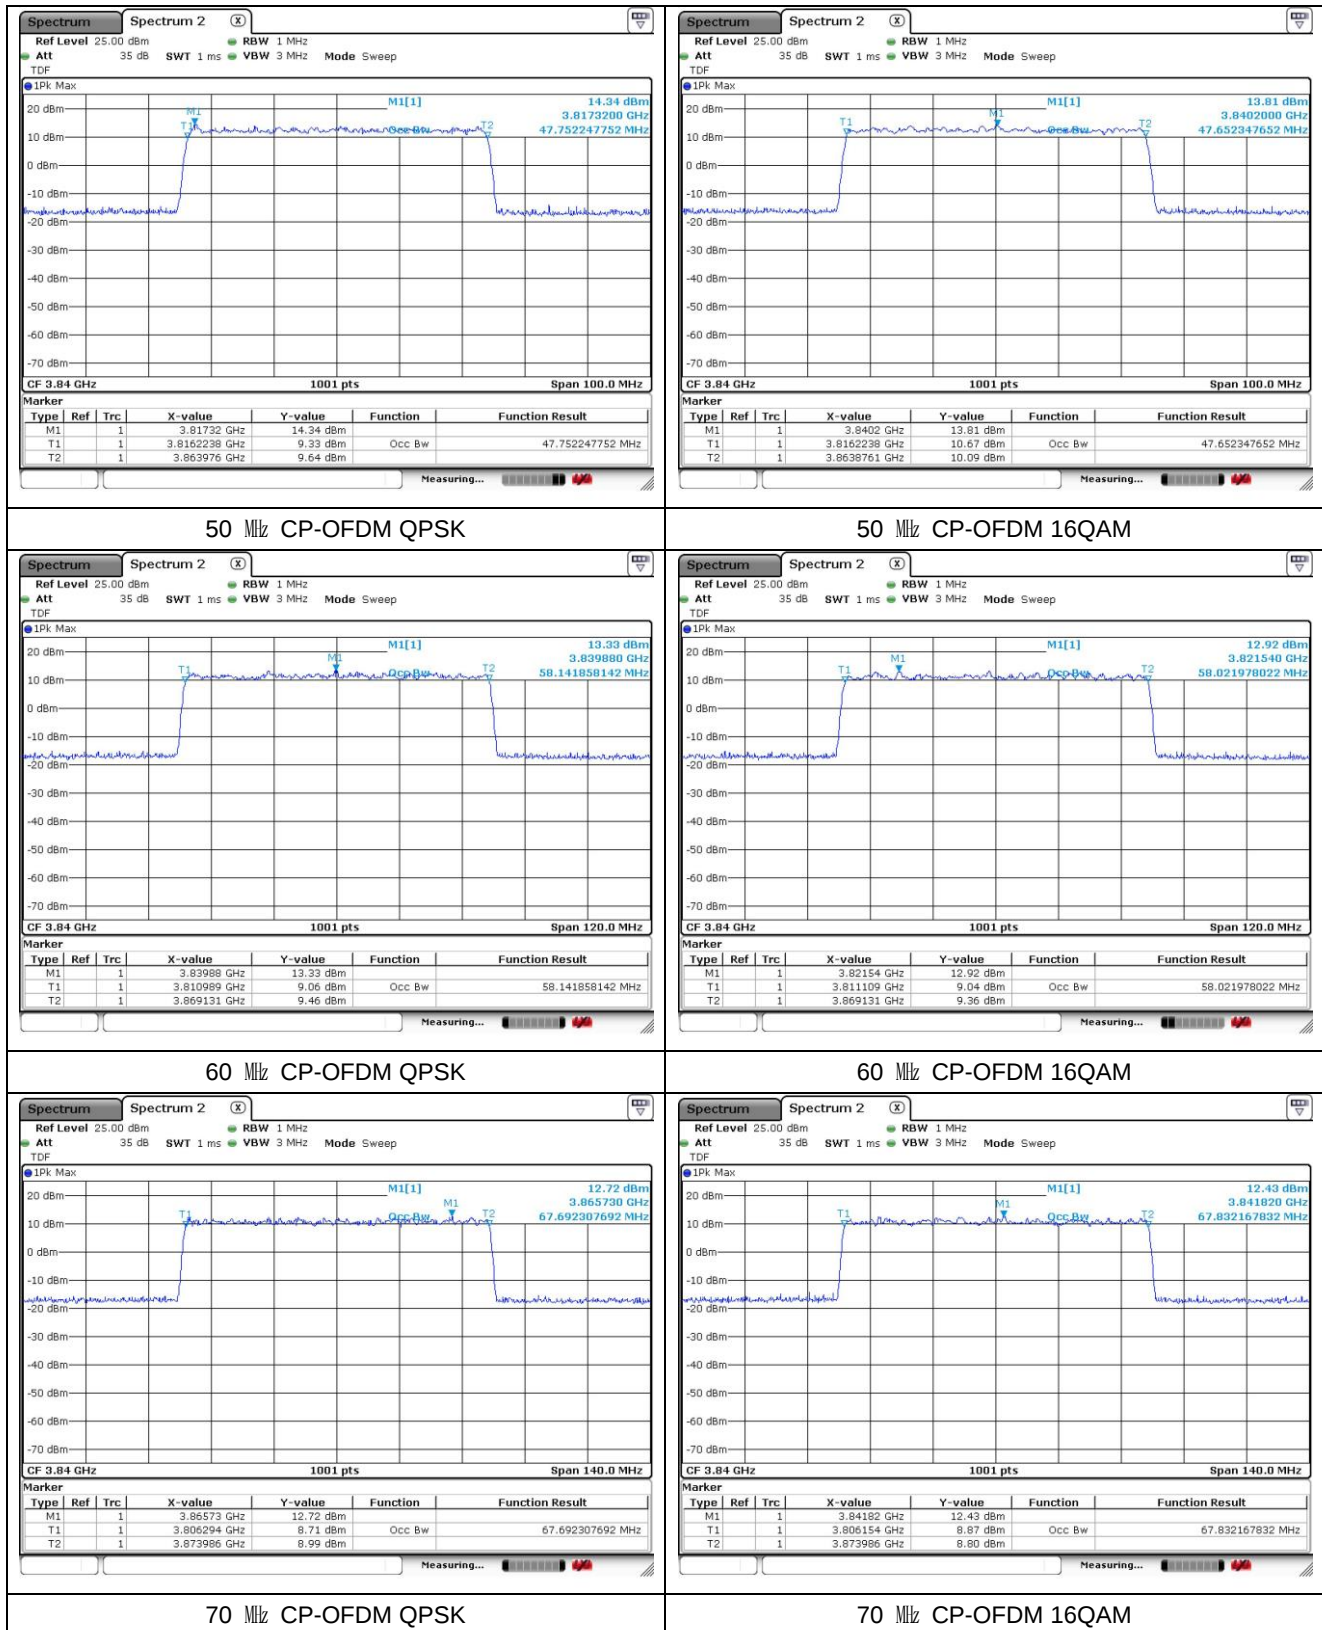


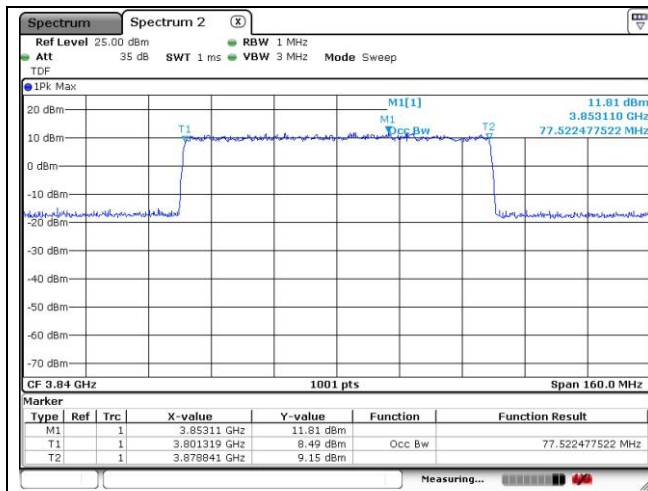


80 MHz CP-OFDM QPSK

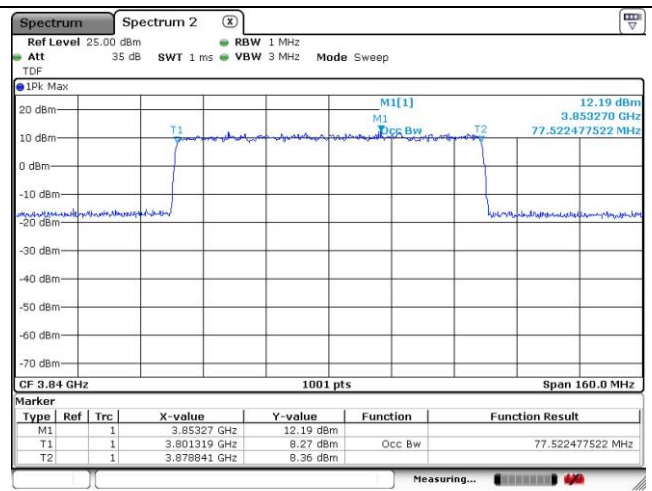


80 MHz CP-OFDM 16QAM

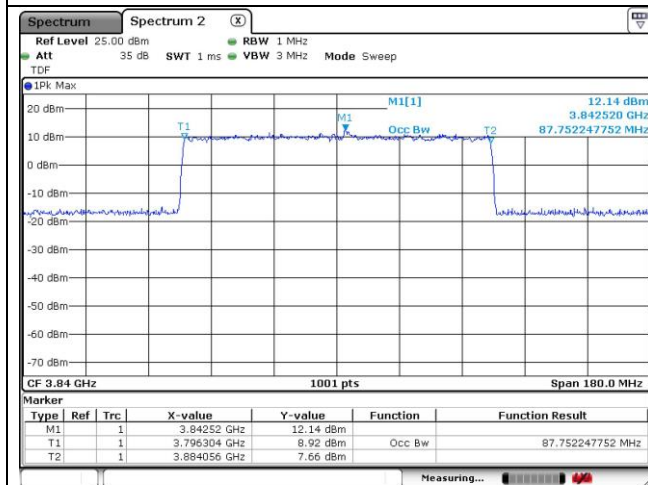


90 MHz CP-OFDM QPSK

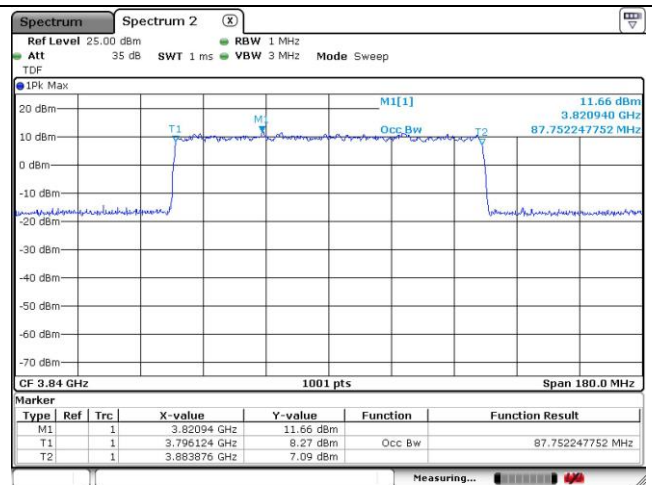

90 MHz CP-OFDM 16QAM

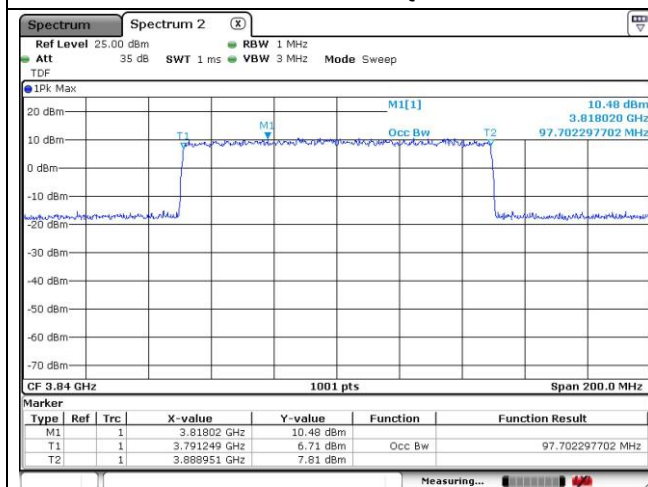

100 MHz CP-OFDM QPSK

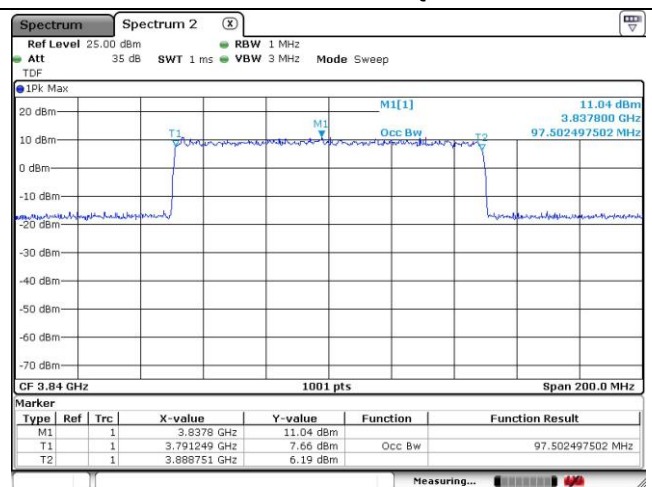




100 MHz CP-OFDM 16QAM

MIMO_Port 2

NR band 77/78_High Band





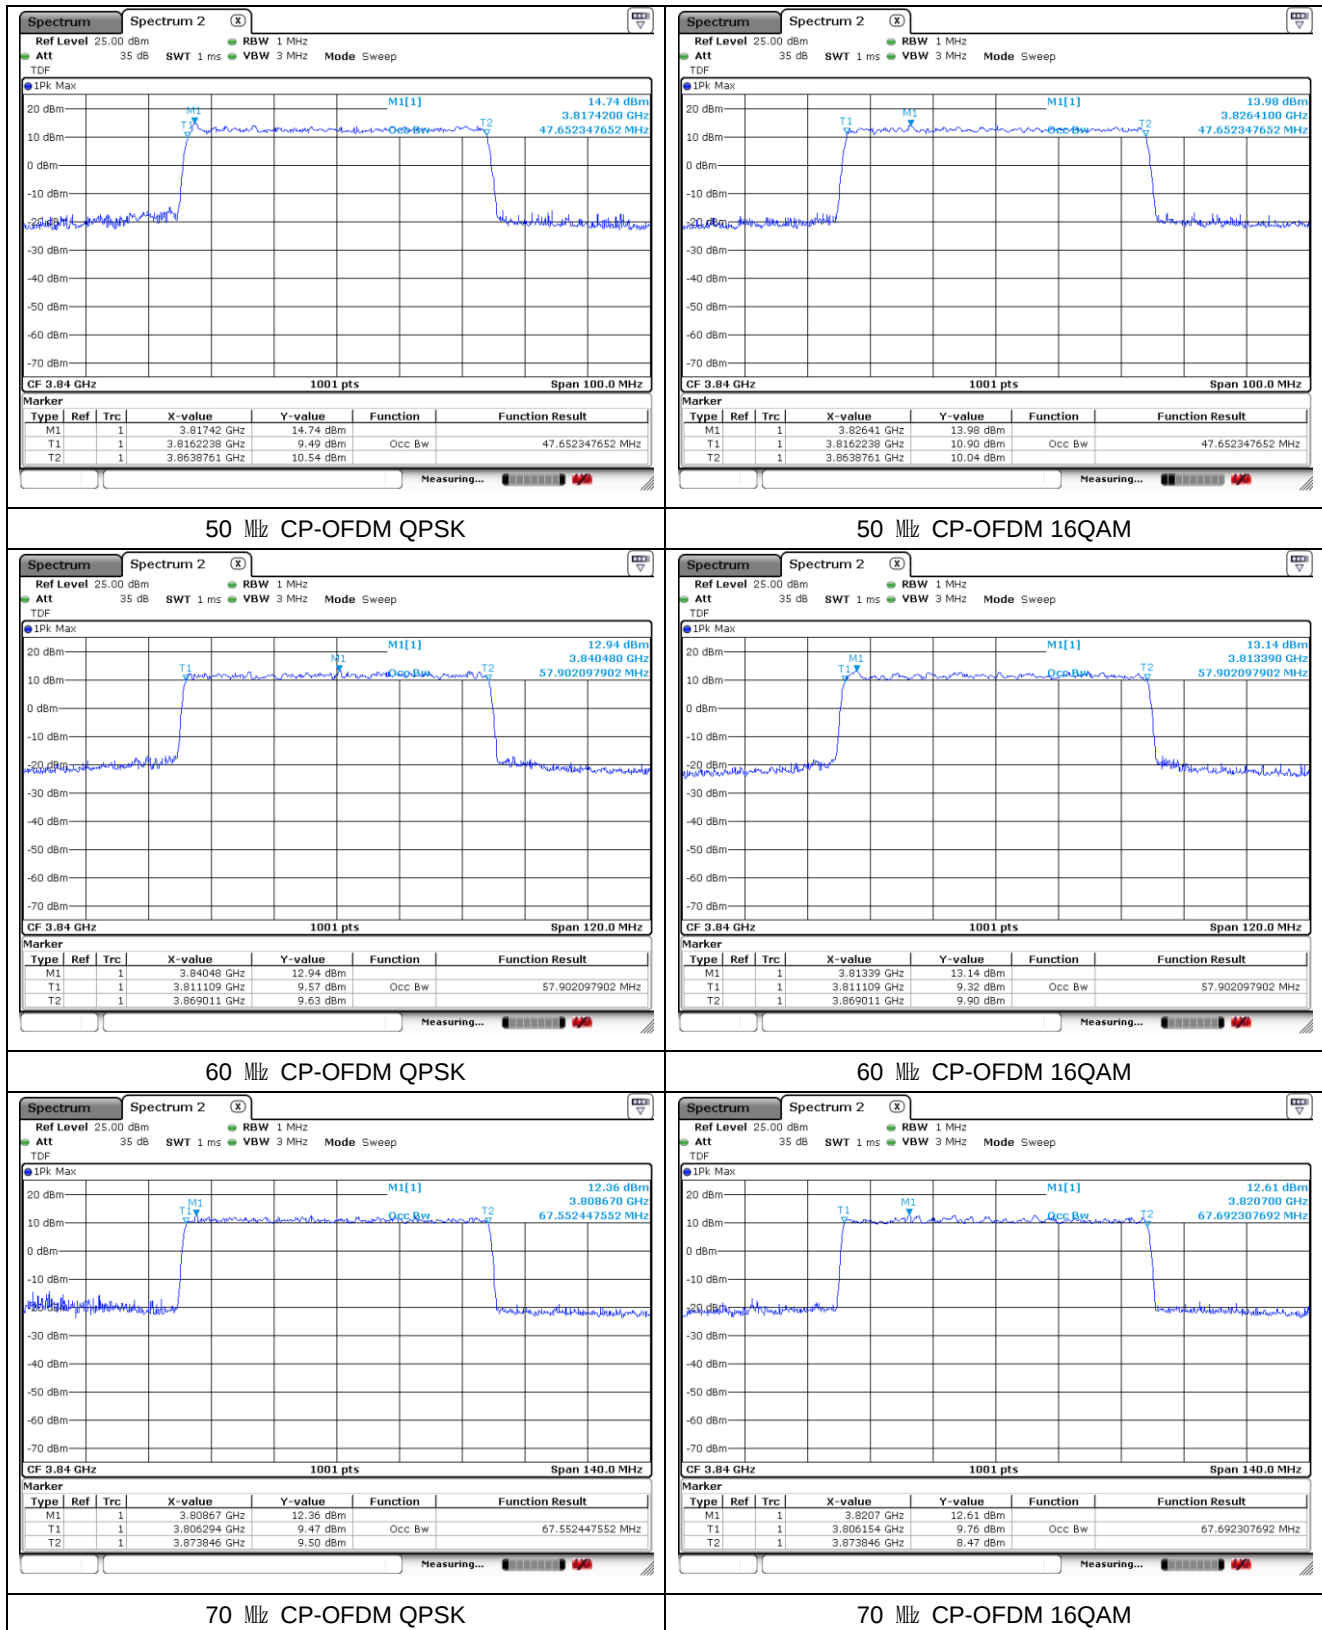

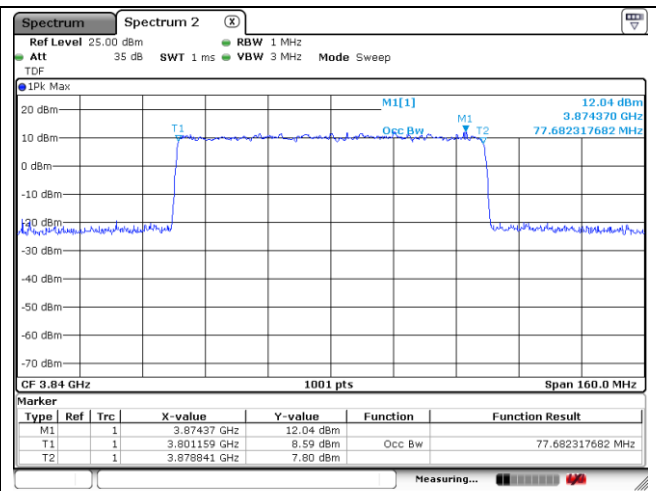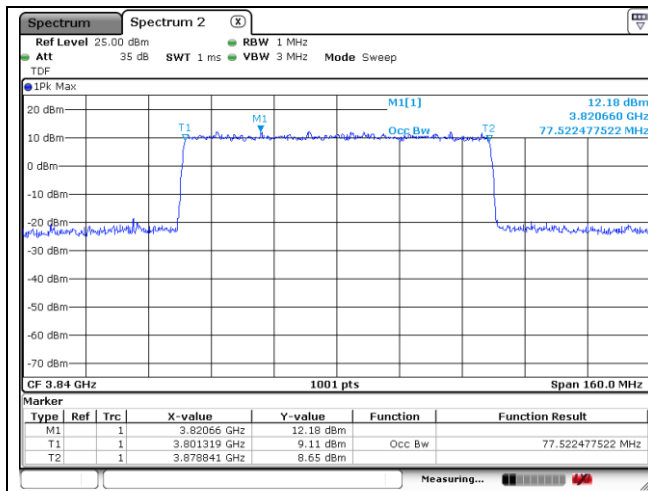



80 MHz CP-OFDM QPSK

80 MHz CP-OFDM 16QAM

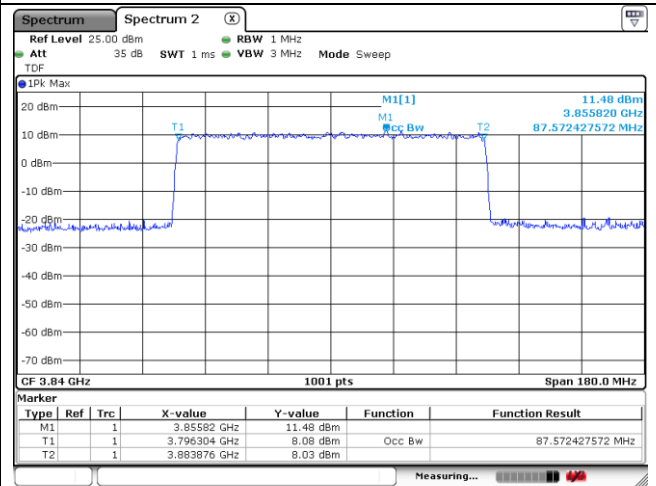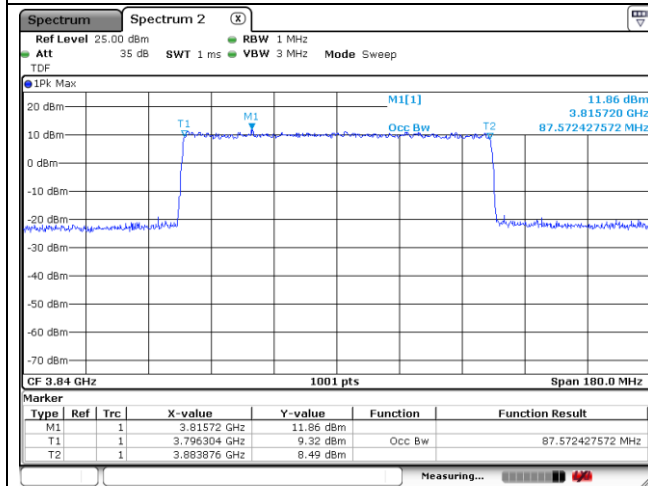

90 MHz CP-OFDM QPSK

90 MHz CP-OFDM 16QAM

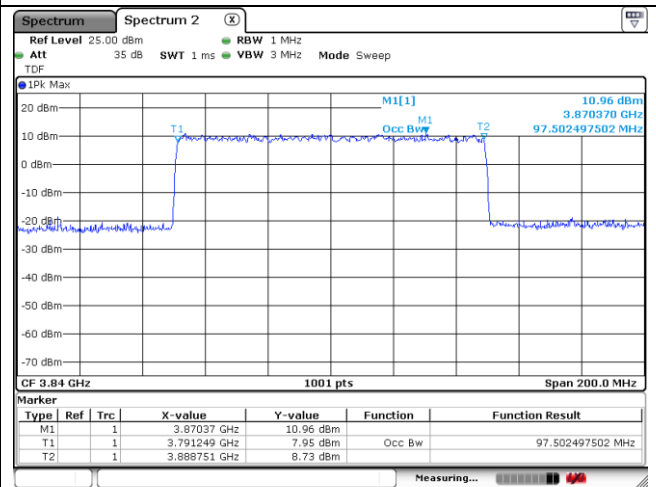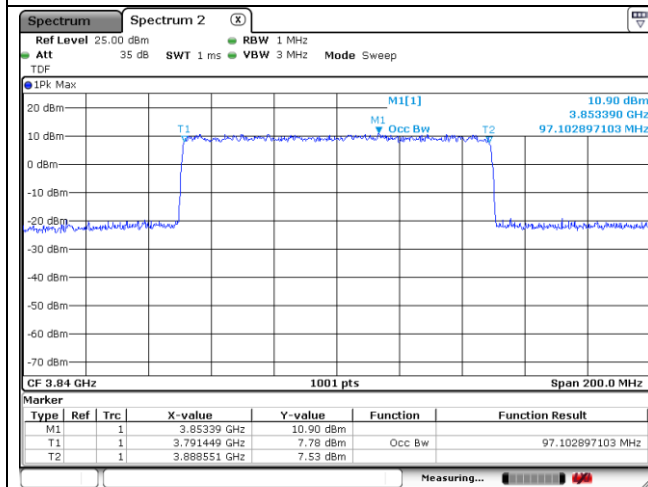

100 MHz CP-OFDM QPSK

100 MHz CP-OFDM 16QAM

5. Peak-Average Ratio

5.1. Limit

- §27.50(j)(4), Equipment employed must be authorized in accordance with the provisions of § 27.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (j)(5) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


- §27.50(k)(4), Equipment employed must be authorized in accordance with the provisions of § 27.51. Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (k)(5) of this section. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.2. Test Procedure

The test follows section 5.2.3.4 of ANSI C63.26-2015.

See instrumentation-specific application literature for further guidance regarding use of the CCDF capability. The following guidelines are offered for performing a CCDF measurement.

- a. Set resolution/measurement bandwidth $\geq$ OBW or specified reference bandwidth.
- b. Set the number of counts to a value that stabilizes the measured CCDF curve.
- c. Set the measurement interval as follows:
 - 1) For continuous transmissions, set to greater of $[10 \times (\text{number of points in sweep}) \times (\text{transmission symbol period})]$ or 1 ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize. Set the measurement interval to a time that is less than or equal to the burst duration.
 - 3) If there are several carriers in a single antenna port, the peak power shall be determined for each individual carrier (by disabling the other carriers while measuring the required carrier) and the total peak power calculated from the sum of the individual carrier peak powers.
- d. Record the maximum PAPR level associated with a probability of 0.1 %.
- e. The peak power level is calculated from the sum of the PAPR value from step d) to the measured average power.

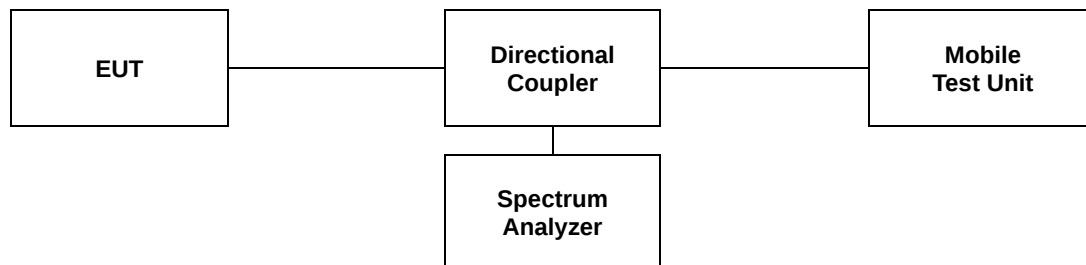

5.3 Test Results

Ambient temperature : (23 ± 1) °C
 Relative humidity : 47 % R.H.

SISO

Band	SCS (kHz)	BW (MHz)	Mode	Frequency (MHz)	PAR (dB)	
					DFT-S-OFDM	CP-OFDM
n77/78 Low Band	30	20	64QAM	3 460.02	6.52	7.68
				3 500.01	6.61	8.03
				3 540	6.78	7.97
		30	64QAM	3 465	6.49	8.17
				3 500.01	6.55	8.29
				3 534.99	6.52	8.23
		40	64QAM	3 470.01	6.38	8.20
				3 500.01	6.38	8.23
				3 529.98	6.29	8.26
		50	64QAM	3 475.02	6.46	8.43
				3 500.01	6.38	8.38
				3 525	6.41	8.43
		60	64QAM	3 480	6.87	8.64
				3 500.01	6.93	8.49
				3 519.99	6.84	8.46
		70	64QAM	3 485.01	7.04	8.55
				3 500.01	7.07	8.52
				3 514.98	7.01	8.67
		80	64QAM	3 490.02	7.10	8.43
				3 500.01	7.07	8.46
				3 510	7.22	8.43
		90	64QAM	3 495	7.51	8.61
				3 500.01	7.48	8.61
				3 504.99	7.57	8.61
		100	64QAM	3 500.01	7.39	8.67

Band	SCS (kHz)	BW (MHz)	Mode	Frequency (MHz)	PAR (dB)	
					DFT-S-OFDM	CP-OFDM
n77/78 High Band	30	20	64QAM	3 710.01	6.38	7.48
				3 840	6.35	7.42
				3 969.99	6.29	7.33
		30	64QAM	3 715.02	6.29	7.65
				3 840	6.26	7.62
				3 964.98	6.20	7.65
		40	64QAM	3 720	6.17	7.71
				3 840	6.12	7.68
				3 960	6.06	7.62
		50	64QAM	3 725.01	6.35	8.12
				3 840	6.35	7.97
				3 954.99	6.32	8.09
		60	64QAM	3 730.02	6.84	8.23
				3 840	6.84	8.26
				3 949.98	6.84	8.29
		70	64QAM	3 735	6.99	8.29
				3 840	6.99	8.29
				3 945	6.99	8.29
		80	64QAM	3 740.01	7.13	8.26
				3 840	7.13	8.26
				3 939.99	7.07	8.17
		90	64QAM	3 745.02	7.42	8.49
				3 840	7.51	8.41
				3 934.98	7.45	8.41
		100	64QAM	3 750	7.30	8.46
				3 840	7.33	8.46
				3 930	7.25	8.49



MIMO

Band	SCS (kHz)	BW (MHz)	Mode	Frequency (MHz)	PAR (dB)	
					CP-OFDM	
					Port 1	Port 2
77/78 Low Band	30	20	64QAM	3 460.02	8.67	8.72
				3 500.01	8.67	8.81
				3 540	8.72	8.67
		30	64QAM	3 465	8.87	8.93
				3 500.01	9.01	9.04
				3 534.99	8.99	8.93
		40	64QAM	3 470.01	8.96	8.78
				3 500.01	8.87	8.84
				3 529.98	8.93	8.72
		50	64QAM	3 475.02	8.93	8.90
				3 500.01	8.93	8.70
				3 525	8.81	8.81
		60	64QAM	3 480	8.72	8.93
				3 500.01	8.81	9.01
				3 519.99	8.72	8.87
		70	64QAM	3 485.01	8.72	8.84
				3 500.01	8.78	8.90
				3 514.98	8.75	8.81
		80	64QAM	3 490.02	8.49	8.43
				3 500.01	8.55	8.32
				3 510	8.58	8.35
		90	64QAM	3 495	8.87	8.52
				3 500.01	8.93	8.64
				3 504.99	8.72	8.90
		100	64QAM	3 500.01	8.55	8.52
Band	SCS (kHz)	BW (MHz)	Mode	Frequency (MHz)	PAR (dB)	
					CP-OFDM	
					Port 1	Port 2
77/78 High Band	30	20	64QAM	3 710.01	8.64	8.26
				3 840	8.55	8.26
				3 969.99	8.26	8.29
		30	64QAM	3 715.02	8.84	8.35
				3 840	8.70	8.72
				3 964.98	8.58	8.35
		40	64QAM	3 720	8.70	8.67
				3 840	8.49	8.41
				3 960	8.23	8.26
		50	64QAM	3 725.01	8.78	8.72
				3 840	8.70	8.43
				3 954.99	8.55	8.46
		60	64QAM	3 730.02	8.75	8.81
				3 840	8.67	8.70
				3 949.98	8.58	8.72
		70	64QAM	3 735	8.64	8.70
				3 840	8.64	8.81
				3 945	8.72	8.70
		80	64QAM	3 740.01	8.43	8.29
				3 840	8.26	8.49
				3 939.99	8.41	8.23
		90	64QAM	3 745.02	8.87	8.52
				3 840	8.72	8.87
				3 934.98	8.78	8.55
		100	64QAM	3 750	8.52	8.84
				3 840	8.75	8.43
				3 930	8.67	8.41


- Test plots

SISO


NR band 77/78 Low Band

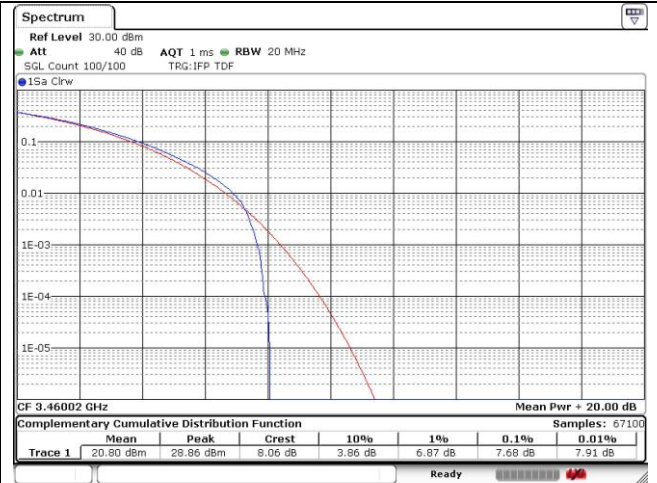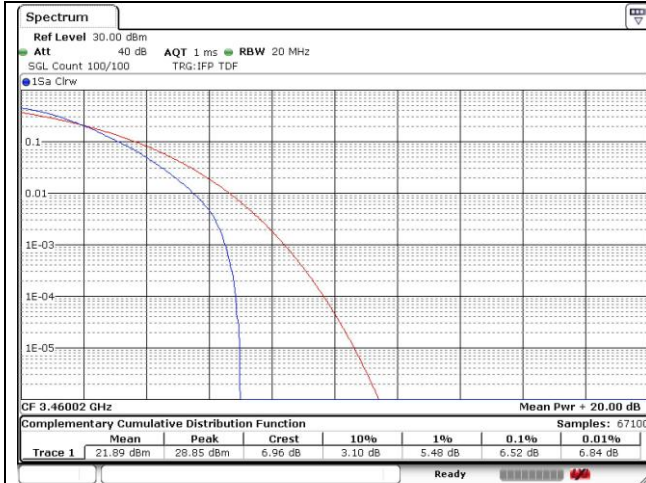


20 MHz Low Channel - Full RB - DFT-S-OFDM

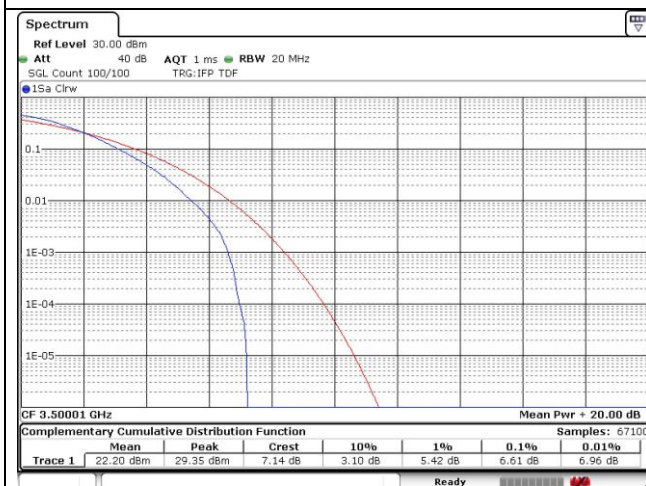


20 MHz Low Channel - Full RB - CP-OFDM

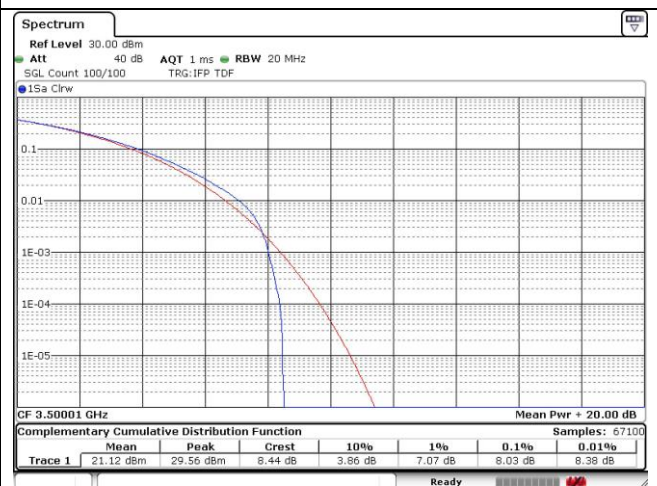

20 MHz Middle Channel - Full RB - DFT-S-OFDM

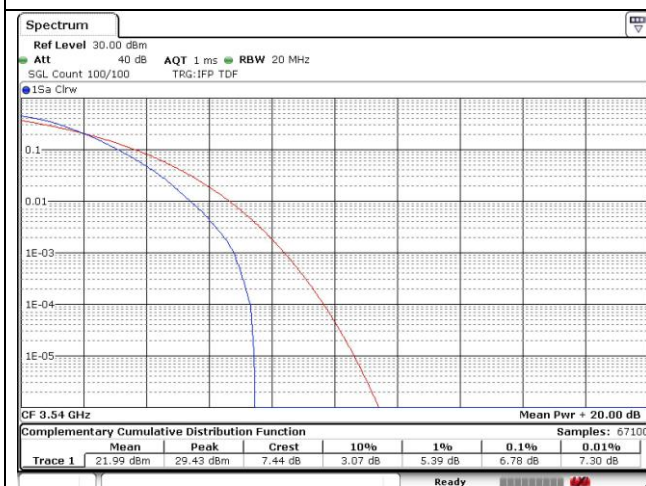

20 MHz Middle Channel - Full RB - CP-OFDM

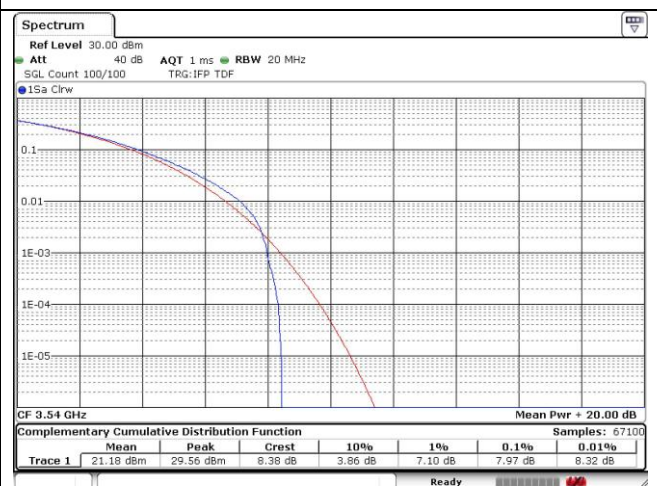

20 MHz High Channel - Full RB - DFT-S-OFDM

20 MHz High Channel - Full RB - CP-OFDM

