

Page: 1 of 24

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART E REQUIREMENT DFS TEST REPORT

silex technology, Inc. Applicant:

2-3-1 Hikaridai, Seika-cho, Souraku-gun, Kyoto 619-0237, Japan

Product Name: SX-SDMAC2

silex technology, Inc. **Brand Name:**

Marketing Name: Wireless Embedded Module

Model No.: SX-SDMAC2

Model Difference: N/A

Report Number: T190321W03-RP5

FCC ID: N6C-SDMAC2 **FCC Rule Part:** §15.407, Cat: NII Issue Date: Jun. 19, 2019

Date of Test: Mar. 21, 2019 ~ Apr. 16, 2019

Mar. 21, 2019 Date of EUT Received:

Compliance Certification Services Inc.Wugu Lab.

No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. Issued by:

(R.O.C.)

service@ccsrf.com

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report. The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory).

Tested By:

lerry Lu / Sr. Engineer

Approved By:

Kevin Tsai / Deputy Manager





Member of the SGS Group (SGS SA)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 2 of 24

Revision History

| Report Number | Revision | Description | Effected Page | Issue Date | Revised By |
|----------------|----------|-----------------------------------|------------------|---------------|---------------|
| T190321W03-RP5 | Rev.00 | Initial creation of docu- ment | All | Jun. 19, 2019 | Violetta Tang |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 3 of 24

Contents

| 1 | GENERAL INFORMATION | 4 |
|---|-------------------------|---|
| 2 | SUMMARY OF TEST RESULT | 8 |
| 3 | MEASUREMENT UNCERTAINTY | 8 |
| - | TPC and DFS MEASUREMENT | _ |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 4 of 24

GENERAL INFORMATION

1.1 Product Description

| Product Name: | SX-SDMAC2 |
|-------------------|--------------------------|
| Brand Name: | silex technology, Inc. |
| Marketing Name: | Wireless Embedded Module |
| Model No.: | SX-SDMAC2 |
| Model Difference: | N/A |
| Hardware Version: | N/A |
| Software Version: | N/A |
| Power Supply: | 3.3Vdc |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 5 of 24

| WLAN 802.11 | Frequency Range | Channels | Rated Power (Avg.) (dBm) | Modulation Technology |
|-----------------------|----------------------------|---|--|--------------------------|
| | 5150~5250 | 4 | 16.81 (2TX) | |
| | 5250~5350 | 4 | 18.94 (2TX) | OFDM |
| а | 5470~5725 | 11 | 18.65 (2TX) | OFDIVI |
| | 5725-5850 | 5 | 18.96 (2TX) | |
| | 5150~5250 | 4 | HT: 16.79 (MIMO-CDD) | |
| n_HT | 5250~5350 | 4 | HT: 18.48 (MIMO-CDD) | OFDM |
| ac_VHT 20M | 5470~5725 | 11 | HT: 18.26 (MIMO-CDD) | OFDIVI |
| | 5725-5850 | 5 | HT: 18.49 (MIMO-CDD) | |
| | · · | | HT: 17.37 (MIMO-CDD) | |
| n_HT ac_VHT 40M | 5250~5350 | 2 | HT: 17.31 (MIMO-CDD) | OFDM |
| | 5470~5725 | 5 | HT: 17.36 (MIMO-CDD) | OFDIVI |
| 5725-5850 | | 2 | HT: 17.28 (MIMO-CDD) | |
| | 5150~5250 1 10.81 (MIMO-CI | | 10.81 (MIMO-CDD) | |
| ac_VHT | 5250~5350 | 1 | 14.81 (MIMO-CDD) | OFDM |
| 80M | 5470~5725 | 2 | 17.37 (MIMO-CDD) | OFDIVI |
| 5725~5850 1 | | 16.24 (MIMO-CDD) | | |
| Modulation type | | 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 802.11ac only | | |
| Transition Rate: | | 802.11 n_20 802.11 n_40 802.11 ac_2 802.11 ac_4 | 9/12/18/24/36/48/54 Mbps MHz: 6.5 – 144.4Mbps MHz: 13.5 – 300.0Mbps 0MHz: 6.5 –173.3Mbps 0MHz: 13.5 –400.0Mbps 0MHz: 29.3 – 866.7Mbps | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 6 of 24

1.2 Antenna Designation

| Antenna Type | Supplier | Antenna Part No. | Freq. (MHz) | Peak Antenna Gain (dBi) | Worst Antenna Gain |
|-----------------|--------------|-----------------------|----------------|-------------------------------|--------------------------|
| РСВ | Unictron | H2B1PC1A1C (AA258) | 5GHz | 4.4 | |
| РСВ | Unictron | H2B1PD1A1C (AA222) | 5GHz | 4.2 | |
| PCB | molex | 146153 | 5GHz | 5 | V |
| Dipole | Sansei Denki | ANTDC-081A0/B0 | 5GHz | 2 | V |
| Dipole | Sansei Denki | ANTDP-027A0 | 5GHz | 0.8 | |
| Dipole | Sansei Denki | ANTDP-039A0 | 5GHz | 0.8 | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明·此報告結果僅對測試之樣品負責·同時此樣品僅保留90天。本報告未經本公司書面許可·不可部份複製。



Page: 7 of 24

1.3 Test Methodology of Applied Standards

FCC Part 15, Subpart E §15.407

FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02

FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

Note: All test items have been performed and record as per the above standards.

1.4 Test Facility

Compliance Certification Services Inc. Wugu Lab. No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.) (TAF code 1309) FCC Designation number: TW1309

1.5 Special Accessories

There are no special accessories used while test was conducted.

1.6 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page: 8 of 24

SUMMARY OF TEST RESULT

| FCC Rules | Description Of Test | Result |
|------------|-------------------------|-----------|
| §15.407(h) | TPC and DFS Measurement | Compliant |

MEASUREMENT UNCERTAINTY

| Test Items | Uncertainty |
|-------------------------|----------------------------|
| TPC and DFS Measurement | +/- 123.36 Hz |
| Temperature | +/- 0.65 °C |
| Humidity | +/- 4.6 % |
| DC / AC Power Source | DC= +/- 0.13%, AC=+/- 0.2% |

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.
- 3. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page: 9 of 24

TPC AND DFS MEASUREMENT

4.1 TPC: Standard Applicable

According to §15.407(h)(1), Transmit power control (TPC). U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. A TPC mechanism is not required for systems with an e.i.r.p. of less than 500 mW.

4.1.1. Result: N/A, The output power is less than 500mW.

4.2 DFS: Standard Applicable

According to §15.407(h)(2) and FCC KDB 905462 D02, Radar Detection Function of Dynamic Frequency Selection (DFS).

Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems. Operators shall only use equipment with a DFS mechanism that is turned on when operating in these bands. The device must sense for radar signals at 100 percent of its emission bandwidth. The minimum DFS detection threshold for devices with a maximum e.i.r.p. of 200 mW to 1 W is -64 dBm. For devices that operate with less than 200 mW e.i.r.p. and a power spectral density of less than 10 dBm in a 1 MHz band, the minimum detection threshold is −62 dBm. The detection threshold is the received power averaged over 1 microsecond referenced to a 0 dBi antenna. For the initial channel setting, the manufacturers shall be permitted to provide for either random channel selection or manual channel selection.

- (i) Operational Modes. The DFS requirement applies to the following operational modes:
- (A) The requirement for channel availability check time applies in the master operational mode.
- (B) The requirement for channel move time applies in both the master and slave operational modes.
- (ii) Channel Availability Check Time. A U-NII device shall check if there is a radar system already operating on the channel before it can initiate a transmission on a channel and when it has to move to a new channel. The U-NII device may start using the channel if no radar signal with a power level greater than the interference threshold values listed in paragraph (h)(2) of this section, is detected within 60 seconds.
- (iii) Channel Move Time. After a radar's presence is detected, all transmissions shall cease on the operating channel within 10 seconds. Transmissions during this period shall consist of normal traffic for a maximum of 200 ms after detection of the radar signal. In addition, intermittent management and control signals can be sent during the remaining time to facilitate vacating the operating channel.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 10 of 24

(iv) Non-occupancy Period. A channel that has been flagged as containing a radar system, either by a channel availability check or in-service monitoring, is subject to a non-occupancy period of at least 30 minutes. The non-occupancy period starts at the time when the radar system is detected.

4.2.1. Limit

Table 1: Applicability of DFS requirements prior to use of a channel

| | Operational Mode | | | |
|------------------------------------|------------------|---------------------------------|------------------------------|--|
| Requirement | Master | Client(without radar detection) | Client(with radar detection) | |
| Non-occupancy Period | Yes | Not required | Yes | |
| DFS Detection Thresh- old | Yes | Not required | Yes | |
| Channel Availability Check Time | Yes | Not required | Not required | |
| U-NII Detection Bandwidth | Yes | Not required | Yes | |

Table 2: Applicability of DFS requirements during normal operation

| | Operational Mode | | |
|----------------------------------|--|-----------------------------------|--|
| Requirement | Master Device or Client with Radar Detection | Client Without Radar Detection | |
| DFS Detection Threshold | Yes | Not required | |
| Cannel Closing Transmission time | Yes | Yes | |
| Channel Move time | Yes | Yes | |
| U-NII Detection Bandwidth | Yes | Not required | |

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧



Page: 11 of 24

| Additional requirements for devices with multiple bandwidth mode | Master Device or Client with Radar Detection | Client Without Radar Detection |
|---|--|--|
| U-NII Detection Band- width and Statistical Performance Check | All BW modes must be tested | Not required |
| Channel Move Time and Channel Closing Transmission Time | Test using widest BW mode available | Test using the widest BW mode available for the link |
| All other tests | Any single BW mode | Not required |

Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Table 3: Interference Threshold values, Master or Client incorporating In-Service Monitoring

| Maximum Transmit Power | Value |
|--|-------------------------|
| | (See Notes 1, 2, and 3) |
| EIRP ≥ 200 milliwatt | -64 dBm |
| EIRP < 200 milliwatt and | -62 dBm |
| power spectral density < 10 dBm/MHz | |
| EIRP < 200 milliwatt that do not meet the power spectral | -64 dBm |
| density requirement | |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.

Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.

Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911

| Devices | DFS Threshold | |
|---|---------------|--|
| Devices with an e.i.r.p. < 200 mW AND a | -62 dBm | |
| Power Spectral Density < 10 dBm/MHz | | |
| Devices with | -64 dBm | |
| $200 \text{ mW} \le e.i.r.p. \le 1 \text{ W}$ | | |
| Note: The detection threshold narrow is the security of narrow averaged error a 1 microscoped | | |

Note: The detection threshold power is the received power, averaged over a 1-microsecond reference to a 0 dBi antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天。本報告未經本公司書面許可‧不可部份複製。



Page: 12 of 24

Table 4: DFS Response requirement values

| Parameter | Value | | | |
|-----------------------------------|-----------------------|--|--|--|
| Non-occupancy period | Minimum 30 minutes | | | |
| Channel Availability Check Time | 60 seconds | | | |
| Channel Move Time | 10 seconds | | | |
| | See Note 1. | | | |
| Channel Closing Transmission Time | 200 milliseconds + an | | | |
| | aggregate of 60 | | | |
| | milliseconds over | | | |
| | remaining 10 second | | | |
| | period. | | | |
| | See Notes 1 and 2. | | | |
| U-NII Detection Bandwidth | Minimum 100% of the U | | | |
| | NII 99% transmission | | | |
| | power bandwidth. See | | | |
| | Note 3. | | | |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 13 of 24

Table 5: Radar Test Waveforms Short Pulse Radar

| uise radai | | | | | | | | | |
|--|--------------|---|--|---------------|----------|--|--|--|--|
| Radar | Pulse | PRI | Number of Pulses | Minimum | Minimum | | | | |
| Type | Width | (µsec) | | Percentage of | Number | | | | |
| | (µsec) | | | Successful | of | | | | |
| | | | | Detection | Trials | | | | |
| 0 | 1 | 1428 | 18 | See Note 1 | See Note | | | | |
| | | | | | 1 | | | | |
| 1 | 1 | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 µsec, with a minimum increment of 1 µsec, excluding PRI values | Roundup $ \left\{ \frac{\left(\frac{1}{360}\right)}{\left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu \text{sec}}}\right)} \right\} $ | 60% | 30 | | | | |
| 2 | 1-5 | selected in Test A | 23-29 | 60% | 30 | | | | |
| | | 150-230 | | | | | | | |
| 3 | 6-10 | 200-500 | 16-18 | 60% | 30 | | | | |
| 4 | 11-20 | 200-500 | 12-16 | 60% | 30 | | | | |
| | (Radar Types | | | 80% | 120 | | | | |
| Note 1: Chort Pulse Pader Type 0 should be used for the detection bandwidth test, channel move | | | | | | | | | |

Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.

Long Pulse Radar

| Radar Type | Pulse Width (µsec) | Chirp Width (MHz) | PRI (µsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Number of Trials |
|---------------|--------------------------|-------------------------|---------------|----------------------------------|---------------------|--|--------------------------------|
| 5 | 50-100 | 5-20 | 1000- 2000 | 1-3 | 8-20 | 80% | 30 |

Frequency Hopping Radar

| oy nopping rada. | | | | | | | | |
|------------------|--------|--------|--------|---------|----------|---------------|-----------|--|
| Radar | Pulse | PRI | Pulses | Hopping | Hopping | Minimum | Minimum | |
| Type | Width | (µsec) | per | Rate | Sequence | Percentage of | Number of | |
| | (µsec) | | Hop | (kHz) | Length | Successful | Trials | |
| | | | | | (msec) | Detection | | |
| 6 | 1 | 333 | 9 | 0.333 | 300 | 70% | 30 | |

The applicant of this given application confirms that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧




Page: 14 of 24


4.2.2. Test Setup

Setup for Master with injection at the Master

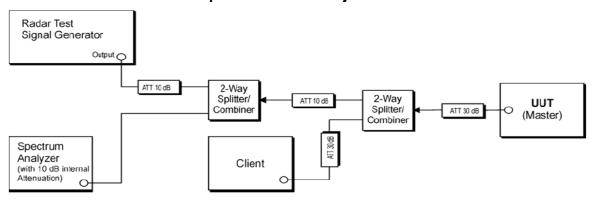

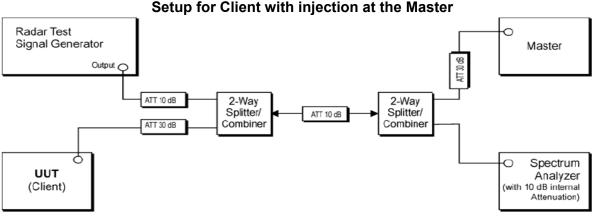



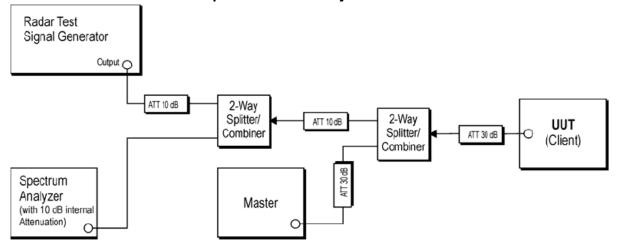

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 15 of 24

4.2.3. Test Equipment Used:

| EQUIPMENT | MFR | MODEL | SERIAL | LAST | CAL DUE. |
|--------------------------|--------------------------|--|---|------------|------------|
| TYPE | | NUMBER | NUMBER | CAL. | |
| Signal Generator | Signal Generator Agilent | | 5182B MY56200007 | | 08/12/2019 |
| EXA Spectrum Analyzer | | | 02/13/2019 | 02/12/2020 | |
| Splitter | RF-LAMBAD | RFLT4W1G18G | SPCD10-004 | 02/26/2019 | 02/25/2020 |
| Splitter | RF-LAMBAD | RFLT2W1G18G | 11-JSPF412-020 | 02/26/2019 | 02/25/2020 |
| Splitter | RF-LAMBAD | RFLT2W1G18G | 11-JSPF412-017 | 02/26/2019 | 02/25/2020 |
| Attenuator | Agilent | 8494B MY42152151 | | 02/26/2019 | 02/25/2020 |
| Attenuator | Agilent | 8496B | 8496B MY42147434 | | 02/25/2020 |
| Splitter | RF-LAMBAD | RFLT2W1G18G | 11-JSPD022-013 | 02/26/2019 | 02/25/2020 |
| DC Block | Mini-Circuits | BLK-18-S+ | 31129(1) | 02/26/2019 | 02/25/2020 |
| Access Point | LINKSYS | WRT3200ACM | 1981060B614986 FCC ID:Q87-WRT3200 | N/A | N/A |
| 7.00007 0.111 | Little | ************************************** | ACM IC:3839A-WRT320 0ACM | | . 4// (|

4.2.4. Description of EUT:

EUT operates over the 5250-5350MHz and 5470-5725MHz ranges and EUT is a slave device (client equipment) w/o radar detection and DFS capability.

EUT has no TPC mechanism implemented with no adjustment of lowest, and highest power, but the level of power emission stays at fixed level.

The EUT utilizes the 802.11ac VHT80 architecture, with a nominal channel bandwidth of 80MHz. WLAN traffic is generated by streaming the mpeg file from the master to slave in full monitor video mode using the media player.

The rated output power of the master unit is >23dBm(EIRP).therefore the required interference threshold level is -62dBm.after correction for antenna gain and procedural adjustments, the required conducted threshold at the antenna port is -62dBm, and the master device as employed for the applicable DFS test is CISCO router whose FCC ID= LDK102061

While calibrate the path on antenna port of DFS test equipment (master), measurements equipments (spectrum) is ensured to be 50 Ohms, and therefore verification on antenna gain measurement can be ignored.

Conducted test was performed with appropriate adjustment, and calibration to ensure power from DFS simulator injects to antenna port of DFS test equipment (DFS) is -62dBm

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 16 of 24

Message or files that is used for communication between Master and Client: IP based system:

For the required channel loading, the full motion, 30 frames per second MPEG video file from http://ntiacsd.ntia.doc.gov/dfs/ was streamed from a network on a test bench (server of the storage to download the mandatory format of Video file), via the DFS Master device, to the UE (mobile phone).

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧




Noise Floor

Page: 17 of 24


4.2.5. Test results

Calibration plots for each of the required radar waveforms

Radar type 0

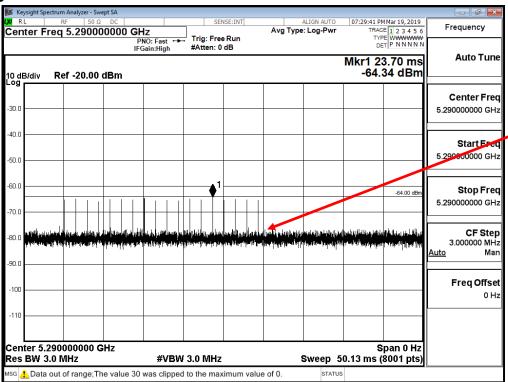

Radar type 1-A

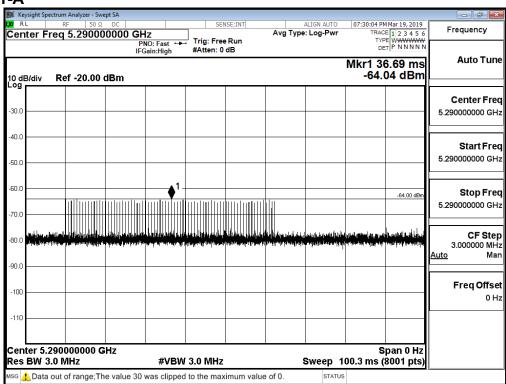


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page: 18 of 24

Radar type 1-B

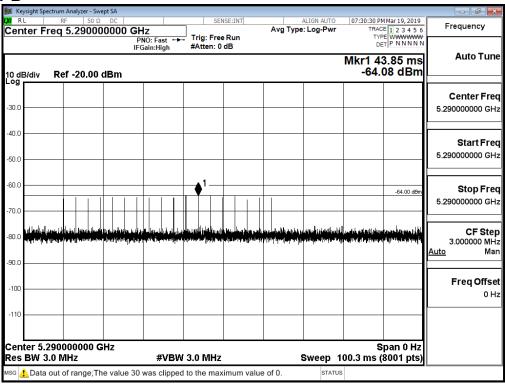

Radar type 2

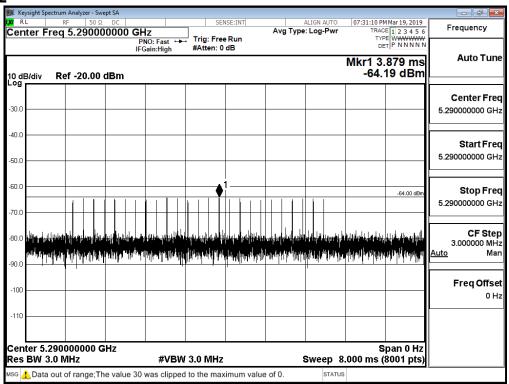


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page: 19 of 24

Radar type 3

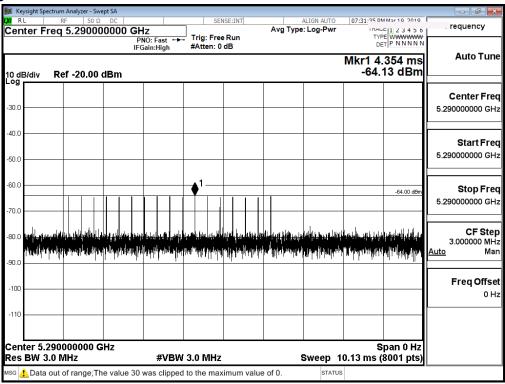

Radar type 4

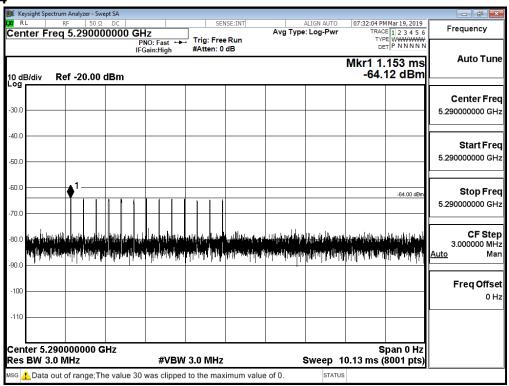


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。




Page: 20 of 24

Radar type 5

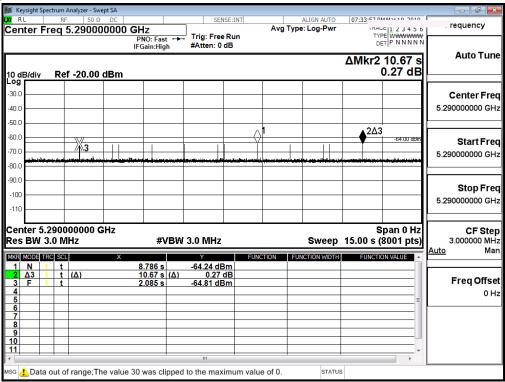

Radar type 6

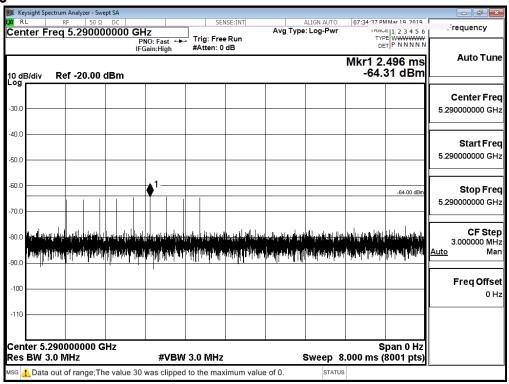


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧




Page: 21 of 24

WLAN Payload 5290MHz

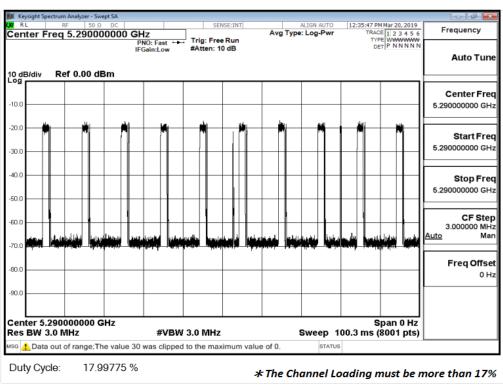

5530MHz

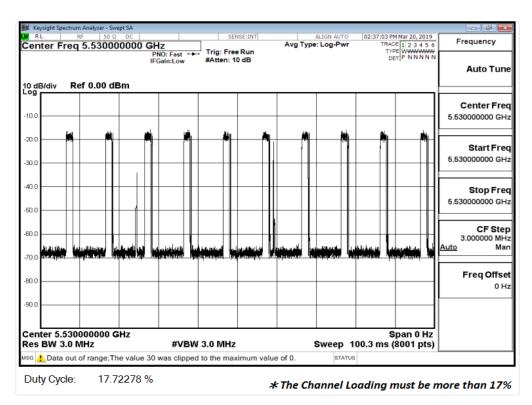

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Member of the SGS Group (SGS SA)




Page: 22 of 24

5290MHz **Channel Move Transmission Time**

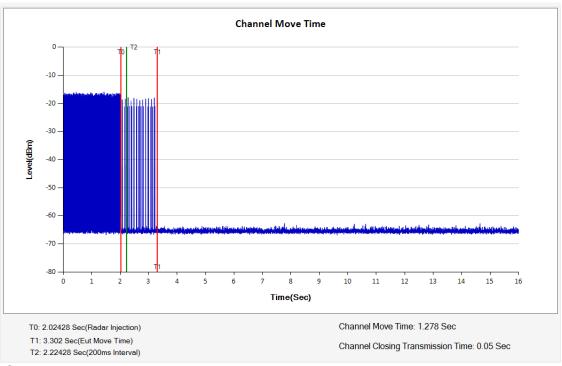

Channel Closing Transmission Time

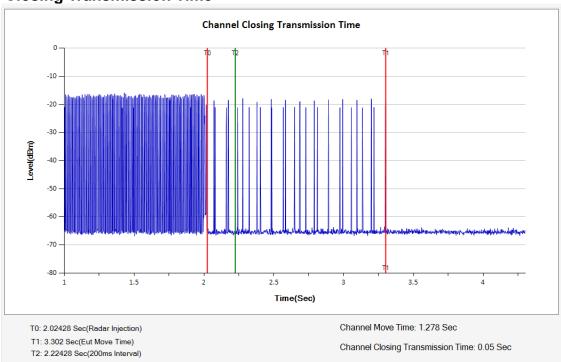

Verdict: Note: narrowing the sweep time as the good engineering process for the verification of transmission closing in 200ms


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧




Page: 23 of 24

5530MHz **Channel Move Transmission Time**

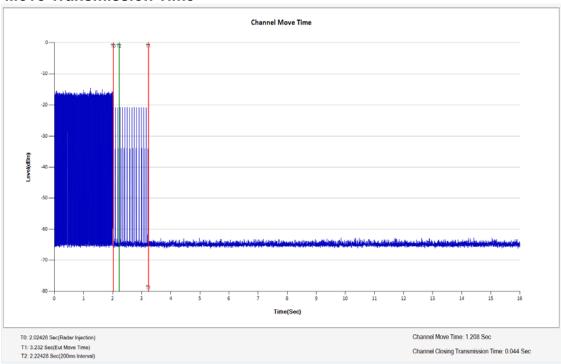

Channel Closing Transmission Time

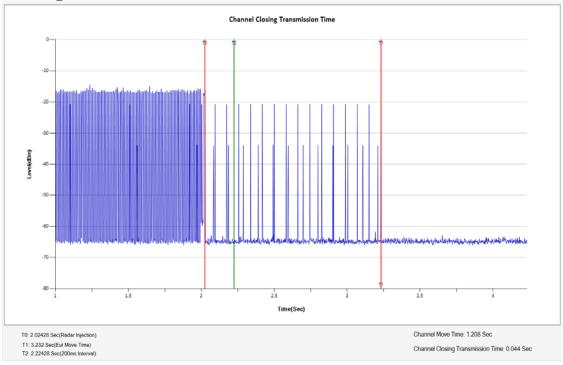

Verdict: Note: narrowing the sweep time as the good engineering process for the verification of transmission closing in 200ms


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。



Page: 24 of 24

Non-occupancy Period (without radar detection)

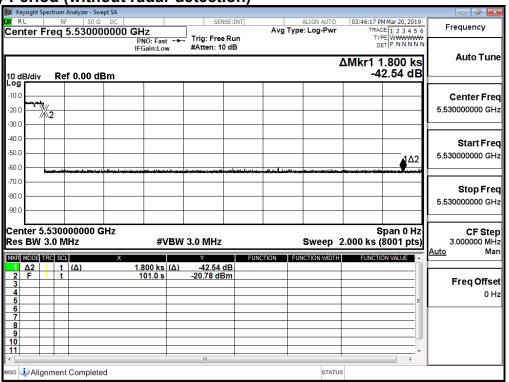

Verdict:

To verify whether channel is unavailable to be operated in 30 minutes. 1.8ks = 1800s = 1800 s/min /60 = 30minute

~ End of Report ~

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明‧此報告結果僅對測試之樣品負責‧同時此樣品僅保留90天‧本報告未經本公司書面許可‧不可部份複製‧