



# **FCC Test Report**

Report No.: AGC02390220402FE03

FCC ID : 2ABRU-2564C

**APPLICATION PURPOSE** : Original Equipment

**PRODUCT DESIGNATION**: BDE Bluetooth 5.1 Dual Mode Transceiver Module Based

on CC2564C

**BRAND NAME** : BDE

**MODEL NAME** : BDE-BD2564CA, BDE-BD2564CN

**APPLICANT**: Guangzhou BDE Technology Inc.

**DATE OF ISSUE** : Aug. 19, 2022

**STANDARD(S)** : FCC Part 15.247

**REPORT VERSION** : V1.0

Attestation of Global Edition (Shenzhen) Co., Ltd





Report No.: AGC02390220402FE03

Page 2 of 88

## REPORT REVISE RECORD

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Aug. 19, 2022	Valid	Initial Release




# **TABLE OF CONTENTS**

1. VERIFICATION OF CONFORMITY	5
2. GENERAL INFORMATION	6
2.1. PRODUCT DESCRIPTION	6
2.2. TABLE OF CARRIER FREQUENCYS	6
2.3. RECEIVER INPUT BANDWIDTH	7
2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE	7
2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR	7
2.6. RELATED SUBMITTAL(S) / GRANT (S)	8
2.7. TEST METHODOLOGY	8
2.8. SPECIAL ACCESSORIES	8
2.9. EQUIPMENT MODIFICATIONS	8
2.10. ANTENNA REQUIREMENT	8
3. MEASUREMENT UNCERTAINTY	10
4. DESCRIPTION OF TEST MODES	11
5. SYSTEM TEST CONFIGURATION	12
5.1. CONFIGURATION OF EUT SYSTEM	12
5.2. EQUIPMENT USED IN TESTED SYSTEM	12
5.3. SUMMARY OF TEST RESULTS	
6. TEST FACILITY	13
7. PEAK OUTPUT POWER	14
7.1. MEASUREMENT PROCEDURE	14
7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	14
7.3. LIMITS AND MEASUREMENT RESULT	15
8. 20DB BANDWIDTH	20
8.1. MEASUREMENT PROCEDURE	20
8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	20
8.3. LIMITS AND MEASUREMENT RESULTS	21
9. CONDUCTED SPURIOUS EMISSION	26
9.1. MEASUREMENT PROCEDURE	26



9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)	26
9.3. MEASUREMENT EQUIPMENT USED	26
9.4. LIMITS AND MEASUREMENT RESULT	26
10. RADIATED EMISSION	47
10.1. MEASUREMENT PROCEDURE	47
10.2. TEST SETUP	49
10.3. LIMITS AND MEASUREMENT RESULT	50
10.4. TEST RESULT	50
11. NUMBER OF HOPPING FREQUENCY	78
11.1. MEASUREMENT PROCEDURE	78
11.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	78
11.3. MEASUREMENT EQUIPMENT USED	78
11.4. LIMITS AND MEASUREMENT RESULT	78
12. TIME OF OCCUPANCY (DWELL TIME)	79
12.1. MEASUREMENT PROCEDURE	79
12.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	79
12.3. MEASUREMENT EQUIPMENT USED	79
12.4. LIMITS AND MEASUREMENT RESULT	79
13. FREQUENCY SEPARATION	83
13.1. MEASUREMENT PROCEDURE	83
13.2. TEST SETUP (BLOCK DIAGRAM OF CONFIGURATION)	83
13.3. MEASUREMENT EQUIPMENT USED	83
13.4. LIMITS AND MEASUREMENT RESULT	83
14. LINE CONDUCTED EMISSION TEST	84
14.1. LIMITS OF LINE CONDUCTED EMISSION TEST	84
14.2. BLOCK DIAGRAM OF LINE CONDUCTED EMISSION TEST	84
14.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST	85
14.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST	
14.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST	86
APPENDIX A: PHOTOGRAPHS OF TEST SETUP	88
APPENDIX B: PHOTOGRAPHS OF EUT	88





## 1. VERIFICATION OF CONFORMITY

Applicant	Guangzhou BDE Technology Inc.	
Address	B2-403, ChuangYi Building, 162 Science Avenue, Huangpu District, Guangzhou 510663, China	
Manufacturer	Guangzhou BDE Technology Inc.	
Address	B2-403, ChuangYi Building, 162 Science Avenue, Huangpu District, Guangzhou 510663, China	
Factory	Guangzhou BDE Technology Inc.	
Address	B2-403, ChuangYi Building, 162 Science Avenue, Huangpu District, Guangzhou 510663, China	
Product Designation BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564		
Brand Name BDE		
Test Model BDE-BD2564CA		
Series Model BDE-BD2564CN		
<b>Declaration of Difference</b> The main test module BDE-BD2564CA integrates the chip antenna, a series module BDE-BD2564CN connects the whip antenna or chip at through the RF pad, and the rest are the same.		
Date of test	Jun. 27, 2022 to Aug. 19, 2022	
Deviation	No any deviation from the test method	
Condition of Test Sample Normal		
Test Result	Pass	
Report Template	AGCRT-US-BR/RF	

# We hereby certify that:

The above equipment was tested by Attestation of Global Compliance (Shenzhen) Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC PART 15.247.

Prepared By	Alan Duan	
	Alan Duan (Project Engineer)	Aug. 19, 2022
Reviewed By	Calin Lin	
	Calvin Liu (Reviewer)	Aug. 19, 2022
Approved By	Max Zhang	
	Max Zhang (Authorized Officer)	Aug. 19, 2022



Report No.: AGC02390220402FE03 Page 6 of 88

# 2. GENERAL INFORMATION

## 2.1. PRODUCT DESCRIPTION

The EUT is designed as "BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C". It is designed by way of utilizing the GFSK, Pi/4 DQPSK and 8DPSK technology to achieve the system operation. A major technical description of EUT is described as following

Operation Frequency	2.402 GHz to 2.480 GHz	
RF Output Power	8.649dBm (Max)	
Bluetooth Version	V5.1	
Modulation	BR ⊠GFSK, EDR ⊠π /4-DQPSK, ⊠8DPSK BLE □GFSK 1Mbps □GFSK 2Mbps	
Number of channels	79	
Hardware Version	1.1	
Software Version	1.0	
Antenna Designation	Refer to Chapter 2.11 of the report. (Comply with requirements of the FCC part 15.203)	
Antenna Gain	Refer to Chapter 2.11 of the report.	
Power Supply	DC 3.3V	

## 2.2. TABLE OF CARRIER FREQUENCYS

Frequency Band	Channel Number	Frequency
	0	2402 MHz
	1	2403 MHz
	÷	:
	38	2440 MHz
2402~2480MHz	39	2441 MHz
	40	2442 MHz
	·	:
	77	2479 MHz
	78	2480 MHz



Report No.: AGC02390220402FE03 Page 7 of 88

## 2.3. RECEIVER INPUT BANDWIDTH

The input bandwidth of the receiver is 1.3MHz, in every connection one Bluetooth device is the master and the other one is slave. The master determines the hopping sequence. The slave follows this sequence. Both devices shift between RX and TX time slot according to the clock of the master. Additionally, the type of connection (e.g. single of multi slot packet) is set up at the beginning of the connection. The master adapts its hopping frequency and its TX/RX timing according to the packet type of the connection. Also, the slave of the connection will use these settings. Repeating of a packet has no influence on the hopping sequence. The hopping sequence generated by the master of the connection will be followed in any case. That means, a repeated packet will not be send on the same frequency, it is send on the next frequency of the hopping sequence.

## 2.4. EXAMPLE OF A HOPPING SEQUENCY IN DATA MODE

Example of a hopping sequence in data mode:

40, 21, 44, 23, 04, 15, 66, 56, 19, 78, 07, 28, 69, 55,

36, 45, 05, 13, 43, 74, 57, 35, 67, 76, 02, 34, 54, 63,

42, 11, 30, 06, 64, 25, 75, 48, 17, 33, 58, 01, 29, 14,

51, 72, 03, 31, 50, 61, 77, 18, 10, 47, 12, 68, 08, 49,

20, 00, 73, 09, 16, 60, 71, 41, 24, 53, 38, 26, 46, 37,

65, 32, 70, 52, 27, 59, 22, 62, 39

#### 2.5. EQUALLY AVERAGE USE OF FREQUENCIES AND BEHAVIOUR

The generation of the hopping sequence in connection mode depends essentially on two input values:


- 1. LAP/UAP of the master of the connection.
- 2. Internal master clock.

The LAP (lower address part) are the 24 LSB's of the 48 BD\_ADDRESS. The BD\_ADDRESS is an unambiguous number of every Bluetooth unit. The UAP (upper address part) are the 24MSB's of the 48BD\_ADDRESS

The internal clock of a Bluetooth unit is derived from a free running clock which is never adjusted and is never turned off. For behavior action with other units only offset is used. It has no relation to the time of the day. Its resolution is at least half the RX/TX slot length of 312.5us. The clock has a cycle of about one day(23h30). In most case it is implemented as 28 bits counter. For the deriving of the hopping sequence the entire. LAP (24 bits),4LSB's(4bits) (Input 1) and the 27MSB's of the clock (Input 2) are used. With this input values different mathematical procedures (permutations, additions, XOR-operations) are performed to generate the Sequence. This will be done at the beginning of every new transmission.

Regarding short transmissions the Bluetooth system has the following behavior:

The first connection between the two devices is established, a hopping sequence was generated. For Transmitting the wanted data the complete hopping sequence was not used. The connection ended.





The second connection will be established. A new hopping sequence is generated. Due to the fact the Bluetooth clock has a different value, because the period between the two transmission is longer (and it Cannot be shorter) than the minimum resolution of the clock(312.5us). The hopping sequence will always differ from the first one.

# 2.6. RELATED SUBMITTAL(S) / GRANT (S)

This submittal(s) (test report) is intended for **FCC ID: 2ABRU-2564C** filing to comply with the FCC PART 15.247 requirements.

## 2.7. TEST METHODOLOGY

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10 (2013). Radiated testing was performed at an antenna to EUT distance 3 meters.

#### 2.8. SPECIAL ACCESSORIES

Refer to section 5.2.


#### 2.9. EQUIPMENT MODIFICATIONS

Not available for this EUT intended for grant.

#### 2.10. ANTENNA REQUIREMENT

This intentional radiator is designed with a permanently attached antenna of an antenna to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

For more information of the antenna, please refer to the APPENDIX B: PHOTOGRAPHS OF EUT.





## 2.11. DESCRIPTION OF AVAILABLE ANTENNAS

Model No.: BDE-BD2564CA

Bluetooth Dedicated	d Antenna		
Antenna number	Antenna Type	Frequency Band (MHz)	Max Peak Gain (dBi)
1	Chip antenna	2400 ~ 2483.5	0.5

# Model No.: BDE-BD2564CN

Bluetooth Dedicated	d Antenna		
Antenna number	Antenna Type	Frequency Band (MHz)	Max Peak Gain (dBi)
2	Whip antenna	2400 ~ 2483.5	2.5

Bluetooth Integrated Antenna			
Antenna number	Antenna Type	Frequency Band (MHz)	Max Peak Gain (dBi)
3	Chip antenna	2400 ~ 2483.5	0.8

#### 2.12. DESCRIPTION OF ANTENNA RF PORT

Antenna RF Port				
	Bluetooth (BDE-BD2564CA)	Bluetooth (BDE-BD2564CN)		
Software Control Port	Chip antenna	Chip antenna or U.FL Port		
	Integrated Chip Geramic Antonna  See Section 19 19 19 19 19 19 19 19 19 19 19 19 19	Or Connect An External Antenna Through U.F.I. Connector  Chia Caramic Antenna  On O		

Note: The above RF soldering board is for testing use only.



Report No.: AGC02390220402FE03

Page 10 of 88

# 3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement y ±U, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Item	Measurement Uncertainty
Uncertainty of Conducted Emission for AC Port	$U_c = \pm 3.1 \text{ dB}$
Uncertainty of Radiated Emission below 1GHz	$U_c = \pm 4.0 \text{ dB}$
Uncertainty of Radiated Emission above 1GHz	$U_c = \pm 4.8 \text{ dB}$
Uncertainty of total RF power, conducted	$U_c = \pm 0.8 \text{ dB}$
Uncertainty of RF power density, conducted	$U_c = \pm 2.6 \text{ dB}$
Uncertainty of spurious emissions, conducted	$U_c = \pm 2 \%$
Uncertainty of Occupied Channel Bandwidth	$U_c = \pm 2 \%$




# 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Low channel GFSK
2	Middle channel GFSK
3	High channel GFSK
4	Low channel π/4-DQPSK
5	Middle channel π/4-DQPSK
6	High channel π/4-DQPSK
7	Low channel 8DPSK
8	Middle channel 8DPSK
9	High channel 8DPSK
10	Hopping mode GFSK
11	Hopping mode π/4-DQPSK
12	Hopping mode 8DPSK

#### Note:

- 1. Only the result of the worst case was recorded in the report, if no other cases.
- 2. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
- 3. For Conducted Test method, a temporary antenna connector is provided by the manufacture.

## Software Setting

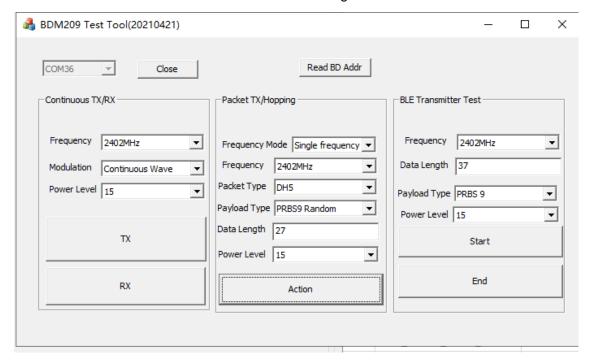



Report No.: AGC02390220402FE03

Page 12 of 88


# 5. SYSTEM TEST CONFIGURATION

# **5.1. CONFIGURATION OF EUT SYSTEM**

Radiated Emission Configure:



Conducted Emission Configure:



#### **5.2. EQUIPMENT USED IN TESTED SYSTEM**

Item	Equipment	Model No.	ID or Specification	Remark
	BDE Bluetooth 5.1 Dual			
1	Mode Transceiver Module	BDE-BD2564CA	2ABRU-2564C	EUT
	Based on CC2564C			
2	Control Box	N/A	USB-TTL	AE

# **5.3. SUMMARY OF TEST RESULTS**

FCC RULES	DESCRIPTION OF TEST	RESULT
15.247 (b)(1)	Peak Output Power	Compliant
15.247 (a)(1)	20 dB Bandwidth	Compliant
15.247 (d)	Conducted Spurious Emission	Compliant
15.209	Radiated Emission	Compliant
15.247 (a)(1)(iii)	Number of Hopping Frequency	Compliant
15.247 (a)(1)(iii)	Time of Occupancy	Compliant
15.247 (a)(1)	Frequency Separation	Compliant
15.207	Conducted Emission	Compliant



Report No.: AGC02390220402FE03

Page 13 of 88

# **6. TEST FACILITY**


Test Site	Attestation of Global Compliance (Shenzhen) Co., Ltd		
Location	Location  1-2/F, Building 19, Junfeng Industrial Park, Chongqing Road, Heping Communi Fuhai Street, Bao'an District, Shenzhen, Guangdong, China		
Designation Number	CN1259		
FCC Test Firm Registration Number	975832		
A2LA Cert. No.	5054.02		
Description	Attestation of Global Compliance (Shenzhen) Co., Ltd is accredited by A2LA		

# **TEST EQUIPMENT OF CONDUCTED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESPI	101206	Mar. 28, 2022	Mar. 27, 2023
LISN	R&S	ESH2-Z5	100086	Jun. 08, 2022	Jun. 07, 2023
Test software	R&S	ES-K1(Ver.V1.71)	N/A	N/A	N/A

#### **TEST EQUIPMENT OF RADIATED EMISSION TEST**

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Mar. 28, 2022	Mar. 27, 2023
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Nov. 17, 2021	Nov. 16, 2022
Power sensor	Aglient	U2021XA	MY54110007	Mar. 04, 2022	Mar. 03, 2023
2.4GHz Filter	EM Electronics	2400-2500MHz	N/A	Mar. 22, 2022	Mar. 21, 2024
Attenuator	ZHINAN	E-002	N/A	Sep. 03, 2020	Sep. 02, 2022
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Oct. 31, 2021	Oct. 30, 2023
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Mar. 12, 2022	Mar. 21, 2024
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	Apr. 23, 2021	Apr. 22, 2023
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Sep. 03, 2020	Sep. 02, 2022
ANTENNA	SCHWARZBECK	VULB9168	494	Jan. 08, 2020	Jan. 07, 2023
Test software	Tonscend	JS32-RE (Ver.2.5)	N/A	N/A	N/A





# 7. PEAK OUTPUT POWER

## 7.1. MEASUREMENT PROCEDURE


For peak power test:


- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
- 3. RBW > 20 dB bandwidth of the emission being measured.
- 4. VBW ≥RBW.
- 5. Sweep: Auto.
- 6. Detector function: Peak.
- 7. Trace: Max hold.

Allow trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power, after any corrections for external attenuators and cables.

# 7.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

#### **PEAK POWER TEST SETUP**

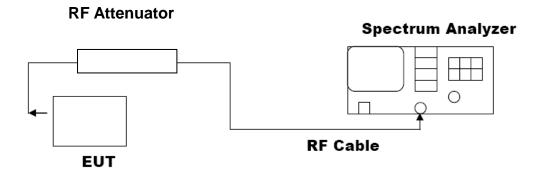






#### 7.3. LIMITS AND MEASUREMENT RESULT

Test Data of Conducted Output Power					
Test Mode	Test Channel (MHz)	Peak Power (dBm)	Limits (dBm)	Pass or Fail	
	2402	7.471	≤21	Pass	
GFSK	2441	8.028	≤21	Pass	
	2480	8.029	≤21	Pass	
	2402	7.444	≤21	Pass	
π /4-DQPSK	2441	7.910	≤21	Pass	
	2480	7.941	≤21	Pass	
8DPSK	2402	8.082	≤21	Pass	
	2441	8.649	≤21	Pass	
	2480	8.615	≤21	Pass	


# **Test Graphs of Conducted Output Power**

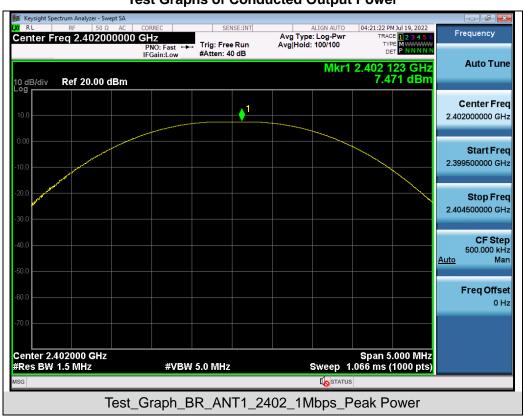

Freq Offset

Span 5.000 MHz Sweep 1.066 ms (1000 pts)



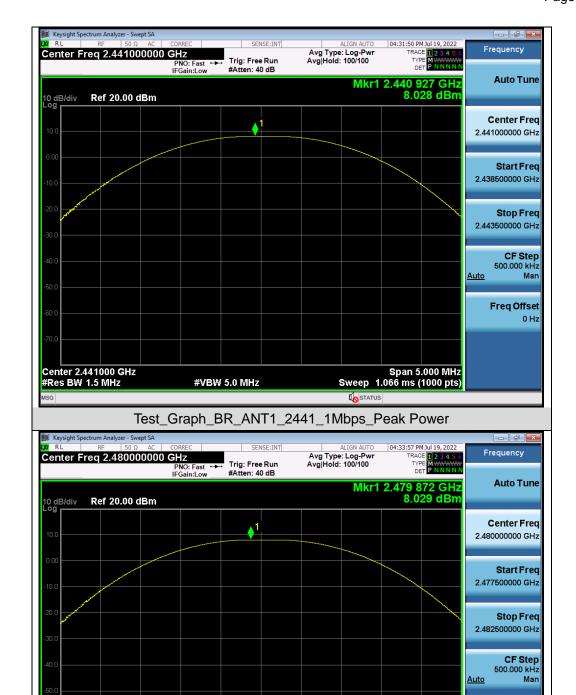


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_BR\_ANT1\_2480\_1Mbps\_Peak Power

#VBW 5.0 MHz

Center 2.480000 GHz #Res BW 1.5 MHz



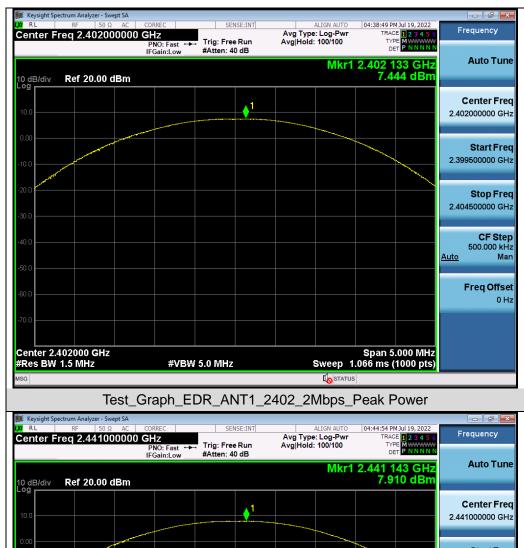

Center Freq 2.441000000 GHz

Start Freq 2.438500000 GHz

Stop Freq 2.443500000 GHz


CF Step 500.000 kHz
Auto Man

Freq Offset 0 Hz

#Res BW 1.5 MHz #VBW 5.0 MHz Sweep 1.066 ms (1000 pts)


Test\_Graph\_EDR\_ANT1\_2441\_2Mbps\_Peak Power



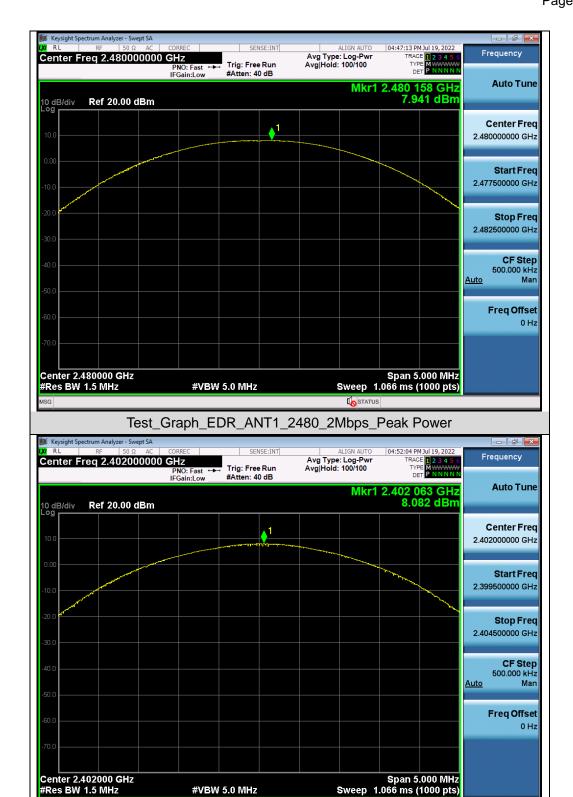

Test\_Graph\_EDR\_ANT1\_2402\_3Mbps\_Peak Power




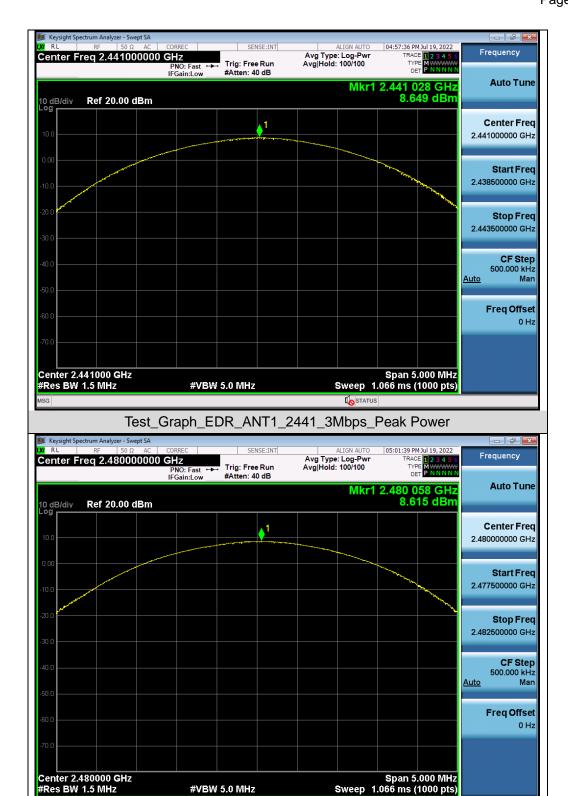

Test\_Graph\_EDR\_ANT1\_2480\_3Mbps\_Peak Power

#VBW 5.0 MHz

Web: http://www.agccert.com/







# 8. 20DB BANDWIDTH

# **8.1. MEASUREMENT PROCEDURE**

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2, Set the EUT Work on the top, the middle and the bottom operation frequency individually.
- 3. Set Span = approximately 2 to 5 times the 20 dB bandwidth, centered on a hoping channel
  The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video
  bandwidth (VBW) shall be approximately three times RBW; Sweep = auto; Detector function = peak
- 4. Set SPA Trace 1 Max hold, then View.

# 8.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

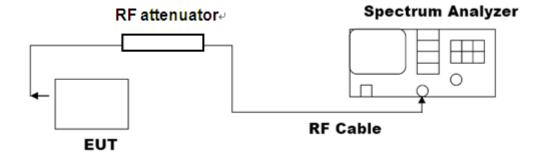






#### 8.3. LIMITS AND MEASUREMENT RESULTS

Test Data of Occupied Bandwidth and -20dB Bandwidth					
Test Mode	Test Channel (MHz)	99% Occupied Bandwidth (MHz)	-20dB Bandwidth (MHz)	Limits	Pass or Fail
	2402	0.843	0.906	N/A	Pass
GFSK	2441	0.843	0.908	N/A	Pass
	2480	0.844	0.912	N/A	Pass
	2402	1.193	1.320	N/A	Pass
π /4-DQPSK	2441	1.209	1.323	N/A	Pass
	2480	1.188	1.320	N/A	Pass
8DPSK	2402	1.135	1.212	N/A	Pass
	2441	1.133	1.212	N/A	Pass
	2480	1.141	1.222	N/A	Pass

# Test Graphs of Occupied Bandwidth and -20 Bandwidth

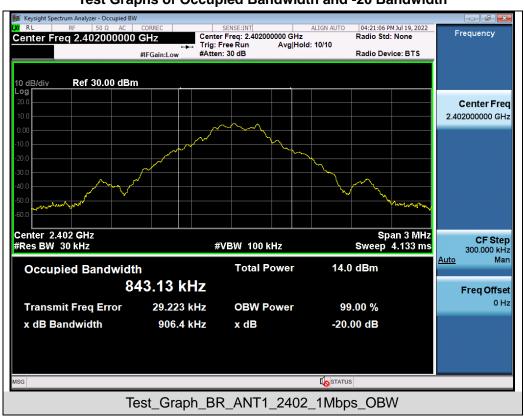



















Report No.: AGC02390220402FE03

Page 26 of 88

## 9. CONDUCTED SPURIOUS EMISSION

## 9.1. MEASUREMENT PROCEDURE

- 1. Connect EUT RF output port to the Spectrum Analyzer through an RF attenuator
- 2. Set the EUT Work on the top, the Middle and the bottom operation frequency individually.
- 3. Set the Span = wide enough to capture the peak level of the in-band emission and all spurious emissions from the lowest frequency generated in the EUT up through the 10th harmonic.
  RBW = 100 kHz; VBW= 300 kHz; Sweep = auto; Detector function = peak.
- 4. Set SPA Trace 1 Max hold, then View.

# 9.2. TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)

The same as described in section 8.2

#### 9.3. MEASUREMENT EQUIPMENT USED

The same as described in section 6

# 9.4. LIMITS AND MEASUREMENT RESULT

LIMITS AND MEASUREMENT RESULT				
Amuliachia Limita	Measurement Result			
Applicable Limits	Test Data	Criteria		
In any 100 kHz Bandwidth Outside the	At least -20dBc than the limit			
frequency band in which the spread spectrum	Specified on the BOTTOM	PASS		
intentional radiator is operating, the radio frequency	Channel			
power that is produce by the intentional radiator shall				
be at least 20 dB below that in 100KHz bandwidth				
within the band that contains the highest level of the				
desired power.	At least -20dBc than the limit	PASS		
In addition, radiation emissions which fall in the	Specified on the TOP Channel	PASS		
restricted bands, as defined in §15.205(a), must also				
comply with the radiated emission limits specified				
in§15.209(a))				



## Test Graphs of Spurious Emissions in Non-Restricted Frequency Bands



Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

2.442500000 GHz


<u>Auto</u>

Span 3.000 MHz Sweep 2.000 ms (30000 pts) CF Step 300.000 kHz

Freq Offset

Man



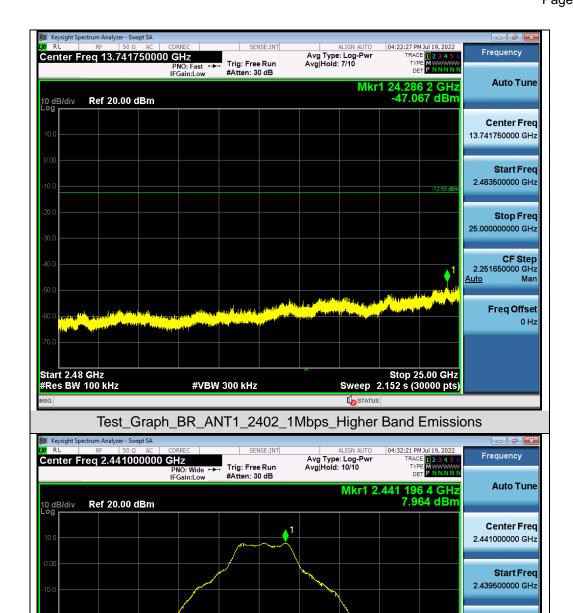

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_BR\_ANT1\_2441\_1Mbps\_Reference Level

#VBW 300 kHz

Tel: +86-755 2523 4088 E-mail: agc@agccert.com Web: http://www.agccert.com/

Center 2.441000 GHz #Res BW 100 kHz

25.000000000 GHz


<u>Auto</u>

**CF Step** 2.251650000 GHz

Freq Offset 0 Hz

Mar



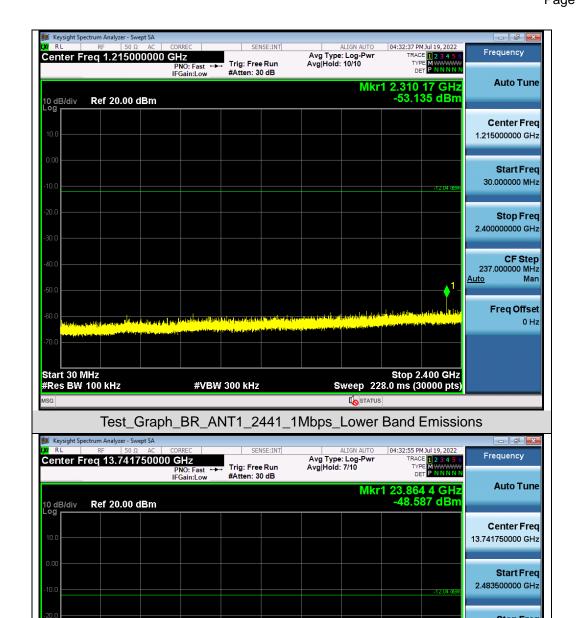

Start 2.48 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.152 s (300000 pts)


Test\_Graph\_BR\_ANT1\_2441\_1Mbps\_Higher Band Emissions

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.







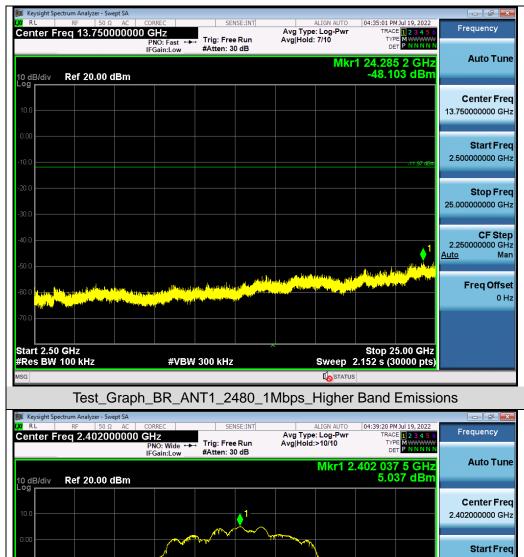

Mkr1 2.402 037 5 GHz
5.037 dBm

Center Freq
2.40200000 GHz

Start Freq
2.400500000 GHz

Stop Freq
2.403500000 GHz

Auto

Freq Offset
0 Hz

Center 2.4020000 GHz

Stop Freq
2.403500000 GHz

Auto

Stop Freq
2.403500000 GHz


Auto

Man

Freq Offset
0 Hz

Test\_Graph\_EDR\_ANT1\_2402\_2Mbps\_Reference Level



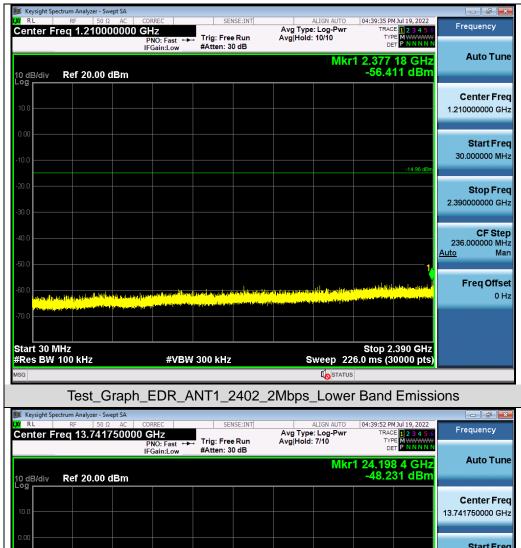






Test\_Graph\_EDR\_ANT1\_2441\_2Mbps\_Lower Band Emissions

#VBW 300 kHz

Stop 2.400 GHz Sweep 228.0 ms (30000 pts)

Start 30 MHz #Res BW 100 kHz



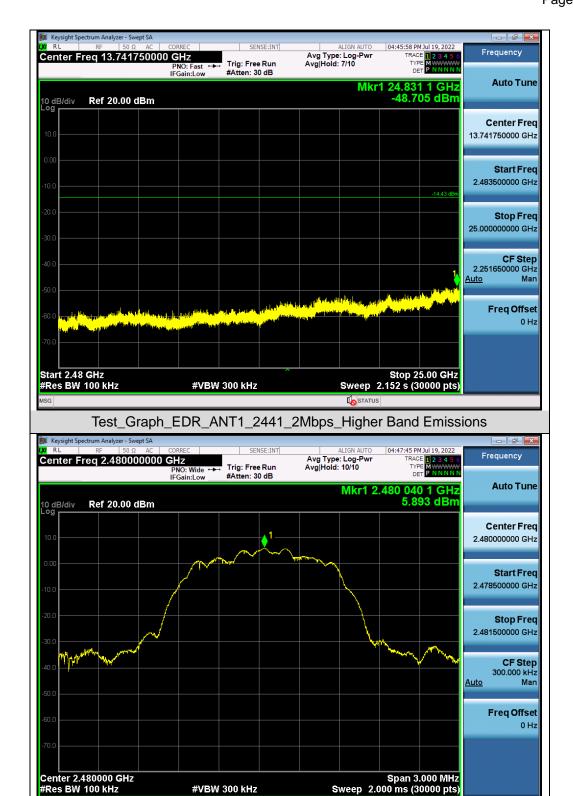

Test\_Graph\_EDR\_ANT1\_2480\_2Mbps\_Reference Level

#VBW 300 kHz

Web: http://www.agccert.com/

CF Step 2.250000000 GHz


> Freq Offset 0 Hz

Mar

<u>Auto</u>

Stop 25.00 GHz Sweep 2.152 s (30000 pts)



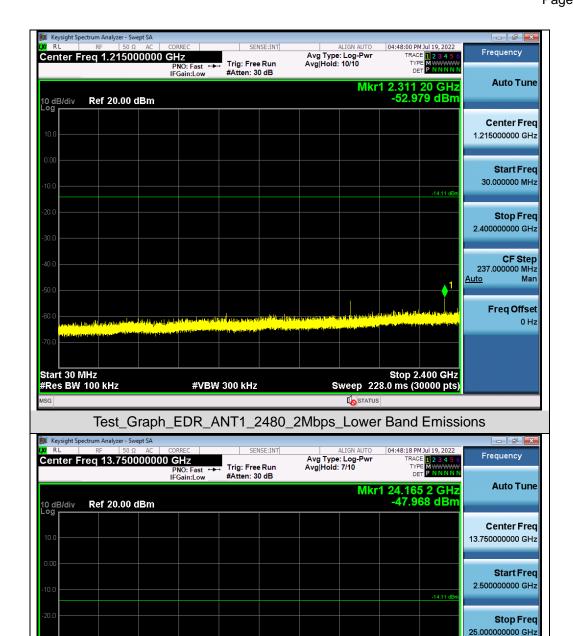

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_EDR\_ANT1\_2480\_2Mbps\_Higher Band Emissions

#VBW 300 kHz

Start 2.50 GHz #Res BW 100 kHz

<u>Auto</u>

Stop 2.390 GHz Sweep 226.0 ms (30000 pts) Mar

Freq Offset





Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_EDR\_ANT1\_2402\_3Mbps\_Lower Band Emissions

#VBW 300 kHz

Start 30 MHz #Res BW 100 kHz

**Stop Freq** 2.442500000 GHz


CF Step 300.000 kHz

Freq Offset

Man

<u>Auto</u>



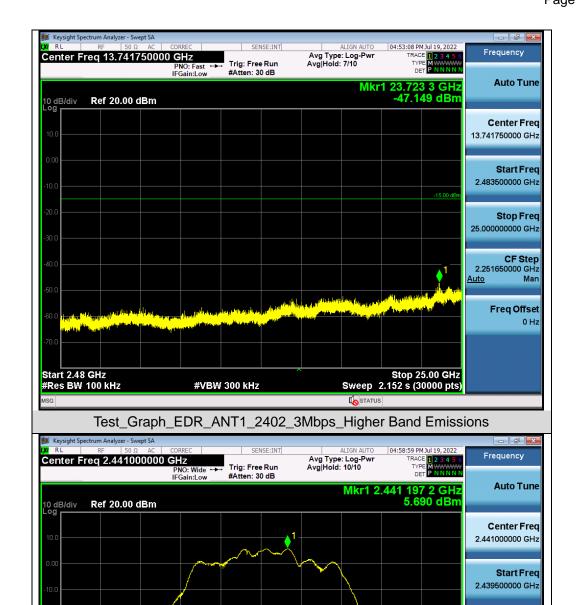

Center 2.441000 GHz
#Res BW 100 kHz #VBW 300 kHz Sweep 2.000 ms (30000 pts)

Test\_Graph\_EDR\_ANT1\_2441\_3Mbps\_Reference Level

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

25.000000000 GHz


<u>Auto</u>

Stop 25.00 GHz Sweep 2.152 s (30000 pts) **CF Step** 2.251650000 GHz

Freq Offset 0 Hz

Mar



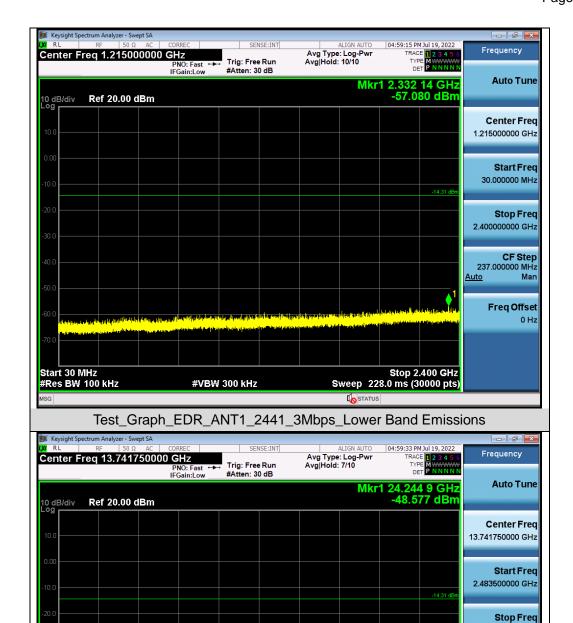

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.

Test\_Graph\_EDR\_ANT1\_2441\_3Mbps\_Higher Band Emissions

#VBW 300 kHz

Start 2.48 GHz #Res BW 100 kHz






Test\_Graph\_EDR\_ANT1\_2480\_3Mbps\_Lower Band Emissions


#VBW 300 kHz

Stop 2.400 GHz Sweep 228.0 ms (30000 pts)

Start 30 MHz #Res BW 100 kHz




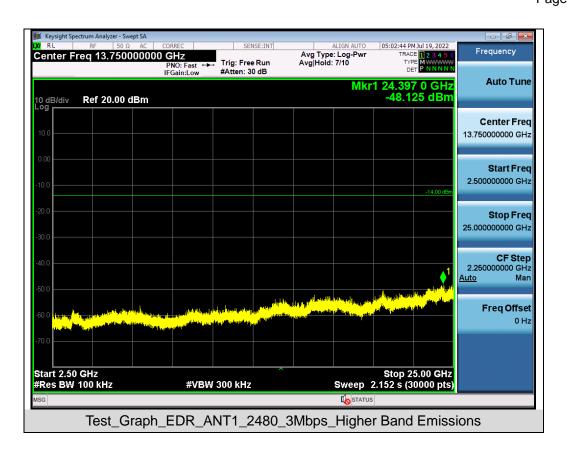






# Test Graphs of Band Edge Emissions in Non-Restricted Frequency Bands

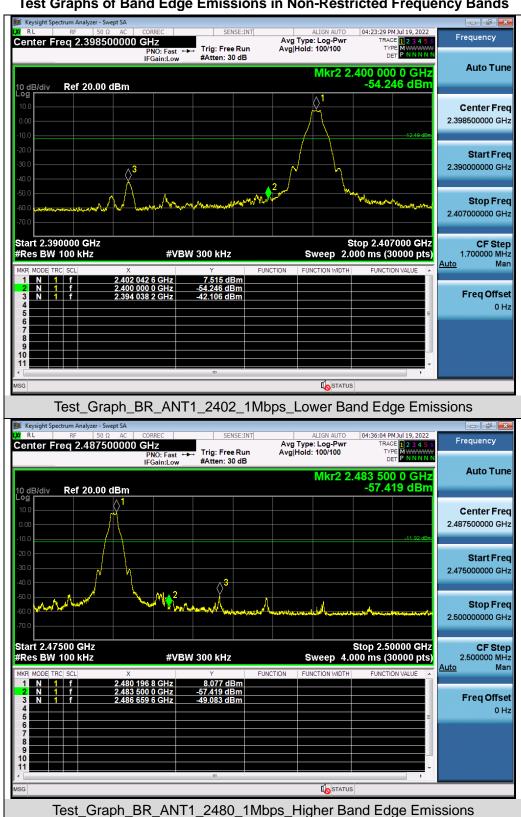


Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.



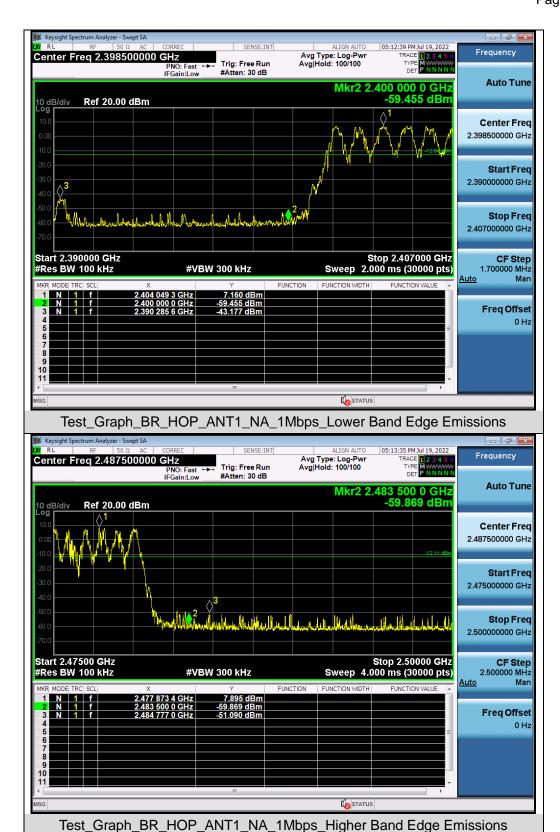



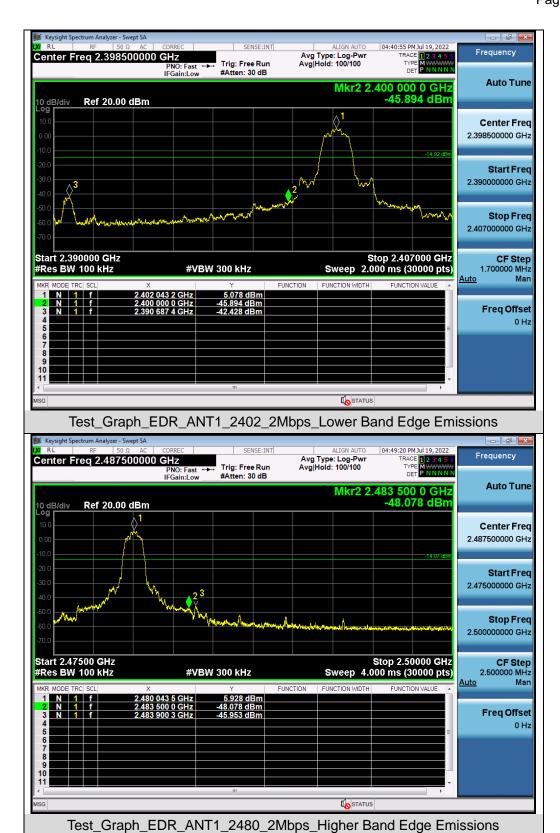







Test\_Graph\_EDR\_HOP\_ANT1\_NA\_2Mbps\_Higher Band Edge Emissions



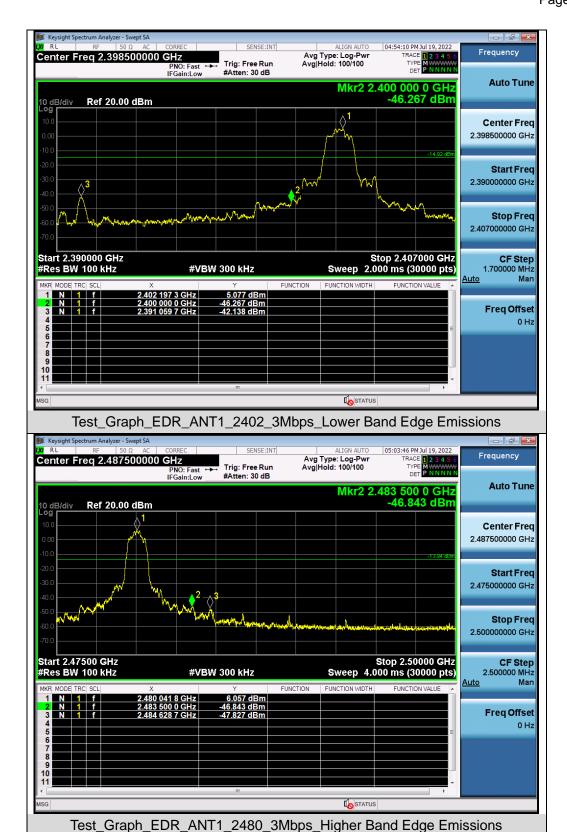



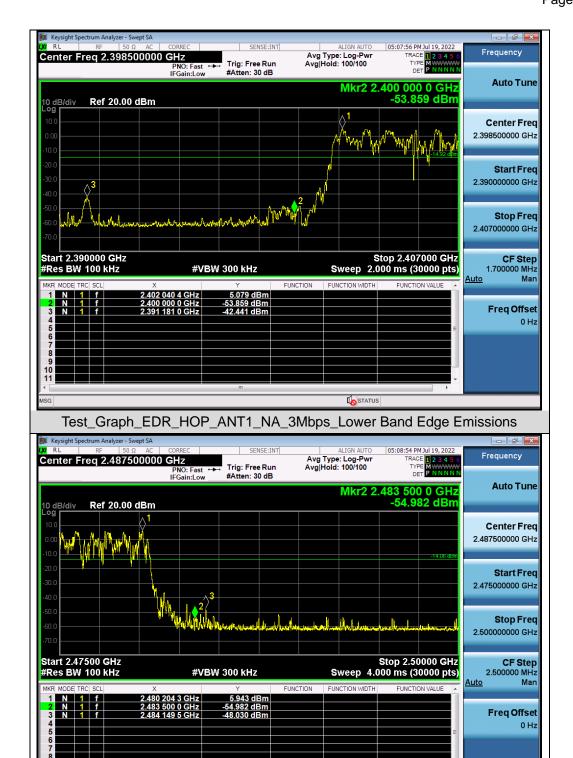

Test\_Graph\_EDR\_HOP\_ANT1\_NA\_3Mbps\_Higher Band Edge Emissions



Page 47 of 88

### 10. RADIATED EMISSION

### 10.1. MEASUREMENT PROCEDURE

- 1. The EUT was placed on the top of the turntable 0.8 or 1.5 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
- 2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
- 3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
- 4. For each suspected emission, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
- 5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
- 6. For emissions above 1GHz, use 1MHz RBW and 3MHz VBW for peak reading. Place the measurement antenna away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.
- 7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.
- 8.If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
- 9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
- 10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High Low scan is not required in this case.



Page 48 of 88

# The following table is the setting of spectrum analyzer and receiver.


Spectrum Parameter	Setting		
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP		
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP		
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP		
Start Stan Fraguency	1GHz~26.5GHz		
Start ~Stop Frequency	1MHz/3MHz for Peak, 1MHz/3MHz for Average		

Receiver Parameter	Setting	
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP	
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP	
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP	




#### 10.2. TEST SETUP


# Radiated Emission Test-Setup Frequency Below 30MHz

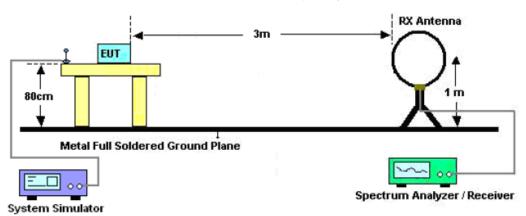

### RADIATED EMISSION TEST SETUP 30MHz-1000MHz

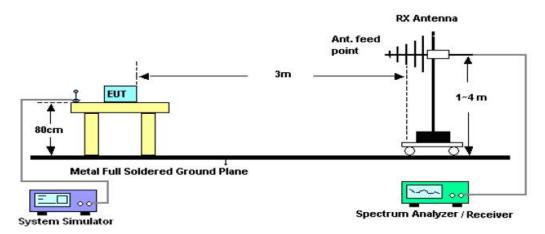

## RADIATED EMISSION TEST SETUP ABOVE 1000MHz

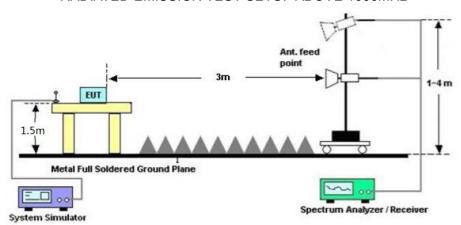



Page 50 of 88

#### 10.3. LIMITS AND MEASUREMENT RESULT

15.209 Limit in the below table has to be followed

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

Note: All modes were tested for restricted band radiated emission, the test records reported below are the worst result compared to other modes.

## 10.4. TEST RESULT

#### Radiated emission below 30MHz


The amplitude of spurious emissions from 9kHz to 30MHz which are attenuated more than 20 dB below the permissible value need not be reported.



### Radiated emission from 30MHz to 1000MHz

# Antenna 1: Chip antenna:

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal

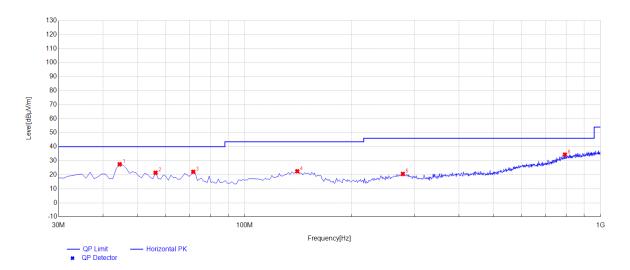


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.55	27.47	11.17	40.00	12.53	100	50	Horizontal
2	56.19	21.45	11.20	40.00	18.55	100	240	Horizontal
3	71.71	22.11	8.87	40.00	17.89	100	210	Horizontal
4	140.58	22.50	17.79	43.50	21.00	100	320	Horizontal
5	278.32	20.61	16.14	46.00	25.39	100	120	Horizontal
6	794.36	34.38	28.93	46.00	11.62	100	110	Horizontal

**RESULT: PASS** 



EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

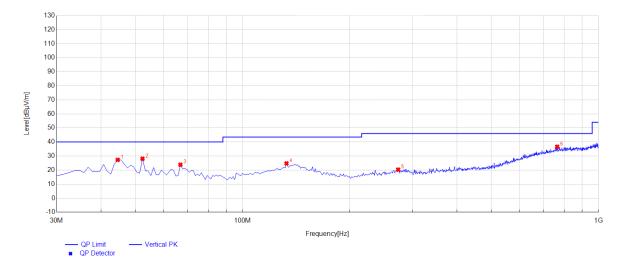


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	44.55	27.27	11.17	40.00	12.73	100	270	Vertical
2	52.31	28.09	11.49	40.00	11.91	100	50	Vertical
3	66.86	23.81	9.76	40.00	16.19	100	350	Vertical
4	132.82	24.79	18.28	43.50	18.71	100	150	Vertical
5	273.47	20.34	15.71	46.00	25.66	100	10	Vertical
6	765.26	36.65	30.62	46.00	9.35	100	10	Vertical

**RESULT: PASS** 



# Antenna 2: Whip antenna:

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal

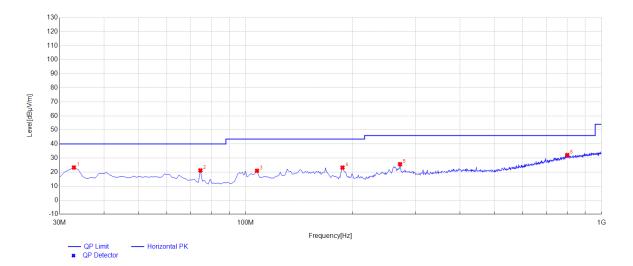


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91	23.23	10.36	40.00	16.77	100	1	Horizontal
2	74.62	21.15	8.27	40.00	18.85	100	356	Horizontal
3	107.6	20.94	11.41	43.50	22.56	100	258	Horizontal
4	187.14	23.20	11.37	43.50	20.30	100	119	Horizontal
5	271.53	25.62	15.55	46.00	20.38	100	136	Horizontal
6	801.15	32.10	26.21	46.00	13.90	100	67	Horizontal

**RESULT: PASS** 



EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

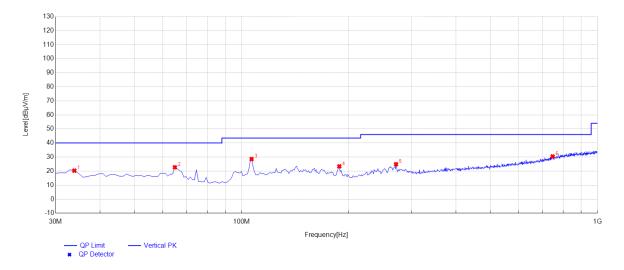


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	33.88	20.31	10.53	40.00	19.69	100	116	Vertical
2	64.92	22.70	10.09	40.00	17.30	100	359	Vertical
3	106.63	28.56	12.07	43.50	14.94	100	350	Vertical
4	188.11	23.37	12.21	43.50	20.13	100	335	Vertical
5	271.53	24.90	15.55	46.00	21.10	100	217	Vertical
6	747.8	30.42	24.71	46.00	15.58	100	34	Vertical

**RESULT: PASS** 



## Antenna 3: Chip antenna:

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal

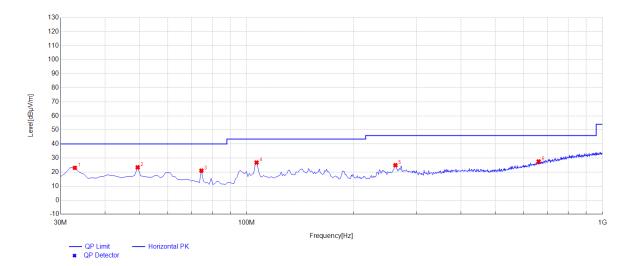


NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91	23.00	10.36	40.00	17.00	100	156	Horizontal
2	49.4	23.39	11.61	40.00	16.61	100	55	Horizontal
3	74.62	21.02	8.27	40.00	18.98	100	257	Horizontal
4	106.63	26.79	11.40	43.50	16.71	100	360	Horizontal
5	261.83	24.90	14.71	46.00	21.10	100	120	Horizontal
6	661.47	27.54	21.77	46.00	18.46	100	97	Horizontal

**RESULT: PASS** 



EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

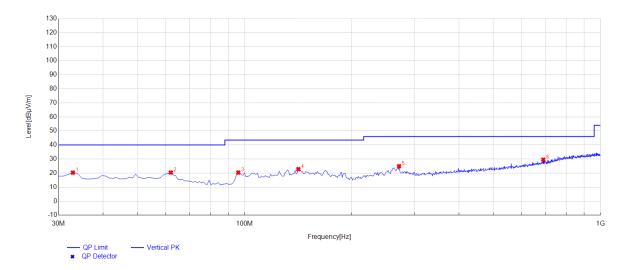

NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.91	20.33	10.36	40.00	19.67	100	96	Vertical
2	62.01	20.43	10.58	40.00	19.57	100	315	Vertical
3	95.96	20.37	9.71	43.50	23.13	100	227	Vertical
4	141.55	22.81	14.88	43.50	20.69	100	352	Vertical
5	271.53	24.89	15.55	46.00	21.11	100	359	Vertical
6	690.57	29.54	22.87	46.00	16.46	100	82	Vertical

### **RESULT: PASS**

Note: 1. Factor=Antenna Factor + Cable loss, Margin=Measurement-Limit.

2. All test modes had been pre-tested. The mode 8 is the worst case and recorded in the report.



Page 57 of 88

### Radiated emission above 1GHz

## Antenna 1: Chip antenna:

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.36	0.08	46.44	74	-27.56	peak
4804.000	37.54	0.08	37.62	54	-16.38	AVG
7206.000	41.05	2.21	43.26	74	-30.74	peak
7206.000	32.11	2.21	34.32	54	-19.68	AVG

Remark:

Factor = Antenna Factor + Cable Loss – Pre-amplifier.


EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.35	0.08	46.43	74	-27.57	peak
4804.000	36.28	0.08	36.36	54	-17.64	AVG
7206.000	41.02	2.21	43.23	74	-30.77	peak
7206.000	32.47	2.21	34.68	54	-19.32	AVG

Remark:

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.






EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type	
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type	
4882.000	46.58	0.14	46.72	74	-27.28	peak	
4882.000	37.42	0.14	37.56	54	-16.44	AVG	
7323.000	41.05	2.36	43.41	74	-30.59	peak	
7323.000	32.58	2.36	34.94	54	-19.06	AVG	
Remark:							
actor = Antenna Factor + Cable Loss – Pre-amplifier.							

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	45.97	0.14	46.11	74	-27.89	peak
4882.000	35.84	0.14	35.98	54	-18.02	AVG
7323.000	41.05	2.36	43.41	74	-30.59	peak
7323.000	32.55	2.36	34.91	54	-19.09	AVG
 Remark:						
temark:						
Remark: -actor = Anter	nna Factor + Cabl	e Loss – Pre-	amplifier.			





EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

(4D) (			Limits	Margin	Value Type
(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	\ \text{value Type}
47.51	0.22	47.73	74	-26.27	peak
36.95	0.22	37.17	54	-16.83	AVG
42.15	2.64	44.79	74	-29.21	peak
31.55	2.64	34.19	54	-19.81	AVG
	36.95 42.15 31.55	36.95     0.22       42.15     2.64       31.55     2.64	36.95     0.22     37.17       42.15     2.64     44.79	36.95     0.22     37.17     54       42.15     2.64     44.79     74       31.55     2.64     34.19     54	36.95     0.22     37.17     54     -16.83       42.15     2.64     44.79     74     -29.21       31.55     2.64     34.19     54     -19.81

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	46.98	0.22	47.2	74	-26.8	peak
4960.000	37.52	0.22	37.74	54	-16.26	AVG
7440.000	41.05	2.64	43.69	74	-30.31	peak
7440.000	32.46	2.64	35.1	54	-18.9	AVG
Remark:						
Factor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

**RESULT: PASS** 



Page 60 of 88

# Antenna 2: Whip antenna:

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	46.58	0.08	46.66	74	-27.34	peak
4804.000	37.42	0.08	37.5	54	-16.5	AVG
7206.000	41.06	2.21	43.27	74	-30.73	peak
7206.000	32.48	2.21	34.69	54	-19.31	AVG


Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	47.28	0.08	47.36	74	-26.64	peak
4804.000	37.54	0.08	37.62	54	-16.38	AVG
7206.000	42.18	2.21	44.39	74	-29.61	peak
7206.000	32.69	2.21	34.9	54	-19.1	AVG
Remark:						

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

Any report having not been signed by authorized approver, or having been altered without authorization, or having not been stamped by the "Dedicated Testing/Inspection Stamp" is deemed to be invalid. Copying or excerpting portion of, or altering the content of the report is not permitted without the written authorization of AGC. The test results presented in the report apply only to the tested sample. Any objections to report issued by AGC should be submitted to AGC within 15days after the issuance of the test report. Further enquiry of validity or verification of the test report should be addressed to AGC by agc01@agccert.com.





EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4882.000	46.85	0.14	46.99	74	-27.01	peak
4882.000	37.54	0.14	37.68	54	-16.32	AVG
7323.000	41.06	2.36	43.42	74	-30.58	peak
7323.000	32.48	2.36	34.84	54	-19.16	AVG
emark:						

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	47.51	0.14	47.65	74	-26.35	peak
4882.000	37.51	0.14	37.65	54	-16.35	AVG
7323.000	42.16	2.36	44.52	74	-29.48	peak
7323.000	33.54	2.36	35.9	54	-18.1	AVG
temark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Page 62 of 88

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	47.49	0.22	47.71	74	-26.29	peak
4960.000	36.24	0.22	36.46	54	-17.54	AVG
7440.000	42.51	2.64	45.15	74	-28.85	peak
7440.000	32.48	2.64	35.12	54	-18.88	AVG
						<u> </u>
emark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	46.28	0.22	46.5	74	-27.5	peak
4960.000	37.54	0.22	37.76	54	-16.24	AVG
7440.000	42.15	2.64	44.79	74	-29.21	peak
7440.000	32.57	2.64	35.21	54	-18.79	AVG
Remark:						

Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**RESULT: PASS** 



Page 63 of 88

# Antenna 3: Chip antenna:

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	\/alua Tyraa
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4804.000	46.59	0.08	46.67	74	-27.33	peak
4804.000	37.54	0.08	37.62	54	-16.38	AVG
7206.000	41.58	2.21	43.79	74	-30.21	peak
7206.000	32.33	2.21	34.54	54	-19.46	AVG
					·	

Factor = Antenna Factor + Cable Loss - Pre-amplifier.

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4804.000	47.58	0.08	47.66	74	-26.34	peak
4804.000	37.41	0.08	37.49	54	-16.51	AVG
7206.000	42.08	2.21	44.29	74	-29.71	peak
7206.000	32.37	2.21	34.58	54	-19.42	AVG
Remark <sup>.</sup>		•			•	

Factor = Antenna Factor + Cable Loss - Pre-amplifier.





EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	46.15	0.14	46.29	74	-27.71	peak
4882.000	36.28	0.14	36.42	54	-17.58	AVG
7323.000	42.19	2.36	44.55	74	-29.45	peak
7323.000	32.47	2.36	34.83	54	-19.17	AVG
Remark:						
actor = Anter	na Factor + Cabl	e Loss – Pre-	amplifier.			

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 8	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4882.000	47.18	0.14	47.32	74	-26.68	peak
4882.000	37.84	0.14	37.98	54	-16.02	AVG
7323.000	41.05	2.36	43.41	74	-30.59	peak
7323.000	32.68	2.36	35.04	54	-18.96	AVG
emark:						



Page 65 of 88

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	value Type
4960.000	47.51	0.22	47.73	74	-26.27	peak
4960.000	36.57	0.22	36.79	54	-17.21	AVG
7440.000	42.16	2.64	44.8	74	-29.2	peak
7440.000	32.48	2.64	35.12	54	-18.88	AVG
emark:						

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CN
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Vertical

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Value Type
(MHz)	(dBµV)	(dB)	(dBµV/m)	(dBµV/m)	(dB)	Value Type
4960.000	46.28	0.22	46.5	74	-27.5	peak
4960.000	37.54	0.22	37.76	54	-16.24	AVG
7440.000	42.18	2.64	44.82	74	-29.18	peak
7440.000	32.47	2.64	35.11	54	-18.89	AVG
Remark:						
actor = Anter	nna Factor + Cable	e Loss – Pre-	amplifier.			

# **RESULT: PASS**

#### Note:

The amplitude of other spurious emissions from 1G to 25 GHz which are attenuated more than 20 dB below the permissible value need not be reported.

Factor = Antenna Factor + Cable loss - Amplifier gain, Over=Measure-Limit.

The "Factor" value can be calculated automatically by software of measurement system.

All test modes had been tested. The 8DPSK modulation is the worst case and recorded in the report.



# Test result for band edge emission at restricted bands


### Antenna 1: Chip antenna:

EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Horizontal

## Test Graph for Peak Measurement



### Test Graph for Average Measurement

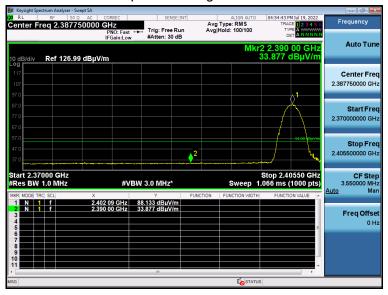


#### **RESULT: PASS**




EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 7	Antenna	Vertical

## Test Graph for Peak Measurement

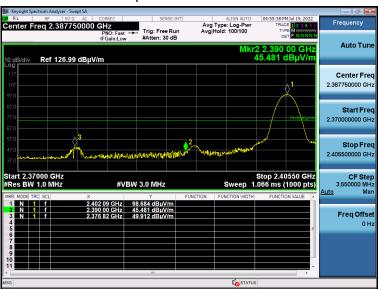

# Test Graph for Average Measurement

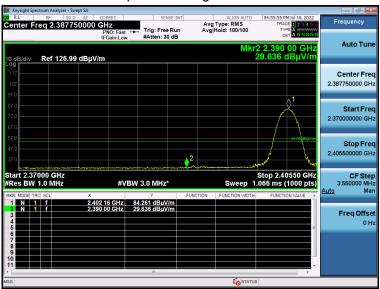


**RESULT: PASS** 




EUT	BDE Bluetooth 5.1 Dual Mode Transceiver Module Based on CC2564C	Model Name	BDE-BD2564CA
Temperature	25°C	Relative Humidity	55.4%
Pressure	960hPa	Test Voltage	Normal Voltage
Test Mode	Mode 9	Antenna	Horizontal

## Test Graph for Peak Measurement

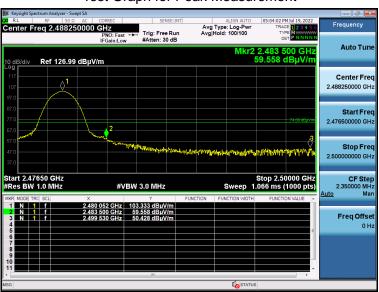

# Test Graph for Average Measurement

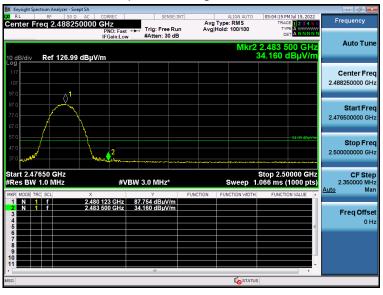

**RESULT: PASS**