

**01\_LTE Band 71\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_Ch133297**

Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_240410 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.835$  S/m;  $\epsilon_r = 42.057$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17

- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch133297/Area Scan (81x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.162 W/kg


**Ch133297/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.196 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.184 W/kg

**SAR(1 g) = 0.145 W/kg; SAR(10 g) = 0.112 W/kg**

Maximum value of SAR (measured) = 0.157 W/kg

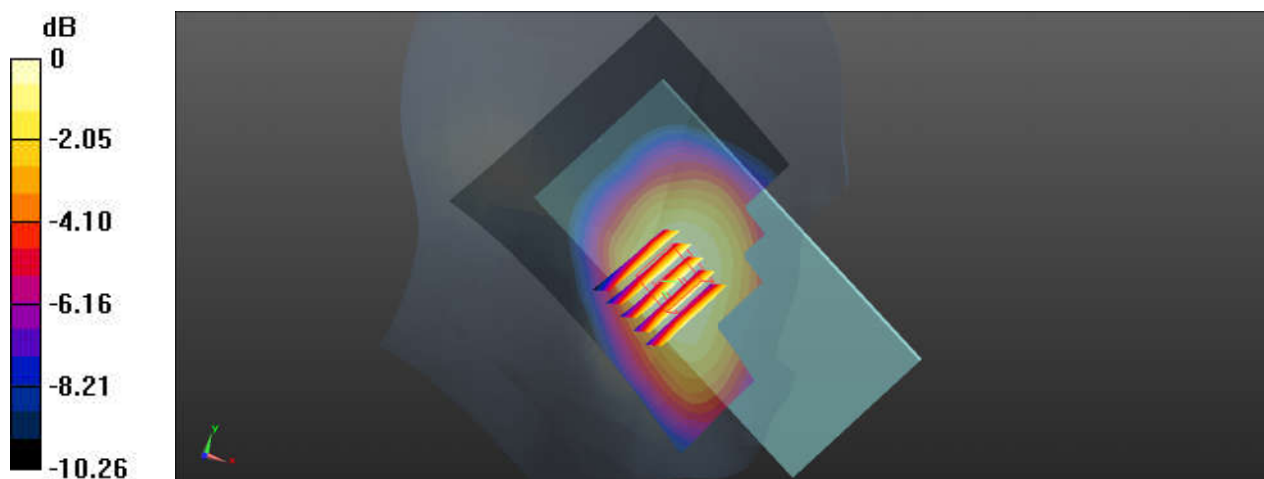

0 dB = 0.157 W/kg

**02\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Left Cheek\_Ch23095**

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_240410 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 41.609$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23095/Area Scan (81x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.149 W/kg


**Ch23095/Zoom Scan (6x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.486 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.212 W/kg

**SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.129 W/kg**

Maximum value of SAR (measured) = 0.183 W/kg

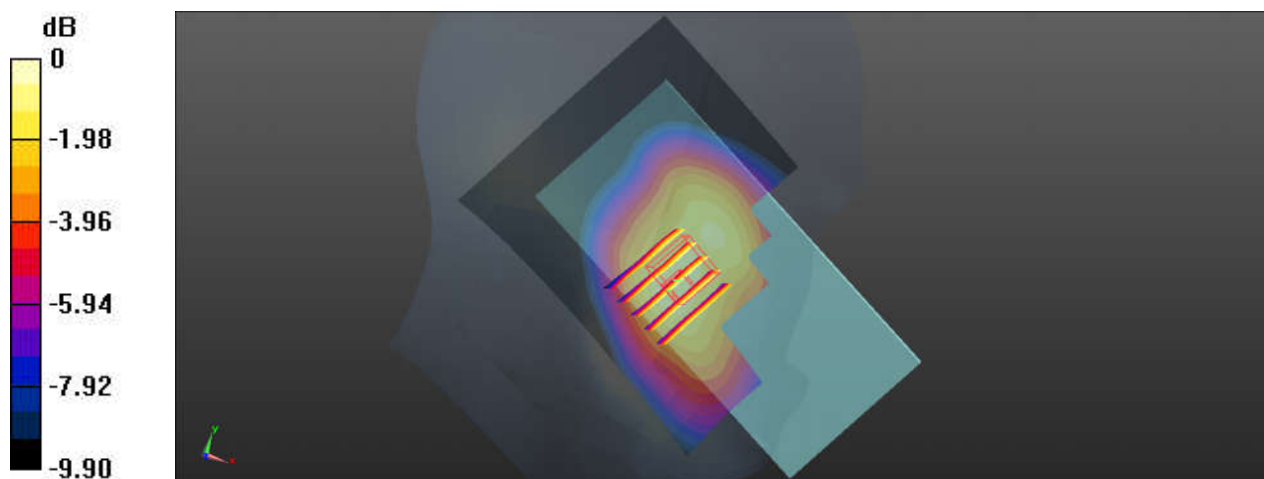

0 dB = 0.183 W/kg

**03\_LTE Band 13\_10M\_QPSK\_1RB\_49Offset\_Left Cheek\_Ch23230**

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_240410 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.925 \text{ S/m}$ ;  $\epsilon_r = 43.347$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.1 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23230/Area Scan (81x121x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.231 \text{ W/kg}$


**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $3.597 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$

Peak SAR (extrapolated) =  $0.271 \text{ W/kg}$

**SAR(1 g) =  $0.208 \text{ W/kg}$ ; SAR(10 g) =  $0.158 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.229 \text{ W/kg}$

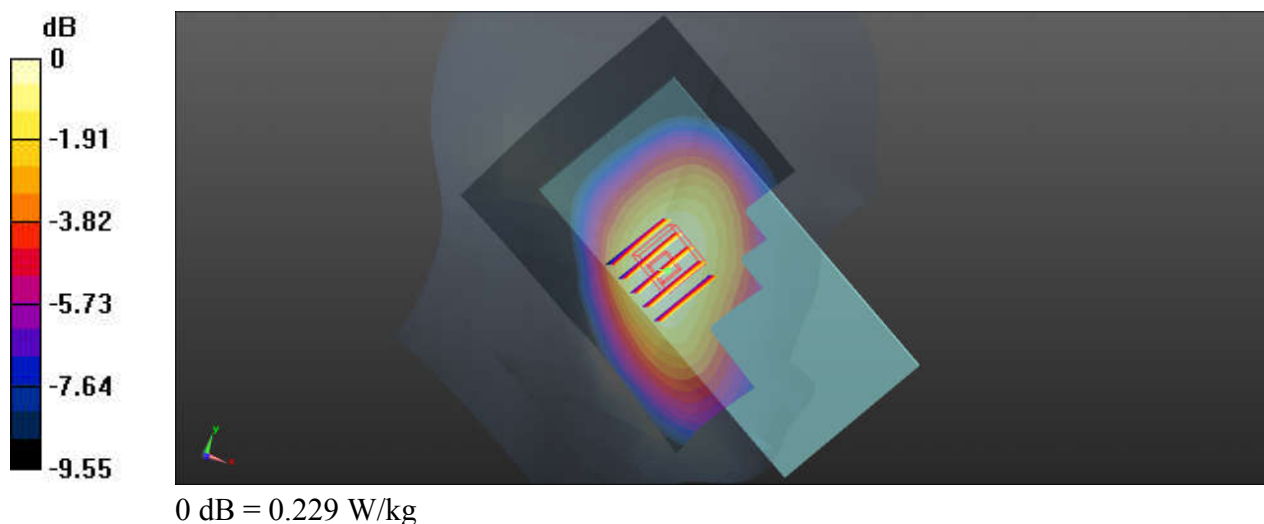

**04\_FR1 n71\_20M\_QPSK\_50RB\_28Offset\_DFT-15\_Left Cheek\_Ch136100**


Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_240410 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.835$  S/m;  $\epsilon_r = 42.057$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch136100/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.183 W/kg

**Ch136100/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.804 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.202 W/kg  
**SAR(1 g) = 0.164 W/kg; SAR(10 g) = 0.128 W/kg**  
Maximum value of SAR (measured) = 0.178 W/kg

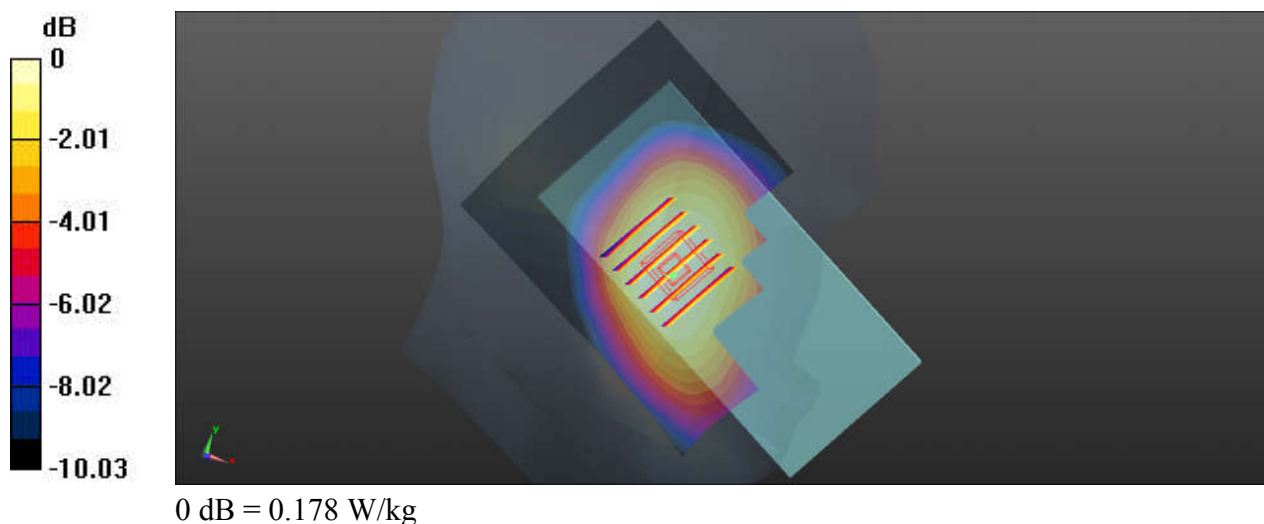

**05\_CDMA BC0\_RC3 SO55\_Left Cheek\_Ch1013**


Communication System: UID 0, CDMA2000 (0); Frequency: 824.7 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240409 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 43.18$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch1013/Area Scan (71x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 0.228 W/kg

**Ch1013/Zoom Scan (6x6x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 3.491 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 0.261 W/kg  
**SAR(1 g) = 0.203 W/kg; SAR(10 g) = 0.154 W/kg**  
Maximum value of SAR (measured) = 0.222 W/kg

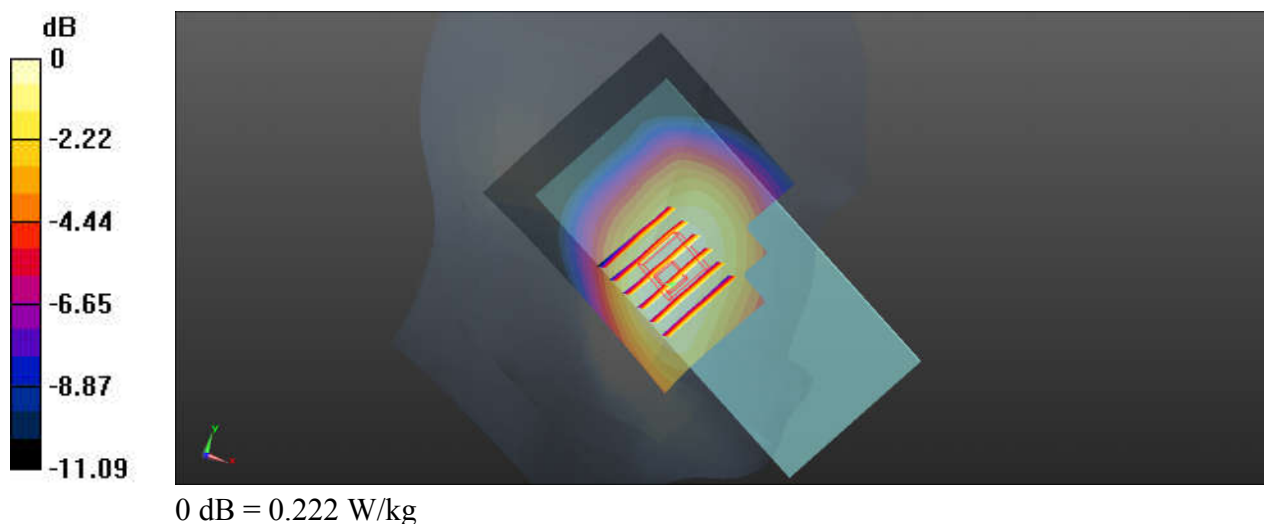

**06\_GSM850\_GPRS (3 Tx slots)\_Left Cheek\_Ch128**


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.77  
Medium: HSL\_835\_240409 Medium parameters used:  $f = 824.2$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 43.177$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch128/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.0670 W/kg

**Ch128/Zoom Scan (7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 2.343 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 0.0810 W/kg  
**SAR(1 g) = 0.090 W/kg; SAR(10 g) = 0.069 W/kg**  
Maximum value of SAR (measured) = 0.0744 W/kg

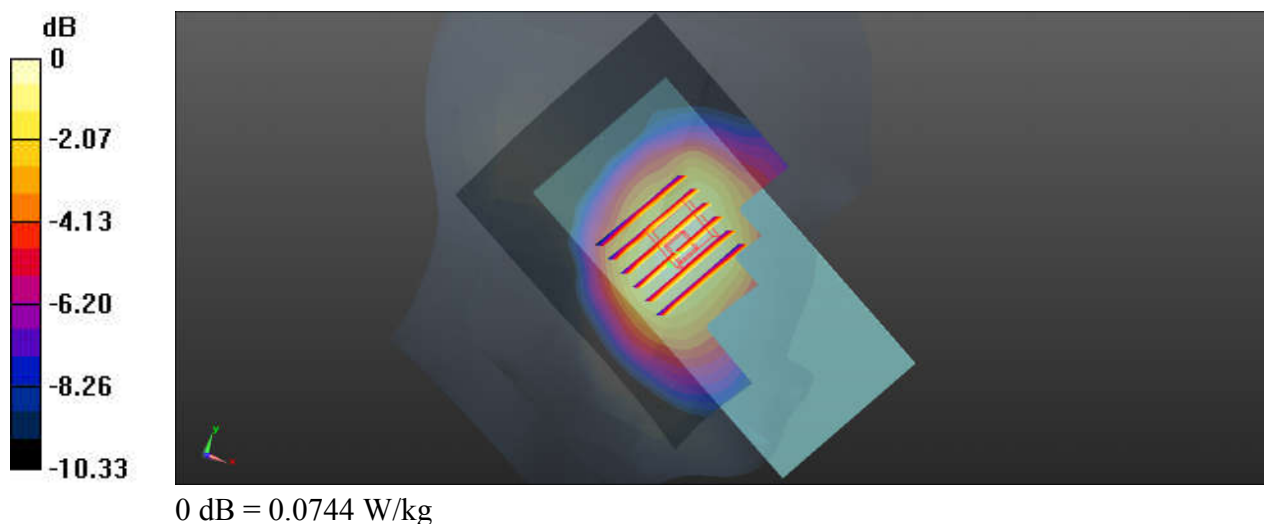

**07\_WCDMA V\_RMC 12.2Kbps\_Left Cheek\_Ch4132**


Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240409 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 43.178$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch4132/Area Scan (81x121x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.276 W/kg

**Ch4132/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.817 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 0.323 W/kg  
**SAR(1 g) = 0.248 W/kg; SAR(10 g) = 0.190 W/kg**  
Maximum value of SAR (measured) = 0.273 W/kg

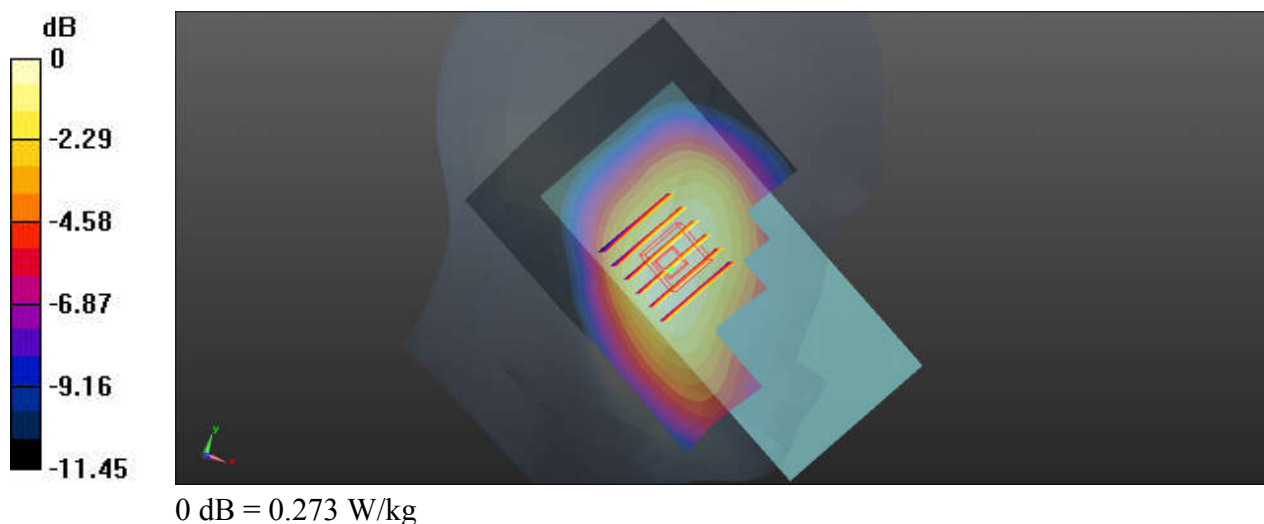

**08\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Left Cheek\_Ch26865**

Communication System: UID 0, LTE (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_240409 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.945$  S/m;  $\epsilon_r = 43.162$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch26865/Area Scan (81x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.237 W/kg


**Ch26865/Zoom Scan (7x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.196 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.277 W/kg

**SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.165 W/kg**

Maximum value of SAR (measured) = 0.236 W/kg

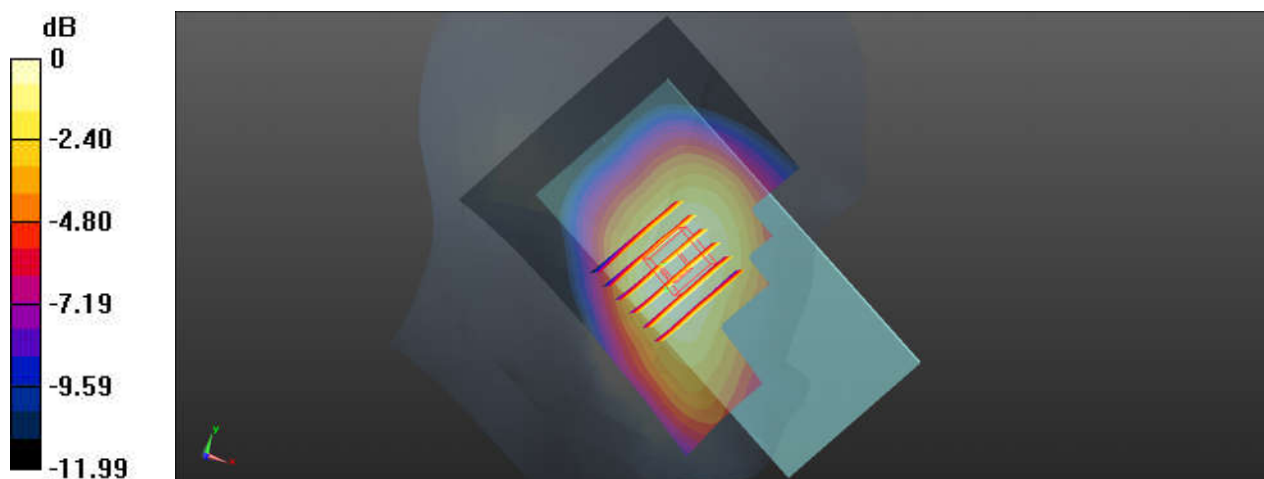

0 dB = 0.236 W/kg

**09\_FR1 n26\_20M\_QPSK\_1RB\_1Offset\_DFT-15\_Left Cheek\_Ch166300**


Communication System: UID 0, 5G NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240409 Medium parameters used:  $f = 831.5$  MHz;  $\sigma = 0.945$  S/m;  $\epsilon_r = 43.162$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch166300/Area Scan (81x101x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.192 W/kg

**Ch166300/Zoom Scan (6x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 3.329 V/m; Power Drift = -0.02 dB  
Peak SAR (extrapolated) = 0.216 W/kg  
**SAR(1 g) = 0.166 W/kg; SAR(10 g) = 0.125 W/kg**  
Maximum value of SAR (measured) = 0.182 W/kg

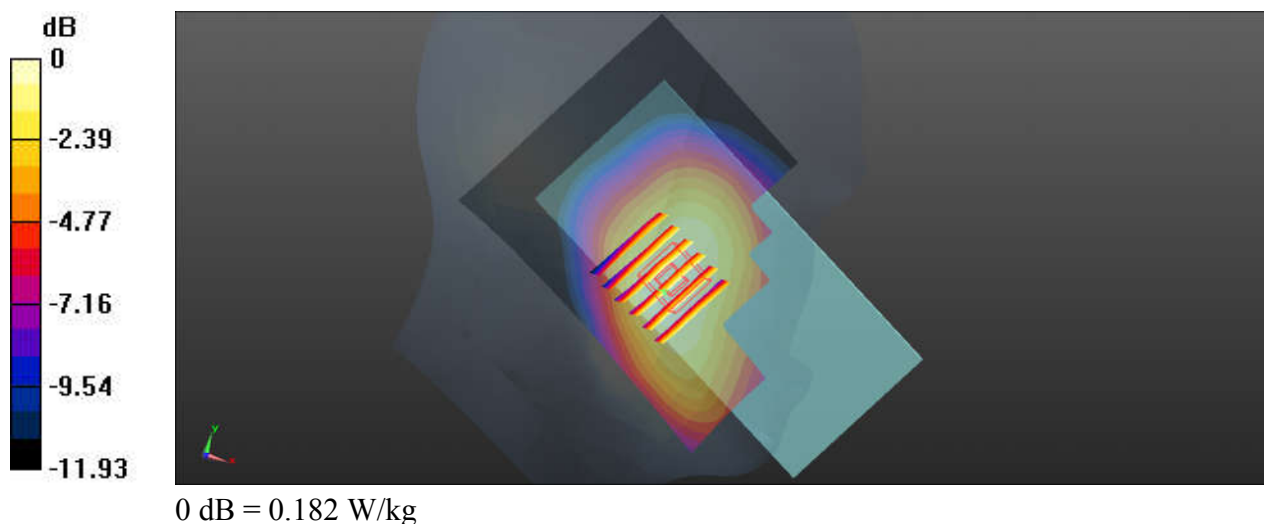

## 10\_WCDMA IV\_RMC 12.2Kbps\_Right Cheek\_Ch1513


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240406 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.377$  S/m;  $\epsilon_r = 40.528$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch1513/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.27 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 5.517 V/m; Power Drift = 0.04 dB  
Peak SAR (extrapolated) = 2.04 W/kg  
**SAR(1 g) = 0.942 W/kg; SAR(10 g) = 0.432 W/kg**  
Maximum value of SAR (measured) = 1.31 W/kg

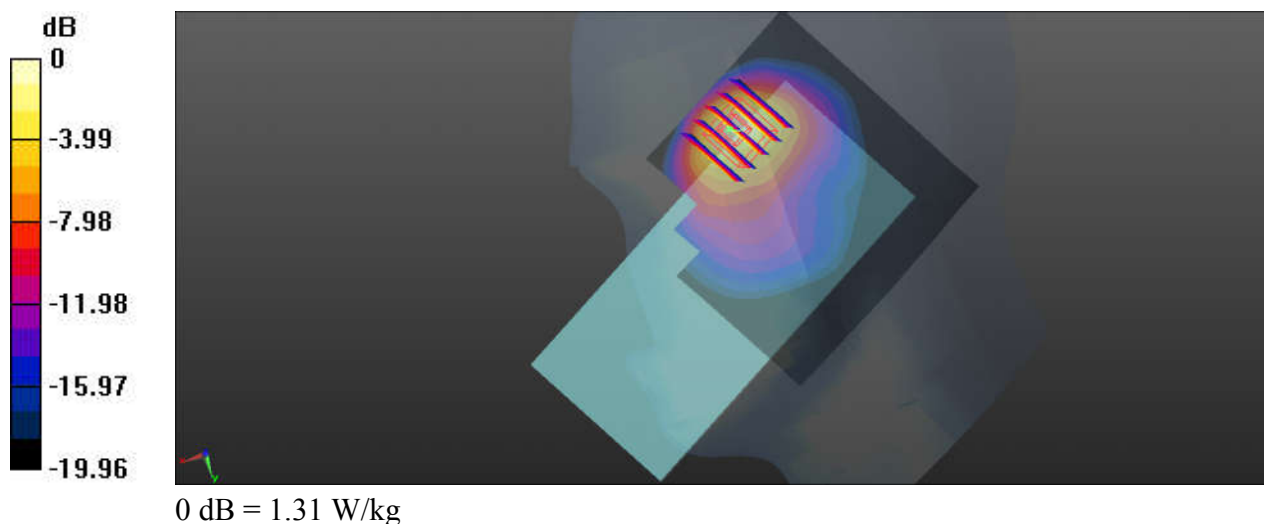

**11\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch132572**

Communication System: UID 0, LTE (0); Frequency: 1770 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_240406 Medium parameters used:  $f = 1770$  MHz;  $\sigma = 1.388$  S/m;  $\epsilon_r = 40.494$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch132572/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.13 W/kg


**Ch132572/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.76 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.79 W/kg

**SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.428 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

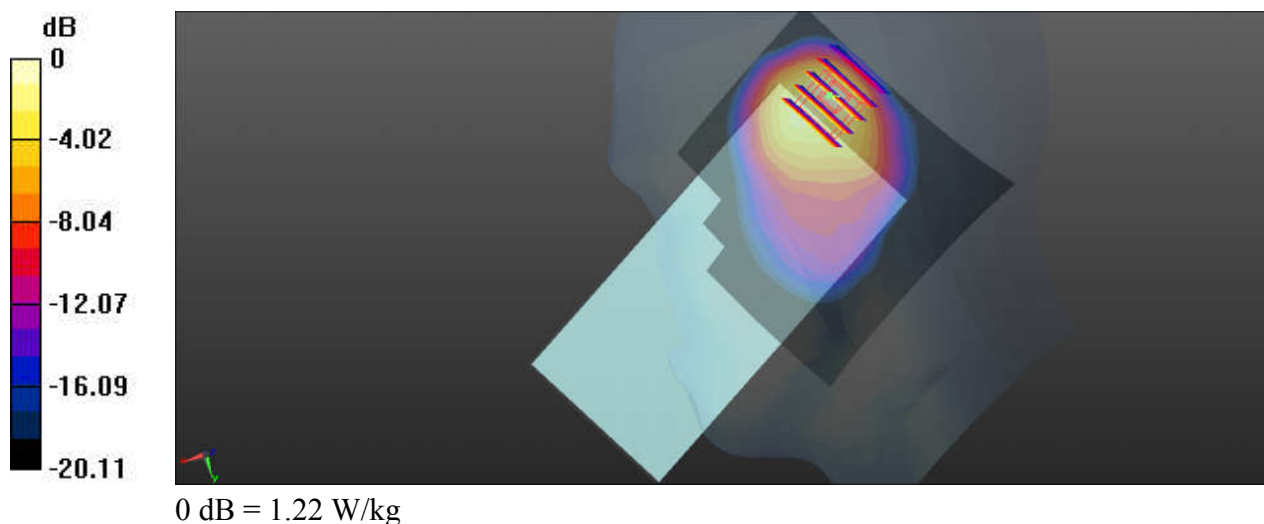

**12\_FR1 n66\_40M\_QPSK\_1RB\_1Offset\_DFT-15\_Right Cheek\_Ch349000**


Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240406 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 40.544$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch349000/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.33 W/kg

**Ch349000/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.349 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 2.20 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.454 W/kg**  
Maximum value of SAR (measured) = 1.42 W/kg

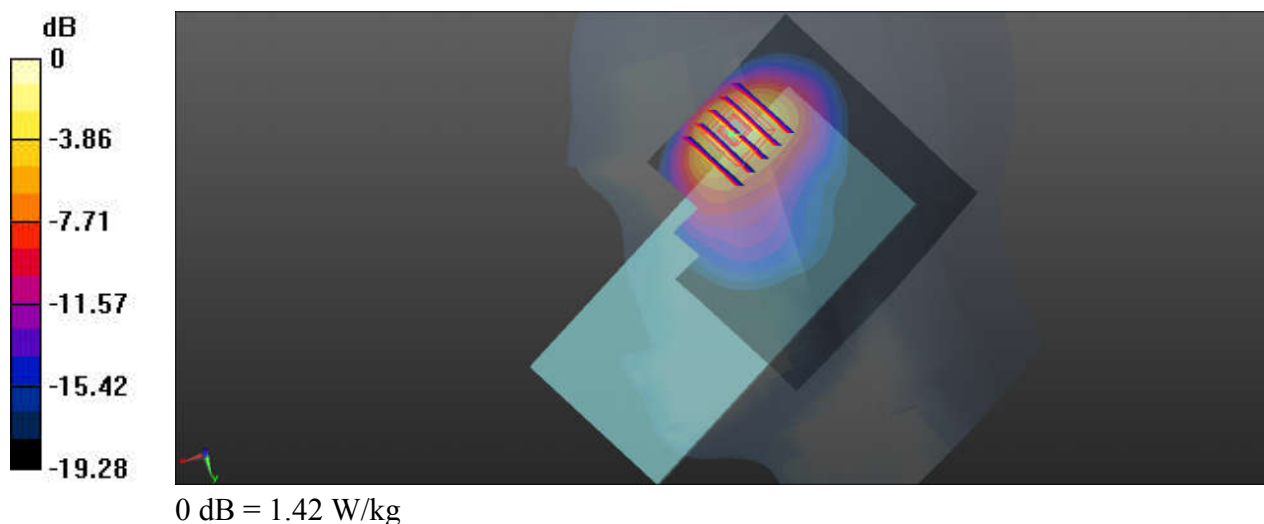

### 13\_GSM1900\_GPRS (3 Tx slots)\_Right Cheek\_Ch512


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77  
Medium: HSL\_1900\_240407 Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.325$  S/m;  $\epsilon_r = 39.509$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch512/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.27 W/kg

**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.947 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 2.17 W/kg  
**SAR(1 g) = 0.999 W/kg; SAR(10 g) = 0.450 W/kg**  
Maximum value of SAR (measured) = 1.42 W/kg

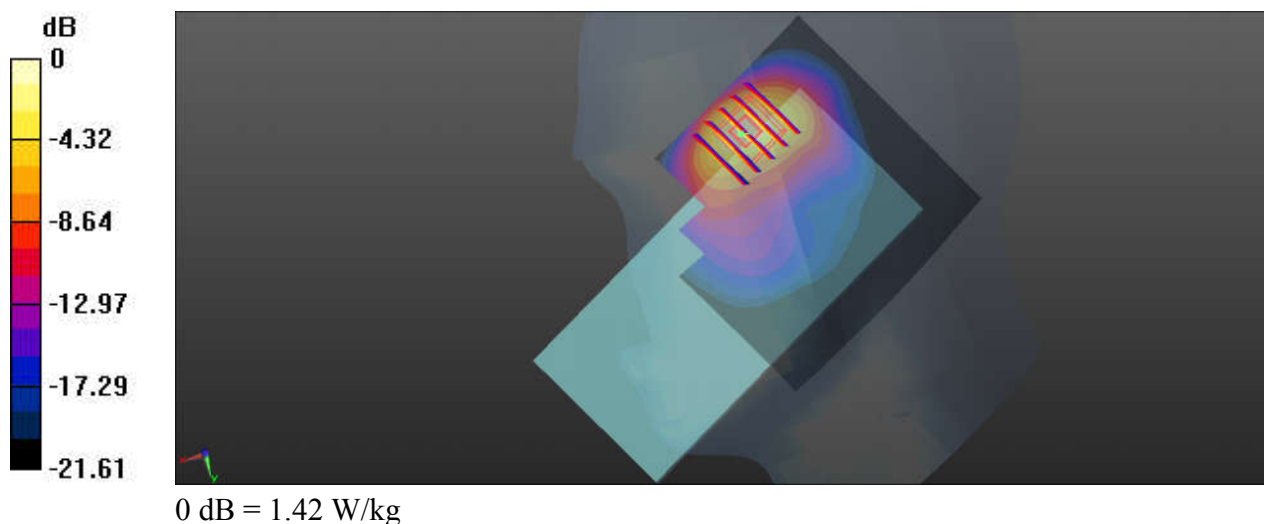

## 14\_WCDMA II\_RMC 12.2Kbps\_Right Cheek\_Ch9262


Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240407 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.359$  S/m;  $\epsilon_r = 39.501$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch9262/Area Scan (81x81x1):** Interpolated grid:  $dx=1.500$  mm,  $dy=1.500$  mm  
Maximum value of SAR (interpolated) = 1.34 W/kg

**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8$ mm,  $dy=8$ mm,  $dz=5$ mm  
Reference Value = 6.710 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 2.03 W/kg  
**SAR(1 g) = 0.949 W/kg; SAR(10 g) = 0.429 W/kg**  
Maximum value of SAR (measured) = 1.27 W/kg

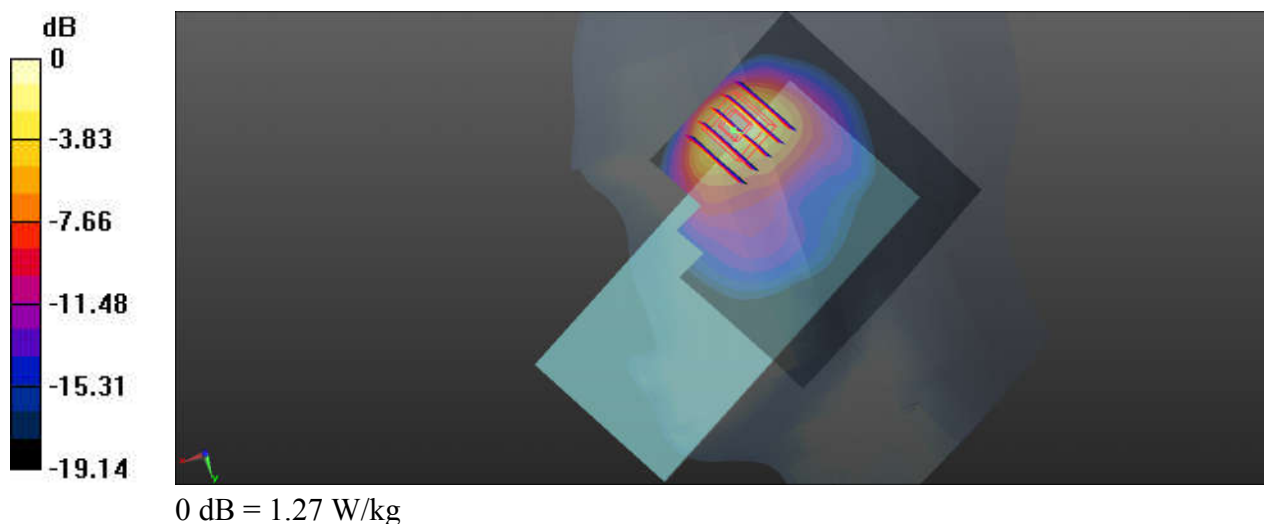

**15\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch26140**

Communication System: UID 0, LTE (0); Frequency: 1860 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_240407 Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.266$  S/m;  $\epsilon_r = 39.475$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch26140/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.23 W/kg


**Ch26140/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.434 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.07 W/kg

**SAR(1 g) = 0.932 W/kg; SAR(10 g) = 0.428 W/kg**

Maximum value of SAR (measured) = 1.35 W/kg

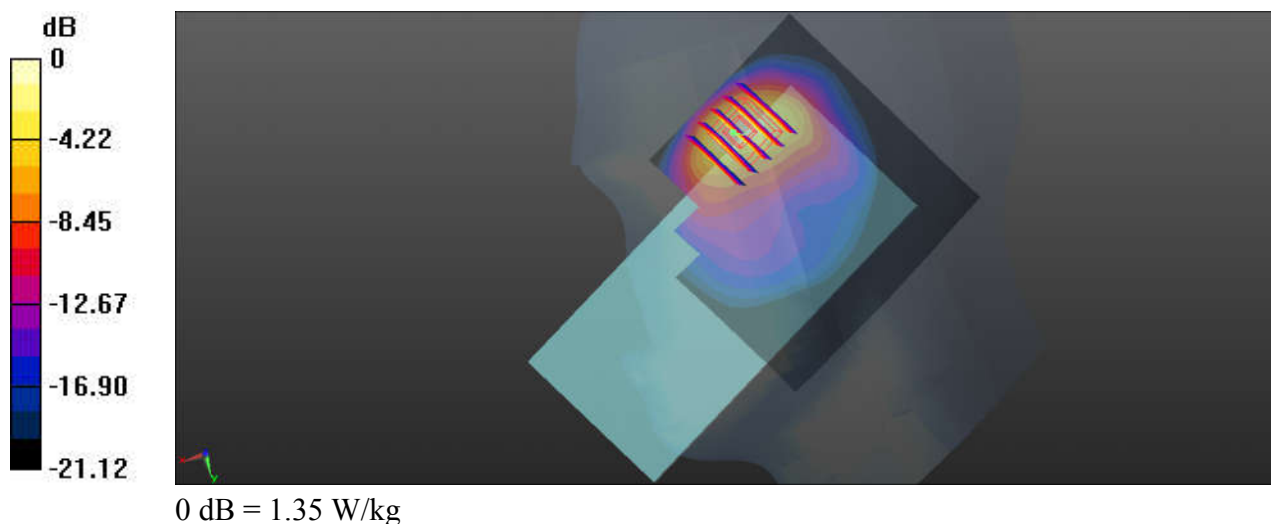

**16\_FR1 n2\_40M\_QPSK\_1RB\_1Offset\_DFT-15\_Right Cheek\_Ch376000**


Communication System: UID 0, 5G NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240407 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.385$  S/m;  $\epsilon_r = 39.388$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch376000/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.37 W/kg

**Ch376000/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 4.993 V/m; Power Drift = 0.05 dB  
Peak SAR (extrapolated) = 2.17 W/kg  
**SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.467 W/kg**  
Maximum value of SAR (measured) = 1.35 W/kg

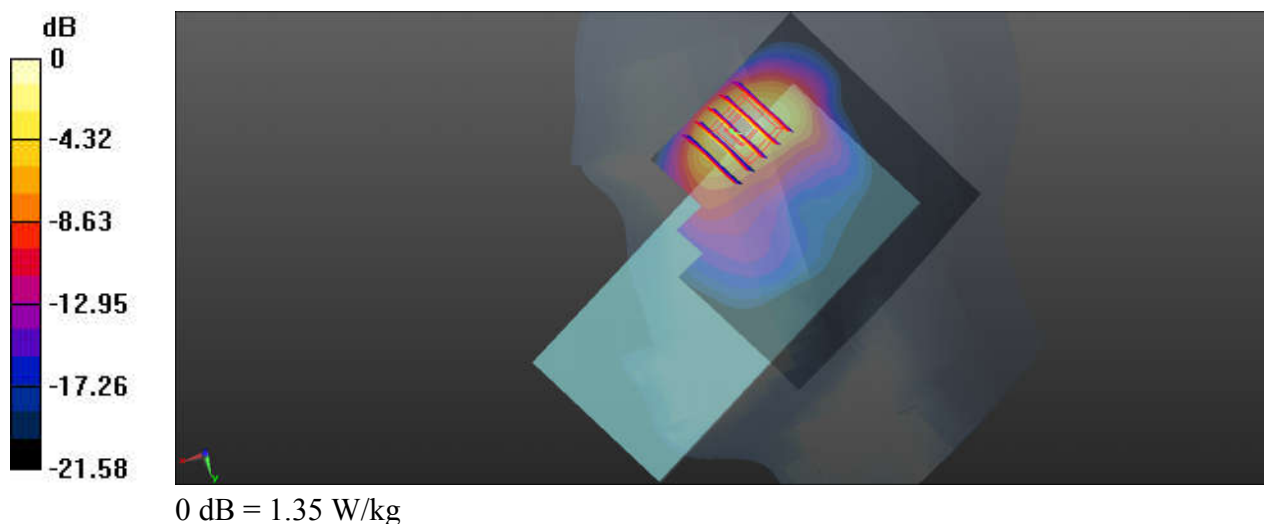

**17\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_Ch21350**

Communication System: UID 0, LTE (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL\_2600\_240414 Medium parameters used:  $f = 2560$  MHz;  $\sigma = 1.866$  S/m;  $\epsilon_r = 37.709$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch21350/Area Scan (101x131x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


**Ch21350/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.071 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.36 W/kg

**SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.342 W/kg**

Maximum value of SAR (measured) = 1.78 W/kg

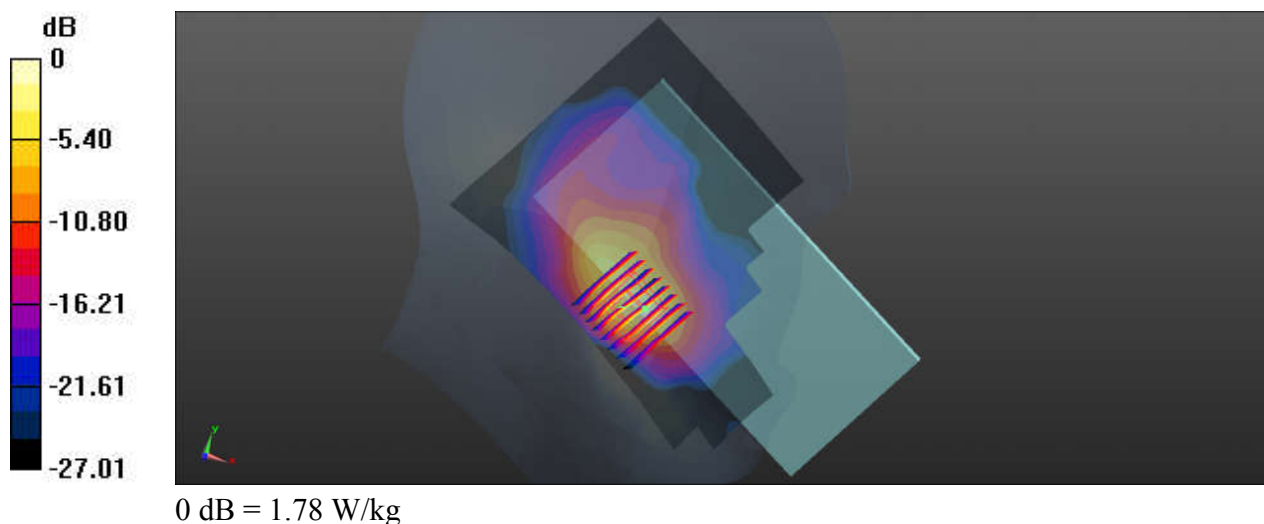

**18\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Right Cheek\_Ch41490**

Communication System: UID 0, LTE (0); Frequency: 2680 MHz; Duty Cycle: 1:2.331

Medium: HSL\_2600\_240414 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 37.516$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch41490/Area Scan (101x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.69 W/kg


**Ch41490/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.14 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.70 W/kg

**SAR(1 g) = 0.974 W/kg; SAR(10 g) = 0.352 W/kg**

Maximum value of SAR (measured) = 1.97 W/kg

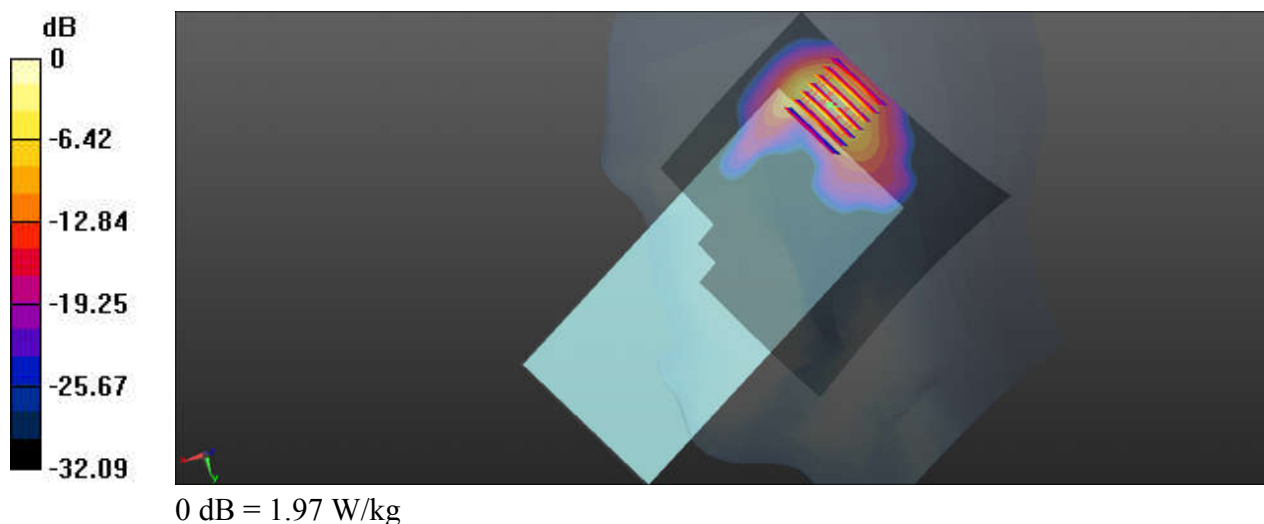

**19\_FR1 n7\_40M\_QPSK\_1RB\_1Offset\_DFT-15\_Right Tilted\_Ch507000**


Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240414 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.846$  S/m;  $\epsilon_r = 37.753$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch507000/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.88 W/kg

**Ch507000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 15.64 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 2.58 W/kg  
**SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.399 W/kg**  
Maximum value of SAR (measured) = 1.93 W/kg

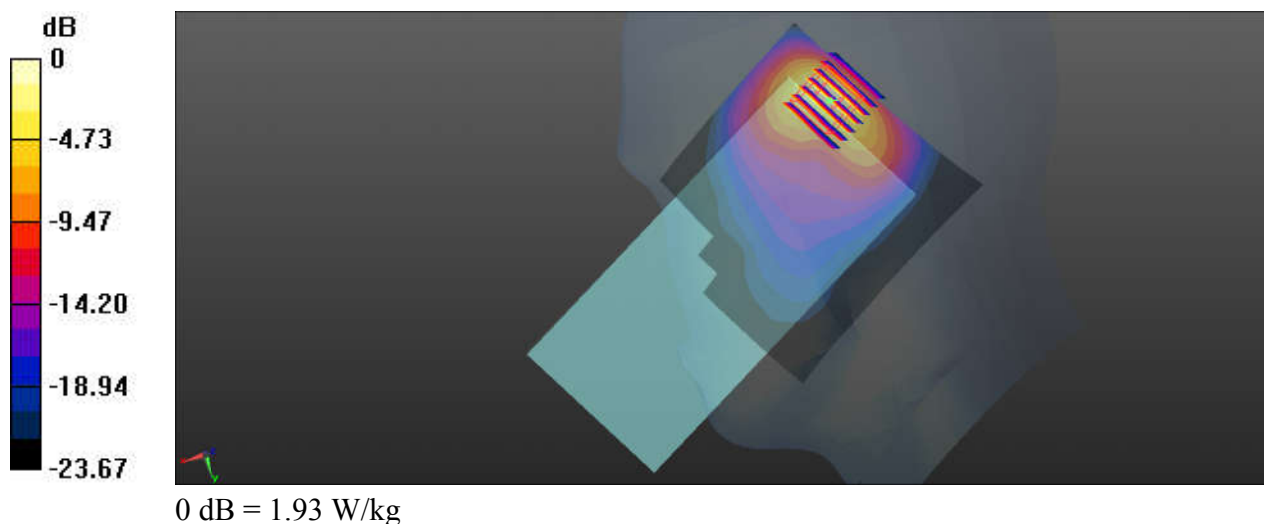

**20\_FR1 n41\_100M\_QPSK\_1RB\_1Offset\_DFT-30\_Left Cheek\_Ch518598**


Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:2  
Medium: HSL\_2600\_240414 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.891$  S/m;  $\epsilon_r = 37.673$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch518598/Area Scan (101x131x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.41 W/kg

**Ch518598/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.884 V/m; Power Drift = 0.11 dB  
Peak SAR (extrapolated) = 2.71 W/kg  
**SAR(1 g) = 0.998 W/kg; SAR(10 g) = 0.398 W/kg**  
Maximum value of SAR (measured) = 2.03 W/kg

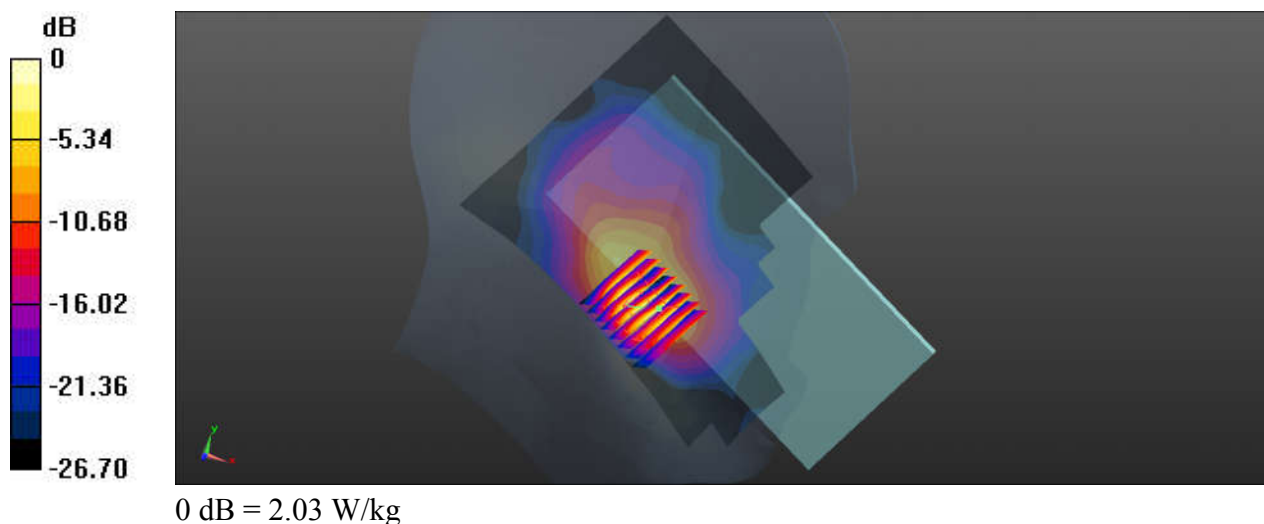

**21\_LTE Band 42\_20M\_QPSK\_1RB\_0Offset\_Left Cheek\_Ch42990**

Communication System: UID 0, LTE (0); Frequency: 3540 MHz; Duty Cycle: 1:1.59

Medium: HSL\_3500\_240404 Medium parameters used:  $f = 3540$  MHz;  $\sigma = 2.886$  S/m;  $\epsilon_r = 38.376$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.76, 6.76, 6.76); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch42990/Area Scan (101x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.51 W/kg


**Ch42990/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 3.916 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 3.11 W/kg

**SAR(1 g) = 0.945 W/kg; SAR(10 g) = 0.338 W/kg**

Maximum value of SAR (measured) = 2.04 W/kg

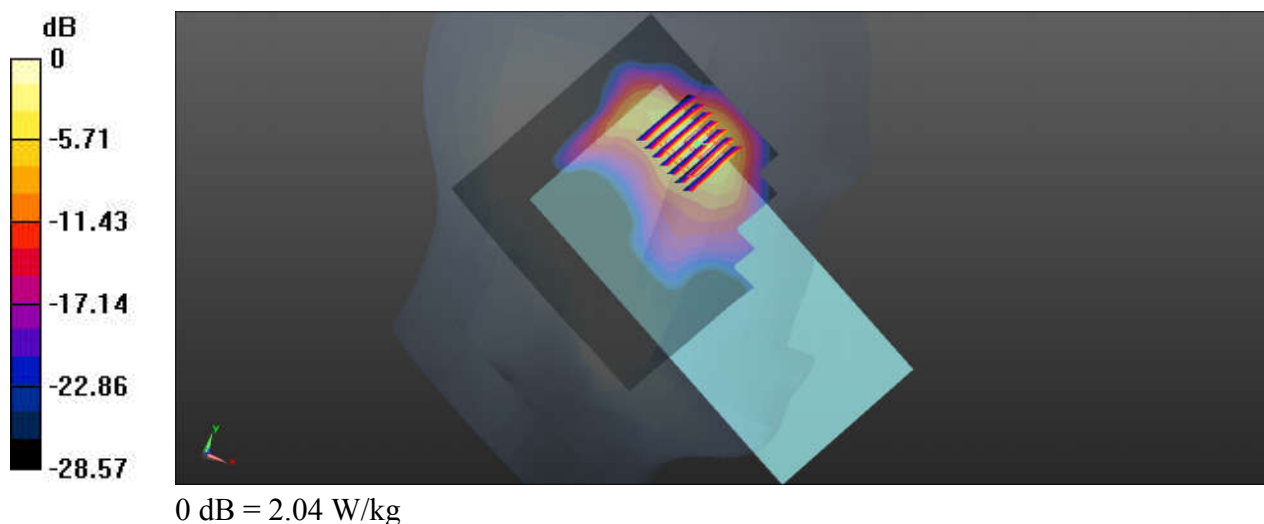

**22\_FR1 n77\_100M\_QPSK\_1RB\_1Offset\_DFT-30\_Left Cheek\_Ch656000**

Communication System: UID 0, 5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:2

Medium: HSL\_3900\_240403 Medium parameters used:  $f = 3840$  MHz;  $\sigma = 3.12$  S/m;  $\epsilon_r = 38.054$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(6.53, 6.53, 6.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch656000/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.55 W/kg


**Ch656000/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 5.075 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 3.34 W/kg

**SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.379 W/kg**

Maximum value of SAR (measured) = 2.36 W/kg

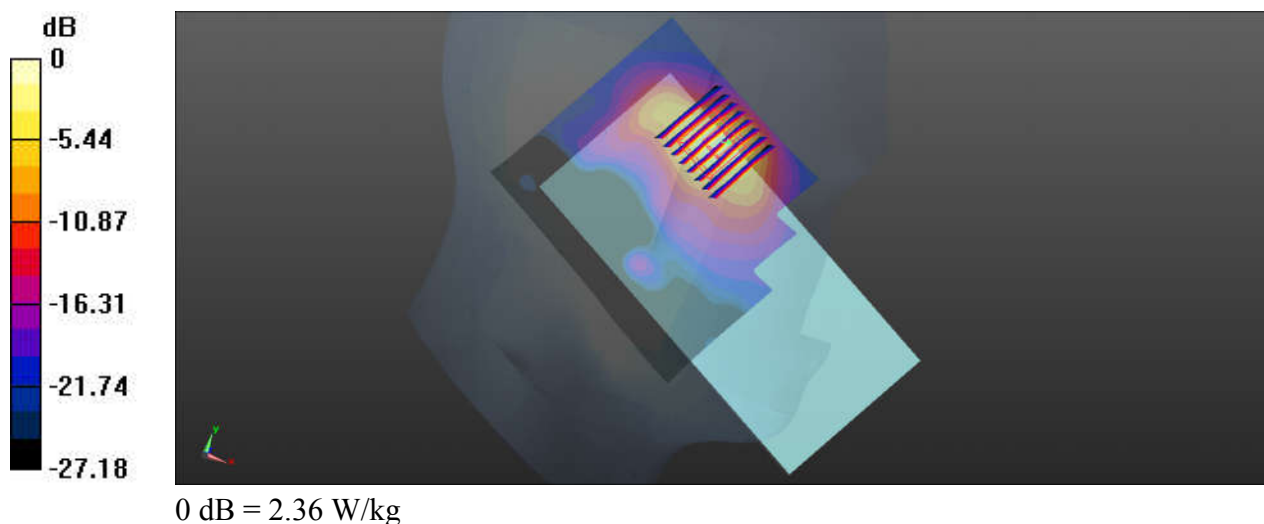

## 23\_Bluetooth\_DH5 1Mbps\_Left Cheek\_Ch0


Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.298  
Medium: HSL\_2450\_240405 Medium parameters used:  $f = 2402$  MHz;  $\sigma = 1.747$  S/m;  $\epsilon_r = 37.924$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch0/Area Scan (101x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 0.970 W/kg

**Ch0/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 3.151 V/m; Power Drift = 0.09 dB  
Peak SAR (extrapolated) = 1.38 W/kg  
**SAR(1 g) = 0.530 W/kg; SAR(10 g) = 0.204 W/kg**  
Maximum value of SAR (measured) = 1.01 W/kg

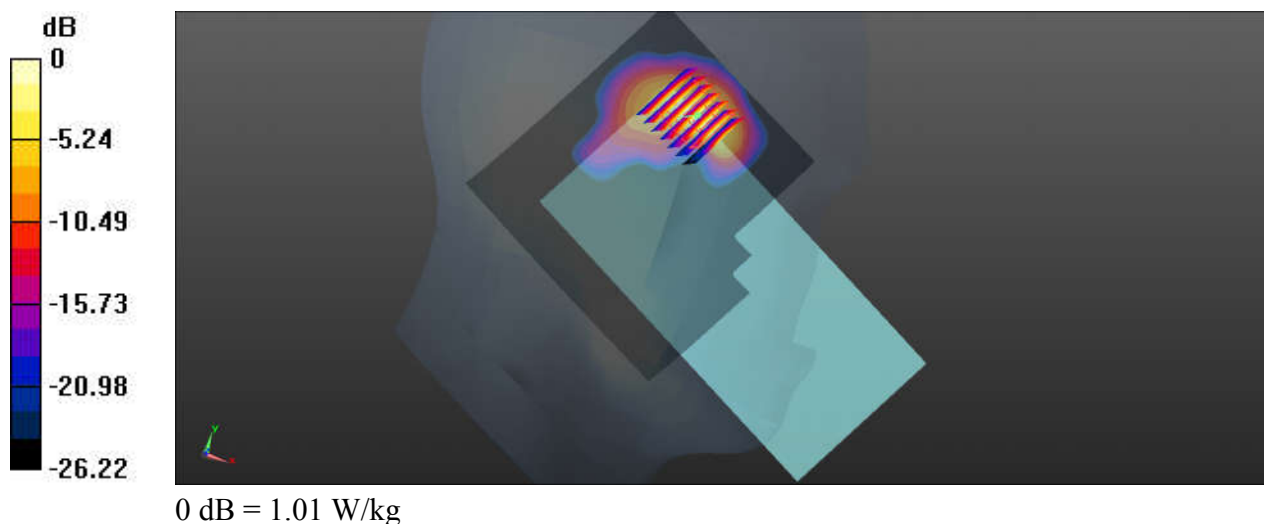

**24\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_Ch11**

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.015  
Medium: HSL\_2450\_240405 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.824$  S/m;  $\epsilon_r = 37.585$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch11/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.46 W/kg


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.701 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.89 W/kg

**SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.267 W/kg**

Maximum value of SAR (measured) = 1.44 W/kg

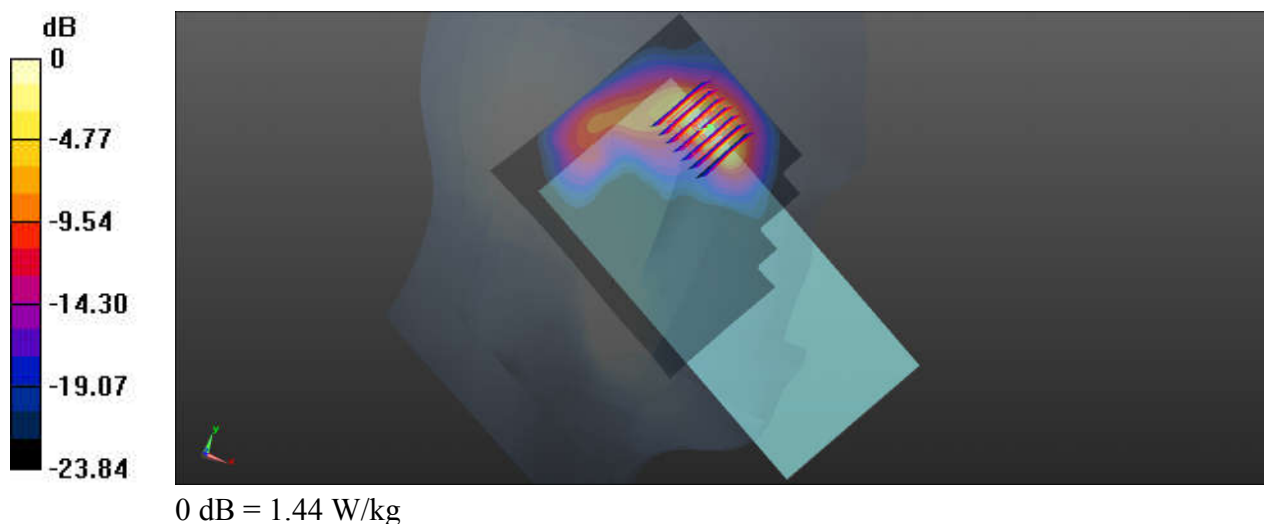

**25\_WLAN5GHz\_802.11ac-VHT160 MCS0\_Left Cheek\_Ch50**


Communication System: UID 0, WIFI (0); Frequency: 5250 MHz; Duty Cycle: 1:1.013  
Medium: HSL\_5250\_240411 Medium parameters used:  $f = 5250$  MHz;  $\sigma = 4.597$  S/m;  $\epsilon_r = 36.629$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(5.31, 5.31, 5.31); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch50/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 1.85 W/kg

**Ch50/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 14.89 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 3.14 W/kg  
**SAR(1 g) = 0.777 W/kg; SAR(10 g) = 0.267 W/kg**  
Maximum value of SAR (measured) = 1.90 W/kg

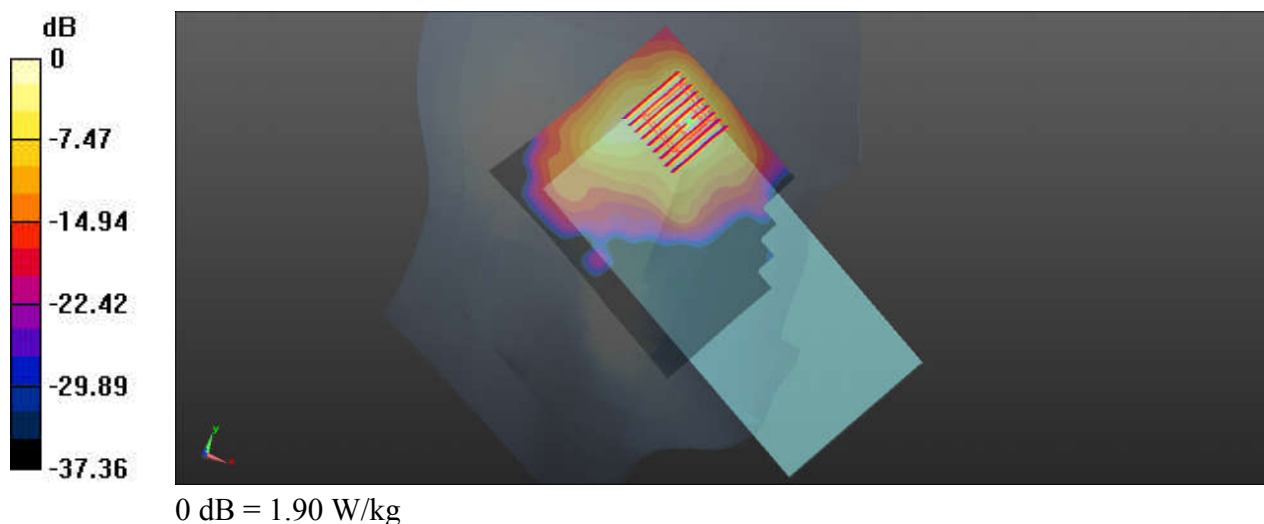

**26\_WLAN5GHz\_802.11ac-VHT160 MCS0\_Left Cheek\_Ch114**

Communication System: UID 0, WIFI (0); Frequency: 5570 MHz; Duty Cycle: 1:1.013  
Medium: HSL\_5600\_240412 Medium parameters used:  $f = 5570$  MHz;  $\sigma = 4.966$  S/m;  $\epsilon_r = 36.144$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.5 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(4.68, 4.68, 4.68); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch114/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.38 W/kg


**Ch114/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.28 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 4.03 W/kg

**SAR(1 g) = 0.873 W/kg; SAR(10 g) = 0.304 W/kg**

Maximum value of SAR (measured) = 2.32 W/kg

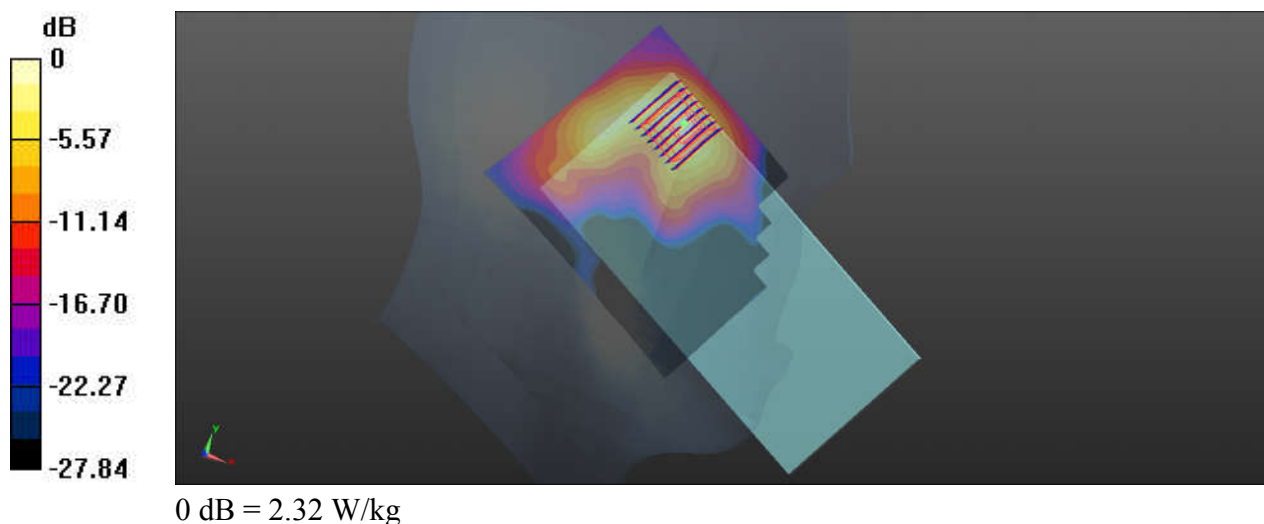

**27\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Left Cheek\_Ch155**

Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.007  
Medium: HSL\_5750\_240413 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.202$  S/m;  $\epsilon_r = 35.804$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(4.87, 4.87, 4.87); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch155/Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.15 W/kg

**Ch155/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.03 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 8.40 W/kg

**SAR(1 g) = 0.835 W/kg; SAR(10 g) = 0.281 W/kg**

Maximum value of SAR (measured) = 2.13 W/kg



**Ch155/Zoom Scan (8x8x7)/Cube 1:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 16.03 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.67 W/kg

**SAR(1 g) = 0.701 W/kg; SAR(10 g) = 0.237 W/kg**

Maximum value of SAR (measured) = 1.88 W/kg

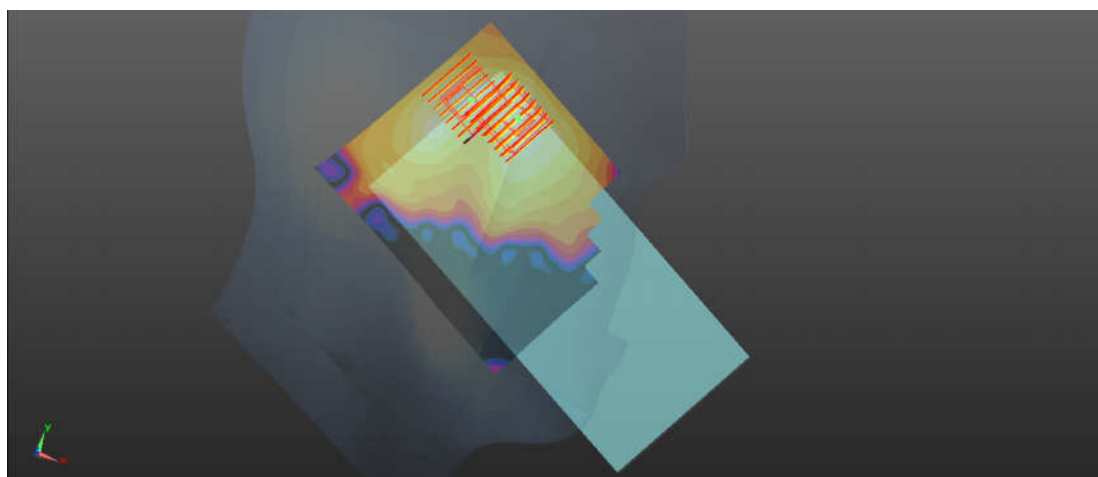

0 dB = 1.88 W/kg

Date: 2024/4/15

## 28\_WLAN6GHz\_802.11be-EHT320 MCS0\_Left Cheek\_Ch191

Communication System: U-NII-8; Frequency: 6905.0MHz; Duty Cycle: 1:1.012  
Medium: HSL Medium parameters used:  $f = 6905.0$  MHz;  $\sigma = 6.69$  S/m;  $\epsilon_r = 33.2$   
Ambient Temperature: 23.4°C; Liquid Temperature: 22.3°C

### DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.19, 5.07, 5.26); Calibrated: 2023-4-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1664; Calibrated: 2023-6-6
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: cDASY6 16.2.2.1588
- UID: WLAN, 10671-AAC

**Area Scan (119.0 mm x 204.0 mm):** Measurement Grid: 8.5 mm x 8.5 mm


SAR (1g) = 0.407 W/kg; SAR (10g) = 0.114 W/kg;

**Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.13 dB

SAR (1g) = 0.440 W/kg; SAR (10g) = 0.114 W/kg

psAPD (4.0cm<sup>2</sup>, sq) = 2.67 [W/m<sup>2</sup>]

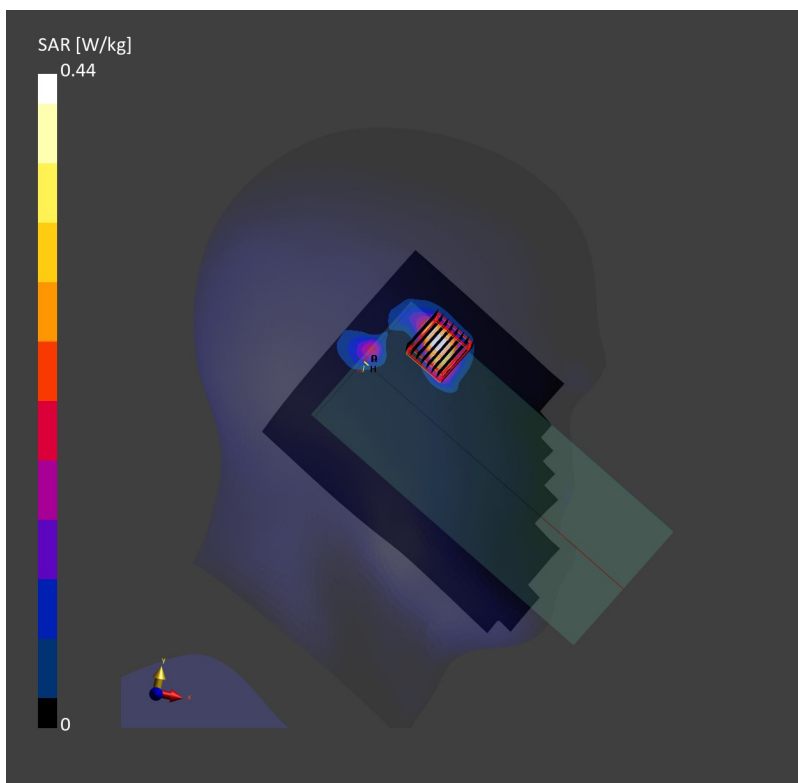

**29\_LTE Band 71\_20M\_QPSK\_1RB\_0Offset\_Left Side\_5mm\_Ch133297**

Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_240410 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.835$  S/m;  $\epsilon_r = 42.057$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch133297/Area Scan (41x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.888 W/kg


**Ch133297/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.74 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.23 W/kg

**SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.416 W/kg**

Maximum value of SAR (measured) = 0.882 W/kg

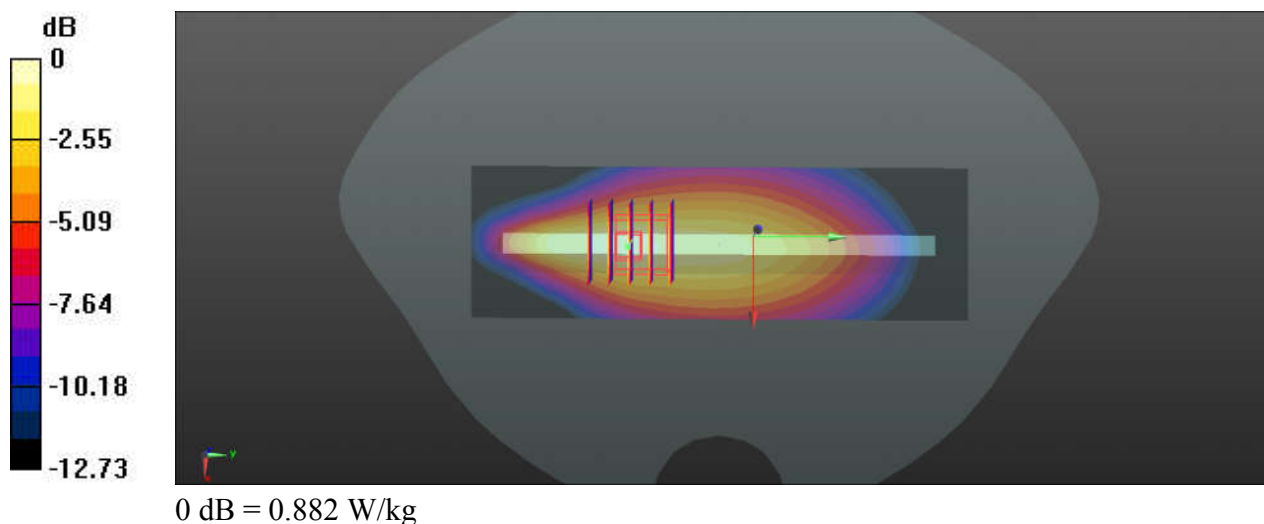

**30\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Left Side\_5mm\_Ch23095**

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_240410 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 41.609$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17

- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23095/Area Scan (41x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.887 W/kg


**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.89 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.24 W/kg

**SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.404 W/kg**

Maximum value of SAR (measured) = 0.879 W/kg

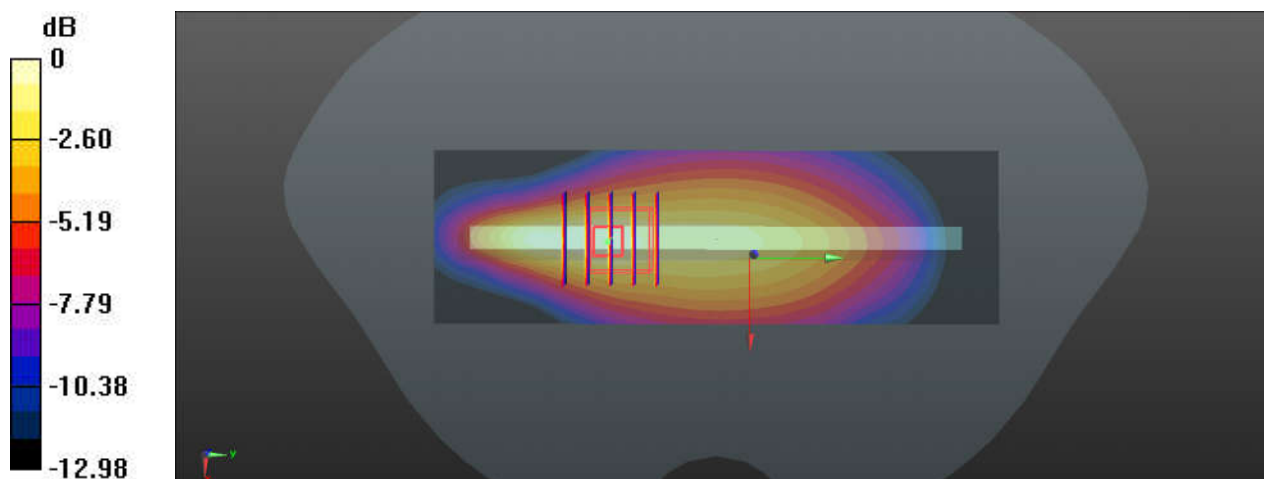

0 dB = 0.879 W/kg

**31\_LTE Band 13\_10M\_QPSK\_1RB\_49Offset\_Back\_5mm\_Ch23230**

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_240410 Medium parameters used:  $f = 782$  MHz;  $\sigma = 0.897$  S/m;  $\epsilon_r = 39.943$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23230/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.787 W/kg


**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.39 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.355 W/kg**

Maximum value of SAR (measured) = 0.811 W/kg

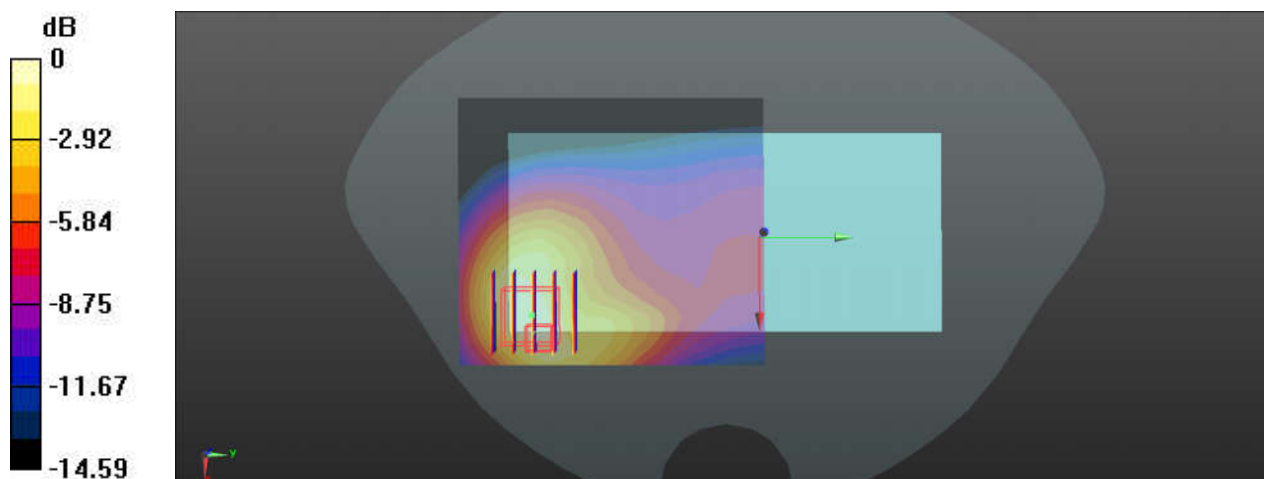

0 dB = 0.811 W/kg

**32\_FR1 n71\_20M\_QPSK\_50RB\_28Offset\_DFT-15\_Left Side\_5mm\_Ch136100**


Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_240410 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.835$  S/m;  $\epsilon_r = 42.057$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch136100/Area Scan (41x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.700 W/kg

**Ch136100/Zoom Scan (5x6x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 26.10 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 0.962 W/kg  
**SAR(1 g) = 0.552 W/kg; SAR(10 g) = 0.336 W/kg**  
Maximum value of SAR (measured) = 0.699 W/kg

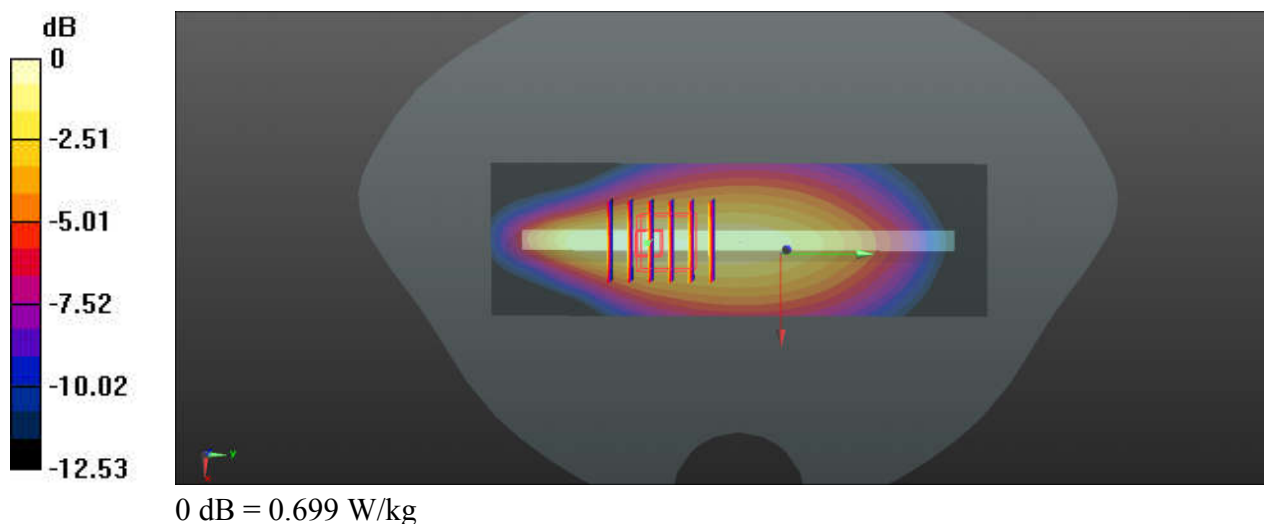

### 33\_CDMA BC0\_RC3 S032(+ F-SCH)\_Back\_5mm\_Ch1013


Communication System: UID 0, CDMA2000 (0); Frequency: 824.7 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240409 Medium parameters used:  $f = 825$  MHz;  $\sigma = 0.942$  S/m;  $\epsilon_r = 43.18$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch1013/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.935 W/kg

**Ch1013/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 11.23 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 1.40 W/kg  
**SAR(1 g) = 0.753 W/kg; SAR(10 g) = 0.440 W/kg**  
Maximum value of SAR (measured) = 0.956 W/kg

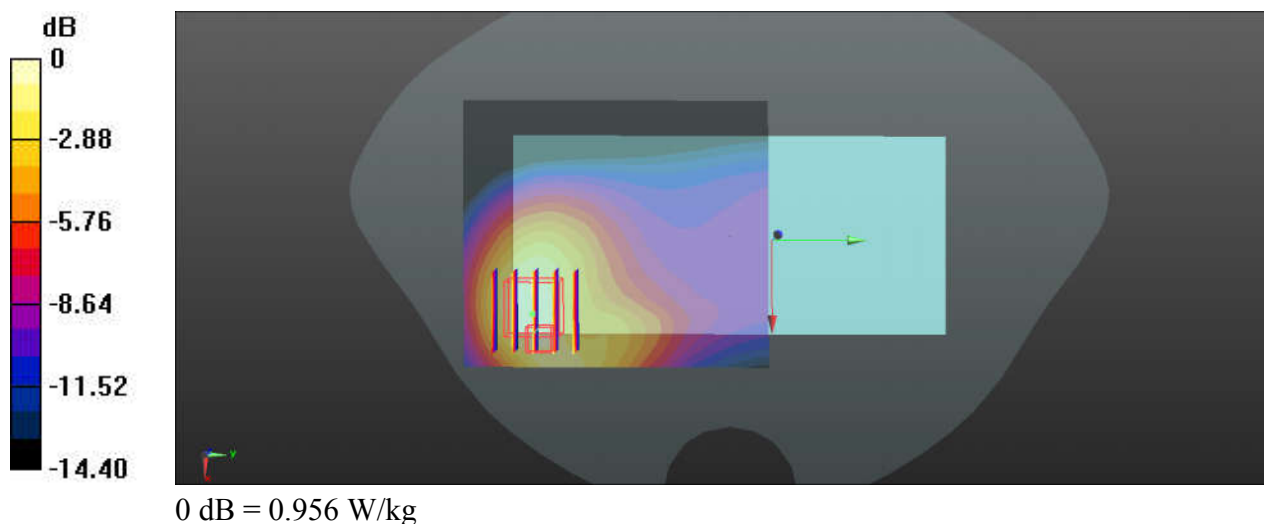

### 34\_GSM850\_GPRS (3 Tx slots)\_Back\_5mm\_Ch189


Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 836.4 MHz; Duty Cycle: 1:2.77  
Medium: HSL\_835\_240409 Medium parameters used:  $f = 836.4$  MHz;  $\sigma = 0.947$  S/m;  $\epsilon_r = 43.15$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch189/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.543 W/kg

**Ch189/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 8.091 V/m; Power Drift = 0.01 dB  
Peak SAR (extrapolated) = 0.955 W/kg  
**SAR(1 g) = 0.493 W/kg; SAR(10 g) = 0.263 W/kg**  
Maximum value of SAR (measured) = 0.650 W/kg

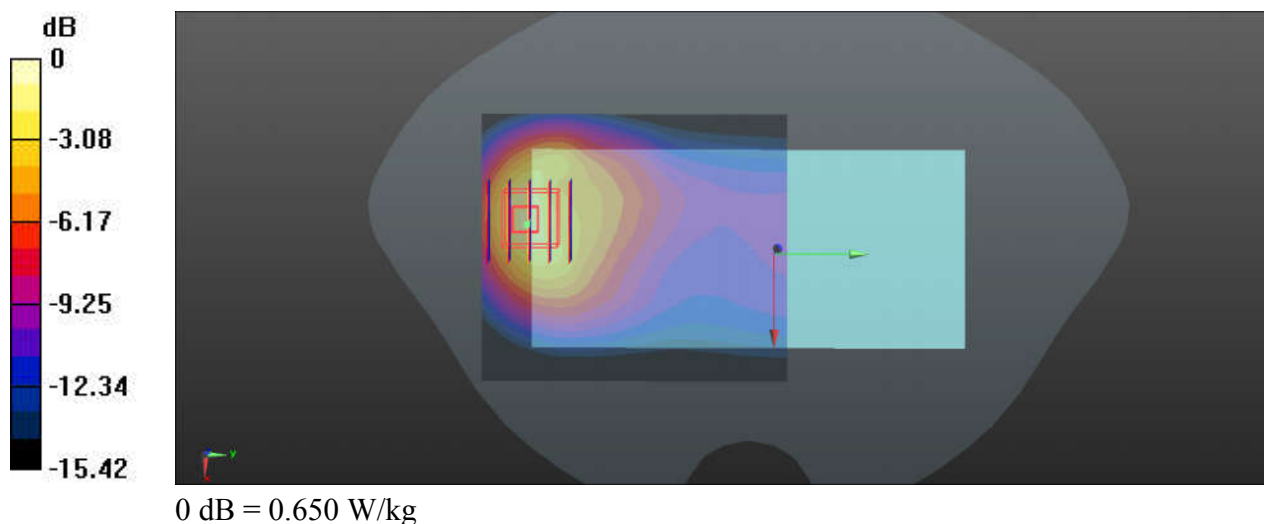

### 35\_WCDMA V\_RMC 12.2Kbps\_Back\_5mm\_Ch4132


Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_835\_240409 Medium parameters used:  $f = 826.4$  MHz;  $\sigma = 0.943$  S/m;  $\epsilon_r = 43.178$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2°C; Liquid Temperature : 22.4 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch4132/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.854 W/kg

**Ch4132/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 16.67 V/m; Power Drift = -0.03 dB  
Peak SAR (extrapolated) = 1.24 W/kg  
**SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.377 W/kg**  
Maximum value of SAR (measured) = 0.832 W/kg

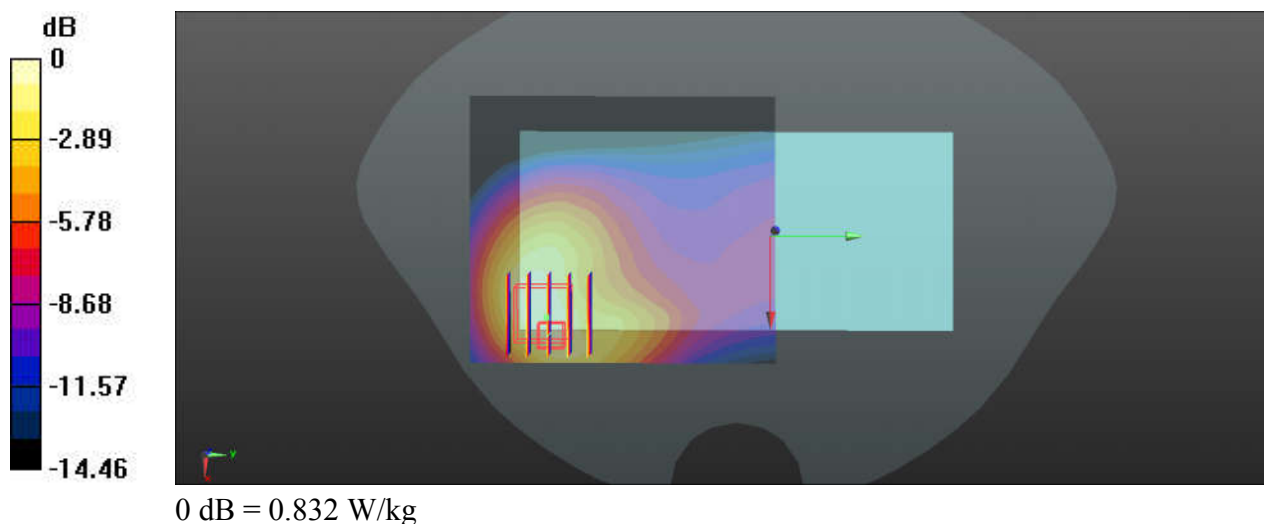

**36\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch26965**

Communication System: UID 0, LTE (0); Frequency: 841.5 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_240409 Medium parameters used:  $f = 841.5$  MHz;  $\sigma = 0.949$  S/m;  $\epsilon_r = 43.137$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch26965/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.916 W/kg


**Ch26965/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.53 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.31 W/kg

**SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.427 W/kg**

Maximum value of SAR (measured) = 0.898 W/kg

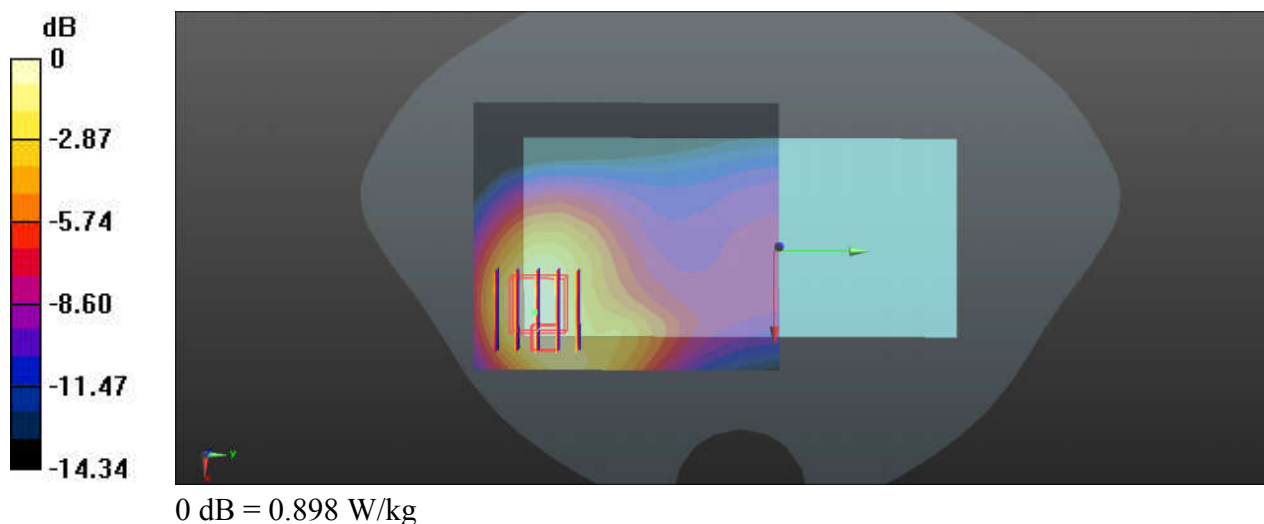

**37\_FR1 n26\_20M\_QPSK\_1RB\_1Offset\_DFT-15\_Back\_5mm\_Ch166300**

Communication System: UID 0, 5G NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_240409 Medium parameters used:  $f = 832$  MHz;  $\sigma = 0.941$  S/m;  $\epsilon_r = 41.963$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.32, 10.32, 10.32); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch166300/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.09 W/kg


**Ch166300/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.23 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.36 W/kg

**SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.361 W/kg**

Maximum value of SAR (measured) = 1.11 W/kg

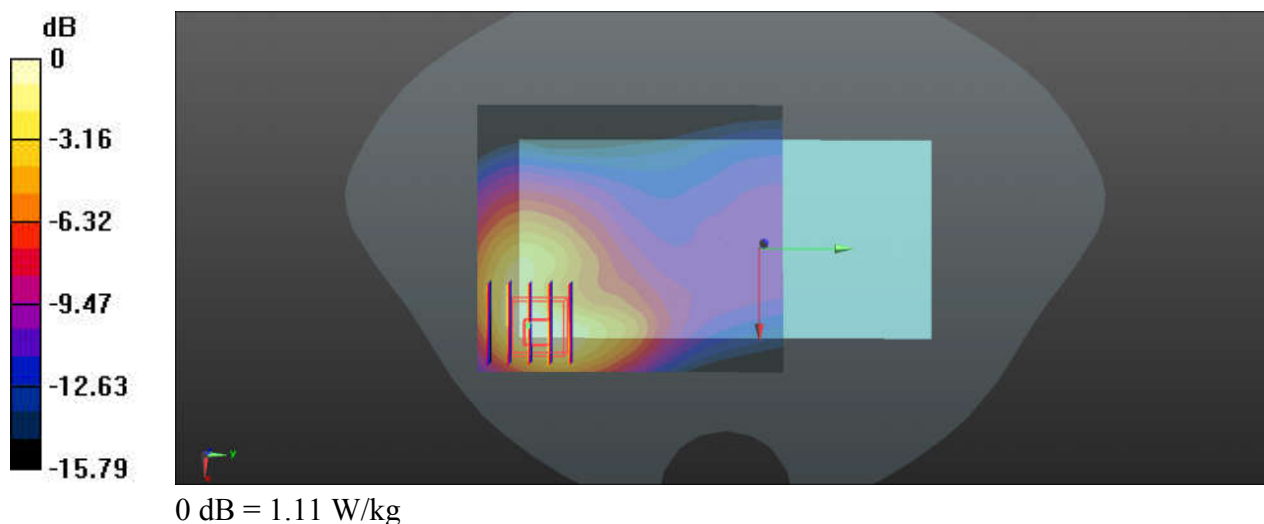

### 38\_WCDMA IV\_RMC 12.2Kbps\_Left Side\_5mm\_Ch1513


Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium: HSL\_1750\_240406 Medium parameters used:  $f = 1753$  MHz;  $\sigma = 1.377$  S/m;  $\epsilon_r = 40.528$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.2 °C

#### DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch1513/Area Scan (51x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.10 W/kg

**Ch1513/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 1.143 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 2.20 W/kg  
**SAR(1 g) = 0.971 W/kg; SAR(10 g) = 0.427 W/kg**  
Maximum value of SAR (measured) = 1.31 W/kg

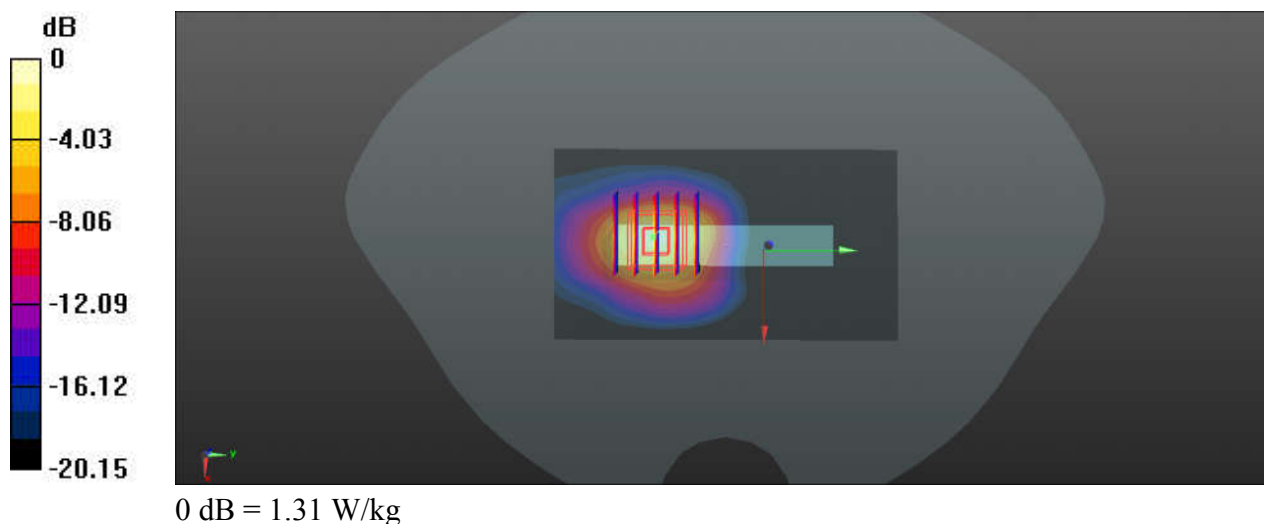

**39\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Left Side\_5mm\_Ch132072**

Communication System: UID 0, LTE (0); Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_240406 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.356$  S/m;  $\epsilon_r = 40.593$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch132072/Area Scan (41x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.50 W/kg


**Ch132072/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.132 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 2.29 W/kg

**SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.465 W/kg**

Maximum value of SAR (measured) = 1.46 W/kg

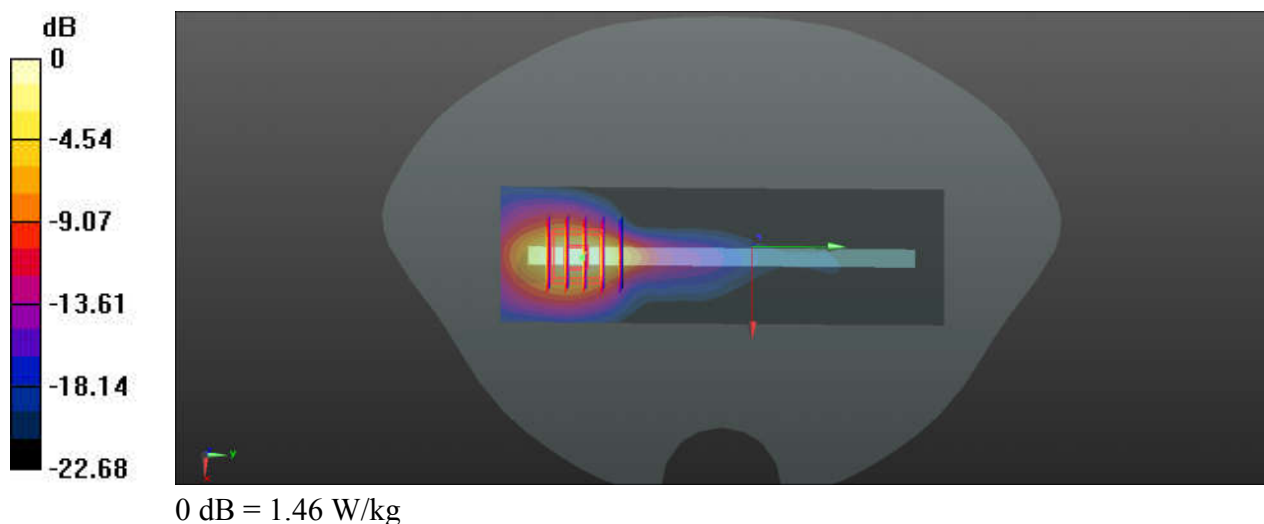

**40\_FR1 n66\_40M\_QPSK\_1RB\_1Offset\_DFT-15\_Left Side\_5mm\_Ch349000**

Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL\_1750\_240406 Medium parameters used:  $f = 1745$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 40.544$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(9.07, 9.07, 9.07); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch349000/Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.36 W/kg


**Ch349000/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.81 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.93 W/kg

**SAR(1 g) = 0.946 W/kg; SAR(10 g) = 0.447 W/kg**

Maximum value of SAR (measured) = 1.27 W/kg

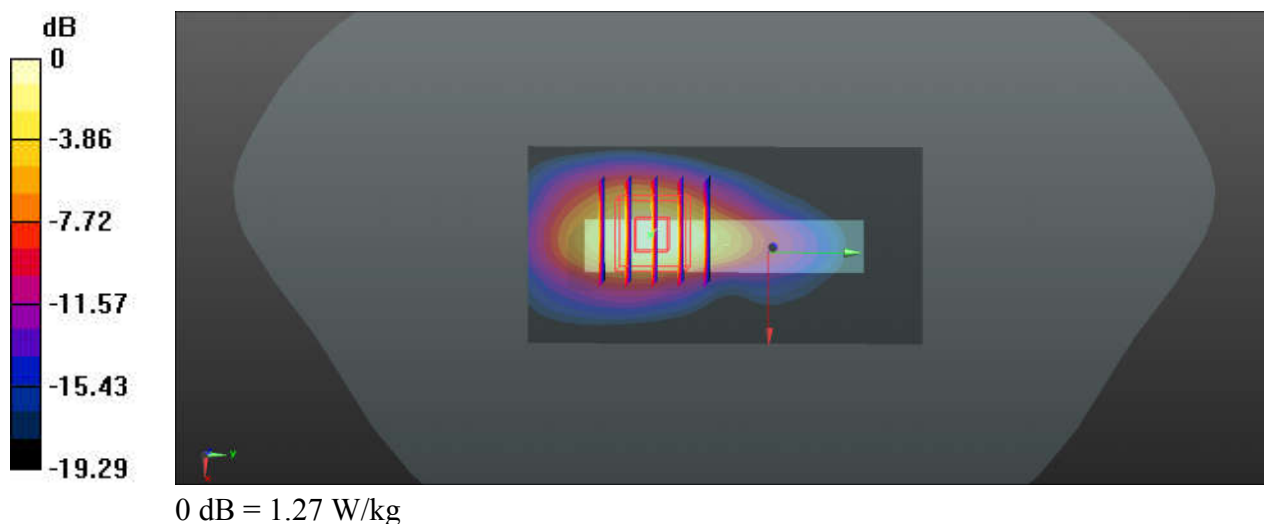

**41\_GSM1900\_GPRS (3 Tx slots)\_Left Side\_5mm\_Ch810**

Communication System: UID 0, GPRS/EDGE11 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.77  
Medium: HSL\_1900\_240407 Medium parameters used:  $f = 1910$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 39.246$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch810/Area Scan (51x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.890 W/kg


**Ch810/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.62 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.48 W/kg

**SAR(1 g) = 0.698 W/kg; SAR(10 g) = 0.307 W/kg**

Maximum value of SAR (measured) = 0.986 W/kg

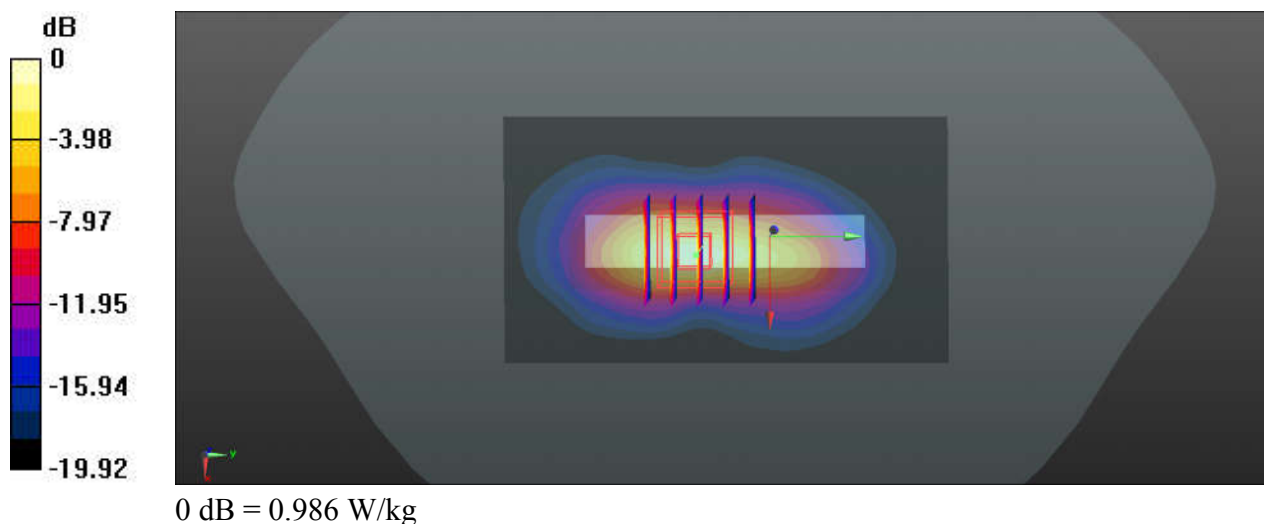

**42\_WCDMA II\_RMC 12.2Kbps\_Left Side\_5mm\_Ch9262**


Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240407 Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.359$  S/m;  $\epsilon_r = 39.501$ ;  $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch9262/Area Scan (41x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.37 W/kg

**Ch9262/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 1.500 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 1.98 W/kg  
**SAR(1 g) = 0.938 W/kg; SAR(10 g) = 0.432 W/kg**  
Maximum value of SAR (measured) = 1.26 W/kg

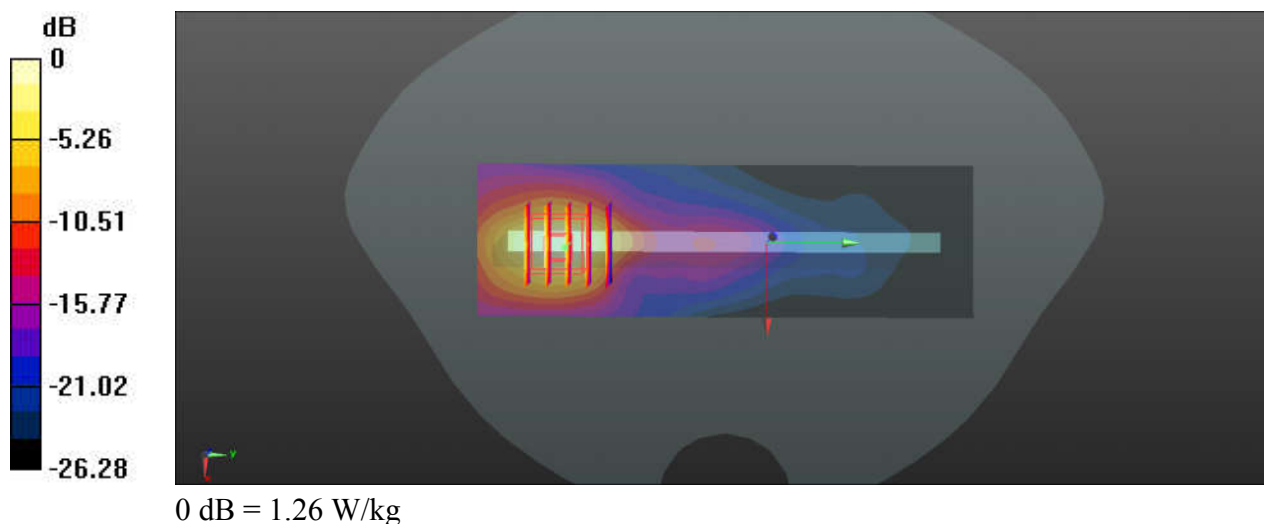

**43\_LTE Band 2\_20M\_QPSK\_1RB\_0Offset\_Left Side\_5mm\_Ch18900**

Communication System: UID 0, LTE (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_240407 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.385$  S/m;  $\epsilon_r = 39.388$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch18900/Area Scan (41x131x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.57 W/kg


**Ch18900/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.026 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.39 W/kg

**SAR(1 g) = 1 W/kg; SAR(10 g) = 0.518 W/kg**

Maximum value of SAR (measured) = 1.53 W/kg

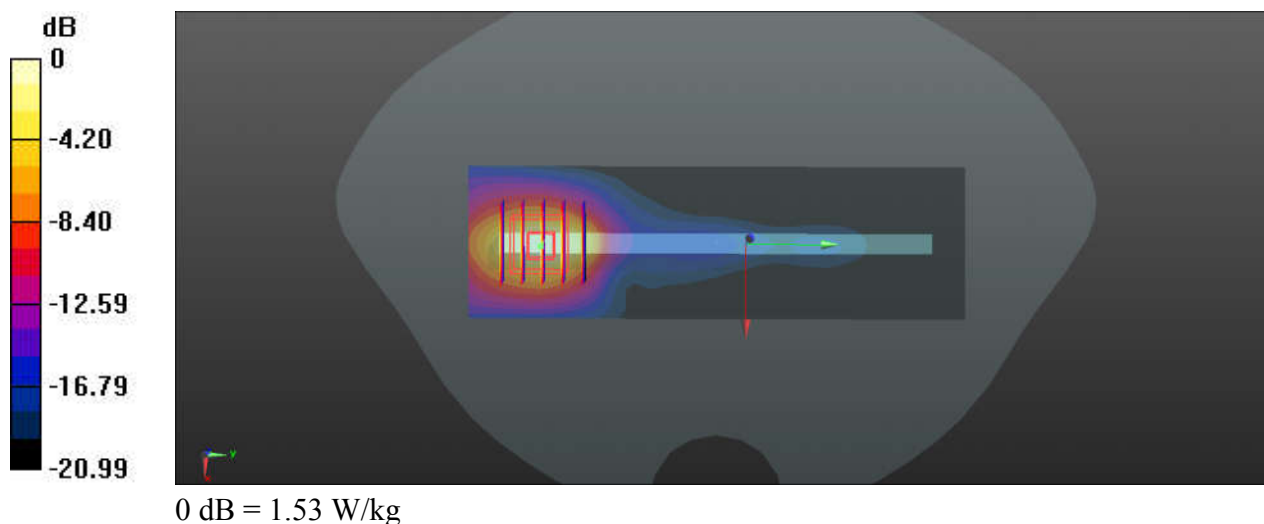

**44\_FR1 n2\_40M\_QPSK\_1RB\_1Offset\_DFT-15\_Bottom Side\_5mm\_Ch376000**


Communication System: UID 0, 5G NR (0); Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium: HSL\_1900\_240407 Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.385$  S/m;  $\epsilon_r = 39.388$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(8.69, 8.69, 8.69); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch376000/Area Scan (41x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.15 W/kg

**Ch376000/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 18.02 V/m; Power Drift = 0.03 dB  
Peak SAR (extrapolated) = 2.45 W/kg  
**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.428 W/kg**  
Maximum value of SAR (measured) = 1.62 W/kg

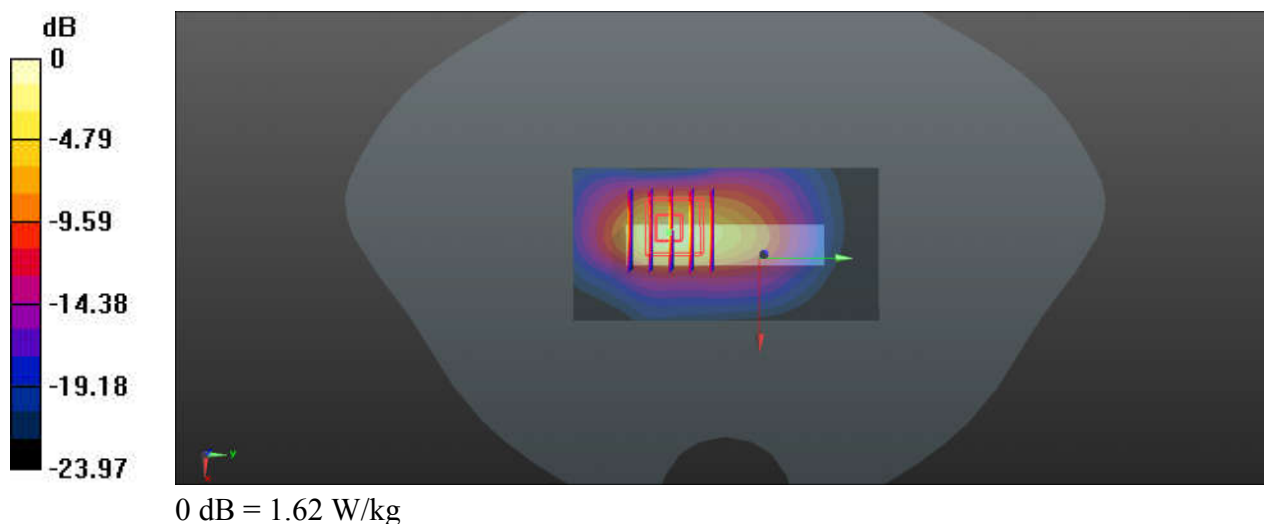

**45\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_5mm\_Ch20850**

Communication System: UID 0, LTE (0); Frequency: 2510 MHz; Duty Cycle: 1:1

Medium: HSL\_2600\_240414 Medium parameters used:  $f = 2510$  MHz;  $\sigma = 1.823$  S/m;  $\epsilon_r = 37.799$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch20850/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.83 W/kg


**Ch20850/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.02 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 2.60 W/kg

**SAR(1 g) = 0.930 W/kg; SAR(10 g) = 0.376 W/kg**

Maximum value of SAR (measured) = 1.93 W/kg

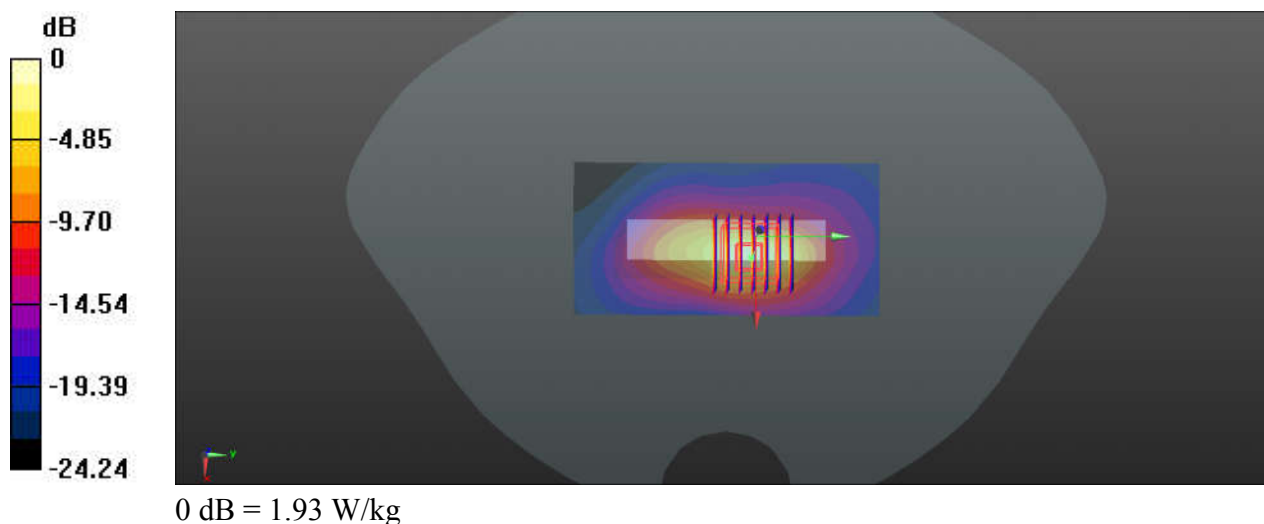

**46\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Top Side\_5mm\_Ch41490**

Communication System: UID 0, LTE (0); Frequency: 2680 MHz; Duty Cycle: 1:2.331

Medium: HSL\_2600\_240414 Medium parameters used:  $f = 2680$  MHz;  $\sigma = 1.96$  S/m;  $\epsilon_r = 37.516$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch41490/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.71 W/kg


**Ch41490/Zoom Scan (7x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 14.41 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.76 W/kg

**SAR(1 g) = 0.980 W/kg; SAR(10 g) = 0.362 W/kg**

Maximum value of SAR (measured) = 1.96 W/kg

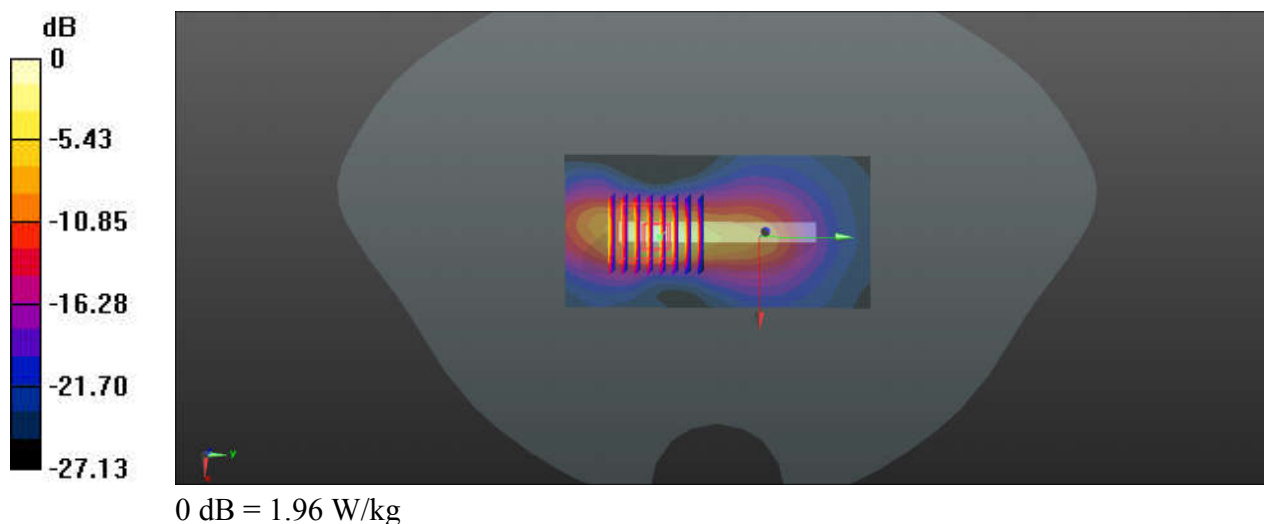

**47\_FR1 n7\_40M\_QPSK\_108RB\_54Offset\_DFT-15\_Bottom Side\_5mm\_Ch507000**


Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240414 Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.846$  S/m;  $\epsilon_r = 37.753$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch507000/Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.89 W/kg

**Ch507000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 17.71 V/m; Power Drift = 0.08 dB  
Peak SAR (extrapolated) = 2.65 W/kg  
**SAR(1 g) = 0.970 W/kg; SAR(10 g) = 0.394 W/kg**  
Maximum value of SAR (measured) = 1.97 W/kg

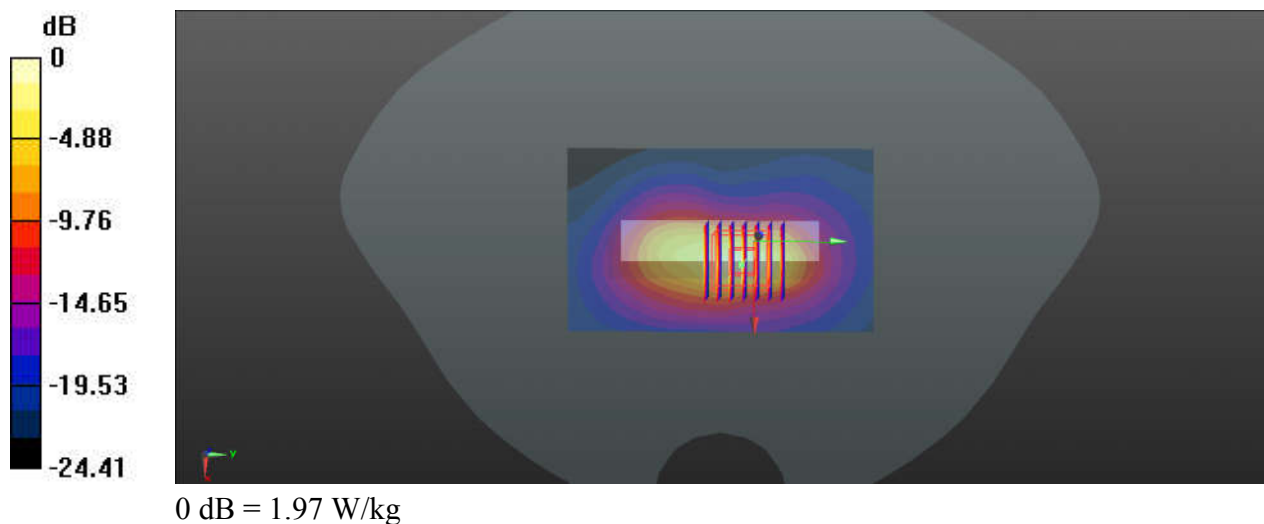

**48\_FR1 n41\_100M\_QPSK\_135RB\_69Offset\_DFT-30\_Back\_5mm\_Ch518598**


Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1  
Medium: HSL\_2600\_240414 Medium parameters used:  $f = 2593$  MHz;  $\sigma = 1.891$  S/m;  $\epsilon_r = 37.673$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(7.89, 7.89, 7.89); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch518598/Area Scan (91x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm  
Maximum value of SAR (interpolated) = 1.96 W/kg

**Ch518598/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 5.971 V/m; Power Drift = 0 dB  
Peak SAR (extrapolated) = 2.67 W/kg  
**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.446 W/kg**  
Maximum value of SAR (measured) = 2.04 W/kg

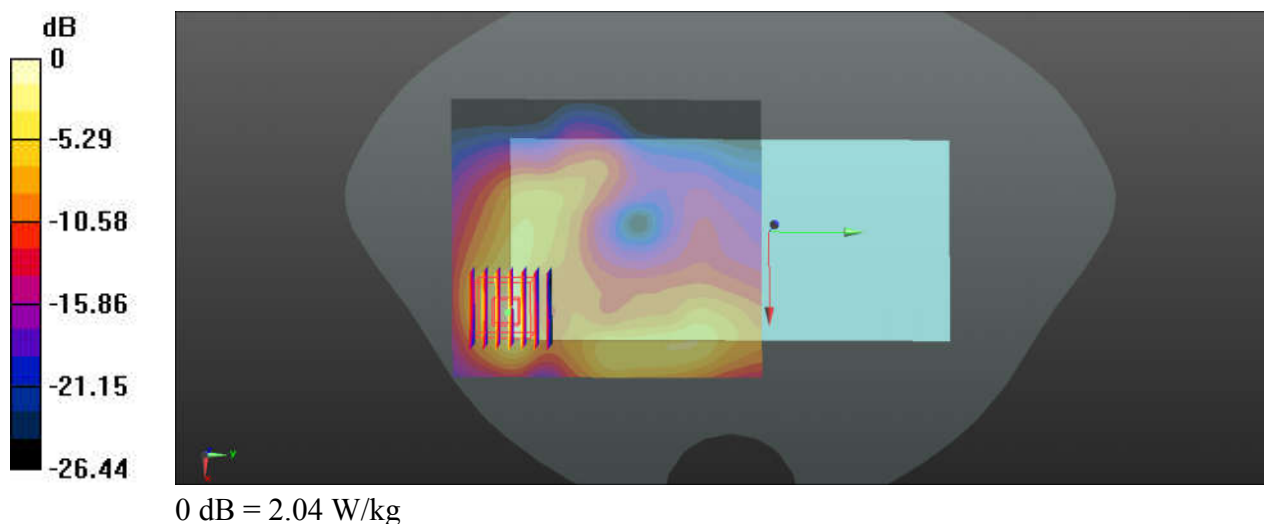

**49\_ LTE Band 42\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_5mm\_Ch42190**

Communication System: UID 0, LTE (0); Frequency: 3460 MHz; Duty Cycle: 1:1.59

Medium: HSL\_3500\_240404 Medium parameters used:  $f = 3460$  MHz;  $\sigma = 2.827$  S/m;  $\epsilon_r = 38.471$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.1 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(6.76, 6.76, 6.76); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch42190/Area Scan (61x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.81 W/kg


**Ch42190/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 12.40 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 2.99 W/kg

**SAR(1 g) = 0.840 W/kg; SAR(10 g) = 0.249 W/kg**

Maximum value of SAR (measured) = 1.88 W/kg

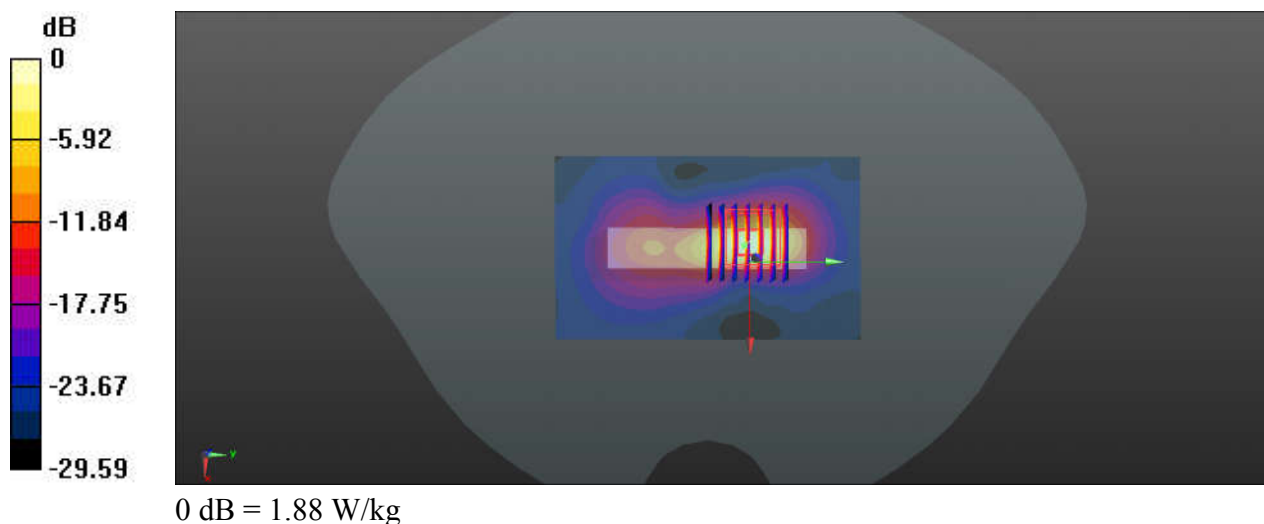

**50\_FR1 n77\_100M\_QPSK\_1RB\_1Offset\_DFT-30\_Top Side\_5mm\_Ch656000**

Communication System: UID 0, 5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL\_3900\_240403 Medium parameters used:  $f = 3840$  MHz;  $\sigma = 3.12$  S/m;  $\epsilon_r = 38.054$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(6.53, 6.53, 6.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch656000/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.51 W/kg


**Ch656000/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=1.4mm

Reference Value = 8.276 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 2.59 W/kg

**SAR(1 g) = 0.813 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 1.75 W/kg

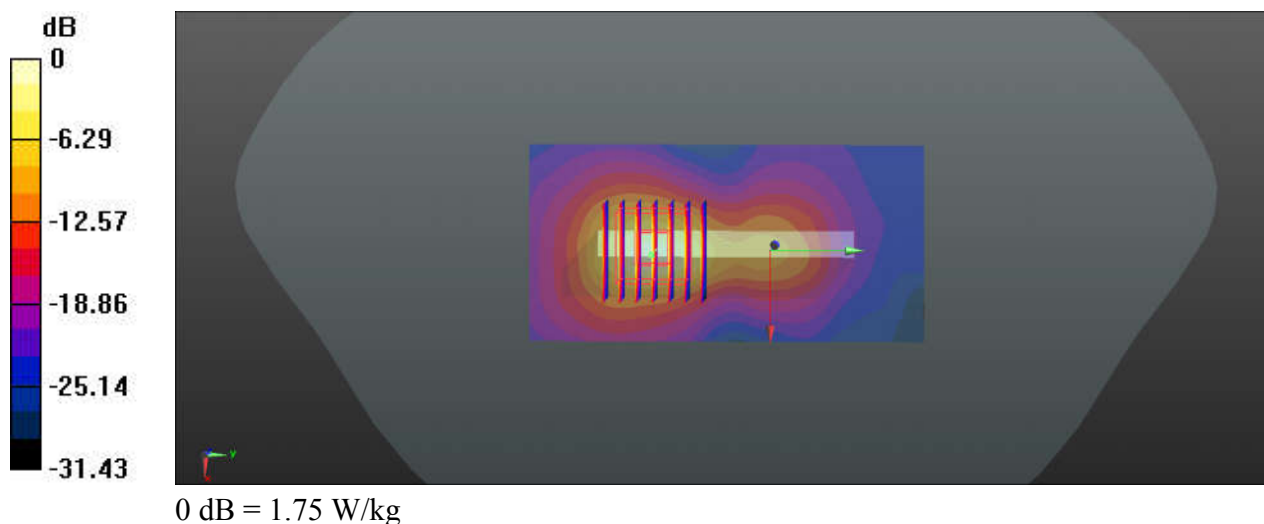

**51\_Bluetooth\_DH5 1Mbps\_Right Side\_5mm\_Ch39**

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.298  
Medium: HSL\_2450\_240405 Medium parameters used:  $f = 2441$  MHz;  $\sigma = 1.774$  S/m;  $\epsilon_r = 37.875$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch39/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.46 W/kg


**Ch39/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 11.70 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.60 W/kg

**SAR(1 g) = 0.638 W/kg; SAR(10 g) = 0.242 W/kg**

Maximum value of SAR (measured) = 1.22 W/kg

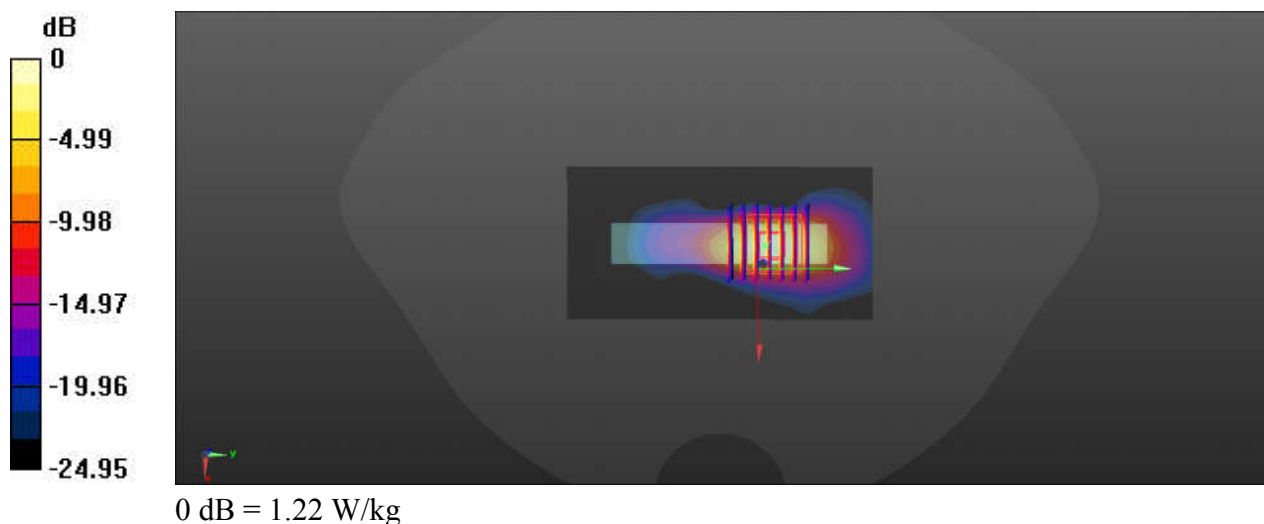

**52\_WLAN2.4GHz\_802.11b 1Mbps\_Right Side\_5mm\_Ch11**

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1.015  
Medium: HSL\_2450\_240405 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.824$  S/m;  $\epsilon_r = 37.585$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(8.13, 8.13, 8.13); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch11/Area Scan (51x101x1):** Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.66 W/kg


**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.58 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 2.14 W/kg

**SAR(1 g) = 0.829 W/kg; SAR(10 g) = 0.330 W/kg**

Maximum value of SAR (measured) = 1.58 W/kg

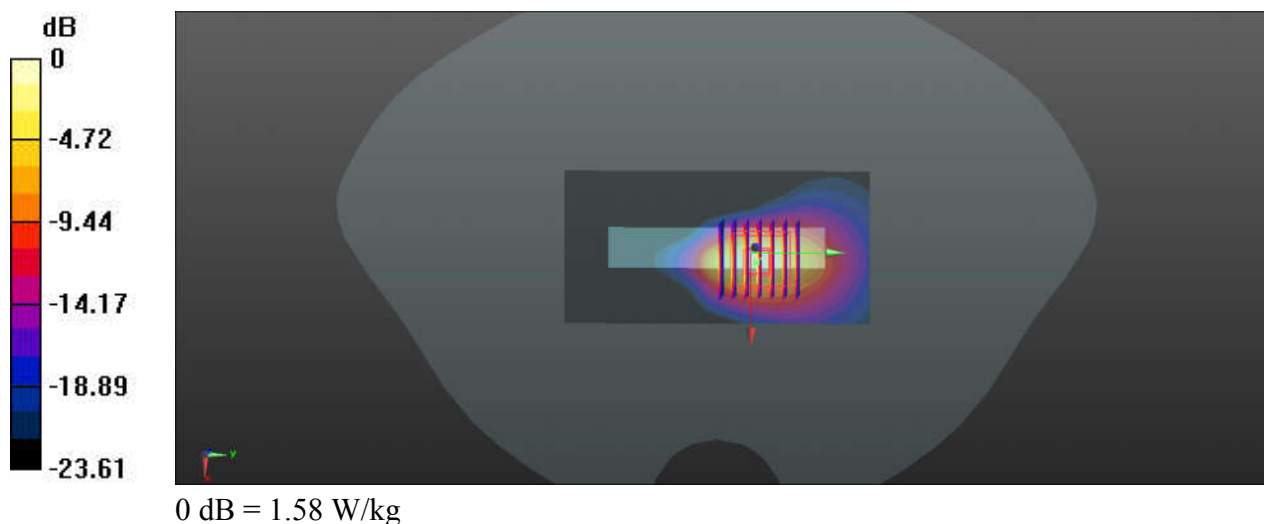

**53\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Side\_5mm\_Ch42**

Communication System: UID 0, WIFI (0); Frequency: 5210 MHz; Duty Cycle: 1:1.007  
Medium: HSL\_5250\_240411 Medium parameters used:  $f = 5210$  MHz;  $\sigma = 4.553$  S/m;  $\epsilon_r = 36.681$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.2 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(5.31, 5.31, 5.31); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch42/Area Scan (51x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.92 W/kg


**Ch42/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.95 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 3.46 W/kg

**SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.257 W/kg**

Maximum value of SAR (measured) = 1.87 W/kg

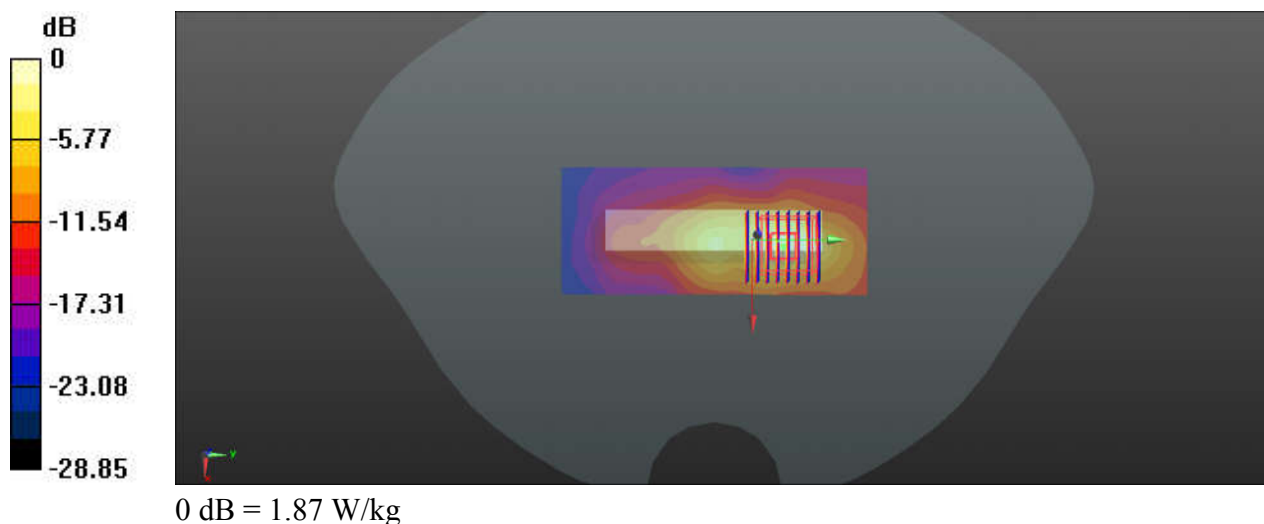

**54\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Side\_5mm\_Ch155**


Communication System: UID 0, WIFI (0); Frequency: 5775 MHz; Duty Cycle: 1:1.007  
Medium: HSL\_5750\_240413 Medium parameters used:  $f = 5775$  MHz;  $\sigma = 5.202$  S/m;  $\epsilon_r = 35.804$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(4.87, 4.87, 4.87); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch155/Area Scan (51x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 2.14 W/kg

**Ch155/Zoom Scan (9x9x7)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=1.4mm  
Reference Value = 10.35 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 4.56 W/kg  
**SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.255 W/kg**  
Maximum value of SAR (measured) = 2.25 W/kg

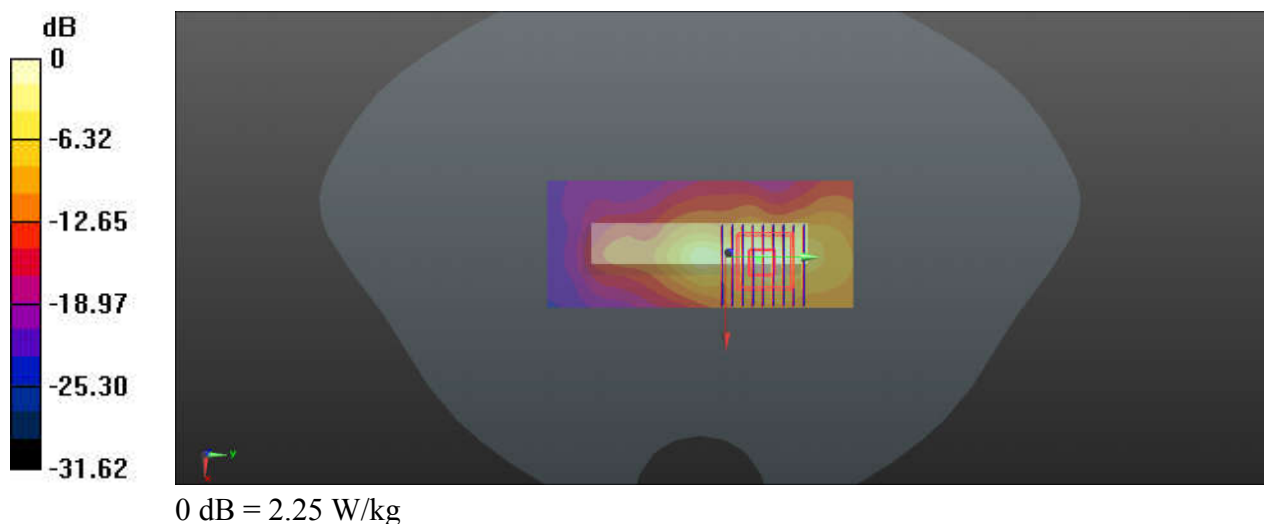

**55\_LTE Band 71\_20M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch133297**


Communication System: UID 0, LTE (0); Frequency: 680.5 MHz; Duty Cycle: 1:1  
Medium: HSL\_750\_240410 Medium parameters used:  $f = 680.5$  MHz;  $\sigma = 0.835$  S/m;  $\epsilon_r = 42.057$ ;  
 $\rho = 1000$  kg/m<sup>3</sup>  
Ambient Temperature : 23.2 °C; Liquid Temperature : 22.1 °C

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch133297/Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.556 W/kg

**Ch133297/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 1.495 V/m; Power Drift = 0.06 dB  
Peak SAR (extrapolated) = 0.874 W/kg  
**SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.240 W/kg**  
Maximum value of SAR (measured) = 0.565 W/kg

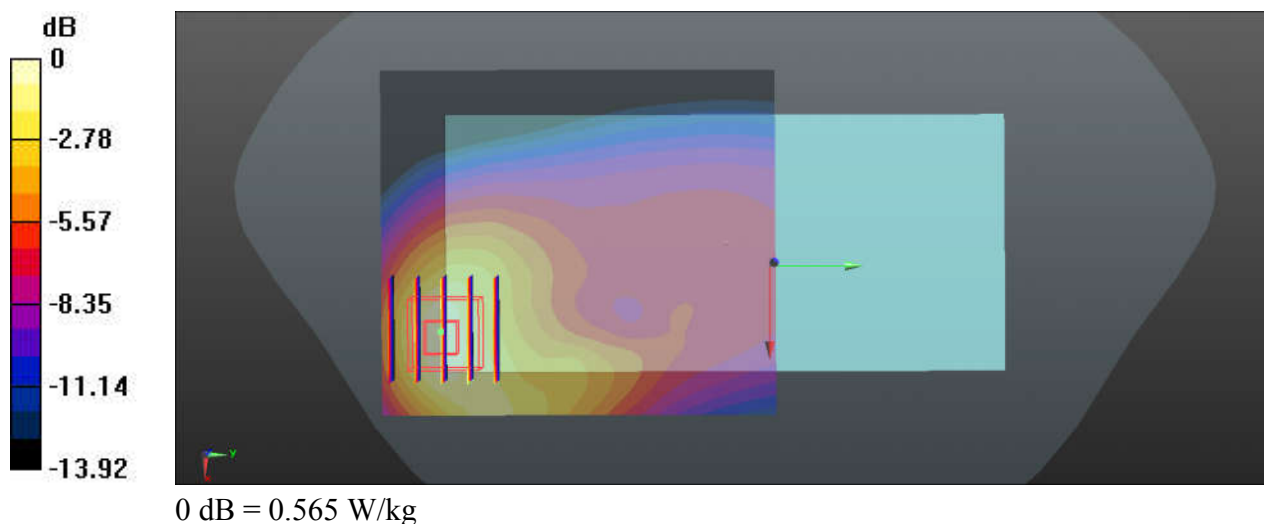

**56\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch23095**

Communication System: UID 0, LTE (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_240410 Medium parameters used:  $f = 707.5$  MHz;  $\sigma = 0.856$  S/m;  $\epsilon_r = 41.609$ ;

$\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23

- Sensor-Surface: 1.4mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17

- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671

- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23095/Area Scan (81x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.585 W/kg


**Ch23095/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.85 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.870 W/kg

**SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.273 W/kg**

Maximum value of SAR (measured) = 0.598 W/kg

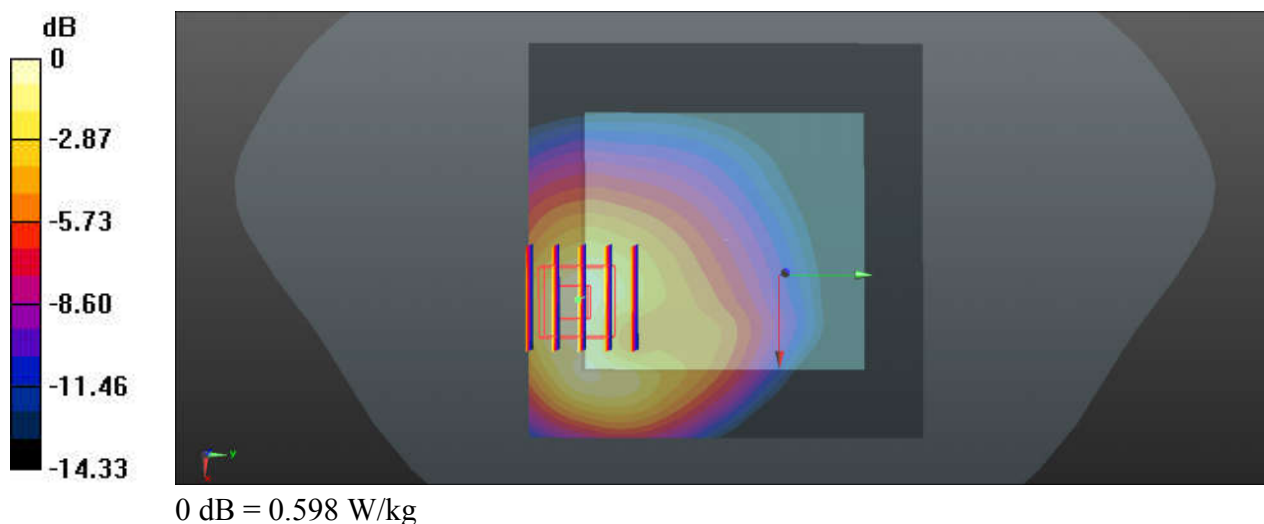

**57\_LTE Band 13\_10M\_QPSK\_1RB\_49Offset\_Back\_5mm\_Ch23230**

Communication System: UID 0, LTE (0); Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL\_750\_240410 Medium parameters used:  $f = 782 \text{ MHz}$ ;  $\sigma = 0.897 \text{ S/m}$ ;  $\epsilon_r = 39.943$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature :  $23.2 \text{ }^\circ\text{C}$ ; Liquid Temperature :  $22.1 \text{ }^\circ\text{C}$

**DASY5 Configuration:**

- Probe: EX3DV4 - SN7576; ConvF(10.53, 10.53, 10.53); Calibrated: 2023/8/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2023/7/17
- Phantom: SAM with CRP v5.0(Front); Type: QD000P40CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

**Ch23230/Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.787 \text{ W/kg}$

**Ch23230/Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $12.39 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$

Peak SAR (extrapolated) =  $1.19 \text{ W/kg}$

**SAR(1 g) =  $0.628 \text{ W/kg}$ ; SAR(10 g) =  $0.355 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.811 \text{ W/kg}$

