



# FCC TEST REPORT

## Client Information:

Applicant: DONGGUAN GCELL ELECTRONICS CO LTD  
Applicant add.: Room 301, Building 2, No.56, Shunye street, Qingxi town, Dongguan city, Guangdong province, P. R. China  
Manufacturer: DONGGUAN GCELL ELECTRONICS CO LTD  
Manufacturer add.: Room 301, Building 2, No.56, Shunye street, Qingxi town, Dongguan city, Guangdong province, P. R. China

## Product Information:

Product Name: Power Bank  
Model No.: 715209, 5MWC-12/2083  
Brand Name: N/A  
FCC ID: 2BBTQ-715209

Applicable standards: FCC Rules and Regulations part 2.1091  
KDB680106 D01v03

## Prepared By:

### Dongguan Yaxu (AiT) Technology Limited

No.22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan,  
Guangdong, China

Tel.: +86-769-8202 0499 Fax.: +86-769-8202 0495

Date of Receipt: June 21, 2023

Date of Test: June 21~ June 28, 2023

Date of Issue: June 29, 2023

Test Result: Pass

This device described above has been tested by Dongguan Yaxu (AiT) Technology Limited and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

Note: This report shall not be reproduced except in full, without the written approval of Dongguan Yaxu (AiT) Technology Limited, this document may be altered or revised by Dongguan Yaxu (AiT) Technology Limited, personal only, and shall be noted in the revision of the document. This test report must not be used by the client to claim product endorsement.

Reviewed by: Simba Huang  
Simba Huang

Approved by:

Seal.chen  
Seal.chen

## Contents

<b><u>1</u></b>	<b><u>TEST FACILITY .....</u></b>	<b><u>3</u></b>
1.1	Deviation from standard	3
1.2	Abnormalities from standard conditions	3
1.3	Test Location	3
1.4	Environmental conditions	3
<b><u>2</u></b>	<b><u>GENERAL INFORMATION .....</u></b>	<b><u>4</u></b>
2.1	Product Description	4
2.2	Description of the test mode	5
2.3	Special Accessories	5
2.4	Summary of measurement results	6
2.5	Statement of the measurement uncertainty	6
2.6	Equipments Used during the Test	6
<b><u>3</u></b>	<b><u>TEST CONDITIONS AND RESULTS .....</u></b>	<b><u>7</u></b>
3.1	Applicable Standard	7
3.2	Limit	7
3.3	Test Setup	8
3.4	Measurement Procedure	8
3.5	Test Result of E and H field Strength	8
3.6	Conclusion	10
<b><u>4</u></b>	<b><u>TEST SETUP PHOTOS OF THE EUT .....</u></b>	<b><u>11</u></b>

## 1 Test Facility

**The test facility is recognized, certified or accredited by the following organizations:**

**.CNAS- Registration No: L6177**

Dongguan Yaxu (AiT) technology Limited is accredited to ISO/IEC 17025:2017 general Requirements for the competence of testing and calibration laboratories (CNAS-CL01 Accreditation Criteria for the competence of testing and calibration laboratories) on April 18, 2022

**FCC-Registration No.: 703111 Designation Number: CN1313**

Dongguan Yaxu (AiT) technology Limited has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files.

**IC —Registration No.: 6819A CAB identifier: CN0122**

The 3m Semi-anechoic chamber of Dongguan Yaxu (AiT) technology Limited has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 6819A

**A2LA-Lab Cert. No.: 6317.01**

Dongguan Yaxu (AiT) technology Limited has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2017 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

### 1.1 Deviation from standard

None

### 1.2 Abnormalities from standard conditions

None

### 1.3 Test Location

**Dongguan Yaxu (AiT) Technology Limited**

Address: No.22, Jinqianling 3rd Street, Jitigang, Huangjiang, Dongguan, Guangdong, China

Tel.: +86-769-8202 0499

Fax.: +86-769-8202 0495

### 1.4 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature:	15-35 ° C
Humidity:	30-60 %
Atmospheric pressure:	950-1050mbar

## 2 General Information

### 2.1 Product Description

EUT Name:	Power Bank
Model No:	715209
Serial Model:	5MWC-12/2083
Test sample(s) ID:	23062103
Sample(s) Status:	Engineer sample
Serial No.:	N/A
Operation frequency:	113kHz-205kHz
Modulation Technology:	ASK
Antenna Type:	loop coil Antenna
Antenna gain:	0dBi
Hardware version.:	N/A
Software version.:	N/A
Power supply:	Type-c Input:5V/3.0A,9V/2A Type-c Output:5V/3A,9V/2.22A,12V/1.67A Wireless output:5W,7.5W,10W,15W
Battery:	DC3.7V
Note:	For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

## 2.2 Description of the test mode

Equipment under test was operated during the measurement under the following conditions:

☒ Charging and communication mode

Test Mode	Description	Exposure conditions	
Mode 1	AC Adapter : Wireless charging (15W)+Load	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable	Record
Mode 2	AC Adapter : Wireless charging (10W) +Load	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable	Pre-tested
Mode 3	AC Adapter : Wireless charging (7.5W) +Load	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable	Pre-tested
Mode 4	AC Adapter : Wireless charging (5W) +Load	<input checked="" type="checkbox"/> Mobile <input type="checkbox"/> Portable	Pre-tested
Mode 5	Battery(Battery Level > 99%) : Wireless charging(15W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Record
Mode 6	Battery(Battery Level > 99%) : Wireless charging(10W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 7	Battery(Battery Level > 99%) : Wireless charging(7.5W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 8	Battery(Battery Level > 99%) : Wireless charging(5W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 9	Battery(Battery Level 50%) : Wireless charging(15W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 10	Battery(Battery Level 50%) : Wireless charging(10W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 11	Battery(Battery Level 50%) : Wireless charging(7.5W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 12	Battery(Battery Level 50%) : Wireless charging(5W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 13	Battery(Battery Level < 1%) : Wireless charging(15W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 14	Battery(Battery Level < 1%) : Wireless charging(10W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 15	Battery(Battery Level < 1%) : Wireless charging(7.5W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 16	Battery(Battery Level < 1%) : Wireless charging(5W)+Load	<input type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Mode 17	Test the EUT in idle mode.	<input checked="" type="checkbox"/> Mobile <input checked="" type="checkbox"/> Portable	Pre-tested
Note: All test modes were pre-tested, but we only recorded the worst case in this report.			

## 2.3 Special Accessories

Follow auxiliary equipment(s) test with EUT that provided by the manufacturer or laboratory is listed as follow:

Description	Manufacturer	Model	Technical Parameters	Certificate	Provided by
Mobile phone	XIAOMI	MI 11	/	FCC	laboratory

## 2.4 Summary of measurement results

Test Item	Result
Magnetic Field Strength (H) (A/m)	Compliant

## 2.5 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to CISPR 16 - 4 „Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements“ and is documented in the Shenzhen Global Test Service Co.,Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Test Item	Frequency Range	Measurement Uncertainty	Notes
Radiated Emission	0.009MHz-30MHz	3.10dB	(1)
Radiated Emission	30MHz-1GHz	3.75dB	(1)
Radiated Emission	1GHz-18GHz	3.88dB	(1)
Radiated Emission	18GHz-40GHz	3.88dB	(1)
AC Power Line Conducted Emission	0.15MHz ~ 30MHz	1.20dB	(1)

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

## 2.6 Equipments Used during the Test

Test Equipment	Manufacturer	Model No.	SN.	Cal.Date (mm-dd-yy)	Cal.Due date (mm-dd-yy)
Electric and Magnetic Field Analyzer	Narda	EHP-200A	180ZX10505	2022.06.21	2024.06.20

### 3 TEST CONDITIONS AND RESULTS

#### 3.1 Applicable Standard

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

According to §1.1310 and §2.1091 RF exposure is calculated.

**According KDB 680106 D01 RF Exposure Wireless Charging App v03**

#### 3.2 Limit

Limits for Maximum Permissible Exposure (MPE)/Controlled Exposure

Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	6
3.0 – 30	1842/f	4.89/f	(900/f)*	6
30 – 300	61.4	0.163	1.0	6
300 – 1500	/	/	f/300	6
1500 – 100,000	/	/	5	6

Limits for Maximum Permissible Exposure (MPE)/Uncontrolled Exposure


Frequency Range(MHz)	Electric Field Strength(V/m)	Magnetic Field Strength(A/m)	Power Density (mW/cm <sup>2</sup> )	Averaging Time (minute)
Limits for Occupational/Controlled Exposure				
0.3 – 3.0	614	1.63	(100) *	30
3.0 – 30	824/f	2.19/f	(180/f)*	30
30 – 300	27.5	0.073	0.2	30
300 – 1500	/	/	f/1500	30
1500 – 100,000	/	/	1.0	30

F=frequency in MHz

\*=Plane-wave equivalent power density

### 3.3 Test Setup

#### 1. Block diagram of EUT configuration

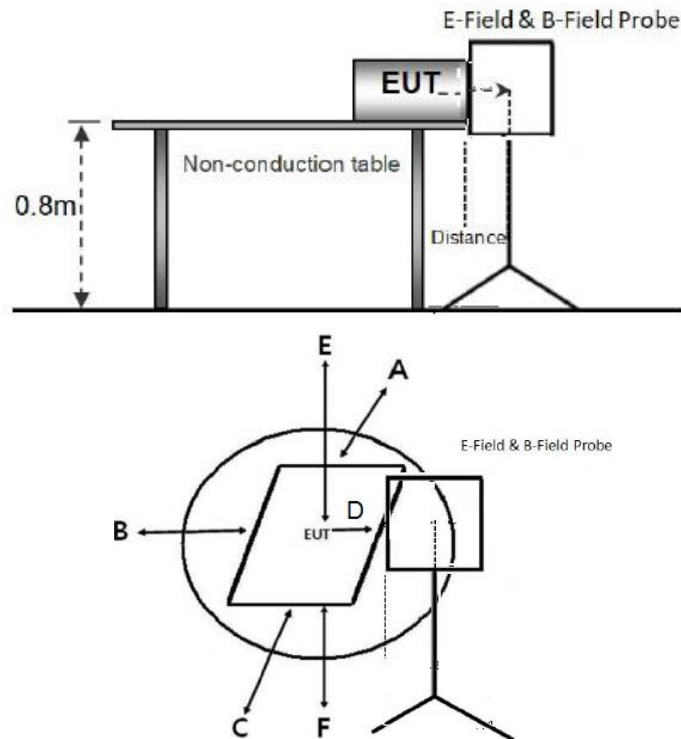

**Note:** A, B, C, D, E, F for six surfaces of the product.

### 3.4 Measurement Procedure

For mobile RF exposure  
For mobile RF exposure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance which is between the edge of the charger and the geometric center of probe.
- The turn table was rotated 360 degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E) were completed.
- The EUT were measured according to the dictates of KDB 680106D01v03.

For portable RF exposure

- The RF exposure test was performed on 360 degree turn table in anechoic chamber.
- The measurement probe was placed at test distance (0cm) which is between the edge of the charger and the geometric center of probe.
- The turn table was rotated 360 degree to search of highest strength.
- The highest emission level was recorded and compared with limit as soon as measurement of each points (A, B, C, D, E, F) were completed.
- Repeated measured (a) – (d) at measure distance 2 cm, 4cm, 6cm, 8cm, 10cm, 12 cm, 14cm, 16cm, 18cm and 20cm.
- The EUT were measured according to the dictates of KDB 680106D01v03.

### 3.5 Test Result of E and H field Strength

Temperature:	25.7°C	Humidity:	58%
Test Engineer:	Simba Huang	Test site:	Anechoic chamber



**E-Filed Strength at 15 cm from the edges surrounding the EUT (V/m)**

Unit	Test mode	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	50% Limits (V/m)	Limits (V/m)
V/m	TM1	49.563	50.169	48.478	50.036	49.689	307	614

**H-Filed Strength at 15 cm from the edges surrounding the EUT (A/m)**

Unit	Test mode	Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	50% Limits (A/m)	Limits (A/m)
A/m	TM1	0.201	0.199	0.210	0.188	0.191	0.815	1.63

**H-Filed Strength at 20 cm from the top of the EUT (A/m)**

Unit	Test mode	Test Position E	50% Limits (A/m)	Limits (A/m)
A/m	TM1	0.195	0.815	1.63

**H-Field Strength at 0-20 cm from the edges surrounding the EUT**

Test Conditions	Unit	Measured Distance (cm)	Measured H-Field Strength Values (A/m)						FCC H-Field Strength (A/m)	
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Limits	50% Limits
TM5	A/m	0	0.4830	0.3777	0.3305	0.4089	0.4236	0.3507	1.63	0.815
TM5	A/m	2	0.3628	0.3555	0.2894	0.2719	0.5483	0.3108	1.63	0.815
TM5	A/m	4	0.3202	0.3913	0.5169	0.2794	0.6154	0.2494	1.63	0.815
TM5	A/m	6	0.4499	0.3112	0.3064	0.2696	0.3369	0.3310	1.63	0.815
TM5	A/m	8	0.4113	0.3095	0.3524	0.1890	0.3330	0.2022	1.63	0.815
TM5	A/m	10	0.1795	0.2656	0.3945	0.3694	0.2317	0.1981	1.63	0.815
TM5	A/m	12	0.2927	0.2782	0.3496	0.1372	0.4118	0.3244	1.63	0.815
TM5	A/m	14	0.1865	0.3364	0.2684	0.1665	0.2126	0.1280	1.63	0.815
TM5	A/m	16	0.2217	0.1828	0.2292	0.0692	0.3389	0.1067	1.63	0.815
TM5	A/m	18	0.1862	0.1170	0.2303	0.1301	0.2492	0.2301	1.63	0.815
TM5	A/m	20	0.1423	0.2936	0.1727	0.1754	0.2427	0.2258	1.63	0.815

**E-Field Strength at 0-20 cm from the edges surrounding the EUT**

Test Conditions	Unit	Measured Distance (cm)	Measured E-Field Strength Values (V/m)						FCC E-Field Strength (V/m)	
			Test Position A	Test Position B	Test Position C	Test Position D	Test Position E	Test Position F	Limits	50% Limits
TM1	V/m	0	82.604	83.134	80.195	81.700	82.493	82.109	614	307
TM1	V/m	2	76.637	75.198	74.264	75.202	77.160	78.277	614	307
TM1	V/m	4	74.251	71.053	73.166	70.479	71.637	73.308	614	307
TM1	V/m	6	69.144	67.320	69.209	67.256	68.057	70.232	614	307
TM1	V/m	8	66.151	63.240	65.154	65.200	64.153	63.269	614	307
TM1	V/m	10	63.283	60.161	62.494	61.909	61.850	60.978	614	307
TM1	V/m	12	59.187	56.507	58.275	58.113	57.412	55.341	614	307
TM1	V/m	14	56.101	51.255	51.351	55.095	52.803	50.145	614	307
TM1	V/m	16	48.196	45.365	47.647	48.921	46.846	44.568	614	307
TM1	V/m	18	41.288	40.002	41.198	42.995	40.962	42.640	614	307
TM1	V/m	20	40.030	38.716	40.055	41.233	38.887	40.096	614	307

#### Equipment Approval Considerations

The EUT does comply with KDB 680106 D01 as follow table.

Requirements of KDB 680106 D01	Yes / No	Description
Power transfer frequency is less than 1 MHz	Yes	The device operate in the frequency range 113kHz~205kHz
Output power from each primary coil is less than or equal to 15 watts	Yes	The maximum output power for each primary coil is 15W.
The system may consist of more than one source primary coils, charging one or more clients. If more than one primary coil is present, the coil pairs may be powered on at the same time.	Yes	The transfer system includes only one primary coils.
Client device is placed directly in contact with the transmitter.	Yes	Client device is placed directly in contact with the transmitter.
Mobile exposure conditions only (portable exposure conditions are not covered by this exclusion).	No	Mixed mobile and portable exposure conditions
The aggregate H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.	Yes	The EUT H-field strengths at 15 cm surrounding the device and 20 cm above the top surface from all simultaneous transmitting coils are demonstrated to be less than 50% of the MPE limit.


### 3.6 Conclusion

A minimum safety distance of 0 cm to the antenna is required when the device is charging a smart phone for portable exposure and 20 cm to the antenna for mobile exposure. The detected emissions are below the limitations according FCC KDB 680106 and confirmed by the FCC according to KDB Inquire.

## 4 Test Setup Photos of the EUT




Test Position A-0cm from the edge of EUT to the geometric center of the probe

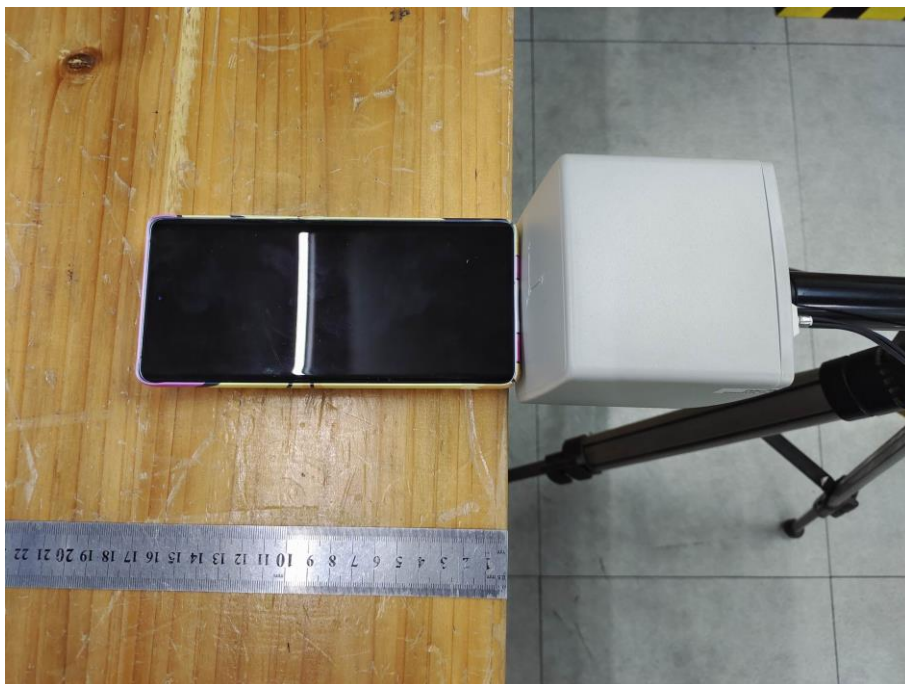

Test Position B-0cm from the edge of EUT to the geometric center of the probe




Test Position C-0cm from the edge of EUT to the geometric center of the probe

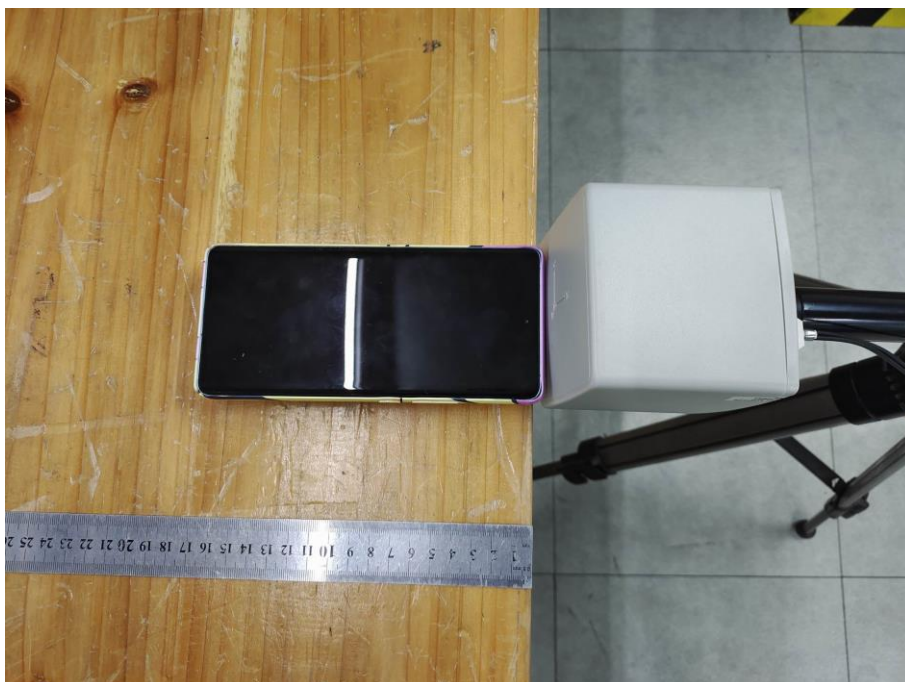

Test Position D-0cm from the edge of EUT to the geometric center of the probe



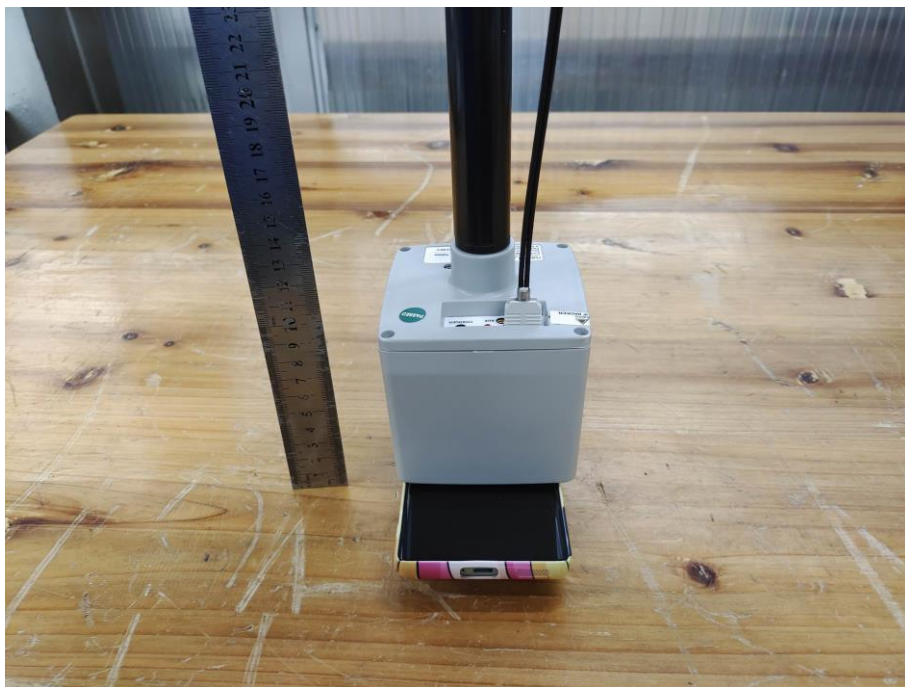


Test Position E-0cm from the edge of EUT to the geometric center of the probe



Test Position F-0cm from the edge of EUT to the geometric center of the probe

Mobile use

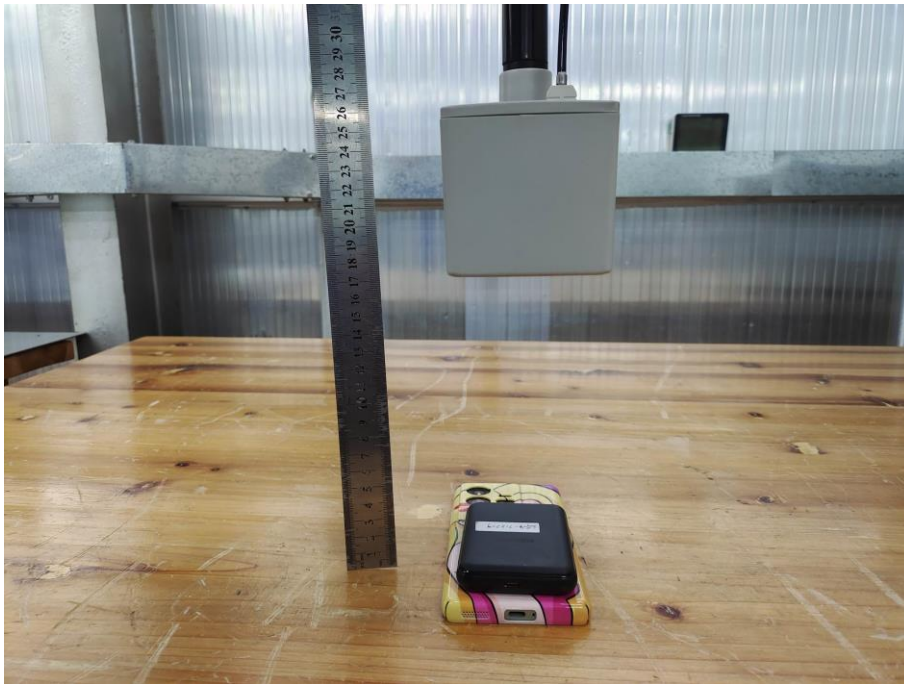

Test Position E-20cm from the edge of EUT to the geometric center of the probe

\*\* End of report \*\*