

FCC TEST REPORT

for

47 CFR Part 15, Subpart C

Equipment : TABLET

Model No. : PowerMate Wireless

FCC ID : FSUGMPAD

Filing Type : Original Grant

Applicant : **KYE SYSTEMS CORP.**
No. 492, Sec. 5, Chung Hsin Rd., San Chung, Taipei
Hsien, 241, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

CERTIFICATE OF COMPLIANCE	3
1. General Description of Equipment under Test	4
1.1. Applicant	4
1.2. Manufacturer	4
1.3. Basic Description of Equipment under Test	4
1.4. Feature of Equipment under Test	4
2. Test Configuration of Equipment under Test	5
2.1. Test Manner	5
2.2. Description of Test System	5
2.3. Connection Diagram of Test System	7
3. Test Software	8
4. General Information of Test	9
4.1. Test Facility	9
4.2. Standard for Methods of Measurement	9
4.3. Test in Compliance with	9
4.4. Frequency Range Investigated	9
4.5. Test Distance	9
5. Test of Radiated Emission (Spurious emission).....	10
5.1. Major Measuring Instruments	10
5.2. Test Procedures	11
5.3. Typical Test Setup Layout of Radiated Emission	12
5.4. Test Result of Radiated Emission (Spurious emission)	13
6. Test of Radiated Emission (Fundamental emission)	14
6.1. Major Measuring Instruments	14
6.2. Test Procedures	15
6.3. Typical Test Setup Layout of Radiated Emission	16
6.4. Test Result of Radiated Emission (Fundamental emission)	17
6.5. Photographs of Radiated Emission Test Configuration	18
7. List of Measuring Equipments Used.....	19

CERTIFICATE OF COMPLIANCE

for

47 CFR Part 15, Subpart C

Equipment : TABLET

Model No. : PowerMate Wireless

FCC ID : FSUGMPAD

Applicant : KYE SYSTEMS CORP.
No. 492, Sec. 5, Chung Hsin Rd., San Chung, Taipei
Hsien, 241, Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the energy emitted by this equipment was **passed 47 CFR Part 15, Subpart C** emission limits. Testing was carried out on Sep. 21, 2000 at **SPORTON International Inc.** LAB. in Lin Kou.

W. L. Huang
General Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

KYE SYSTEMS CORP.

No. 492, Sec. 5, Chung Hsin Rd., San Chung, Taipei Hsien, 241, Taiwan, R.O.C.

1.2. Manufacturer

Same as 1.1.

1.3. Basic Description of Equipment under Test

Equipment	: TABLET
Model No.	: PowerMate Wireless
FCC ID	: FSUGMPAD
Trade Name	: KYE SYSTEMS CORP.
Data cable	: Shielded, 1.55 m
Power Supply Type	: from PC
Power Cord	: N/A

1.4. Feature of Equipment under Test

- Platform Support: PC
- Hardware Interface: PS/2
- Software Driver: GeniTab III for Windows 95, 98, NT
- Resolution: Up to 2,540LPI
- Accuracy: 0.0 Inch
- Proximity: 8 mm from surface of tablet
- Working Area: Horizontal: 120 mm , Vertical : 90 mm
- Baud Rate: PS2 synchronous transmission
- Report Rate: Up to 200 RPS
- Protocol: Standard PS2, Intelli and Net Mouse plus KYE Pen Mode
- Power Source: PS2
- Operation mode: Steam mode
- Technology: Electromagnetic with cordless transaction
- Cursor Support: S-09W Cordless pen P08 5 button mouse

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The SONY Monitor, DELL PS/2 Keyboard, HP Printer, ACEEX Modem and EUT were connected to the FIC PC for EMI test.
- c. Frequency range investigated: radiation 0.345 MHz to 30MHz.

2.2. Description of Test System

Support Unit 1. -- Personal Computer (FIC)

FCC ID	: N/A
Model No.	: P2L97
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0037
Data Cable	: Shielded, 360 degree via metal backshells
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 2. -- Monitor (SONY)

FCC ID	: AK8GDM17SE2T
Model No.	: GDM-17SE2T
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0063
Data Cable	: Double-Shielded, 360 degree via metal backshells, 1.7m

Support Unit 3. -- PS/2 Keyboard (DELL)

FCC ID	: GYUM92SK
Model No.	: AT101(DE8M)
Serial No.	: SP0054
Data Cable	: Shielded, 360 degree via metal backshells, 1.9m


Support Unit 4. -- Modem (ACEEX)

FCC ID	: IFAXDM1414
Model No.	: DM1414
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0015
Data Cable	: Shielded, 360 degree via metal backshells, 1.15m

Support Unit 5. -- Printer (HP)

FCC ID	: B94C2642X
Model No.	: DeskJet 400
Power Supply Type	: Linear
Power Cord	: Non-Shielded
Serial No.	: SP0048
Data Cable	: Braided-Shielded, 1.35m

2.3. Connection Diagram of Test System

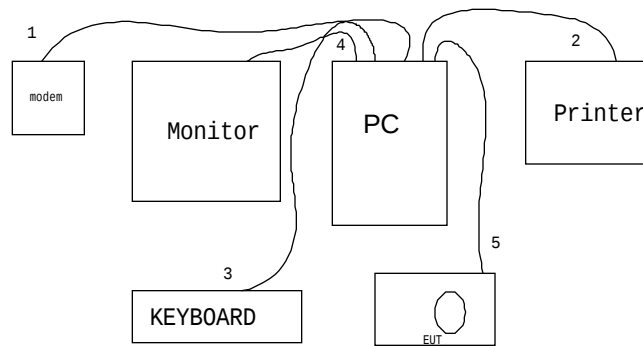

1. The I/O cable is connected from PC to the support unit 4.
2. The I/O cable is connected from PC to the support unit 5.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from PC to the support unit 2.
5. The I/O cable is connected from PC to the EUT.

3. Test Software

An executive program, EMITEST.EXE under WIN 98, which generates a complete line of continuously repeating " H" pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H" messages to the modem.
- f. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

At the same time, "WordPad" of Accessories under Win 98 was used as the test software.

4. General Information of Test

4.1. Test Facility

This test was carried out by SPORTON International Inc. in an openarea test site.

Openarea Test Site Location: No. 30-2, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,
Taipei Hsien, Taiwan, R.O.C.

TEL : 886-2-2601-1640

FAX : 886-2-2601-1695

4.2. Standard for Methods of Measurement

ANSI C63.4-1992

4.3. Test in Compliance with

FCC Part 15 Subpart C

4.4. Frequency Range Investigated

a. Radiation : from 0.345 MHz to 30 MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Test of Radiated Emission (Spurious emission)

Radiated emissions from 30 MHz to 1,000 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 5.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


5.1. Major Measuring Instruments

Amplifier	(HP 8447D)
Attenuation	0 dB
RF Gain	25 dB
Signal Input	0.1 MHz to 1.3 GHz
Spectrum Analyzer	(HP 8568B)
Attenuation	0 dB
Start Frequency	30 MHz
Stop Frequency	1,000 MHz
Resolution Bandwidth	1 MHz
Video Bandwidth	1 MHz
Signal Input	100 Hz to 1.5 GHz
Quasi-Peak Adapter	(85650A)
Resolution Bandwidth	120 KHz
Frequency Band	30 MHz to 1 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode OFF for Peak Mode

5.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 10 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

5.3. Typical Test Setup Layout of Radiated Emission

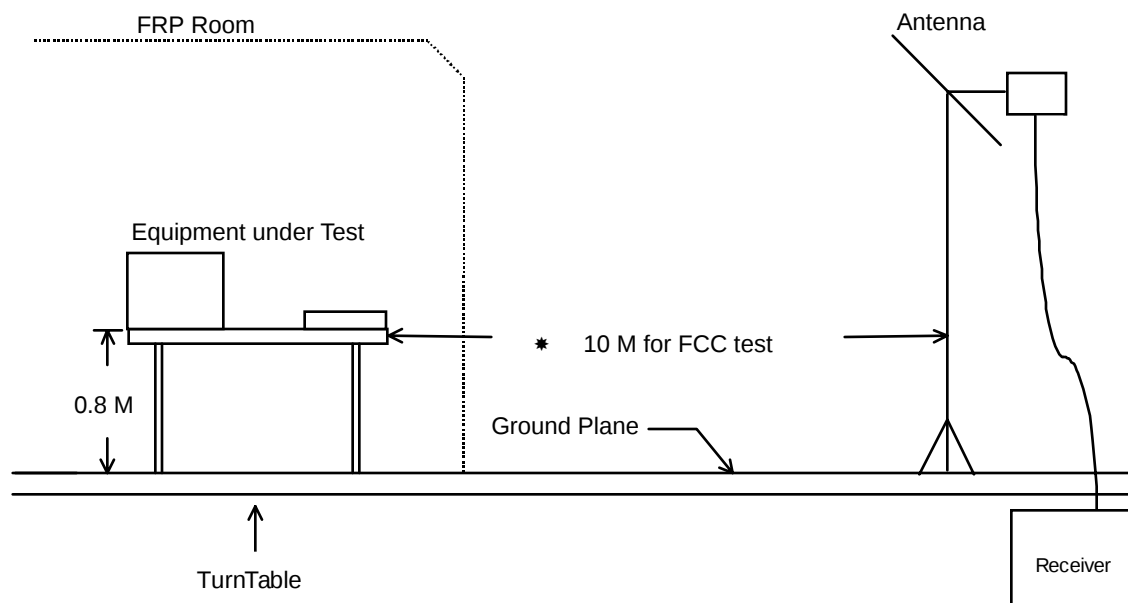

5.4. Test Result of Radiated Emission (Spurious emission)

- Test Distance : 10 M
- Temperature : 24°C
- Relative Humidity : 51 %
- Test Date : Mar. 29, 1999
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading : Antenna Factor + Cable Loss + Reading = Emission

The Radiated Emission test was passed at minimum margin

199.90 MHz / 24.50 dBuV (VERTICAL) Antenna Height 1.2 Meter, Turntable Degree 122 °.

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin		
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	
200.10	H	8.80	1.40	12.20	30.00	32	22.40	13.18	-7.60
430.40	H	16.09	2.26	11.35	37.00	71	29.70	30.55	-7.30
33.10	V	16.82	0.80	3.39	30.00	32	21.01	11.23	-8.99
44.20	V	10.50	0.80	10.07	30.00	32	21.37	11.71	-8.63
55.20	V	6.70	0.80	14.18	30.00	32	21.68	12.13	-8.32
199.90	V	8.80	1.40	14.30	30.00	32	24.50	16.79	-5.50

Test Engineer : _____
JONES JAN

6. Test of Radiated Emission (Fundamental emission)

Radiated emissions from 0.345 MHz to 30 MHz were measured with a bandwidth of 120 kHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in section 6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.


6.1. Major Measuring Instruments

Test Receiver	(R&S ESCS30)
Resolution Bandwidth	120 KHz
Frequency Band	9 KHz to 2.75 GHz
Quasi-Peak Detector	ON for Quasi-Peak Mode OFF for Peak Mode

6.2. Test Procedures

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The loop antenna was oriented horizontally and vertically. Rotate the loop antenna 360 degrees on its vertical axis to find the maximum value of the field strength both horizontal polarization and vertical polarization.
- e. Set the test-receiver system to Average Detect Function. (According to 15.209 of 47 CFR., 345KHz is based on measurement employing an Average detector.)

6.3. Typical Test Setup Layout of Radiated Emission

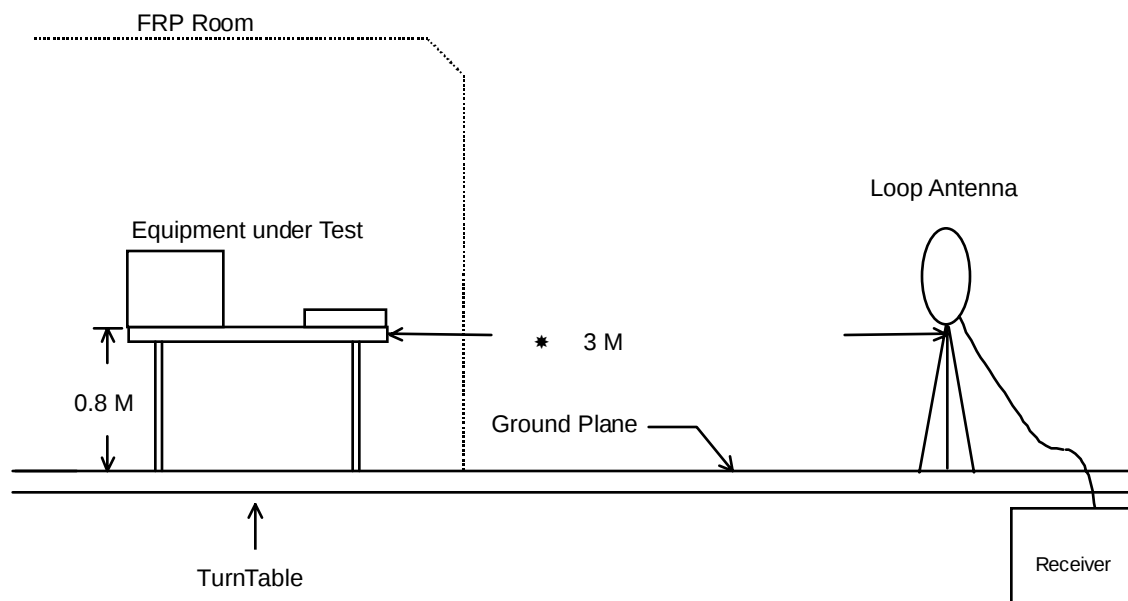

6.4. Test Result of Radiated Emission (Fundamental emission)

- Equipment meets the technical specifications of 15.209
- Frequency Range of Test : from 230KHz to 30 MHz
- Test Distance : 3 M
- Temperature : 27
- Relative Humidity : 55% RH
- Test Date : Sep. 21, 2000
- Limits at 3 meters are calculated by following method:
for the limit at 345Khz per 15.209 is $2400/345=6.957\mu\text{V/m}$ at 300m, To determine the level at the 3m test distance take $20 \log (6.957)=16.85\text{dBuV/m}$ and then per 15.31 (f)(2) a 40dB/decade correction factor may be used below 30Mhz giving a 3m limit of 96.85dBuV/m.
- Emission level (dBuV/m)= $20\log$ emission level ($\mu\text{V/m}$)
- Sample Calculation at 0.345MHz
Corrected Reading = $0.1+ 68.4= 68.5$ (dBuV/m)
- Remark: The R&S test receiver will automatically offset the antenna factor, therefore, the reading value shown on the R&S test receiver is included receiving value added antenna factor.

Frequency (MHz)	Polarity	Cable Loss (dB)	Reading (dBuV)	Limits (dBuV/m) (uV/m)		Emission Level (dBuV/m) (uV/m)		Margin (dB)	Orthogonal
0.345	H	0.10	68.40	96.85	69582	68.50	2660.73	-28.35	X
0.345	H	0.10	68.40	96.85	69582	68.50	2660.73	-28.35	Y
0.345	H	0.10	66.50	96.85	69582	66.60	2137.96	-30.25	Z
0.345	V	0.10	67.10	96.85	69582	67.20	2290.87	-29.65	X
0.345	V	0.10	65.50	96.85	69582	65.60	1905.46	-31.25	Y
0.345	V	0.10	65.70	96.85	69582	65.80	1949.84	-31.05	Z

Remark:

1. Data shown in above three rows represents three orthogonal (X, Y, Z) .
2. Testing at Vertical Polarity, emission was too low to be detected.
3. This emission was base on measurements employing an average detector

6.5. Photographs of Radiated Emission Test Configuration

- The photographs show the configuration that generates the maximum emission.

FRONT VIEW



REAR VIEW



7. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date
Receiver	R&S	ESCS30	847793/003	9 K – 2.75 GHz	Dec. 16, 1999
Loop Antenna	R&S	HFH2-Z2	824132	10KHz - 30MHz	Dec. 18, 1999