



			I IIIai	_11030	411				
Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8226.250000		31.19	54.00	22.81	500.0	200.0	Н	305.0	-2.4
8943.750000	44.57		68.20	23.63	500.0	200.0	٧	88.0	-1.3
9142.500000		32.53	54.00	21.47	500.0	200.0	٧	88.0	-1.1
9478.750000		34.60	54.00	19.40	500.0	200.0	V	93.0	0.0
9706.250000	45.31		68.20	22.89	500.0	200.0	V	31.0	-0.7
10540.000000	44.55		68.20	23.65	500.0	100.0	H	81.0	-0.9
11141.250000		33.68	54.00	20.32	500.0	100.0	٧	111.0	-0.5
13336.250000		34.97	54.00	19.03	500.0	200.0	٧	31.0	2.3
13501.250000	46.43		68.20	21.77	500.0	200.0	Ξ	254.0	2.7
15306.250000	49.25		68.20	18.95	500.0	200.0	٧	41.0	5.6
15592.500000		38.63	54.00	15.37	500.0	100.0	٧	235.0	6.5
17605.000000	53.08		68.20	15.12	500.0	200.0	V	267.0	10.1

#### 802.11n HT20 CH157




			1.1.11			11 1 1 4			_
Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBuV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
(	(,	(,	(	( /	(ms)	(3.3.7)		(==0)	(
1263.375000	40.58		68.20	27.62	500.0	100.0	Н	0.0	-8.5
1388.500000		30.65	54.00	23.35	500.0	100.0	V	69.0	-7.6
1689.500000		32.00	54.00	22.00	500.0	200.0	Н	283.0	-6.0
2068.375000	45.05		68.20	23.15	500.0	200.0	Н	183.0	-4.0
2463.000000	48.52		68.20	19.68	500.0	200.0	V	65.0	-2.3
2813.000000		36.18	54.00	17.82	500.0	200.0	V	241.0	-1.2
3477.125000	50.87		68.20	17.33	500.0	200.0	Н	24.0	1.7
3961.875000		39.96	54.00	14.04	500.0	200.0	Н	315.0	2.9
5149.250000		40.06	54.00	13.94	500.0	100.0	Н	132.0	5.0
5572.750000	52.59		68.20	15.61	500.0	100.0	Н	194.0	5.5
6616.625000	53.64		68.20	14.56	500.0	200.0	٧	10.0	6.6
7713.875000		42.30	54.00	11.70	500.0	200.0	V	70.0	7.5

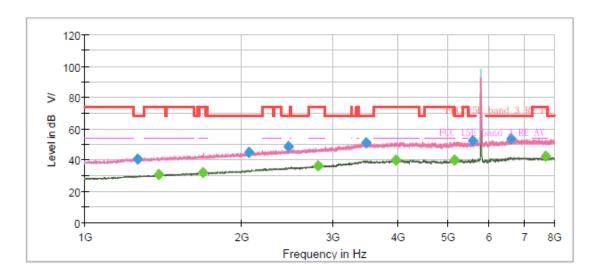

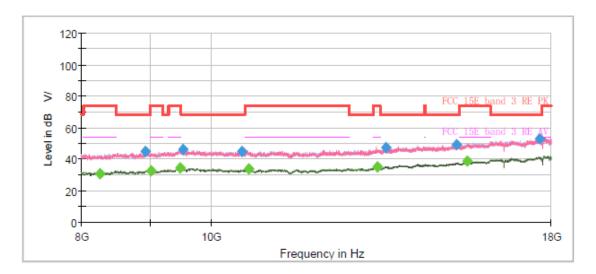


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
` '	` ' '	` ' '	` ' '	` '	(ms)	` '		, 0,	` ′
8252.500000		30.65	54.00	23.35	500.0	200.0	Н	303.0	-2.5
8931.250000	44.66		68.20	23.54	500.0	200.0	V	211.0	-1.3
9026.250000		32.74	54.00	21.26	500.0	100.0	Н	130.0	-1.3
9478.750000		34.62	54.00	19.38	500.0	100.0	Η	37.0	0.0
9527.500000	46.05		68.20	22.15	500.0	200.0	H	138.0	-0.2
10551.250000	45.03		68.20	23.17	500.0	100.0	H	163.0	-0.9
10668.750000		33.58	54.00	20.42	500.0	200.0	Ξ	0.0	-0.8
13321.250000		34.84	54.00	19.16	500.0	200.0	>	97.0	2.3
13521.250000	47.31		68.20	20.89	500.0	100.0	٧	199.0	2.8
15282.500000	49.05		68.20	19.15	500.0	200.0	Н	284.0	5.6
15567.500000		38.49	54.00	15.51	500.0	100.0	V	335.0	6.4
17635.000000	52.87		68.20	15.33	500.0	200.0	Н	246.0	10.2

#### RF Test Report 802.11n HT20 CH165

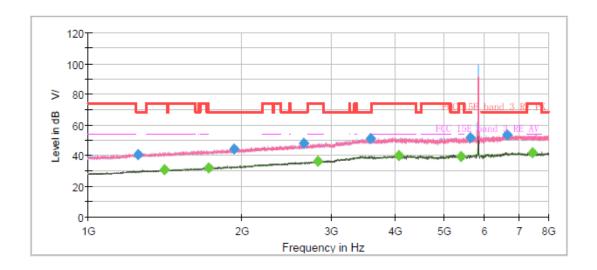

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1254.625000	40.48		68.20	27.72	500.0	200.0	V	146.0	-8.6
1413.875000		30.95	54.00	23.05	500.0	100.0	V	18.0	-7.5
1720.125000		32.23	54.00	21.77	500.0	200.0	Н	290.0	-5.9
1936.250000	44.57		68.20	23.63	500.0	100.0	V	286.0	-4.8
2651.125000	47.83		68.20	20.37	500.0	100.0	V	125.0	-2.0
2816.500000		36.39	54.00	17.61	500.0	200.0	V	49.0	-1.2
3577.750000	50.94		68.20	17.26	500.0	100.0	Н	106.0	1.7
4066.000000		40.00	54.00	14.00	500.0	200.0	Н	0.0	3.5
5396.000000		39.56	54.00	14.44	500.0	200.0	Н	345.0	5.1
5609.500000	51.86		68.20	16.34	500.0	100.0	Н	134.0	5.6
6637.625000	53.25		68.20	14.96	500.0	200.0	Н	350.0	6.6
7427.750000		41.60	54.00	12.40	500.0	200.0	V	170.0	7.1




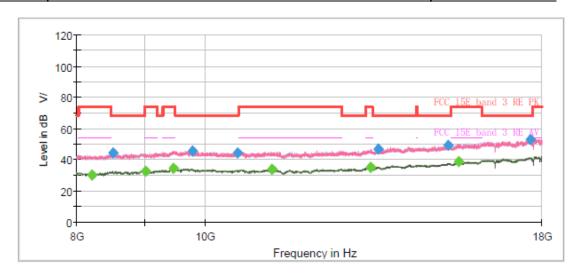

				_					
Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8211,250000		30.35	54.00	23.65	500.0	200.0	Н	282.0	-2.4
8522.500000	44.18		68.20	24.02	500.0	200.0	Н	75.0	-1.8
9025.000000		32.69	54.00	21.31	500.0	100.0	Н	10.0	-1.3
9473.750000		34.45	54.00	19.55	500.0	200.0	Н	156.0	0.0
9788.750000	45.68		68.20	22.52	500.0	200.0	V	192.0	-0.5
10588.750000	44.28		68.20	23.92	500.0	100.0	V	286.0	-0.9
11241.250000		33.75	54.00	20.25	500.0	200.0	Н	183.0	-0.6
13350.000000		35.34	54.00	18.67	500.0	200.0	V	99.0	2.4
13536.250000	46.84		68.20	21.36	500.0	200.0	Н	226.0	2.8
15285.000000	49.36		68.20	18.84	500.0	200.0	Н	113.0	5.6
15563.750000		38.58	54.00	15.42	500.0	100.0	V	26.0	6.3
17636.250000	52.87		68.20	15.33	500.0	200.0	Н	47.0	10.2


#### RF Test Report

#### 802.11n HT40 CH38

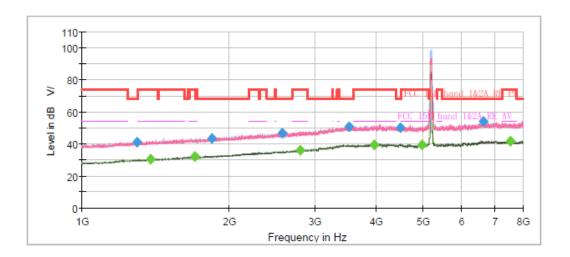


					•••				
Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1298.375000	41.40		68.20	26.80	500.0	100.0	V	138.0	-8.2
1380.625000		30.69	54.00	23.31	500.0	100.0	V	254.0	-7.7
1700.000000		31.90	54.00	22.10	500.0	100.0	Н	239.0	-6.0
1847.000000	43.16		68.20	25.04	500.0	100.0	V	152.0	-5.2
2570.625000	46.54		68.20	21.66	500.0	200.0	٧	12.0	-2.0
2792.875000		36.30	54.00	17.71	500.0	100.0	Н	220.0	-1.3
3525.250000	50.94		68.20	17.26	500.0	200.0	V	86.0	1.7
3965.375000		39.70	54.00	14.30	500.0	100.0	٧	0.0	3.0
4479.000000	50.45		68.20	17.75	500.0	200.0	٧	21.0	3.7
4976.875000		39.50	54.00	14.50	500.0	100.0	V	32.0	4.5
6635.000000	54.11		68.20	14.09	500.0	100.0	Н	27.0	6.6
7527.500000		41.58	54.00	12.42	500.0	200.0	٧	255.0	7.0



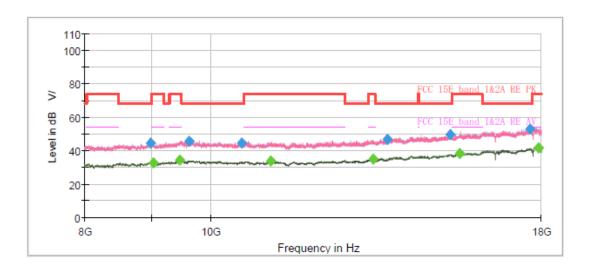


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
8987.500000	44.36		68.20	23.84	500.0	200.0	V	60.0	-1.3
9031.250000		32.97	54.00	21.03	500.0	200.0	Н	64.0	-1.3
9471.250000		34.44	54.00	19.56	500.0	200.0	V	191.0	-0.1
9627.500000	45.71		68.20	22.49	500.0	100.0	V	337.0	-0.6
10562.500000	44.81		68.20	23.40	500.0	200.0	Н	263.0	-0.9
11126.250000		33.68	54.00	20.32	500.0	100.0	Н	240.0	-0.5
13347.500000		34.84	54.00	19.16	500.0	200.0	V	268.0	2.4
13700.000000	46.75		68.20	21.45	500.0	200.0	Н	111.0	3.2
15320.000000	49.43		68.20	18.77	500.0	100.0	٧	16.0	5.7
15570.000000		38.39	54.00	15.61	500.0	200.0	Н	0.0	6.4
17640.000000	53.20		68.20	15.00	500.0	100.0	Н	216.0	10.2
17897.500000		41.95	54.00	12.05	500.0	100.0	V	228.0	10.1

#### 802.11n HT40 CH46

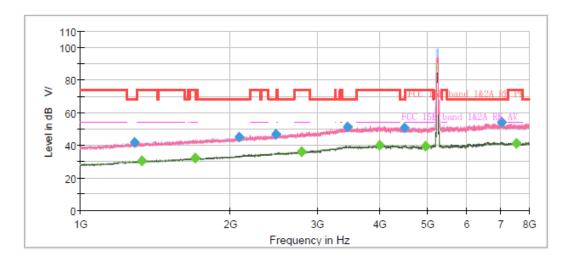


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
					(ms)				
1282.625000	41.71		68.20	26.49	500.0	200.0	Н	228.0	-8.3
1327.250000		30.61	54.00	23.39	500.0	200.0	Н	359.0	-8.0
1703.500000		32.05	54.00	21.95	500.0	200.0	Ξ	346.0	-6.0
2083.250000	45.15	-	68.20	23.05	500.0	200.0	٧	0.0	-3.9
2474.375000	47.00	-	68.20	21.20	500.0	200.0	>	216.0	-2.3
2784.125000		36.07	54.00	17.93	500.0	100.0	Ξ	166.0	-1.4
3448.250000	51.11		68.20	17.09	500.0	100.0	Ξ	294.0	1.6
3996.875000		39.96	54.00	14.04	500.0	100.0	Ξ	128.0	3.2
4493.000000	50.96	-	68.20	17.24	500.0	200.0	Ξ	196.0	3.9
4947.125000		39.47	54.00	14.53	500.0	200.0	Η	223.0	4.6
7040.125000	54.09		68.20	14.11	500.0	100.0	Н	70.0	6.9
7531.875000		41.44	54.00	12.56	500.0	100.0	Н	20.0	7.0

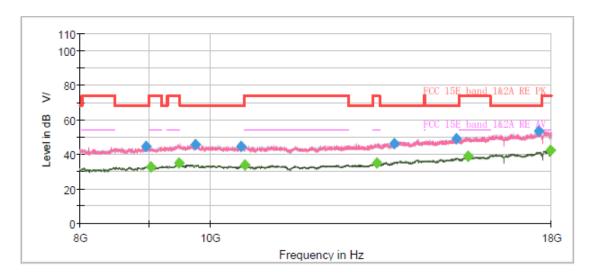

Frequency	MaxPeak (dDu)//m)	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time (ms)	(cm)		(deg)	(dB/m)
8962.500000	44.49		68.20	23.71	500.0	100.0	V	280.0	-1.3
9032.500000		32.59	54.00	21.41	500.0	100.0	Н	57.0	-1.3
9478.750000		34.70	54.00	19.30	500.0	200.0	Н	214.0	0.0
9765.000000	45.48		68.20	22.72	500.0	100.0	٧	132.0	-0.5
10548.750000	44.34		68.20	23.86	500.0	100.0	H	35.0	-0.9
10625.000000		33.65	54.00	20.35	500.0	200.0	Н	168.0	-0.8
13326.250000		34.89	54.00	19.11	500.0	200.0	٧	24.0	2.3
13735.000000	46.47		68.20	21.73	500.0	100.0	Н	62.0	3.4
15280.000000	48.93		68.20	19.27	500.0	200.0	Н	275.0	5.6
15583.750000		38.66	54.00	15.34	500.0	100.0	Н	0.0	6.5
17623.750000	53.35		68.20	14.85	500.0	200.0	Н	1.0	10.2
17973.750000		42.12	54.00	11.88	500.0	200.0	٧	0.0	10.8


Report No.: R2411A1659-R4

#### 802.11n HT40 CH54

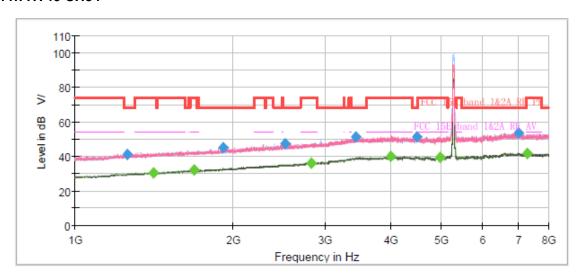


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
					(ms)				
1258.125000	41.23		68.20	26.97	500.0	100.0	Н	2.0	-8.6
1410.375000		30.56	54.00	23.44	500.0	100.0	H	165.0	-7.5
1686.000000		32.33	54.00	21.67	500.0	200.0	Η	247.0	-6.0
1917.875000	44.87		68.20	23.33	500.0	100.0	Ξ	284.0	-4.9
2513.750000	47.33		68.20	20.87	500.0	200.0	٧	225.0	-2.1
2819.125000		36.24	54.00	17.76	500.0	200.0	٧	331.0	-1.2
3429.000000	51.27		68.20	16.93	500.0	100.0	Н	92.0	1.5
3995.125000		39.92	54.00	14.08	500.0	200.0	٧	36.0	3.2
4483.375000	51.11		68.20	17.09	500.0	200.0	٧	117.0	3.8
4977.750000		39.65	54.00	14.35	500.0	200.0	٧	5.0	4.5
7007.750000	53.64		68.20	14.56	500.0	100.0	Н	289.0	7.0
7286.875000		41.49	54.00	12.51	500.0	200.0	V	85.0	7.0



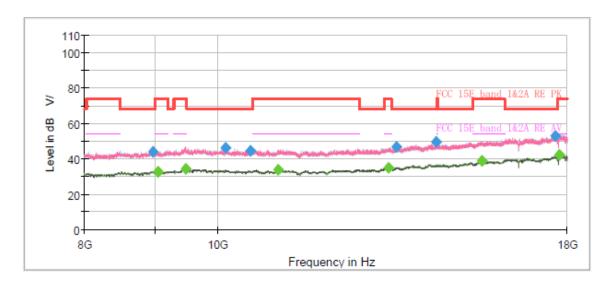


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8973.750000	43.97		68.20	24.23	500.0	200.0	Н	160.0	-1.3
9057.500000		32.78	54.00	21.22	500.0	200.0	٧	268.0	-1.2
9480.000000		34.62	54.00	19.38	500.0	200.0	٧	94.0	0.0
10143.750000	46.02		68.20	22.18	500.0	200.0	٧	230.0	-1.0
10572.500000	44.69		68.20	23.51	500.0	200.0	Η	301.0	-0.9
11080.000000		34.10	54.00	19.90	500.0	100.0	٧	173.0	-0.5
13333.750000		35.07	54.00	18.93	500.0	200.0	Ξ	134.0	2.3
13512.500000	46.69		68.20	21.51	500.0	200.0	Н	258.0	2.8
14435.000000	49.40		68.20	18.80	500.0	200.0	٧	66.0	4.5
15585.000000		38.74	54.00	15.26	500.0	100.0	H	164.0	6.5
17630.000000	53.03		68.20	15.17	500.0	100.0	٧	150.0	10.2
17773.750000		42.17	54.00	11.83	500.0	100.0	٧	293.0	10.3

#### 802.11n HT40 CH62

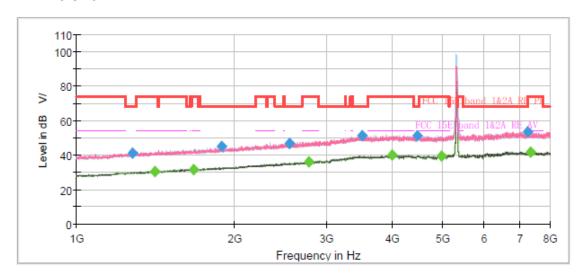


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time (ms)	(cm)		(deg)	(dB/m)
1281.750000	41.30		68.20	26.90	500.0	100.0	V	98.0	-8.3
1409.500000		30.66	54.00	23.34	500.0	100.0	V	161.0	-7.5
1672.875000		31.84	54.00	22.16	500.0	100.0	V	260.0	-6.1
1895.125000	44.87		68.20	23.33	500.0	200.0	V	159.0	-5.0
2550.500000	47.06		68.20	21.14	500.0	100.0	٧	251.0	-2.1
2771.000000		36.33	54.00	17.67	500.0	200.0	V	105.0	-1.4
3501.625000	51.39		68.20	16.81	500.0	100.0	V	193.0	1.8
3994.250000		39.85	54.00	14.15	500.0	100.0	V	125.0	3.2
4476.375000	51.08		68.20	17.12	500.0	100.0	V	269.0	3.7
4975.125000		39.25	54.00	14.75	500.0	100.0	Н	0.0	4.5
7245.750000	53.85		68.20	14.35	500.0	200.0	Н	116.0	7.1
7332.375000		41.62	54.00	12.38	500.0	100.0	Н	123.0	7.0

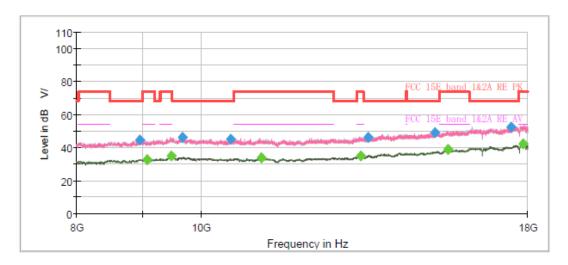


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8961.250000	44.32		68.20	23.88	500.0	100.0	Н	77.0	-1.3
9078.750000		32.77	54.00	21.23	500.0	200.0	٧	119.0	-1.2
9477.500000		34.92	54.00	19.08	500.0	200.0	٧	24.0	0.0
9675.000000	46.07		68.20	22.13	500.0	100.0	Н	12.0	-0.7
10547.500000	45.40		68.20	22.80	500.0	100.0	٧	288.0	-0.9
11155.000000		33.58	54.00	20.42	500.0	100.0	٧	279.0	-0.5
13337.500000		34.80	54.00	19.20	500.0	200.0	٧	119.0	2.3
13513.750000	46.51		68.20	21.69	500.0	200.0	Н	202.0	2.8
15227.500000	48.91		68.20	19.29	500.0	200.0	H	0.0	5.5
15600.000000		38.74	54.00	15.26	500.0	100.0	٧	153.0	6.5
17480.000000	52.50		68.20	15.70	500.0	200.0	Н	166.0	9.8
17838.750000		42.03	54.00	11.97	500.0	200.0	Н	231.0	10.2

#### 802.11n HT40 CH102

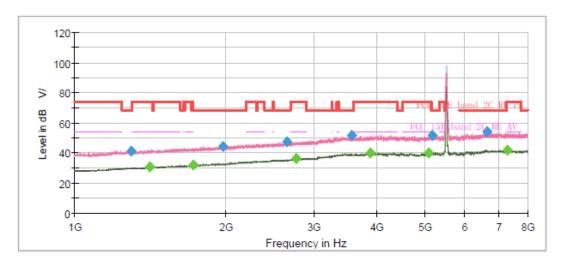

Frequency (MHz)	MaxPeak (dBuV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
,,	,	, , ,	,	,,	(ms)	, ,		, 0,	, ,
1295.750000	41.36		68.20	26.84	500.0	200.0	Н	356.0	-8.2
1413.875000		30.66	54.00	23.34	500.0	200.0	٧	0.0	-7.5
1721.875000		31.81	54.00	22.19	500.0	100.0	V	253.0	-5.9
1973.000000	44.49		68.20	23.71	500.0	200.0	٧	27.0	-4.7
2649.375000	47.59		68.20	20.61	500.0	200.0	٧	145.0	-2.0
2764.000000		36.10	54.00	17.90	500.0	200.0	>	353.0	-1.5
3568.125000	51.44		68.20	16.76	500.0	200.0	>	185.0	1.7
3883.125000		39.77	54.00	14.23	500.0	100.0	>	347.0	2.6
5072.250000		39.74	54.00	14.26	500.0	100.0	>	274.0	5.0
5164.125000	51.79		68.20	16.41	500.0	200.0	٧	116.0	5.1
6639.375000	54.10		68.20	14.10	500.0	200.0	٧	189.0	6.6
7297.375000		41.79	54.00	12.21	500.0	200.0	V	145.0	7.0




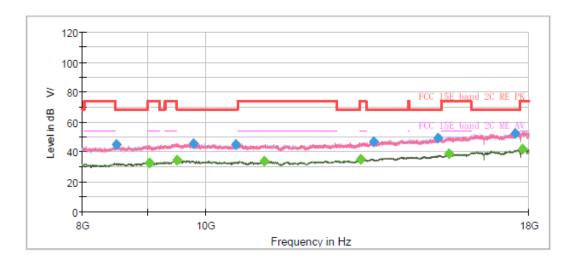

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8510.000000	44.67		68.20	23.53	500.0	200.0	V	210.0	-1.8
9042.500000		32.62	54.00	21.38	500.0	200.0	Н	303.0	-1.3
9496.250000		34.48	54.00	19.52	500.0	200.0	V	182.0	0.0
9783.750000	45.71		68.20	22.49	500.0	200.0	V	102.0	-0.5
10570.000000	44.77		68.20	23.43	500.0	100.0	V	341.0	-0.9
11133.750000		34.15	54.00	19.85	500.0	100.0	V	336.0	-0.5
13263.750000		34.86	54.00	19.14	500.0	100.0	Н	149.0	2.1
13566.250000	47.02		68.20	21.18	500.0	100.0	V	327.0	2.9
15263.750000	49.41		68.20	18.79	500.0	100.0	V	168.0	5.6
15566.250000		38.66	54.00	15.34	500.0	100.0	٧	262.0	6.4
17542.500000	52.56		68.20	15.64	500.0	200.0	V	346.0	9.9
17792.500000		41.94	54.00	12.06	500.0	200.0	Н	200.0	10.2


#### RF Test Report

#### 802.11n HT40 CH118

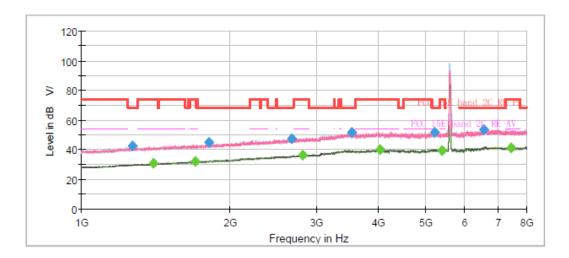


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1270.375000	42.20		68.20	26.00	500.0	100.0	Н	221.0	-8.4
1398.125000		30.59	54.00	23.41	500.0	200.0	V	19.0	-7.6
1700.875000		31.98	54.00	22.02	500.0	200.0	٧	188.0	-6.0
1811.125000	45.19		68.20	23.01	500.0	200.0	Н	270.0	-5.4
2675.625000	47.45		68.20	20.75	500.0	100.0	٧	0.0	-1.8
2809.500000	1	36.51	54.00	17.49	500.0	100.0	٧	0.0	-1.2
3542.750000	51.39		68.20	16.81	500.0	200.0	٧	172.0	1.7
4039.750000	-	40.07	54.00	13.93	500.0	100.0	٧	349.0	3.3
5199.125000	51.88		68.20	16.32	500.0	100.0	Η	29.0	5.3
5389.000000	1	39.40	54.00	14.60	500.0	100.0	٧	231.0	5.1
6562.375000	53.58		68.20	14.62	500.0	200.0	Н	287.0	6.5
7453.125000		41.48	54.00	12.52	500.0	200.0	٧	102.0	7.0



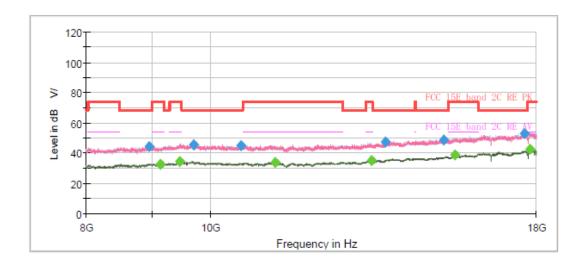


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
8961.250000	44.22		68.20	23.98	500.0	100.0	Н	165.0	-1.3
9142.500000		32.90	54.00	21.10	500.0	200.0	Н	319.0	-1.1
9472.500000		34.52	54.00	19.48	500.0	100.0	V	162.0	-0.1
9701.250000	45.81		68.20	22.39	500.0	100.0	V	265.0	-0.7
10572.500000	44.65		68.20	23.55	500.0	200.0	V	36.0	-0.9
11236.250000		33.88	54.00	20.12	500.0	100.0	V	345.0	-0.6
13370.000000		35.00	54.00	19.00	500.0	200.0	٧	158.0	2.4
13705.000000	47.08		68.20	21.12	500.0	200.0	H	239.0	3.2
15245.000000	48.90		68.20	19.30	500.0	200.0	V	210.0	5.5
15546.250000		38.54	54.00	15.46	500.0	200.0	Н	310.0	6.3
17622.500000	53.21		68.20	14.99	500.0	100.0	V	275.0	10.2
17778.750000		42.32	54.00	11.68	500.0	200.0	Н	0.0	10.3

#### RF Test Report 802.11n HT40 CH134

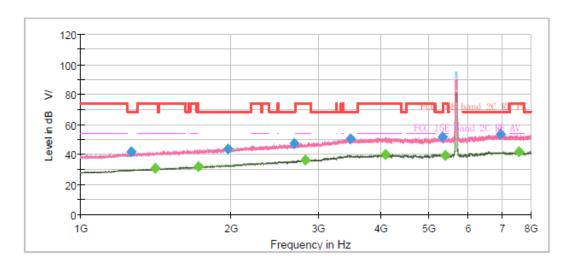


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1264.250000	41.61		68.20	26.59	500.0	100.0	Н	81.0	-8.5
1413.000000		30.74	54.00	23.26	500.0	100.0	Н	104.0	-7.5
1720.125000		31.87	54.00	22.13	500.0	200.0	Н	240.0	-5.9
1975.625000	43.96		68.20	24.24	500.0	100.0	Н	0.0	-4.7
2683.500000	47.41		68.20	20.79	500.0	200.0	V	0.0	-1.8
2822.625000		36.16	54.00	17.84	500.0	200.0	Н	126.0	-1.2
3478.000000	50.74		68.20	17.46	500.0	200.0	V	218.0	1.7
4081.750000		39.97	54.00	14.03	500.0	100.0	Н	180.0	3.4
5308.500000	51.64		68.20	16.56	500.0	200.0	Н	235.0	5.4
5394.250000		39.29	54.00	14.71	500.0	200.0	Н	0.0	5.1
6957.875000	53.83		68.20	14.37	500.0	100.0	V	175.0	7.1
7560.750000		42.02	54.00	11.98	500.0	200.0	V	298.0	7.1



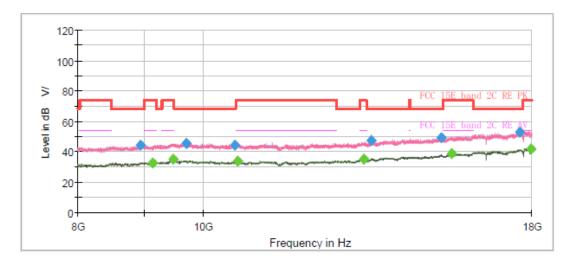


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8947.500000	44.26		68.20	23.94	500.0	100.0	V	186.0	-1.3
9147.500000		32.67	54.00	21.33	500.0	200.0	V	70.0	-1.1
9480.000000		34.79	54.00	19.21	500.0	200.0	Н	343.0	0.0
9711.250000	45.61		68.20	22.59	500.0	200.0	٧	255.0	-0.7
10588.750000	44.46		68.20	23.74	500.0	100.0	Н	138.0	-0.9
10648.750000		33.67	54.00	20.33	500.0	100.0	V	255.0	-0.8
13341.250000		34.98	54.00	19.02	500.0	200.0	Н	189.0	2.3
13498.750000	47.51		68.20	20.69	500.0	100.0	Н	358.0	2.7
15320.000000	49.23		68.20	18.97	500.0	100.0	V	302.0	5.7
15585.000000		38.70	54.00	15.30	500.0	200.0	٧	298.0	6.5
17607.500000	53.11		68.20	15.09	500.0	100.0	V	159.0	10.1
17977.500000		42.09	54.00	11.91	500.0	200.0	Н	223.0	10.9

#### RF Test Report 802.11n HT40 CH142

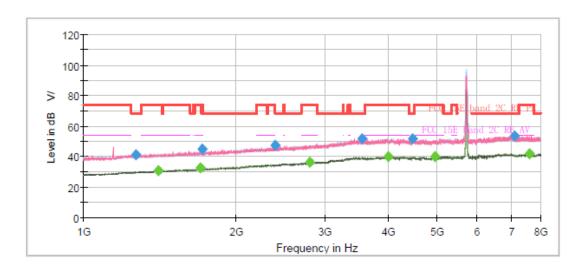


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
					(ms)				
1270.375000	41.11		68.20	27.09	500.0	200.0	Н	303.0	-8.4
1405.125000		30.63	54.00	23.37	500.0	200.0	H	8.0	-7.6
1700.875000		32.33	54.00	21.67	500.0	200.0	Η	0.0	-6.0
1716.625000	44.97		68.20	23.23	500.0	200.0	٧	119.0	-5.9
2393.875000	47.43		68.20	20.77	500.0	200.0	Н	249.0	-2.6
2795.500000		36.11	54.00	17.89	500.0	100.0	Ξ	136.0	-1.3
3558.500000	51.55		68.20	16.65	500.0	100.0	Н	53.0	1.7
3999.500000		39.82	54.00	14.18	500.0	200.0	٧	196.0	3.2
4462.375000	51.55		68.20	16.65	500.0	100.0	Ξ	39.0	3.6
4945.375000		40.05	54.00	13.95	500.0	100.0	٧	0.0	4.6
7089.125000	53.63		68.20	14.57	500.0	100.0	V	0.0	7.0
7614.125000		41.99	54.00	12.01	500.0	200.0	V	143.0	7.1



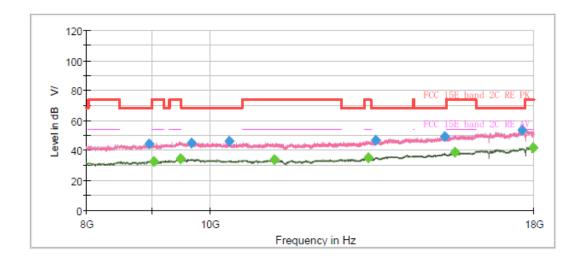


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8953.750000	44.61		68.20	23.59	500.0	200.0	V	73.0	-1.3
9033.750000		32.49	54.00	21.51	500.0	100.0	V	345.0	-1.3
9483.750000		34.38	54.00	19.62	500.0	100.0	٧	0.0	0.0
9670.000000	44.90		68.20	23.30	500.0	200.0	Н	271.0	-0.6
10355.000000	46.18		68.20	22.02	500.0	200.0	Н	353.0	-1.0
11235.000000		33.59	54.00	20.41	500.0	200.0	Н	276.0	-0.6
13323.750000		35.03	54.00	18.97	500.0	100.0	V	341.0	2.3
13506.250000	47.06		68.20	21.14	500.0	100.0	Н	44.0	2.7
15302.500000	49.32	-	68.20	18.88	500.0	100.0	Н	265.0	5.6
15591.250000		38.54	54.00	15.46	500.0	200.0	Н	196.0	6.5
17620.000000	53.55		68.20	14.65	500.0	200.0	V	245.0	10.2
17978.750000		42.07	54.00	11.93	500.0	200.0	Н	70.0	10.9

#### 802.11n HT40 CH151

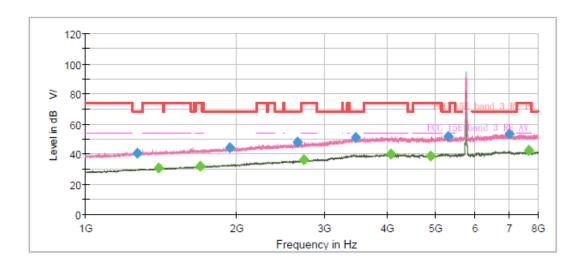


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1267.750000	40.69		60.20	27.51	(ms)	400.0	- 11	194.0	-8.5
1396.375000		30.74	68.20 54.00	23.26	500.0 500.0	100.0 100.0	H	45.0	-8.5 -7.6
1691.250000		31.84	54.00	22.16	500.0	200.0	Н	0.0	-6.0
1944.125000	44.52		68.20	23.68	500.0	100.0	V	186.0	-4.7
2645.000000	47.83		68.20	20.37	500.0	200.0	Н	43.0	-2.0
2724.625000		36.16	54.00	17.84	500.0	200.0	V	20.0	-1.5
3461.375000	51.04		68.20	17.16	500.0	100.0	V	272.0	1.6
4073.875000		40.09	54.00	13.91	500.0	100.0	V	203.0	3.5
4884.125000		39.02	54.00	14.98	500.0	200.0	V	15.0	4.3
5304.125000	51.70		68.20	16.50	500.0	200.0	Н	263.0	5.4
7006.875000	53.47		68.20	14.73	500.0	100.0	٧	222.0	7.0
7673.625000		42.20	54.00	11.80	500.0	200.0	V	178.0	7.4



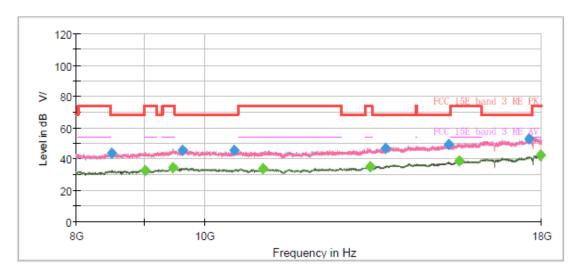


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
				_			PUI		
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
8510.000000	43.96		68.20	24.24	500.0	200.0	V	327.0	-1.8
9022.500000		32.81	54.00	21.19	500.0	100.0	Н	155.0	-1.3
9473.750000		34.77	54.00	19.23	500.0	100.0	H	315.0	0.0
9623.750000	45.53		68.20	22.67	500.0	100.0	Н	146.0	-0.6
10537.500000	45.76		68.20	22.44	500.0	100.0	V	81.0	-1.0
11077.500000		33.59	54.00	20.41	500.0	100.0	Н	150.0	-0.6
13343.750000		34.92	54.00	19.08	500.0	200.0	V	190.0	2.3
13708.750000	46.87		68.20	21.33	500.0	100.0	V	243.0	3.2
15317.500000	49.21		68.20	18.99	500.0	200.0	Н	255.0	5.6
15586.250000		38.66	54.00	15.34	500.0	100.0	H	70.0	6.5
17602.500000	52.94		68.20	15.26	500.0	100.0	V	105.0	10.1
17980.000000		42.20	54.00	11.80	500.0	200.0	Н	179.0	10.9

#### RF Test Report 802.11n HT40 CH159

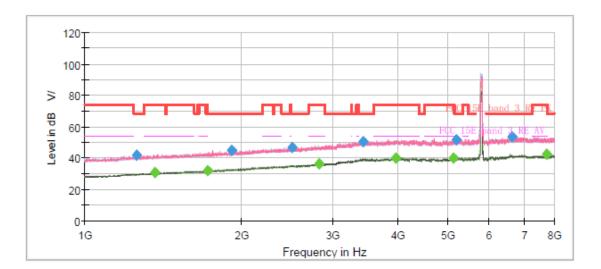


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
, ,				` '	(ms)	` '		, ,	, ,
1259.000000	41.74		68.20	26.46	500.0	200.0	Н	267.0	-8.5
1365.750000		30.54	54.00	23.46	500.0	100.0	V	0.0	-7.7
1720.125000		31.78	54.00	22.22	500.0	100.0	Н	25.0	-5.9
1918.750000	44.92		68.20	23.28	500.0	100.0	٧	115.0	-4.9
2504.125000	47.00		68.20	21.20	500.0	200.0	٧	85.0	-2.1
2827.875000		36.27	54.00	17.73	500.0	200.0	٧	30.0	-1.1
3427.250000	50.76		68.20	17.44	500.0	100.0	٧	257.0	1.5
3961.875000		39.96	54.00	14.04	500.0	200.0	٧	92.0	2.9
5122.125000		40.15	54.00	13.85	500.0	200.0	٧	115.0	5.1
5183.375000	51.69		68.20	16.51	500.0	200.0	٧	173.0	5.2
6647.250000	53.35		68.20	14.85	500.0	200.0	Н	170.0	6.6
7727.000000		42.43	54.00	11.57	500.0	200.0	V	39.0	7.5



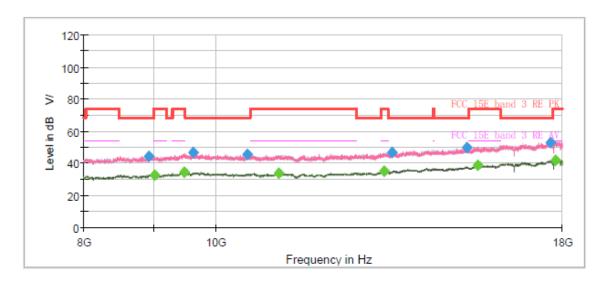


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8938.750000	44.54		68.20	23.66	500.0	100.0	V	244.0	-1.3
9022.500000		32.69	54.00	21.31	500.0	200.0	Н	348.0	-1.3
9480.000000		34.45	54.00	19.55	500.0	200.0	V	0.0	0.0
9626.250000	46.53		68.20	21.67	500.0	200.0	Н	97.0	-0.6
10545.000000	45.39		68.20	22.81	500.0	100.0	Н	273.0	-0.9
11123.750000		33.74	54.00	20.26	500.0	200.0	V	176.0	-0.5
13307.500000		35.17	54.00	18.83	500.0	100.0	Н	84.0	2.3
13478.750000	46.93		68.20	21.27	500.0	200.0	Н	307.0	2.6
15311.250000	49.55		68.20	18.65	500.0	200.0	Н	126.0	5.6
15586.250000		38.50	54.00	15.50	500.0	200.0	Н	83.0	6.5
17631.250000	53.19		68.20	15.01	500.0	100.0	Н	21.0	10.2
17778.750000		42.11	54.00	11.89	500.0	200.0	Н	121.0	10.3

#### RF Test Report 802.11ac VHT80 CH42

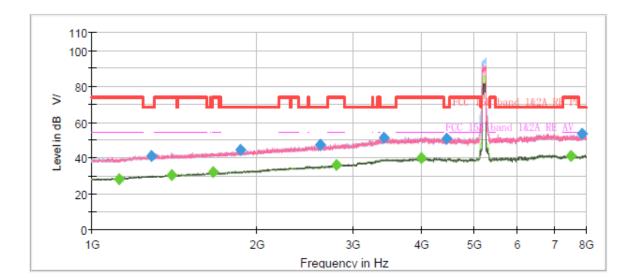


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1122.500000		28.43	54.00	25.57	500.0	200.0	Н	243.0	-9.9
1287.875000	41.15		68.20	27.05	500.0	200.0	V	234.0	-8.3
1398.125000		30.67	54.00	23.33	500.0	100.0	V	265.0	-7.6
1668.500000		32.19	54.00	21.81	500.0	100.0	Н	73.0	-6.1
1872.375000	44.28		68.20	23.92	500.0	100.0	V	314.0	-5.1
2610.875000	47.21		68.20	20.99	500.0	200.0	V	355.0	-2.0
2798.125000		36.10	54.00	17.90	500.0	100.0	V	247.0	-1.3
3423.750000	51.31		68.20	16.89	500.0	100.0	Н	202.0	1.4
3999.500000		39.79	54.00	14.21	500.0	100.0	V	202.0	3.2
4441.375000	50.84		68.20	17.36	500.0	200.0	٧	187.0	3.5
7515.250000		41.34	54.00	12.66	500.0	200.0	Н	303.0	7.0
7878.375000	53.83		68.20	14.37	500.0	100.0	٧	202.0	7.7



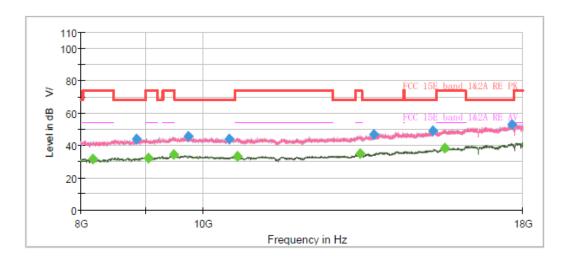


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
					(ms)				
8181.250000		31.37	54.00	22.63	500.0	200.0	Н	0.0	-2.4
8860.000000	43.83		68.20	24.37	500.0	100.0	V	99.0	-1.4
9052.500000		32.26	54.00	21.74	500.0	200.0	Н	27.0	-1.3
9481.250000		34.27	54.00	19.73	500.0	200.0	V	141.0	0.0
9743.750000	45.42		68.20	22.78	500.0	200.0	Н	70.0	-0.6
10498.750000	43.91		68.20	24.29	500.0	200.0	Н	41.0	-1.0
10652.500000		33.46	54.00	20.54	500.0	100.0	V	52.0	-0.8
13351.250000		34.71	54.00	19.29	500.0	100.0	٧	113.0	2.4
13700.000000	46.91		68.20	21.29	500.0	200.0	Н	79.0	3.2
15258.750000	49.35		68.20	18.85	500.0	200.0	Н	18.0	5.5
15587.500000		38.28	54.00	15.72	500.0	200.0	Н	70.0	6.5
17635.000000	53.12		68.20	15.08	500.0	100.0	Н	71.0	10.2

#### RF Test Report 802.11ac VHT80 CH58

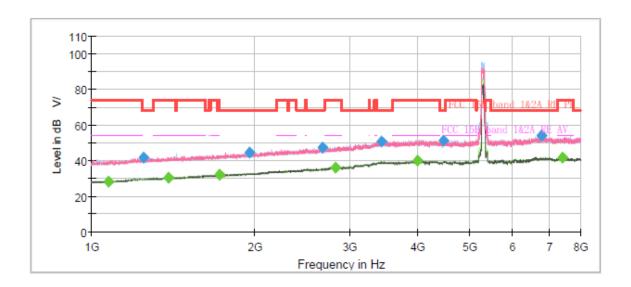

				_					
Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1074.375000		28.26	54.00	25.74	500.0	100.0	Н	17.0	-10.3
1245.875000	41.60		68.20	26.60	500.0	100.0	Н	75.0	-8.6
1387.625000		30.59	54.00	23.41	500.0	200.0	Н	286.0	-7.7
1720.125000		31.88	54.00	22.12	500.0	100.0	Н	134.0	-5.9
1961.625000	44.67		68.20	23.53	500.0	200.0	Ξ	226.0	-4.7
2669.500000	47.17		68.20	21.03	500.0	200.0	Ξ	343.0	-1.9
2820.875000		36.23	54.00	17.77	500.0	100.0	Ξ	279.0	-1.2
3430.750000	50.90		68.20	17.30	500.0	100.0	٧	309.0	1.5
3991.625000		39.97	54.00	14.03	500.0	100.0	٧	323.0	3.2
4471.125000	51.25		68.20	16.95	500.0	200.0	H	13.0	3.7
6775.875000	53.89		68.20	14.31	500.0	200.0	V	0.0	6.7
7400.625000		41.57	54.00	12.43	500.0	200.0	٧	70.0	7.3




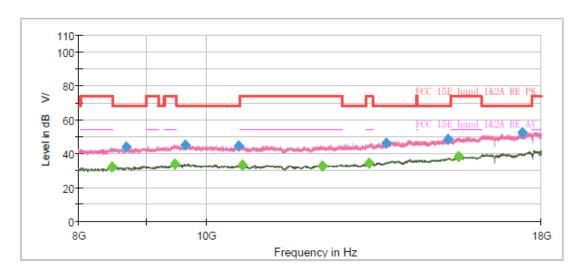


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
8478.750000		32.32	54.00	21.68	500.0	200.0	V	276.0	-1.9
8695.000000	43.97		68.20	24.23	500.0	200.0	V	293.0	-1.5
9470.000000		34.11	54.00	19.89	500.0	100.0	Н	215.0	-0.1
9650.000000	45.26		68.20	22.94	500.0	100.0	V	36.0	-0.5
10592.500000	44.39		68.20	23.81	500.0	200.0	Н	56.0	-0.9
10655.000000		33.39	54.00	20.61	500.0	100.0	V	41.0	-0.8
12253.750000		32.83	54.00	21.17	500.0	200.0	Н	262.0	0.2
13317.500000		34.60	54.00	19.40	500.0	100.0	V	41.0	2.3
13725.000000	46.26		68.20	21.94	500.0	100.0	V	73.0	3.3
15272.500000	48.39		68.20	19.81	500.0	100.0	Н	242.0	5.6
15560.000000		38.19	54.00	15.81	500.0	100.0	Н	299.0	6.3
17421.250000	52.55		68.20	15.65	500.0	100.0	V	55.0	9.7

#### RF Test Report

#### 802.11ac VHT80 CH106

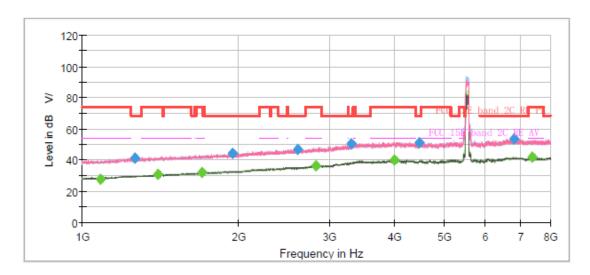


				_					
Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
1085.750000		27.97	54.00	26.03	500.0	200.0	Н	184.0	-10.2
1262.500000	41.43	-	68.20	26.77	500.0	200.0	H	49.0	-8.5
1399.000000		30.60	54.00	23.40	500.0	100.0	V	274.0	-7.6
1698.250000		31.87	54.00	22.13	500.0	200.0	H	322.0	-6.0
1946.750000	44.36	-	68.20	23.84	500.0	100.0	٧	159.0	-4.7
2607.375000	46.76	-	68.20	21.44	500.0	100.0	٧	196.0	-2.0
2827.875000		36.10	54.00	17.90	500.0	100.0	Η	334.0	-1.1
3307.375000	50.62	-	68.20	17.58	500.0	200.0	Ξ	3.0	0.9
3997.750000		39.94	54.00	14.06	500.0	100.0	Ξ	290.0	3.2
4460.625000	51.01		68.20	17.19	500.0	100.0	V	97.0	3.6
6817.875000	53.47		68.20	14.73	500.0	200.0	٧	320.0	6.8
7373.500000		41.80	54.00	12.20	500.0	200.0	V	338.0	7.2

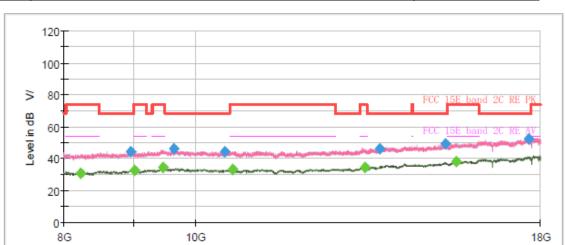


Frequency in Hz

Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
8230.000000		30.63	54.00	23.37	500.0	200.0	Н	91.0	-2.4
8967.500000	44.29		68.20	23.91	500.0	200.0	Н	268.0	-1.3
9022.500000		32.58	54.00	21.42	500.0	200.0	٧	334.0	-1.3
9473.750000		34.27	54.00	19.73	500.0	200.0	Н	156.0	0.0
9647.500000	45.96		68.20	22.24	500.0	100.0	Ξ	145.0	-0.5
10521.250000	44.41		68.20	23.79	500.0	200.0	٧	178.0	-1.0
10656.250000		33.37	54.00	20.63	500.0	100.0	Ξ	357.0	-0.8
13343.750000		34.58	54.00	19.42	500.0	100.0	Η	275.0	2.3
13691.250000	46.11		68.20	22.09	500.0	100.0	٧	57.0	3.1
15315.000000	49.02		68.20	19.18	500.0	100.0	٧	198.0	5.6
15603.750000		38.14	54.00	15.86	500.0	200.0	Н	226.0	6.5
17635.000000	52.52		68.20	15.68	500.0	100.0	٧	0.0	10.2

#### RF Test Report 802.11ac VHT80 CH122

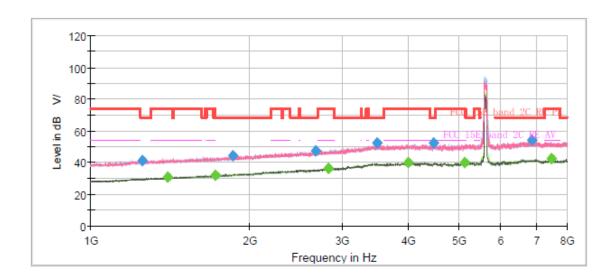


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
					(ms)				
1252.875000	41.04		68.20	27.16	500.0	200.0	٧	273.0	-8.6
1399.000000		30.65	54.00	23.35	500.0	100.0	٧	87.0	-7.6
1721.875000		31.86	54.00	22.14	500.0	100.0	V	197.0	-5.9
1859.250000	44.39		68.20	23.81	500.0	100.0	٧	101.0	-5.2
2668.625000	47.41	-	68.20	20.79	500.0	200.0	٧	180.0	-1.9
2820.875000		36.24	54.00	17.76	500.0	200.0	Н	27.0	-1.2
3491.125000	52.03		68.20	16.17	500.0	100.0	H	305.0	1.7
3996.875000		39.74	54.00	14.26	500.0	100.0	٧	292.0	3.2
4472.875000	52.06	-	68.20	16.14	500.0	200.0	>	66.0	3.7
5126.500000		40.03	54.00	13.97	500.0	200.0	Н	121.0	5.1
6870.375000	54.02		68.20	14.18	500.0	200.0	V	206.0	6.7
7480.250000		42.59	54.00	11.41	500.0	200.0	V	188.0	6.9

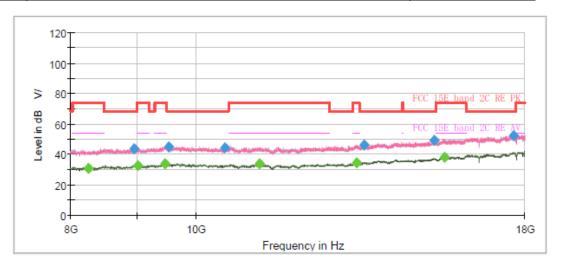


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBµV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
					(ms)				
8255.000000		30.71	54.00	23.29	500.0	100.0	Н	195.0	-2.5
8957.500000	43.97		68.20	24.23	500.0	200.0	V	0.0	-1.3
9027.500000		32.40	54.00	21.60	500.0	100.0	Н	106.0	-1.3
9468.750000		34.03	54.00	19.97	500.0	200.0	V	168.0	-0.1
9532.500000	45.17		68.20	23.03	500.0	100.0	Н	315.0	-0.2
10532.500000	44.27		68.20	23.93	500.0	100.0	٧	277.0	-1.0
11207.500000		33.55	54.00	20.45	500.0	100.0	V	316.0	-0.6
13341.250000		34.61	54.00	19.39	500.0	200.0	H	138.0	2.3
13511.250000	46.23		68.20	21.97	500.0	100.0	H	97.0	2.8
15317.500000	49.36		68.20	18.84	500.0	100.0	H	273.0	5.6
15593.750000		38.24	54.00	15.76	500.0	100.0	Н	139.0	6.5
17646.250000	52.34		68.20	15.86	500.0	200.0	V	0.0	10.2

#### 802.11ac VHT80 CH138

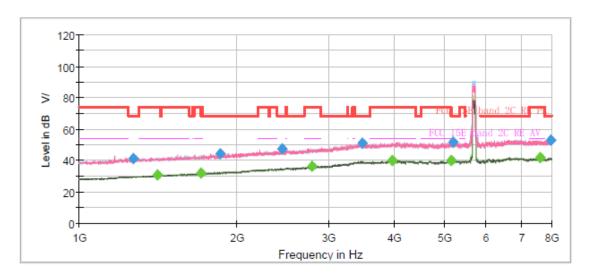


			I IIIui		411				
Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1269.500000	41.31		68.20	26.89	500.0	200.0	Н	227.0	-8.4
1412.125000		30.46	54.00	23.54	500.0	200.0	Н	0.0	-7.5
1708.750000		31.77	54.00	22.23	500.0	200.0	Н	209.0	-5.9
1861.000000	44.50		68.20	23.70	500.0	100.0	V	7.0	-5.2
2446.375000	47.39		68.20	20.81	500.0	100.0	Н	33.0	-2.4
2790.250000		36.27	54.00	17.73	500.0	200.0	Н	0.0	-1.3
3478.875000	50.86		68.20	17.34	500.0	100.0	Н	241.0	1.7
3959.250000		39.91	54.00	14.09	500.0	200.0	V	62.0	2.9
5147.500000		40.16	54.00	13.84	500.0	100.0	Н	89.0	5.0
5179.000000	51.76		68.20	16.44	500.0	200.0	Н	281.0	5.2
7587.000000		41.96	54.00	12.04	500.0	200.0	٧	140.0	7.1
7965.000000	53.12		68.20	15.08	500.0	100.0	٧	279.0	7.6



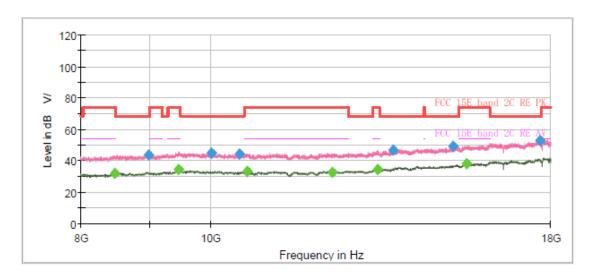


Frequency	MaxPeak	Average	Limit	Margin	Meas.	Height	Pol	Azimuth	Corr.
(MHz)	(dBuV/m)	(dBµV/m)	(dBµV/m)	(dB)	Time	(cm)		(deg)	(dB/m)
. ,				` '	(ms)	` '		, 0,	, ,
8478.750000		32.28	54.00	21.72	500.0	100.0	Н	294.0	-1.9
8988.750000	43.86		68.20	24.34	500.0	100.0	V	170.0	-1.3
9465.000000		34.18	54.00	19.82	500.0	200.0	٧	298.0	-0.1
10025.000000	45.00		68.20	23.20	500.0	200.0	٧	354.0	-0.8
10518.750000	44.17		68.20	24.03	500.0	200.0	Н	248.0	-1.0
10651.250000		33.26	54.00	20.74	500.0	100.0	Н	140.0	-0.8
12341.250000		32.42	54.00	21.58	500.0	100.0	Н	359.0	0.3
13346.250000		34.62	54.00	19.38	500.0	200.0	Н	8.0	2.4
13707.500000	46.59		68.20	21.61	500.0	200.0	Н	35.0	3.2
15207.500000	48.98		68.20	19.22	500.0	200.0	Н	17.0	5.4
15573.750000		38.25	54.00	15.75	500.0	100.0	Н	354.0	6.4
17666.250000	52.91		68.20	15.29	500.0	100.0	Н	214.0	10.2

#### 802.11ac VHT80 CH155

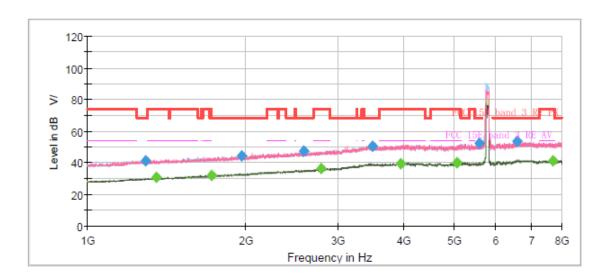

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
4004.075000	44.40		20.00	07.00	(ms)	400.0		400.0	
1291.375000	41.18		68.20	27.02	500.0	100.0	Ι	183.0	-8.3
1350.000000		30.61	54.00	23.39	500.0	100.0	Ι	174.0	-7.9
1720.125000		32.02	54.00	21.98	500.0	200.0	Ξ	100.0	-5.9
1967.750000	44.17		68.20	24.03	500.0	200.0	Н	46.0	-4.7
2575.875000	47.19		68.20	21.01	500.0	200.0	Η	55.0	-2.0
2790.250000		36.27	54.00	17.73	500.0	200.0	>	118.0	-1.3
3491.125000	50.74		68.20	17.46	500.0	100.0	Ξ	334.0	1.7
3950.500000		39.68	54.00	14.32	500.0	100.0	Ξ	5.0	2.8
5061.750000		40.03	54.00	13.97	500.0	100.0	Η	309.0	5.0
5572.750000	52.55		68.20	15.65	500.0	200.0	Н	217.0	5.5
6575.500000	53.66		68.20	14.54	500.0	100.0	Н	260.0	6.6
7700.750000		41.33	54.00	12.67	500.0	200.0	V	167.0	7.6



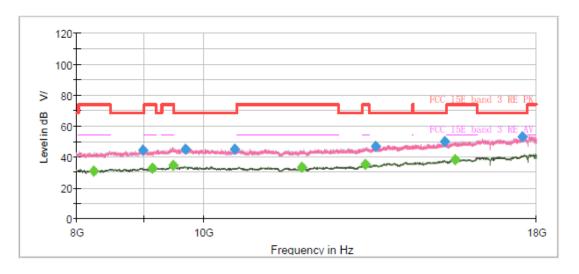


Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)	
8247.500000		30.66	54.00	23.34	500.0	200.0	Η	62.0	-2.4	
8990.000000	44.33		68.20	23.87	500.0	200.0	Н	62.0	-1.3	
9140.000000		32.52	54.00	21.48	500.0	200.0	V	307.0	-1.1	
9482.500000		34.16	54.00	19.84	500.0	200.0	٧	143.0	0.0	
9691.250000	45.14		68.20	23.06	500.0	200.0	Н	67.0	-0.7	
10572.500000	44.75		68.20	23.45	500.0	100.0	٧	99.0	-0.9	
11903.750000		33.21	54.00	20.79	500.0	200.0	V	180.0	0.1	
13316.250000		34.79	54.00	19.21	500.0	200.0	Н	2.0	2.3	
13553.750000	46.89		68.20	21.31	500.0	200.0	V	250.0	2.9	
15297.500000	49.79		68.20	18.41	500.0	100.0	Н	190.0	5.6	
15582.500000		38.38	54.00	15.62	500.0	200.0	V	212.0	6.4	
17541.250000	52.90		68.20	15.30	500.0	100.0	V	169.0	9.9	




RF Test Report No.: R2411A1659-R4

During the test, the Radiates Emission from 18GHz to 40GHz was performed in all modes with all channels. The test data of the worst-case condition was recorded in this report.

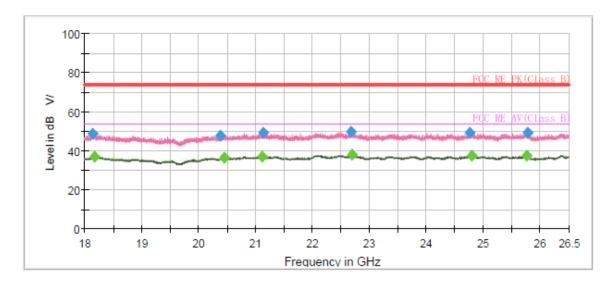

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
18131.750000	48.67		74.00	25.33	500.0	100.0	Н	172.0	-5.8
18173.187500		37.04	54.00	16.96	500.0	200.0	Н	0.0	-5.8
20386.375000	47.93		74.00	26.07	500.0	100.0	Н	168.0	-5.2
20455.437500		36.41	54.00	17.59	500.0	100.0	Н	94.0	-4.9
21111.000000		37.15	54.00	16.85	500.0	100.0	Н	195.0	-4.1
21131.187500	49.25		74.00	24.75	500.0	200.0	H	277.0	-4.2
22684.562500	49.53		74.00	24.47	500.0	200.0	Н	272.0	-3.4
22689.875000		37.73	54.00	16.27	500.0	200.0	H	224.0	-3.4
24759.625000	49.15		74.00	24.85	500.0	200.0	Н	164.0	-2.7
24798.937500		37.55	54.00	16.45	500.0	200.0	Н	50.0	-2.7
25756.250000		37.58	54.00	16.42	500.0	100.0	Н	344.0	-2.4
25779.625000	49.35		74.00	24.65	500.0	100.0	Н	244.0	-2.5

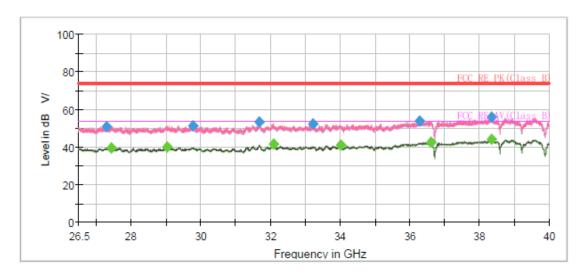

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
27293.125000	50.91		74.00	23.09	500.0	100.0	V	250.0	-0.5
27439.937500		39.68	54.00	14.32	500.0	200.0	Н	223.0	-0.3
29026.187500		39.85	54.00	14.15	500.0	100.0	V	226.0	0.1
29773.750000	51.34		74.00	22.66	500.0	100.0	Н	88.0	-0.6
31689.062500	53.18		74.00	20.82	500.0	100.0	V	226.0	-1.4
32099.125000		41.33	54.00	12.67	500.0	100.0	٧	213.0	-0.9
33224.687500	52.35		74.00	21.65	500.0	100.0	V	180.0	-0.6
34012.750000		40.91	54.00	13.09	500.0	100.0	V	170.0	-0.3
36284.125000	53.98		74.00	20.02	500.0	100.0	V	156.0	3.8
36603.062500		42.51	54.00	11.49	500.0	100.0	V	122.0	4.2
38334.437500		43.88	54.00	10.12	500.0	200.0	V	14.0	5.4
38334.437500	55.69		74.00	18.31	500.0	100.0	V	250.0	5.4

RF Test Report No.: R2411A1659-R4

#### 5.6. Conducted Emission

#### **Ambient condition**


Temperature	Relative humidity	Pressure
15°C ~ 35°C	20% ~ 80%	86 kPa ~ 106 kPa

#### **Methods of Measurement**

The EUT IS placed on a non-metallic table of 80cm height above the horizontal metal reference ground plane. During the test, the EUT was operating in its typical mode. The test method is according to ANSI C63.10.Connect the AC power line of the EUT to the LISN Use EMI receiver to detect the average and Quasi-peak value. RBW is set to 9kHz, VBW is set to 30kHz The measurement result should include both L line and N line.

The test is in transmitting mode.

#### **Test Setup**

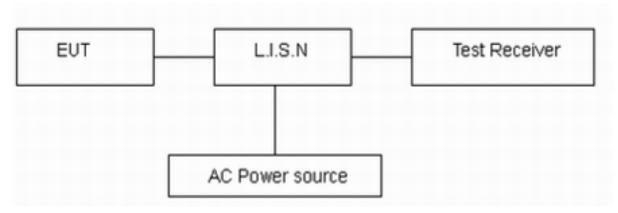

Note: AC Power source is used to change the voltage 110V/60Hz.

#### Limits

Frequency	Conducted Limits(dBμV)						
(MHz)	Quasi-peak	Average					
0.15 - 0.5	66 to 56 *	56 to 46*					
0.5 - 5	56	46					
5 - 30	60	50					
*: Decreases with the logarithm of the frequency.							

#### **Measurement Uncertainty**


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor k = 1.96, U = 2.69 dB.



RF Test Report No.: R2411A1659-R4

#### **Test Results:**

Following plots, Blue trace uses the peak detection and Green trace uses the average detection. During the test, the Conducted Emission was performed in all modes with all channels. The test data of the worst-case condition was recorded in this report.

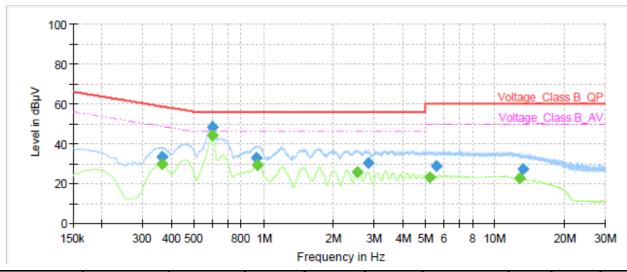

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.36	33.38		58.69	25.31	1000.0	9.000	L1	ON	21.0
0.36		29.81	48.69	18.88	1000.0	9.000	L1	ON	21.0
0.60		44.34	46.00	1.66	1000.0	9.000	L1	ON	20.8
0.60	48.20		56.00	7.80	1000.0	9.000	L1	ON	20.8
0.93	32.97		56.00	23.03	1000.0	9.000	L1	ON	20.3
0.94		29.22	46.00	16.78	1000.0	9.000	L1	ON	20.3
2.55		25.45	46.00	20.55	1000.0	9.000	L1	ON	19.6
2.84	30.07		56.00	25.93	1000.0	9.000	L1	ON	19.6
5.23		23.23	50.00	26.77	1000.0	9.000	L1	ON	19.5
5.55	28.65		60.00	31.35	1000.0	9.000	L1	ON	19.5
12.80		22.82	50.00	27.18	1000.0	9.000	L1	ON	19.6
13.28	27.11		60.00	32.89	1000.0	9.000	L1	ON	19.6

Remark: Correct factor=cable loss + LISN factor


L line Conducted Emission from 150 kHz to 30 MHz

Eurofins TA Technology (Shanghai) Co., Ltd. TA-MB-04-006R

This report shall not be reproduced except in full, without the written approval of Eurofins TA Technology (Shanghai) Co., Ltd.



**RF Test Report** Report No.: R2411A1659-R4

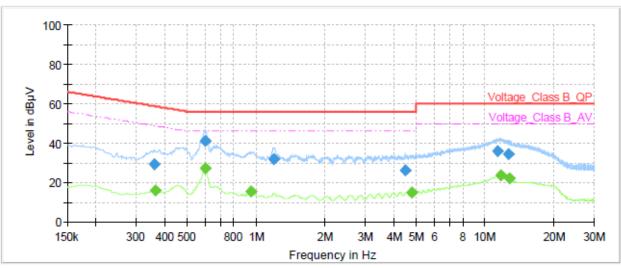

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Line	Filter	Corr. (dB)
0.36	29.36		58.75	29.39	1000.0	9.000	N	ON	21.0
0.36		15.82	48.69	32.87	1000.0	9.000	N	ON	21.0
0.60	41.08		56.00	14.92	1000.0	9.000	N	ON	20.8
0.60		27.17	46.00	18.83	1000.0	9.000	N	ON	20.8
0.95		15.24	46.00	30.76	1000.0	9.000	N	ON	20.3
1.20	31.89		56.00	24.11	1000.0	9.000	N	ON	20.1
4.51	25.90		56.00	30.10	1000.0	9.000	N	ON	19.5
4.80		14.64	46.00	31.36	1000.0	9.000	N	ON	19.5
11.38	35.92		60.00	24.08	1000.0	9.000	N	ON	19.6
11.69		23.42	50.00	26.58	1000.0	9.000	N	ON	19.6
12.60	34.40		60.00	25.60	1000.0	9.000	N	ON	19.6
12.80		22.30	50.00	27.70	1000.0	9.000	N	ON	19.6

Remark: Correct factor=cable loss + LISN factor

N line Conducted Emission from 150 kHz to 30 MHz



Report No.: R2411A1659-R4

### 6. Main Test Instruments

Name	Manufacturer	Туре	Type Serial Number		Expiration Date
Power Sensor	R&S	NRP18S	101954	2024-05-07	2025-05-06
Spectrum Analyzer	KEYSIGHT	N9020A	MY51330870	2024-05-07	2025-05-06
DC Dower Cumby	LINILT	UTP1306S+	2205D0547426	2023-12-05	2024-12-04
DC Power Supply	UNI-T	01713065+	2205D0517426	2024-12-02	2025-12-01
Temperature	FORFO	CLL 040	02000500	2023-12-05	2024-12-04
Chamber	ESPEC	SU-242	93000506	2024-12-02	2025-12-01
EMI Test Receiver	R&S	ESCI3	100948	2024-05-07	2025-05-06
Signal Analyzer	R&S	FSV40	101186	2024-05-07	2025-05-06
Loop Antenna	SCHWARZBECK	FMZB1519	1519-047	2023-04-16	2026-04-15
TRILOG Broadband Antenna	SCHWARZBECK	VULB 9163	1023	2023-07-14	2026-07-13
Horn Antenna	ETS-Lindgren	3160-09	00102643	2024-09-24	2027-09-23
Horn Antenna	STEATITE	QSH-SL-26-40 -K-15	16779	2023-01-17	2026-01-16
Software	R&S	EMC32	9.26.01	/	/
		Conducted Emis	sion		
Artificial main	Dec	ENIV/04.0	404474	2023-12-05	2025-12-04
network	R&S	ENV216	101171	2024-12-02	2026-12-01
EMI Test Receiver	R&S	ESR	101667	2024-05-07	2025-05-06
Software	R&S	EMC32	10.35.10	/	/
Software	R&S	EMC32	9.26.0	/	/



RF Test Report Report No.: R2411A1659-R4

# **ANNEX A: The EUT Appearance**

The EUT Appearance are submitted separately.



RF Test Report Report No.: R2411A1659-R4

# **ANNEX B: Test Setup Photos**

The Test Setup Photos are submitted separately.

\*\*\*\*\* END OF REPORT \*\*\*\*\*