

FCC Test Report

Report No.: RF181219E02-1

FCC ID: I88EMG3435Q20B

Test Model: EMG3435-Q20A

Series Model: SoMA5200

Received Date: Dec. 19, 2018

Test Date: Jan. 18 to Feb. 18, 2019

Issued Date: Mar. 12, 2019

Applicant: Zyxel Communications Corporation

Address: No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu 30075, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT	7
3.2 Description of Test Modes	9
3.2.1 Test Mode Applicability and Tested Channel Detail	10
3.3 Duty Cycle of Test Signal	12
3.4 Description of Support Units	13
3.4.1 Configuration of System under Test	14
3.5 General Description of Applied Standard	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement.....	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedure	20
4.1.4 Deviation from Test Standard	20
4.1.5 Test Setup.....	21
4.1.6 EUT Operating Condition	22
4.1.7 Test Results	23
4.2 Conducted Emission Measurement	43
4.2.1 Limits of Conducted Emission Measurement	43
4.2.2 Test Instruments	43
4.2.3 Test Procedure	44
4.2.4 Deviation from Test Standard	44
4.2.5 Test Setup.....	44
4.2.6 EUT Operating Condition	44
4.2.7 Test Results	45
4.3 Transmit Power Measurement	47
4.3.1 Limits of Transmit Power Measurement	47
4.3.2 Test Setup.....	47
4.3.3 Test Instruments	47
4.3.4 Test Procedure	47
4.3.5 Deviation from Test Standard	47
4.3.6 EUT Operating Condition	47
4.3.7 Test Results	48
4.4 Occupied Bandwidth Measurement	54
4.4.1 Test Setup.....	54
4.4.2 Test Instruments	54
4.4.3 Test Procedure	54
4.4.4 Test Results	55
4.5 Peak Power Spectral Density Measurement	61
4.5.1 Limits of Peak Power Spectral Density Measurement	61
4.5.2 Test Setup.....	61
4.5.3 Test Instruments	61
4.5.4 Test Procedure	62
4.5.5 Deviation from Test Standard	62
4.5.6 EUT Operating Condition	62
4.5.7 Test Results	63
4.6 Frequency Stability Measurement.....	69
4.6.1 Limits of Frequency Stability Measurement	69

4.6.2 Test Setup	69
4.6.3 Test Instruments	69
4.6.4 Test Procedure	69
4.6.5 Deviation from Test Standard	69
4.6.6 EUT Operating Condition	69
4.6.7 Test Results	70
4.7 6dB Bandwidth Measurement	71
4.7.1 Limits of 6dB Bandwidth Measurement	71
4.7.2 Test Setup	71
4.7.3 Test Instruments	71
4.7.4 Test Procedure	71
4.7.5 Deviation from Test Standard	71
4.7.6 EUT Operating Condition	71
4.7.7 Test Results	72
5 Pictures of Test Arrangements	74
Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)	75
Appendix – Information of the Testing Laboratories	78

Release Control Record

Issue No.	Description	Date Issued
RF181219E02-1	Original release.	Mar. 12, 2019

1 Certificate of Conformity

Product: Dual-Band Wireless AC2600 Gigabit Ethernet Gateway

Brand: ZYXEL

Test Model: EMG3435-Q20A

Series Model: SoMA5200

Sample Status: ENGINEERING SAMPLE


Applicant: Zyxel Communications Corporation

Test Date: Jan. 18 to Feb. 18, 2019

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** Mar. 12, 2019
Claire Kuan / Specialist

Approved by :  , **Date:** Mar. 12, 2019
May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -9.93dB at 0.43906MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -0.6dB at 5150.00MH, 5646.05MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is N-Type. (The device is professionally installed)

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) ($\pm$)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	5.1 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	5.0 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Dual-Band Wireless AC2600 Gigabit Ethernet Gateway
Brand	ZYXEL
Test Model	EMG3435-Q20A
Series Model	SoMA5200
Sample Status	ENGINEERING SAMPLE
Power Supply Rating	DC 12V from adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode
Modulation Technology	DSSS, OFDM
Transfer Rate	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps
Operating Frequency	2.4GHz: 2.412GHz ~ 2.462GHz 5GHz: 5.18GHz ~ 5.24GHz, 5.745GHz ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20): 11 802.11n (HT40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20): 9 802.11n (HT40), 802.11ac (VHT40): 4 802.11ac (VHT80): 2
Output Power	2.4GHz: CDD Mode: 628.549mW Beamforming Mode: 432.562mW 5.18 ~ 5.24GHz CDD Mode: 244.893 mW Beamforming Mode: 64.774mW 5.745 ~ 5.825GHz CDD Mode: 985.078mW Beamforming Mode: 271.155mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	NA
Data Cable Supplied	Ethernet Cable x 1 (Unshielded 1.8m)

Note:

1. The EUT has below model names, which are identical to each other in all aspects except for the following:

Brand	Model No.	Difference
ZYXEL	EMG3435-Q20A	The Variation of model number is for strategy of marketing. The circuit of each model is identical.
	SoMA5200	

From the above models, model: **EMG3435-Q20A** was selected as representative model for the test and its data are recorded in this report.

2. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	WLAN 5GHz

Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

3. The EUT must be supplied with a power adapter (for test only, not for sale) as following table:

Brand	Model No.	Spec.
APD	WA-36A12R	AC Input: 100-240Vac, 0.9A, 50/60Hz DC Output: 12V, 3A DC Output Cable: 1.5m unshielded with one core

4. The antennas provided to the EUT, please refer to the following table:

Antenna No.	Chain No.	Brand	Model	Antenna Net Gain (dBi)	Frequency range (GHz)	Antenna type	Connector Type						
1	Chain 0	WHA YU	C107-511211-A	3.5	2.4~2.4835	Dipole	N type						
	Chain 3			6.0	5.15~5.25								
				5.3	5.725~5.85								
2	Chain 1	WHA YU	C107-511211-A	3.5	2.4~2.4835			Dipole	N type				
	Chain 2			6.0	5.15~5.25								
				5.3	5.725~5.85								
3	Chain 2	WHA YU	C107-511211-A	3.5	2.4~2.4835					Dipole	N type		
	Chain 1			6.0	5.15~5.25								
				5.3	5.725~5.85								
4	Chain 3	WHA YU	C107-511211-A	3.5	2.4~2.4835							Dipole	N type
	Chain 0			6.0	5.15~5.25								
				5.3	5.725~5.85								

5. The EUT incorporates a MIMO function.

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	4TX	4RX
802.11g	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX

Note:

- The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)
 - All of modulation mode support beamforming function except (802.11b/g/a) modulation mode.
 - The EUT support Beamforming and CDD mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
6. The EUT will install at outdoor area, for U-NII-1 the highest antenna gain is -3.19dBi from the horizon above 30 degrees, for more detail information please refer to antenna specification and user manual.
7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210 MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE $\geq$ 1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE $\geq$ 1G**: Radiated Emission above 1GHz

RE<1G: Radiated Emission below 1GHz

PLC: Power Line Conducted Emission

APCM: Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Radiated Emission Test (Below 1GHz):

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240, 5745-5825	36 to 48, 149 to 165	157	OFDM	BPSK	6

Power Line Conducted Emission Test:

- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240, 5745-5825	36 to 48, 149 to 165	157	OFDM	BPSK	6

Antenna Port Conducted Measurement:

- ☒ This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- ☒ Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- ☒ Following channel(s) was (were) selected for the final test as listed below.

CDD Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11a	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6
802.11ac (VHT20)		36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11a	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6
802.11ac (VHT20)		149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3
Beamforming Mode (output power only)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11ac (VHT20)	5180-5240	36 to 48	36, 40, 48	OFDM	BPSK	6.5
802.11ac (VHT40)		38 to 46	38, 46	OFDM	BPSK	13.5
802.11ac (VHT80)		42	42	OFDM	BPSK	29.3
802.11ac (VHT20)	5745-5825	149 to 165	149, 157, 165	OFDM	BPSK	6.5
802.11ac (VHT40)		151 to 159	151, 159	OFDM	BPSK	13.5
802.11ac (VHT80)		155	155	OFDM	BPSK	29.3

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE _≥ 1G	23deg. C, 63%RH	120Vac, 60Hz	Frank CHuang
RE _{<} 1G	22deg. C, 70%RH	120Vac, 60Hz	Andy Ho
PLC	23deg. C, 74%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal

If duty cycle of test signal is $\geq 98\%$, duty factor is not required.


If duty cycle of test signal is $< 98\%$, duty factor shall be considered.

802.11a: Duty cycle = $2.026/2.087 = 0.971$, Duty factor = $10 * \log(1/0.971) = 0.13$

802.11ac (VHT20): Duty cycle = $4.963/5.045 = 0.984$

802.11ac (VHT40): Duty cycle = $2.412/2.485 = 0.971$, Duty factor = $10 * \log(1/0.971) = 0.13$

802.11ac (VHT80): Duty cycle = $1.136/1.201 = 0.946$, Duty factor = $10 * \log(1/0.946) = 0.24$

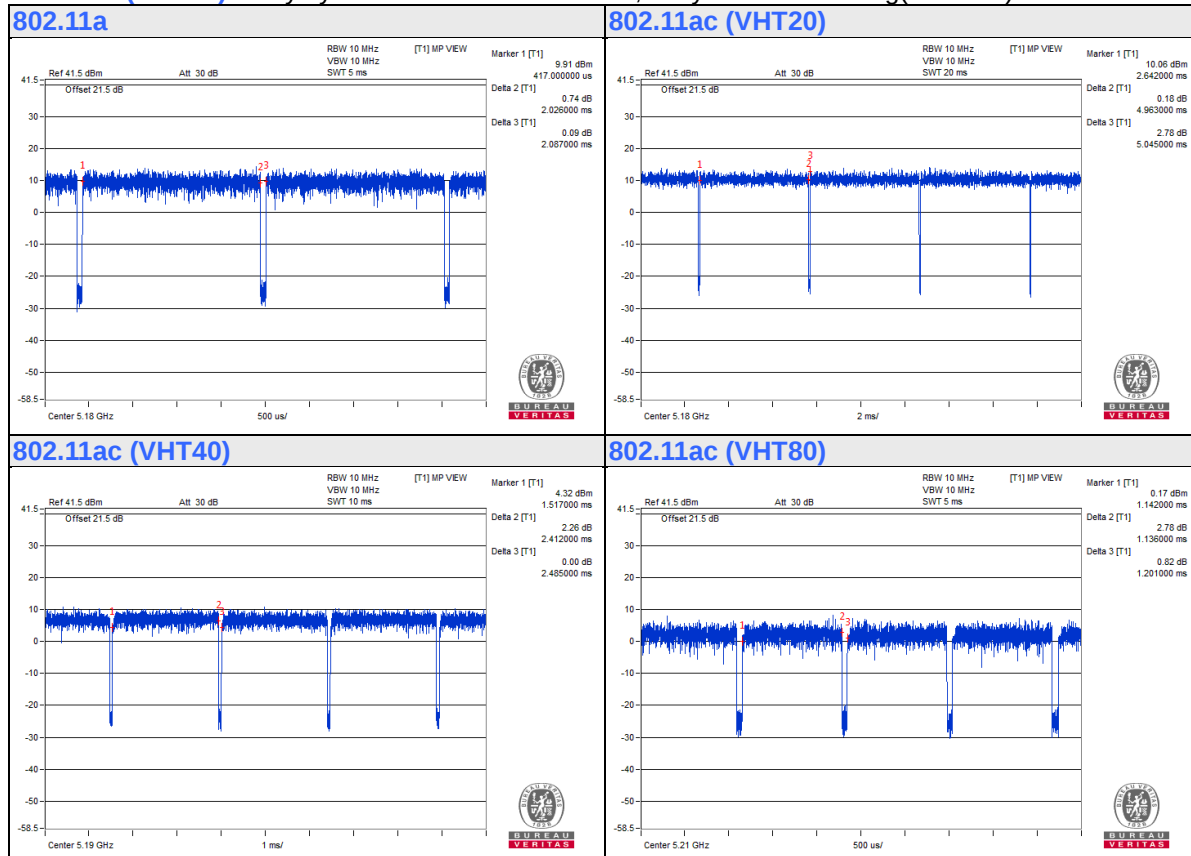

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab
B.	Adapter	APD	WA-36A12R	NA	NA	Supplied by client


Note:

1. All power cords of the above support units are non-shielded (1.8m).


ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	RJ-45 Cable	1	10	No	0	Provided by Lab
2.	DC Cable	1	1.5	No	1	Supplied by client

3.4.1 Configuration of System under Test

For conducted emission test:

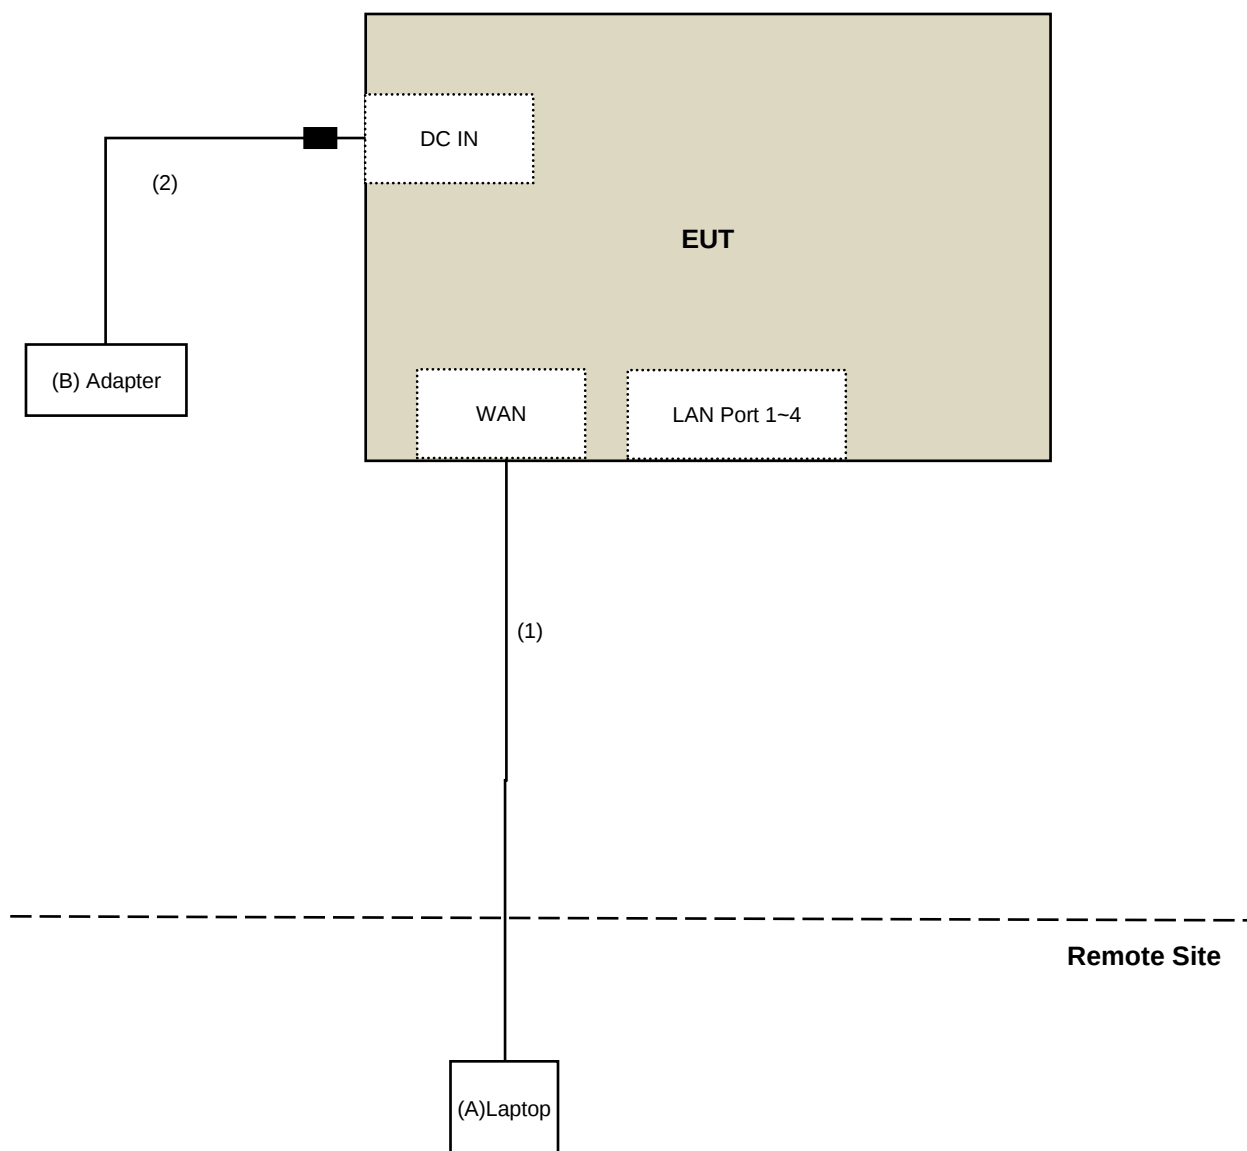

For other test items:

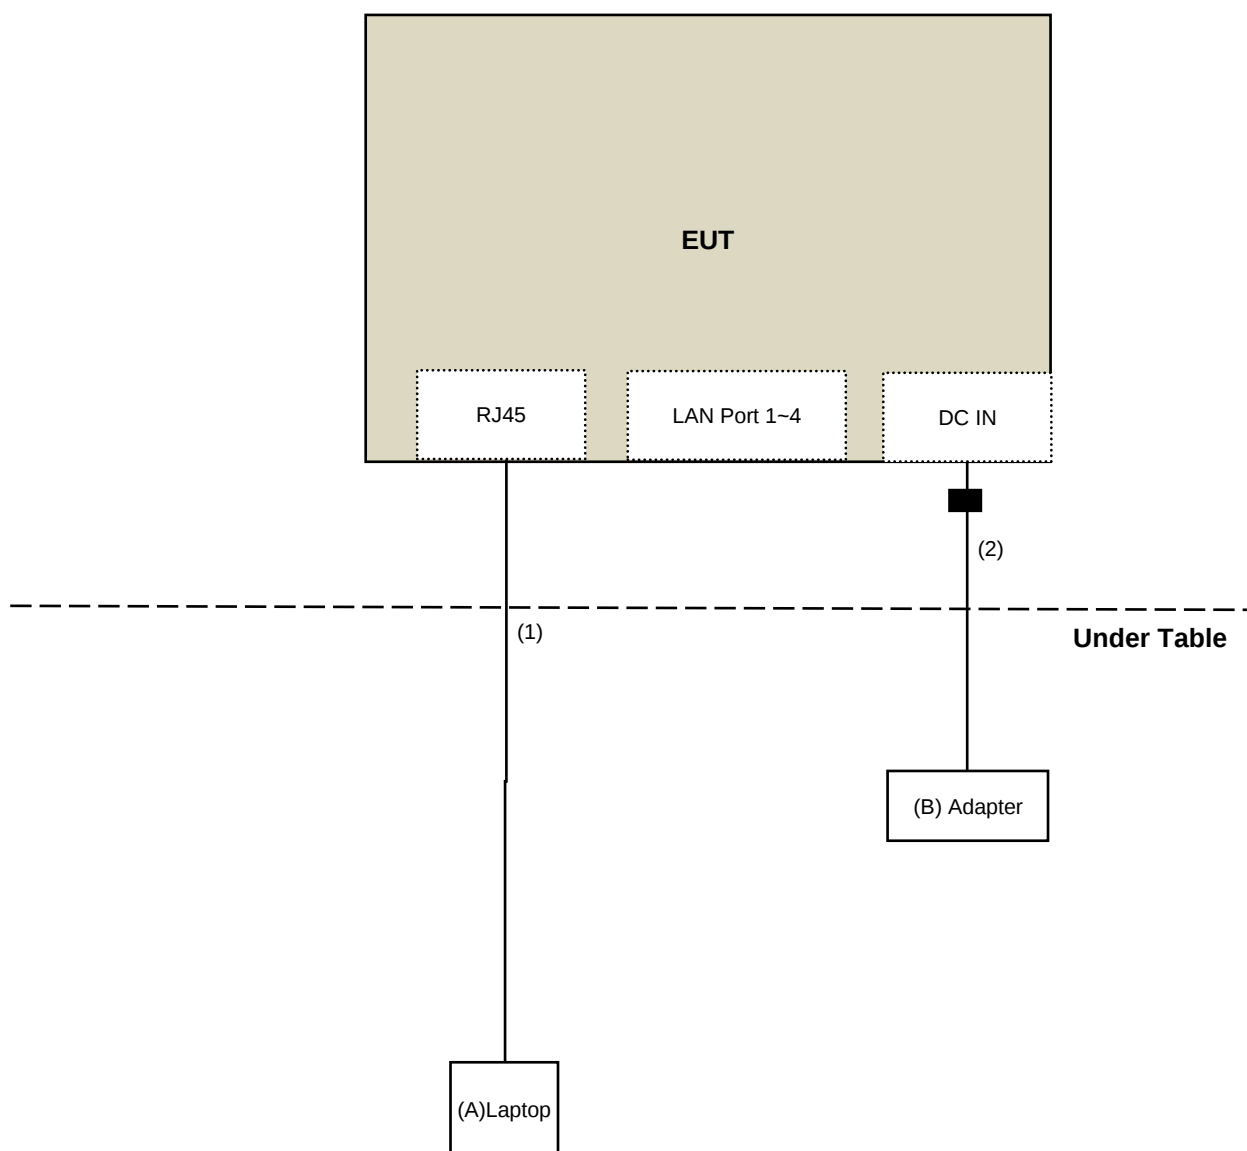

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

- The lower limit shall apply at the transition frequencies.
- Emission level (dBuV/m) = 20 log Emission level (uV/m).
- For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To			Limit	
789033 D02 General UNII Test Procedure New Rules v02r01			Field Strength at 3m	
			PK:74 (dBμV/m)	AV:54 (dBμV/m)
Frequency Band	Applicable To		EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)		PK:-27 (dBm/MHz)	PK:68.2(dBμV/m)
5250~5350 MHz	15.407(b)(2)			
5470~5725 MHz	15.407(b)(3)			
5725~5850 MHz	☒	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBμV/m) ^{*1} PK:105.2 (dBμV/m) ^{*2} PK: 110.8(dBμV/m) ^{*3} PK:122.2 (dBμV/m) ^{*4}
	☐	15.407(b)(4)(ii)	Emission limits in section 15.247(d)	
^{*1} beyond 75 MHz or more above of the band edge.			^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.			^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

For radiated test:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Agilent	N9038A	MY50010156	July 12, 2018	July 11, 2019
Pre-Amplifier EMCI	EMC001340	980142	Jan. 25, 2019	Jan. 24, 2020
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-05	May 05, 2018	May 04, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-361	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-3-1	Mar. 20, 2018	Mar. 19, 2019
RF Cable	8D	966-3-2	Mar. 20, 2018	Mar. 19, 2019
RF Cable	8D	966-3-3	Mar. 20, 2018	Mar. 19, 2019
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-3-01	Sep. 27, 2018	Sep. 26, 2019
Horn Antenna SCHWARZBECK	BBHA9120-D	9120D-406	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980384	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC104-SM-SM-1200	160922	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC104-SM-SM-2000	180601	June 12, 2018	June 11, 2019
RF Cable	EMC104-SM-SM-6000	180602	June 12, 2018	June 11, 2019
Spectrum Analyzer Keysight	N9030A	MY54490679	July 23, 2018	July 22, 2019
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Antenna Tower & Turn Table Max-Full	MF-7802	MF780208406	NA	NA
Boresight Antenna Fixture	FBA-01	FBA-SIP01	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 20, 2018	June 19, 2019
Power meter Anritsu	ML2495A	1014008	May 09, 2018	May 08, 2019
Power sensor Anritsu	MA2411B	0917122	May 09, 2018	May 08, 2019
AC Power Source Extech Electronics	6205	1440452	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 09, 2019	Jan. 08, 2020
True RMS Clamp Meter FLUKE	325	31130711WS	May 22, 2018	May 21, 2019

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The CANADA Site Registration No. is 20331-1
4. Loop antenna was used for all emissions below 30 MHz.
5. Tested Date: Jan. 28 to Feb. 18, 2019

For other test items:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSV40	100964	June 20, 2018	June 19, 2019
Power meter Anritsu	ML2495A	1014008	May 09, 2018	May 08, 2019
Power sensor Anritsu	MA2411B	0917122	May 09, 2018	May 08, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 16, 2018	Apr. 15, 2019

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 3.
3. The CANADA Site Registration No. is 20331-1
4. Loop antenna was used for all emissions below 30 MHz.
5. Tested Date: Jan. 18 to 28, 2019

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle $< 98\%$) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

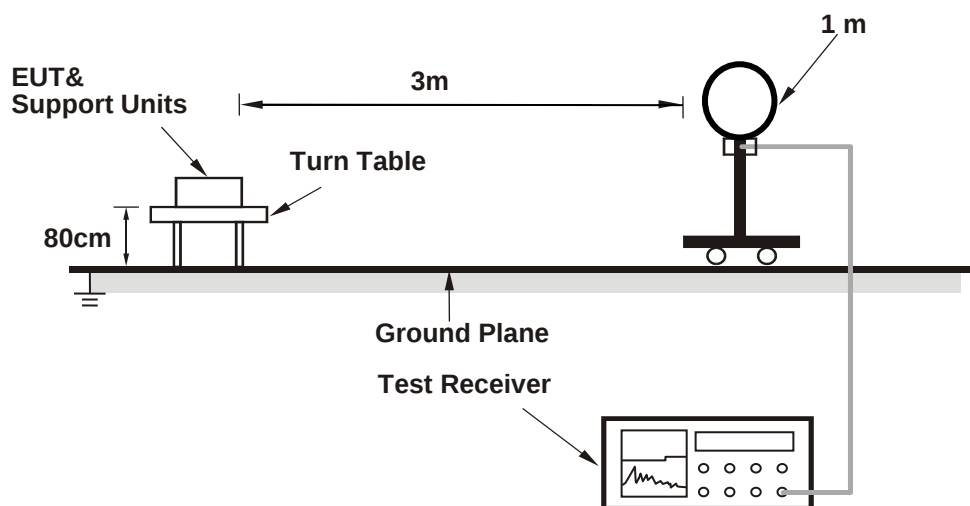

For Radiated emission 30MHz to 1GHz

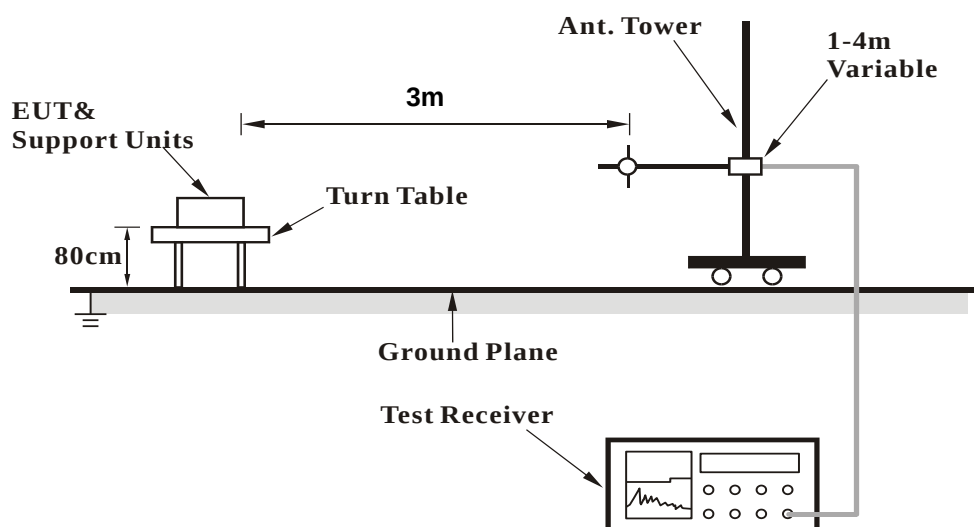

For Radiated emission above 1GHz

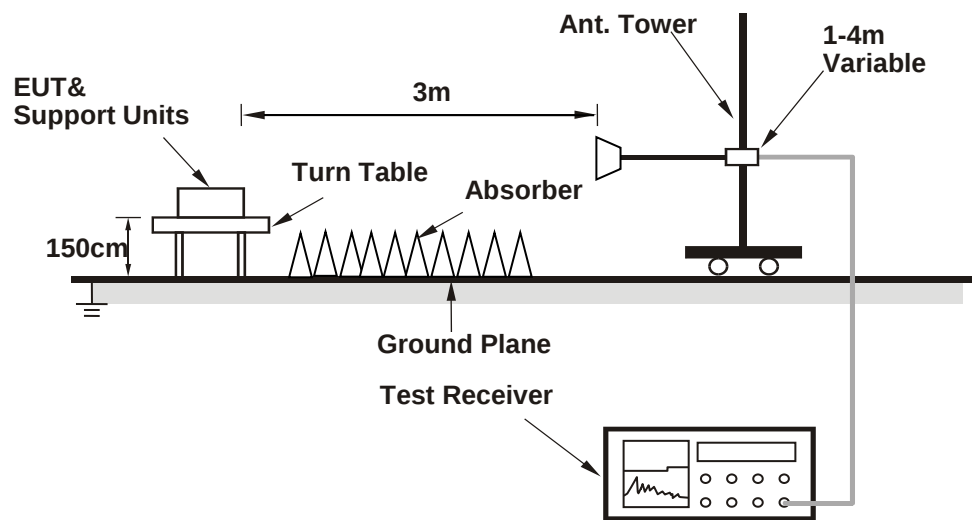

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- Connected the EUT with the Laptop which is placed on remote site.
- Controlling software (QDART 1.0.38 (Version: V3.0.210.0)) has been activated to set the EUT on specific status.

4.1.7 Test Results

CDD Mode

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.4 PK	74.0	-18.6	1.37 H	14	52.3	3.1
2	5150.00	46.2 AV	54.0	-7.8	1.37 H	14	43.1	3.1
3	*5180.00	101.5 PK			1.37 H	14	98.4	3.1
4	*5180.00	95.2 AV			1.37 H	14	92.1	3.1
5	#10360.00	48.6 PK	68.2	-19.6	2.47 H	360	36.3	12.3
6	15540.00	49.5 PK	74.0	-24.5	1.36 H	19	36.5	13.0
7	15540.00	39.6 AV	54.0	-14.4	1.36 H	19	26.6	13.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.3 PK	74.0	-14.7	1.91 V	48	56.2	3.1
2	5150.00	49.2 AV	54.0	-4.8	1.91 V	48	46.1	3.1
3	*5180.00	120.2 PK			1.91 V	48	117.1	3.1
4	*5180.00	109.2 AV			1.91 V	48	106.1	3.1
5	#10360.00	51.4 PK	68.2	-16.8	1.11 V	308	39.1	12.3
6	15540.00	51.6 PK	74.0	-22.4	1.55 V	48	38.6	13.0
7	15540.00	41.3 AV	54.0	-12.7	1.55 V	48	28.3	13.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	105.3 PK			1.43 H	30	102.3	3.0
2	*5200.00	95.2 AV			1.43 H	30	92.2	3.0
3	#10400.00	49.0 PK	68.2	-19.2	2.49 H	360	36.3	12.7
4	15600.00	49.3 PK	74.0	-24.7	1.39 H	31	35.8	13.5
5	15600.00	39.2 AV	54.0	-14.8	1.39 H	31	25.7	13.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	119.3 PK			1.88 V	46	116.3	3.0
2	*5200.00	108.9 AV			1.88 V	46	105.9	3.0
3	#10400.00	55.8 PK	68.2	-12.4	1.18 V	317	43.1	12.7
4	15600.00	60.9 PK	74.0	-13.1	1.60 V	43	47.4	13.5
5	15600.00	48.0 AV	54.0	-6.0	1.60 V	43	34.5	13.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	105.5 PK			1.47 H	32	102.8	2.7
2	*5240.00	95.3 AV			1.47 H	32	92.6	2.7
3	5350.00	49.4 PK	74.0	-24.6	1.47 H	32	46.5	2.9
4	5350.00	39.2 AV	54.0	-14.8	1.47 H	32	36.3	2.9
5	#10480.00	48.6 PK	68.2	-19.6	2.54 H	360	36.1	12.5
6	15720.00	50.1 PK	74.0	-23.9	1.53 H	33	37.6	12.5
7	15720.00	40.1 AV	54.0	-13.9	1.53 H	33	27.6	12.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	118.5 PK			1.87 V	146	115.8	2.7
2	*5240.00	109.1 AV			1.87 V	146	106.4	2.7
3	5350.00	55.3 PK	74.0	-18.7	1.87 V	146	52.4	2.9
4	5350.00	41.4 AV	54.0	-12.6	1.87 V	146	38.5	2.9
5	#10480.00	55.8 PK	68.2	-12.4	1.16 V	304	43.3	12.5
6	15720.00	61.4 PK	74.0	-12.6	1.57 V	35	48.9	12.5
7	15720.00	48.5 AV	54.0	-5.5	1.57 V	35	36.0	12.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5556.80	56.5 PK	68.2	-11.7	1.43 H	21	53.5	3.0
2	*5745.00	109.5 PK			1.43 H	21	106.2	3.3
3	*5745.00	100.1 AV			1.43 H	21	96.8	3.3
4	#5984.62	56.5 PK	68.2	-11.7	1.43 H	21	52.9	3.6
5	11490.00	63.3 PK	74.0	-10.7	1.67 H	52	50.6	12.7
6	11490.00	51.1 AV	54.0	-2.9	1.67 H	52	38.4	12.7
7	#17235.00	60.2 PK	68.2	-8.0	1.51 H	45	44.3	15.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5641.32	59.5 PK	68.2	-8.7	2.12 V	75	56.5	3.0
2	*5745.00	125.9 PK			2.12 V	75	122.6	3.3
3	*5745.00	115.1 AV			2.12 V	75	111.8	3.3
4	#5955.92	58.1 PK	68.2	-10.1	2.12 V	75	54.4	3.7
5	11490.00	57.1 PK	74.0	-16.9	2.20 V	319	44.4	12.7
6	11490.00	45.2 AV	54.0	-8.8	2.20 V	319	32.5	12.7
7	#17235.00	57.6 PK	68.2	-10.6	1.60 V	43	41.7	15.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5574.11	56.6 PK	68.2	-11.6	1.46 H	18	53.6	3.0
2	*5785.00	109.2 PK			1.46 H	18	105.7	3.5
3	*5785.00	99.8 AV			1.46 H	18	96.3	3.5
4	#6007.25	55.9 PK	68.2	-12.3	1.46 H	18	52.3	3.6
5	11570.00	63.0 PK	74.0	-11.0	1.65 H	52	50.5	12.5
6	11570.00	50.6 AV	54.0	-3.4	1.65 H	52	38.1	12.5
7	#17355.00	60.1 PK	68.2	-8.1	1.46 H	37	43.5	16.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5606.06	58.7 PK	68.2	-9.5	2.07 V	62	55.7	3.0
2	*5785.00	125.7 PK			2.07 V	62	122.2	3.5
3	*5785.00	115.0 AV			2.07 V	62	111.5	3.5
4	#5948.43	58.1 PK	68.2	-10.1	2.07 V	62	54.4	3.7
5	11570.00	56.7 PK	74.0	-17.3	2.20 V	316	44.2	12.5
6	11570.00	44.7 AV	54.0	-9.3	2.20 V	316	32.2	12.5
7	#17355.00	57.5 PK	68.2	-10.7	1.66 V	44	40.9	16.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5602.26	57.2 PK	68.2	-11.0	1.48 H	33	54.2	3.0
2	*5825.00	109.4 PK			1.48 H	33	105.9	3.5
3	*5825.00	99.9 AV			1.48 H	33	96.4	3.5
4	#5992.76	56.5 PK	68.2	-11.7	1.48 H	33	52.9	3.6
5	11650.00	63.5 PK	74.0	-10.5	1.60 H	43	51.0	12.5
6	11650.00	51.3 AV	54.0	-2.7	1.60 H	43	38.8	12.5
7	#17475.00	59.7 PK	68.2	-8.5	1.50 H	34	41.7	18.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5620.48	58.2 PK	68.2	-10.0	2.09 V	63	55.2	3.0
2	*5825.00	125.4 PK			2.09 V	63	121.9	3.5
3	*5825.00	114.9 AV			2.09 V	63	111.4	3.5
4	#5981.50	58.3 PK	68.2	-9.9	2.09 V	63	54.7	3.6
5	11650.00	56.4 PK	74.0	-17.6	2.16 V	307	43.9	12.5
6	11650.00	44.8 AV	54.0	-9.2	2.16 V	307	32.3	12.5
7	#17475.00	57.4 PK	68.2	-10.8	1.62 V	56	39.4	18.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT20)

CHANNEL	TX Channel 36	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.2 PK	74.0	-18.8	1.47 H	13	52.1	3.1
2	5150.00	46.3 AV	54.0	-7.7	1.47 H	13	43.2	3.1
3	*5180.00	105.3 PK			1.47 H	13	102.2	3.1
4	*5180.00	95.2 AV			1.47 H	13	92.1	3.1
5	#10360.00	49.2 PK	68.2	-19.0	2.50 H	360	36.9	12.3
6	15540.00	49.0 PK	74.0	-25.0	1.35 H	26	36.0	13.0
7	15540.00	39.1 AV	54.0	-14.9	1.35 H	26	26.1	13.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	59.4 PK	74.0	-14.6	2.23 V	48	56.3	3.1
2	5150.00	49.2 AV	54.0	-4.8	2.23 V	48	46.1	3.1
3	*5180.00	120.4 PK			2.23 V	48	117.3	3.1
4	*5180.00	109.2 AV			2.23 V	48	106.1	3.1
5	#10360.00	51.6 PK	68.2	-16.6	1.18 V	318	39.3	12.3
6	15540.00	51.6 PK	74.0	-22.4	1.54 V	37	38.6	13.0
7	15540.00	41.2 AV	54.0	-12.8	1.54 V	37	28.2	13.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 40	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	104.8 PK			1.38 H	17	101.8	3.0
2	*5200.00	94.7 AV			1.38 H	17	91.7	3.0
3	#10400.00	49.0 PK	68.2	-19.2	2.53 H	360	36.3	12.7
4	15600.00	49.5 PK	74.0	-24.5	1.59 H	53	36.0	13.5
5	15600.00	39.8 AV	54.0	-14.2	1.59 H	53	26.3	13.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	119.5 PK			1.94 V	21	116.5	3.0
2	*5200.00	109.1 AV			1.94 V	21	106.1	3.0
3	#10400.00	51.5 PK	68.2	-16.7	1.17 V	301	38.8	12.7
4	15600.00	52.1 PK	74.0	-21.9	1.53 V	50	38.6	13.5
5	15600.00	41.7 AV	54.0	-12.3	1.53 V	50	28.2	13.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 48	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	104.7 PK			1.39 H	10	102.0	2.7
2	*5240.00	94.6 AV			1.39 H	10	91.9	2.7
3	5350.00	53.7 PK	74.0	-20.3	1.39 H	10	50.8	2.9
4	5350.00	44.3 AV	54.0	-9.7	1.39 H	10	41.4	2.9
5	#10480.00	48.2 PK	68.2	-20.0	2.49 H	360	35.7	12.5
6	15720.00	49.6 PK	74.0	-24.4	1.58 H	45	37.1	12.5
7	15720.00	39.5 AV	54.0	-14.5	1.58 H	45	27.0	12.5
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	120.1 PK			1.96 V	112	117.4	2.7
2	*5240.00	109.8 AV			1.96 V	112	107.1	2.7
3	5350.00	54.7 PK	74.0	-19.3	1.96 V	112	51.8	2.9
4	5350.00	45.3 AV	54.0	-8.7	1.96 V	112	42.4	2.9
5	#10480.00	51.8 PK	68.2	-16.4	1.12 V	309	39.3	12.5
6	15720.00	51.6 PK	74.0	-22.4	1.63 V	19	39.1	12.5
7	15720.00	41.6 AV	54.0	-12.4	1.63 V	19	29.1	12.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 149	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5636.58	57.3 PK	68.2	-10.9	1.49 H	43	54.3	3.0
2	*5745.00	109.4 PK			1.49 H	43	106.1	3.3
3	*5745.00	99.9 AV			1.49 H	43	96.6	3.3
4	#5939.70	57.3 PK	68.2	-10.9	1.49 H	43	53.5	3.8
5	11490.00	62.6 PK	74.0	-11.4	1.61 H	51	49.9	12.7
6	11490.00	50.7 AV	54.0	-3.3	1.61 H	51	38.0	12.7
7	#17235.00	59.9 PK	68.2	-8.3	1.57 H	60	44.0	15.9
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5622.13	60.7 PK	68.2	-7.5	2.13 V	73	57.7	3.0
2	*5745.00	124.8 PK			2.13 V	73	121.5	3.3
3	*5745.00	114.9 AV			2.13 V	73	111.6	3.3
4	#5987.37	58.1 PK	68.2	-10.1	2.13 V	73	54.5	3.6
5	11490.00	57.0 PK	74.0	-17.0	2.22 V	314	44.3	12.7
6	11490.00	44.8 AV	54.0	-9.2	2.22 V	314	32.1	12.7
7	#17235.00	57.9 PK	68.2	-10.3	1.65 V	27	42.0	15.9

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5589.02	59.2 PK	68.2	-9.0	1.51 H	19	56.2	3.0
2	*5785.00	109.8 PK			1.51 H	19	106.3	3.5
3	*5785.00	100.2 AV			1.51 H	19	96.7	3.5
4	#5982.75	57.4 PK	68.2	-10.8	1.51 H	19	53.8	3.6
5	11570.00	63.2 PK	74.0	-10.8	1.57 H	52	50.7	12.5
6	11570.00	50.9 AV	54.0	-3.1	1.57 H	52	38.4	12.5
7	#17355.00	60.5 PK	68.2	-7.7	1.52 H	35	43.9	16.6

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5590.70	59.2 PK	68.2	-9.0	2.19 V	84	56.2	3.0
2	*5785.00	124.9 PK			2.19 V	84	121.4	3.5
3	*5785.00	114.6 AV			2.19 V	84	111.1	3.5
4	#5933.85	58.2 PK	68.2	-10.0	2.19 V	84	54.4	3.8
5	11570.00	56.5 PK	74.0	-17.5	2.19 V	323	44.0	12.5
6	11570.00	44.9 AV	54.0	-9.1	2.19 V	323	32.4	12.5
7	#17355.00	58.3 PK	68.2	-9.9	1.59 V	42	41.7	16.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 165	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5611.79	56.9 PK	68.2	-11.3	1.53 H	30	53.9	3.0
2	*5825.00	109.3 PK			1.53 H	30	105.8	3.5
3	*5825.00	99.8 AV			1.53 H	30	96.3	3.5
4	#5993.77	57.2 PK	68.2	-11.0	1.53 H	30	53.6	3.6
5	11650.00	63.1 PK	74.0	-10.9	1.60 H	47	50.6	12.5
6	11650.00	50.9 AV	54.0	-3.1	1.60 H	47	38.4	12.5
7	#17475.00	59.6 PK	68.2	-8.6	1.47 H	55	41.6	18.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5628.59	59.5 PK	68.2	-8.7	2.13 V	77	56.5	3.0
2	*5825.00	124.6 PK			2.13 V	77	121.1	3.5
3	*5825.00	115.1 AV			2.13 V	77	111.6	3.5
4	#5943.55	58.5 PK	68.2	-9.7	2.13 V	77	54.8	3.7
5	11650.00	56.8 PK	74.0	-17.2	2.25 V	316	44.3	12.5
6	11650.00	45.1 AV	54.0	-8.9	2.25 V	316	32.6	12.5
7	#17475.00	57.8 PK	68.2	-10.4	1.55 V	57	39.8	18.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT40)

CHANNEL	TX Channel 38	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5139.00	56.5 PK	74.0	-17.5	1.48 H	19	53.4	3.1
2	5139.00	47.2 AV	54.0	-6.8	1.48 H	19	44.1	3.1
3	5150.00	53.2 PK	74.0	-20.8	1.48 H	19	50.1	3.1
4	5150.00	43.2 AV	54.0	-10.8	1.48 H	19	40.1	3.1
5	*5190.00	110.4 PK			1.48 H	19	107.4	3.0
6	*5190.00	90.1 AV			1.48 H	19	87.1	3.0
7	5350.00	51.4 PK	74.0	-22.6	1.48 H	19	48.5	2.9
8	5350.00	40.2 AV	54.0	-13.8	1.48 H	19	37.3	2.9
9	5375.80	57.4 PK	74.0	-16.6	1.48 H	19	54.5	2.9
10	5375.80	45.3 AV	54.0	-8.7	1.48 H	19	42.4	2.9
11	#10380.00	47.7 PK	68.2	-20.5	2.48 H	360	35.2	12.5
12	15570.00	49.9 PK	74.0	-24.1	1.60 H	42	36.6	13.3
13	15570.00	39.6 AV	54.0	-14.4	1.60 H	42	26.3	13.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5139.00	62.0 PK	74.0	-12.0	1.91 V	111	58.9	3.1
2	5139.00	52.4 AV	54.0	-1.6	1.91 V	111	49.3	3.1
3	5150.00	58.3 PK	74.0	-15.7	1.91 V	111	55.2	3.1
4	5150.00	49.2 AV	54.0	-4.8	1.91 V	111	46.1	3.1
5	*5190.00	115.2 PK			1.91 V	111	112.2	3.0
6	*5190.00	105.1 AV			1.91 V	111	102.1	3.0
7	5350.00	58.3 PK	74.0	-15.7	1.91 V	111	55.4	2.9
8	5350.00	42.4 AV	54.0	-11.6	1.91 V	111	39.5	2.9
9	5375.80	61.4 PK	74.0	-12.6	1.91 V	111	58.5	2.9
10	5375.80	46.3 AV	54.0	-7.7	1.91 V	111	43.4	2.9
11	#10380.00	47.6 PK	68.2	-20.6	1.18 V	319	35.1	12.5
12	15570.00	49.8 PK	74.0	-24.2	1.58 V	23	36.5	13.3
13	15570.00	39.6 AV	54.0	-14.4	1.58 V	23	26.3	13.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 46	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5136.90	56.4 PK	74.0	-17.6	1.45 H	24	53.3	3.1
2	5136.90	45.3 AV	54.0	-8.7	1.45 H	24	42.2	3.1
3	5150.00	55.9 PK	74.0	-18.1	1.00 H	0	52.8	3.1
4	5150.00	44.8 AV	54.0	-9.2	1.00 H	0	41.7	3.1
5	*5230.00	101.9 PK			1.45 H	24	99.1	2.8
6	*5230.00	90.3 AV			1.45 H	24	87.5	2.8
7	5350.00	56.2 PK	74.0	-17.8	1.45 H	24	53.3	2.9
8	5350.00	44.8 AV	54.0	-9.2	1.45 H	24	41.9	2.9
9	#10460.00	47.9 PK	68.2	-20.3	2.52 H	360	35.4	12.5
10	15690.00	49.4 PK	74.0	-24.6	1.63 H	52	36.7	12.7
11	15690.00	39.2 AV	54.0	-14.8	1.63 H	52	26.5	12.7
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5136.90	57.6 PK	74.0	-16.4	1.92 V	120	54.5	3.1
2	5136.90	46.5 AV	54.0	-7.5	1.92 V	120	43.4	3.1
3	5150.00	56.3 PK	74.0	-17.7	1.92 V	120	53.2	3.1
4	5150.00	45.4 AV	54.0	-8.6	1.92 V	120	42.3	3.1
5	*5230.00	114.9 PK			1.92 V	120	112.1	2.8
6	*5230.00	104.7 AV			1.92 V	120	101.9	2.8
7	5350.00	57.2 PK	74.0	-16.8	1.92 V	120	54.3	2.9
8	5350.00	46.2 AV	54.0	-7.8	1.92 V	120	43.3	2.9
9	#10460.00	47.1 PK	68.2	-21.1	1.14 V	327	34.6	12.5
10	15690.00	49.5 PK	74.0	-24.5	1.59 V	26	36.8	12.7
11	15690.00	39.3 AV	54.0	-14.7	1.59 V	26	26.6	12.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 151	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.10	57.2 PK	68.2	-11.0	1.41 H	21	54.2	3.0
2	*5755.00	110.8 PK			1.41 H	21	107.4	3.4
3	*5755.00	101.5 AV			1.41 H	21	98.1	3.4
4	#6021.14	57.4 PK	68.2	-10.8	1.41 H	21	53.8	3.6
5	11510.00	57.3 PK	74.0	-16.7	1.59 H	52	44.6	12.7
6	11510.00	46.1 AV	54.0	-7.9	1.59 H	52	33.4	12.7
7	#17265.00	59.2 PK	68.2	-9.0	1.44 H	67	43.2	16.0
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5646.05	67.6 PK	68.2	-0.6	1.86 V	125	64.6	3.0
2	*5755.00	123.4 PK			1.86 V	125	120.0	3.4
3	*5755.00	113.8 AV			1.86 V	125	110.4	3.4
4	#6023.69	58.3 PK	68.2	-9.9	1.86 V	125	54.7	3.6
5	11510.00	56.4 PK	74.0	-17.6	2.24 V	319	43.7	12.7
6	11510.00	44.9 AV	54.0	-9.1	2.24 V	319	32.2	12.7
7	#17265.00	58.4 PK	68.2	-9.8	1.55 V	56	42.4	16.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 159	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5599.96	57.1 PK	68.2	-11.1	1.42 H	22	54.1	3.0
2	*5795.00	112.3 PK			1.42 H	22	108.9	3.4
3	*5795.00	102.7 AV			1.42 H	22	99.3	3.4
4	#5937.02	57.5 PK	68.2	-10.7	1.42 H	22	53.7	3.8
5	11590.00	59.3 PK	74.0	-14.7	1.54 H	50	46.8	12.5
6	11590.00	48.2 AV	54.0	-5.8	1.54 H	50	35.7	12.5
7	#17385.00	59.0 PK	68.2	-9.2	1.52 H	55	42.2	16.8
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5645.50	61.3 PK	68.2	-6.9	1.86 V	125	58.3	3.0
2	*5795.00	123.5 PK			1.86 V	125	120.1	3.4
3	*5795.00	113.9 AV			1.86 V	125	110.5	3.4
4	#5927.14	67.5 PK	68.2	-0.7	1.86 V	125	63.8	3.7
5	11590.00	56.2 PK	74.0	-17.8	2.22 V	322	43.7	12.5
6	11590.00	44.9 AV	54.0	-9.1	2.22 V	322	32.4	12.5
7	#17385.00	58.7 PK	68.2	-9.5	1.62 V	30	41.9	16.8

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ac (VHT80)

CHANNEL	TX Channel 42	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	54.1 PK	74.0	-19.9	1.46 H	26	51.0	3.1
2	5150.00	45.7 AV	54.0	-8.3	1.46 H	26	42.6	3.1
3	*5210.00	95.4 PK			1.46 H	26	92.5	2.9
4	*5210.00	85.6 AV			1.46 H	26	82.7	2.9
5	5350.00	51.4 PK	74.0	-22.6	1.46 H	26	48.5	2.9
6	5350.00	38.2 AV	54.0	-15.8	1.46 H	26	35.3	2.9
7	#10420.00	48.3 PK	68.2	-19.9	2.47 H	360	35.7	12.6
8	15630.00	49.1 PK	74.0	-24.9	1.63 H	65	35.9	13.2
9	15630.00	39.1 AV	54.0	-14.9	1.63 H	65	25.9	13.2

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	68.1 PK	74.0	-5.9	1.97 V	117	65.0	3.1
2	5150.00	53.4 AV	54.0	-0.6	1.97 V	117	50.3	3.1
3	*5210.00	109.3 PK			1.97 V	117	106.4	2.9
4	*5210.00	99.8 AV			1.97 V	117	96.9	2.9
5	5350.00	52.3 PK	74.0	-21.7	1.97 V	117	49.4	2.9
6	5350.00	40.7 AV	54.0	-13.3	1.97 V	117	37.8	2.9
7	#10420.00	48.1 PK	68.2	-20.1	1.18 V	319	35.5	12.6
8	15630.00	49.9 PK	74.0	-24.1	1.55 V	30	36.7	13.2
9	15630.00	39.6 AV	54.0	-14.4	1.55 V	30	26.4	13.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 155	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5648.94	56.8 PK	68.2	-11.4	1.43 H	21	53.8	3.0
2	*5775.00	102.5 PK			1.43 H	21	99.1	3.4
3	*5775.00	94.1 AV			1.43 H	21	90.7	3.4
4	#5984.83	57.0 PK	68.2	-11.2	1.43 H	21	53.4	3.6
5	11550.00	52.2 PK	74.0	-21.8	1.58 H	43	39.6	12.6
6	11550.00	41.5 AV	54.0	-12.5	1.58 H	43	28.9	12.6
7	#17325.00	56.1 PK	68.2	-12.1	1.49 H	70	39.8	16.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5632.10	63.7 PK	68.2	-4.5	1.86 V	82	60.7	3.0
2	#5653.44	69.4 PK	70.8	-1.4	1.86 V	82	66.3	3.1
3	*5775.00	115.5 PK			1.86 V	82	112.1	3.4
4	*5775.00	106.3 AV			1.86 V	82	102.9	3.4
5	#5933.25	59.9 PK	68.2	-8.3	1.86 V	82	56.2	3.7
6	11550.00	51.3 PK	74.0	-22.7	2.26 V	331	38.7	12.6
7	11550.00	40.2 AV	54.0	-13.8	2.26 V	331	27.6	12.6
8	#17325.00	56.3 PK	68.2	-11.9	1.51 V	63	40.0	16.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

Below 1GHz Data:


802.11a

CHANNEL	TX Channel 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	33.2 QP	40.0	-6.8	3.00 H	137	42.8	-9.6
2	125.06	33.0 QP	43.5	-10.5	3.00 H	265	43.0	-10.0
3	225.94	37.4 QP	46.0	-8.6	2.00 H	302	47.8	-10.4
4	406.36	32.5 QP	46.0	-13.5	1.50 H	176	37.0	-4.5
5	499.48	36.2 QP	46.0	-9.8	1.50 H	137	38.2	-2.0
6	610.06	37.8 QP	46.0	-8.2	1.00 H	194	37.6	0.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

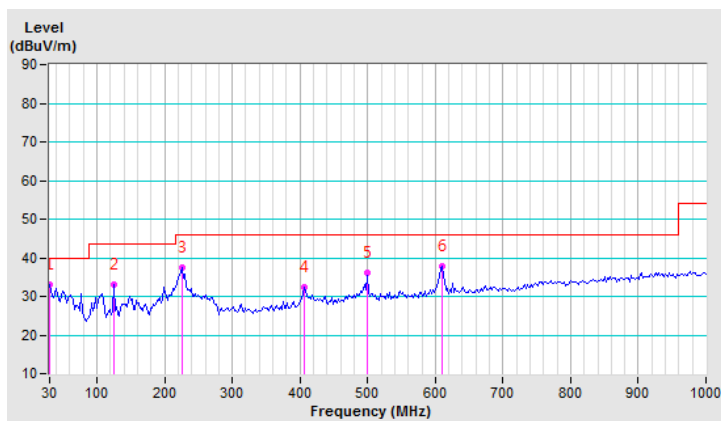


CHANNEL	TX Channel 157	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	30.00	34.8 QP	40.0	-5.2	1.00 V	238	44.4	-9.6
2	125.06	34.4 QP	43.5	-9.1	1.00 V	154	44.4	-10.0
3	249.22	33.2 QP	46.0	-12.8	1.50 V	261	42.2	-9.0
4	410.24	32.4 QP	46.0	-13.6	1.50 V	263	36.8	-4.4
5	499.48	41.7 QP	46.0	-4.3	2.00 V	172	43.7	-2.0
6	610.06	42.3 QP	46.0	-3.7	2.00 V	165	42.1	0.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

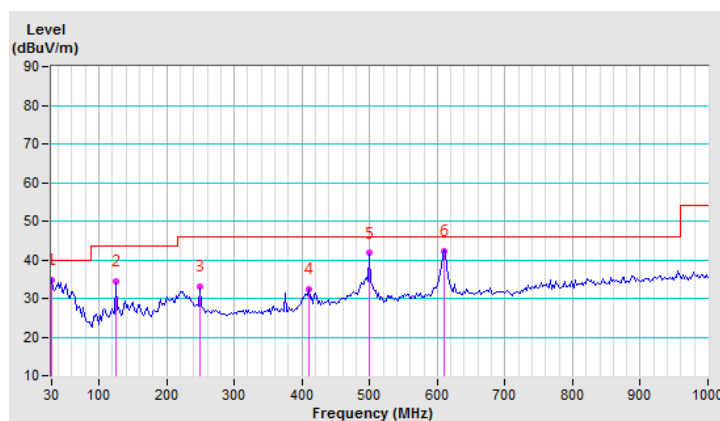

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ENV216	100072	June 04, 2018	June 03, 2019
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 16, 2018	Mar. 15, 2019
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: Jan. 23, 2019

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

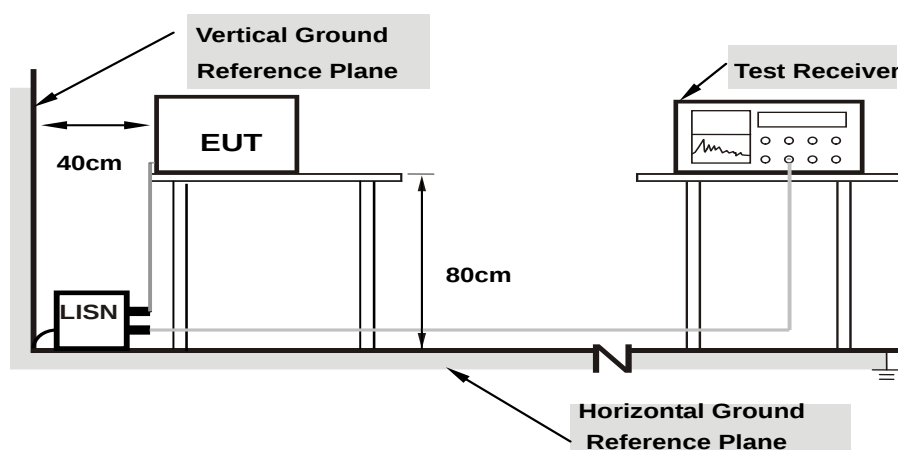

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results

Phase	Line (L)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	10.03	28.86	18.13	38.89	28.16	65.58	55.58	-26.69	-27.42
2	0.17344	10.04	26.19	14.67	36.23	24.71	64.79	54.79	-28.56	-30.08
3	0.22812	10.05	17.48	2.27	27.53	12.32	62.52	52.52	-34.99	-40.20
4	0.43906	10.08	27.84	27.07	37.92	37.15	57.08	47.08	-19.16	-9.93
5	3.58594	10.29	13.62	6.30	23.91	16.59	56.00	46.00	-32.09	-29.41
6	21.05078	11.38	15.47	7.25	26.85	18.63	60.00	50.00	-33.15	-31.37

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

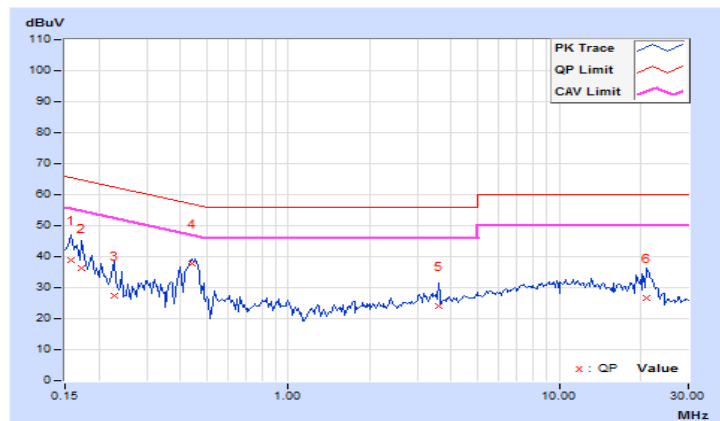


Phase	Neutral (N)	Detector Function	Quasi-Peak (QP) / Average (AV)
-------	-------------	-------------------	--------------------------------

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
	[MHz]	Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16953	9.94	24.40	11.58	34.34	21.52	64.98	54.98	-30.64	-33.46
2	0.18516	9.95	23.19	9.25	33.14	19.20	64.25	54.25	-31.11	-35.05
3	0.27891	9.96	13.65	6.85	23.61	16.81	60.85	50.85	-37.24	-34.04
4	0.44688	9.98	22.25	12.08	32.23	22.06	56.93	46.93	-24.70	-24.87
5	9.35547	10.49	17.58	11.98	28.07	22.47	60.00	50.00	-31.93	-27.53
6	21.36328	11.16	13.86	5.67	25.02	16.83	60.00	50.00	-34.98	-33.17

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

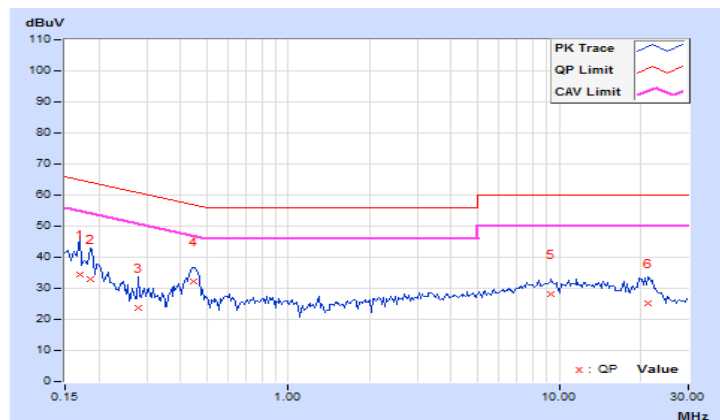

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1	√	Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p ≤ 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
		Fixed point-to-point Access Point	1 Watt (30 dBm)
		Indoor Access Point	1 Watt (30 dBm)
		Client device	250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3		√	1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,


Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;

Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

4.3.2 Test Setup



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

CDD Mode

For U-NII-1

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	17.56	17.95	17.52	17.35	230.208	23.62	30.00	Pass
40	5200	17.46	18.62	17.55	17.72	244.538	23.88	30.00	Pass
48	5240	17.52	18.58	17.63	17.66	244.893	23.89	30.00	Pass

EIRP POWER OUTPUT

Chan.	Chan. Freq. (MHz)	EIRP Power (mW)	EIRP Power (dBm)	Power Limit (dBm)	Pass / Fail
36	5180	110.408	20.43	21.00	Pass
40	5200	117.220	20.69	21.00	Pass
48	5240	117.490	20.70	21.00	Pass

*This device is outdoor access point and antenna at any elevation angle above 30 degrees as measured from the horizon, therefore Max. e.i.r.p $\leq$ 125mW(21 dBm) to compliance.

Max. gain (horizon above 30 degrees) = -3.19dBi

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	17.49	17.58	17.62	17.58	228.475	23.59	30.00	Pass
40	5200	17.58	17.59	17.46	17.55	227.296	23.57	30.00	Pass
48	5240	17.76	17.47	17.61	17.33	227.303	23.57	30.00	Pass

EIRP POWER OUTPUT

Chan.	Chan. Freq. (MHz)	EIRP Power (mW)	EIRP Power (dBm)	Power Limit (dBm)	Pass / Fail
36	5180	109.648	20.40	21.00	Pass
40	5200	109.144	20.38	21.00	Pass
48	5240	109.144	20.38	21.00	Pass

*This device is outdoor access point and antenna at any elevation angle above 30 degrees as measured from the horizon, therefore Max. e.i.r.p $\leq$ 125mW(21 dBm) to compliance.

Max. gain (horizon above 30 degrees) = -3.19dBi

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	17.72	17.75	17.96	17.42	236.447	23.74	30.00	Pass
46	5230	17.76	17.82	17.95	17.71	241.631	23.83	30.00	Pass

EIRP POWER OUTPUT

Chan.	Chan. Freq. (MHz)	EIRP Power (mW)	EIRP Power (dBm)	Power Limit (dBm)	Pass / Fail
38	5190	113.501	20.55	21.00	Pass
46	5230	115.878	20.64	21.00	Pass

*This device is outdoor access point and antenna at any elevation angle above 30 degrees as measured from the horizon, therefore Max. e.i.r.p $\leq$ 125mW(21 dBm) to compliance.

Max. gain (horizon above 30 degrees) = -3.19dBi

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	15.44	15.27	16.10	15.48	144.702	21.60	30.00	Pass

EIRP POWER OUTPUT

Chan.	Chan. Freq. (MHz)	EIRP Power (mW)	EIRP Power (dBm)	Power Limit (dBm)	Pass / Fail
42	5210	69.343	18.41	21.00	Pass

*This device is outdoor access point and antenna at any elevation angle above 30 degrees as measured from the horizon, therefore Max. e.i.r.p $\leq$ 125mW(21 dBm) to compliance.

Max. gain (horizon above 30 degrees) = -3.19dBi

For U-NII-3

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	23.94	24.13	23.82	23.75	984.691	29.93	30.00	Pass
157	5785	24.02	24.04	23.78	23.81	985.078	29.93	30.00	Pass
165	5825	24.04	23.86	23.77	23.83	976.511	29.90	30.00	Pass

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	23.67	23.78	23.71	23.78	945.334	29.76	30.00	Pass
157	5785	23.61	23.74	23.68	23.84	941.656	29.74	30.00	Pass
165	5825	23.66	23.57	23.84	23.81	942.323	29.74	30.00	Pass

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	23.88	23.76	23.81	23.92	969.067	29.86	30.00	Pass
159	5795	23.91	23.87	23.85	23.84	974.582	29.89	30.00	Pass

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	21.32	21.39	21.52	21.28	549.422	27.40	30.00	Pass

Beamforming Mode

For U-NII-1

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	11.88	11.99	12.11	12.09	63.665	18.04	23.98	Pass
40	5200	12.07	12.10	11.98	12.05	64.132	18.07	23.98	Pass
48	5240	12.26	11.87	12.12	11.81	63.673	18.04	23.98	Pass

Note: 1. Directional gain = 6dBi + 10log(4) = 12.02dBi > 6dBi , so the power limit shall be reduced to 30-(12.02-6) = 23.98dBm.

EIRP POWER OUTPUT

Chan.	Chan. Freq. (MHz)	EIRP Power (mW)	EIRP Power (dBm)	Power Limit (dBm)	Pass / Fail
36	5180	122.180	20.87	21.00	Pass
40	5200	123.027	20.90	21.00	Pass
48	5240	122.180	20.87	21.00	Pass

*This device is outdoor access point and antenna at any elevation angle above 30 degrees as measured from the horizon, therefore Max. e.i.r.p $\leq$ 125mW(21 dBm) to compliance.

Directional gain (horizon above 30 degrees) = -3.19dBi + 10log(4) = 2.83dBi

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	11.68	11.91	11.95	11.62	60.436	17.81	23.98	Pass
46	5230	11.64	11.94	11.93	11.71	60.64	17.83	23.98	Pass

Note: 1. Directional gain = 6dBi + 10log(4) = 12.02dBi > 6dBi , so the power limit shall be reduced to 30-(12.02-6) = 23.98dBm.

EIRP POWER OUTPUT

Chan.	Chan. Freq. (MHz)	EIRP Power (mW)	EIRP Power (dBm)	Power Limit (dBm)	Pass / Fail
38	5190	115.878	20.64	21.00	Pass
46	5230	116.413	20.66	21.00	Pass

*This device is outdoor access point and antenna at any elevation angle above 30 degrees as measured from the horizon, therefore Max. e.i.r.p $\leq$ 125mW(21 dBm) to compliance.

Directional gain (horizon above 30 degrees) = -3.19dBi + 10log(4) = 2.83dBi

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	11.94	11.78	12.59	12.02	64.774	18.11	23.98	Pass

Note: 1. Directional gain = $6\text{dBi} + 10\log(4) = 12.02\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30 - (12.02 - 6) = 23.98\text{dBm}$.

EIRP POWER OUTPUT

Chan.	Chan. Freq. (MHz)	EIRP Power (mW)	EIRP Power (dBm)	Power Limit (dBm)	Pass / Fail
42	5210	124.165	20.94	21.00	Pass

*This device is outdoor access point and antenna at any elevation angle above 30 degrees as measured from the horizon, therefore $\text{Max. e.i.r.p} \leq 125\text{mW}(21\text{ dBm})$ to compliance.

Directional gain (horizon above 30 degrees) = $-3.19\text{dBi} + 10\log(4) = 2.83\text{dBi}$

For UNII-3

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
149	5745	18.18	18.26	18.17	18.13	263.382	24.21	24.68	Pass
157	5785	18.08	18.13	18.04	18.19	258.879	24.13	24.68	Pass
165	5825	18.14	18.17	18.23	18.28	264.603	24.23	24.68	Pass

Note: 1. Directional gain = $5.3\text{dBi} + 10\log(4) = 11.32\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(11.32-6) = 24.68\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
151	5755	18.28	18.27	18.25	18.28	268.573	24.29	24.68	Pass
159	5795	18.50	18.23	18.31	18.20	271.155	24.33	24.68	Pass

Note: 1. Directional gain = $5.3\text{dBi} + 10\log(4) = 11.32\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(11.32-6) = 24.68\text{dBm}$.


802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
155	5775	18.22	18.19	18.38	18.02	264.543	24.22	24.68	Pass

Note: 1. Directional gain = $5.3\text{dBi} + 10\log(4) = 11.32\text{dBi} > 6\text{dBi}$, so the power limit shall be reduced to $30-(11.32-6) = 24.68\text{dBm}$.

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.4.4 Test Results

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	16.44	16.56	16.44	16.56
40	5200	16.44	16.56	16.44	16.56
48	5240	16.44	16.44	16.56	16.56
149	5745	16.44	16.44	16.44	16.44
157	5785	16.68	16.56	16.56	16.56
165	5825	16.56	16.68	16.56	16.68

802.11ac (VHT20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
36	5180	17.76	17.88	17.64	17.64
40	5200	17.64	17.64	17.64	17.64
48	5240	17.64	17.64	17.64	17.76
149	5745	17.64	17.64	17.64	17.64
157	5785	17.64	17.64	17.88	17.64
165	5825	17.76	17.64	17.64	17.76

802.11ac (VHT40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
38	5190	36.72	36.72	36.24	36.24
46	5230	36.72	36.48	36.48	36.48
151	5755	36.72	36.48	36.72	36.48
159	5795	36.48	36.72	36.72	36.72

802.11ac (VHT80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
42	5210	75.84	76.32	75.84	75.84
155	5775	76.32	76.32	76.32	76.32

Spectrum Plot of Max Value


802.11a_Chain 0 / CH157

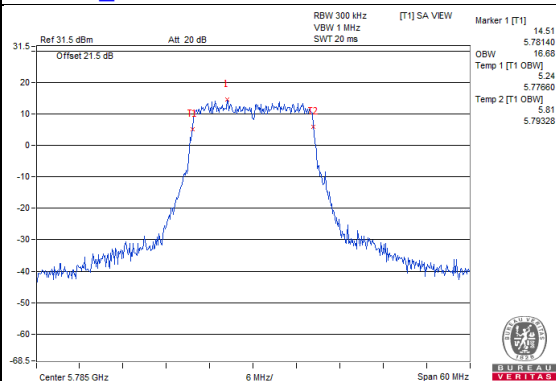


802.11ac (VHT20)_Chain 1 / CH36

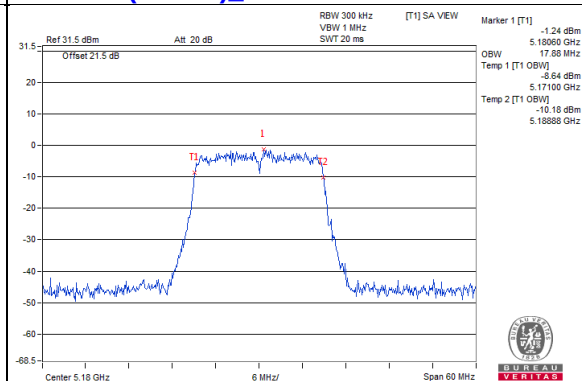

802.11ac (VHT40)_Chain 0 / CH151

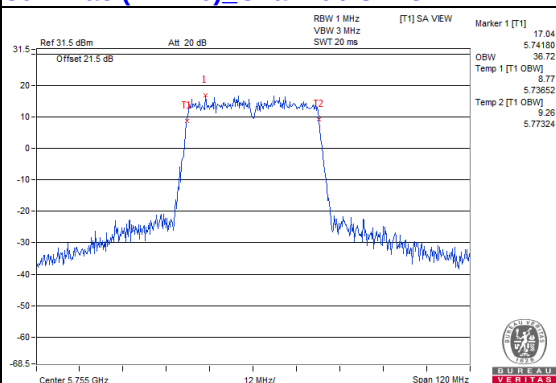


802.11ac (VHT80)_Chain 0 / CH155

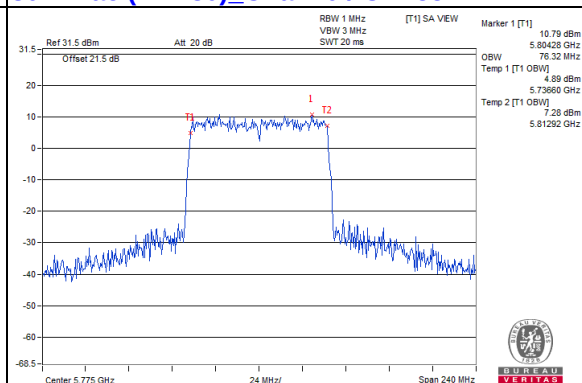


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11a_Chain0 / CH48

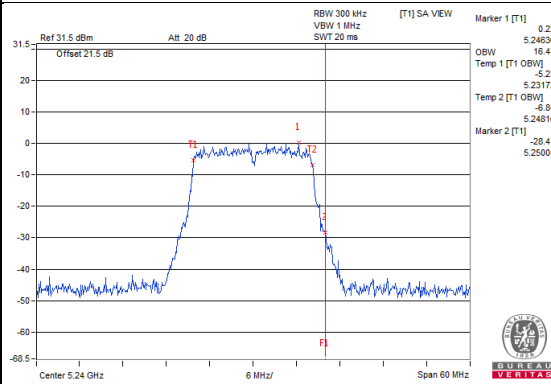


802.11a_Chain1 / CH48

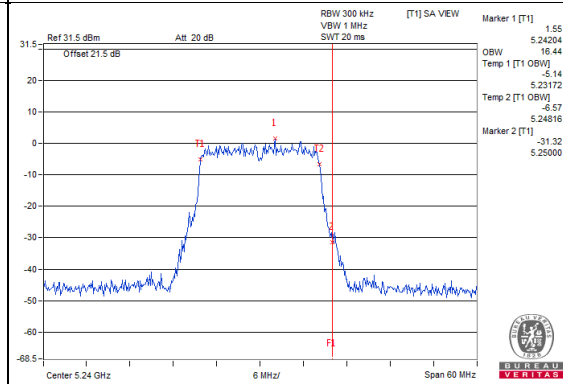


802.11a_Chain2 / CH48

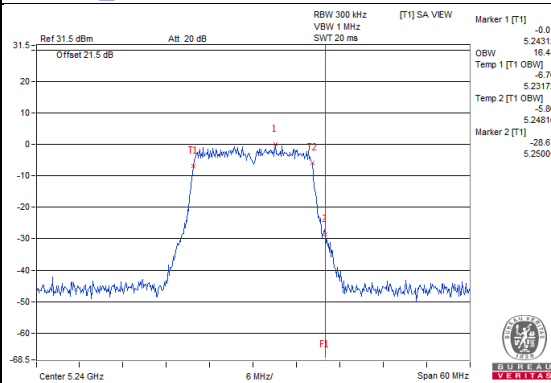


802.11a_Chain3 / CH48

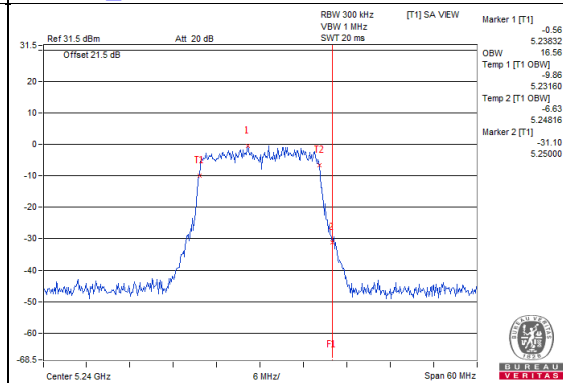


802.11ac(VHT20)_Chain0 / CH48

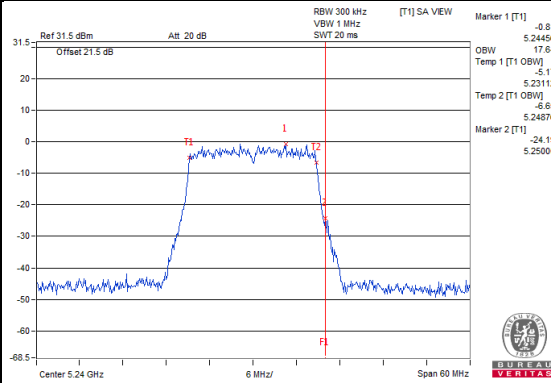


802.11ac(VHT20)_Chain1 / CH48

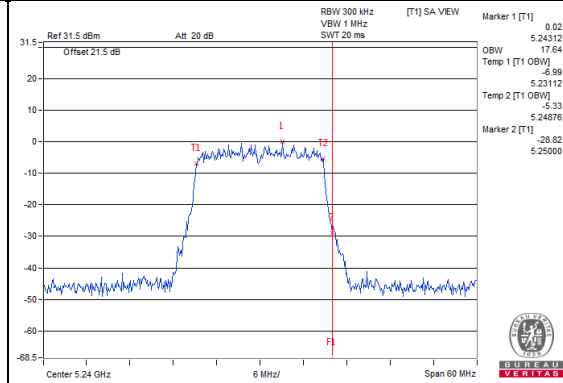

802.11ac(VHT20)_Chain2 / CH48

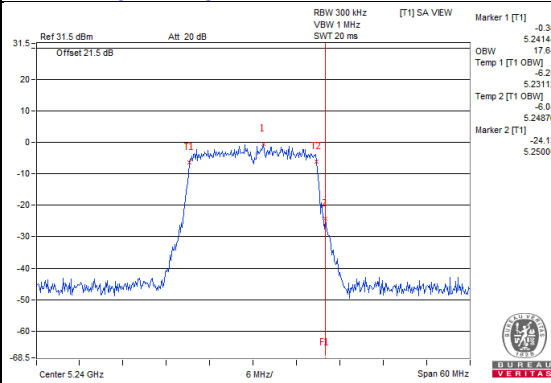


802.11ac(VHT20)_Chain3 / CH48

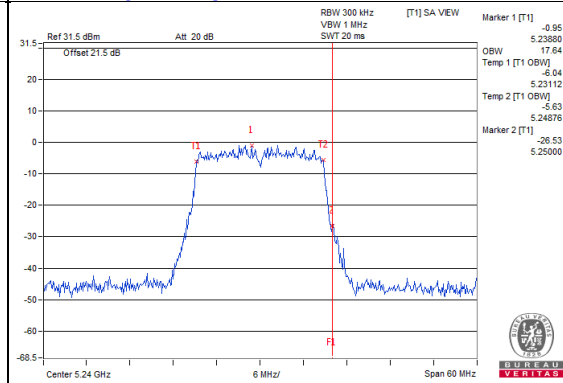


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2A band)


802.11ac(VHT40)_Chain0 / CH46

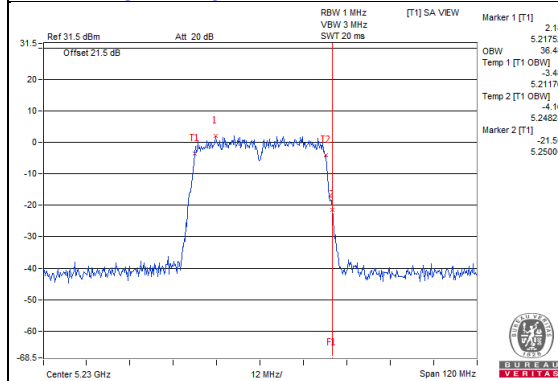


802.11ac(VHT40)_Chain1 / CH46

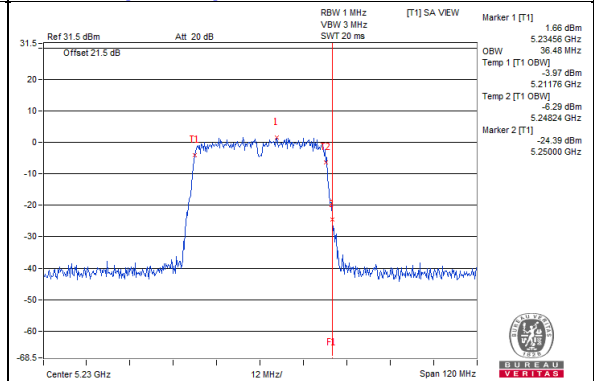


802.11ac(VHT40)_Chain2 / CH46

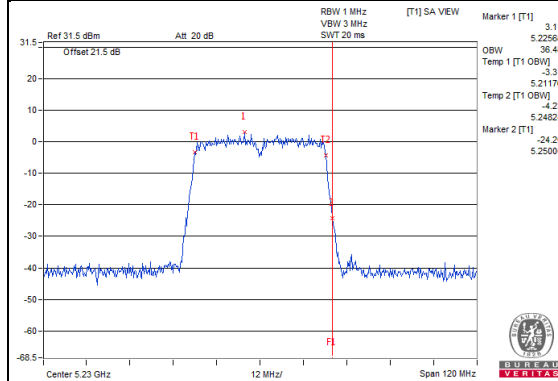


802.11ac(VHT40)_Chain3 / CH46

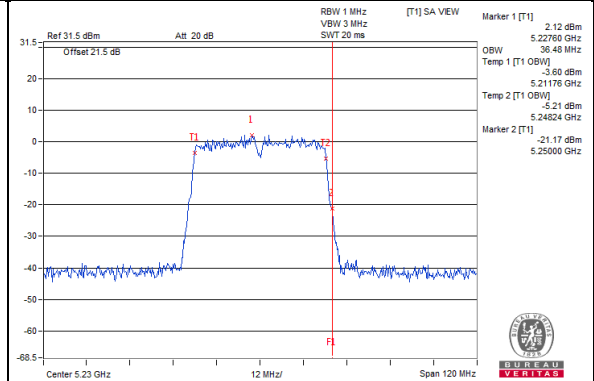


802.11ac(VHT80)_Chain0 / CH42

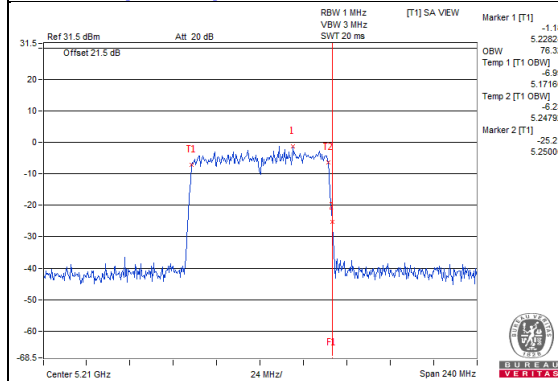


802.11ac(VHT80)_Chain1 / CH42

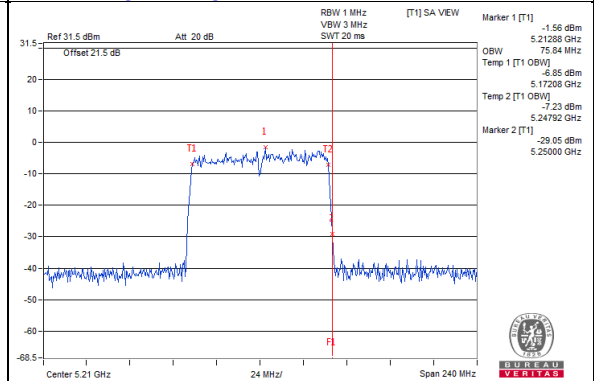

802.11ac(VHT80)_Chain2 / CH42

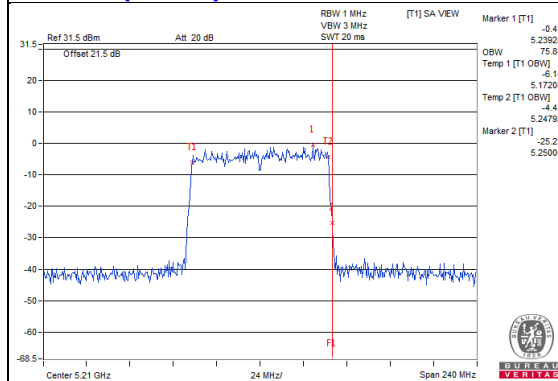


802.11ac(VHT80)_Chain3 / CH42

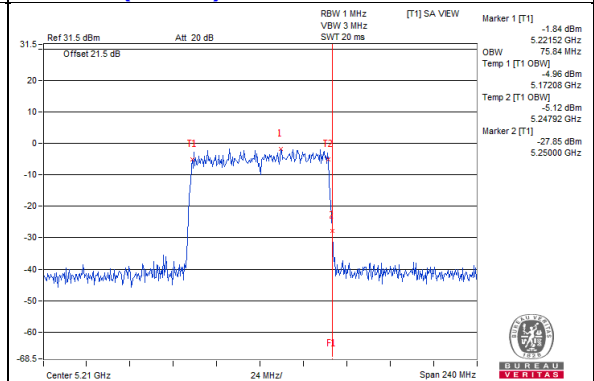


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11a_Chain0 / CH149

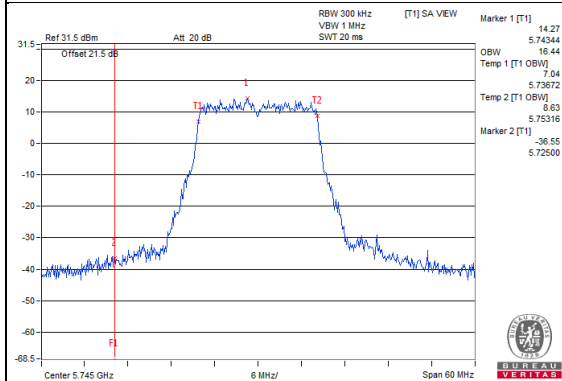


802.11a_Chain1 / CH149

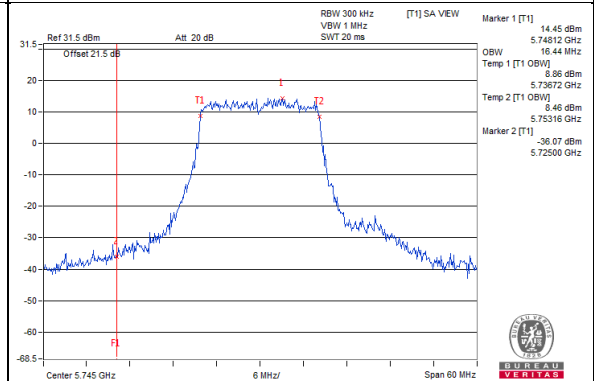


802.11a_Chain2 / CH149

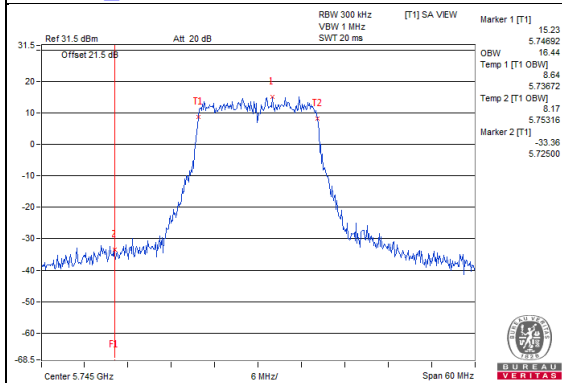


802.11a_Chain3 / CH149

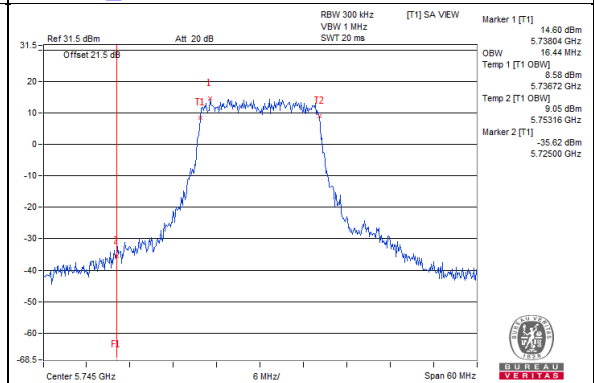


802.11ac(VHT20)_Chain0 / CH149

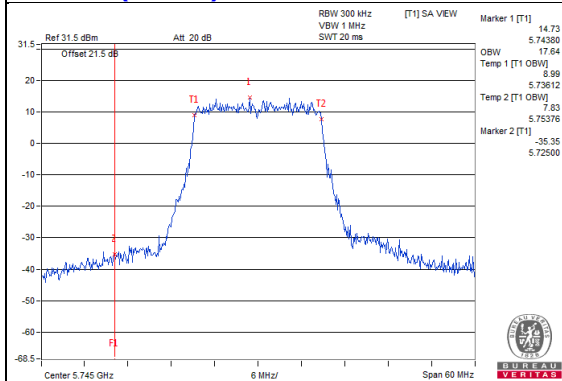


802.11ac(VHT20)_Chain1 / CH149

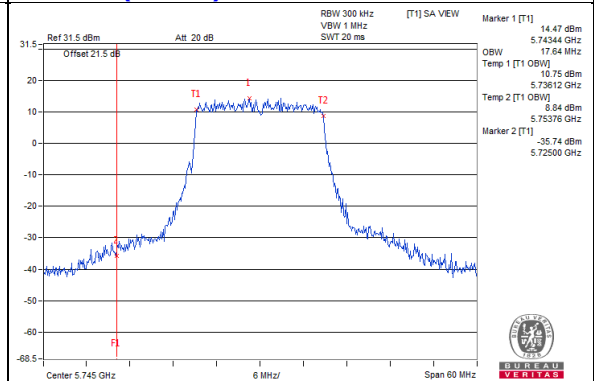

802.11ac(VHT20)_Chain2 / CH149

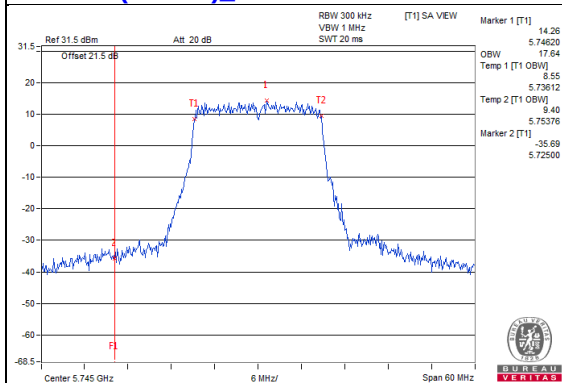


802.11ac(VHT20)_Chain3 / CH149

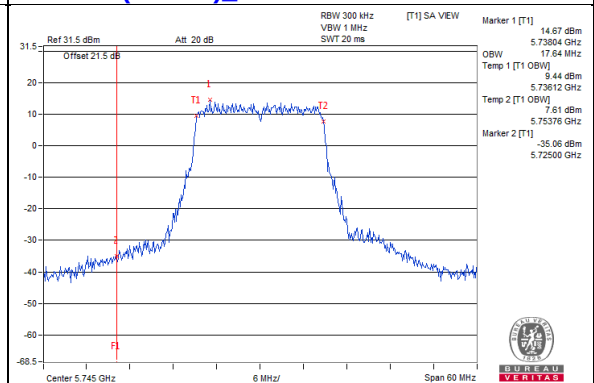


Spectrum Plot for near by DFS band (DFS is required, if 99% OCP straddle into U-NII-2C band)


802.11ac(VHT40)_Chain0 / CH151

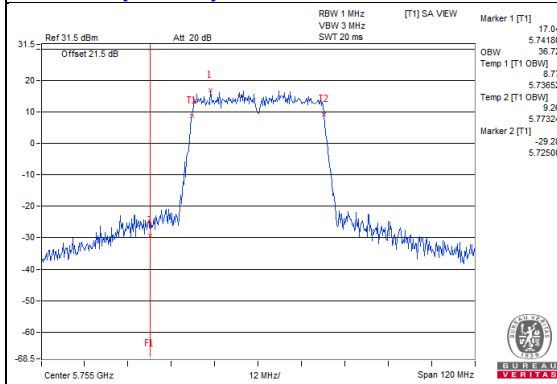


802.11ac(VHT40)_Chain1 / CH151

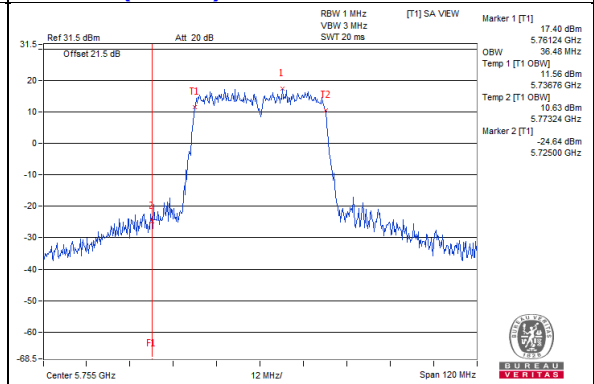


802.11ac(VHT40)_Chain2 / CH151

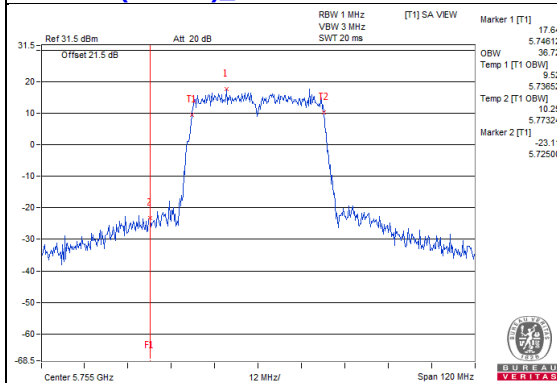


802.11ac(VHT40)_Chain3 / CH151

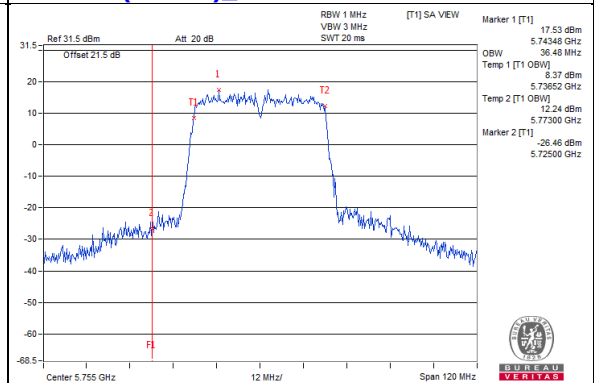


802.11ac(VHT80)_Chain0 / CH155

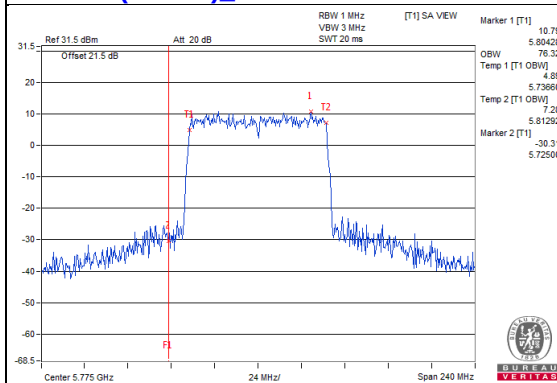


802.11ac(VHT80)_Chain1 / CH155

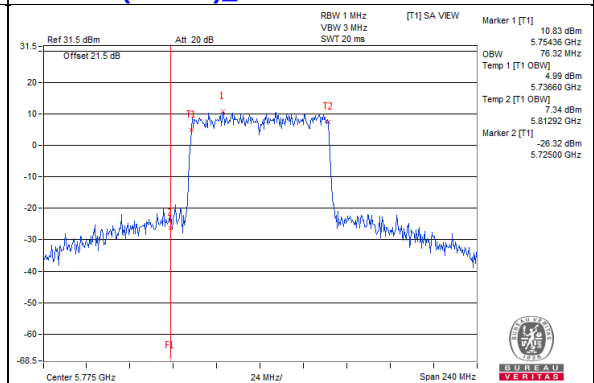

802.11ac(VHT80)_Chain2 / CH155

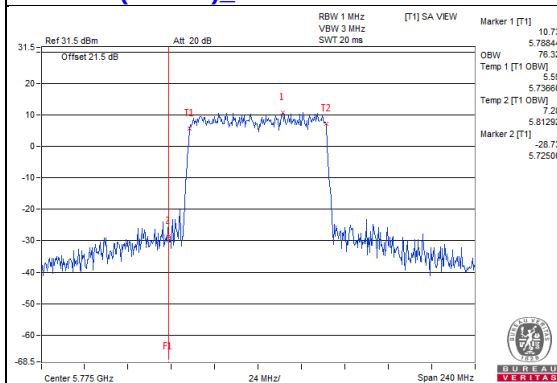

802.11ac(VHT80)_Chain3 / CH155

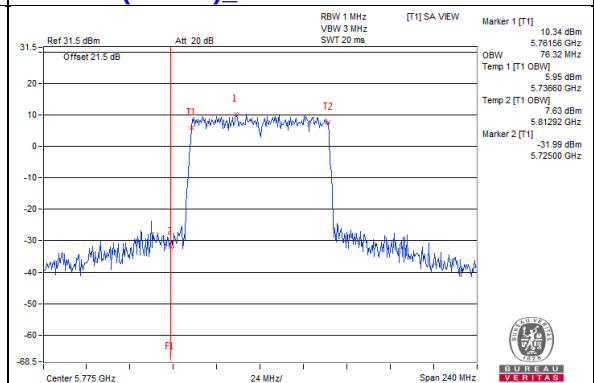


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1	√	Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
		Client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C			11dBm/ MHz
U-NII-3		√	30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For U-NII-1 band:

For 802.11ac (VHT20):

Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

For other Modulation test:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW $\geq$ 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

For 802.11ac (VHT20):

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value

For other Modulation test:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW $\geq$ 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add 10 log (1/duty cycle)

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

For U-NII-1:

CDD Mode

802.11a

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
36	5180	3.77	3.70	4.20	3.86	0.13	10.04	10.98	Pass
40	5200	4.16	4.67	4.23	4.20	0.13	10.47	10.98	Pass
48	5240	4.37	4.88	4.58	3.92	0.13	10.60	10.98	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $6\text{dBi} + 10\log(4) = 12.02\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(12.02-6) = 10.98\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	PSD (dBm/MHz)				Total Power Density (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3			
36	5180	3.15	3.51	3.54	3.92	9.56	10.98	Pass
40	5200	3.57	3.65	4.00	4.11	9.86	10.98	Pass
48	5240	3.93	3.25	4.15	3.87	9.83	10.98	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $6\text{dBi} + 10\log(4) = 12.02\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(12.02-6) = 10.98\text{dBm}$.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
38	5190	0.71	0.54	0.90	0.57	0.13	6.83	10.98	Pass
46	5230	0.96	0.92	1.03	0.59	0.13	7.03	10.98	Pass

- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $6\text{dBi} + 10\log(4) = 12.02\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(12.02-6) = 10.98\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.


802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	MAX. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
42	5210	-4.51	-5.46	-4.17	-5.29	0.24	1.44	10.98	Pass


- Note:** 1. Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
2. Directional gain = $6\text{dBi} + 10\log(4) = 12.02\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $17-(12.02-6) = 10.98\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a / Chain 1 : CH48

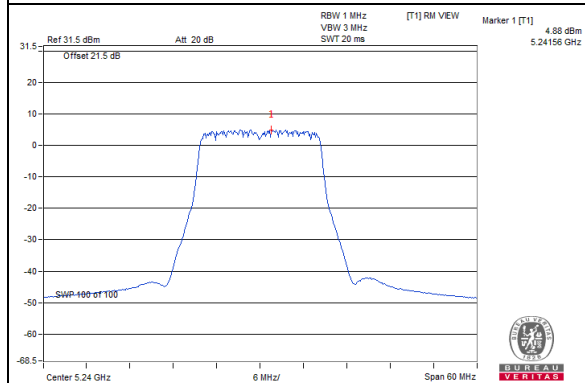


802.11ac (VHT20) / Chain 2 : CH48

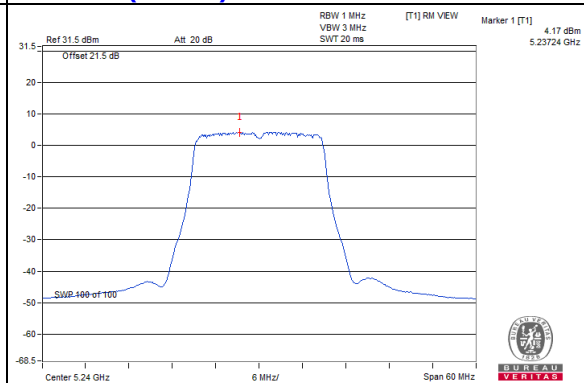

802.11ac (VHT40) / Chain 2: CH46

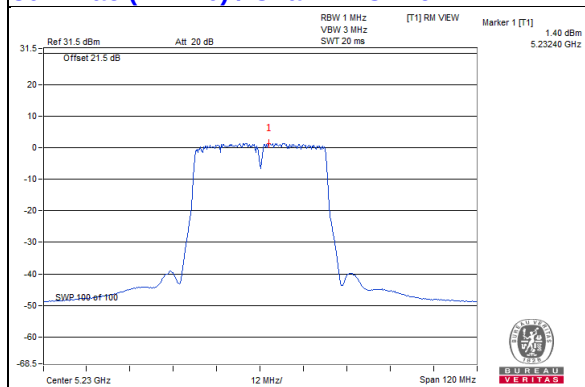

802.11ac (VHT80) / Chain 2 : CH42

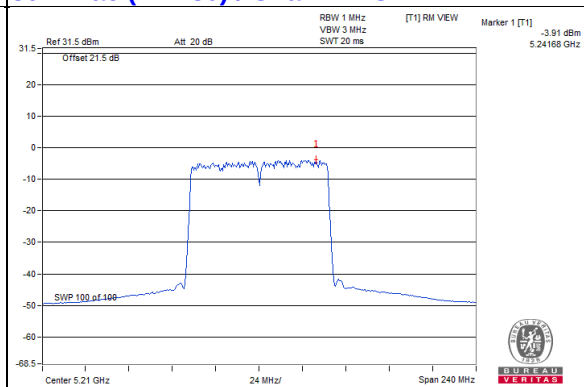

For U-NII-3:

802.11a

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/ 500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		mW/ 300kHz	dBm/ 300kHz			
149	5745	1.36	2.10	2.29	1.84	0.13	6.3985	8.06	10.28	24.68	Pass
157	5785	1.88	2.61	2.23	2.07	0.13	6.8475	8.36	10.58	24.68	Pass
165	5825	1.81	2.46	2.28	2.06	0.13	6.7744	8.31	10.53	24.68	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $5.3\text{dBi} + 10\log(4) = 11.32\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (11.32 - 6) = 24.68\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT20)

Chan.	Freq. (MHz)	PSD (dBm/300kHz)				Total PSD		Total PSD (dBm/500kHz)	Limit (dBm/ 500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3	mW/ 300kHz	dBm/ 300kHz			
149	5745	1.32	2.02	1.80	1.43	5.8509	7.67	9.89	24.68	Pass
157	5785	1.49	1.60	1.72	1.79	5.8507	7.67	9.89	24.68	Pass
165	5825	1.49	1.60	2.02	1.72	5.9329	7.73	9.95	24.68	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $5.3\text{dBi} + 10\log(4) = 11.32\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (11.32 - 6) = 24.68\text{dBm}$.

802.11ac (VHT40)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/ 500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		mW/ 300kHz	dBm/ 300kHz			
151	5755	-2.33	-1.86	-1.40	-1.92	0.13	2.6823	4.29	6.51	24.68	Pass
159	5795	-2.07	-1.87	-1.60	-1.85	0.13	2.6951	4.31	6.53	24.68	Pass

- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $5.3\text{dBi} + 10\log(4) = 11.32\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (11.32 - 6) = 24.68\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.


802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Total PSD With Duty Factor (dBm/500kHz)	Limit (dBm/ 500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		mW/ 300kHz	dBm/ 300kHz			
155	5775	-8.05	-8.07	-7.63	-8.00	0.24	0.6805	-1.67	0.55	24.68	Pass


- Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
2. Directional gain = $5.3\text{dBi} + 10\log(4) = 11.32\text{dBi} > 6\text{dBi}$, so the power density limit shall be reduced to $30 - (11.32 - 6) = 24.68\text{dBm}$.
3. Refer to section 3.3 for duty cycle spectrum plot.

Spectrum Plot of Worst Value


802.11a / Chain 1 : CH157

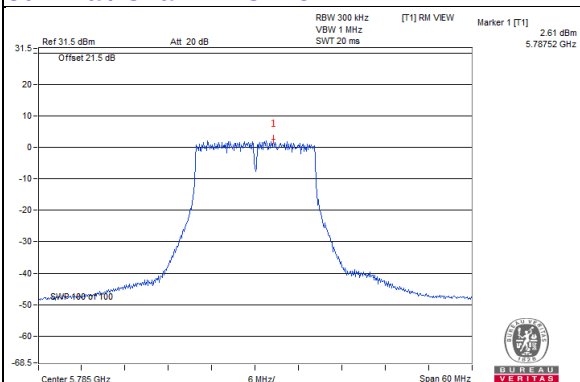


802.11ac (VHT20) / Chain 1 : CH149

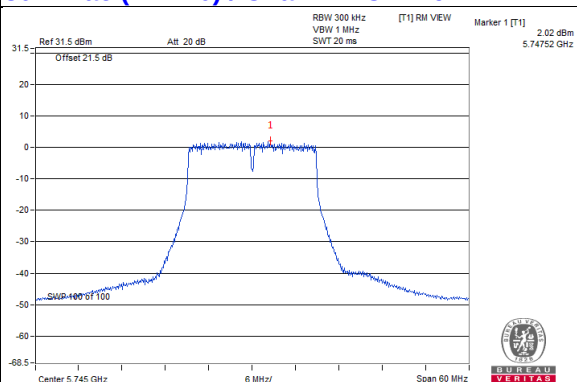

802.11ac (VHT40) / Chain 2: CH151

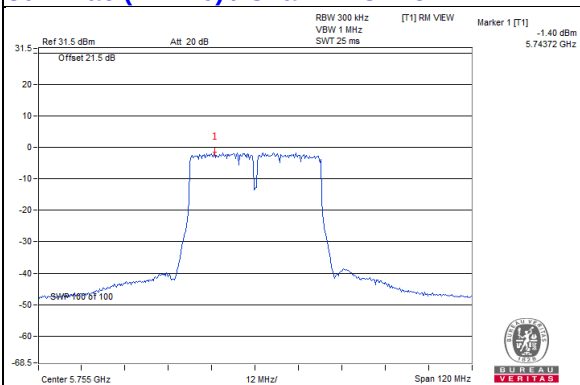

802.11ac (VHT80) / Chain 2 : CH155

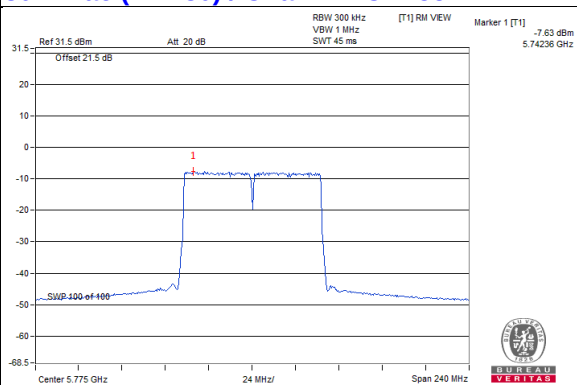


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

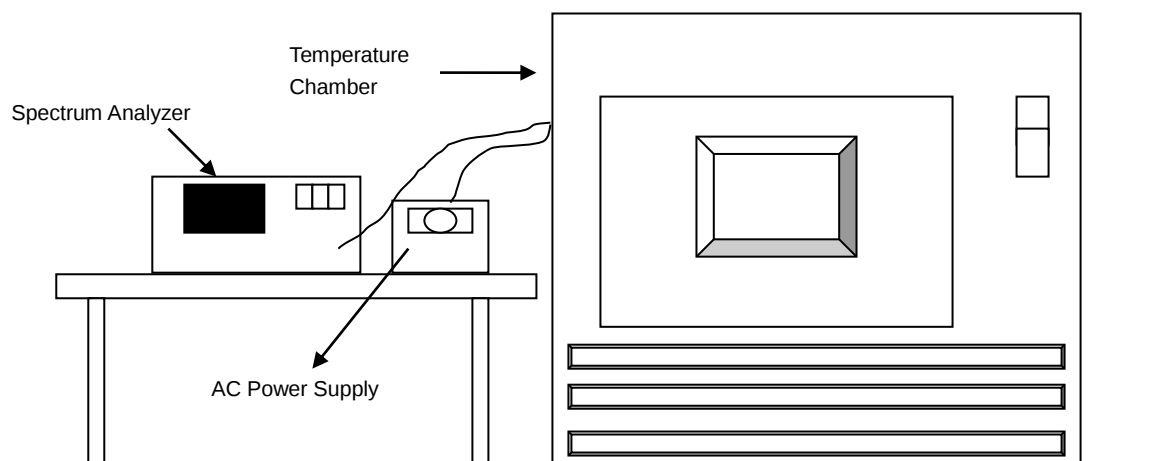

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- Turn the EUT on and couple its output to a spectrum analyzer.
- Turn the EUT off and set the chamber to the highest temperature specified.
- Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 0, 2, 5, and 10 Minutes.
- Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	120	5180.0078	PASS	5180.0044	PASS	5180.0082	PASS	5180.0036	PASS
40	120	5180.0095	PASS	5180.0089	PASS	5180.0132	PASS	5180.0133	PASS
30	120	5180.0081	PASS	5180.0075	PASS	5180.0078	PASS	5180.0071	PASS
20	120	5179.9938	PASS	5179.9945	PASS	5179.993	PASS	5179.9977	PASS
10	120	5180.0135	PASS	5180.0135	PASS	5180.0152	PASS	5180.0136	PASS
0	120	5179.9822	PASS	5179.9811	PASS	5179.9838	PASS	5179.9824	PASS
-10	120	5179.9954	PASS	5179.9928	PASS	5179.9959	PASS	5179.9959	PASS
-20	120	5180.0081	PASS	5180.0109	PASS	5180.0118	PASS	5180.0092	PASS
-30	120	5180.003	PASS	5180.0058	PASS	5180.0042	PASS	5180.0027	PASS


Frequency Stability Versus Voltage									
Operating Frequency: 5180 MHz									
TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5179.9939	PASS	5179.9952	PASS	5179.9934	PASS	5179.9983	PASS
	120	5179.9938	PASS	5179.9945	PASS	5179.993	PASS	5179.9977	PASS
	102	5179.9933	PASS	5179.995	PASS	5179.9921	PASS	5179.9985	PASS

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- Set resolution bandwidth (RBW) = 100kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- Trace mode = max hold.
- Sweep = auto couple.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	16.39	16.39	16.40	16.37	0.5	Pass
157	5785	16.39	16.40	16.40	16.39	0.5	Pass
165	5825	16.39	16.39	16.40	16.40	0.5	Pass

802.11ac (VHT20)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
149	5745	17.62	17.61	17.62	17.62	0.5	Pass
157	5785	17.64	17.62	17.57	17.61	0.5	Pass
165	5825	17.62	17.58	17.59	17.60	0.5	Pass

802.11ac (VHT40)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
151	5755	36.13	36.42	36.46	36.42	0.5	Pass
159	5795	36.44	36.44	36.00	36.01	0.5	Pass

802.11ac (VHT80)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
155	5775	76.45	76.41	76.44	76.38	0.5	Pass

Spectrum Plot of Worst Value


802.11a / Chain 3 : CH149

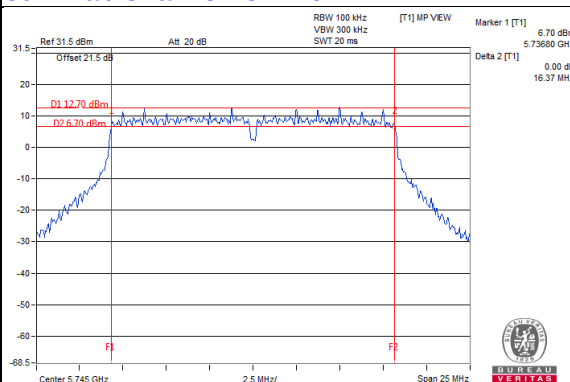


802.11ac (VHT20) / Chain 2 : CH157

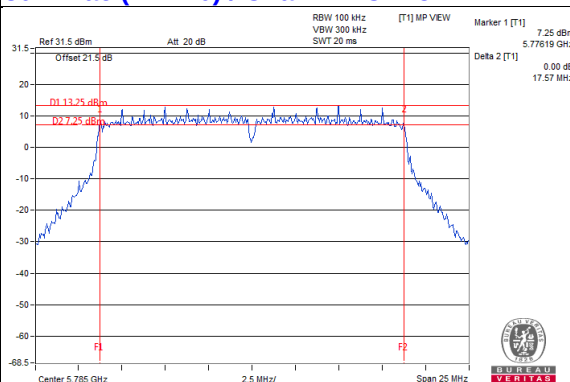

802.11ac (VHT40) / Chain 2 : CH159

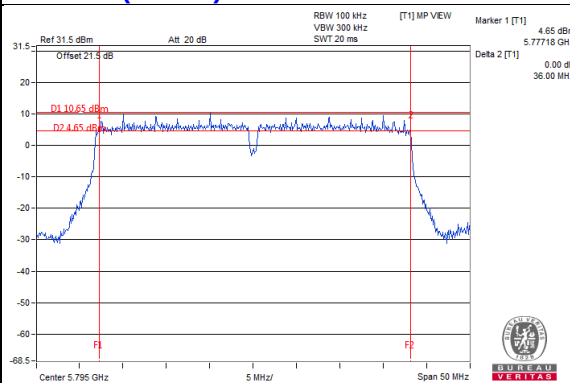

802.11ac (VHT80) / Chain 3 : CH155

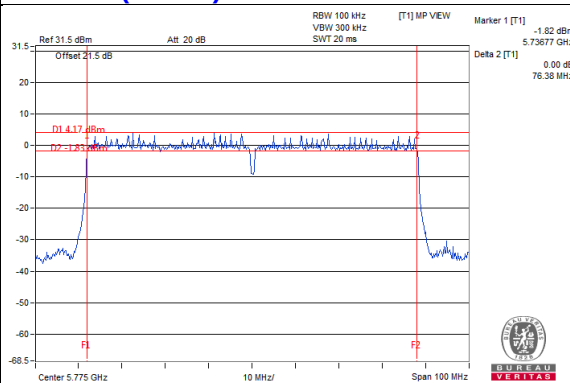

5 Pictures of Test Arrangements


Please refer to the attached file (Test Setup Photo).

Annex A- Radiated Out of Band Emission (OOBE) Measurement (For U-NII-3 band)


802.11a

CH 149 5745 MHz

Horizontal

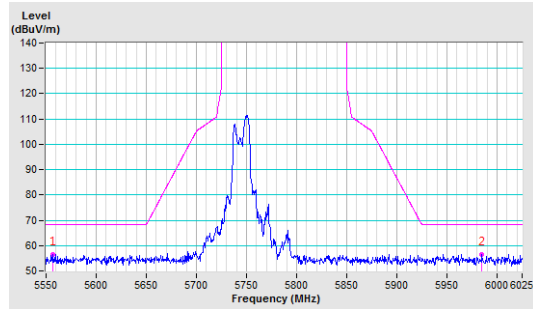


Vertical

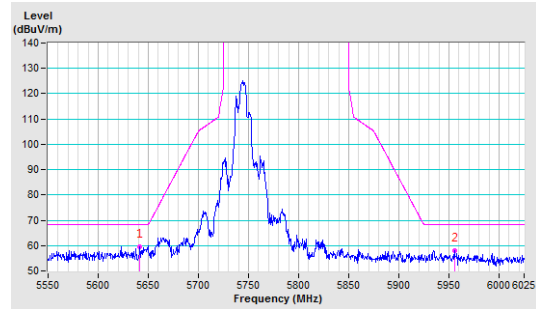


CH 157 5785 MHz

Horizontal

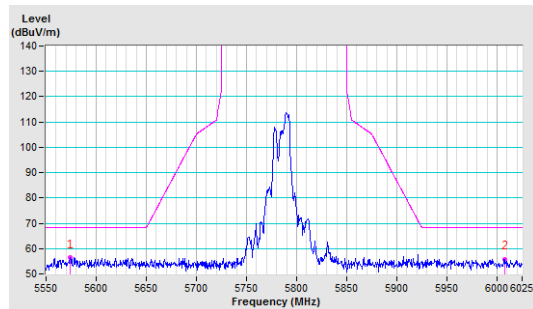


Vertical

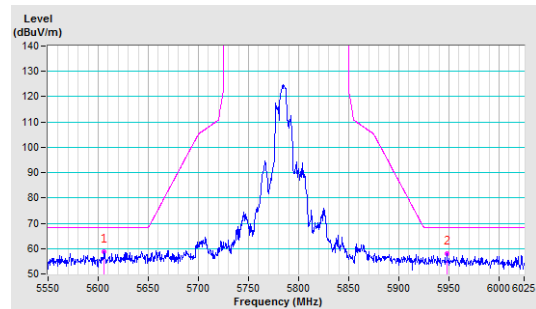


CH 165 5825 MHz

Horizontal

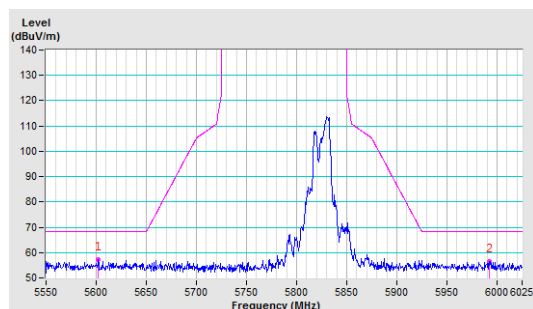


Vertical

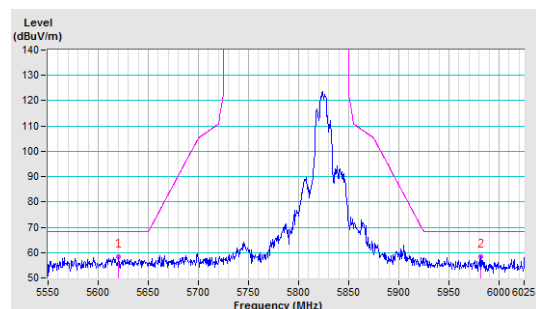


802.11ac (VHT20)

CH 149 5745 MHz

Horizontal

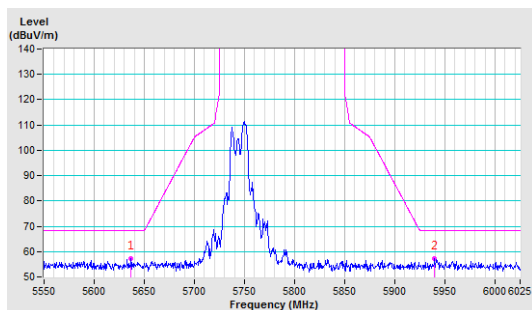


Vertical

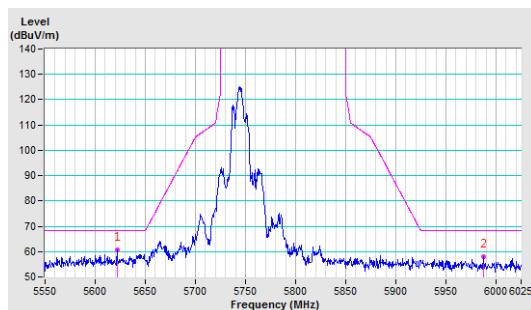


CH 157 5785 MHz

Horizontal

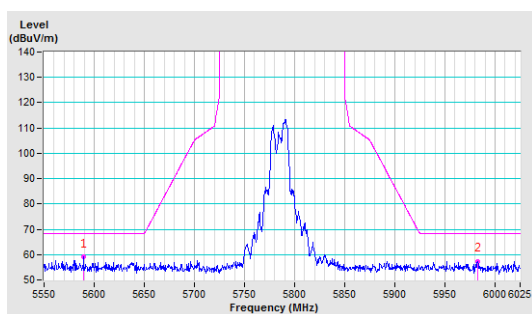


Vertical

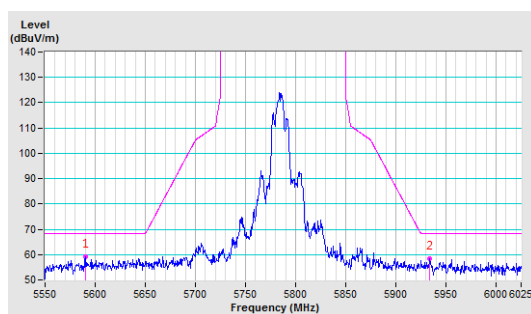


CH 165 5825 MHz

Horizontal

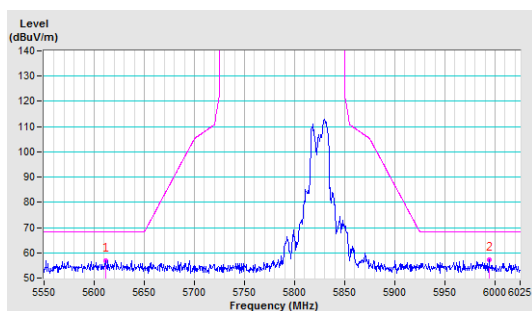


Vertical

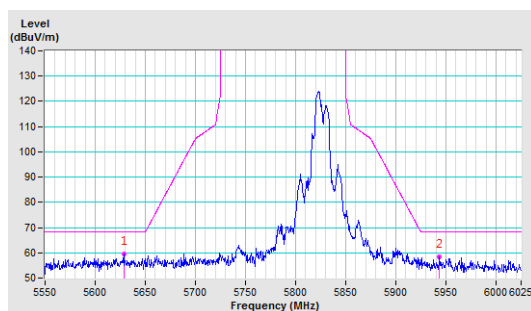


802.11ac (VHT40)

CH 151 5755 MHz

Horizontal

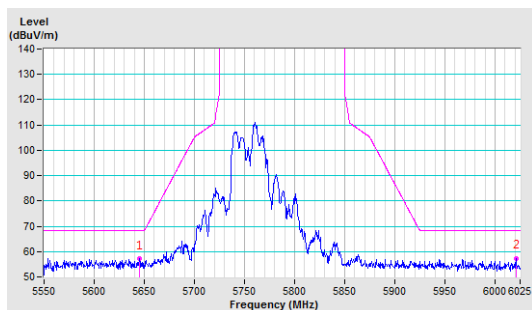


Vertical

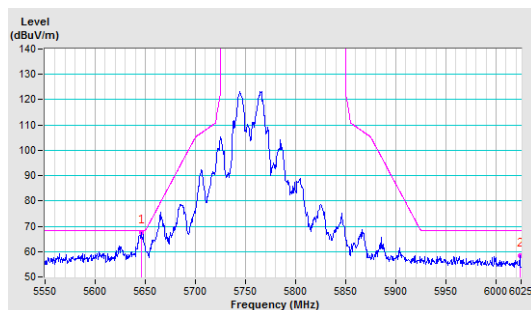


CH 159 5795 MHz

Horizontal

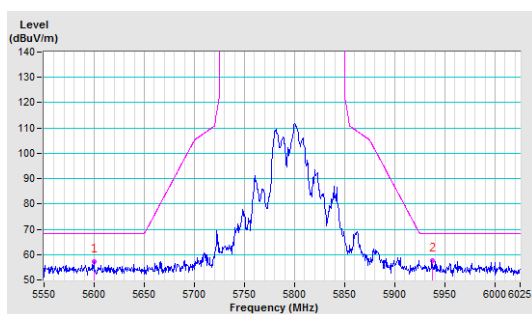


Vertical

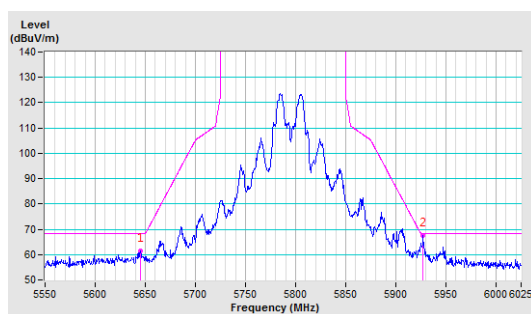


802.11ac (VHT80)

CH 155 5775 MHz

Horizontal

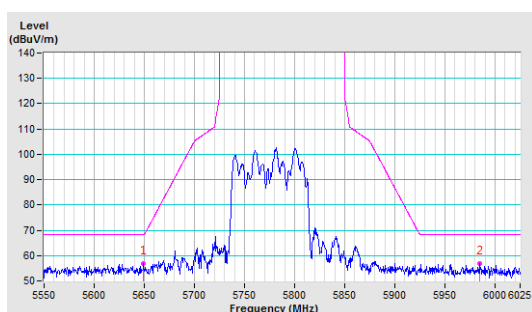

Vertical

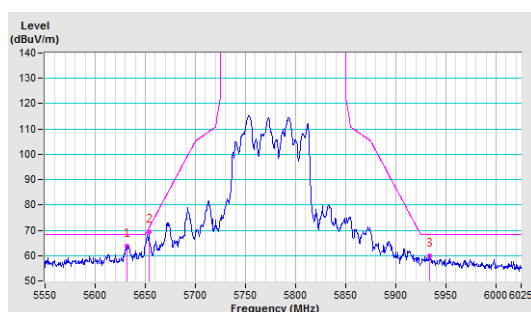

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---