

Test Report No.: Prüfbericht-Nr.:	US21YWD5.002 Rev.: 02 Part 2	Order No.: Auftrags-Nr.:	P00230111 234174286	Page 1 of 47 Seite 1 von 47
Client Reference No.: Kunden-Referenz-Nr.:	2229228	Order date: Auftragsdatum:	3/26/2021	
Client: Auftraggeber:	Satellite Tracking of People, LLC 5353 W Sam Houston Parkway N, Suite 190 Houston, Texas, 77041			
Test item: Prüfgegenstand:	BLUrepeater			
Identification/ Type No.: Bezeichnung / Typ-Nr.	BLUrepeater V1			
Order content: Auftrags-Inhalt:	Radio Compliance Test Report			
Test specification: Prüfgrundlage:	FCC 47 CFR Part 15.247:2021, RSS-247:2020			
Date of sample receipt: Wareneingangsdatum:	7/1/2021	See Test Setup Exhibit for Photos		
Test sample No: Prüfmuster-Nr.:	0001, 0002			
Testing period: Prüfzeitraum:	7/6/2021- 7/13/2021			
Testing laboratory: Prüflaboratorium:	TUV Rheinland of North America 710 Resende Road, Building 199 Webster, NY 14580			
Test result*: Prüfergebnis*:	Pass			
tested by: Alexander Sowinski geprüft von:	authorized by: Richard Decker genehmigt von:			
Date: 12/8/2021 Datum:	Issue Date: 12/8/2021 Ausstellungsdatum:			
Position / Stellung:	Expert	Position / Stellung:	Expert	
Others / Sonstiges:				
Condition of the test item at delivery: Zustand des Prüfgegenstandes bei Anlieferung:		Test sample complete and undamaged		
* Legend:	P(ass) = passed a.m. test specification(s)	F(ail) = failed a.m. test specification(s)	N/A = not applicable	N/T = not tested
* Legende:	P(ass) = entspricht o.g. Prüfgrundlage(n)	F(ail) = entspricht nicht o.g. Prüfgrundlage(n)	N/A = nicht anwendbar	N/T = nicht getestet
This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark. Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens.				

Prüfbericht-Nr.: US21YWD5.0022 Rev.:02 Part 2 <i>Test report no.:</i>			Seite 2 von 47 Page 2 of 47
Absatz Clause	Anforderungen - Prüfungen / Requirements - Tests	Messergebnisse – Bemerkungen / Measuring results - Remarks	Ergebnis Result

1	The equipment used during the specified testing period was calibrated according to our test laboratory calibration program. The equipment fulfils the requirements included in the relevant standards. The traceability of the test equipment used is ensured by compliance with the regulations of our management system. Detailed information regarding test conditions, equipment and measurement uncertainty is available in the test laboratory and could be provided on request. <i>Alle eingesetzten Prüfmittel waren zum angegebenen Prüfzeitraum gemäß eines festgelegten Kalibrierungsprogramms unseres Prüfhauses kalibriert. Sie entsprechen den in den Prüfprogrammen hinterlegten Anforderungen. Die Rückverfolgbarkeit der eingesetzten Prüfmittel ist durch die Einhaltung der Regelungen unseres Managementsystems gegeben. Detaillierte Informationen bezüglich Prüfkonditionen, Prüfequipment und Messunsicherheiten sind im Prüflabor vorhanden und können auf Wunsch bereitgestellt werden.</i>		
2	As contractually agreed, this document has been signed digitally only. TÜV Rheinland has not verified and unable to verify which legal or other pertaining requirements are applicable for this document. Such verification is within the responsibility of the user of this document. Upon request by its client, TÜV Rheinland can confirm the validity of the digital signature by a separate document. Such request shall be addressed to our Sales department. An environmental fee for such additional service will be charged. <i>Wie vertraglich vereinbart, wurde dieses Dokument nur digital unterzeichnet. Der TÜV Rheinland hat nicht überprüft, welche rechtlichen oder sonstigen diesbezüglichen Anforderungen für dieses Dokument gelten. Diese Überprüfung liegt in der Verantwortung des Benutzers dieses Dokuments. Auf Verlangen des Kunden kann der TÜV Rheinland die Gültigkeit der digitalen Signatur durch ein gesondertes Dokument bestätigen. Diese Anfrage ist an unseren Vertrieb zu richten. Eine Umweltgebühr für einen solchen zusätzlichen Service wird erhoben.</i>		
3	Test clauses with remark of * are subcontracted to qualified subcontractors and described under the respective test clause in the report. Deviations of testing specification(s) or customer requirements are listed in specific test clause in the report. <i>Prüfklausel mit der Note * wurden an qualifizierte Unterauftragnehmer vergeben und sind unter der jeweiligen Prüfklausel des Berichts beschrieben. Abweichungen von Prüfspezifikation(en) oder Kundenanforderungen sind in der jeweiligen Prüfklausel im Bericht aufgeführt.</i>		
4	The test results contained in this report refer exclusively to the product(s) presented for testing. No liability may be assumed for models or products not referred to herein. This test report may not be published or duplicated in part without permission of the testing body. This test report by itself does not constitute authorization for the use of any TÜV Rheinland test mark. The report must not be used by the client to claim product certification, approval, or endorsement by A2LA.		
5	Radio Compliance Test Report. The above product was found to be Compliant to the above test standard(s).		

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 3 of 47
Seite 3 von 47

Prüfbericht-Nr.:

Product description
Produktbeschreibung

1	Product details: <i>Produktdetails:</i>	BLUrepeater is a small, lightweight RF signal range extender. Designed to work with accessories to extend the LoRa/FSK signal.
2	Dimensions / Weight: <i>Maße / Gewicht:</i>	3.62 cm x 6.35 cm x 6.35 cm / 0.091 kg
3	Operating elements: <i>Bedienelemente:</i>	Battery Powered 3.7 VDC. AC Mains 85-264 VAC, 50/60Hz. Transmit band 902-928 MHz
4	Equipment / Accessories: <i>Ausstattung / Zubehör:</i>	None.
5	Used materials: <i>Verwendete Materialien:</i>	None.
6	Other: <i>Sonstiges:</i>	Test sample(s), as well sample information, description, product details and intended usage was provided by customer.
7	Test sample obtaining: <i>Prüfmusterbereitstellung:</i>	☒ Sending by customer ☐ Sampling by TÜV Rheinland Group ☐ others:

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 4 of 47
Seite 4 von 47

Prüfbericht-Nr.:

Revisions

Date mm/dd/yy	Name	Page Number of Change	Describe Change
07/23/2021	Rev.:01	N/A	Original Document
12/08/2021	Rev.:02	All	Updated FCC ID, Operating Frequency Band.

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 5 of 47
Seite 5 von 47

Prüfbericht-Nr.:

TABLE OF CONTENTS

1	General Information	6
1.1	Scope	6
1.2	Purpose	6
1.3	Summary of Test Results	7
2	Laboratory Information	8
2.1	Accreditations & Endorsements	8
2.2	Test Software	8
2.3	Measurement Uncertainty	9
2.4	Calibration Traceability	10
2.5	Measurement Equipment Identification	11
3	Product Information	12
3.1	Test Plan	12
4	Transmitter Requirements	13
4.1	Transmitter Spurious Emissions	13

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 6 of 47
Seite 6 von 47

Prüfbericht-Nr.:

1 General Information

1.1 Scope

This report is intended to document the status of conformance based on the results of testing performed on the BLUrepeater, Model Number: BLUrepeater V1, manufactured by Satellite Tracking of People, LLC. This report only applies to the specific samples tested under the stated test conditions. It is the responsibility of the manufacturer to assure that additional production units of this model are manufactured with identical or EMI equivalent electrical and mechanical components.

1.2 Purpose

Testing was performed to evaluate the Radio performance of the EUT (Equipment Under Test) in accordance with the applicable requirements, procedures, and criteria defined in the application of regulations and application of standards listed in this report.

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 7 of 47
Seite 7 von 47

Prüfbericht-Nr.:

1.3 Summary of Test Results

Applicant:	Satellite Tracking of People, LLC 5353 W Sam Houston Parkway N, Suite 190 Houston, Texas, 77041	Tel:	713-354-9393	Contact:	Mark Kirincic
		Fax:	--	e-mail:	mkirincic@securustechnologies.com
Description:	BLUrepeater	Test Voltage/Freq.:	Battery: 3.7 VDC, AC: 120VAC 60Hz		
Model Number:	BLUrepeater V1				
Serial Number:	0001, 0002	Test Engineer:	Alexander Sowinski		
Standards	Description	Severity Level or Limit		Criteria	Test Result
FCC 47 CFR Part 15.247:2021, RSS-247:2020 Radio Standard	Operation within the bands 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.	See Basic Sections Below		See Below	Complies
FCC 47 CFR Part 15.203, RSS-Gen (6.8)	Antenna Requirements	Per Standards		Report	Complies
FCC 47 CFR Part 15.247 (b.3), RSS-247 (5.4)	Transmitter Output Power	EIRP < 1 Watt (30 dBm)		Limit	Complies
FCC 47 CFR Part 15.247 (a.2), RSS-247 (5.2)	Occupied Bandwidth	6dB OBW > 500 kHz		Limit	Complies
FCC 47 CFR Part 15.247 (e), RSS-247 (5.2)	Power Spectral Density	PSD < 8dBm / 3kHz band		Limit	Complies
FCC 47 CFR Part 15.247 (d), RSS-247 (5.5)	Out of Band Emissions	< 20 dB / 100kHz band		Limit	Complies
FCC CFR 15.209, RSS-Gen (8.9)	Transmitter Spurious Emissions	Class B, 30 - 1000 MHz Class B, 1000 - 18000 MHz		Limit	Complies
FCC CFR 15.207, RSS-Gen (8.8)	AC Line Conducted Emissions	Class B, 150 kHz – 30 MHz		Limit	Complies

2 Laboratory Information

2.1 Accreditations & Endorsements

TUV Rheinland of North America located at, 710 Resende Road Webster, NY 14580 is accredited by the commission for performing testing services for the general public on a fee basis. This laboratory test facilities have been fully described in reports submitted to and accepted by the FCC (Registration No 5253). The laboratory scope of accreditation includes: Title 47 CFR Part 15, and 18. The accreditation is updated every 3 years.

2.1.1 ILAC/A2LA

This is a program which is administered under the auspices of A2LA accredited. The laboratory has been assessed and accredited in accordance with ISO Standard 17025:2017 (Certificate Number: 3331.08). The scope of laboratory accreditation includes emission and immunity testing. The accreditation is updated annually.

2.1.2 VCCI

VCCI Accredited test lab. Registration numbers A-0329.

2.1.3 Industry Canada

(Registration No.: 482B-1) The 10 meter Semi-Anechoic chamber has been accepted by Industry Canada to perform testing to 3 and to 10m, based on the test procedures described in ANSI C63.4-2014.

2.1.4 BSMI

Registration No.: SL2-IN-E-1159R. The BSMI accreditation was obtained by NIST MRA with the BSMI.

2.1.5 Korea

(Designation No.: US0192). Recognized by National Radio Research Agency (RRA) as an accredited Conformity Assessment Body (CAB) under the terms for Korea Phase I of the APEC TEL.

2.2 Test Software

- 1) CIGUI 32 Version 1.4 for California Instruments AC power source
- 2) TILE version 4.1.B
- 3) TILE 7 version 7.1.3.24
- 4) Voltech PM 6000 Firmware 1.22.07RC6, Software IEC61000-3 for PM6000 Release 1.24.12
- 5) California Instruments AC power source MXHCL
- 6) Rohde & Schwarz EMI Measurement software EMC32 version 8.54.0
- 7) TEMA 3000 version 4.1.2
- 8) TILE version 3.4.k.28

2.3 Measurement Uncertainty

Two types of measurement uncertainty are expressed in this report, per *ISO Guide To The Expression Of Uncertainty In Measurement*, 1st Edition, 1995.

The Combined Standard Uncertainty is the standard uncertainty of the result of a measurement when that result is obtained from the values of a number of other quantities, equal to the positive square root of a sum of terms, the terms being the variances or co-variances of these other quantities weighted according to how the measurement result varies with changes in these quantities. The term standard uncertainty is the result of a measurement expressed as a standard deviation.

The Expanded Uncertainty defines an interval about the result of a measurement that may be expected to encompass a large fraction of the distribution of values that could reasonably be attributed to the measurand. The fraction may be viewed as the coverage probability or level of confidence of the interval.

2.3.1 Sample Calculation – radiated & conducted emissions

The field strength is calculated by subtracting the Amplifier Gain and adding the Cable Loss and Antenna Correction Factor to the measured reading. The basic equation is as follows:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{RAW} - \text{AMP} + \text{CBL} + \text{ACF}$$

Where: RAW = Measured level before correction (dBμV)

AMP = Amplifier Gain (dB)

CBL = Cable Loss (dB)

ACF = Antenna Correction Factor (dB/m)

$$\mu\text{V/m} = 10^{\frac{\text{dB}\mu\text{V/m}}{20}}$$

Sample radiated emissions calculation @ 30 MHz

Measurement +Antenna Factor–Amplifier Gain+Cable loss=Radiated Emissions (dBuV/m)

$$25 \text{ dBuV/m} + 17.5 \text{ dB} - 20 \text{ dB} + 1.0 \text{ dB} = 23.5 \text{ dBuV/m}$$

2.3.2 Measurement Uncertainty Emissions

Per CISPR 16-4-2	Ulab	Ucisp
Radiated Disturbance @ 10m		
30 MHz – 1,000 MHz	4.57 dB	5.2 dB
Radiated Disturbance @ 3m		
1.0 GHz – 6.0 GHz	5.18 dB	5.2 dB
6.0 GHz – 18.0 GHz	5.48 dB	5.5 dB
18.0 GHz – 26.5 GHz	5.21 dB	
26.5 GHz – 40.0 GHz	4.99 dB	
Conducted Disturbance @ Mains Terminals		
150 kHz – 30 MHz	2.62 dB	3.6 dB
Disturbance Power		

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 10 of 47
Seite 10 von 47

Prüfbericht-Nr.:

30 MHz – 300 MHz	3.88 dB	4.5 dB
------------------	---------	--------

Measurement Uncertainty Emissions

The estimated combined standard uncertainty for radiated emissions measurements is ± 4.57 dB	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for radiated emissions measurements from 1 GHz to 6 GHz is ± 5.18 dB	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for radiated emissions measurements from 6 GHz to 18 GHz is ± 5.48 dB	Per CISPR16-4-2 Method
The estimated combined standard uncertainty for conducted emissions measurements is ± 2.62 dB.	Per CISPR16-4-2 Method

Expanded measurement uncertainty numbers are shown in the tables above. Compliance criteria are not based on measurement uncertainty.

2.4 Calibration Traceability

All measurement instrumentation is traceable to the National Institute of Standards and Technology (NIST). Measurement method complies with ANSI/NCSL Z540-1-1994 and ISO Standard ISO IEC 17025:2017. Equipment calibration records are kept on file at the test facility.

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 11 of 47
Seite 11 von 47

Prüfbericht-Nr.:

2.5 Measurement Equipment Identification

Equip.	Description	Model	Manufacturer	Page	1 of 1
				Last Date MM/DD/YYYY	Due Date MM/DD/YYYY
G1701077	SunAR JB6 Antenna	JB6	SunAR	04/30/2020	04/30/2022
G1701081	Fluke Multimeter 87 V 39760226	87 V	Fluke	04/09/2021	04/09/2022
G1701082	Temperature/Humidity/Barometer	68000-49	Control Company	02/12/2021	06/12/2023
G1701089	R&S EMI Receiver ESW44 101880	ESW44	Rohde & Schwarz	04/02/2021	04/02/2022
G1701233	EMCO Horn Antenna 3115 9812-5635	3115	EMCO	02/28/2020	03/28/2022
G1701365	EMCO Horn 3160-10 1180	3160-10	EMCO	08/11/2020	08/11/2022
G1701367	EMCO Horn 3160-09 6707	3160-09	EMCO	08/11/2020	08/11/2022
G1701385	R&S EMI Receiver ESU40 100274	ESU40	Rohde & Schwarz	02/09/2021	02/09/2022
G1701452	RF Path 30-1000MHz	RF Cable Path		05/12/2021	02/12/2023
G1701526	Tunable Notch Filter	240NFM	EAGLE	No Cal	No Cal

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 12 of 47
Seite 12 von 47

Prüfbericht-Nr.:

3 Product Information

3.1 Test Plan

The EUT product information, test configuration, mode of operation, test types, test procedures, test levels, pass/failure criteria, in this report were carried out per the product test plan located in appendix A of this report.

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 13 of 47
Seite 13 von 47

Prüfbericht-Nr.:

4 Transmitter Requirements

4.1 Transmitter Spurious Emissions

This test measures the electromagnetic levels of spurious signals generated by the EUT that radiated from the EUT and may affect the performance of other nearby electronic equipment.

4.1.1 Over View of Test

Results	Complies (as tested per this report)					Date	07/08/2021	
Standard	FCC CFR 15.209, RSS-Gen (8.9)							
Product Model	BLUrepeater V1				Serial#	0002		
Configuration	See test plan for details.							
Test Set-up	Tested 3 meters semi- anechoic chamber placed on turn-table, see test plans for details.							
EUT Powered By	3.7 VDC	Temp	24°C	Humidity	56%	Pressure	1005 mbar	
Frequency Range	30 - 1000 MHz @ 3 meters 1000 - 18000 MHz @ 3 meters							
Channel Frequencies	Low Channel: 903 MHz Mid Channel: 915 MHz High Channel: 927 MHz			Power Setting @ Channel		14 dBm		
Perf. Criteria	Class B (Below Limit)			Perf. Verification		Readings Under Limit		
Mod. to EUT	None			Test Performed By		Alexander Sowinski		

4.1.2 Test Procedure

Radiated emissions tests were performed using the procedures of FCC 47 CFR Part 15.209 and/or ANSI C63.10 including methods for signal maximizations and EUT configuration. The photos included with the report show the EUT in its maximized configuration. Further radiated emission tests were performed per the procedures stated in the other emissions standards listed in this report. A notch filter was installed along the signal path to protect the measurement equipment.

The frequency range 30 – 18000 MHz investigated for radiated emissions. No spurious emissions were detected below 30MHz.

4.1.3 Deviations

There were no deviations from the test methodology listed in the test plan for the radiated emission test.

4.1.4 Final Test

All final radiated emissions measurements were below (in compliance) the limits.

Test report no.: US21YWD5.002 Rev.:02 Part 2


Page 14 of 47
Seite 14 von 47

Prüfbericht-Nr.:

4.1.5 Final Graphs

NOTES: LoRa Low Channel (903 MHz)

Radiated Emissions 30 – 1000 MHz
Vertical

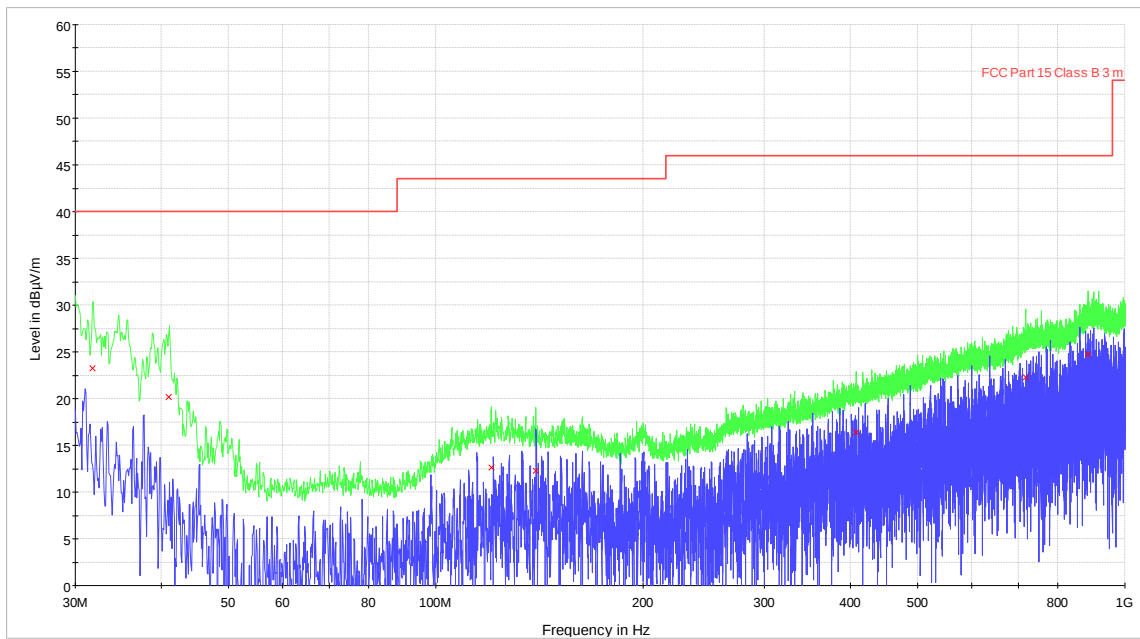


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 15 of 47
Seite 15 von 47

Prüfbericht-Nr.:

NOTES: LoRa Low Channel (903 MHz)

Radiated Emissions 30 – 1000 MHz
Horizontal

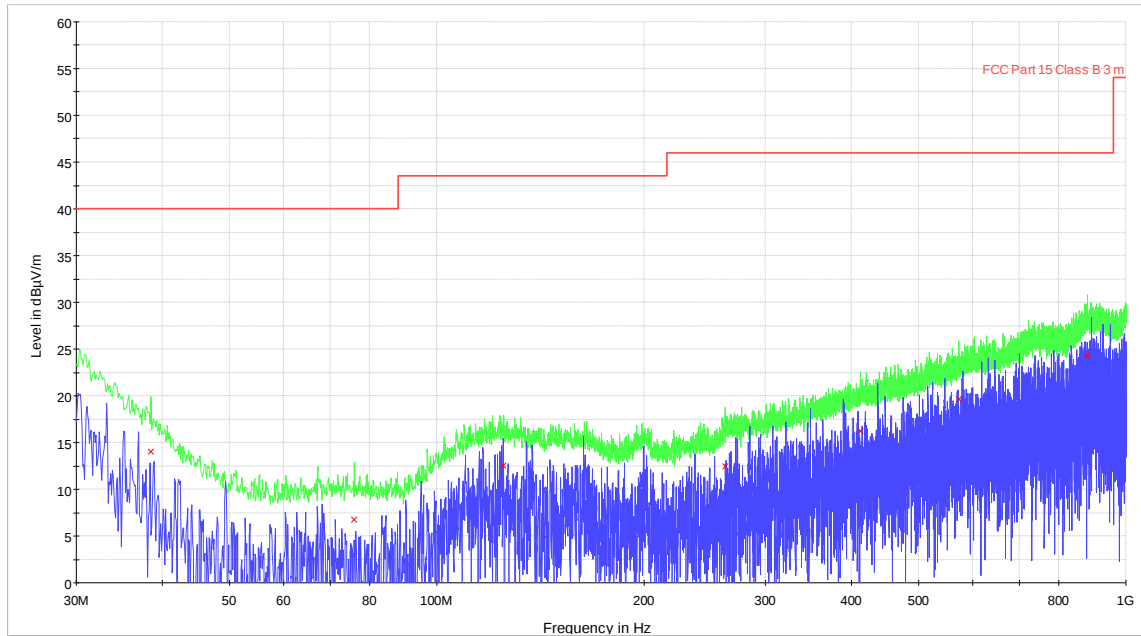


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 16 of 47
Seite 16 von 47

Prüfbericht-Nr.:

NOTES: LoRa Mid Channel (915 MHz)

Radiated Emissions 30 – 1000 MHz
Vertical

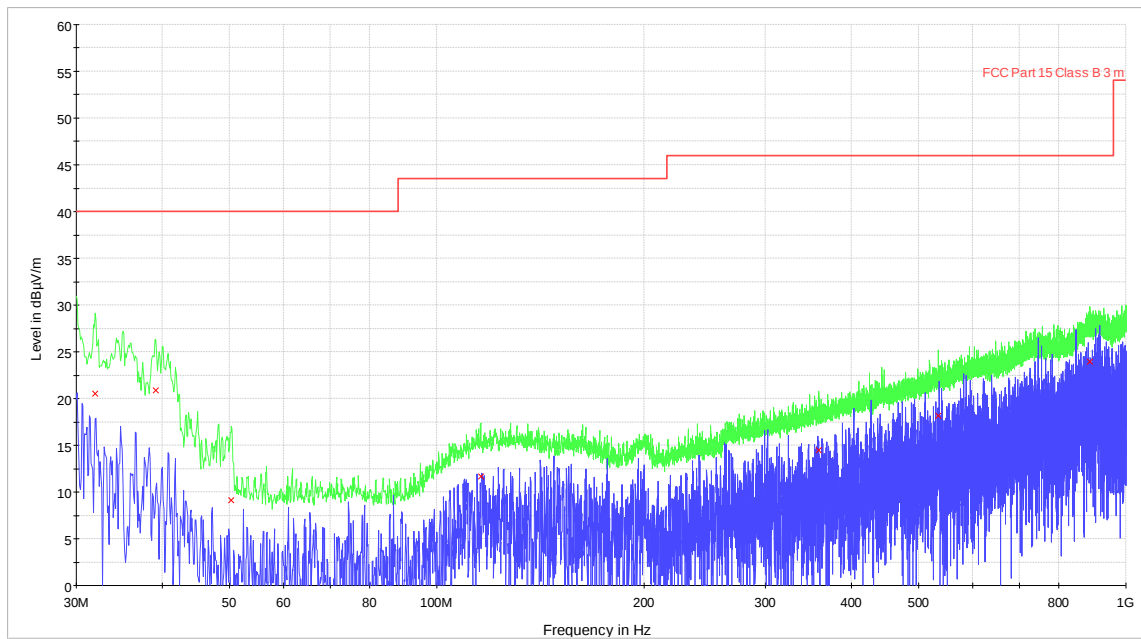


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 17 of 47
Seite 17 von 47

Prüfbericht-Nr.:

NOTES: LoRa Mid Channel (915 MHz)

Radiated Emissions 30 – 1000 MHz
Horizontal

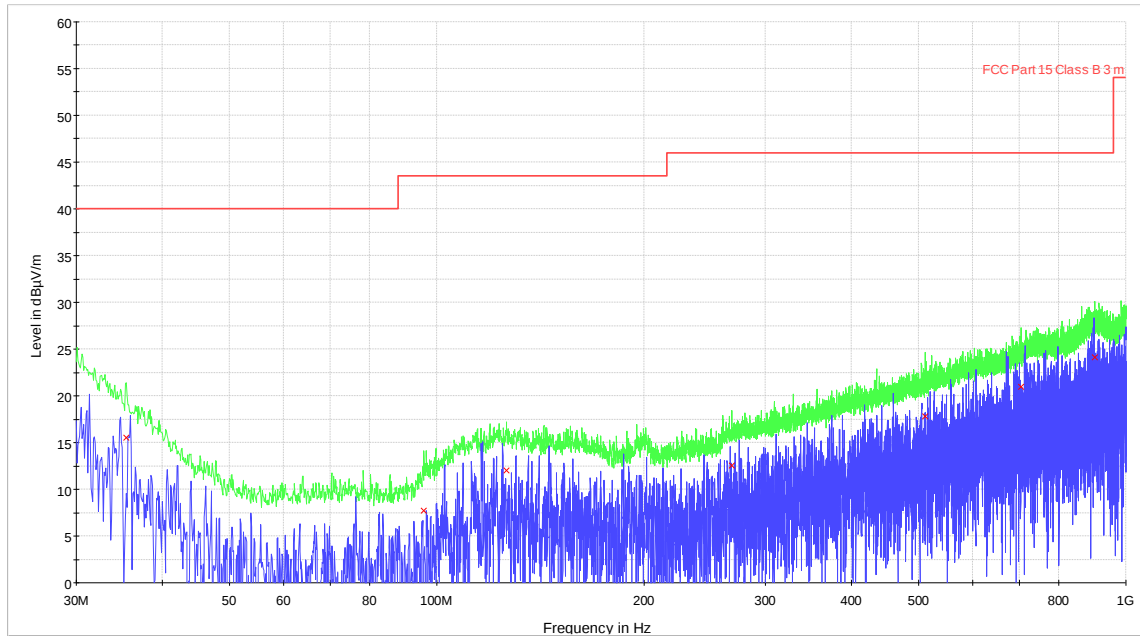


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 18 of 47
Seite 18 von 47

Prüfbericht-Nr.:

NOTES: LoRa High Channel (927 MHz)

Radiated Emissions 30 – 1000 MHz
Vertical

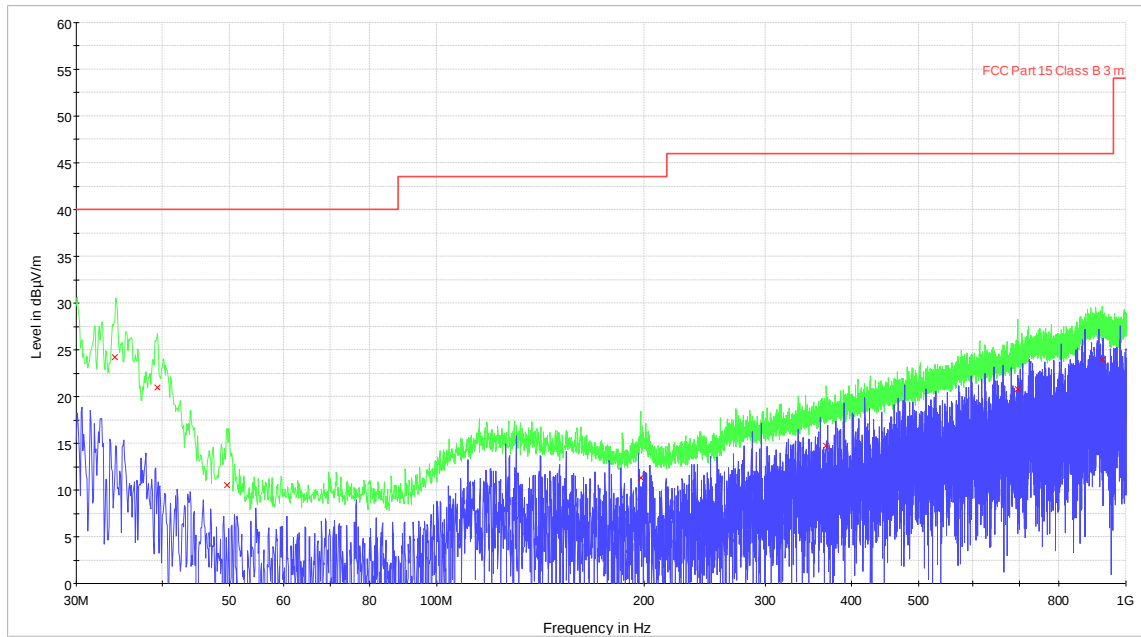


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 19 of 47
Seite 19 von 47

Prüfbericht-Nr.:

NOTES: LoRa High Channel (927 MHz)

Radiated Emissions 30 – 1000 MHz
Horizontal

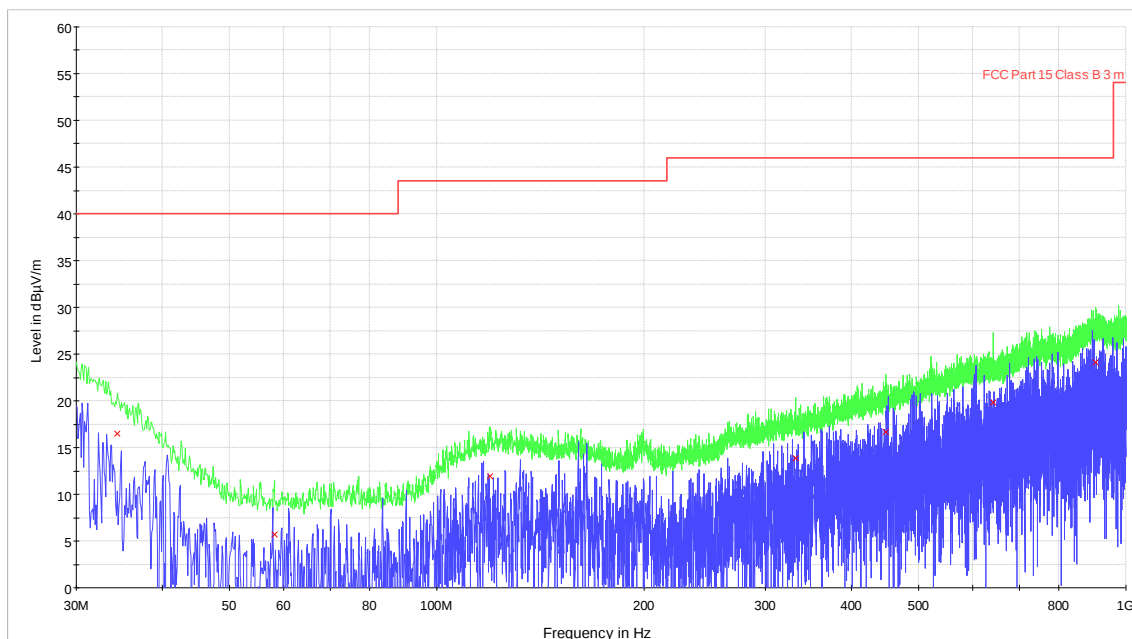


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 20 of 47
Seite 20 von 47

Prüfbericht-Nr.:

NOTES: FSK Low Channel (903 MHz)

Radiated Emissions 30 – 1000 MHz
Vertical

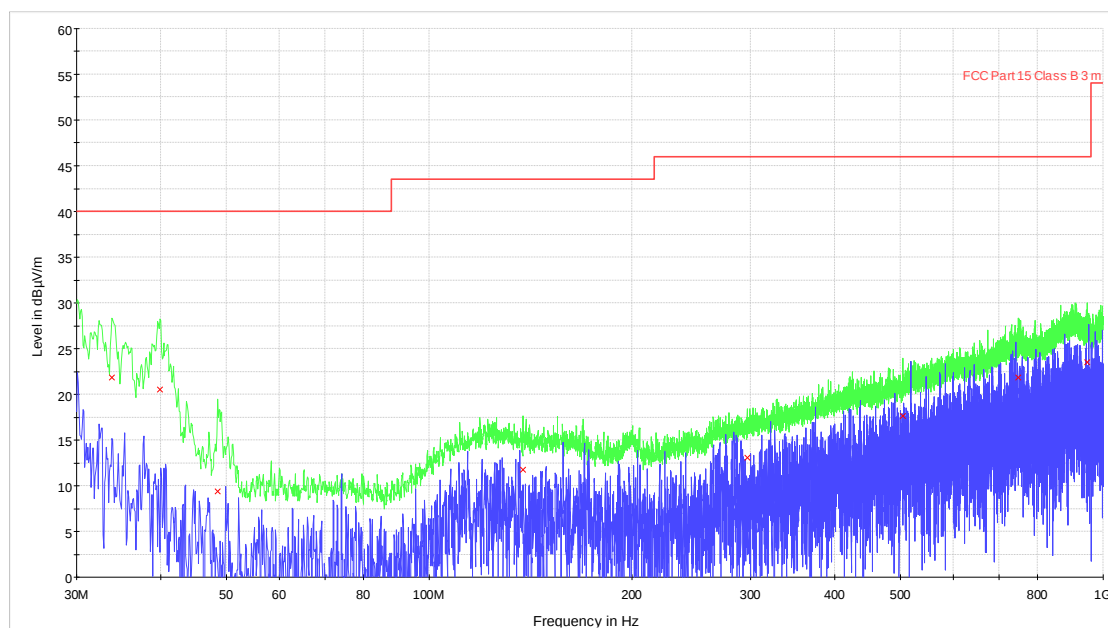


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 21 of 47
Seite 21 von 47

Prüfbericht-Nr.:

NOTES: FSK Low Channel (903 MHz)

Radiated Emissions 30 – 1000 MHz
Horizontal

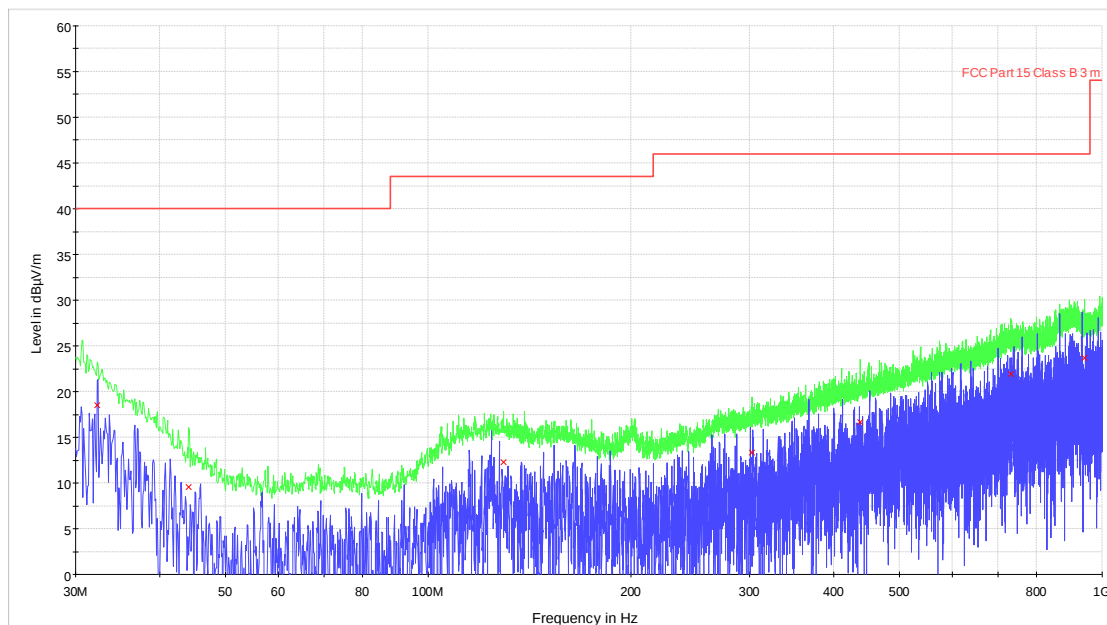


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 22 of 47
Seite 22 von 47

Prüfbericht-Nr.:

NOTES: FSK Mid Channel (915 MHz)

Radiated Emissions 30 – 1000 MHz
Vertical

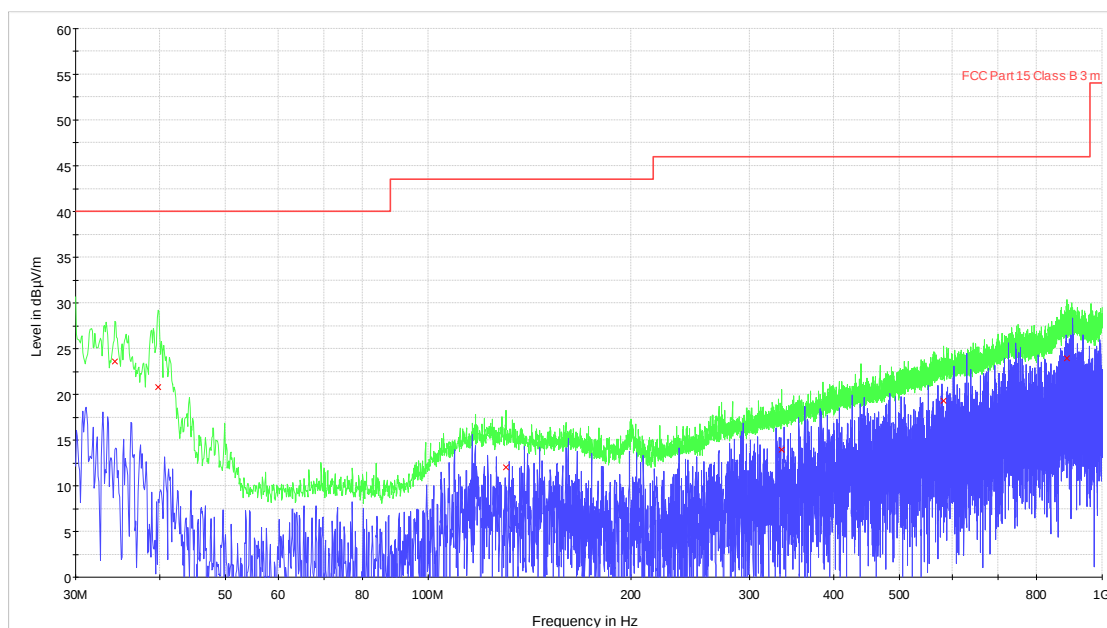


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 23 of 47
Seite 23 von 47

Prüfbericht-Nr.:

NOTES: FSK Mid Channel (915 MHz)

Radiated Emissions 30 – 1000 MHz
Horizontal

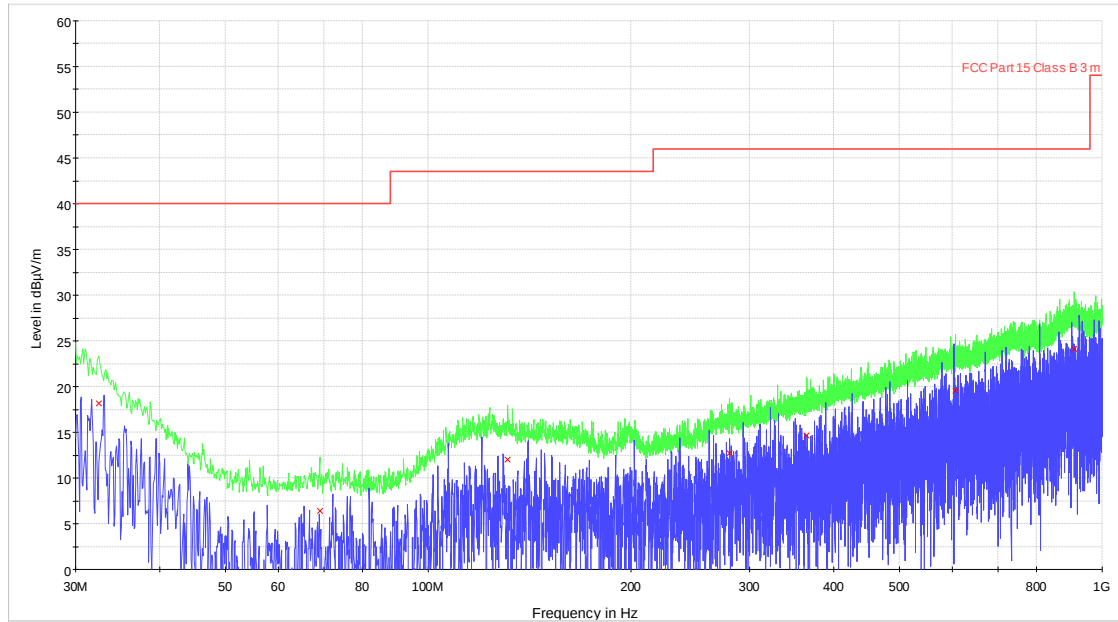


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 24 of 47
Seite 24 von 47

Prüfbericht-Nr.:

NOTES: FSK High Channel (927 MHz)

Radiated Emissions 30 – 1000 MHz
Vertical

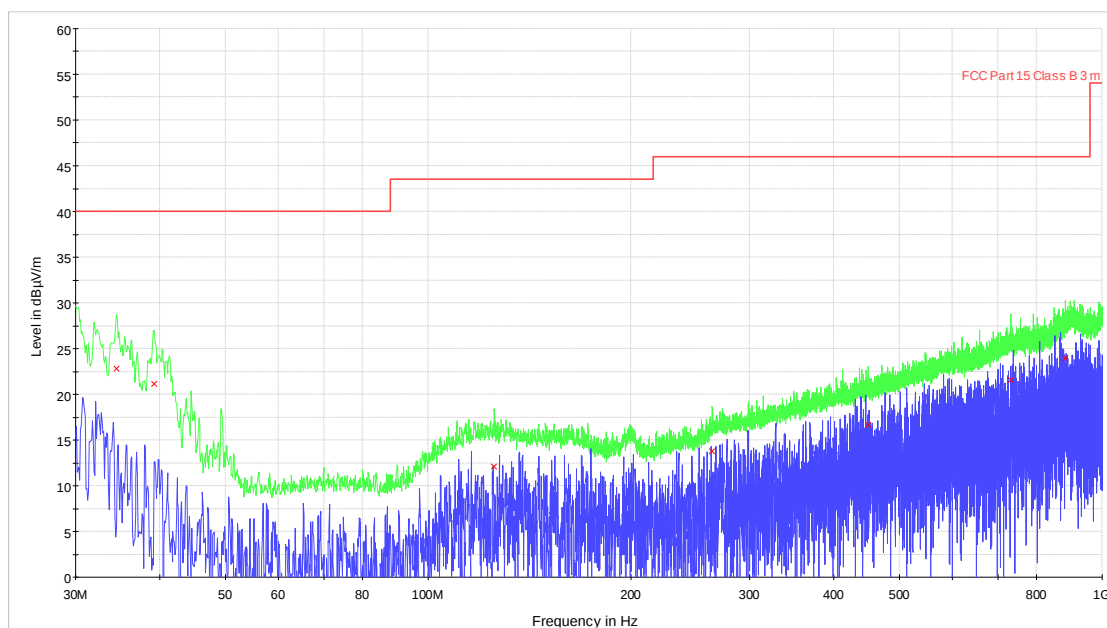


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 25 of 47
Seite 25 von 47

Prüfbericht-Nr.:

NOTES: FSK High Channel (927 MHz)

Radiated Emissions 30 – 1000 MHz
Horizontal

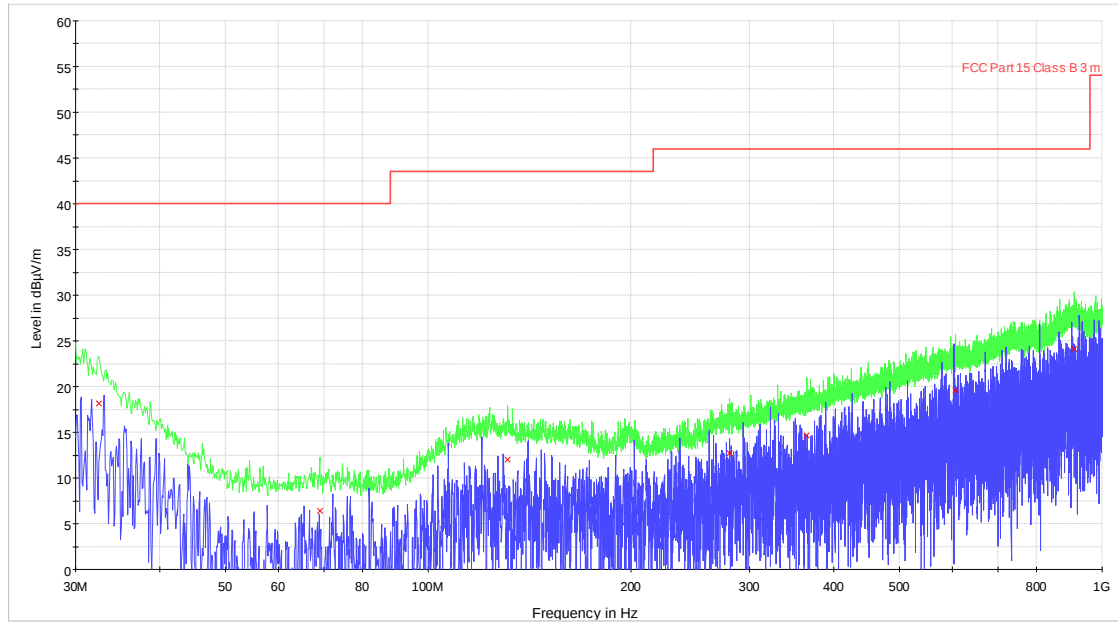


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 26 of 47
Seite 26 von 47

Prüfbericht-Nr.:

NOTES: LoRa Low Channel (903 MHz)

**Radiated Emissions Band Edge
Worst Case - Horizontal**

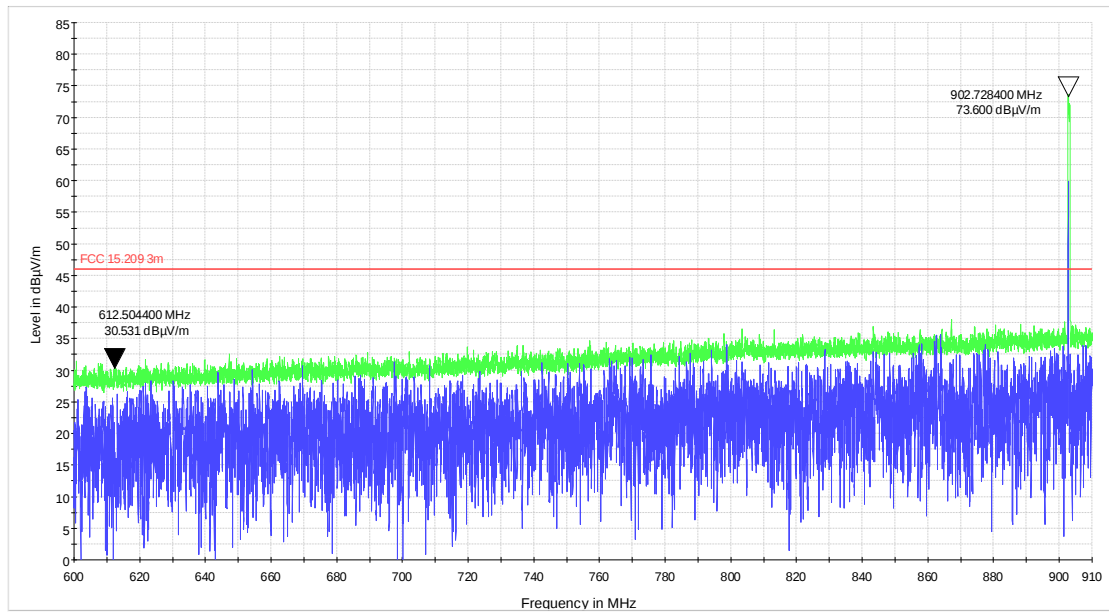


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 27 of 47
Seite 27 von 47

Prüfbericht-Nr.:

NOTES: LoRa High Channel (927 MHz)

**Radiated Emissions Band Edge
Worst Case - Horizontal**

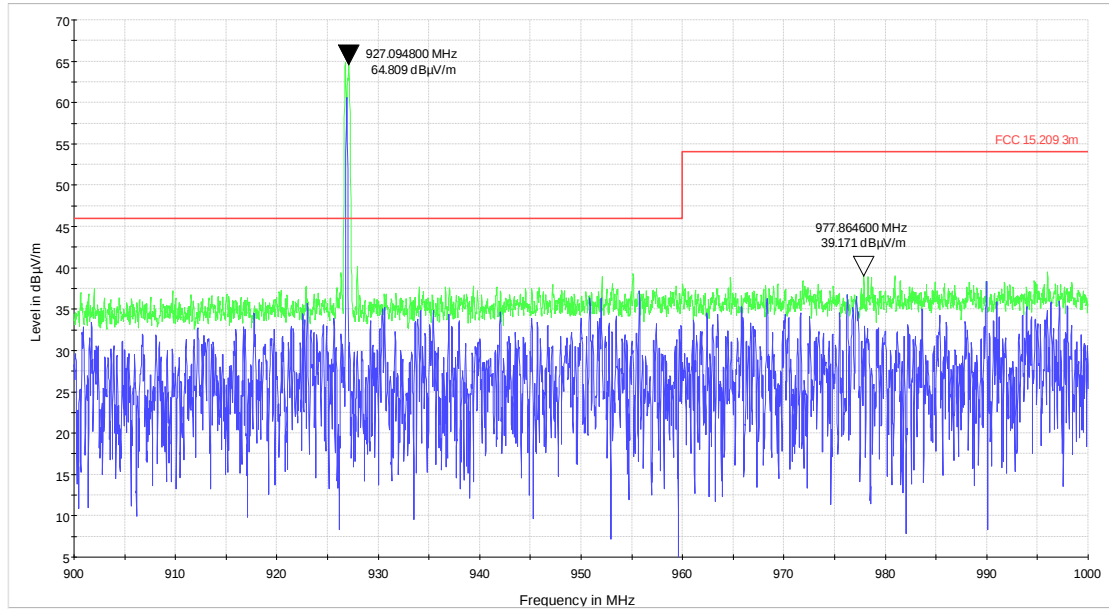


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 28 of 47
Seite 28 von 47

Prüfbericht-Nr.:

NOTES: FSK Low Channel (903 MHz)

**Radiated Emissions Band Edge
Worst Case - Horizontal**

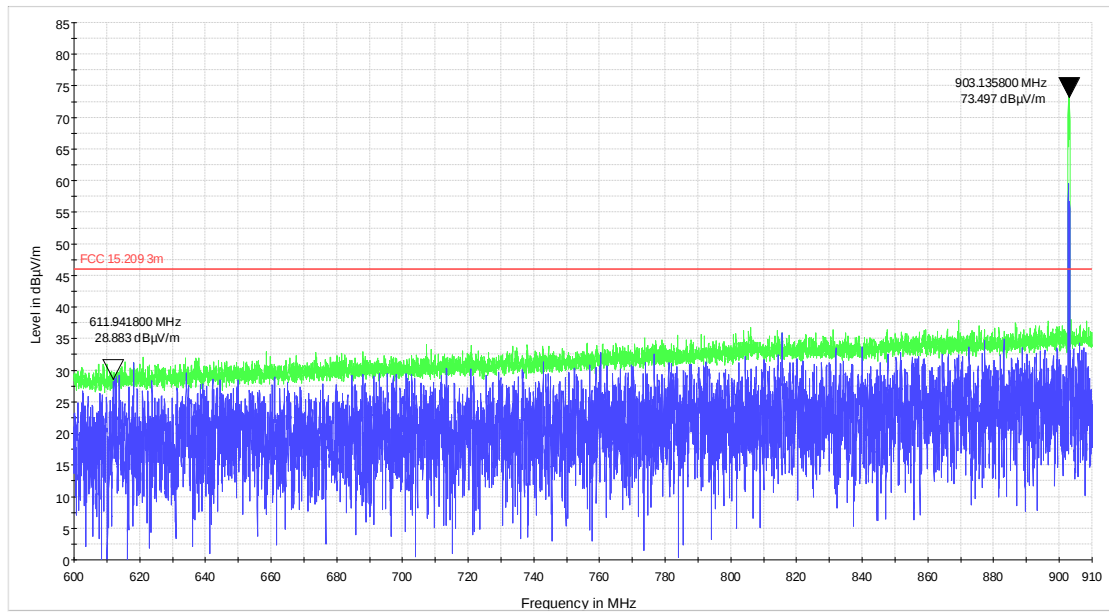


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 29 of 47
Seite 29 von 47

Prüfbericht-Nr.:

NOTES: FSK High Channel (927 MHz)

**Radiated Emissions Band Edge
Worst Case - Horizontal**

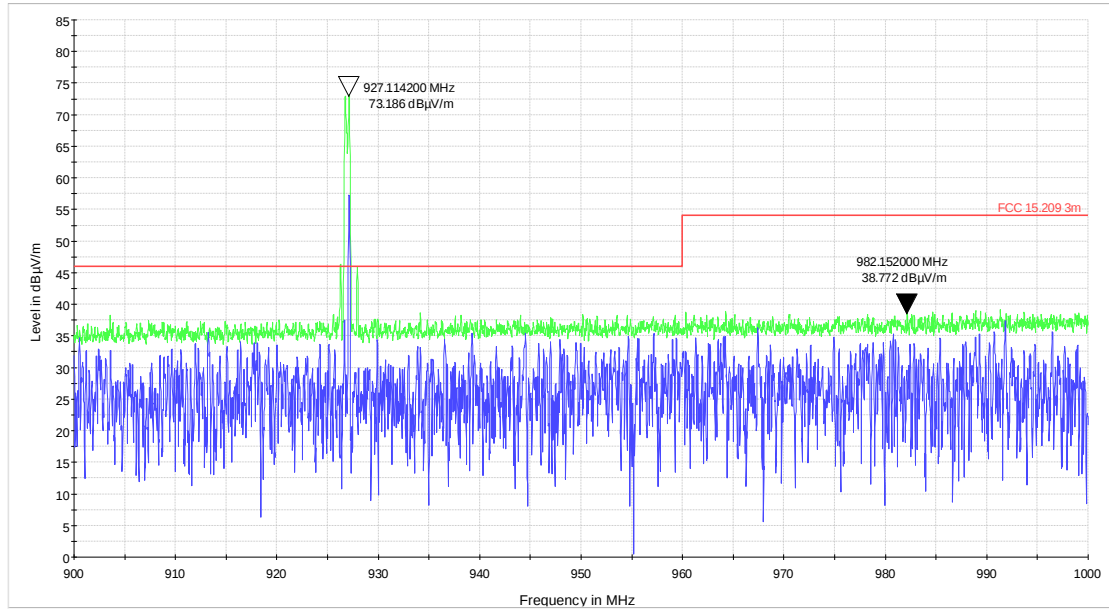


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 30 of 47
Seite 30 von 47

Prüfbericht-Nr.:

NOTES: LoRa Low Channel (903 MHz)

Radiated Emissions 1 – 18 GHz
Vertical

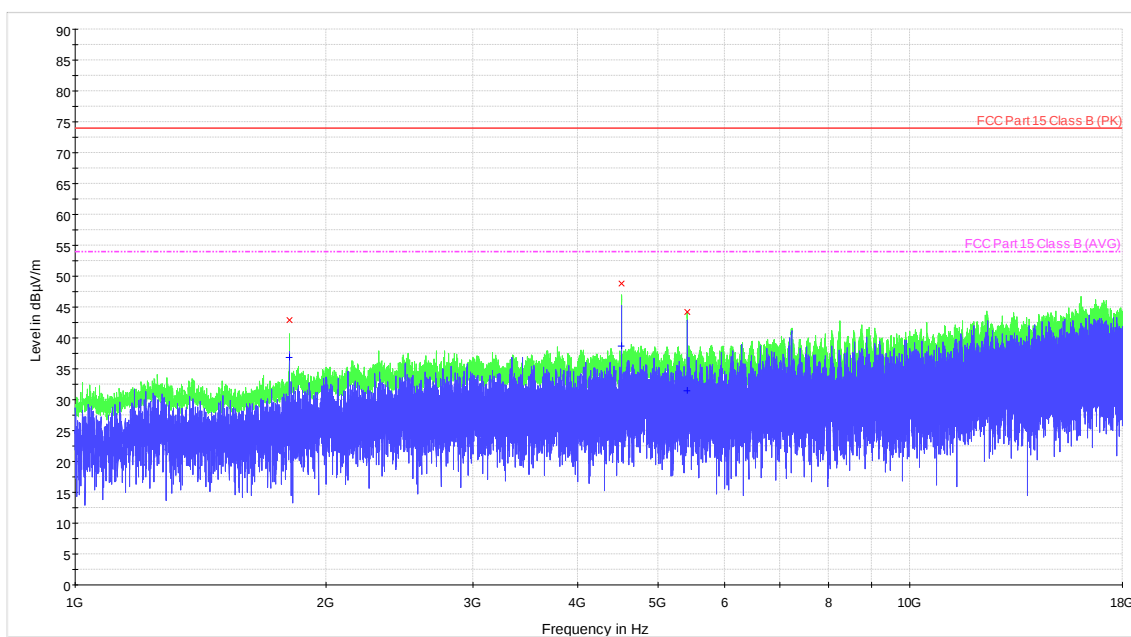


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 31 of 47
Seite 31 von 47

Prüfbericht-Nr.:

NOTES: LoRa Low Channel (903 MHz)

Radiated Emissions 1 – 18 GHz
Horizontal

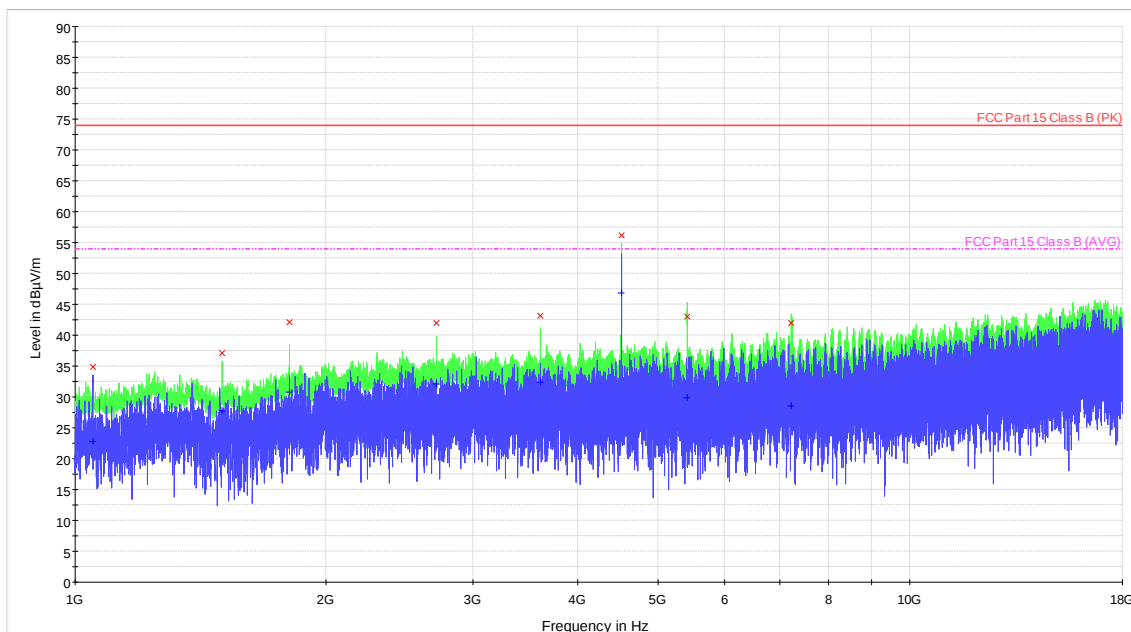


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 32 of 47
Seite 32 von 47

Prüfbericht-Nr.:

NOTES: LoRa Mid Channel (915 MHz)

Radiated Emissions 1 – 18 GHz
Vertical

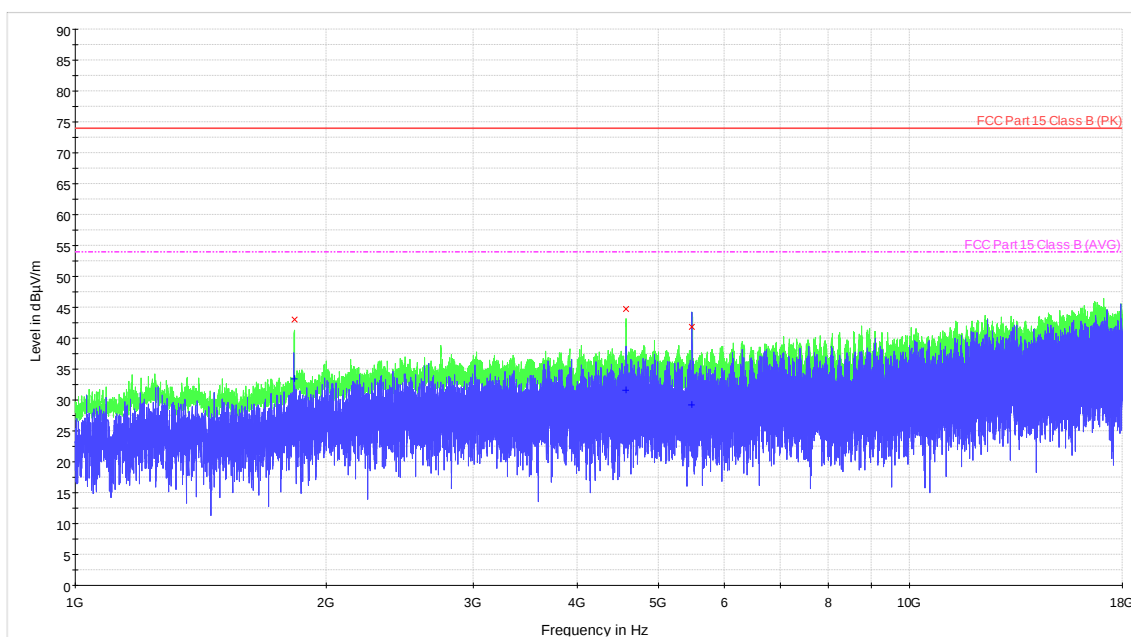


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 33 of 47
Seite 33 von 47

Prüfbericht-Nr.:

NOTES: LoRa Mid Channel (915 MHz)

**Radiated Emissions 1 – 18 GHz
Horizontal**

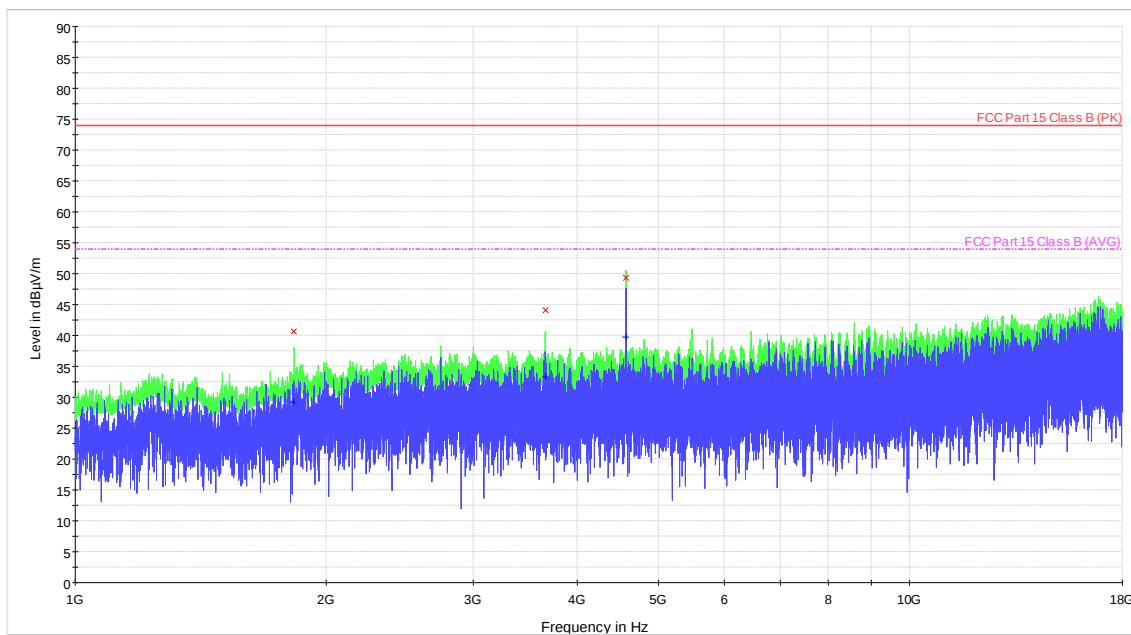


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 34 of 47
Seite 34 von 47

Prüfbericht-Nr.:

NOTES: LoRa High Channel (927 MHz)

Radiated Emissions 1 – 18 GHz
Vertical

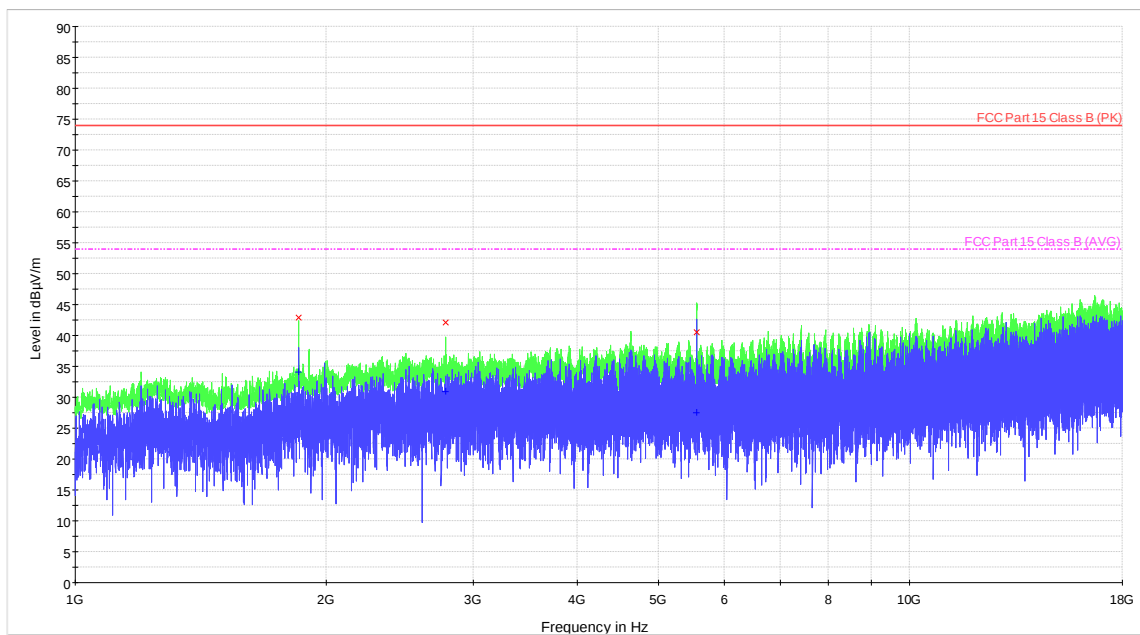


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 35 of 47
Seite 35 von 47

Prüfbericht-Nr.:

NOTES: LoRa High Channel (927 MHz)

Radiated Emissions 1 – 18 GHz
Horizontal

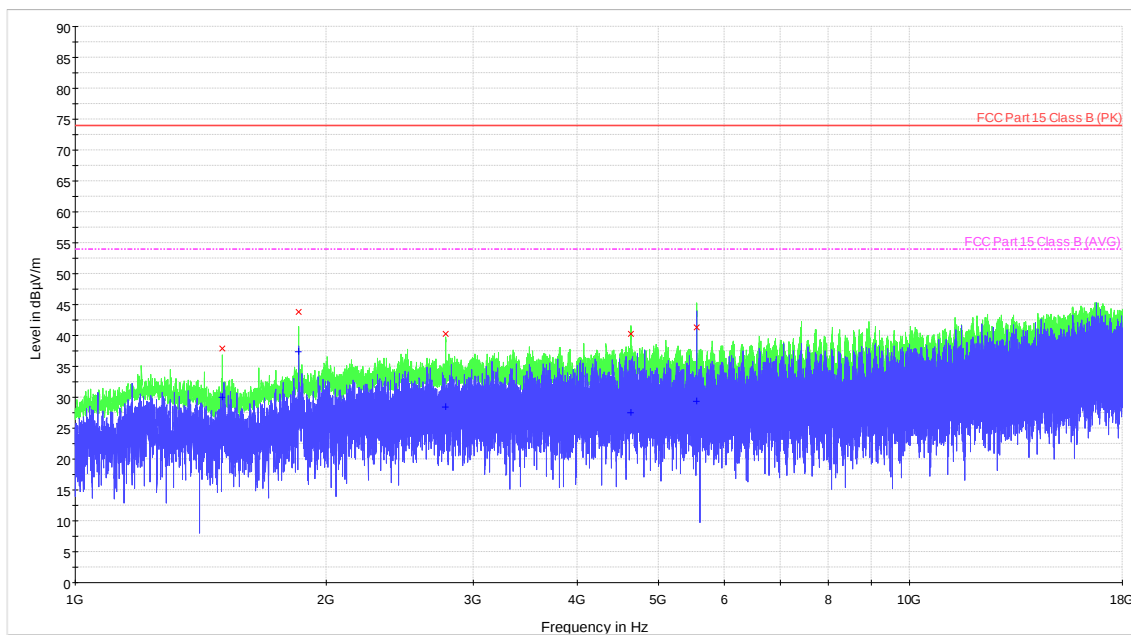


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 36 of 47
Seite 36 von 47

Prüfbericht-Nr.:

NOTES: FSK Low Channel (903 MHz)

Radiated Emissions 1 – 18 GHz
Vertical

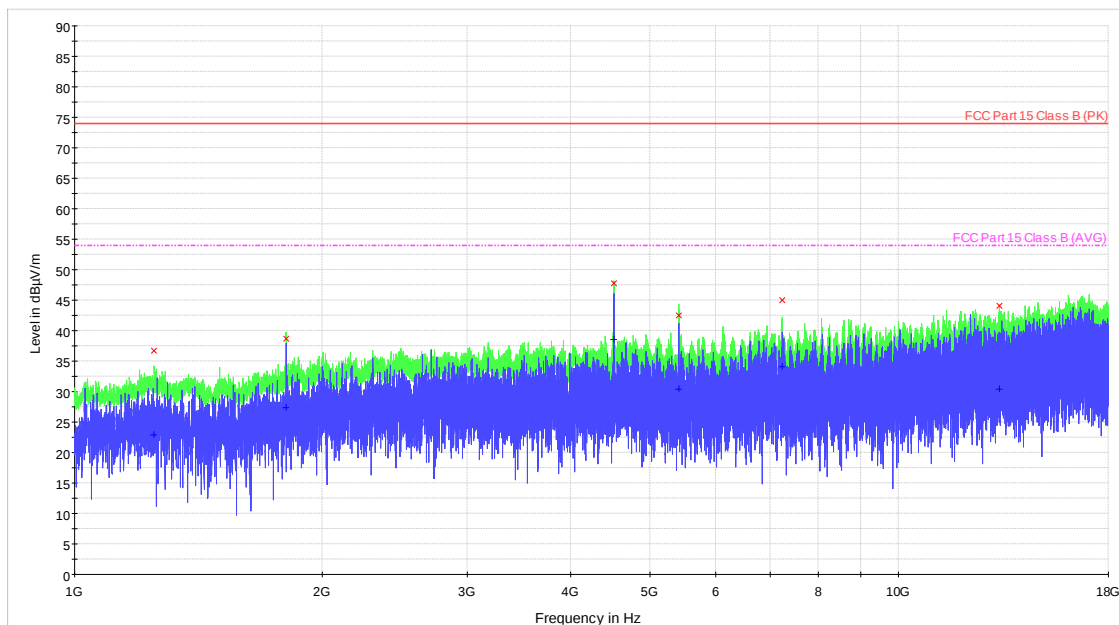


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 37 of 47
Seite 37 von 47

Prüfbericht-Nr.:

NOTES: FSK Low Channel (903 MHz)

**Radiated Emissions 1 – 18 GHz
Horizontal**

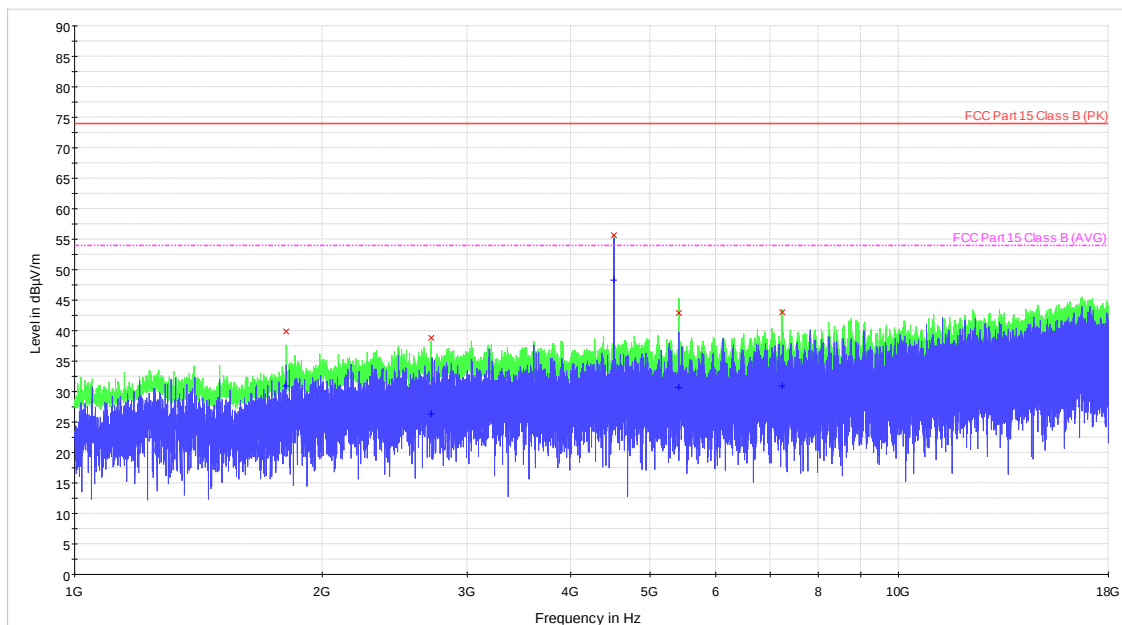


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 38 of 47
Seite 38 von 47

Prüfbericht-Nr.:

NOTES: FSK Mid Channel (915 MHz)

**Radiated Emissions 1 – 18 GHz
Vertical**

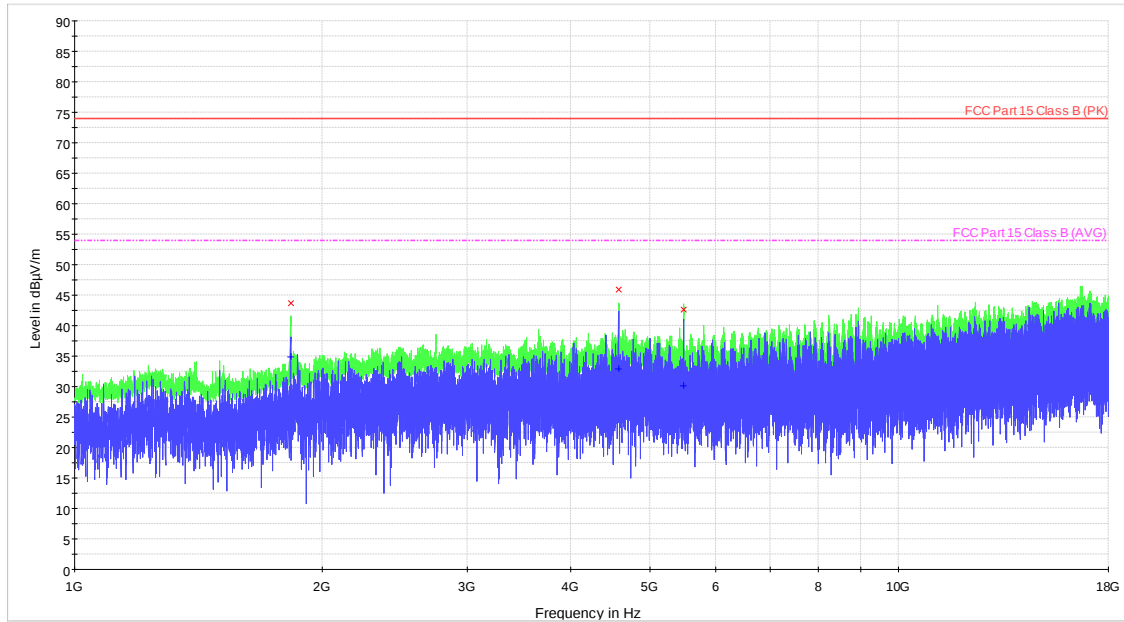


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 39 of 47
Seite 39 von 47

Prüfbericht-Nr.:

NOTES: FSK Mid Channel (915 MHz)

**Radiated Emissions 1 – 18 GHz
Horizontal**

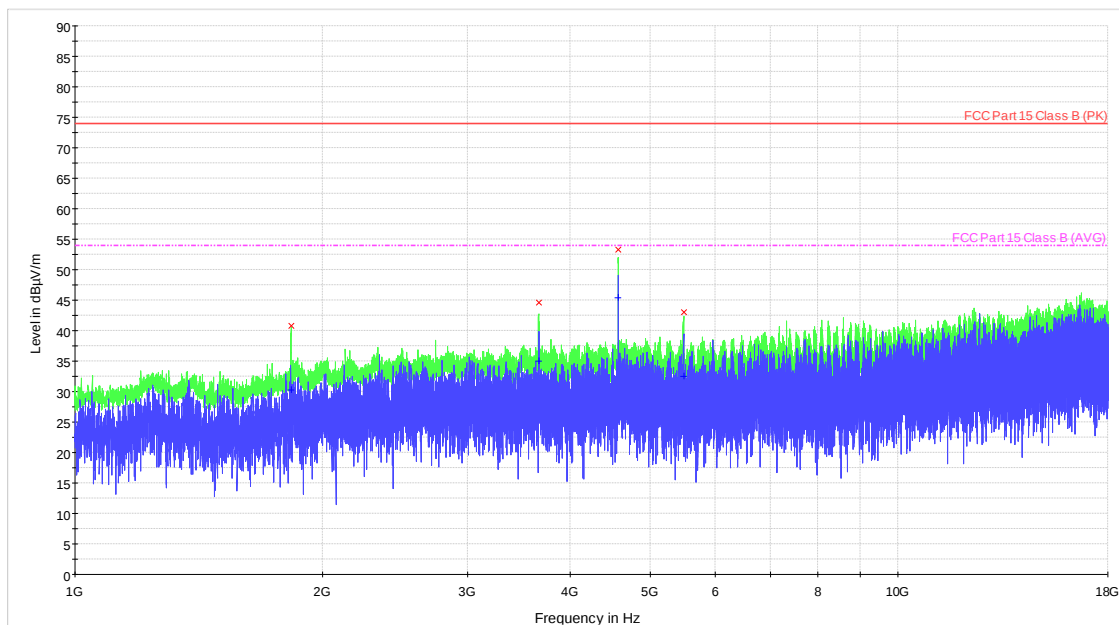


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 40 of 47
Seite 40 von 47

Prüfbericht-Nr.:

NOTES: FSK High Channel (927 MHz)

**Radiated Emissions 1 – 18 GHz
Vertical**

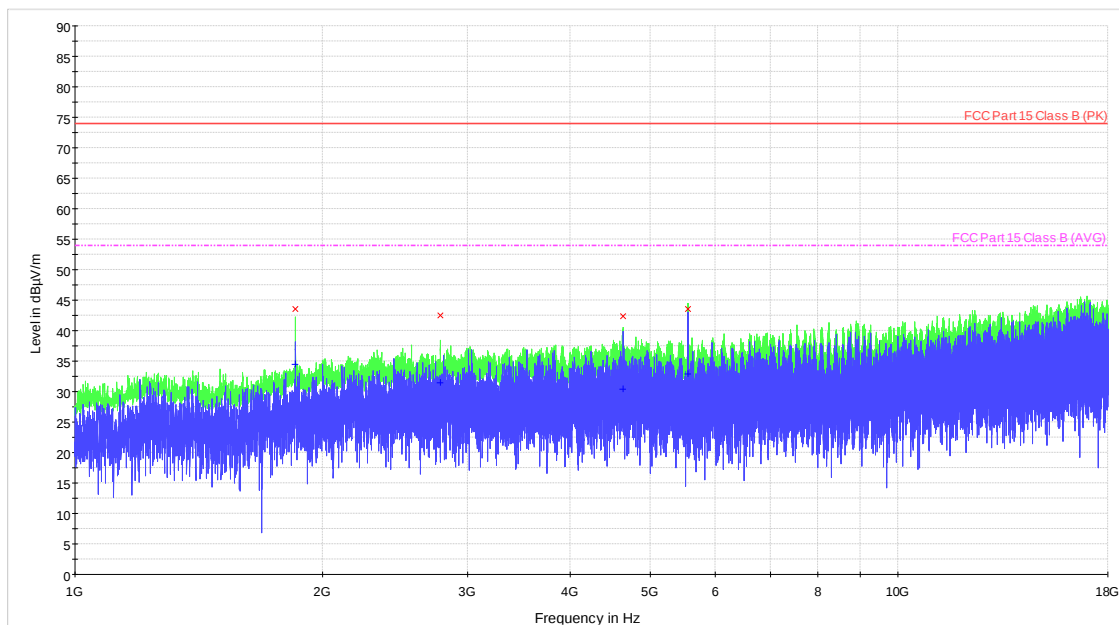


Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 41 of 47
Seite 41 von 47

Prüfbericht-Nr.:

NOTES: FSK High Channel (927 MHz)

**Radiated Emissions 1 – 18 GHz
Horizontal**

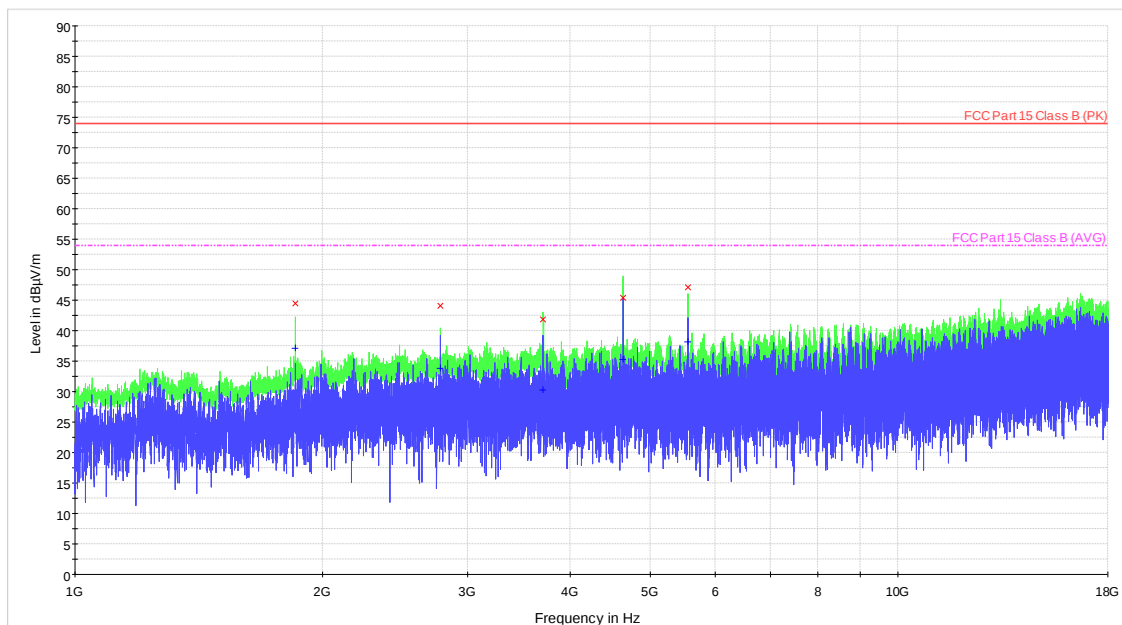

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 42 of 47
Seite 42 von 47

Prüfbericht-Nr.:

4.1.6 Final Tabulated Data

No spurious emissions detected between 9kHz – 30MHz.

30-1000 MHz (LoRa Low Channel 903 MHz) –

Frequency	QuasiPeak	Height	Pol	Azimuth	Limit - QPK	Margin - QPK
MHz	dBµV/m	cm		deg	dBµV/m	dB
31.76	23.3	100.0	V	348.0	40.0	-16.7
38.52	14.0	250.0	H	261.0	40.0	-26.0
41.04	20.2	100.0	V	225.0	40.0	-19.8
75.96	6.8	250.0	H	173.0	40.0	-33.2
120.40	12.7	100.0	V	130.0	43.5	-30.8
125.04	12.5	250.0	H	109.0	43.5	-31.0
139.80	12.3	100.0	V	270.0	43.5	-31.2
261.92	12.5	250.0	H	45.0	46.0	-33.5
407.64	16.4	100.0	V	73.0	46.0	-29.6
411.52	16.3	250.0	H	141.0	46.0	-29.7
572.04	19.6	250.0	H	203.0	46.0	-26.4
717.16	22.3	100.0	V	183.0	46.0	-23.7
879.04	24.3	250.0	H	233.0	46.0	-21.7
884.00	24.8	100.0	V	307.0	46.0	-21.2

30-1000 MHz (LoRa Mid Channel 915 MHz) –

Frequency	QuasiPeak	Height	Pol	Azimuth	Limit - QPK	Margin - QPK
MHz	dBµV/m	cm		deg	dBµV/m	dB
31.92	20.5	100.0	V	103.0	40.0	-19.5
35.44	15.5	250.0	H	108.0	40.0	-24.5
39.12	20.9	100.0	V	157.0	40.0	-19.1
50.36	9.1	100.0	V	300.0	40.0	-30.9
95.88	7.8	250.0	H	179.0	43.5	-35.7
115.84	11.7	100.0	V	348.0	43.5	-31.8
126.24	12.0	250.0	H	234.0	43.5	-31.5
267.96	12.5	250.0	H	288.0	46.0	-33.5
358.72	14.5	100.0	V	321.0	46.0	-31.5
511.04	17.8	250.0	H	258.0	46.0	-28.2
534.68	18.2	100.0	V	219.0	46.0	-27.8
704.64	21.0	250.0	H	206.0	46.0	-25.0
886.52	24.0	100.0	V	123.0	46.0	-22.0
900.68	24.1	250.0	H	147.0	46.0	-21.9

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 43 of 47
Seite 43 von 47

Prüfbericht-Nr.:

30-1000 MHz (LoRa High Channel 927 MHz) –

Frequency MHz	QuasiPeak dBμV/m	Height cm	Pol	Azimuth deg	Limit - QPK dBμV/m	Margin - QPK dB
34.16	24.2	100.0	V	328.0	40.0	-15.8
34.36	16.5	250.0	H	236.0	40.0	-23.5
39.32	20.9	100.0	V	33.0	40.0	-19.1
49.60	10.6	100.0	V	317.0	40.0	-29.4
58.12	5.7	250.0	H	99.0	40.0	-34.3
119.64	11.9	250.0	H	53.0	43.5	-31.6
197.60	11.3	100.0	V	97.0	43.5	-32.2
331.68	13.9	250.0	H	26.0	46.0	-32.1
367.64	14.8	100.0	V	223.0	46.0	-31.2
448.84	16.7	250.0	H	76.0	46.0	-29.3
642.16	19.9	250.0	H	170.0	46.0	-26.1
697.08	20.8	100.0	V	69.0	46.0	-25.2
904.08	24.1	250.0	H	273.0	46.0	-21.9
923.84	24.0	100.0	V	259.0	46.0	-22.0

30-1000 MHz (FSK Low Channel 903 MHz) –

Frequency MHz	QuasiPeak dBμV/m	Height cm	Pol	Azimuth deg	Limit - QPK dBμV/m	Margin - QPK dB
32.32	18.5	250.0	H	126.0	40.0	-21.5
33.88	21.9	100.0	V	-2.0	40.0	-18.1
39.88	20.5	100.0	V	-2.0	40.0	-19.5
44.16	9.5	250.0	H	80.0	40.0	-30.5
48.52	9.4	100.0	V	-2.0	40.0	-30.6
129.44	12.3	250.0	H	5.0	43.5	-31.2
137.88	11.7	100.0	V	-2.0	43.5	-31.8
296.28	13.0	100.0	V	-2.0	46.0	-33.0
302.56	13.3	250.0	H	241.0	46.0	-32.7
437.20	16.6	250.0	H	211.0	46.0	-29.4
503.96	17.6	100.0	V	-2.0	46.0	-28.4
732.56	22.0	250.0	H	41.0	46.0	-24.0
748.76	21.9	100.0	V	-2.0	46.0	-24.1
941.52	23.7	250.0	H	104.0	46.0	-22.3
946.28	23.5	100.0	V	-2.0	46.0	-22.5

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 44 of 47
Seite 44 von 47

Prüfbericht-Nr.:

30-1000 MHz (FSK Mid Channel 915 MHz) –

Frequency MHz	QuasiPeak dBµV/m	Height cm	Pol	Azimuth deg	Limit - QPK dBµV/m	Margin - QPK dB
32.52	18.2	250.0	H	64.0	40.0	-21.8
34.28	23.6	100.0	V	81.0	40.0	-16.4
39.80	20.8	100.0	V	278.0	40.0	-19.2
69.08	6.4	250.0	H	151.0	40.0	-33.6
130.40	12.1	100.0	V	-2.0	43.5	-31.4
131.36	12.0	250.0	H	234.0	43.5	-31.5
279.96	12.7	250.0	H	283.0	46.0	-33.3
334.48	14.0	100.0	V	349.0	46.0	-32.0
364.64	14.6	250.0	H	188.0	46.0	-31.4
581.44	19.3	100.0	V	310.0	46.0	-26.7
606.56	19.5	250.0	H	116.0	46.0	-26.5
885.72	23.9	100.0	V	125.0	46.0	-22.1
908.32	24.1	250.0	H	28.0	46.0	-21.9

30-1000 MHz (FSK High Channel 927 MHz) –

Frequency MHz	QuasiPeak dBµV/m	Height cm	Pol	Azimuth deg	Limit - QPK dBµV/m	Margin - QPK dB
34.48	22.8	100.0	V	2.0	40.0	-17.2
35.04	15.9	250.0	H	332.0	40.0	-24.1
39.20	21.1	100.0	V	335.0	40.0	-18.9
58.12	5.7	250.0	H	183.0	40.0	-34.3
122.24	12.1	250.0	H	-2.0	43.5	-31.4
125.36	12.1	100.0	V	2.0	43.5	-31.4
208.88	10.0	250.0	H	127.0	43.5	-33.5
255.80	11.2	250.0	H	4.0	46.0	-34.8
263.96	13.7	100.0	V	119.0	46.0	-32.3
449.52	16.7	100.0	V	147.0	46.0	-29.3
731.80	21.6	100.0	V	88.0	46.0	-24.4
738.68	21.8	250.0	H	155.0	46.0	-24.2
882.64	23.9	100.0	V	25.0	46.0	-22.1
927.16	25.6	250.0	H	247.0	46.0	-20.4

1-18GHz (LoRa Low Channel 903 MHz) –

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Height cm	Pol	Azimuth deg	Limit - PK dBµV/m	Margin - PK dB	Limit - AVG dBµV/m	Margin - AVG dB
1049.60	34.9	22.8	225.0	H	269.0	74.0	-39.1	54.0	-31.2
1499.80	37.1	27.8	225.0	H	297.0	74.0	-36.9	54.0	-26.2
1805.50	42.2	30.7	225.0	H	-2.0	74.0	-31.8	54.0	-23.3
1805.80	42.9	36.9	125.0	V	128.0	74.0	-31.1	54.0	-17.1
2709.20	42.0	32.1	225.0	H	145.0	74.0	-32.0	54.0	-21.9
3611.90	43.2	32.4	225.0	H	358.0	74.0	-30.8	54.0	-21.6
4513.90	56.1	46.8	225.0	H	189.0	74.0	-17.9	54.0	-7.2
4514.90	48.8	38.6	125.0	V	345.0	74.0	-25.2	54.0	-15.4
5417.30	43.1	29.9	225.0	H	219.0	74.0	-30.9	54.0	-24.1
5417.60	44.3	31.5	125.0	V	290.0	74.0	-29.7	54.0	-22.5
7222.00	42.0	28.6	225.0	H	313.0	74.0	-32.0	54.0	-25.4

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 45 of 47
Seite 45 von 47

Prüfbericht-Nr.:

1-18GHz (LoRa Mid Channel 915 MHz) –

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Height cm	Pol	Azimuth deg	Limit - PK dBµV/m	Margin - PK dB	Limit - AVG dBµV/m	Margin - AVG dB
1829.30	40.6	29.2	225.0	H	240.0	74.0	-33.4	54.0	-24.8
1830.30	43.1	33.4	125.0	V	278.0	74.0	-30.9	54.0	-20.6
3660.20	44.0	33.2	225.0	H	125.0	74.0	-30.0	54.0	-20.8
4575.10	49.3	39.8	225.0	H	81.0	74.0	-24.7	54.0	-14.2
4575.80	44.8	31.6	125.0	V	78.0	74.0	-29.2	54.0	-22.4
5490.00	41.9	29.3	125.0	V	184.0	74.0	-32.1	54.0	-24.7

1-18GHz (LoRa High Channel 927 MHz) –

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Height cm	Pol	Azimuth deg	Limit - PK dBµV/m	Margin - PK dB	Limit - AVG dBµV/m	Margin - AVG dB
1499.80	37.9	30.0	225.0	H	278.0	74.0	-36.1	54.0	-24.0
1853.40	42.8	34.0	125.0	V	34.0	74.0	-31.2	54.0	-20.0
1853.70	43.9	37.3	225.0	H	18.0	74.0	-30.1	54.0	-16.7
2780.20	42.1	30.9	125.0	V	171.0	74.0	-31.9	54.0	-23.1
2780.20	40.3	28.4	225.0	H	82.0	74.0	-33.7	54.0	-25.6
4634.60	40.3	27.5	225.0	H	154.0	74.0	-33.7	54.0	-26.5
5561.40	41.3	29.3	225.0	H	203.0	74.0	-32.7	54.0	-24.7
5562.10	40.5	27.4	125.0	V	222.0	74.0	-33.5	54.0	-26.6

1-18GHz (FSK Low Channel 903 MHz) –

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Height cm	Pol	Azimuth deg	Limit - PK dBµV/m	Margin - PK dB	Limit - AVG dBµV/m	Margin - AVG dB
1249.60	36.7	22.9	125.0	V	32.0	74.0	-37.3	54.0	-31.1
1805.10	38.7	27.3	125.0	V	275.0	74.0	-35.3	54.0	-26.7
1806.10	39.9	31.0	225.0	H	188.0	74.0	-34.1	54.0	-23.0
2709.50	38.8	26.4	225.0	H	21.0	74.0	-35.2	54.0	-27.6
4515.60	47.8	38.6	125.0	V	121.0	74.0	-26.2	54.0	-15.4
4515.60	55.7	48.3	225.0	H	297.0	74.0	-18.3	54.0	-5.7
5416.30	42.8	30.7	225.0	H	76.0	74.0	-31.2	54.0	-23.3
5418.60	42.5	30.4	125.0	V	200.0	74.0	-31.5	54.0	-23.6
7224.70	43.0	31.0	225.0	H	251.0	74.0	-31.0	54.0	-23.0
7225.10	45.1	34.1	125.0	V	334.0	74.0	-28.9	54.0	-19.9
13266.20	44.1	30.4	125.0	V	68.0	74.0	-29.9	54.0	-23.6

1-18GHz (FSK Mid Channel 915 MHz) –

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Height cm	Pol	Azimuth deg	Limit - PK dBµV/m	Margin - PK dB	Limit - AVG dBµV/m	Margin - AVG dB
1830.30	43.6	34.9	125.0	V	56.0	74.0	-30.4	54.0	-19.1
1830.30	40.7	30.3	225.0	H	179.0	74.0	-33.3	54.0	-23.7
3659.10	44.6	35.0	225.0	H	297.0	74.0	-29.4	54.0	-19.0
4573.70	53.3	45.5	225.0	H	148.0	74.0	-20.7	54.0	-8.5
4575.10	46.0	32.9	125.0	V	211.0	74.0	-28.0	54.0	-21.1
5488.70	42.6	30.2	125.0	V	312.0	74.0	-31.4	54.0	-23.8
5490.70	43.0	32.5	225.0	H	108.0	74.0	-31.0	54.0	-21.5

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 46 of 47
Seite 46 von 47

Prüfbericht-Nr.:

1-18GHz (FSK High Channel 927 MHz) –

Frequency MHz	MaxPeak dBµV/m	CAverage dBµV/m	Height cm	Pol	Azimuth deg	Limit - PK dBµV/m	Margin - PK dB	Limit - AVG dBµV/m	Margin - AVG dB
1853.40	43.5	34.5	125.0	V	160.0	74.0	-30.5	54.0	-19.5
1854.10	44.4	37.1	225.0	H	180.0	74.0	-29.6	54.0	-16.9
2780.20	42.5	31.5	125.0	V	79.0	74.0	-31.5	54.0	-22.5
2780.20	44.1	33.8	225.0	H	221.0	74.0	-29.9	54.0	-20.2
3706.70	41.8	30.2	225.0	H	39.0	74.0	-32.2	54.0	-23.8
4633.60	45.4	35.3	225.0	H	91.0	74.0	-28.6	54.0	-18.7
4635.30	42.4	30.4	125.0	V	265.0	74.0	-31.6	54.0	-23.6
5560.40	47.2	38.2	225.0	H	263.0	74.0	-26.8	54.0	-15.8
5562.50	43.5	32.9	125.0	V	37.0	74.0	-30.5	54.0	-21.1

Test report no.: US21YWD5.002 Rev.:02 Part 2

Page 47 of 47
Seite 47 von 47

Prüfbericht-Nr.:

--- Ende des Prüfberichts / End of Test Report ---