



ELECTROMAGNETIC EMISSIONS **COMPLIANCE REPORT**





Page: 1 of 71

Applicant: Motive Technologies, Inc.

55 Hawthorne St. Suite #400, San Francisco, CA 94105, USA

Manufacturer: Motive Technologies, Inc.

55 Hawthorne St. Suite #400, San Francisco, CA 94105, USA

Al Dashcam Plus **Product Name:**

Brand Name: Motive

Model No.: DC64-NA.01

/ISED HVIN:

Family Model No.: DC63-NA.01, DC64-WW.01, DC63-WW.01

/ Family ISED HVIN:

Model Difference: DC64-NA.01 & DC64-WW.01 with 3 cameras design; DC63-

NA.01 & DC63-WW.01 with 2 cameras design

ISED PMN: Al Dashcam Plus

TERF2404001128ER **Report Number:**

FCC ID 2AQM7-DC6 IC: 24516-DC6

Date of EUT Received: April 22, 2024

Date of Test: April 22, 2024~June 7, 2024

Issue Date: December 30, 2024

Approved By

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. Central RF Lab The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT comply with FCC rule part §15.247, ISED RSS-247.

The results of this report relate only to the sample identified in this report.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Report No.: TERF2404001128ER

Page: 2 of 71

SGS	

Revision History						
Report Number	Revision	Description	Issue Date	Revised By	Remark	
TERF2404001128ER	00	Original	Dec. 2, 2024	Candice Li		
TERF2404001128ER	1 1111	Add PMN, Revision Note 3; Modify FVIN	Dec. 30, 2024	Candice Li	*	

Note:

- 1 . The remark "*" indicates modification of the report upon requests from certification body.
- 2 Variant information of model numbers is provided by the applicant, test results of this report are applicable to the sample EUT(s) received. And are assessed as electrically identical in RF characteristics, therefore, no further assessment required for the variant(s).
- 3 . There is no different camera module among HVINs, the DC63-NA.01 and DC63-WW.01 are depopulated 1 camera from the DC64-NA01 and DC64-WW.01. And DC64-WW.01 & DC63-WW.01 just for marketing purpose.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. |





Contents

1	GENERAL INFORMATION	4
2	SYSTEM TEST CONFIGURATION	6
3	SUMMARY OF TEST RESULTS	8
4	DESCRIPTION OF TEST MODES	9
5	MEASUREMENT UNCERTAINTY	11
6	MEASUREMENT EQUIPMENT USED	12
7	CONDUCTED EMISSION TEST	13
8	PEAK OUTPUT POWER MEASUREMENT	14
9	EMISSION BANDWIDTH MEASUREMENT	17
10	CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT	23
11	RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT	27
12	FREQUENCY SEPARATION	62
13	NUMBER OF HOPPING FREQUENCY	64
14	TIME OF OCCUPANCY (DWELL TIME)	66
15	ANTENNA REQUIREMENT	71

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 4 of 71



1 GENERAL INFORMATION

1.1 Product Description

Product Name:	Al Dashcam Plus
Brand Name:	Motive
Model No.: /ISED HVIN:	DC64-NA.01
Family Model No.: / Family ISED HVIN:	DC63-NA.01, DC64-WW.01, DC63-WW.01
Model Difference:	DC64-NA.01 & DC64-WW.01 with 3 cameras design; DC63-NA.01 & DC63-WW.01 with 2 cameras design
Hardware Version:	1
Firmware Version:	N/A
EUT Series No.:	AABV52BE140032
Power Supply:	12-24Vdc
Test Software (Name/Version)	QRCT V4.0

1.2 RF Specification

Radio Technology:	BT BR+EDR
Channel number:	79 channels
Modulation type:	GFSK + π/4DQPSK + 8DPSK
Transmit Power:	14.79 dBm
Frequency Range:	2.402GHz – 2.480GHz
Dwell Time:	≦ 0.4s

1.3 Antenna Designation

Antenna Type	Supplier	Antenna Model No.	Freq. (MHz)	ch0/ch1	Peak Antenna Gain (dBi)	
IFA	INPAQ	WAG-F-LTE12LB-00-002	2402~2480	ch0	3.88	ı

Note:

- 1. Pre-scanned was done on the above antennas, measurements were demonstrated by using the antenna with the highest gain as the worst case scenarios.
- 2. Antenna information is provided by the applicant.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有验明,此就是结果保护证明,是我们就是一个专家,因此让我们就是一个专家的。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 5 of 71



Test Methodology of Applied Standards

FCC Part 15, Subpart C §15.247 FCC KDB 558074 D01 15.247 Meas. Guidance v05r02 RSS-247 issue 3 Aug. 2023 RSS-Gen, Issue 5 April 2018, Amendment 2 (February 2021) ANSI C63.10:2013

1.5 **Test Facility**

Laboratory	Test Site Address	Test Site Name	FCC Designa- tion number	IC CAB
		SAC 1		
		SAC 2		
		SAC 3		
	No 404 Welkers Deed New Trine	Conduction 1		
	No.134, Wu Kung Road, New Taipei	Conducted 1	TM/0027	
	Industrial Park, Wuku District, New	Conducted 2	TW0027	
	Taipei City, Taiwan.	Conducted 3	-	TW3702
		Conducted 4		
		Conducted 5		
SGS Taiwan Ltd.		Conducted 6		
Central RF Lab.		Conduction C		
(TAF code 3702)		SAC C		
		SAC D		
		SAC G		
		Conducted A		
	No.2, Keji 1st Rd., Guishan District,	Conducted B	TW0028	
	Taoyuan City, Taiwan 333	Conducted C		
		Conducted D		
		Conducted E	-	
		Conducted F		
		Conducted G		

Note: Test site name is remarked on the equipment list in each section of this report as an indication where measurements occurred in specific test site and address.

1.6 **Special Accessories**

There is no special accessory used while test was conducted.

Equipment Modifications 1.7

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 6 of 71

SYSTEM TEST CONFIGURATION

2.1 **EUT Configuration**

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 **EUT Exercise**

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 **Test Procedure**

2.3.1 **Conducted Emissions**

The EUT is a placed on a table which is 0.8 m above ground plane. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz. The CISPR Quasi-Peak and Average detector mode is employed. The two LISNs provide 50uH/50 ohm of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 **Conducted Test (RF)**

The active antenna port of the unlicensed wireless device is connected to the spectrum analyzer with attenuator to protect the instrumentation. If a second antenna port is available, it is tested at one operating frequency, with other port(s) appropriately terminated, to verify it has similar output characteristics as the fully tested port.

2.3.3 **Radiated Emissions**

The EUT is a placed on a turn table. For emissions testing at or below 1 GHz, the table height shall be 0.8 m above the reference ground plane. For emission measurements above 1 GHz, the table height shall be 1.5 m. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 7 of 71



Measurement Results Explanation Example

2.4.1 Radiated Emission Test Sites For Measurements From 9 kHz To 30 MHz


Radiated emission below 30MHz is measured in a 9m*6m*6m semi-ane choic chamber, the measurements correspond to those obtained at an open-field test site.


There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.4.2 For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

2.5 **Test Configuration**

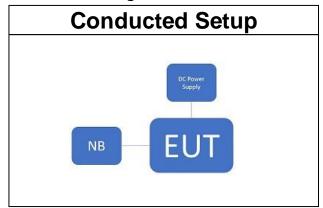

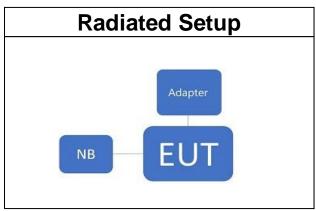

2.6 Control Unit(s)

	• • •					
	Conducted Emission Test Site: Conducted F					
EQUIPMENT TYPE MFR		MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.	
Noteboo	k HP	HSN-Q35C-4	P0003860	N/A	N/A	

Radiated Emission Test Site: SAC D							
EQUIPMENT TYPE	EQUIPMENT TYPE MFR MODEL NUMBER SERIAL NUMBER LAST CAL. CAL DUE.						
Notebook	Lenovo	L480	P0002332	N/A	N/A		
Adapter	iMax	CHAO024-120200	N/A	N/A	N/A		
USB Cable MI SJX10ZM N/A N/A N/A							

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 8 of 71



SUMMARY OF TEST RESULTS

FCC Rules	ISED Rules	Description Of Test	Result
§15.207(a)	RSS-Gen §8.8	AC Power Line Conducted Emission	Non applicable
§15.247(b)(1)	RSS-247 §5.4 b	Peak Output Power	Compliant
§15.247(a)(1)	RSS-247 §5.1 b RSS-Gen §6.7	Emission Bandwidth	Compliant
§15.247(d) §15.209	RSS-247 §5.5 RSS-Gen §8.9	Conducted Band Edge and Spurious Emission	Compliant
§15.247(d) §15.209	RSS-247 §5.5 RSS-Gen §8.9	Radiated Band Edge and Spurious Emission	Compliant
§15.205	RSS-Gen § 8.10	Restricted Bands	Compliant
§15.247(a)(1)	RSS-247 §5.1 b	Frequency Separation	Compliant
§15.247(a)(1)(iii)	RSS-247 §5.1 d	Number of hopping frequency Time of Occupancy	Compliant
§15.203	N/A	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 9 of 71



DESCRIPTION OF TEST MODES

4.1 Operated in 2400 ~ 2483.5MHz Band

			2400~24	83.5 MHz			
CH	Freq. (MHz)	СН	Freq. (MHz)	СН	Freq. (MHz)	СН	Freq. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 10 of 71



4.2 The Worst Test Modes and Channel Details

- 1 The EUT has been tested under operating condition.
- 2 Test program used to control the EUT for staying in continuous transmitting and receiving mode is programmed.
- 3 The field strength of radiated emission was measured as the EUT positioned in different orthogonal planes (E1/E2/H) based on actual usage of the EUT to pre-scan the emissions for determining the worst case scenario.
- 4 Investigation has been done on all the possible configurations for searching the worst case.

•		•		
	ANT	NNA PORT CONDUCTE	ED TEST	
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION	PACKET TYPE
	Peak Output Po	wer, 20dB Band Width,	Spurious Emission	
	0 to 78	0,39,78	GFSK	DH5
Bluetooth	0 to 78	0,39,78	π/4-DQPSK	2DH5
	0 to 78	0,39,78	8-DPSK	3DH5
		Band Edge		
Bluetooth	0 to 78	0,78	GFSK/8-DPSK	DH5/3DH5
		Frequency Separation	on	•
		0,1,2,	GFSK	DH5
Bluetooth	0 to 78 38,39,40, 76,77,78	38,39,40,	π/4-DQPSK	2DH5
		76,77,78	8-DPSK	3DH5
	Number of H	lopping Frequency, Ho	pping Band edge	•
Bluetooth	0 to 78	0 to 78	GFSK/8-DPSK	DH5/3DH5
	Ti	ime of Occupancy(Dwe	II time)	
			GFSK	DH1/DH3/DH5
Bluetooth	0 to 78	39	π/4-DQPSK	2DH1/2DH3/2DH
			8-DPSK	3DH1/3DH3/3DH
	AVAILABLE	TESTED		PACKET
MODE	CHANNEL	CHANNEL	MODULATION	TYPE
	TRANSMIT RA	ADIATED EMISSION TE	ST (BELOW 1 GHz)	
Bluetooth	0 to 78	39	GFSK	DH5
	TRANSMIT RA	ADIATED EMISSION TE	ST (ABOVE 1 GHz)	
Bluetooth	0 to 78	0,39,78	GFSK/8-DPSK	DH5/3DH5

Note: The field strength of radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for channel Low, Mid and High, the worst case position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 11 of 71



MEASUREMENT UNCERTAINTY

Test Items	U	ncertair	nty
AC Power Line Conducted Emission	+/-	1.54	dB
Output Power measurement	+/-	0.97	dB
Emission Bandwidth	+/-	1.38	Hz
Conducted emission measurement	+/-	0.77	dB
Frequency Separation	+/-	1.48	Hz
Number of hopping frequency	+/-	1.48	Hz
Time of Occupancy	+/-	1.48	Hz
Temperature	+/-	0.6	°C
Humidity	+/-	3	%
DC / AC Power Source	+/-	1	%

Radiated Spurious Emission Measurement Uncertainty					
	+/-	1.89	dB	9kHz~30MHz	
Polarization: Vertical	+/-	4.15	dB	30MHz - 1000MHz	
Polarization. Vertical	+/-	3.43	dB	1GHz - 18GHz	
	+/-	3.86	dB	18GHz - 40GHz	
	+/-	1.89	dB	9kHz~30MHz	
Polarization: Horizontal	+/-	4.02	dB	30MHz - 1000MHz	
Polarization. Horizontal	+/-	3.43	dB	1GHz - 18GHz	
	+/-	3.86	dB	18GHz - 40GHz	
	+/-	2	dB	33GHz-50GHz	
	+/-	1.59	dB	50GHz-60GHz	
Radiated Spurious Emission	+/-	1.7	dB	60GHz-90GHz	
	+/-	1.64	dB	90GHz-140GHz	
	+/-	3.83	dB	140GHz-220GHz	

Note:

- 1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.
- 2. The conformity assessment statement in this report is based solely on the test results, measurement uncertainty is excluded.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 12 of 71



MEASUREMENT EQUIPMENT USED

6.1 **Conducted Measurement**

	Conducted Emission Test Site: Conducted F							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Attenuator	Woken	WATT-218FS-10	RF18	11/15/2023	11/14/2024			
Attenuator	Woken	WATT-218FS-10	RF22	11/15/2023	11/14/2024			
DC Block	PASTERNACK	PE8210	RF153	11/15/2023	11/14/2024			
DC Power Supply	Gwinstek	SPS-3610	GEW902165	01/17/2024	01/16/2025			
Power Meter	Anritsu	ML2496A	1326001	08/22/2023	08/21/2024			
Power Sensor	Anritsu	MA2411B	1315048	08/22/2023	08/21/2024			
Power Sensor	Anritsu	MA2411B	1315049	08/22/2023	08/21/2024			
Spectrum Analyzer	KEYSIGHT	N9010B	MY59071570	06/15/2023	06/14/2024			
Test Software	SGS Taiwan	Radio Test Software	Ver.21	N.C.R	N.C.R			

6.2 **Radiated Measurement**

	Radiated Emission Test Site: SAC D							
EQUIPMENT TYPE	MFR	MODEL NUMBER	SERIAL NUMBER	LAST CAL.	CAL DUE.			
Broadband Antenna	SCHWARZBECK	VULB 9168	9168-617	12/14/2023	12/13/2024			
Horn Antenna	Schwarzbeck	BBHA9120D	1187	01/24/2024	01/23/2025			
Horn Antenna	SCHWARZBECK	BBHA9170	185	08/21/2023	08/20/2024			
Active Loop Antenna	COM-POWER	AL-130R	10160105	12/04/2023	12/03/2024			
3m Site NSA	SGS	966 chamber D	N/A	04/30/2024	04/29/2025			
Spectrum Analyzer	KEYSIGHT	N9010A	MY57120200	04/03/2024	04/02/2025			
Test Software	audix	e3	E3 20923 SGS Ver.9 (C)	N.C.R	N.C.R			
Pre-Amplifier	EMC Instruments	EMC18405SEE	980881	11/15/2023	11/14/2024			
Pre-Amplifier	EMC Instruments	EMC9135	980234	11/15/2023	11/14/2024			
Pre-Amplifier	EMC Instruments	EMC12630SE	980273	11/15/2023	11/14/2024			
Coaxial Cable	Huber+Suhner	RG 214/U	W21.01	11/15/2023	11/14/2024			
Coaxial Cable	Huber+Suhner	EMC106-SM-SM- 7200	150703	11/15/2023	11/14/2024			

NOTE: N.C.R refers to Not Calibrated Required.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 13 of 71

CONDUCTED EMISSION TEST

7.1 Standard Applicable

Frequency within 150 kHz to 30MHz shall not exceed the limit table as below.

Frequency range	Limits dB(uV)		
MHz	Quasi-peak	Average	
0.15 to 0.50	66 to 56	56 to 46	
0.50 to 5	56	46	
5 to 30	60	50	


Note

- 1. The lower limit shall apply at the transition frequencies
- 2.The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

7.2 **EUT Setup:**

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

7.3 **Test Setup**

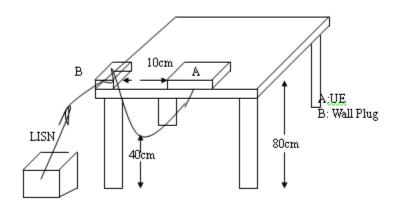

7.4 **Measurement Procedure**

- 1. The EUT was placed on a table which is 0.8m above ground plane.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

7.5 **Measurement Result**

N/A; Powered from car battery.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 14 of 71


8 PEAK OUTPUT POWER MEASUREMENT

8.1 Standard Applicable

For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, The Limit: 1Watt. For all other frequency hopping systems in the 2400 – 2483.5MHz band: The Limit: 0.125 Watts. The power limit for 1Mbps is 1watt, and 2Mbps, 3Mbps and AFH mode are 0.125 watts.

The e.i.r.p. shall not exceed 4 W.

8.2 Test Setup



8.3 Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- The testing follows ANSI C63.10 Measurement Guidelines.
- 3. Duty cycle of test signal is < 98 %, duty factor shall be considered.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the power meter or spectrum. (Max Hold, Detector = Peak, RBW >=20dB bandwidth)
- 5. Record the max. reading.
- 6. Repeat above procedures until all default test channel is completed.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

f (886-2) 2298-0488

SGS Taiwan Ltd.



Page: 15 of 71

SGS

8.4 Peak & Average Power Measurement Result

	Duty Cycle (%) = Ton / (Ton+Toff)	Duty Factor (dB) =10*log (1/Duty Cycle)	1/T (kHz)	VBW setting (kHz)
DH1	30.80	5.11	2.60	3.00
DH3	65.60	1.83	0.61	1.00
DH5	77.20	1.12	0.35	1.00
2DH1	31.20	5.06	2.56	3.00
2DH3	65.60	1.83	0.61	1.00
2DH5	76.80	1.15	0.35	1.00
3DH1	30.80	5.11	2.60	3.00
3DH3	65.60	1.83	0.61	1.00
3DH5	77.20	1.12	0.35	1.00

1M BR mode (Peak):

СН	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	9	13.77	23.823	1000
Mid	2441	9	14.79	30.130	1000
High	2480	9	9.47	8.851	1000

2M FDR mode (Peak):

CH	Freq.	Power	Peak Output	Output Power	Limit
O.I.	(MHz)	Setting	Power (dBm)	(mW)	(mW)
Low	2402	9	12.99	19.907	125
Mid	2441	9	14.09	25.645	125
High	2480	9	8.63	7.295	125

3M EDR mode (Peak):

SW LDK Mode (Feak).							
СН	Freq. (MHz)	Power Setting	Peak Output Power (dBm)	Output Power (mW)	Limit (mW)		
Low	2402	9	13.21	20.941	125		
Mid	2441	9	14.33	27.102	125		
High	2480	9	8.87	7.709	125		

^{*} Note: Avg. output power has been calculated with duty factor.

1M BR mode (Average):

СН	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	9	13.72	23.571	1000
Mid	2441	9	14.47	28.014	1000
High	2480	9	9.36	8.637	1000

2M EDR mode (Average):

СН	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	9	10.23	10.535	125
Mid	2441	9	11.54	14.244	125
High	2480	9	6.10	4.070	125

3M EDR mode (Average):

CH	Freq. (MHz)	Power Setting	Avg. Output Power (dBm)	Output Power (mW)	Limit (mW)
Low	2402	9	10.56	11.386	125
Mid	2441	9	11.83	15.254	125
High	2480	9	6.16	4.134	125

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對文學具有書,同時他學具屬是例的子。本都學主德本公司書面對面,不可可以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 16 of 71



8.5 EIRP Measurement Result

1M BR mode EIRP

Channel	Frequency (MHz)	Power Setting	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	9	13.72	3.88	57.595	4000
Mid	2441	9	14.47	3.88	68.451	4000
High	2480	9	9.36	3.88	21.105	4000

2M EDR mode EIRP

Channel	Frequency (MHz)	Power Setting	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	9	10.23	3.88	25.742	4000
Mid	2441	9	11.54	3.88	34.805	4000
High	2480	9	6.10	3.88	9.946	4000

3M EDR mode EIRP

Channel	Frequency (MHz)	Power Setting	Avg. Output Power (dBm)	Antenna Gain (dBi)	EIRP (mW)	Limit (mW)
Low	2402	9	10.56	3.88	27.822	4000
Mid	2441	9	11.83	3.88	37.272	4000
High	2480	9	6.16	3.88	10.101	4000

^{*} Note: EIRP = Average Power + Gain

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有验明,此就是结果保护证明,是我们就是一个专家,因此让我们就是一个专家的。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.






Page: 17 of 71

9 EMISSION BANDWIDTH MEASUREMENT

9.1 Standard Applicable

For frequency hopping systems operating in the 2400 MHz-2483.5 MHz no limit for 20dB bandwidth.

9.2 Test Setup



9.3 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set the spectrum analyzer as

RBW= 1% to 5% of OBW,

VBW = 3 X RBW

Span= 2 to 5 times of the OBW,

Sweep=auto,

Detector = Peak, and Max hold for 20dB Bandwidth test.

- 5. Mark the peak frequency and -20dB (upper and lower) frequency
- 6. Set the spectrum analyzer as

RBW= 1 % to 5% of 99% Bandwidth,

VBW ≥ 3 X RBW,

Span= large enough to capture all products of the modulation process,

Sweep=auto,

Detector = Peak, and Max hold for 99% Bandwidth test.

- 7. Mark the peak frequency and 99%dB (upper and lower) frequency
- 8. Repeat above procedures until all test default channel is completed

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生结用攝影測建立幾只有著,同時世輕具攝展例の主。大報生主概太公司書面對可,不可可以複劃。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 18 of 71

20dB Bandwidth

GFSK

СН	20 dB BW (MHz)	2/3 BW (MHz)
Low	0.9391	0.63
Mid	0.9389	0.63
High	0.9395	0.63

π/4-DQPSK

СН	20 dB BW (MHz)	2/3 BW (MHz)
Low	1.287	0.86
Mid	1.287	0.86
High	1.308	0.87

8-DPSK

СН	20 dB BW (MHz)	2/3 BW (MHz)
Low	1.304	0.87
Mid	1.301	0.87
High	1.299	0.87

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 19 of 71



GFSK

OI OIL			
СН	99% BW		
OH	(MHz)		
Low	0.83467		
Mid	0.83458		
High	0.83041		

π/4-DQPSK

СН	99% BW (MHz)
Low	1.1780
Mid	1.1773
High	1.1749

8-DPSK

СН	99% BW (MHz)
Low	1.1800
Mid	1.1813
High	1.1806


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.





Page: 20 of 71




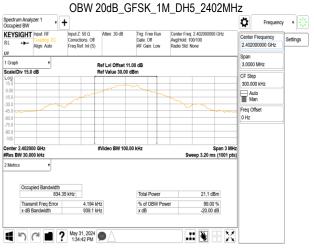


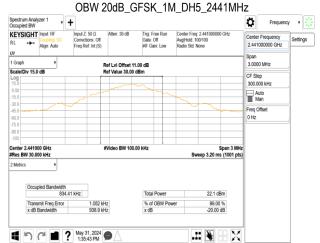

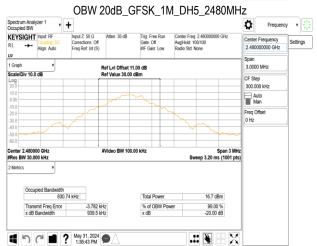

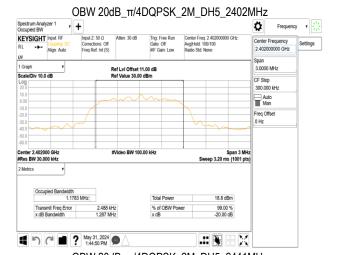

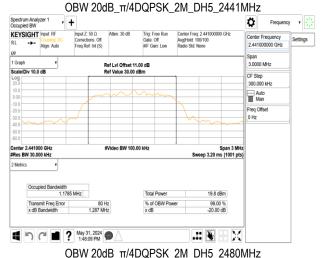

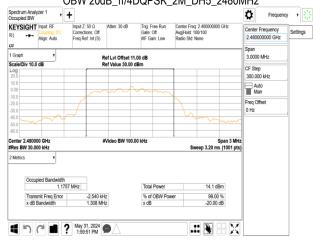

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 21 of 71

IC OBW 99%_GFSK_1M_DH5_2402MHz OBW 20dB 8DPSK 3M DH5 2402MHz Spectrum Analyzer 1 Frequency v Spectrum Analyzer 1 Frequency • ٥ ٥ Trig: Free Run Gate: Off #IF Gain: Low Trig: Free Run Gale: Off #IF Gain: I nw KEYSIGHT Input: RF KEYSIGHT Input: RF sut 7: 50 O Settings Center Frequency 2.402000000 GHz Settings 1 Graph 1 Graph Scale/Div 10.0 dB Scala/Div 10 0 dB CF Step 300.000 kHz Auto Man Auto Man Freq Offset 0 Hz Freq Offset 0 Hz Span 2 MHz eep 2.13 ms (1001 pts) Occupied Bandwidth 1.1813 MHz Occupied Bandwidth 834.67 kHz Total Power 18.8 dBm Total Power 21.1 dBm Transmit Freq Error x dB Bandwidth Transmit Freq Error x dB Bandwidth % of OBW Power x dB % of OBW Power x dB 99.00 % -20.00 dB May 31, 2024 9:11:45 PM .: 👺 :: X ■ ? May 31, 2024 ■ ? 1:34:22 PM .:: 🕦 🗄 💢 OBW 20dB_8DPSK_3M_DH5_2441MHz IC OBW 99%_GFSK_1M_DH5_2441MHz Ö Frequency • ٥ Frequency • , + + KEYSIGHT Input: RF Trig: Free Run Gate: Off #IF Gain: Low Center Freq: 2.441000000 GHz KEYSIGHT Input RF Atten: 30 dB Trig: Free Run Gate: Off #IF Gain: Low 2.441000000 GHz 2.441000000 GH 3,0000 MH 2.0000 MHz Ref Lvi Offset 11.00 dB Ref Value 30.00 dBm Ref Lvi Offset 11.00 dB Ref Value 30.00 dBm Scale/Div 10.0 dB Scale/Div 15.0 dB CF Step 200.000 kHz Auto Man Auto Man Freq Offset 0 Hz Freq Offset 0 Hz Span 2 MHz Sweep 2.13 ms (1001 pts) Occupied Bandwidth 1.1819 MHz Occupied Bandwidth 834.58 kHz % of OBW Power x dB % of OBW Power x dB 99.00 % -20.00 dB 99.00 % -20.00 dB ■ ? May 31, 2024 ● .# 🖫 🖁 💢 135:22 PM OBW 20dB 8DPSK 3M DH5 2480MHz IC OBW 99% GFSK 1M DH5 2480MHz ٥ Frequency v ٥ Input Z: 50 Ω Corrections: Off Freq Ref: Int (S) Input Z: 50 \O Corrections: Off Freq Ref: Int (S) KEYSIGHT Input: RF KEYSIGHT Input: RF Settings 2.0000 MHz Ref Lvi Offset 11.00 dB Ref Value 30.00 dBm Ref Lvi Offset 11.00 dB Ref Value 30.00 dBm Scale/Div 10.0 dB CF Step 300.000 kHz CF Step 200.000 kHz Auto Man Auto Man Freq Offset 0 Hz Freq Offset 0 Hz #Video BW 100.00 kHz #Video BW 100.00 kHz Span 3 MHz Sweep 3.20 ms (1001 pts) #Res BW 30.000 kHz #Res BW 30.000 kHz Sweep 2.13 ms (1001 pts Occupied Bandwidth 830.41 kHz Occupied Bandwidth 1.1817 MHz Total Power 14.2 dBm Total Power 16.7 dBm Transmit Freq Error x dB Bandwidth % of OBW Power x dB Transmit Freq Error % of OBW Power x dB 99.00 % -20.00 dB

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

.# 👺 👭 💢

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

■ ? May 31, 2024 ■ ? 1:36:22 PM

1 9 P 1 224-08 PM

.# 署 🖁 💢



Page: 22 of 71



Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

.# 👺 👭 💢

% of OBW Power x dB

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

Transmit Freq Error

■ ? May 31, 2024 ●

1 5 C 2 7 May 31, 2024

% of OBW Power x dB

99.00 % -20.00 dB

.# 署 🖁 💢




Page: 23 of 71

10 CONDUCTED BAND EDGES AND SPURIOUS EMISSION MEASUREMENT

10.1 Standard Applicable

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a) & RSS-Gen §8.10, must also comply with the radiated emission limits specified in §15.209(a) & RSS-Gen §8.9.

10.2 Test Setup



10.3 Measurement Procedure

10.3.1 Conducted Band Edge:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW=100 kHz, VBW=300 kHz, Sweep = auto
- 6. Mark Peak, below 2.4GHz and above 2.4835GHz and record the max. level.
- 7. Repeat above procedures until all frequency measured were complete.

10.3.2 Conducted Spurious Emission:

- To connect Antenna Port of EUT to Spectrum.
- 2. The testing follows ANSI C63.10:2013.
- 3. Set RBW = 100 kHz & VBW = 300 kHz, Detector = Peak, Sweep = Auto
- 4. Allow trace to fully stabilize.
- 5. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
- 6. Repeat above procedures until all default test channel measured were complete.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司



Page: 24 of 71

SGS

10.4 Measurement Result

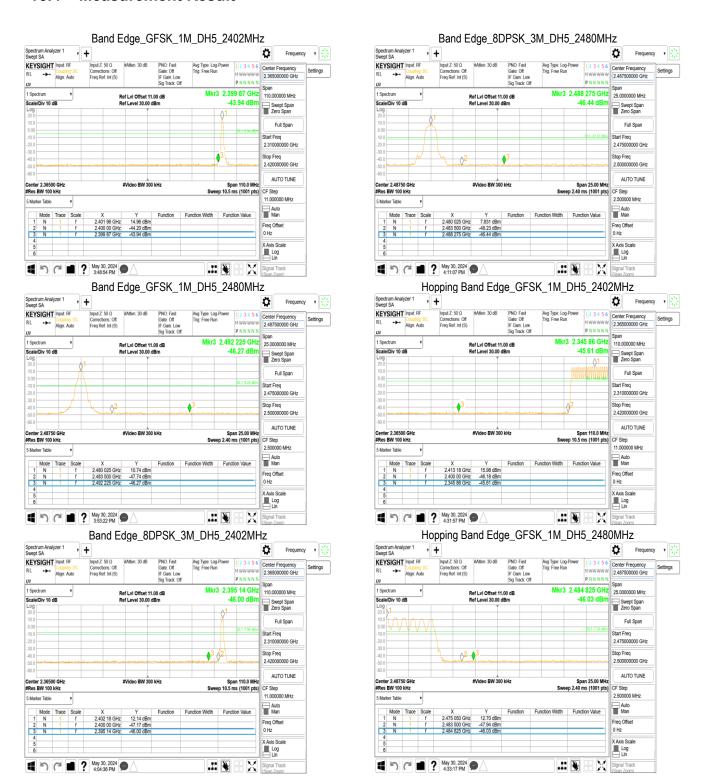


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



Page: 25 of 71

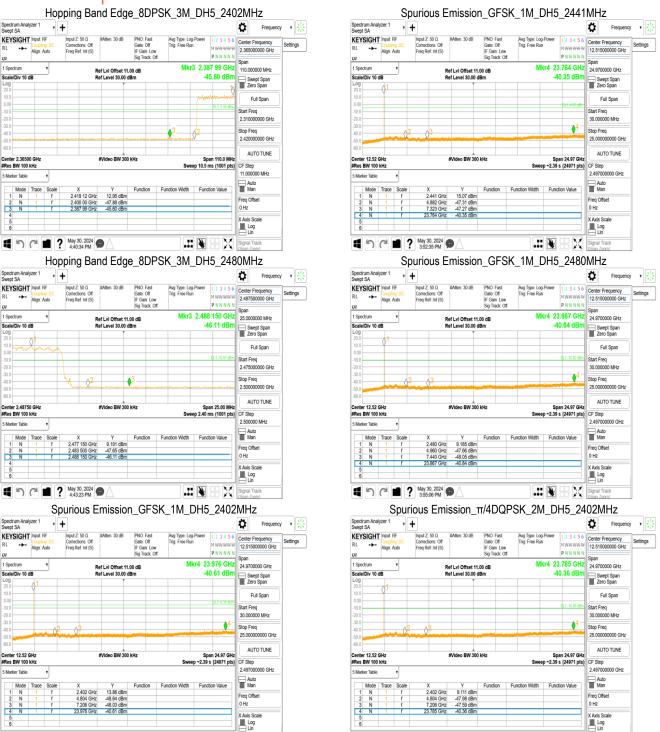

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號 f (886-2) 2298-0488

May 30, 2024 9 3:57:55 PM


May 30, 2024 9





Page: 26 of 71

Spurious Emission π/4DQPSK 2M DH5 2441MHz ٥ KEYSIGHT Input: RF out 7: 50 0 Settings 12,515000 PNNNN Mkr4 24.839 GHz 24.9700000 GHz 1 Spectrum -40.96 dB Swept Span Zero Span Full Span Center 12.52 GHz #Res BW 100 kHz Auto Man Function Width Function Value Freq Offse 0 Hz Log Lin 4:00:09 PM .:: 🖫 Signal Traci Spurious Emission_π/4DQPSK_2M_DH5_2480MHz



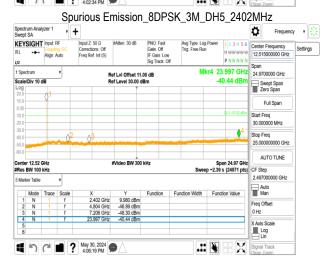

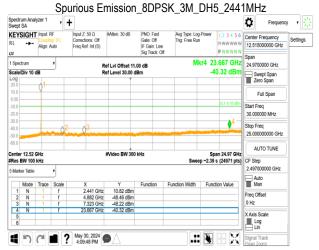

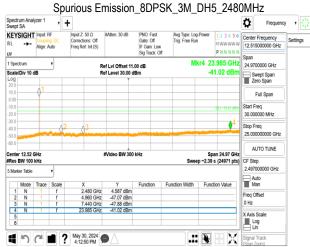

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



Page: 27 of 71



11 RADIATED BANDEDGE AND SPURIOUS EMISSION MEASUREMENT

Standard Applicable

11.1.1 **Duty Cycle Correction Factor**

According to 15. 35(c) and RSS-Gen §8.2, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification.

11.1.2 **Spurious Emission**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. In addition, radiated emissions which fall in the restricted bands must also comply with the §15.209 and RSS-Gen §8.9 Table 5 and 6 limit as below.

And according to §15.33(a) (1) & RSS-Gen §6.13.2.a, for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to 40GHz, whichever is lower.

Frequency (MHz)	Field strength (microvolts/meter)	Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

1. The lower limit shall apply at the transition frequencies.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.


Report No.: TERF2404001128ER

Page: 28 of 71




11.2 Test Setup

Duty Cycle Correction Factor




11.2.2 **Radiated Emission**

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz.

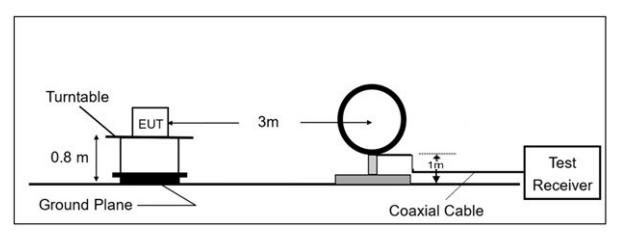

(B) Radiated Emission Test Set-Up, Frequency From 30MHz to 1000MHz.

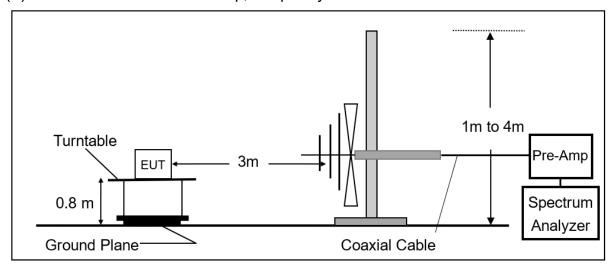

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 29 of 71

(C) Radiated Emission Test Set-Up, Frequency Above 1 GHz.

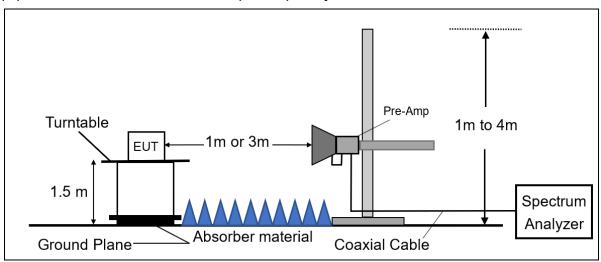

11.3 **Measurement Procedure**

11.3.1 **Duty Cycle Correction Factor**

- 1. Adjust and configure any EUT switches, controls, or input data streams to ensure that the EUT is transmitting or encoded to obtain the "worst-case" pulse ON time.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep=100ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

11.3.2 Radiated Emission

- 1. The testing follows the Measurement Procedure of ANSI C63.10:2013.
- 2. The EUT was placed on a turn table with 0.8m for frequency< 1GHz and 1.5m for frequency> 1GHz above ground plane.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.
- 5. Set the spectrum analyzer as RBW=100 kHz and VBW=300 kHz for Peak Detector (PK) at frequency between 30MHz and 1 GHz.
- 6. Use receiver mode as RBW=120 kHz for Quasi-peak (QP) at frequency between 30MHz and 1 GHz.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

SGS Taiwan Ltd.

www.sgs.com.tw



Page: 30 of 71

- 7. Set the spectrum analyzer as RBW=1 MHz, VBW=3 MHz for Maximum Emission Measurements at frequency above 1 GHz.
- 8. According to C63.10:2013 Section 7.5 Procedure for determining the average value of pulsed emissions with duty cycle correction factor 20 log (Ton/100ms).
- 9. When measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.
- 10. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 11. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 12. Repeat above procedures until all default test channel measured were complete.

11.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m)

Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Average value(dBµV/m)=Peak Actual FS(dBµV/m)+ Duty Cycle Correction Factor(dB)

Duty Cycle Correction Factor(dB) = $20 \log (T_{on}/100 \text{ ms})$

11.5 Test Results of Radiated Spurious Emissions form 9 kHz to 30 MHz

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit per 15.31(o) & RSS-GEN §6.13.2 was not reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 31 of 71



Measurement Result:

11.6.1 **Duty Cycle Correction Factor**

Bluetooth 1M

Time ON of 100ms: 5.800 ms Duty Cycle=5.8ms / 100ms= 0.058

Duty Cycle correction factor=20 LOG 0.058 = -24.73 dB


Bluetooth 3M


Time ON of 100ms: 5.800 ms Duty Cycle=5.8ms / 100ms= 0.058

Duty Cycle correction factor=20 LOG 0.058 = -24.73 dB

11.6.2 **Duty Cycle test plot**

BR

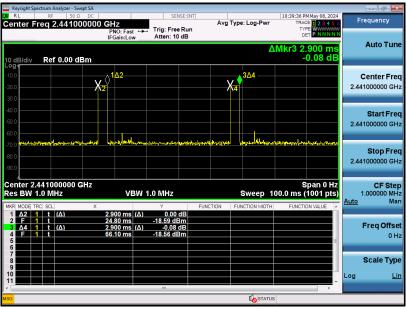

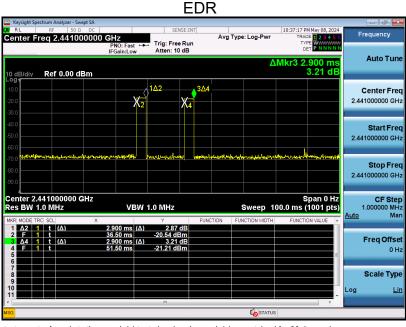

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司



Page: 32 of 71



11.6.3 Bandedge Result


Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2402 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

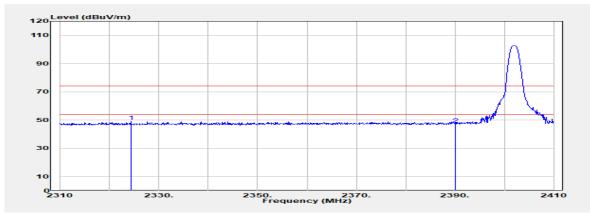

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2324.300	Peak	54.18	-4.92	49.26	74.00	-24.74
2390.000	Peak	51.76	-4.58	47.17	74.00	-26.83
F	Datastan	Da ala Alataral	Destre Occala	A	A	N 4
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
		· · ·	, ,	,	, ,	•
2324.300	Average	49.26	-24.73	24.53	54.00	-29.47
2390.000	Average	47.17	-24.73	22.44	54.00	-31.56

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大型企业等等。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 33 of 71


Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode: BR Test Date :2024-05-08

Test Frequency :2402 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

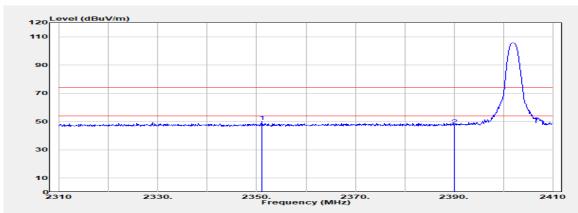

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBμV	dB	dBμV/m	dBμV/m	dB
	2351.000	Peak	54.79	-4.83	49.96	74.00	-24.04
	2390.000	Peak	51.94	-4.58	47.36	74.00	-26.64
	Frod	Detector	Peak Actual	Duty Cycle	Averege	Average	Morgin
	Freq.	Detector Mode	Feak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	2351.000	Average	49.96	-24.73	25.23	54.00	-28.77
	2390.000	Average	47.36	-24.73	22.63	54.00	-31.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 34 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2480 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

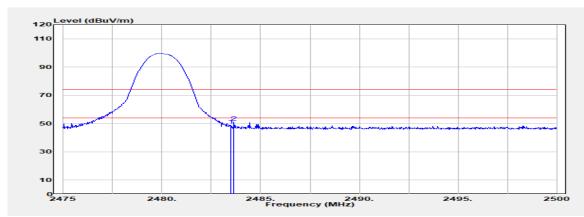

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	53.96	-5.30	48.65	74.00	-25.35
2483.650	Peak	56.27	-5.31	50.97	74.00	-23.03
_				_	_	
Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
	Mode	FS	Factor	Value	Limit@3m	
MHz_	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2483.500	Average	48.65	-24.73	23.92	54.00	-30.08
2483.650	Average	50.97	-24.73	26.24	54.00	-27.76

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大型企业等等。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 35 of 71


Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode: BR Test Date :2024-05-08

Test Frequency :2480 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

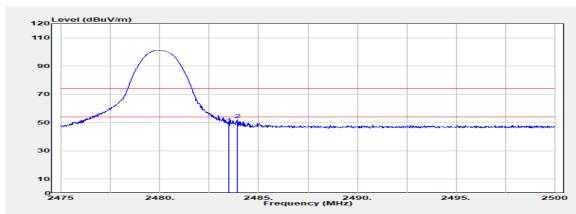

Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
Peak	54.30	-5.30	48.99	74.00	-25.01
Peak	57.29	-5.31	51.98	74.00	-22.02
Detector	Peak Actual	Duty Cycle	Average	Average	Margin
		, ,	•	•	Margin
AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
					_
Average	48.99	-24.73	24.26	54.00	-29.74
Average	51.98	-24.73	27.25	54.00	-26.75
	Mode PK/QP/AV Peak Peak Detector Mode AV Average	Mode PK/QP/AV Reading Level dBμV Peak 54.30 Feak 57.29 Detector Peak Actual FS (dBμV/m) Average 48.99	Mode PK/QP/AV Reading Level dBμV dB Peak 54.30 -5.30 Peak 57.29 -5.31 Detector Mode FS Factor AV Peak Actual FS Factor (dBμV/m) Duty Cycle Factor (dB) Average 48.99 -24.73	Mode PK/QP/AVReading Level dBμVFS dBμV/mPeak 54.30 -5.30 48.99 Peak 57.29 -5.31 51.98 Detector Mode FS Factor AVPeak Actual GBμV/m)Duty Cycle Factor Value (dBμV/m)Average 48.99 -24.73 24.26	Mode PK/QP/AV Reading Level dBμV FS dBμV/m @3m dBμV/m Peak 54.30 -5.30 48.99 74.00 Peak 57.29 -5.31 51.98 74.00 Detector Peak Actual Mode FS Factor Value Limit@3m (dBμV/m) FS Factor Value (dBuV/m) Limit@3m (dBuV/m) AV (dBμV/m) (dBμV/m) 24.26 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 36 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2402 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Hopping Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

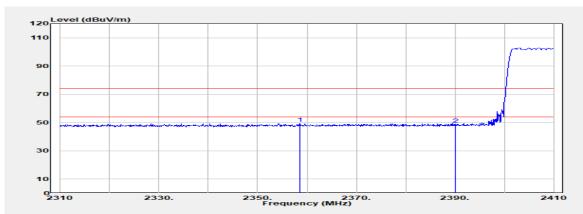

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2358.500	Peak	54.30	-4.78	49.52	74.00	-24.48
2390.000	Peak	53.23	-4.58	48.64	74.00	-25.36
From	Detector	Peak Actual	Duty Cycle	Averege	Average	Morgin
Freq.	Detector Mode	FEAK ACTUAL	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2358.500	Average	49.52	-24.73	24.79	54.00	-29.21
2390.000	Average	48.64	-24.73	23.91	54.00	-30.09

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對文學具有書,同時他學具屬是例的子。本都學主德本公司書面對面,不可可以推翻。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. N 台灣檢驗科技股份有限公司 t



Page: 37 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode: BR Test Date :2024-05-08

Test Frequency :2402 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Hopping Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

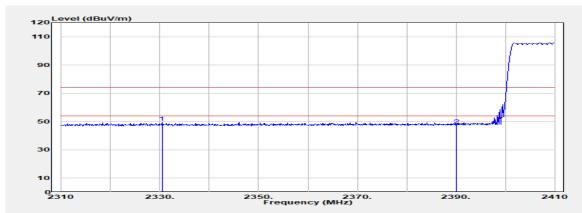

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBμV	dB	dBμV/m	dBμV/m	dB
	2330.400	Peak	54.26	-4.90	49.37	74.00	-24.63
	2390.000	Peak	52.07	-4.58	47.49	74.00	-26.51
	F	Detector	Daals Astrod	Destric Overla	A	A	Manain
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
			· · ·	,	•	,	` '
	2330.400	Average	49.37	-24.73	24.64	54.00	-29.36
	2390.000	Average	47.49	-24.73	22.76	54.00	-31.24

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.





Page: 38 of 71


Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2480 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Hopping Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

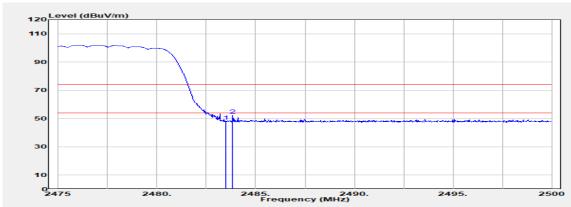

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	2483.500	Peak	53.28	-5.30	47.98	74.00	-26.02
	2483.825	Peak	57.81	-5.31	52.50	74.00	-21.50
	Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
		Mode	FS	Factor	Value	Limit@3m	
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	2483.500	Average	47.98	-24.73	23.25	54.00	-30.75
	2483.825	Average	52.50	-24.73	27.77	54.00	-26.23

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有铅明,此報生结用攝影測建立幾只有著,同時世輕具攝展例の主。大報生主概太公司書面對可,不可可以猶剩。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 39 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2480 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Hopping Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

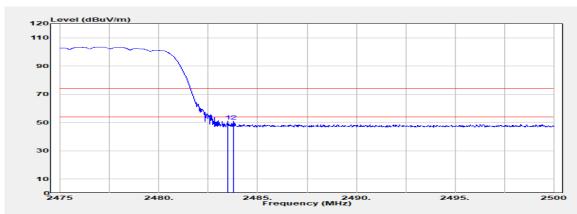

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	2483.500	Peak	56.35	-5.30	51.05	74.00	-22.95
	2483.775	Peak	56.46	-5.31	51.15	74.00	-22.85
	_	5	5	5 . 6 .			
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average	Margin
	MHz	AV	rS (dBµV/m)	racioi (dB)	(dBuV/m)	Limit@3m (dBuV/m)	(dB)
_	1411 12	7.0	(αΒμν/ιιι)	(GD)	(abav/iii)	(aba v/iii)	(GD)
	2483.500	Average	51.05	-24.73	26.32	54.00	-27.68
	2483.775	Average	51.15	-24.73	26.42	54.00	-27.58
		3					

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 40 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode: EDR 3M Test Date :2024-05-08 Test Frequency :2402 MHz Temp./Humi. :22.1°C/63%

Antenna Pol. :Vertical Test Mode :Bandedge

EUT Pol :H Plane :Sam Huang Engineer

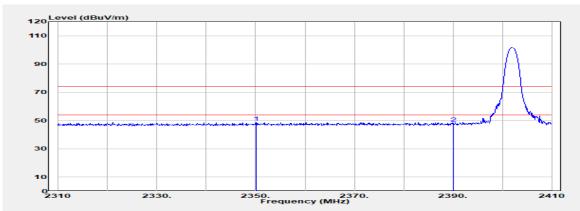

	Freq.	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	2350.100	Peak	53.70	-4.83	48.86	74.00	-25.14
	2390.000	Peak	52.81	-4.58	48.22	74.00	-25.78
	Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
		Mode	FS	Factor	Value	Limit@3m	
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	2350.100	Average	48.86	-24.73	24.13	54.00	-29.87
	2390.000	Average	48.22	-24.73	23.49	54.00	-30.51

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.




Page: 41 of 71



Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :EDR 3M Test Date :2024-05-08
Test Frequency :2402 MHz Temp./Humi. :22.1°C/63%
Test Mode :Bandedge Antenna Pol. :Horizontal
EUT Pol :H Plane Engineer :Sam Huang

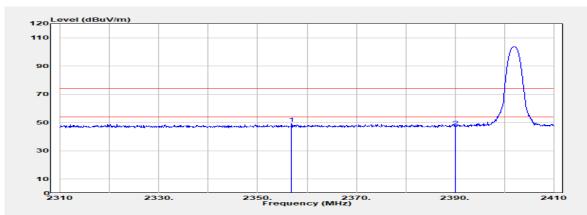

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2356.900	Peak	54.08	-4.79	49.29	74.00	-24.71
2390.000	Peak	51.74	-4.58	47.16	74.00	-26.84
_				_	_	
Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
MHz	Mode AV	FS (dBµV/m)	Factor (dB)	Value (dBuV/m)	Limit@3m (dBuV/m)	(dB)
IVII IZ	Av	(ασμν/π)	(GD)	(dDdV/III)	(ubuv/iii)	(ub)
0050 000	A	40.00	04.70	04.50	54.00	00.44
2356.900	Average	49.29	-24.73	24.56	54.00	-29.44
2390.000	Average	47.16	-24.73	22.43	54.00	-31.57

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 42 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode: EDR 3M Test Date :2024-05-08 Test Frequency :2480 MHz Temp./Humi. :22.1°C/63%

Antenna Pol. :Vertical Test Mode :Bandedge

Engineer **EUT Pol** :H Plane :Sam Huang

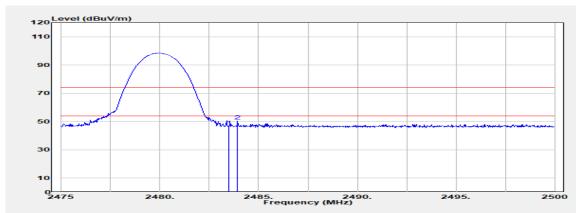

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dBμV	dB	dBμV/m	dBμV/m	dB
	2483.500	Peak	51.85	-5.30	46.55	74.00	-27.45
	2483.925	Peak	55.66	-5.31	50.36	74.00	-23.64
	Гтол	Detector	Dook Astual	Duty Ovala	Avaraga	Avanana	Margin
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
					•		
	2483.500	Average	46.55	-24.73	21.82	54.00	-32.18
	2483.925	Average	50.36	-24.73	25.63	54.00	-28.37

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司




Page: 43 of 71



Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode:EDR 3MTest Date:2024-05-08Test Frequency:2480 MHzTemp./Humi.:22.1°C/63%Test Mode:BandedgeAntenna Pol.:HorizontalEUT Pol:H PlaneEngineer:Sam Huang

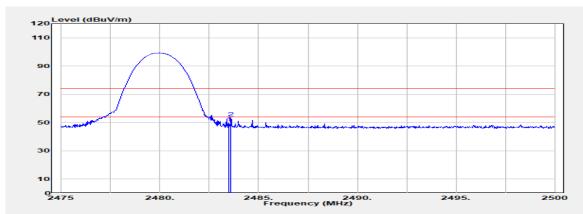

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	55.19	-5.30	49.88	74.00	-24.12
2483.600	Peak	58.62	-5.31	53.31	74.00	-20.69
_						
Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
MHz	Mode AV	FS (dBu)//m)	Factor	Value (dBuV/m)	Limit@3m (dBuV/m)	(AD)
IVITZ	AV	(dBµV/m)	(dB)	(ubuv/III)	(ubuv/III)	(dB)
	_					
2483.500	Average	49.88	-24.73	25.15	54.00	-28.85
2483.600	Average	53.31	-24.73	28.58	54.00	-25.42

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 险非只有的明,此想些结果做新测验之缘具负责,同时此模具做是例如于。木型生主领水公司事面纯可,不可可以推测。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 44 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :EDR 3M Test Date :2024-05-08
Test Frequency :2402 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Hopping Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

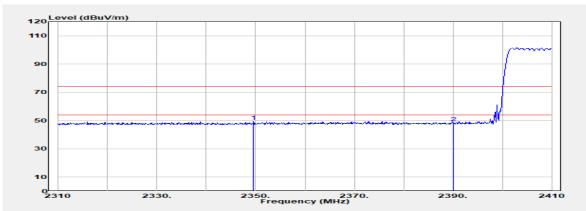

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
_	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
	2349.600	Peak	54.28	-4.84	49.44	74.00	-24.56
	2390.000	Peak	52.96	-4.58	48.38	74.00	-25.62
	Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
		Mode	FS	Factor	Value	Limit@3m	
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	2349.600	Average	49.44	-24.73	24.71	54.00	-29.29
	2390.000	Average	48.38	-24.73	23.65	54.00	-30.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 45 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :EDR 3M Test Date :2024-05-08

Test Frequency :2402 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Hopping Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

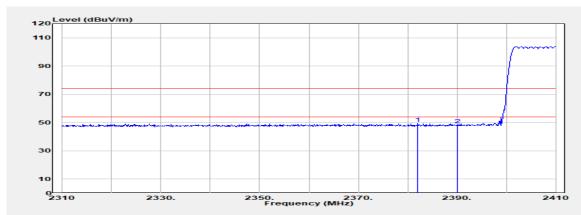

Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
Peak	53.90	-4.63	49.27	74.00	-24.73
Peak	52.94	-4.58	48.35	74.00	-25.65
Datastan	Dools Astrod	Durby Ovala	A	A	Manain
		, ,	•	•	Margin
AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
	•	,	· ·	,	` '
Average	49.27	-24.73	24.54	54.00	-29.46
Average	48.35	-24.73	23.62	54.00	-30.38
	Mode PK/QP/AV Peak Peak Detector Mode AV Average	Mode PK/QP/AV Reading Level dBμV Peak 53.90 Peak 52.94 Detector Peak Actual FS (dBμV/m) Average 49.27	Mode PK/QP/AV Reading Level dBμV dB Peak Peak 53.90 -4.63 Peak 52.94 -4.58 Detector Mode FS AV Peak Actual FS Factor (dBμV/m) Duty Cycle Factor (dB) Average 49.27 -24.73	Mode PK/QP/AVReading Level dBμVFS dBμV/mPeak 53.90 -4.63 49.27 Peak 52.94 -4.58 48.35 Detector Mode FS Factor AVPeak Actual Pactor (dBμV/m)Duty Cycle Average Value (dBμV/m)Average 49.27 -24.73 24.54	Mode PK/QP/AV Reading Level dBμV FS dBμV/m @3m dBμV/m Peak 53.90 -4.63 49.27 74.00 Peak 52.94 -4.58 48.35 74.00 Detector Peak Actual Mode FS Factor Value Limit@3m (dBμV/m) FS Factor Value (dBuV/m) Limit@3m (dBuV/m) AV (dBμV/m) (dBμV/m) (dBμV/m) 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大型企业等等。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. N

台灣檢驗科技股份有限公司



Page: 46 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :EDR 3M Test Date :2024-05-08
Test Frequency :2480 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Hopping Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

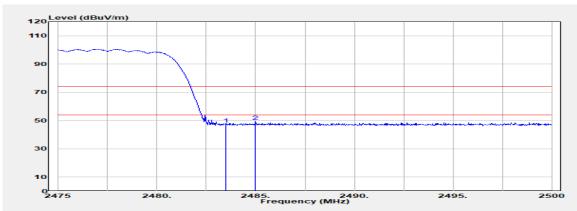

Freq.	Detector	Spectrum	Factor	Actual FS	Limit	Margin
N 41 1—	Mode	Reading Level	-ID		@3m	-ID
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
2483.500	Peak	52.86	-5.30	47.56	74.00	-26.44
2485.000	Peak	54.79	-5.32	49.48	74.00	-24.52
Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
	Mode	FS	Factor	Value	Limit@3m	
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
2483.500	Average	47.56	-24.73	22.83	54.00	-31.17
2485.000	Average	49.48	-24.73	24.75	54.00	-29.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大型企业等等。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 47 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :EDR 3M Test Date :2024-05-08

Test Frequency :2480 MHz Temp./Humi. :22.1°C/63%

Test Mode :Bandedge Hopping Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

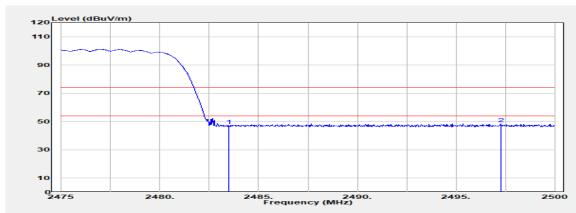

Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
PK/QP/AV	dBμV	dB	dBμV/m	dBμV/m	dB
Peak	52.31	-5.30	47.01	74.00	-26.99
Peak	54.02	-5.41	48.61	74.00	-25.39
Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
					_
Average	47.01	-24.73	22.28	54.00	-31.72
Average	48.61	-24.73	23.88	54.00	-30.12
	Mode PK/QP/AV Peak Peak Detector Mode AV Average	Mode PK/QP/AV Reading Level dBμV Peak 52.31 Peak 54.02 Detector Peak Actual FS (dBμV/m) Average 47.01	$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	Mode PK/QP/AVReading Level dBμVFS dBμV/mPeak 52.31 -5.30 47.01 Peak 54.02 -5.41 48.61 Detector Mode FS Factor AVPeak Actual Pactor (dBμV/m)Duty Cycle Average Value (dBμV/m)Average 47.01 -24.73 22.28	Mode PK/QP/AV Reading Level dB μV FS dB μV/m @3m dB μV/m Peak 52.31 -5.30 47.01 74.00 Peak 54.02 -5.41 48.61 74.00 Detector Mode FS Factor AV Peak Actual Psactor Value (dB μV/m) Limit@3m (dB μV/m) AV (dB μV/m) (dB) (dB μV/m) 54.00

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Antenna Pol. :Vertical

Page: 48 of 71



Test Mode

11.6.4 Radiated Spurious Emission


:Tx

Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2441 MHz Temp./Humi. :22.1 °C/63%

EUT Pol :H Plane Engineer :Sam Huang

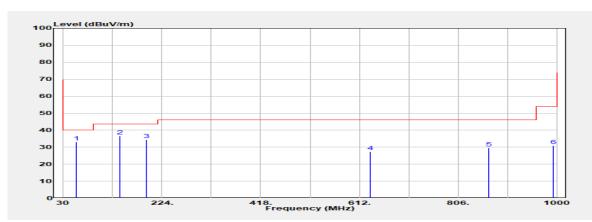

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
55.220	Peak	49.98	-16.83	33.15	40.00	-6.85
140.580	Peak	53.38	-16.91	36.48	43.50	-7.02
192.960	Peak	53.70	-19.35	34.34	43.50	-9.16
634.310	Peak	35.78	-8.29	27.49	46.00	-18.51
866.140	Peak	35.52	-5.95	29.58	46.00	-16.42
994.180	Peak	34.81	-3.94	30.87	54.00	-23.13

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 49 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode: BR Test Date :2024-05-08

Test Frequency :2441 MHz Temp./Humi. :22.1 °C/63%

:Tx Antenna Pol. :Horizontal Test Mode

EUT Pol :H Plane Engineer :Sam Huang

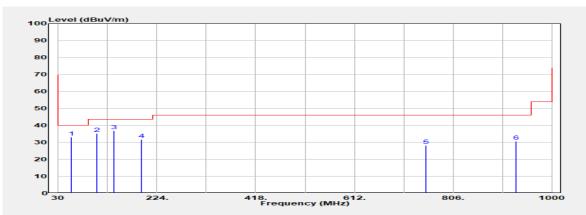

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
55.220	Peak	49.90	-16.83	33.07	40.00	-6.93
106.630	Peak	55.73	-20.50	35.24	43.50	-8.26
138.640	Peak	53.90	-16.99	36.91	43.50	-6.59
192.960	Peak	51.01	-19.35	31.65	43.50	-11.85
752.650	Peak	34.88	-6.65	28.22	46.00	-17.78
930.160	Peak	34.84	-4.20	30.65	46.00	-15.35

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 50 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2402 MHz Temp./Humi. :22.1 ℃/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

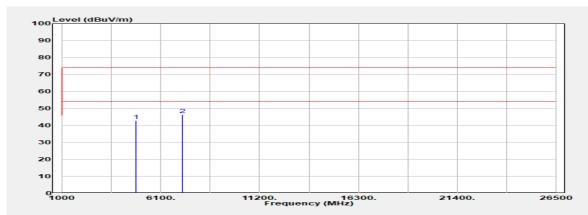

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4804.000	Peak	41.87	0.98	42.86	74.00	-31.14
7206.000	Peak	38.35	8.13	46.48	74.00	-27.52
Frog	Detector	Peak Actual	Duty Cycle	Averege	Average	Morgin
Freq.	Mode	Feak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4804.000	Average	42.86	-24.73	18.13	54.00	-35.87
7206.000	Average	46.48	-24.73	21.75	54.00	-32.25

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 51 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2402 MHz Temp./Humi. :22.1 °C/63%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

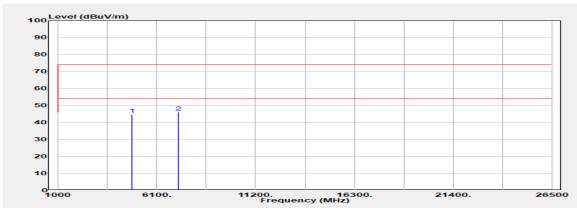

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dBμV	dB	dBμV/m	dBμV/m	dB
							_
	4804.000	Peak	43.77	0.98	44.76	74.00	-29.24
	7206.000	Peak	37.91	8.13	46.04	74.00	-27.96
	_	D ()	D A	D 1 0 1	•	•	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
-	1411 12	7.00	(αΒμν/ιιι)	(42)	(abaviii)	(aba v/iii)	(45)
	4804.000	Average	44.76	-24.73	20.03	54.00	-33.97
	7206.000	Average	46.04	-24.73	21.31	54.00	-32.69

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sgs.com.tw



Page: 52 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2441 MHz Temp./Humi. :22.1 ℃/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

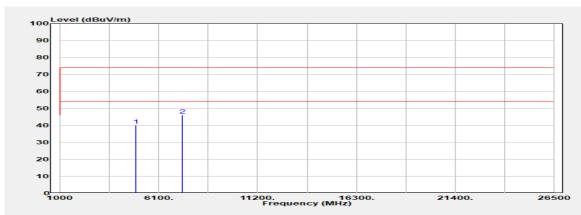

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4882.000	Peak	38.99	0.99	39.98	74.00	-34.02
7323.000	Peak	37.17	9.03	46.20	74.00	-27.80
Frog	Detector	Dook Actual	Duty Cycle	Averege	Average	Morgin
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4882.000	Average	39.98	-24.73	15.25	54.00	-38.75
7323.000	Average	46.20	-24.73	21.47	54.00	-32.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 53 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode: BR Test Date :2024-05-08

Test Frequency :2441 MHz Temp./Humi. :22.1 °C/63%

:Tx Test Mode Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

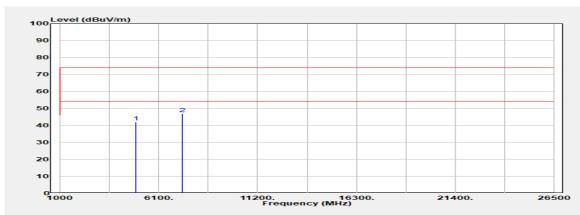

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4882.000	Peak	41.05	0.99	42.04	74.00	-31.96
7323.000	Peak	37.86	9.03	46.89	74.00	-27.11
Eroa	Detector	Peak Actual	Duty Cycle	Avorage	Average	Margin
Freq.	Mode	Feak Actual FS	Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4882.000	Average	42.04	-24.73	17.31	54.00	-36.69
7323.000	Average	46.89	-24.73	22.16	54.00	-31.84

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 54 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2480 MHz Temp./Humi. :22.1 °C/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

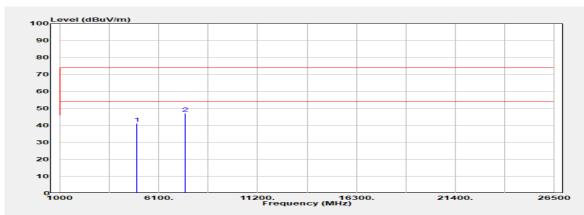

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4960.000	Peak	39.28	1.87	41.15	74.00	-32.85
7440.000	Peak	37.21	9.98	47.20	74.00	-26.80
F	D - 4 4	Daala Aataal	Destruction	A	A	N 4
Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
		· · · · · · · · · · · · · · · · · · ·	,	,		` '
4960.000	Average	41.15	-24.73	16.42	54.00	-37.58
7440.000	Average	47.20	-24.73	22.47	54.00	-31.53

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除业只有约明,此程生处用度影响经少锋中乌害,同时此类早度原列的主,大型企业等等。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 55 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :BR Test Date :2024-05-08

Test Frequency :2480 MHz Temp./Humi. :22.1 °C/63%

Test Mode :Tx Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

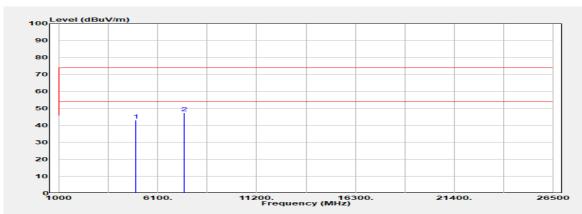

	Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
	MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
							_
	4960.000	Peak	41.30	1.87	43.17	74.00	-30.83
	7440.000	Peak	37.44	9.98	47.42	74.00	-26.58
	_	5	D A	D (O)	٨	٨	
	Freq.	Detector Mode	Peak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
	MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
-			(()	((======================================	(==)
	4960.000	Average	43.17	-24.73	18.44	54.00	-35.56
	7440.000	Average	47.42	-24.73	22.69	54.00	-31.31

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.






Page: 56 of 71

Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :EDR 3M Test Date :2024-05-08
Test Frequency :2402 MHz Temp./Humi. :22.1 °C/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

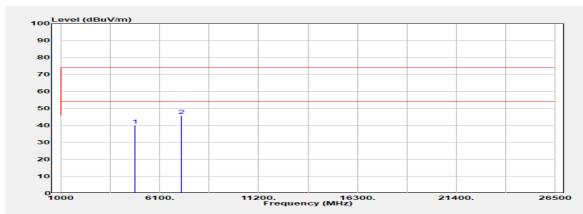

Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
					_
Peak	39.13	0.98	40.11	74.00	-33.89
Peak	37.62	8.13	45.75	74.00	-28.25
Detector	Dook Actual	Duty Cycle	Average	Average	Margin
		, ,	•	•	Margin
AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
			•		
Average	40.11	-24.73	15.38	54.00	-38.62
Average	45.75	-24.73	21.02	54.00	-32.98
	Mode PK/QP/AV Peak Peak Detector Mode AV Average	Mode PK/QP/AV Reading Level dBμV Peak 39.13 Peak 37.62 Detector Peak Actual FS AV (dBμV/m) Average 40.11	Mode PK/QP/AV Reading Level dBμV dB Peak Peak 39.13 0.98 Peak Peak 37.62 8.13 Detector Mode FS AV Peak Actual FS Factor (dBμV/m) Duty Cycle Factor (dB) Average 40.11 -24.73	Mode PK/QP/AVReading Level dBμVFS dBμV/mPeak39.130.9840.11Peak37.628.1345.75Detector Mode FS Factor AV (dBμV/m)Peak Actual Pactor (dBμV/m)Duty Cycle Average Value (dBμV/m)Average40.11-24.7315.38	Mode PK/QP/AV Reading Level dBμV FS dBμV/m @3m dBμV/m Peak 39.13 0.98 40.11 74.00 Peak 37.62 8.13 45.75 74.00 Detector Peak Actual Mode FS Factor AV Galue (dBμV/m) Factor Value (dBμV/m) Limit@3m (dBuV/m) AV (dBμV/m) (dBμV/m) (dBμV/m) 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 57 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode: EDR 3M Test Date :2024-05-08

Test Frequency :2402 MHz Temp./Humi. :22.1 °C/63%

:Tx Test Mode Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

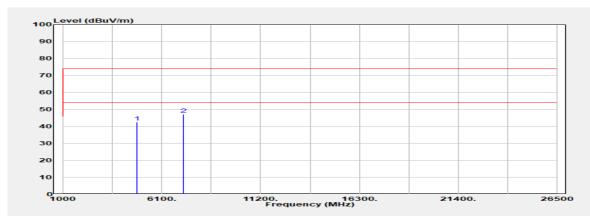

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4804.000	Peak	41.64	0.98	42.62	74.00	-31.38
7206.000	Peak	38.99	8.13	47.12	74.00	-26.88
Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
	Mode	FS	Factor	Value	Limit@3m	
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4804.000	Average	42.62	-24.73	17.89	54.00	-36.11
7206.000	Average	47.12	-24.73	22.39	54.00	-31.61

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. t (886-2) 2299-3279



Page: 58 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :EDR 3M Test Date :2024-05-08
Test Frequency :2441 MHz Temp./Humi. :22.1 °C/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

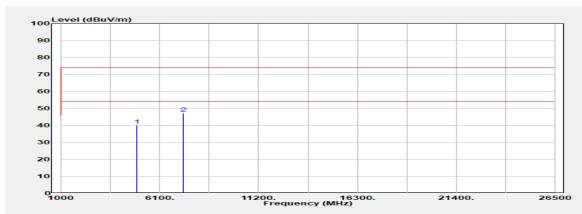

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4882.000	Peak	39.19	0.99	40.18	74.00	-33.82
7323.000	Peak	38.16	9.03	47.19	74.00	-26.81
From	Detector	Peak Actual	Duty Cycle	Average	Average	Morgin
Freq.	Detector Mode	Feak Actual FS	Duty Cycle Factor	Average Value	Average Limit@3m	Margin
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
				•		
4882.000	Average	40.18	-24.73	15.45	54.00	-38.55
7323.000	Average	47.19	-24.73	22.46	54.00	-31.54

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Antenna Pol. :Horizontal



Test Mode

:Tx


Page: 59 of 71

Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode :EDR 3M Test Date :2024-05-08

Test Frequency :2441 MHz Temp./Humi. :22.1 °C/63%

EUT Pol :H Plane Engineer :Sam Huang

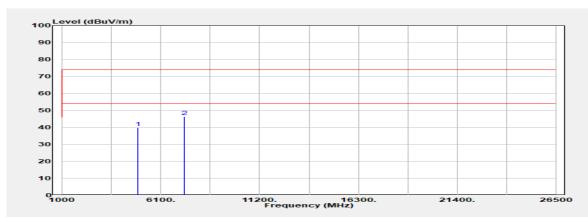

Freq.	Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
MHz	PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
4882.000	Peak	38.89	0.99	39.88	74.00	-34.12
7323.000	Peak	37.20	9.03	46.23	74.00	-27.77
Freq.	Detector	Peak Actual	Duty Cycle	Average	Average	Margin
	Mode	FS	Factor	Value	Limit@3m	
MHz	AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
4882.000	Average	39.88	-24.73	15.15	54.00	-38.85
7323.000	Average	46.23	-24.73	21.50	54.00	-32.50

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是结果做新测验之样具色素,同时他接具做是例如于。木型生产概率从同事而连可,不可如必指制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



:SAC D

Page: 60 of 71



Report Number :TERF2404001128ER


Test Site

Operation Mode :EDR 3M Test Date :2024-05-08

Test Frequency :2480 MHz Temp./Humi. :22.1 ℃/63%

Test Mode :Tx Antenna Pol. :Vertical

EUT Pol :H Plane Engineer :Sam Huang

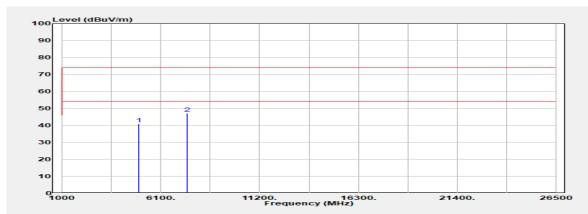

Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
Peak	39.03	1.87	40.89	74.00	-33.11
Peak	37.07	9.98	47.06	74.00	-26.94
Detector	Dook Actual	Duty Cycle	Average	Average	Morgin
		, ,	0	•	Margin
AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
Average	40.89	-24.73	16.16	54.00	-37.84
Average	47.06	-24.73	22.33	54.00	-31.67
	Mode PK/QP/AV Peak Peak Detector Mode AV Average	Mode PK/QP/AV Reading Level dBμV Peak 39.03 Peak 37.07 Detector Peak Actual FS AV (dBμV/m) Average 40.89	Mode PK/QP/AV Reading Level dBμV dB Peak Peak 39.03 1.87 Peak Peak 37.07 9.98 Detector Mode FS AV Peak Actual FS Factor (dBμV/m) Duty Cycle Factor (dB) Average 40.89 -24.73	Mode PK/QP/AVReading Level dBμVFS dBμV/mPeak39.031.8740.89Peak37.079.9847.06Detector Mode AVPeak Actual Psector (dBμV/m)Duty Cycle Factor Value (dBμV/m)Average (dBμV/m)	Mode PK/QP/AV Reading Level dBμV FS dBμV/m @3m dBμV/m Peak 39.03 1.87 40.89 74.00 Peak 37.07 9.98 47.06 74.00 Detector Peak Actual Mode FS Factor Value Limit@3m (dBμV/m) Factor Value (dBμV/m) Limit@3m (dBuV/m) AV (dBμV/m) (dBμV/m) 16.16 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非只有的用,他都是好用属對個對分類具有害,同時他與只屬是例的子。未都些主權大利司事而雖可,不可與以資制。

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司 No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 $134 \,$ 號

www.sgs.com.tw



Page: 61 of 71




Report Number :TERF2404001128ER Test Site :SAC D

Operation Mode: EDR 3M Test Date :2024-05-08

Test Frequency :2480 MHz Temp./Humi. :22.1 °C/63%

:Tx Test Mode Antenna Pol. :Horizontal

EUT Pol :H Plane Engineer :Sam Huang

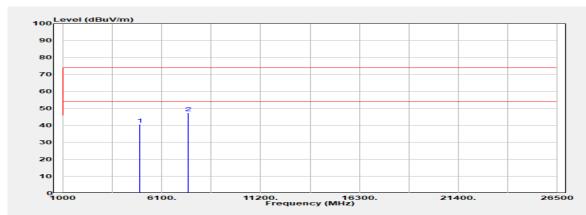

Detector Mode	Spectrum Reading Level	Factor	Actual FS	Limit @3m	Margin
PK/QP/AV	dΒμV	dB	dBμV/m	dBμV/m	dB
Peak	38.69	1.87	40.56	74.00	-33.44
Peak	37.57	9.98	47.55	74.00	-26.45
Detector	Dook Astual	Duty Cyala	A., a. a. a. a.	A	Marain
		, ,	•	•	Margin
AV	(dBµV/m)	(dB)	(dBuV/m)	(dBuV/m)	(dB)
		•			
Average	40.56	-24.73	15.83	54.00	-38.17
Average	47.55	-24.73	22.82	54.00	-31.18
	Mode PK/QP/AV Peak Peak Detector Mode AV Average	Mode PK/QP/AV Reading Level dBμV Peak 38.69 Peak 37.57 Detector Peak Actual FS (dBμV/m) Average 40.56	Mode PK/QP/AV Reading Level dBμV dB Peak Peak 38.69 1.87 Peak Peak 37.57 9.98 Detector Mode FS AV Peak Actual FS Factor (dBμV/m) Duty Cycle Factor (dB) Average 40.56 -24.73	Mode PK/QP/AVReading Level dBμVFS dBμV/mPeak 38.69 1.87 40.56 Peak 37.57 9.98 47.55 Detector Mode FS Factor AVPeak Actual Pactor (dBμV/m)Duty Cycle Factor Value (dBμV/m)Average 40.56 -24.73 15.83	Mode PK/QP/AV Reading Level dBμV FS dBμV/m @3m dBμV/m Peak 38.69 1.87 40.56 74.00 Peak 37.57 9.98 47.55 74.00 Detector Mode FS Factor AV Peak Actual (dBμV/m) Duty Cycle Average Average Limit@3m (dBuV/m) Limit@3m (dBuV/m) AV (dBμV/m) (dBμV/m) (dBμV/m) 54.00

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.

台灣檢驗科技股份有限公司




Page: 62 of 71

12 FREQUENCY SEPARATION

Standard Applicable

Frequency hopping systems shall have hopping channel carrier frequencies separated by minimum of 25 kHz or the 2/3*20dB bandwidth of the hopping channel, whichever is greater.

12.2 Test Setup



12.3 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = middle of hopping channel.
- 5. Set the RBW approximately 30% of the channel spacing, VBW ≥ RBW.
- 6. Adjust Span to Wide enough to capture the peaks of two adjacent channels.
- 7. Sweep = auto.
- 8. Max hold. Mark 3 Peaks of hopping channel and record the 3 peaks frequency.

Measurement Result 12.4

Channel separation (MHz)	Limit	Result
1	≥25 kHz or 2/3 times 20dB bandwidth	PASS

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 63 of 71

Ö

Swept Span Zero Span

Stop Freq

Auto Man

Freq Offset 0 Hz

Ö

5.00000000 MHz

Swept Span Zero Span

Start Freq

0 Hz

Ö

Center Frequency 2.479000000 GHz

Swept Span Zero Span

500.000 kHz

Auto Man

Freq Offset

0 Hz X Axis Scale

Full Span Start Freq 2.476500000 GHz

X Axis Scale

Frequency •

Settings

Full Span

2.438500000 GHz Stop Freq 2.4435000 AUTO TUNE

2.405500000 GHz

AUTO TUNE

Settings





Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.



SGS


Page: 64 of 71

13 NUMBER OF HOPPING FREQUENCY

13.1 Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5 MHz bands shall use at least 15 hopping frequencies.

13.2 Test Setup



13.3 Measurement Procedure

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set spectrum analyzer Start=2400MHz, Stop = 2483.5MHz, Sweep = auto.
- 5. Set the spectrum analyzer as RBW = 30% of the channel spacing, VBW ≥ RBW., Detector = Peak
- 6. Max hold, view and count how many channel in the band.

13.4 Measurement Result

Tabular Data of Total Channel Number

	Channel Number	Limit
2.4 GHz – 2.441 GHz	40	
2.441 GHz – 2.4835 GHz	39	>15
2.4 GHz ~2.4835 GHz	(40+39) = 79	


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留的天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.


SGS Taiwan Ltd. 台灣檢驗科技股份有限公司





Page: 65 of 71



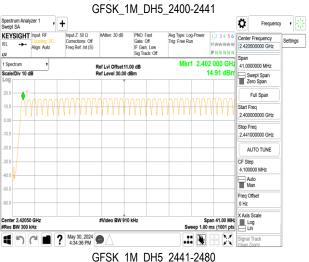

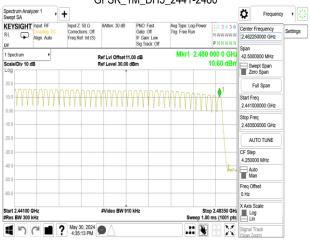

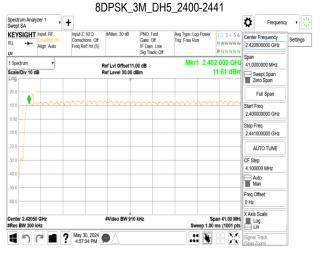

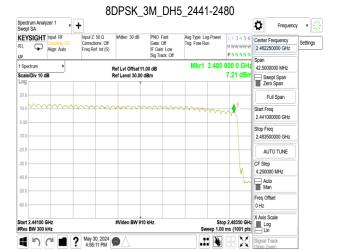

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.






Page: 66 of 71

14 TIME OF OCCUPANCY (DWELL TIME)

Standard Applicable

Frequency hopping systems operating in the 2400MHz-2483.5MHz. The average time of occupancy on any frequency shall not greater than 0.4 s within period of 0.4 seconds multiplied by the number of hopping channel employed.

14.2 Test Setup



14.3 **Measurement Procedure**

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. The testing follows ANSI C63.10:2013.
- 3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
- 4. Set center frequency of spectrum analyzer = operating frequency.
- 5. Set the spectrum analyzer as RBW, VBW=1MHz, 3MHz, Span = 0Hz, Detector = Peak, Adjust Sweep = 2~8ms.
- 6. Repeat above procedures until all frequency of the interest measured were complete.

Formula Deduced: time occupancy of one time slot X Hopping rate / total slot in one channel / total channel that hops X period of working channels.

Where, standard hopping rate is 1600 hops/s, slot in one channel for DH1, DH3, and DH5 is 2, 4, and 6, respectively.

DH1 consists of single time slot of the uplink, and one slot of the downlink Total Slot: 2 DH3 consists of three time slot of the uplink, and one slot of the downlink. Total Slot: 4 DH5 consists of five time slot of the uplink, and one slot of the downlink. Total Slot: 6

Note: the result of the complete test default channel at 1Mbps is recorded on the test report, 2Mbps, and 3Mbps only records the measurement result at middle channel that reveals no much deviation.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. 台灣檢驗科技股份有限公司

No.134,Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan/新北市五股區新北產業園區五工路 134 號

www.sqs.com.tw



Page: 67 of 71

Measurement Result

GFSK (1Mbps)

Or Ort (Thispo)			
Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	DH1	123.20	400
Mid	DH3	262.40	400
	DH5	308.80	400

$\pi/4$ DQPSK (2Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	2DH1	124.80	400
Mid	2DH3	262.40	400
	2DH5	307.20	400

8-DPSK (3Mbps)

Channel	PACKET TYPE	Measurement Result (ms)	Limit (ms)
	3DH1	123.20	400
Mid	3DH3	262.40	400
	3DH5	308.80	400

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd.



Page: 68 of 71



GFSK (1Mbps):

CH Mid	DH1 time slot	=	0.385 *	(1600/2/79)	*	31.6 =	123.20 (ms)
	DH3 time slot	=	1.640 *	(1600/4/79)	*	31.6 =	262.40 (ms)

2.895 * 31.6 = DH5 time slot (1600/6/79) 308.80 (ms)

$\pi/4$ -DQPSK (2Mbps):

CH Mid	2DH1 time slot	=	0.390 *	(1600/2/79)	*	31.6 =	124.80 (ms)

2DH3 time slot (1600/4/79)1.640 * 31.6 262.40 (ms)

31.6 2DH5 time slot 2.880 * (1600/6/79) 307.20 (ms)

8-DPSK (3Mbps):

CH Mid 3DH1 time slot	=	0.385 *	(1600/2/79)	*	31.6 =	123.20 (ms	3)
-----------------------	---	---------	-------------	---	--------	------------	----

(1600/4/79)3DH3 time slot 1.640 * 31.6 = 262.40 (ms)

3DH5 time slot 2.895 * (1600/6/79)31.6 = 308.80 (ms)

A period time = 0.4 (s) * 79 = 31.6 (s)


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format


documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



Page: 69 of 71



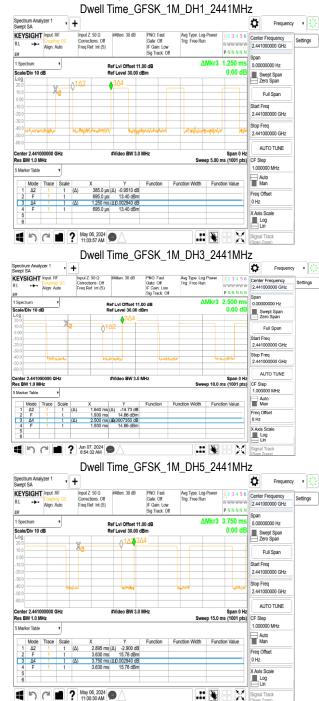

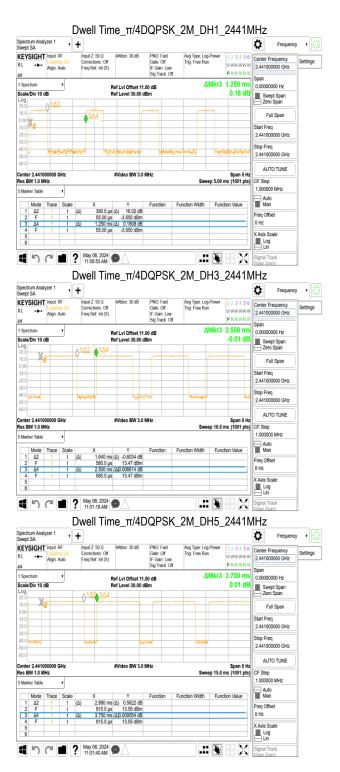

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。
This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com.tw/Terms-and-Conditions and for electronic format documents, subject to Terms and Conditions for Electronic Documents at http://www.sgs.com.tw/Terms-and-Conditions. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd.