

Measurement Results

1-2703/21-01-05_log1_conducted

[Test logging](#)

This addendum is electronically signed and valid without handwritten signature.
For verification of the electronic signatures, the public keys can be requested at the testing laboratory.

Document authorized:

Michael Dorongovski
Lab Manager
Radio Communications

Table of Content

EUT Summary	3
1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	4
2. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	7
3. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	10
4. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps	13
5. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps	16
6. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps	19
7. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps	22
8. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps	25
9. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	28
10. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	30
11. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	32
12. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps	34
13. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps	36
14. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps	38
15. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps	40
16. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps	42
17. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	44
18. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	46
19. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	48
20. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps	50
21. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps	52
22. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps	54
23. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps	56
24. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps	58
25. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	60
26. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	63
27. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	66
28. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps	69
29. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps	72
30. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps	75
31. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps	78
32. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps	81
33. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	84
34. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	86
35. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	88
36. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps	90
37. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps	92
38. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps	94
39. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps	96
40. FCC Part 15.247 TX Spurious Conducted ~ BT LE 2 Msps	98

EUT Summary

EUT DEFINITION	
Manufacturer	WSAUD A/S
Type	RF Module 5
Kind	RF Module for Hearing Instruments
Serial Number Setup Number	NI 1.0
Version SW FW HW	- D12A.F12A.10.10.70.20 D12AF12A
Comment 1 2	
Temperature [°C] Min Nom Max	0 20 50
Voltage [V] Min Nom Max	3.3 3.85 4.2

EUT Common Settings BT Low Energy	
Intermodulation Value N	3
Image Freq. Low Mid High [MHz]	-4 -4 -4
Power Class	2
1 Mbps supported	True TXpayload 255 RXpayload 255
2 Mbps supported	True TXpayload 255 RXpayload 255
Longrange S8 supported	False TXpayload 255 RXpayload 255
Longrange S2 supported	False TXpayload 255 RXpayload 255
Signaling Settings	None TWO 3 2400 None S1 None On
Signaling RF Settings	RF1com 0 0 On
User Interaction	No
Switch Matrix & Pathcompensation enabled	Yes

1. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 14:38:28
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.93 10.89 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	539	kHz	INFO

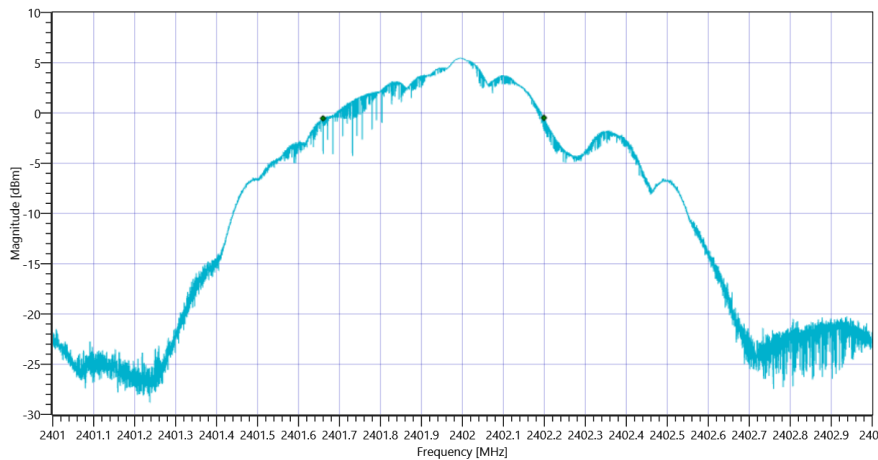


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_02082021_143856.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.93 10.89 25
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	5.73	dBm	PASS
Peak Power	---	1000	3.741106	mW	PASS
Frequency at Peak	---	---	2401.752	MHz	INFO

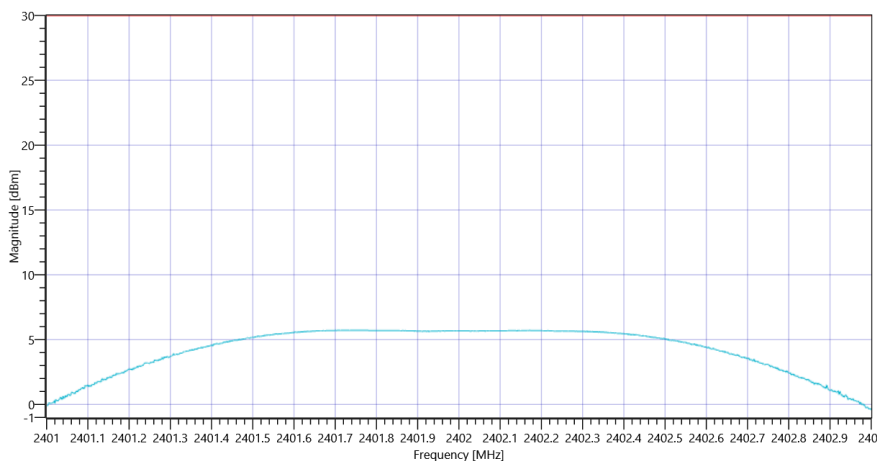

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_02082021_143914.png

TEST FINISHED	
General Verdict	PASS

2. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 14:50:40
Ambit Temp [°C] Humidity [rel%]	26.8 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.70 10.9 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	531	kHz	INFO

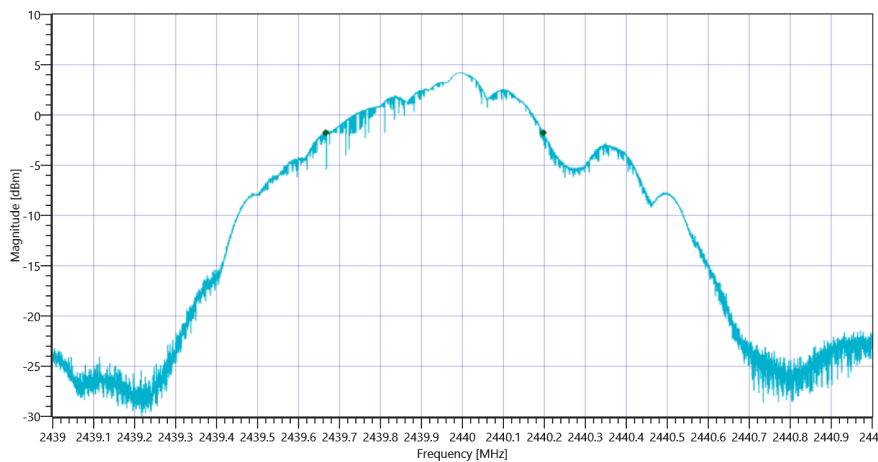


READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.70 10.9 20
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	4.76	dBm	PASS
Peak Power	---	1000	2.992265	mW	PASS
Frequency at Peak	---	---	2440.164	MHz	INFO

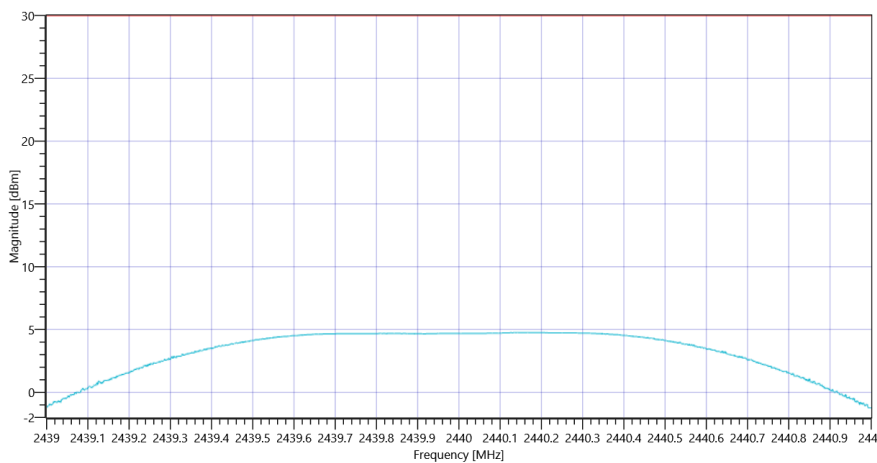

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msp_02082021_145126.png

TEST FINISHED	
General Verdict	PASS

3. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 15:07:00
Ambit Temp [°C] Humidity [rel%]	26.7 46
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.65 10.95 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	541	kHz	INFO

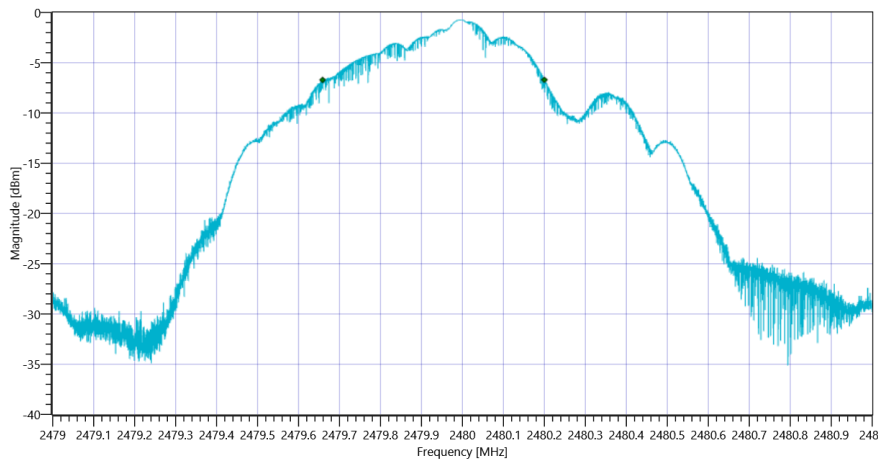


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_02082021_150729.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.65 10.95 15
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-0.38	dBm	PASS
Peak Power	---	1000	0.91622	mW	PASS
Frequency at Peak	---	---	2479.75	MHz	INFO

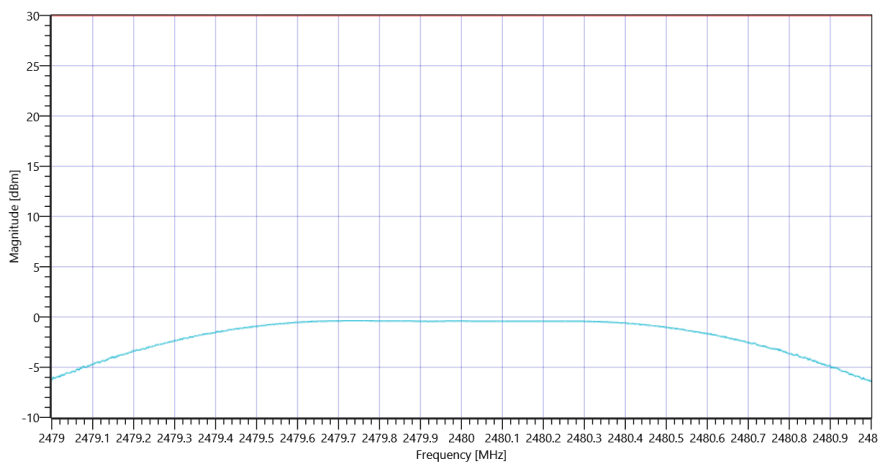

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_02082021_150747.png

TEST FINISHED	
General Verdict	PASS

4. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps

Test References	
TC Start	02.08.2021 16:17:53
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.50 10.9 15
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	643	kHz	INFO

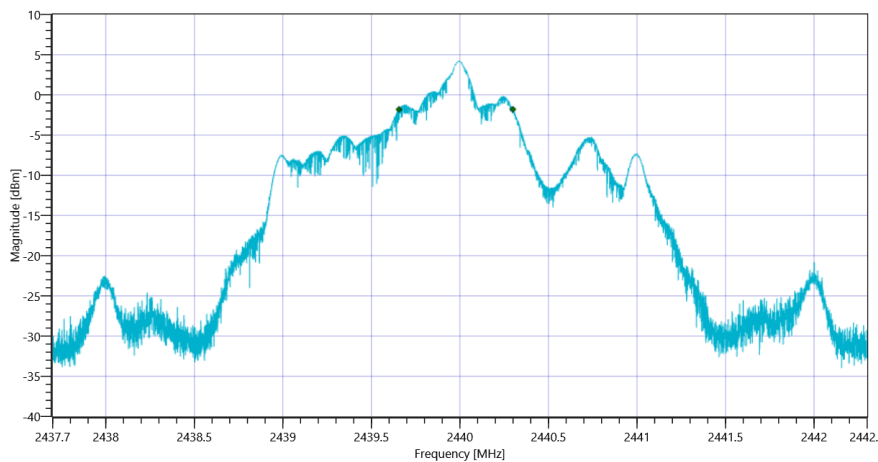


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps DTS BW_02082021_161822.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	14.50 10.9 20
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	4.77	dBm	PASS
Peak Power	---	1000	2.999163	mW	PASS
Frequency at Peak	---	---	2440.473	MHz	INFO

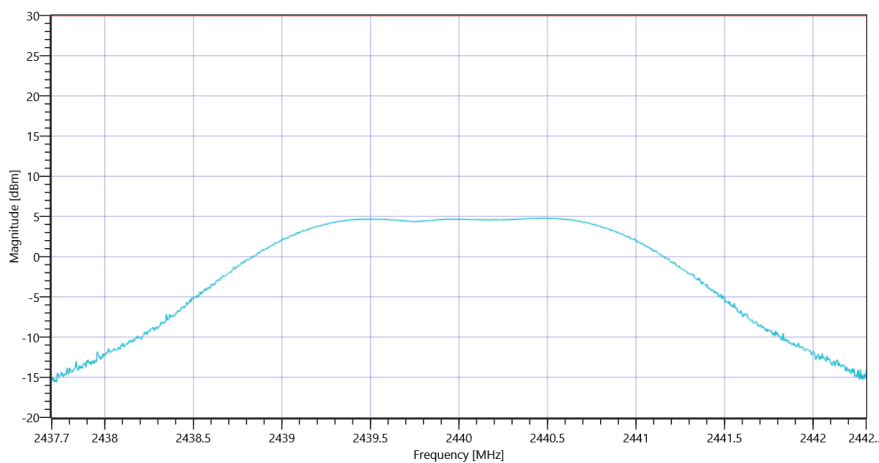

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_02082021_161840.png

TEST FINISHED	
General Verdict	PASS

5. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps

Test References	
TC Start	02.08.2021 16:38:30
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.49 10.95 10
Start [MHz] Stop [MHz]	2477.700 2482.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	644	kHz	INFO

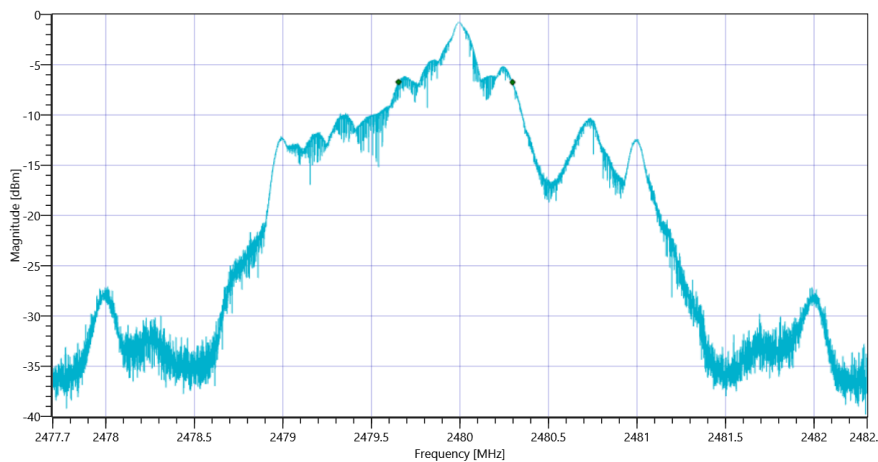


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps DTS BW_02082021_163859.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.49 10.95 15
Start [MHz] Stop [MHz]	2477.700 2482.300
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	-0.36	dBm	PASS
Peak Power	---	1000	0.92045	mW	PASS
Frequency at Peak	---	---	2479.508	MHz	INFO

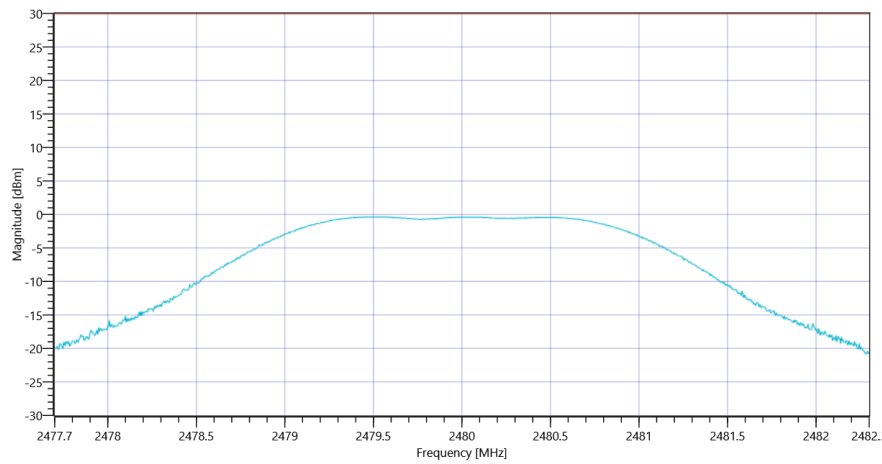

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_02082021_163917.png

TEST FINISHED

General Verdict

PASS

6. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 17:01:50
Ambit Temp [°C] Humidity [rel%]	27.0 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2478 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.53 10.95 15
Start [MHz] Stop [MHz]	2477.000 2479.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	539	kHz	INFO

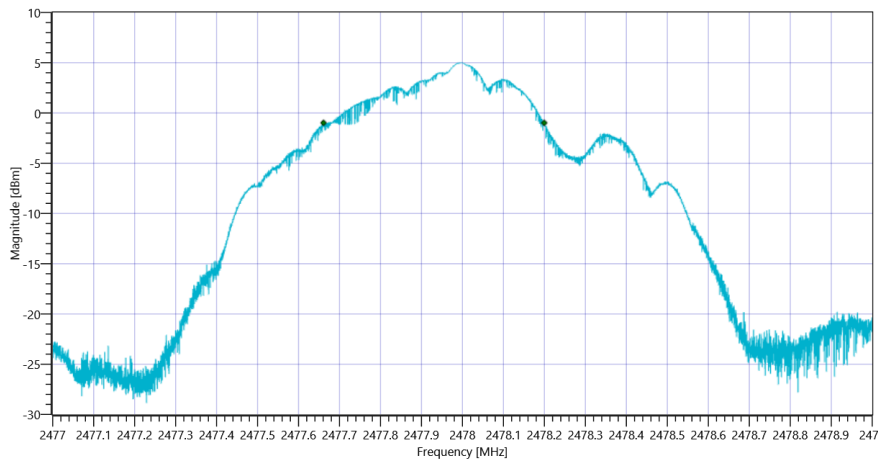


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps DTS BW_02082021_170218.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.53 10.95 20
Start [MHz] Stop [MHz]	2477.000 2479.000
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	5.57	dBm	PASS
Peak Power	---	1000	3.605786	mW	PASS
Frequency at Peak	---	---	2478.174	MHz	INFO

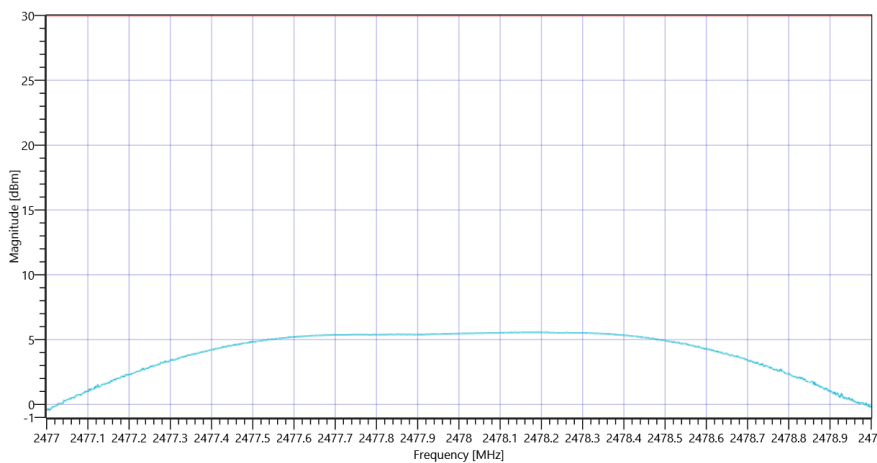

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 1 Msps_02082021_170236.png

TEST FINISHED	
General Verdict	PASS

7. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps

Test References	
TC Start	02.08.2021 17:11:47
Ambit Temp [°C] Humidity [rel%]	27.1 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2478 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.35 10.95 15
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	640	kHz	INFO

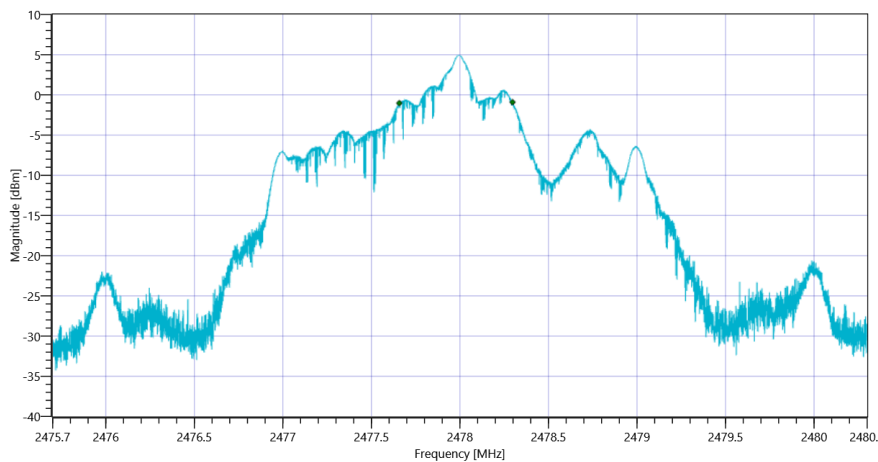


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps DTS BW_02082021_171216.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.35 10.95 20
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	5.58	dBm	PASS
Peak Power	---	1000	3.614099	mW	PASS
Frequency at Peak	---	---	2478.482	MHz	INFO

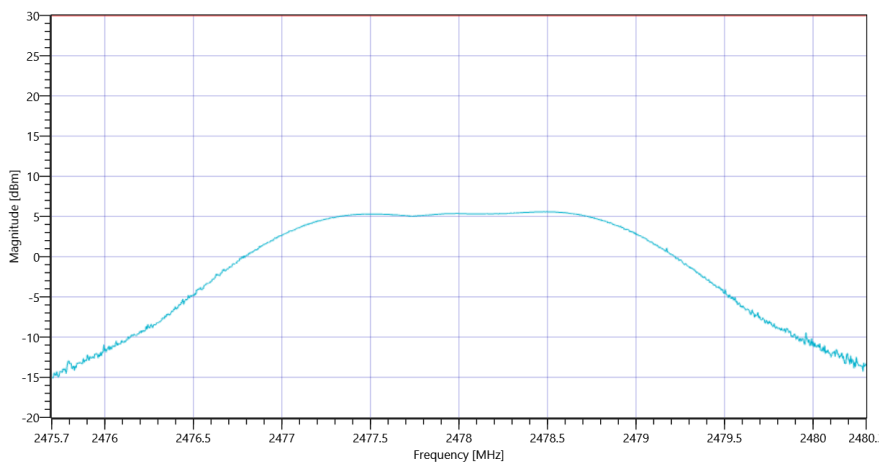

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_02082021_171234.png

TEST FINISHED	
General Verdict	PASS

8. FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps

Test References	
TC Start	03.08.2021 15:41:40
Ambit Temp [°C] Humidity [rel%]	26.4 47
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.3.1.1 RBW ≥ DTS Bandwidth
TC Version	0.0.1
My Description	FCC 15.247 Maximum Peak Output Power Conducted DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.82 10.89 15
Start [MHz] Stop [MHz]	2399.700 2404.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

DTS Bandwidth

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	---	---	643	kHz	INFO

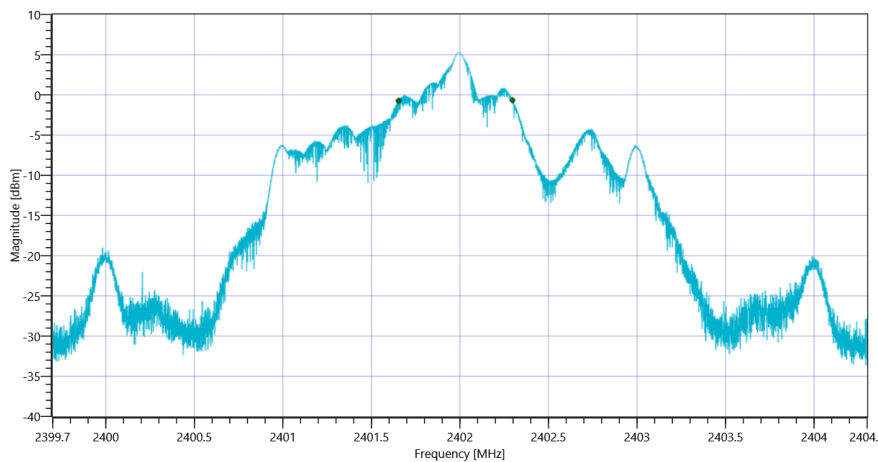


Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps DTS BW_03082021_154209.png

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	15.82 10.89 20
Start [MHz] Stop [MHz]	2399.700 2404.300
RBW [MHz] VBW [MHz]	1.000000 3.000000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 1001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Peak Power	---	30.00	5.89	dBm	PASS
Peak Power	---	1000	3.881504	mW	PASS
Frequency at Peak	---	---	2401.49	MHz	INFO

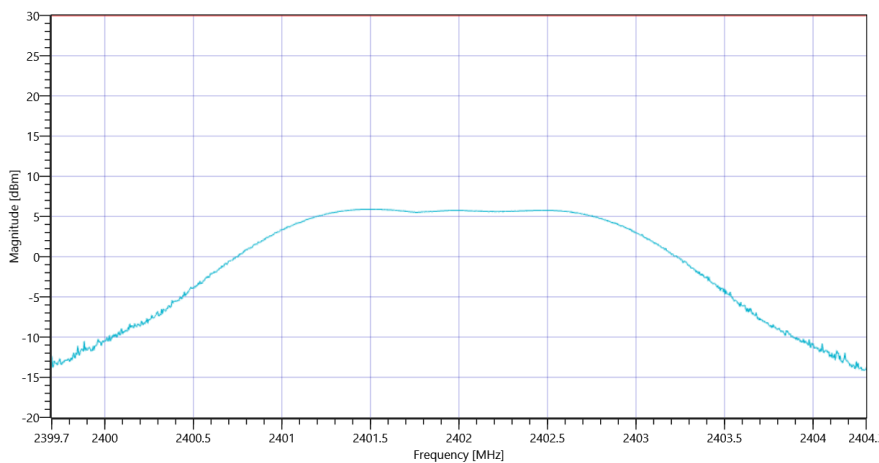

Plot_FCC Part 15.247 Maximum Peak Conducted Output Power DTS ~ BT LE 2 Msps_03082021_154226.png

TEST FINISHED	
General Verdict	PASS

9. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps


Test References	
TC Start	02.08.2021 14:39:19
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2402 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.95 10.89 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	538	kHz	PASS

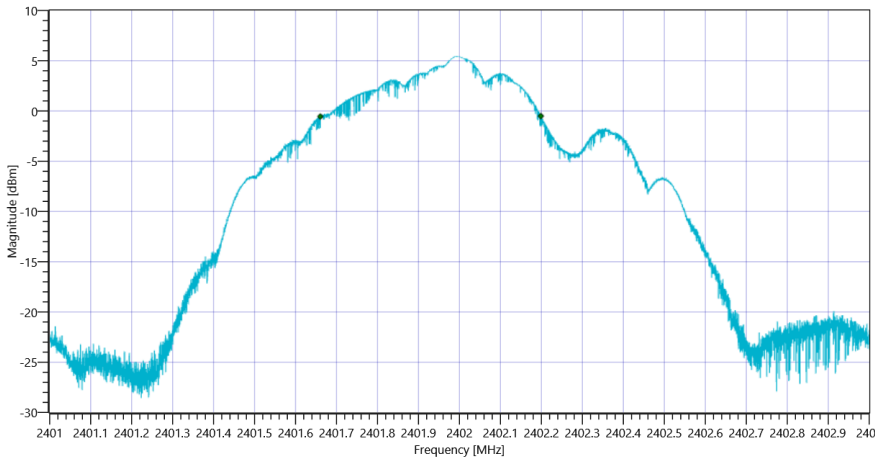

TEST FINISHED	
General Verdict	PASS

10. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps


Test References	
TC Start	02.08.2021 14:51:32
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2440 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.68 10.9 15	
Start [MHz] Stop [MHz]	2439.000 2441.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	534	kHz	PASS

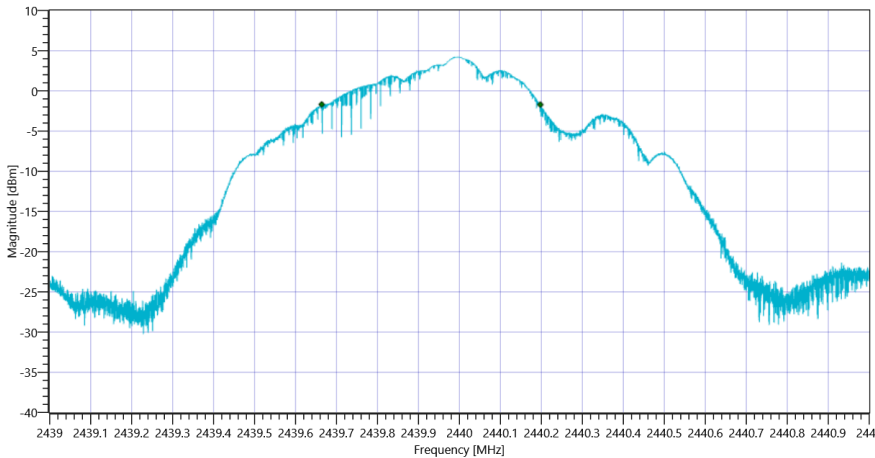

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_02082021_145201.png

TEST FINISHED	
General Verdict	PASS

11. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps


Test References	
TC Start	02.08.2021 15:07:53
Ambit Temp [°C] Humidity [rel%]	26.8 46
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2480 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.73 10.95 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	540	kHz	PASS

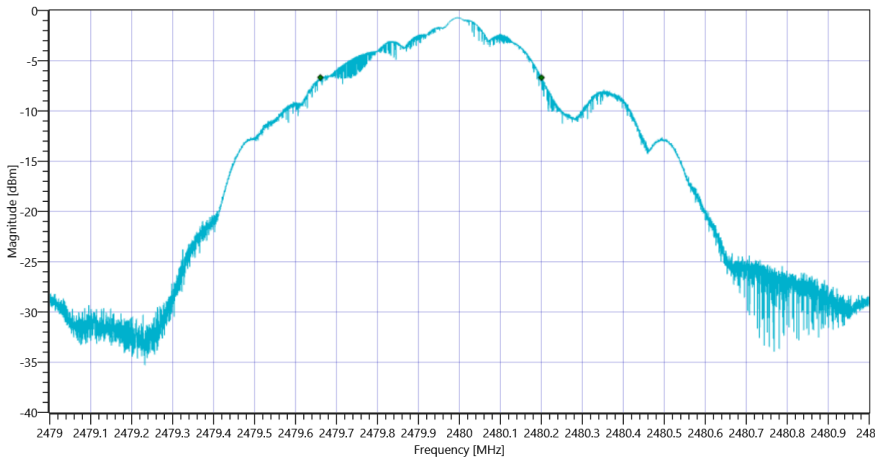

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps_02082021_150822.png

TEST FINISHED	
General Verdict	PASS

12. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps


Test References	
TC Start	02.08.2021 16:18:46
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2440 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.49 10.9 15
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	641	kHz	PASS

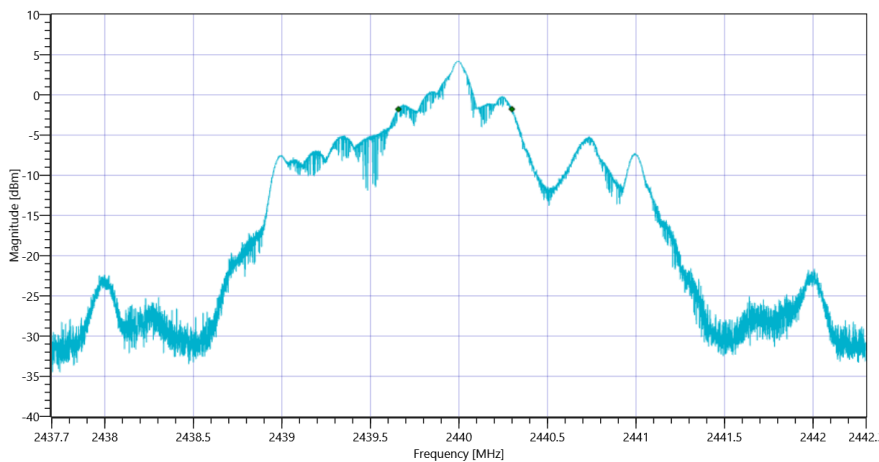

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_02082021_161915.png

TEST FINISHED	
General Verdict	PASS

13. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps


Test References	
TC Start	02.08.2021 16:39:23
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2480 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.53 10.95 10
Start [MHz] Stop [MHz]	2477.700 2482.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	644	kHz	PASS

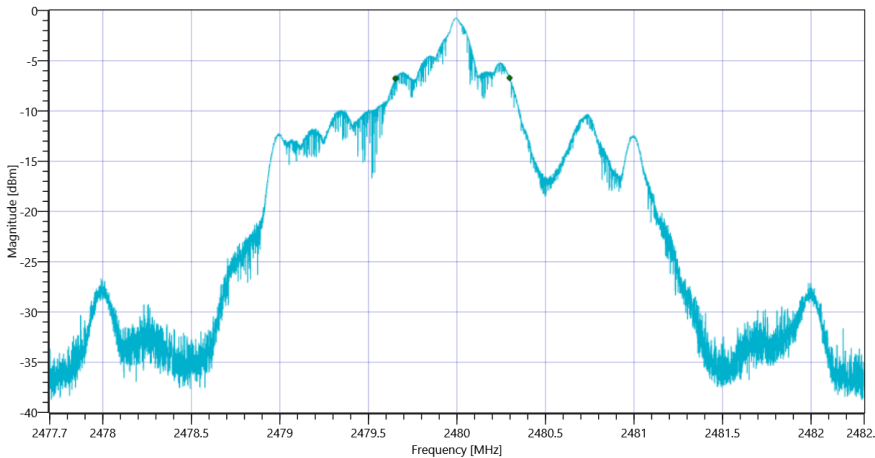

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_02082021_163952.png

TEST FINISHED	
General Verdict	PASS

14. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 1 Msps


Test References	
TC Start	02.08.2021 17:02:41
Ambit Temp [°C] Humidity [rel%]	27.0 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2478 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.52 10.95 15	
Start [MHz] Stop [MHz]	2477.000 2479.000	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	528	kHz	PASS

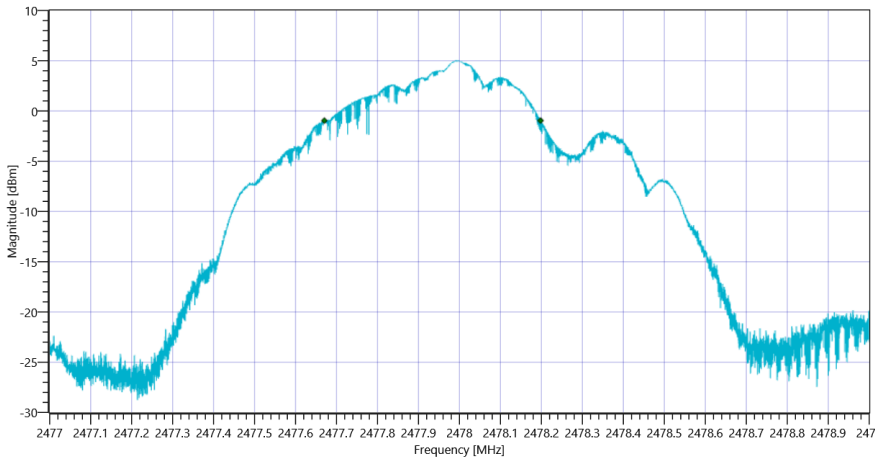

TEST FINISHED	
General Verdict	PASS

15. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps


Test References	
TC Start	02.08.2021 17:12:39
Ambit Temp [°C] Humidity [rel%]	27.1 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2478 MHz

READ SA SETTINGS:		
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.42 10.95 15	
Start [MHz] Stop [MHz]	2475.700 2480.300	
RBW [MHz] VBW [MHz]	0.100000 0.300000	
Detector TraceMode	POS MAXH	
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE	

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	643	kHz	PASS

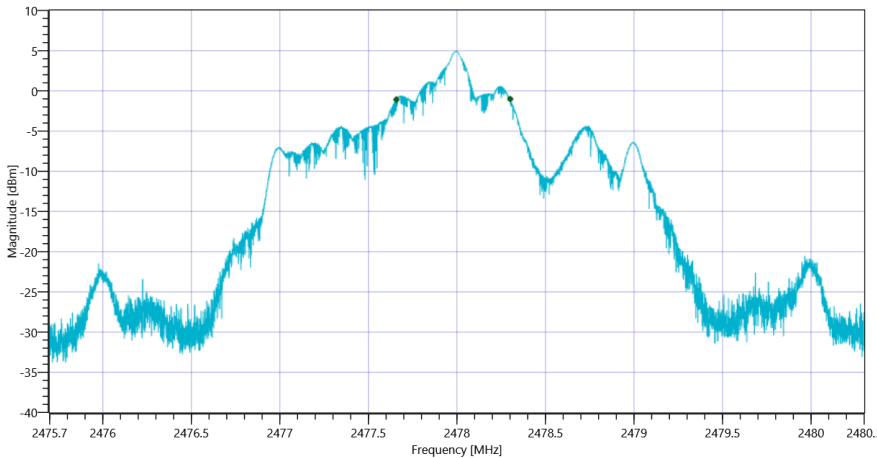

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_02082021_171308.png

TEST FINISHED	
General Verdict	PASS

16. FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps


Test References	
TC Start	03.08.2021 15:42:32
Ambit Temp [°C] Humidity [rel%]	26.4 47
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	99
TC Version	0.0.1
My Description	FCC 15.247 Bandwidth 6dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2402 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.72 10.89 15
Start [MHz] Stop [MHz]	2399.700 2404.300
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
DTS Bandwidth (6dB)	500	---	643	kHz	PASS

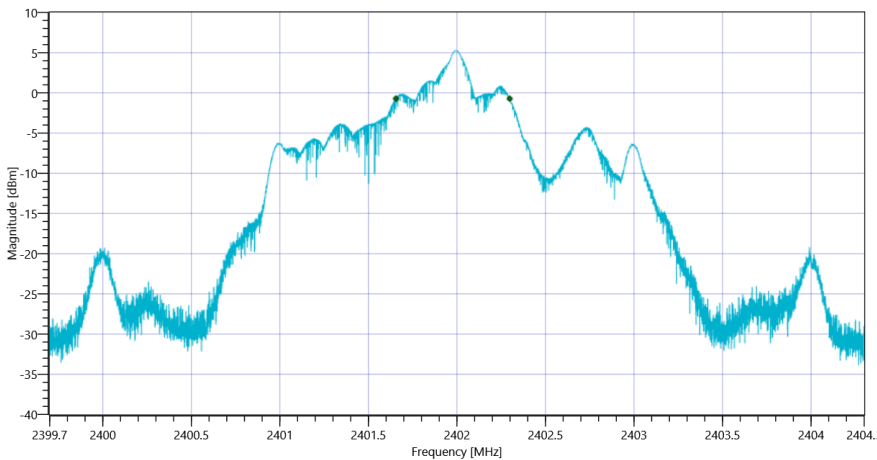

Plot_FCC Part 15.247 Bandwidth 6dB DTS ~ BT LE 2 Msps_03082021_154300.png

TEST FINISHED	
General Verdict	PASS

17. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps


Test References	
TC Start	02.08.2021 14:39:53
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2402 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.91 10.89 20
Start [MHz] Stop [MHz]	2401.250 2402.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	4.45	dBm/3KHz	PASS

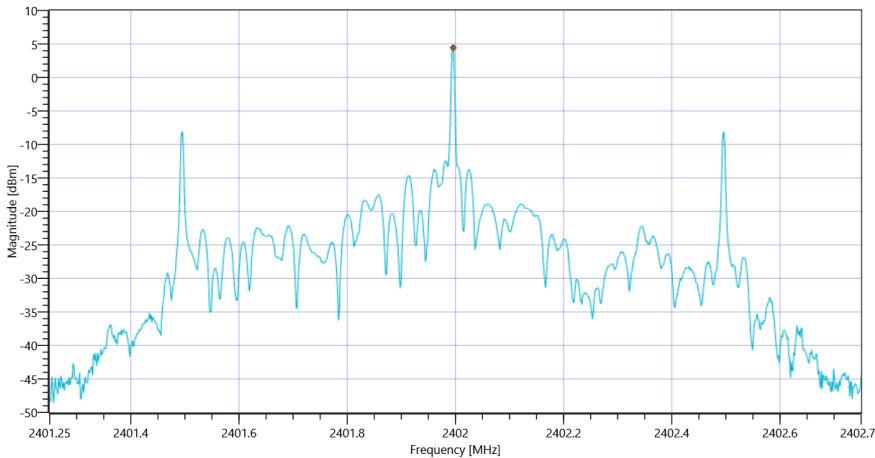

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_02082021_144031.png

TEST FINISHED	
General Verdict	PASS

18. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps


Test References	
TC Start	02.08.2021 14:52:06
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2440 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.72 10.9 15
Start [MHz] Stop [MHz]	2439.250 2440.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	3.24	dBm/3KHz	PASS

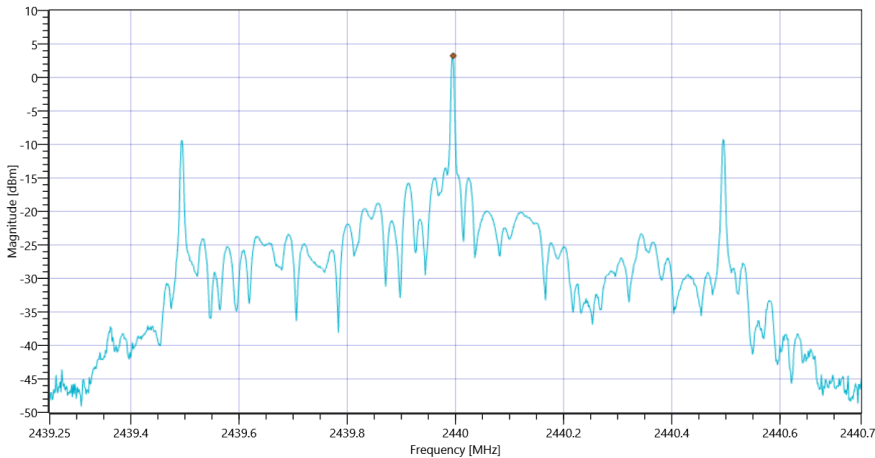

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_02082021_145245.png

TEST FINISHED	
General Verdict	PASS

19. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps


Test References	
TC Start	02.08.2021 15:08:27
Ambit Temp [°C] Humidity [rel%]	26.8 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2480 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.67 10.95 10
Start [MHz] Stop [MHz]	2479.250 2480.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-1.71	dBm/3KHz	PASS

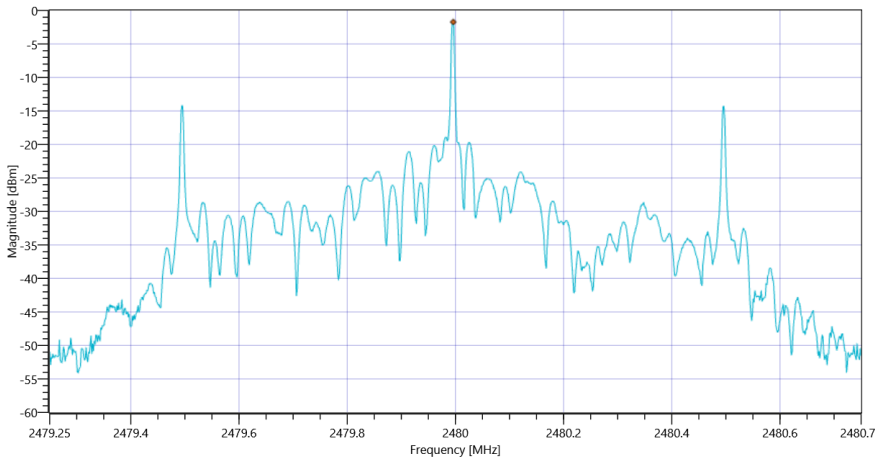

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_02082021_150906.png

TEST FINISHED	
General Verdict	PASS

20. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps


Test References	
TC Start	02.08.2021 16:19:21
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2440 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.46 10.9 15
Start [MHz] Stop [MHz]	2438.275 2441.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-0.25	dBm/3KHz	PASS

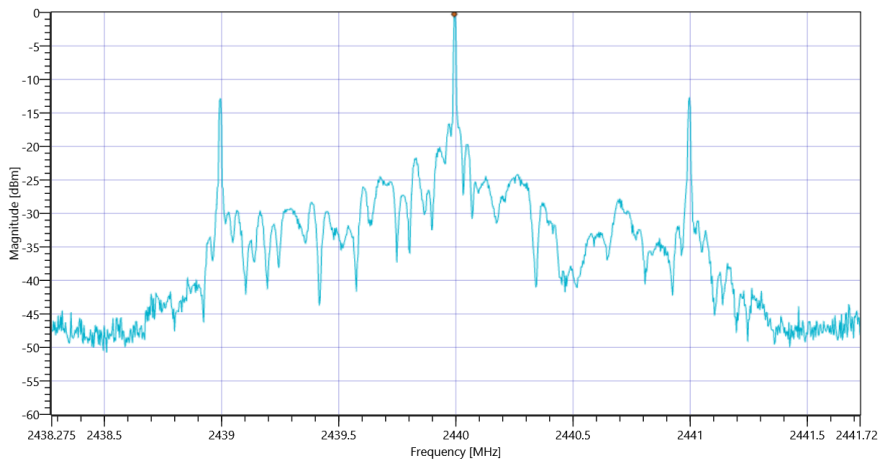

TEST FINISHED	
General Verdict	PASS

21. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps


Test References	
TC Start	02.08.2021 16:39:58
Ambit Temp [°C] Humidity [rel%]	26.9 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2480 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.45 10.95 10
Start [MHz] Stop [MHz]	2478.275 2481.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	-5.22	dBm/3KHz	PASS

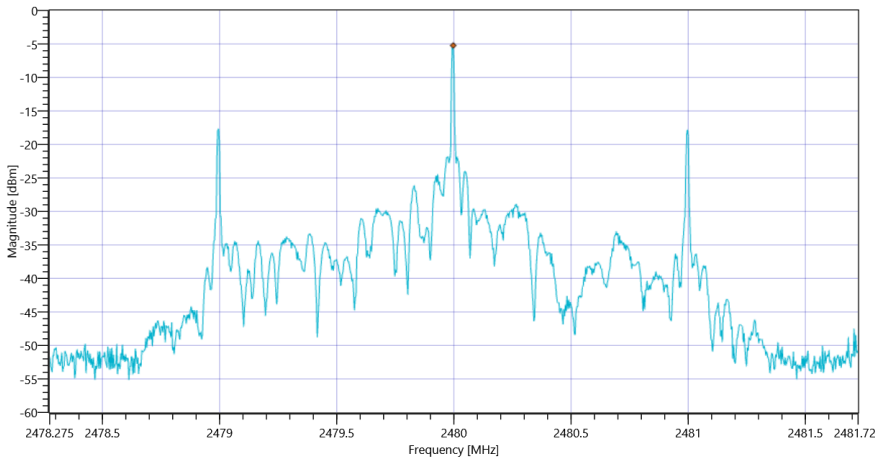

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_02082021_164038.png

TEST FINISHED	
General Verdict	PASS

22. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps


Test References	
TC Start	02.08.2021 17:03:15
Ambit Temp [°C] Humidity [rel%]	27.0 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2478 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.52 10.95 15
Start [MHz] Stop [MHz]	2477.250 2478.750
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	4.01	dBm/3KHz	PASS

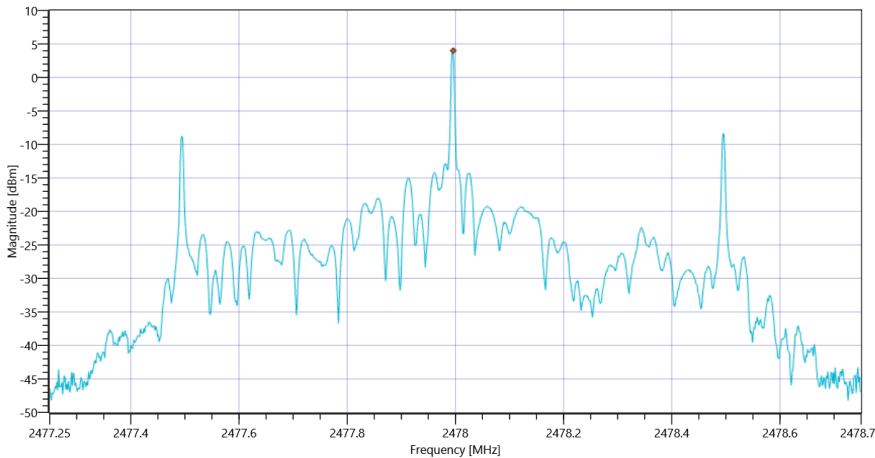

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 1 Msps_02082021_170354.png

TEST FINISHED	
General Verdict	PASS

23. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps


Test References	
TC Start	02.08.2021 17:13:13
Ambit Temp [°C] Humidity [rel%]	27.1 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2478 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.28 10.95 15
Start [MHz] Stop [MHz]	2476.275 2479.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	0.48	dBm/3KHz	PASS

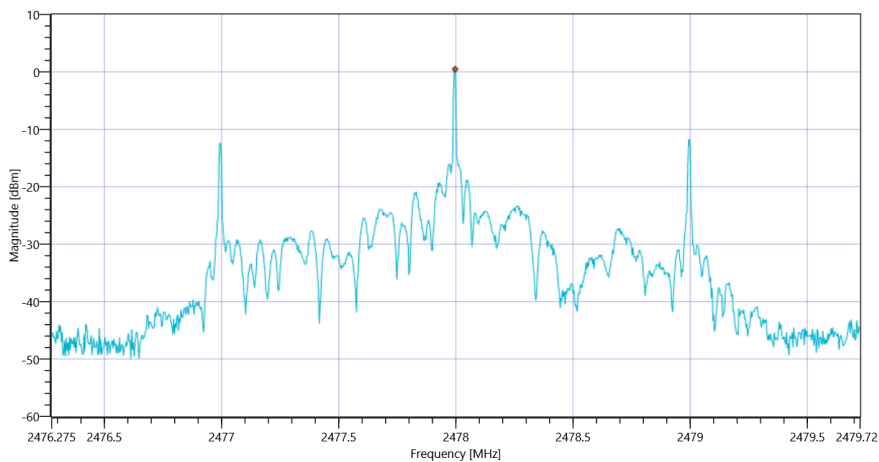

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_02082021_171352.png

TEST FINISHED	
General Verdict	PASS

24. FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps


Test References	
TC Start	03.08.2021 15:43:06
Ambit Temp [°C] Humidity [rel%]	26.4 47
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	DTS: KDB 558074 D01 V05 - Chapter 8.4 DTS maximum power spectral density level in the fundamental emission
TC Version	0.0.1
My Description	FCC 15.247 Peak Power Spectral Density DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer

Test at TX 2402 MHz

READ SA SETTINGS:	
RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.76 10.89 15
Start [MHz] Stop [MHz]	2400.275 2403.725
RBW [MHz] VBW [MHz]	0.003000 0.010000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	1000 20 1001 SWE

RESULT					
Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Max Peak power Density	---	8	0.83	dBm/3KHz	PASS

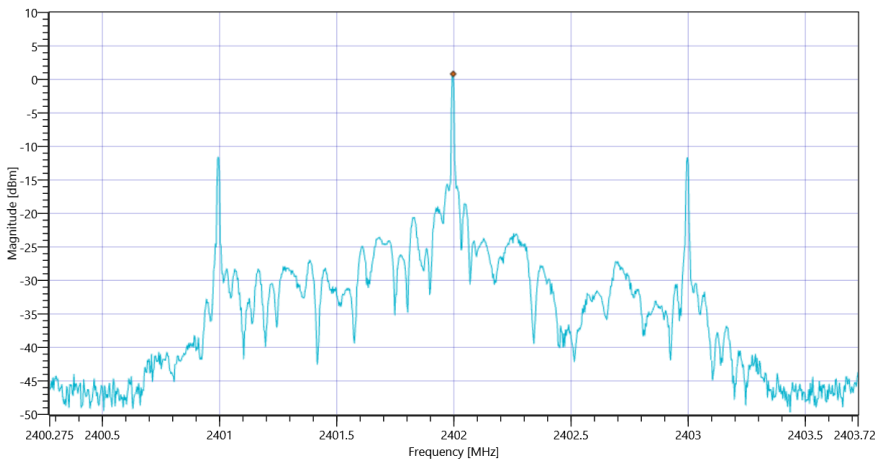

Plot_FCC Part 15.247 Peak Power Spectral Density DTS ~ BT LE 2 Msps_03082021_154344.png

TEST FINISHED	
General Verdict	PASS

25. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 14:40:36
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.93 10.89 20
Start [MHz] Stop [MHz]	2401.000 2403.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1047.295	kHz	INFO
T1 99%	2400.000000	---	2401.4803	MHz	PASS
T2 99%	---	2483.500000	2402.5275	MHz	PASS

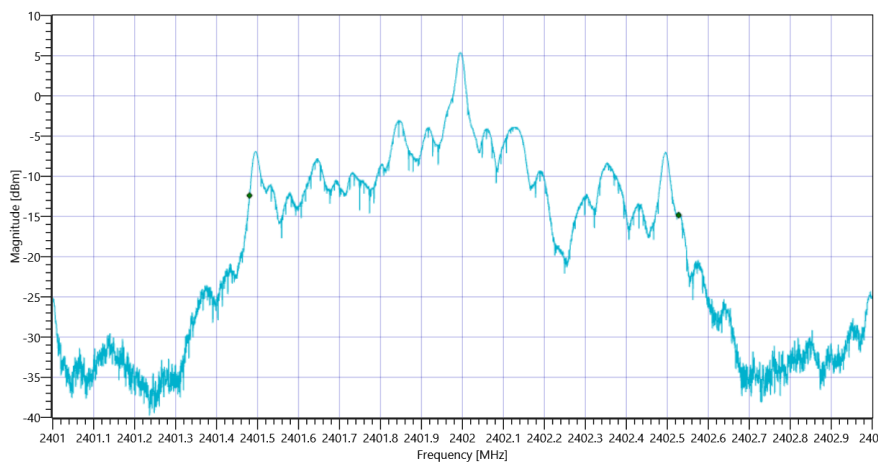


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_02082021_144106.png

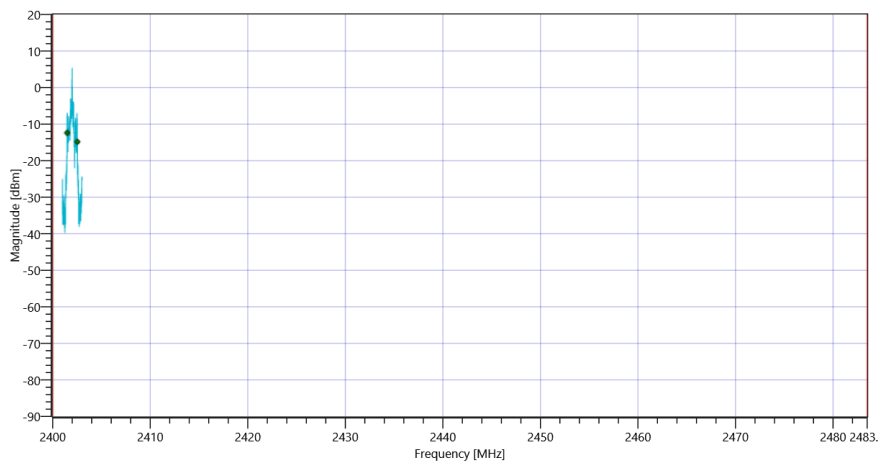


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_02082021_144112.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1054	kHz	INFO
T1 20dB	2400.000000	---	2401.4766	MHz	PASS
T2 20dB	---	2483.500000	2402.5308	MHz	PASS

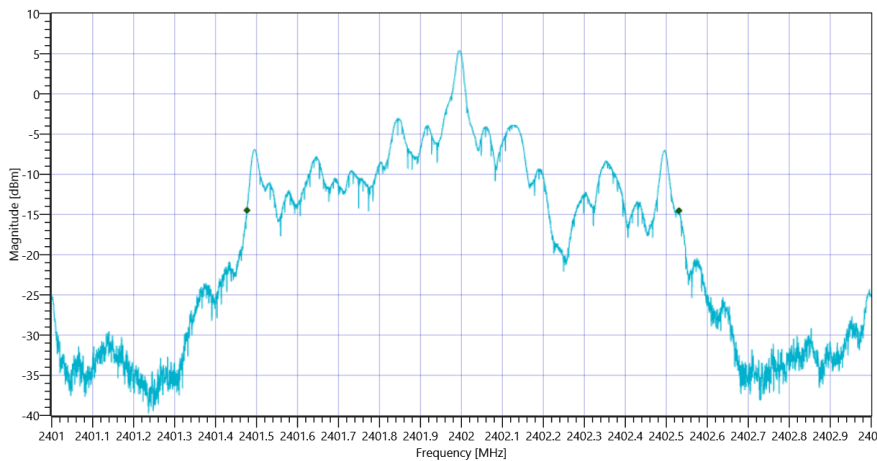

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_02082021_144119.png

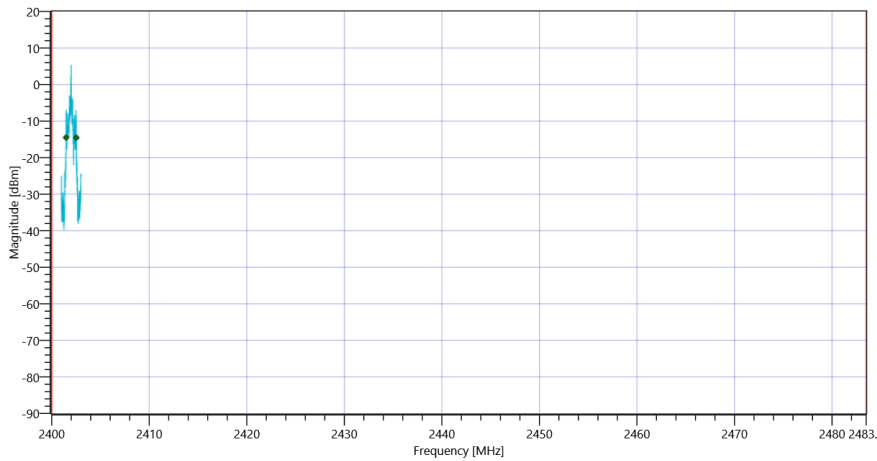

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_02082021_144125.png

TEST FINISHED	
General Verdict	PASS

26. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 14:52:50
Ambit Temp [°C] Humidity [rel%]	26.8 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.69 10.9 15
Start [MHz] Stop [MHz]	2439.000 2441.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1047.895	kHz	INFO
T1 99%	2400.000000	---	2439.4801	MHz	PASS
T2 99%	---	2483.500000	2440.5279	MHz	PASS

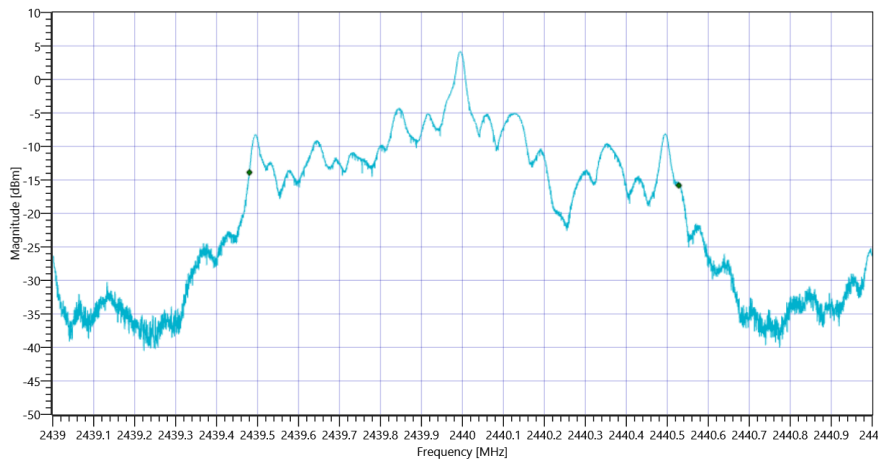


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_02082021_145320.png

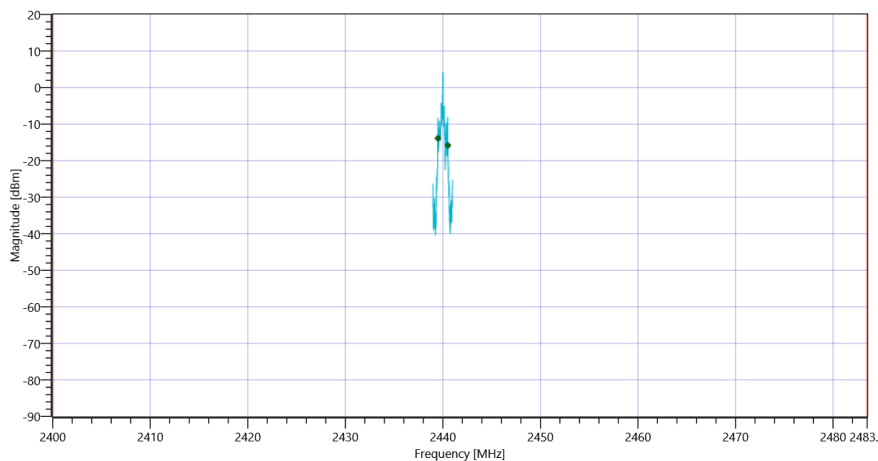


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_02082021_145326.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1054	kHz	INFO
T1 20dB	2400.000000	---	2439.4762	MHz	PASS
T2 20dB	---	2483.500000	2440.5306	MHz	PASS

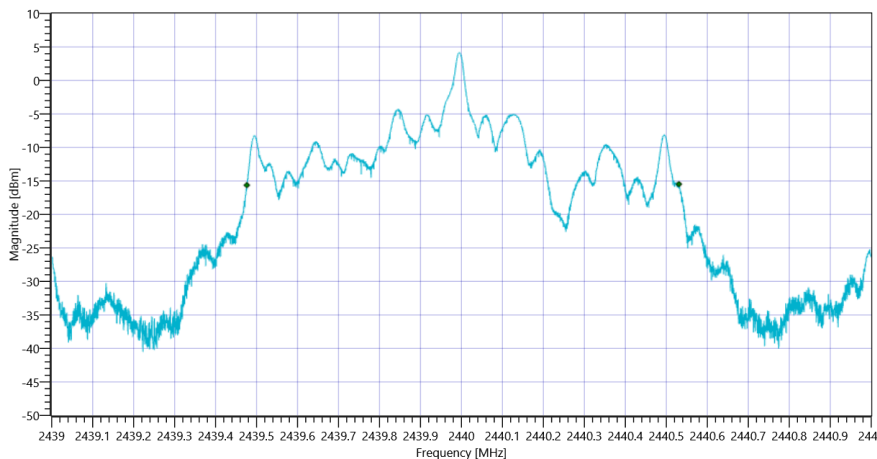

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_02082021_145333.png

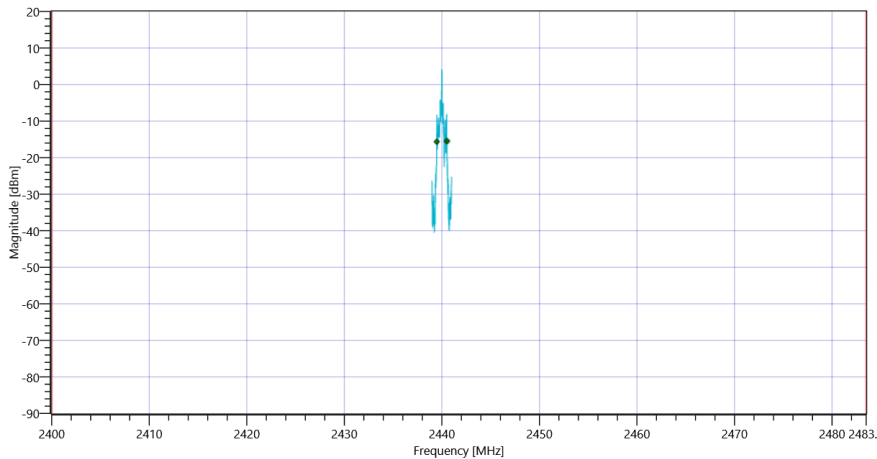

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_02082021_145340.png

TEST FINISHED	
General Verdict	PASS

27. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 15:09:11
Ambit Temp [°C] Humidity [rel%]	26.8 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.66 10.95 10
Start [MHz] Stop [MHz]	2479.000 2481.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1048.495	kHz	INFO
T1 99%	2400.000000	---	2479.4803	MHz	PASS
T2 99%	---	2483.500000	2480.5287	MHz	PASS

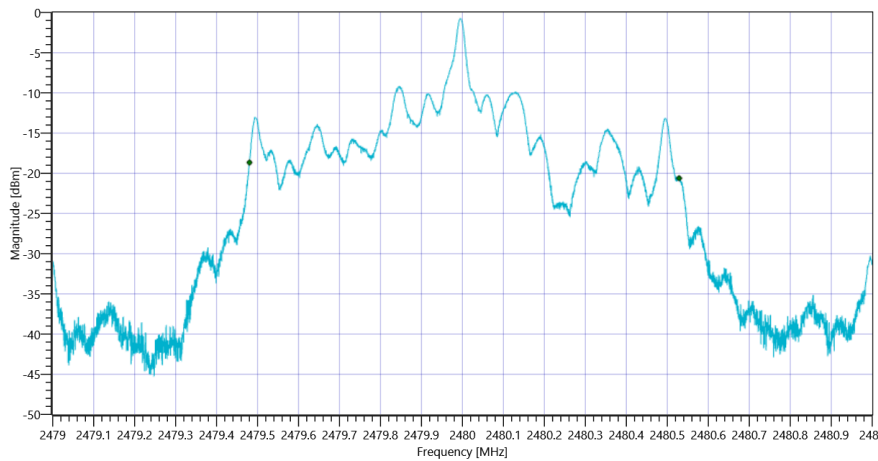


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_02082021_150941.png

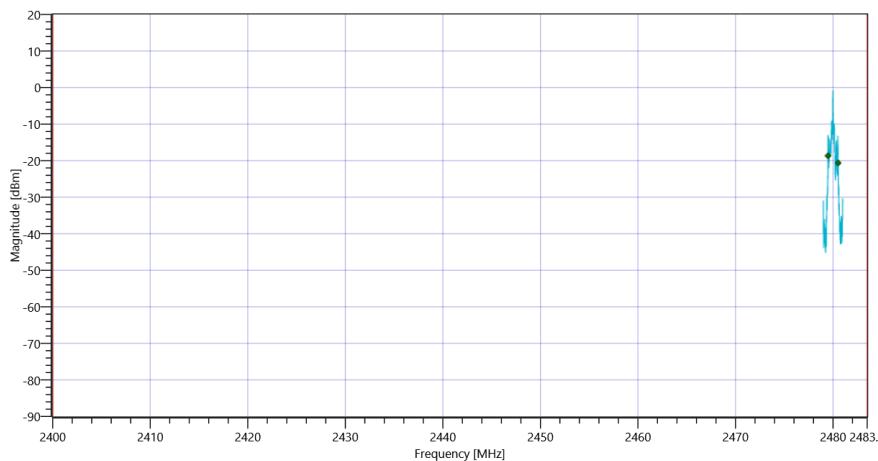


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_02082021_150947.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1056	kHz	INFO
T1 20dB	2400.000000	---	2479.4758	MHz	PASS
T2 20dB	---	2483.500000	2480.5320	MHz	PASS

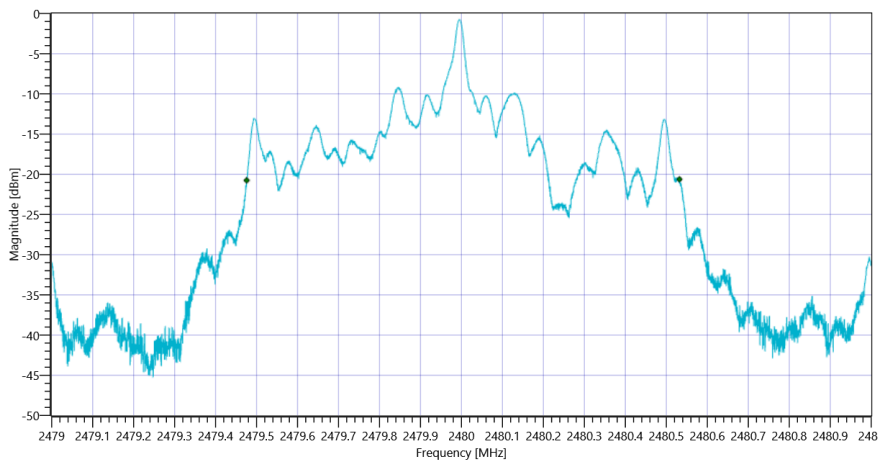

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_02082021_150954.png

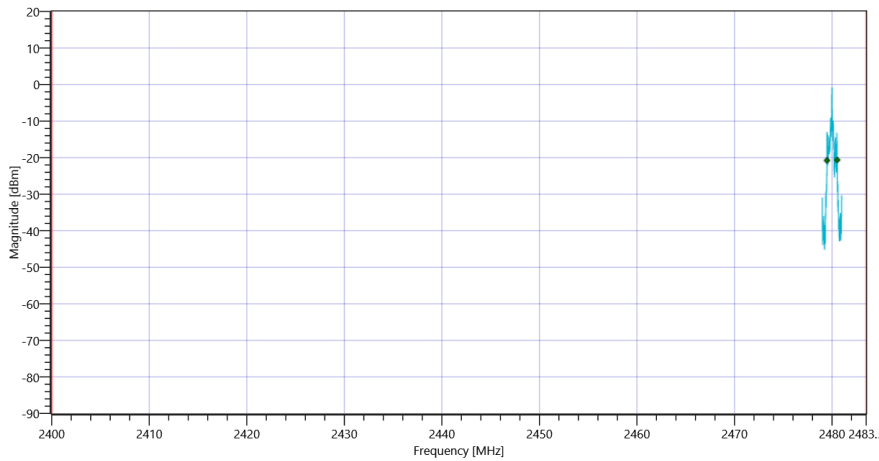

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_02082021_151000.png

TEST FINISHED	
General Verdict	PASS

28. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	02.08.2021 16:20:06
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	9.49 10.9 15
Start [MHz] Stop [MHz]	2437.700 2442.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2131.887	kHz	INFO
T1 99%	2400.000000	---	2438.9485	MHz	PASS
T2 99%	---	2483.500000	2441.0804	MHz	PASS

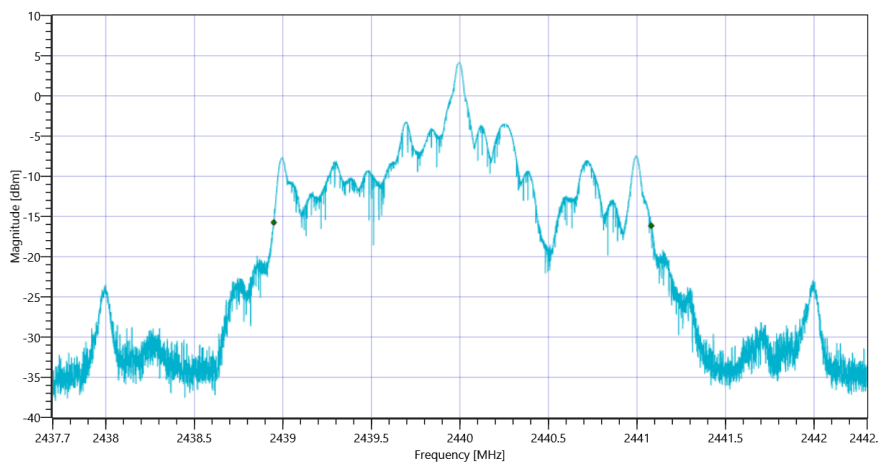


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_02082021_162036.png

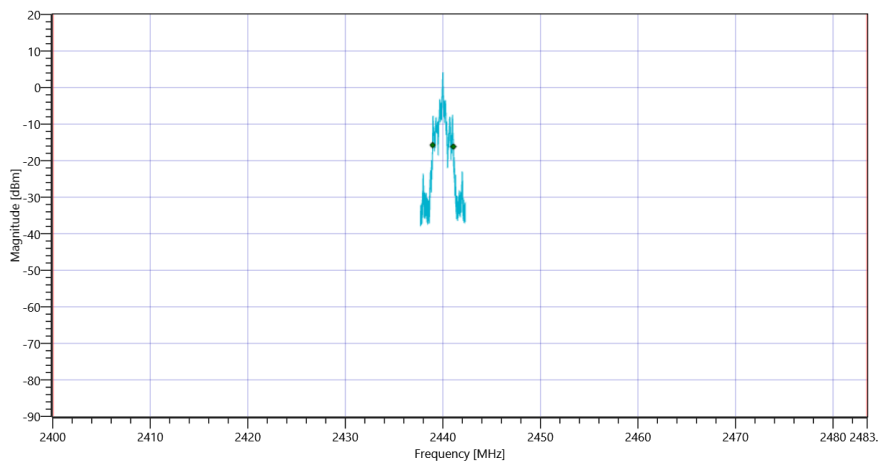


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_02082021_162042.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2131	kHz	INFO
T1 20dB	2400.000000	---	2438.9480	MHz	PASS
T2 20dB	---	2483.500000	2441.0787	MHz	PASS

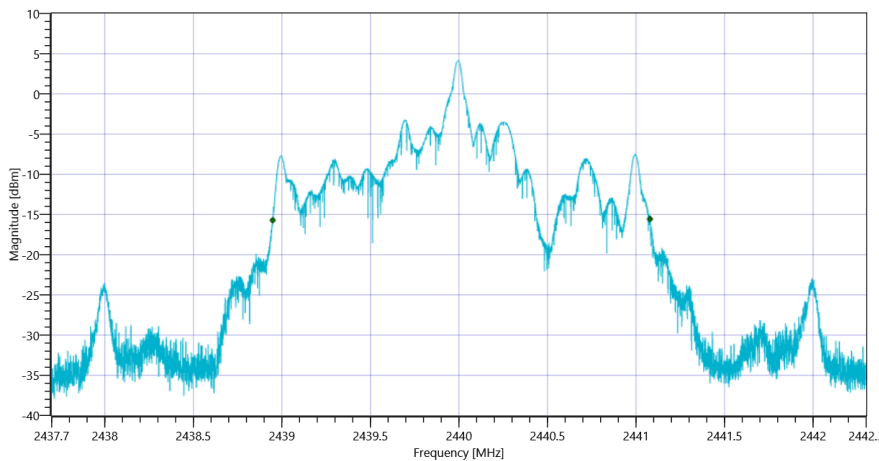

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_02082021_162050.png

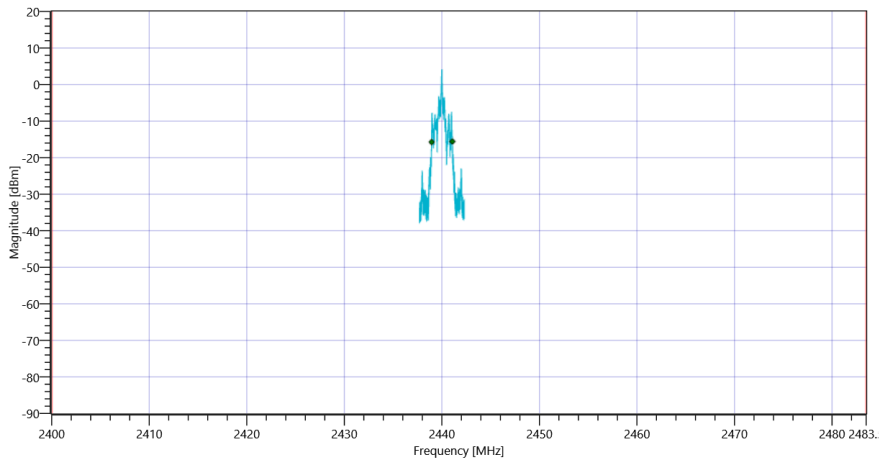

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_02082021_162056.png

TEST FINISHED	
General Verdict	PASS

29. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	02.08.2021 16:40:43
Ambit Temp [°C] Humidity [rel%]	26.9 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2480 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.48 10.95 10
Start [MHz] Stop [MHz]	2477.700 2482.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2130.047	kHz	INFO
T1 99%	2400.000000	---	2478.9444	MHz	PASS
T2 99%	---	2483.500000	2481.0745	MHz	PASS

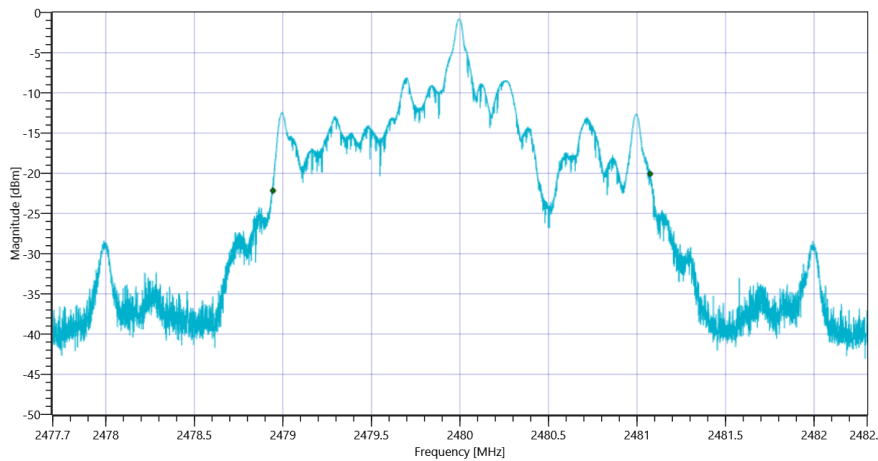


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 99PCT_02082021_164114.png

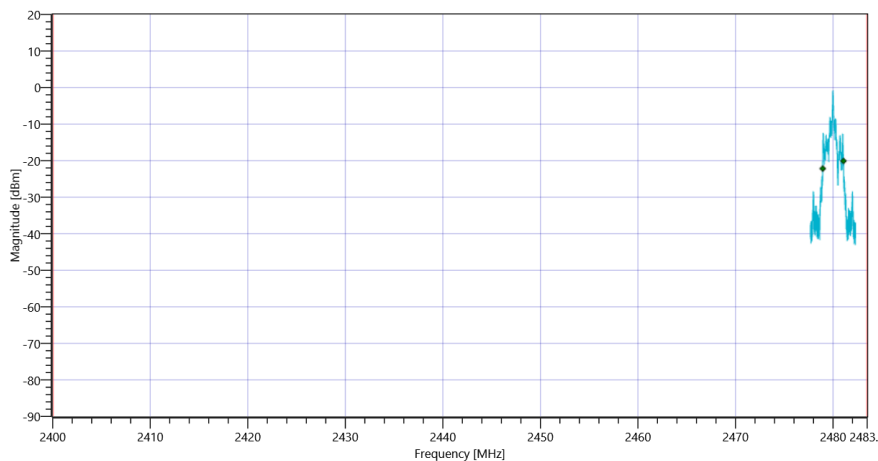


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_02082021_164120.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2133	kHz	INFO
T1 20dB	2400.000000	---	2478.9457	MHz	PASS
T2 20dB	---	2483.500000	2481.0782	MHz	PASS

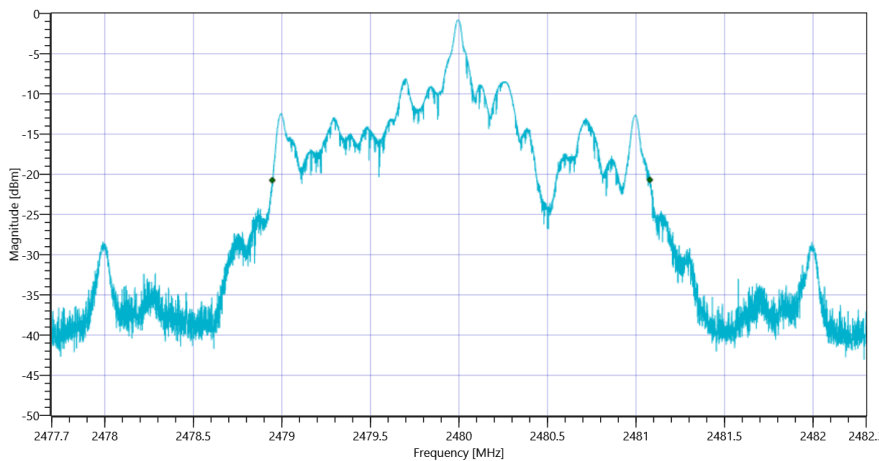

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_02082021_164127.png

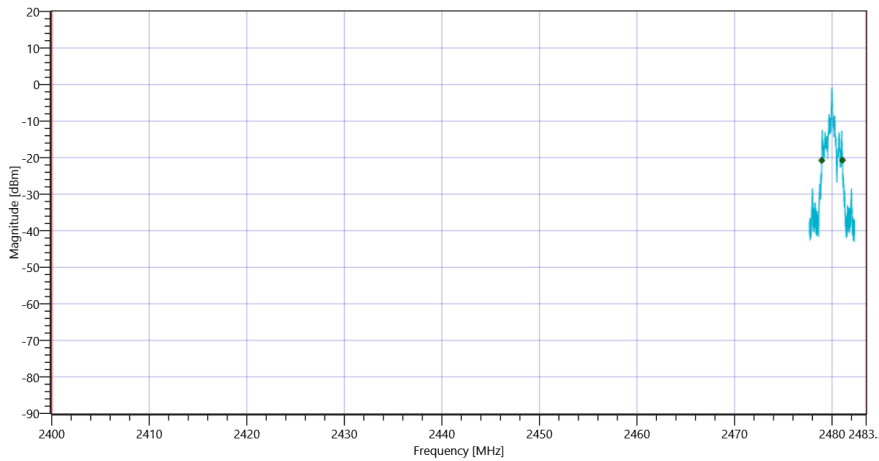

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_02082021_164133.png

TEST FINISHED	
General Verdict	PASS

30. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 17:03:59
Ambit Temp [°C] Humidity [rel%]	27.0 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2478 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.56 10.95 15
Start [MHz] Stop [MHz]	2477.000 2479.000
RBW [MHz] VBW [MHz]	0.020000 0.100000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	1048.895	kHz	INFO
T1 99%	2400.000000	---	2477.4805	MHz	PASS
T2 99%	---	2483.500000	2478.5293	MHz	PASS

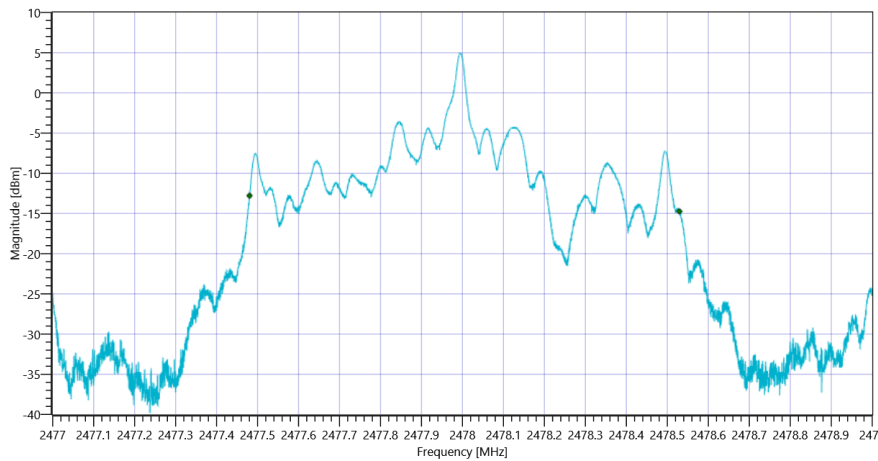


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 99PCT_02082021_170428.png

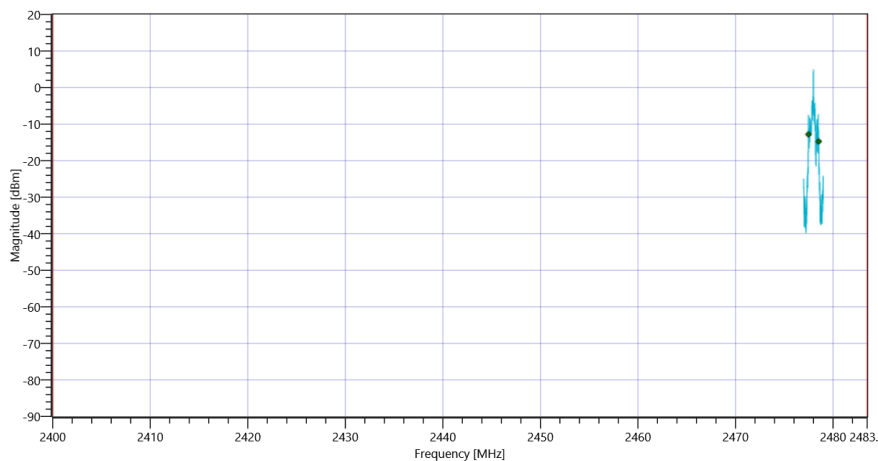


Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_02082021_170434.png

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	1056	kHz	INFO
T1 20dB	2400.000000	---	2477.4762	MHz	PASS
T2 20dB	---	2483.500000	2478.5324	MHz	PASS

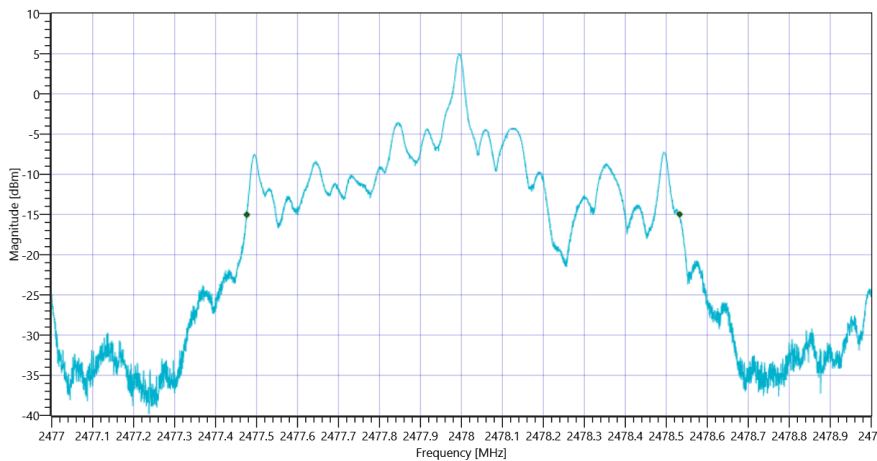

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps 20dB_02082021_170441.png

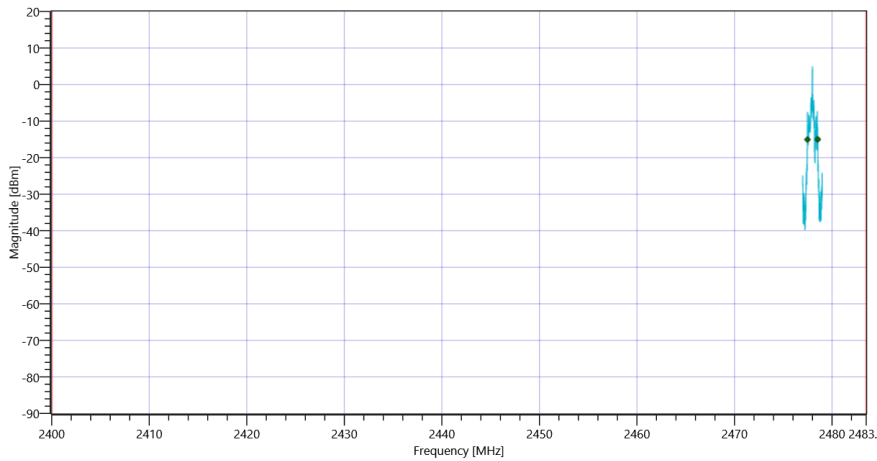

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 1 Msps_02082021_170447.png

TEST FINISHED	
General Verdict	PASS

31. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	02.08.2021 17:13:57
Ambit Temp [°C] Humidity [rel%]	27.1 44
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2478
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer



Test at TX 2478 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.38 10.95 15
Start [MHz] Stop [MHz]	2475.700 2480.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2133.267	kHz	INFO
T1 99%	2400.000000	---	2476.9527	MHz	PASS
T2 99%	---	2483.500000	2479.0860	MHz	PASS

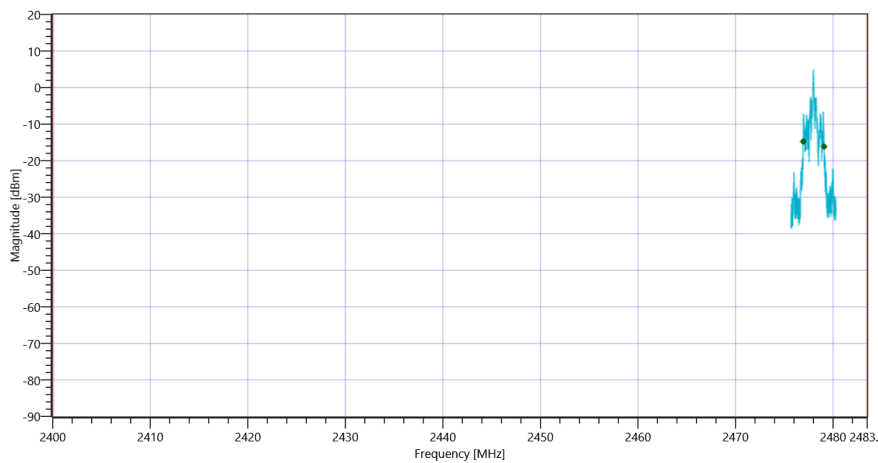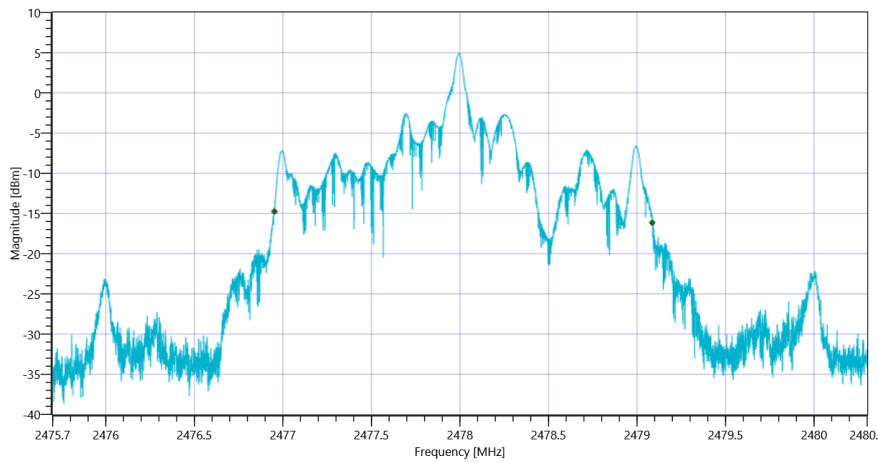


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2135	kHz	INFO
T1 20dB	2400.000000	---	2476.9494	MHz	PASS
T2 20dB	---	2483.500000	2479.0842	MHz	PASS

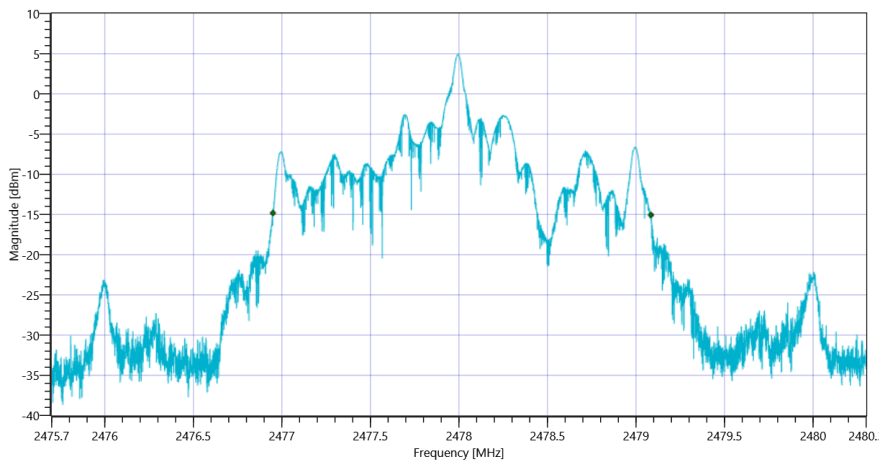

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_02082021_171440.png

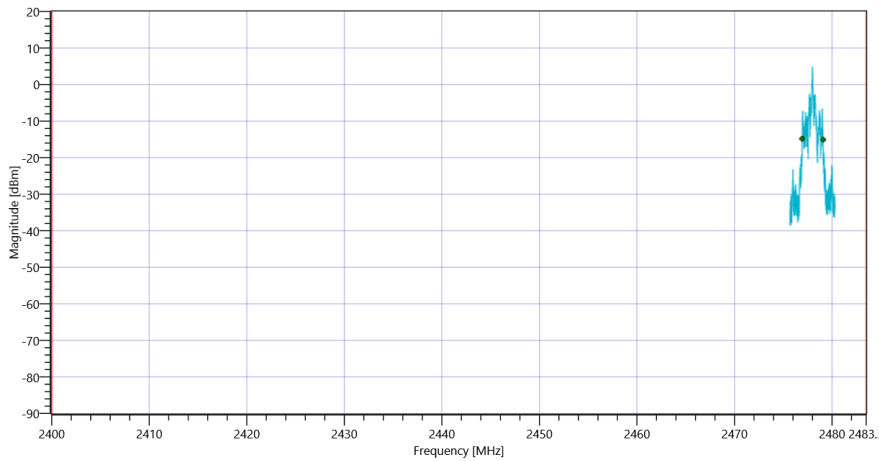

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_02082021_171446.png

TEST FINISHED	
General Verdict	PASS

32. FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps

Test References	
TC Start	03.08.2021 15:43:50
Ambit Temp [°C] Humidity [rel%]	26.4 47
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	
TC Version	0.0.2
My Description	FCC 15.247 Bandwidth 99PCT-20dB DTS - BT LE 2 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 2 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer



Test at TX 2402 MHz

READ SA SETTINGS:

RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	10.78 10.89 15
Start [MHz] Stop [MHz]	2399.700 2404.300
RBW [MHz] VBW [MHz]	0.050000 0.200000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	50 200 10001 SWE


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 99%	---	---	2142.006	kHz	INFO
T1 99%	2400.000000	---	2400.9370	MHz	PASS
T2 99%	---	2483.500000	2403.0791	MHz	PASS

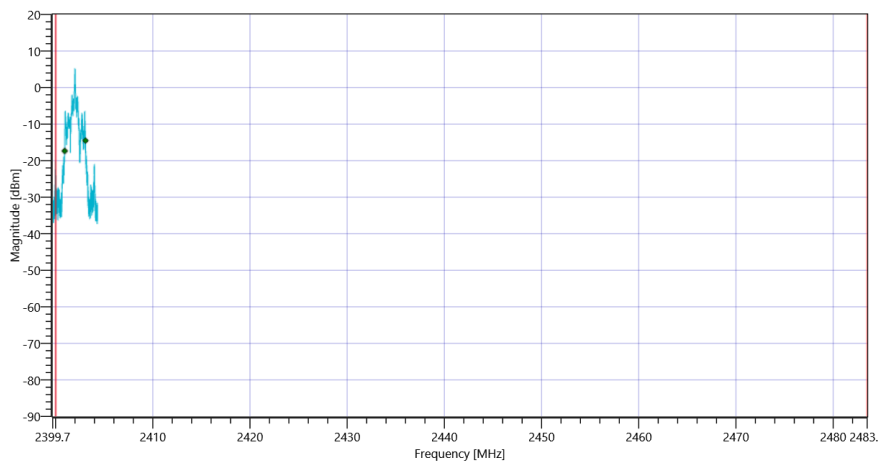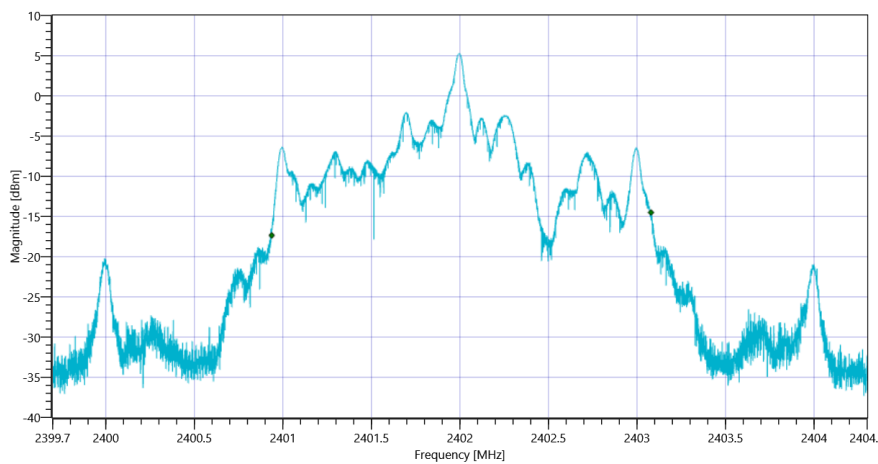


RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Bandwidth 20dB	---	---	2131	kHz	INFO
T1 20dB	2400.000000	---	2400.9484	MHz	PASS
T2 20dB	---	2483.500000	2403.0792	MHz	PASS

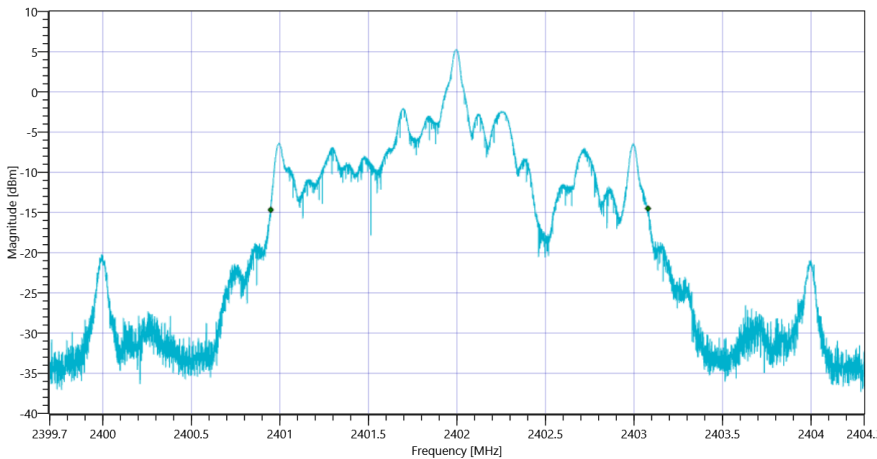

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps 20dB_03082021_154432.png

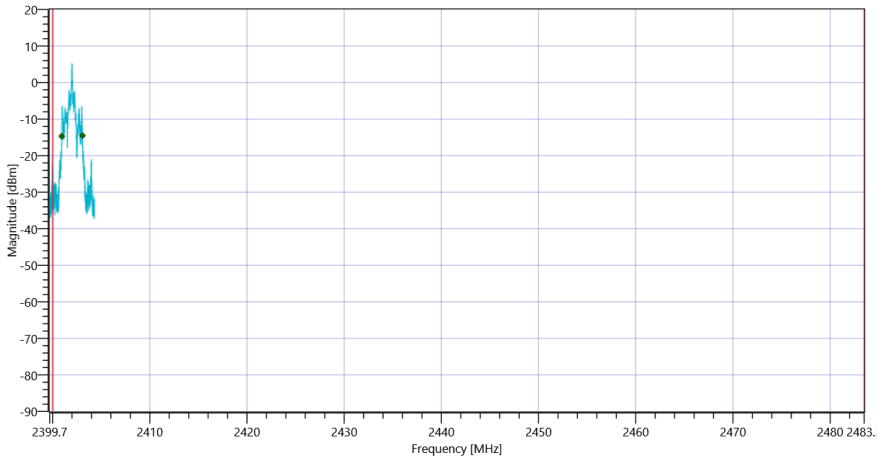

Plot_FCC Part 15.247 Bandwidth 99PCT-20dB ~ BT LE 2 Msps_03082021_154439.png

TEST FINISHED	
General Verdict	PASS

33. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 14:41:31
Ambit Temp [°C] Humidity [rel%]	26.9 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	True Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2402 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	5.90 0 25
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2402.00 MHz	---	---	5.23	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 2399.833 MHz	0	---	23.01	dB	INFO

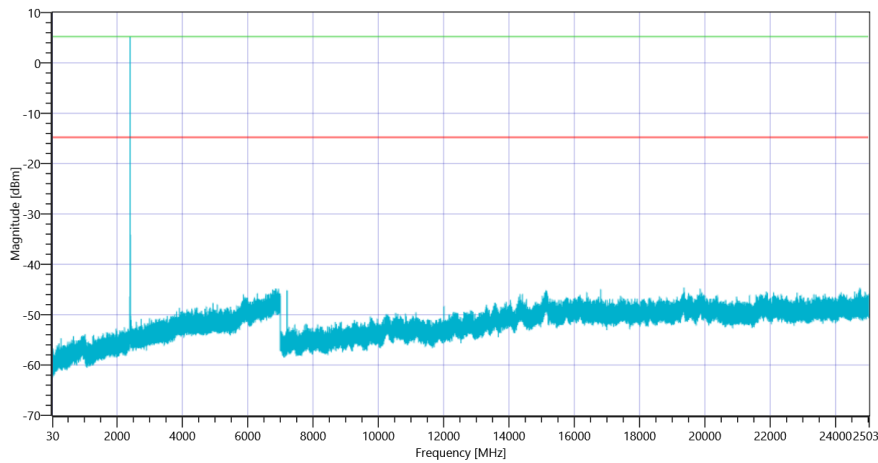

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_02082021_144703.png

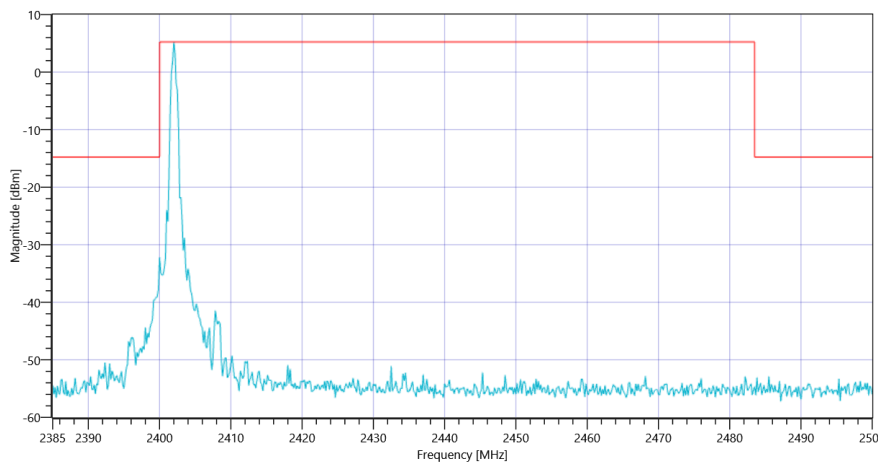

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2402_02082021_144708.png

TEST FINISHED

General Verdict

PASS

34. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 14:53:45
Ambit Temp [°C] Humidity [rel%]	26.7 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	True Freq [MHz] 2440
Frequency high to test	False Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer


Test at TX 2440 MHz

READ SA SETTINGS:


RefLevel [dBm] RefLevelOffset [dB] InpAtt [dB]	4.70 0 20
Start [MHz] Stop [MHz]	24530.000 25030.000
RBW [MHz] VBW [MHz]	0.100000 0.300000
Detector TraceMode	POS MAXH
Sweep: Time [ms] Count Points per Section Type	500 8 3001 SWE

RESULT

Test Description	Lower Limit	Upper Limit	Measured	Unit	Verdict
Reference @ 2440.00 MHz	---	---	4.26	dBm	INFO
No peaks detected	---	---			PASS
Lowest margin to limit 7320 MHz	0	---	26.76	dB	INFO

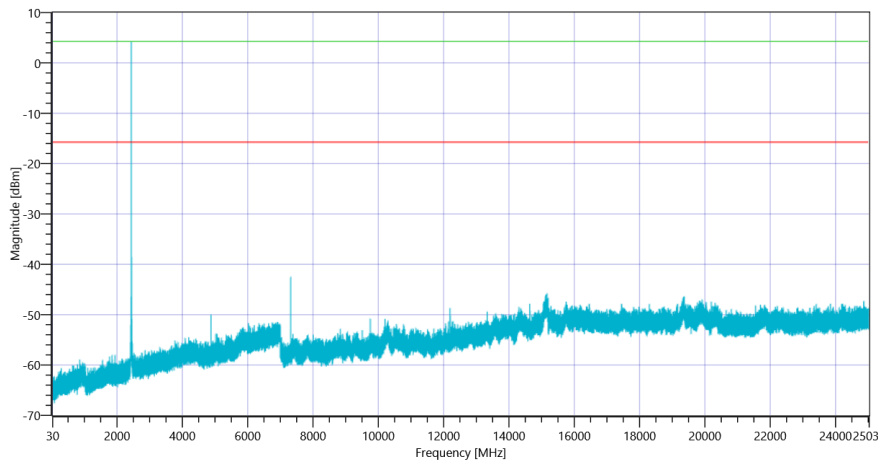

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_02082021_145918.png

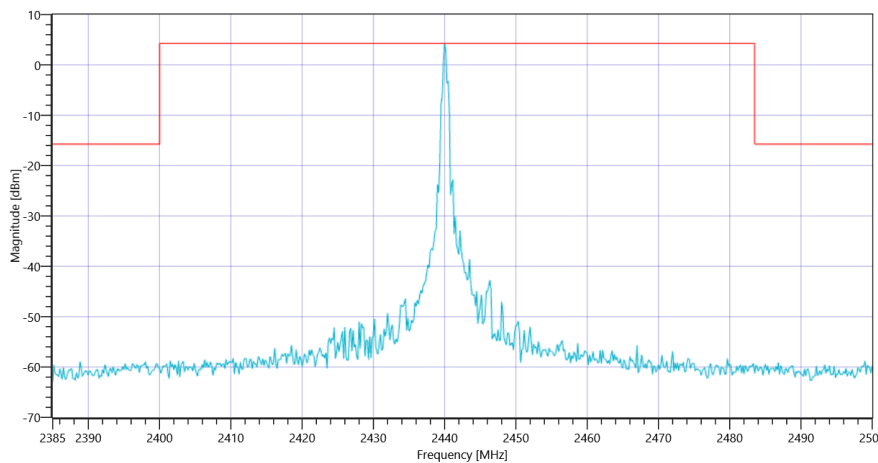

Plot_FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps 2440_02082021_145923.png

TEST FINISHED

General Verdict

PASS

35. FCC Part 15.247 TX Spurious Conducted ~ BT LE 1 Msps

Test References	
TC Start	02.08.2021 15:10:06
Ambit Temp [°C] Humidity [rel%]	26.7 45
System Version	3.0.1.5
Test Specification	FCC Part 15.247
Test Method	IF DTS then 8.5 DTS emissions in non-restricted frequency bands: Subclause 11.11 of ANSI C63.10 is applicable.
TC Version	0.0.1
My Description	FCC 15.247 TX Emissions Conducted DTS - BT LE 1 Msps
Add. Information	

Test Parameter	
Technology to test	BT LE 1 Msps
Antenna Port used	1
Temperature	nom
Voltage	nom
Frequency low to test	False Freq [MHz] 2402
Frequency mid to test	False Freq [MHz] 2440
Frequency high to test	True Freq [MHz] 2480
Auto Control enabled Power Supply Climatic Box	No No
Additional Path Loss [dB]	0.8
Switched Path	EUT - SignalingUnit - SpectrumAnalyzer