



DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

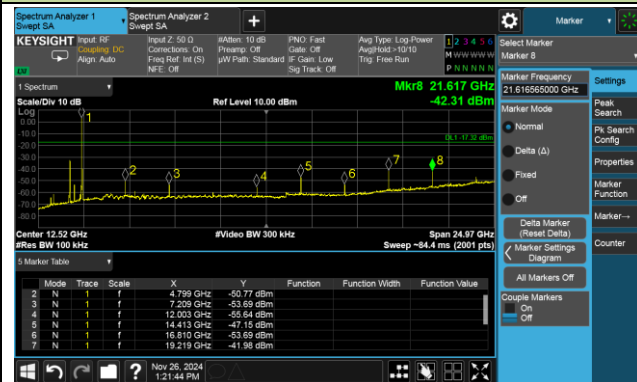

Channel 39 (2441MHz)

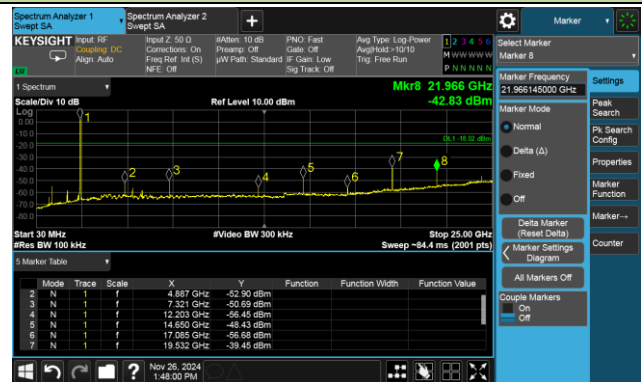


Channel 78 (2480MHz)

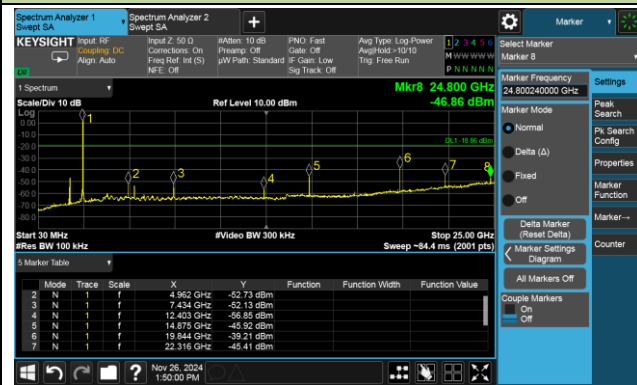


2DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

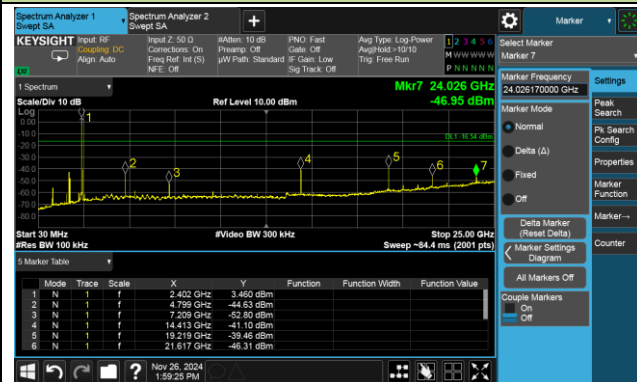

Channel 39 (2441MHz)

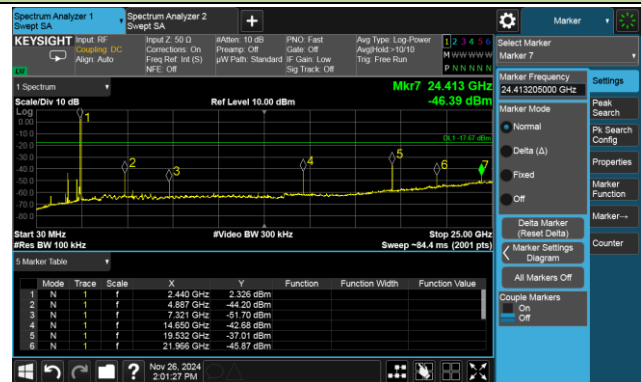


Channel 78 (2480MHz)

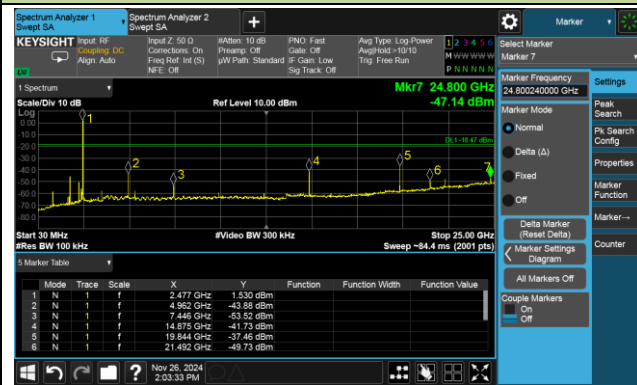


3DH5 Conducted Spurious Emissions


Channel 00 (2402MHz)

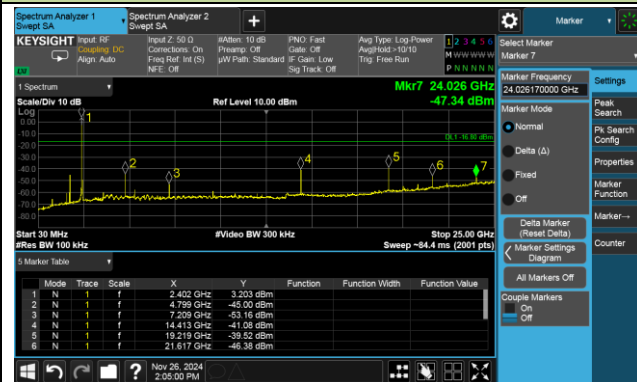

Channel 39 (2441MHz)

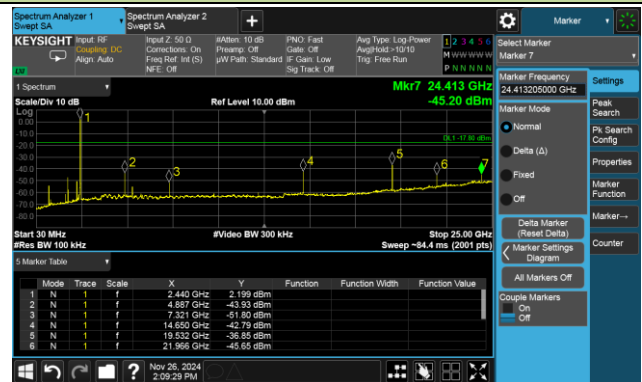

Channel 78 (2480MHz)

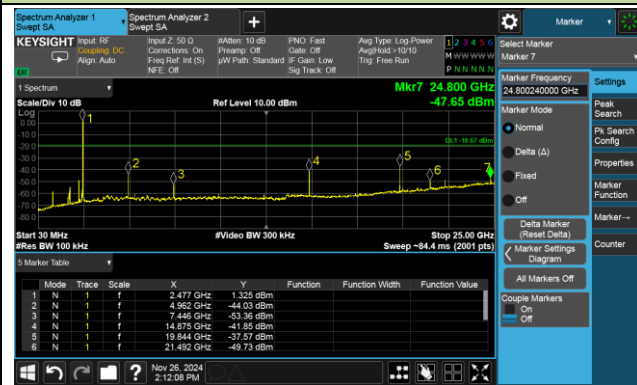

A.9 Radiated Spurious Emission Test Result

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-24	Test Mode	DH5
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4804.6	41.8	3.8	45.6	74.0	-28.4	Peak	Horizontal
	7392.0	36.5	8.9	45.4	74.0	-28.6	Peak	Horizontal
	8405.2	36.3	9.9	46.2	74.0	-27.8	Peak	Horizontal
	4804.6	40.6	3.8	44.4	74.0	-29.6	Peak	Vertical
	7645.3	37.1	9.1	46.2	74.0	-27.8	Peak	Vertical
	8401.8	35.6	9.9	45.5	74.0	-28.5	Peak	Vertical
39	4882.8	41.8	3.7	45.5	74.0	-28.5	Peak	Horizontal
	7322.3	42.8	8.9	51.7	74.0	-22.3	Peak	Horizontal
	8260.7	36.4	9.6	46.0	74.0	-28.0	Peak	Horizontal
	4882.8	42.3	3.7	46.0	74.0	-28.0	Peak	Vertical
	7322.3	39.6	8.9	48.5	74.0	-25.5	Peak	Vertical
	8145.1	35.6	9.8	45.4	74.0	-28.6	Peak	Vertical
78	4959.3	50.1	4.0	54.1	74.0	-19.9	Peak	Horizontal
	7439.6	41.0	8.8	49.8	74.0	-24.2	Peak	Horizontal
	8124.7	35.6	10.0	45.6	74.0	-28.4	Peak	Horizontal
	4961.0	48.6	4.0	52.6	74.0	-21.4	Peak	Vertical
	7439.6	40.8	8.8	49.6	74.0	-24.4	Peak	Vertical
	8265.8	36.4	9.6	46.0	74.0	-28.0	Peak	Vertical
Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m) Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)								

Test Site	WZ-AC1	Test Engineer	Lucas Wang
Test Date	2024-11-24 ~ 2024-11-27	Test Mode	2DH5
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		

Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4804.6*	52.7	3.8	25.7	54.0	-28.3	Average	Horizontal
	7626.6	38.1	8.8	46.9	74.0	-27.1	Peak	Horizontal
	8369.5	35.9	9.6	45.5	74.0	-28.5	Peak	Horizontal
	4804.6*	51.5	3.8	24.5	54.0	-29.5	Average	Vertical
	7386.9	36.4	8.9	45.3	74.0	-28.7	Peak	Vertical
	8053.3	36.3	10.0	46.3	74.0	-27.7	Peak	Vertical
39	4882.8*	54.2	3.7	27.1	54.0	-26.9	Average	Horizontal
	7324.0	41.5	8.8	50.3	74.0	-23.7	Peak	Horizontal
	10916.1	36.1	15.2	51.3	74.0	-22.7	Peak	Horizontal
	4882.8*	50.8	3.7	23.7	54.0	-30.3	Average	Vertical
	7324.0	38.0	8.8	46.8	74.0	-27.2	Peak	Vertical
	10967.1	35.2	15.0	50.2	74.0	-23.8	Peak	Vertical
78	4959.3*	58.2	2.6	30.0	54.0	-24.0	Average	Horizontal
	7441.3	42.4	10.5	52.9	74.0	-21.1	Peak	Horizontal
	11592.7	31.9	16.2	48.1	74.0	-25.9	Peak	Horizontal
	4961.0*	55.7	2.6	27.5	54.0	-26.5	Average	Vertical
	7441.3	40.2	10.5	50.7	74.0	-23.3	Peak	Vertical
	10865.1	33.1	15.4	48.5	74.0	-25.5	Peak	Vertical

Notes:

- Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)
- "*" means Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -30.8dB.

Test Site	WZ-AC2	Test Engineer	Dick Shen
Test Date	2024-11-27	Test Mode	3DH5
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20dB below limit line within 1-18GHz, there is not show in the report.		


Test Channel	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
00	4804.6*	51.3	2.8	23.0	54.0	-31.0	Average	Horizontal
	7708.2	32.6	10.2	42.8	74.0	-31.2	Peak	Horizontal
	11432.9	32.9	16.3	49.2	74.0	-24.8	Peak	Horizontal
	4804.6*	55.7	2.8	27.4	54.0	-26.6	Average	Vertical
	7470.2	32.2	10.5	42.7	74.0	-31.3	Peak	Vertical
	11354.7	32.2	16.3	48.5	74.0	-25.5	Peak	Vertical
39	4882.8*	54.8	2.6	26.3	54.0	-27.7	Average	Horizontal
	7324.0	36.8	10.2	47.0	74.0	-27.0	Peak	Horizontal
	11494.1	31.9	16.6	48.5	74.0	-25.5	Peak	Horizontal
	4882.8*	55.1	2.6	26.6	54.0	-27.4	Average	Vertical
	7324.0	35.5	10.2	45.7	74.0	-28.3	Peak	Vertical
	11426.1	33.3	16.4	49.7	74.0	-24.3	Peak	Vertical
78	4959.3*	57.3	2.6	28.8	54.0	-25.2	Average	Horizontal
	7439.6	42.4	10.5	52.9	74.0	-21.1	Peak	Horizontal
	11490.7	31.7	16.7	48.4	74.0	-25.6	Peak	Horizontal
	4959.3*	55.4	2.6	26.9	54.0	-27.1	Average	Vertical
	7439.6	40.1	10.5	50.6	74.0	-23.4	Peak	Vertical
	11001.1	33.2	15.8	49.0	74.0	-25.0	Peak	Vertical

Notes:

- Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)
Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)
- "*" means Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -31.1dB.

The Result of Radiated Emission below 1GHz:

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part15.209_RSE(3m)_PK	Test Engineer	Dick Shen
Factor	VULB 9162_30-7000MHz	Polarity	Horizontal
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-DH5 at 2402MHz		

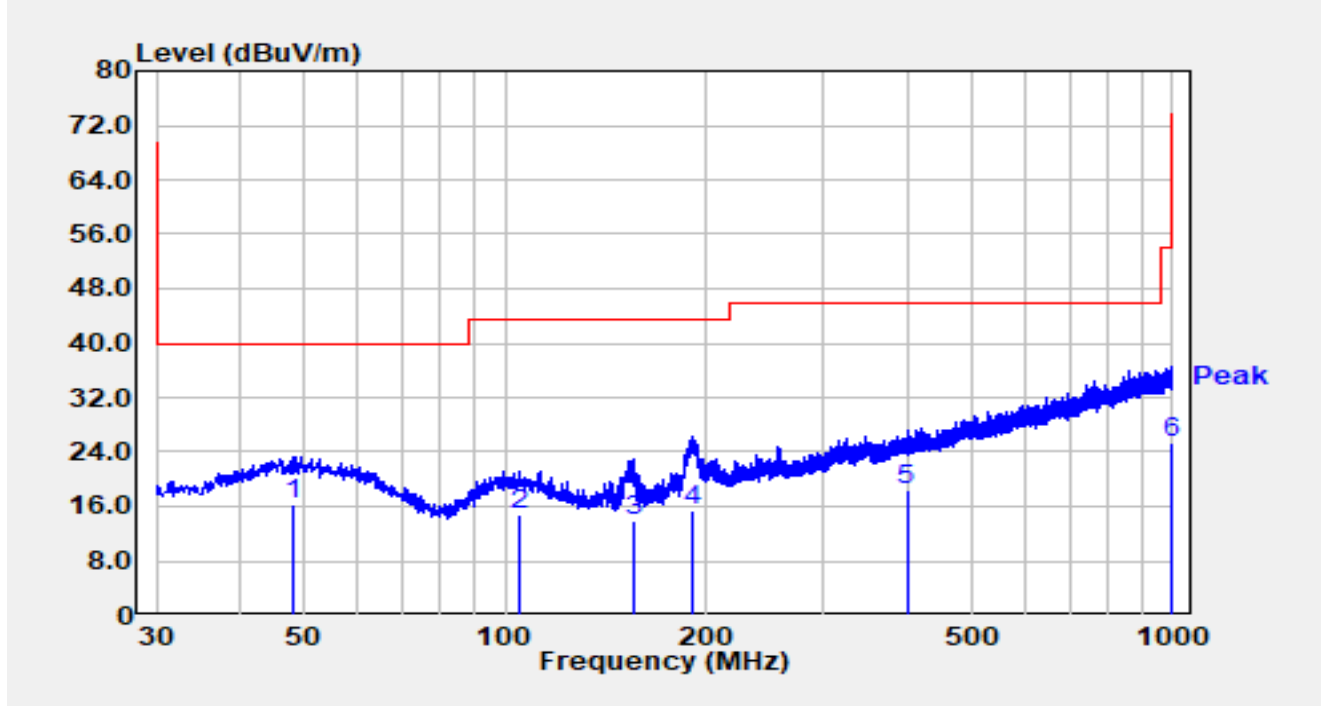


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	48.236	-4.28	20.46	16.18	-23.82	40.00	QP
2		104.884	-3.72	18.55	14.83	-28.67	43.50	QP
3		155.809	-1.68	15.49	13.81	-29.69	43.50	QP
4		190.050	-2.68	17.99	15.31	-28.19	43.50	QP
5		399.667	-5.08	23.37	18.28	-27.72	46.00	QP
6		993.113	-6.89	32.37	25.48	-28.52	54.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part15.209_RSE(3m)_PK	Test Engineer	Dick Shen
Factor	VULB 9162_30-7000MHz	Polarity	Vertical
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-DH5 at 2402MHz		

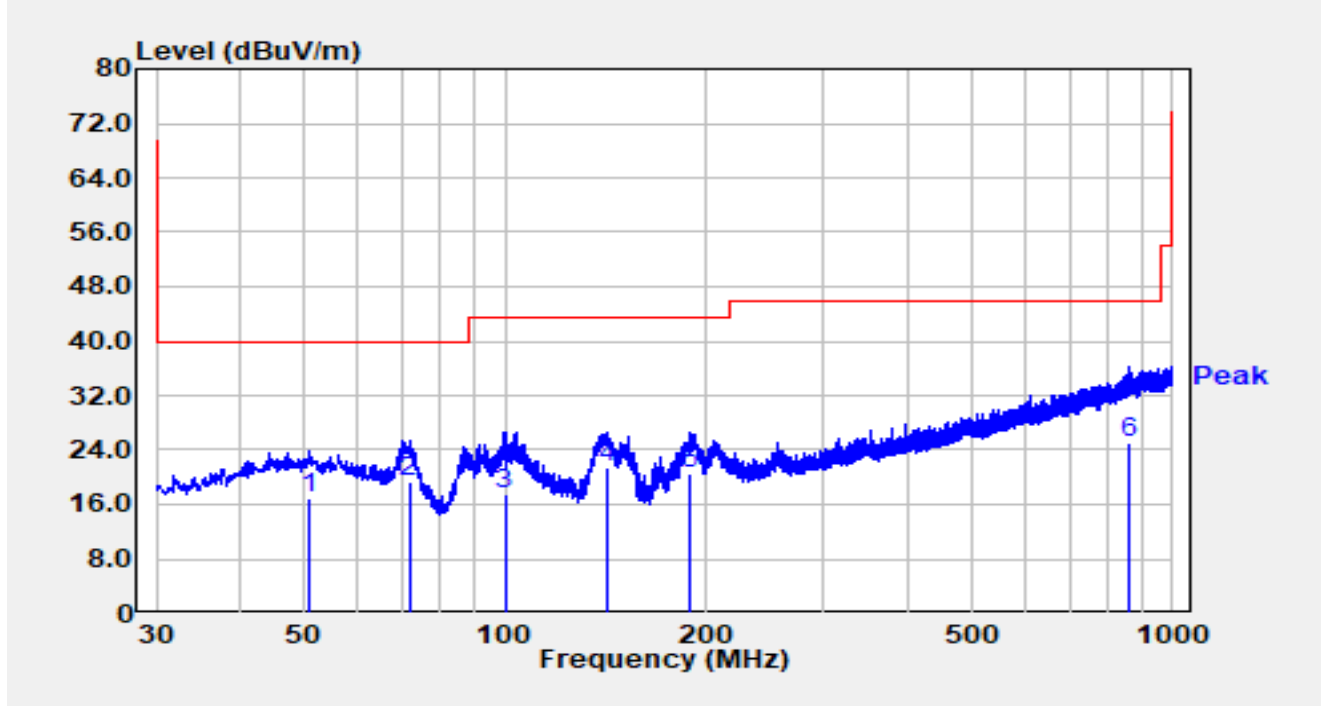


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		50.758	-3.58	20.47	16.89	-23.11	40.00	QP
2	*	71.710	3.58	15.78	19.36	-20.64	40.00	QP
3		99.840	-0.96	18.54	17.59	-25.91	43.50	QP
4		142.520	6.22	15.20	21.43	-22.07	43.50	QP
5		189.371	2.64	17.91	20.55	-22.95	43.50	QP
6		863.909	-6.27	31.35	25.08	-20.92	46.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m)+ Cable Loss (dB)-AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.10 Radiated Restricted Band Edge Test Result

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-DH5 at 2402MHz		

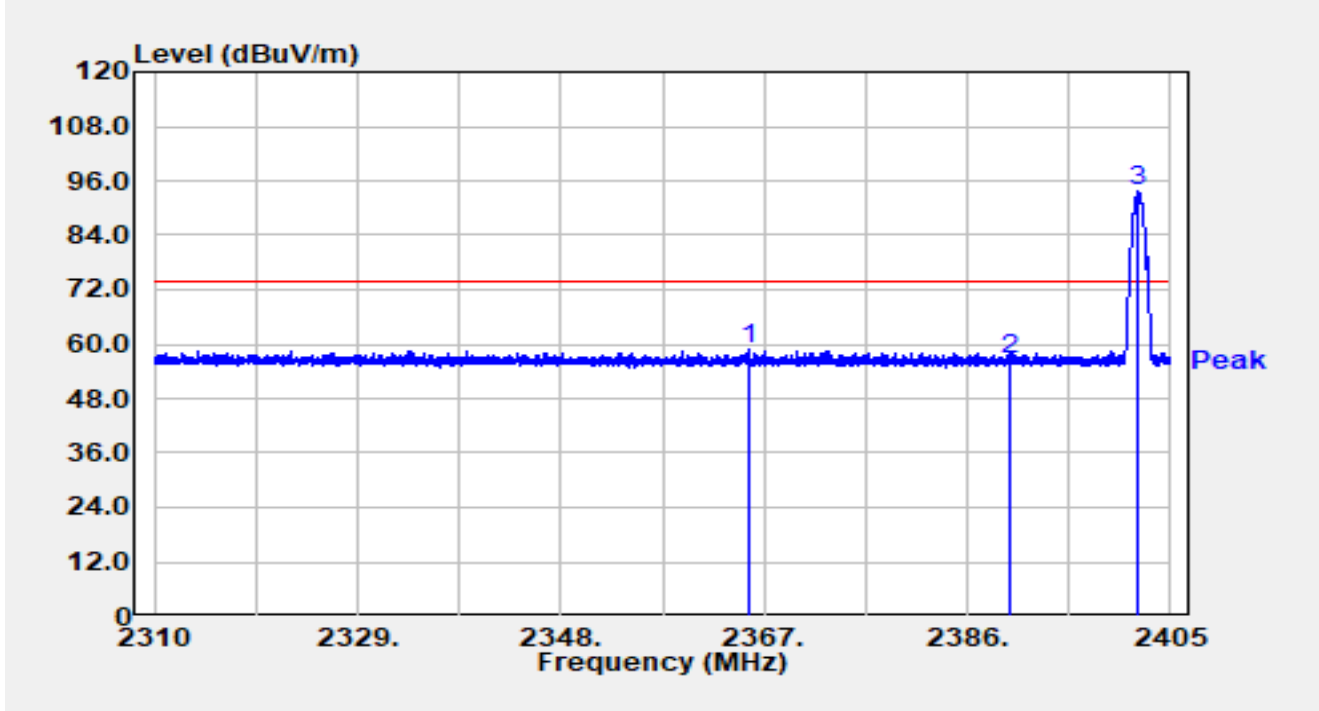


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1	*	2365.537	27.34	31.50	58.84	-15.16	N/A	74.00	Peak
		2365.537	27.34	31.50	27.74	-26.26	-31.1	54.00	Average
2		2390.000	25.06	31.43	56.49	-17.51	N/A	74.00	Peak
		2390.000	25.06	31.43	25.39	-28.61	-31.1	54.00	Average
3		2401.998	62.17	31.41	93.58	N/A	N/A	N/A	Peak
		2401.998	62.17	31.41	62.48	N/A	-31.1	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -31.1dB.

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-DH5 at 2402MHz		

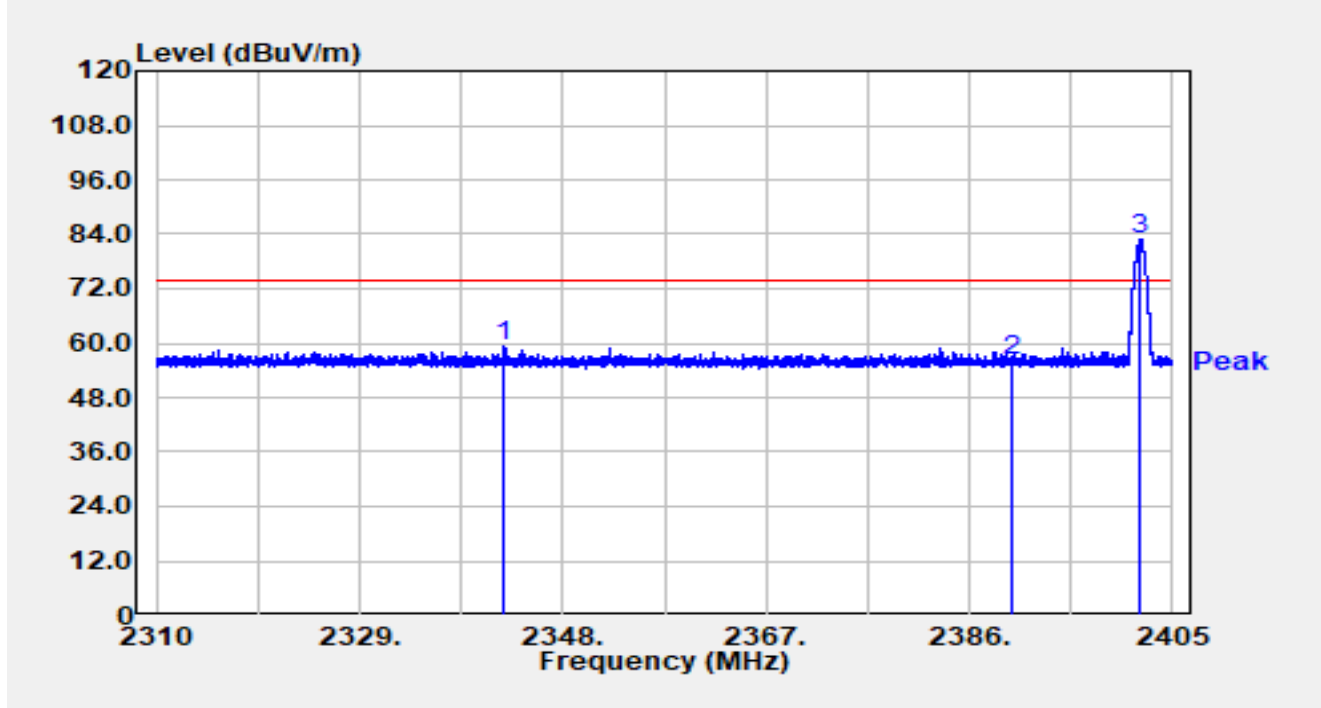


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1	*	2342.566	27.69	31.57	59.26	-14.74	N/A	74.00	Peak
		2342.566	27.69	31.57	28.16	-25.84	-31.1	54.00	Average
2		2390.000	24.56	31.43	55.99	-18.01	N/A	74.00	Peak
		2390.000	24.56	31.43	24.89	-29.11	-31.1	54.00	Average
3		2402.045	51.33	31.41	82.74	N/A	N/A	N/A	Peak
		2402.045	51.33	31.41	51.64	N/A	-31.1	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -31.1dB.

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-DH5 at 2480MHz		

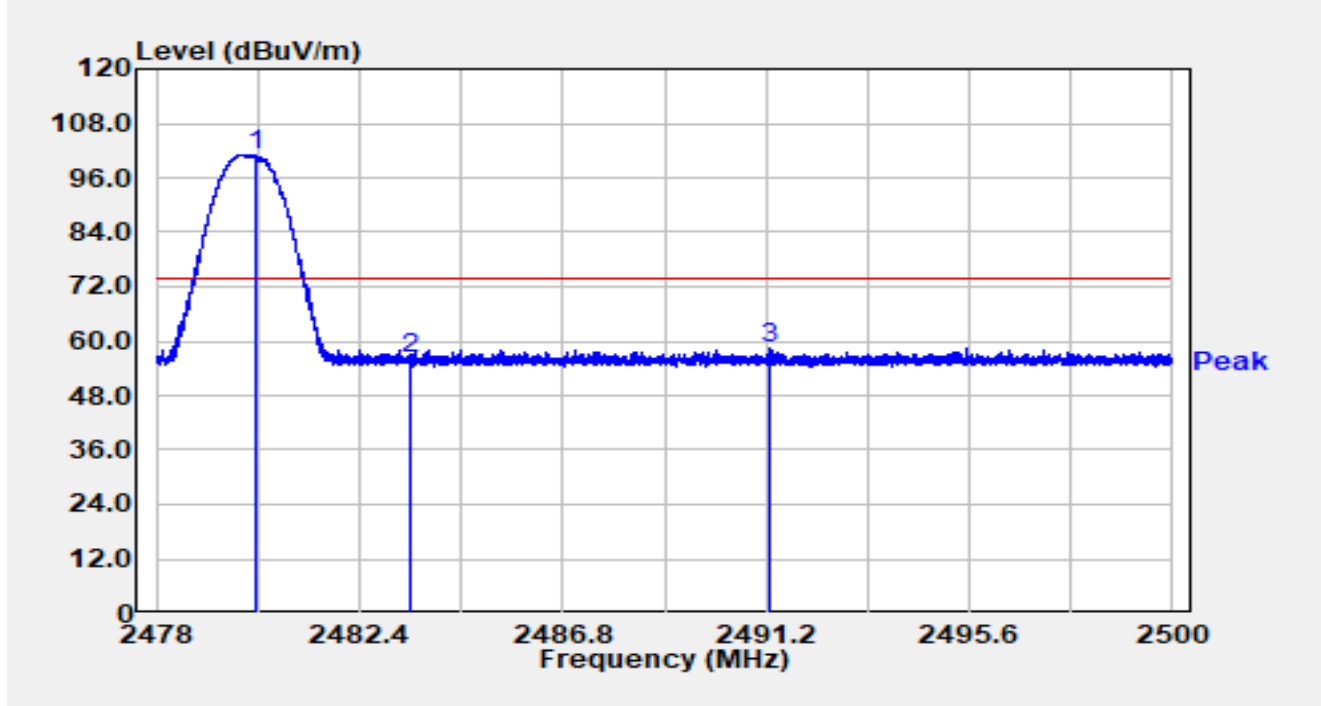


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1		2480.156	69.65	31.33	100.97	N/A	N/A	N/A	Peak
		2480.156	69.65	31.33	69.87	N/A	-31.1	N/A	Average
2		2483.500	24.69	31.32	56.01	-17.99	N/A	74.00	Peak
		2483.500	24.69	31.32	24.91	-29.09	-31.1	54.00	Average
3	*	2491.303	27.06	31.31	58.37	-15.63	N/A	74.00	Peak
		2491.303	27.06	31.31	27.27	-26.73	-31.1	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -31.1dB.

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-DH5 at 2480MHz		

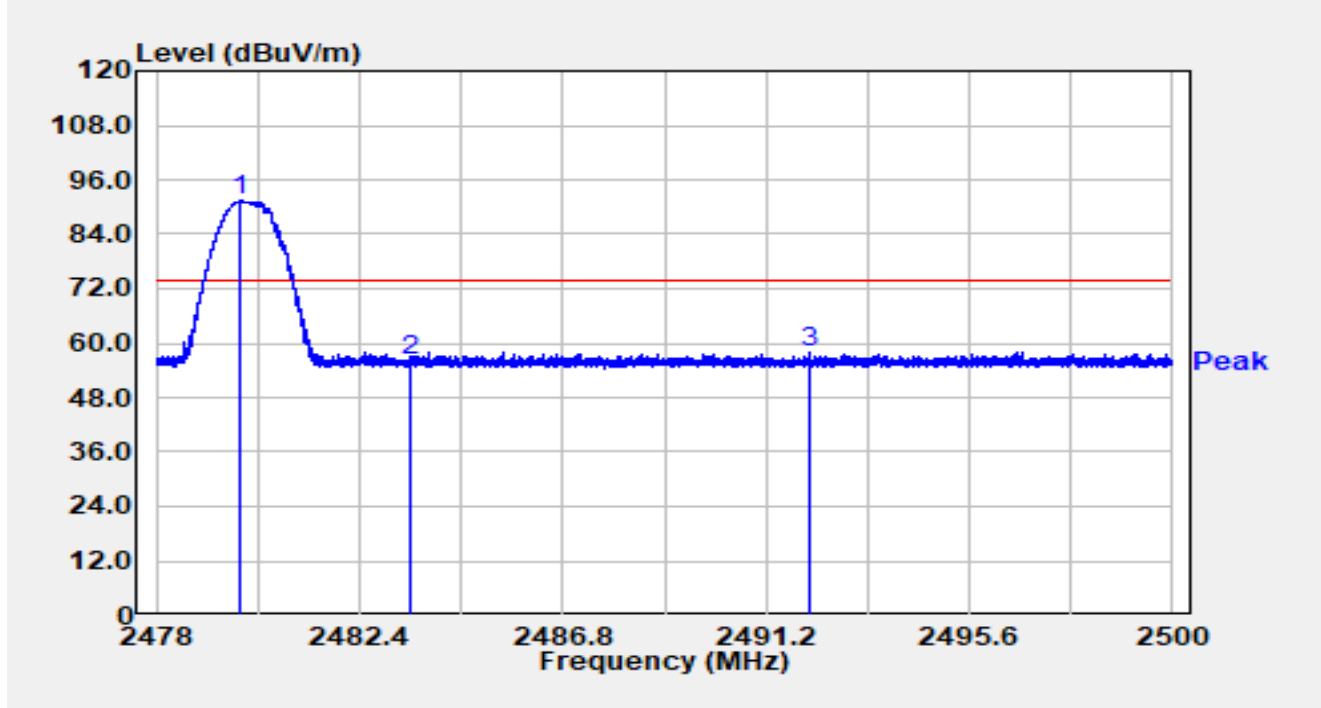


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1		2479.833	59.97	31.33	91.30	N/A	N/A	N/A	Peak
		2479.833	59.97	31.33	60.20	N/A	-31.1	N/A	Average
2		2483.500	24.73	31.32	56.05	-17.95	N/A	74.00	Peak
		2483.500	24.73	31.32	24.95	-29.05	-31.1	54.00	Average
3	*	2492.137	26.67	31.31	57.98	-16.02	N/A	74.00	Peak
		2492.137	26.67	31.31	26.88	-27.12	-31.1	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -31.1dB.

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-2DH5 at 2402MHz		

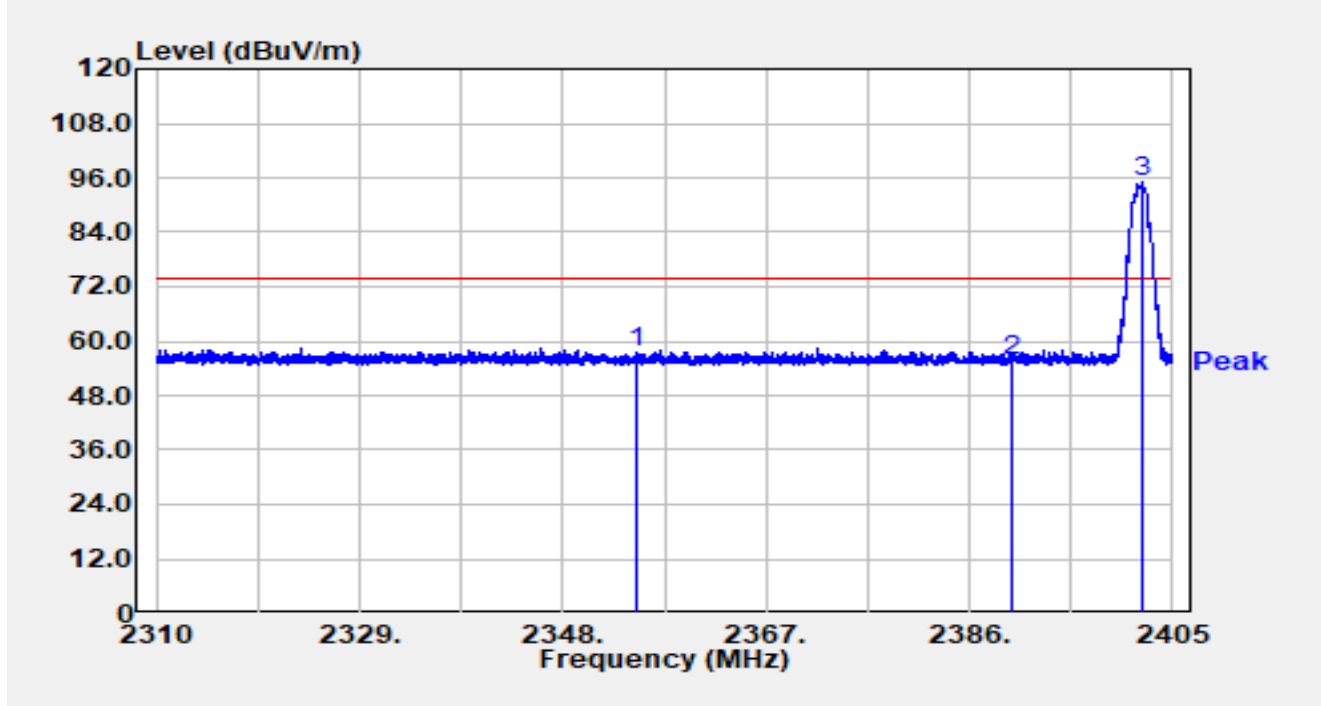


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1	*	2354.821	25.80	31.53	57.33	-16.67	N/A	74.00	Peak
		2354.821	25.80	31.53	26.53	-27.47	-30.8	54.00	Average
2		2390.000	24.18	31.43	55.61	-18.39	N/A	74.00	Peak
		2390.000	24.18	31.43	24.81	-29.19	-30.8	54.00	Average
3		2402.140	63.80	31.41	95.22	N/A	N/A	N/A	Peak
		2402.140	63.80	31.41	64.42	N/A	-30.8	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -30.8dB.

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-2DH5 at 2402MHz		

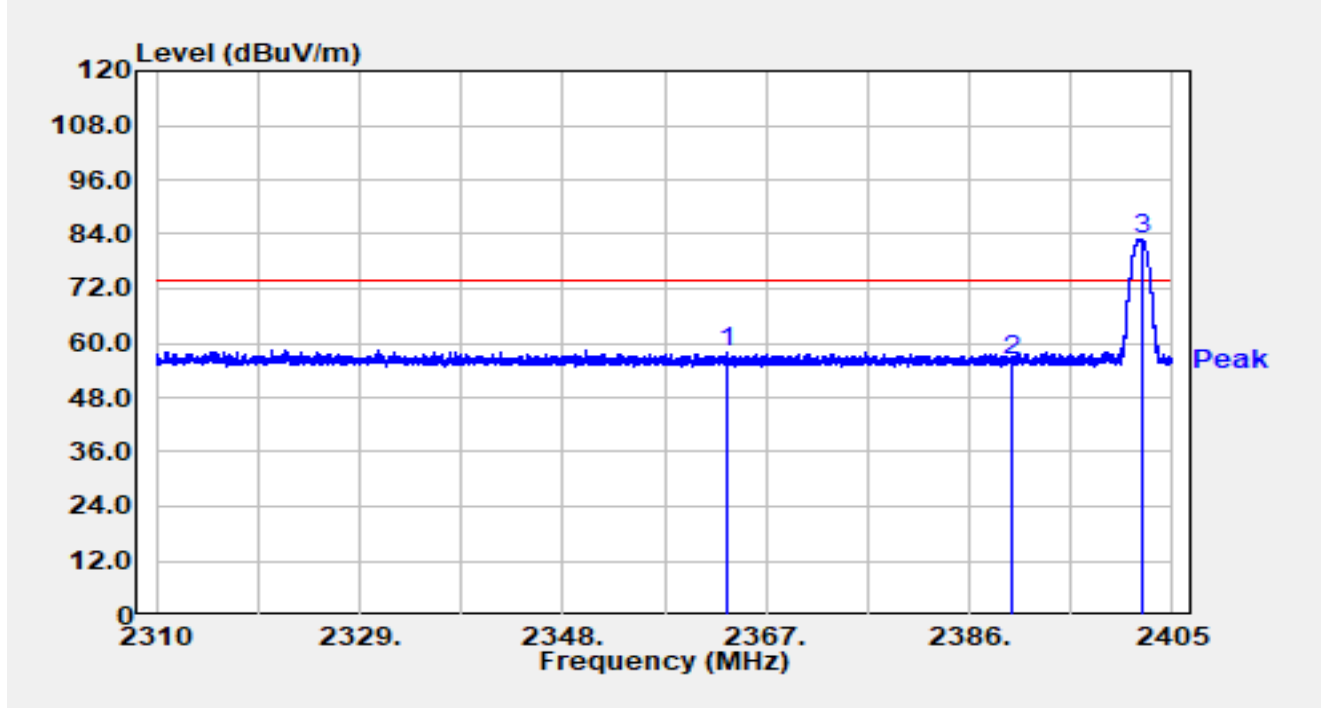


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1	*	2363.285	26.61	31.51	58.11	-15.89	N/A	74.00	Peak
		2363.285	26.61	31.51	27.31	-26.69	-30.8	54.00	Average
2		2390.000	24.72	31.43	56.15	-17.85	N/A	74.00	Peak
		2390.000	24.72	31.43	25.35	-28.65	-30.8	54.00	Average
3		2402.093	51.63	31.41	83.04	N/A	N/A	N/A	Peak
		2402.093	51.63	31.41	52.24	N/A	-30.8	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -30.8dB.

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-2DH5 at 2480MHz		

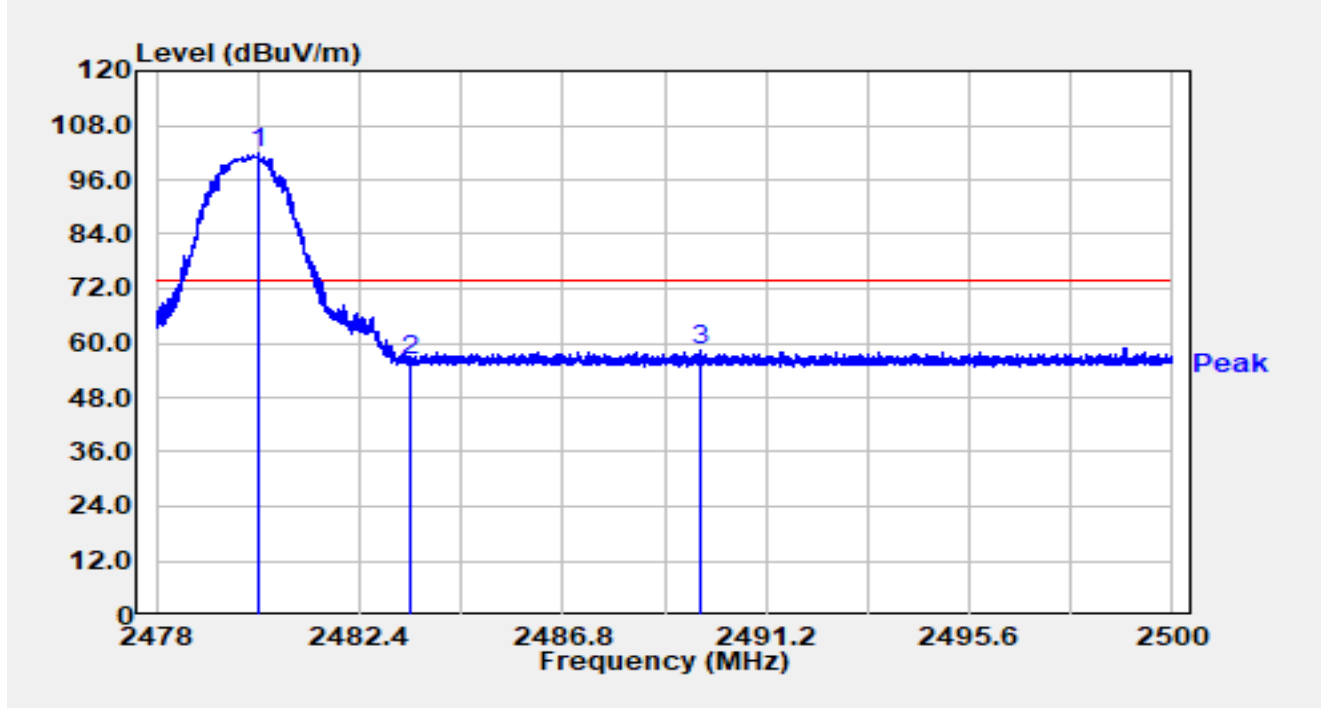


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1		2480.224	70.60	31.33	101.92	N/A	N/A	N/A	Peak
		2480.224	70.60	31.33	71.12	N/A	-30.8	N/A	Average
2		2483.500	24.79	31.32	56.11	-17.89	N/A	74.00	Peak
		2483.500	24.79	31.32	25.31	-28.69	-30.8	54.00	Average
3	*	2489.779	26.96	31.31	58.27	-15.73	N/A	74.00	Peak
		2489.779	26.96	31.31	27.47	-26.53	-30.8	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -30.8dB.

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-2DH5 at 2480MHz		

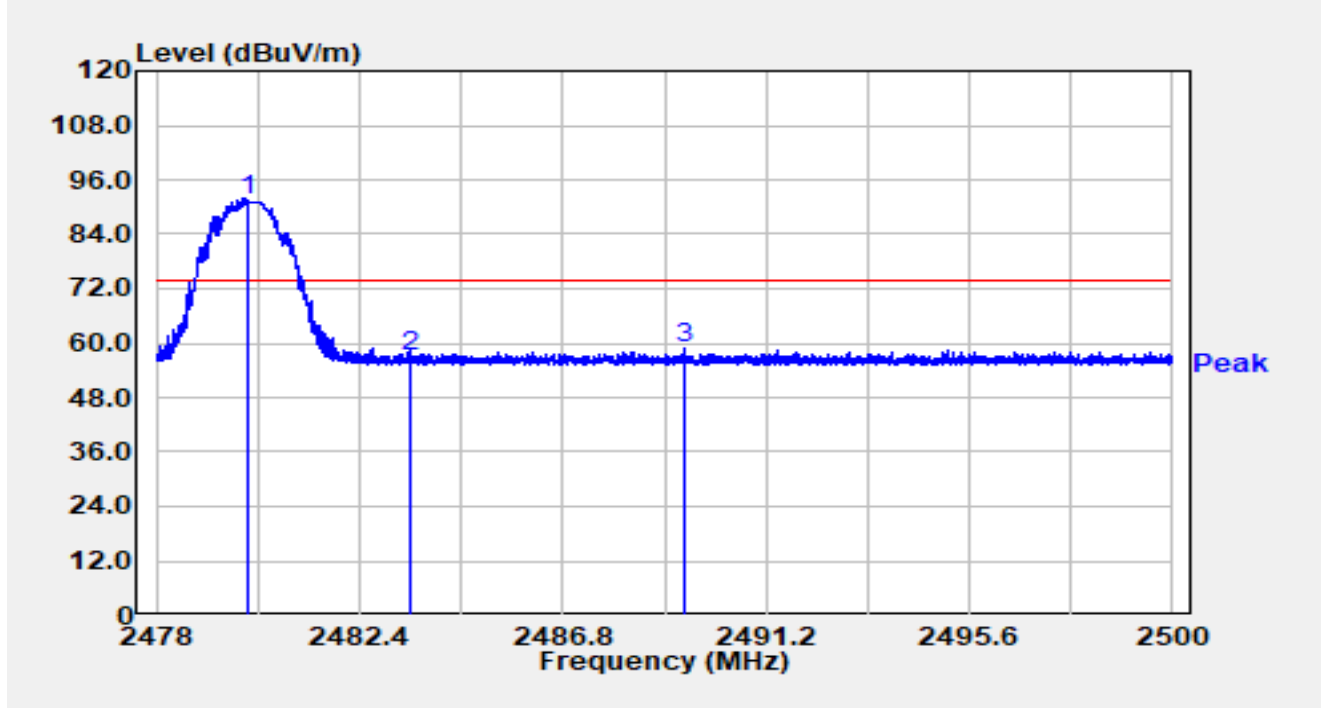


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1		2479.982	60.18	31.33	91.50	N/A	N/A	N/A	Peak
		2479.982	60.18	31.33	60.7	N/A	-30.8	N/A	Average
2		2483.500	25.87	31.32	57.19	-16.81	N/A	74.00	Peak
		2483.500	25.87	31.32	26.39	-27.61	-30.8	54.00	Average
3	*	2489.431	27.45	31.31	58.76	-15.24	N/A	74.00	Peak
		2489.431	27.45	31.31	27.96	-26.04	-30.8	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -30.8dB.

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Horizontal
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-3DH5 at 2402MHz		

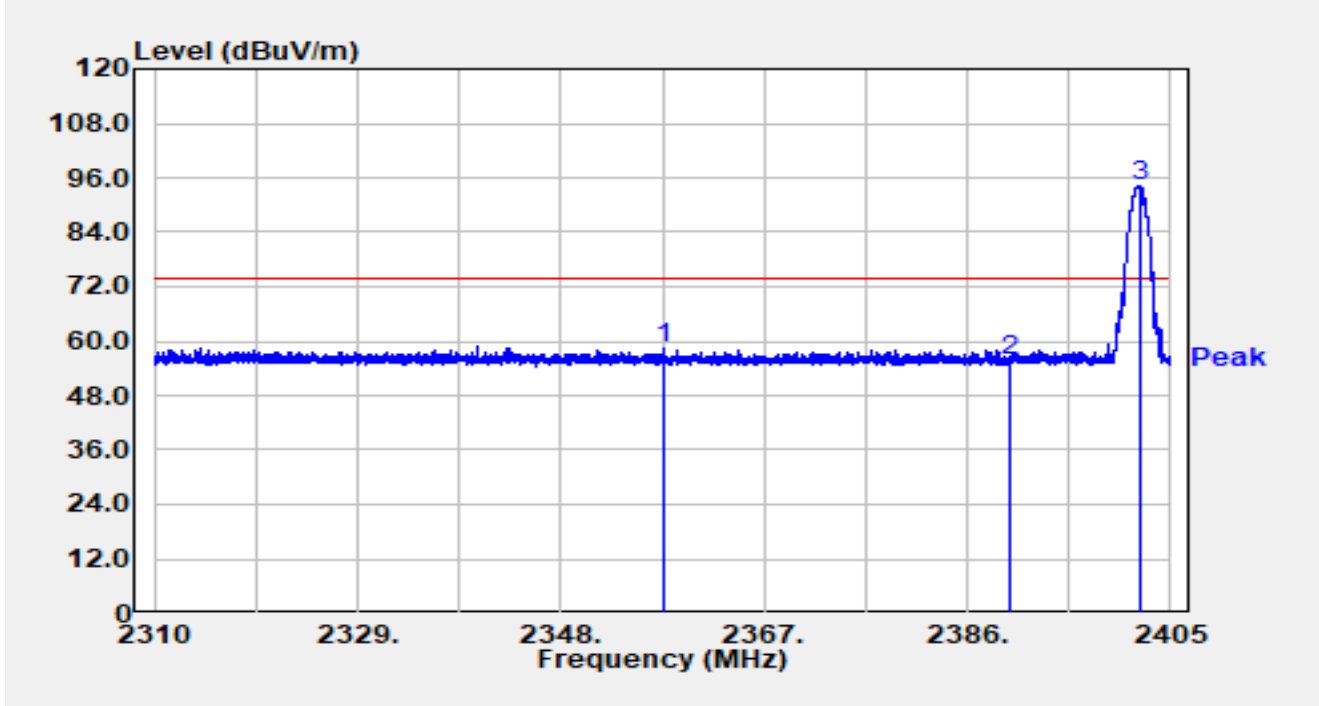


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1	*	2357.585	26.81	31.52	58.34	-15.66	N/A	74.00	Peak
		2357.585	26.81	31.52	27.24	-26.73	-31.1	54.00	Average
2		2390.000	24.19	31.43	55.62	-18.38	N/A	74.00	Peak
		2390.000	24.19	31.43	24.52	-29.48	-31.1	54.00	Average
3		2402.122	62.65	31.41	94.06	N/A	N/A	N/A	Peak
		2402.122	62.65	31.41	62.96	N/A	-31.1	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -31.1dB.

Site	WZ-AC2	Test Date	2024-11-20
Temperature	27.2°C	Humidity	46.5%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Dick Shen
Factor	BBHA 9120D_1457_1-18GHz	Polarity	Vertical
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-3DH5 at 2402MHz		

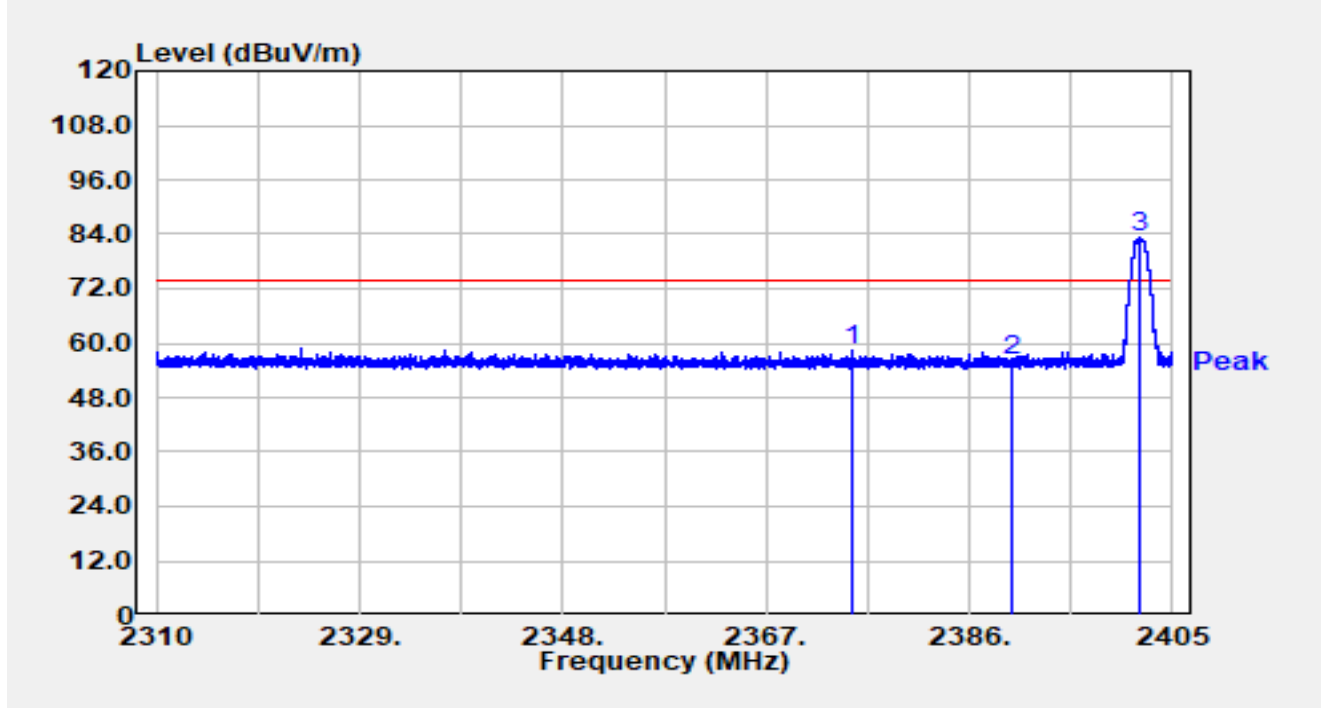


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1	*	2374.951	26.88	31.46	58.34	-15.66	N/A	74.00	Peak
		2374.951	26.88	31.46	27.24	-26.76	-31.1	54.00	Average
2		2390.000	24.86	31.43	56.29	-17.71	N/A	74.00	Peak
		2390.000	24.86	31.43	25.19	-28.81	-31.1	54.00	Average
3		2401.846	51.75	31.41	83.16	N/A	N/A	N/A	Peak
		2401.846	51.75	31.41	52.06	N/A	-31.1	N/A	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -31.1dB.

Site	WZ-AC1	Test Date	2024-11-24
Temperature	22.1°C	Humidity	42.1%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Horizontal
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-3DH5 at 2480MHz		

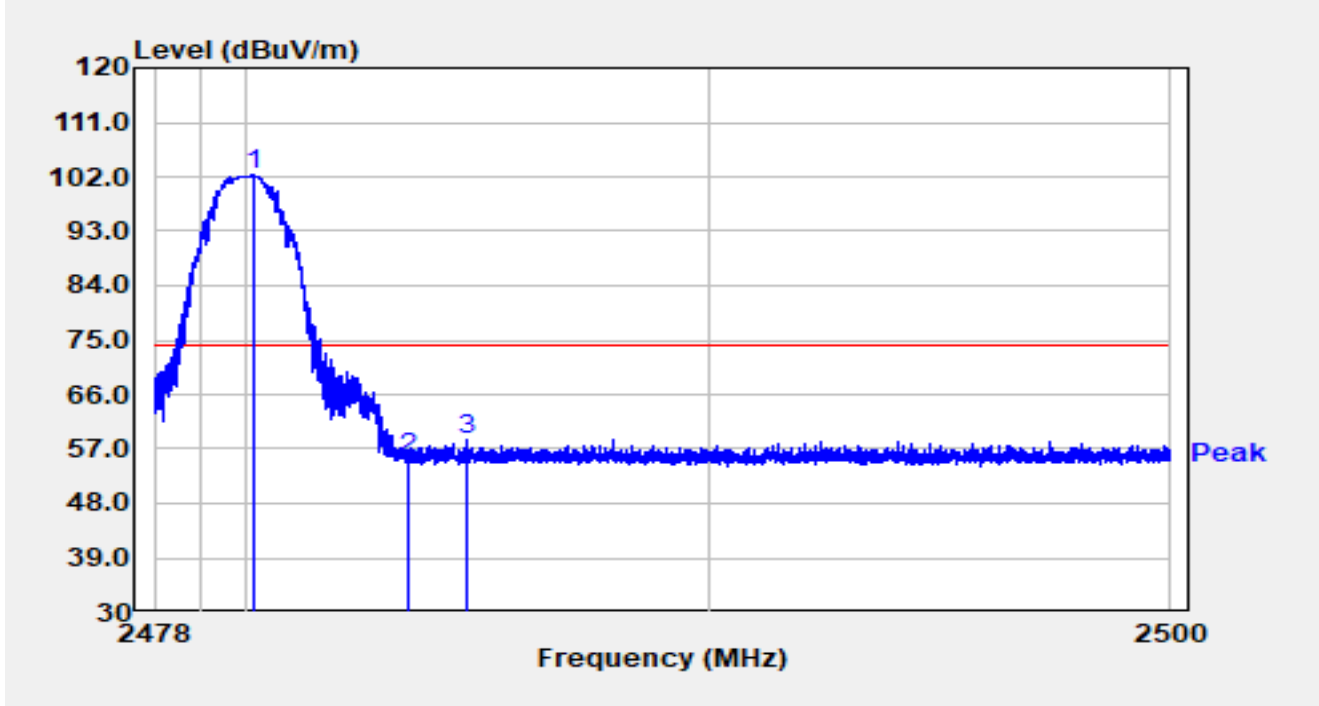


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1		2480.141	70.56	31.80	102.36	N/A	N/A	N/A	Peak
		2480.141	70.56	31.80	71.26	N/A	-31.1	N/A	Average
2		2483.500	23.65	31.81	55.46	-18.54	N/A	74.00	Peak
		2483.500	23.65	31.81	24.36	-29.64	-31.1	54.00	Average
3	*	2484.721	26.87	31.81	58.68	-15.32	N/A	74.00	Peak
		2484.721	26.87	31.81	27.58	-26.42	-31.1	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -31.1dB.

Site	WZ-AC1	Test Date	2024-11-24
Temperature	22.1°C	Humidity	42.1%
Limit	FCC_Part 15_Band Edge(3m)_PK	Test Engineer	Lucas Wang
Factor	BBHA 9120D_1167_1-18GHz	Polarity	Vertical
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-3DH5 at 2480MHz		

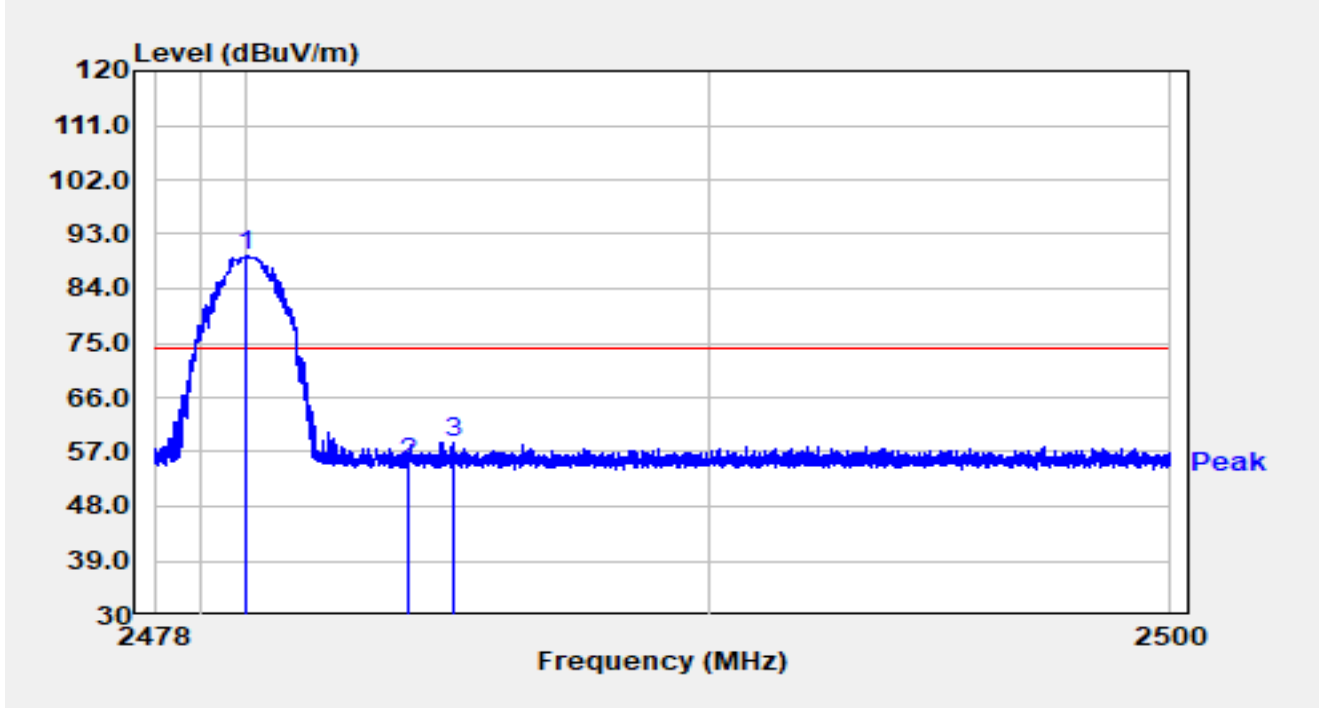


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Duty cycle Factor (dB)	Limit (dBμV/m)	Detector
1		2479.995	57.48	31.80	89.29	N/A	N/A	N/A	Peak
		2479.995	57.48	31.80	58.19	N/A	-31.1	N/A	Average
2		2483.500	23.16	31.81	54.96	-19.04	N/A	74.00	Peak
		2483.500	23.16	31.81	26.86	-30.14	-31.1	54.00	Average
3	*	2484.431	26.70	31.81	58.51	-15.49	N/A	74.00	Peak
		2484.431	26.70	31.81	27.41	-26.59	-31.1	54.00	Average

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. Average Measure Level = Peak Measure Level + Duty Cycle Factor, Duty Cycle Factor = -31.1dB.

A.11 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2024-11-28
Temperature	20.0°C	Humidity	34.6%
Limit	FCC Part15.207_CE_0.15MHz-30MHz_QP	Test Engineer	Linda Wei
Factor	ENV216_101683_L1_Filter Off_E	Polarity	Line1
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-3DH5 at 2402MHz		

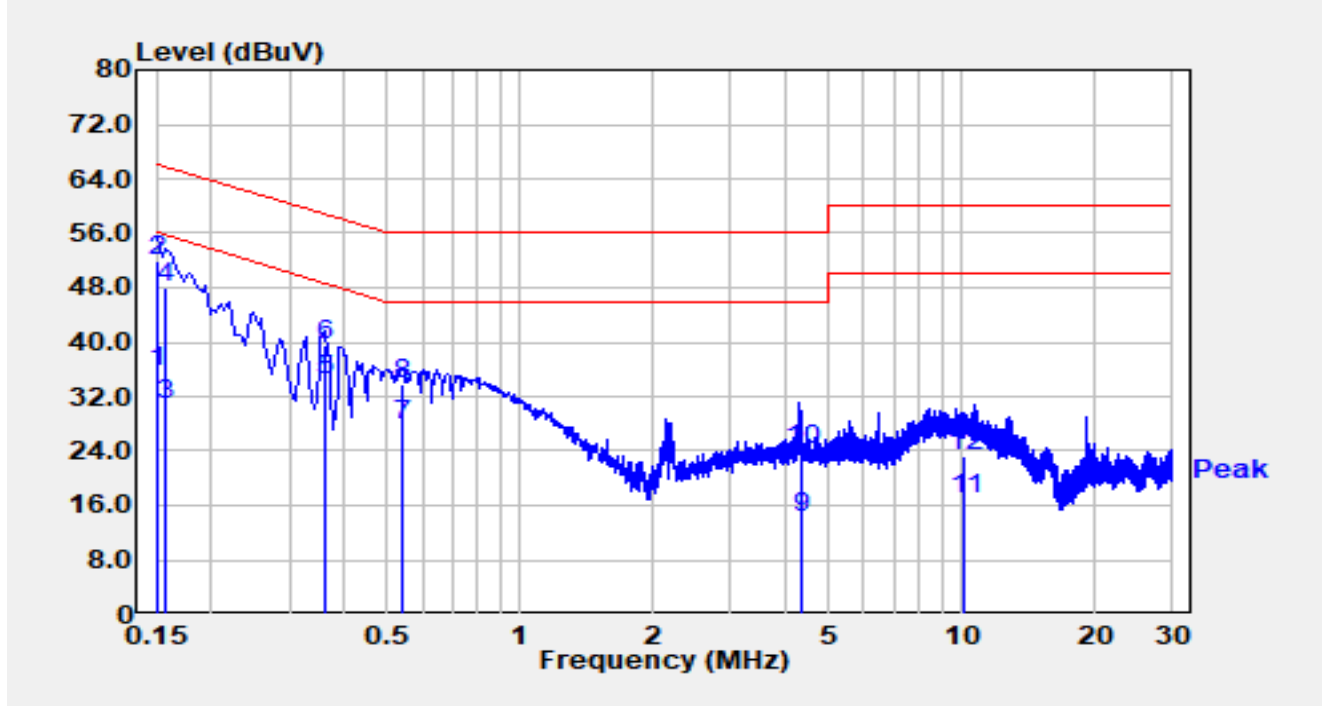


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	25.80	9.79	35.59	-20.41	56.00	Average
2	*	0.150	42.10	9.79	51.89	-14.11	66.00	QP
3		0.158	20.90	9.77	30.67	-24.89	55.57	Average
4		0.158	38.20	9.77	47.97	-17.59	65.57	QP
5		0.362	24.60	9.86	34.46	-14.22	48.68	Average
6		0.362	29.60	9.86	39.46	-19.22	58.68	QP
7		0.538	17.70	9.95	27.65	-18.35	46.00	Average
8		0.538	24.00	9.95	33.95	-22.05	56.00	QP
9		4.320	3.80	10.51	14.31	-31.69	46.00	Average
10		4.320	13.70	10.51	24.21	-31.79	56.00	QP
11		10.160	6.00	10.98	16.98	-33.02	50.00	Average
12		10.160	12.40	10.98	23.38	-36.62	60.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Site	WZ-SR2	Test Date	2024-11-28
Temperature	20.0°C	Humidity	34.6%
Limit	FCC Part15.207_CE_0.15MHz-30MHz_QP	Test Engineer	Linda Wei
Factor	ENV216_101683_N_Filter Off_E	Polarity	Neutral
EUT	Charger Cradle	Test Voltage	AC 120V/60Hz
Test Mode	Transmit by BT-3DH5 at 2402MHz		

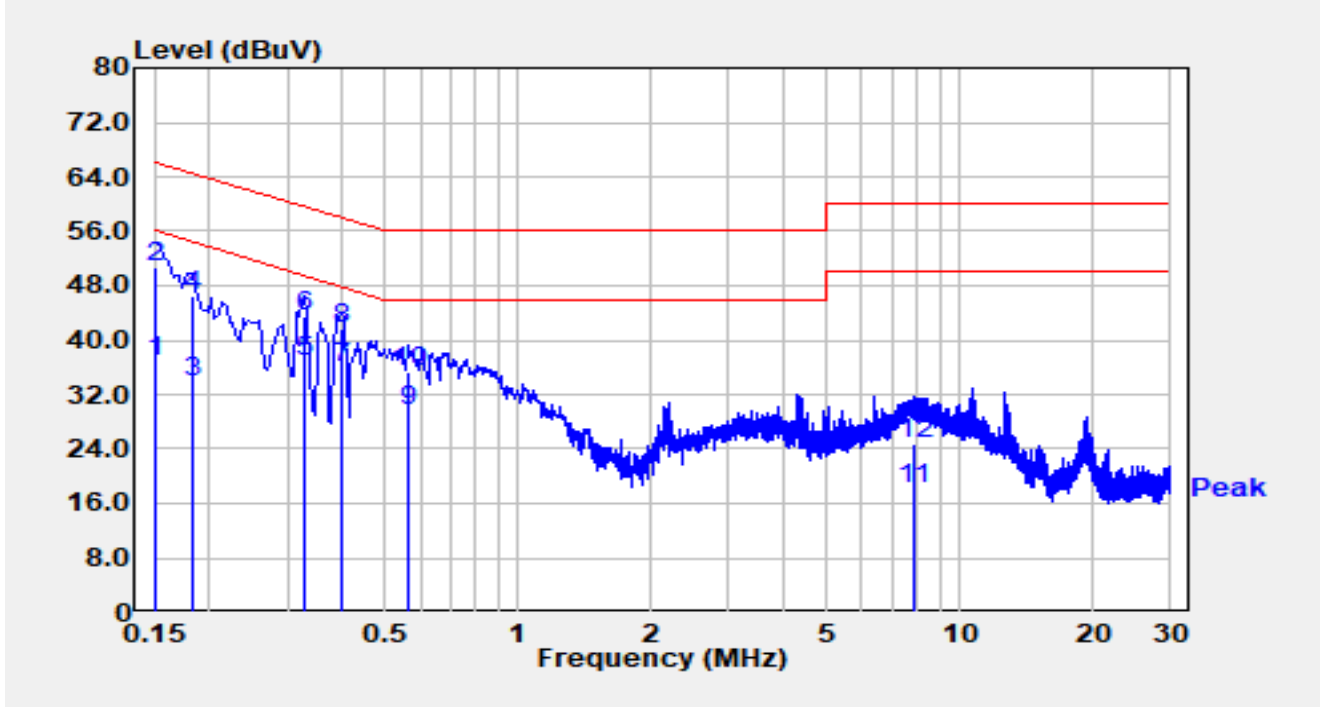

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.150	27.20	9.75	36.95	-19.05	56.00	Average
2		0.150	41.10	9.75	50.85	-15.15	66.00	QP
3		0.182	23.90	9.77	33.67	-20.73	54.39	Average
4		0.182	36.60	9.77	46.37	-18.03	64.39	QP
5		0.330	27.10	9.83	36.93	-12.52	49.45	Average
6		0.330	33.70	9.83	43.53	-15.92	59.45	QP
7	*	0.398	26.20	9.86	36.06	-11.83	47.90	Average
8		0.398	31.80	9.86	41.66	-16.23	57.90	QP
9		0.566	19.60	9.94	29.54	-16.46	46.00	Average
10		0.566	25.50	9.94	35.44	-20.56	56.00	QP
11		7.890	7.40	10.84	18.24	-31.76	50.00	Average
12		7.890	13.90	10.84	24.74	-35.26	60.00	QP

Notes:

1. " *", means this data is the worst emission level.
2. C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
3. Measurement (dB μ V) = Reading (dB μ V) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to “2410RSU075-UT” file.

Appendix C - EUT Photograph

Refer to “2410RSU075-UE” file.