



PART 0 SAR CHAR REPORT

Applicant Name:Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea**Date of Testing:**

06/10/2024 - 07/22/2024

Test Site/Location:

Element, Columbia, MD, USA

Document Serial No.:

1M2405140039-22.A3L

FCC ID:**A3LSMX828U****APPLICANT:****SAMSUNG ELECTRONICS CO., LTD****Report Type:**

Part 0 SAR Characterization

DUT Type:

Portable Computing Device

Model(s):

SM-X828U

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

Test results reported herein relate only to the item(s) tested.

RJ Ortanez
Executive Vice President

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 1 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

TABLE OF CONTENTS

1	DEVICE UNDER TEST	3
1.1	DEVICE OVERVIEW	3
1.2	TIME-AVERAGING FOR SAR	4
1.3	NOMENCLATURE FOR PART 0 REPORT	4
1.4	BIBLIOGRAPHY	4
2	SAR AND POWER DENSITY MEASUREMENTS	5
2.1	SAR DEFINITION	5
2.2	SAR MEASUREMENT PROCEDURE	5
3	SAR CHARACTERIZATION	7
3.1	ECI AND SAR DETERMINATION	7
3.2	SAR DESIGN TARGET	7
3.3	SAR CHAR	8
4	EQUIPMENT LIST	10
5	MEASUREMENT UNCERTAINTIES	12

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 2 of 298

REV 22.0
03/30/2022

1 DEVICE UNDER TEST

1.1 Device Overview

This device uses time-averaged SAR (TAS) feature to control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is in compliance with the FCC requirement for WWAN operations via MediaTek. Additionally, this device supports WLAN/BT technologies, but the output power of these modems is not controlled by the TAS algorithm.

Band & Mode	Operating Modes	Tx Frequency
UMTS 850	Data	826.40 - 846.60 MHz
UMTS 1750	Data	1712.4 - 1752.6 MHz
UMTS 1900	Data	1852.4 - 1907.6 MHz
LTE Band 71	Data	665.5 - 695.5 MHz
LTE Band 12	Data	699.7 - 715.3 MHz
LTE Band 13	Data	779.5 - 784.5 MHz
LTE Band 14	Data	790.5 - 795.5 MHz
LTE Band 26	Data	814.7 - 848.3 MHz
LTE Band 5	Data	824.7 - 848.3 MHz
LTE Band 66	Data	1710.7 - 1779.3 MHz
LTE Band 4	Data	1710.7 - 1754.3 MHz
LTE Band 25	Data	1850.7 - 1914.3 MHz
LTE Band 2	Data	1850.7 - 1909.3 MHz
LTE Band 30	Data	2307.5 - 2312.5 MHz
LTE Band 7	Data	2502.5 - 2567.5 MHz
LTE Band 41	Data	2498.5 - 2687.5 MHz
LTE Band 38	Data	2572.5 - 2617.5 MHz
LTE Band 48	Data	3552.5 - 3697.5 MHz
NR Band n71	Data	665.5 - 695.5 MHz
NR Band n12	Data	701.5 - 713.5 MHz
NR Band n26	Data	816.5 - 846.5 MHz
NR Band n5	Data	826.5 - 846.5 MHz
NR Band n70	Data	1697.5 - 1707.5 MHz
NR Band n66	Data	1712.5 - 1777.5 MHz
NR Band n25	Data	1852.5 - 1912.5 MHz
NR Band n2	Data	1852.5 - 1907.5 MHz
NR Band n30	Data	2307.5 - 2312.5 MHz
NR Band n7	Data	2502.5 - 2567.5 MHz
NR Band n41	Data	2501.01 - 2685 MHz
NR Band n38	Data	2575 - 2615 MHz
NR Band n48	Data	3555 - 3694.98 MHz
NR Band n77	Data	3455.01 - 3544.98 MHz; 3705 - 3975 MHz
NR Band n258	Data	24250 - 24450 MHz; 24750 - 25250 MHz
NR Band n260	Data	37000 - 40000 MHz
NR Band n261	Data	27500 - 28350 MHz
2.4 GHz WIFI	Data	2412 - 2472 MHz
5 GHz WIFI	Data	U-NII-1: 5180 - 5240 MHz U-NII-2A: 5260 - 5320 MHz U-NII-2C: 5500 - 5720 MHz U-NII-3: 5745 - 5825 MHz U-NII-4: 5845 - 5885 MHz
6 GHz WIFI	Data	U-NII-5: 5945 - 6415 MHz U-NII-6: 6435 - 6515 MHz U-NII-7: 6535 - 6875 MHz U-NII-8: 6895 - 7115 MHz
2.4 GHz Bluetooth	Data	2402 - 2480 MHz

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 3 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.2 Time-Averaging for SAR

This device is enabled with MediaTek TAS algorithm to control and manage transmitting power in real time and to ensure that the time-averaged RF exposure from WWAN is in compliance with FCC requirements. This Part 0 report shows SAR characterization of WWAN radios. Characterization is achieved by determining P_{Limit} for WWAN that corresponds to the exposure design targets after accounting for all device design related uncertainties, i.e., SAR_design_target (< FCC SAR limit) for WWAN radios. The SAR characterization is denoted as SAR Char in this report. Section 1.3 includes a nomenclature of the specific terms used in this report.

The compliance test under the static transmission scenario and simultaneous transmission analysis are reported in Part 1 report. The validation of the time-averaging algorithm and compliance under the dynamic (time-varying) transmission scenario for WWAN technologies are reported in Part 2 report (report SN could be found in Section 1.4 – Bibliography).

1.3 Nomenclature for Part 0 Report

Technology	Term	Description
WWAN	P_{limit}	Power level that corresponds to the exposure design target (SAR_design_target) after accounting for all device design related uncertainties
	P_{max}	Maximum tune up output power
	SAR_design_target	Target SAR level < FCC SAR limit after accounting for all device design related uncertainties
	SAR Char	Table containing P_{limit} for all technologies and bands

1.4 Bibliography

Report Type	Report Serial Number
RF Exposure Part 2 Test Report	TESA2406000425ES
RF Exposure Compliance Summary Report	1M2405140039-21.A3L
RF Exposure Part 1 Test Report	1M2405140039-20.A3L
PD Evaluation Report (Part 0)	
Near Field PD Report (Part 1)	1M2405140039-23.A3L

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 4 of 298

REV 22.0
03/30/2022

2 SAR AND POWER DENSITY MEASUREMENTS

2.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 2-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

2.2 SAR Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

1. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
2. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
3. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume




Figure 2-1
Sample SAR Area Scan

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 5 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):

- a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
4. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.

Table 2-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 6 of 298

REV 22.0
03/30/2022

3 SAR CHARACTERIZATION

3.1 ECI and SAR Determination

For WWAN operations this device uses different Exposure Condition Index (ECI) via MediaTek TAS to configure different time averaged power levels based on certain exposure scenarios. Depending on the detection scheme implemented in the smartphone, the worst-case SAR was determined by measurements for the relevant exposure conditions for that ECI. Detailed descriptions of the detection mechanisms are included in the operational description.

When 1g SAR exposure comparison is needed, the worst-case was determined from SAR normalized to 1g SAR limit.

The exposure condition index (ECI) conditions used in Table 3-1 represent different exposure scenarios.

Table 3-1
Exposure Scenarios for MTK TAS

Scenario	Description	SAR Test Cases
Free (ECI = 0)	▪ Device transmits in tablet or laptop mode when grip sensors are not triggered	Tablet SAR per KDB Publication 648474 D04v01r03
Grip Sensor Active (ECI = 1)	▪ Device transmits in tablet or laptop mode when grip sensors are triggered	Tablet SAR per KDB Publication 648474 D04v01r03
Grip Sensor #3 Active (ECI = 2)	▪ Device transmits in tablet mode when grip sensor #3 is triggered	Tablet SAR per KDB Publication 648474 D04v01r03

3.2 SAR Design Target

SAR_design_target is determined by ensuring that it is less than FCC SAR limit after accounting for total device designed related uncertainties specified by the manufacturer (see Table 3-2).

Table 3-2
***SAR_design_target* Calculations for WWAN Operations**

<i>SAR_design_target</i>			
$SAR_design_target < SAR_regulatory_limit \times 10^{\frac{-Total\ Uncertainty}{10}}$			
1g SAR (W/kg)		10g SAR (W/kg)	
<i>Total Uncertainty</i>	1.0 dB	<i>Total Uncertainty</i>	1.0 dB
<i>SAR_regulatory_limit</i>	1.6 W/kg	<i>SAR_regulatory_limit</i>	4.0 W/kg
<i>SAR_design_target</i>	0.8 W/kg	<i>SAR_design_target</i>	2.0 W/kg

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 7 of 298

REV 22.0
03/30/2022

3.3 SAR Char

SAR test results corresponding to P_{max} for each antenna/technology/band/ECI can be found in Part 1 Test Report.

P_{limit} is calculated by linearly scaling with the measured SAR at the P_{part0} to correspond to the SAR_{design_target} . When $P_{limit} < P_{max}$, P_{part0} was used as P_{limit} in the TAS. When $P_{limit} > P_{max}$ and $P_{part0}=P_{max}$, calculated P_{limit} was used in the TAS. All reported SAR obtained from the P_{part0} SAR tests was less than $SAR_{Design_target} + 1$ dB Uncertainty. The final P_{limit} determination for each exposure scenario corresponding to SAR_{design_target} are shown in Table 3-3

Table 3-3
 P_{limit} Determination for MTK TAS

Exposure Condition Index (ECI)	P_{limit} Determination Scenarios
0	P_{limit} is calculated based on: • 1g Body Laptop SAR at 0 mm for bottom edge with keyboard accessory attached. • Tablet with no keyboard accessory and grip sensors inactive at 19, 15, 0 mm for back, top, right and left surfaces.
1	P_{limit} is calculated based on 1g Body Tablet SAR at 0 mm for back, top, bottom, right, and left surfaces with and without keyboard accessory.
2	P_{limit} is calculated based on 1g Body Tablet SAR at 0 mm for right edge with and without keyboard accessory for Ant M1.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 8 of 298

REV 22.0
03/30/2022

Table 3-4
SAR Characterizations for MTK TAS

Exposure Scenario		Maximum Tune-Up Output Power*	Free	Grip Sensor	Grip Sensor #3
Averaging Volume			1g	1g	1g
Spacing			0, 15, 19 mm	0 mm	0 mm
ECI			0	1	2
Technology/Band	Antenna	Pmax			
UMTS 850	M1	24.0	23.0	15.0	23.0
UMTS 1750	M1	24.0	29.4	13.5	22.5
UMTS 1900	M1	24.0	28.4	11.5	17.5
LTE Band 71	M1	24.0	23.5	15.5	23.5
LTE Band 12	M1	24.0	28.1	15.5	28.1
LTE Band 13	M1	24.0	25.4	14.0	25.4
LTE Band 14	M1	24.0	23.5	14.0	23.5
LTE Band 26/5	M1	24.0	25.5	14.0	25.5
LTE Band 66/4	M1	24.0	29.4	14.5	22.5
LTE Band 66	S2	24.0	28.1	12.5	N/A
LTE Band 4	S2	23.0	28.1	12.5	N/A
LTE Band 25/2	M1	24.0	27.8	12.0	17.5
LTE Band 25/2	S2	23.0	29.5	12.5	N/A
LTE Band 30	M1	23.0	27.8	12.0	20.0
LTE Band 30	S2	23.0	29.2	12.0	N/A
LTE Band 7	M1	24.0	25.4	11.0	20.0
LTE Band 7	S2	23.0	27.2	10.5	N/A
LTE Band 41/38 PC3	M1	22.0	26.4	10.0	19.4
LTE Band 41 PC2	M1	22.4	26.4	10.0	19.4
LTE Band 48	S4	21.0	23.2	10.5	N/A
NR Band n71	M1	24.0	27.9	16.0	27.9
NR Band n12	M1	24.0	28.5	16.0	28.5
NR Band n26/n5	M1	24.0	25.6	13.5	25.6
NR Band n70	M1	24.0	22.5	12.5	21.5
NR Band n66	M1	24.0	23.5	13.5	22.5
NR Band n25/n2	M1	24.0	23.0	11.0	17.5
NR Band n30	M1	23.0	28.1	10.5	20.0
NR Band n7	M1	24.0	23.0	9.5	19.0
NR Band n41/38 PC3	M1	24.0	18.0	11.0	18.0
NR Band n41 PC3	S2	21.5	16.0	11.0	N/A
NR Band n41 PC3	S4	23.5	17.5	11.0	N/A
NR Band n41 PC3	S1	20.0	14.0	11.5	N/A
NR Band n41 PC2	M1	27.0	18.0	11.0	18.0
NR Band n41 PC2	S2	21.5	16.0	11.0	N/A
NR Band n41 PC2	S4	23.5	17.5	11.0	N/A
NR Band n41 PC2	S1	20.0	14.0	11.5	N/A
NR Band n48	S4	23.0	17.0	10.0	N/A
NR Band n48	S2	19.0	13.0	9.5	N/A
NR Band n48	M2	20.0	14.0	7.0	N/A
NR Band n48	S3	22.5	16.5	9.5	N/A
NR Band n77 PC3	M2	24.0	18.0	9.0	N/A
NR Band n77 PC3	S2	21.5	15.5	8.0	N/A
NR Band n77 PC3	S4	21.5	15.5	6.5	N/A
NR Band n77 PC3	S3	21.5	15.5	6.5	N/A
NR Band n77 PC2	M2	27.0	18.0	9.0	N/A
NR Band n77 PC2	S2	21.5	15.5	8.0	N/A
NR Band n77 PC2	S4	21.5	15.5	6.5	N/A
NR Band n77 PC2	S3	21.5	15.5	6.5	N/A

1. When $P_{max} < P_{limit}$, the DUT will operate at a power level up to P_{max} .
2. All P_{limit} and maximum tune up output power P_{max} levels entered in above Table correspond to average power levels after accounting for duty cycle in the case of TDD or GMSK, modulation schemes (e.g. GSM and LTE TDD).
3. Maximum tune up output power P_{max} is used to configure EUT during RF tune up procedure. The maximum allowed output power is equal to maximum Tune up output power + 1dB device design uncertainty.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 9 of 298

REV 22.0
03/30/2022

4 EQUIPMENT LIST

For SAR measurements

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4404B	Spectrum Analyzer	N/A	N/A	N/A	MY45113242
Agilent	E4438C	ESG Vector Signal Generator	11/14/2023	Annual	11/14/2024	MY45093852
Agilent	E4438C	ESG Vector Signal Generator	11/15/2023	Annual	11/15/2024	MY45092078
Agilent	N5182A	MWG Vector Signal Generator	10/12/2023	Annual	10/12/2024	MY47400015
Agilent	N5182A	MWG Vector Signal Generator	3/7/2024	Annual	3/7/2025	MY47308609
Agilent	8753ES	S-Parameter Vector Network Analyzer	1/10/2024	Annual	1/10/2025	MY40001472
Agilent	8753ES	S-Parameter Vector Network Analyzer	7/21/2023	Annual	7/21/2024	US59170118
Agilent	E5515C	Wireless Communications Test Set	CBT	N/A	CBT	GB46310798
Agilent	E5515C	Wireless Communications Test Set	CBT	N/A	CBT	US41140256
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46370464
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433973
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433974
Amplifier Research	150A100C	Amplifier	CBT	N/A	CBT	350132
Anritsu	MNA110B	I/O Adapter	CBT	N/A	CBT	6261747881
Anritsu	ML2496A	Power Meter	6/24/2024	Annual	6/24/2025	1840005
Anritsu	ML2495A	Power Meter	7/8/2024	Annual	7/8/2025	1039008
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	11/8/2023	Annual	11/8/2024	1027293
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	12/15/2023	Annual	12/15/2024	6200901290
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	5/15/2024	Annual	5/15/2025	6262150047
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	5/30/2024	Annual	5/30/2025	6262044725
Anritsu	MT8800A	Radio Communication Test Station	CBT	N/A	CBT	6261967072
Anritsu	MT8800A	Radio Communication Test Station	4/10/2024	Annual	4/10/2025	6261987983
Anritsu	MT8800A	Radio Communication Test Station	5/2/2024	Annual	5/2/2025	6273174346
Anritsu	MA24106A	USB Power Sensor	12/4/2023	Annual	12/4/2024	1520501
Anritsu	MA24106A	USB Power Sensor	4/15/2024	Annual	4/15/2025	1827528
Mini-Circuits	PWR-4GHS	USB Power Sensor	6/13/2024	Annual	6/13/2025	1200100013
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240173446
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240171096
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240171059
Control Company	4040	Therm./ Clock/ Humidity Monitor	4/15/2024	Biennial	4/15/2026	240310280
Control Company	4040	Therm./ Clock/ Humidity Monitor	4/15/2024	Biennial	4/15/2026	240310282
Control Company	566379	Therm./ Clock/ Humidity Monitor	2/16/2024	Biennial	2/16/2026	240240513
Mitutoyo	500-196-30	CD-6 ASX digital Caliper	2/16/2022	Triennial	2/16/2025	A20238413
Keyight Technologies	N9020A	MXA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Agilent	N9020A	MXA Signal Analyzer	6/14/2024	Annual	6/14/2025	MY56470202
MCL	BW-N60W5+	Low Pass Filter DC to 6000 MHz	CBT	N/A	CBT	39
Mini-Circuits	VLF-6000+	Low Pass Filter DC to 6000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	VLF-6000+	Low Pass Filter DC to 6000 MHz	7/5/2023	Annual	7/5/2024	31634
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20-dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N250W5+	Low Pass Filter DC to 2700 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1226
Mini-Circuits	ZUDC10-83-5+	Directional Coupler	CBT	N/A	CBT	2050
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-53W2	Attenuator (3dB)	CBT	N/A	CBT	120
Seelionk	NC-100	Torque Wrench	CBT	N/A	CBT	2217
Seelionk	NC-100	Torque Wrench	4/2/2024	Biennial	4/2/2026	1262
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/11/2024	Annual	1/11/2025	150117
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	1/10/2024	Annual	1/10/2025	131454
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/10/2023	Annual	8/10/2024	146144
Rohde & Schwarz	CMW500	Wideband Radio Communication Tester	8/9/2023	Annual	8/9/2024	162125
SPEAG	DAK-3.5	Dielectric Assessment Kit	11/13/2023	Annual	11/13/2024	1277
SPEAG	DAK3-3.5	Portable Dielectric Assessment Kit	8/14/2023	Annual	8/14/2024	1041
SPEAG	MMA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1237
SPEAG	MMA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1331
SPEAG	MMA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1390
SPEAG	DAK-12	Dielectric Assessment Kit (4MHz - 3GHz)	3/11/2024	Annual	3/11/2025	1102
SPEAG	D750V3	750 MHz SAR Dipole	10/19/2021	Triennial	10/19/2024	1161
SPEAG	D750V3	750 MHz SAR Dipole	3/14/2022	Triennial	3/14/2025	1054
SPEAG	D835V2	835 MHz SAR Dipole	1/18/2024	Annual	1/18/2025	46133
SPEAG	D835V2	835 MHz SAR Dipole	3/11/2024	Annual	3/11/2025	46133
SPEAG	D835V2	835 MHz SAR Dipole	3/14/2022	Triennial	3/14/2025	46047
SPEAG	D1750V2	1750 MHz SAR Dipole	10/22/2021	Triennial	10/22/2024	1150
SPEAG	D1750V2	1750 MHz SAR Dipole	1/18/2022	Triennial	1/18/2025	1149
SPEAG	D1900V2	1900 MHz SAR Dipole	8/8/2022	Biennial	8/8/2024	54800
SPEAG	D1900V2	1900 MHz SAR Dipole	2/21/2022	Triennial	2/21/2025	56148
SPEAG	D2300V2	2300 MHz SAR Dipole	8/25/2022	Biennial	8/25/2024	1073
SPEAG	D2450V2	2450 MHz SAR Dipole	2/8/2024	Annual	2/8/2025	882
SPEAG	D2450V2	2450 MHz SAR Dipole	8/18/2023	Triennial	8/18/2024	981
SPEAG	D2450V2	2450 MHz SAR Dipole	11/25/2023	Triennial	11/25/2024	981
SPEAG	D2600V2	2600 MHz SAR Dipole	8/10/2023	Annual	8/10/2024	1126
SPEAG	D2600V2	2600 MHz SAR Dipole	4/8/2024	Annual	4/8/2025	1004
SPEAG	D2600V2	2600 MHz SAR Dipole	11/15/2022	Biennial	11/15/2024	1071
SPEAG	D3500V2	3500 MHz SAR Dipole	12/13/2022	Annual	12/13/2024	1058
SPEAG	D3500V2	3500 MHz SAR Dipole	1/10/2023	Biennial	1/10/2025	1097
SPEAG	D3700V2	3700 MHz SAR Dipole	12/13/2023	Annual	12/13/2024	1029
SPEAG	D3700V2	3700 MHz SAR Dipole	1/13/2023	Biennial	1/13/2025	1067
SPEAG	D3900V2	3900 MHz SAR Dipole	10/19/2023	Annual	10/19/2024	1056
SPEAG	D5GHV2	5 GHz SAR Dipole	4/9/2024	Annual	4/9/2025	1237
SPEAG	D5GHV2	5 GHz SAR Dipole	2/21/2024	Annual	2/21/2025	1057
SPEAG	D5GHV2	5 GHz SAR Dipole	1/17/2024	Annual	1/17/2025	1191
SPEAG	D6.5GHV2	6.5 GHz SAR Dipole	2/22/2024	Annual	2/22/2025	1111
SPEAG	D6.5GHV2	6.5 GHz SAR Dipole	1/10/2024	Annual	1/10/2025	1018
SPEAG	5G Verification Source 10GHz	10GHz System Verification Antenna	3/5/2024	Annual	3/5/2025	1002
SPEAG	DAE4	Dasg Data Acquisition Electronics	1/16/2024	Annual	1/16/2025	1530
SPEAG	DAE4	Dasg Data Acquisition Electronics	5/8/2024	Annual	5/8/2025	728
SPEAG	DAE4	Dasg Data Acquisition Electronics	3/27/2024	Annual	3/27/2025	1415
SPEAG	DAE4	Dasg Data Acquisition Electronics	3/12/2024	Annual	3/12/2025	665
SPEAG	DAE4	Dasg Data Acquisition Electronics	5/8/2024	Annual	5/8/2025	1678
SPEAG	DAE4	Dasg Data Acquisition Electronics	9/12/2023	Annual	9/12/2024	1449
SPEAG	DAE4	Dasg Data Acquisition Electronics	9/6/2023	Annual	9/6/2024	1364
SPEAG	DAE4	Dasg Data Acquisition Electronics	1/16/2024	Annual	1/16/2025	1466
SPEAG	DAE4	Dasg Data Acquisition Electronics	3/12/2024	Annual	3/12/2025	1272
SPEAG	DAE4ip	Dasg Data Acquisition Electronics	11/15/2023	Annual	11/15/2024	1639
SPEAG	DAE4ip	Dasg Data Acquisition Electronics	10/18/2023	Annual	10/18/2024	1638
SPEAG	DAE4	Dasg Data Acquisition Electronics	4/18/2024	Annual	4/18/2025	1407
SPEAG	DAE4	Dasg Data Acquisition Electronics	10/18/2023	Annual	10/18/2024	1322
SPEAG	EX3DV4	SAR Probe	5/10/2024	Annual	5/10/2025	3914
SPEAG	EX3DV4	SAR Probe	3/8/2024	Annual	3/8/2025	7527
SPEAG	EX3DV4	SAR Probe	9/12/2023	Annual	9/12/2024	7508
SPEAG	EX3DV4	SAR Probe	4/17/2024	Annual	4/17/2025	7718
SPEAG	EX3DV4	SAR Probe	1/16/2024	Annual	1/16/2025	7555
SPEAG	EX3DV4	SAR Probe	10/16/2023	Annual	10/16/2024	7539
SPEAG	EX3DV4	SAR Probe	3/8/2024	Annual	3/8/2025	7488
SPEAG	EX3DV4	SAR Probe	9/22/2023	Annual	9/22/2024	7670
SPEAG	EX3DV4	SAR Probe	5/8/2024	Annual	5/8/2025	7940
SPEAG	EX3DV4	SAR Probe	1/17/2024	Annual	1/17/2025	7713
SPEAG	EX3DV4	SAR Probe	10/23/2023	Annual	10/23/2024	7547
SPEAG	EX3DV4	SAR Probe	4/17/2024	Annual	4/17/2025	7659
SPEAG	EX3DV4	SAR Probe	7/7/2023	Annual	7/7/2024	7410
SPEAG	EUmmMW4	EUmmMW4 Probe	2/12/2024	Annual	2/12/2025	9622

Note:

1. CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 10 of 298

REV 22.0
03/30/2022

measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

2. Each equipment item was used solely within its respective calibration period.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 11 of 298

REV 22.0
03/30/2022

5 MEASUREMENT UNCERTAINTIES

For SAR Measurements

a	b	c	d	e= f(d,k)	f	g	h = c x f/e	i = c x g/e	k
Uncertainty Component	IEEE 1528 Sec.	ToL (± %)	Prob. Dist.	Div.	c _f 1gm	c _g 10 gms	1gm u _f (± %)	10gms u _g (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E.2.3	2	R	1.732	1	1	1.2	1.2	∞
Linearity	E.2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E.2.4	0.25	R	1.732	1	1	0.1	0.1	∞
Modulation Response	E.2.5	4.8	R	1.732	1	1	2.8	2.8	∞
Readout Electronics	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	R	1.732	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.732	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	3	R	1.732	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	3	R	1.732	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.732	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E.6.3	6.7	R	1.732	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	4	R	1.732	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E.4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E.2.9	5	R	1.732	1	1	2.9	2.9	∞
SAR Scaling	E.6.5	0	R	1.732	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E.3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E.3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E.3.4	3.4	R	1.732	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E.3.4	0.6	R	1.732	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)							RSS	12.2	12.0
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	24.4	24.0

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 12 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.



SAR EVALUATION REPORT

Applicant Name:
Samsung Electronics Co., Ltd.
129, Samsung-ro, Maetan dong,
Yeongtong-gu, Suwon-si
Gyeonggi-do, 16677, Korea

Date of Testing:
06/10/2024 - 07/22/2024
Test Site/Location:
Element, Columbia, MD, USA
Document Serial No.:
1M2405140039-20.A3L

FCC ID: A3LSMX828U

APPLICANT: SAMSUNG ELECTRONICS CO., LTD.

DUT Type: Portable Computing Device
Application Type: Certification
FCC Rule Part(s): CFR §2.1093
Model(s): SM-X828U

Equipment Class	Band & Mode	Tx Frequency	SAR	
			Eq Laptop SAR (W/kg)	Eq Tablet SAR (W/kg)
PCB	UMTS-B50	825.40 - 846.00 MHz	<0.1	0.60
PCB	UMTS-T350	1122.4 - 1172.6 MHz	<0.1	0.62
PCB	UMTS-T360	1852.4 - 1907.6 MHz	0.17	0.48
PCB	LTE-Band 71	665.5 - 695.5 MHz	<0.1	0.58
PCB	LTE-Band 12	699.7 - 715.3 MHz	0.11	0.54
PCB	LTE-Band 13	779.5 - 784.5 MHz	<0.1	0.63
PCB	LTE-Band 14	729.5 - 795.5 MHz	<0.1	0.77
PCB	LTE-Band 26	814.7 - 848.3 MHz	0.10	0.78
PCB	LTE-Band 5	824.7 - 848.3 MHz	N/A	N/A
PCB	LTE-Band 66	1710.7 - 1779.3 MHz	0.17	0.76
PCB	LTE-Band 4	1710.7 - 1754.3 MHz	N/A	N/A
PCB	LTE-Band 26	1850.7 - 1910.3 MHz	0.21	0.77
PCB	LTE-Band 2	1850.7 - 1900.3 MHz	N/A	N/A
PCB	LTE-Band 30	2307.5 - 2312.5 MHz	0.21	0.80
PCB	LTE-Band 7	2502.5 - 2567.5 MHz	0.20	0.82
PCB	LTE-Band 41	2498.5 - 2687.5 MHz	0.18	0.54
PCB	LTE-Band 38	2612.5 - 2617.5 MHz	N/A	N/A
PCB	LTE-Band 48	3525.5 - 3597.5 MHz	0.30	0.93
PCB	NR-Band n71	665.5 - 695.5 MHz	<0.1	0.51
PCB	NR-Band n12	701.5 - 715.5 MHz	<0.1	0.48
PCB	NR-Band n26	816.5 - 846.5 MHz	0.13	0.87
PCB	NR-Band n5	826.5 - 846.5 MHz	N/A	N/A
PCB	NR-Band n70	1677.5 - 1707.5 MHz	0.14	0.63
PCB	NR-Band n66	1712.5 - 1777.5 MHz	0.17	0.71
PCB	NR-Band n25	1852.5 - 1912.5 MHz	0.20	0.60
PCB	NR-Band n2	1852.5 - 1907.5 MHz	N/A	N/A
PCB	NR-Band n20	2307.5 - 2312.5 MHz	0.16	0.66
PCB	NR-Band n7	2502.5 - 2567.5 MHz	0.18	0.67
PCB	NR-Band n41	2501.01 - 2685 MHz	<0.1	0.73
PCB	NR-Band n38	2575 - 2615 MHz	N/A	N/A
CBE	NR-Band n48	3555 - 3694.96 MHz	0.26	0.89
PCB	NR-Band n77	3455.01 - 3544.98 MHz	0.24	0.54
DTX	2.4 GHz WFI	2412 - 2472 MHz	0.15	0.47
NR	5 GHz WFI	U-NR-1: 5130 - 5240 MHz	0.37	0.65
		U-NR-2A: 5200 - 5200 MHz		
		U-NR-2C: 5500 - 5720 MHz		
		U-NR-3: 5745 - 5825 MHz		
GCD	6 GHz WFI	U-NR-4: 5845 - 5885 MHz	0.16	0.71
		U-NR-5: 5945 - 6415 MHz		
		U-NR-6: 6435 - 6515 MHz		
		U-NR-7: 6535 - 6875 MHz		
DSS	2.4 GHz Bluetooth	U-NR-8: 6895 - 7115 MHz	1.01	0.59
		2402 - 2480 MHz		
Simultaneous SAR per IC/B 680/782 DO161/1703				
Equipment Class	Band & Mode	Tx Frequency	ACQ-1020/20	
			Laptop	Tablet
GCD	6 GHz WFI	U-NR-5: 5945 - 6415 MHz U-NR-6: 6435 - 6515 MHz U-NR-7: 6535 - 6875 MHz U-NR-8: 6895 - 7115 MHz	0.85	2.24

This wireless portable device has been shown to be capable of compliance for localized specific absorption rate (SAR) for uncontrolled environment/general population exposure limits specified in ANSI/IEEE C95.1-1992 and has been tested in accordance with the measurement procedures specified in Section 1.9 of this report; for North American frequency bands only.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them. Test results reported herein relate only to the item(s) tested.

RJ Ortanez
Executive Vice President



The SAR Tick is an initiative of the Mobile & Wireless Forum (MWF). While a product may be considered eligible, use of the SAR Tick logo requires an agreement with the MWF. Further details can be obtained by emailing: sartick@mwfaai.info.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 13 of 298

REV 22.0
03/30/2022

TABLE OF CONTENTS

1	DEVICE UNDER TEST	15
2	LTE AND NR INFORMATION	35
3	INTRODUCTION	37
4	DOSIMETRIC ASSESSMENT	38
5	TEST CONFIGURATION POSITIONS	39
6	RF EXPOSURE LIMITS	40
7	FCC MEASUREMENT PROCEDURES.....	42
8	RF CONDUCTED POWERS.....	47
9	SYSTEM VERIFICATION.....	104
10	SAR DATA SUMMARY	117
11	SAR MEASUREMENT VARIABILITY	155
12	ADDITIONAL TESTING PER FCC GUIDANCE	156
13	EQUIPMENT LIST.....	160
14	MEASUREMENT UNCERTAINTIES.....	161
15	CONCLUSION.....	164
16	REFERENCES	165
APPENDIX A: SAR TEST PLOTS		
APPENDIX B: SAR DIPOLE VERIFICATION PLOTS		
APPENDIX C: PROBE AND DIPOLE CALIBRATION CERTIFICATES		
APPENDIX D: SAR TISSUE SPECIFICATIONS		
APPENDIX E: MULTI-TX AND ANTENNA SAR CONSIDERATIONS		
APPENDIX F: POWER REDUCTION VERIFICATION		
APPENDIX G: SAR SYSTEM VALIDATION		
APPENDIX H: LTE AND NR LOWER BANDWIDTH RF CONDUCTED POWERS		
APPENDIX I: DOWNLINK LTE CA RF CONDUCTED POWERS		
APPENDIX J: IEEE 802.11ax RU SAR EXCLUSION		
APPENDIX K: DUT ANTENNA DIAGRAM AND SAR TEST SETUP PHOTOGRAPHS		

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 14 of 298

REV 22.0
03/30/2022

1 DEVICE UNDER TEST

1.1 Device Overview

Band & Mode	Operating Modes	Tx Frequency
UMTS 850	Data	826.40 - 846.60 MHz
UMTS 1750	Data	1712.4 - 1752.6 MHz
UMTS 1900	Data	1852.4 - 1907.6 MHz
LTE Band 71	Data	665.5 - 695.5 MHz
LTE Band 12	Data	699.7 - 715.3 MHz
LTE Band 13	Data	779.5 - 784.5 MHz
LTE Band 14	Data	790.5 - 795.5 MHz
LTE Band 26	Data	814.7 - 848.3 MHz
LTE Band 5	Data	824.7 - 848.3 MHz
LTE Band 66	Data	1710.7 - 1779.3 MHz
LTE Band 4	Data	1710.7 - 1754.3 MHz
LTE Band 25	Data	1850.7 - 1914.3 MHz
LTE Band 2	Data	1850.7 - 1909.3 MHz
LTE Band 30	Data	2307.5 - 2312.5 MHz
LTE Band 7	Data	2502.5 - 2567.5 MHz
LTE Band 41	Data	2498.5 - 2687.5 MHz
LTE Band 38	Data	2572.5 - 2617.5 MHz
LTE Band 48	Data	3552.5 - 3697.5 MHz
NR Band n71	Data	665.5 - 695.5 MHz
NR Band n12	Data	701.5 - 713.5 MHz
NR Band n26	Data	816.5 - 846.5 MHz
NR Band n5	Data	826.5 - 846.5 MHz
NR Band n70	Data	1697.5 - 1707.5 MHz
NR Band n66	Data	1712.5 - 1777.5 MHz
NR Band n25	Data	1852.5 - 1912.5 MHz
NR Band n2	Data	1852.5 - 1907.5 MHz
NR Band n30	Data	2307.5 - 2312.5 MHz
NR Band n7	Data	2502.5 - 2567.5 MHz
NR Band n41	Data	2501.01 - 2685 MHz
NR Band n38	Data	2575 - 2615 MHz
NR Band n48	Data	3555 - 3694.98 MHz
NR Band n77	Data	3455.01 - 3544.98 MHz; 3705 - 3975 MHz
NR Band n258	Data	24250 - 24450 MHz; 24750 - 25250 MHz
NR Band n260	Data	37000 - 40000 MHz
NR Band n261	Data	27500 - 28350 MHz
2.4 GHz WIFI	Data	2412 - 2472 MHz
5 GHz WIFI	Data	U-NII-1: 5180 - 5240 MHz U-NII-2A: 5260 - 5320 MHz U-NII-2C: 5500 - 5720 MHz U-NII-3: 5745 - 5825 MHz U-NII-4: 5845 - 5885 MHz
6 GHz WIFI	Data	U-NII-5: 5945 - 6415 MHz U-NII-6: 6435 - 6515 MHz U-NII-7: 6535 - 6875 MHz U-NII-8: 6895 - 7115 MHz
2.4 GHz Bluetooth	Data	2402 - 2480 MHz

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 15 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.2 Time-Averaging Algorithm for RF Exposure Compliance

This Device is enabled with MediaTek TAS feature for WWAN modes technologies. These features perform time averaging algorithm in real time to control and manage transmitting power and ensure the time-averaged RF exposure is in compliance with FCC requirements all the time. Refer to Compliance Summary document for detailed description of MediaTek TAS feature (report SN could be found in Section 1.11 – Bibliography).

Note that WLAN, and Bluetooth operations are not enabled with TAS.

The TAS algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit (i.e., Plimit for WWAN sub-6), for each characterized technology and band. Characterization is achieved by determining Plimit for WWAN sub-6 that corresponds to the exposure design targets after accounting for all device design related uncertainties, i.e., SAR_design_target (<FCC SAR Limit) for sub-6 radio. The SAR characterization is denoted as SAR char in this report (see RF Exposure Part 0 Test Report, report SN could be found in Section 1.10 - Bibliography).

TAS allows the device to transmit at higher power instantaneously, as high as Pmax, when needed, but enforces power limiting to maintain time-averaged transmit power to Plimit. Below table shows Final Plimit settings and maximum tune up output power Pmax configured for this EUT for various transmit conditions (Exposure Condition Index ECI for MediaTek). Note that the device uncertainty for sub-6GHz WWAN is 1.0dB for this EUT.

Exposure Scenario		Maximum Tune-Up Output Power*	Free	Grip Sensor	Grip Sensor #3
Averaging Volume			1g	1g	1g
Spacing			0, 15, 19 mm	0 mm	0 mm
ECI			0	1	2
Technology/Band	Antenna	Pmax			
UMTS 850	M1	24.0	23.0	15.0	23.0
UMTS 1750	M1	24.0	29.4	13.5	22.5
UMTS 1900	M1	24.0	28.4	11.5	17.5
LTE Band 71	M1	24.0	23.5	15.5	23.5
LTE Band 12	M1	24.0	28.1	15.5	28.1
LTE Band 13	M1	24.0	25.4	14.0	25.4
LTE Band 14	M1	24.0	23.5	14.0	23.5
LTE Band 26/5	M1	24.0	25.5	14.0	25.5
LTE Band 66/4	M1	24.0	29.4	14.5	22.5
LTE Band 66	S2	24.0	28.1	12.5	N/A
LTE Band 4	S2	23.0	28.1	12.5	N/A
LTE Band 25/2	M1	24.0	27.8	12.0	17.5
LTE Band 25/2	S2	23.0	29.5	12.5	N/A
LTE Band 30	M1	23.0	27.8	12.0	20.0
LTE Band 30	S2	23.0	29.2	12.0	N/A
LTE Band 7	M1	24.0	25.4	11.0	20.0
LTE Band 7	S2	23.0	27.2	10.5	N/A
LTE Band 41/38 PC3	M1	22.0	26.4	10.0	19.4
LTE Band 41 PC2	M1	22.4	26.4	10.0	19.4
LTE Band 48	S4	21.0	23.2	10.5	N/A
NR Band n71	M1	24.0	27.9	16.0	27.9
NR Band n12	M1	24.0	28.5	16.0	28.5
NR Band n26/n5	M1	24.0	25.6	13.5	25.6
NR Band n70	M1	24.0	22.5	12.5	21.5
NR Band n66	M1	24.0	23.5	13.5	22.5
NR Band n25/n2	M1	24.0	23.0	11.0	17.5
NR Band n30	M1	23.0	28.1	10.5	20.0
NR Band n7	M1	24.0	23.0	9.5	19.0
NR Band n41/38 PC3	M1	24.0	18.0	11.0	18.0
NR Band n41 PC3	S2	21.5	16.0	11.0	N/A
NR Band n41 PC3	S4	23.5	17.5	11.0	N/A
NR Band n41 PC3	S1	20.0	14.0	11.5	N/A
NR Band n41 PC2	M1	27.0	18.0	11.0	18.0
NR Band n41 PC2	S2	21.5	16.0	11.0	N/A
NR Band n41 PC2	S4	23.5	17.5	11.0	N/A
NR Band n41 PC2	S1	20.0	14.0	11.5	N/A
NR Band n48	S4	23.0	17.0	10.0	N/A
NR Band n48	S2	19.0	13.0	9.5	N/A
NR Band n48	M2	20.0	14.0	7.0	N/A
NR Band n48	S3	22.5	16.5	9.5	N/A
NR Band n77 PC3	M2	24.0	18.0	9.0	N/A
NR Band n77 PC3	S2	21.5	15.5	8.0	N/A
NR Band n77 PC3	S4	21.5	15.5	6.5	N/A
NR Band n77 PC3	S3	21.5	15.5	6.5	N/A
NR Band n77 PC2	M2	27.0	18.0	9.0	N/A
NR Band n77 PC2	S2	21.5	15.5	8.0	N/A
NR Band n77 PC2	S4	21.5	15.5	6.5	N/A
NR Band n77 PC2	S3	21.5	15.5	6.5	N/A

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 16 of 298

*Maximum tune up output power P_{max} is used to configure EUT during RF tune up procedure. The maximum allowed output power is equal to maximum Tune up output power + 1dB device design uncertainty.

The maximum time-averaged output power (dBm) for any WWAN sub-6 technology, band, and ECI is the minimum of ("Plimit " and "Maximum tune up output power Pmax") + 1dB device uncertainty. SAR values in this report were scaled to this maximum time-averaged output power to determine compliance per KDB Publication 447498 D01v06.

1.3 Power Reduction for SAR

This device uses a power reduction mechanism for SAR compliance. The power reduction mechanism is activated when the device is used in close proximity to the user's body. FCC KDB Publication 616217 D04v01r02 Section 6 was used as a guideline for selecting SAR test distances for this device. Detailed descriptions of the power reduction mechanism are included in the operational description.

This device uses an independent fixed level power reduction mechanism for WLAN/BT operations when 5G NR is active. Detailed descriptions of the power reduction mechanism are included in the operational description.

1.4 Nominal and Maximum Output Power Specifications

This device operates using the following maximum and nominal output power specifications. SAR values were scaled to the maximum allowed power to determine compliance per KDB Publication 447498 D04v01.

Note: Targets for 802.11ax RU operations can be found in 802.11ax RU SAR Exclusion Appendix.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 17 of 298

REV 22.0
03/30/2022

1.4.1 Licensed Output Power

UMTS Band 5 (850 MHz)					
Antenna M1					
Power Level		Modulated Average Output Power			
		3GPP WCDMA Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6	3GPP DC-HSDPA Rel 8
Pmax	Max Allowed Power	25.0	24.0	23.0	24.0
	Nominal	24.0	23.0	22.0	23.0
ECI = 0 (Free)	Max Allowed Power	24.0	23.0	22.0	23.0
	Nominal	23.0	22.0	21.0	22.0
ECI = 1 (Grip Sensor)	Max Allowed Power	16.0	16.0	16.0	16.0
	Nominal	15.0	15.0	15.0	15.0
ECI = 2 (Grip Sensor #3)	Max Allowed Power	24.0	23.0	22.0	23.0
	Nominal	23.0	22.0	21.0	22.0
UMTS Band 4 (1750 MHz)					
Antenna M1					
Power Level		Modulated Average Output Power			
		3GPP WCDMA Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6	3GPP DC-HSDPA Rel 8
Pmax	Max Allowed Power	25.0	24.0	23.0	24.0
	Nominal	24.0	23.0	22.0	23.0
ECI = 0 (Free)	Max Allowed Power	25.0	24.0	23.0	24.0
	Nominal	24.0	23.0	22.0	23.0
ECI = 1 (Grip Sensor)	Max Allowed Power	14.5	14.5	14.5	14.5
	Nominal	13.5	13.5	13.5	13.5
ECI = 2 (Grip Sensor #3)	Max Allowed Power	23.5	23.5	23.0	23.5
	Nominal	22.5	22.5	22.0	22.5
UMTS Band 2 (1900 MHz)					
Antenna M1					
Power Level		Modulated Average Output Power			
		3GPP WCDMA Rel 99	3GPP HSDPA Rel 5	3GPP HSUPA Rel 6	3GPP DC-HSDPA Rel 8
Pmax	Max Allowed Power	25.0	24.0	23.0	24.0
	Nominal	24.0	23.0	22.0	23.0
ECI = 0 (Free)	Max Allowed Power	25.0	24.0	23.0	24.0
	Nominal	24.0	23.0	22.0	23.0
ECI = 1 (Grip Sensor)	Max Allowed Power	12.5	12.5	12.5	12.5
	Nominal	11.5	11.5	11.5	11.5
ECI = 2 (Grip Sensor #3)	Max Allowed Power	18.5	18.5	18.5	18.5
	Nominal	17.5	17.5	17.5	17.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L		Page 18 of 298

REV 22.0
03/30/2022

Mode / Band	Antenna		Modulated Average Output Power (in dBm)			
			Pmax	ECI = 0 (Free)	ECI = 1 (Grip Sensor)	ECI = 2 (Grip Sensor #3)
LTE Band 71	M1	Max Allowed Power	25.0	24.5	16.5	24.5
		Nominal	24.0	23.5	15.5	23.5
LTE Band 12	M1	Max Allowed Power	25.0	25.0	16.5	25.0
		Nominal	24.0	24.0	15.5	24.0
LTE Band 13	M1	Max Allowed Power	25.0	25.0	15.0	25.0
		Nominal	24.0	24.0	14.0	24.0
LTE Band 14	M1	Max Allowed Power	25.0	24.5	15.0	24.5
		Nominal	24.0	23.5	14.0	23.5
LTE Band 26/5	M1	Max Allowed Power	25.0	25.0	15.0	25.0
		Nominal	24.0	24.0	14.0	24.0
LTE Band 66/4	M1	Max Allowed Power	25.0	25.0	15.5	23.5
		Nominal	24.0	24.0	14.5	22.5
LTE Band 66	S2	Max Allowed Power	25.0	25.0	13.5	N/A
		Nominal	24.0	24.0	12.5	N/A
LTE Band 4	S2	Max Allowed Power	24.0	24.0	13.5	N/A
		Nominal	23.0	23.0	12.5	N/A
LTE Band 25/2	M1	Max Allowed Power	25.0	25.0	13.0	18.5
		Nominal	24.0	24.0	12.0	17.5
LTE Band 25/2	S2	Max Allowed Power	24.0	24.0	13.5	N/A
		Nominal	23.0	23.0	12.5	N/A
LTE Band 30	M1	Max Allowed Power	24.0	24.0	13.0	21.0
		Nominal	23.0	23.0	12.0	20.0
LTE Band 30	S2	Max Allowed Power	24.0	24.0	13.0	N/A
		Nominal	23.0	23.0	12.0	N/A
LTE Band 7	M1	Max Allowed Power	25.0	25.0	12.0	21.0
		Nominal	24.0	24.0	11.0	20.0
LTE Band 7	S2	Max Allowed Power	24.0	24.0	11.5	N/A
		Nominal	23.0	23.0	10.5	N/A
LTE Band 41/38 PC3	M1	Max Allowed Power	25.0	25.0	13.0	22.4
		Nominal	24.0	24.0	12.0	21.4
LTE Band 41 PC2	M1	Max Allowed Power	27.0	27.0	14.6	24.0
		Nominal	26.0	26.0	13.6	23.0
LTE Band 48	S4	Max Allowed Power	24.0	24.0	13.5	N/A
		Nominal	23.0	23.0	12.5	N/A

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L		Page 19 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Mode / Band	Antenna		Modulated Average Output Power (in dBm)			
			Pmax	EI = 0 (Free)	EI = 1 (Grip Sensor)	EI = 2 (Grip Sensor #3)
NR Band n71	M1	Max Allowed Power	25.0	25.0	17.0	25.0
		Nominal	24.0	24.0	16.0	24.0
NR Band n12	M1	Max Allowed Power	25.0	25.0	17.0	25.0
		Nominal	24.0	24.0	16.0	24.0
NR Band n26/n5	M1	Max Allowed Power	25.0	25.0	14.5	25.0
		Nominal	24.0	24.0	13.5	24.0
NR Band n70	M1	Max Allowed Power	25.0	23.5	13.5	22.5
		Nominal	24.0	22.5	12.5	21.5
NR Band n66	M1	Max Allowed Power	25.0	24.5	14.5	23.5
		Nominal	24.0	23.5	13.5	22.5
NR Band n25/n2	M1	Max Allowed Power	25.0	24.0	12.0	18.5
		Nominal	24.0	23.0	11.0	17.5
NR Band n30	M1	Max Allowed Power	24.0	24.0	11.5	21.0
		Nominal	23.0	23.0	10.5	20.0
NR Band n7	M1	Max Allowed Power	25.0	24.0	10.5	20.0
		Nominal	24.0	23.0	9.5	19.0
NR Band n41/38 PC3	M1	Max Allowed Power	25.0	19.0	12.0	19.0
		Nominal	24.0	18.0	11.0	18.0
NR Band n41 PC3	S2	Max Allowed Power	22.5	17.0	12.0	N/A
		Nominal	21.5	16.0	11.0	N/A
NR Band n41 PC3	S4	Max Allowed Power	24.5	18.5	12.0	N/A
		Nominal	23.5	17.5	11.0	N/A
NR Band n41 PC3	S1	Max Allowed Power	21.0	15.0	12.5	N/A
		Nominal	20.0	14.0	11.5	N/A
NR Band n41 PC2	M1	Max Allowed Power	28.0	19.0	12.0	19.0
		Nominal	27.0	18.0	11.0	18.0
NR Band n41 PC2	S2	Max Allowed Power	22.5	17.0	12.0	N/A
		Nominal	21.5	16.0	11.0	N/A
NR Band n41 PC2	S4	Max Allowed Power	24.5	18.5	12.0	N/A
		Nominal	23.5	17.5	11.0	N/A
NR Band n41 PC2	S1	Max Allowed Power	21.0	15.0	12.5	N/A
		Nominal	20.0	14.0	11.5	N/A
NR Band n48	S4	Max Allowed Power	24.0	18.0	11.0	N/A
		Nominal	23.0	17.0	10.0	N/A
NR Band n48	S2	Max Allowed Power	20.0	14.0	10.5	N/A
		Nominal	19.0	13.0	9.5	N/A
NR Band n48	M2	Max Allowed Power	21.0	15.0	8.0	N/A
		Nominal	20.0	14.0	7.0	N/A
NR Band n48	S3	Max Allowed Power	23.5	17.5	10.5	N/A
		Nominal	22.5	16.5	9.5	N/A
NR Band n77 PC3	M2	Max Allowed Power	25.0	19.0	10.0	N/A
		Nominal	24.0	18.0	9.0	N/A
NR Band n77 PC3	S2	Max Allowed Power	22.5	16.5	9.0	N/A
		Nominal	21.5	15.5	8.0	N/A
NR Band n77 PC3	S4	Max Allowed Power	22.5	16.5	7.5	N/A
		Nominal	21.5	15.5	6.5	N/A
NR Band n77 PC3	S3	Max Allowed Power	22.5	16.5	7.5	N/A
		Nominal	21.5	15.5	6.5	N/A
NR Band n77 PC2	M2	Max Allowed Power	28.0	19.0	10.0	N/A
		Nominal	27.0	18.0	9.0	N/A
NR Band n77 PC2	S2	Max Allowed Power	22.5	16.5	9.0	N/A
		Nominal	21.5	15.5	8.0	N/A
NR Band n77 PC2	S4	Max Allowed Power	22.5	16.5	7.5	N/A
		Nominal	21.5	15.5	6.5	N/A
NR Band n77 PC2	S3	Max Allowed Power	22.5	16.5	7.5	N/A
		Nominal	21.5	15.5	6.5	N/A

For LTE TDD and NR TDD, the above powers listed are TDD burst average values.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L		Page 20 of 298

REV 22.0
03/30/2022

1.4.2 2.4 GHz SISO/MIMO WLAN Output Power

The below table is applicable in the following conditions:

- Maximum Power

Power Level	IEEE 802.11 Modulated Output Power (in dBm)							
	Antenna WIFI 0, Antenna WIFI 1, and SISO in MIMO							
	MIMO							
	b (CDD + STBC)		g (CDD + STBC)		n (CDD + STBC, SDM)		ax (SU) (CDD + STBC, SDM)	
Maximum / Nominal Power	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
2.45 GHz	19.0	18.0	18.0	17.0	18.0 ch. 1: 16.5 ch. 11: 17.0	17.0 15.5 16.0	15.0	14.0

The below table is applicable in the following conditions:

- Grip Sensor Active

Power Level	IEEE 802.11 Modulated Output Power (in dBm)							
	Antenna WIFI 0, Antenna WIFI 1, and SISO in MIMO							
	MIMO							
	b (CDD + STBC)		g (CDD + STBC)		n (CDD + STBC, SDM)		ax (SU) (CDD + STBC, SDM)	
Maximum / Nominal Power	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
2.45 GHz	12.0	11.0	12.0	11.0	12.0	11.0	12.0	11.0

The below table is applicable in the following conditions:

- Simultaneous conditions with 5/6 GHz WLAN and/or 5G FR1/FR2

Power Level	IEEE 802.11 Modulated Output Power (in dBm)							
	Antenna WIFI 0, Antenna WIFI 1, and SISO in MIMO							
	MIMO							
	b (CDD + STBC)		g (CDD + STBC)		n (CDD + STBC, SDM)		ax (SU) (CDD + STBC, SDM)	
Maximum / Nominal Power	Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
2.45 GHz	10.0	9.0	10.0	9.0	10.0	9.0	10.0	9.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 21 of 298

REV 22.0
03/30/2022

1.4.3 5 GHz SISO/MIMO WLAN Output Power

The below table is applicable in the following conditions:

- Maximum Power

Mode	Band	IEEE 802.11 Modulated Output Power (in dBm)							
		Antenna WIFI 0, Antenna WIFI 1, and SISO in MIMO							
		MIMO							
		a (CDD + STBC)		n (CDD + STBC, SDM)		ac (CDD + STBC, SDM)		ax (SU) (CDD + STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.
5 GHz WIFI (20MHz BW)	UNII-1	17.0 ch. 48: 13.0	16.0 12.0	17.0 ch. 48: 13.0	16.0 12.0	17.0 ch. 48: 13.0	16.0 12.0	11.0	10.0
	UNII-2A	17.0	16.0	17.0	16.0	17.0	16.0	11.0	10.0
	UNII-2C	17.0	16.0	17.0	16.0	17.0	16.0	11.0	10.0
	UNII-3	17.0 ch. 165: 16.0	16.0 15.0	17.0 ch. 165: 16.0	16.0 15.0	17.0 ch. 165: 16.0	16.0 15.0	11.0	10.0
	UNII-4	16.0	15.0	16.0	15.0	16.0	15.0	11.0	10.0
5 GHz WIFI (40MHz BW)	UNII-1			17.0 ch. 46: 13.0	16.0 12.0	17.0 ch. 38: 15.0 ch. 46: 13.0	16.0 14.0 12.0	11.0	10.0
	UNII-2A			17.0	16.0	17.0	16.0	11.0	10.0
	UNII-2C			17.0	16.0	17.0	16.0	11.0	10.0
	UNII-3			17.0	16.0	17.0	16.0	11.0	10.0
	UNII-4			16.0	15.0	16.0	15.0	11.0	10.0
5 GHz WIFI (80MHz BW)	UNII-1					12.5	11.5	11.0	10.0
	UNII-2A					16.0	15.0	11.0	10.0
	UNII-2C					16.0	15.0	11.0	10.0
	UNII-3					16.0	15.0	11.0	10.0
	UNII-4					16.0	15.0	11.0	10.0
5 GHz WIFI (160MHz BW)	UNII-1/2A					9.5	8.5	10.0	9.0
	UNII-2C					11.5	10.5	11.0	10.0
	UNII-3/4					15.0	14.0	11.0	10.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 22 of 298

REV 22.0
03/30/2022

The below table is applicable in the following conditions:

- Grip Sensor Active

Mode	Band	IEEE 802.11 Modulated Output Power (in dBm)								
		Antenna WIFI 0, Antenna WIFI 1, and SISO in MIMO								
		MIMO								
		a (CDD + STBC)		n (CDD + STBC, SDM)		ac (CDD + STBC, SDM)		ax (SU) (CDD + STBC, SDM)		
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	
5 GHz WIFI (20MHz BW)	UNII-1	8.0	7.0	8.0	7.0	8.0	7.0	8.0	7.0	
	UNII-2A	8.0	7.0	8.0	7.0	8.0	7.0	8.0	7.0	
	UNII-2C	8.0	7.0	8.0	7.0	8.0	7.0	8.0	7.0	
	UNII-3	8.0	7.0	8.0	7.0	8.0	7.0	8.0	7.0	
	UNII-4	7.5	6.5	7.5	6.5	7.5	6.5	7.5	6.5	
5 GHz WIFI (40MHz BW)	UNII-1				8.0	7.0	8.0	7.0	8.0	7.0
	UNII-2A				8.0	7.0	8.0	7.0	8.0	7.0
	UNII-2C				8.0	7.0	8.0	7.0	8.0	7.0
	UNII-3				8.0	7.0	8.0	7.0	8.0	7.0
	UNII-4				7.5	6.5	7.5	6.5	7.5	6.5
5 GHz WIFI (80MHz BW)	UNII-1						8.0	7.0	8.0	7.0
	UNII-2A						8.0	7.0	8.0	7.0
	UNII-2C						8.0	7.0	8.0	7.0
	UNII-3						8.0	7.0	8.0	7.0
	UNII-4						7.5	6.5	7.5	6.5
5 GHz WIFI (160MHz BW)	UNII-1/2A						8.0	7.0	8.0	7.0
	UNII-2C						8.0	7.0	8.0	7.0
	UNII-3/4						7.5	6.5	7.5	6.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 23 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

The below table is applicable in the following conditions:

- Simultaneous conditions with 2.4 GHz WLAN and/or 5G FR1/FR2

Mode	Band	IEEE 802.11 Modulated Output Power (in dBm)								
		Antenna WIFI 0, Antenna WIFI 1, and SISO in MIMO								
		MIMO								
		a (CDD + STBC)		n (CDD + STBC, SDM)		ac (CDD + STBC, SDM)		ax (SU) (CDD + STBC, SDM)		
Maximum / Nominal Power		Max	Nom.	Max	Nom.	Max	Nom.	Max	Nom.	
5 GHz WIFI (20MHz BW)	UNII-1	6.5	5.5	6.5	5.5	6.5	5.5	6.5	5.5	
	UNII-2A	6.5	5.5	6.5	5.5	6.5	5.5	6.5	5.5	
	UNII-2C	6.5	5.5	6.5	5.5	6.5	5.5	6.5	5.5	
	UNII-3	6.5	5.5	6.5	5.5	6.5	5.5	6.5	5.5	
		ch. 165: 6.0	5.0	ch. 165: 6.0	5.0	ch. 165: 6.0	5.0	ch. 165: 6.0	5.0	
UNII-4	6.0	5.0	6.0	5.0	6.0	5.0	6.0	5.0		
5 GHz WIFI (40MHz BW)	UNII-1				6.5	5.5	6.5	5.5	6.5	5.5
	UNII-2A				6.5	5.5	6.5	5.5	6.5	5.5
	UNII-2C				6.5	5.5	6.5	5.5	6.5	5.5
	UNII-3				6.5	5.5	6.5	5.5	6.5	5.5
	UNII-4				6.0	5.0	6.0	5.0	6.0	5.0
5 GHz WIFI (80MHz BW)	UNII-1					6.5	5.5	6.5	5.5	
	UNII-2A					6.5	5.5	6.5	5.5	
	UNII-2C					6.5	5.5	6.5	5.5	
	UNII-3					6.5	5.5	6.5	5.5	
	UNII-4					6.0	5.0	6.0	5.0	
5 GHz WIFI (160MHz BW)	UNII-1/2A					6.5	5.5	6.5	5.5	
	UNII-2C					6.5	5.5	6.5	5.5	
	UNII-3/4					6.0	5.0	6.0	5.0	

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 24 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

1.4.4 6 GHz SISO/MIMO WLAN Output Power

Note: Targets for 6GHz are applicable for both SP and LPI.

The below table is applicable in the following conditions:

- Maximum

Mode	Band	IEEE 802.11 Modulated Output Power (in dBm)			
		Antenna WIFI 0, Antenna WIFI 1, and SISO in MIMO			
		MIMO			
		a (CDD + STBC)		ax (SU) (CDD + STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.
6 GHz WIFI (20MHz BW)	UNII-5	10.0	9.0	10.0	9.0
	UNII-6	10.0	9.0	10.0	9.0
	UNII-7	10.0	9.0	10.0	9.0
	UNII-8	10.0	9.0	10.0	9.0
6 GHz WIFI (40MHz BW)	UNII-5			10.0	9.0
	UNII-6			10.0	9.0
	UNII-7			10.0	9.0
	UNII-8			10.0	9.0
6 GHz WIFI (80MHz BW)	UNII-5			10.0	9.0
	UNII-6			10.0	9.0
	UNII-7			10.0	9.0
	UNII-8			10.0	9.0
6 GHz WIFI (160MHz BW)	UNII-5			10.0	9.0
	UNII-6			10.0	9.0
	UNII-7			10.0	9.0
	UNII-8			10.0	9.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 25 of 298

REV 22.0
03/30/2022

The below table is applicable in the following conditions:

- Grip Sensor Active

Mode	Band	IEEE 802.11 Modulated Output Power (in dBm)			
		Antenna WIFI 0, Antenna WIFI 1, and SISO in MIMO			
		MIMO			
		a (CDD + STBC)		ax (SU) (CDD + STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.
6 GHz WIFI (20MHz BW)	UNII-5	6.5	5.5	6.5	5.5
	UNII-6	6.5	5.5	6.5	5.5
	UNII-7	6.5	5.5	6.5	5.5
	UNII-8	6.5	5.5	6.5	5.5
6 GHz WIFI (40MHz BW)	UNII-5			6.5	5.5
	UNII-6			6.5	5.5
	UNII-7			6.5	5.5
	UNII-8			6.5	5.5
6 GHz WIFI (80MHz BW)	UNII-5			6.5	5.5
	UNII-6			6.5	5.5
	UNII-7			6.5	5.5
	UNII-8			6.5	5.5
6 GHz WIFI (160MHz BW)	UNII-5			6.5	5.5
	UNII-6			6.5	5.5
	UNII-7			6.5	5.5
	UNII-8			6.5	5.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 26 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

The below table is applicable in the following conditions:

- Simultaneous conditions with 2.4 GHz WLAN and/or 5G FR1/FR2 NR

Mode	Band	IEEE 802.11 Modulated Output Power (in dBm)			
		Antenna WIFI 0, Antenna WIFI 1, and SISO in MIMO			
		MIMO			
		a (CDD + STBC)		ax (SU) (CDD + STBC, SDM)	
Maximum / Nominal Power		Max	Nom.	Max	Nom.
6 GHz WIFI (20MHz BW)	UNII-5	2.5	1.5	2.5	1.5
	UNII-6	2.5	1.5	2.5	1.5
	UNII-7	2.5	1.5	2.5	1.5
	UNII-8	2.5	1.5	2.5	1.5
6 GHz WIFI (40MHz BW)	UNII-5			2.5	1.5
	UNII-6			2.5	1.5
	UNII-7			2.5	1.5
	UNII-8			2.5	1.5
6 GHz WIFI (80MHz BW)	UNII-5			2.5	1.5
	UNII-6			2.5	1.5
	UNII-7			2.5	1.5
	UNII-8			2.5	1.5
6 GHz WIFI (160MHz BW)	UNII-5			2.5	1.5
	UNII-6			2.5	1.5
	UNII-7			2.5	1.5
	UNII-8			2.5	1.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 27 of 298

REV 22.0
03/30/2022

1.4.5 2.4 GHz Bluetooth Output Power

The below table is applicable in the following conditions:

- Maximum

Mode	Data Rate	Modulated Output Power (in dBm)			
		Single Antenna			
		Antenna WIFI 0		Antenna WIFI 1	
Maximum / Nominal Power		Max	Nom.	Max	Nom.
Bluetooth	1Mbps	15.0	14.0	15.0	14.0
Bluetooth EDR	2Mbps	15.0	14.0	15.0	14.0
Bluetooth EDR	3Mbps	15.0	14.0	15.0	14.0
Bluetooth LE	1Mbps	15.0	14.0	15.0	14.0
Bluetooth LE	2Mbps	15.0	14.0	15.0	14.0
Bluetooth LE	125kbps	13.0	12.0	13.0	12.0
Bluetooth LE	500kbps	13.0	12.0	13.0	12.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 28 of 298

REV 22.0
03/30/2022

The below table is applicable in the following conditions:

- Grip Sensor Active
- Grip Sensor Active with 5/6 GHz WLAN and/or 5G FR1/FR2 Active
- 5/6 GHz WLAN and/or 5G FR1/FR2 Active

Mode	Data Rate	Modulated Output Power (in dBm)			
		Single Antenna			
		Antenna WIFI 0		Antenna WIFI 1	
Maximum / Nominal Power		Max	Nom.	Max	Nom.
Bluetooth	1Mbps	7.5	6.5	7.5	6.5
Bluetooth EDR	2Mbps	7.5	6.5	7.5	6.5
Bluetooth EDR	3Mbps	7.5	6.5	7.5	6.5
Bluetooth LE	1Mbps	7.5	6.5	7.5	6.5
Bluetooth LE	2Mbps	7.5	6.5	7.5	6.5
Bluetooth LE	125kbps	7.5	6.5	7.5	6.5
Bluetooth LE	500kbps	7.5	6.5	7.5	6.5

1.5 DUT Antenna Locations

The overall dimensions of this device is > 200 mm. A diagram showing the location of the device antennas can be found in the DUT Antenna Diagram and SAR Test Setup Photographs Appendix. Exact dimensions and separation distances are shown in the Technical Descriptions in the FCC filings.

Table 1-1
Device Edges/Sides for SAR Testing Tablet Mode

Antenna	Back	Front	Top	Bottom	Right	Left
M1	Yes	No	Yes	No	Yes	Yes
S2	Yes	No	No	Yes	Yes	Yes
S4	Yes	No	No	Yes	Yes	Yes
M2	Yes	No	No	Yes	No	Yes
S3	Yes	No	Yes	Yes	Yes	Yes
WIFI 0	Yes	No	Yes	Yes	Yes	Yes
WIFI 1	Yes	No	Yes	Yes	Yes	Yes
MIMO	Yes	No	Yes	No	Yes	Yes

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 29 of 298

REV 22.0
03/30/2022

Table 1-2
Device Edges/Sides for SAR Testing Laptop Mode

Antenna	Back	Front	Top	Bottom	Right	Left
M1	No	No	No	Yes	No	No
S2	No	No	No	Yes	No	No
S4	No	No	No	Yes	No	No
S1	No	No	No	Yes	No	No
M2	No	No	No	Yes	No	No
S3	No	No	No	Yes	No	No
WIFI 0	No	No	No	Yes	No	No
WIFI 1	No	No	No	Yes	No	No
MIMO	No	No	No	Yes	No	No

Note: Note: Per FCC KDB Publication 616217 D04v01r01, particular edges were not required to be evaluated for SAR based on the SAR exclusion threshold in KDB 447498 D04v01. Additional edges may have been evaluated for simultaneous transmission analysis.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 30 of 298

REV 22.0
03/30/2022

1.6 Simultaneous Transmission Capabilities

According to FCC KDB Publication 447498 D04v01, transmitters are considered to be operating simultaneously when there is overlapping transmission, with the exception of transmissions during network hand-offs with maximum hand-off duration less than 30 seconds.

This device contains multiple transmitters that may operate simultaneously, and therefore requires a simultaneous transmission analysis according to FCC KDB Publication 447498 D04v01 4.3.2 procedures.

**Table 1-3
Simultaneous Transmission Scenarios**

No.	Capable Transmit Configuration	Tablet/Laptop	Notes
1	UMTS + 2.4 GHz Bluetooth WIFI 1	Yes ^A	^A Bluetooth Tethering is considered
2	UMTS + 2.4 GHz Bluetooth WIFI 1 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
3	UMTS + 2.4 GHz Bluetooth WIFI 1 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
4	UMTS + 2.4 GHz Bluetooth WIFI 0	Yes ^A	^A Bluetooth Tethering is considered
5	UMTS + 2.4 GHz Bluetooth WIFI 0 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
6	UMTS + 2.4 GHz Bluetooth WIFI 0 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
7	UMTS + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	
8	UMTS + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	
9	UMTS + 2.4 GHz WLAN MIMO	Yes	
10	UMTS + 5 GHz WLAN MIMO	Yes	
11	UMTS + 6 GHz WLAN MIMO	Yes	
12	UMTS + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
13	UMTS + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
14	UMTS + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1	Yes ^A	^A Bluetooth Tethering is considered
15	UMTS + 2.4 GHz WLAN WIFI 0	Yes	
16	UMTS + 2.4 GHz WLAN WIFI 1	Yes	
17	UMTS + 5 GHz WLAN WIFI 0	Yes	
18	UMTS + 5 GHz WLAN WIFI 1	Yes	
19	UMTS + 6 GHz WLAN WIFI 0	Yes	
20	UMTS + 6 GHz WLAN WIFI 1	Yes	
21	LTE + 2.4 GHz Bluetooth WIFI 1	Yes ^A	^A Bluetooth Tethering is considered
22	LTE + 2.4 GHz Bluetooth WIFI 1 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
23	LTE + 2.4 GHz Bluetooth WIFI 1 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
24	LTE + 2.4 GHz Bluetooth WIFI 0	Yes ^A	^A Bluetooth Tethering is considered
25	LTE + 2.4 GHz Bluetooth WIFI 0 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
26	LTE + 2.4 GHz Bluetooth WIFI 0 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
27	LTE + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	
28	LTE + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	
29	LTE + 2.4 GHz WLAN MIMO	Yes	
30	LTE + 5 GHz WLAN MIMO	Yes	
31	LTE + 6 GHz WLAN MIMO	Yes	
32	LTE + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
33	LTE + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
34	LTE + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1	Yes ^A	^A Bluetooth Tethering is considered
35	LTE + 2.4 GHz WLAN WIFI 0	Yes	
36	LTE + 2.4 GHz WLAN WIFI 1	Yes	
37	LTE + 5 GHz WLAN WIFI 0	Yes	
38	LTE + 5 GHz WLAN WIFI 1	Yes	
39	LTE + 6 GHz WLAN WIFI 0	Yes	
40	LTE + 6 GHz WLAN WIFI 1	Yes	
41	LTE + NR	Yes	
42	LTE + NR + 2.4 GHz Bluetooth WIFI 1	Yes ^A	^A Bluetooth Tethering is considered
43	LTE + NR + 2.4 GHz Bluetooth WIFI 1 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
44	LTE + NR + 2.4 GHz Bluetooth WIFI 1 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
45	LTE + NR + 2.4 GHz Bluetooth WIFI 0	Yes ^A	^A Bluetooth Tethering is considered
46	LTE + NR + 2.4 GHz Bluetooth WIFI 0 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
47	LTE + NR + 2.4 GHz Bluetooth WIFI 0 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
48	LTE + NR + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	
49	LTE + NR + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	
50	LTE + NR + 2.4 GHz WLAN MIMO	Yes	
51	LTE + NR + 5 GHz WLAN MIMO	Yes	
52	LTE + NR + 6 GHz WLAN MIMO	Yes	
53	LTE + NR + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
54	LTE + NR + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
55	LTE + NR + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1	Yes ^A	^A Bluetooth Tethering is considered
56	LTE + NR + 2.4 GHz WLAN WIFI 0	Yes	
57	LTE + NR + 2.4 GHz WLAN WIFI 1	Yes	
58	LTE + NR + 5 GHz WLAN WIFI 0	Yes	
59	LTE + NR + 5 GHz WLAN WIFI 1	Yes	
60	LTE + NR + 6 GHz WLAN WIFI 0	Yes	
61	LTE + NR + 6 GHz WLAN WIFI 1	Yes	
62	NR + 2.4 GHz Bluetooth WIFI 1	Yes ^A	^A Bluetooth Tethering is considered
63	NR + 2.4 GHz Bluetooth WIFI 1 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
64	NR + 2.4 GHz Bluetooth WIFI 1 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
65	NR + 2.4 GHz Bluetooth WIFI 0	Yes ^A	^A Bluetooth Tethering is considered
66	NR + 2.4 GHz Bluetooth WIFI 0 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
67	NR + 2.4 GHz Bluetooth WIFI 0 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
68	NR + 2.4 GHz WLAN MIMO + 6 GHz WLAN MIMO	Yes	
69	NR + 2.4 GHz WLAN MIMO + 5 GHz WLAN MIMO	Yes	
70	NR + 2.4 GHz WLAN MIMO	Yes	
71	NR + 5 GHz WLAN MIMO	Yes	
72	NR + 6 GHz WLAN MIMO	Yes	
73	NR + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1 + 5 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
74	NR + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1 + 6 GHz WLAN MIMO	Yes ^A	^A Bluetooth Tethering is considered
75	NR + 2.4 GHz Bluetooth WIFI 0 + 2.4 GHz WLAN WIFI 1	Yes ^A	^A Bluetooth Tethering is considered
76	NR + 2.4 GHz WLAN WIFI 0	Yes	
77	NR + 2.4 GHz WLAN WIFI 1	Yes	
78	NR + 5 GHz WLAN WIFI 0	Yes	
79	NR + 5 GHz WLAN WIFI 1	Yes	
80	NR + 6 GHz WLAN WIFI 0	Yes	
81	NR + 6 GHz WLAN WIFI 1	Yes	

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 31 of 298

1. This device supports 2x2 MIMO Tx for WLAN 802.11b/a/g/n/ac/ax. 802.11b/a/g/n/ac/ax supports CDD and STBC and 802.11n/ac/ax additionally supports SDM.
2. This device supports Bluetooth Tethering.
3. 2.4 GHz WLAN Antenna WIFI 0 and 2.4 GHz Bluetooth Ant WIFI 0 share the same antenna path and cannot transmit simultaneously.
4. 2.4 GHz WLAN Antenna WIFI 1 and 2.4 GHz Bluetooth Ant WIFI 1 share the same antenna path and cannot transmit simultaneously.
5. 5 GHz WLAN and 6 GHz WLAN share the same antenna path and cannot transmit simultaneously.
6. LTE + 5G NR FR1 Scenarios are limited to EN-DC combinations with anchor bands as shown in the NR FR1 checklist.

1.7 Miscellaneous SAR Test Considerations

(A) WIFI/BT

Since U-NII-1 and U-NII-2A bands have the same maximum output power and the highest reported SAR for U-NII-2A is less than 1.2 W/kg, SAR is not required for U-NII-1 band according to FCC KDB Publication 248227 D01v02r02.

This device supports IEEE 802.11ac with the following features:

- a) Up to 160 MHz Bandwidth only
- b) No aggregate channel configurations
- c) 2 Tx antenna output
- d) 256 QAM is supported
- e) TDWR and Band gap channels are supported

This device supports IEEE 802.11ax with the following features:

- a) Up to 160 MHz Bandwidth only for 5/6 GHz
- b) Up to 20 MHz Bandwidth only for 2.4 GHz
- c) 2 Tx antenna output
- d) Up to 1024 QAM is supported
- e) TDWR and Band gap channels are supported for 5/6 GHz
- f) MU-MIMO UL Operations are not supported

Per FCC Guidance, 802.11ax RU was considered a higher order 802.11 mode when compared to a/b/g/n/ac to apply KDB Publication 248227 D01v02r02 for OFDM mode selection. Therefore, SAR tests were not required for 802.11ax/be RU based on the maximum allowed output powers of OFDM modes and the reported SAR values. Per FCC Guidance, maximum conducted powers were performed for each RU size to demonstrate that the output powers would not be higher than the other OFDM 802.11 modes. Please see Measurement Reports SNs: 1M2405140039-11.A3L, and 1M2405140039-13.A3L for 802.11ax RU output powers.

Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors. FCC KDB 648474 and FCC KDB 248227 were followed for test positions, distances, and modes. Per TCB workshop October 2020 notes, 5 channels were tested. Absorbed power density (APD) using a 4cm² averaging area is reported based on SAR measurements. Incident power density is evaluated at 2mm ensuring that the resolution is sufficient such that integrated power density (IPD) between d=2mm and d=λ/5mm is ≥ -1dB per equipment manufacturer guidance. Power density results are scaled up for uncertainty above 30%.

(B) Licensed Transmitter(s)

This device is only capable of QPSK HSUPA in the uplink. Therefore, no additional SAR tests are required beyond that described for devices with HSUPA in KDB 941225 D01v03r01.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 32 of 298

REV 22.0
03/30/2022

LTE SAR for the higher modulations and lower bandwidths were not tested since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth; and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg for all configurations according to FCC KDB 941225 D05v02r04.

This device supports LTE Carrier Aggregation (CA) in the downlink. All uplink communications are identical to Release 8 specifications. Per FCC KDB Publication 941225 D05A v01r02, SAR for LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive. The downlink carrier aggregation exclusion analysis can be found in the Downlink LTE CA RF Conducted Powers Appendix.

This device supports downlink 4x4 MIMO operations for some LTE Bands. Per May 2017 TCB Workshop Notes, SAR for 4x4 DL MIMO was not needed since the maximum average output power in 4x4 DL MIMO mode was not more than 0.25 dB higher than the maximum output power with 4x4 DL MIMO inactive. Additionally, SAR for 4x4 MIMO Downlink Carrier Aggregation was not needed since the maximum average output power in 4x4 MIMO Downlink Carrier Aggregation mode was not more than 0.25 dB higher than the maximum output power with 4x4 MIMO Downlink and downlink carrier aggregation inactive.

This device supports LTE/NR capabilities with overlapping transmission frequency ranges. When the supported frequency range of an LTE/NR Band falls completely within an LTE/NR band with a larger transmission frequency range, both LTE/NR bands have the same target power (or the band with the larger transmission frequency range has a higher target power), and both LTE/NR bands share the same transmission path and signal characteristics, SAR was only assessed for the band with the larger transmission frequency range.

This device supports both Power Class 2 (PC2) and Power Class 3 (PC3) for LTE Band 41. Per May 2017 TCB Workshop Notes, SAR tests were performed with Power Class 3 (given the specific UL/DL limitations for Power Class 2). Additionally, SAR testing for the power class 2 condition was evaluated for the highest configuration in Power Class 3 for each test configuration to confirm the results were scalable linearly (See Section 12)

This device supports LTE Carrier Aggregation (CA) for LTE Band 7, LTE Band 66, LTE Band 41, and LTE Band 48 with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per 2017 Fall TCB Workshop Notes.

NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.

Per MTK guidance, SRS was tested with modulated signal. DFT-s-OFDM QPSK was used as the lowest order modulation and RB Size/Offset was selected to resemble continuous wave signal.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 33 of 298

REV 22.0
03/30/2022

1.8 Guidance Applied

- IEEE 1528-2013
- FCC KDB Publication 941225 D01v03r01, D05v02r05, D05Av01r02 (3G/4G)
- FCC KDB Publication 248227 D01v02r02 (SAR Considerations for 802.11 Devices)
- FCC KDB Publication 447498 D04v01 (General SAR Guidance)
- FCC KDB Publication 865664 D01v01r04, D02v01r02 (SAR Measurements up to 6 GHz)
- May 2017 TCB Workshop Notes (LTE 4x4 Downlink MIMO, LTE Band 41 Power Class 2/3)
- November 2017, April 2018, October 2018 TCB Workshop Notes (LTE Carrier Aggregation)
- April 2019 TCB Workshop Notes (IEEE 802.11ax)
- FCC KDB 648474 D04 (Accessories)
- FCC KDB Publication 616217 D04v01r02 (Tablet/Laptop)
- IEC 62479:2010
- SPEAG DASY6 System Handbook
- IEC/IEEE 63195-1:2022
- SPEAG DASY6 Application Note (Interim Procedures for Devices Operating at 6-10 GHz) (Nov 2021)

1.9 Device Serial Numbers

Several samples with identical hardware were used to support SAR testing. The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units. The serial numbers used for each test are indicated alongside the results in Section 10 and Section 11.

1.10 Bibliography

Report Type	Report Serial Number
RF Exposure Part 2 Test Report	TESA2406000425ES
RF Exposure Compliance Summary Report	1M2405140039-21.A3L
RF Exposure Part 0 Test Report	1M2405140039-22.A3L
PD Evaluation Report (Part 0)	
Near Field PD Report (Part 1)	1M2405140039-23.A3L

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 34 of 298

REV 22.0
03/30/2022

2 LTE AND NR INFORMATION

		LTE Information				
Form Factor		Portable Computing Device				
Frequency Range of each LTE transmission band		LTE Band 71: 665.5 - 695.5 MHz				
		LTE Band 12: 699.7 - 715.3 MHz				
		LTE Band 13: 779.5 - 794.5 MHz				
		LTE Band 14: 790.5 - 795.5 MHz				
		LTE Band 26: 814.7 - 848.3 MHz				
		LTE Band 5: 824.7 - 848.3 MHz				
		LTE Band 66: 1710.7 - 1779.3 MHz				
		LTE Band 4: 1710.7 - 1754.3 MHz				
		LTE Band 25: 1850.7 - 1914.3 MHz				
		LTE Band 2: 1850.7 - 1909.3 MHz				
		LTE Band 30: 2307.5 - 2312.5 MHz				
		LTE Band 7: 2502.5 - 2567.5 MHz				
		LTE Band 41: 2498.5 - 2567.5 MHz				
		LTE Band 38: 2572.5 - 2617.5 MHz				
		LTE Band 48: 3552.5 - 3697.5 MHz				
Channel Bandwidths		LTE Band 71: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
		LTE Band 12: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
		LTE Band 13: 5 MHz, 10 MHz				
		LTE Band 14: 5 MHz, 10 MHz				
		LTE Band 26: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz				
		LTE Band 5: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz				
		LTE Band 66: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
		LTE Band 4: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
		LTE Band 25: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
		LTE Band 2: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz				
		LTE Band 30: 5 MHz, 10 MHz				
		LTE Band 7: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
		LTE Band 41: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
		LTE Band 38: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
		LTE Band 48: 5 MHz, 10 MHz, 15 MHz, 20 MHz				
Channel Numbers and Frequencies (MHz)	Low	Low-Mid	Mid	Mid-High	High	
LTE Band 71: 5 MHz	665.5 (133147)		680.5 (133297)		695.5 (133447)	
LTE Band 71: 10 MHz	668 (133172)		680.5 (133297)		693 (133422)	
LTE Band 71: 15 MHz	670.5 (133197)		680.5 (133297)		690.5 (133397)	
LTE Band 71: 20 MHz	673 (133222)		680.5 (133297)		688 (133372)	
LTE Band 12: 1.4 MHz	699.7 (23017)		707.5 (23095)		715.3 (23173)	
LTE Band 12: 3 MHz	700.5 (23025)		707.5 (23095)		714.5 (23165)	
LTE Band 12: 5 MHz	701.5 (23035)		707.5 (23095)		713.5 (23155)	
LTE Band 12: 10 MHz	704 (23060)		707.5 (23095)		711 (23130)	
LTE Band 13: 5 MHz	779.5 (23205)		782 (23230)		784.5 (23255)	
LTE Band 13: 10 MHz	(N/A)		782 (23230)		(N/A)	
LTE Band 14: 5 MHz	790.5 (23305)		793 (23330)		795.5 (23355)	
LTE Band 14: 10 MHz	(N/A)		793 (23330)		(N/A)	
LTE Band 26: 1.4 MHz	814.7 (26697)		831.5 (26865)		848.3 (27033)	
LTE Band 26: 3 MHz	815.5 (26705)		831.5 (26865)		847.5 (27025)	
LTE Band 26: 5 MHz	816.5 (26715)		831.5 (26865)		846.5 (27015)	
LTE Band 26: 10 MHz	819 (26740)		831.5 (26865)		844 (26990)	
LTE Band 26: 15 MHz	821.5 (26765)		831.5 (26865)		841.5 (26965)	
LTE Band 5: 1.4 MHz	824.7 (26407)		836.5 (26525)		848.3 (26643)	
LTE Band 5: 3 MHz	825.5 (26415)		836.5 (26525)		847.5 (26635)	
LTE Band 5: 5 MHz	826.5 (26425)		836.5 (26525)		846.5 (26625)	
LTE Band 5: 10 MHz	829 (26450)		836.5 (26525)		844 (26600)	
LTE Band 66: 1.4 MHz	1710.7 (131979)		1745 (132322)		1779.3 (132665)	
LTE Band 66: 3 MHz	1711.5 (131987)		1745 (132322)		1778.5 (132657)	
LTE Band 66: 5 MHz	1712.5 (131997)		1745 (132322)		1777.5 (132647)	
LTE Band 66: 10 MHz	1715 (132022)		1745 (132322)		1775 (132622)	
LTE Band 66: 15 MHz	1717.5 (132047)		1745 (132322)		1772.5 (132597)	
LTE Band 66: 20 MHz	1720 (132072)		1745 (132322)		1770 (132572)	
LTE Band 4: 1.4 MHz	1710.7 (19957)		1732.5 (20175)		1754.3 (20393)	
LTE Band 4: 3 MHz	1711.5 (19965)		1732.5 (20175)		1753.5 (20385)	
LTE Band 4: 5 MHz	1712.5 (19975)		1732.5 (20175)		1752.5 (20375)	
LTE Band 4: 10 MHz	1715 (20000)		1732.5 (20175)		1750 (20350)	
LTE Band 4: 15 MHz	1717.5 (20025)		1732.5 (20175)		1747.5 (20325)	
LTE Band 4: 20 MHz	1720 (20050)		1732.5 (20175)		1745 (20300)	
LTE Band 25: 1.4 MHz	1850.7 (26047)		1882.5 (26365)		1914.3 (26683)	
LTE Band 25: 3 MHz	1851.5 (26055)		1882.5 (26365)		1913.5 (26675)	
LTE Band 25: 5 MHz	1852.5 (26065)		1882.5 (26365)		1912.5 (26665)	
LTE Band 25: 10 MHz	1855 (26090)		1882.5 (26365)		1910 (26640)	
LTE Band 25: 15 MHz	1857.5 (26115)		1882.5 (26365)		1907.5 (26615)	
LTE Band 25: 20 MHz	1860 (26140)		1882.5 (26365)		1905 (26590)	
LTE Band 2: 1.4 MHz	1850.7 (18607)		1880 (18900)		1909.3 (19133)	
LTE Band 2: 3 MHz	1851.5 (18615)		1880 (18900)		1908.5 (19185)	
LTE Band 2: 5 MHz	1852.5 (18625)		1880 (18900)		1907.5 (19175)	
LTE Band 2: 10 MHz	1855 (18650)		1880 (18900)		1905 (19150)	
LTE Band 2: 15 MHz	1857.5 (18675)		1880 (18900)		1902.5 (19125)	
LTE Band 2: 20 MHz	1860 (18700)		1880 (18900)		1900 (19100)	
LTE Band 30: 5 MHz	2307.5 (27765)		2310 (27710)		2312.5 (27735)	
LTE Band 30: 10 MHz	(N/A)		2310 (27710)		(N/A)	
LTE Band 7: 5 MHz	2502.5 (20775)		2536 (21100)		2567.5 (21425)	
LTE Band 7: 10 MHz	2505 (20800)		2535 (21100)		2565 (21400)	
LTE Band 7: 15 MHz	2507.5 (20825)		2536 (21100)		2562.5 (21375)	
LTE Band 7: 20 MHz	2510 (20850)		2536 (21100)		2560 (21350)	
LTE Band 41: 5 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41480)	
LTE Band 41: 10 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41480)	
LTE Band 41: 15 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41480)	
LTE Band 41: 20 MHz	2506 (39750)	2549.5 (40185)	2593 (40620)	2636.5 (41055)	2680 (41480)	
LTE Band 38: 5 MHz	2572.5 (37775)		2595 (38000)		2617.5 (38225)	
LTE Band 38: 10 MHz	2575 (37800)		2595 (38000)		2615 (38200)	
LTE Band 38: 15 MHz	2577.5 (37825)		2595 (38000)		2612.5 (38175)	
LTE Band 38: 20 MHz	2580 (37850)		2595 (38000)		2610 (38150)	
LTE Band 48: 5 MHz	3552.5 (55265)	3600.8 (55748)	(N/A)	3649.2 (56232)	3697.5 (56715)	
LTE Band 48: 10 MHz	3555 (55290)	3601.7 (55757)	(N/A)	3648.3 (56223)	3695 (56690)	
LTE Band 48: 15 MHz	3557.5 (55315)	3602.5 (55765)	(N/A)	3647.5 (56215)	3692.5 (56665)	
LTE Band 48: 20 MHz	3560 (55340)	3603.3 (55773)	(N/A)	3646.7 (56207)	3690 (56640)	
UE Category	UL UE Cat 18, DL UE Cat 19					
Modulations Supported in UL	QPSK, 16QAM, 64QAM, 256QAM					
LTE MPR Permanently implemented per 3GPP TS 36.101 section 6.2.3-6.2.57 (manufacturer attestation to be provided)	YES					
A-MPR (Additional MPR) disabled for SAR Testing?	YES					
LTE Carrier Aggregation Possible Combinations	The technical description includes all the possible carrier aggregation combinations					
LTE Additional Information	This device does not support full CA features on 3GPP Release 15. It supports carrier aggregation, downlink MIMO features as shown in the RF Conducted Powers section of this report and the Downlink LTE CA RF Conducted Powers Appendix. All uplink communications are identical to the Release 8 Specifications. Uplink communications are done on the PCC. The following LTE Release 15 Features are not supported: Relay, HetNet, Enhanced MIMO, eICIC, eMBMS, WII Offloading, Cross-Carrier Scheduling, Enhanced SC-FDMA.					

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 35 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

[illegible]

3 INTRODUCTION

The FCC and Innovation, Science, and Economic Development Canada have adopted the guidelines for evaluating the environmental effects of radio frequency (RF) radiation in ET Docket 93-62 on Aug. 6, 1996 and Health Canada Safety Code 6 to protect the public and workers from the potential hazards of RF emissions due to FCC-regulated portable devices. [1]

The safety limits used for the environmental evaluation measurements are based on the criteria published by the American National Standards Institute (ANSI) for localized specific absorption rate (SAR) in IEEE/ANSI C95.1-1992 Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz [3] and Health Canada RF Exposure Guidelines Safety Code 6 [22]. The measurement procedure described in IEEE/ANSI C95.3-2002 Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave [4] is used for guidance in measuring the Specific Absorption Rate (SAR) due to the RF radiation exposure from the Equipment Under Test (EUT). These criteria for SAR evaluation are similar to those recommended by the International Committee for Non-Ionizing Radiation Protection (ICNIRP) in Biological Effects and Exposure Criteria for Radiofrequency Electromagnetic Fields,” Report No. Vol 74. SAR is a measure of the rate of energy absorption due to exposure to an RF transmitting source. SAR values have been related to threshold levels for potential biological hazards.

3.1 SAR Definition

Specific Absorption Rate is defined as the time derivative (rate) of the incremental energy (dU) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dV) of a given density (ρ). It is also defined as the rate of RF energy absorption per unit mass at a point in an absorbing body (see Equation 3-1).

Equation 3-1
SAR Mathematical Equation

$$SAR = \frac{d}{dt} \left(\frac{dU}{dm} \right) = \frac{d}{dt} \left(\frac{dU}{\rho dv} \right)$$

SAR is expressed in units of Watts per Kilogram (W/kg).

$$SAR = \frac{\sigma \cdot E^2}{\rho}$$

where:

- σ = conductivity of the tissue-simulating material (S/m)
- ρ = mass density of the tissue-simulating material (kg/m³)
- E = Total RMS electric field strength (V/m)

NOTE: The primary factors that control rate of energy absorption were found to be the wavelength of the incident field in relation to the dimensions and geometry of the irradiated organism, the orientation of the organism in relation to the polarity of field vectors, the presence of reflecting surfaces, and whether conductive contact is made by the organism with a ground plane.[6]

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 37 of 298

REV 22.0
03/30/2022

4 DOSIMETRIC ASSESSMENT

4.1 Measurement Procedure

The evaluation was performed using the following procedure compliant to FCC KDB Publication 865664 D01v01r04 and IEEE 1528-2013:

5. The SAR distribution at the exposed side of the head or body was measured at a distance no greater than 5.0 mm from the inner surface of the shell. The area covered the entire dimension of the device-head and body interface and the horizontal grid resolution was determined per FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013.
6. The point SAR measurement was taken at the maximum SAR region determined from Step 1 to enable the monitoring of SAR fluctuations/drifts during the 1g/10g cube evaluation. SAR at this fixed point was measured and used as a reference value.
7. Based on the area scan data, the peak of the region with maximum SAR was determined by spline interpolation. Around this point, a volume was assessed according to the measurement resolution and volume size requirements of FCC KDB Publication 865664 D01v01r04 (See Table 4-1) and IEEE 1528-2013. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure (see references or the DASY manual online for more details):
 - a. SAR values at the inner surface of the phantom are extrapolated from the measured values along the line away from the surface with spacing no greater than that in Table 4-1. The extrapolation was based on a least-squares algorithm. A polynomial of the fourth order was calculated through the points in the z-axis (normal to the phantom shell).
 - b. After the maximum interpolated values were calculated between the points in the cube, the SAR was averaged over the spatial volume (1g or 10g) using a 3D-Spline interpolation algorithm. The 3D-spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y, and z directions). The volume was then integrated with the trapezoidal algorithm. One thousand points (10 x 10 x 10) were obtained through interpolation, in order to calculate the averaged SAR.
 - c. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
8. The SAR reference value, at the same location as step 2, was re-measured after the zoom scan was complete to calculate the SAR drift. If the drift deviated by more than 5%, the SAR test and drift measurements were repeated.




Figure 4-1
Sample SAR Area Scan

Table 4-1
Area and Zoom Scan Resolutions per FCC KDB Publication 865664 D01v01r04*

Frequency	Maximum Area Scan Resolution (mm) ($\Delta x_{\text{area}}, \Delta y_{\text{area}}$)	Maximum Zoom Scan Resolution (mm) ($\Delta x_{\text{zoom}}, \Delta y_{\text{zoom}}$)	Maximum Zoom Scan Spatial Resolution (mm)			Minimum Zoom Scan Volume (mm) (x,y,z)
			Uniform Grid	Graded Grid		
				$\Delta z_{\text{zoom}}(n)$	$\Delta z_{\text{zoom}}(1)^*$	
≤ 2 GHz	≤ 15	≤ 8	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
2-3 GHz	≤ 12	≤ 5	≤ 5	≤ 4	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 30
3-4 GHz	≤ 12	≤ 5	≤ 4	≤ 3	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 28
4-5 GHz	≤ 10	≤ 4	≤ 3	≤ 2.5	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 25
5-6 GHz	≤ 10	≤ 4	≤ 2	≤ 2	≤ 1.5* $\Delta z_{\text{zoom}}(n-1)$	≥ 22

*Also compliant to IEEE 1528-2013 Table 6

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 38 of 298

REV 22.0
03/30/2022

5 TEST CONFIGURATION POSITIONS

5.1 Device Holder

The device holder is made out of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$.

5.2 SAR Testing for Tablet per KDB Publication 616217 D04v01r02

Per FCC KDB Publication 616217 D04v01r02, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR Exclusion Threshold in KDB 447498 D04v01 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 39 of 298

REV 22.0
03/30/2022

6 RF EXPOSURE LIMITS

6.1 Uncontrolled Environment

UNCONTROLLED ENVIRONMENTS are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

CONTROLLED ENVIRONMENTS are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. This exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Table 6-1
SAR Human Exposure Specified in ANSI/IEEE C95.1-1992 and Health Canada Safety Code 6

HUMAN EXPOSURE LIMITS		
	UNCONTROLLED ENVIRONMENT <i>General Population</i> (W/kg) or (mW/g)	CONTROLLED ENVIRONMENT <i>Occupational</i> (W/kg) or (mW/g)
Peak Spatial Average SAR Head	1.6	8.0
Whole Body SAR	0.08	0.4
Peak Spatial Average SAR Hands, Feet, Ankle, Wrists, etc.	4.0	20

1. The Spatial Peak value of the SAR averaged over any 1 gram of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.
2. The Spatial Average value of the SAR averaged over the whole body.
3. The Spatial Peak value of the SAR averaged over any 10 grams of tissue (defined as a tissue volume in the shape of a cube) and over the appropriate averaging time.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 40 of 298

REV 22.0
03/30/2022

6.3 RF Exposure Limits for Frequencies above 6 GHz

Per §1.1310 (d)(3), the MPE limits are applied for frequencies above 6 GHz. Power Density is expressed in units of W/m^2 or mW/cm^2 .

Peak Spatially Averaged Power Density was evaluated over a circular area of 4 cm^2 per interim FCC Guidance for near-field power density evaluations per October 2018 TCB Workshop notes.

Table 6-2
Human Exposure Limits Specified in FCC 47 CFR §1.1310

Human Exposure to Radiofrequency (RF) Radiation Limits		
Frequency Range [MHz]	Power Density [mW/cm^2]	Average Time [Minutes]
(A) Limits For Occupational / Controlled Environments		
1,500 – 100,000	5.0	6
(B) Limits For General Population / Uncontrolled Environments		
1,500 – 100,000	1.0	30

Note: 1.0 mW/cm^2 is 10 W/m^2

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 41 of 298

REV 22.0
03/30/2022

7 FCC MEASUREMENT PROCEDURES

Power measurements for licensed transmitters are performed using a base station simulator under digital average power.

7.1 Measured and Reported SAR

Per FCC KDB Publication 447498 D04v01, when SAR is not measured at the maximum power level allowed for production units, the results must be scaled to the maximum tune-up tolerance limit according to the power applied to the individual channels tested to determine compliance. For simultaneous transmission, the measured aggregate SAR must be scaled according to the sum of the differences between the maximum tune-up tolerance and actual power used to test each transmitter. When SAR is measured at or scaled to the maximum tune-up tolerance limit, the results are referred to as *reported* SAR. The highest *reported* SAR results are identified on the grant of equipment authorization according to procedures in KDB 690783 D01v01r03.

7.2 3G SAR Test Reduction Procedure

In FCC KDB Publication 941225 D01v03r01, certain transmission modes within a frequency band and wireless mode evaluated for SAR are defined as primary modes. The equivalent modes considered for SAR test reduction are denoted as secondary modes. When the maximum output power including tune-up tolerance specified for production units in a secondary mode is ≤ 0.25 dB higher than the primary mode or when the highest reported SAR of the primary mode, scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode, is ≤ 1.2 W/kg, SAR measurements are not required for the secondary mode. These criteria are referred to as the 3G SAR test reduction procedure. When the 3G SAR test reduction procedure is not satisfied, SAR measurements are additionally required for the secondary mode.

7.3 Procedures Used to Establish RF Signal for SAR

The following procedures are according to FCC KDB Publication 941225 D01v03r01 “3G SAR Measurement Procedures.”

The device is placed into a simulated call using a base station simulator in a RF shielded chamber. Establishing connections in this manner ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. Devices under test are evaluated prior to testing, with a fully charged battery and were configured to operate at maximum output power. In order to verify that the device is tested throughout the SAR test at maximum output power, the SAR measurement system measures a “point SAR” at an arbitrary reference point at the start and end of the 1 gram SAR evaluation, to assess for any power drifts during the evaluation. If the power drift deviates by more than 5%, the SAR test and drift measurements are repeated.

7.4 SAR Measurement Conditions for UMTS

7.4.1 Output Power Verification

Maximum output power is verified on the High, Middle and Low channels according to the general descriptions in section 5.2 of 3GPP TS 34.121, using the appropriate RMC with TPC (transmit power control) set to all “1s” or applying the required inner loop power control procedures to maintain maximum output power while HSUPA is active. Results for all applicable physical channel configurations (DPCCH, DPDCHn and spreading codes, HS-DPCCH etc) are tabulated in this test report. All configurations that are not supported by the DUT or cannot be measured due to technical or equipment limitations are identified.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 42 of 298

REV 22.0
03/30/2022

7.4.2 Body SAR Measurements

SAR for body exposure configurations is measured using the 12.2 kbps RMC with the TPC bits all “1s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCH_n configurations supported by the handset with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured using an applicable RMC configuration with the corresponding spreading code or DPDCH_n, for the highest reported SAR configuration in 12.2 kbps RMC.

7.4.3 SAR Measurements with Rel 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

7.4.4 SAR Measurements with Rel 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body configurations with 12.2 kbps RMC as the primary mode. Otherwise, Body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA.

When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing.

7.4.5 SAR Measurement Conditions for DC-HSDPA

SAR is required for Rel. 8 DC-HSDPA when SAR is required for Rel. 5 HSDPA; otherwise, the 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

7.5 SAR Measurement Conditions for LTE

LTE modes are tested according to FCC KDB 941225 D05v02r04 publication. Establishing connections with base station simulators ensure a consistent means for testing SAR and are recommended for evaluating SAR [4]. The R&S CMW500 or Anritsu MT8820C simulators are used for LTE output power measurements and SAR testing. Closed loop power control was used so the UE transmits with maximum output power during SAR testing. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).

7.5.1 Spectrum Plots for RB Configurations

A properly configured base station simulator was used for SAR tests and power measurements. Therefore, spectrum plots for RB configurations were not required to be included in this report.

7.5.2 MPR

MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 43 of 298

REV 22.0
03/30/2022

7.5.3 A-MPR

A-MPR (Additional MPR) has been disabled for all SAR tests by setting NS=01 on the base station simulator.

7.5.4 Required RB Size and RB Offsets for SAR Testing

According to FCC KDB 941225 D05v02r04:

- a. Per Section 5.2.1, SAR is required for QPSK 1 RB Allocation for the largest bandwidth
 - i. The required channel and offset combination with the highest maximum output power is required for SAR.
 - ii. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required. Otherwise, SAR is required for the remaining required test channels using the RB offset configuration with highest output power for that channel.
 - iii. When the reported SAR for a required test channel is > 1.45 W/kg, SAR is required for all RB offset configurations for that channel.
- b. Per Section 5.2.2, SAR is required for 50% RB allocation using the largest bandwidth following the same procedures outlined in Section 5.2.1.
- c. Per Section 5.2.3, QPSK SAR is not required for the 100% allocation when the highest maximum output power for the 100% allocation is less than the highest maximum output power of the 1 RB and 50% RB allocations and the reported SAR for the 1 RB and 50% RB allocations is < 0.8 W/kg.
- d. Per Section 5.2.4 and 5.3, SAR tests for higher order modulations and lower bandwidths configurations are not required when the conducted power of the required test configurations determined by Sections 5.2.1 through 5.2.3 is less than or equal to $\frac{1}{2}$ dB higher than the equivalent configuration using QPSK modulation and when the QPSK SAR for those configurations is < 1.45 W/kg.

7.5.5 TDD

LTE TDD testing is performed using the SAR test guidance provided in FCC KDB 941225 D05v02r04. TDD is tested at the highest duty factor using UL-DL configuration 0 with special subframe configuration 6 and applying the FDD LTE procedures in KDB 941225 D05v02r04. SAR testing is performed using the extended cyclic prefix listed in 3GPP TS 36.211 Section 4.

7.5.6 Downlink Only Carrier Aggregation

Conducted power measurements with LTE Carrier Aggregation (CA) (downlink only) active are made in accordance to KDB Publication 941225 D05Av01r02. The RRC connection is only handled by one cell, the primary component carrier (PCC) for downlink and uplink communications. After making a data connection to the PCC, the UE device adds secondary component carrier(s) (SCC) on the downlink only. All uplink communications and acknowledgements remain identical to specifications when downlink carrier aggregation is inactive on the PCC. Additional conducted output powers are measured with the downlink carrier aggregation active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band. Per FCC KDB Publication 941225 D05Av01r02, no SAR measurements are required for downlink only carrier aggregation configurations when the average output power with downlink only carrier aggregation active is not more than 0.25 dB higher than the average output power with downlink only carrier aggregation inactive.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 44 of 298

REV 22.0
03/30/2022

7.6 SAR Testing with 802.11 Transmitters

The normal network operating configurations of 802.11 transmitters are not suitable for SAR measurements. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure the results are consistent and reliable. See KDB Publication 248227 D01v02r02 for more details.

7.6.1 General Device Setup

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters.

A periodic duty factor is required for current generation SAR systems to measure SAR. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. The reported SAR is scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

7.6.2 U-NII-1 and U-NII-2A

For devices that operate in both U-NII-1 and U-NII-2A bands, when the same maximum output power is specified for both bands, SAR measurement using OFDM SAR test procedures is not required for U-NII-1 unless the highest reported SAR for U-NII-2A is > 1.2 W/kg. When different maximum output powers are specified for the bands, SAR measurement for the U-NII band with the lower maximum output power is not required unless the highest reported SAR for the U-NII band with the higher maximum output power, adjusted by the ratio of lower to higher specified maximum output power for the two bands, is > 1.2 W/kg. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.6.3 U-NII-2C and U-NII-3

The frequency range covered by U-NII-2C and U-NII-3 is 380 MHz (5.47 – 5.85 GHz), which requires a minimum of at least two SAR probe calibration frequency points to support SAR measurements. When Terminal Doppler Weather Radar (TDWR) restriction applies, the channels at 5.60 – 5.65 GHz in U-NII-2C band must be disabled with acceptable mechanisms and documented in the equipment certification. Unless band gap channels are permanently disabled, SAR must be considered for these channels. Each band is tested independently according to the normally required OFDM SAR measurement and probe calibration frequency points requirements.

7.6.4 2.4 GHz SAR Test Requirements

SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:

- 1) When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
- 2) When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 45 of 298

REV 22.0
03/30/2022

2.4 GHz 802.11 g/n/ax OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test Configuration Procedures should be followed. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.6.5 OFDM Transmission Mode and SAR Test Channel Selection

When the same maximum output power was specified for multiple OFDM transmission mode configurations in a frequency band or aggregated band, SAR is measured using the configuration with the largest channel bandwidth, lowest order modulation and lowest data rate. When the maximum output power of a channel is the same for equivalent OFDM configurations; for example, 802.11a, 802.11n and 802.11ac or 802.11g and 802.11n with the same channel bandwidth, modulation and data rate etc., the lower order 802.11 mode i.e., 802.11a, then 802.11n and 802.11ac or 802.11g then 802.11n, is used for SAR measurement. Per April 2019 TCB Workshop guidance, 802.11ax was considered the highest order 802.11 mode. When the maximum output power are the same for multiple test channels, either according to the default or additional power measurement requirements, SAR is measured using the channel closest to the middle of the frequency band or aggregated band. When there are multiple channels with the same maximum output power, SAR is measured using the higher number channel.

7.6.6 Subsequent Test Configuration Procedures

For OFDM configurations in each frequency band and aggregated band, SAR is evaluated for initial test configuration using the fixed test position or the initial test position procedure. When the highest reported SAR (for the initial test configuration), adjusted by the ratio of the specified maximum output power of the subsequent test configuration to initial test configuration, is ≤ 1.2 W/kg, no additional SAR tests for the subsequent test configurations are required. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

7.6.7 MIMO SAR considerations

Per KDB Publication 248227 D01v02r02, the simultaneous SAR provisions in KDB Publication 447498 D04v01 should be applied to determine simultaneous transmission SAR test exclusion for WIFI MIMO. If the sum of 1g single transmission chain SAR measurements is < 1.6 W/kg, no additional SAR measurements for MIMO are required. Alternatively, SAR for MIMO can be measured with all antennas transmitting simultaneously at the specified maximum output power of MIMO operation. When 10g SAR measurement is considered, a factor of 2.5 is applied to the thresholds above.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 46 of 298

REV 22.0
03/30/2022

8 RF CONDUCTED POWERS

8.1 UMTS Conducted Powers

8.1.1 UMTS Antenna M1

Table 8-1
UMTS Antenna M1 Measured P_{Max} for ECI = 0 (Free)
UMTS 850 Antenna M1 Measured P_{Max} for ECI = 2 (Grip Sensor #3 Active)

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	23.50	23.49	23.73	23.50	23.57	23.58	23.60	23.54	23.59	-
6	HSDPA	Subtest 1	22.11	22.39	22.50	22.47	22.48	22.49	22.39	22.31	22.28	0
6		Subtest 2	22.09	22.37	22.54	22.52	22.53	22.52	22.40	22.27	22.26	0
6		Subtest 3	21.72	21.92	22.06	22.00	22.10	22.08	21.92	21.82	21.78	0.5
6		Subtest 4	21.67	21.88	21.97	21.92	21.97	21.99	21.86	21.74	21.74	0.5
6	HSUPA	Subtest 1	22.59	22.37	22.52	22.51	22.50	22.52	22.40	22.31	22.27	0
6		Subtest 2	22.11	22.43	22.55	22.54	22.52	22.56	22.41	22.32	22.30	2
6		Subtest 3	21.70	21.91	22.02	21.98	22.00	22.01	21.90	21.80	21.81	1
6		Subtest 4	22.17	22.45	22.55	22.56	22.59	22.60	22.45	22.37	22.32	2
6		Subtest 5	21.50	21.57	21.68	21.55	21.61	21.57	21.44	21.35	21.31	0
8	DC-HSDPA	Subtest 1	22.43	22.52	22.67	22.56	22.75	22.87	22.57	22.55	22.70	0
8		Subtest 2	22.45	22.52	22.57	22.43	22.65	22.86	22.26	22.52	22.54	0
8		Subtest 3	21.92	22.00	22.02	22.04	22.22	22.33	22.08	22.03	22.07	0.5
8		Subtest 4	21.90	22.01	22.15	22.09	22.19	22.37	22.09	22.04	22.15	0.5

Table 8-2
UMTS Antenna M1 Measured P_{limit} for ECI = 1 (Grip Sensor Active)

3GPP Release Version	Mode	3GPP 34.121 Subtest	Cellular Band [dBm]			AWS Band [dBm]			PCS Band [dBm]			3GPP MPR [dB]
			4132	4183	4233	1312	1412	1513	9262	9400	9538	
99	WCDMA	12.2 kbps RMC	15.40	15.57	15.63	13.23	13.24	13.22	11.24	11.16	11.15	-
6	HSDPA	Subtest 1	14.95	15.25	15.41	14.09	14.14	14.13	11.30	11.32	11.26	0
6		Subtest 2	14.93	15.20	15.36	14.07	14.06	14.10	11.27	11.28	11.20	0
6		Subtest 3	14.97	15.27	15.41	14.09	14.10	14.13	11.26	11.32	11.29	0
6		Subtest 4	14.93	15.21	15.36	14.05	14.09	14.07	11.26	11.27	11.23	0
6	HSUPA	Subtest 1	15.01	15.28	15.43	14.16	14.25	14.22	11.41	11.38	11.35	0
6		Subtest 2	14.93	15.25	15.39	14.19	14.22	14.18	11.38	11.39	11.35	0
6		Subtest 3	14.93	15.22	15.38	14.18	14.17	14.21	11.38	11.38	11.33	0
6		Subtest 4	14.95	15.24	15.41	14.18	14.18	14.21	11.39	11.40	11.35	0
6		Subtest 5	14.95	15.26	15.40	14.17	14.24	14.24	11.45	11.42	11.36	0
8	DC-HSDPA	Subtest 1	14.98	15.25	15.38	14.16	14.21	14.21	11.36	11.40	11.36	0
8		Subtest 2	14.92	15.27	15.37	14.21	14.20	14.22	11.36	11.37	11.35	0
8		Subtest 3	14.93	15.24	15.43	14.18	14.17	14.21	11.36	11.36	11.34	0
8		Subtest 4	14.94	15.27	15.37	14.17	14.21	14.25	11.37	11.36	11.32	0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 47 of 298

REV 22.0
03/30/2022

Table 8-3
UMTS 1750 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3)

3GPP Release Version	Mode	3GPP 34.121 Subtest	AWS Band [dBm]			MPR [dB]
			1312	1412	1513	
99	WCDMA	12.2 kbps RMC	22.00	21.96	21.99	-
6	HSDPA	Subtest 1	22.34	22.38	22.36	0
6		Subtest 2	22.31	22.34	22.31	0
6		Subtest 3	22.34	22.37	22.35	0
6		Subtest 4	22.30	22.32	22.30	0
6	HSUPA	Subtest 1	21.28	21.30	21.10	1
6		Subtest 2	21.09	21.09	21.09	1
6		Subtest 3	22.09	22.14	22.15	0
6		Subtest 4	20.59	20.63	20.58	1.5
6		Subtest 5	22.11	22.13	22.12	0
8	DC-HSDPA	Subtest 1	22.34	22.31	22.34	0
8		Subtest 2	22.29	22.33	22.32	0
8		Subtest 3	22.32	22.30	22.34	0
8		Subtest 4	22.33	22.34	22.35	0

Table 8-4
UMTS 1900 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3)

3GPP Release Version	Mode	3GPP 34.121 Subtest	PCS Band [dBm]			MPR [dB]
			9262	9400	9538	
99	WCDMA	12.2 kbps RMC	17.27	17.16	17.19	-
6	HSDPA	Subtest 1	17.49	17.48	17.43	0
6		Subtest 2	17.42	17.44	17.40	0
6		Subtest 3	17.48	17.48	17.42	0
6		Subtest 4	17.45	17.45	17.41	0
6	HSUPA	Subtest 1	17.44	17.46	17.39	0
6		Subtest 2	17.42	17.45	17.38	0
6		Subtest 3	17.46	17.41	17.41	0
6		Subtest 4	17.42	17.43	17.37	0
6		Subtest 5	17.47	17.45	17.42	0
8	DC-HSDPA	Subtest 1	17.42	17.44	17.39	0
8		Subtest 2	17.40	17.41	17.39	0
8		Subtest 3	17.36	17.41	17.42	0
8		Subtest 4	17.40	17.40	17.34	0

DC-HSDPA considerations

- 3GPP Specification 34.121-1 Release 8 Ver 8.10.0 was used for DC-HSDPA guidance
- H-Set 12 (QPSK) was confirmed to be used during DC-HSDPA measurements
- The DUT supports UE category 24 for HSDPA



Figure 8-1
Power Measurement Setup

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 48 of 298

8.2 LTE Conducted Powers

Note: Per FCC KDB Publication 941225 D05v02r05, LTE SAR for the lower bandwidths was not required for testing since the maximum average output power of all required channels and configurations was not more than 0.5 dB higher than the highest bandwidth and the reported LTE SAR for the highest bandwidth was less than 1.45 W/kg. Lower bandwidth conducted powers for all LTE bands can be found in the LTE and NR Lower Bandwidth Conducted Power Appendix.

Note: Some bands do not support three non-overlapping channels. Per KDB Publication 941225 D05v02, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

LTE Carrier Aggregation Notes:

1. This device supports uplink carrier aggregation for LTE CA_66B, LTE CA_7C, LTE CA_66C, LTE CA_48C, and LTE CA_41C with a maximum of two component carriers. For intraband contiguous carrier aggregation scenarios, 3GPP 36.101 Table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when non-contiguous RB allocation is implemented. The conducted powers and MPR settings in this device are permanently implemented per the above 3GPP requirements.
2. Per FCC Guidance, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 49 of 298

REV 22.0
03/30/2022

8.2.1 LTE Band 71 Antenna M1

Table 8-5
LTE Band 71 Antenna M1 Measured P_{limit} for ECI = 0 (Free), ECI = 2 (Grip Sensor #3 Active) - 20 MHz Bandwidth

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz) Conducted Power [dBm]		
QPSK	1	0	23.57	0	0
	1	50	23.43		0
	1	99	23.47		0
	50	0	22.64	0-1	0.5
	50	25	22.40		0.5
	50	50	22.52		0.5
	100	0	22.58		0.5
16QAM	1	0	22.85	0-1	0.5
	1	50	22.73		0.5
	1	99	22.82		0.5
	50	0	21.61	0-2	1.5
	50	25	21.36		1.5
	50	50	21.48		1.5
	100	0	21.58		1.5
64QAM	1	0	21.55	0-2	1.5
	1	50	21.39		1.5
	1	99	21.46		1.5
	50	0	20.99	0-3	2.5
	50	25	20.80		2.5
	50	50	20.86		2.5
	100	0	20.95		2.5
256QAM	1	0	18.94	0-5	4.5
	1	50	18.84		4.5
	1	99	18.88		4.5
	50	0	18.91		4.5
	50	25	18.76		4.5
	50	50	18.86		4.5
	100	0	18.86		4.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 50 of 298

REV 22.0
03/30/2022

Table 8-6
LTE Band 71 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			133297 (680.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	15.52	0	0
	1	50	15.23		0
	1	99	15.26		0
	50	0	15.55	0-1	0
	50	25	15.37		0
	50	50	15.50		0
	100	0	15.51		0
16QAM	1	0	15.40	0-1	0
	1	50	15.27		0
	1	99	15.29		0
	50	0	15.30	0-2	0
	50	25	15.04		0
	50	50	15.13		0
	100	0	15.19		0
64QAM	1	0	15.33	0-2	0
	1	50	15.13		0
	1	99	15.16		0
	50	0	15.34	0-3	0
	50	25	15.01		0
	50	50	15.14		0
	100	0	15.19		0
256QAM	1	0	15.30	0-5	0
	1	50	15.11		0
	1	99	14.99		0
	50	0	15.36		0
	50	25	15.03		0
	50	50	15.21		0
	100	0	15.19		0

8.2.2 LTE Band 12 Antenna M1

Table 8-7
LTE Band 12 Antenna M1 Measured P_{Max} for ECI = 0 (Free), ECI = 2 (Grip Sensor #3 Active) - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.99	0	0
	1	25	24.05		0
	1	49	23.63		0
	25	0	23.10	0-1	1
	25	12	23.03		1
	25	25	22.76		1
	50	0	22.97		1
16QAM	1	0	23.27	0-1	1
	1	25	23.31		1
	1	49	22.96		1
	25	0	22.19	0-2	2
	25	12	22.11		2
	25	25	21.84		2
	50	0	21.88		2
64QAM	1	0	22.25	0-2	2
	1	25	22.26		2
	1	49	21.94		2
	25	0	21.42	0-3	3
	25	12	21.35		3
	25	25	21.09		3
	50	0	21.23		3
256QAM	1	0	19.01	0-5	5
	1	25	19.04		5
	1	49	19.18		5
	25	0	19.35		5
	25	12	19.31		5
	25	25	19.06		5
	50	0	19.18		5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 51 of 298

REV 22.0
03/30/2022

Table 8-8
LTE Band 12 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 10 MHz Bandwidth

LTE Band 12 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23095 (707.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	15.81	0	0
	1	25	16.20		0
	1	49	15.89		0
	25	0	16.17	0-1	0
	25	12	15.76		0
	25	25	15.78		0
	50	0	15.79		0
16QAM	1	0	16.15	0-1	0
	1	25	16.19		0
	1	49	16.23		0
	25	0	15.76	0-2	0
	25	12	15.90		0
	25	25	15.78		0
	50	0	15.80		0
64QAM	1	0	15.95	0-2	0
	1	25	16.04		0
	1	49	16.01		0
	25	0	15.81	0-3	0
	25	12	15.91		0
	25	25	15.78		0
	50	0	15.72		0
256QAM	1	0	15.91	0-5	0
	1	25	15.98		0
	1	49	16.02		0
	25	0	15.82		0
	25	12	15.89		0
	25	25	15.76		0
	50	0	15.78		0

8.2.3 LTE Band 13 Antenna M1

Table 8-9
LTE Band 13 Antenna M1 Measured P_{Max} for ECI = 0 (Free), ECI = 2 (Grip Sensor #3 Active) - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23230 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.87	0	0
	1	25	23.89		0
	1	49	23.82		0
	25	0	22.81	0-1	1
	25	12	22.92		1
	25	25	22.95		1
	50	0	22.90		1
16QAM	1	0	23.27	0-1	1
	1	25	23.35		1
	1	49	23.25		1
	25	0	21.83	0-2	2
	25	12	21.95		2
	25	25	21.97		2
	50	0	21.82		2
64QAM	1	0	21.96	0-2	2
	1	25	22.05		2
	1	49	21.96		2
	25	0	20.79	0-3	3
	25	12	20.89		3
	25	25	20.91		3
	50	0	20.87		3
256QAM	1	0	19.30	0-5	5
	1	25	19.47		5
	1	49	19.41		5
	25	0	19.12		5
	25	12	19.30		5
	25	25	19.31		5
	50	0	19.17		5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 52 of 298

Table 8-10
LTE Band 13 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 10 MHz Bandwidth

LTE Band 13 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			2330 (782.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.64	0	0
	1	25	13.87		0
	1	49	13.54		0
	25	0	13.65	0-1	0
	25	12	13.59		0
	25	25	13.67		0
	50	0	13.59		0
16QAM	1	0	14.19	0-1	0
	1	25	14.00		0
	1	49	13.84		0
	25	0	13.58	0-2	0
	25	12	13.63		0
	25	25	13.56		0
	50	0	13.52		0
64QAM	1	0	14.07	0-2	0
	1	25	13.74		0
	1	49	13.71		0
	25	0	13.55	0-3	0
	25	12	13.61		0
	25	25	13.54		0
	50	0	13.55		0
256QAM	1	0	13.81	0-5	0
	1	25	13.67		0
	1	49	13.65		0
	25	0	13.54		0
	25	12	13.61		0
	25	25	13.56		0
	50	0	13.54		0

8.2.4 LTE Band 14 Antenna M1

Table 8-11
LTE Band 14 Antenna M1 Measured P_{limit} for ECI = 0 (Free), ECI = 2 (Grip Sensor #3 Active) - 10 MHz Bandwidth

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			2330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.90	0	0
	1	25	23.84		0
	1	49	23.76		0
	25	0	22.94	0-1	0.5
	25	12	22.88		0.5
	25	25	22.87		0.5
	50	0	22.89		0.5
16QAM	1	0	23.21	0-1	0.5
	1	25	23.19		0.5
	1	49	23.09		0.5
	25	0	22.00	0-2	1.5
	25	12	21.94		1.5
	25	25	21.96		1.5
	50	0	21.84		1.5
64QAM	1	0	22.18	0-2	1.5
	1	25	22.17		1.5
	1	49	22.03		1.5
	25	0	20.94	0-3	2.5
	25	12	20.86		2.5
	25	25	20.86		2.5
	50	0	20.87		2.5
256QAM	1	0	18.86	0-5	4.5
	1	25	18.78		4.5
	1	49	18.66		4.5
	25	0	19.18		4.5
	25	12	19.17		4.5
	25	25	19.12		4.5
	50	0	19.10		4.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 53 of 298

Table 8-12
LTE Band 14 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 10 MHz Bandwidth

LTE Band 14 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			23330 (793.0 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	13.62	0	0
	1	25	13.56		0
	1	49	13.52		0
	25	0	13.64	0-1	0
	25	12	13.55		0
	25	25	13.56		0
	50	0	13.55		0
16QAM	1	0	13.92	0-1	0
	1	25	13.92		0
	1	49	13.98		0
	25	0	13.59	0-2	0
	25	12	13.59		0
	25	25	13.59		0
	50	0	13.54		0
64QAM	1	0	13.84	0-2	0
	1	25	13.76		0
	1	49	13.78		0
	25	0	13.58	0-3	0
	25	12	13.58		0
	25	25	13.55		0
	50	0	13.55		0
256QAM	1	0	13.74	0-5	0
	1	25	13.66		0
	1	49	13.71		0
	25	0	13.59		0
	25	12	13.60		0
	25	25	13.58		0
	50	0	13.54		0

8.2.5 LTE Band 26 Antenna M1

Table 8-13
LTE Band 26 Antenna M1 Measured P_{Max} for ECI = 0 (Free), ECI = 2 (Grip Sensor #3 Active) - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz)		
			Conducted Power [dBm]		
QPSK	1	0	23.84	0	0
	1	36	23.92		0
	1	74	24.25		0
	36	0	22.84	0-1	1
	36	18	22.90		1
	36	37	23.20		1
	75	0	22.90		1
16QAM	1	0	22.76	0-1	1
	1	36	22.90		1
	1	74	23.00		1
	36	0	21.40	0-2	2
	36	18	21.46		2
	36	37	21.58		2
	75	0	21.52		2
64QAM	1	0	21.39	0-2	2
	1	36	21.53		2
	1	74	21.73		2
	36	0	20.39	0-3	3
	36	18	20.47		3
	36	37	20.56		3
	75	0	20.52		3
256QAM	1	0	18.93	0-5	5
	1	36	18.94		5
	1	74	18.97		5
	36	0	18.66		5
	36	18	18.77		5
	36	37	18.87		5
	75	0	18.85		5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 54 of 298

Table 8-14
LTE Band 26 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 15 MHz Bandwidth

LTE Band 26 (Cell) 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26865 (831.5 MHz) Conducted Power [dBm]		
QPSK	1	0	13.42	0	0
	1	36	13.48		0
	1	74	13.85		0
	36	0	13.50	0-1	0
	36	18	13.41		0
	36	37	13.74		0
	75	0	13.53		0
16QAM	1	0	13.66	0-1	0
	1	36	13.81		0
	1	74	14.04		0
	36	0	13.54	0-2	0
	36	18	13.48		0
	36	37	13.54		0
	75	0	13.55		0
64QAM	1	0	13.55	0-2	0
	1	36	13.66		0
	1	74	13.85		0
	36	0	13.56	0-3	0
	36	18	13.42		0
	36	37	13.59		0
	75	0	13.51		0
256QAM	1	0	13.45	0-5	0
	1	36	13.53		0
	1	74	13.78		0
	36	0	13.51		0
	36	18	13.43		0
	36	37	13.52		0
	75	0	13.54		0

8.2.6 LTE Band 66 Antenna M1

Table 8-15
LTE Band 66 (AWS) Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.84	23.77	23.56	0	0
	1	50	23.82	23.83	23.68		0
	1	99	23.85	23.76	23.69		0
	50	0	22.90	22.85	22.61	0-1	1
	50	25	22.87	22.84	22.73		1
	50	50	22.93	22.74	22.72		1
	100	0	22.89	22.79	22.76		1
16QAM	1	0	23.14	23.01	22.97	0-1	1
	1	50	23.17	23.21	23.09		1
	1	99	23.19	22.97	23.09		1
	50	0	21.81	21.73	21.59	0-2	2
	50	25	21.79	21.79	21.67		2
	50	50	21.87	21.72	21.67		2
	100	0	21.80	21.74	21.68		2
64QAM	1	0	21.98	21.82	21.82	0-2	2
	1	50	22.05	21.93	21.76		2
	1	99	21.96	21.97	21.88		2
	50	0	21.13	21.10	20.88	0-3	3
	50	25	21.08	21.09	20.99		3
	50	50	21.14	21.03	21.04		3
	100	0	21.16	21.06	20.97		3
256QAM	1	0	19.14	19.01	19.00	0-5	5
	1	50	19.15	19.23	19.10		5
	1	99	19.14	19.13	19.08		5
	50	0	19.17	19.04	18.86		5
	50	25	19.04	19.09	18.94		5
	50	50	19.10	19.05	18.99		5
	100	0	19.14	19.04	18.96		5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 55 of 298

Table 8-16
LTE Band 66 (AWS) Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]	
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)			
			Conducted Power [dBm]					
QPSK	1	0	23.64	23.63	23.62	0	0	
	1	25	23.63	23.67	23.65		0	
	1	49	23.65	23.57	23.52		0	
	25	0	22.69	22.64	22.73	0-1	1	
	25	12	22.68	22.70	22.70		1	
	25	25	22.59	22.60	22.58		1	
16QAM	50	0	22.63	22.63	22.67	0-1	1	
	1	0	22.96	22.83	22.79		0-2	1
	1	25	22.93	22.81	22.97			1
	1	49	22.90	22.93	22.94	0-2		1
	25	0	21.61	21.61	21.61		2	
	25	12	21.61	21.64	21.59		2	
64QAM	25	25	21.55	21.58	21.54	0-2	2	
	50	0	21.57	21.55	21.61		0-3	2
	1	0	21.88	21.79	21.73			2
	1	25	21.91	21.89	21.79	0-3		2
	1	49	21.83	21.78	21.78		0-3	2
	25	0	20.91	20.95	20.91			3
256QAM	25	12	20.95	20.96	20.97	0-3		3
	25	25	20.91	20.92	20.90		0-3	3
	50	0	20.89	20.89	20.92			3
	1	0	19.03	18.94	18.94	0-5		5
	1	25	19.08	18.99	19.00		5	
	1	49	19.07	19.07	19.04		5	
25	0	18.89	18.86	18.86	5			
25	12	18.95	18.86	18.88	5			
25	25	18.89	18.89	18.92	5			
256QAM	50	0	18.87	18.88	18.89		5	

Table 8-17
LTE Band 66 (AWS) Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.28	14.24	14.35	0	0
	1	50	14.24	14.23	14.18		0
	1	99	14.13	14.20	14.20		0
	50	0	14.34	14.38	14.39	0-1	0
	50	25	14.28	14.31	14.25		0
	50	50	14.18	14.20	14.25		0
	100	0	14.30	14.25	14.32	0	
16QAM	1	0	14.50	14.53	14.60	0-1	0
	1	50	14.54	14.53	14.49		0
	1	99	14.50	14.45	14.47		0
	50	0	14.33	14.30	14.32	0-2	0
	50	25	14.26	14.24	14.27		0
	50	50	14.20	14.24	14.28		0
	100	0	14.33	14.27	14.34	0	
64QAM	1	0	14.44	14.44	14.48	0-2	0
	1	50	14.39	14.45	14.34		0
	1	99	14.38	14.39	14.38		0
	50	0	14.32	14.33	14.32	0-3	0
	50	25	14.29	14.25	14.27		0
	50	50	14.27	14.23	14.25		0
	100	0	14.25	14.26	14.29	0	
256QAM	1	0	14.38	14.38	14.44	0-5	0
	1	50	14.21	14.31	14.44		0
	1	99	14.21	14.29	14.30		0
	50	0	14.32	14.37	14.33		0
	50	25	14.26	14.26	14.29		0
	50	50	14.20	14.21	14.29		0
	100	0	14.26	14.27	14.28		0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 56 of 298

Table 8-18
LTE Band 66 (AWS) Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 10 MHz Bandwidth

LTE Band 66 (AWS) 10 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132022 (1715.0 MHz)	132322 (1745.0 MHz)	132622 (1775.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	14.10	14.28	14.51	0	0
	1	25	14.13	14.40	14.58		0
	1	49	14.15	14.39	14.70		0
	25	0	14.21	14.39	14.56	0-1	0
	25	12	14.19	14.41	14.62		0
	25	25	14.16	14.40	14.58		0
	50	0	14.19	14.39	14.61		0
16QAM	1	0	14.43	14.63	14.84	0-1	0
	1	25	14.42	14.75	14.82		0
	1	49	14.49	14.69	14.80		0
	25	0	14.13	14.33	14.59	0-2	0
	25	12	14.15	14.38	14.61		0
	25	25	14.18	14.40	14.61		0
	50	0	14.17	14.36	14.58		0
64QAM	1	0	14.26	14.49	14.78	0-2	0
	1	25	14.35	14.50	14.78		0
	1	49	14.35	14.58	14.75		0
	25	0	14.11	14.34	14.60	0-3	0
	25	12	14.10	14.39	14.63		0
	25	25	14.17	14.34	14.63		0
	50	0	14.20	14.37	14.56		0
256QAM	1	0	14.22	14.36	14.67	0-5	0
	1	25	14.31	14.41	14.74		0
	1	49	14.23	14.52	14.80		0
	25	0	14.15	14.37	14.60		0
	25	12	14.14	14.40	14.65		0
	25	25	14.18	14.35	14.63		0
	50	0	14.14	14.35	14.60		0

Table 8-19
LTE Band 66 (AWS) Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3 Active) - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.00	21.84	22.05	0	0
	1	50	21.99	21.91	22.06		0
	1	99	21.98	21.87	22.04		0
	50	0	21.96	21.85	21.90	0-1	0
	50	25	21.96	21.88	21.98		0
	50	50	21.96	21.87	21.90		0
	100	0	21.93	21.86	21.92		0
16QAM	1	0	22.32	22.14	22.00	0-1	0
	1	50	22.25	22.19	21.97		0
	1	99	22.11	22.17	22.01		0
	50	0	22.10	21.83	21.65	0-2	0.5
	50	25	21.89	21.84	21.69		0.5
	50	50	21.88	21.79	21.73		0.5
	100	0	21.95	21.75	21.70		0.5
64QAM	1	0	22.12	21.98	21.83	0-2	0.5
	1	50	22.12	22.09	21.87		0.5
	1	99	22.15	22.10	22.20		0.5
	50	0	21.32	21.26	21.09	0-3	1.5
	50	25	21.36	21.29	21.05		1.5
	50	50	21.43	21.24	21.19		1.5
	100	0	21.37	21.21	21.14		1.5
256QAM	1	0	19.42	19.24	19.05	0-5	3.5
	1	50	19.42	19.34	19.21		3.5
	1	99	19.42	19.27	19.27		3.5
	50	0	19.32	19.26	19.05		3.5
	50	25	19.35	19.23	19.08		3.5
	50	50	19.39	19.18	19.10		3.5
	100	0	19.34	19.20	19.11		3.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L		Page 57 of 298

 REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-20

LTE Band 66 (AWS) Antenna M1 Uplink Carrier Aggregation Measured P_{Max} for ECI = 0 (Free)

Combination	PCC									SCC									Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL) Channel	SCC (UL) Frequency [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_66C	LTE B66	20	132072	1720.0	66536	2120.0	QPSK	1	99	LTE B66	20	132270	1739.8	66734	2139.8	QPSK	1	0	23.09	23.85
CA_66B	LTE B66	10	132022	1715.0	66486	2115.0	QPSK	1	49	LTE B66	10	132121	1724.9	66585	2124.9	QPSK	1	0	23.34	23.65

Table 8-21

LTE Band 66 (AWS) Antenna M1 Uplink Carrier Aggregation Measured P_{Max} for ECI = 1 (Grip Sensor Active)

Combination	PCC									SCC									Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL) Channel	PCC (UL) Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL) Channel	SCC (UL) Frequency [MHz]	SCC (DL) Channel	SCC (DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_66C	LTE B66	20	132572	1770.0	67036	2170.0	QPSK	1	0	LTE B66	20	132374	1750.2	66838	2150.2	QPSK	1	99	14.00	14.35
CA_66B	LTE B66	10	132622	1775.0	67086	2175.0	QPSK	1	0	LTE B66	10	132523	1765.1	66987	2165.1	QPSK	1	49	13.98	14.31

8.2.7 LTE Band 66 Antenna S2

Table 8-22

LTE Band 66 (AWS) Antenna S2 Measured P_{Max} for ECI = 0 (Free) - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.89	24.02	24.19	0	0
	1	50	23.96	24.20	24.23		0
	1	99	24.15	24.22	24.26		0
	50	0	22.94	23.17	23.21	0-1	1
	50	25	23.01	23.18	23.33		1
	50	50	23.24	23.28	23.30		1
	100	0	23.09	23.23	23.32	1	
16QAM	1	0	23.29	23.19	23.54	0-1	1
	1	50	23.38	23.60	23.33		1
	1	99	23.42	23.59	23.58		1
	50	0	22.42	22.65	22.64	0-2	2
	50	25	22.46	22.65	22.70		2
	50	50	22.62	22.73	22.74		2
	100	0	22.57	22.70	22.70	2	
64QAM	1	0	22.60	22.72	22.85	0-2	2
	1	50	22.69	22.93	22.93		2
	1	99	22.79	22.93	23.00		2
	50	0	21.40	21.65	21.62	0-3	3
	50	25	21.49	21.68	21.75		3
	50	50	21.65	21.69	21.73		3
	100	0	21.51	21.66	21.65	3	
256QAM	1	0	19.36	19.57	19.60	0-5	5
	1	50	19.55	19.73	19.79		5
	1	99	19.66	19.70	19.79		5
	50	0	19.35	19.63	19.58	0-5	5
	50	25	19.45	19.58	19.67		5
	50	50	19.60	19.60	19.69		5
	100	0	19.47	19.67	19.66		5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 58 of 298

Table 8-23
LTE Band 66 (AWS) Antenna S2 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 66 (AWS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			132072 (1720.0 MHz)	132322 (1745.0 MHz)	132572 (1770.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.19	12.36	12.43	0	0
	1	50	12.34	12.53	12.48		0
	1	99	12.41	12.49	12.58		0
	50	0	12.22	12.51	12.44	0-1	0
	50	25	12.35	12.48	12.58		0
	50	50	12.50	12.55	12.53		0
	100	0	12.39	12.54	12.47		0
16QAM	1	0	12.50	12.59	12.73	0-1	0
	1	50	12.62	12.77	12.76		0
	1	99	12.63	12.88	12.92		0
	50	0	12.17	12.51	12.41	0-2	0
	50	25	12.32	12.44	12.55		0
	50	50	12.53	12.49	12.47		0
	100	0	12.35	12.52	12.47		0
64QAM	1	0	12.36	12.55	12.67	0-2	0
	1	50	12.42	12.69	12.65		0
	1	99	12.65	12.73	12.71		0
	50	0	12.19	12.50	12.41	0-3	0
	50	25	12.30	12.50	12.55		0
	50	50	12.51	12.52	12.52		0
	100	0	12.36	12.50	12.46		0
256QAM	1	0	12.32	12.50	12.54	0-5	0
	1	50	12.46	12.54	12.52		0
	1	99	12.46	12.59	12.67		0
	50	0	12.23	12.51	12.41		0
	50	25	12.34	12.50	12.56		0
	50	50	12.50	12.52	12.51		0
	100	0	12.43	12.42	12.47		0

8.2.8 LTE Band 25 Antenna M1

Table 8-24
LTE Band 25 (PCS) Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.84	23.86	23.82	0	0
	1	50	23.85	23.83	23.75		0
	1	99	23.89	23.80	23.85		0
	50	0	22.85	22.90	22.86	0-1	1
	50	25	22.87	22.84	22.82		1
	50	50	22.91	22.83	22.72		1
	100	0	22.90	22.86	22.81		1
16QAM	1	0	23.10	23.23	23.32	0-1	1
	1	50	23.02	23.22	23.26		1
	1	99	23.04	23.21	23.24		1
	50	0	21.91	21.87	21.81	0-2	2
	50	25	21.84	21.79	21.76		2
	50	50	21.90	21.81	21.64		2
	100	0	21.87	21.86	21.77		2
64QAM	1	0	22.05	21.92	21.79	0-2	2
	1	50	21.99	21.93	21.75		2
	1	99	22.06	21.89	21.76		2
	50	0	20.87	20.88	20.83	0-3	3
	50	25	20.80	20.81	20.79		3
	50	50	20.85	20.83	20.73		3
	100	0	20.79	20.84	20.78		3
256QAM	1	0	19.24	19.26	19.01	0-5	5
	1	50	19.19	19.30	18.96		5
	1	99	19.23	19.23	18.98		5
	50	0	19.15	19.10	19.12		5
	50	25	19.09	19.09	19.05		5
	50	50	19.13	19.09	18.99		5
	100	0	19.08	19.08	19.06		5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 59 of 298

Table 8-25
LTE Band 25 (PCS) Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.06	12.09	12.10	0	0
	1	50	12.10	12.14	12.09		0
	1	99	12.18	12.10	12.19		0
	50	0	12.17	12.11	12.15	0-1	0
	50	25	12.13	12.17	12.20		0
	50	50	12.17	12.14	12.05		0
	100	0	12.14	12.14	12.18		0
16QAM	1	0	12.22	12.41	12.29	0-1	0
	1	50	12.49	12.45	12.41		0
	1	99	12.49	12.34	12.34		0
	50	0	12.17	12.13	12.17	0-2	0
	50	25	12.17	12.12	12.14		0
	50	50	12.23	12.11	12.10		0
	100	0	12.13	12.16	12.15		0
64QAM	1	0	12.23	12.34	12.30	0-2	0
	1	50	12.31	12.29	12.32		0
	1	99	12.33	12.38	12.28		0
	50	0	12.17	12.11	12.20	0-3	0
	50	25	12.19	12.18	12.19		0
	50	50	12.17	12.16	12.07		0
	100	0	12.13	12.13	12.15		0
256QAM	1	0	12.16	12.17	12.22	0-5	0
	1	50	12.28	12.28	12.22		0
	1	99	12.28	12.27	12.20		0
	50	0	12.20	12.16	12.15		0
	50	25	12.20	12.16	12.16		0
	50	50	12.23	12.14	12.04		0
	100	0	12.17	12.17	12.15		0

Table 8-26
LTE Band 25 (PCS) Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3 Active) - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	17.25	17.11	17.10	0	0
	1	50	17.26	17.15	17.06		0
	1	99	17.21	17.18	17.11		0
	50	0	17.26	17.23	17.21	0-1	0
	50	25	17.19	17.19	17.14		0
	50	50	17.27	17.20	17.08		0
16QAM	100	0	17.22	17.17	17.16	0-1	0
	1	0	17.39	17.43	17.41		0
	1	50	17.48	17.47	17.28		0
	1	99	17.50	17.39	17.41	0-2	0
	50	0	17.22	17.17	17.20		0
	50	25	17.16	17.11	17.11		0
64QAM	50	50	17.28	17.13	17.02	0-2	0
	100	0	17.25	17.20	17.15		0
	1	0	17.39	17.29	17.32	0-2	0
	1	50	17.39	17.30	17.30		0
	1	99	17.37	17.27	17.26		0
	256QAM	50	0	17.25	17.21	17.18	0-3
50		25	17.22	17.12	17.10	0	
50		50	17.24	17.13	17.09	0	
100		0	17.22	17.16	17.16	0-5	0
1		0	17.24	17.28	17.28		0
1		50	17.29	17.25	17.18		0
1	99	17.28	17.22	17.25	0		
50	0	17.22	17.20	17.18	0		
256QAM	50	25	17.15	17.14	17.10	0-5	0
	50	50	17.21	17.18	17.10		0
	100	0	17.19	17.16	17.17		0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 60 of 298

 REV 22.0
03/30/2022

8.2.9 LTE Band 25 Antenna S2

Table 8-27

LTE Band 25 (PCS) Antenna S2 Measured P_{Max} for ECI = 0 (Free) - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.81	22.74	22.82	0	0
	1	50	22.90	22.81	22.96		0
	1	99	22.85	22.89	22.97		0
	50	0	22.36	22.10	22.14	0-1	1
	50	25	22.28	22.14	22.37		1
	50	50	22.22	22.13	22.21		1
	100	0	22.27	22.10	22.16		1
16QAM	1	0	22.39	22.32	22.42	0-1	1
	1	50	22.47	22.33	22.59		1
	1	99	22.41	22.56	22.47		1
	50	0	21.25	21.09	21.14	0-2	2
	50	25	21.20	21.12	21.23		2
	50	50	21.23	21.09	21.09		2
	100	0	21.25	21.06	21.15		2
64QAM	1	0	21.32	21.22	21.28	0-2	2
	1	50	21.34	21.33	21.47		2
	1	99	21.33	21.42	21.46		2
	50	0	20.23	20.08	20.02	0-3	3
	50	25	20.20	20.13	20.16		3
	50	50	20.18	20.06	20.06		3
	100	0	20.21	20.06	20.07		3
256QAM	1	0	18.29	18.02	18.23	0-5	5
	1	50	18.25	18.18	18.13		5
	1	99	18.19	18.21	18.13		5
	50	0	18.18	18.03	18.01		5
	50	25	18.15	18.12	18.23		5
	50	50	18.14	18.09	18.07		5
	100	0	18.18	17.99	18.03		5

Table 8-28

LTE Band 25 (PCS) Antenna S2 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 25 (PCS) 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			26140 (1860.0 MHz)	26365 (1882.5 MHz)	26590 (1905.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	12.19	12.36	12.43	0	0
	1	50	12.34	12.53	12.48		0
	1	99	12.41	12.49	12.58		0
	50	0	12.22	12.51	12.44	0-1	0
	50	25	12.35	12.48	12.58		0
	50	50	12.50	12.55	12.53		0
	100	0	12.39	12.54	12.47		0
16QAM	1	0	12.50	12.59	12.73	0-1	0
	1	50	12.62	12.77	12.76		0
	1	99	12.63	12.88	12.92		0
	50	0	12.17	12.51	12.41	0-2	0
	50	25	12.32	12.44	12.55		0
	50	50	12.53	12.49	12.47		0
	100	0	12.35	12.52	12.47		0
64QAM	1	0	12.36	12.55	12.67	0-2	0
	1	50	12.42	12.69	12.65		0
	1	99	12.65	12.73	12.71		0
	50	0	12.19	12.50	12.41	0-3	0
	50	25	12.30	12.50	12.55		0
	50	50	12.51	12.52	12.52		0
	100	0	12.36	12.50	12.46		0
256QAM	1	0	12.32	12.50	12.54	0-5	0
	1	50	12.46	12.54	12.52		0
	1	99	12.46	12.59	12.67		0
	50	0	12.23	12.51	12.41		0
	50	25	12.34	12.50	12.56		0
	50	50	12.50	12.52	12.51		0
	100	0	12.43	12.42	12.47		0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 61 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

8.2.10 LTE Band 30 Antenna M1

Table 8-29
LTE Band 30 Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz) Conducted Power [dBm]		
QPSK	1	0	22.77	0	0
	1	25	22.80		0
	1	49	22.71		0
	25	0	21.72	0-1	1
	25	12	21.77		1
	25	25	21.78		1
16QAM	50	0	21.72	0-1	1
	1	0	22.29		1
	1	25	22.29		1
	1	49	22.21	0-2	1
	25	0	20.72		2
	25	12	20.79		2
64QAM	25	25	20.79	0-2	2
	50	0	20.67		2
	1	0	20.76	0-3	2
	1	25	20.76		2
	1	49	20.68		2
	25	0	19.98	0-3	3
256QAM	25	12	20.08		3
	25	25	20.12		3
	50	0	20.03	0-5	3
	1	0	18.43		5
	1	25	18.41		5
	1	49	18.37		5
256QAM	25	0	18.00	0-5	5
	25	12	18.08		5
	25	25	18.08		5
	50	0	18.06		5

Table 8-30
LTE Band 30 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz) Conducted Power [dBm]		
QPSK	1	0	11.88	0	0
	1	25	11.89		0
	1	49	11.86		0
	25	0	11.89	0-1	0
	25	12	11.96		0
	25	25	11.90		0
16QAM	50	0	11.85	0-1	0
	1	0	11.92		0
	1	25	11.92		0
	1	49	11.89	0-2	0
	25	0	11.92		0
	25	12	12.00		0
64QAM	25	25	11.97	0-2	0
	50	0	11.89		0
	1	0	11.83	0-3	0
	1	25	11.86		0
	1	49	11.82		0
	25	0	11.92	0-3	0
256QAM	25	12	11.99		0
	25	25	12.00		0
	50	0	11.90	0-5	0
	1	0	12.17		0
	1	25	12.18		0
	1	49	12.14		0
256QAM	25	0	11.94	0-5	0
	25	12	12.01		0
	25	25	11.99		0
	50	0	11.94		0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 62 of 298

Table 8-31
LTE Band 30 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3 Active) - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz) Conducted Power [dBm]		
QPSK	1	0	19.57	0	0
	1	25	19.66		0
	1	49	19.56		0
	25	0	19.49	0-1	0
	25	12	19.56		0
	25	25	19.57		0
	50	0	19.56		0
16QAM	1	0	19.82	0-1	0
	1	25	19.90		0
	1	49	19.81		0
	25	0	19.51	0-2	0
	25	12	19.57		0
	25	25	19.57		0
	50	0	19.54		0
64QAM	1	0	19.75	0-2	0
	1	25	19.75		0
	1	49	19.79		0
	25	0	19.43	0-3	0
	25	12	19.59		0
	25	25	19.58		0
	50	0	19.53		0
256QAM	1	0	18.20	0-5	2
	1	25	18.18		2
	1	49	18.13		2
	25	0	17.93		2
	25	12	18.04		2
	25	25	18.14		2
	50	0	18.06		2

8.2.11 LTE Band 30 Antenna S2

Table 8-32
LTE Band 30 Antenna S2 Measured P_{Max} for ECI = 0 (Free) - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz) Conducted Power [dBm]		
QPSK	1	0	23.12	0	0
	1	25	23.25		0
	1	49	23.19		0
	25	0	22.23	0-1	1
	25	12	22.30		1
	25	25	22.26		1
	50	0	22.24		1
16QAM	1	0	22.52	0-1	1
	1	25	22.66		1
	1	49	22.57		1
	25	0	21.21	0-2	2
	25	12	21.24		2
	25	25	21.28		2
	50	0	21.26		2
64QAM	1	0	21.40	0-2	2
	1	25	21.42		2
	1	49	21.41		2
	25	0	20.19	0-3	3
	25	12	20.27		3
	25	25	20.23		3
	50	0	20.22		3
256QAM	1	0	18.23	0-5	5
	1	25	18.31		5
	1	49	18.28		5
	25	0	18.17		5
	25	12	18.20		5
	25	25	18.17		5
	50	0	18.20		5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 63 of 298

Table 8-33
LTE Band 30 Antenna S2 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 10 MHz Bandwidth

LTE Band 30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Mid Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			27710 (2310.0 MHz) Conducted Power [dBm]		
QPSK	1	0	11.72	0	0
	1	25	11.60		0
	1	49	11.71		0
	25	0	11.59	0-1	0
	25	12	11.59		0
	25	25	11.70		0
	50	0	11.53		0
	50	0	11.53		0
16QAM	1	0	11.89	0-1	0
	1	25	11.94		0
	1	49	11.95		0
	25	0	11.53	0-2	0
	25	12	11.58		0
	25	25	11.53		0
	50	0	11.53		0
	50	0	11.53		0
64QAM	1	0	11.68	0-2	0
	1	25	11.82		0
	1	49	11.82		0
	25	0	11.52	0-3	0
	25	12	11.60		0
	25	25	11.58		0
	50	0	11.56		0
	50	0	11.56		0
256QAM	1	0	11.67	0-5	0
	1	25	11.74		0
	1	49	11.74		0
	25	0	11.57		0
	25	12	11.60		0
	25	25	11.56		0
	50	0	11.63		0
	50	0	11.63		0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 64 of 298

REV 22.0
03/30/2022

8.2.12 LTE Band 7 Antenna M1

Table 8-34
LTE Band 7 Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	23.90	23.96	23.91	0	0
	1	50	23.89	23.90	23.83		0
	1	99	23.91	23.84	23.76		0
	50	0	22.88	22.88	22.82	0-1	1
	50	25	22.87	22.90	22.77		1
	50	50	22.89	22.87	22.76		1
	100	0	22.85	22.89	22.80		1
16QAM	1	0	23.36	23.13	23.29	0-1	1
	1	50	23.34	23.13	23.16		1
	1	99	23.36	23.08	23.07		1
	50	0	21.83	21.87	21.82	0-2	2
	50	25	21.84	21.90	21.74		2
	50	50	21.82	21.88	21.76		2
	100	0	21.89	21.86	21.76		2
64QAM	1	0	21.84	22.10	21.98	0-2	2
	1	50	21.81	22.12	21.88		2
	1	99	21.86	22.09	21.76		2
	50	0	20.83	20.82	20.80	0-3	3
	50	25	20.86	20.85	20.74		3
	50	50	20.84	20.78	20.75		3
	100	0	20.85	20.78	20.76		3
256QAM	1	0	19.10	19.23	19.36	0-5	5
	1	50	19.10	19.27	19.24		5
	1	99	19.08	19.27	19.13		5
	50	0	19.14	19.10	19.04		5
	50	25	19.13	19.14	19.07		5
	50	50	19.17	19.17	19.07		5
	100	0	19.16	19.12	19.06		5

Table 8-35
LTE Band 7 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	10.99	11.08	11.05	0	0
	1	50	10.99	10.97	10.98		0
	1	99	10.95	10.96	10.88		0
	50	0	11.04	11.00	10.98	0-1	0
	50	25	11.00	11.04	10.97		0
	50	50	11.06	11.08	10.99		0
16QAM	100	0	11.01	11.02	10.99	0-1	0
	1	0	11.18	11.14	11.39		0
	1	50	11.18	11.19	11.30		0
	1	99	11.16	11.17	11.21	0-2	0
	50	0	11.01	10.98	10.95		0
	50	25	10.98	11.09	10.98		0
64QAM	50	50	11.01	11.06	10.94	0-2	0
	100	0	11.04	11.01	10.97		0
	1	0	11.01	11.16	11.12	0-2	0
	1	50	11.00	11.18	10.99		0
	1	99	10.96	11.20	10.93		0
	50	0	11.10	11.00	11.03	0-3	0
50	25	11.09	11.06	11.01	0		
50	50	11.09	11.06	11.02	0		
256QAM	100	0	11.02	10.98	10.99	0-5	0
	1	0	11.00	11.14	11.23		0
	1	50	10.98	11.18	11.11		0
	1	99	10.96	11.18	11.02		0
	50	0	11.05	10.96	11.00	0	
	50	25	11.07	11.05	10.97	0	
50	50	11.10	11.06	10.98	0		
100	0	11.06	11.02	10.98	0		

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 65 of 298

REV 22.0
03/30/2022

Table 8-36
LTE Band 7 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3 Active) - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	19.41	19.44	19.50	0	0
	1	50	19.48	19.48	19.38		0
	1	99	19.50	19.52	19.53		0
	50	0	19.47	19.46	19.41	0-1	0
	50	25	19.41	19.51	19.43		0
	50	50	19.52	19.53	19.54		0
	100	0	19.41	19.51	19.40		0
16QAM	1	0	19.69	19.80	19.81	0-1	0
	1	50	19.78	19.87	19.65		0
	1	99	19.76	19.78	19.48		0
	50	0	19.45	19.48	19.41	0-2	0
	50	25	19.43	19.50	19.38		0
	50	50	19.52	19.57	19.40		0
	100	0	19.48	19.55	19.39		0
64QAM	1	0	19.56	19.66	19.68	0-2	0
	1	50	19.67	19.70	19.52		0
	1	99	19.59	19.63	19.45		0
	50	0	19.42	19.43	19.42	0-3	0
	50	25	19.48	19.50	19.43		0
	50	50	19.52	19.60	19.39		0
	100	0	19.48	19.54	19.47		0
256QAM	1	0	19.03	19.05	19.07	0-5	1
	1	50	19.13	19.12	18.93		1
	1	99	19.03	19.15	18.86		1
	50	0	18.91	18.98	18.92		1
	50	25	18.92	18.98	18.88		1
	50	50	19.00	19.11	18.90		1
	100	0	18.97	18.97	18.95		1

Table 8-37
LTE Band 7 Antenna M1 Uplink Carrier Aggregation Measured P_{Max} for ECI = 0 (Free) - 20 MHz Bandwidth

	PCC									SCC									Power	
Combination	PCC Band	PCC Bandwidth [MHz]	PCC UL Channel	PCC UL Frequency [MHz]	PCC DL Channel	PCC DL Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC UL Channel	SCC UL Frequency [MHz]	SCC DL Channel	SCC DL Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_7C	LTE B7	20	21100	2535.0	3100	2655.0	QPSK	1	0	LTE B7	20	20902	2515.2	2902	2635.2	QPSK	1	99	23.06	23.96

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 66 of 298

8.2.13 LTE Band 7 Antenna S2

Table 8-38
LTE Band 7 Antenna S2 Measured P_{Max} for ECI = 0 (Free) - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	22.86	22.67	22.80	0	0
	1	50	22.78	22.69	22.88		0
	1	99	22.77	22.86	23.06		0
	50	0	21.94	21.91	21.93	0-1	1
	50	25	21.80	21.84	21.99		1
	50	50	22.00	21.87	22.01		1
	100	0	21.93	21.87	21.93		1
16QAM	1	0	22.16	22.07	22.17	0-1	1
	1	50	22.09	22.09	22.16		1
	1	99	21.99	22.18	22.44		1
	50	0	20.92	20.91	20.83	0-2	2
	50	25	20.77	20.81	20.96		2
	50	50	20.97	20.81	20.97		2
	100	0	20.92	20.86	20.94		2
64QAM	1	0	20.95	20.84	21.02	0-2	2
	1	50	20.96	21.02	20.93		2
	1	99	20.96	21.04	21.14		2
	50	0	19.90	19.86	19.87	0-3	3
	50	25	19.73	19.83	19.94		3
	50	50	19.98	19.77	19.94		3
	100	0	19.90	19.79	19.89		3
256QAM	1	0	17.89	17.72	17.86	0-5	5
	1	50	17.73	17.76	17.81		5
	1	99	17.65	17.84	18.14		5
	50	0	17.83	17.86	17.74		5
	50	25	17.75	17.72	17.87		5
	50	50	17.85	17.67	17.90		5
	100	0	17.84	17.76	17.85		5

Table 8-39
LTE Band 7 Antenna S2 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 7 20 MHz Bandwidth							
Modulation	RB Size	RB Offset	Low Channel	Mid Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			20850 (2510.0 MHz)	21100 (2535.0 MHz)	21350 (2560.0 MHz)		
			Conducted Power [dBm]				
QPSK	1	0	9.85	9.72	9.81	0	0
	1	50	9.78	9.76	9.80		0
	1	99	9.71	9.85	10.04		0
	50	0	9.90	9.82	9.75	0-1	0
	50	25	9.79	9.81	9.84		0
	50	50	9.92	9.76	9.95		0
	100	0	9.88	9.82	9.89		0
16QAM	1	0	9.98	10.09	10.21	0-1	0
	1	50	9.97	10.21	10.27		0
	1	99	9.99	10.16	10.40		0
	50	0	9.86	9.83	9.75	0-2	0
	50	25	9.83	9.81	9.88		0
	50	50	9.90	9.77	9.94		0
	100	0	9.82	9.80	9.88		0
64QAM	1	0	10.05	9.82	9.85	0-2	0
	1	50	9.93	9.95	9.99		0
	1	99	9.81	9.90	10.20		0
	50	0	9.86	9.86	9.80	0-3	0
	50	25	9.80	9.83	9.90		0
	50	50	9.91	9.78	9.93		0
	100	0	9.85	9.83	9.80		0
256QAM	1	0	10.00	9.84	9.87	0-5	0
	1	50	9.81	9.85	10.01		0
	1	99	9.76	9.86	10.15		0
	50	0	9.87	9.84	9.74		0
	50	25	9.80	9.82	9.85		0
	50	50	9.92	9.72	9.95		0
	100	0	9.88	9.82	9.83		0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 67 of 298

8.2.14 LTE Band 41 Antenna M1

Table 8-40
LTE Band 41 PC3 Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	23.86	23.85	23.62	23.71	23.82	0	0
	1	50	23.84	23.79	23.51	23.71	23.81		0
	1	99	23.84	23.78	23.52	23.75	23.90		0
	50	0	22.76	22.82	22.59	22.71	22.85	0-1	1
	50	25	22.86	22.77	22.54	22.72	22.88		1
	50	50	22.85	22.85	22.53	22.71	22.89		1
16QAM	100	0	22.83	22.79	22.53	22.73	22.85	0-1	1
	1	0	23.13	22.88	23.00	23.00	22.91		1
	1	50	23.12	22.81	22.89	22.97	22.87		1
	1	99	23.12	22.81	22.95	23.06	22.95	0-2	1
	50	0	21.73	21.84	21.50	21.61	21.86		2
	50	25	21.74	21.75	21.52	21.65	21.85		2
64QAM	50	50	21.82	21.75	21.49	21.69	21.84	0-2	2
	100	0	21.78	21.80	21.51	21.66	21.85		2
	1	0	22.09	21.83	21.05	21.82	21.84		0-2
	1	50	21.96	21.76	21.00	21.88	21.80	2	
	1	99	21.93	21.76	21.02	21.89	21.85	0-3	
	50	0	20.70	20.83	20.48	20.58	20.88		3
256QAM	50	25	20.75	20.81	20.45	20.58	20.83		0-3
	50	50	20.78	20.82	20.46	20.64	20.87	3	
	100	0	20.71	20.79	20.52	20.62	20.86	3	
	1	0	19.10	19.13	18.77	18.84	19.15	0-5	5
	1	50	19.07	19.04	18.73	18.87	19.17		5
	1	99	18.99	19.01	18.72	18.92	19.20		5
256QAM	50	0	19.00	19.08	18.82	18.87	19.09	0-5	5
	50	25	19.10	19.02	18.78	18.93	19.09		5
	50	50	19.03	19.01	18.77	18.91	19.16		5
	100	0	19.03	19.05	18.86	18.86	19.16		5

Table 8-41
LTE Band 41 PC3 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)	
QPSK	1	0	12.70	12.44	12.36	12.59	12.73	0
	1	50	12.63	12.35	12.26	12.74	12.86	
	1	99	12.50	12.23	12.23	12.75	12.80	
	50	0	12.76	12.39	12.31	12.70	12.97	0-1
	50	25	12.75	12.35	12.31	12.79	12.84	
	50	50	12.72	12.35	12.25	12.78	12.81	
16QAM	100	0	12.68	12.38	12.25	12.72	12.74	0-1
	1	0	12.79	12.45	12.31	12.63	12.75	
	1	50	12.74	12.37	12.23	12.72	12.74	
	1	99	12.58	12.28	12.28	12.76	12.68	0-2
	50	0	12.72	12.46	12.26	12.76	12.85	
	50	25	12.72	12.45	12.29	12.81	12.76	
64QAM	50	50	12.72	12.38	12.27	12.83	12.75	0-2
	100	0	12.75	12.42	12.29	12.74	12.81	
	1	0	12.51	12.16	12.05	12.33	12.51	0-3
	1	50	12.46	12.11	11.96	12.45	12.47	
	1	99	12.31	11.95	11.95	12.47	12.38	
	50	0	12.83	12.45	12.36	12.75	12.81	0-5
256QAM	50	25	12.80	12.40	12.36	12.84	12.84	
	50	50	12.81	12.41	12.30	12.81	12.74	
	100	0	12.77	12.42	12.26	12.74	12.74	0-5
	1	0	12.74	12.43	12.26	12.54	12.68	
	1	50	12.62	12.26	12.11	12.60	12.63	
	1	99	12.47	12.22	12.15	12.85	12.59	0-5
	50	0	12.76	12.54	12.31	12.81	12.83	
	50	25	12.74	12.44	12.33	12.86	12.84	
	50	50	12.78	12.43	12.40	12.87	12.82	0-5
	100	0	12.75	12.41	12.26	12.75	12.82	

Table 8-42
LTE Band 41 PC2 Antenna M1 Measured P_{max} for ECI = 0 (Free) - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	25.91	25.85	25.57	25.75	25.84	0	0
	1	50	25.85	25.83	25.52	25.77	25.83		0
	1	99	25.92	25.77	25.50	25.77	25.90		0
	50	0	24.82	24.87	24.63	24.69	24.92	0-1	1
	50	25	24.83	24.86	24.56	24.70	24.87		1
	50	50	24.94	24.86	24.62	24.78	24.88		1
	100	0	24.90	24.81	24.60	24.70	24.88		1
	100	0	24.90	24.81	24.60	24.70	24.88		1

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 68 of 298

Table 8-43
LTE Band 41 PC2 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	14.13	14.07	13.72	13.83	13.95	0	0
	1	50	14.03	13.93	13.64	13.78	13.96		0
	1	99	14.10	14.01	13.67	13.91	13.85		0
	50	0	13.93	14.03	13.74	13.73	13.96	0-1	0
	50	25	14.11	14.08	13.79	13.82	13.92		0
	50	50	14.08	14.07	13.83	13.78	13.98		0
	100	0	14.00	14.02	13.80	13.73	13.94		0

Table 8-44
LTE Band 41 PC3 Antenna M1 Uplink Carrier Aggregation Measured P_{Max} for ECI = 0 (Free)

Combination	PCC							SCC							Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	41490	2680.0	QPSK	1	0	LTE B41	20	41292	2660.2	QPSK	1	99	23.24	23.82

Table 8-45
LTE Band 41 PC2 Antenna M1 Uplink Carrier Aggregation Measured P_{max} for ECI = 0 (Free)

Combination	PCC							SCC						Power		
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41 PC2	20	41490	2680.0	QPSK	1	0	LTE B41 PC2	20	41292	2660.2	QPSK	1	99	25.20	25.84

Table 8-46
LTE Band 41 PC3 Antenna M1 Uplink Carrier Aggregation Measured P_{limit} for ECI = 1 (Grip Sensor Active)

Combination	PCC							SCC							Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41	20	41490	2680.0	QPSK	1	0	LTE B41	20	41292	2660.2	QPSK	1	99	11.80	12.73

Table 8-47
LTE Band 41 PC2 Antenna M1 Uplink Carrier Aggregation Measured P_{Limit} for ECI = 1 (Grip Sensor Active)

Combination	PCC							SCC							Power	
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_41C	LTE B41 PC2	20	41490	2680.0	QPSK	1	0	LTE B41 PC2	20	41292	2660.2	QPSK	1	99	13.66	13.95

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 69 of 298

Table 8-48
LTE Band 41 PC3 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3) - 20 MHz Bandwidth

LTE Band 41 20 MHz Bandwidth									
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			39750 (2506.0 MHz)	40185 (2549.5 MHz)	40620 (2593.0 MHz)	41055 (2636.5 MHz)	41490 (2680.0 MHz)		
			Conducted Power [dBm]						
QPSK	1	0	21.94	21.84	21.79	21.82	21.80	0	0
	1	50	21.98	21.83	21.72	21.82	21.81		0
	1	99	21.97	21.70	21.70	21.82	21.81		0
	50	0	21.94	21.92	21.77	21.81	21.86	0-1	0
	50	25	21.90	21.89	21.77	21.83	21.82		0
	50	50	21.88	21.87	21.77	21.84	21.83		0
	100	0	21.87	21.87	21.77	21.80	21.79		0
16QAM	1	0	22.00	21.86	21.76	21.81	21.77	0-1	0
	1	50	22.02	21.85	21.69	21.81	21.78		0
	1	99	21.99	21.78	21.74	21.83	21.80		0
	50	0	21.48	21.68	21.28	21.49	21.59	0-2	0
	50	25	21.55	21.59	21.27	21.46	21.54		0
	50	50	21.64	21.58	21.31	21.47	21.58		0
	100	0	21.58	21.62	21.31	21.46	21.55		0
64QAM	1	0	21.16	21.27	21.00	21.09	21.17	0-2	0
	1	50	21.14	21.24	20.89	21.09	21.18		0
	1	99	21.23	21.14	20.92	21.09	21.22		0
	50	0	20.75	20.66	20.48	20.49	20.61	0-3	0.4
	50	25	20.80	20.62	20.47	20.47	20.58		0.4
	50	50	20.67	20.59	20.54	20.53	20.53		0.4
	100	0	20.77	20.55	20.48	20.50	20.46		0.4
256QAM	1	0	18.73	18.65	18.56	18.63	18.65	0-5	2.4
	1	50	18.64	18.69	18.60	18.61	18.64		2.4
	1	99	18.64	18.58	18.60	18.67	18.69		2.4
	50	0	18.83	18.91	18.90	18.81	18.97		2.4
	50	25	18.99	18.97	18.81	18.78	18.96		2.4
	50	50	18.95	18.95	18.88	18.78	18.92		2.4
	100	0	18.90	18.89	18.84	18.77	18.93		2.4

8.2.15 LTE Band 48 Antenna S4

Table 8-49
LTE Band 48 Antenna S4 Measured P_{Max} for ECI = 0 (Free) - 20 MHz Bandwidth

LTE Band 48 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			55340 (3560.0 MHz)	55773 (3603.3 MHz)	56207 (3646.7 MHz)	56640 (3690.0 MHz)		
			Conducted Power [dBm]					
QPSK	1	0	22.61	22.84	22.99	22.72	0	0
	1	50	22.70	22.92	22.91	22.66		0
	1	99	22.68	23.01	22.84	22.58		0
	50	0	21.64	21.85	22.00	21.76	0-1	1
	50	25	21.66	21.92	21.93	21.66		1
	50	50	21.72	22.05	21.96	21.65		1
	100	0	21.74	21.95	21.92	21.71		1
16QAM	1	0	21.85	21.81	22.37	22.00	0-1	1
	1	50	21.92	21.90	22.36	21.94		1
	1	99	21.95	21.93	22.17	21.75		1
	50	0	20.63	20.88	20.95	20.66	0-2	2
	50	25	20.67	20.95	20.91	20.62		2
	50	50	20.69	20.99	20.93	20.61		2
	100	0	20.69	20.89	20.91	20.68		2
64QAM	1	0	20.81	20.76	20.55	20.94	0-2	2
	1	50	20.88	20.87	20.53	20.91		2
	1	99	20.93	20.91	20.42	20.73		2
	50	0	19.59	19.89	19.96	19.70	0-3	3
	50	25	19.62	19.95	19.89	19.65		3
	50	50	19.70	20.03	19.91	19.62		3
	100	0	19.61	19.92	19.92	19.66		3
256QAM	1	0	17.53	17.83	17.88	17.67	0-5	5
	1	50	17.60	17.92	17.79	17.62		5
	1	99	17.70	18.00	17.67	17.45		5
	50	0	17.59	17.77	17.95	17.62		5
	50	25	17.63	17.83	17.91	17.61		5
	50	50	17.65	17.89	17.89	17.54		5
	100	0	17.58	17.83	17.91	17.59		5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 70 of 298

Table 8-50
LTE Band 48 Antenna S4 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

LTE Band 48 20 MHz Bandwidth								
Modulation	RB Size	RB Offset	Low Channel	Low-Mid Channel	Mid-High Channel	High Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			55340 (3560.0 MHz)	55773 (3603.3 MHz)	56207 (3646.7 MHz)	56640 (3690.0 MHz)		
			Conducted Power [dBm]					
QPSK	1	0	12.00	12.56	12.66	12.06	0	0
	1	50	12.11	12.57	12.53	11.98		0
	1	99	12.25	12.67	12.36	11.90		0
	50	0	12.06	12.58	12.56	12.09	0-1	0
	50	25	12.11	12.54	12.52	11.94		0
	50	50	12.17	12.66	12.45	11.95		0
	100	0	12.06	12.58	12.53	11.96		0
16QAM	1	0	12.19	12.73	12.85	12.22	0-1	0
	1	50	12.36	12.79	12.69	12.21		0
	1	99	12.44	12.88	12.61	12.12		0
	50	0	12.06	12.63	12.64	12.03	0-2	0
	50	25	12.13	12.66	12.58	11.99		0
	50	50	12.20	12.63	12.48	11.93		0
	100	0	12.16	12.63	12.54	11.95		0
64QAM	1	0	11.90	12.47	12.58	12.03	0-2	0
	1	50	12.09	12.54	12.50	11.94		0
	1	99	12.19	12.62	12.38	11.87		0
	50	0	12.11	12.57	12.62	11.99	0-3	0
	50	25	12.14	12.66	12.53	12.02		0
	50	50	12.23	12.68	12.49	11.96		0
	100	0	12.14	12.60	12.53	11.93		0
256QAM	1	0	11.93	12.51	12.67	11.99	0-5	0
	1	50	12.11	12.55	12.53	11.93		0
	1	99	12.22	12.69	12.40	11.88		0
	50	0	12.07	12.66	12.69	12.05		0
	50	25	12.17	12.66	12.55	11.99		0
	50	50	12.20	12.74	12.52	11.98		0
	100	0	12.16	12.64	12.53	11.97		0

Table 8-51
LTE Band 48 Antenna S4 Uplink Carrier Aggregation Measured P_{Max} for ECI = 0 (Free)

Combination	PCC							SCC						Power		
	PCC Band	PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_48C	LTE B48	20	55773	3603.3	QPSK	1	99	LTE B48	20	55971	3623.1	QPSK	1	0	22.16	23.01

Table 8-52
LTE Band 48 Antenna S4 Uplink Carrier Aggregation Measured P_{Max} for ECI = 1 (Grip Sensor Active)

LTE Band 48 CA Scenario 1: PCC Carrier Aggregation (measured at max Tx Power)																
Combination	PCC Band	PCC							SCC					Power		
		PCC Bandwidth [MHz]	PCC (UL/DL) Channel	PCC (UL/DL) Frequency [MHz]	Modulation	PCC UL# RB	PCC UL RB Offset	SCC Band	SCC Bandwidth [MHz]	SCC (UL/DL) Channel	SCC (UL/DL) Frequency [MHz]	Modulation	SCC UL# RB	SCC UL RB Offset	LTE Tx.Power with UL CA Enabled (dBm)	LTE Single Carrier Tx Power (dBm)
CA_48C	LTE B48	20	56640	3690.0	QPSK	50	0	LTE B48	20	56442	3670.2	QPSK	50	50	12.06	12.09



Figure 8-2
Power Measurement Setup

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 71 of 298

REV 22.0
03/30/2022

8.3 NR Conducted Powers

Per October 2020 TCB Workshop Guidance, NR FR1 SAR evaluations are being generally based on adapting the existing LTE SAR procedures (FCC KDB Publication 941225 D05v02r05). Therefore, NR SAR for the lower bandwidths was not required for testing based on the measured output power and the reported NR SAR for the highest bandwidth. Lower bandwidth conducted powers for all NR bands can be found in the LTE and NR Lower Bandwidth Conducted Powers Appendix.

Note: Some bands do not support non-overlapping channels. Per FCC Guidance, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

8.3.1 NR Band n71 Antenna M1

Table 8-53
NR Band n71 Antenna M1 Measured P_{Max} for ECI = 0 (Free), ECI = 2 (Grip Sensor #3 Active) - 20 MHz Bandwidth

NR Band n71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			136100 (680.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	24.14	0	0.0
	1	53	24.09		0.0
	1	104	23.71		0.0
	50	0	23.61	0-1	1.0
	50	28	24.03	0	0.0
	50	56	23.55	0-1	1.0
	100	0	23.50		1.0
DFT-s-OFDM 16QAM	1	1	22.82	0-1	1.0
CP-OFDM QPSK	1	1	23.10	0-1.5	1.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 72 of 298

REV 22.0
03/30/2022

Table 8-54
NR Band n71 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

NR Band n71 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			136100 (680.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	15.79	0	0.0
	1	53	15.78		0.0
	1	104	15.43		0.0
	50	0	16.16	0-1	0.0
	50	28	15.82	0	0.0
	50	56	15.94	0-1	0.0
	100	0	15.74		0.0
DFT-s-OFDM 16QAM	1	1	15.76	0-1	0.0
CP-OFDM QPSK	1	1	16.02	0-1.5	0.0

8.3.2 NR Band n12 Antenna M1

Table 8-55
NR Band n12 Antenna M1 Measured P_{Max} for ECI = 0 (Free), ECI = 2 (Grip Sensor #3 Active) – 15 MHz Bandwidth

NR Band n12 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			141500 (707.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	24.01	0	0.0
	1	40	24.00		0.0
	1	77	23.79		0.0
	36	0	22.95	0-1	1.0
	36	22	24.04	0	0.0
	36	43	22.83	0-1	1.0
	75	0	22.94		1.0
DFT-s-OFDM 16QAM	1	1	23.06	0-1	1.0
CP-OFDM QPSK	1	1	22.51	0-1.5	1.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 73 of 298

REV 22.0
03/30/2022

Table 8-56
NR Band n12 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 15 MHz Bandwidth

NR Band n12 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			141500 (707.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	15.95	0	0.0
	1	40	15.88		0.0
	1	77	15.90		0.0
	36	0	15.92	0-1	0.0
	36	22	16.01	0	0.0
	36	43	15.97	0-1	0.0
	75	0	15.93		0.0
DFT-s-OFDM 16QAM	1	1	15.92	0-1	0.0
CP-OFDM QPSK	1	1	16.13	0-1.5	0.0

8.3.3 NR Band n26 Antenna M1

Table 8-57
NR Band n26 Antenna M1 Measured P_{Max} for ECI = 0 (Free), ECI = 2 (Grip Sensor #3 Active) - 20 MHz Bandwidth

NR Band n26 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			166300 (831.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	23.11	0	0.0
	1	53	23.30		0.0
	1	104	23.58		0.0
	50	0	22.50	0-1	1.0
	50	28	23.57	0	0.0
	50	56	22.77	0-1	1.0
	100	0	22.65		1.0
DFT-s-OFDM 16QAM	1	1	22.26	0-1	1.0
CP-OFDM QPSK	1	1	21.85	0-1.5	1.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 74 of 298

REV 22.0
03/30/2022

Table 8-58
NR Band n26 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 20 MHz Bandwidth

NR Band n26 20 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			166300 (831.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	13.50	0	0.0
	1	53	13.79		0.0
	1	104	13.97		0.0
	50	0	13.93	0-1	0.0
	50	28	13.87	0	0.0
	50	56	14.18	0-1	0.0
	100	0	13.95		0.0
DFT-s-OFDM 16QAM	1	1	13.62	0-1	0.0
CP-OFDM QPSK	1	1	13.79	0-1.5	0.0

8.3.4 NR Band n70 Antenna M1

Table 8-59
NR Band n70 Antenna M1 Measured P_{Max} for ECI = 0 (Free) – 15 MHz Bandwidth

NR Band n70 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			340500 (1702.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	22.73	0	0.0
	1	40	22.83		0.0
	1	77	22.85		0.0
	36	0	22.35	0-1	0.0
	36	22	22.96	0	0.0
	36	43	22.37	0-1	0.0
	75	0	22.35		0.0
DFT-s-OFDM 16QAM	1	1	22.24	0-1	0.0
CP-OFDM QPSK	1	1	22.00	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 75 of 298

REV 22.0
03/30/2022

Table 8-60
NR Band n70 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 15 MHz Bandwidth

NR Band n70 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			340500 (1702.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	12.83	0	0.0
	1	40	12.90		0.0
	1	77	12.83		0.0
	36	0	12.94	0-1	0.0
	36	22	12.98	0	0.0
	36	43	12.97	0-1	0.0
	75	0	12.89		0.0
DFT-s-OFDM 16QAM	1	1	12.85	0-1	0.0
CP-OFDM QPSK	1	1	12.83	0-1.5	0.0

Table 8-61
NR Band n70 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3 Active) - 15 MHz Bandwidth

NR Band n70 15 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			340500 (1702.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	21.72	0	0.0
	1	40	21.77		0.0
	1	77	21.74		0.0
	36	0	21.71	0-1	0.0
	36	22	21.76	0	0.0
	36	43	21.70	0-1	0.0
	75	0	21.69		0.0
DFT-s-OFDM 16QAM	1	1	21.21	0-1	0.0
CP-OFDM QPSK	1	1	20.82	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 76 of 298

REV 22.0
03/30/2022

8.3.5 NR Band n66 Antenna M1

Table 8-62
NR Band n66 Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 40 MHz Bandwidth

NR Band n66 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			349000 (1745 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	23.41	0	0.0
	1	108	23.51		0.0
	1	214	23.11		0.0
	108	0	22.91	0-1	0.5
	108	54	23.43	0	0.0
	108	108	22.72	0-1	0.5
	216	0	22.82		0.5
DFT-s-OFDM 16QAM	1	1	22.86	0-1	0.5
CP-OFDM QPSK	1	1	22.46	0-1.5	1.0

Table 8-63
NR Band n66 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 40 MHz Bandwidth

NR Band n66 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			349000 (1745 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	14.18	0	0.0
	1	108	14.20		0.0
	1	214	13.96		0.0
	108	0	14.07	0-1	0.0
	108	54	14.16	0	0.0
	108	108	13.96	0-1	0.0
	216	0	14.02		0.0
DFT-s-OFDM 16QAM	1	1	14.05	0-1	0.0
CP-OFDM QPSK	1	1	14.22	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 77 of 298

REV 22.0
03/30/2022

Table 8-64

NR Band n66 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3 Active) - 40 MHz Bandwidth

NR Band n66 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			349000 (1745 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	21.90	0	0.0
	1	108	22.06		0.0
	1	214	21.64		0.0
	108	0	21.91	0-1	0.0
	108	54	21.94	0	0.0
	108	108	21.72	0-1	0.0
	216	0	21.82		0.0
DFT-s-OFDM 16QAM	1	1	21.56	0-1	0.0
CP-OFDM QPSK	1	1	22.00	0-1.5	0.0

8.3.6 NR Band n25 Antenna M1

Table 8-65

NR Band n25 Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 40 MHz Bandwidth

NR Band n25 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			376500 (1882.5 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	23.45	0	0.0
	1	108	23.58		0.0
	1	214	23.41		0.0
	108	0	22.92	0-1	0.0
	108	54	23.53	0	0.0
	108	108	22.91	0-1	0.0
	216	0	22.95		0.0
DFT-s-OFDM 16QAM	1	1	22.93	0-1	0.0
CP-OFDM QPSK	1	1	22.33	0-1.5	0.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 78 of 298

REV 22.0
03/30/2022

Table 8-66
NR Band n25 Antenna M11 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 40 MHz Bandwidth

NR Band n25 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			376500 (1882.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.39	0	0.0
	1	108	11.42		0.0
	1	214	11.28		0.0
	108	0	11.40	0-1	0.0
	108	54	11.49	0	0.0
	108	108	11.36	0-1	0.0
	216	0	11.38		0.0
DFT-s-OFDM 16QAM	1	1	11.38	0-1	0.0
CP-OFDM QPSK	1	1	11.44	0-1.5	0.0

Table 8-67
NR Band n25 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3 Active) - 40 MHz Bandwidth

NR Band n25 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			376500 (1882.5 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	17.43	0	0.0
	1	108	17.52		0.0
	1	214	17.38		0.0
	108	0	17.42	0-1	0.0
	108	54	17.50	0	0.0
	108	108	17.33	0-1	0.0
	216	0	17.42		0.0
DFT-s-OFDM 16QAM	1	1	17.69	0-1	0.0
CP-OFDM QPSK	1	1	17.45	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 79 of 298

REV 22.0
03/30/2022

8.3.7 NR Band n30 Antenna M1

Table 8-68
NR Band n30 Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 10 MHz Bandwidth

NR Band n30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			462000 (2310 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	22.50	0	0.0
	1	26	22.56		0.0
	1	50	22.51		0.0
	25	0	22.04	0-1	1.0
	25	14	22.66	0	0.0
	25	27	22.12	0-1	1.0
	50	0	22.11		1.0
DFT-s-OFDM 16QAM	1	1	22.05	0-1	1.0
CP-OFDM QPSK	1	1	21.52	0-1.5	1.5

Table 8-69
NR Band n30 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 10 MHz Bandwidth

NR Band n30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			462000 (2310 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	10.00	0	0.0
	1	26	10.15		0.0
	1	50	10.01		0.0
	25	0	10.04	0-1	0.0
	25	14	10.22	0	0.0
	25	27	10.23	0-1	0.0
	50	0	10.13		0.0
DFT-s-OFDM 16QAM	1	1	10.09	0-1	0.0
CP-OFDM QPSK	1	1	10.32	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 80 of 298

REV 22.0
03/30/2022

Table 8-70
NR Band n30 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3 Active) - 10 MHz Bandwidth

NR Band n30 10 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			462000 (2310 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	19.80	0	0.0
	1	26	19.91		0.0
	1	50	19.83		0.0
	25	0	19.77	0-1	0.0
	25	14	19.89	0	0.0
	25	27	19.90	0-1	0.0
	50	0	19.87		0.0
DFT-s-OFDM 16QAM	1	1	19.36	0-1	0.0
CP-OFDM QPSK	1	1	19.78	0-1.5	0.0

8.3.8 NR Band n7 Antenna M1

Table 8-71
NR Band n7 Antenna M1 Measured P_{Max} for ECI = 0 (Free) - 40 MHz Bandwidth

NR Band n7 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			507000 (2535 MHz)		
			Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	23.00	0	0.0
	1	108	23.15		0.0
	1	214	23.21		0.0
	108	0	22.54	0-1	0.0
	108	54	23.19	0	0.0
	108	108	22.41	0-1	0.0
	216	0	22.53		0.0
DFT-s-OFDM 16QAM	1	1	22.71	0-1	0.0
CP-OFDM QPSK	1	1	22.18	0-1.5	0.5

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 81 of 298

REV 22.0
03/30/2022

Table 8-72
NR Band n7 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 40 MHz Bandwidth

NR Band n7 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			507000 (2535 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	9.66	0	0.0
	1	108	9.70		0.0
	1	214	9.90		0.0
	108	0	9.62	0-1	0.0
	108	54	9.69	0	0.0
	108	108	9.49	0-1	0.0
	216	0	9.56		0.0
DFT-s-OFDM 16QAM	1	1	9.88	0-1	0.0
CP-OFDM QPSK	1	1	9.93	0-1.5	0.0

Table 8-73
NR Band n7 Antenna M1 Measured P_{Limit} for ECI = 2 (Grip Sensor #3 Active) - 40 MHz Bandwidth

NR Band n7 40 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			507000 (2535 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	19.00	0	0.0
	1	108	18.82		0.0
	1	214	18.72		0.0
	108	0	18.70	0-1	0.0
	108	54	18.85	0	0.0
	108	108	18.65	0-1	0.0
	216	0	18.69		0.0
DFT-s-OFDM 16QAM	1	1	18.56	0-1	0.0
CP-OFDM QPSK	1	1	18.82	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 82 of 298

REV 22.0
03/30/2022

8.3.9 NR Band n41 Antenna M1

Table 8-74
NR Band n41 Antenna M1 Measured P_{Limit} for ECI = 0 (Free) - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			518598 (2592.99 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	18.67	0	0.0
	1	137	18.48		0.0
	1	271	18.64		0.0
	135	0	18.73	0-1	0.0
	135	69	18.63	0	0.0
	135	138	18.58	0-1	0.0
	270	0	18.63		0.0
DFT-s-OFDM 16QAM	1	1	18.68	0-1	0.0
CP-OFDM QPSK	1	1	18.69	0-1.5	0.0

Table 8-75
NR Band n41 Antenna M1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			518598 (2592.99 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	11.09	0	0.0
	1	137	11.29		0.0
	1	271	11.68		0.0
	135	0	11.19	0-1	0.0
	135	69	11.39	0	0.0
	135	138	11.53	0-1	0.0
	270	0	11.37		0.0
DFT-s-OFDM 16QAM	1	1	10.75	0-1	0.0
CP-OFDM QPSK	1	1	11.11	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 83 of 298

REV 22.0
03/30/2022

8.3.10 NR Band n41 SRS Antennas S2, S4, & S1

Table 8-76

NR Band n41 Antennas S2, S4, & S1 Measured P_{Limit} for ECI = 0 (Free) - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth	
Channel	
Antenna	518598 (2592.99 MHz)
	Conducted Power [dBm]
SRS #2 Ant S2	16.30
SRS #3 Ant S4	17.55
SRS #4 Ant S1	14.44

Table 8-77

NR Band n41 Antennas S2, S4, & S1 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 100 MHz Bandwidth

NR Band n41 100 MHz Bandwidth	
Channel	
Antenna	518598 (2592.99 MHz)
	Conducted Power [dBm]
SRS #2 Ant S2	10.99
SRS #3 Ant S4	10.96
SRS #4 Ant S1	11.50

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 84 of 298

REV 22.0
03/30/2022

8.3.11 NR Band n48 Antenna S4

Table 8-78
NR Band n48 Antenna S4 Measured P_{Limit} for ECI = 0 (Free) - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM QPSK	1	1	17.55	17.91	17.42	0	0.0
	1	53	17.49	17.83	17.28		0.0
	1	104	17.53	17.62	17.26		0.0
	50	0	17.51	17.92	17.35	0-1	0.0
	50	28	17.49	17.90	17.28	0	0.0
	50	56	17.44	17.67	17.23	0-1	0.0
	100	0	17.49	17.86	17.24		0.0
DFT-s-OFDM 16QAM	1	1	17.35	17.68	17.21	0-1	0.0
CP-OFDM QPSK	1	1	17.60	17.70	17.34	0-1.5	0.0

Table 8-79
NR Band n48 Antenna S4 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth							
			Channel			MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)		
			Conducted Power [dBm]				
DFT-s-OFDM QPSK	1	1	9.90	10.72	10.53	0	0.0
	1	53	9.94	10.62	10.27		0.0
	1	104	9.97	10.61	10.27		0.0
	50	0	9.92	10.68	10.51	0-1	0.0
	50	28	9.99	10.59	10.38	0	0.0
	50	56	9.90	10.64	10.32	0-1	0.0
	100	0	9.97	10.57	10.45		0.0
DFT-s-OFDM 16QAM	1	1	9.68	10.38	10.48	0-1	0.0
CP-OFDM QPSK	1	1	9.95	10.62	10.70	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 85 of 298

REV 22.0
03/30/2022

8.3.12 NR Band n48 SRS Antennas S2, M2, & S3

Table 8-80
NR Band n48 Antennas S2, M2, & S3 Measured P_{Limit} for ECI = 0 (Free) - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth			
Channel			
Antenna	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)
	Conducted Power [dBm]		
SRS #2 Ant S2	12.63	13.64	13.95
SRS #3 Ant M2	13.40	14.26	13.94
SRS #4 Ant S3	16.02	17.04	16.83

Table 8-81
NR Band n48 Antennas S2, M2, & S3 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 40 MHz Bandwidth

NR Band n48 40 MHz Bandwidth			
Channel			
Antenna	638000 (3570 MHz)	641666 (3624.99 MHz)	645332 (3679.98 MHz)
	Conducted Power [dBm]		
SRS #2 Ant S2	9.14	10.40	10.12
SRS #3 Ant M2	6.94	7.44	7.75
SRS #4 Ant S3	9.61	10.49	10.30

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 86 of 298

REV 22.0
03/30/2022

8.3.13 NR Band n77 Antenna M2

Table 8-82
NR Band n77 Antenna M2 Measured P_{Limit} for ECI = 0 (Free) - 100 MHz Bandwidth

NR Band n77 100 MHz Bandwidth						
			Channel		MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	650000 (3750 MHz)	662000 (3930 MHz)		
			Conducted Power [dBm]			
DFT-s-OFDM QPSK	1	1	18.07	17.55	0	0.0
	1	137	18.97	18.04		0.0
	1	271	18.66	17.94		0.0
	135	0	18.52	17.87	0-1	0.0
	135	69	18.83	17.99	0	0.0
	135	138	18.77	17.97	0-1	0.0
	270	0	18.64	17.92		0.0
DFT-s-OFDM 16QAM	1	1	17.82	17.36	0-1	0.5
CP-OFDM QPSK	1	1	18.05	17.71	0-1.5	0.0

Table 8-83
NR Band n77 Antenna M2 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 100 MHz Bandwidth

NR Band n77 100 MHz Bandwidth						
			Channel		MPR Allowed per 3GPP [dB]	MPR [dB]
Modulation	RB Size	RB Offset	650000 (3750 MHz)	662000 (3930 MHz)		
			Conducted Power [dBm]			
DFT-s-OFDM QPSK	1	1	9.08	8.46	0	0.0
	1	137	9.97	8.97		0.0
	1	271	9.65	8.84		0.0
	135	0	9.51	8.67	0-1	0.0
	135	69	9.83	8.88	0	0.0
	135	138	9.70	8.91	0-1	0.0
	270	0	9.65	8.78		0.0
DFT-s-OFDM 16QAM	1	1	8.77	8.25	0-1	0.5
CP-OFDM QPSK	1	1	9.18	8.56	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 87 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 8-84
NR Band n77 Antenna M2 DoD Measured P_{Limit} for ECI = 0 (Free) - 100 MHz Bandwidth

NR Band n77 DoD 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			633334 (3500.01 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	17.38	0	0.0
	1	137	17.75		0.0
	1	271	17.65		0.0
	135	0	17.63	0-1	0.0
	135	69	17.71	0	0.0
	135	138	17.7	0-1	0.0
	270	0	17.66		0.0
DFT-s-OFDM 16QAM	1	1	17.18	0-1	0.0
CP-OFDM QPSK	1	1	17.31	0-1.5	0.0

Table 8-85
NR Band n77 Antenna M2 DoD Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 100 MHz Bandwidth

NR Band n77 DoD 100 MHz Bandwidth					
Modulation	RB Size	RB Offset	Channel	MPR Allowed per 3GPP [dB]	MPR [dB]
			633334 (3500.01 MHz) Conducted Power [dBm]		
DFT-s-OFDM QPSK	1	1	8.79	0	0.0
	1	137	9.16		0.0
	1	271	9.12		0.0
	135	0	9.04	0-1	0.0
	135	69	9.13	0	0.0
	135	138	9.11	0-1	0.0
	270	0	9.06		0.0
DFT-s-OFDM 16QAM	1	1	8.58	0-1	0.0
CP-OFDM QPSK	1	1	8.80	0-1.5	0.0

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 88 of 298

REV 22.0
03/30/2022

8.3.14 NR Band n77 SRS Antennas S2, S3, & S4

Table 8-86
NR Band n77 Antennas S2, S3, & S4 Measured P_{Limit} for ECI = 0 (Free) - 100 MHz Bandwidth

NR Band n77 100 MHz Bandwidth		
Channel		
Antenna	650000 (3750 MHz)	662000 (3930 MHz)
	Conducted Power [dBm]	
SRS #2 Ant S2	15.30	16.00
SRS #3 Ant S4	15.77	15.71
SRS #4 Ant S3	15.42	15.01

Table 8-87
NR Band n77 Antennas S2, S3, & S4 Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 100 MHz Bandwidth

NR Band n77 100 MHz Bandwidth		
Channel		
Antenna	650000 (3750 MHz)	662000 (3930 MHz)
	Conducted Power [dBm]	
SRS #2 Ant S2	8.35	7.75
SRS #3 Ant S4	6.75	6.72
SRS #4 Ant S3	6.27	6.15

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 89 of 298

REV 22.0
03/30/2022

Table 8-88
NR Band n77 Antennas S2, S3, & S4 DoD Measured P_{Limit} for ECI = 0 (Free) - 100 MHz Bandwidth

NR Band n77 DoD 100 MHz Bandwidth	
Channel	
Antenna	633334 (3500.01 MHz)
	Conducted Power [dBm]
SRS #2 Ant S2	15.72
SRS #3 Ant S4	15.70
SRS #4 Ant S3	15.47

Table 8-89
NR Band n77 Antennas S2, S3, & S4 DoD Measured P_{Limit} for ECI = 1 (Grip Sensor Active) - 100 MHz Bandwidth

NR Band n77 DoD 100 MHz Bandwidth	
Channel	
Antenna	633334 (3500.01 MHz)
	Conducted Power [dBm]
SRS #2 Ant S2	7.30
SRS #3 Ant S4	7.24
SRS #4 Ant S3	7.23




Figure 8-3
Power Measurement Setup – NR Online

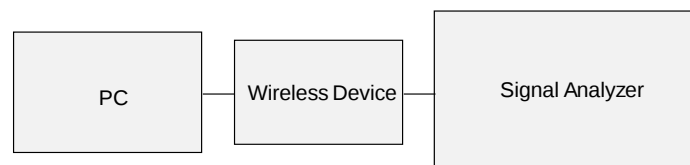


Figure 8-4
Power Measurement Setup – NR FTM

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 90 of 298

8.4 WLAN Conducted Powers

Table 8-90
2.4 GHz WLAN Maximum Average RF Power – Antenna WIFI 0

2.4GHz WIFI (20MHz 802.11b SISO ANT WIFI 0)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	18.41
2437	6		18.53
2462	11		18.64
2.4GHz WIFI (20MHz 802.11g SISO Ant WIFI 0)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	17.69
2437	6		17.43
2462	11		17.64
2.4GHz WIFI (20MHz 802.11n SISO Ant WIFI 0)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.91
2417	2		17.39
2437	6		17.39
2457	10		17.59
2462	11		16.61
2.4GHz WIFI (20MHz 802.11ax SISO Ant WIFI 0)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	14.42
2437	6		14.39
2462	11		14.46

Table 8-91
2.4 GHz WLAN Maximum Average RF Power – Antenna WIFI 1

2.4GHz WIFI (20MHz 802.11b SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	18.76
2437	6		18.45
2462	11		18.46
2.4GHz WIFI (20MHz 802.11g SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	17.77
2437	6		17.52
2462	11		17.57
2.4GHz WIFI (20MHz 802.11n SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	15.69
2417	2		17.42
2437	6		17.32
2457	10		17.63
2462	11		16.49
2.4GHz WIFI (20MHz 802.11ax SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	14.72
2437	6		14.42
2462	11		14.53

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 91 of 298

REV 22.0
03/30/2022

Table 8-92
2.4 GHz WLAN Reduced Average RF Power with Grip Sensor Active – Antenna WIFI 0

2.4GHz WIFI (20MHz 802.11b SISO Ant WIFI 0)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	11.93
2437	6		11.47
2462	11		11.94
2.4GHz WIFI (20MHz 802.11g SISO Ant WIFI 0)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	11.55
2437	6		11.92
2462	11		11.59
2.4GHz WIFI (20MHz 802.11n SISO Ant WIFI 0)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	11.70
2437	6		11.75
2462	11		11.75
2.4GHz WIFI (20MHz 802.11ax SISO Ant WIFI 0)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	11.65
2437	6		11.75
2462	11		11.80

Table 8-93
2.4 GHz WLAN Reduced Average RF Power with Grip Sensor Active – Antenna WIFI 1

2.4GHz WIFI (20MHz 802.11b SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	11.97
2437	6		11.76
2462	11		11.98
2.4GHz WIFI (20MHz 802.11g SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	11.80
2437	6		11.90
2462	11		11.60
2.4GHz WIFI (20MHz 802.11n SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	11.80
2437	6		11.77
2462	11		11.63
2.4GHz WIFI (20MHz 802.11ax SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	11.80
2437	6		11.94
2462	11		11.80

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 92 of 298

REV 22.0
03/30/2022

Table 8-94

2.4 GHz WLAN Reduced Average RF Power with 5/6 GHz WLAN Active and/or NR Active – Antenna WIFI 1

2.4GHz WIFI (20MHz 802.11b SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	9.86
2437	6		9.74
2462	11		9.82
2.4GHz WIFI (20MHz 802.11g SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	9.27
2437	6		9.42
2462	11		9.33
2.4GHz WIFI (20MHz 802.11n SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	9.63
2437	6		9.85
2462	11		9.99
2.4GHz WIFI (20MHz 802.11ax SISO Ant WIFI 1)			
Freq. [MHz]	Channel	Detector	Conducted Power [dBm]
2412	1	Average	9.99
2437	6		9.57
2462	11		9.43

Table 8-95

2.4 GHz WLAN Maximum Average RF Power – MIMO

2.4GHz WIFI (20MHz 802.11b MIMO)					
Freq [MHz]	Channel	Detector	Conducted Power [dBm]		
			ANT1	ANT2	MIMO
2412	1	Average	18.42	18.87	21.66
2437	6		18.47	18.41	21.45
2462	11		18.63	18.49	21.57

Table 8-96

2.4 GHz WLAN Reduced Average RF Power with Grip Sensor Active – MIMO

2.4GHz WIFI (20MHz 802.11b MIMO)					
Freq [MHz]	Channel	Detector	Conducted Power [dBm]		
			ANT1	ANT2	MIMO
2412	1	Average	11.32	11.62	14.48
2437	6		11.62	11.89	14.77
2462	11		11.71	11.98	14.86

Table 8-97

2.4 GHz WLAN Reduced Average RF Power with 5/6 GHz WLAN Active and/or NR Active – MIMO

2.4GHz WIFI (20MHz 802.11b MIMO)					
Freq [MHz]	Channel	Detector	Conducted Power [dBm]		
			ANT1	ANT2	MIMO
2412	1	Average	9.55	9.80	12.69
2437	6		9.82	9.80	12.82
2462	11		9.84	9.80	12.83

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 93 of 298

Table 8-98
5 GHz WLAN Maximum Average RF Power – Antenna WIFI 0

5GHz WIFI (40MHz 802.11n SISO Ant WIFI 0)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	16.24
	5230	46	12.82
UNII-2A	5270	54	16.34
	5310	62	16.37
UNII-2C	5510	102	16.42
	5590	118	16.46
	5630	126	16.38
	5710	142	16.88
UNII-3	5755	151	16.46
	5795	159	16.48
UNII-4	5835	167	15.17
	5875	175	15.12
5GHz WIFI (40MHz 802.11ac SISO Ant WIFI 0)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.51
	5230	46	12.83
UNII-2A	5270	54	16.42
	5310	62	16.45
UNII-2C	5510	102	16.50
	5590	118	16.60
	5630	126	16.35
	5710	142	16.81
UNII-3	5755	151	16.45
	5795	159	16.58
UNII-4	5835	167	15.36
	5875	175	15.21
5GHz WIFI (40MHz 802.11ax SISO Ant WIFI 0)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	10.84
	5230	46	10.78
UNII-2A	5270	54	10.51
	5310	62	10.64
UNII-2C	5510	102	10.66
	5590	118	10.69
	5630	126	10.61
	5710	142	10.58
UNII-3	5755	151	10.79
	5795	159	10.86
UNII-4	5835	167	10.40
	5875	175	10.26

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 94 of 298

REV 22.0
03/30/2022

Table 8-99
5 GHz WLAN Maximum Average RF Power – Antenna WIFI 1

5GHz WIFI (40MHz 802.11n SISO Ant WIFI 1)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	16.51
	5230	46	12.59
UNII-2A	5270	54	16.56
	5310	62	16.47
UNII-2C	5510	102	16.65
	5590	118	16.84
	5630	126	16.44
	5710	142	16.65
UNII-3	5755	151	16.76
	5795	159	16.76
UNII-4	5835	167	15.22
	5875	175	15.16
5GHz WIFI (40MHz 802.11ac SISO Ant WIFI 1)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	14.24
	5230	46	12.32
UNII-2A	5270	54	16.37
	5310	62	16.54
UNII-2C	5510	102	16.69
	5590	118	16.83
	5630	126	16.43
	5710	142	16.63
UNII-3	5755	151	16.80
	5795	159	16.75
UNII-4	5835	167	15.47
	5875	175	15.22
5GHz WIFI (40MHz 802.11ax SISO Ant WIFI 1)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5190	38	10.69
	5230	46	10.75
UNII-2A	5270	54	10.69
	5310	62	10.60
UNII-2C	5510	102	10.70
	5590	118	10.84
	5630	126	10.78
	5710	142	10.71
UNII-3	5755	151	10.89
	5795	159	10.79
UNII-4	5835	167	10.10
	5875	175	10.36

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 95 of 298

REV 22.0
03/30/2022

Table 8-100
5 GHz WLAN Reduced Average RF Power with Grip Sensor Active – Antenna WIFI 0

5GHz WIFI (80MHz 802.11ac SISO Ant WIFI 0)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	7.23
UNII-2A	5290	58	7.36
UNII-2C	5530	106	7.58
	5610	122	7.98
	5690	138	7.62
UNII-3	5775	155	7.66
UNII-4	5855	171	6.95
5GHz WIFI (80MHz 802.11ax SISO Ant WIFI 0)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	7.13
UNII-2A	5290	58	7.01
UNII-2C	5530	106	7.33
	5610	122	7.42
	5690	138	7.55
UNII-3	5775	155	7.73
UNII-4	5855	171	6.67

Table 8-101
5 GHz WLAN Reduced Average RF Power with Grip Sensor Active – Antenna WIFI 1

5GHz WIFI (80MHz 802.11ac SISO Ant WIFI 1)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	7.58
UNII-2A	5290	58	7.78
UNII-2C	5530	106	7.87
	5610	122	7.95
	5690	138	7.87
UNII-3	5775	155	7.83
UNII-4	5855	171	7.12
5GHz WIFI (80MHz 802.11ax SISO Ant WIFI 1)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-1	5210	42	7.46
UNII-2A	5290	58	7.36
UNII-2C	5530	106	7.30
	5610	122	7.47
	5690	138	7.04
UNII-3	5775	155	7.60
UNII-4	5855	171	6.82

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 96 of 298

REV 22.0
03/30/2022

Table 8-102
5 GHz WLAN Maximum Average RF Power – MIMO
5GHz WIFI (40MHz 802.11n MIMO)

Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT1	ANT2	MIMO
UNII-1	5190	38	16.77	16.70	19.75
	5230	46	12.42	12.82	15.63
UNII-2A	5270	54	16.79	16.75	19.78
	5310	62	16.82	16.66	19.75
UNII-2C	5510	102	16.15	16.61	19.40
	5590	118	16.53	16.76	19.66
	5630	126	16.38	16.47	19.44
	5710	142	16.82	16.62	19.73
UNII-3	5755	151	16.49	16.77	19.64
	5795	159	16.38	16.61	19.51
UNII-4	5835	167	15.52	15.55	18.55
	5875	175	15.63	15.92	18.79

Table 8-103
5 GHz WLAN Reduced Average RF Power with Grip Sensor Active – MIMO
5GHz WIFI (80MHz 802.11ac MIMO)

Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT1	ANT2	MIMO
UNII-1	5210	42	7.51	7.48	10.51
UNII-2A	5290	58	7.39	7.42	10.42
UNII-2C	5530	106	7.42	7.81	10.63
	5610	122	7.56	7.37	10.48
	5690	138	7.89	7.67	10.79
UNII-3	5775	155	7.56	7.52	10.55
UNII-4	5885	171	6.58	6.81	9.71

Table 8-104
5 GHz WLAN Reduced Average RF Power with 2.4 GHz WLAN Active and/or NR Active – MIMO
5GHz WIFI (80MHz 802.11ac MIMO)

Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT1	ANT2	MIMO
UNII-1	5210	42	6.11	6.40	9.27
UNII-2A	5290	58	5.90	6.11	9.02
UNII-2C	5530	106	5.80	6.47	9.16
	5610	122	6.25	6.23	9.25
	5690	138	6.30	6.25	9.29
UNII-3	5775	155	5.89	6.31	9.12
UNII-4	5885	171	5.21	5.53	8.38

Table 8-105
6 GHz WLAN Maximum Average RF Power – Ant WIFI 0
6GHz WIFI (80MHz 802.11ax SISO ANT WIFI 0)

Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	5985	7	9.33
	6305	71	9.44
UNII-6	6465	103	9.20
UNII-7	6705	151	9.42
UNII-8	7025	215	9.23

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 97 of 298

Table 8-106
6 GHz WLAN Maximum Average RF Power – Ant WIFI 1

6GHz WIFI (80MHz 802.11ax SISO ANT WIFI 1)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	5985	7	9.31
	6305	71	9.23
UNII-6	6465	103	9.41
UNII-7	6705	151	9.38
UNII-8	7025	215	9.49

Table 8-107
6 GHz WLAN Reduced Average RF Power with Grip Sensor Active – Ant WIFI 0

6GHz WIFI (80MHz 802.11ax SISO ANT WIFI 0)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	5985	7	6.13
	6305	71	6.02
UNII-6	6465	103	6.32
UNII-7	6705	151	6.29
UNII-8	7025	215	6.14

Table 8-108
6 GHz WLAN Reduced Average RF Power with Grip Sensor Active – Ant WIFI 1

6GHz WIFI (80MHz 802.11ax SISO ANT WIFI 1)			
Band	Freq. [MHz]	Channel	Avg. Conducted Power [dBm]
UNII-5	5985	7	6.47
	6305	71	6.47
UNII-6	6465	103	6.02
UNII-7	6705	151	6.30
UNII-8	7025	215	6.39

Table 8-109
6 GHz WLAN Maximum Average RF Power – MIMO

6GHz WIFI (80MHz 802.11ax MIMO)					
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT1	ANT2	MIMO
UNII-5	5985	7	9.78	9.76	12.78
	6305	71	9.20	9.83	12.54
UNII-6	6465	103	9.88	9.84	12.87
UNII-7	6705	151	9.63	9.72	12.69
UNII-8	7025	215	9.43	9.87	12.67

Table 8-110
6 GHz WLAN Reduced Average RF Power with Grip Sensor Active – MIMO

6GHz WIFI (80MHz 802.11ax MIMO)					
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT1	ANT2	MIMO
UNII-5	5985	7	6.33	6.30	9.33
	6305	71	6.39	6.24	9.33
UNII-6	6465	103	6.48	6.14	9.32
UNII-7	6705	151	6.42	6.03	9.24
UNII-8	7025	215	6.21	6.41	9.32

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 98 of 298

Table 8-111
6 GHz WLAN Reduced Average RF Power with 2.4 GHz WLAN Active and/or NR Active – MIMO

6GHz WIFI (80MHz 802.11ax MIMO)					
Band	Freq [MHz]	Channel	Avg. Conducted Powers [dBm]		
			ANT1	ANT2	MIMO
UNII-5	5985	7	2.15	1.88	5.03
	6305	71	1.74	2.32	5.05
UNII-6	6465	103	2.20	1.78	5.01
UNII-7	6705	151	1.63	1.44	4.55
UNII-8	7025	215	1.34	2.19	4.80

Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02:

- Power measurements were performed for the transmission mode configuration with the highest maximum output power specified for production units.
- For transmission modes with the same maximum output power specification, powers were measured for the largest channel bandwidth, lowest order modulation and lowest data rate.
- For transmission modes with identical maximum specified output power, channel bandwidth, modulation and data rates, power measurements were required for all identical configurations.
- For each transmission mode configuration, powers were measured for the highest and lowest channels; and at the mid-band channel(s) when there were at least 3 channels supported. For configurations with multiple mid-band channels, due to an even number of channels, both channels were measured.

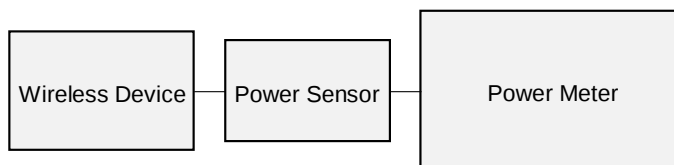


Figure 8-5
Power Measurement Setup

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 99 of 298

REV 22.0
03/30/2022

8.5 Bluetooth Conducted Powers

Table 8-112
Bluetooth Maximum Average RF Power – Ant WIFI 0

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	13.55	22.662
2441	1.0	39	13.83	24.143
2480	1.0	78	13.87	24.384
2402	2.0	0	14.39	27.460
2441	2.0	39	14.79	30.102
2480	2.0	78	13.52	22.465
2402	3.0	0	14.45	27.855
2441	3.0	39	14.80	30.186
2480	3.0	78	13.52	22.465

Table 8-113
Bluetooth Maximum Average RF Power – Ant WIFI 1

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	14.12	25.793
2441	1.0	39	13.91	24.575
2480	1.0	78	14.24	26.540
2402	2.0	0	14.01	25.183
2441	2.0	39	14.41	27.631
2480	2.0	78	13.31	21.434
2402	3.0	0	14.05	25.398
2441	3.0	39	14.45	27.868
2480	3.0	78	13.34	21.553

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 100 of 298

REV 22.0
03/30/2022

Table 8-114

Bluetooth Reduced Average RF Power with Grip sensor active, 5/6 GHz WLAN active, and/or NR Active – Ant WIFI 0

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	6.03	4.009
2441	1.0	39	6.22	4.188
2480	1.0	78	5.91	3.899

Table 8-115


Bluetooth Reduced Average RF Power with Grip sensor active, 5/6 GHz WLAN active, and/or NR Active – Ant WIFI 1

Frequency [MHz]	Data Rate [Mbps]	Channel No.	Avg Conducted Power	
			[dBm]	[mW]
2402	1.0	0	6.06	4.036
2441	1.0	39	6.31	4.276
2480	1.0	78	5.88	3.873

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 101 of 298

REV 22.0
03/30/2022

Figure 8-7
Bluetooth Transmission Plot – Ant WIFI 1

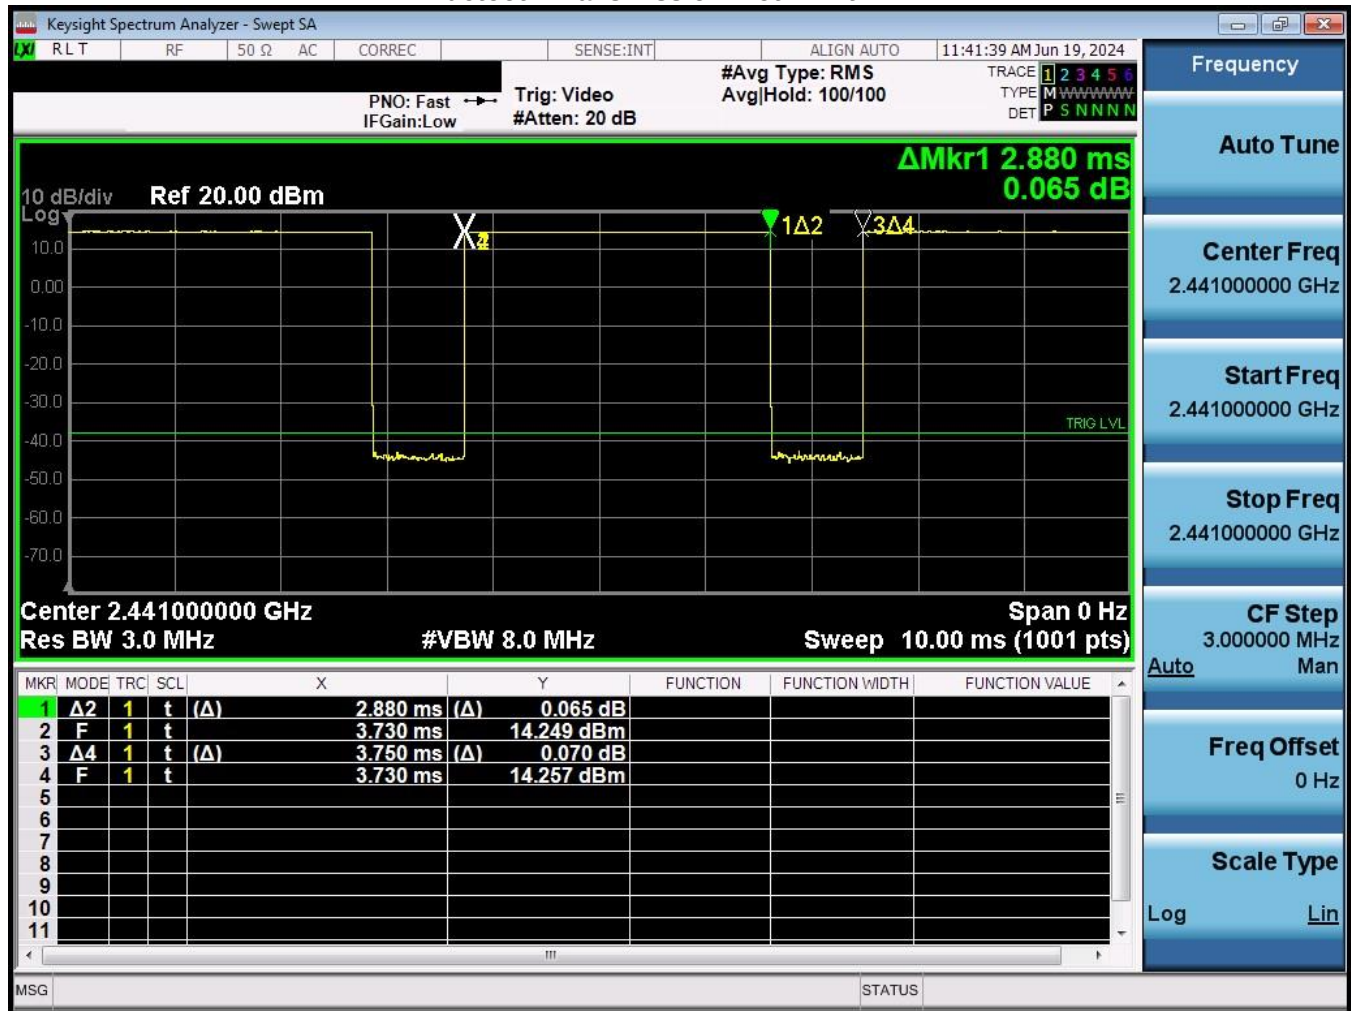

Equation 8-2
Bluetooth Antenna WIFI 1 Duty Cycle Calculation

$$\text{Duty Cycle} = \frac{\text{Pulse Width}}{\text{Period}} * 100\% = \frac{2.88\text{ms}}{3.75\text{ms}} * 100\% = 76.8\%$$

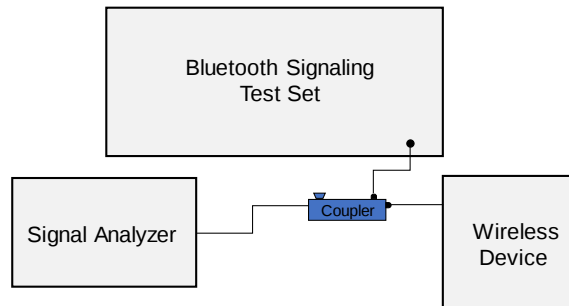


Figure 8-8
Power Measurement Setup

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 103 of 298

REV 22.0
03/30/2022

9 SYSTEM VERIFICATION

9.1 Tissue Verification

Table 9-1
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/12/2024	750 Head	21.8	680	0.847	40.950	0.888	42.305	-4.62%	-3.20%
			695	0.851	40.894	0.889	42.227	-4.27%	-3.16%
			710	0.856	40.820	0.890	42.149	-3.82%	-3.15%
			725	0.860	40.750	0.891	42.071	-3.48%	-3.14%
			750	0.868	40.679	0.894	41.942	-2.91%	-3.01%
			770	0.874	40.659	0.895	41.838	-2.35%	-2.82%
			785	0.879	40.632	0.896	41.760	-1.90%	-2.70%
			800	0.884	40.581	0.897	41.682	-1.45%	-2.64%
06/17/2024	750 Head	22.6	680	0.861	41.588	0.888	42.305	-3.04%	-1.69%
			695	0.867	41.557	0.889	42.227	-2.47%	-1.59%
			710	0.873	41.524	0.890	42.149	-1.91%	-1.48%
			725	0.879	41.476	0.891	42.071	-1.35%	-1.41%
			750	0.888	41.377	0.894	41.942	-0.67%	-1.35%
			770	0.894	41.300	0.895	41.838	-0.11%	-1.29%
			785	0.899	41.246	0.896	41.760	0.33%	-1.23%
			800	0.905	41.200	0.897	41.682	0.89%	-1.16%
07/04/2024	750 Head	20.9	680	0.862	42.399	0.888	42.305	-2.93%	0.22%
			695	0.867	42.373	0.889	42.227	-2.47%	0.35%
			710	0.872	42.337	0.890	42.149	-2.02%	0.45%
			725	0.877	42.280	0.891	42.071	-1.57%	0.50%
			750	0.886	42.163	0.894	41.942	-0.89%	0.53%
			770	0.892	42.090	0.895	41.838	-0.34%	0.60%
			785	0.898	42.043	0.896	41.760	0.22%	0.68%
			800	0.904	42.006	0.897	41.682	0.78%	0.78%
07/08/2024	750 Head	22.1	680	0.874	40.567	0.888	42.305	-1.58%	-4.11%
			695	0.879	40.541	0.889	42.227	-1.12%	-3.99%
			710	0.881	40.532	0.889	42.201	-0.90%	-3.95%
			725	0.885	40.510	0.890	42.149	-0.56%	-3.89%
			750	0.890	40.471	0.891	42.071	-0.11%	-3.80%
			770	0.900	40.388	0.894	41.942	0.67%	-3.71%
			785	0.906	40.331	0.895	41.838	1.23%	-3.60%
			800	0.912	40.292	0.896	41.760	1.79%	-3.52%
07/10/2024	750 Head	22.3	680	0.850	41.791	0.888	42.305	-4.28%	-1.21%
			695	0.855	41.754	0.889	42.227	-3.82%	-1.12%
			710	0.861	41.704	0.890	42.149	-3.26%	-1.06%
			725	0.866	41.651	0.891	42.071	-2.81%	-1.00%
			750	0.874	41.584	0.894	41.942	-2.24%	-0.85%
			770	0.880	41.538	0.895	41.838	-1.68%	-0.72%
			785	0.886	41.503	0.896	41.760	-1.12%	-0.62%
			800	0.892	41.461	0.897	41.682	-0.56%	-0.53%
07/15/2024	750 Head	22.2	680	0.847	41.232	0.888	42.305	-4.62%	-2.54%
			695	0.851	41.186	0.889	42.227	-4.27%	-2.47%
			710	0.853	41.166	0.889	42.201	-4.05%	-2.45%
			725	0.856	41.128	0.890	42.149	-3.82%	-2.42%
			750	0.862	41.071	0.891	42.071	-3.25%	-2.38%
			770	0.870	41.000	0.894	41.942	-2.68%	-2.25%
			785	0.876	40.960	0.895	41.838	-2.12%	-2.10%
			800	0.882	40.919	0.896	41.760	-1.56%	-2.01%
06/12/2024	835 Head	21.8	815	0.887	40.868	0.897	41.682	-1.11%	-1.95%
			820	0.890	40.512	0.898	41.594	-0.89%	-2.60%
			825	0.892	40.488	0.899	41.578	-0.78%	-2.62%
			835	0.897	40.418	0.900	41.500	-0.33%	-2.61%
			850	0.902	40.367	0.916	41.500	-1.53%	-2.73%
			815	0.911	41.158	0.898	41.594	1.45%	-1.05%
			820	0.913	41.143	0.899	41.578	1.56%	-1.05%
			835	0.918	41.089	0.900	41.500	2.00%	-0.99%
06/17/2024	835 Head	22.6	850	0.923	41.036	0.916	41.500	0.76%	-1.12%
			815	0.895	41.032	0.898	41.594	-0.33%	-1.35%
			820	0.897	41.018	0.899	41.578	-0.22%	-1.35%
			835	0.901	40.969	0.900	41.500	0.11%	-1.28%
			850	0.906	40.921	0.916	41.500	-1.09%	-1.40%
			815	0.899	41.876	0.898	41.594	0.11%	0.68%
			820	0.900	41.864	0.899	41.578	0.11%	0.69%
			835	0.905	41.823	0.900	41.500	0.56%	0.78%
06/18/2024	835 Head	22.3	850	0.911	41.776	0.916	41.500	-0.55%	0.67%
			815	0.898	41.408	0.898	41.594	0.00%	-0.45%
			820	0.900	41.390	0.899	41.578	0.11%	-0.45%
			835	0.905	41.337	0.900	41.500	0.56%	-0.39%
			850	0.910	41.290	0.916	41.500	-0.66%	-0.51%
			815	0.893	40.810	0.898	41.594	-0.56%	-1.88%
			820	0.895	40.789	0.899	41.578	-0.44%	-1.90%
			835	0.900	40.743	0.900	41.500	0.00%	-1.82%
07/10/2024	835 Head	22.2	850	0.906	40.706	0.916	41.500	-1.09%	-1.91%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 104 of 298

REV 22.0
03/30/2022

Table 9-2
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/19/2024	1750 Head	20.1	1700	1.324	39.997	1.343	40.145	-1.41%	-0.37%
			1705	1.327	39.990	1.345	40.141	-1.34%	-0.38%
			1710	1.329	39.984	1.348	40.136	-1.41%	-0.38%
			1720	1.335	39.972	1.354	40.126	-1.40%	-0.38%
			1745	1.354	39.934	1.368	40.087	-1.02%	-0.38%
			1750	1.357	39.922	1.371	40.079	-1.02%	-0.39%
			1770	1.370	39.877	1.383	40.047	-0.94%	-0.42%
			1790	1.380	39.845	1.394	40.016	-1.00%	-0.43%
06/27/2024	1750 Head	22.3	1700	1.287	40.427	1.343	40.145	-4.17%	0.70%
			1705	1.290	40.421	1.345	40.141	-4.09%	0.70%
			1710	1.292	40.414	1.348	40.136	-4.15%	0.69%
			1720	1.298	40.401	1.354	40.126	-4.14%	0.69%
			1745	1.312	40.367	1.368	40.087	-4.09%	0.70%
			1750	1.315	40.360	1.371	40.079	-4.08%	0.70%
			1770	1.326	40.347	1.383	40.047	-4.12%	0.75%
			1790	1.337	40.333	1.394	40.016	-4.09%	0.79%
07/01/2024	1750 Head	22.4	1700	1.281	39.478	1.343	40.145	-4.62%	-1.66%
			1705	1.284	39.469	1.345	40.141	-4.54%	-1.67%
			1710	1.287	39.461	1.348	40.136	-4.53%	-1.68%
			1720	1.292	39.443	1.354	40.126	-4.58%	-1.70%
			1745	1.308	39.404	1.368	40.087	-4.39%	-1.70%
			1750	1.311	39.396	1.371	40.079	-4.38%	-1.70%
			1770	1.323	39.374	1.383	40.047	-4.34%	-1.68%
			1790	1.334	39.337	1.394	40.016	-4.30%	-1.70%
07/10/2024	1750 Head	22.9	1700	1.289	40.180	1.343	40.145	-4.02%	0.09%
			1705	1.291	40.175	1.345	40.141	-4.01%	0.08%
			1710	1.293	40.169	1.348	40.136	-4.08%	0.08%
			1720	1.298	40.159	1.354	40.126	-4.14%	0.08%
			1745	1.313	40.129	1.368	40.087	-4.02%	0.10%
			1750	1.316	40.124	1.371	40.079	-4.01%	0.11%
			1770	1.328	40.105	1.383	40.047	-3.98%	0.14%
			1790	1.339	40.083	1.394	40.016	-3.95%	0.17%
07/10/2024	1750 Head	22.6	1700	1.333	41.722	1.343	40.145	-0.74%	3.93%
			1705	1.335	41.714	1.345	40.141	-0.74%	3.92%
			1710	1.338	41.704	1.348	40.136	-0.74%	3.91%
			1720	1.343	41.681	1.354	40.126	-0.81%	3.88%
			1745	1.357	41.624	1.368	40.087	-0.80%	3.83%
			1750	1.360	41.613	1.371	40.079	-0.80%	3.83%
			1770	1.372	41.583	1.383	40.047	-0.80%	3.84%
			1790	1.383	41.563	1.394	40.016	-0.79%	3.87%
07/17/2024	1750 Head	22.2	1700	1.317	40.809	1.343	40.145	-1.94%	1.65%
			1705	1.320	40.798	1.345	40.141	-1.86%	1.64%
			1710	1.323	40.788	1.348	40.136	-1.85%	1.62%
			1720	1.328	40.764	1.354	40.126	-1.92%	1.59%
			1745	1.343	40.720	1.368	40.087	-1.83%	1.58%
			1750	1.346	40.713	1.371	40.079	-1.82%	1.58%
			1770	1.358	40.692	1.383	40.047	-1.81%	1.61%
			1790	1.368	40.679	1.394	40.016	-1.87%	1.66%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 105 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 9-3
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/18/2024	1900 Head	22.3	1850	1.375	39.008	1.400	40.000	-1.79%	-2.48%
			1860	1.379	38.998	1.400	40.000	-1.50%	-2.51%
			1880	1.388	38.978	1.400	40.000	-0.86%	-2.56%
			1900	1.402	38.938	1.400	40.000	0.14%	-2.65%
			1905	1.405	38.927	1.400	40.000	0.36%	-2.68%
			1910	1.409	38.916	1.400	40.000	0.64%	-2.71%
			1920	1.415	38.897	1.400	40.000	1.07%	-2.76%
06/19/2024	1900 Head	20.1	1850	1.416	39.766	1.400	40.000	1.14%	-0.59%
			1860	1.423	39.742	1.400	40.000	1.64%	-0.65%
			1880	1.437	39.695	1.400	40.000	2.64%	-0.76%
			1900	1.450	39.659	1.400	40.000	3.57%	-0.85%
			1905	1.453	39.655	1.400	40.000	3.79%	-0.86%
			1910	1.456	39.649	1.400	40.000	4.00%	-0.88%
			1920	1.461	39.638	1.400	40.000	4.36%	-0.91%
07/01/2024	1900 Head	22.4	1850	1.369	39.231	1.400	40.000	-2.21%	-1.92%
			1860	1.375	39.221	1.400	40.000	-1.79%	-1.95%
			1880	1.385	39.194	1.400	40.000	-1.07%	-2.01%
			1900	1.395	39.161	1.400	40.000	-0.36%	-2.10%
			1905	1.399	39.154	1.400	40.000	-0.07%	-2.11%
			1910	1.402	39.148	1.400	40.000	0.14%	-2.13%
			1920	1.409	39.139	1.400	40.000	0.64%	-2.15%
07/10/2024	1900 Head	22.9	1850	1.375	39.998	1.400	40.000	-1.79%	-0.01%
			1860	1.381	39.986	1.400	40.000	-1.36%	-0.04%
			1880	1.392	39.963	1.400	40.000	-0.57%	-0.09%
			1900	1.404	39.934	1.400	40.000	0.29%	-0.17%
			1905	1.407	39.927	1.400	40.000	0.50%	-0.18%
			1910	1.410	39.920	1.400	40.000	0.71%	-0.20%
			1920	1.417	39.906	1.400	40.000	1.21%	-0.24%
07/10/2024	1900 Head	22.6	1850	1.418	41.480	1.400	40.000	1.29%	3.70%
			1860	1.424	41.462	1.400	40.000	1.71%	3.66%
			1880	1.437	41.432	1.400	40.000	2.64%	3.58%
			1900	1.449	41.415	1.400	40.000	3.50%	3.54%
			1905	1.453	41.411	1.400	40.000	3.79%	3.53%
			1910	1.456	41.408	1.400	40.000	4.00%	3.52%
			1920	1.462	41.399	1.400	40.000	4.43%	3.50%
07/17/2024	1900 Head	22.2	1850	1.402	40.590	1.400	40.000	0.14%	1.48%
			1860	1.409	40.579	1.400	40.000	0.64%	1.45%
			1880	1.423	40.568	1.400	40.000	1.64%	1.42%
			1900	1.436	40.559	1.400	40.000	2.57%	1.40%
			1905	1.439	40.554	1.400	40.000	2.79%	1.39%
			1910	1.442	40.549	1.400	40.000	3.00%	1.37%
			1920	1.447	40.534	1.400	40.000	3.36%	1.34%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 106 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 9-4
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/10/2024	2450 Head	20.5	2300	1.699	38.082	1.670	39.500	1.74%	-3.59%
			2310	1.706	38.071	1.679	39.480	1.61%	-3.57%
			2320	1.713	38.059	1.687	39.460	1.54%	-3.55%
			2400	1.772	37.954	1.756	39.289	0.91%	-3.40%
			2450	1.812	37.888	1.800	39.200	0.67%	-3.35%
			2480	1.834	37.838	1.833	39.162	0.05%	-3.38%
			2500	1.850	37.797	1.855	39.136	-0.27%	-3.42%
			2510	1.859	37.781	1.866	39.123	-0.38%	-3.43%
			2535	1.880	37.744	1.893	39.092	-0.69%	-3.45%
			2550	1.892	37.722	1.909	39.073	-0.89%	-3.46%
			2560	1.900	37.706	1.920	39.060	-1.04%	-3.47%
			2600	1.932	37.623	1.964	39.009	-1.63%	-3.55%
			2650	1.973	37.524	2.018	38.945	-2.23%	-3.65%
			2680	1.996	37.468	2.051	38.907	-2.68%	-3.70%
			2700	2.012	37.425	2.073	38.882	-2.94%	-3.75%
06/17/2024	2450 Head	20.6	2300	1.698	37.767	1.670	39.500	1.68%	-4.39%
			2310	1.705	37.759	1.679	39.480	1.55%	-4.36%
			2320	1.712	37.747	1.687	39.460	1.48%	-4.34%
			2400	1.773	37.602	1.756	39.289	0.97%	-4.29%
			2450	1.813	37.542	1.800	39.200	0.72%	-4.23%
			2480	1.835	37.477	1.833	39.162	0.11%	-4.30%
			2500	1.850	37.438	1.855	39.136	-0.27%	-4.34%
			2510	1.858	37.422	1.866	39.123	-0.43%	-4.35%
			2535	1.879	37.385	1.893	39.092	-0.74%	-4.37%
			2550	1.892	37.366	1.909	39.073	-0.89%	-4.37%
			2560	1.900	37.351	1.920	39.060	-1.04%	-4.38%
			2600	1.932	37.272	1.964	39.009	-1.63%	-4.45%
			2650	1.972	37.164	2.018	38.945	-2.28%	-4.57%
			2680	1.997	37.122	2.051	38.907	-2.63%	-4.59%
			2700	2.013	37.089	2.073	38.882	-2.89%	-4.61%
06/19/2024	2450 Head	21.3	2300	1.699	38.074	1.670	39.500	1.74%	-3.61%
			2310	1.706	38.063	1.679	39.480	1.61%	-3.59%
			2320	1.712	38.043	1.687	39.460	1.48%	-3.59%
			2400	1.774	37.917	1.756	39.289	1.03%	-3.49%
			2450	1.812	37.806	1.800	39.200	0.67%	-3.56%
			2480	1.838	37.772	1.833	39.162	0.27%	-3.55%
			2500	1.851	37.736	1.855	39.136	-0.22%	-3.58%
			2510	1.857	37.713	1.866	39.123	-0.48%	-3.60%
			2535	1.878	37.659	1.893	39.092	-0.79%	-3.67%
			2550	1.892	37.636	1.909	39.073	-0.89%	-3.68%
			2560	1.901	37.626	1.920	39.060	-0.99%	-3.67%
			2600	1.929	37.555	1.964	39.009	-1.78%	-3.73%
			2650	1.970	37.462	2.018	38.945	-2.38%	-3.81%
			2680	1.991	37.420	2.051	38.907	-2.93%	-3.82%
			2700	2.005	37.377	2.073	38.882	-3.28%	-3.87%
06/20/2024	2450 Head	21.3	2300	1.693	37.696	1.670	39.500	1.38%	-4.57%
			2310	1.699	37.681	1.679	39.480	1.19%	-4.56%
			2320	1.705	37.657	1.687	39.460	1.07%	-4.57%
			2400	1.766	37.521	1.756	39.289	0.57%	-4.50%
			2450	1.801	37.407	1.800	39.200	0.06%	-4.57%
			2480	1.824	37.389	1.833	39.162	-0.49%	-4.53%
			2500	1.838	37.354	1.855	39.136	-0.92%	-4.55%
			2510	1.844	37.329	1.866	39.123	-1.18%	-4.59%
			2535	1.863	37.274	1.893	39.092	-1.58%	-4.65%
			2550	1.875	37.254	1.909	39.073	-1.78%	-4.66%
			2560	1.883	37.246	1.920	39.060	-1.93%	-4.64%
			2600	1.911	37.194	1.964	39.009	-2.70%	-4.65%
			2650	1.951	37.106	2.018	38.945	-3.32%	-4.72%
			2680	1.973	37.073	2.051	38.907	-3.80%	-4.71%
			2700	1.987	37.029	2.073	38.882	-4.15%	-4.77%
07/01/2024	2450 Head	19.7	2300	1.654	40.356	1.670	39.500	-0.96%	2.17%
			2310	1.662	40.345	1.679	39.480	-1.01%	2.19%
			2320	1.670	40.334	1.687	39.460	-1.01%	2.21%
			2400	1.732	40.214	1.756	39.289	-1.37%	2.35%
			2450	1.772	40.139	1.800	39.200	-1.56%	2.40%
			2480	1.795	40.080	1.833	39.162	-2.07%	2.34%
			2500	1.811	40.050	1.855	39.136	-2.37%	2.34%
			2510	1.819	40.035	1.866	39.123	-2.52%	2.33%
			2535	1.839	39.998	1.893	39.092	-2.85%	2.32%
			2550	1.852	39.975	1.909	39.073	-2.99%	2.31%
			2560	1.860	39.956	1.920	39.060	-3.12%	2.29%
			2600	1.892	39.893	1.964	39.009	-3.67%	2.27%
			2650	1.931	39.796	2.018	38.945	-4.31%	2.19%
			2680	1.955	39.752	2.051	38.907	-4.68%	2.17%
			2700	1.970	39.735	2.073	38.882	-4.97%	2.19%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 107 of 298

Table 9-5
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
07/01/2024	2450 Head	21.0	2300	1.695	38.033	1.670	39.500	1.50%	-3.71%
			2310	1.702	38.018	1.679	39.480	1.37%	-3.70%
			2320	1.710	38.006	1.687	39.460	1.36%	-3.68%
			2400	1.766	37.877	1.756	39.289	0.57%	-3.59%
			2450	1.803	37.802	1.800	39.200	0.17%	-3.57%
			2480	1.825	37.766	1.833	39.162	-0.44%	-3.56%
			2500	1.841	37.735	1.855	39.136	-0.75%	-3.58%
			2510	1.849	37.719	1.866	39.123	-0.91%	-3.59%
			2535	1.866	37.677	1.893	39.092	-1.43%	-3.62%
			2550	1.877	37.657	1.909	39.073	-1.68%	-3.62%
			2560	1.885	37.645	1.920	39.060	-1.82%	-3.62%
			2600	1.918	37.589	1.964	39.009	-2.34%	-3.64%
			2650	1.958	37.507	2.018	38.945	-2.97%	-3.69%
			2680	1.981	37.465	2.051	38.907	-3.41%	-3.71%
			2700	1.998	37.435	2.073	38.882	-3.62%	-3.72%
07/03/2024	2450 Head	20.1	2300	1.704	37.744	1.670	39.500	2.04%	-4.45%
			2310	1.712	37.728	1.679	39.480	1.97%	-4.44%
			2320	1.720	37.711	1.687	39.460	1.96%	-4.43%
			2400	1.777	37.582	1.756	39.289	1.20%	-4.34%
			2450	1.815	37.499	1.800	39.200	0.83%	-4.34%
			2480	1.837	37.448	1.833	39.162	0.22%	-4.38%
			2500	1.851	37.408	1.855	39.136	-0.22%	-4.42%
			2510	1.859	37.390	1.866	39.123	-0.38%	-4.43%
			2535	1.880	37.348	1.893	39.092	-0.69%	-4.46%
			2550	1.893	37.326	1.909	39.073	-0.84%	-4.47%
			2560	1.901	37.314	1.920	39.060	-0.99%	-4.47%
			2600	1.931	37.250	1.964	39.009	-1.68%	-4.51%
			2650	1.971	37.154	2.018	38.945	-2.33%	-4.60%
			2680	1.996	37.105	2.051	38.907	-2.68%	-4.63%
			2700	2.012	37.075	2.073	38.882	-2.94%	-4.65%
07/08/2024	2450 Head	21.9	2300	1.720	40.900	1.670	39.500	2.99%	3.54%
			2310	1.727	40.884	1.679	39.480	2.86%	3.56%
			2320	1.734	40.870	1.687	39.460	2.79%	3.57%
			2400	1.793	40.761	1.756	39.289	2.11%	3.75%
			2450	1.831	40.685	1.800	39.200	1.72%	3.79%
			2480	1.855	40.646	1.833	39.162	1.20%	3.79%
			2500	1.870	40.622	1.855	39.136	0.81%	3.80%
			2510	1.877	40.606	1.866	39.123	0.59%	3.79%
			2535	1.897	40.559	1.893	39.092	0.21%	3.75%
			2550	1.910	40.530	1.909	39.073	0.05%	3.73%
			2560	1.919	40.511	1.920	39.060	-0.05%	3.71%
			2600	1.951	40.466	1.964	39.009	-0.66%	3.74%
			2650	1.991	40.357	2.018	38.945	-1.34%	3.63%
			2680	2.017	40.313	2.051	38.907	-1.66%	3.61%
			2700	2.033	40.297	2.073	38.882	-1.93%	3.64%
07/08/2024	2450 Head	20.3	2300	1.728	40.386	1.670	39.500	3.47%	2.24%
			2310	1.737	40.367	1.679	39.480	3.45%	2.25%
			2320	1.745	40.330	1.687	39.460	3.44%	2.20%
			2400	1.808	40.231	1.756	39.289	2.96%	2.40%
			2450	1.841	40.133	1.800	39.200	2.28%	2.38%
			2480	1.867	40.054	1.833	39.162	1.85%	2.28%
			2500	1.888	40.025	1.855	39.136	1.78%	2.27%
			2510	1.898	40.009	1.866	39.123	1.71%	2.26%
			2535	1.915	40.000	1.893	39.092	1.16%	2.32%
			2550	1.925	39.998	1.909	39.073	0.84%	2.37%
			2560	1.933	39.979	1.920	39.060	0.68%	2.35%
			2600	1.966	39.850	1.964	39.009	0.10%	2.16%
			2650	2.011	39.789	2.018	38.945	-0.35%	2.17%
			2680	2.030	39.786	2.051	38.907	-1.02%	2.26%
			2700	2.046	39.733	2.073	38.882	-1.30%	2.19%
07/10/2024	2450 Head	20.2	2300	1.701	38.684	1.670	39.500	1.86%	-2.07%
			2310	1.708	38.671	1.679	39.480	1.73%	-2.05%
			2320	1.715	38.655	1.687	39.460	1.66%	-2.04%
			2400	1.774	38.503	1.756	39.289	1.03%	-2.00%
			2450	1.811	38.446	1.800	39.200	0.61%	-1.92%
			2480	1.834	38.387	1.833	39.162	0.05%	-1.98%
			2500	1.850	38.349	1.855	39.136	-0.27%	-2.01%
			2510	1.859	38.334	1.866	39.123	-0.38%	-2.02%
			2535	1.881	38.306	1.893	39.092	-0.63%	-2.01%
			2550	1.893	38.294	1.909	39.073	-0.84%	-1.99%
			2560	1.902	38.285	1.920	39.060	-0.94%	-1.98%
			2600	1.935	38.215	1.964	39.009	-1.48%	-2.04%
			2650	1.979	38.119	2.018	38.945	-1.93%	-2.12%
			2680	2.005	38.086	2.051	38.907	-2.24%	-2.11%
			2700	2.021	38.055	2.073	38.882	-2.51%	-2.13%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 108 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 9-6
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
07/11/2024	2450 Head	22.6	2300	1.707	40.027	1.670	39.500	2.22%	1.33%
			2310	1.715	40.013	1.679	39.480	2.14%	1.35%
			2320	1.722	40.001	1.687	39.460	2.07%	1.37%
			2400	1.783	39.878	1.756	39.289	1.54%	1.50%
			2450	1.821	39.799	1.800	39.200	1.17%	1.53%
			2480	1.843	39.759	1.833	39.162	0.55%	1.52%
			2500	1.858	39.722	1.855	39.136	0.16%	1.50%
			2510	1.866	39.703	1.866	39.123	0.00%	1.48%
			2535	1.887	39.661	1.893	39.092	-0.32%	1.46%
			2550	1.899	39.642	1.909	39.073	-0.52%	1.46%
			2560	1.907	39.630	1.920	39.060	-0.68%	1.46%
			2600	1.938	39.557	1.964	39.009	-1.32%	1.40%
			2650	1.980	39.479	2.018	38.945	-1.88%	1.37%
			2680	2.004	39.423	2.051	38.907	-2.29%	1.33%
			2700	2.020	39.383	2.073	38.882	-2.56%	1.29%
			2300	1.662	39.152	1.670	39.500	-0.48%	-0.88%
			2310	1.670	39.143	1.679	39.480	-0.54%	-0.85%
07/15/2024	2450 Head	21.7	2320	1.678	39.135	1.687	39.460	-0.53%	-0.82%
			2400	1.740	39.022	1.756	39.289	-0.91%	-0.68%
			2450	1.777	38.937	1.800	39.200	-1.28%	-0.67%
			2480	1.801	38.892	1.833	39.162	-1.75%	-0.69%
			2500	1.816	38.858	1.855	39.136	-2.10%	-0.71%
			2510	1.824	38.840	1.866	39.123	-2.25%	-0.72%
			2535	1.844	38.803	1.893	39.092	-2.59%	-0.74%
			2550	1.856	38.783	1.909	39.073	-2.78%	-0.74%
			2560	1.864	38.769	1.920	39.060	-2.92%	-0.75%
			2600	1.895	38.693	1.964	39.009	-3.51%	-0.81%
			2650	1.936	38.611	2.018	38.945	-4.06%	-0.86%
			2680	1.960	38.558	2.051	38.907	-4.44%	-0.90%
			2700	1.975	38.523	2.073	38.882	-4.73%	-0.92%
			2300	1.740	40.159	1.670	39.500	4.19%	1.67%
			2310	1.748	40.149	1.679	39.480	4.11%	1.69%
			2320	1.755	40.139	1.687	39.460	4.03%	1.72%
			2400	1.817	40.032	1.756	39.289	3.47%	1.89%
07/15/2024	2450 Head	23.4	2450	1.856	39.953	1.800	39.200	3.11%	1.92%
			2480	1.880	39.905	1.833	39.162	2.56%	1.90%
			2500	1.896	39.871	1.855	39.136	2.21%	1.88%
			2510	1.904	39.854	1.866	39.123	2.04%	1.87%
			2535	1.924	39.820	1.893	39.092	1.64%	1.86%
			2550	1.937	39.800	1.909	39.073	1.47%	1.86%
			2560	1.945	39.786	1.920	39.060	1.30%	1.86%
			2600	1.978	39.706	1.964	39.009	0.71%	1.79%
			2650	2.021	39.610	2.018	38.945	0.15%	1.71%
			2680	2.046	39.553	2.051	38.907	-0.24%	1.66%
			2700	2.064	39.518	2.073	38.882	-0.43%	1.64%
			2300	1.684	39.636	1.670	39.500	0.84%	0.34%
			2310	1.693	39.623	1.679	39.480	0.83%	0.36%
			2320	1.702	39.619	1.687	39.460	0.89%	0.40%
			2400	1.760	39.489	1.756	39.289	0.23%	0.51%
			2450	1.805	39.439	1.800	39.200	0.28%	0.61%
			2480	1.826	39.400	1.833	39.162	-0.38%	0.61%
07/17/2024	2450 Head	19.9	2500	1.839	39.334	1.855	39.136	-0.86%	0.51%
			2510	1.847	39.300	1.866	39.123	-1.02%	0.45%
			2535	1.871	39.244	1.893	39.092	-1.16%	0.39%
			2550	1.886	39.233	1.909	39.073	-1.20%	0.41%
			2560	1.895	39.233	1.920	39.060	-1.30%	0.44%
			2600	1.923	39.177	1.964	39.009	-2.09%	0.43%
			2650	1.966	39.045	2.018	38.945	-2.58%	0.26%
			2680	1.997	39.037	2.051	38.907	-2.63%	0.33%
			2700	2.011	39.009	2.073	38.882	-2.99%	0.33%
			3300	2.618	39.956	2.708	38.157	-3.32%	4.71%
			3350	2.662	39.873	2.759	38.100	-3.52%	4.65%
			3450	2.751	39.688	2.861	37.986	-3.84%	4.48%
			3500	2.794	39.588	2.913	37.929	-4.09%	4.37%
			3550	2.841	39.513	2.964	37.871	-4.15%	4.34%
			3560	2.849	39.491	2.974	37.860	-4.20%	4.31%
			3600	2.887	39.425	3.015	37.814	-4.25%	4.26%
			3650	2.935	39.345	3.066	37.757	-4.27%	4.21%
06/18/2024	3600 Head	21.7	3690	2.970	39.283	3.107	37.711	-4.41%	4.17%
			3700	2.979	39.267	3.117	37.700	-4.43%	4.16%
			3750	3.031	39.185	3.169	37.643	-4.35%	4.10%
			3900	3.179	38.941	3.323	37.471	-4.33%	3.92%
			3930	3.210	38.894	3.353	37.437	-4.26%	3.89%
			4100	3.384	38.609	3.528	37.243	-4.08%	3.67%
			4150	3.436	38.519	3.579	37.186	-4.00%	3.58%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 109 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 9-7
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/28/2024	3600 Head	20.2	3300	2.604	39.111	2.708	38.157	-3.84%	2.50%
			3350	2.654	39.029	2.759	38.100	-3.81%	2.44%
			3450	2.746	38.846	2.861	37.986	-4.02%	2.26%
			3500	2.790	38.763	2.913	37.929	-4.22%	2.20%
			3550	2.840	38.672	2.964	37.871	-4.18%	2.12%
			3560	2.849	38.658	2.974	37.860	-4.20%	2.11%
			3600	2.882	38.593	3.015	37.814	-4.41%	2.06%
			3650	2.930	38.512	3.066	37.757	-4.44%	2.00%
			3690	2.968	38.422	3.107	37.711	-4.47%	1.89%
			3700	2.978	38.409	3.117	37.700	-4.46%	1.88%
			3750	3.022	38.338	3.169	37.643	-4.64%	1.85%
			3900	3.181	38.115	3.323	37.471	-4.27%	1.72%
			3930	3.214	38.042	3.353	37.437	-4.15%	1.62%
			4100	3.389	37.792	3.528	37.243	-3.94%	1.47%
			4150	3.444	37.700	3.579	37.186	-3.77%	1.38%
07/03/2024	3600 Head	19.0	3300	2.610	38.854	2.708	38.157	-3.62%	1.83%
			3350	2.655	38.783	2.759	38.100	-3.77%	1.79%
			3450	2.749	38.590	2.861	37.986	-3.91%	1.59%
			3500	2.792	38.511	2.913	37.929	-4.15%	1.53%
			3550	2.841	38.415	2.964	37.871	-4.15%	1.44%
			3560	2.851	38.403	2.974	37.860	-4.14%	1.43%
			3600	2.888	38.349	3.015	37.814	-4.21%	1.41%
			3650	2.935	38.254	3.066	37.757	-4.27%	1.32%
			3690	2.973	38.178	3.107	37.711	-4.31%	1.24%
			3700	2.983	38.161	3.117	37.700	-4.30%	1.22%
			3750	3.032	38.071	3.169	37.643	-4.32%	1.14%
			3900	3.182	37.820	3.323	37.471	-4.24%	0.93%
			3930	3.213	37.768	3.353	37.437	-4.18%	0.88%
			4100	3.387	37.483	3.528	37.243	-4.00%	0.64%
			4150	3.442	37.389	3.579	37.186	-3.83%	0.55%
07/15/2024	3600 Head	20.4	3300	2.604	38.864	2.708	38.157	-3.84%	1.85%
			3350	2.644	38.752	2.759	38.100	-4.17%	1.71%
			3450	2.739	38.590	2.861	37.986	-4.26%	1.59%
			3500	2.786	38.515	2.913	37.929	-4.36%	1.54%
			3550	2.831	38.429	2.964	37.871	-4.49%	1.47%
			3560	2.841	38.418	2.974	37.860	-4.47%	1.47%
			3600	2.881	38.350	3.015	37.814	-4.44%	1.42%
			3650	2.926	38.252	3.066	37.757	-4.57%	1.31%
			3690	2.962	38.184	3.107	37.711	-4.67%	1.25%
			3700	2.972	38.173	3.117	37.700	-4.65%	1.25%
			3750	3.015	38.048	3.169	37.643	-4.86%	1.08%
			3900	3.164	37.789	3.323	37.471	-4.78%	0.85%
			3930	3.196	37.709	3.353	37.437	-4.68%	0.73%
			4100	3.367	37.382	3.528	37.243	-4.56%	0.37%
			4150	3.427	37.271	3.579	37.186	-4.25%	0.23%
07/18/2024	3600 Head	20.5	3300	2.607	39.142	2.708	38.157	-3.73%	2.58%
			3350	2.659	39.050	2.759	38.100	-3.62%	2.49%
			3450	2.746	38.851	2.861	37.986	-4.02%	2.28%
			3500	2.795	38.715	2.913	37.929	-4.05%	2.07%
			3550	2.838	38.648	2.964	37.871	-4.25%	2.05%
			3560	2.846	38.612	2.974	37.860	-4.30%	1.99%
			3600	2.889	38.491	3.015	37.814	-4.18%	1.79%
			3650	2.935	38.478	3.066	37.757	-4.27%	1.91%
			3690	2.985	38.358	3.107	37.711	-3.93%	1.72%
			3700	2.990	38.327	3.117	37.700	-4.07%	1.66%
			3750	3.045	38.295	3.169	37.643	-3.91%	1.73%
			3900	3.213	37.987	3.323	37.471	-3.31%	1.38%
			3930	3.245	37.922	3.353	37.437	-3.22%	1.30%
			4100	3.446	37.776	3.528	37.243	-2.32%	1.43%
			4150	3.482	37.628	3.579	37.186	-2.71%	1.19%
07/18/2024	3600 Head	19.0	3300	2.627	38.891	2.708	38.157	-2.99%	1.92%
			3350	2.677	38.802	2.759	38.100	-2.97%	1.84%
			3450	2.767	38.609	2.861	37.986	-3.29%	1.64%
			3500	2.811	38.531	2.913	37.929	-3.50%	1.59%
			3550	2.865	38.430	2.964	37.871	-3.34%	1.48%
			3560	2.872	38.410	2.974	37.860	-3.43%	1.45%
			3600	2.906	38.351	3.015	37.814	-3.62%	1.42%
			3650	2.957	38.273	3.066	37.757	-3.56%	1.37%
			3690	2.998	38.192	3.107	37.711	-3.51%	1.28%
			3700	3.006	38.174	3.117	37.700	-3.56%	1.26%
			3750	3.059	38.075	3.169	37.643	-3.47%	1.15%
			3900	3.215	37.818	3.323	37.471	-3.25%	0.93%
			3930	3.246	37.762	3.353	37.437	-3.19%	0.87%
			4100	3.431	37.468	3.528	37.243	-2.75%	0.60%
			4150	3.481	37.384	3.579	37.186	-2.74%	0.53%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 110 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 9-8
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
07/08/2024	5200-5800 Head	21.2	5180	4.471	35.108	4.635	36.009	-3.54%	-2.50%
			5190	4.483	35.092	4.645	35.998	-3.49%	-2.52%
			5200	4.497	35.066	4.655	35.986	-3.39%	-2.56%
			5210	4.510	35.036	4.666	35.975	-3.34%	-2.61%
			5220	4.519	35.010	4.676	35.963	-3.36%	-2.65%
			5240	4.540	34.970	4.696	35.940	-3.32%	-2.70%
			5250	4.551	34.944	4.706	35.929	-3.29%	-2.74%
			5260	4.561	34.914	4.717	35.917	-3.31%	-2.79%
			5270	4.568	34.896	4.727	35.906	-3.36%	-2.81%
			5280	4.576	34.885	4.737	35.894	-3.40%	-2.81%
			5290	4.587	34.876	4.748	35.883	-3.39%	-2.81%
			5300	4.597	34.851	4.758	35.871	-3.38%	-2.84%
			5310	4.604	34.827	4.768	35.860	-3.44%	-2.88%
			5320	4.612	34.806	4.778	35.849	-3.47%	-2.91%
			5500	4.810	34.428	4.963	35.643	-3.08%	-3.41%
			5510	4.820	34.413	4.973	35.632	-3.08%	-3.42%
			5520	4.834	34.411	4.983	35.620	-2.99%	-3.39%
			5530	4.851	34.403	4.994	35.609	-2.86%	-3.39%
			5540	4.862	34.373	5.004	35.597	-2.84%	-3.44%
			5550	4.871	34.334	5.014	35.586	-2.85%	-3.52%
			5560	4.880	34.317	5.024	35.574	-2.87%	-3.53%
			5580	4.903	34.293	5.045	35.551	-2.81%	-3.54%
			5600	4.923	34.239	5.065	35.529	-2.80%	-3.63%
			5610	4.934	34.226	5.076	35.518	-2.80%	-3.64%
			5620	4.948	34.222	5.086	35.506	-2.71%	-3.62%
			5640	4.984	34.190	5.106	35.483	-2.39%	-3.64%
			5660	5.004	34.157	5.127	35.460	-2.40%	-3.67%
			5670	5.018	34.143	5.137	35.449	-2.32%	-3.68%
			5680	5.028	34.117	5.147	35.437	-2.31%	-3.72%
			5690	5.038	34.088	5.158	35.426	-2.33%	-3.78%
			5700	5.044	34.076	5.168	35.414	-2.40%	-3.78%
			5710	5.054	34.069	5.178	35.403	-2.39%	-3.77%
			5720	5.070	34.050	5.188	35.391	-2.27%	-3.79%
			5745	5.104	33.980	5.214	35.363	-2.11%	-3.91%
			5750	5.111	33.975	5.219	35.357	-2.07%	-3.91%
			5755	5.115	33.970	5.224	35.351	-2.09%	-3.91%
			5765	5.128	33.961	5.234	35.340	-2.03%	-3.90%
			5775	5.140	33.946	5.245	35.329	-2.00%	-3.91%
			5785	5.149	33.927	5.255	35.317	-2.02%	-3.94%
			5795	5.156	33.911	5.265	35.305	-2.07%	-3.95%
			5800	5.160	33.906	5.270	35.300	-2.09%	-3.95%
			5800	5.160	33.906	5.270	35.300	-2.09%	-3.95%
			5805	5.164	33.905	5.275	35.294	-2.10%	-3.94%
			5825	5.189	33.877	5.296	35.271	-2.02%	-3.95%
			5835	5.199	33.857	5.305	35.230	-2.00%	-3.90%
			5845	5.210	33.840	5.315	35.210	-1.98%	-3.89%
			5850	5.216	33.832	5.320	35.200	-1.95%	-3.89%
			5855	5.224	33.827	5.325	35.197	-1.90%	-3.89%
			5865	5.241	33.807	5.336	35.190	-1.78%	-3.93%
			5865	5.241	33.807	5.336	35.190	-1.78%	-3.93%
			5865	5.241	33.807	5.336	35.190	-1.78%	-3.93%
			5865	5.241	33.807	5.336	35.190	-1.78%	-3.93%
			5875	5.254	33.773	5.347	35.183	-1.74%	-4.01%
			5885	5.261	33.746	5.357	35.177	-1.79%	-4.07%
			5905	5.281	33.724	5.379	35.163	-1.82%	-4.09%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 111 of 298

REV 22.0
03/30/2022

Table 9-9
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
07/22/2024	5200-5800 Head	21.8	5180	4.434	36.398	4.635	36.009	-4.34%	1.08%
			5190	4.445	36.373	4.645	35.998	-4.31%	1.04%
			5200	4.458	36.353	4.655	35.986	-4.23%	1.02%
			5210	4.472	36.337	4.666	35.975	-4.16%	1.01%
			5220	4.484	36.324	4.676	35.963	-4.11%	1.00%
			5240	4.505	36.286	4.696	35.940	-4.07%	0.96%
			5250	4.512	36.264	4.706	35.929	-4.12%	0.93%
			5260	4.519	36.253	4.717	35.917	-4.20%	0.94%
			5270	4.530	36.236	4.727	35.906	-4.17%	0.92%
			5280	4.542	36.218	4.737	35.894	-4.12%	0.90%
			5290	4.554	36.195	4.748	35.883	-4.09%	0.87%
			5300	4.569	36.175	4.758	35.871	-3.97%	0.85%
			5310	4.580	36.160	4.768	35.860	-3.94%	0.84%
			5320	4.591	36.147	4.778	35.849	-3.91%	0.83%
			5500	4.787	35.840	4.963	35.643	-3.55%	0.55%
			5510	4.797	35.831	4.973	35.632	-3.54%	0.56%
			5520	4.807	35.814	4.983	35.620	-3.53%	0.54%
			5530	4.816	35.793	4.994	35.609	-3.56%	0.52%
			5540	4.827	35.757	5.004	35.597	-3.54%	0.45%
			5550	4.839	35.735	5.014	35.586	-3.49%	0.42%
			5560	4.852	35.726	5.024	35.574	-3.42%	0.43%
			5580	4.881	35.719	5.045	35.551	-3.25%	0.47%
			5600	4.903	35.678	5.065	35.529	-3.20%	0.42%
			5610	4.912	35.671	5.076	35.518	-3.23%	0.43%
			5620	4.923	35.656	5.086	35.506	-3.20%	0.42%
			5640	4.942	35.601	5.106	35.483	-3.21%	0.33%
			5660	4.970	35.576	5.127	35.460	-3.06%	0.33%
			5670	4.984	35.562	5.137	35.449	-2.98%	0.32%
			5680	4.997	35.550	5.147	35.437	-2.91%	0.32%
			5690	5.008	35.541	5.158	35.426	-2.91%	0.32%
			5700	5.018	35.535	5.168	35.414	-2.90%	0.34%
			5710	5.026	35.509	5.178	35.403	-2.94%	0.30%
			5720	5.037	35.485	5.188	35.391	-2.91%	0.27%
			5745	5.068	35.456	5.214	35.363	-2.80%	0.26%
			5750	5.074	35.448	5.219	35.357	-2.78%	0.26%
			5755	5.080	35.441	5.224	35.351	-2.76%	0.25%
			5765	5.087	35.422	5.234	35.340	-2.81%	0.23%
			5775	5.096	35.411	5.245	35.329	-2.84%	0.23%
			5785	5.107	35.390	5.255	35.317	-2.82%	0.21%
			5795	5.122	35.366	5.265	35.305	-2.72%	0.17%
			5805	5.132	35.347	5.275	35.294	-2.71%	0.15%
			5825	5.152	35.308	5.296	35.271	-2.72%	0.10%
			5835	5.168	35.287	5.305	35.230	-2.58%	0.16%
			5845	5.183	35.269	5.315	35.210	-2.48%	0.17%
			5850	5.187	35.266	5.320	35.200	-2.50%	0.19%
			5855	5.191	35.257	5.325	35.197	-2.52%	0.17%
			5875	5.209	35.226	5.347	35.183	-2.58%	0.12%
			5885	5.221	35.209	5.357	35.177	-2.54%	0.09%
			5905	5.239	35.174	5.379	35.163	-2.60%	0.03%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 112 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 9-10
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
06/24/2024	6000 Head	22.3	5935	5.366	34.863	5.411	35.143	-0.83%	-0.80%
			5970	5.406	34.769	5.448	35.120	-0.77%	-1.00%
			5985	5.426	34.726	5.464	35.110	-0.70%	-1.09%
			6000	5.459	34.690	5.480	35.100	-0.38%	-1.17%
			6025	5.537	34.763	5.510	35.070	0.49%	-0.88%
			6065	5.541	34.689	5.557	35.022	-0.29%	-0.95%
			6075	5.534	34.631	5.569	35.010	-0.63%	-1.08%
			6085	5.546	34.594	5.580	34.998	-0.61%	-1.15%
			6185	5.685	34.464	5.698	34.878	-0.23%	-1.19%
			6275	5.827	34.274	5.805	34.770	0.38%	-1.43%
			6285	5.819	34.282	5.816	34.758	0.05%	-1.37%
			6305	5.832	34.225	5.840	34.734	-0.14%	-1.47%
			6345	5.916	34.105	5.887	34.686	0.49%	-1.68%
			6475	6.084	33.903	6.041	34.530	0.71%	-1.82%
			6485	6.113	33.924	6.052	34.518	1.01%	-1.72%
			6500	6.106	33.915	6.070	34.500	0.59%	-1.70%
			6505	6.096	33.913	6.076	34.494	0.33%	-1.68%
			6545	6.139	33.720	6.122	34.446	0.28%	-2.11%
			6665	6.256	33.574	6.265	34.302	-0.14%	-2.12%
			6675	6.288	33.523	6.273	34.290	0.24%	-2.24%
			6685	6.310	33.480	6.285	34.278	0.40%	-2.33%
			6715	6.351	33.549	6.319	34.242	0.51%	-2.02%
			6785	6.404	33.319	6.400	34.158	0.06%	-2.46%
			6825	6.468	33.300	6.447	34.110	0.33%	-2.37%
			6985	6.625	33.100	6.633	33.918	-0.12%	-2.41%
			6995	6.615	33.062	6.644	33.906	-0.44%	-2.49%
			7000	6.620	33.037	6.650	33.900	-0.45%	-2.55%
			7005	6.625	33.004	6.656	33.894	-0.47%	-2.63%
			7025	6.667	32.891	6.680	33.870	-0.19%	-2.89%
06/30/2024	6000 Head	21.0	5935	5.227	35.982	5.411	35.143	-3.40%	2.39%
			5970	5.198	36.024	5.448	35.120	-4.59%	2.57%
			5985	5.207	35.908	5.464	35.110	-4.70%	2.27%
			6000	5.210	35.679	5.480	35.100	-4.93%	1.65%
			6025	5.264	35.636	5.510	35.070	-4.46%	1.61%
			6065	5.296	35.670	5.557	35.022	-4.70%	1.85%
			6085	5.302	35.612	5.580	34.998	-4.98%	1.75%
			6185	5.447	35.512	5.698	34.878	-4.41%	1.82%
			6275	5.577	35.346	5.805	34.770	-3.93%	1.66%
			6285	5.577	35.361	5.816	34.758	-4.11%	1.73%
			6305	5.601	35.331	5.840	34.734	-4.09%	1.72%
			6345	5.662	35.242	5.887	34.686	-3.82%	1.60%
			6475	5.823	35.051	6.041	34.530	-3.61%	1.51%
			6485	5.845	35.052	6.052	34.518	-3.42%	1.55%
			6500	5.849	35.014	6.070	34.500	-3.64%	1.49%
			6505	5.845	35.005	6.076	34.494	-3.80%	1.48%
			6545	5.886	34.873	6.122	34.446	-3.85%	1.24%
			6665	6.008	34.719	6.265	34.302	-4.10%	1.22%
			6675	6.038	34.670	6.273	34.290	-3.75%	1.11%
			6685	6.059	34.642	6.285	34.278	-3.60%	1.06%
			6715	6.099	34.701	6.319	34.242	-3.48%	1.34%
			6785	6.153	34.446	6.400	34.158	-3.86%	0.84%
			6825	6.240	34.479	6.447	34.110	-3.21%	1.08%
			6985	6.376	34.289	6.633	33.918	-3.87%	1.09%
			6995	6.361	34.222	6.644	33.906	-4.26%	0.93%
			7000	6.362	34.177	6.650	33.900	-4.33%	0.82%
			7005	6.372	34.139	6.656	33.894	-4.27%	0.72%
			7025	6.439	34.047	6.680	33.870	-3.61%	0.52%

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 113 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 9-11
Measured Head Tissue Properties

Calibrated for Tests Performed on:	Tissue Type	Tissue Temp During Calibration (°C)	Measured Frequency (MHz)	Measured Conductivity, σ (S/m)	Measured Dielectric Constant, ϵ	TARGET Conductivity, σ (S/m)	TARGET Dielectric Constant, ϵ	% dev σ	% dev ϵ
07/01/2024	6000 Head	21.9	5935	5.353	34.181	5.411	35.143	-1.07%	-2.74%
			5970	5.404	34.111	5.448	35.120	-0.81%	-2.87%
			5985	5.415	34.096	5.464	35.110	-0.90%	-2.89%
			6000	5.442	34.074	5.480	35.100	-0.69%	-2.92%
			6025	5.523	34.121	5.510	35.070	0.24%	-2.71%
			6065	5.537	34.026	5.557	35.022	-0.36%	-2.84%
			6075	5.535	33.973	5.569	35.010	-0.61%	-2.96%
			6085	5.552	33.944	5.580	34.998	-0.50%	-3.01%
			6185	5.672	33.811	5.698	34.878	-0.46%	-3.06%
			6275	5.809	33.634	5.805	34.770	0.07%	-3.27%
			6285	5.803	33.643	5.816	34.758	-0.22%	-3.21%
			6305	5.821	33.584	5.840	34.734	-0.33%	-3.31%
			6345	5.893	33.475	5.887	34.686	0.10%	-3.49%
			6475	6.056	33.263	6.041	34.530	0.25%	-3.67%
			6485	6.078	33.264	6.052	34.518	0.43%	-3.63%
			6500	6.082	33.266	6.070	34.500	0.20%	-3.58%
			6505	6.076	33.268	6.076	34.494	0.00%	-3.55%
			6545	6.112	33.067	6.122	34.446	-0.16%	-4.00%
			6665	6.236	32.922	6.265	34.302	-0.46%	-4.02%
			6675	6.261	32.866	6.273	34.290	-0.19%	-4.15%
			6685	6.279	32.823	6.285	34.278	-0.10%	-4.24%
			6715	6.314	32.885	6.319	34.242	-0.08%	-3.96%
			6785	6.389	32.661	6.400	34.158	-0.17%	-4.38%
			6825	6.446	32.658	6.447	34.110	-0.02%	-4.26%
			6985	6.597	32.468	6.633	33.918	-0.54%	-4.28%
			6995	6.596	32.423	6.644	33.906	-0.72%	-4.37%
			7000	6.601	32.390	6.650	33.900	-0.74%	-4.45%
			7005	6.607	32.356	6.656	33.894	-0.74%	-4.54%
			7025	6.649	32.253	6.680	33.870	-0.46%	-4.77%

The above measured tissue parameters were used in the DASY software. The DASY software was used to perform interpolation to determine the dielectric parameters at the SAR test device frequencies (per KDB Publication 865664 D01v01r04 and IEEE 1528-2013 6.6.1.2. The tissue parameters listed in the SAR test plots may slightly differ from the table above due to significant digit rounding in the software.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 114 of 298

REV 22.0
03/30/2022

9.2 Test System Verification

Prior to SAR assessment, the system is verified to $\pm 10\%$ of the SAR measurement on the reference dipole at the time of calibration by the calibration facility. Full system validation status and result summary can be found in the SAR System Validation Appendix.

Table 9-12
System Verification Results

System Verification TARGET & MEASURED																					
SAR System	Tissue Frequency (MHz)	Tissue Type	Date	Amb. Temp. (C)	Liquid Temp. (C)	Input Power (W)	Source SN	Probe SN	DAE	Measured SAR 1g (W/kg)	1W Target SAR 1g (W/kg)	1W Normalized SAR 1g (W/kg)	Deviation 1g (%)	Measured SAR 10g (W/kg)	1W Target SAR 10g (W/kg)	1W Normalized SAR 10g (W/kg)	Deviation 10g (%)	Measured 4cm2 APD (W/m2)	1W Target 4cm2 APD (W/m2)	1W Normalized 4cm2 APD (W/m2)	Deviation 4cm2 APD (%)
Q	750	HEAD	06/12/2024	24.9	23.6	0.20	1161	7339	1639	1.68	8.44	8.40	-0.47%	1.09	5.51	5.45	-1.09%	0.00	0.00	0.00	0.00%
J	750	HEAD	06/17/2024	23.5	22.6	0.20	1054	7670	1449	1.68	8.52	8.40	-1.41%	1.10	5.60	5.50	-1.79%	0.00	0.00	0.00	0.00%
O	750	HEAD	07/04/2024	22.2	20.9	0.20	1161	3914	728	1.82	8.44	9.10	7.82%	1.30	5.51	6.00	8.89%	0.00	0.00	0.00	0.00%
O	750	HEAD	07/08/2024	21.5	21.4	0.20	1054	3914	728	1.79	8.52	8.95	5.05%	1.18	5.60	5.90	5.36%	0.00	0.00	0.00	0.00%
O	750	HEAD	07/10/2024	21.6	20.7	0.20	1054	3914	728	1.77	8.52	8.85	3.87%	1.17	5.60	5.85	4.46%	0.00	0.00	0.00	0.00%
O	750	HEAD	07/15/2024	21.3	20.3	0.20	1054	3914	728	1.78	8.52	8.90	4.46%	1.18	5.60	5.90	5.36%	0.00	0.00	0.00	0.00%
J	835	HEAD	06/12/2024	24.9	23.6	0.20	46133	7339	1639	2.00	9.94	10.00	0.60%	1.28	6.49	6.40	-1.39%	0.00	0.00	0.00	0.00%
J	835	HEAD	06/17/2024	23.5	22.6	0.20	46133	7670	1449	1.86	9.94	9.30	-6.44%	1.22	6.49	6.10	-6.01%	0.00	0.00	0.00	0.00%
J	835	HEAD	06/18/2024	24.1	22.2	0.20	46133	7670	1449	1.92	9.94	9.60	-3.42%	1.25	6.49	6.25	-3.70%	0.00	0.00	0.00	0.00%
J	835	HEAD	07/10/2024	21.5	22.9	0.20	46132	7670	1449	1.96	9.84	9.40	-4.41%	1.28	6.40	6.00	-6.00%	0.00	0.00	0.00	0.00%
O	835	HEAD	07/10/2024	21.6	20.7	0.20	46047	3914	728	2.09	9.65	10.45	8.29%	1.37	6.31	6.85	8.56%	0.00	0.00	0.00	0.00%
O	835	HEAD	07/15/2024	21.3	20.3	0.20	46047	3914	728	2.09	9.65	10.45	8.29%	1.37	6.31	6.85	8.56%	0.00	0.00	0.00	0.00%
P	1750	HEAD	06/19/2024	20.1	19.3	0.10	1150	7718	665	3.73	36.90	37.30	1.08%	2.00	19.40	20.00	3.09%	0.00	0.00	0.00	0.00%
J	1750	HEAD	06/27/2024	22.7	21.6	0.10	1150	7670	1449	3.63	36.90	36.30	-1.63%	1.95	19.40	19.50	0.52%	0.00	0.00	0.00	0.00%
J	1750	HEAD	07/01/2024	22.5	21.7	0.10	1150	7670	1449	3.66	36.90	36.60	-0.81%	1.95	19.40	19.50	0.52%	0.00	0.00	0.00	0.00%
J	1750	HEAD	07/10/2024	23.5	22.9	0.10	1148	7670	1449	3.73	37.20	37.30	0.27%	1.98	19.40	19.80	2.06%	0.00	0.00	0.00	0.00%
S	1750	HEAD	07/10/2024	24.1	23.0	0.10	1150	7527	1272	3.72	36.90	37.20	0.81%	2.00	19.40	20.00	3.09%	0.00	0.00	0.00	0.00%
S	1750	HEAD	07/17/2024	23.8	22.7	0.10	1150	7527	1272	3.70	36.90	37.00	0.27%	1.99	19.40	19.50	2.58%	0.00	0.00	0.00	0.00%
J	1900	HEAD	06/18/2024	24.1	22.2	0.10	54080	7670	1449	4.13	39.60	41.30	4.29%	2.14	20.70	21.40	3.38%	0.00	0.00	0.00	0.00%
P	1900	HEAD	06/19/2024	20.1	19.3	0.10	54148	7718	665	3.98	40.10	39.80	-0.75%	2.08	21.00	20.80	-0.95%	0.00	0.00	0.00	0.00%
J	1900	HEAD	07/01/2024	22.5	21.7	0.10	54148	7670	1449	3.99	40.10	39.90	-0.50%	2.06	21.00	20.60	-1.90%	0.00	0.00	0.00	0.00%
J	1900	HEAD	07/10/2024	23.5	22.9	0.10	54080	7670	1449	4.09	39.60	40.90	3.28%	2.11	20.70	21.10	1.93%	0.00	0.00	0.00	0.00%
S	1900	HEAD	07/10/2024	24.1	22.2	0.10	54148	7527	1272	4.28	40.10	42.80	6.72%	2.23	21.00	22.30	6.19%	0.00	0.00	0.00	0.00%
S	1900	HEAD	07/17/2024	23.8	22.7	0.10	54148	7527	1272	4.16	40.10	41.60	3.74%	2.17	21.00	21.70	3.33%	0.00	0.00	0.00	0.00%
O	2300	HEAD	06/17/2024	22.0	20.6	0.10	1073	3914	728	4.79	48.60	47.90	-1.44%	2.32	23.70	23.20	-2.11%	0.00	0.00	0.00	0.00%
G	2300	HEAD	07/08/2024	21.6	21.6	0.10	1073	7713	1530	4.73	48.60	47.30	-2.67%	2.24	23.70	22.40	-5.49%	0.00	0.00	0.00	0.00%
G	2300	HEAD	07/11/2024	23.5	23.5	0.10	1073	7713	1530	4.69	48.60	46.90	-3.50%	2.23	23.70	22.30	-5.91%	0.00	0.00	0.00	0.00%
J	2300	HEAD	07/15/2024	22.0	21.6	0.10	1073	7670	1449	4.87	48.60	48.70	0.21%	2.35	23.70	23.50	-0.84%	0.00	0.00	0.00	0.00%
K4	2450	HEAD	06/10/2024	20.0	20.5	0.10	882	7565	1466	5.22	53.00	52.20	-1.51%	2.41	24.90	24.10	-3.21%	0.00	0.00	0.00	0.00%
O	2450	HEAD	06/19/2024	22.2	21.3	0.10	719	3914	728	5.20	55.00	52.00	-5.45%	2.43	25.70	24.30	-5.45%	0.00	0.00	0.00	0.00%
H	2450	HEAD	06/20/2024	23.7	21.3	0.10	881	7488	1415	5.40	53.90	54.00	0.19%	2.51	25.40	25.10	-1.18%	0.00	0.00	0.00	0.00%
K4	2450	HEAD	07/01/2024	21.7	21.0	0.10	882	7565	1466	5.25	53.00	52.50	-0.94%	2.43	24.90	24.30	-2.41%	0.00	0.00	0.00	0.00%
K4	2450	HEAD	07/03/2024	19.6	20.1	0.10	882	7565	1466	5.30	53.00	53.00	0.00%	2.45	24.90	24.50	-1.63%	0.00	0.00	0.00	0.00%
K4	2450	HEAD	07/10/2024	20.6	20.2	0.10	882	7565	1466	5.22	53.00	52.20	-1.51%	2.42	24.90	24.20	-2.81%	0.00	0.00	0.00	0.00%
G	2450	HEAD	07/15/2024	22.5	22.5	0.10	719	7713	1530	5.28	55.00	52.80	-4.00%	2.44	25.70	24.40	-5.06%	0.00	0.00	0.00	0.00%
O	2600	HEAD	06/19/2024	22.2	21.3	0.10	1071	3914	728	5.56	56.50	55.60	-1.59%	2.51	25.40	25.10	-1.18%	0.00	0.00	0.00	0.00%
H	2600	HEAD	06/20/2024	23.7	21.3	0.10	1044	7488	1415	5.74	56.30	57.40	1.95%	2.58	25.20	25.80	2.38%	0.00	0.00	0.00	0.00%
G	2600	HEAD	07/01/2024	22.5	21.2	0.10	1071	7713	1530	5.62	56.50	56.20	-0.53%	2.53	25.40	25.30	-0.39%	0.00	0.00	0.00	0.00%
K3	2600	HEAD	07/08/2024	21.3	20.3	0.10	1126	7558	1364	5.72	56.00	57.20	2.14%	2.57	25.30	25.70	1.58%	0.00	0.00	0.00	0.00%
G	2600	HEAD	07/15/2024	22.5	22.5	0.10	1071	7713	1530	5.78	56.50	57.80	2.30%	2.59	25.40	25.90	1.97%	0.00	0.00	0.00	0.00%
J	2600	HEAD	07/15/2024	21.0	21.6	0.10	1071	7670	1449	5.33	56.50	53.30	-5.66%	2.44	25.40	24.40	-3.94%	0.00	0.00	0.00	0.00%
K3	2600	HEAD	07/17/2024	20.3	19.9	0.10	1126	7558	1364	5.80	56.00	58.00	3.57%	2.61	25.30	26.10	3.16%	0.00	0.00	0.00	0.00%
K4	3500	HEAD	06/18/2024	21.5	21.7	0.10	1068	7565	1466	6.00	65.30	60.00	-8.12%	2.29	24.70	22.90	-7.29%	0.00	0.00	0.00	0.00%
H	3500	HEAD	06/28/2024	22.3	22.0	0.10	1097	7488	1415	6.30	65.40	63.00	-3.67%	2.45	24.70	24.50	-0.81%	0.00	0.00	0.00	0.00%
K3	3500	HEAD	07/03/2024	20.9	20.7	0.10	1068	7558	1364	6.72	65.30	67.20	2.91%	2.56	24.70	25.60	3.64%	0.00	0.00	0.00	0.00%
K3	3500	HEAD	07/15/2024	21.8	20.6	0.10	1068	7558	1364	6.78	65.30	67.80	3.83%	2.58	24.70	25.80	4.45%	0.00	0.00	0.00	0.00%
L	3500	HEAD	07/18/2024	23.1	20.7	0.10	1097	7660	1678	6.49	65.40	64.90	-0.76%	2.48	24.70	24.80	0.40%	0.00	0.00	0.00	0.00%
K3	3500	HEAD	07/18/2024	21.6	20.6	0.10	1068	7558	1364	6.56	65.30	65.60	0.46%	2.50	24.70	25.00	1.21%	0.00	0.00	0.00	0.00%
K4	3700	HEAD	06/18/2024	21.5	21.7	0.10	1029	7565	1466	6.60	67.30	66.00	-1.93%	2.45	24.50	24.50	0.00%	0.00	0.00	0.00	0.00%
H	3700	HEAD	06/28/2024	22.3	22.0	0.10	1067	7488	1415	6.73	66.90	67.30	0.60%	2.50	24.30	25.00	2.88%	0.00	0.00	0.00	0.00%
K3	3700	HEAD	07/03/2024	20.9	20.7	0.10	1029	7558	1364	6.26	67.30	62.60	-6.98%	2.34	24.50	23.40	-4.49%	0.00	0.00	0.00	0.00%
K3	3700	HEAD	07/15/2024	21.8	20.6	0.10	1029	7558	1364	6.74	67.30	67.40	0.15%	2.49	24.50	24.90	1.63%	0.00	0.00	0.00	0.00%
L	3700	HEAD	07/18/2024	23.1	20.7	0.10	1067	7660	1678	6.86	66.90	68.60	2.54%	2.54	24.30	25.40	4.53%	0.00	0.00	0.00	0.00%
K3	3700	HEAD	07/18/2024	21.6	20.6	0.10	1029	7558	1364	6.70	67.30	67.00	-0.43%	2.48	24.50	24.80	1.22%	0.00	0.00	0.00	0.00%
H	3900	HEAD	06/28/2024	22.3	22.0	0.10	1056	7488	1415	7.14	68.20	71.40	4.69%	2.53	23.80	25.30	6.30%	0.00	0.00	0.0	

9.3 Power Density Test System Verification

The system was verified to be within ± 0.66 dB of the power density targets on the calibration certificate according to the test system specification in the user's manual and calibration facility recommendation. The 0.66 dB deviation threshold represents the expanded uncertainty for system performance checks using SPEAG's mmWave verification sources. The same spatial resolution and measurement region used in the source calibration was applied during the system check.

The measured power density distribution of verification source was also confirmed through visual inspection to have no noticeable differences, both spatially (shape) and numerically (level) from the distribution provided by the manufacturer, per November 2017 TCBC Workshop Notes.

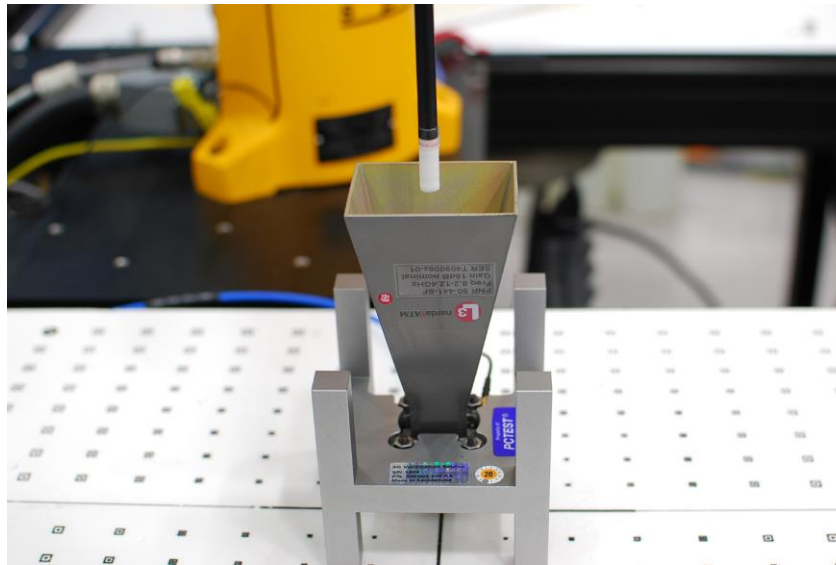


Figure 9-3
System Verification Setup Photo

Table 9-13
10 GHz Verifications

System Verification											
System	Frequency (GHz)	Date	Source S/N	Probe S/N	Prad (mW)	Normal psPD (W/m ² over 4 cm ²)		Deviation (dB)	Total psPD (W/m ² over 4 cm ²)		Deviation (dB)
						Measured	Target		Measured	Target	
Q	10	06/18/2024	1002	9622	93.3	65.00	58.50	0.46	65.20	58.70	0.46
Q	10	06/23/2024	1002	9622	93.3	65.60	58.50	0.50	65.90	58.70	0.50

Note: A **10 mm distance spacing** was used from the reference horn antenna aperture to the probe element.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 116 of 298

REV 22.0
03/30/2022

10 SAR DATA SUMMARY

10.1 UMTS 850 Standalone SAR

Table 10-1
UMTS 850 Tablet Max Power

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	UMTS 850	RMC	M1	0377M	1:1	-0.08	846.60	4233	24.0	23.73	Back	19	0.466	1.064	0.496		27.0
Body	UMTS 850	RMC	M1	0377M	1:1	-0.01	826.40	4132	24.0	23.50	Top	19	0.385	1.122	0.432		27.6
Body	UMTS 850	RMC	M1	0377M	1:1	-0.05	836.60	4183	24.0	23.49	Top	19	0.471	1.125	0.530		26.7
Body	UMTS 850	RMC	M1	0377M	1:1	-0.01	846.60	4233	24.0	23.73	Top	19	0.526	1.064	0.560		26.5
Body	UMTS 850	RMC	M1	0377M	1:1	0.06	846.60	4233	24.0	23.73	Right	0	0.255	1.064	0.271		29.6
Body	UMTS 850	RMC	M1	0377M	1:1	-0.19	846.60	4233	24.0	23.73	Left	0	0.164	1.064	0.174		31.5
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 10-2
UMTS 850 Tablet with Grip Sensor Active

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	UMTS 850	RMC	M1	0377M	1:1	0.06	826.40	4132	16.0	15.40	Back	0	N/A	0.409	1.148	0.470		19.2
Body	UMTS 850	RMC	M1	0377M	1:1	0.01	836.60	4183	16.0	15.57	Back	0	N/A	0.465	1.104	0.513		18.8
Body	UMTS 850	RMC	M1	0377M	1:1	-0.20	846.60	4233	16.0	15.63	Back	0	N/A	0.491	1.089	0.535		18.7
Body	UMTS 850	RMC	M1	0377M	1:1	-0.02	826.40	4132	16.0	15.40	Top	0	N/A	0.520	1.148	0.597		18.2
Body	UMTS 850	RMC	M1	0377M	1:1	0.01	826.40	4132	16.0	15.40	Top	0	Variant 1	0.498	1.148	0.572		18.4
Body	UMTS 850	RMC	M1	0377M	1:1	-0.03	826.40	4132	16.0	15.40	Top	0	Variant 2	0.498	1.148	0.572		18.4
Body	UMTS 850	RMC	M1	0377M	1:1	-0.04	836.60	4183	16.0	15.57	Top	0	N/A	0.541	1.104	0.597	A1	18.2
Body	UMTS 850	RMC	M1	0377M	1:1	0.00	846.60	4233	16.0	15.63	Top	0	N/A	0.523	1.089	0.570		18.4
ANSI/IEEE C95.1 1992 - SAFETY LIMIT														Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																		

Table 10-3
UMTS 850 Laptop

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	UMTS 850	RMC	M1	0505M	1:1	-0.18	846.60	4233	24.0	23.73	Bottom	0	Variant #1	0.037	1.064	0.039		38.0
Body	UMTS 850	RMC	M1	0505M	1:1	-0.09	846.60	4233	24.0	23.73	Bottom	0	Variant #2	0.057	1.064	0.061	A2	36.1
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram						

10.2 UMTS 1750 Standalone SAR

Table 10-4
UMTS 1750 Tablet Max Power

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	UMTS 1750	RMC	M1	0377M	1:1	-0.11	1752.60	1513	25.0	23.58	Back	19	0.258	1.387	0.358		29.4
Body	UMTS 1750	RMC	M1	0377M	1:1	-0.01	1752.60	1513	25.0	23.58	Top	19	0.252	1.387	0.350		29.5
Body	UMTS 1750	RMC	M1	0377M	1:1	-0.07	1752.60	1513	25.0	23.58	Right	15	0.063	1.387	0.087		35.5
Body	UMTS 1750	RMC	M1	0377M	1:1	0.01	1752.60	1513	25.0	23.58	Left	0	0.178	1.387	0.247		31.0
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram					

FCC ID: A3LSMX828U	SAR EVALUATION REPORT		Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device		Page 117 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-5
UMTS 1750 Tablet with Grip Sensor Active

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	UMTS 1750	RMC	M1	0377M	1:1	0.05	1732.40	1412	14.5	13.24	Back	0	N/A	0.242	1.337	0.324		19.4
Body	UMTS 1750	RMC	M1	0377M	1:1	-0.12	1732.40	1412	14.5	13.24	Top	0	N/A	0.493	1.337	0.659		16.3
Body	UMTS 1750	RMC	M1	0383M	1:1	-0.06	1712.40	1312	23.5	22.00	Right	0	N/A	0.530	1.413	0.749		24.7
Body	UMTS 1750	RMC	M1	0383M	1:1	0.05	1732.40	1412	23.5	21.96	Right	0	N/A	0.576	1.426	0.821	A3	24.3
Body	UMTS 1750	RMC	M1	0505M	1:1	-0.13	1732.40	1412	23.5	21.96	Right	0	Variant #1	0.295	1.426	0.421		27.2
Body	UMTS 1750	RMC	M1	0505M	1:1	0.00	1732.40	1412	23.5	21.96	Right	0	Variant #2	0.177	1.426	0.252		29.4
Body	UMTS 1750	RMC	M1	0383M	1:1	-0.07	1752.60	1513	23.5	21.99	Right	0	N/A	0.560	1.416	0.793		24.5
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-6
UMTS 1750 Laptop

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	UMTS 1750	RMC	M1	0505M	1:1	-0.13	1752.60	1513	25.0	23.58	Bottom	0	Variant #1	0.042	1.387	0.058		37.3
Body	UMTS 1750	RMC	M1	0505M	1:1	0.08	1752.60	1513	25.0	23.58	Bottom	0	Variant #2	0.058	1.387	0.080	A4	35.9
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram							

10.3 UMTS 1900 Standalone SAR

Table 10-7
UMTS 1900 Tablet Max Power

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	UMTS 1900	RMC	M1	0377M	1:1	-0.13	1852.40	9262	25.0	23.60	Back	19		0.302	1.380	0.417		28.7
Body	UMTS 1900	RMC	M1	0377M	1:1	-0.06	1852.40	9262	25.0	23.60	Top	19		0.289	1.380	0.399		28.9
Body	UMTS 1900	RMC	M1	0377M	1:1	-0.03	1852.40	9262	25.0	23.60	Right	15		0.093	1.380	0.128		33.9
Body	UMTS 1900	RMC	M1	0377M	1:1	0.03	1852.40	9262	25.0	23.60	Left	0		0.328	1.380	0.453		28.4
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-8
UMTS 1900 Tablet with Grip Sensor Active

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	UMTS 1900	RMC	M1	0377M	1:1	0.06	1852.40	9262	12.5	11.24	Back	0	N/A	0.206	1.337	0.275		18.1
Body	UMTS 1900	RMC	M1	0377M	1:1	-0.11	1852.40	9262	12.5	11.24	Top	0	N/A	0.357	1.337	0.477	A5	15.7
Body	UMTS 1900	RMC	M1	0377M	1:1	-0.08	1852.40	9262	12.5	11.24	Top	0	Variant #1	0.232	1.337	0.310		17.5
Body	UMTS 1900	RMC	M1	0377M	1:1	-0.11	1852.40	9262	12.5	11.24	Top	0	Variant #2	0.231	1.337	0.309		17.6
Body	UMTS 1900	RMC	M1	0383M	1:1	-0.03	1852.40	9262	18.5	17.27	Right	0	N/A	0.228	1.327	0.303		23.6
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-9
UMTS 1900 Laptop

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	UMTS 1900	RMC	M1	0505M	1:1	-0.05	1852.40	9262	25.0	23.60	Bottom	0	Variant #1	0.091	1.380	0.126		34.0
Body	UMTS 1900	RMC	M1	0505M	1:1	-0.01	1852.40	9262	25.0	23.60	Bottom	0	Variant #2	0.126	1.380	0.174	A6	32.5
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population											Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMX828U	SAR EVALUATION REPORT										Approved by: Technical Manager							
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device										Page 118 of 298							

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10.4 LTE Band 71 Standalone SAR

Table 10-10
LTE Band 71 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 71	20	QPSK	M1	2085M	1:1	-0.13	680.50	133297	0.0	24.5	23.57	1	0	Back	19	N/A	0.396	1.239	0.491		27.5
Body	LTE Band 71	20	QPSK	M1	2085M	1:1	0.12	680.50	133297	0.5	24.0	22.64	50	0	Back	19	N/A	0.321	1.368	0.439		27.5
Body	LTE Band 71	20	QPSK	M1	2085M	1:1	0.06	680.50	133297	0.0	24.5	23.57	1	0	Top	19	N/A	0.464	1.239	0.575	A7	26.9
Body	LTE Band 71	20	QPSK	M1	0386M	1:1	-0.04	680.50	133297	0.0	24.5	23.57	1	0	Top	19	Variant 2	0.285	1.239	0.353		29.0
Body	LTE Band 71	20	QPSK	M1	0386M	1:1	0.17	680.50	133297	0.0	24.5	23.57	1	0	Top	19	Variant 1	0.278	1.239	0.344		29.1
Body	LTE Band 71	20	QPSK	M1	2085M	1:1	0.01	680.50	133297	0.5	24.0	22.64	50	0	Top	19	N/A	0.375	1.368	0.508		26.9
Body	LTE Band 71	20	QPSK	M1	2085M	1:1	0.01	680.50	133297	0.0	24.5	23.57	1	0	Right	0	N/A	0.397	1.239	0.492		27.5
Body	LTE Band 71	20	QPSK	M1	2085M	1:1	0.00	680.50	133297	0.5	24.0	22.64	50	0	Right	0	N/A	0.281	1.368	0.384		28.1
Body	LTE Band 71	20	QPSK	M1	2085M	1:1	0.03	680.50	133297	0.0	24.5	23.57	1	0	Left	0	N/A	0.155	1.239	0.192		31.6
Body	LTE Band 71	20	QPSK	M1	2085M	1:1	0.08	680.50	133297	0.5	24.0	22.64	50	0	Left	0	N/A	0.108	1.368	0.148		32.3
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram				

Table 10-11
LTE Band 71 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]	
Body	LTE Band 71	20	QPSK	M1	0383M	1:1	0.08	680.50	133297	0.0	16.5	15.52	1	0	Back	0	0.271	1.253	0.340		21.1	
Body	LTE Band 71	20	QPSK	M1	0383M	1:1	0.01	680.50	133297	0.0	16.5	15.55	50	0	Back	0	0.310	1.245	0.386		20.6	
Body	LTE Band 71	20	QPSK	M1	0383M	1:1	-0.04	680.50	133297	0.0	16.5	15.52	1	0	Top	0	0.244	1.253	0.293		21.8	
Body	LTE Band 71	20	QPSK	M1	0383M	1:1	-0.01	680.50	133297	0.0	16.5	15.55	50	0	Top	0	0.278	1.245	0.346		21.1	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																		Body				
Spatial Peak																		1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																		averaged over 1 gram				

Table 10-12
LTE Band 71 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 71	20	QPSK	M1	0386M	1:1	0.10	680.50	133297	0.0	24.5	23.57	1	0	Bottom	0	Variant 1	0.014	1.239	0.017		42.1
Body	LTE Band 71	20	QPSK	M1	0386M	1:1	0.08	680.50	133297	0.0	24.5	23.57	1	0	Bottom	0	Variant 2	0.042	1.239	0.052		37.3
Body	LTE Band 71	20	QPSK	M1	0386M	1:1	0.01	680.50	133297	0.5	24.0	22.64	50	0	Bottom	0	Variant 1	0.025	1.368	0.034		38.6
Body	LTE Band 71	20	QPSK	M1	0386M	1:1	-0.12	680.50	133297	0.5	24.0	22.64	50	0	Bottom	0	Variant 2	0.056	1.368	0.077	A8	35.1
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram				

10.5 LTE Band 12 Standalone SAR

Table 10-13
LTE Band 12 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]	
Body	LTE Band 12	10	QPSK	M1	2085M	1:1	0.03	707.50	23095	0.0	25.0	24.05	1	25	Back	19	0.377	1.245	0.469		28.2	
Body	LTE Band 12	10	QPSK	M1	2085M	1:1	0.09	707.50	23095	1.0	24.0	23.10	25	0	Back	19	0.280	1.230	0.344		28.6	
Body	LTE Band 12	10	QPSK	M1	2085M	1:1	0.00	707.50	23095	0.0	25.0	24.05	1	25	Top	19	0.392	1.245	0.488		28.1	
Body	LTE Band 12	10	QPSK	M1	2085M	1:1	0.01	707.50	23095	1.0	24.0	23.10	25	0	Top	19	0.300	1.230	0.369		28.3	
Body	LTE Band 12	10	QPSK	M1	2085M	1:1	0.02	707.50	23095	0.0	25.0	24.05	1	25	Right	0	0.334	1.245	0.416		28.8	
Body	LTE Band 12	10	QPSK	M1	2085M	1:1	0.06	707.50	23095	1.0	24.0	23.10	25	0	Right	0	0.264	1.230	0.325		28.8	
Body	LTE Band 12	10	QPSK	M1	2085M	1:1	0.07	707.50	23095	0.0	25.0	24.05	1	25	Left	0	0.101	1.245	0.126		34.0	
Body	LTE Band 12	10	QPSK	M1	2085M	1:1	0.04	707.50	23095	1.0	24.0	23.10	25	0	Left	0	0.084	1.230	0.103		33.8	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																		Body				
Spatial Peak																		1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																		averaged over 1 gram				

Table 10-14
LTE Band 12 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 12	10	QPSK	M1	0383M	1:1	0.02	707.50	23095	0.0	16.5	16.20	1	25	Back	0	N/A	0.501	1.072	0.527	A9	19.2
Body	LTE Band 12	10	QPSK	M1	0377M	1:1	0.11	707.50	23095	0.0	16.5	16.20	1	25	Back	0	Variant 1	0.007	1.072	0.008		37.7
Body	LTE Band 12	10	QPSK	M1	0383M	1:1	0.03	707.50	23095	0.0	16.5	16.20	1	25	Back	0	Variant 2	0.079	1.072	0.085		27.2
Body	LTE Band 12	10	QPSK	M1	0383M	1:1	-0.01	707.50	23095	0.0	16.5	16.17	25	0	Back	0	N/A	0.486	1.079	0.524		19.3
Body	LTE Band 12	10	QPSK	M1	0386M	1:1	0.01	707.50	23095	0.0	16.5	16.20	1	25	Top	0	N/A	0.401	1.072	0.430		20.1
Body	LTE Band 12	10	QPSK	M1	0386M	1:1	-0.01	707.50	23095	0.0	16.5	16.17	25	0	Top	0	N/A	0.381	1.079	0.411		20.3
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram				

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																Approved by: Technical Manager				
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																Page 119 of 298				

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-15
LTE Band 12 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 12	10	QPSK	M1	0386M	1:1	0.03	707.50	23095	0.0	25.0	24.05	1	25	Bottom	0	Variant 1	0.039	1.245	0.049	A10	38.1
Body	LTE Band 12	10	QPSK	M1	0386M	1:1	-0.09	707.50	23095	1.0	24.0	23.10	25	0	Bottom	0	Variant 1	0.038	1.230	0.047		37.3
Body	LTE Band 12	10	QPSK	M1	0386M	1:1	0.12	707.50	23095	1.0	24.0	23.10	25	0	Bottom	0	Variant 2	0.074	1.230	0.091		34.4
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram					

10.6 LTE Band 13 Standalone SAR

Table 10-16
LTE Band 13 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 13	10	QPSK	M1	0383M	1:1	-0.08	782.00	23230	0.0	25.0	23.89	1	25	Back	19	N/A	0.368	1.291	0.475		28.2
Body	LTE Band 13	10	QPSK	M1	0383M	1:1	0.04	782.00	23230	1.0	24.0	22.95	25	25	Back	19	N/A	0.320	1.274	0.408		27.8
Body	LTE Band 13	10	QPSK	M1	2085M	1:1	-0.07	782.00	23230	0.0	25.0	23.89	1	25	Top	19	N/A	0.643	1.291	0.830	A11	25.8
Body	LTE Band 13	10	QPSK	M1	0386M	1:1	0.03	782.00	23230	0.0	25.0	23.89	1	25	Top	19	Variant 2	0.435	1.291	0.562		27.5
Body	LTE Band 13	10	QPSK	M1	0386M	1:1	0.00	782.00	23230	0.0	25.0	23.89	1	25	Top	19	Variant 1	0.341	1.291	0.440		28.5
Body	LTE Band 13	10	QPSK	M1	2085M	1:1	0.00	782.00	23230	1.0	24.0	22.95	25	25	Top	19	N/A	0.577	1.274	0.671		25.7
Body	LTE Band 13	10	QPSK	M1	2085M	1:1	-0.01	782.00	23230	1.0	24.0	22.90	50	0	Top	19	N/A	0.553	1.288	0.712		25.4
Body	LTE Band 13	10	QPSK	M1	2085M	1:1	0.04	782.00	23230	0.0	25.0	23.89	1	25	Right	0	N/A	0.361	1.291	0.466		28.3
Body	LTE Band 13	10	QPSK	M1	2085M	1:1	-0.14	782.00	23230	1.0	24.0	22.95	25	25	Right	0	N/A	0.382	1.274	0.359		28.4
Body	LTE Band 13	10	QPSK	M1	2085M	1:1	0.04	782.00	23230	0.0	25.0	23.89	1	25	Left	0	N/A	0.402	1.291	0.132		33.8
Body	LTE Band 13	10	QPSK	M1	2085M	1:1	0.05	782.00	23230	1.0	24.0	22.95	25	25	Left	0	N/A	0.115	1.274	0.147		32.3
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 10-17
LTE Band 13 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 13	10	QPSK	M1	0383M	1:1	0.01	782.00	23230	0.0	15.0	13.87	1	25	Back	0	0	0.261	1.297	0.339		19.7
Body	LTE Band 13	10	QPSK	M1	0383M	1:1	0.08	782.00	23230	0.0	15.0	13.67	25	25	Back	0	0	0.257	1.258	0.342		19.7
Body	LTE Band 13	10	QPSK	M1	0383M	1:1	0.00	782.00	23230	0.0	15.0	13.87	1	25	Top	0	0	0.307	1.297	0.398		18.9
Body	LTE Band 13	10	QPSK	M1	0383M	1:1	0.00	782.00	23230	0.0	15.0	13.67	25	25	Top	0	0	0.291	1.358	0.395		19.0
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 10-18
LTE Band 13 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 13	10	QPSK	M1	0386M	1:1	0.03	782.00	23230	0.0	25.0	23.89	1	25	Bottom	0	Variant 1	0.036	1.291	0.046		38.3
Body	LTE Band 13	10	QPSK	M1	0386M	1:1	0.03	782.00	23230	0.0	25.0	23.89	1	25	Bottom	0	Variant 2	0.058	1.291	0.075	A12	36.2
Body	LTE Band 13	10	QPSK	M1	0386M	1:1	-0.08	782.00	23230	1.0	24.0	22.95	25	25	Bottom	0	Variant 1	0.075	1.274	0.032		38.9
Body	LTE Band 13	10	QPSK	M1	0386M	1:1	0.08	782.00	23230	1.0	24.0	22.95	25	25	Bottom	0	Variant 2	0.046	1.274	0.059		36.3
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram					

10.7 LTE Band 14 Standalone SAR

Table 10-19
LTE Band 14 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 14	10	QPSK	M1	0383M	1:1	0.03	793.00	23330	0.0	24.5	23.90	1	0	Back	19	N/A	0.432	1.148	0.496		27.5
Body	LTE Band 14	10	QPSK	M1	0383M	1:1	-0.16	793.00	23330	0.5	24.0	22.94	25	0	Back	19	N/A	0.367	1.276	0.468		27.2
Body	LTE Band 14	10	QPSK	M1	2085M	1:1	-0.04	793.00	23330	0.0	24.5	23.90	1	0	Top	19	N/A	0.673	1.148	0.773	A13	25.6
Body	LTE Band 14	10	QPSK	M1	0386M	1:1	0.00	793.00	23330	0.0	24.5	23.90	1	0	Top	19	Variant 1	0.512	1.148	0.588		26.8
Body	LTE Band 14	10	QPSK	M1	0386M	1:1	-0.01	793.00	23330	0.0	24.5	23.90	1	0	Top	19	Variant 2	0.499	1.148	0.573		26.9
Body	LTE Band 14	10	QPSK	M1	2085M	1:1	0.01	793.00	23330	0.5	24.0	22.94	25	0	Top	19	N/A	0.554	1.276	0.707		25.5
Body	LTE Band 14	10	QPSK	M1	2085M	1:1	0.00	793.00	23330	0.5	24.0	22.89	50	0	Top	19	N/A	0.598	1.291	0.772		25.1
Body	LTE Band 14	10	QPSK	M1	2085M	1:1	0.02	793.00	23330	0.0	24.5	23.90	1	0	Right	0	N/A	0.367	1.148	0.421		28.2
Body	LTE Band 14	10	QPSK	M1	2085M	1:1	-0.05	793.00	23330	0.5	24.0	22.94	25	0	Right	0	N/A	0.276	1.276	0.352		28.5
Body	LTE Band 14	10	QPSK	M1	2085M	1:1	0.02	793.00	23330	0.0	24.5	23.90	1	0	Left	0	N/A	0.125	1.148	0.144		32.9
Body	LTE Band 14	10	QPSK	M1	2085M	1:1	0.04	793.00	23330	0.5	24.0	22.94	25	0	Left	0	N/A	0.116	1.276	0.148		32.2
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram					

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																Approved by: Technical Manager				
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																Page 120 of 298				

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-20
LTE Band 14 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	PLimit [dBm]
Body	LTE Band 14	10	QPSK	M1	0383M	1:1	0.01	793.00	23330	0.0	15.0	13.62	1	0	Back	0	0.320	1.374	0.440		18.5
Body	LTE Band 14	10	QPSK	M1	0383M	1:1	0.01	793.00	23330	0.0	15.0	13.64	25	0	Back	0	0.314	1.368	0.430		18.6
Body	LTE Band 14	10	QPSK	M1	0383M	1:1	0.01	793.00	23330	0.0	15.0	13.62	1	0	Top	0	0.471	1.374	0.647		16.8
Body	LTE Band 14	10	QPSK	M1	0383M	1:1	0.00	793.00	23330	0.0	15.0	13.64	25	0	Top	0	0.464	1.368	0.635		16.9
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram				

Table 10-21
LTE Band 14 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	PLimit [dBm]	
Body	LTE Band 14	10	QPSK	M1	0386M	1:1	0.13	793.00	23330	0.0	24.5	23.90	1	0	Bottom	0	Variant 1	0.032	1.148	0.037		38.8	
Body	LTE Band 14	10	QPSK	M1	0386M	1:1	0.14	793.00	23330	0.0	24.5	23.90	1	0	Bottom	0	Variant 2	0.070	1.148	0.080	A14	35.4	
Body	LTE Band 14	10	QPSK	M1	0386M	1:1	0.04	793.00	23330	0.5	24.0	22.94	25	0	Bottom	0	Variant 1	0.028	1.276	0.036		38.4	
Body	LTE Band 14	10	QPSK	M1	0386M	1:1	0.04	793.00	23330	0.5	24.0	22.94	25	0	Bottom	0	Variant 2	0.061	1.276	0.078		35.0	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body						
Spatial Peak																	1.6 W/kg (mW/g)						
Uncontrolled Exposure/General Population																	averaged over 1 gram						

10.8 LTE Band 26 (Cell) Standalone SAR

Table 10-22
LTE Band 26 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	PLimit [dBm]
Body	LTE Band 26	15	QPSK	M1	0383M	1:1	-0.03	831.50	26865	0.0	25.0	24.25	1	74	Back	19	N/A	0.520	1.189	0.618		27.0
Body	LTE Band 26	15	QPSK	M1	0383M	1:1	-0.19	831.50	26865	1.0	24.0	23.20	36	37	Back	19	N/A	0.404	1.202	0.486		27.1
Body	LTE Band 26	15	QPSK	M1	2085M	1:1	0.00	831.50	26865	0.0	25.0	24.25	1	74	Top	19	N/A	0.653	1.189	0.776	A15	26.1
Body	LTE Band 26	15	QPSK	M1	0366M	1:1	-0.02	831.50	26865	0.0	25.0	24.25	1	74	Top	19	Variant 1	0.429	1.189	0.530		27.9
Body	LTE Band 26	15	QPSK	M1	0366M	1:1	0.08	831.50	26865	0.0	25.0	24.25	1	74	Top	19	Variant 2	0.523	1.189	0.622		27.0
Body	LTE Band 26	15	QPSK	M1	2085M	1:1	0.00	831.50	26865	1.0	24.0	23.20	36	37	Top	19	N/A	0.506	1.202	0.608		26.1
Body	LTE Band 26	15	QPSK	M1	2085M	1:1	-0.06	831.50	26865	1.0	24.0	22.80	75	0	Top	19	N/A	0.316	1.318	0.706		25.5
Body	LTE Band 26	15	QPSK	M1	2085M	1:1	0.20	831.50	26865	0.0	25.0	24.25	1	74	Right	0	N/A	0.452	1.189	0.537		27.6
Body	LTE Band 26	15	QPSK	M1	2085M	1:1	-0.03	831.50	26865	1.0	24.0	23.20	36	37	Right	0	N/A	0.371	1.202	0.446		27.5
Body	LTE Band 26	15	QPSK	M1	2085M	1:1	-0.20	831.50	26865	0.0	25.0	24.25	1	74	Left	0	N/A	0.223	1.189	0.265		30.7
Body	LTE Band 26	15	QPSK	M1	2085M	1:1	0.03	831.50	26865	1.0	24.0	23.20	36	37	Left	0	N/A	0.363	1.202	0.596		31.0
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																						
Spatial Peak																						
Uncontrolled Exposure/General Population																			Body 1.6 W/kg (mW/g) averaged over 1 gram			

Table 10-23
LTE Band 26 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	PLimit [dBm]
Body	LTE Band 26	15	QPSK	M1	0383M	1:1	-0.12	831.50	26865	0.0	15.0	13.85	1	74	Back	0	0.398	1.303	0.519		17.8
Body	LTE Band 26	15	QPSK	M1	0383M	1:1	0.01	831.50	26865	0.0	15.0	13.74	36	37	Back	0	0.385	1.337	0.526		17.8
Body	LTE Band 26	15	QPSK	M1	0383M	1:1	0.00	831.50	26865	0.0	15.0	13.85	1	74	Top	0	0.384	1.303	0.500		18.0
Body	LTE Band 26	15	QPSK	M1	0383M	1:1	-0.01	831.50	26865	0.0	15.0	13.74	36	37	Top	0	0.381	1.337	0.509		17.9
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram				

Table 10-24
LTE Band 26 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	PLimit [dBm]
Body	LTE Band 26	15	QPSK	M1	0386M	1:1	0.09	831.50	26865	0.0	25.0	24.25	1	74	Bottom	0	Variant 1	0.041	1.189	0.049		38.1
Body	LTE Band 26	15	QPSK	M1	0386M	1:1	0.04	831.50	26865	0.0	25.0	24.25	1	74	Bottom	0	Variant 2	0.081	1.189	0.096	A16	35.1
Body	LTE Band 26	15	QPSK	M1	0386M	1:1	0.20	831.50	26865	1.0	24.0	23.20	36	37	Bottom	0	Variant 1	0.044	1.202	0.053		36.7
Body	LTE Band 26	15	QPSK	M1	0386M	1:1	-0.17	831.50	26865	1.0	24.0	23.20	36	37	Bottom	0	Variant 2	0.080	1.202	0.096		34.1
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																		Body				
Spatial Peak																		1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																		averaged over 1 gram				

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 121 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10.9 LTE Band 66 (AWS) Standalone SAR

Table 10-25
LTE Band 66 Tablet Max Power

ANS/IEEE C95.1 1992 - SAFETY LIMIT																					
Spatial Peak										Body											
Uncontrolled Exposure/General Population																					
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	0.02	1720.00	132072	0.0	25.0	23.85	1	99	Back	19	0.245	1.303	0.319	29.9	
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	-0.02	1720.00	132072	1.0	24.0	22.93	50	50	Back	19	0.224	1.279	0.286	29.4	
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	-0.06	1720.00	132072	0.0	25.0	23.85	1	99	Top	19	0.044	1.303	0.057	37.4	
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	0.04	1720.00	132072	1.0	24.0	22.93	50	50	Top	19	0.044	1.279	0.056	36.4	
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	0.02	1720.00	132072	0.0	25.0	23.85	1	99	Right	15	0.045	1.303	0.064	36.9	
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	0.09	1720.00	132072	1.0	24.0	22.93	50	50	Right	15	0.041	1.279	0.052	36.8	
Body	LTE Band 66	20	QPSK	M1	0377M	1:1	0.04	1720.00	132072	0.0	25.0	23.85	1	99	Left	0	0.195	1.303	0.254	30.9	
Body	LTE Band 66	20	QPSK	M1	0377M	1:1	0.07	1720.00	132072	1.0	24.0	22.93	50	50	Left	0	0.172	1.279	0.220	30.5	
ANS/IEEE C95.1 1992 - SAFETY LIMIT																					
Spatial Peak										Body											
Uncontrolled Exposure/General Population																					
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 66	20	QPSK	S2	2054M	1:1	0.17	1770.00	132572	0.0	25.0	24.26	1	99	Back	19	0.391	1.186	0.464	28.3	
Body	LTE Band 66	20	QPSK	S2	2054M	1:1	-0.03	1770.00	132572	1.0	24.0	23.33	50	25	Back	19	0.320	1.167	0.373	28.2	
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.02	1770.00	132572	0.0	25.0	24.26	1	99	Bottom	19	0.413	1.186	0.490	28.1	
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.05	1770.00	132572	1.0	24.0	23.33	50	25	Bottom	19	0.310	1.167	0.362	28.4	
Body	LTE Band 66	20	QPSK	S2	2054M	1:1	0.09	1770.00	132572	0.0	25.0	24.26	1	99	Right	0	0.226	1.186	0.268	30.7	
Body	LTE Band 66	20	QPSK	S2	2054M	1:1	-0.03	1770.00	132572	1.0	24.0	23.33	50	25	Right	0	0.203	1.167	0.237	30.2	
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.08	1770.00	132572	0.0	25.0	24.26	1	99	Left	0	0.191	1.186	0.227	31.4	
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.07	1770.00	132572	1.0	24.0	23.33	50	25	Left	0	0.182	1.167	0.212	30.7	
ANS/IEEE C95.1 1992 - SAFETY LIMIT																					
Spatial Peak										Body											
Uncontrolled Exposure/General Population																					
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 66	20	QPSK	S2	2054M	1:1	0.17	1770.00	132572	0.0	25.0	24.26	1	99	Back	19	0.391	1.186	0.464	28.3	
Body	LTE Band 66	20	QPSK	S2	2054M	1:1	-0.03	1770.00	132572	1.0	24.0	23.33	50	25	Back	19	0.320	1.167	0.373	28.2	
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.02	1770.00	132572	0.0	25.0	24.26	1	99	Bottom	19	0.413	1.186	0.490	28.1	
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.05	1770.00	132572	1.0	24.0	23.33	50	25	Bottom	19	0.310	1.167	0.362	28.4	
Body	LTE Band 66	20	QPSK	S2	2054M	1:1	0.09	1770.00	132572	0.0	25.0	24.26	1	99	Right	0	0.226	1.186	0.268	30.7	
Body	LTE Band 66	20	QPSK	S2	2054M	1:1	-0.03	1770.00	132572	1.0	24.0	23.33	50	25	Right	0	0.203	1.167	0.237	30.2	
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.08	1770.00	132572	0.0	25.0	24.26	1	99	Left	0	0.191	1.186	0.227	31.4	
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.07	1770.00	132572	1.0	24.0	23.33	50	25	Left	0	0.182	1.167	0.212	30.7	

Table 10-26
LTE Band 66 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type / Addr / Info	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	-0.01	1770.00	132572	0.0	15.5	14.35	1	0	Back	0	N/A	0.296	1.303	0.386		19.6
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	0.00	1770.00	132572	0.0	15.5	14.39	50	0	Back	0	N/A	0.292	1.291	0.377		19.7
Body	LTE Band 66	20	QPSK	M1	0383M	1:1	-0.02	1770.00	132572	0.0	15.5	14.35	1	0	Top	0	N/A	0.443	1.303	0.577		17.8
Body	LTE Band 66	20	QPSK	M1	0383M	1:1	0.01	1770.00	132572	0.0	15.5	14.35	1	0	Top	0	Variant 2	0.402	1.303	0.524		18.3
Body	LTE Band 66	20	QPSK	M1	0383M	1:1	-0.02	1770.00	132572	0.0	15.5	14.35	1	0	Top	0	Variant 1	0.412	1.303	0.485		18.6
Body	LTE Band 66	10	QPSK	M1	0383M	1:1	0.02	1775.00	132622	0.0	15.5	14.31	1	0	Top	0	N/A	0.411	1.315	0.540		18.1
Body	LTE Band 66	20	QPSK	M1	0383M	1:1	-0.01	1770.00	132572	0.0	15.5	14.39	50	0	Top	0	N/A	0.331	1.291	0.427		19.1
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	0.14	1770.00	132572	0.0	23.5	22.06	1	50	Right	0	N/A	0.291	1.393	0.405		27.4
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	0.01	1770.00	132572	0.0	23.5	21.98	50	25	Right	0	N/A	0.296	1.419	0.420		27.2
Body	LTE Band 66	20											1	0								
		20			M1	0383M	1:1	-0.01	1770.20	132374	0.0	15.5	14.00	1	99		ULCA 66C	0.439	1.413	0.620		17.5
Body	LTE Band 66	10											1	0								
		10	QPSK	M1	0383M	1:1	0.05	1775.00	132622	0.0	15.5	13.98	1	0	Top	0	ULCA 66B	0.413	1.419	0.586		17.8
ANSI/IEEE C95.1.1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population															averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.00	1770.00	132572	0.0	13.5	12.58	1	99	Back	0	N/A	0.617	1.236	0.763	A17	14.6
Body	LTE Band 66	20	QPSK	S2	0377M	1:1	0.04	1770.00	132572	0.0	13.5	12.58	1	99	Back	0	Variant 1	0.016	1.236	0.020		30.5
Body	LTE Band 66	20	QPSK	S2	0377M	1:1	0.20	1770.00	132572	0.0	13.5	12.58	1	99	Back	0	Variant 2	0.024	1.236	0.030		28.7
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.04	1770.00	132572	0.0	13.5	12.58	50	25	Bottom	0	N/A	0.378	1.236	0.714		14.9
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	-0.03	1770.00	132572	0.0	13.5	12.58	1	99	Bottom	0	N/A	0.367	1.236	0.454		16.9
Body	LTE Band 66	20	QPSK	S2	0505M	1:1	0.04	1770.00	132572	0.0	13.5	12.58	50	25	Bottom	0	N/A	0.363	1.236	0.449		16.9
ANSI/IEEE C95.1.1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population															averaged over 1 gram							

Table 10-27
LTE Band 66 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type Add'l Info	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Pilot #	Plimit [dBm]
Body	LTE Band 66	10	QPSK	M1	0383M	1:1	0.05	1715.00	132022	0.0	25.0	23.65	1	49	Bottom	0	Variant 2	0.104	1.365	0.142		33.4
Body	LTE Band 66	20	QPSK	M1	0383M	1:1	0.01	1720.00	132072	0.0	25.0	23.85	1	99	Bottom	0	Variant 2	0.128	1.303	0.167	A18	32.7
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	-0.06	1720.00	132072	0.0	25.0	23.85	1	99	Bottom	0	Variant 1	0.064	1.303	0.083		25.7
Body	LTE Band 66	20	QPSK	M1	0377M	1:1	0.03	1720.00	132072	1.0	24.0	22.93	50	50	Bottom	0	Variant 2	0.117	1.279	0.150		32.2
Body	LTE Band 66	20	QPSK	M1	0505M	1:1	0.06	1720.00	132072	1.0	24.0	22.93	50	50	Bottom	0	Variant 1	0.048	1.279	0.061		36.1
Body	LTE Band 66	10	QPSK	M1	0383M	1:1	0.05	1715.00	132022	0.0	25.0	23.34	1	49	Bottom	0	Variant 2 ULCA 66B	0.106	1.466	0.155		33.0
Body	LTE Band 66	10	QPSK	M1	0383M	1:1	0.04	1724.80	132121	0.0	25.0	23.34	1	49	Bottom	0	Variant 2 ULCA 66C	0.098	1.552	0.152		33.1
		1720.00						132072	1				99									
															ANSI/IEEE C95.1-1992 - SAFETY LIMIT Spatial Peak		Body 1.6 W/kg (mW/g)					
															Uncontrolled Exposure/General Population		averaged over 1 gram					
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Pilot #	Plimit [dBm]
Body	LTE Band 66	20	QPSK	S2	0377M	1:1	-0.01	1770.00	132572	0.0	25.0	24.26	1	99	Bottom	0	Variant 1	0.045	1.186	0.053		37.7
Body	LTE Band 66	20	QPSK	S2	0377M	1:1	0.05	1770.00	132572	0.0	25.0	24.26	1	99	Bottom	0	Variant 2	0.119	1.186	0.141		33.5
Body	LTE Band 66	20	QPSK	S2	0377M	1:1	0.09	1770.00	132572	1.0	24.0	23.33	50	25	Bottom	0	Variant 1	0.040	1.167	0.045		37.3
Body	LTE Band 66	20	QPSK	S2	0377M	1:1	0.04	1770.00	132572	1.0	24.0	23.33	50	25	Bottom	0	Variant 2	0.048	1.167	0.114		33.4
															ANSI/IEEE C95.1-1992 - SAFETY LIMIT Spatial Peak		Body 1.6 W/kg (mW/g)					
															Uncontrolled Exposure/General Population		averaged over 1 g/cm					

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 122 of 298

10.10 LTE Band 25 (PCS) Standalone SAR

Table 10-28
LTE Band 25 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	0.04	1860.00	26140	0.0	25.0	23.89	1	99	Back	19	0.243	1.291	0.314		30.0
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	0.00	1860.00	26140	1.0	24.0	22.91	50	50	Back	19	0.186	1.285	0.239		30.2
Body	LTE Band 25	20	QPSK	M1	0386M	1:1	-0.02	1860.00	26140	0.0	25.0	23.89	1	99	Top	19	0.354	1.291	0.457		28.3
Body	LTE Band 25	20	QPSK	M1	0386M	1:1	0.00	1860.00	26140	1.0	24.0	22.91	50	50	Top	19	0.287	1.285	0.369		28.3
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	-0.21	1860.00	26140	0.0	25.0	23.89	1	99	Right	15	0.053	1.291	0.068		36.6
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	0.09	1860.00	26140	1.0	24.0	22.91	50	50	Right	15	0.050	1.285	0.064		35.9
Body	LTE Band 25	20	QPSK	M1	0377M	1:1	-0.03	1860.00	26140	0.0	25.0	23.89	1	99	Left	0	0.352	1.291	0.454		28.4
Body	LTE Band 25	20	QPSK	M1	0377M	1:1	-0.21	1860.00	26140	1.0	24.0	22.91	50	50	Left	0	0.324	1.285	0.416		27.8
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																					
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 25	20	QPSK	S2	2054M	1:1	-0.04	1905.00	26590	0.0	24.0	22.97	1	99	Back	19	0.203	1.268	0.257		29.8
Body	LTE Band 25	20	QPSK	S2	2054M	1:1	-0.05	1905.00	26590	1.0	23.0	22.37	50	25	Back	19	0.166	1.256	0.192		30.1
Body	LTE Band 25	20	QPSK	S2	0505M	1:1	-0.08	1905.00	26590	0.0	24.0	22.97	1	99	Bottom	19	0.219	1.268	0.278		29.5
Body	LTE Band 25	20	QPSK	S2	2054M	1:1	-0.04	1905.00	26590	1.0	23.0	22.37	50	25	Bottom	19	0.175	1.156	0.202		29.9
Body	LTE Band 25	20	QPSK	S2	2054M	1:1	-0.15	1905.00	26590	0.0	24.0	22.97	1	99	Right	0	0.085	1.268	0.108		33.6
Body	LTE Band 25	20	QPSK	S2	2054M	1:1	0.08	1905.00	26590	1.0	23.0	22.37	50	25	Right	0	0.126	1.156	0.146		31.3
Body	LTE Band 25	20	QPSK	S2	0505M	1:1	0.00	1905.00	26590	0.0	24.0	22.97	1	99	Left	0	0.089	1.268	0.113		33.4
Body	LTE Band 25	20	QPSK	S2	0505M	1:1	0.08	1905.00	26590	1.0	23.0	22.37	50	25	Left	0	0.131	1.156	0.151		31.1
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																					

Table 10-29
LTE Band 25 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	0.13	1905.00	26590	0.0	13.0	12.19	1	99	Back	0	N/A	0.352	1.205	0.424		16.7
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	0.09	1905.00	26590	0.0	13.0	12.20	50	25	Back	0	N/A	0.351	1.202	0.422		16.7
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	-0.03	1905.00	26590	0.0	13.0	12.19	1	99	Top	0	N/A	0.448	1.205	0.540		15.6
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	0.02	1905.00	26590	0.0	13.0	12.20	50	25	Top	0	N/A	0.450	1.202	0.541		15.6
Body	LTE Band 25	20	QPSK	M1	0383M	1:1	0.02	1905.00	26590	0.0	13.0	12.20	50	25	Top	0	Variant1	0.325	1.202	0.391		17.0
Body	LTE Band 25	20	QPSK	M1	0383M	1:1	-0.03	1905.00	26590	0.0	13.0	12.20	50	25	Top	0	Variant2	0.319	1.202	0.383		17.1
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	-0.02	1860.00	26140	0.0	18.5	17.26	1	50	Right	0	N/A	0.355	1.330	0.472		21.7
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	0.01	1860.00	26140	0.0	18.5	17.27	50	50	Right	0	N/A	0.363	1.327	0.482		21.6
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram					
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 25	20	QPSK	S2	0505M	1:1	0.12	1905.00	26590	0.0	13.5	12.58	1	99	Back	0	N/A	0.580	1.236	0.717		14.9
Body	LTE Band 25	20	QPSK	S2	0505M	1:1	0.01	1905.00	26590	0.0	13.5	12.58	50	25	Back	0	N/A	0.621	1.236	0.768	A19	14.6
Body	LTE Band 25	20	QPSK	S2	0377M	1:1	0.20	1905.00	26590	0.0	13.5	12.58	50	25	Back	0	Variant 1	0.014	1.236	0.017		31.1
Body	LTE Band 25	20	QPSK	S2	0377M	1:1	0.11	1905.00	26590	0.0	13.5	12.58	50	25	Back	0	Variant 2	0.012	1.236	0.015		31.7
Body	LTE Band 25	20	QPSK	S2	0505M	1:1	-0.06	1905.00	26590	0.0	13.5	12.58	1	99	Bottom	0	N/A	0.408	1.236	0.504		16.4
Body	LTE Band 25	20	QPSK	S2	0505M	1:1	-0.04	1905.00	26590	0.0	13.5	12.58	50	25	Bottom	0	N/A	0.407	1.236	0.503		16.4
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 10-30
LTE Band 25 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 25	20	QPSK	M1	0383M	1:1	0.01	1860.00	26140	0.0	25.0	23.89	1	99	Bottom	0	Variant 2	0.163	1.291	0.210	A20	31.7
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	0.16	1860.00	26140	0.0	25.0	23.89	1	99	Bottom	0	Variant 1	0.112	1.291	0.145		33.3
Body	LTE Band 25	20	QPSK	M1	0377M	1:1	-0.13	1860.00	26140	1.0	24.0	22.91	50	50	Bottom	0	Variant 2	0.142	1.285	0.182		31.3
Body	LTE Band 25	20	QPSK	M1	0505M	1:1	0.00	1860.00	26140	1.0	24.0	22.91	50	50	Bottom	0	Variant 1	0.095	1.285	0.122		33.1
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body 1.6 W/kg (mW/g) averaged over 1 gram					
Spatial Peak Uncontrolled Exposure/General Population																						

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 25	20	QPSK	S2	0377M	1:1	0.01	1905.00	26590	0.0	24.0	22.97	1	99	Bottom	0	Variant 1	0.032	1.268	0.041		37.9
Body	LTE Band 25	20	QPSK	S2	0377M	1:1	0.08	1905.00	26590	0.0	24.0	22.97	1	99	Bottom	0	Variant 2	0.069	1.268	0.087		34.5
Body	LTE Band 25	20	QPSK	S2	0377M	1:1	-0.03	1905.00	26590	1.0	23.0	22.37	50	25	Bottom	0	Variant 1	0.051	1.156	0.059		35.2
Body	LTE Band 25	20	QPSK	S2	0377M	1:1	-0.01	1905.00	26590	1.0	23.0	22.37	50	25	Bottom	0	Variant 2	0.084	1.156	0.097		33.1
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body 1.6 W/kg (mW/g) averaged over 1 gram					
Spatial Peak Uncontrolled Exposure/General Population																						

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																	Approved by: Technical Manager			
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																	Page 123 of 298			

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10.11 LTE Band 30 Standalone SAR

Table 10-31
LTE Band 30 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.13	2310.00	27710	0.0	24.0	22.80	1	25	Back	19	0.134	1.318	0.177		31.5
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.07	2310.00	27710	1.0	23.0	21.78	25	25	Back	19	0.116	1.324	0.154		31.1
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	-0.05	2310.00	27710	0.0	24.0	22.80	1	25	Top	19	0.231	1.318	0.304		29.1
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	-0.03	2310.00	27710	1.0	23.0	21.78	25	25	Top	19	0.199	1.324	0.263		28.7
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.08	2310.00	27710	0.0	24.0	22.80	1	25	Right	0	0.232	1.318	0.306		29.1
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.01	2310.00	27710	1.0	23.0	21.78	25	25	Right	0	0.202	1.324	0.267		28.7
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.01	2310.00	27710	0.0	24.0	22.80	1	25	Left	0	0.272	1.318	0.358		28.4
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.01	2310.00	27710	1.0	23.0	21.78	25	25	Left	0	0.345	1.324	0.324		27.8
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																					
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 30	10	QPSK	S2	0505M	1:1	0.01	2310.00	27710	0.0	24.0	23.25	1	25	Back	19	0.081	1.189	0.096		34.1
Body	LTE Band 30	10	QPSK	S2	0505M	1:1	0.05	2310.00	27710	1.0	23.0	22.30	25	12	Back	19	0.066	1.175	0.078		34.1
Body	LTE Band 30	10	QPSK	S2	0505M	1:1	-0.06	2310.00	27710	0.0	24.0	23.25	1	25	Bottom	19	0.125	1.189	0.149		32.2
Body	LTE Band 30	10	QPSK	S2	0505M	1:1	-0.07	2310.00	27710	1.0	23.0	22.30	25	12	Bottom	19	0.097	1.175	0.114		32.4
Body	LTE Band 30	10	QPSK	S2	0383M	1:1	0.02	2310.00	27710	0.0	24.0	23.25	1	25	Right	0	0.227	1.189	0.270		29.6
Body	LTE Band 30	10	QPSK	S2	0383M	1:1	0.06	2310.00	27710	1.0	23.0	22.30	25	12	Right	0	0.202	1.175	0.237		29.2
Body	LTE Band 30	10	QPSK	S2	0383M	1:1	0.03	2310.00	27710	0.0	24.0	23.25	1	25	Left	0	0.040	1.189	0.048		37.2
Body	LTE Band 30	10	QPSK	S2	0383M	1:1	0.05	2310.00	27710	1.0	23.0	22.30	25	12	Left	0	0.034	1.175	0.040		36.9
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																					

Table 10-32
LTE Band 30 Tablet with Grip Sensor Active

ANSI/IEEE C95.1 1992 - SAFETY LIMIT																						
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.01	2310.00	27710	0.0	13.0	11.89	1	25	Back	0	N/A	0.309	1.291	0.399		16.9
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.01	2310.00	27710	0.0	13.0	11.96	25	12	Back	0	N/A	0.311	1.271	0.395		17.0
Body	LTE Band 30	10	QPSK	M1	0386M	1:1	-0.06	2310.00	27710	0.0	13.0	11.89	1	25	Top	0	N/A	0.564	1.291	0.728		14.3
Body	LTE Band 30	10	QPSK	M1	0386M	1:1	0.07	2310.00	27710	0.0	13.0	11.89	1	25	Top	0	Variant 1	0.424	1.291	0.547		15.6
Body	LTE Band 30	10	QPSK	M1	0386M	1:1	-0.05	2310.00	27710	0.0	13.0	11.89	1	25	Top	0	Variant 2	0.440	1.291	0.568		15.4
Body	LTE Band 30	10	QPSK	M1	0386M	1:1	-0.01	2310.00	27710	0.0	13.0	11.96	25	12	Top	0	N/A	0.566	1.271	0.719		14.4
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body 1.6 W/kg (mW/g) averaged over 1 gram					
Spatial Peak Uncontrolled Exposure/General Population																						
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 30	10	QPSK	S2	0505M	1:1	0.08	2310.00	27710	0.0	13.0	11.72	1	0	Back	0	N/A	0.356	1.343	0.478		16.2
Body	LTE Band 30	10	QPSK	S2	0505M	1:1	0.07	2310.00	27710	0.0	13.0	11.70	25	25	Back	0	N/A	0.369	1.349	0.498		16.0
Body	LTE Band 30	10	QPSK	S2	0505M	1:1	-0.04	2310.00	27710	0.0	13.0	11.72	1	0	Bottom	0	N/A	0.576	1.343	0.774		14.1
Body	LTE Band 30	10	QPSK	S2	0505M	1:1	-0.05	2310.00	27710	0.0	13.0	11.70	25	25	Bottom	0	N/A	0.590	1.349	0.796	A21	13.9
Body	LTE Band 30	10	QPSK	S2	0377M	1:1	0.00	2310.00	27710	0.0	13.0	11.70	25	25	Bottom	0	Variant 2	0.355	1.349	0.479		16.1
Body	LTE Band 30	10	QPSK	S2	0377M	1:1	-0.08	2310.00	27710	0.0	13.0	11.70	25	25	Bottom	0	Variant 1	0.268	1.349	0.362		17.4
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body 1.6 W/kg (mW/g) averaged over 1 gram					
Spatial Peak Uncontrolled Exposure/General Population																						

Table 10-33
LTE Band 30 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.00	2310.00	27710	0.0	24.0	22.80	1	25	Bottom	0	Variant 2	0.162	1.318	0.214	A22	30.7
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	0.00	2310.00	27710	0.0	24.0	22.80	1	25	Bottom	0	Variant 1	0.069	1.318	0.091		34.4
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	-0.02	2310.00	27710	1.0	23.0	21.78	25	25	Bottom	0	Variant 2	0.138	1.324	0.183		30.3
Body	LTE Band 30	10	QPSK	M1	0383M	1:1	-0.02	2310.00	27710	1.0	23.0	21.78	25	25	Bottom	0	Variant 1	0.061	1.324	0.081		33.9
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body					
Spatial Peak																	1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																	averaged over 1 gram					
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 30	10	QPSK	S2	0377M	1:1	0.03	2310.00	27710	0.0	24.0	23.25	1	25	Bottom	0	Variant 1	0.014	1.189	0.017		41.7
Body	LTE Band 30	10	QPSK	S2	0377M	1:1	0.03	2310.00	27710	0.0	24.0	23.25	1	25	Bottom	0	Variant 2	0.016	1.189	0.019		41.2
Body	LTE Band 30	10	QPSK	S2	0377M	1:1	0.14	2310.00	27710	1.0	23.0	22.30	25	12	Bottom	0	Variant 1	0.013	1.175	0.015		41.1
Body	LTE Band 30	10	QPSK	S2	0377M	1:1	0.03	2310.00	27710	1.0	23.0	22.30	25	12	Bottom	0	Variant 2	0.012	1.175	0.014		41.5
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																	Body					
Spatial Peak																	1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																	averaged over 1 gram					

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																Approved by: Technical Manager				
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																Page 124 of 298				

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10.12 LTE Band 7 Standalone SAR

Table 10-34
LTE Band 7 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.01	2535.00	21100	0.0	25.0	23.96	1	0	Back	19	N/A	0.334	1.271	0.425		28.7
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.09	2535.00	21100	1.0	24.0	22.90	50	25	Back	19	N/A	0.295	1.288	0.380		28.2
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.04	2510.00	20850	0.0	25.0	23.91	1	99	Top	19	N/A	0.601	1.285	0.772		26.1
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	-0.06	2535.00	21100	0.0	25.0	23.96	1	0	Top	19	N/A	0.443	1.271	0.817	A73	25.8
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.02	2535.00	21100	0.0	25.0	23.96	1	0	Top	19	Variant 2	0.437	1.271	0.555		27.5
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.02	2535.00	21100	0.0	25.0	23.96	1	0	Top	19	Variant 1	0.457	1.271	0.581		27.3
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	-0.12	2560.00	21350	0.0	25.0	23.91	1	0	Top	19	N/A	0.591	1.285	0.759		26.1
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	-0.06	2535.00	21100	1.0	24.0	22.90	50	25	Top	19	N/A	0.560	1.288	0.721		25.4
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	-0.14	2535.00	21100	1.0	24.0	22.89	100	0	Top	19	N/A	0.526	1.291	0.683		25.6
Body	LTE Band 7	20	QPSK	M1	0377M	1:1	-0.11	2535.00	21100	0.0	25.0	23.96	1	0	Right	15	N/A	0.107	1.271	0.136		33.6
Body	LTE Band 7	20	QPSK	M1	0377M	1:1	0.02	2535.00	21100	1.0	24.0	22.90	50	25	Right	15	N/A	0.100	1.288	0.129		32.8
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.03	2535.00	21100	0.0	25.0	23.96	1	0	Left	0	N/A	0.228	1.271	0.290		30.3
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.02	2535.00	21100	1.0	24.0	22.90	1	0	Left	0	N/A	0.208	1.288	0.268		29.7
Body	LTE Band 7	20	QPSK	M1	0377M	1:1	0.09	2535.00	21100	0.0	25.0	23.96	1	0	Top	19	ULCA 7C	0.517	1.563	0.808		25.9
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram						
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 7	20	QPSK	S2	0505M	1:1	0.11	2560.00	21350	0.0	24.0	23.06	1	99	Back	19		0.188	1.242	0.233		30.3
Body	LTE Band 7	20	QPSK	S2	0505M	1:1	0.01	2560.00	21350	1.0	23.0	22.01	50	50	Back	19		0.110	1.256	0.136		31.5
Body	LTE Band 7	20	QPSK	S2	0505M	1:1	-0.02	2560.00	21350	0.0	24.0	23.06	1	99	Bottom	19		0.362	1.242	0.450		27.4
Body	LTE Band 7	20	QPSK	S2	0505M	1:1	-0.10	2560.00	21350	1.0	23.0	22.01	50	50	Bottom	19		0.255	1.256	0.320		27.9
Body	LTE Band 7	20	QPSK	S2	0383M	1:1	0.01	2560.00	21350	0.0	24.0	23.06	1	99	Right	0		0.383	1.242	0.476		27.2
Body	LTE Band 7	20	QPSK	S2	0383M	1:1	0.01	2560.00	21350	1.0	23.0	22.01	50	50	Right	0		0.261	1.256	0.328		27.8
Body	LTE Band 7	20	QPSK	S2	0383M	1:1	0.08	2560.00	21350	0.0	24.0	23.06	1	99	Left	0		0.119	1.242	0.148		32.3
Body	LTE Band 7	20	QPSK	S2	0383M	1:1	0.02	2560.00	21350	1.0	23.0	22.01	50	50	Left	0		0.101	1.256	0.127		31.9
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 10-35
LTE Band 7 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.01	2535.00	21100	0.0	12.0	11.08	1	0	Back	0		0.371	1.236	0.459		15.3
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.01	2535.00	21100	0.0	12.0	11.08	50	50	Back	0		0.362	1.236	0.472		15.2
Body	LTE Band 7	20	QPSK	M1	0386M	1:1	-0.03	2535.00	21100	0.0	12.0	11.08	1	0	Top	0		0.592	1.236	0.732		13.3
Body	LTE Band 7	20	QPSK	M1	0386M	1:1	-0.08	2535.00	21100	0.0	12.0	11.08	50	50	Top	0		0.577	1.236	0.713		13.4
Body	LTE Band 7	20	QPSK	M1	0377M	1:1	0.01	2560.00	21350	0.0	21.0	19.53	1	99	Right	0		0.326	1.403	0.457		24.3
Body	LTE Band 7	20	QPSK	M1	0377M	1:1	0.09	2560.00	21350	0.0	21.0	19.54	50	50	Right	0		0.330	1.400	0.462		24.3
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram						
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 7	20	QPSK	S2	0505M	1:1	0.04	2560.00	21350	0.0	11.5	10.04	1	99	Back	0	N/A	0.452	1.400	0.633		13.4
Body	LTE Band 7	20	QPSK	S2	0505M	1:1	0.14	2560.00	21350	0.0	11.5	9.95	50	50	Back	0	N/A	0.417	1.429	0.596		13.7
Body	LTE Band 7	20	QPSK	S2	0505M	1:1	-0.06	2560.00	21350	0.0	11.5	10.04	1	99	Bottom	0	N/A	0.498	1.400	0.697		13.0
Body	LTE Band 7	20	QPSK	S2	0505M	1:1	-0.08	2560.00	21350	0.0	11.5	9.95	50	50	Bottom	0	N/A	0.436	1.429	0.706		12.6
Body	LTE Band 7	20	QPSK	S2	0377M	1:1	0.02	2560.00	21350	0.0	11.5	9.95	50	50	Bottom	0	Variant 1	0.269	1.429	0.384		15.6
Body	LTE Band 7	20	QPSK	S2	0377M	1:1	-0.05	2560.00	21350	0.0	11.5	9.95	50	50	Bottom	0	Variant 2	0.269	1.429	0.384		15.6
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 10-36
LTE Band 7 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type Add'l Info	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.13	2535.00	21100	0.0	25.0	23.96	1	0	Bottom	0	Variant 2	0.217	1.271	0.276	A24	30.5
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	0.13	2535.00	21100	0.0	25.0	23.96	1	0	Bottom	0	Variant 1	0.084	1.271	0.107		34.7
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	-0.06	2535.00	21100	1.0	24.0	22.90	50	25	Bottom	0	Variant 2	0.185	1.288	0.238		30.2
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	-0.06	2535.00	21100	1.0	24.0	22.90	50	25	Bottom	0	Variant 1	0.076	1.288	0.098		34.0
Body	LTE Band 7	20	QPSK	M1	0383M	1:1	-0.15	2535.00	21100	0.0	25.0	23.32	1	0	Bottom	0	Variant 2 & CA 7C	0.188	1.476	0.277		30.5
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram						
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 7	20	QPSK	S2	0377M	1:1	-0.11	2560.00	21350	0.0	24.0	23.06	1	99	Bottom	0	Variant 1	0.021	1.242	0.026		39.8
Body	LTE Band 7	20	QPSK	S2	0377M	1:1	0.08	2560.00	21350	0.0	24.0	23.06	1	99	Bottom	0	Variant 2	0.062	1.242	0.077		35.1
Body	LTE Band 7	20	QPSK	S2	0377M	1:1	0.03	2560.00	21350	1.0	23.0	22.01	50	50	Bottom	0	Variant 1	0.017	1.256	0.021		39.7
Body	LTE Band 7	20	QPSK	S2	0377M	1:1	0.09	2560.00	21350	1.0	23.0	22.01	50	50	Bottom	0	Variant 2	0.054	1.256	0.068		34.6
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram						

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																	Approved by: Technical Manager			
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																	Page 125 of 298			

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-41
LTE Band 48 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type Add'l Info	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.05	3560.00	55340	0.0	13.5	12.25	1	99	Back	0	N/A	0.672	1.334	0.896		11.9
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	-0.01	3603.30	55773	0.0	13.5	12.67	1	99	Back	0	N/A	0.701	1.211	0.849		12.2
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.01	3646.70	56207	0.0	13.5	12.66	1	0	Back	0	N/A	0.714	1.213	0.866	A27	12.1
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	-0.02	3690.00	56640	0.0	13.5	12.06	1	0	Back	0	N/A	0.690	1.393	0.905		11.9
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.01	3560.00	55340	0.0	13.5	12.17	50	50	Back	0	N/A	0.661	1.358	0.898		11.9
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.05	3603.30	55773	0.0	13.5	12.66	50	50	Back	0	N/A	0.709	1.213	0.860		12.1
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.03	3646.70	56207	0.0	13.5	12.56	50	0	Back	0	N/A	0.704	1.242	0.874		12.1
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	-0.03	3690.00	56640	0.0	13.5	12.09	50	0	Back	0	N/A	0.656	1.384	0.908		11.9
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.04	3690.00	56640	0.0	13.5	12.09	50	0	Back	0	Variant 1	0.011	1.384	0.015		29.6
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	-0.01	3690.00	56640	0.0	13.5	12.09	50	0	Back	0	Variant 2	0.012	1.384	0.017		29.3
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.00	3603.30	55773	0.0	13.5	12.58	100	0	Back	0	N/A	0.705	1.236	0.871		12.1
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.03	3603.30	55773	0.0	13.5	12.67	1	99	Bottom	0	N/A	0.439	1.211	0.532		14.2
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.08	3603.30	55773	0.0	13.5	12.66	50	50	Bottom	0	N/A	0.444	1.213	0.539		14.2
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	-0.01	3690.00	56640	0.0	13.5	12.06	50	0	Back	0	ULCA 48C	0.622	1.393	0.866		12.1
ANSI/IEEE C63.1-1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 10-42
LTE Band 48 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type Add'l info	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	-0.06	3603.30	55773	0.0	24.0	23.01	1	99	Bottom	0	Variant 2	0.297	1.256	0.373	A28	26.2
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	-0.01	3603.30	55773	0.0	24.0	23.01	1	99	Bottom	0	Variant 1	0.153	1.256	0.192		29.1
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	-0.04	3603.30	55773	1.0	23.0	22.05	50	50	Bottom	0	Variant 2	0.221	1.245	0.275		26.6
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.07	3603.30	55773	1.0	23.0	22.05	50	50	Bottom	0	Variant 1	0.127	1.245	0.158		29.0
Body	LTE Band 48	20	QPSK	S4	0337M	1:1.58	0.00	3603.30	55773	0.0	24.0	22.16	1	99	Bottom	0	ULCA 48C Variant 2	0.263	1.528	0.402		25.9
ANSI/IEEE C63.1-1992 - SAFETY LIMIT																Body						
Spatial Peak																1.6 W/kg (mW/g)						
Uncontrolled Exposure/General Population																averaged over 1 gram						

10.15 NR Band n71 Standalone SAR

Table 10-43
NR Band n71 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n71	20	QPSK	M1	2026M	1:1	-0.04	680.50	136100	DFT-s-OFDM	0.0	25.0	24.14	1	1	Back	19	N/A	0.305	1.219	0.372		29.2
Body	NR Band n71	20	QPSK	M1	2026M	1:1	-0.02	680.50	136100	DFT-s-OFDM	0.0	25.0	24.03	50	28	Back	19	N/A	0.309	1.250	0.386		29.1
Body	NR Band n71	20	QPSK	M1	2026M	1:1	-0.02	680.50	136100	DFT-s-OFDM	0.0	25.0	24.14	1	1	Top	19	N/A	0.393	1.219	0.479		28.1
Body	NR Band n71	20	QPSK	M1	2026M	1:1	0.00	680.50	136100	DFT-s-OFDM	0.0	25.0	24.03	50	28	Top	19	N/A	0.405	1.250	0.506	A29	27.9
Body	NR Band n71	20	QPSK	M1	0386M	1:1	-0.01	680.50	136100	DFT-s-OFDM	0.0	25.0	24.03	50	28	Top	19	Variant 1	0.180	1.250	0.225		31.4
Body	NR Band n71	20	QPSK	M1	0386M	1:1	0.01	680.50	136100	DFT-s-OFDM	0.0	25.0	24.03	50	28	Top	19	Variant 2	0.177	1.250	0.221		31.5
Body	NR Band n71	20	QPSK	M1	0386M	1:1	-0.10	680.50	136100	CP-OFDM	1.5	23.5	23.30	1	1	Top	19	N/A	0.118	1.096	0.139		32.3
Body	NR Band n71	20	QPSK	M1	0386M	1:1	0.09	680.50	136100	DFT-s-OFDM	0.0	25.0	24.14	1	1	Right	0	N/A	0.050	1.219	0.061		37.1
Body	NR Band n71	20	QPSK	M1	0386M	1:1	-0.06	680.50	136100	DFT-s-OFDM	0.0	25.0	24.03	50	28	Right	0	N/A	0.051	1.250	0.064		36.9
Body	NR Band n71	20	QPSK	M1	0377M	1:1	0.05	680.50	136100	DFT-s-OFDM	0.0	25.0	24.14	1	1	Left	0	N/A	0.125	1.219	0.152		33.1
Body	NR Band n71	20	QPSK	M1	0377M	1:1	-0.01	680.50	136100	DFT-s-OFDM	0.0	25.0	24.03	50	28	Left	0	N/A	0.143	1.250	0.179		32.4
ANSI/IEEE C63.1-1992 - SAFETY LIMIT																Body							
Spatial Peak																1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population																averaged over 1 gram							

Table 10-44
NR Band n71 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n71	20	QPSK	M1	0386M	1:1	0.02	680.50	136100	DFT-s-OFDM	0.0	17.0	15.79	1	1	Back	0	0.268	1.321	0.354		21.5
Body	NR Band n71	20	QPSK	M1	0386M	1:1	0.01	680.50	136100	DFT-s-OFDM	0.0	17.0	16.16	50	0	Back	0	0.317	1.213	0.385		21.1
Body	NR Band n71	20	QPSK	M1	0386M	1:1	-0.02	680.50	136100	DFT-s-OFDM	0.0	17.0	15.79	1	1	Top	0	0.226	1.321	0.299		22.2
Body	NR Band n71	20	QPSK	M1	0386M	1:1	0.01	680.50	136100	DFT-s-OFDM	0.0	17.0	16.16	50	0	Top	0	0.305	1.213	0.370		21.3
ANSI/IEEE C63.1-1992 - SAFETY LIMIT																		Body				
Spatial Peak																		1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																		averaged over 1 gram				

Table 10-45
NR Band n71 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n71	20	QPSK	M1	0386M	1:1	0.02	680.50	136100	DFT-s-OFDM	0.0	25.0	24.14	1	1	Bottom	0	Variant 2	0.057	1.219	0.069	A30	36.5
Body	NR Band n71	20	QPSK	M1	0386M	1:1	-0.10	680.50	136100	DFT-s-OFDM	0.0	25.0	24.14	1	1	Bottom	0	Variant 1	0.023	1.219	0.028		40.5
Body	NR Band n71	20	QPSK	M1	0386M	1:1	-0.03	680.50	136100	DFT-s-OFDM	0.0	25.0	24.03	50	28	Bottom	0	Variant 2	0.052	1.250	0.065		36.8
Body	NR Band n71	20	QPSK	M1	0386M	1:1	0.01	680.50	136100	DFT-s-OFDM	0.0	25.0	24.03	50	28	Bottom	0	Variant 1	0.028	1.250	0.035		39.5
Body	NR Band n71	20	QPSK	M1	0386M	1:1	0.06	680.50	136100	CP-OFDM	1.5	23.5	23.30	1	1	Bottom	0	Variant 2	0.048	1.096	0.053		36.2
Body	NR Band n71	20	QPSK	M1	0386M	1:1	-0.12	680.50	136100	CP-OFDM	1.5	23.5	23.30	1	1	Bottom	0	Variant 1	0.027	1.096	0.019		40.7
ANSI/IEEE C63.1-1992 - SAFETY LIMIT																							
Spatial Peak																			Body				
Uncontrolled Exposure/General Population																			1.6 W/kg (mW/g)				
																			averaged over 1 gram				

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																	Approved by: Technical Manager			
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																	Page 127 of 298			

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-51
NR Band n26 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n26	20	QPSK	M1	0386M	1:1	-0.71	831.50	166300	DFT-s-OFDM	0.0	25.0	23.58	1	104	Bottom	0	Variant 2	0.081	1.587	0.126	A34	33.9
Body	NR Band n26	20	QPSK	M1	0386M	1:1	0.05	831.50	166300	DFT-s-OFDM	0.0	25.0	23.58	1	104	Bottom	0	Variant 1	0.085	1.587	0.060		37.2
Body	NR Band n26	20	QPSK	M1	0386M	1:1	-0.05	831.50	166300	DFT-s-OFDM	0.0	25.0	23.57	50	28	Bottom	0	Variant 2	0.089	1.390	0.124		34.0
Body	NR Band n26	20	QPSK	M1	0386M	1:1	-0.06	831.50	166300	DFT-s-OFDM	0.0	25.0	23.57	50	28	Bottom	0	Variant 1	0.086	1.390	0.064		36.9
Body	NR Band n26	20	QPSK	M1	0386M	1:1	-0.13	831.50	166300	CP-OFDM	1.5	23.5	21.85	1	1	Bottom	0	Variant 2	0.064	1.462	0.094		33.7
Body	NR Band n26	20	QPSK	M1	0386M	1:1	0.07	831.50	166300	CP-OFDM	1.5	23.5	21.85	1	1	Bottom	0	Variant 1	0.080	1.462	0.058		35.8
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																		Body					
Spatial Peak																		1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																		averaged over 1 gram					

10.1 NR Band n70 Standalone SAR

Table 10-52
NR Band n70 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]	
Body	NR Band n70	15	QPSK	M1	0386M	1:1	0.01	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.85	1	77	Back	19	0.202	1.161	0.235		29.7	
Body	NR Band n70	15	QPSK	M1	0386M	1:1	-0.02	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.86	36	22	Back	19	0.210	1.132	0.238		29.7	
Body	NR Band n70	15	QPSK	M1	0386M	1:1	-0.01	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.85	1	77	Top	19	0.201	1.561	0.233		29.8	
Body	NR Band n70	15	QPSK	M1	0386M	1:1	0.00	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.86	36	22	Top	19	0.213	1.132	0.241		29.6	
Body	NR Band n70	15	QPSK	M1	0386M	1:1	-0.13	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.85	1	77	Right	15	0.049	1.161	0.057		35.9	
Body	NR Band n70	15	QPSK	M1	0386M	1:1	-0.02	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.86	36	22	Right	15	0.049	1.132	0.055		36.0	
Body	NR Band n70	15	QPSK	M1	0505M	1:1	0.02	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.85	1	77	Left	0	0.149	1.161	0.173		31.1	
Body	NR Band n70	15	QPSK	M1	0505M	1:1	0.01	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.86	36	22	Left	0	0.159	1.132	0.180		30.9	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																		Body					
Spatial Peak																		1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																		averaged over 1 gram					

Table 10-53
NR Band n70 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n70	15	QPSK	M1	0386M	1:1	-0.01	1702.50	340500	DFT-s-OFDM	0.0	13.5	12.90	1	40	Back	0	N/A	0.276	1.148	0.317		18.4
Body	NR Band n70	15	QPSK	M1	0386M	1:1	0.00	1702.50	340500	DFT-s-OFDM	0.0	13.5	12.98	36	22	Back	0	N/A	0.262	1.127	0.318		18.4
Body	NR Band n70	15	QPSK	M1	0386M	1:1	0.00	1702.50	340500	DFT-s-OFDM	0.0	13.5	12.90	1	40	Top	0	N/A	0.485	1.148	0.557		16.0
Body	NR Band n70	15	QPSK	M1	0386M	1:1	0.01	1702.50	340500	DFT-s-OFDM	0.0	13.5	12.98	36	22	Top	0	N/A	0.535	1.127	0.580		15.8
Body	NR Band n70	15	QPSK	M1	0386M	1:1	0.03	1702.50	340500	CP-OFDM	0.0	13.5	12.83	1	1	Top	0	N/A	0.541	1.167	0.631	A35	15.4
Body	NR Band n70	15	QPSK	M1	0505M	1:1	0.09	1702.50	340500	CP-OFDM	0.0	13.5	12.83	1	1	Top	0	Variant 3	0.502	1.167	0.624		19.9
Body	NR Band n70	15	QPSK	M1	0505M	1:1	-0.10	1702.50	340500	CP-OFDM	0.0	13.5	12.83	1	1	Top	0	Variant 2	0.257	1.167	0.300		18.7
Body	NR Band n70	15	QPSK	M1	0363M	1:1	-0.06	1702.50	340500	DFT-s-OFDM	0.0	22.5	21.77	1	40	Right	0	N/A	0.291	1.183	0.344		27.1
Body	NR Band n70	15	QPSK	M1	0363M	1:1	0.02	1702.50	340500	DFT-s-OFDM	0.0	22.5	21.76	36	22	Right	0	N/A	0.300	1.186	0.356		26.9
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																		Body					
Spatial Peak																		1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																		averaged over 1 gram					

Table 10-54
NR Band n70 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n70	15	QPSK	M1	0377M	1:1	0.09	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.85	1	77	Bottom	0	Variant 1	0.057	1.561	0.066		35.2
Body	NR Band n70	15	QPSK	M1	0377M	1:1	0.06	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.85	1	77	Bottom	0	Variant 2	0.097	1.561	0.113		32.9
Body	NR Band n70	15	QPSK	M1	0377M	1:1	0.09	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.86	36	22	Bottom	0	Variant 1	0.064	1.132	0.072		34.8
Body	NR Band n70	15	QPSK	M1	0377M	1:1	0.10	1702.50	340500	DFT-s-OFDM	0.0	23.5	22.86	36	22	Bottom	0	Variant 2	0.119	1.132	0.135	A36	32.2
Body	NR Band n70	15	QPSK	M1	0377M	1:1	0.13	1702.50	340500	CP-OFDM	0.0	23.5	21.85	1	1	Bottom	0	Variant 1	0.052	1.462	0.076		34.6
Body	NR Band n70	15	QPSK	M1	0377M	1:1	0.09	1702.50	340500	CP-OFDM	0.0	23.5	21.85	1	1	Bottom	0	Variant 2	0.095	1.462	0.139		32.0
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																		Body					
Spatial Peak																		1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																		averaged over 1 gram					

10.2 NR Band n66 Standalone SAR

Table 10-55
NR Band n66 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]	
Body	NR Band n66	40	QPSK	M1	0386M	1:1	0.00	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.51	1	108	Back	19	0.318	1.256	0.399		28.4	
Body	NR Band n66	40	QPSK	M1	0386M	1:1	-0.01	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.43	108	54	Back	19	0.313	1.279	0.400		28.4	
Body	NR Band n66	40	QPSK	M1	0386M	1:1	-0.01	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.51	1	108	Top	19	0.405	1.256	0.509		27.4	
Body	NR Band n66	40	QPSK	M1	0386M	1:1	0.00	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.43	108	54	Top	19	0.400	1.279	0.512		27.4	
Body	NR Band n66	40	QPSK	M1	0386M	1:1	0.13	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.51	1	108	Right	15	0.078	1.256	0.098		34.5	
Body	NR Band n66	40	QPSK	M1	0386M	1:1	-0.09	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.43	108	54	Right	15	0.070	1.279	0.090		34.9	
Body	NR Band n66	40	QPSK	M1	0505M	1:1	-0.05	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.51	1	108	Left	0	0.183	1.256	0.230		30.8	
Body	NR Band n66	40	QPSK	M1	0505M	1:1	-0.05	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.43	108	54	Left	0	0.179	1.279	0.229		30.9	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																		Body					
Spatial Peak																		1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																		averaged over 1 gram					

Table 10-56
NR Band n66 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n66	40	QPSK	M1	0386M	1:1	-0.02	1745.00	349000	DFT-s-OFDM	0.0	14.5	14.30	1	108	Back	0	N/A	0.392	1.072	0.420		18.2
Body	NR Band n66	40	QPSK	M1	0386M	1:1	-0.02	1745.00	349000	DFT-s-OFDM	0.0	14.5	14.36	108	54	Back	0	N/A	0.389	1.081	0.421		18.2
Body	NR Band n66	40	QPSK	M1	0386M	1:1	-0.01	1745.00	349000	DFT-s-OFDM	0.0	14.5	14.30	1	108	Top	0	N/A	0.556	1.072	0.596	A37	16.7
Body	NR Band n66	40	QPSK	M1	0386M	1:1	-0.01	1745.00	349000	DFT-s-OFDM	0.0	14.5	14.36	108	54	Top	0	N/A	0.551	1.081	0.596		16.7
Body	NR Band n66	40	QPSK	M1	0386M	1:1	-0.03	1745.00	349000	DFT-s-OFDM	0.0	23.5	22.06	1	108	Right	0	N/A	0.422	1.399	0.588		25.8
Body	NR Band n66	40	QPSK	M1	0363M	1:1	-0.05	1745.00	349000	DFT-s-OFDM	0.0	23.5	21.94	108	54	Right	0	N/A	0.493	1.432	0.706		25.0
Body	NR Band n66	40	QPSK	M1	0386M	1:1	-0.01	1745.00	349000	DFT-s-OFDM	0.0	23.5	21.94	108	54	Right	0	Variant 1	0.293	1.432	0.420		27.2
Body	NR Band n66	40	QPSK	M1	0386M	1:1	0.03	1745.00	349000	DFT-s-OFDM	0.0	23.5	21.94	108	54	Right	0	Variant 2	0.202	1.432	0.289		28.8
Body	NR Band n66	40	QPSK	M1	0363M	1:1	-0.14	1745.00	349000	CP-OFDM	0.0	23.5	22.00	1	1	Right	0	N/A	0.463	1.413	0.654		25.3
ANSI/IEEE C63.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 10-57
NR Band n66 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n66	40	QPSK	M1	0377M	1:1	0.08	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.51	1	108	Bottom	0	Variant 1	0.067	1.256	0.084		35.2
Body	NR Band n66	40	QPSK	M1	0377M	1:1	0.05	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.51	1	108	Bottom	0	Variant 2	0.127	1.256	0.160		32.4
Body	NR Band n66	40	QPSK	M1	0377M	1:1	0.10	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.43	108	54	Bottom	0	Variant 1	0.074	1.279	0.095		34.7
Body	NR Band n66	40	QPSK	M1	0377M	1:1	0.07	1745.00	349000	DFT-s-OFDM	0.0	24.5	23.43	108	54	Bottom	0	Variant 2	0.122	1.279	0.159	A38	32.2
Body	NR Band n66	40	QPSK	M1	0377M	1:1	0.07	1745.00	349000	CP-OFDM	1.0	23.5	22.46	1	1	Bottom	0	Variant 1	0.064	1.271	0.081		34.3
Body	NR Band n66	40	QPSK	M1	0377M	1:1	0.02	1745.00	349000	CP-OFDM	1.0	23.5	22.46	1	1	Bottom	0	Variant 2	0.132	1.271	0.168		31.2
ANSI/IEEE C63.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram					

10.3 NR Band n25 Standalone SAR

Table 10-58
NR Band n25 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n25	40	QPSK	M1	0386M	1:1	-0.03	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.58	1	108	Back	19	0.304	1.102	0.335		28.7
Body	NR Band n25	40	QPSK	M1	0386M	1:1	0.03	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.53	108	54	Back	19	0.307	1.114	0.342		28.6
Body	NR Band n25	40	QPSK	M1	0386M	1:1	-0.05	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.58	1	108	Top	19	0.366	1.102	0.403		27.9
Body	NR Band n25	40	QPSK	M1	0386M	1:1	-0.01	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.53	108	54	Top	19	0.376	1.114	0.419		27.7
Body	NR Band n25	40	QPSK	M1	0386M	1:1	0.14	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.58	1	108	Right	15	0.092	1.102	0.101		33.9
Body	NR Band n25	40	QPSK	M1	0386M	1:1	-0.10	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.53	108	54	Right	15	0.084	1.114	0.094		34.2
Body	NR Band n25	40	QPSK	M1	0505M	1:1	-0.05	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.58	1	108	Left	0	0.432	1.102	0.476		27.2
Body	NR Band n25	40	QPSK	M1	0505M	1:1	0.09	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.53	108	54	Left	0	0.400	1.114	0.446		27.5
ANSI/IEEE C63.1.1992 - SAFETY LIMIT																		Body				
Spatial Peak																		1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																		averaged over 1 gram				

Table 10-59
NR Band n25 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n25	40	QPSK	M1	0386M	1:1	-0.01	1882.50	376500	DFT-s-OFDM	0.0	12.0	11.42	1	108	Back	0	N/A	0.361	1.143	0.413		15.8
Body	NR Band n25	40	QPSK	M1	0386M	1:1	-0.01	1882.50	376500	DFT-s-OFDM	0.0	12.0	11.49	108	54	Back	0	N/A	0.365	1.125	0.411		15.8
Body	NR Band n25	40	QPSK	M1	0386M	1:1	-0.01	1882.50	376500	DFT-s-OFDM	0.0	12.0	11.42	1	108	Top	0	N/A	0.426	1.143	0.487		15.1
Body	NR Band n25	40	QPSK	M1	0386M	1:1	-0.07	1882.50	376500	DFT-s-OFDM	0.0	12.0	11.49	108	54	Top	0	N/A	0.430	1.125	0.484		15.1
Body	NR Band n25	40	QPSK	M1	0386M	1:1	-0.08	1882.50	376500	CP-OFDM	0.0	12.0	11.44	1	1	Top	0	N/A	0.436	1.138	0.496	A39	15.0
Body	NR Band n25	40	QPSK	M1	0505M	1:1	0.08	1882.50	376500	CP-OFDM	0.0	12.0	11.44	1	1	Top	0	Variant 1	0.252	1.138	0.287		17.4
Body	NR Band n25	40	QPSK	M1	0505M	1:1	0.18	1882.50	376500	CP-OFDM	0.5	12.0	11.44	1	1	Top	0	Variant 2	0.320	1.138	0.345		16.6
Body	NR Band n25	40	QPSK	M1	0386M	1:1	0.01	1882.50	376500	DFT-s-OFDM	0.0	18.5	17.52	1	108	Right	0	N/A	0.283	1.253	0.355		23.0
Body	NR Band n25	40	QPSK	M1	0386M	1:1	0.06	1882.50	376500	DFT-s-OFDM	0.0	18.5	17.50	108	54	Right	0	N/A	0.284	1.259	0.358		22.9
ANSI/IEEE C63.1.1992 - SAFETY LIMIT																		Body					
Uncontrolled Exposure/General Population																		1.6 W/kg (mW/g)					
																		averaged over 1 gram					

Table 10-60
NR Band n25 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n25	40	QPSK	M1	0377M	1:1	0.07	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.58	1	108	Bottom	0	Variant 1	0.099	1.102	0.109		33.6
Body	NR Band n25	40	QPSK	M1	0377M	1:1	0.16	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.58	1	108	Bottom	0	Variant 2	0.229	1.102	0.252	A40	29.9
Body	NR Band n25	40	QPSK	M1	0377M	1:1	-0.01	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.53	108	54	Bottom	0	Variant 1	0.099	1.114	0.110		33.5
Body	NR Band n25	40	QPSK	M1	0377M	1:1	0.07	1882.50	376500	DFT-s-OFDM	0.0	24.0	23.53	108	54	Bottom	0	Variant 2	0.228	1.114	0.254		29.9
Body	NR Band n25	40	QPSK	M1	0377M	1:1	0.07	1882.50	376500	CP-OFDM	0.5	23.5	22.33	1	1	Bottom	0	Variant 1	0.075	1.309	0.098		33.5
Body	NR Band n25	40	QPSK	M1	0377M	1:1	0.06	1882.50	376500	CP-OFDM	0.5	23.5	22.33	1	1	Bottom	0	Variant 2	0.201	1.309	0.263		29.2
ANSI/IEEE C63.1.1992 - SAFETY LIMIT																		Body					
Spatial Peak																		1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																		averaged over 1 gram					

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																		Approved by: Technical Manager			
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																		Page 130 of 298			

10.4 NR Band n30 Standalone SAR

Table 10-61
NR Band n30 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n30	10	QPSK	M1	0385M	1:1	-0.05	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.56	1	26	Back	19	0.276	1.393	0.384		28.1
Body	NR Band n30	10	QPSK	M1	0385M	1:1	0.01	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.66	25	14	Back	19	0.274	1.361	0.373		28.2
Body	NR Band n30	10	QPSK	M1	0383M	1:1	-0.10	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.56	1	26	Top	19	0.218	1.393	0.304		29.1
Body	NR Band n30	10	QPSK	M1	0383M	1:1	-0.01	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.66	25	14	Top	19	0.212	1.361	0.289		29.3
Body	NR Band n30	10	QPSK	M1	0383M	1:1	0.05	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.56	1	26	Right	15	0.027	1.393	0.038		38.2
Body	NR Band n30	10	QPSK	M1	0383M	1:1	0.02	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.66	25	14	Right	15	0.025	1.361	0.034		38.6
Body	NR Band n30	10	QPSK	M1	0383M	1:1	0.02	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.56	1	26	Left	0	0.042	1.393	0.059		36.3
Body	NR Band n30	10	QPSK	M1	0383M	1:1	0.05	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.66	25	14	Left	0	0.043	1.361	0.059		36.3
ANSI/IEEE C63.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																	Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 10-62
NR Band n30 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]	
Body	NR Band n30	10	QPSK	M1	0377M	1:1	0.01	2310.00	462000	DFT-s-OFDM	0.0	11.5	10.15	1	26	Back	0	N/A	0.294	1.365	0.401		15.4	
Body	NR Band n30	10	QPSK	M1	0377M	1:1	0.00	2310.00	462000	DFT-s-OFDM	0.0	11.5	10.23	25	27	Back	0	N/A	0.293	1.340	0.393		15.5	
Body	NR Band n30	10	QPSK	M1	0505M	1:1	-0.07	2310.00	462000	DFT-s-OFDM	0.0	11.5	10.15	1	26	Top	0	N/A	0.480	1.365	0.655		13.3	
Body	NR Band n30	10	QPSK	M1	0505M	1:1	-0.05	2310.00	462000	DFT-s-OFDM	0.0	11.5	10.23	1	26	Top	0	Variant 1	0.335	1.365	0.457		14.8	
Body	NR Band n30	10	QPSK	M1	0505M	1:1	-0.06	2310.00	462000	DFT-s-OFDM	0.0	11.5	10.35	1	26	Top	0	Variant 2	0.382	1.365	0.521		14.3	
Body	NR Band n30	10	QPSK	M1	0505M	1:1	-0.11	2310.00	462000	DFT-s-OFDM	0.0	11.5	10.23	25	27	Top	0	N/A	0.479	1.340	0.642		13.4	
Body	NR Band n30	10	QPSK	M1	0505M	1:1	0.00	2310.00	462000	CP-OFDM	0.0	11.5	10.32	1	1	Top	0	N/A	0.483	1.312	0.634	A41	13.4	
Body	NR Band n30	10	QPSK	M1	0383M	1:1	0.04	2310.00	462000	DFT-s-OFDM	0.0	21.0	19.91	1	26	Right	0	N/A	0.145	1.285	0.186		28.2	
Body	NR Band n30	10	QPSK	M1	0383M	1:1	0.02	2310.00	462000	DFT-s-OFDM	0.0	21.0	19.90	25	27	Right	0	N/A	0.138	1.288	0.178		28.5	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																							Body 1.6 W/kg (mW/g) averaged over 1 gram	

Table 10-63
NR Band n30 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n30	10	QPSK	M1	0362M	1:1	-0.01	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.56	1	26	Bottom	0	Variant 1	0.066	1.393	0.064		35.9
Body	NR Band n30	10	QPSK	M1	0362M	1:1	-0.16	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.56	1	26	Bottom	0	Variant 2	0.093	1.393	0.130		32.8
Body	NR Band n30	10	QPSK	M1	0362M	1:1	0.12	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.66	25	14	Bottom	0	Variant 1	0.093	1.361	0.072		35.4
Body	NR Band n30	10	QPSK	M1	0362M	1:1	-0.12	2310.00	462000	DFT-s-OFDM	0.0	24.0	22.66	25	14	Bottom	0	Variant 2	0.116	1.361	0.158	A42	32.0
Body	NR Band n30	10	QPSK	M1	0362M	1:1	0.04	2310.00	462000	CP-OFDM	1.5	22.5	21.52	1	1	Bottom	0	Variant 1	0.028	1.253	0.048		35.7
Body	NR Band n30	10	QPSK	M1	0362M	1:1	-0.06	2310.00	462000	CP-OFDM	1.5	22.5	21.52	1	1	Bottom	0	Variant 2	0.087	1.253	0.109		32.1
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																	Body						
Spatial Peak																	1.6 W/kg (mW/g)						
Uncontrolled Exposure/General Population																	averaged over 1 gram						

10.1 NR Band n7 Standalone SAR

Table 10-64
NR Band n7 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	NR Band n7	40	QPSK	M1	0386M	1:1	0.00	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.21	1	214	Back	19	N/A	0.340	1.199	0.408	
Body	NR Band n7	40	QPSK	M1	0386M	1:1	0.02	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.19	108	54	Back	19	N/A	0.349	1.205	0.421	
Body	NR Band n7	40	QPSK	M1	0383M	1:1	-0.02	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.21	1	214	Top	19	N/A	0.525	1.199	0.629	
Body	NR Band n7	40	QPSK	M1	0386M	1:1	0.00	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.19	108	54	Top	19	N/A	0.545	1.205	0.657	A43
Body	NR Band n7	40	QPSK	M1	0386M	1:1	0.01	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.19	108	54	Top	19	Variant 1	0.451	1.205	0.507	
Body	NR Band n7	40	QPSK	M1	0386M	1:1	0.01	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.19	108	54	Top	19	Variant 2	0.454	1.205	0.547	
Body	NR Band n7	40	QPSK	M1	0383M	1:1	0.02	2535.00	507000	DFT-s-OFDM	0.0	24.0	22.53	216	0	Top	19	N/A	0.474	1.403	0.665	
Body	NR Band n7	40	QPSK	M1	0382M	1:1	-0.10	2535.00	507000	CP-OFDM	0.5	23.5	22.18	1	1	Top	19	N/A	0.483	1.355	0.654	
Body	NR Band n7	40	QPSK	M1	0383M	1:1	0.02	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.21	1	214	Right	15	N/A	0.121	1.199	0.145	
Body	NR Band n7	40	QPSK	M1	0383M	1:1	0.13	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.19	108	54	Right	15	N/A	0.112	1.205	0.135	
Body	NR Band n7	40	QPSK	M1	0383M	1:1	0.02	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.21	1	214	Left	0	N/A	0.242	1.199	0.290	
Body	NR Band n7	40	QPSK	M1	0383M	1:1	0.03	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.19	108	54	Left	0	N/A	0.288	1.205	0.341	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																	Body					
Spatial Peak																	1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																	averaged over 1 gram					

Table 10-65
NR Band n7 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n7	40	QPSK	M1	0386M	1:1	-0.01	2535.00	507000	DFT-s-OFDM	0.0	10.5	9.90	1	214	Back	0	0.530	1.148	0.608		12.6
Body	NR Band n7	40	QPSK	M1	0386M	1:1	0.01	2535.00	507000	DFT-s-OFDM	0.0	10.5	9.69	108	54	Back	0	0.537	1.205	0.647		12.3
Body	NR Band n7	40	QPSK	M1	0386M	1:1	-0.02	2535.00	507000	DFT-s-OFDM	0.0	10.5	9.90	1	214	Top	0	0.495	1.148	0.568		12.9
Body	NR Band n7	40	QPSK	M1	0386M	1:1	0.01	2535.00	507000	DFT-s-OFDM	0.0	10.5	9.69	108	54	Top	0	0.509	1.205	0.613		12.6
Body	NR Band n7	40	QPSK	M1	0383M	1:1	0.08	2535.00	507000	DFT-s-OFDM	0.0	20.0	19.00	1	1	Right	0	0.292	1.259	0.368		24.3
Body	NR Band n7	40	QPSK	M1	0383M	1:1	0.02	2535.00	507000	DFT-s-OFDM	0.0	20.0	18.85	108	54	Right	0	0.318	1.303	0.414		23.8
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																						
Spatial Peak																		Body				
Uncontrolled Exposure/General Population																		1.6 W/kg (mW/g) averaged over 1 gram				

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																	Approved by: Technical Manager			
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																	Page 131 of 298			

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-66
NR Band n7 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPE [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n7	40	QPSK	M1	0362M	1:1	-0.11	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.21	1	214	Bottom	0	Variant 1	0.067	1.199	0.080		34.9
Body	NR Band n7	40	QPSK	M1	0362M	1:1	-0.07	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.21	1	214	Bottom	0	Variant 2	0.145	1.199	0.171		31.6
Body	NR Band n7	40	QPSK	M1	0362M	1:1	0.04	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.39	108	54	Bottom	0	Variant 1	0.072	1.205	0.087		34.6
Body	NR Band n7	40	QPSK	M1	0362M	1:1	-0.12	2535.00	507000	DFT-s-OFDM	0.0	24.0	23.19	108	54	Bottom	0	Variant 2	0.149	1.205	0.180	A44	31.4
Body	NR Band n7	40	QPSK	M1	0362M	1:1	-0.04	2535.00	507000	CP-OFDM	0.5	23.5	22.48	1	1	Bottom	0	Variant 1	0.061	1.355	0.083		34.3
Body	NR Band n7	40	QPSK	M1	0362M	1:1	0.05	2535.00	507000	CP-OFDM	0.5	23.5	22.38	1	1	Bottom	0	Variant 2	0.117	1.355	0.159		31.4
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																			Body				
Spatial Peak																			1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																			averaged over 1 gram				

10.2 NR Band n41 Standalone SAR

Table 10-67
NR Band n41 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPE [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]	
Body	NR Band n41	100	QPSK	M1	2004M	1:1	0.12	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.67	1	1	Back	19	0.075	1.079	0.081		29.9	
Body	NR Band n41	100	QPSK	M1	2004M	1:1	0.10	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.73	135	0	Back	19	0.069	1.064	0.073		30.3	
Body	NR Band n41	100	QPSK	M1	2004M	1:1	-0.01	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.67	1	1	Top	19	0.143	1.079	0.154		27.1	
Body	NR Band n41	100	QPSK	M1	2004M	1:1	-0.09	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.73	135	0	Top	19	0.113	1.064	0.142		27.4	
Body	NR Band n41	100	QPSK	M1	2004M	1:1	0.09	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.67	1	1	Right	15	0.038	1.079	0.030		34.1	
Body	NR Band n41	100	QPSK	M1	2004M	1:1	0.15	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.73	135	0	Right	15	0.032	1.064	0.034		33.6	
Body	NR Band n41	100	QPSK	M1	2004M	1:1	0.03	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.67	1	1	Left	0	0.057	1.079	0.062		31.1	
Body	NR Band n41	100	QPSK	M1	2004M	1:1	0.04	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.73	135	0	Left	0	0.061	1.064	0.065		30.8	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																			Body				
Spatial Peak																			1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																			averaged over 1 gram				
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]					
Body	NR Band n41	100	S2	0374M	1:1	0.11	2592.99	518598	CW/SRS	17.0	16.30	Back	19	0.031	1.175	0.036		31.3					
Body	NR Band n41	100	S2	0374M	1:1	0.03	2592.99	518598	CW/SRS	17.0	16.30	Bottom	19	0.049	1.175	0.058		29.3					
Body	NR Band n41	100	S2	0374M	1:1	0.02	2592.99	518598	CW/SRS	17.0	16.30	Right	0	0.088	1.175	0.103		26.8					
Body	NR Band n41	100	S2	0374M	1:1	0.05	2592.99	518598	CW/SRS	17.0	16.30	Left	0	0.025	1.175	0.029		32.3					
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																			Body				
Spatial Peak																			1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																			averaged over 1 gram				
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]					
Body	NR Band n41	100	S4	0374M	1:1	0.18	2592.99	518598	CW/SRS	18.5	17.55	Back	19	0.009	1.245	0.011		38.0					
Body	NR Band n41	100	S4	0374M	1:1	0.09	2592.99	518598	CW/SRS	18.5	17.55	Bottom	19	0.005	1.245	0.006		40.5					
Body	NR Band n41	100	S4	0374M	1:1	0.00	2592.99	518598	CW/SRS	18.5	17.55	Right	0	0.006	1.245	0.007		39.7					
Body	NR Band n41	100	S4	0374M	1:1	0.04	2592.99	518598	CW/SRS	18.5	17.55	Left	0	0.091	1.245	0.113		27.9					
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																			Body				
Spatial Peak																			1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																			averaged over 1 gram				
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]					
Body	NR Band n41	100	S1	0374M	1:1	-0.07	2592.99	518598	CW/SRS	15.0	14.44	Back	19	0.036	1.138	0.041		28.8					
Body	NR Band n41	100	S1	0374M	1:1	0.19	2592.99	518598	CW/SRS	15.0	14.44	Top	0	0.002	1.138	0.002		41.4					
Body	NR Band n41	100	S1	0374M	1:1	0.04	2592.99	518598	CW/SRS	15.0	14.44	Bottom	19	0.004	1.138	0.005		38.4					
Body	NR Band n41	100	S1	0374M	1:1	-0.21	2592.99	518598	CW/SRS	15.0	14.44	Right	15	0.009	1.138	0.010		34.8					
Body	NR Band n41	100	S1	0374M	1:1	-0.05	2592.99	518598	CW/SRS	15.0	14.44	Left	0	0.001	1.138	0.001		44.4					
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																			Body				
Spatial Peak																			1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																			averaged over 1 gram				

Table 10-68
NR Band n41 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPE [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n41	100	QPSK	M1	0374M	1:1	-0.08	2592.99	518598	DFT-s-OFDM	0.0	12.0	11.68	1	271	Back	0	N/A	0.528	1.076	0.568		14.4
Body	NR Band n41	100	QPSK	M1	0374M	1:1	-0.01	2592.99	518598	DFT-s-OFDM	0.0	12.0	11.53	135	138	Back	0	N/A	0.528	1.114	0.588		14.3
Body	NR Band n41	100	QPSK	M1	0374M	1:1	0.00	2592.99	518598	DFT-s-OFDM	0.0	12.0	11.68	1	271	Top	0	N/A	0.558	1.076	0.600		14.2
Body	NR Band n41	100	QPSK	M1	0374M	1:1	0.02	2592.99	518598	DFT-s-OFDM	0.0	12.0	11.53	135	138	Top	0	N/A	0.540	1.114	0.602		14.2
Body	NR Band n41	100	QPSK	M1	0374M	1:1	0.00	2592.99	518598	DFT-s-OFDM	0.0	12.0	11.37	270	0	Top	0	N/A	0.538	1.156	0.622		14.0
Body	NR Band n41	100	QPSK	M1	0374M	1:1	0.01	2592.99	518598	CP-OFDM	0.0	12.0	11.11	1	1	Top	0	N/A	0.530	1.227	0.650		13.8
Body	NR Band n41	100	QPSK	M1	0374M	1:1	-0.01	2592.99	518598	CP-OFDM	0.0	12.0	11.11	1	1	Top	0	Variant 2	0.469	1.227	0.575		14.3
Body	NR Band n41	100	QPSK	M1	0374M	1:1	-0.05	2592.99	518598	CP-OFDM	0.0	12.0	11.11	1	1	Top	0	Variant 1	0.435	1.227	0.534		14.7
Body	NR Band n41	100	QPSK	M1	0374M	1:1	0.02	2592.99	518598	DFT-s-OFDM	0.0	12.0	11.68	1	271	Right	0	N/A	0.065	1.076	0.070		23.5
Body	NR Band n41	100	QPSK	M1	0374M	1:1	-0.03	2592.99	518598	DFT-s-OFDM	0.0	12.0	11.53	135	138	Right	0	N/A	0.055	1.114	0.061		24.1
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																			Body				
Spatial Peak																			1.6 W/kg (mW/g)				
Uncontrolled Exposure (General Population)																			Weighted over 10 g mean				

Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n41	100	S2	0374M	1:1	0.07	2592.99	518598	CW/SRS	12.0	10.99	Back	0	N/A	0.381	1.262	0.481		15.1
Body	NR Band n41	100	S2	0374M	1:1	0.01	2592.99	518598	CW/SRS	12.0	10.99	Bottom	0	N/A	0.582	1.262	0.734	A45	13.3
Body	NR Band n41	100	S2	0374M	1:1	0.01	2592.99	518598	CW/SRS	12.0	10.99	Bottom	0	Variant 2	0.391	1.262	0.493		15.0
Body	NR Band n41	100	S2	0374M	1:1	-0.02	2592.99	518598	CW/SRS	12.0	10.99	Bottom	0	Variant 1	0.333	1.262	0.420		15.7
ANS/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n41	100	S4	0374M	1:1	0.03	2592.99	518598	CW/SRS	12.0	10.96	Back	0	N/A	0.138	1.271	0.175		19.5
Body	NR Band n41	100	S4	0374M	1:1	0.07	2592.99	518598	CW/SRS	12.0	10.96	Back	0	Variant 1	0.004	1.271	0.005		34.9
Body	NR Band n41	100	S4	0374M	1:1	0.06	2592.99	518598	CW/SRS	12.0	10.96	Back	0	Variant 2	0.007	1.271	0.009		32.5
Body	NR Band n41	100	S4	0374M	1:1	0.03	2592.99	518598	CW/SRS	12.0	10.96	Bottom	0	N/A	0.110	1.271	0.140		20.5
ANS/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n41	100	S1	0374M	1:1	0.07	2592.99	518598	CW/SRS	12.5	11.50	Back	0	N/A	0.566	1.259	0.713		13.9
Body	NR Band n41	100	S1	0374M	1:1	-0.03	2592.99	518598	CW/SRS	12.5	11.50	Back	0	Variant 2	0.017	1.259	0.021		29.1
Body	NR Band n41	100	S1	0374M	1:1	-0.05	2592.99	518598	CW/SRS	12.5	11.50	Back	0	Variant 1	0.013	1.259	0.016		30.3
Body	NR Band n41	100	S1	0374M	1:1	-0.05	2592.99	518598	CW/SRS	12.5	11.50	Bottom	0	N/A	0.133	1.259	0.167		20.2
Body	NR Band n41	100	S1	0374M	1:1	0.00	2592.99	518598	CW/SRS	12.5	11.50	Right	0	N/A	0.273	1.259	0.344		17.1
ANS/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-69
NR Band n41 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n41	100	QPSK	M1	0374M	1:1	0.10	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.67	1	1	Bottom	0	Variant 2	0.039	1.079	0.042		32.7
Body	NR Band n41	100	QPSK	M1	0374M	1:1	-0.04	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.67	1	1	Bottom	0	Variant 1	0.018	1.079	0.019		36.1
Body	NR Band n41	100	QPSK	M1	0374M	1:1	0.01	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.73	135	0	Bottom	0	Variant 2	0.005	1.064	0.048		32.1
Body	NR Band n41	100	QPSK	M1	0374M	1:1	-0.08	2592.99	518598	DFT-s-OFDM	0.0	19.0	18.73	135	0	Bottom	0	Variant 1	0.020	1.064	0.021		35.7
Body	NR Band n41	100	QPSK	M1	0374M	1:1	0.13	2592.99	518598	CP-OFDM	0.0	19.0	18.69	1	1	Bottom	0	Variant 2	0.040	1.074	0.043		32.6
Body	NR Band n41	100	QPSK	M1	0374M	1:1	0.21	2592.99	518598	CP-OFDM	0.0	19.0	18.69	1	1	Bottom	0	Variant 1	0.019	1.074	0.020		35.9
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n41	100	S2	0374M	1:1	0.03	2592.99	518598	CW/SRS	17.0	16.30	Bottom	0	Variant 1	0.003	1.175	0.004		41.5				
Body	NR Band n41	100	S2	0374M	1:1	0.02	2592.99	518598	CW/SRS	17.0	16.30	Bottom	0	Variant 2	0.012	1.175	0.014		35.5				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n41	100	S4	0374M	1:1	0.01	2592.99	518598	CW/SRS	18.5	17.55	Bottom	0	Variant 1	0.015	1.245	0.019		35.7				
Body	NR Band n41	100	S4	0374M	1:1	-0.01	2592.99	518598	CW/SRS	18.5	17.55	Bottom	0	Variant 2	0.045	1.245	0.056	A46	31.0				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n41	100	S1	0374M	1:1	0.01	2592.99	518598	CW/SRS	15.0	14.44	Bottom	0	Variant 1	0.000	1.138	0.000		54.4				
Body	NR Band n41	100	S1	0374M	1:1	0.03	2592.99	518598	CW/SRS	15.0	14.44	Bottom	0	Variant 2	0.000	1.138	0.000		54.4				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 133 of 298

10.3 NR Band n48 Standalone SAR

Table 10-70
NR Band n48 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n48	40	QPSK	S4	2023M	1:1	-0.04	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.91	1	1	Back	19	0.032	1.021	0.033		32.8
Body	NR Band n48	40	QPSK	S4	2023M	1:1	0.07	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.92	50	0	Back	19	0.031	1.019	0.032		33.0
Body	NR Band n48	40	QPSK	S4	2023M	1:1	0.19	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.91	1	1	Bottom	19	0.050	1.021	0.051		30.9
Body	NR Band n48	40	QPSK	S4	2023M	1:1	-0.09	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.92	50	0	Bottom	19	0.049	1.019	0.050		31.0
Body	NR Band n48	40	QPSK	S4	2023M	1:1	0.02	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.91	1	1	Right	0	0.067	1.021	0.068		29.6
Body	NR Band n48	40	QPSK	S4	2023M	1:1	0.20	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.92	50	0	Right	0	0.062	1.019	0.063		29.9
Body	NR Band n48	40	QPSK	S4	2023M	1:1	0.04	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.91	1	1	Left	0	0.180	1.021	0.184		25.3
Body	NR Band n48	40	QPSK	S4	2023M	1:1	-0.04	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.92	50	0	Left	0	0.173	1.019	0.176		25.5
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population															averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n48	40	M2	0374M	1:1	0.02	3624.99	641666	CW/SRS	15.0	14.26	Back	19	0.042	1.186	0.050		28.0				
Body	NR Band n48	40	M2	0374M	1:1	0.09	3624.99	641666	CW/SRS	15.0	14.26	Top	0	0.024	1.186	0.028		30.4				
Body	NR Band n48	40	M2	0374M	1:1	-0.06	3624.99	641666	CW/SRS	15.0	14.26	Bottom	19	0.040	1.186	0.047		28.2				
Body	NR Band n48	40	M2	0374M	1:1	0.02	3624.99	641666	CW/SRS	15.0	14.26	Right	0	0.009	1.186	0.011		34.7				
Body	NR Band n48	40	M2	0374M	1:1	0.03	3624.99	641666	CW/SRS	15.0	14.26	Left	15	0.093	1.186	0.110		24.5				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population															averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n48	40	S2	0374M	1:1	0.03	3679.98	645332	CW/SRS	14.0	13.95	Back	19	0.023	1.012	0.023		30.3				
Body	NR Band n48	40	S2	0374M	1:1	0.03	3679.98	645332	CW/SRS	14.0	13.95	Top	0	0.000	1.012	0.000		53.9				
Body	NR Band n48	40	S2	0374M	1:1	0.02	3679.98	645332	CW/SRS	14.0	13.95	Bottom	19	0.014	1.012	0.014		32.4				
Body	NR Band n48	40	S2	0374M	1:1	0.03	3679.98	645332	CW/SRS	14.0	13.95	Right	0	0.307	1.012	0.311		19.0				
Body	NR Band n48	40	S2	0374M	1:1	0.05	3679.98	645332	CW/SRS	14.0	13.95	Left	0	0.015	1.012	0.015		32.1				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population															averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n48	40	S3	0374M	1:1	0.08	3624.99	641666	CW/SRS	17.5	17.04	Back	19	0.017	1.112	0.019		34.7				
Body	NR Band n48	40	S3	0374M	1:1	0.08	3624.99	641666	CW/SRS	17.5	17.04	Top	19	0.017	1.112	0.019		34.7				
Body	NR Band n48	40	S3	0374M	1:1	-0.09	3624.99	641666	CW/SRS	17.5	17.04	Bottom	0	0.013	1.112	0.014		35.9				
Body	NR Band n48	40	S3	0374M	1:1	0.05	3624.99	641666	CW/SRS	17.5	17.04	Right	0	0.000	1.112	0.000		57.0				
Body	NR Band n48	40	S3	0374M	1:1	-0.20	3624.99	641666	CW/SRS	17.5	17.04	Left	15	0.054	1.112	0.060		29.7				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body							
Spatial Peak															1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population															averaged over 1 gram							

Table 10-71
NR Band n48 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n48	40	QPSK	S4	0374M	1:1	0.03	3624.99	641666	DFT-s-OFDM	0.0	11.0	10.72	1	1	Back	0	N/A	0.512	1.067	0.546		13.6
Body	NR Band n48	40	QPSK	S4	0374M	1:1	0.05	3624.99	641666	DFT-s-OFDM	0.0	11.0	10.88	50	0	Back	0	N/A	0.523	1.028	0.538		13.6
Body	NR Band n48	40	QPSK	S4	0374M	1:1	-0.02	3624.99	641666	DFT-s-OFDM	0.0	11.0	10.88	50	0	Back	0	Variant 1	0.037	1.028	0.038		25.1
Body	NR Band n48	40	QPSK	S4	0374M	1:1	0.03	3624.99	641666	DFT-s-OFDM	0.0	11.0	10.88	50	0	Back	0	Variant 2	0.033	1.028	0.034		25.6
Body	NR Band n48	40	QPSK	S4	0374M	1:1	-0.01	3679.98	645332	CP-OFDM	0.0	11.0	10.70	1	1	Back	0	N/A	0.485	1.072	0.520		13.8
Body	NR Band n48	40	QPSK	S4	0374M	1:1	-0.05	3624.99	641666	DFT-s-OFDM	0.0	11.0	10.72	1	1	Bottom	0	N/A	0.447	1.067	0.477		14.2
Body	NR Band n48	40	QPSK	S4	0374M	1:1	0.01	3624.99	641666	DFT-s-OFDM	0.0	11.0	10.88	50	0	Bottom	0	N/A	0.446	1.028	0.458		14.3
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body							
Spatial Peak																1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population																averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n48	40	M2	0374M	1:1	0.05	3679.98	645332	CW/SRS	8.0	7.75	Back	0	N/A	0.425	1.059	0.450		11.4				
Body	NR Band n48	40	M2	0374M	1:1	0.03	3679.98	645332	CW/SRS	8.0	7.75	Back	0	Variant 2	0.024	1.059	0.025		23.9				
Body	NR Band n48	40	M2	0374M	1:1	-0.10	3679.98	645332	CW/SRS	8.0	7.75	Back	0	Variant 1	0.039	1.059	0.041		21.8				
Body	NR Band n48	40	M2	0374M	1:1	0.04	3679.98	645332	CW/SRS	8.0	7.75	Bottom	0	N/A	0.182	1.059	0.193		15.1				
Body	NR Band n48	40	M2	0374M	1:1	0.01	3679.98	645332	CW/SRS	8.0	7.75	Left	0	N/A	0.413	1.059	0.437		11.5				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body							
Spatial Peak																1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population																averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n48	40	S2	0374M	1:1	-0.01	3624.99	641666	CW/SRS	10.5	10.40	Back	0	N/A	0.371	1.023	0.380		14.7				
Body	NR Band n48	40	S2	0374M	1:1	0.03	3624.99	641666	CW/SRS	10.5	10.40	Back	0	Variant 1	0.023	1.023	0.024		26.7				
Body	NR Band n48	40	S2	0374M	1:1	0.02	3624.99	641666	CW/SRS	10.5	10.40	Back	0	Variant 2	0.022	1.023	0.023		26.9				
Body	NR Band n48	40	S2	0374M	1:1	0.01	3624.99	641666	CW/SRS	10.5	10.40	Bottom	0	N/A	0.231	1.023	0.236		16.7				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body							
Spatial Peak																1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population																averaged over 1 gram							

Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n48	40	S3	0374M	1:1	0.06	3624.99	641666	CW/SRS	10.5	10.49	Back	0	N/A	0.451	1.002	0.452		13.9
Body	NR Band n48	40	S3	0374M	1:1	-0.14	3624.99	641666	CW/SRS	10.5	10.49	Top	0	N/A	0.115	1.002	0.115		19.8
Body	NR Band n48	40	S3	0374M	1:1	-0.04	3570.00	638000	CW/SRS	10.5	9.61	Left	0	N/A	0.725	1.227	0.890		11.0
Body	NR Band n48	40	S3	0374M	1:1	0.03	3570.00	638000	CW/SRS	10.5	9.61	Left	0	Variant 1	0.073	1.227	0.090		20.9
Body	NR Band n48	40	S3	0374M	1:1	0.01	3570.00	638000	CW/SRS	10.5	9.61	Left	0	Variant 2	0.366	1.227	0.449		13.9
Body	NR Band n48	40	S3	0374M	1:1	-0.15	3624.99	641666	CW/SRS	10.5	10.49	Left	0	N/A	0.761	1.002	0.763	A47	11.6
Body	NR Band n48	40	S3	0374M	1:1	-0.04	3679.98	645332	CW/SRS	10.5	10.30	Left	0	N/A	0.720	1.047	0.754		11.7
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-72
NR Band n48 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n48	40	QPSK	S4	0374M	1:1	-0.10	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.91	1	1	Bottom	0	Variant 1	0.096	1.021	0.057		30.4
Body	NR Band n48	40	QPSK	S4	0374M	1:1	-0.01	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.91	1	1	Bottom	0	Variant 2	0.141	1.021	0.144		26.4
Body	NR Band n48	40	QPSK	S4	0374M	1:1	0.05	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.92	50	0	Bottom	0	Variant 1	0.095	1.019	0.056		30.5
Body	NR Band n48	40	QPSK	S4	0374M	1:1	-0.05	3624.99	641666	DFT-s-OFDM	0.0	18.0	17.92	50	0	Bottom	0	Variant 2	0.143	1.019	0.146		26.3
Body	NR Band n48	40	QPSK	S4	0374M	1:1	0.02	3624.99	641666	CP-OFDM	0.0	18.0	17.70	1	1	Bottom	0	Variant 1	0.096	1.072	0.060		30.2
Body	NR Band n48	40	QPSK	S4	0374M	1:1	0.00	3624.99	641666	CP-OFDM	0.0	18.0	17.70	1	1	Bottom	0	Variant 2	0.144	1.072	0.154		26.1
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram					
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n48	40	M2	0374M	1:1	0.04	3679.98	645332	CW/SRS	8.0	7.75	Bottom	0	Variant 1	0.065	1.059	0.069		19.6				
Body	NR Band n48	40	M2	0374M	1:1	-0.01	3679.98	645332	CW/SRS	8.0	7.75	Bottom	0	Variant 2	0.249	1.059	0.264	A48	13.7				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram					
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n48	40	S2	0374M	1:1	0.02	3679.98	645332	CW/SRS	14.0	13.95	Bottom	0	Variant 1	0.007	1.012	0.007		35.4				
Body	NR Band n48	40	S2	0374M	1:1	0.08	3679.98	645332	CW/SRS	14.0	13.95	Bottom	0	Variant 2	0.018	1.012	0.018		31.3				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram					
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n48	40	S3	0374M	1:1	-0.15	3624.99	641666	CW/SRS	10.5	10.49	Bottom	0	Variant 2	0.245	1.002	0.245		16.5				
Body	NR Band n48	40	S3	0374M	1:1	-0.07	3624.99	641666	CW/SRS	10.5	10.49	Bottom	0	Variant 1	0.038	1.002	0.038		24.6				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram					

10.4 NR Band n77 Standalone SAR

Table 10-73
NR Band n77 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n77	100	QPSK	M2	0386M	1:1	-0.05	3750.00	650000	DFT-s-OFDM	0.0	19.0	18.97	1	137	Back	19	0.039	1.007	0.039		33.0
Body	NR Band n77	100	QPSK	M2	0386M	1:1	0.06	3750.00	650000	DFT-s-OFDM	0.0	19.0	18.83	135	69	Back	19	0.051	1.040	0.053		31.7
Body	NR Band n77	100	QPSK	M2	0376M	1:1	-0.15	3750.00	650000	DFT-s-OFDM	0.0	19.0	18.97	1	137	Bottom	19	0.030	1.007	0.030		34.1
Body	NR Band n77	100	QPSK	M2	0376M	1:1	0.13	3750.00	650000	DFT-s-OFDM	0.0	19.0	18.83	135	69	Bottom	19	0.034	1.040	0.035		33.5
Body	NR Band n77	100	QPSK	M2	0386M	1:1	0.07	3750.00	650000	DFT-s-OFDM	0.0	19.0	18.97	1	137	Right	0	0.000	1.007	0.000		58.9
Body	NR Band n77	100	QPSK	M2	0386M	1:1	0.07	3750.00	650000	DFT-s-OFDM	0.0	19.0	18.83	135	69	Right	0	0.000	1.040	0.000		58.8
Body	NR Band n77	100	QPSK	M2	0386M	1:1	0.09	3750.00	650000	DFT-s-OFDM	0.0	19.0	18.97	1	137	Left	15	0.084	1.007	0.085		29.7
Body	NR Band n77	100	QPSK	M2	0386M	1:1	0.11	3750.00	650000	DFT-s-OFDM	0.0	19.0	18.83	135	69	Left	15	0.083	1.040	0.086		29.6
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																		Body				
Spatial Peak																		1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																		averaged over 1 gram				

Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]	
Body	NR Band n77	100	S2	0362M	1:1	0.00	3930.00	662000	CW/SRS	16.5	16.00	Back	19	N/A	0.042	1.122	0.047		29.7	
Body	NR Band n77	100	S2	0362M	1:1	0.05	3930.00	662000	CW/SRS	16.5	16.00	Top	0	N/A	0.001	1.122	0.001		46.0	
Body	NR Band n77	100	S2	0362M	1:1	0.03	3930.00	662000	CW/SRS	16.5	16.00	Bottom	19	N/A	0.013	1.122	0.015		34.8	
Body	NR Band n77 DoD	100	S2	0362M	1:1	0.01	3500.01	633334	CW/SRS	16.5	15.72	Right	0	N/A	0.417	1.197	0.499		19.5	
Body	NR Band n77	100	S2	0362M	1:1	-0.01	3750.00	650000	CW/SRS	16.5	15.30	Right	0	N/A	0.396	1.318	0.522		19.3	
Body	NR Band n77	100	S2	0362M	1:1	-0.02	3930.00	662000	CW/SRS	16.5	16.00	Right	0	Variant 1	0.431	1.122	0.484		19.6	
Body	NR Band n77	100	S2	0362M	1:1	-0.08	3930.00	662000	CW/SRS	16.5	16.00	Right	0	Variant 2	0.371	1.122	0.416		20.3	
Body	NR Band n77	100	S2	0362M	1:1	0.05	3930.00	662000	CW/SRS	16.5	16.00	Right	0	N/A	0.469	1.122	0.526	A49	19.2	
Body	NR Band n77	100	S2	0362M	1:1	-0.08	3930.00	662000	CW/SRS	16.5	16.00	Left	0	N/A	0.047	1.122	0.053		29.2	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT															Body					
Spatial Peak															1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population															averaged over 1 gram					

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																Approved by: Technical Manager				
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																Page 135 of 298				

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n77	100	S3	0362M	1:1	0.01	3750.00	650000	CW/SRS	16.5	15.42	Back	19	0.009	1.282	0.012		35.8
Body	NR Band n77	100	S3	0362M	1:1	0.04	3750.00	650000	CW/SRS	16.5	15.42	Top	19	0.004	1.282	0.005		39.3
Body	NR Band n77	100	S3	0362M	1:1	0.06	3750.00	650000	CW/SRS	16.5	15.42	Bottom	0	0.001	1.282	0.001		45.4
Body	NR Band n77	100	S3	0362M	1:1	0.05	3750.00	650000	CW/SRS	16.5	15.42	Right	0	0.000	1.282	0.000		55.4
Tablet	NR Band n77	100	S3	0362M	1:1	0.05	3750.00	650000	CW/SRS	16.5	15.42	Left	15	0.024	1.282	0.031		31.6
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram				
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n77	100	S4	0362M	1:1	0.15	3750.00	650000	CW/SRS	16.5	15.77	Back	19	0.018	1.183	0.021		33.2
Body	NR Band n77	100	S4	0362M	1:1	0.02	3750.00	650000	CW/SRS	16.5	15.77	Top	0	0.000	1.183	0.000		55.7
Body	NR Band n77	100	S4	0362M	1:1	0.08	3750.00	650000	CW/SRS	16.5	15.77	Bottom	19	0.026	1.183	0.031		31.6
Body	NR Band n77	100	S4	0362M	1:1	-0.09	3750.00	650000	CW/SRS	16.5	15.77	Right	0	0.035	1.183	0.041		30.3
Body	NR Band n77	100	S4	0362M	1:1	-0.06	3750.00	650000	CW/SRS	16.5	15.77	Left	0	0.087	1.183	0.103		26.3
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram				

Table 10-74
NR Band n77 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n77	100	QPSK	M2	0386M	1:1	-0.06	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.97	1	137	Back	0	N/A	0.192	1.007	0.193		17.1
Body	NR Band n77	100	QPSK	M2	0386M	1:1	-0.05	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.83	135	69	Back	0	N/A	0.145	1.040	0.151		18.2
Body	NR Band n77	100	QPSK	M2	0386M	1:1	0.03	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.97	1	137	Bottom	0	N/A	0.133	1.007	0.134		18.7
Body	NR Band n77	100	QPSK	M2	0386M	1:1	-0.05	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.83	135	69	Bottom	0	N/A	0.149	1.040	0.155		18.0
Body	NR Band n77 DoD	100	QPSK	M2	0362M	1:1	0.08	3500.01	633334	DFT-s-OFDM	0.0	10.0	9.16	1	137	Left	0	N/A	0.441	1.213	0.535		12.7
Body	NR Band n77 DoD	100	QPSK	M2	0362M	1:1	-0.02	3500.01	633334	DFT-s-OFDM	0.0	10.0	9.16	1	137	Left	0	Variant 1	0.009	1.213	0.072		21.4
Body	NR Band n77 DoD	100	QPSK	M2	0362M	1:1	-0.04	3500.01	633334	DFT-s-OFDM	0.0	10.0	9.16	1	137	Left	0	Variant 2	0.233	1.213	0.283		15.4
Body	NR Band n77	100	QPSK	M2	0386M	1:1	0.03	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.97	1	137	Left	0	N/A	0.363	1.007	0.366		14.3
Body	NR Band n77	100	QPSK	M2	0386M	1:1	-0.05	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.83	135	69	Left	0	N/A	0.378	1.040	0.393		14.0
Body	NR Band n77	100	QPSK	M2	0386M	1:1	0.06	3750.00	650000	CP-OFDM	0.0	10.0	9.18	1	1	Left	0	N/A	0.358	1.208	0.432		13.6
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram									
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]					
Body	NR Band n77	100	S2	0362M	1:1	-0.07	3750.00	650000	CW/SRS	9.0	8.35	Back	0	0.203	1.161	0.236		15.2					
Body	NR Band n77	100	S2	0362M	1:1	-0.03	3750.00	650000	CW/SRS	9.0	8.35	Bottom	0	0.123	1.161	0.143		17.4					
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram									
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n77	100	S3	0362M	1:1	0.05	3750.00	650000	CW/SRS	7.5	6.27	Back	0	N/A	0.004	1.327	0.005		30.2				
Body	NR Band n77	100	S3	0362M	1:1	0.06	3750.00	650000	CW/SRS	7.5	6.27	Top	0	N/A	0.000	1.327	0.000		46.2				
Body	NR Band n77 DoD	100	S3	0362M	1:1	0.05	3500.01	633334	CW/SRS	7.5	7.23	Left	0	N/A	0.193	1.064	0.205		14.3				
Body	NR Band n77	100	S3	0362M	1:1	0.02	3750.00	650000	CW/SRS	7.5	6.27	Left	0	N/A	0.231	1.327	0.307		12.6				
Body	NR Band n77	100	S3	0362M	1:1	0.09	3750.00	650000	CW/SRS	7.5	6.27	Left	0	Variant 1	0.009	1.327	0.012		26.7				
Body	NR Band n77	100	S3	0362M	1:1	0.06	3750.00	650000	CW/SRS	7.5	6.27	Left	0	Variant 2	0.033	1.327	0.044		21.0				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram									
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]				
Body	NR Band n77	100	S4	0362M	1:1	0.06	3750.00	650000	CW/SRS	7.5	6.75	Back	0	N/A	0.000	1.189	0.000		46.7				
Body	NR Band n77 DoD	100	S4	0362M	1:1	-0.04	3500.01	633334	CW/SRS	7.5	7.24	Bottom	0	N/A	0.119	1.062	0.126		16.4				
Body	NR Band n77	100	S4	0362M	1:1	0.10	3750.00	650000	CW/SRS	7.5	6.75	Bottom	0	N/A	0.121	1.189	0.144		15.9				
Body	NR Band n77	100	S4	0362M	1:1	-0.06	3750.00	650000	CW/SRS	7.5	6.75	Bottom	0	Variant 1	0.098	1.189	0.117		16.8				
Body	NR Band n77	100	S4	0362M	1:1	0.00	3750.00	650000	CW/SRS	7.5	6.75	Bottom	0	Variant 2	0.102	1.189	0.121		16.6				
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram									

Table 10-75
NR Band n77 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	MPR [dB]	Max Allowed Power [dBm]	Conducted Power [dBm]	RB Size	RB Offset	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n77 DoD	100	QPSK	M2	0362M	1:1	0.09	3500.01	633334	DFT-s-OFDM	0.0	10.0	9.16	1	137	Bottom	0	Variant 1	0.068	1.213	0.082		20.8
Body	NR Band n77 DoD	100	QPSK	M2	0362M	1:1	-0.01	3500.01	633334	DFT-s-OFDM	0.0	10.0	9.16	1	137	Bottom	0	Variant 2	0.196	1.213	0.238	A50	16.2
Body	NR Band n77	100	QPSK	M2	0362M	1:1	0.02	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.97	1	137	Bottom	0	Variant 1	0.039	1.007	0.039		24.0
Body	NR Band n77	100	QPSK	M2	0362M	1:1	0.01	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.97	1	137	Bottom	0	Variant 2	0.464	1.007	0.465		17.8
Body	NR Band n77	100	QPSK	M2	0362M	1:1	0.06	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.83	135	69	Bottom	0	Variant 1	0.025	1.040	0.032		24.9
Body	NR Band n77	100	QPSK	M2	0362M	1:1	0.03	3750.00	650000	DFT-s-OFDM	0.0	10.0	9.83	135	69	Bottom	0	Variant 2	0.121	1.040	0.126		19.0
Body	NR Band n77	100	QPSK	M2	0362M	1:1	0.08	3750.00	650000	CP-OFDM	0.0	10.0	9.18	1	1	Bottom	0	Variant 1	0.019	1.208	0.023		26.3
Body	NR Band n77	100	QPSK	M2	0362M	1:1	0.02	3750.00	650000	CP-OFDM	0.0	10.0	9.18	1	1	Bottom	0	Variant 2	0.122	1.208	0.147		18.3
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																							
Spatial Peak														Body									
Uncontrolled Exposure/General Population														1.6 W/kg (mW/g) averaged over 1 gram									

FCC ID: A3LSMX828U	SAR EVALUATION REPORT														Approved by: Technical Manager							
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device														Page 136 of 298							

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Keyboard Type	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n77 DoD	100	S2	0362M	1:1	0.08	3500.01	633334	CW/SRS	16.5	15.72	Bottom	0	Variant 1	0.000	1.197	0.000		55.7
Body	NR Band n77 DoD	100	S2	0362M	1:1	0.08	3500.01	633334	CW/SRS	16.5	15.72	Bottom	0	Variant 2	0.002	1.197	0.002		42.7
Body	NR Band n77	100	S2	0362M	1:1	0.04	3750.00	650000	CW/SRS	16.5	15.30	Bottom	0	Variant 1	0.000	1.318	0.000		55.2
Body	NR Band n77	100	S2	0362M	1:1	0.01	3750.00	650000	CW/SRS	16.5	15.30	Bottom	0	Variant 2	0.002	1.318	0.003		42.2
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n77 DoD	100	S3	0362M	1:1	0.17	3500.01	633334	CW/SRS	7.5	7.23	Bottom	0	Variant 1	0.010	1.064	0.011		27.2
Body	NR Band n77 DoD	100	S3	0362M	1:1	0.02	3500.01	633334	CW/SRS	7.5	7.23	Bottom	0	Variant 2	0.031	1.064	0.033		22.3
Body	NR Band n77	100	S3	0362M	1:1	0.06	3750.00	650000	CW/SRS	7.5	6.27	Bottom	0	Variant 2	0.033	1.327	0.044		21.0
Body	NR Band n77	100	S3	0362M	1:1	0.09	3750.00	650000	CW/SRS	7.5	6.27	Bottom	0	Variant 1	0.009	1.327	0.012		26.7
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Ant.	Serial Number	Duty Cycle	Power Drift [dB]	Frequency [MHz]	Channel #	Waveform	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Plot #	Plimit [dBm]
Body	NR Band n77 DoD	100	S4	0362M	1:1	0.01	3500.01	633334	CW/SRS	16.5	15.70	Bottom	0	Variant 1	0.002	1.202	0.002		42.6
Body	NR Band n77 DoD	100	S4	0362M	1:1	0.05	3500.01	633334	CW/SRS	16.5	15.70	Bottom	0	Variant 2	0.007	1.202	0.008		37.2
Body	NR Band n77	100	S4	0362M	1:1	0.06	3750.00	650000	CW/SRS	16.5	15.77	Bottom	0	Variant 1	0.000	1.183	0.000		55.7
Body	NR Band n77	100	S4	0362M	1:1	0.00	3750.00	650000	CW/SRS	16.5	15.77	Bottom	0	Variant 2	0.008	1.183	0.009		36.7
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							

10.5 2.4 GHz WLAN SISO Standalone SAR

Table 10-76
2.4 GHz WLAN Ant WIFI 0 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 0	0237M	98.59	0.11	2462.00	11	1	19.0	18.64	Back	19	0.072	1.086	1.014	0.079	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 0	0237M	98.59	0.04	2462.00	11	1	19.0	18.64	Top	19	0.046	1.086	1.014	0.051	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 0	0237M	98.59	0.02	2462.00	11	1	19.0	18.64	Bottom	0	0.040	1.086	1.014	0.044	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 0	0237M	98.59	0.03	2462.00	11	1	19.0	18.64	Right	0	0.008	1.086	1.014	0.009	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 0	0237M	98.59	0.00	2462.00	11	1	19.0	18.64	Left	15	0.133	1.086	1.014	0.146	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-77
2.4 GHz WLAN Ant WIFI 1 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 1	0237M	98.59	0.04	2412.00	1	1	19.0	18.76	Back	19	0.080	1.057	1.014	0.086	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 1	0237M	98.59	0.07	2412.00	1	1	19.0	18.76	Top	19	0.068	1.057	1.014	0.073	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 1	0237M	98.59	0.04	2412.00	1	1	19.0	18.76	Bottom	0	0.100	1.057	1.014	0.107	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 1	0237M	98.59	-0.02	2412.00	1	1	19.0	18.76	Right	15	0.193	1.057	1.014	0.207	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 1	0237M	98.59	-0.09	2412.00	1	1	19.0	18.76	Left	0	0.005	1.057	1.014	0.005	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-78
2.4 GHz WLAN Ant WIFI 0 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 0	0237M	98.59	0.14	2462.00	11	1	12.0	11.94	Back	0	0.409	1.014	1.014	0.421	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 0	0237M	98.59	0.04	2462.00	11	1	12.0	11.94	Top	0	0.203	1.014	1.014	0.209	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	WIFI 0	0237M	98.59	0.05	2462.00	11	1	12.0	11.94	Left	0	0.241	1.014	1.014	0.248	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							

FCC ID: A3LSMX828U	SAR EVALUATION REPORT														Approved by: Technical Manager				
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device														Page 137 of 298				

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-79
2.4 GHz WLAN Ant WIFI 1 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WIFI 1	0237M	98.59	0.01	2462.00	11	1	12.0	11.98	Back	0	0.389	1.005	1.014	0.396	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WIFI 1	0237M	98.59	-0.06	2462.00	11	1	12.0	11.98	Top	0	0.295	1.005	1.014	0.213	
Body	2.4 GHz WiFi / IEEE 802.11b	22	DSSS	WIFI 1	0237M	98.59	0.07	2462.00	11	1	12.0	11.98	Right	0	0.462	1.005	1.014	0.471	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 10-80
2.4 GHz WLAN Ant WIFI 1 Tablet with 5 GHz WLAN Active and/or NR Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	WIFI 1	0237M	98.59	-0.07	2412.00	1	1	10.0	9.86	Back	0	0.247	1.033	1.014	0.259	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	WIFI 1	0237M	98.59	0.00	2412.00	1	1	10.0	9.86	Top	0	0.167	1.033	1.014	0.175	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	WIFI 1	0237M	98.59	0.08	2412.00	1	1	10.0	9.86	Right	0	0.262	1.033	1.014	0.274	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram					

Table 10-81
2.4 GHz WLAN Ant WIFI 0 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	WIFI 0	0228M	98.59	0.00	2462.00	11	1	12.0	11.94	Bottom	0	Variant 1	0.068	1.014	1.014	0.070	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	WIFI 0	0228M	98.59	-0.08	2462.00	11	1	12.0	11.94	Bottom	0	Variant 2	0.153	1.014	1.014	0.157	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT														Body						
Spatial Peak														1.6 W/kg (mW/g)						
Uncontrolled Exposure/General Population														averaged over 1 gram						

Table 10-82
2.4 GHz WLAN Ant WIFI 1 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	WiFi 1	0237M	98.59	0.05	2412.00	1	1	19.0	18.76	Bottom	0	Variant 1	0.005	1.057	1.014	0.005	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	WiFi 1	0237M	98.59	0.13	2412.00	1	1	19.0	18.76	Bottom	0	Variant 2	0.005	1.057	1.014	0.005	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body				
Spatial Peak																1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																averaged over 1 gram				

10.1 2.4 GHz WLAN MIMO Standalone SAR

Table 10-83
2.4 GHz WLAN MIMO Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	MIMO	1	0237M	98.59	0.01	2412.00	1	1	19.0	18.42	19.0	18.87	Back	19	0.091	1.143	1.014	0.105	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	MIMO	2	0237M	98.59	-0.10	2412.00	1	1	19.0	18.42	19.0	18.87	Back	19	0.080	1.143	1.014	0.093	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	0.02	2412.00	1	1	19.0	18.42	19.0	18.87	Top	19	0.081	1.143	1.014	0.094	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	0.08	2412.00	1	1	19.0	18.42	19.0	18.87	Bottom	0	0.134	1.143	1.014	0.155	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	0.03	2412.00	1	1	19.0	18.42	19.0	18.87	Right	15	0.207	1.143	1.014	0.240	
Body	2.4 GHz WiFi/ IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	0.03	2412.00	1	1	19.0	18.42	19.0	18.87	Left	15	0.119	1.143	1.014	0.138	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																						
Spatial Peak														Body								
Uncontrolled Exposure/General Population														1.6 W/kg (mW/g) averaged over 1 gram								

Note: To achieve the 12 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 19 dBm.

Table 10-84
2.4 GHz WLAN MIMO Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	1	0237M	98.59	0.00	2462.00	11	1	12.0	11.71	12.0	11.98	Back	0	N/A	0.394	1.069	1.014	0.427	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	2	0237M	98.59	-0.02	2462.00	11	1	12.0	11.71	12.0	11.98	Back	0	N/A	0.285	1.069	1.014	0.417	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	0.21	2462.00	11	1	12.0	11.71	12.0	11.98	Top	0	N/A	0.217	1.069	1.014	0.235	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	0.01	2462.00	11	1	12.0	11.71	12.0	11.98	Right	0	N/A	0.527	1.069	1.014	0.571	AS1
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	-0.05	2462.00	11	1	12.0	11.71	12.0	11.98	Right	0	Variant 1	0.417	1.069	1.014	0.462	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	-0.04	2462.00	11	1	12.0	11.71	12.0	11.98	Right	0	Variant 2	0.509	1.069	1.014	0.545	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	-0.12	2462.00	11	1	12.0	11.71	12.0	11.98	Left	0	N/A	0.222	1.069	1.014	0.241	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT														Body									
Spatial Peak														1.6 W/kg (mW/g)									
Uncontrolled Exposure/General Population														averaged over 1 gram									

Note: To achieve the 15 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 12 dBm.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT																Approved by: Technical Manager				
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device																Page 138 of 298				

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-85
2.4 GHz WLAN MIMO Tablet with 5 GHz WLAN Active and/or NR Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	2	0237M	98.59	-0.02	2462.00	11	1	10.0	9.84	10.0	9.80	Back	0	0.280	1.047	1.014	0.297	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	1	0237M	98.59	-0.03	2462.00	11	1	10.0	9.84	10.0	9.80	Back	0	0.249	1.047	1.014	0.264	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	-0.02	2462.00	11	1	10.0	9.84	10.0	9.80	Top	0	0.191	1.047	1.014	0.203	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	-0.02	2462.00	11	1	10.0	9.84	10.0	9.80	Right	0	0.139	1.047	1.014	0.146	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	N/A	0237M	98.59	-0.10	2462.00	11	1	10.0	9.84	10.0	9.80	Left	0	0.181	1.047	1.014	0.192	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																		Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																						

Note: To achieve the 13 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 10 dBm.

Table 10-86
2.4 GHz WLAN MIMO Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	0237M	98.59	0.08	2462.00	11	1	12.0	11.71	12.0	11.98	Bottom	0	Variant 1	0.080	1.069	1.014	0.087	
Body	2.4 GHz WiFi / IEEE 802.11b	20	DSSS	MIMO	0237M	98.59	0.03	2462.00	11	1	12.0	11.71	12.0	11.98	Bottom	0	Variant 2	0.176	1.069	1.014	0.191	A52
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																		Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																						

Note: To achieve the 15 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 12 dBm.

10.2 5 GHz WLAN SISO Standalone SAR

Table 10-87
5 GHz WLAN Ant WIFI 0 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	-0.18	5310.00	62	U-NII-2A	13.5	17.0	16.37	Back	19	0.069	1.156	1.095	0.087	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	0.06	5710.00	142	U-NII-2C	13.5	17.0	16.88	Back	19	0.073	1.028	1.095	0.082	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	-0.14	5795.00	159	U-NII-3	13.5	17.0	16.48	Back	19	0.062	1.127	1.095	0.077	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	0.03	5835.00	167	U-NII-4	13.5	16.0	15.17	Back	19	0.095	1.211	1.095	0.073	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	-0.11	5310.00	62	U-NII-2A	13.5	17.0	16.37	Top	19	0.048	1.156	1.095	0.061	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	0.03	5710.00	142	U-NII-2C	13.5	17.0	16.88	Top	19	0.063	1.028	1.095	0.071	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	0.03	5795.00	159	U-NII-3	13.5	17.0	16.48	Top	19	0.060	1.127	1.095	0.074	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	0.01	5835.00	167	U-NII-4	13.5	16.0	15.17	Top	19	0.056	1.211	1.095	0.074	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0237M	91.34	0.01	5310.00	62	U-NII-2A	13.5	17.0	16.37	Bottom	0	0.005	1.156	1.095	0.006	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0237M	91.34	0.01	5710.00	142	U-NII-2C	13.5	17.0	16.88	Bottom	0	0.017	1.028	1.095	0.019	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0237M	91.34	0.01	5795.00	159	U-NII-3	13.5	17.0	16.48	Bottom	0	0.008	1.127	1.095	0.010	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0237M	91.34	0.03	5835.00	167	U-NII-4	13.5	16.0	15.17	Bottom	0	0.001	1.211	1.095	0.001	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0237M	91.34	0.01	5310.00	62	U-NII-2A	13.5	17.0	16.37	Right	0	0.010	1.156	1.095	0.013	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0237M	91.34	0.08	5710.00	142	U-NII-2C	13.5	17.0	16.88	Right	0	0.012	1.028	1.095	0.014	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0237M	91.34	0.21	5795.00	159	U-NII-3	13.5	17.0	16.48	Right	0	0.002	1.127	1.095	0.002	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0237M	91.34	0.04	5835.00	167	U-NII-4	13.5	16.0	15.17	Right	0	0.000	1.211	1.095	0.000	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	0.13	5310.00	62	U-NII-2A	13.5	17.0	16.37	Left	15	0.188	1.156	1.095	0.238	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	-0.03	5710.00	142	U-NII-2C	13.5	17.0	16.88	Left	15	0.242	1.028	1.095	0.272	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	-0.19	5795.00	159	U-NII-3	13.5	17.0	16.48	Left	15	0.204	1.127	1.095	0.252	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 0	0240M	91.34	0.07	5835.00	167	U-NII-4	13.5	16.0	15.17	Left	15	0.189	1.211	1.095	0.251	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																				

Table 10-88
5 GHz WLAN Ant WIFI 1 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	-0.01	5270.00	54	U-NII-2A	13.5	17.0	16.56	Back	19	0.082	1.107	1.056	0.096	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.02	5590.00	118	U-NII-2C	13.5	17.0	16.84	Back	19	0.059	1.038	1.056	0.065	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.03	5795.00	151	U-NII-3	13.5	17.0	16.76	Back	19	0.075	1.057	1.056	0.084	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.09	5835.00	167	U-NII-4	13.5	16.0	15.22	Back	19	0.048	1.197	1.056	0.061	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.04	5270.00	54	U-NII-2A	13.5	17.0	16.56	Top	19	0.080	1.107	1.056	0.094	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.07	5590.00	118	U-NII-2C	13.5	17.0	16.84	Top	19	0.052	1.038	1.056	0.057	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.07	5795.00	151	U-NII-3	13.5	17.0	16.76	Top	19	0.062	1.057	1.056	0.069	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.06	5835.00	167	U-NII-4	13.5	16.0	15.22	Top	19	0.037	1.197	1.056	0.047	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	-0.08	5270.00	54	U-NII-2A	13.5	17.0	16.56	Bottom	0	0.068	1.107	1.056	0.079	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.04	5590.00	118	U-NII-2C	13.5	17.0	16.84	Bottom	0	0.032	1.038	1.056	0.035	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	-0.09	5795.00	151	U-NII-3	13.5	17.0	16.76	Bottom	0	0.031	1.057	1.056	0.035	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.01	5835.00	167	U-NII-4	13.5	16.0	15.22	Bottom	0	0.029	1.197	1.056	0.037	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.19	5270.00	54	U-NII-2A	13.5	17.0	16.56	Right	15	0.242	1.107	1.056	0.283	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.04	5590.00	118	U-NII-2C	13.5	17.0	16.84	Right	15	0.149	1.038	1.056	0.163	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.17	5795.00	151	U-NII-3	13.5	17.0	16.76	Right	15	0.171	1.057	1.056	0.191	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.03	5835.00	167	U-NII-4	13.5	16.0	15.22	Right	15	0.116	1.197	1.056	0.147	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.06	5270.00	54	U-NII-2A	13.5	17.0	16.56	Left	0	0.004	1.107	1.056	0.005	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.09	5590.00	118	U-NII-2C	13.5	17.0	16.84	Left	0	0.000	1.038	1.056	0.000	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	-0.02	5795.00	151	U-NII-3	13.5	17.0	16.76	Left	0	0.000	1.057	1.056	0.000	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WIFI 1	0240M	94.68	0.05	5835.00	167	U-NII-4	13.5	16.0	15.22	Left	0	0.000	1.197	1.056	0.000	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																				

Table 10-89
5 GHz WLAN Ant WIFI 0 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	0.06	5290.00	58	U-NII-2A	58.5	8.0	7.36	Back	0	0.526	1.159	1.059	0.646	A53
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	-0.04	5610.00	122	U-NII-2C	58.5	8.0	7.98	Back	0	0.605	1.005	1.059	0.644	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	0.01	5775.00	155	U-NII-3	58.5	8.0	7.66	Back	0	0.517	1.081	1.059	0.592	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	0.11	5855.00	171	U-NII-4	58.5	7.5	6.95	Back	0	0.418	1.135	1.059	0.502	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	0.14	5290.00	58	U-NII-2A	58.5	8.0	7.36	Top	0	0.078	1.159	1.059	0.096	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	0.03	5610.00	122	U-NII-2C	58.5	8.0	7.98	Top	0	0.062	1.005	1.059	0.066	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	0.04	5775.00	155	U-NII-3	58.5	8.0	7.66	Top	0	0.046	1.081	1.059	0.053	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	0.20	5855.00	171	U-NII-4	58.5	7.5	6.95	Top	0	0.032	1.135	1.059	0.038	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0028M	94.43	-0.12	5290.00	58	U-NII-2A	58.5	8.0	7.36	Left	0	0.497	1.159	1.059	0.610	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	-0.04	5610.00	122	U-NII-2C	58.5	8.0	7.98	Left	0	0.596	1.005	1.059	0.634	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	0.04	5775.00	155	U-NII-3	58.5	8.0	7.66	Left	0	0.542	1.081	1.059	0.620	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	0228M	94.43	-0.07	5855.00	171	U-NII-4	58.5	7.5	6.95	Left	0	0.387	1.135	1.059	0.465	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																Body				
Spatial Peak																1.6 W/kg (mW/g)				
Uncontrolled Exposure/General Population																averaged over 1 gram				

Table 10-90
5 GHz WLAN Ant WIFI 1 Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.08	5290.00	58	U-NII-2A	58.5	8.0	7.78	Back	0	0.277	1.052	1.055	0.307	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.04	5610.00	122	U-NII-2C	58.5	8.0	7.95	Back	0	0.175	1.012	1.055	0.187	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.05	5775.00	155	U-NII-3	58.5	8.0	7.83	Back	0	0.177	1.040	1.055	0.194	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	-0.15	5855.00	171	U-NII-4	58.5	7.5	7.12	Back	0	0.135	1.091	1.055	0.155	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	-0.02	5290.00	58	U-NII-2A	58.5	8.0	7.78	Top	0	0.111	1.052	1.055	0.123	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.01	5610.00	122	U-NII-2C	58.5	8.0	7.95	Top	0	0.041	1.012	1.055	0.044	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.05	5775.00	155	U-NII-3	58.5	8.0	7.83	Top	0	0.038	1.040	1.055	0.042	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.03	5855.00	171	U-NII-4	58.5	7.5	7.12	Top	0	0.015	1.091	1.055	0.017	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.11	5290.00	58	U-NII-2A	58.5	8.0	7.78	Right	0	0.431	1.052	1.055	0.478	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.17	5610.00	122	U-NII-2C	58.5	8.0	7.95	Right	0	0.364	1.012	1.055	0.389	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.09	5775.00	155	U-NII-3	58.5	8.0	7.83	Right	0	0.374	1.040	1.055	0.410	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 1	0240M	94.75	0.02	5855.00	171	U-NII-4	58.5	7.5	7.12	Right	0	0.294	1.091	1.055	0.338	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																Body 1.6 W/kg (mW/g) averaged over 1 gram				
Spatial Peak Uncontrolled Exposure/General Population																				

Table 10-91
5 GHz WLAN Ant WIFI 0 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	2285M	94.43	0.08	5290.00	58	U-NII-2A	58.5	8.0	7.36	Bottom	0	Variant 2	0.195	1.159	1.059	0.239	A54
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	2285M	94.43	-0.15	5290.00	58	U-NII-2A	58.5	8.0	7.36	Bottom	0	Variant 1	0.045	1.159	1.059	0.055	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	2285M	94.43	0.07	5610.00	122	U-NII-2C	58.5	8.0	7.98	Bottom	0	Variant 2	0.390	1.005	1.059	0.879	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	2285M	94.43	0.04	5610.00	122	U-NII-2C	58.5	8.0	7.98	Bottom	0	Variant 1	0.035	1.005	1.059	0.037	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	2285M	94.43	-0.05	5775.00	155	U-NII-3	58.5	8.0	7.66	Bottom	0	Variant 2	0.225	1.081	1.059	0.258	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	2285M	94.43	0.03	5775.00	155	U-NII-3	58.5	8.0	7.66	Bottom	0	Variant 1	0.029	1.081	1.059	0.033	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	2285M	94.43	0.02	5855.00	171	U-NII-4	58.5	7.5	6.95	Bottom	0	Variant 2	0.307	1.135	1.059	0.369	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	WiFi 0	2285M	94.43	0.05	5855.00	171	U-NII-4	58.5	7.5	6.95	Bottom	0	Variant 1	0.026	1.135	1.059	0.031	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT																Body					
Spatial Peak																1.6 W/kg (mW/g)					
Uncontrolled Exposure/General Population																averaged over 1 gram					

Table 10-92
5 GHz WLAN Ant WIFI 1 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WiFi 1	0237M	94.68	0.03	5270.00	54	13.5	17.0	16.56	Bottom	0	Variant 2	0.000	1.107	1.056	0.000	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WiFi 1	0237M	94.68	0.02	5270.00	54	13.5	17.0	16.56	Bottom	0	Variant 1	0.000	1.107	1.056	0.000	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WiFi 1	0237M	94.68	0.10	5590.00	118	13.5	17.0	16.84	Bottom	0	Variant 2	0.004	1.038	1.056	0.004	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WiFi 1	0237M	94.68	0.02	5590.00	118	13.5	17.0	16.84	Bottom	0	Variant 1	0.005	1.038	1.056	0.005	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WiFi 1	0237M	94.68	0.03	5755.00	151	13.5	17.0	16.76	Bottom	0	Variant 2	0.039	1.057	1.056	0.044	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WiFi 1	0237M	94.68	0.01	5755.00	151	13.5	17.0	16.76	Bottom	0	Variant 1	0.012	1.057	1.056	0.013	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WiFi 1	0237M	94.68	0.07	5835.00	167	13.5	16.0	15.22	Bottom	0	Variant 2	0.043	1.197	1.056	0.054	
Body	5 GHz WiFi / IEEE 802.11n	40	OFDM	WiFi 1	0237M	94.68	0.09	5835.00	167	13.5	16.0	15.22	Bottom	0	Variant 1	0.004	1.197	1.056	0.005	
ANSI/IEEE C63.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																Body 1.6 W/kg (mW/g) averaged over 1 gram				

FCC ID: A3LSMX828U	SAR EVALUATION REPORT															Approved by: Technical Manager				
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device															Page 140 of 298				

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

10.3 5 GHz WLAN MIMO Standalone SAR

Table 10-93
5 GHz WLAN MIMO Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	1	0228M	90.86	-0.34	5270.00	54	U-NII-2A	27	17.0	16.79	17.0	16.75	Back	19	0.068	1.059	1.101	0.079	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	2	0228M	90.86	-0.15	5270.00	54	U-NII-2A	27	17.0	16.79	17.0	16.75	Back	19	0.091	1.059	1.101	0.106	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	1	0228M	90.86	0.06	5730.00	142	U-NII-2C	27	17.0	16.82	17.0	16.62	Back	19	0.051	1.091	1.101	0.061	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	2	0228M	90.86	0.03	5730.00	142	U-NII-2C	27	17.0	16.82	17.0	16.62	Back	19	0.061	1.091	1.101	0.076	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	1	0228M	90.86	0.02	5755.00	151	U-NII-3	27	17.0	16.49	17.0	16.77	Back	19	0.058	1.125	1.101	0.072	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	2	0228M	90.86	-0.11	5755.00	151	U-NII-3	27	17.0	16.49	17.0	16.77	Back	19	0.066	1.125	1.101	0.069	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	1	0228M	90.86	0.03	5875.00	175	U-NII-4	27	16.0	15.63	16.0	15.92	Back	19	0.037	1.089	1.101	0.044	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	2	0228M	90.86	0.07	5875.00	175	U-NII-4	27	16.0	15.63	16.0	15.92	Back	19	0.060	1.089	1.101	0.072	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	-0.05	5270.00	54	U-NII-2A	27	17.0	16.79	17.0	16.75	Top	19	0.080	1.059	1.101	0.093	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	0.03	5730.00	142	U-NII-2C	27	17.0	16.82	17.0	16.62	Top	19	0.062	1.091	1.101	0.074	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	0.07	5755.00	151	U-NII-3	27	17.0	16.49	17.0	16.77	Top	19	0.094	1.125	1.101	0.067	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	-0.34	5875.00	175	U-NII-4	27	16.0	15.63	16.0	15.92	Top	19	0.061	1.089	1.101	0.062	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	-0.11	5270.00	54	U-NII-2A	27	17.0	16.79	17.0	16.75	Bottom	0	0.075	1.059	1.101	0.087	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	0.05	5730.00	142	U-NII-2C	27	17.0	16.82	17.0	16.62	Bottom	0	0.030	1.091	1.101	0.036	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	0.19	5755.00	151	U-NII-3	27	17.0	16.49	17.0	16.77	Bottom	0	0.024	1.125	1.101	0.030	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	-0.08	5875.00	175	U-NII-4	27	16.0	15.63	16.0	15.92	Bottom	0	0.033	1.089	1.101	0.028	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	-0.03	5270.00	54	U-NII-2A	27	17.0	16.79	17.0	16.75	Right	15	0.212	1.059	1.101	0.247	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	0.07	5730.00	142	U-NII-2C	27	17.0	16.82	17.0	16.62	Right	15	0.113	1.091	1.101	0.136	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	-0.19	5755.00	151	U-NII-3	27	17.0	16.49	17.0	16.77	Right	15	0.108	1.125	1.101	0.134	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	0.07	5875.00	175	U-NII-4	27	16.0	15.63	16.0	15.92	Right	15	0.071	1.089	1.101	0.085	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	0.11	5270.00	54	U-NII-2A	27	17.0	16.79	17.0	16.75	Left	15	0.179	1.059	1.101	0.209	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	0.06	5730.00	142	U-NII-2C	27	17.0	16.82	17.0	16.62	Left	15	0.178	1.091	1.101	0.214	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	0.02	5755.00	151	U-NII-3	27	17.0	16.49	17.0	16.77	Left	15	0.179	1.125	1.101	0.222	
Body	5 GHz WIF / IEEE 802.11n	40	OFDM	MIMO	N/A	0228M	90.86	-0.16	5875.00	175	U-NII-4	27	16.0	15.63	16.0	15.92	Left	15	0.100	1.089	1.101	0.120	

ANSI/IEEE C63.19-2017 SAFETY LIMIT

Uncontrolled Exposure/General Population

Note: To achieve the 20 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 17 dBm.

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Table 10-94
5 GHz WLAN MIMO Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	1	0228M	90.46	0.09	5290.00	58	U-NII-2A	58.5	8.0	7.99	8.0	7.42	Back	0	N/A	0.512	1.151	1.105	0.651	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	2	0228M	90.46	-0.04	5290.00	58	U-NII-2A	58.5	8.0	7.99	8.0	7.42	Back	0	N/A	0.319	1.151	1.105	0.406	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	1	0228M	90.46	0.07	5690.00	138	U-NII-2C	58.5	8.0	7.99	8.0	7.07	Back	0	N/A	0.499	1.099	1.105	0.599	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	2	0228M	90.46	0.06	5690.00	138	U-NII-2C	58.5	8.0	7.89	8.0	7.67	Back	0	N/A	0.185	1.079	1.105	0.215	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	1	0228M	90.46	0.02	5775.00	155	U-NII-3	58.5	8.0	7.56	8.0	7.52	Back	0	N/A	0.436	1.117	1.105	0.538	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	2	0228M	90.46	0.10	5775.00	155	U-NII-3	58.5	8.0	7.56	8.0	7.52	Back	0	N/A	0.140	1.117	1.105	0.173	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	1	0228M	90.46	0.02	5855.00	171	U-NII-4	58.5	7.5	6.98	7.5	6.81	Back	0	N/A	0.455	1.286	1.105	0.621	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	2	0228M	90.46	0.12	5855.00	171	U-NII-4	58.5	7.5	6.98	7.5	6.81	Back	0	N/A	0.147	1.286	1.105	0.201	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.06	5290.00	58	U-NII-2A	58.5	8.0	7.99	8.0	7.42	Top	0	N/A	0.090	1.151	1.105	0.114	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.01	5690.00	138	U-NII-2C	58.5	8.0	7.89	8.0	7.67	Top	0	N/A	0.061	1.079	1.105	0.071	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.07	5775.00	155	U-NII-3	58.5	8.0	7.56	8.0	7.52	Top	0	N/A	0.043	1.117	1.105	0.053	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.08	5855.00	171	U-NII-4	58.5	7.5	6.98	7.5	6.81	Top	0	N/A	0.031	1.286	1.105	0.042	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.11	5290.00	58	U-NII-2A	58.5	8.0	7.99	8.0	7.42	Right	0	N/A	0.411	1.151	1.105	0.523	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.12	5690.00	138	U-NII-2C	58.5	8.0	7.89	8.0	7.67	Right	0	N/A	0.383	1.079	1.105	0.457	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.01	5775.00	155	U-NII-3	58.5	8.0	7.56	8.0	7.52	Right	0	N/A	0.302	1.117	1.105	0.373	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.13	5855.00	171	U-NII-4	58.5	7.5	6.98	7.5	6.81	Right	0	N/A	0.269	1.286	1.105	0.362	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.05	5290.00	58	U-NII-2A	58.5	8.0	7.99	8.0	7.42	Left	0	N/A	0.530	1.151	1.105	0.649	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.04	5690.00	138	U-NII-2C	58.5	8.0	7.89	8.0	7.67	Left	0	N/A	0.556	1.079	1.105	0.663	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.07	5775.00	155	U-NII-3	58.5	8.0	7.56	8.0	7.52	Left	0	N/A	0.547	1.117	1.105	0.675	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.02	5775.00	155	U-NII-3	58.5	8.0	7.56	8.0	7.52	Left	0	Variant 2	0.189	1.117	1.105	0.241	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0240M	90.46	0.19	5775.00	155	U-NII-3	58.5	8.0	7.56	8.0	7.52	Left	0	Variant 1	0.079	1.117	1.105	0.098	
Body	5 GHz WIF / IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.01	5855.00	171	U-NII-4	58.5	7.5	6.98	7.5	6.81	Left	0	N/A	0.407	1.286	1.105	0.556	

ANSI/IEEE C63.19-2017 SAFETY LIMIT

Uncontrolled Exposure/General Population

Note: To achieve the 11 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 8 dBm.

Body
1.6 W/kg (mW/g)
averaged over 1 gram

Table 10-95
5 GHz WLAN MIMO Tablet with 2.4 GHz WLAN Active and/or NR Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NII band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	1	0228M	90.46	-0.09	5290.00	58	U-NII-2A	58.5	6.5	5.90	6.5	6.11	Back	0	0.294	1.148	1.105	0.373	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	2	0228M	90.46	-0.08	5290.00	58	U-NII-2A	58.5	6.5	5.90	6.5	6.11	Back	0	0.182	1.148	1.105	0.231	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	1	0228M	90.46	0.18	5690.00	138	U-NII-2C	58.5	6.5	6.30	6.5	6.25	Back	0	0.305	1.059	1.105	0.357	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	2	0228M	90.46	0.01	5690.00	138	U-NII-2C	58.5	6.5	6.30	6.5	6.25	Back	0	0.193	1.059	1.105	0.232	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	1	0228M	90.46	0.01	5775.00	155	U-NII-3	58.5	6.5	5.89	6.5	6.31	Back	0	0.281	1.151	1.105	0.357	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	2	0228M	90.46	-0.03	5775.00	155	U-NII-3	58.5	6.5	5.89	6.5	6.31	Back	0	0.107	1.151	1.105	0.136	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.01	5855.00	171	U-NII-4	58.5	6.5	5.90	6.5	6.11	Right	0	0.199	1.151	1.105	0.263	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	2	0228M	90.46	-0.08	5855.00	171	U-NII-4	58.5	6.0	5.21	6.0	5.53	Back	0	0.067	1.199	1.105	0.089	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.18	5290.00	58	U-NII-2A	58.5	6.5	5.90	6.5	6.11	Top	0	0.084	1.148	1.105	0.054	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.01	5690.00	138	U-NII-2C	58.5	6.5	6.30	6.5	6.25	Top	0	0.059	1.059	1.105	0.057	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.06	5775.00	155	U-NII-3	58.5	6.5	5.89	6.5	6.31	Top	0	0.044	1.151	1.105	0.056	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.01	5855.00	171	U-NII-4	58.5	6.0	5.21	6.0	5.53	Top	0	0.029	1.199	1.105	0.038	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.01	5290.00	58	U-NII-2A	58.5	6.5	5.90	6.5	6.11	Right	0	0.148	1.148	1.105	0.143	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.02	5690.00	138	U-NII-2C	58.5	6.5	6.30	6.5	6.25	Right	0	0.213	1.099	1.105	0.249	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.07	5775.00	155	U-NII-3	58.5	6.5	5.89	6.5	6.31	Right	0	0.205	1.151	1.105	0.261	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.01	5855.00	171	U-NII-4	58.5	6.0	5.21	6.0	5.53	Right	0	0.142	1.199	1.105	0.188	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.02	5290.00	58	U-NII-2A	58.5	6.5	5.90	6.5	6.11	Left	0	0.354	1.148	1.105	0.449	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.08	5690.00	138	U-NII-2C	58.5	6.5	6.30	6.5	6.25	Left	0	0.421	1.059	1.105	0.463	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	0.01	5775.00	155	U-NII-3	58.5	6.5	5.89	6.5	6.31	Left	0	0.153	1.151	1.105	0.169	
Body	5 GHz WIF/ IEEE 802.11ac	80	OFDM	MIMO	N/A	0228M	90.46	-0.13	5855.00	171	U-NII-4	58.5	6.0	5.21	6.0	5.53	Left	0	0.245	1.199	1.105	0.325	
ANS/IEEE C95.3 1982 - SAFETY LIMIT																							
Spatial Peak																							
Uncontrolled Exposure/General Population																							
1.6 W/kg (10W/kg) averaged over 1 gram																							

Table 10-96
5 GHz WLAN MIMO Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	U-NI Band	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	MIMO	0240M	90.46	0.07	5290.00	58	U-NII-2A	58.5	8.0	7.39	8.0	7.42	Bottom	0	Variant 1	0.067	1.151	1.105	0.085	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	MIMO	0228M	90.46	0.09	5290.00	58	U-NII-2A	58.5	8.0	7.39	8.0	7.42	Bottom	0	Variant 2	0.292	1.151	1.105	0.371	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	MIMO	0240M	90.46	0.01	5690.00	158	U-NII-3C	58.5	8.0	7.89	8.0	7.67	Bottom	0	Variant 1	0.088	1.079	1.105	0.105	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	MIMO	0228M	90.46	0.09	5690.00	158	U-NII-3C	58.5	8.0	7.89	8.0	7.67	Bottom	0	Variant 2	0.188	1.079	1.105	0.188	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	MIMO	0240M	90.46	0.06	5775.00	155	U-NII-3	58.5	8.0	7.56	8.0	7.52	Bottom	0	Variant 1	0.073	1.117	1.105	0.090	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	MIMO	0228M	90.46	0.08	5775.00	155	U-NII-3	58.5	8.0	7.56	8.0	7.52	Bottom	0	Variant 2	0.194	1.117	1.105	0.239	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	MIMO	0240M	90.46	0.07	5855.00	171	U-NII-4	58.5	7.5	6.58	7.5	6.81	Bottom	0	Variant 1	0.074	1.236	1.105	0.101	
Body	5 GHz WiFi / IEEE 802.11ac	80	OFDM	MIMO	0228M	90.46	0.08	5855.00	171	U-NII-4	58.5	7.5	6.58	7.5	6.81	Bottom	0	Variant 2	0.188	1.236	1.105	0.257	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																			Body 1.6 W/kg [mW/g] Uncontrolled Exposure/General Population averaged over 1 gram				

Note: To achieve the 11 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 8 dBm.

10.4 6 GHz SISO Standalone SAR and APD

Table 10-97
6 GHz WLAN Antenna WIFI 0 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.06	5985.00	7	34	10.0	9.33	Back	19	0.012	1.167	1.063	0.015		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.05	6305.00	71	34	10.0	9.44	Back	19	0.007	1.138	1.063	0.008		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.06	5985.00	7	34	10.0	9.33	Top	19	0.007	1.167	1.063	0.009		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.05	6305.00	71	34	10.0	9.44	Top	19	0.003	1.138	1.063	0.004		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.08	5985.00	7	34	10.0	9.33	Bottom	0	0.002	1.167	1.063	0.002		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.02	6305.00	71	34	10.0	9.44	Bottom	0	0.004	1.138	1.063	0.005		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.06	5985.00	7	34	10.0	9.33	Right	0	0.000	1.167	1.063	0.000		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.01	6305.00	71	34	10.0	9.44	Right	0	0.001	1.138	1.063	0.001		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.02	5985.00	7	34	10.0	9.33	Left	15	0.009	1.167	1.063	0.011		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.09	6305.00	71	34	10.0	9.44	Left	15	0.028	1.138	1.063	0.034		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.05	6465.00	103	34	10.0	9.20	Left	15	0.019	1.202	1.063	0.024		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.02	6705.00	151	34	10.0	9.42	Left	15	0.012	1.143	1.063	0.015		
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.07	7025.00	215	34	10.0	9.23	Left	15	0.015	1.194	1.063	0.019		
ANSI/IEEE C95.1 1992 - SAFETY LIMIT																Body				
Spatial Peak																1.6 W/kg [mW/g]				
Uncontrolled Exposure/General Population																averaged over 1 gram				

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured APD [W/m² (4cm²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m² (4cm²)]	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.06	5985.00	7	34	10.0	9.33	Back	19	0.097	1.167	1.063	0.120	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.05	6305.00	71	34	10.0	9.44	Back	19	0.078	1.138	1.063	0.094	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.06	5985.00	7	34	10.0	9.33	Top	19	0.032	1.167	1.063	0.040	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.05	6305.00	71	34	10.0	9.44	Top	19	0.040	1.138	1.063	0.048	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.08	5985.00	7	34	10.0	9.33	Bottom	0	0.003	1.167	1.063	0.004	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.02	6305.00	71	34	10.0	9.44	Bottom	0	0.019	1.138	1.063	0.023	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.06	5985.00	7	34	10.0	9.33	Right	0	0.000	1.167	1.063	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.01	6305.00	71	34	10.0	9.44	Right	0	0.009	1.138	1.063	0.011	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.02	5985.00	7	34	10.0	9.33	Left	15	0.046	1.167	1.063	0.057	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.09	6305.00	71	34	10.0	9.44	Left	15	0.255	1.138	1.063	0.308	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.05	6465.00	103	34	10.0	9.20	Left	15	0.174	1.202	1.063	0.222	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.02	6705.00	151	34	10.0	9.42	Left	15	0.098	1.143	1.063	0.119	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 0	0243M	94.03	0.07	7025.00	215	34	10.0	9.23	Left	15	0.140	1.194	1.063	0.178	

Table 10-98
6 GHz WLAN Antenna WIFI 1 Tablet Max Power

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.01	5985.00	7	34	10.0	9.31	Back	19	0.004	1.172	1.060	0.005	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.01	7025.00	215	34	10.0	9.49	Back	19	0.001	1.125	1.060	0.001	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.02	5985.00	7	34	10.0	9.31	Top	19	0.003	1.172	1.060	0.004	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.06	7025.00	215	34	10.0	9.49	Top	19	0.006	1.125	1.060	0.007	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.04	5985.00	7	34	10.0	9.31	Bottom	0	0.000	1.172	1.060	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.01	7025.00	215	34	10.0	9.49	Bottom	0	0.000	1.125	1.060	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.09	5985.00	7	34	10.0	9.31	Right	15	0.009	1.172	1.060	0.011	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.03	6305.00	71	34	10.0	9.23	Right	15	0.009	1.194	1.060	0.011	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.08	6465.00	103	34	10.0	9.41	Right	15	0.008	1.146	1.060	0.010	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.04	6705.00	151	34	10.0	9.38	Right	15	0.011	1.153	1.060	0.013	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.01	7025.00	215	34	10.0	9.49	Right	15	0.008	1.125	1.060	0.010	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.07	5985.00	7	34	10.0	9.31	Left	0	0.000	1.172	1.060	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.06	7025.00	215	34	10.0	9.49	Left	0	0.002	1.125	1.060	0.002	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT														Body 1.6 W/kg [mW/g] Uncontrolled Exposure/General Population averaged over 1 gram					

Exposure	Band/ Mode	Bandwidth [MHz]	Service/ Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured APD [W/(4cm ²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/(4cm ²)]	Plot #
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.01	5985.00	7	34	10.0	9.31	Back	19	0.014	1.172	1.060	0.017	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.01	7025.00	215	34	10.0	9.49	Back	19	0.006	1.125	1.060	0.007	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.02	5985.00	7	34	10.0	9.31	Top	19	0.002	1.172	1.060	0.002	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.06	7025.00	215	34	10.0	9.49	Top	19	0.081	1.125	1.060	0.097	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.04	5985.00	7	34	10.0	9.31	Bottom	0	0.000	1.172	1.060	0.000	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.01	7025.00	215	34	10.0	9.49	Bottom	0	0.001	1.125	1.060	0.001	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.09	5985.00	7	34	10.0	9.31	Right	15	0.071	1.172	1.060	0.088	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.03	6305.00	71	34	10.0	9.23	Right	15	0.059	1.194	1.060	0.075	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.08	6465.00	103	34	10.0	9.41	Right	15	0.047	1.146	1.060	0.057	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.04	6705.00	151	34	10.0	9.38	Right	15	0.098	1.151	1.060	0.120	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.01	7025.00	215	34	10.0	9.49	Right	15	0.043	1.125	1.060	0.063	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	2043M	94.37	0.07	5985.00	7	34	10.0	9.31	Left	0	0.000	1.172	1.060	0.000	
Body	6 GHz WiFi/ IEEE 802.11ax	80	OFDM	WIFI 1	0243M	94.37	0.06	7025.00	215	34	10.0	9.49	Left	0	0.025	1.125	1.060	0.030	

Table 10-99
6 GHz WLAN Antenna WIFI 0 Tablet with Grip Sensors Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.10	5985.00	7	34	6.5	6.13	Back	0	0.558	1.089	1.063	0.646	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.16	6305.00	71	34	6.5	6.02	Back	0	0.597	1.117	1.063	0.706	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.00	6465.00	103	34	6.5	6.32	Back	0	0.473	1.042	1.063	0.524	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	-0.03	6705.00	151	34	6.5	6.29	Back	0	0.422	1.050	1.063	0.471	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	-0.06	7025.00	215	34	6.5	6.14	Back	0	0.401	1.086	1.063	0.463	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.01	6465.00	103	34	6.5	6.32	Top	0	0.023	1.042	1.063	0.025	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.13	6465.00	103	34	6.5	6.32	Left	0	0.151	1.042	1.063	0.167	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population															Body 1.6 W/kg (mW/g) averaged over 1 gram				
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured APD [W/m² (4cm²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m² (4cm²)]	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.10	5985.00	7	34	6.5	6.13	Back	0	2.560	1.089	1.063	2.963	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.16	6305.00	71	34	6.5	6.02	Back	0	2.800	1.117	1.063	3.325	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.00	6465.00	103	34	6.5	6.32	Back	0	2.210	1.042	1.063	2.448	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	-0.03	6705.00	151	34	6.5	6.29	Back	0	1.860	1.050	1.063	2.076	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	-0.06	7025.00	215	34	6.5	6.14	Back	0	1.810	1.086	1.063	2.089	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.01	6465.00	103	34	6.5	6.32	Top	0	0.110	1.042	1.063	0.122	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	0243M	94.03	0.13	6465.00	103	34	6.5	6.32	Left	0	0.765	1.042	1.063	0.847	

Table 10-100
6 GHz WLAN Antenna WIFI 1 Tablet with Grip Sensors Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	-0.03	6305.00	71	34	6.5	6.47	Back	0	0.121	1.007	1.060	0.129	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	0.07	6305.00	71	34	6.5	6.47	Top	0	0.022	1.007	1.060	0.023	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	0.04	5985.00	7	34	6.5	6.47	Right	0	0.208	1.007	1.060	0.222	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	-0.06	6305.00	71	34	6.5	6.47	Right	0	0.156	1.007	1.060	0.165	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	-0.21	6465.00	103	34	6.5	6.02	Right	0	0.088	1.117	1.060	0.104	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	0.07	6705.00	151	34	6.5	6.30	Right	0	0.088	1.047	1.060	0.209	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	0.04	7025.00	215	34	6.5	6.39	Right	0	0.112	1.026	1.060	0.122	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population															Body 1.6 W/kg (mW/g) averaged over 1 gram				
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured APD [W/m² (4cm²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m² (4cm²)]	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	-0.03	6305.00	71	34	6.5	6.47	Back	0	0.650	1.007	1.060	0.694	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	0.07	6305.00	71	34	6.5	6.47	Top	0	0.188	1.007	1.060	0.201	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	0.04	5985.00	7	34	6.5	6.47	Right	0	1.070	1.007	1.060	1.142	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	-0.06	6305.00	71	34	6.5	6.47	Right	0	0.768	1.007	1.060	0.820	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	-0.21	6465.00	103	34	6.5	6.02	Right	0	0.414	1.117	1.060	0.490	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	0.07	6705.00	151	34	6.5	6.30	Right	0	0.974	1.047	1.060	1.081	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	0243M	94.37	0.04	7025.00	215	34	6.5	6.39	Right	0	0.603	1.026	1.060	0.656	

Table 10-101
6 GHz WLAN Antenna WIFI 0 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.02	5985.00	7	34	6.5	6.13	Bottom	0	Variant 2	0.136	1.089	1.063	0.157	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	-0.16	5985.00	7	34	6.5	6.13	Bottom	0	Variant 1	0.004	1.089	1.063	0.005	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.09	6305.00	71	34	6.5	6.02	Bottom	0	Variant 2	0.057	1.117	1.063	0.068	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.14	6305.00	71	34	6.5	6.02	Bottom	0	Variant 1	0.015	1.117	1.063	0.018	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	-0.01	6465.00	103	34	6.5	6.32	Bottom	0	Variant 2	0.045	1.042	1.063	0.050	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.05	6465.00	103	34	6.5	6.32	Bottom	0	Variant 1	0.014	1.042	1.063	0.016	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.08	6705.00	151	34	6.5	6.29	Bottom	0	Variant 2	0.030	1.050	1.063	0.033	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.09	6705.00	151	34	6.5	6.29	Bottom	0	Variant 1	0.006	1.050	1.063	0.007	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.06	7025.00	215	34	6.5	6.14	Bottom	0	Variant 2	0.031	1.086	1.063	0.036	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	-0.10	7025.00	215	34	6.5	6.14	Bottom	0	Variant 1	0.004	1.086	1.063	0.005	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population															Body 1.6 W/kg (mW/g) averaged over 1 gram					
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured APD [W/m² (4cm²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m² (4cm²)]	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.02	5985.00	7	34	6.5	6.13	Bottom	0	Variant 2	0.735	1.089	1.063	0.851	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	-0.16	5985.00	7	34	6.5	6.13	Bottom	0	Variant 1	0.009	1.089	1.063	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.09	6305.00	71	34	6.5	6.02	Bottom	0	Variant 2	0.380	1.117	1.063	0.451	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.14	6305.00	71	34	6.5	6.02	Bottom	0	Variant 1	0.104	1.117	1.063	0.123	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	-0.01	6465.00	103	34	6.5	6.32	Bottom	0	Variant 2	0.266	1.042	1.063	0.295	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.05	6465.00	103	34	6.5	6.32	Bottom	0	Variant 1	0.063	1.042	1.063	0.070	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.08	6705.00	151	34	6.5	6.29	Bottom	0	Variant 2	0.195	1.050	1.063	0.218	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.09	6705.00	151	34	6.5	6.29	Bottom	0	Variant 1	0.040	1.050	1.063	0.045	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	0.06	7025.00	215	34	6.5	6.14	Bottom	0	Variant 2	0.220	1.086	1.063	0.254	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 0	2063M	94.03	-0.10	7025.00	215	34	6.5	6.14	Bottom	0	Variant 1	0.030	1.086	1.063	0.035	

FCC ID: A3LSMX828U	SAR EVALUATION REPORT														Approved by: Technical Manager				
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device														Page 143 of 298				

Table 10-102
6 GHz WLAN Antenna WIFI 1 Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.01	5985.00	7	34	10.0	9.31	Bottom	0	Variant 1	0.002	1.172	1.060	0.002	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.03	5985.00	7	34	10.0	9.31	Bottom	0	Variant 2	0.001	1.172	1.060	0.001	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.17	6305.00	71	34	10.0	9.23	Bottom	0	Variant 1	0.003	1.194	1.060	0.003	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.06	6305.00	71	34	10.0	9.23	Bottom	0	Variant 2	0.000	1.194	1.060	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.02	6465.00	103	34	10.0	9.41	Bottom	0	Variant 1	0.002	1.146	1.060	0.002	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.02	6465.00	103	34	10.0	9.41	Bottom	0	Variant 2	0.000	1.146	1.060	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.03	6705.00	151	34	10.0	9.38	Bottom	0	Variant 1	0.012	1.153	1.060	0.015	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.05	6705.00	151	34	10.0	9.38	Bottom	0	Variant 2	0.000	1.153	1.060	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.09	7025.00	215	34	10.0	9.49	Bottom	0	Variant 1	0.003	1.125	1.060	0.003	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.02	7025.00	215	34	10.0	9.49	Bottom	0	Variant 2	0.003	1.125	1.060	0.004	
ANSI/IEEE C55.1 1992 - SAFETY LIMIT													Body							
Spatial Peak													1.6 W/kg (mW/g)							
Uncontrolled Exposure/General Population													averaged over 1 gram							
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured APD [W/m² (4cm²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m² (4cm²)]	Plot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.01	5985.00	7	34	10.0	9.31	Bottom	0	Variant 1	0.029	1.172	1.060	0.036	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.03	5985.00	7	34	10.0	9.31	Bottom	0	Variant 2	0.016	1.172	1.060	0.020	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.17	6305.00	71	34	10.0	9.23	Bottom	0	Variant 1	0.016	1.194	1.060	0.020	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.06	6305.00	71	34	10.0	9.23	Bottom	0	Variant 2	0.002	1.194	1.060	0.003	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.02	6465.00	103	34	10.0	9.41	Bottom	0	Variant 1	0.020	1.146	1.060	0.024	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.02	6465.00	103	34	10.0	9.41	Bottom	0	Variant 2	0.004	1.146	1.060	0.005	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.03	6705.00	151	34	10.0	9.38	Bottom	0	Variant 1	0.074	1.153	1.060	0.080	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.05	6705.00	151	34	10.0	9.38	Bottom	0	Variant 2	0.000	1.153	1.060	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.09	7025.00	215	34	10.0	9.49	Bottom	0	Variant 1	0.003	1.125	1.060	0.003	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	WiFi 1	2285M	94.37	0.02	7025.00	215	34	10.0	9.49	Bottom	0	Variant 2	0.009	1.125	1.060	0.011	

10.5 6 GHz MIMO Standalone SAR and APD

Table 10-103
6 GHz WLAN MIMO Tablet Max Power

60 GHz WIRELESS LOCAL AREA NETWORKS																						
Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	1	Q243M	90.00	-0.02	5985.00	7	68.1	10.0	9.78	10.0	9.76	Back	19	0.011	1.057	1.111	0.013	
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	2	Q243M	90.00	-0.01	5985.00	7	68.1	10.0	9.78	10.0	9.76	Back	19	0.003	1.057	1.111	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	2	Q243M	90.00	-0.04	6465.00	103	68.1	10.0	9.88	10.0	9.84	Back	19	0.007	1.038	1.111	0.008	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	1	Q243M	90.00	-0.01	6465.00	103	68.1	10.0	9.88	10.0	9.84	Back	19	0.005	1.038	1.111	0.006	
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.09	5985.00	7	68.1	10.0	9.78	10.0	9.76	Top	19	0.000	1.057	1.111	0.000	
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.03	6465.00	103	68.1	10.0	9.88	10.0	9.84	Top	19	0.000	1.038	1.111	0.000	
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.03	5985.00	7	68.1	10.0	9.78	10.0	9.76	Bottom	0	0.000	1.057	1.111	0.000	
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.02	6465.00	103	68.1	10.0	9.88	10.0	9.84	Bottom	0	0.000	1.038	1.111	0.000	
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.09	5985.00	7	68.1	10.0	9.78	10.0	9.76	Right	15	0.004	1.057	1.111	0.005	
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.05	6465.00	103	68.1	10.0	9.88	10.0	9.84	Right	15	0.009	1.038	1.111	0.010	
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.06	5985.00	7	68.1	10.0	9.78	10.0	9.76	Left	15	0.006	1.057	1.111	0.007	
Body	6GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.07	6305.00	71	68.1	10.0	9.20	10.0	9.83	Left	15	0.021	1.202	1.111	0.028	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.09	6465.00	103	68.1	10.0	9.88	10.0	9.84	Left	15	0.015	1.038	1.111	0.017	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.02	6705.00	215	68.1	10.0	9.63	10.0	9.72	Left	15	0.008	1.089	1.111	0.010	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.06	7025.00	215	68.1	10.0	9.43	10.0	9.87	Left	15	0.000	1.140	1.111	0.013	
ANSI/IEEE C95.1-1992 SAFETY LIMIT																						
Spatial Peak																						
Uncontrolled Exposure/General Population																						
																			Body 1.6 W/kg (mW/g) averaged over 1 gram			

Note: To achieve the 13 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 10 dBm.

Exposure	Band/Mode	Bandwidth [MHz]	Service/Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power DcRef [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power [2nd ant] [dBm]	Conducted Power [2nd ant] [dBm]	Test Position	Spacing [mm]	Measured APD [W/m ² 4cm ²]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m ² 4cm ²]	Pilot #
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	1	Q243M	90.00	-0.02	5985.00	7	68.1	10.0	-9.78	10.0	-9.76	Back	19	0.000	1.057	1.111	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	2	Q243M	90.00	-0.03	5985.00	7	68.1	10.0	-9.78	10.0	-9.76	Back	19	0.000	1.057	1.111	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	2	Q243M	90.00	-0.04	6465.00	103	68.1	10.0	-9.88	10.0	-9.84	Back	19	0.038	1.038	1.111	0.044	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	2	Q243M	90.00	-0.01	6465.00	103	68.1	10.0	-9.88	10.0	-9.84	Back	19	0.000	1.038	1.111	0.035	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.09	5985.00	7	68.1	10.0	-9.78	10.0	-9.76	Bottom	19	0.000	1.057	1.111	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.03	6465.00	103	68.1	10.0	-9.88	10.0	-9.84	Top	19	0.000	1.038	1.111	0.031	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.03	5985.00	7	68.1	10.0	-9.78	10.0	-9.76	Bottom	0	0.007	1.057	1.111	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.02	6465.00	103	68.1	10.0	-9.88	10.0	-9.84	Bottom	0	0.008	1.038	1.111	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.08	6465.00	103	68.1	10.0	-9.88	10.0	-9.84	Left	15	0.057	1.057	1.111	0.053	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.05	6465.00	103	68.1	10.0	-9.88	10.0	-9.84	Right	15	0.067	1.038	1.111	0.077	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.08	5985.00	7	68.1	10.0	-9.78	10.0	-9.76	Left	15	0.000	1.057	1.111	0.000	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.07	6305.00	71	68.1	10.0	-9.20	10.0	-9.83	Left	15	0.156	1.202	1.111	0.208	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.09	6465.00	103	68.1	10.0	-9.88	10.0	-9.84	Left	15	0.117	1.038	1.111	0.135	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.13	6705.00	163	68.1	10.0	-9.20	10.0	-9.83	Left	15	0.089	1.093	1.111	0.052	
Body	6 GHz WiFi / IEEE 802.11ax	80	OFDM	MIMO	N/A	Q243M	90.00	-0.06	7025.00	215	68.1	10.0	-9.43	10.0	-9.87	Left	15	0.069	1.128	1.111	0.087	

Note: To achieve the 13 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 10 dBm.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 144 of 298

Table 10-104
6 GHz WLAN MIMO Tablet with Grip Sensor Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Reported 1g SAR [W/kg]	Pilot #	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90.00	0.04	5985.00	7	68.1	6.5	6.33	6.5	6.30	Back	0	N/A	0.082	1.047	0.095	A55	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0243M	90.00	0.06	5985.00	7	68.1	6.5	6.33	6.5	6.30	Back	0	N/A	0.074	1.047	0.784		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90.00	0.03	6305.00	71	68.1	6.5	6.39	6.5	6.24	Back	0	N/A	0.064	1.062	0.076		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0263M	90.00	-0.03	6305.00	71	68.1	6.5	6.39	6.5	6.24	Back	0	N/A	0.029	1.062	0.742		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0243M	90.00	0.15	6465.00	103	68.1	6.5	6.48	6.5	6.14	Back	0	N/A	0.076	1.086	0.816		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90.00	0.07	6465.00	103	68.1	6.5	6.48	6.5	6.14	Back	0	N/A	0.047	1.086	0.057		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0263M	90.00	0.07	6465.00	103	68.1	6.5	6.48	6.5	6.14	Back	0	Variant 1	0.156	1.086	0.188		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0263M	90.00	0.03	6465.00	103	68.1	6.5	6.48	6.5	6.14	Back	0	Variant 2	0.113	1.086	0.378		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0243M	90.00	0.03	6705.00	151	68.1	6.5	6.42	6.5	6.03	Back	0	N/A	0.253	1.115	0.313		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90.00	0.04	6705.00	151	68.1	6.5	6.42	6.5	6.03	Back	0	N/A	0.130	1.115	0.136		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0243M	90.00	0.05	7025.00	215	68.1	6.5	6.21	6.5	6.41	Back	0	N/A	0.595	1.069	0.707		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90.00	0.00	7025.00	215	68.1	6.5	6.21	6.5	6.41	Back	0	N/A	0.107	1.069	0.127		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90.00	0.16	5985.00	7	68.1	6.5	6.33	6.5	6.30	Top	0	N/A	0.041	1.047	0.048		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90.00	0.01	6305.00	71	68.1	6.5	6.39	6.5	6.24	Top	0	N/A	0.040	1.062	0.047		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90.00	0.06	5985.00	7	68.1	6.5	6.33	6.5	6.30	Right	0	N/A	0.334	1.047	0.377		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90.00	0.03	6305.00	71	68.1	6.5	6.39	6.5	6.24	Right	0	N/A	0.214	1.062	0.252		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90.00	0.09	5985.00	7	68.1	6.5	6.33	6.5	6.30	Left	0	N/A	0.303	1.047	0.352		
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90.00	0.06	6305.00	71	68.1	6.5	6.39	6.5	6.24	Left	0	N/A	0.379	1.062	0.447		
ANSI/IEEE C94.1 1992 SAFETY LIMIT																							
Spatial Peak																							
Uncontrolled Exposure/General Population																							
																			Body			1.6 W/kg (mW/g)	
																						averaged over 1 gram	

Note: To achieve the 9.5 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 6.5 dBm.

Exposure	Band/ Mode	Bandwidth [MHz]	Service/ Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured APD [W/m² (4cm²)]	Power Scaling Factor	Reported APD [W/m² (4cm²)]	Pilot #
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90	0.04	5985.00	7	68.1	6.5	6.33	6.5	6.30	Back	0	N/A	0.264	1.047	0.307	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0243M	90	0.06	5985.00	7	68.1	6.5	6.33	6.5	6.30	Back	0	N/A	2.970	1.047	3.455	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90	0.03	6305.00	71	68.1	6.5	6.39	6.5	6.24	Back	0	N/A	0.236	1.062	0.400	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0263M	90	-0.03	6305.00	71	68.1	6.5	6.39	6.5	6.24	Back	0	N/A	3.150	1.062	3.717	A56
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0243M	90	0.15	6465.00	103	68.1	6.5	6.48	6.5	6.14	Back	0	N/A	3.140	1.086	3.789	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90	0.07	6465.00	103	68.1	6.5	6.48	6.5	6.14	Back	0	N/A	0.234	1.086	0.282	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0263M	90	0.07	6465.00	103	68.1	6.5	6.48	6.5	6.14	Back	0	Variant 1	0.798	1.086	0.963	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0263M	90	0.02	6465.00	103	68.1	6.5	6.48	6.5	6.14	Back	0	Variant 2	1.590	1.086	1.918	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0243M	90	0.03	6705.00	151	68.1	6.5	6.42	6.5	6.03	Back	0	N/A	1.140	1.115	1.412	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90	0.04	6705.00	151	68.1	6.5	6.42	6.5	6.03	Back	0	N/A	0.531	1.115	0.658	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	0243M	90	0.05	7025.00	215	68.1	6.5	6.21	6.5	6.41	Back	0	N/A	2.620	1.069	3.112	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	0243M	90	0.00	7025.00	215	68.1	6.5	6.21	6.5	6.41	Back	0	N/A	0.497	1.069	0.590	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90	0.16	5985.00	7	68.1	6.5	6.33	6.5	6.30	Top	0	N/A	0.095	1.047	0.111	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90	0.01	6305.00	71	68.1	6.5	6.39	6.5	6.24	Top	0	N/A	0.192	1.062	0.227	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90	0.06	5985.00	7	68.1	6.5	6.33	6.5	6.30	Right	0	N/A	1.600	1.047	1.861	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90	0.03	6305.00	71	68.1	6.5	6.39	6.5	6.24	Right	0	N/A	1.170	1.062	1.380	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90	0.09	5985.00	7	68.1	6.5	6.33	6.5	6.30	Left	0	N/A	1.960	1.047	1.582	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	0243M	90	0.06	6305.00	71	68.1	6.5	6.39	6.5	6.24	Left	0	N/A	1.900	1.062	2.242	
AND/IEEE C94.1 1992 SAFETY LIMIT																Body						
																Spatial Peak						
																Uncontrolled Exposure/General Population						

Note: To achieve the 9.5 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 6.5 dBm.

Table 10-105
6 GHz WLAN MIMO Tablet with 2.4 GHz WLAN Active and/or NR Active

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Pilot #
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	1993M	90.00	-0.13	5985.00	7	68.1	2.5	2.15	2.5	1.88	Back	0	0.305	1.153	1.111	0.391	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	1993M	90.00	-0.14	5985.00	7	68.1	2.5	2.15	2.5	1.88	Back	0	0.049	1.153	1.111	0.063	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	1993M	90.00	0.03	6305.00	71	68.1	2.5	1.74	2.5	2.32	Back	0	0.354	1.191	1.111	0.468	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	1993M	90.00	0.02	6305.00	71	68.1	2.5	1.74	2.5	2.32	Back	0	0.014	1.191	1.111	0.019	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	1993M	90.00	0.17	5985.00	7	68.1	2.5	2.15	2.5	1.88	Right	0	0.086	1.153	1.111	0.110	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	1993M	90.00	0.02	6305.00	71	68.1	2.5	1.74	2.5	2.32	Right	0	0.057	1.191	1.111	0.075	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	1993M	90.00	0.03	5985.00	7	68.1	2.5	2.15	2.5	1.88	Left	0	0.071	1.153	1.111	0.091	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	1993M	90.00	0.14	6305.00	71	68.1	2.5	1.74	2.5	2.32	Left	0	0.119	1.191	1.111	0.157	
ANSI/IEEE C94.1 1992 SAFETY LIMIT																						
Spatial Peak																						
Uncontrolled Exposure/General Population																						
																		Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note: To achieve the 5.5 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 2.5 dBm.

Exposure	Band/ Mode	Bandwidth [MHz]	Service/ Modulation	Ant.	Peak Number	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Measured APD [W/m ² (4cm ²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m ² (4cm ²)]	Pilot #
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	1993M	90	-0.13	5985.00	7	68.1	2.5	2.15	2.5	1.88	Back	0	1.400	1.153	1.111	1.793	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	1993M	90	-0.14	5985.00	7	68.1	2.5	2.15	2.5	1.88	Back	0	0.211	1.153	1.111	0.270	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	1	1993M	90	0.03	6305.00	71	68.1	2.5	1.74	2.5	2.32	Back	0	1.660	1.191	1.111	2.197	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	2	1993M	90	0.02	6305.00	71	68.1	2.5	1.74	2.5	2.32	Back	0	0.050	1.191	1.111	0.066	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	1993M	90	0.17	5985.00	7	68.1	2.5	2.15	2.5	1.88	Right	0	0.433	1.153	1.111	0.555	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	1993M	90	0.02	6305.00	71	68.1	2.5	1.74	2.5	2.32	Right	0	0.312	1.191	1.111	0.413	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	1993M	90	0.15	5985.00	7	68.1	2.5	2.15	2.5	1.88	Left	0	0.286	1.153	1.111	0.366	
Body	6 GHz WIFU / IEEE 802.11ax	80	OFDM	MIMO	N/A	1993M	90	0.14	6305.00	71	68.1	2.5	1.74	2.5	2.32	Left	0	0.594	1.191	1.111	0.786	

Table 10-106
6 GHz WLAN MIMO Laptop

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	-0.11	5985.00	7	68.1	10.0	9.78	10.0	9.76	Bottom	0	Variant 1	0.055	1.057	1.111	0.065	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	0.07	5985.00	7	68.1	10.0	9.78	10.0	9.76	Bottom	0	Variant 2	0.043	1.057	1.111	0.085	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	0.08	6305.00	71	68.1	10.0	9.20	10.0	9.83	Bottom	0	Variant 1	0.080	1.202	1.111	0.107	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	0.12	6305.00	71	68.1	10.0	9.20	10.0	9.83	Bottom	0	Variant 2	0.111	1.202	1.111	0.415	A57
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	0.07	6465.00	303	68.1	10.0	9.88	10.0	9.84	Bottom	0	Variant 1	0.065	1.038	1.111	0.075	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	0.02	6465.00	303	68.1	10.0	9.88	10.0	9.84	Bottom	0	Variant 2	0.153	1.038	1.111	0.176	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	0.08	6705.00	151	68.1	10.0	9.63	10.0	9.72	Bottom	0	Variant 1	0.039	1.089	1.111	0.047	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	-0.04	6705.00	151	68.1	10.0	9.63	10.0	9.72	Bottom	0	Variant 2	0.089	1.089	1.111	0.108	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	0.04	7025.00	215	68.1	10.0	9.43	10.0	9.87	Bottom	0	Variant 1	0.028	1.140	1.111	0.035	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90.00	0.04	7025.00	215	68.1	10.0	9.43	10.0	9.87	Bottom	0	Variant 2	0.110	1.140	1.111	0.139	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population																		Body 1.6 W/kg (mW/g) averaged over 1 gram				

Note: To achieve the 13 dBm maximum allowed MIMO power shown in the documentation, each antenna transmits at a maximum allowed power of 10 dBm.

Exposure	Band / Mode	Bandwidth [MHz]	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Max Allowed Power (2nd ant) [dBm]	Conducted Power (2nd ant) [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured APD [W/m² (4cm²)]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported APD [W/m² (4cm²)]	Plot #
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	-0.11	5985.00	7	68.1	10.0	9.78	10.0	9.76	Bottom	0	Variant 1	0.391	1.057	1.111	0.459	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	0.07	5985.00	7	68.1	10.0	9.78	10.0	9.76	Bottom	0	Variant 2	1.610	1.057	1.111	1.891	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	0.08	6305.00	71	68.1	10.0	9.20	10.0	9.83	Bottom	0	Variant 1	0.614	1.202	1.111	0.820	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	0.12	6305.00	71	68.1	10.0	9.20	10.0	9.83	Bottom	0	Variant 2	2.040	1.202	1.111	2.724	A57
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	0.07	6465.00	303	68.1	10.0	9.88	10.0	9.84	Bottom	0	Variant 1	0.476	1.038	1.111	0.549	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	0.02	6465.00	303	68.1	10.0	9.88	10.0	9.84	Bottom	0	Variant 2	1.036	1.038	1.111	1.168	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	0.08	6705.00	151	68.1	10.0	9.63	10.0	9.72	Bottom	0	Variant 1	0.306	1.089	1.111	0.370	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	-0.04	6705.00	151	68.1	10.0	9.63	10.0	9.72	Bottom	0	Variant 2	0.554	1.089	1.111	0.670	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	0.04	7025.00	215	68.1	10.0	9.43	10.0	9.87	Bottom	0	Variant 1	0.234	1.140	1.111	0.296	
Body	6 GHz WiFi / IEEE 802.11aa	80	OFDM	MIMO	0263M	90	0.04	7025.00	215	68.1	10.0	9.43	10.0	9.87	Bottom	0	Variant 2	0.719	1.140	1.111	0.911	

10.6 Bluetooth SISO Standalone SAR

Table 10-107
Bluetooth Ant WIFI 0 Tablet Max Power

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz Bluetooth	FHSS	WIFI 0	0237M	76.80	-0.16	2480.00	78	1	15.0	13.87	Back	19	0.015	1.297	1.016	0.020	
Body	2.4 GHz Bluetooth	FHSS	WIFI 0	0237M	76.80	0.10	2480.00	78	1	15.0	13.87	Top	19	0.009	1.297	1.016	0.012	
Body	2.4 GHz Bluetooth	FHSS	WIFI 0	0237M	76.80	0.10	2480.00	78	1	15.0	13.87	Bottom	0	0.013	1.297	1.016	0.017	
Body	2.4 GHz Bluetooth	FHSS	WIFI 0	0237M	76.80	0.08	2480.00	78	1	15.0	13.87	Right	0	0.000	1.297	1.016	0.000	
Body	2.4 GHz Bluetooth	FHSS	WIFI 0	0237M	76.80	0.13	2480.00	78	1	15.0	13.87	Left	15	0.030	1.297	1.016	0.040	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram				

Table 10-108
Bluetooth Ant WIFI 1 Tablet Max Power

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	-0.15	2480.00	78	1	15.0	14.24	Back	19	0.024	1.191	1.016	0.029	
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	-0.21	2480.00	78	1	15.0	14.24	Top	19	0.017	1.191	1.016	0.021	
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	-0.03	2480.00	78	1	15.0	14.24	Bottom	0	0.029	1.191	1.016	0.035	
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	0.00	2480.00	78	1	15.0	14.24	Right	15	0.005	1.191	1.016	0.079	
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	0.09	2480.00	78	1	15.0	14.24	Left	0	0.001	1.191	1.016	0.001	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram				

Table 10-109
Bluetooth Ant WIFI 0 Tablet with Grip Sensor Active

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz Bluetooth	FHSS	WIFI 0	0237M	76.80	0.06	2441.00	39	1	7.5	6.22	Back	0	0.112	1.343	1.016	0.153	A58
Body	2.4 GHz Bluetooth	FHSS	WIFI 0	0237M	76.80	-0.02	2441.00	39	1	7.5	6.22	Top	0	0.043	1.343	1.016	0.059	
Body	2.4 GHz Bluetooth	FHSS	WIFI 0	0237M	76.80	0.18	2441.00	39	1	7.5	6.22	Left	0	0.059	1.343	1.016	0.081	
ANSI/IEEE C95.1 1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population														Body 1.6 W/kg (mW/g) averaged over 1 gram				

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 146 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Table 10-110
Bluetooth Ant WIFI 1 Tablet with Grip Sensor Active

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	0.04	2441.00	39	1	7.5	6.31	Back	0	0.101	1.315	1.016	0.135	
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	0.01	2441.00	39	1	7.5	6.31	Top	0	0.050	1.315	1.016	0.067	
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	0.09	2441.00	39	1	7.5	6.31	Right	0	0.112	1.315	1.016	0.150	
ANSI/IEEE C95.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram						

Table 10-111
Bluetooth Ant WIFI 0 Laptop

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz Bluetooth	FHSS	WiFi0	0237M	76.80	-0.09	2441.00	39	1	6.5	6.22	Bottom	0	Variant 1	0.034	1.067	1.016	0.037	
Body	2.4 GHz Bluetooth	FHSS	WiFi0	0237M	76.80	-0.01	2441.00	39	1	6.5	6.22	Bottom	0	Variant 2	0.069	1.067	1.016	0.075	A59
ANSI/IEEE C95.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							

Table 10-112
Bluetooth Ant WIFI 1 Laptop

Exposure	Band / Mode	Service / Modulation	Ant.	Serial Number	Duty Cycle [%]	Power Drift [dB]	Frequency [MHz]	Channel #	Data Rate [Mbps]	Max Allowed Power [dBm]	Conducted Power [dBm]	Test Position	Spacing [mm]	Keyboard Type	Measured 1g SAR [W/kg]	Power Scaling Factor	Duty Cycle Scaling Factor	Reported 1g SAR [W/kg]	Plot #
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	0.09	2480.00	78	1	15.0	14.24	Bottom	0	Variant 1	0.000	1.191	1.016	0.000	
Body	2.4 GHz Bluetooth	FHSS	WIFI 1	0237M	76.80	0.01	2480.00	78	1	15.0	14.24	Bottom	0	Variant 2	0.000	1.191	1.016	0.000	
ANSI/IEEE C95.1.1992 - SAFETY LIMIT Spatial Peak Uncontrolled Exposure/General Population												Body 1.6 W/kg (mW/g) averaged over 1 gram							

10.7 SAR Test Notes

General Notes:

- The test data reported are the worst-case SAR values according to test procedures specified in IEEE 1528-2013, FCC KDB Publication 447498 D04v01, and FCC KDB Publication 616217 D04v01r02.
- Batteries are fully charged at the beginning of the SAR measurements.
- Liquid tissue depth was at least 15.0 cm for all frequencies.
- The manufacturer has confirmed that the device(s) tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
- SAR results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04v01.
- Per FCC KDB 865664 D01v01r04, variability SAR tests were performed when the measured SAR results for a frequency band were greater than or equal to 0.8 W/kg. Repeated SAR measurements are highlighted in the tables above for clarity. Please see Section 12 for variability analysis.
- This device uses MediaTek TAS for WWAN to control and manage transmitting power in real time to ensure RF Exposure compliance. Per FCC Guidance, compliance for was assessed at the minimum of the time averaged power and the maximum output power for each band/mode/exposure condition (ECI).
- FCC KDB Publication 616217 D04v01r02 Section 4.3, SAR tests are required for the back surface and edges of the tablet with the tablet touching the phantom. The SAR Exclusion Threshold in FCC KDB 447498 D04v01 was applied to determine SAR test exclusion for adjacent edge configurations.
- Per FCC KDB 616217 D04, SAR is evaluated for the bottom surface of a keyboard when it is attached to the DUT in laptop configuration.
- Per FCC KDB 648474 D04, highest reported SAR tablet configuration for a transmission band on an antenna was additionally evaluated with keyboard accessory attached and folded back at 360°
- The orange highlights throughout the report represent the highest scaled SAR per Equipment Class.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 147 of 298

REV 22.0
03/30/2022

UMTS Notes:

1. UMTS mode was tested under RMC 12.2 kbps with HSPA Inactive per KDB Publication 941225 D01v03r01. AMR and HSPA SAR was not required per the 3G Test Reduction Procedure in KDB Publication 941225 D01v03r01.
2. Per FCC KDB Publication 447498 D04v01, if the reported (scaled) SAR measured at the highest output power channel for each test configuration is ≤ 0.8 W/kg for 1g evaluations then testing at the other channels is not required for such test configuration(s).

LTE Notes:

1. LTE test configurations are determined according to SAR Evaluation Considerations for LTE Devices in FCC KDB Publication 941225 D05v02r04. The general test procedures used for testing can be found in Section 7.5.4.
2. MPR is permanently implemented for this device by the manufacturer. The specific manufacturer target MPR is indicated alongside the SAR results. MPR is enabled for this device, according to 3GPP TS36.101 Section 6.2.3 – 6.2.5 under Table 6.2.3-1.
3. A-MPR was disabled for all SAR tests by setting NS=01 and MCC=001 on the base station simulator. SAR tests were performed with the same number of RB and RB offsets transmitting on all TTI frames (maximum TTI).
4. Per FCC KDB Publication 447498 D04v01, when the reported LTE Band 41 or LTE Band 48 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations, testing at the other channels was required for such test configurations.
5. TDD LTE was tested per the guidance provided in FCC KDB Publication 941225 D05v02r04. Testing was performed using UL-DL configuration 0 with 6 UL subframes and 2 S subframes using extended cyclic prefix only and special subframe configuration 6. SAR tests were performed at maximum output power and worst-case transmission duty factor in extended cyclic prefix. Per 3GPP 36.211 Section 4, the duty factor for special subframe configuration 6 using extended cyclic prefix is 0.633.
6. Per KDB Publication 941225 D05Av01r02, SAR for downlink only LTE CA operations was not needed since the maximum average output power in LTE CA mode was not >0.25 dB higher than the maximum output power when downlink carrier aggregation was inactive.
7. This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per FCC Guidance, all SAR tests were performed using Power Class 3. SAR with power class 2 at the available duty factor was additionally performed for the power class 3 configuration with the highest SAR configuration for each exposure conditions. Please see Section 13 for linearity results.
8. For LTE Band 7, LTE Band 66, LTE Band 48, and LTE Band 41, per FCC guidance, SAR was first measured with only a single carrier active in the uplink (carrier aggregation not active). For each exposure condition, the uplink CA scenario with two component carriers was additionally tested for the configuration with the highest SAR when carrier aggregation was not active. The SCC was configured with the closest available contiguous channel. The two component carriers were configured so the resource blocks are physically allocated side by side to achieve the maximum output power.

NR Notes:

1. NR implementation supports SA and NSA mode. In EN-DC mode, NR operates with the LTE Bands shown in the NR FR1 checklist acting as anchor bands. Per FCC guidance, SAR tests for NR Bands and LTE Anchors Bands were performed separately due to limitations in SAR probe calibration factors.
2. Due to test setup limitations, SAR testing for NR was performed using test mode software to establish the connection.
3. Simultaneous transmission analysis for EN-DC operations is addressed in the Part 2 Test Report (Serial Number can be found in the bibliography).
4. This device additionally supports some EN-DC conditions where additional LTE carriers are added on the downlink only.
5. Per FCC Guidance, NR modulations and RB Sizes/Offsets were selected for testing such that configurations with the highest output power were evaluated for SAR tests.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 148 of 298

REV 22.0
03/30/2022

6. Per FCC KDB Publication 447498 D04v01, when the reported NR Band n77 C-Band SAR measured at the highest output power channel in a given a test configuration was > 0.4 W/kg for 1g evaluations and > 1 W/kg for 10g evaluation, testing at the other channels was required for such test configurations.
7. Per FCC KDB Publication 447498 D04v01, when the reported NR Band n41 SAR measured at the highest output power channel in a given a test configuration was > 0.6 W/kg for 1g evaluations and > 1 W/kg for 10g evaluation, testing at the other channels was required for such test configurations.
8. Per MTK guidance, SRS was tested with modulated signal. DFT-s-OFDM QPSK was used as the lowest order modulation and RB Size/Offset was selected to resemble continuous wave signal.

WLAN Notes:

1. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 2.4 GHz WIFI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n/ax) was not required due to the maximum allowed powers and the highest reported DSSS SAR. See Section 7.6.4 for more information.
2. Justification for test configurations for WLAN per KDB Publication 248227 D01v02r02 for 5 GHz WIFI operations, the initial test configuration was selected according to the transmission mode with the highest maximum allowed powers. Other transmission modes were not investigated since the highest reported SAR for initial test configuration adjusted by the ratio of maximum output powers is less than 1.2 W/kg for 1g evaluations. See Section 7.6.5 for more information.
3. Per KDB Publication 248227 D01v02r02, SAR for MIMO was evaluated by following the simultaneous SAR provisions from KDB Publication 447498 D04v01 by either evaluating the sum of the 1g SAR values of each antenna transmitting independently or making a SAR measurement with both antennas transmitting simultaneously. Please see the Simultaneous Numerical Calculations Appendix for complete analysis.
4. When the maximum reported 1g averaged SAR is ≤ 0.8 W/kg, SAR testing on additional channels was not required. Otherwise, SAR for the next highest output power channel was required until the reported SAR result was ≤ 1.20 W/kg for 1g evaluations or all test channels were measured.
5. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools. The reported SAR was scaled to the 100% transmission duty factor to determine compliance. Procedures used to measure the duty factor are identical to that in the associated EMC test reports.
6. Per FCC guidance, SAR was performed using 6.5 GHz SAR probe calibration factors. Per October 2020 TCB Workshop notes, 5 channels were tested.

Bluetooth Notes

1. Bluetooth SAR was measured with the device connected to a call box with hopping disabled with DH5 operation and Tx Tests test mode type. Per October 2016 TCB Workshop Notes, the reported SAR was scaled to the 79% transmission duty factor for Bluetooth to determine compliance. See RF Conducted Power Section for the time domain plot and calculation for the duty factor of the device.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 149 of 298

REV 22.0
03/30/2022

11 POWER DENSITY DATA SUMMARY

11.1 6 GHz WIFI Power Density Results

Table 11-1
6 GHz WLAN Tablet – Antenna WIFI 0

MEASUREMENT RESULTS																								
Frequency (MHz)	Channel	Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (Ant 1) (dBm)	Conducted Power (Ant 1) (dBm)	Power Drift (dB)	Spacing (mm)	Antenna Config.	Keyboard Type	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #
5985.00	7	802.11ax	OFDM	80	10.00	9.33	-0.12	2	WiFi0	N/A	2063M	MC50	Back	94.03	0.125	-	1.554	1.167	1.063	0.546	1.053	0.679	1.309	
6305.00	71	802.11ax	OFDM	80	10.00	9.44	-0.04	2	WiFi0	N/A	2063M	MC50	Back	94.03	0.125	1.060	1.554	1.138	1.063	0.999	1.878	1.190	2.237	
6305.00	71	802.11ax	OFDM	80	10.00	9.44	-0.19	9.51	WiFi0	N/A	2063M	MC50	Back	94.03	0.125	0.248	1.554	1.138	1.063	0.127	0.239	0.145	0.273	
6305.00	71	802.11ax	OFDM	80	10.00	9.44	-0.12	2	WiFi0	Keyboard Variant 1	2063M	MC50	Back	94.03	0.125	-	1.554	1.138	1.063	0.335	0.630	0.463	0.870	
6305.00	71	802.11ax	OFDM	80	10.00	9.44	0.14	2	WiFi0	Keyboard Variant 2	2063M	MC50	Back	94.03	0.125	-	1.554	1.138	1.063	0.463	0.870	0.634	1.192	
6465.00	103	802.11ax	OFDM	80	10.00	9.20	-0.11	2	WiFi0	N/A	2063M	MC50	Back	94.03	0.125	-	1.554	1.202	1.063	0.559	1.110	0.660	1.310	
6705.00	151	802.11ax	OFDM	80	10.00	9.42	-0.01	2	WiFi0	N/A	2063M	MC50	Back	94.03	0.125	-	1.554	1.143	1.063	0.367	0.693	0.449	0.848	
7025.00	215	802.11ax	OFDM	80	10.00	9.23	-0.02	2	WiFi0	N/A	2063M	MC50	Back	94.03	0.125	-	1.554	1.194	1.063	0.361	0.712	0.481	0.949	
6305.00	71	802.11ax	OFDM	80	10.00	9.44	0.13	2	WiFi0	N/A	2063M	MC50	Top	94.03	0.125	-	1.554	1.138	1.063	0.165	0.310	0.178	0.335	
6305.00	71	802.11ax	OFDM	80	10.00	9.44	-0.11	2	WiFi0	N/A	2063M	MC50	Left	94.03	0.125	-	1.554	1.138	1.063	0.199	0.374	0.651	1.224	
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population										Power Density 10 W/m² averaged over 4 cm²														

Table 11-2
6 GHz WLAN Tablet – Antenna WIFI 1

MEASUREMENT RESULTS																								
Frequency (MHz)	Channel	Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (Ant 2) (dBm)	Conducted Power (Ant 2) (dBm)	Power Drift (dB)	Spacing (mm)	Antenna Config.	Keyboard Type	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #
7025.00	215	802.11ax	OFDM	80	10.00	9.49	0.12	2	WIFI1	N/A	2063M	MC50	Back	94.37	0.125	-	1.554	1.125	1.060	0.361	0.669	0.431	0.799	
7025.00	215	802.11ax	OFDM	80	10.00	9.49	-0.02	2	WIFI1	N/A	2063M	MC50	Top	94.37	0.125	-	1.554	1.125	1.060	0.306	0.567	0.353	0.654	
5985.00	7	802.11ax	OFDM	80	10.00	9.31	-0.01	2	WIFI1	N/A	2063M	MC50	Right	94.37	0.125	-	1.554	1.172	1.060	0.503	0.971	0.718	1.386	
5985.00	7	802.11ax	OFDM	80	10.00	9.31	0.15	2	WIFI1	Keyboard Variant 1	2063M	MC50	Right	94.37	0.125	-	1.554	1.172	1.060	0.245	0.473	0.262	0.506	
5985.00	7	802.11ax	OFDM	80	10.00	9.31	0.11	2	WIFI1	Keyboard Variant 2	2063M	MC50	Right	94.37	0.125	-	1.554	1.172	1.060	0.454	0.876	0.773	1.492	
6305.00	71	802.11ax	OFDM	80	10.00	9.23	0.08	2	WIFI1	N/A	2063M	MC50	Right	94.37	0.125	-	1.554	1.194	1.060	0.326	0.641	0.403	0.793	
6465.00	103	802.11ax	OFDM	80	10.00	9.41	-0.02	2	WIFI1	N/A	2063M	MC50	Right	94.37	0.125	0.930	1.554	1.146	1.060	0.149	0.281	0.162	0.306	
6705.00	151	802.11ax	OFDM	80	10.00	9.38	-0.09	2	WIFI1	N/A	2063M	MC50	Right	94.37	0.125	0.230	1.554	1.153	1.060	0.136	0.258	0.191	0.363	
7025.00	215	802.11ax	OFDM	80	10.00	9.49	-0.10	2	WIFI1	N/A	2063M	MC50	Right	94.37	0.125	-	1.554	1.125	1.060	0.484	0.897	0.533	0.988	
7025.00	215	802.11ax	OFDM	80	10.00	9.49	-0.16	8.54	WIFI1	N/A	2063M	MC50	Right	94.37	0.125	-	1.554	1.125	1.060	0.115	0.213	0.131	0.243	
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population										Power Density 10 W/m² averaged over 4 cm²														

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 150 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

**Table 11-3
6 GHz WLAN Tablet – MIMO**

MEASUREMENT RESULTS																											
Frequency (MHz)	Channel	Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (Ant 1) (dBm)	Conducted Power (Ant 1) (dBm)	Maximum Allowed Power (Ant 2) (dBm)	Conducted Power (Ant 2) (dBm)	Power DfB (dB)	Spacing (mm)	Antenna Config.	Peak	Keyboard Type	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per FCC 47.157	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal pAPD (W/m²)	Scaled Normal pAPD (W/m²)	Total pAPD (W/m²)	Scaled Total pAPD (W/m²)	Plot #
5885.00	7	802.11ax	OFDM	80	10.00	9.78	10.00	9.76	-0.13	2	MIMO	1	N/A	1993M	MCSS0	Back	90.00	0.125	1.630	1.554	1.057	1.111	1.730	0.157	1.880	3.431	A40
5885.00	7	802.11ax	OFDM	80	10.00	9.78	10.00	9.76	0.13	2	MIMO	2	N/A	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.057	1.111	0.682	1.246	0.979	1.787	
5885.00	7	802.11ax	OFDM	80	10.00	9.78	10.00	9.76	0.12	9.27	MIMO	1	N/A	1993M	MCSS0	Back	90.00	0.125	0.328	1.554	1.057	1.111	0.173	0.338	0.228	0.416	
5885.00	7	802.11ax	OFDM	80	10.00	9.78	10.00	9.76	-1.50	2	MIMO	1	Keyboard Variant 1	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.057	1.111	0.308	0.633	0.346	0.631	
5885.00	7	802.11ax	OFDM	80	10.00	9.78	10.00	9.76	-0.13	2	MIMO	2	Keyboard Variant 2	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.057	1.111	0.382	0.687	0.462	0.835	
6305.00	71	802.11ax	OFDM	80	10.00	9.20	10.00	9.83	0.10	2	MIMO	1	N/A	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.202	1.111	0.574	1.191	0.895	1.857	
6305.00	71	802.11ax	OFDM	80	10.00	9.20	10.00	9.83	0.10	2	MIMO	2	N/A	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.202	1.111	0.283	0.587	0.453	0.899	
6465.00	103	802.11ax	OFDM	80	10.00	9.88	10.00	9.84	-0.13	2	MIMO	1	N/A	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.038	1.111	0.509	0.912	0.871	1.561	
6465.00	103	802.11ax	OFDM	80	10.00	9.88	10.00	9.84	-0.20	2	MIMO	2	N/A	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.038	1.111	0.404	0.724	0.471	0.844	
6705.00	151	802.11ax	OFDM	80	10.00	9.63	10.00	9.72	-0.13	2	MIMO	1	N/A	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.089	1.111	0.609	1.239	1.010	1.899	
6705.00	151	802.11ax	OFDM	80	10.00	9.63	10.00	9.72	-0.14	2	MIMO	2	N/A	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.089	1.111	0.403	0.758	0.607	1.141	
7025.00	215	802.11ax	OFDM	80	10.00	9.43	10.00	9.87	-0.14	2	MIMO	1	N/A	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.140	1.111	0.788	1.571	0.979	1.907	
7025.00	215	802.11ax	OFDM	80	10.00	9.43	10.00	9.87	-0.09	2	MIMO	2	N/A	1993M	MCSS0	Back	90.00	0.125	-	1.554	1.140	1.111	0.333	0.655	0.458	0.901	
6465.00	103	802.11ax	OFDM	80	10.00	9.88	10.00	9.84	-0.12	2	MIMO	1	N/A	1993M	MCSS0	Top	90.00	0.125	-	1.554	1.038	1.111	0.191	0.342	0.246	0.441	
6465.00	103	802.11ax	OFDM	80	10.00	9.88	10.00	9.84	0.16	2	MIMO	2	N/A	1993M	MCSS0	Top	90.00	0.125	-	1.554	1.038	1.111	0.295	0.529	0.317	0.568	
6465.00	103	802.11ax	OFDM	80	10.00	9.88	10.00	9.84	0.15	2	MIMO	1	N/A	1993M	MCSS0	Right	90.00	0.125	-	1.554	1.038	1.111	0.374	0.670	0.576	1.032	
6465.00	103	802.11ax	OFDM	80	10.00	9.88	10.00	9.84	0.20	2	MIMO	1	N/A	1993M	MCSS0	Left	90.00	0.125	-	1.554	1.038	1.111	0.581	1.041	0.937	1.679	
47 CFR 51.1510 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population															Power Density 10 mW/m² averaged over 4 cm²												

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 151 of 298

Table 11-4
6 GHz WLAN Laptop – Variant 1

MEASUREMENT RESULTS																									
Frequency (MHz)	Channel	Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Power Drift (dB)	Spacing (mm)	Antenna Config.	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #		
5985.00	7	802.11ax	OFDM	80	6.50	6.13	-0.21	2	WIFI0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.089	1.004	0.230	0.391	0.249	0.423			
6305.00	71	802.11ax	OFDM	80	6.50	6.02	0.15	2	WIFI0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.117	1.004	0.070	0.122	0.081	0.141			
6465.00	103	802.11ax	OFDM	80	6.50	6.32	-0.09	2	WIFI0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.042	1.004	0.082	0.133	0.108	0.176			
6705.00	151	802.11ax	OFDM	80	6.50	6.29	0.17	2	WIFI0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.050	1.004	0.167	0.274	0.181	0.297			
7025.00	215	802.11ax	OFDM	80	6.50	6.14	0.12	2	WIFI0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.086	1.004	0.246	0.417	0.255	0.432			
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population										Power Density 10 W/m² averaged over 4 cm²															
MEASUREMENT RESULTS																									
Frequency (MHz)	Channel	Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift (dB)	Spacing (mm)	Antenna Config.	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #		
5985.00	7	802.11ax	OFDM	80	10.00	9.31	0.00	2	WIFI1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.117	1.004	0.083	0.015	0.148	0.027			
6305.00	71	802.11ax	OFDM	80	10.00	9.23	0.18	2	WIFI1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.119	1.004	0.184	0.034	0.214	0.040			
6465.00	103	802.11ax	OFDM	80	10.00	9.41	0.13	2	WIFI1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.115	1.004	0.128	0.023	0.155	0.028			
6705.00	151	802.11ax	OFDM	80	10.00	9.38	0.17	2	WIFI1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.115	1.004	0.099	0.018	0.111	0.020			
7025.00	215	802.11ax	OFDM	80	10.00	9.49	-0.14	2	WIFI1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.112	1.004	0.241	0.042	0.278	0.048			
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population										Power Density 10 W/m² averaged over 4 cm²															
MEASUREMENT RESULTS																									
Frequency (MHz)	Channel	Mode	Service	Bandwidth [MHz]	Maximum Allowed Power (Ant 1) [dBm]	Conducted Power (Ant 1) [dBm]	Maximum Allowed Power (Ant 2) [dBm]	Conducted Power (Ant 2) [dBm]	Power Drift (dB)	Spacing (mm)	Antenna Config.	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #
5985.00	7	802.11ax	OFDM	80	10.00	9.78	10.00	9.76	0.19	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.057	1.004	0.323	0.533	0.462	0.745	
6305.00	71	802.11ax	OFDM	80	10.00	9.20	10.00	9.83	-0.10	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.202	1.004	0.270	0.506	0.426	0.799	
6465.00	103	802.11ax	OFDM	80	10.00	9.88	10.00	9.84	-0.13	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.038	1.004	0.237	0.384	0.361	0.585	
6705.00	151	802.11ax	OFDM	80	10.00	9.63	10.00	9.72	-0.18	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.089	1.004	0.181	0.308	0.288	0.489	
7025.00	215	802.11ax	OFDM	80	10.00	9.43	10.00	9.87	0.18	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.140	1.004	0.399	0.710	0.496	0.882	
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population										Power Density 10 W/m² averaged over 4 cm²															

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 152 of 298

Table 11-5
6 GHz WLAN Laptop – Variant 2

MEASUREMENT RESULTS																									
Frequency (MHz)	Channel	Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (Ant 1) (dBm)	Conducted Power (Ant 1) (dBm)	Power Drift (dB)	Spacing (mm)	Antenna Config.	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #		
5985.00	7	802.11ax	OFDM	80	6.50	6.13	0.14	2	WIFI 0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.089	1.004	0.335	0.569	0.538	0.914			
6305.00	71	802.11ax	OFDM	80	6.50	6.02	0.08	2	WIFI 0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.117	1.004	0.395	0.688	0.463	0.807			
6465.00	103	802.11ax	OFDM	80	6.50	6.32	-0.11	2	WIFI 0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.042	1.004	0.557	0.906	0.666	1.083			
6705.00	151	802.11ax	OFDM	80	6.50	6.29	-0.13	2	WIFI 0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.050	1.004	0.289	0.473	0.293	0.480			
7025.00	215	802.11ax	OFDM	80	6.50	6.14	-0.12	2	WIFI 0	2063M	MCS0	Bottom	99.60	0.125	-	1.554	1.086	1.004	0.325	0.551	0.343	0.581			
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population										Power Density 10 W/m² averaged over 4 cm²															
MEASUREMENT RESULTS																									
Frequency (MHz)	Channel	Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (Ant 2) (dBm)	Conducted Power (Ant 2) (dBm)	Power Drift (dB)	Spacing (mm)	Antenna Config.	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #		
5985.00	7	802.11ax	OFDM	80	10.00	9.31	0.12	2	WIFI 1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.117	1.004	0.091	0.017	0.105	0.019			
6305.00	71	802.11ax	OFDM	80	10.00	9.23	0.15	2	WIFI 1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.119	1.004	0.276	0.051	0.323	0.060			
6465.00	103	802.11ax	OFDM	80	10.00	9.41	-0.12	2	WIFI 1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.115	1.004	0.172	0.031	0.183	0.033			
6705.00	151	802.11ax	OFDM	80	10.00	9.38	0.14	2	WIFI 1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.115	1.004	0.199	0.036	0.212	0.038			
7025.00	215	802.11ax	OFDM	80	10.00	9.49	0.18	2	WIFI 1	2063M	MCS0	Bottom	99.60	0.125	-	1.554	0.112	1.004	0.310	0.054	0.325	0.057			
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population										Power Density 10 W/m² averaged over 4 cm²															
MEASUREMENT RESULTS																									
Frequency (MHz)	Channel	Mode	Service	Bandwidth (MHz)	Maximum Allowed Power (Ant 1) (dBm)	Conducted Power (Ant 1) (dBm)	Maximum Allowed Power (Ant 2) (dBm)	Conducted Power (Ant 2) (dBm)	Power Drift (dB)	Spacing (mm)	Antenna Config.	DUT Serial Number	Data Rate (Mbps)	Side	Duty Cycle (%)	Grid Step (A)	IPD (W/m²)	Scaling Factor for Measurement Uncertainty per IEC 62479	Scaling Factor (Power)	Scaling Factor (Duty Cycle)	Normal psPD (W/m²)	Scaled Normal psPD (W/m²)	Total psPD (W/m²)	Scaled Total psPD (W/m²)	Plot #
5985.00	7	802.11ax	OFDM	80	10.00	9.78	10.00	9.76	-0.14	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.057	1.004	0.748	1.234	1.040	1.715	A61
6305.00	71	802.11ax	OFDM	80	10.00	9.20	10.00	9.83	-0.12	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.202	1.004	0.295	0.553	0.689	1.292	
6465.00	103	802.11ax	OFDM	80	10.00	9.88	10.00	9.84	-0.14	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.038	1.004	0.614	0.994	0.771	1.249	
6705.00	151	802.11ax	OFDM	80	10.00	9.63	10.00	9.72	-0.14	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.089	1.004	0.185	0.314	0.202	0.343	
7025.00	215	802.11ax	OFDM	80	10.00	9.43	10.00	9.87	-0.17	2	MIMO	1993M	MCS0	Bottom	99.60	0.125	-	1.554	1.140	1.004	0.362	0.644	0.427	0.759	
47 CFR §1.1310 - SAFETY LIMIT Spatial Average Uncontrolled Exposure / General Population										Power Density 10 W/m² averaged over 4 cm²															

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 153 of 298

Power Density General Notes

1. The manufacturer has confirmed that the devices tested have the same physical, mechanical and thermal characteristics and are within operational tolerances expected for production units.
2. Batteries are fully charged at the beginning of the measurements. The DUT was connected to a wall charger for some measurements due to the test duration. It was confirmed that the charger plugged into this DUT did not impact the near-field PD test results.
3. Power density was calculated by repeated E-field measurements on two measurement planes separated by $\lambda/4$.
4. The device was configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools.
5. Per FCC guidance and equipment manufacturer guidance, power density results were scaled according to IEC 62479:2010 for the portion of the measurement uncertainty > 30%. Total expanded uncertainty of 2.68 dB (85.4%) was used to determine the psPD measurement scaling factor.
6. Per equipment manufacturer guidance, power density was measured at $d=2\text{mm}$ and $d=\lambda/5\text{mm}$ using the same grid size and grid step size for some frequencies and surfaces. The integrated Power Density (iPD) was calculated based on these measurements. Since iPD ratio between the two distances is $\geq -1\text{dB}$, the grid step was sufficient for determining compliance at $d=2\text{mm}$.
7. PTP-PR algorithm was used during psPD measurement and calculations.
8. PD results were scaled to the maximum allowed power to demonstrate compliance per FCC KDB Publication 447498 D04.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 154 of 298

REV 22.0
03/30/2022

12 SAR MEASUREMENT VARIABILITY

12.1 Measurement Variability

Per FCC KDB Publication 865664 D01v01r04, all measured 1 g SAR values were <0.8 W/kg. Therefore, no SAR measurement variability analysis was required.

12.2 Measurement Uncertainty

The measured SAR was <1.5 W/kg for 1g for all frequency bands. Therefore, per KDB Publication 865664 D01v01r04, the extended measurement uncertainty analysis per IEEE 1528-2013 was not required.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 155 of 298

REV 22.0
03/30/2022

13 ADDITIONAL TESTING PER FCC GUIDANCE

13.1 LTE Band 41 Power Class 2 and Power Class 3 Linearity

This device supports Power Class 2 and Power Class 3 operations for LTE Band 41. The highest available duty cycle for Power Class 2 operations is 43.3 % using UL-DL configuration 1. Per May 2017 TCB Workshop Notes based on the device behavior, all SAR tests were performed using Power Class 3. SAR with Power Class 2 at the highest power and available duty factor was additionally performed for the Power Class 3 configuration with the highest SAR for each exposure condition. The linearity between the Power Class 2 and Power Class 3 SAR results and the respective frame averaged powers was calculated to determine that the results were linear. Per May 2017 TCB Workshop, no additional SAR measurements were required since the linearity between power classes was < 10% and all reported SAR values were < 1.4 W/kg for 1g and < 3.5 W/kg for 10g.

Table 13-1
LTE Band 41 Body Linearity Data - Laptop

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.0	27.0
Measured Output Power (dBm)	23.90	25.90
Measured SAR (W/kg)	0.120	0.121
Measured Power (mW)	245.47	389.05
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	155.38	168.46
% deviation from expected linearity		-6.99%

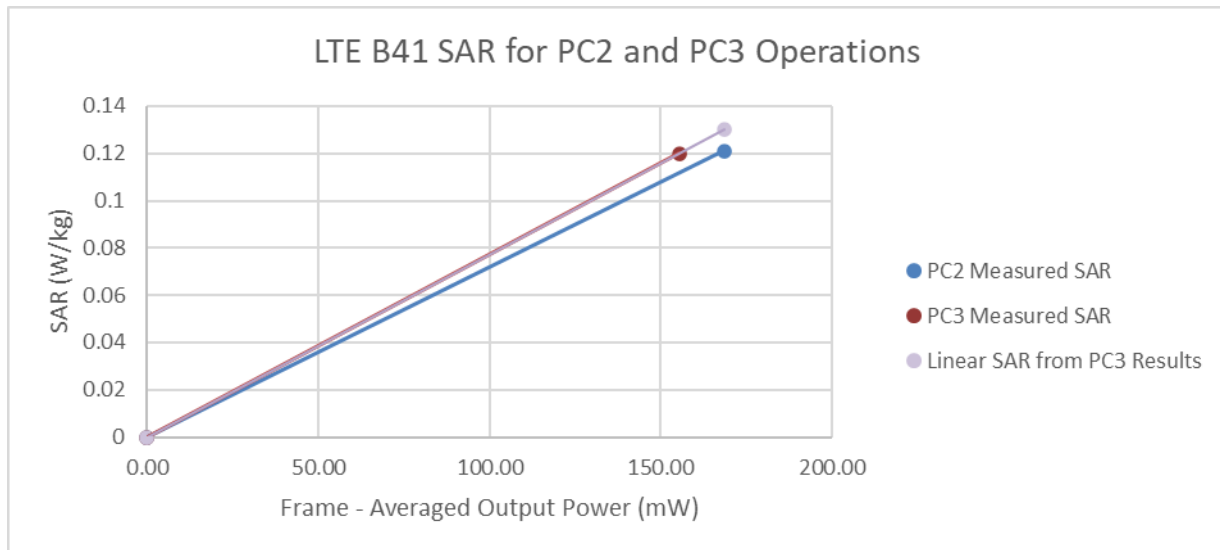


Figure 13-1
LTE Band 41 Body Linearity – Laptop

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 156 of 298

REV 22.0
03/30/2022

Table 13-2
LTE Band 41 ULCA Body Linearity Data - Laptop

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	25.0	27.0
Measured Output Power (dBm)	23.24	25.20
Measured SAR (W/kg)	0.111	0.120
Measured Power (mW)	210.86	331.13
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	133.48	143.38
% deviation from expected linearity		0.64%

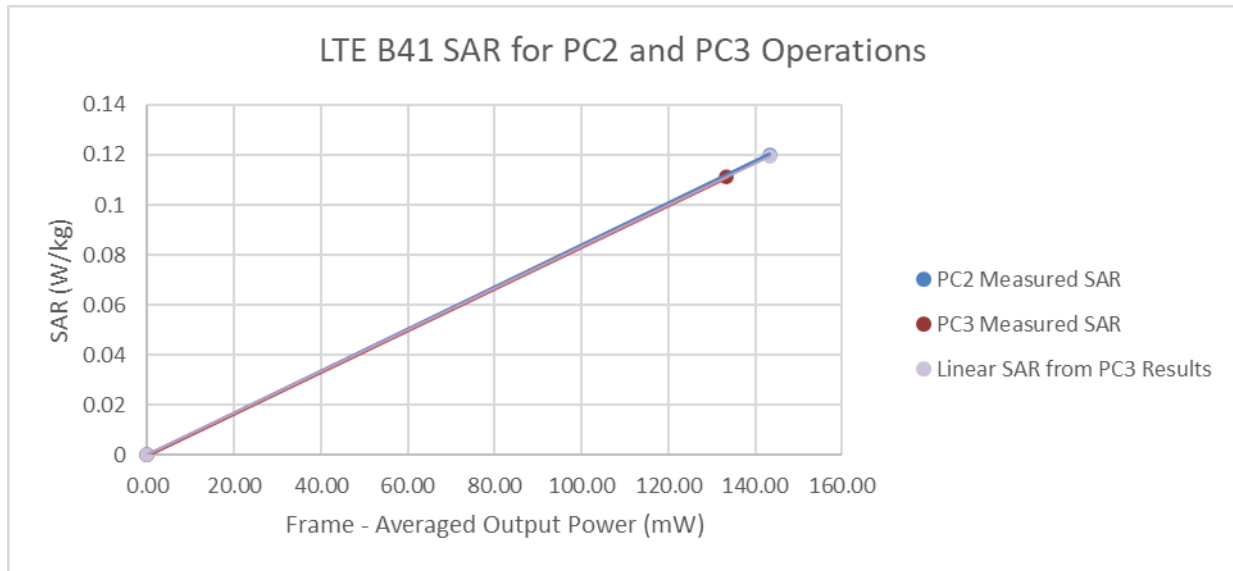


Figure 13-2
LTE Band 41 ULCA Body Linearity - Laptop

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 157 of 298

REV 22.0
03/30/2022

Table 13-3
LTE Band 41 Body Linearity Data - Tablet

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	13.00	14.60
Measured Output Power (dBm)	12.73	13.95
Measured SAR (W/kg)	0.467	0.459
Measured Power (mW)	18.75	24.83
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	11.87	10.75
% deviation from expected linearity		8.50%

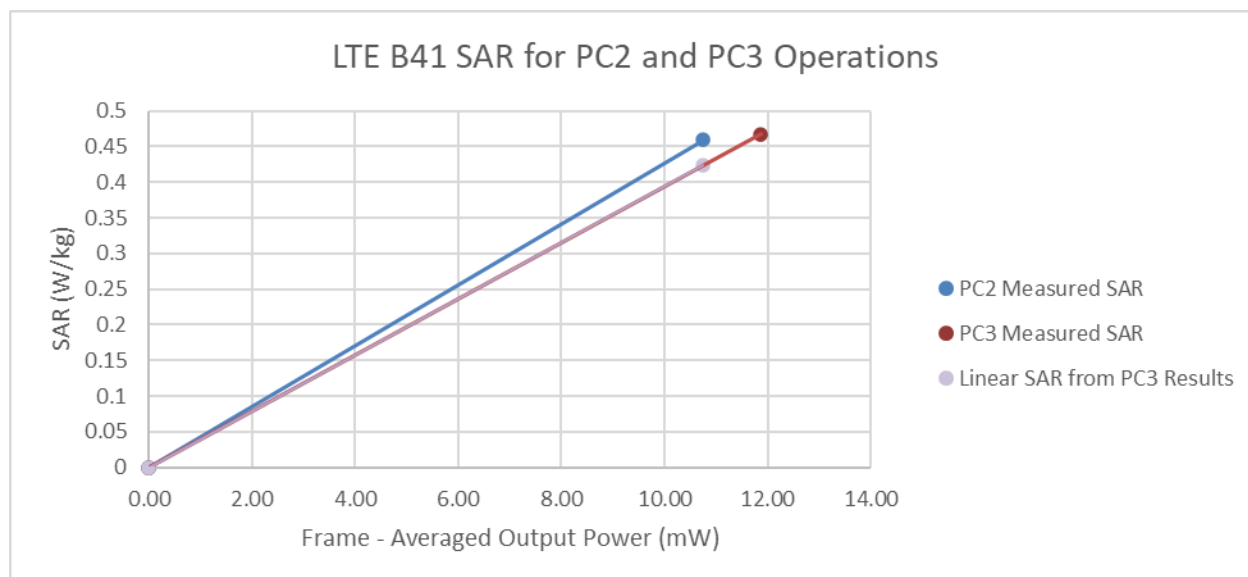


Figure 13-3
LTE Band 41 Body Linearity - Tablet

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 158 of 298

REV 22.0
03/30/2022

Table 13-4
LTE Band 41 ULCA Body Linearity Data - Tablet

	LTE Band 41 PC3	LTE Band 41 PC2
Maximum Allowed Output Power (dBm)	13.0	14.6
Measured Output Power (dBm)	11.75	13.66
Measured SAR (W/kg)	0.409	0.395
Measured Power (mW)	14.96	23.23
Duty Cycle	63.3%	43.3%
Frame Averaged Output Power (mW)	9.47	10.06
% deviation from expected linearity		-9.05%

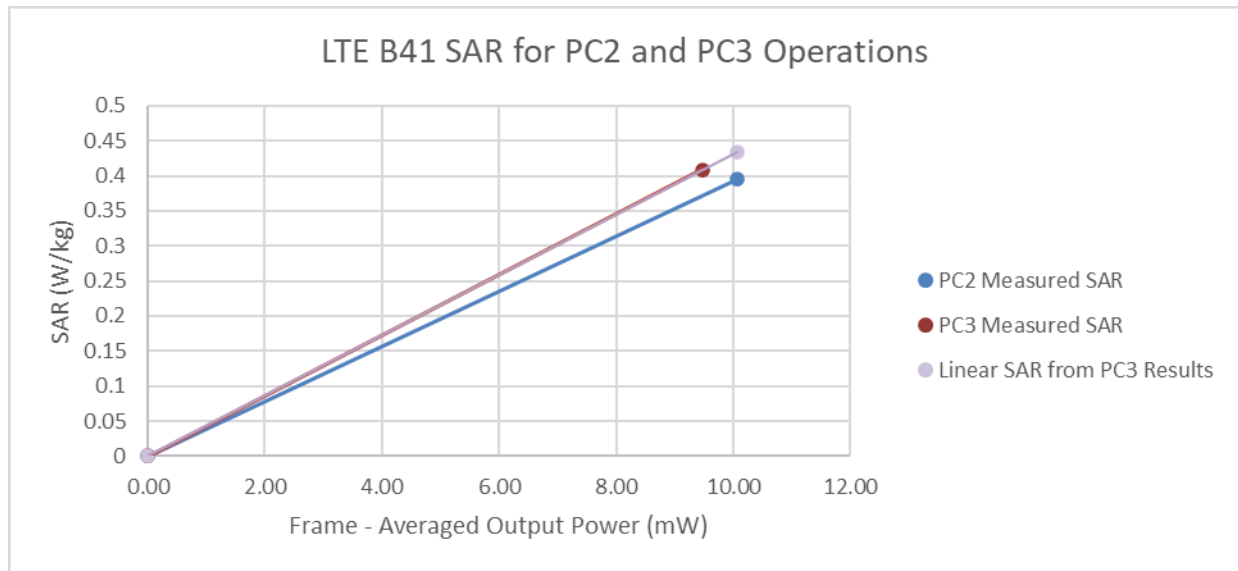


Figure 13-4
LTE Band 41 ULCA Body Linearity - Tablet

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 159 of 298

REV 22.0
03/30/2022

14 EQUIPMENT LIST

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Agilent	E4404B	Spectrum Analyzer	N/A	N/A	N/A	MY4511242
Agilent	E4438C	ESG Vector Signal Generator	11/14/2023	Annual	11/14/2024	MY45093852
Agilent	E4438C	ESG Vector Signal Generator	11/15/2023	Annual	11/15/2024	MY4502078
Agilent	N5182A	MWG Vector Signal Generator	10/12/2023	Annual	10/12/2024	MY47400015
Agilent	N5182A	MWG Vector Signal Generator	3/7/2024	Annual	3/7/2025	MY47420683
Agilent	8733ES	S-Parameter Vector Network Analyzer	1/10/2024	Annual	1/10/2025	MY40004572
Agilent	8733ES	S-Parameter Vector Network Analyzer	7/21/2023	Annual	7/21/2024	US39170118
Agilent	E5515C	Wireless Communications Test Set	CBT	N/A	CBT	GB46310798
Agilent	E5515C	Wireless Communications Test Set	CBT	N/A	CBT	US41140256
Agilent	N4010A	Wireless Connectivity Test Set	N/A	N/A	N/A	GB46310464
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433973
Amplifier Research	1551G6	Amplifier	CBT	N/A	CBT	433974
Amplifier Research	150A100C	Amplifier	CBT	N/A	CBT	350132
Anritsu	MN3110B	I/Q Adapter	CBT	N/A	CBT	6261147881
Anritsu	ML2486A	Power Meter	6/24/2024	Annual	6/24/2025	1840005
Anritsu	ML2486A	Power Meter	7/8/2024	Annual	7/8/2025	1039008
Anritsu	MA2411B	Pulse Power Sensor	8/22/2023	Annual	8/22/2024	1726262
Anritsu	MA2411B	Pulse Power Sensor	11/8/2023	Annual	11/8/2024	1027293
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	12/15/2023	Annual	12/15/2024	6209901290
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	5/15/2024	Annual	5/15/2025	6203200847
Anritsu	MT8821C	Radio Communication Analyzer MT8821C	5/30/2024	Annual	5/30/2025	6262044735
Anritsu	MT8821C	Radio Communication Test Station	CBT	N/A	CBT	626196-7072
Anritsu	MT8821C	Radio Communication Test Station	4/10/2024	Annual	4/10/2025	6261987983
Anritsu	MT8821C	Radio Communication Test Station	5/12/2024	Annual	5/12/2025	627117436
Anritsu	MA24106A	USB Power Sensor	12/4/2023	Annual	12/4/2024	1520501
Anritsu	MA24106A	USB Power Sensor	4/15/2024	Annual	4/15/2025	1827528
Mini-Circuits	PMW-4GH5	USB Power Sensor	6/12/2024	Annual	6/12/2025	12001070013
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240114346
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	24011096
Control Company	4052	Long Stem Thermometer	2/27/2024	Biennial	2/27/2026	240371059
Control Company	4040	Therm./ Clock/ Humidity Monitor	4/15/2024	Biennial	4/15/2026	240310280
Control Company	4040	Therm./ Clock/ Humidity Monitor	4/15/2024	Biennial	4/15/2026	240310282
Control Company	960279	Therm./ Clock/ Humidity Monitor	2/16/2024	Biennial	2/16/2026	240420054
Control Company	960279	Therm./ Clock/ Humidity Monitor	2/16/2024	Triennial	2/16/2025	620328413
Keysight Technologies	N9020A	MNA Signal Analyzer	4/11/2024	Annual	4/11/2025	MY54500644
Agilent	N9020A	MNA Signal Analyzer	6/14/2024	Annual	6/14/2025	MY5470202
MCL	BW-N6W5+	5dB Attenuator	CBT	N/A	CBT	1139
Mini-Circuits	VLF-6000+	Low Pass Filter DC to 6000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	VLF-6000+	Low Pass Filter DC to 6000 MHz	7/5/2023	Annual	7/5/2024	31634
Mini-Circuits	BW-N20W5+	DC to 18 GHz Precision Fixed 20 dB Attenuator	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-1200+	Low Pass Filter DC to 1000 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	NLP-2950+	Low Pass Filter DC to 2900 MHz	CBT	N/A	CBT	N/A
Mini-Circuits	BW-N20W5	Power Attenuator	CBT	N/A	CBT	1206
Mini-Circuits	ZUDC10-83-5+	Directional Coupler	CBT	N/A	CBT	2050
Narda	4772-3	Attenuator (3dB)	CBT	N/A	CBT	9406
Narda	BW-SW2	Attenuator (3dB)	CBT	N/A	CBT	120
Selenion	NC-100	CBT	CBT	N/A	CBT	22217
Seebrook	NC-100	Torque Wrench	4/27/2024	Biennial	4/27/2026	1362
Rohde & Schwarz	CMAW500	Wideband Radio Communication Tester	1/11/2024	Annual	1/11/2025	150217
Rohde & Schwarz	CMAW500	Wideband Radio Communication Tester	1/30/2024	Annual	1/30/2025	131454
Rohde & Schwarz	CMAW500	Wideband Radio Communication Tester	8/10/2023	Annual	8/10/2024	140144
Rohde & Schwarz	CMAW500	Wideband Radio Communication Tester	8/9/2023	Annual	8/9/2024	162125
SPEAG	DAK-3.5	Dielectric Assessment Kit	11/13/2023	Annual	11/13/2024	1277
SPEAG	DAK-3.5	Portable Dielectric Assessment Kit	8/14/2023	Annual	8/14/2024	1041
SPEAG	MAA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1237
SPEAG	MAA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1331
SPEAG	MAA	Modulation and Audio Interference Analyzer	N/A	N/A	N/A	1390
SPEAG	DAK-12	Dielectric Assessment Kit (MHz - 3GHz)	3/11/2024	Annual	3/11/2025	1102
SPEAG	D750V3	750 MHz SAR Dipole	10/19/2021	Triennial	10/19/2024	1161
SPEAG	D750V3	750 MHz SAR Dipole	3/14/2022	Triennial	3/14/2025	1054
SPEAG	D835V2	835 MHz SAR Dipole	3/18/2024	Annual	3/18/2025	46432
SPEAG	D835V2	835 MHz SAR Dipole	3/11/2024	Annual	3/11/2025	46433
SPEAG	D835V2	835 MHz SAR Dipole	3/14/2022	Triennial	3/14/2025	46437
SPEAG	D1750V2	1750 MHz SAR Dipole	10/22/2021	Triennial	10/22/2024	1150
SPEAG	D1750V2	1750 MHz SAR Dipole	1/18/2022	Triennial	1/18/2025	1148
SPEAG	D1900V2	1900 MHz SAR Dipole	8/2/2022	Biennial	8/2/2024	5480
SPEAG	D1900V2	1900 MHz SAR Dipole	2/21/2022	Triennial	2/21/2025	54548
SPEAG	D2300V2	2300 MHz SAR Dipole	8/25/2022	Biennial	8/25/2024	1073
SPEAG	D2450V2	2450 MHz SAR Dipole	2/8/2024	Annual	2/8/2025	882
SPEAG	D2450V2	2450 MHz SAR Dipole	8/18/2021	Triennial	8/18/2024	739
SPEAG	D2450V2	2450 MHz SAR Dipole	11/25/2021	Triennial	11/25/2024	891
SPEAG	D2600V2	2600 MHz SAR Dipole	8/10/2023	Annual	8/10/2024	1126
SPEAG	D2600V2	2600 MHz SAR Dipole	4/8/2024	Annual	4/8/2025	1004
SPEAG	D2600V2	2600 MHz SAR Dipole	11/15/2022	Biennial	11/15/2024	10071
SPEAG	D3500V2	3500 MHz SAR Dipole	12/13/2021	Annual	12/13/2024	1068
SPEAG	D3500V2	3500 MHz SAR Dipole	1/10/2023	Biennial	1/10/2025	1097
SPEAG	D3700V2	3700 MHz SAR Dipole	12/13/2023	Annual	12/13/2024	1029
SPEAG	D3700V2	3700 MHz SAR Dipole	1/13/2023	Biennial	1/13/2025	1067
SPEAG	D3900V2	3900 MHz SAR Dipole	10/19/2023	Annual	10/19/2024	1056
SPEAG	D5G4HV2	5 GHz SAR Dipole	4/9/2024	Annual	4/9/2025	1217
SPEAG	D5G4HV2	5 GHz SAR Dipole	2/21/2024	Annual	2/21/2025	1057
SPEAG	D5G4HV2	5 GHz SAR Dipole	1/17/2024	Annual	1/17/2025	1191
SPEAG	D6.5GHV2	6.5 GHz SAR Dipole	2/22/2024	Annual	2/22/2025	1111
SPEAG	D6.5GHV2	6.5 GHz SAR Dipole	1/10/2024	Annual	1/10/2025	1058
SPEAG	5G Verification Source 10GHz	10GHz System Verification Antenna	3/5/2024	Annual	3/5/2025	1002
SPEAG	DAE4	Das Data Acquisition Electronics	1/16/2024	Annual	1/16/2025	1530
SPEAG	DAE4	Das Data Acquisition Electronics	5/8/2024	Annual	5/8/2025	728
SPEAG	DAE4	Das Data Acquisition Electronics	3/27/2024	Annual	3/27/2025	1415
SPEAG	DAE4	Das Data Acquisition Electronics	3/12/2024	Annual	3/12/2025	665
SPEAG	DAE4	Das Data Acquisition Electronics	5/8/2024	Annual	5/8/2025	1678
SPEAG	DAE4	Das Data Acquisition Electronics	9/12/2023	Annual	9/12/2024	1449
SPEAG	DAE4	Das Data Acquisition Electronics	9/6/2023	Annual	9/6/2024	1364
SPEAG	DAE4	Das Data Acquisition Electronics	1/16/2024	Annual	1/16/2025	1466
SPEAG	DAE4	Das Data Acquisition Electronics	3/12/2024	Annual	3/12/2025	1212
SPEAG	DAE4ip	Das Data Acquisition Electronics	11/15/2023	Annual	11/15/2024	1639
SPEAG	DAE4ip	Das Data Acquisition Electronics	10/18/2023	Annual	10/18/2024	1638
SPEAG	DAE4	Das Data Acquisition Electronics	4/18/2024	Annual	4/18/2025	1407
SPEAG	DAE4	Das Data Acquisition Electronics	10/14/2023	Annual	10/14/2024	1607
SPEAG	EX3DV4	SAR Probe	5/10/2024	Annual	5/10/2025	3914
SPEAG	EX3DV4	SAR Probe	3/8/2024	Annual	3/8/2025	7527
SPEAG	EX3DV4	SAR Probe	9/12/2023	Annual	9/12/2024	7508
SPEAG	EX3DV4	SAR Probe	4/17/2024	Annual	4/17/2025	7718
SPEAG	EX3DV4	SAR Probe	1/16/2024	Annual	1/16/2025	7545
SPEAG	EX3DV4	SAR Probe	10/16/2023	Annual	10/16/2024	7539
SPEAG	EX3DV4	SAR Probe	3/8/2024	Annual	3/8/2025	7488
SPEAG	EX3DV4	SAR Probe	9/22/2023	Annual	9/22/2024	7670
SPEAG	EX3DV4	SAR Probe	5/8/2024	Annual	5/8/2025	7660
SPEAG	EX3DV4	SAR Probe	1/17/2024	Annual	1/17/2025	7713
SPEAG	EX3DV4	SAR Probe	10/23/2023	Annual	10/23/2024	7547
SPEAG	EX3DV4	SAR Probe	4/17/2024	Annual	4/17/2025	7659
SPEAG	EX3DV4	SAR Probe	7/7/2023	Annual	7/7/2024	7410
SPEAG	ElumWW4	ElumWW4 Probe	2/2/2024	Annual	2/2/2025	9622

Note: 1) All equipment was used solely within its respective calibration period. 2) CBT (Calibrated Before Testing). Prior to testing, the measurement paths containing a cable, amplifier, attenuator, coupler or filter were connected to a calibrated source (i.e. a signal generator) to determine the losses of the measurement path. The power meter offset was then adjusted to compensate for the measurement system losses. This level offset is stored within the power meter before measurements are made. This calibration verification procedure applies to the system verification and output power measurements. The calibrated reading is then taken directly from the power meter after compensation of the losses for all final power measurements.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 160 of 298

15 MEASUREMENT UNCERTAINTIES

Applicable for SAR Measurements < 6 GHz:

Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	f(d,k) Div.	c _i 1gm	c _i 10 gms	c x f/e 1gm u _i (± %)	c x g/e 10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	7	N	1	1	1	7.0	7.0	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E.2.3	2	R	1.73	1	1	1.2	1.2	∞
Linearity	E.2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E.2.4	0.25	R	1.73	1	1	0.1	0.1	∞
Modulation Response	E.2.5	4.8	R	1.73	1	1	2.8	2.8	∞
Readout Electronics	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	3	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	3	R	1.73	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E.6.3	6.7	R	1.73	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E.4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E.2.9	5	R	1.73	1	1	2.9	2.9	∞
SAR Scaling	E.6.5	0	R	1.73	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E.3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E.3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E.3.4	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E.3.4	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)							RSS 12.2	12.0	191
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2 24.4	24.0	

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 161 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Applicable for SAR Measurements > 6 GHz:

				f(d,k)			c x f/e	c x g/e	
Uncertainty Component	IEEE 1528 Sec.	Tol. (± %)	Prob. Dist.	Div.	c _i 1gm	c _i 10 gms	1gm u _i (± %)	10gms u _i (± %)	v _i
Measurement System									
Probe Calibration	E.2.1	9.3	N	1	1	1	9.3	9.3	∞
Axial Isotropy	E.2.2	0.25	N	1	0.7	0.7	0.2	0.2	∞
Hemishperical Isotropy	E.2.2	1.3	N	1	0.7	0.7	0.9	0.9	∞
Boundary Effect	E.2.3	2	R	1.73	1	1	1.2	1.2	∞
Linearity	E.2.4	0.3	N	1	1	1	0.3	0.3	∞
System Detection Limits	E.2.4	0.25	R	1.73	1	1	0.1	0.1	∞
Modulation Response	E.2.5	4.8	R	1.73	1	1	2.8	2.8	∞
Readout Electronics	E.2.6	0.3	N	1	1	1	0.3	0.3	∞
Response Time	E.2.7	0.8	R	1.73	1	1	0.5	0.5	∞
Integration Time	E.2.8	2.6	R	1.73	1	1	1.5	1.5	∞
RF Ambient Conditions - Noise	E.6.1	3	R	1.73	1	1	1.7	1.7	∞
RF Ambient Conditions - Reflections	E.6.1	3	R	1.73	1	1	1.7	1.7	∞
Probe Positioner Mechanical Tolerance	E.6.2	0.8	R	1.73	1	1	0.5	0.5	∞
Probe Positioning w/ respect to Phantom	E.6.3	6.7	R	1.73	1	1	3.9	3.9	∞
Extrapolation, Interpolation & Integration algorithms for Max. SAR Evaluation	E.5	4	R	1.73	1	1	2.3	2.3	∞
Test Sample Related									
Test Sample Positioning	E.4.2	3.12	N	1	1	1	3.1	3.1	35
Device Holder Uncertainty	E.4.1	1.67	N	1	1	1	1.7	1.7	5
Output Power Variation - SAR drift measurement	E.2.9	5	R	1.73	1	1	2.9	2.9	∞
SAR Scaling	E.6.5	0	R	1.73	1	1	0.0	0.0	∞
Phantom & Tissue Parameters									
Phantom Uncertainty (Shape & Thickness tolerances)	E.3.1	7.6	R	1.73	1.0	1.0	4.4	4.4	∞
Liquid Conductivity - measurement uncertainty	E.3.3	4.3	N	1	0.78	0.71	3.3	3.0	76
Liquid Permittivity - measurement uncertainty	E.3.3	4.2	N	1	0.23	0.26	1.0	1.1	75
Liquid Conductivity - Temperature Uncertainty	E.3.4	3.4	R	1.73	0.78	0.71	1.5	1.4	∞
Liquid Permittivity - Temperature Uncertainty	E.3.4	0.6	R	1.73	0.23	0.26	0.1	0.1	∞
Liquid Conductivity - deviation from target values	E.3.2	5.0	R	1.73	0.64	0.43	1.8	1.2	∞
Liquid Permittivity - deviation from target values	E.3.2	5.0	R	1.73	0.60	0.49	1.7	1.4	∞
Combined Standard Uncertainty (k=1)							RSS	13.8	13.6
Expanded Uncertainty (95% CONFIDENCE LEVEL)							k=2	27.6	27.1

The above measurement uncertainties are according to IEEE Std. 1528-2013

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 162 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Applicable for Power Density Measurements:

a	b	c	d	e	f = c x f/e	g
Uncertainty Component	Unc. (± dB)	Prob. Dist.	Div.	c _i	u _i (± dB)	v _i
Measurement System						
Calibration	0.49	N	1	1	0.49	∞
Probe Correction	0.00	R	1.73	1	0.00	∞
Frequency Response	0.20	R	1.73	1	0.12	∞
Sensor Cross Coupling	0.00	R	1.73	1	0.00	∞
Isotropy	0.50	R	1.73	1	0.29	∞
Linearity	0.20	R	1.73	1	0.12	∞
Probe Scattering	0.00	R	1.73	1	0.00	∞
Probe Positioning offset	0.30	R	1.73	1	0.17	∞
Probe Positioning Repeatability	0.04	R	1.73	1	0.02	∞
Sensor Mechanical Offset	0.00	R	1.73	1	0.00	∞
Probe Spatial Resolution	0.00	R	1.73	1	0.00	∞
Field Impedance Dependence	0.00	R	1.73	1	0.00	∞
Amplitude and Phase Drift	0.00	R	1.73	1	0.00	∞
Amplitude and Phase Noise	0.04	R	1.73	1	0.02	∞
Measurement Area Truncation	0.00	R	1.73	1	0.00	∞
Data Acquisition	0.03	N	1	1	0.03	∞
Sampling	0.00	R	1.73	1	0.00	∞
Field Reconstruction	2.00	R	1.73	1	1.15	∞
Forward Transformation	0.00	R	1.73	1	0.00	∞
Power Density Scaling	0.00	R	1.73	1	0.00	∞
Spatial Averaging	0.10	R	1.73	1	0.06	∞
System Detection Limit	0.04	R	1.73	1	0.02	∞
Test Sample Related						
Probe Coupling with DUT	0.00	R	1.73	1	0.00	∞
Modulation Response	0.40	R	1.73	1	0.23	∞
Integration Time	0.00	R	1.73	1	0.00	∞
Response Time	0.00	R	1.73	1	0.00	∞
Device Holder Influence	0.10	R	1.73	1	0.06	∞
DUT alignment	0.00	R	1.73	1	0.00	∞
RF Ambient Conditions	0.04	R	1.73	1	0.02	∞
Ambient Reflections	0.04	R	1.73	1	0.02	∞
Immunity/Secondary Reception	0.00	R	1.73	1	0.00	∞
Drift of DUT	0.21	R	1.73	1	0.12	∞
Combined Standard Uncertainty (k=1)					RSS	1.34
Expanded Uncertainty (95% CONFIDENCE LEVEL)					k=2	

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 163 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

16 CONCLUSION

16.1 Measurement Conclusion

The SAR evaluation indicates that the EUT complies with the RF radiation exposure limits of the FCC and Innovation, Science, and Economic Development Canada, with respect to all parameters subject to this test. These measurements were taken to simulate the RF effects of RF exposure under worst-case conditions. Precise laboratory measures were taken to assure repeatability of the tests. The results and statements relate only to the item(s) tested.

Please note that the absorption and distribution of electromagnetic energy in the body are very complex phenomena that depend on the mass, shape, and size of the body, the orientation of the body with respect to the field vectors, and the electrical properties of both the body and the environment. Other variables that may play a substantial role in possible biological effects are those that characterize the environment (e.g. ambient temperature, air velocity, relative humidity, and body insulation) and those that characterize the individual (e.g. age, gender, activity level, debilitation, or disease). Because various factors may interact with one another to vary the specific biological outcome of an exposure to electromagnetic fields, any protection guide should consider maximal amplification of biological effects as a result of field-body interactions, environmental conditions, and physiological variables. [3]

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 164 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

17 REFERENCES

- [1] Federal Communications Commission, ET Docket 93-62, Guidelines for Evaluating the Environmental Effects of Radiofrequency Radiation, Aug. 1996.
- [2] ANSI/IEEE C95.1-2005, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, 2006.
- [3] ANSI/IEEE C95.1-1992, American National Standard safety levels with respect to human exposure to radio frequency electromagnetic fields, 3kHz to 300GHz, New York: IEEE, Sept. 1992.
- [4] ANSI/IEEE C95.3-2002, IEEE Recommended Practice for the Measurement of Potentially Hazardous Electromagnetic Fields - RF and Microwave, New York: IEEE, December 2002.
- [5] IEEE Standards Coordinating Committee 39 –Standards Coordinating Committee 34 – IEEE Std. 1528-2013, IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques.
- [6] NCRP, National Council on Radiation Protection and Measurements, Biological Effects and Exposure Criteria for RadioFrequency Electromagnetic Fields, NCRP Report No. 86, 1986. Reprinted Feb. 1995.
- [7] T. Schmid, O. Egger, N. Kuster, Automated E-field scanning system for dosimetric assessments, IEEE Transaction on Microwave Theory and Techniques, vol. 44, Jan. 1996, pp. 105-113.
- [8] K. Pokovic, T. Schmid, N. Kuster, Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies, ICECOM97, Oct. 1997, pp. 1 -124.
- [9] K. Pokovic, T. Schmid, and N. Kuster, E-field Probe with improved isotropy in brain simulating liquids, Proceedings of the ELMAR, Zadar, Croatia, June 23-25, 1996, pp. 172-175.
- [10] Schmid & Partner Engineering AG, Application Note: Data Storage and Evaluation, June 1998, p2.
- [11] V. Hombach, K. Meier, M. Burkhardt, E. Kuhn, N. Kuster, The Dependence of EM Energy Absorption upon Human Modeling at 900 MHz, IEEE Transaction on Microwave Theory and Techniques, vol. 44 no. 10, Oct. 1996, pp. 1865-1873.
- [12] N. Kuster and Q. Balzano, Energy absorption mechanism by biological bodies in the near field of dipole antennas above 300MHz, IEEE Transaction on Vehicular Technology, vol. 41, no. 1, Feb. 1992, pp. 17-23.
- [13] G. Hartsgrrove, A. Kraszewski, A. Surowiec, Simulated Biological Materials for Electromagnetic Radiation Absorption Studies, University of Ottawa, Bioelectromagnetics, Canada: 1987, pp. 29-36.
- [14] Q. Balzano, O. Garay, T. Manning Jr., Electromagnetic Energy Exposure of Simulated Users of Portable Cellular Telephones, IEEE Transactions on Vehicular Technology, vol. 44, no.3, Aug. 1995.
- [15] W. Gander, Computermathematick, Birkhaeuser, Basel, 1992.
- [16] W.H. Press, S.A. Teukolsky, W.T. Vetterling, and B.P. Flannery, Numerical Recipes in C, The Art of Scientific Computing, Second edition, Cambridge University Press, 1992.
- [17] N. Kuster, R. Kastle, T. Schmid, Dosimetric evaluation of mobile communications equipment with known precision, IEEE Transaction on Communications, vol. E80-B, no. 5, May 1997, pp. 645-652.
- [18] CENELEC CLC/SC111B, European Prestandard (prENV 50166-2), Human Exposure to Electromagnetic Fields High-frequency: 10kHz-300GHz, Jan. 1995.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 165 of 298

REV 22.0
03/30/2022

- [19] Prof. Dr. Niels Kuster, ETH, Eidgenössische Technische Hochschule Zürich, Dosimetric Evaluation of the Cellular Phone.
- [20] IEC 62209-1, Measurement procedure for the assessment of specific absorption rate of human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Part 1: Devices used next to the ear (Frequency range of 300 MHz to 6 GHz), July 2016.
- [21] Innovation, Science, Economic Development Canada RSS-102 Radio Frequency Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands) Issue 5, March 2015.
- [22] Health Canada Safety Code 6 Limits of Human Exposure to Radio Frequency Electromagnetic Fields in the Frequency Range from 3 kHz – 300 GHz, 2015
- [23] FCC SAR Test Procedures for 2G-3G Devices, Mobile Hotspot and UMPC Devices KDB Publications 941225, D01-D07
- [24] SAR Measurement Guidance for IEEE 802.11 Transmitters, KDB Publication 248227 D01
- [25] FCC SAR Considerations for Handsets with Multiple Transmitters and Antennas, KDB Publications 648474 D03-D04
- [26] FCC SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers, FCC KDB Publication 616217 D04
- [27] FCC SAR Measurement and Reporting Requirements for 100MHz – 6 GHz, KDB Publications 865664 D01-D02
- [28] FCC General RF Exposure Guidance and SAR Procedures for Dongles, KDB Publication 447498, D01-D02
- [29] Anexo à Resolução No. 533, de 10 de Setembro de 2009.
- [30] IEC 62209-2, Human exposure to radio frequency fields from hand-held and body-mounted wireless communication devices - Human models, instrumentation, and procedures - Part 2: Procedure to determine the specific absorption rate (SAR) for wireless communication devices used in close proximity to the human body (frequency range of 30 MHz to 6 GHz), Mar. 2010.

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 166 of 298

REV 22.0
03/30/2022

APPENDIX A: SAR TEST PLOTS

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 167 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0377M

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 836.600 MHz

Medium: 835 Head; Medium parameters used:

f = 836.600 MHz; cond = 0.902 S/m; perm = 41.0; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/18/2024; Ambient Temp: 24.1°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7670; ConvF:(9.68,9.68,9.68); Calibrated: 2023-09-22

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1449; Calibrated: 2023-09-12

Phantom: Twin-SAM V5.0; Serial: 1800

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: UMTS 850, Antenna M1, Exp: Tablet| Top Edge, Ch. Mid

Area Scan (40.0 x 240.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (33.6 x 33.6 x 30.0): Measurement grid: dx=4.8 mm, dy=4.8 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.59 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.541 W/kg

Smallest distance from peaks to all points 3 dB below is 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.1 %

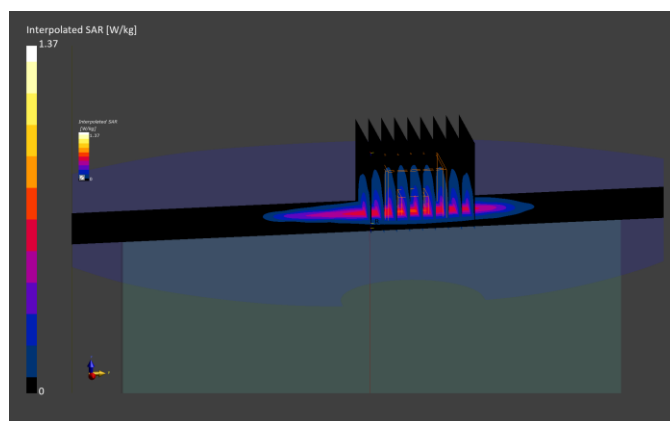

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 168 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0505M

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 846.600 MHz

Medium: 835 Head; Medium parameters used:

f = 846.600 MHz; cond = 0.910 S/m; perm = 41.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7670; ConvF:(9.68,9.68,9.68); Calibrated: 2023-09-22

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1449; Calibrated: 2023-09-12

Phantom: Twin-SAM V5.0; Serial: 1800

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: UMTS 850, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. High

Area Scan (40.0 x 210.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.06 W/kg; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.138 W/kg

SAR(1 g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.0 %

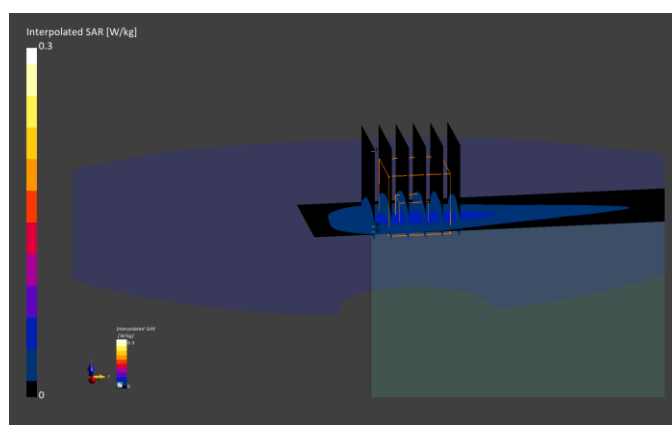

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 169 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0383M

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1732.400 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1732.400 \text{ MHz}$; $\text{cond} = 1.30 \text{ S/m}$; $\text{perm} = 40.4$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/27/2024; Ambient Temp: 22.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7670; ConvF:(8.47,8.47,8.47); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: UMTS 1750, Antenna M1, Exp: Tablet| Right Edge, Ch. Mid

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (33.6 x 33.6 x 30.0): Measurement grid: $dx=4.8 \text{ mm}$, $dy=4.8 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.42 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 0.576 W/kg

Smallest distance from peaks to all points 3 dB below is 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.0 %

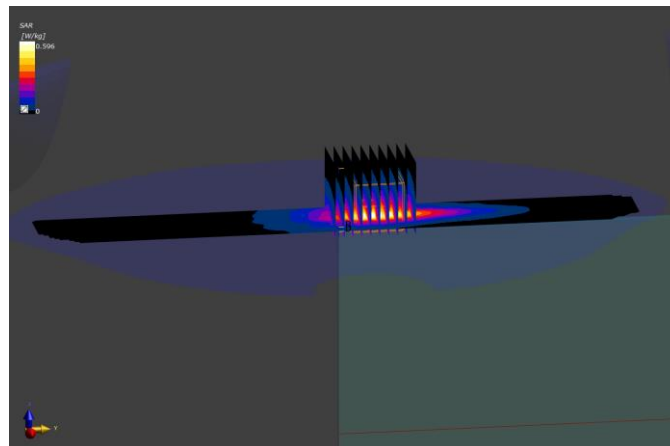

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 170 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0505M

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1752.600 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1752.600$ MHz; $\text{cond} = 1.32$ S/m; $\text{perm} = 40.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7670; ConvF:(8.47,8.47,8.47); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: UMTS 1750, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. High

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.05 W/kg; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below is 14.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.4 %

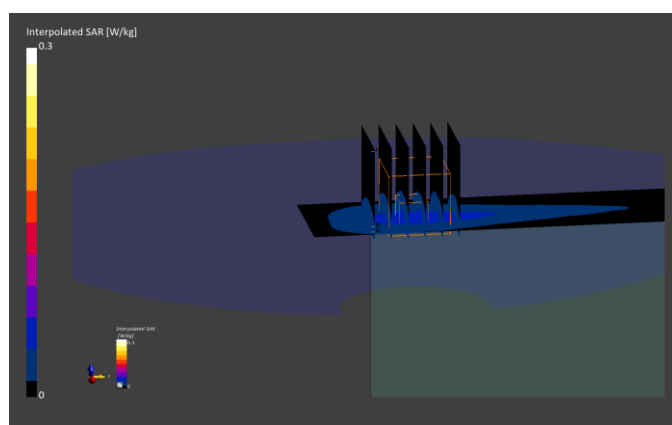

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 171 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0377M

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1852.400 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1852.400$ MHz; $\text{cond} = 1.38$ S/m; $\text{perm} = 39.0$; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/18/2024; Ambient Temp: 24.1°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7670; ConvF:(8.42,8.42,8.42); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: UMTS 1900, Antenna M1, Exp: Tablet| Top Edge, Ch. Low

Area Scan (40.0 x 240.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.15 W/kg; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.357 W/kg

Smallest distance from peaks to all points 3 dB below is 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.8 %

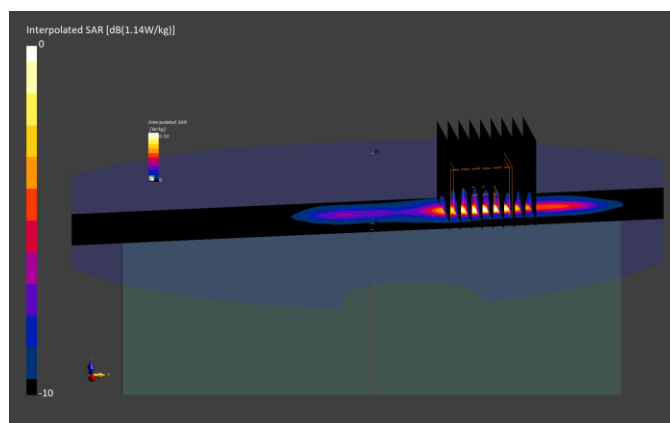

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 172 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0505M

Communication System: UID:10011 - CAC, WCDMA; MAIA: Y; Frequency: 1852.400 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1852.400$ MHz; $\text{cond} = 1.38$ S/m; $\text{perm} = 40.0$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7670; ConvF:(8.42,8.42,8.42); Calibrated: 2023-09-22

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1449; Calibrated: 2023-09-12

Phantom: Twin-SAM V5.0; Serial: 1800

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: UMTS 1900, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Low

Area Scan (40.0 x 210.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.11 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below is 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

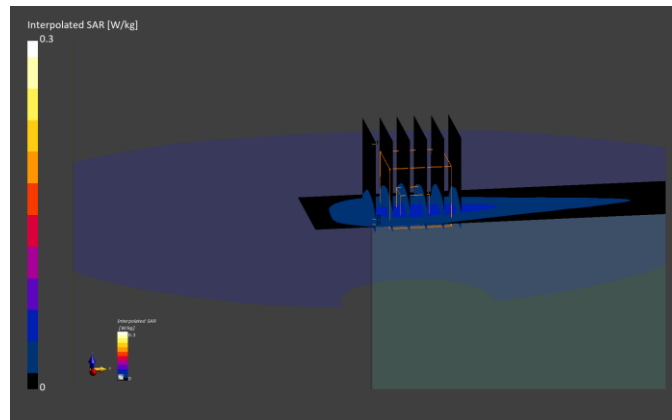

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 173 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 2085M

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 680.500 MHz
Medium: 750 Head; Medium parameters used:
 $f = 680.500 \text{ MHz}$; $\text{cond} = 0.847 \text{ S/m}$; $\text{perm} = 40.9$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 19.00 mm

Test Date: 06/12/2024; Ambient Temp: 24.9°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7539; ConvF:(10.16,10.16,10.16); Calibrated: 2023-10-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4ip Sn1639; Calibrated: 2023-11-15
Phantom: Twin-SAM V8.0; Serial: 1980
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 71, Antenna M1, Exp: Tablet| Top Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 240.0): Measurement grid: $\text{dx}=5.0 \text{ mm}$, $\text{dy}=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $\text{dx}=6.0 \text{ mm}$, $\text{dy}=6.0 \text{ mm}$, $\text{dz}=1.5 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.50 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.790 W/kg

SAR(1 g) = 0.464 W/kg

Smallest distance from peaks to all points 3 dB below is 23.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

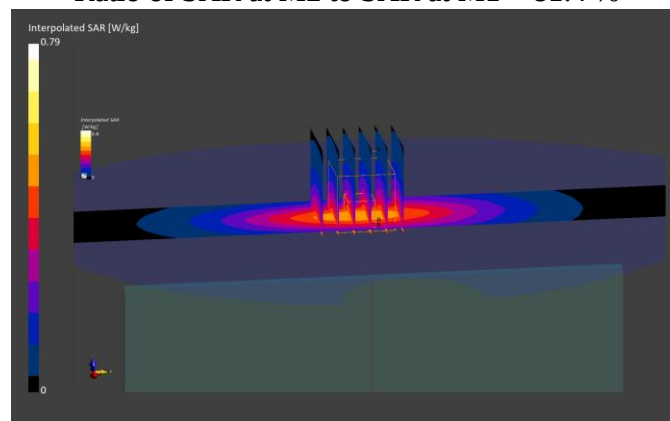

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 174 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10297 - AAE, LTE-FDD; MAIA: Y; Frequency: 680.500 MHz

Medium: 750 Head; Medium parameters used:

f = 680.500 MHz; cond = 0.850 S/m; perm = 41.8; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); Calibrated: 2024-05-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn728; Calibrated: 2024-05-08

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 71, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (40.0 x 330.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=5.9 mm, dy=5.9 mm, dz=1.5 mm; Graded Ratio:
1.5


Reference Value = 0.04 W/kg; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.147 W/kg

SAR(10 g) = 0.056 W/kg

Smallest distance from peaks to all points 3 dB below is 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.1 %

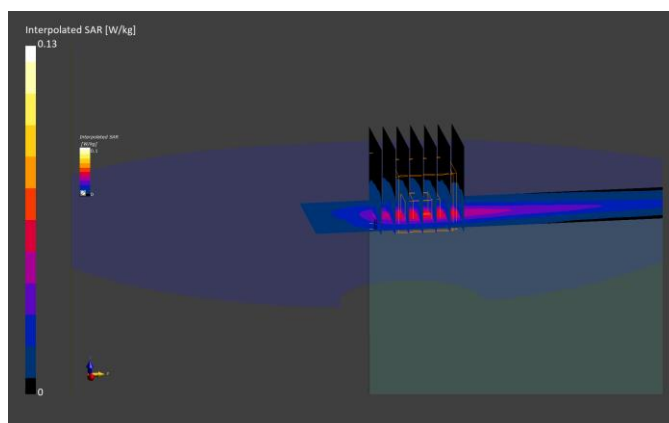

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 175 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0383M

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 707.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.500$ MHz; $\text{cond} = 0.871$ S/m; $\text{perm} = 42.3$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/04/2024; Ambient Temp: 22.2°C; Tissue Temp: 20.9°C

Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); Calibrated: 2024-05-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn728; Calibrated: 2024-05-08

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 12, Antenna M1, Exp: Tablet| Back Side, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (240.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=3.0$ mm, $dy=3.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.52 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.501 W/kg

Smallest distance from peaks to all points 3 dB below is 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 71.8 %

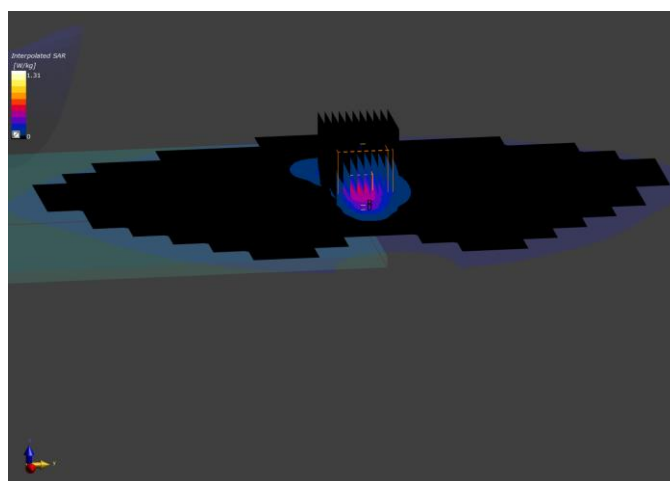

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 176 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 707.500 MHz
Medium: 750 Head; Medium parameters used:
 $f = 707.500 \text{ MHz}$; $\text{cond} = 0.860 \text{ S/m}$; $\text{perm} = 41.7$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); Calibrated: 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; Calibrated: 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 12, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio:
1.5


Reference Value = 0.03 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.205 W/kg

SAR(1 g) = 0.085 W/kg

Smallest distance from peaks to all points 3 dB below is 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 70.7 %

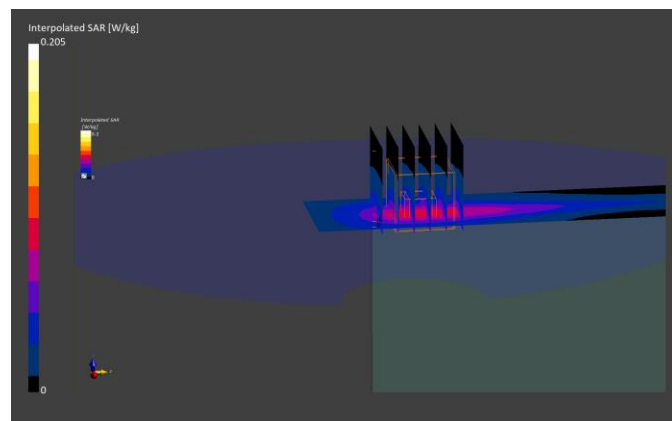

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 177 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 2085M

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 782.000 MHz

Medium: 750 Head; Medium parameters used:

$f = 782.000$ MHz; $\text{cond} = 0.878$ S/m; $\text{perm} = 40.6$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 19.00 mm

Test Date: 06/12/2024; Ambient Temp: 24.9°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7539; ConvF:(10.16,10.16,10.16); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4ip Sn1639; Calibrated: 2023-11-15

Phantom: Twin-SAM V8.0; Serial: 1980

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 13, Antenna M1, Exp: Tablet| Top Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (40.0 x 240.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.72 W/kg; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.08 W/kg

SAR(1 g) = 0.643 W/kg

Smallest distance from peaks to all points 3 dB below is 18.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

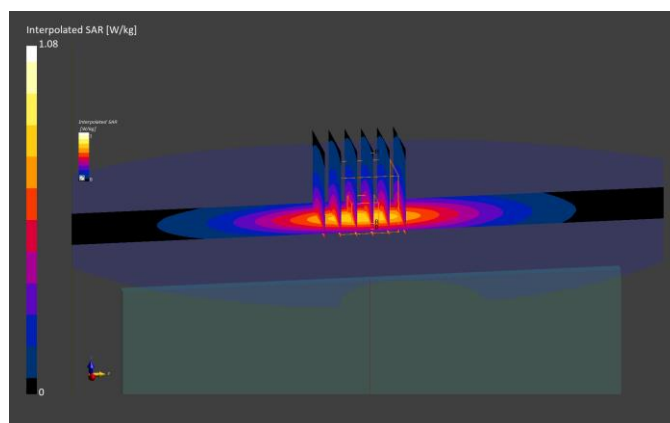

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 178 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 782.000 MHz

Medium: 750 Head; Medium parameters used:

f = 782.000 MHz; cond = 0.885 S/m; perm = 41.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); Calibrated: 2024-05-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn728; Calibrated: 2024-05-08

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: LTE Band 13, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Mid, 10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset

Area Scan (40.0 x 330.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.04 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.146 W/kg

SAR(1 g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below is 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.5 %

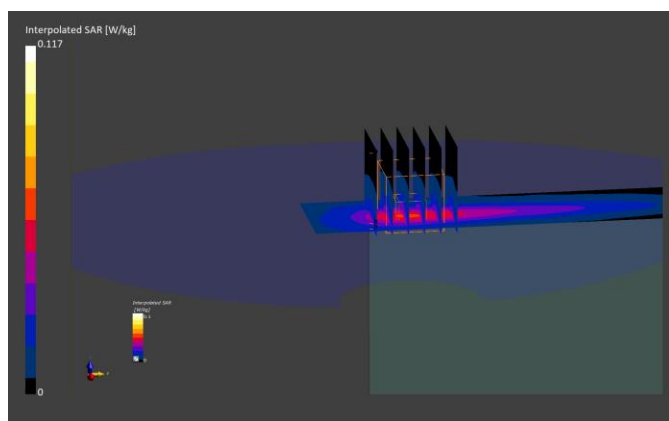

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 179 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 2085M

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 793.000 MHz

Medium: 750 Head; Medium parameters used:

f = 793.000 MHz; cond = 0.882 S/m; perm = 40.6; density = 1000 kg/m³

Phantom Section: Flat; Space: 19.00 mm

Test Date: 06/12/2024; Ambient Temp: 24.9°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7539; ConvF:(10.16,10.16,10.16); Calibrated: 2023-10-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4ip Sn1639; Calibrated: 2023-11-15

Phantom: Twin-SAM V8.0; Serial: 1980

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 14, Antenna M1, Exp: Tablet| Top Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 240.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=6.0 mm, dy=6.0 mm, dz=1.5 mm; Graded Ratio:
1.5


Reference Value = 0.74 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.673 W/kg

Smallest distance from peaks to all points 3 dB below is 19.7 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

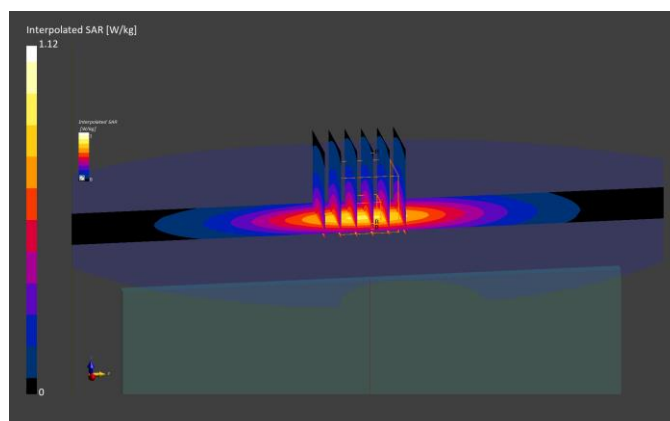

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 180 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 793.000 MHz
Medium: 750 Head; Medium parameters used:
 $f = 793.000 \text{ MHz}$; $\text{cond} = 0.889 \text{ S/m}$; $\text{perm} = 41.5$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); Calibrated: 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; Calibrated: 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 14, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 330.0): Measurement grid: $\text{dx}=5.0 \text{ mm}$, $\text{dy}=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $\text{dx}=6.0 \text{ mm}$, $\text{dy}=6.0 \text{ mm}$, $\text{dz}=1.5 \text{ mm}$; Graded Ratio:
1.5


Reference Value = 0.05 W/kg; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.177 W/kg

SAR(1 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below is 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.6 %

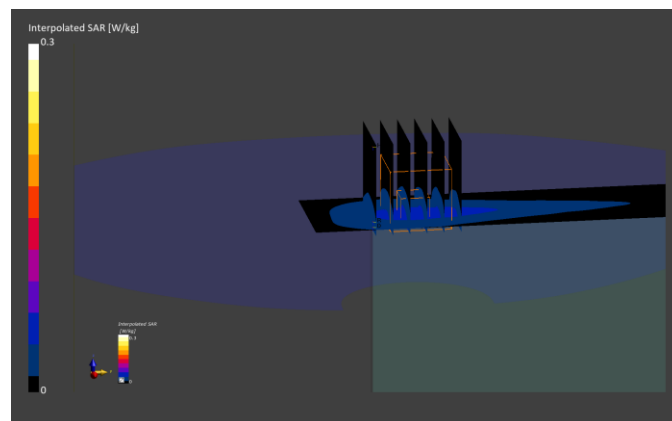

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 181 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 2085M

Communication System: UID:10181 - CAF, LTE-FDD; MAIA: Y; Frequency: 831.500 MHz
Medium: 835 Head; Medium parameters used:
 $f = 831.500 \text{ MHz}$; $\text{cond} = 0.896 \text{ S/m}$; $\text{perm} = 40.4$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 19.00 mm

Test Date: 06/12/2024; Ambient Temp: 24.9°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7539; ConvF:(9.79,9.79,9.79); Calibrated: 2023-10-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4ip Sn1639; Calibrated: 2023-11-15
Phantom: Twin-SAM V8.0; Serial: 1980
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 26, Antenna M1, Exp: Tablet| Top Edge, Ch. Mid,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**

Area Scan (40.0 x 240.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio:
1.5


Reference Value = 0.72 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.653 W/kg

Smallest distance from peaks to all points 3 dB below is 15.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

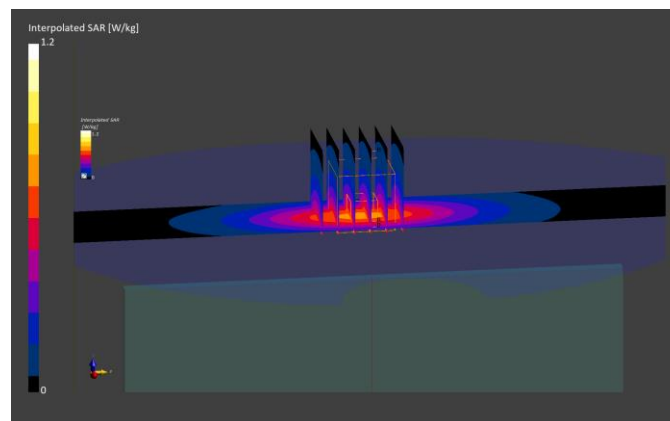

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 182 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10181 - CAF, LTE-FDD; MAIA: Y; Frequency: 831.500 MHz

Medium: 835 Head; Medium parameters used:

$f = 831.500$ MHz; $\text{cond} = 0.904$ S/m; $\text{perm} = 41.3$; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN3914; ConvF:(9.48,8.48,8.69); Calibrated: 2024-05-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn728; Calibrated: 2024-05-08

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 26, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Mid,
15 MHz Bandwidth, QPSK, 1 RB, 74 RB Offset**

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.02 W/kg; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.188 W/kg

SAR(1 g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below is 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.6 %

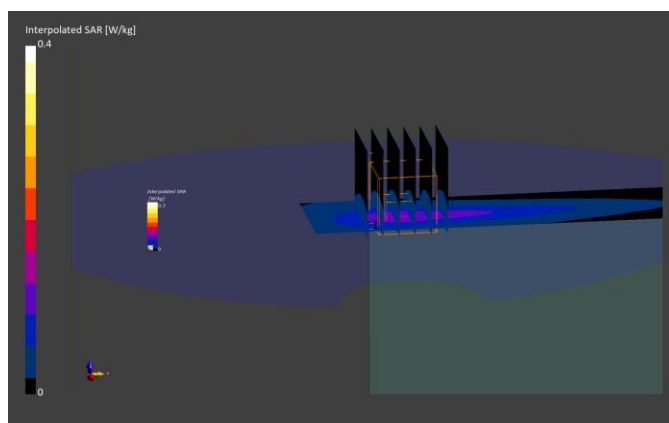

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 183 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0505M

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1770.000 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1770.000$ MHz; $\text{cond} = 1.37$ S/m; $\text{perm} = 39.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/19/2024; Ambient Temp: 20.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7718; ConvF:(7.81,7.9,8.22); Calibrated: 2024-04-17
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn665; Calibrated: 2024-03-01
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 66, Antenna S2, Exp: Tablet| Back Side, Ch. High,
20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset**

Area Scan (240.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=3.2$ mm, $dy=3.2$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.29 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 0.617 W/kg

Smallest distance from peaks to all points 3 dB below is 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.2 %

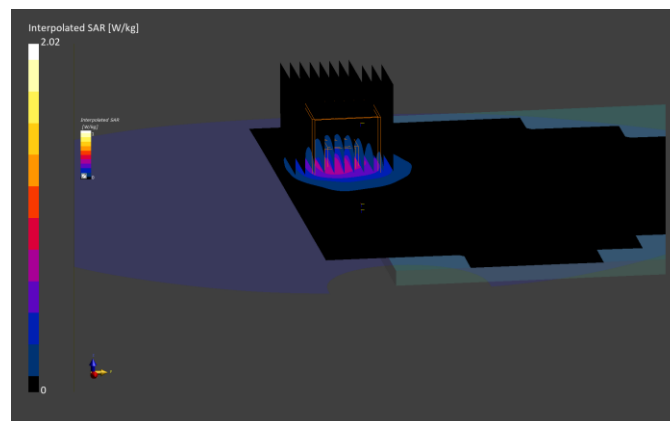

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 184 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0383M

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1720.000 MHz

Medium: 1750 Head; Medium parameters used:

f = 1720.000 MHz; cond = 1.34 S/m; perm = 41.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7527; ConvF:(8.08,7.43,8.45); Calibrated: 2024-03-08

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1272; Calibrated: 2024-03-12

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: LTE Band 66, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Low, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (40.0 x 330.0): Measurement grid: dx=5.0 mm, dy=15.0 mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: dx=3.2 mm, dy=3.2 mm, dz=1.5 mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.285 W/kg

SAR(1 g) = 0.128 W/kg

Smallest distance from peaks to all points 3 dB below is 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.8 %

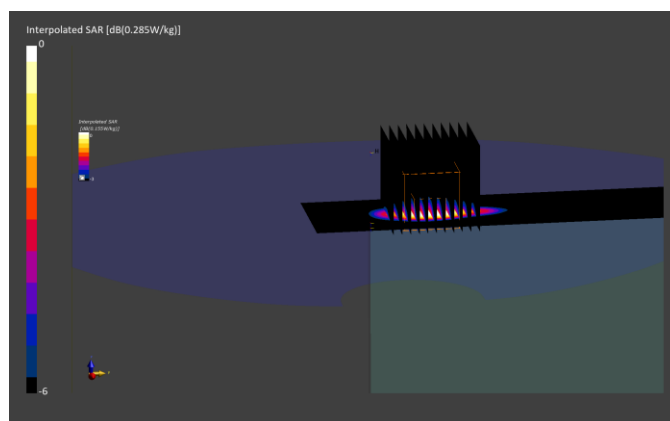

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 185 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0505M

Communication System: UID:10297 - AAE, LTE-FDD; MAIA: Y; Frequency: 1905.000 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1905.000$ MHz; $\text{cond} = 1.45$ S/m; $\text{perm} = 39.7$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/19/2024; Ambient Temp: 20.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7718; ConvF:(7.55,7.58,7.86); Calibrated: 2024-04-17
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn665; Calibrated: 2024-03-01
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 25, Antenna S2, Exp: Tablet| Back Side, Ch. High,
20 MHz Bandwidth, QPSK, 50 RB, 25 RB Offset**

Area Scan (240.0 x 330.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=3.2$ mm, $dy=3.2$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.33 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 0.621 W/kg

Smallest distance from peaks to all points 3 dB below is 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 65.0 %

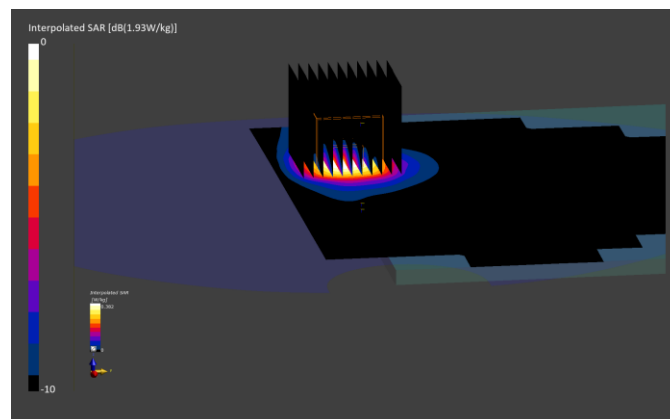

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 186 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0383M

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 1860.000 MHz

Medium: 1900 Head; Medium parameters used:

$f = 1860.000$ MHz; $\text{cond} = 1.42$ S/m; $\text{perm} = 41.5$; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7527; ConvF:(8.09,7.39,8.47); Calibrated: 2024-03-08

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1272; Calibrated: 2024-03-12

Phantom: Twin-SAM V8.0; Serial: 2065

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: LTE Band 25, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Low, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=3.2$ mm, $dy=3.2$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.00 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below is 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.4 %

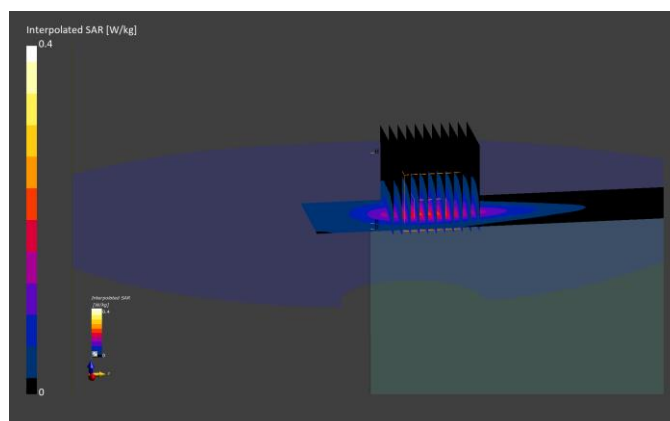

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 187 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0505M

Communication System: UID:10154 - CAH, LTE-FDD; MAIA: Y; Frequency: 2310.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2310.000$ MHz; $\text{cond} = 1.71$ S/m; $\text{perm} = 37.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/17/2024; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN3914; ConvF:(7.58,6.92,6.98); Calibrated: 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; Calibrated: 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 30, Antenna S2, Exp: Tablet| Bottom Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 25 RB, 25 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=3.2$ mm, $dy=3.2$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.16 W/kg; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.590 W/kg

Smallest distance from peaks to all points 3 dB below is 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.2 %

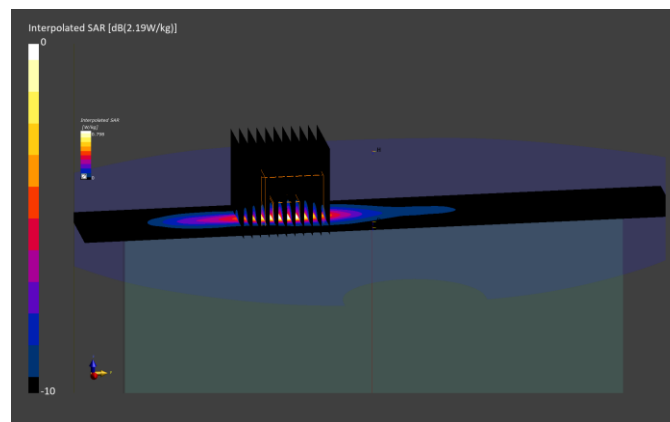

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 188 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0383M

Communication System: UID:10175 - CAH, LTE-FDD; MAIA: Y; Frequency: 2310.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2310.000$ MHz; $\text{cond} = 1.72$ S/m; $\text{perm} = 40.0$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/11/2024; Ambient Temp: 23.5°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7713; ConvF:(8.41,8.41,8.41); Calibrated: 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; Calibrated: 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 30, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Mid,
10 MHz Bandwidth, QPSK, 1 RB, 25 RB Offset**

Area Scan (60.0 x 364.0): Measurement grid: $\text{dx}=15.0$ mm, $\text{dy}=26.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $\text{dx}=3.2$ mm, $\text{dy}=3.2$ mm, $\text{dz}=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.14 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.651 W/kg

SAR(1 g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below is 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.9 %

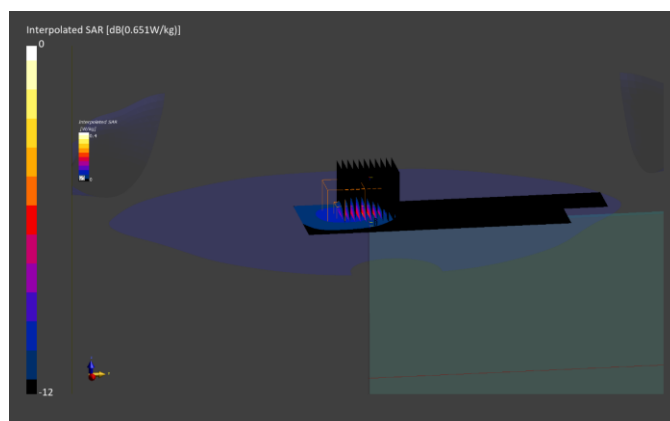

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 189 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0383M

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2535.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2535.000$ MHz; $\text{cond} = 1.88$ S/m; $\text{perm} = 37.7$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 19.00 mm

Test Date: 06/19/2024; Ambient Temp: 22.2°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3914; ConvF:(7.42,6.75,6.83); Calibrated: 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; Calibrated: 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 7, Antenna M1, Exp: Tablet| Top Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=3.2$ mm, $dy=3.2$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.24 W/kg; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.643 W/kg

Smallest distance from peaks to all points 3 dB below is 17.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

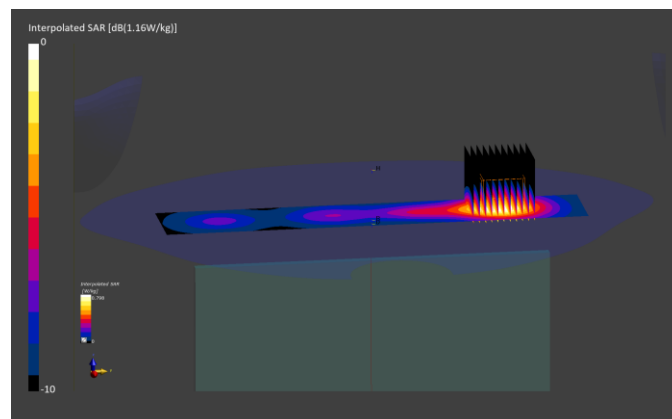

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 190 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0383M

Communication System: UID:10169 - CAF, LTE-FDD; MAIA: Y; Frequency: 2535.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2535.000$ MHz; $\text{cond} = 1.92$ S/m; $\text{perm} = 39.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/15/2024; Ambient Temp: 22.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7713; ConvF:(8.08,8.08,8.08); Calibrated: 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; Calibrated: 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 7, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. Mid,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 320.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=3.2$ mm, $dy=3.2$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.19 W/kg; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below is 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 72.4 %

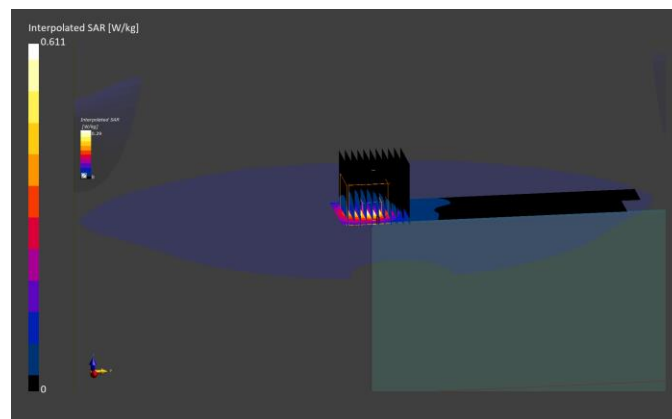

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 191 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 2015M

Communication System: UID:10494 - AAG, LTE-TDD; MAIA: Y; Frequency: 2680.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2680.000$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 37.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/20/2024; Ambient Temp: 23.7°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7488; ConvF:(7.65,7.57,7.31); Calibrated: 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1415; Calibrated: 2024-03-27
Phantom: Twin-SAM V5.0; Serial: 1759
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 41, Antenna M1, Exp: Tablet| Back Side, Ch. High,
20 MHz Bandwidth, QPSK, 50 RB, 0 RB Offset**

Area Scan (220.0 x 320.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=3.9$ mm, $dy=3.9$ mm, $dz=1.4$ mm; Graded Ratio:
1.4


Reference Value = 0.00 W/kg; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.530 W/kg

Smallest distance from peaks to all points 3 dB below is 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.7 %

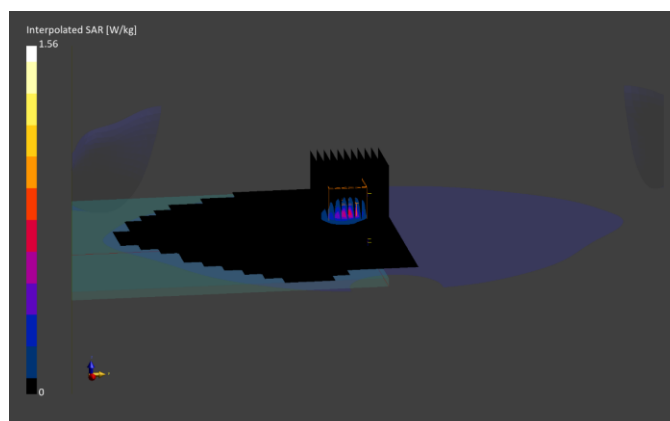

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 192 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10172 - CAH, LTE-TDD; MAIA: Y; Frequency: 2680.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2680.000$ MHz; $\text{cond} = 2.05$ S/m; $\text{perm} = 39.6$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/15/2024; Ambient Temp: 22.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7713; ConvF:(8.08,8.08,8.08); Calibrated: 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; Calibrated: 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 41, HPUE, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. High,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.16 W/kg; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.332 W/kg

SAR(1 g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below is 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.9 %

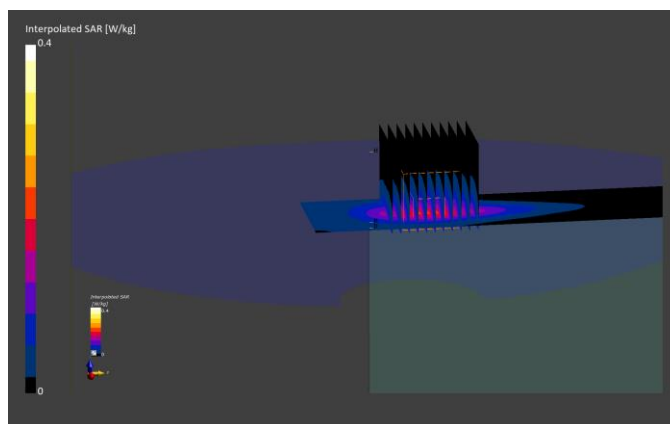

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 193 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0337M

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 3646.700 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3646.700 \text{ MHz}$; $\text{cond} = 2.93 \text{ S/m}$; $\text{perm} = 39.4$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/18/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7565; ConvF:(6.82,5.99,5.94); Calibrated: 2024-01-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; Calibrated: 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1868
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: LTE Band 48, Antenna S4, Exp: Tablet| Back Side, Ch. Mid-High,
20 MHz Bandwidth, QPSK, 1 RB, 0 RB Offset**

Area Scan (220.0 x 320.0): Measurement grid: $dx=10.0 \text{ mm}$, $dy=10.0 \text{ mm}$

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=3.4 \text{ mm}$, $dy=3.4 \text{ mm}$, $dz=1.4 \text{ mm}$; Graded Ratio:
1.4


Reference Value = 0.39 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.15 W/kg

SAR(1 g) = 0.714 W/kg

Smallest distance from peaks to all points 3 dB below is 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 62.7 %

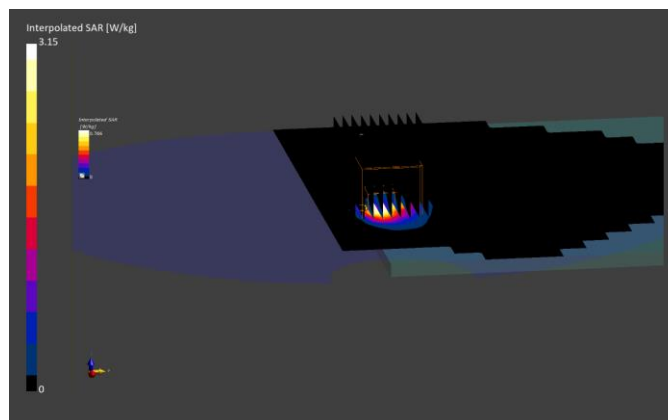

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 194 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0337M

Communication System: UID:10435 - AAG, LTE-TDD; MAIA: Y; Frequency: 3603.300 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3603.300 \text{ MHz}$; $\text{cond} = 2.89 \text{ S/m}$; $\text{perm} = 38.5$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/18/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7558; ConvF:(6.94,6.94,6.94); Calibrated: 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; Calibrated: 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: LTE Band 48, Antenna S4, Exp: Laptop Variant 2| Bottom Edge, Ch. Low-Mid, 20 MHz Bandwidth, QPSK, 1 RB, 99 RB Offset

Area Scan (50.0 x 320.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=10.0 \text{ mm}$

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=4.6 \text{ mm}$, $dy=4.6 \text{ mm}$, $dz=1.4 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.26 W/kg; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.297 W/kg

Smallest distance from peaks to all points 3 dB below is 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 70.1 %

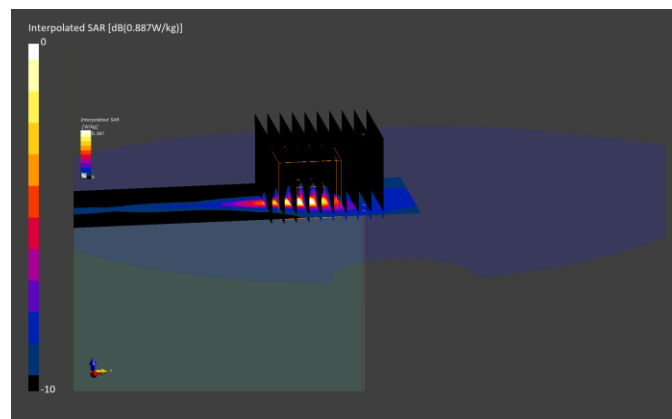

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 195 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 2026M

Communication System: UID:10939 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 680.500 MHz
Medium: 750 Head; Medium parameters used:
 $f = 680.500 \text{ MHz}$; $\text{cond} = 0.861 \text{ S/m}$; $\text{perm} = 41.6$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 19.00 mm

Test Date: 06/17/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7670; ConvF:(9.94,9.94,9.94); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n71, Antenna M1, Exp: Tablet| Top Edge, Ch. 136100,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 50 RB, 28 RB Offset**

Area Scan (40.0 x 240.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio:
1.5


Reference Value = 0.43 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.630 W/kg

SAR(1 g) = 0.405 W/kg

Smallest distance from peaks to all points 3 dB below is > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.6 %

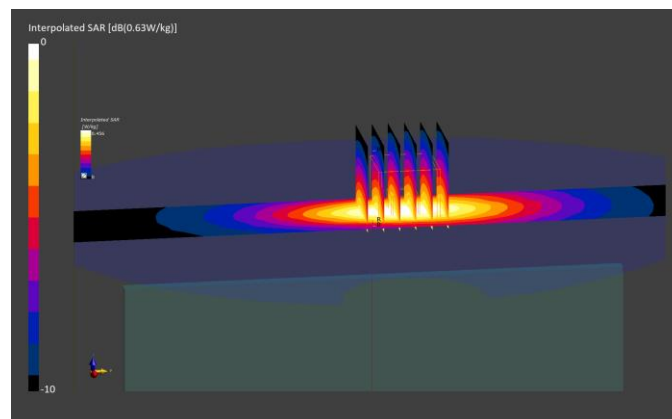

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 196 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 680.500 MHz
Medium: 750 Head; Medium parameters used:
 $f = 680.500 \text{ MHz}$; $\text{cond} = 0.847 \text{ S/m}$; $\text{perm} = 41.2$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/15/2024; Ambient Temp: 21.3°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); Calibrated: 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; Calibrated: 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n71, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. 136100,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio:
1.5


Reference Value = 0.02 W/kg; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.158 W/kg

SAR(1 g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below is 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 62.4 %

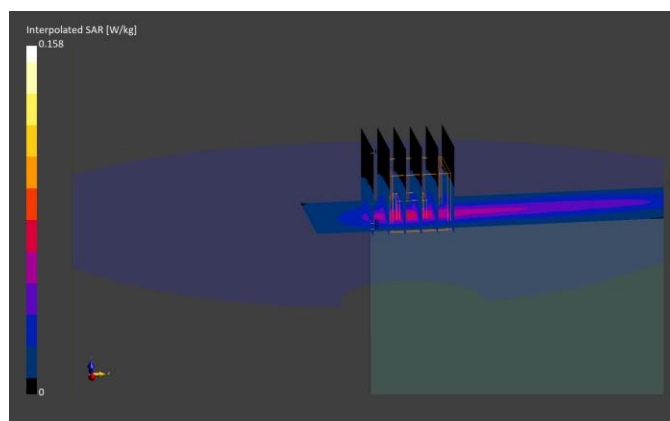

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 197 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M


Communication System: UID:10938 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 707.500 MHz
Medium: 750 Head; Medium parameters used:
 $f = 707.500 \text{ MHz}$; $\text{cond} = 0.923 \text{ S/m}$; $\text{perm} = 40.2$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/08/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.4°C

Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); Calibrated: 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; Calibrated: 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n12, Antenna M1, Exp: Tablet| Back Side, Ch. 141500,
15 MHz Bandwidth, DFT-s-OFDM QPSK, 36 RB, 22 RB Offset**

Area Scan (240.0 x 330.0): Measurement grid: $dx=15.0 \text{ mm}$, $dy=15.0 \text{ mm}$
Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=4.0 \text{ mm}$, $dy=4.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio:
1.5
Reference Value = 0.37 W/kg; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.998 W/kg
SAR(1 g) = 0.378 W/kg
Smallest distance from peaks to all points 3 dB below is 5.9 mm
Ratio of SAR at M2 to SAR at M1 = 69.6 %

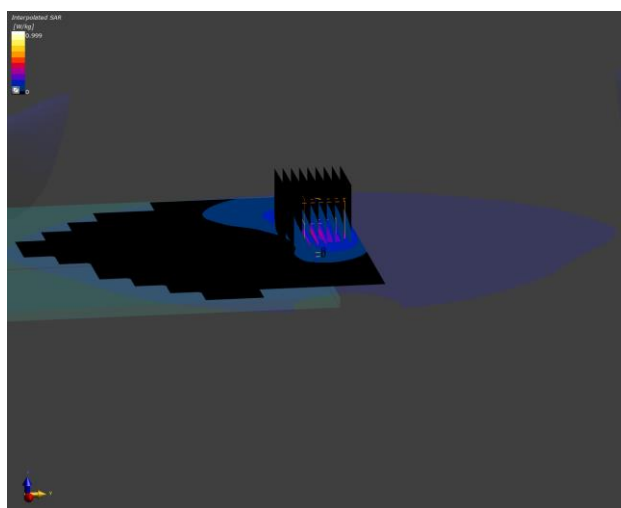

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 198 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10938 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 707.500 MHz

Medium: 750 Head; Medium parameters used:

$f = 707.500 \text{ MHz}$; $\text{cond} = 0.855 \text{ S/m}$; $\text{perm} = 41.1$; $\text{density} = 1000 \text{ kg/m}^3$

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/15/2024; Ambient Temp: 21.3°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); Calibrated: 2024-05-10

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn728; Calibrated: 2024-05-08

Phantom: Twin-SAM V8.0; Serial: 2060

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: NR Band n12, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. 141500, 15 MHz Bandwidth, DFT-s-OFDM QPSK, 36 RB, 22 RB Offset

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.02 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.178 W/kg

SAR(1 g) = 0.075 W/kg

Smallest distance from peaks to all points 3 dB below is 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 68.3 %

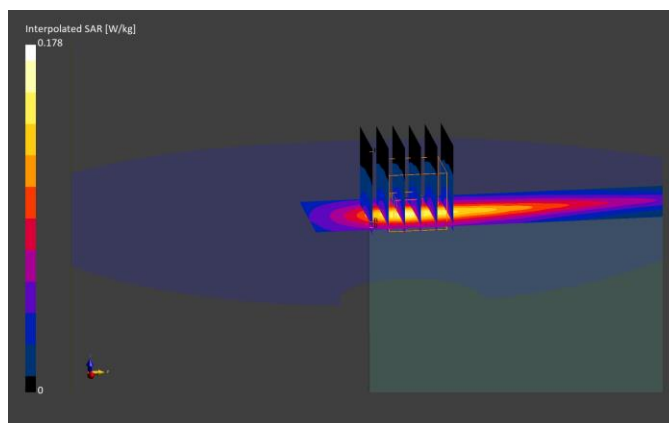

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 199 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 2026M

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 831.500 MHz
Medium: 835 Head; Medium parameters used:
 $f = 831.500 \text{ MHz}$; $\text{cond} = 0.917 \text{ S/m}$; $\text{perm} = 41.1$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 19.00 mm

Test Date: 06/17/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7670; ConvF:(9.68,9.68,9.68); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n26, Antenna M1, Exp: Tablet| Top Edge, Ch. 166300,
20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 104 RB Offset**

Area Scan (40.0 x 240.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio:
1.5


Reference Value = 0.67 W/kg; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.977 W/kg

SAR(1 g) = 0.625 W/kg

Smallest distance from peaks to all points 3 dB below is 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.8 %

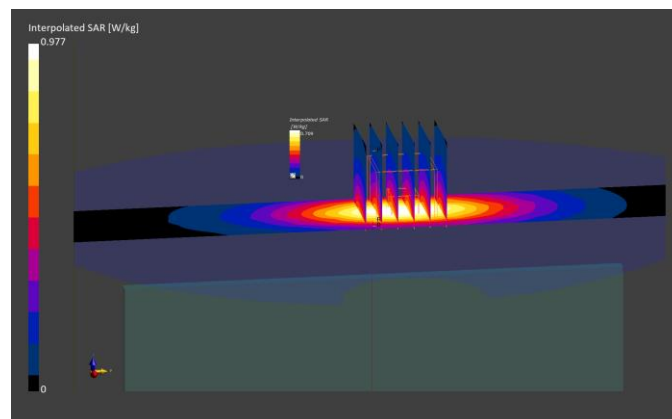

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 200 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10931 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 831.500 MHz
Medium: 835 Head; Medium parameters used:
 $f = 831.500 \text{ MHz}$; $\text{cond} = 0.899 \text{ S/m}$; $\text{perm} = 40.8$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/15/2024; Ambient Temp: 21.3°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN3914; ConvF:(9.48,8.48,8.69); Calibrated: 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; Calibrated: 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: NR Band n26, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. 166300, 20 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 104 RB Offset

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5


Reference Value = 0.02 W/kg; Power Drift = -0.21 dB

Peak SAR (extrapolated) = 0.219 W/kg

SAR(1 g) = 0.091 W/kg

Smallest distance from peaks to all points 3 dB below is 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 68.7 %

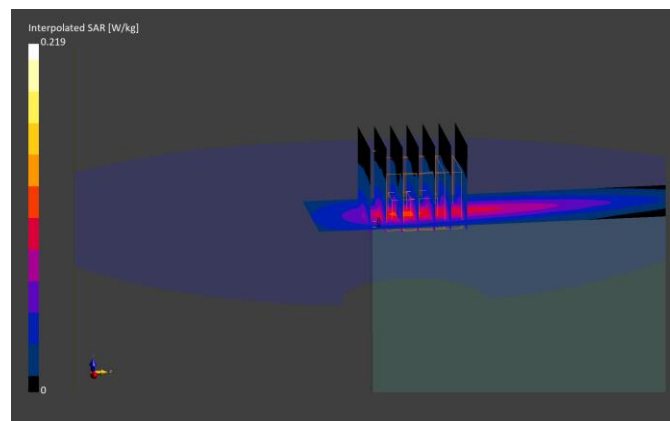

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 201 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10769 - AAD, CW; MAIA: Y; Frequency: 1702.500 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1702.500$ MHz; $\text{cond} = 1.28$ S/m; $\text{perm} = 39.5$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/01/2024; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7670; ConvF:(8.47,8.47,8.47); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n70, Antenna M1, Exp: Tablet| Top Edge, Ch. 340500,
15 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 240.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.8 x 30.8 x 30.0): Measurement grid: $dx=2.8$ mm, $dy=2.8$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.40 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.541 W/kg

Smallest distance from peaks to all points 3 dB below is 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 60.1 %

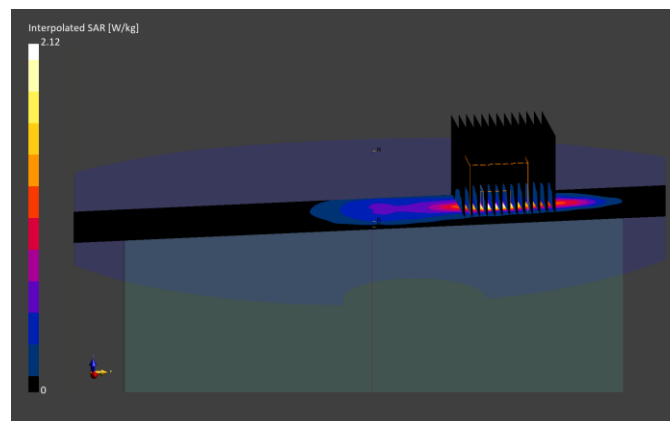

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 202 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0377M

Communication System: UID:10938 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1702.500 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1702.500 \text{ MHz}$; $\text{cond} = 1.32 \text{ S/m}$; $\text{perm} = 40.8$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/17/2024; Ambient Temp: 23.8°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7527; ConvF:(8.08,7.43,8.45); Calibrated: 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2024-03-12
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n70, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. 340500,
15 MHz Bandwidth, DFT-s-OFDM QPSK, 36 RB, 22 RB Offset**

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio:
1.5


Reference Value = 0.12 W/kg; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.268 W/kg

SAR(1 g) = 0.119 W/kg

Smallest distance from peaks to all points 3 dB below is 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.5 %

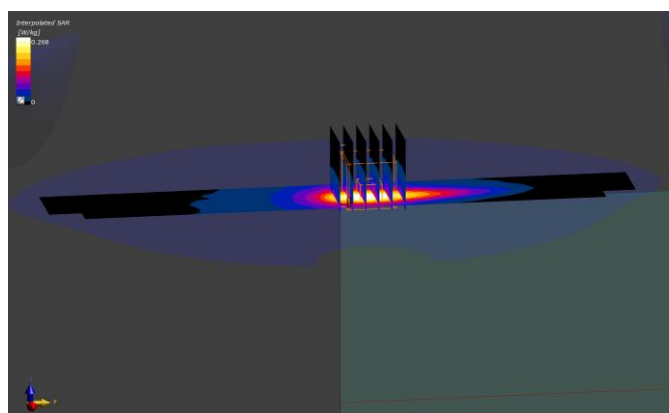

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 203 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M


Communication System: UID:10934 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1745.000 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1745.000$ MHz; $\text{cond} = 1.31$ S/m; $\text{perm} = 39.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/01/2024; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7670; ConvF:(8.47,8.47,8.47); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n66, Antenna M1, Exp: Tablet| Top Edge, Ch. 349000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 108 RB Offset**

Area Scan (60.0 x 240.0): Measurement grid: $dx=15.0$ mm, $dy=15.0$ mm
Zoom Scan (30.8 x 30.8 x 30.0): Measurement grid: $dx=2.8$ mm, $dy=2.8$ mm, $dz=1.5$ mm; Graded Ratio:
1.5
Reference Value = 0.40 W/kg; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 2.27 W/kg
SAR(1 g) = 0.556 W/kg
Smallest distance from peaks to all points 3 dB below is 4.5 mm
Ratio of SAR at M2 to SAR at M1 = 55.1 %

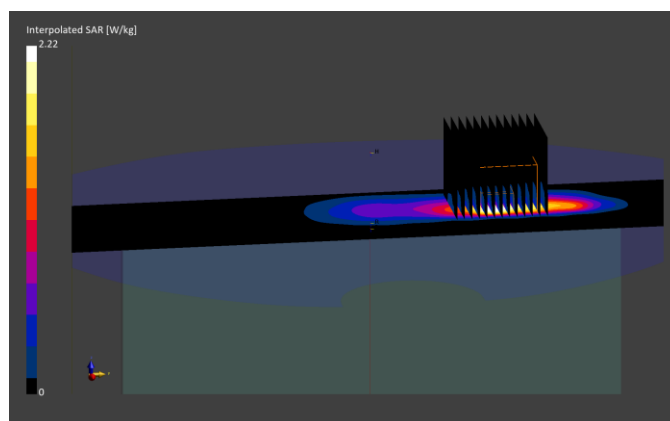

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 204 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0377M

Communication System: UID:10942 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1745.000 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1745.000$ MHz; $\text{cond} = 1.34$ S/m; $\text{perm} = 40.7$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/17/2024; Ambient Temp: 23.8°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7527; ConvF:(8.08,7.43,8.45); Calibrated: 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2024-03-12
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n66, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. 349000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 108 RB, 54 RB Offset**

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.01 W/kg; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.301 W/kg

SAR(1 g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below is 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 73.0 %

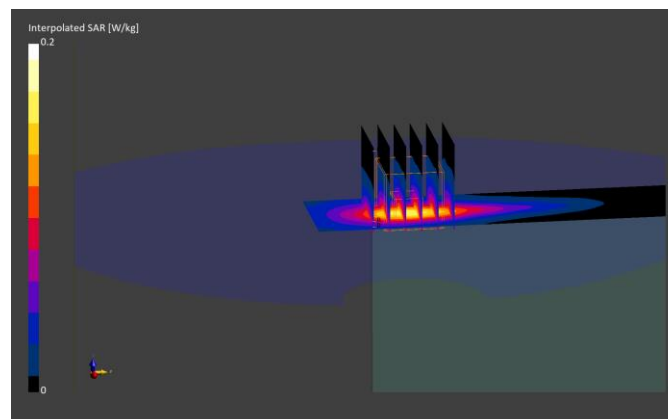

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 205 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10773 - AAF, CW; MAIA: Y; Frequency: 1882.500 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1882.500 \text{ MHz}$; $\text{cond} = 1.39 \text{ S/m}$; $\text{perm} = 39.2$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/01/2024; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7670; ConvF:(8.42,8.42,8.42); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n25, Antenna M1, Exp: Tablet| Top Edge, Ch. 376500,
40 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (60.0 x 240.0): Measurement grid: $dx=15.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.8 x 30.8 x 30.0): Measurement grid: $dx=2.8 \text{ mm}$, $dy=2.8 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio:
1.5


Reference Value = 0.35 W/kg; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.436 W/kg

Smallest distance from peaks to all points 3 dB below is 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 62.3 %

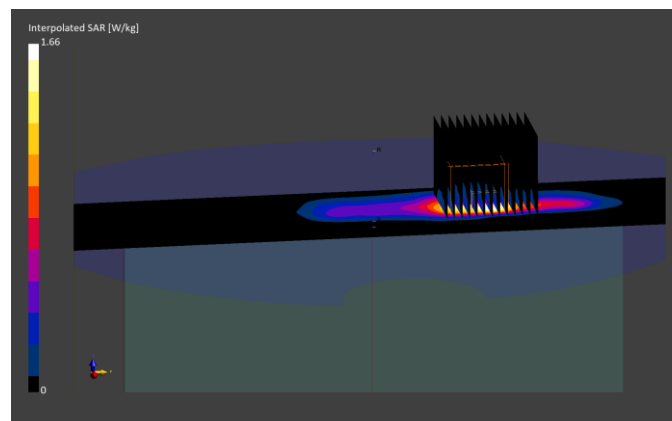

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 206 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0377M

Communication System: UID:10934 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 1882.500 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1882.500$ MHz; $\text{cond} = 1.42$ S/m; $\text{perm} = 40.6$; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/17/2024; Ambient Temp: 23.8°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7527; ConvF:(8.09,7.39,8.47); Calibrated: 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; Calibrated: 2024-03-12
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n25, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. 376500,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 108 RB Offset**

Area Scan (40.0 x 330.0): Measurement grid: $dx=5.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.01 W/kg; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.493 W/kg

SAR(1 g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below is 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

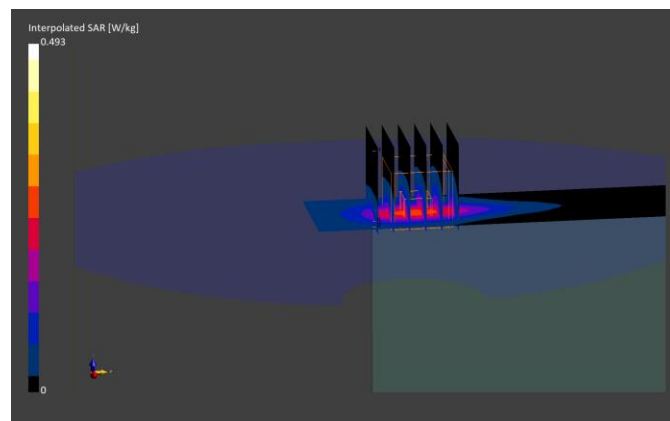

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 207 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0505M

Communication System: UID:10768 - AAE, CW; MAIA: Y; Frequency: 2310.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2310.000$ MHz; $\text{cond} = 1.73$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/08/2024; Ambient Temp: 21.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7713; ConvF:(8.41,8.41,8.41); Calibrated: 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; Calibrated: 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n30, Antenna M1, Exp: Tablet| Top Edge, Ch. 462000,
10 MHz Bandwidth, CP-OFDM QPSK, 1 RB, 1 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=3.8$ mm, $dy=3.8$ mm, $dz=1.4$ mm; Graded Ratio:
1.4


Reference Value = 0.41 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 2.05 W/kg

SAR(1 g) = 0.483 W/kg

Smallest distance from peaks to all points 3 dB below is 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.0 %

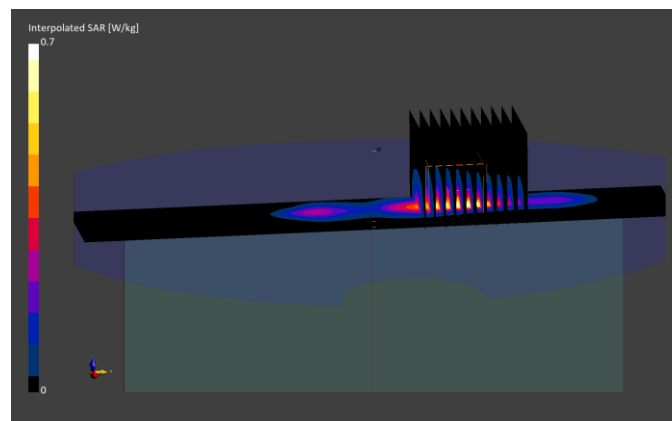

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 208 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0362M

Communication System: UID:10937 - AAD, 5G NR FR1 FDD; MAIA: Y; Frequency: 2310.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2310.000$ MHz; $\text{cond} = 1.67$ S/m; $\text{perm} = 39.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/15/2024; Ambient Temp: 22.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7670; ConvF:(8.16,8.16,8.16); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: NR Band n30, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. 462000, 10 MHz Bandwidth, DFT-s-OFDM QPSK, 25 RB, 14 RB Offset

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5


Reference Value = 0.13 W/kg; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.324 W/kg

SAR(1 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below is 9.5 mm

Ratio of SAR at M2 to SAR at M1 = 62.5 %

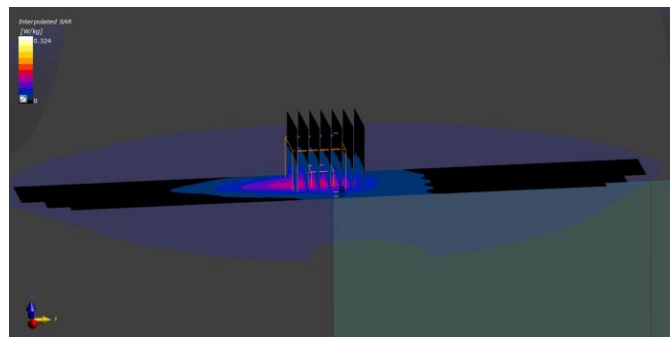

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 209 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0386M

Communication System: UID:10942 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2535.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2535.000$ MHz; $\text{cond} = 1.84$ S/m; $\text{perm} = 40.0$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 19.00 mm

Test Date: 07/01/2024; Ambient Temp: 22.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7713; ConvF:(8.08,8.08,8.08); Calibrated: 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; Calibrated: 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n7, Antenna M1, Exp: Tablet| Top Edge, Ch. 507000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 108 RB, 54 RB Offset**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.20 W/kg; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 0.984 W/kg

SAR(1 g) = 0.545 W/kg

Smallest distance from peaks to all points 3 dB below is 19.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.5 %

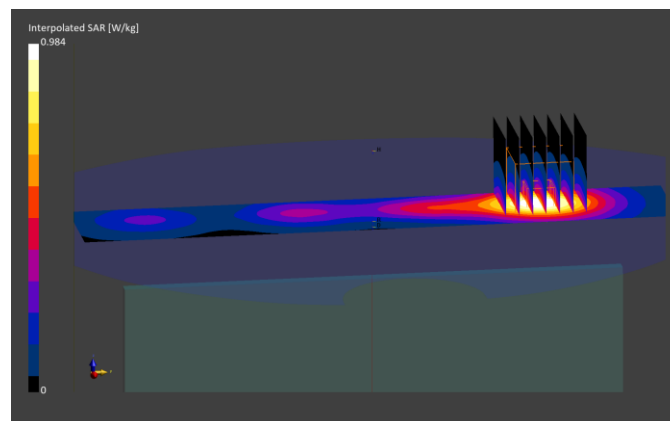

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 210 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0362M

Communication System: UID:10942 - AAC, 5G NR FR1 FDD; MAIA: Y; Frequency: 2535.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2535.000$ MHz; $\text{cond} = 1.84$ S/m; $\text{perm} = 38.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/15/2024; Ambient Temp: 22.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7670; ConvF:(7.73,7.73,7.73); Calibrated: 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; Calibrated: 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n7, Antenna M1, Exp: Laptop Variant 2| Bottom Edge, Ch. 507000,
40 MHz Bandwidth, DFT-s-OFDM QPSK, 108 RB, 54 RB Offset**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.18 W/kg; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.410 W/kg

SAR(1 g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below is 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.7 %

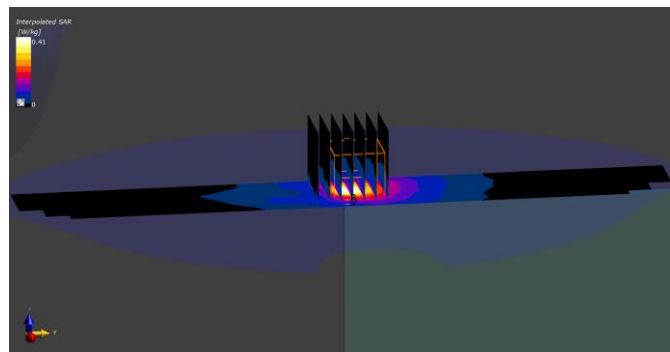

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 211 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0374M

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 2593.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2593.000$ MHz; $\text{cond} = 1.96$ S/m; $\text{perm} = 39.9$; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/08/2024; Ambient Temp: 21.3°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7558; ConvF:(7.42,7.42,7.42); Calibrated: 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; Calibrated: 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n41, Antenna S2, Exp: Tablet| Bottom Edge, Ch. 518598,
100 MHz Bandwidth, CW/SRS**

Area Scan (40.0 x 220.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (32.0 x 32.0 x 30.0): Measurement grid: $dx=3.2$ mm, $dy=3.2$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.54 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 2.19 W/kg

SAR(1 g) = 0.582 W/kg

Smallest distance from peaks to all points 3 dB below is 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 63.6 %

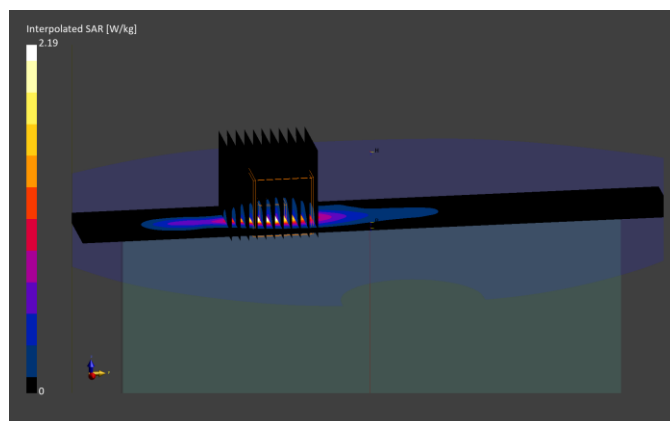

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 212 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0374M

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 2593.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2593.000$ MHz; $\text{cond} = 1.92$ S/m; $\text{perm} = 39.2$; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/17/2024; Ambient Temp: 20.3°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7558; ConvF:(7.42,7.42,7.42); Calibrated: 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; Calibrated: 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n41, Antenna S4, Exp: Laptop Variant 2| Bottom Edge, Ch. 518598,
100 MHz Bandwidth, CW/SRS**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.04 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.120 W/kg

SAR(1 g) = 0.045 W/kg

Smallest distance from peaks to all points 3 dB below is 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 67.1 %

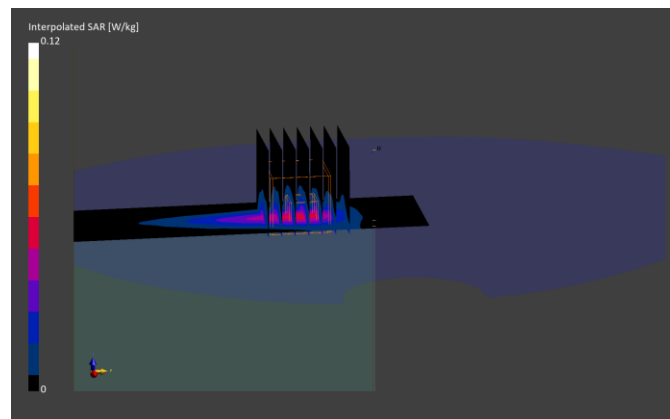

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 213 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0374M

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 3625.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3625.000$ MHz; $\text{cond} = 2.91$ S/m; $\text{perm} = 38.3$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/03/2024; Ambient Temp: 20.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7558; ConvF:(6.94,6.94,6.94); Calibrated: 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; Calibrated: 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n48, Antenna S3, Exp: Tablet| Left Edge, Ch. 641666,
40 MHz Bandwidth, CW/SRS**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=2.9$ mm, $dy=2.9$ mm, $dz=1.2$ mm; Graded Ratio:
1.2


Reference Value = 0.57 W/kg; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 3.78 W/kg

SAR(1 g) = 0.761 W/kg

Smallest distance from peaks to all points 3 dB below is 3.7 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %

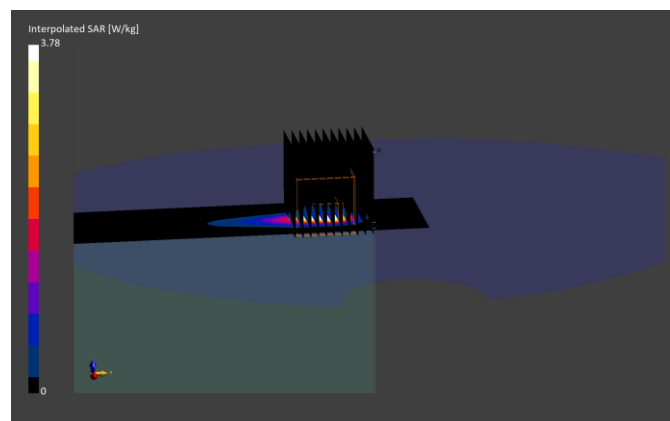

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 214 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0374M

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 3680.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3680.000$ MHz; $\text{cond} = 2.95$ S/m; $\text{perm} = 38.2$; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/15/2024; Ambient Temp: 21.8°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7558; ConvF:(6.94,6.94,6.94); Calibrated: 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; Calibrated: 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n48, Antenna M2, Exp: Laptop Variant 2| Bottom Edge, Ch. 645332,
40 MHz Bandwidth, CW/SRS**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=4.2$ mm, $dy=4.2$ mm, $dz=1.4$ mm; Graded Ratio:
1.4


Reference Value = 0.21 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.875 W/kg

SAR(1 g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below is 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.3 %

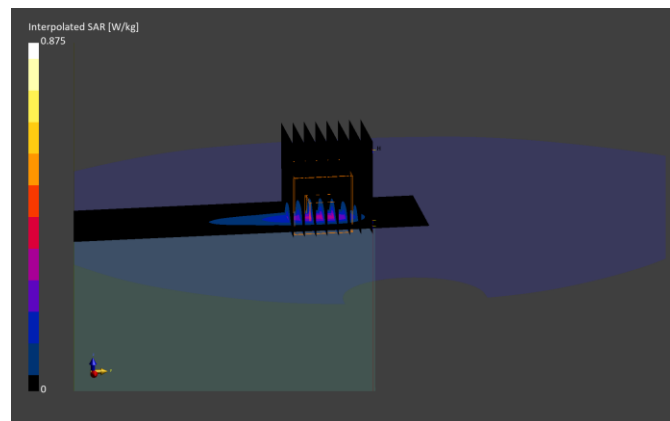

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 215 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0362M

Communication System: UID:0 - -, CW; MAIA: Y; Frequency: 3930.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3930.000$ MHz; $\text{cond} = 3.21$ S/m; $\text{perm} = 38.0$; density = 1000 kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/28/2024; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7488; ConvF:(6.86,6.84,6.56); Calibrated: 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1415; Calibrated: 2024-03-27
Phantom: Twin-SAM V5.0; Serial: 1759
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: NR Band n77, Antenna S2, Exp: Tablet| Right Edge, Ch. 662000,
100 MHz Bandwidth, CW/SRS**

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio:
1.5


Reference Value = 0.45 W/kg; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.469 W/kg

Smallest distance from peaks to all points 3 dB below is 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.7 %

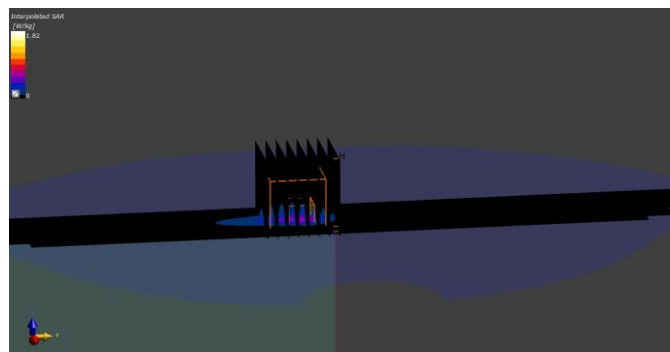

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 216 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0362M


Communication System: UID:10866 - AAF, 5G NR FR1 TDD; MAIA: Y; Frequency: 3500.010 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3500.010$ MHz; $\text{cond} = 2.81$ S/m; $\text{perm} = 38.5$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/18/2024; Ambient Temp: 23.1°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7660; ConvF:(6.95,6.76,7.38); Calibrated: 2024-05-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1678; Calibrated: 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 1966
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: NR Band n77 DoD, Antenna M2, Exp: Laptop Variant 2| Bottom Edge, Ch. 633334,
100 MHz Bandwidth, DFT-s-OFDM QPSK, 1 RB, 137 RB Offset

Area Scan (40.0 x 320.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Reference Value = 0.14 W/kg; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.635 W/kg
SAR(1 g) = 0.196 W/kg
Smallest distance from peaks to all points 3 dB below is 6.0 mm
Ratio of SAR at M2 to SAR at M1 = 69.4 %

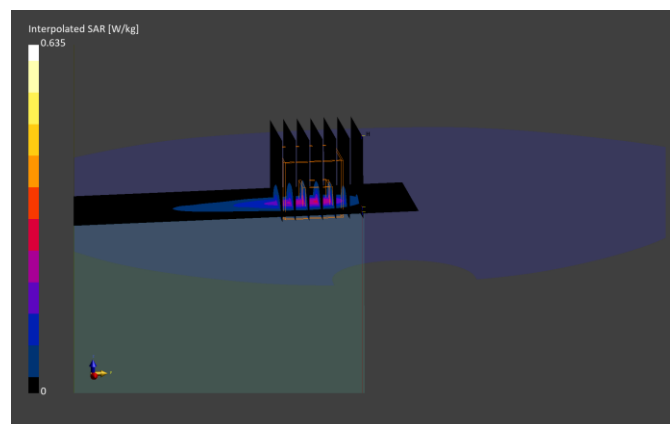

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 217 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0237M

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2462.000 MHz

Medium: 2450 Head; Medium parameters used:

f = 2462.000 MHz; cond = 1.82 S/m; perm = 37.9; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/10/2024; Ambient Temp: 20.0°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7565; ConvF:(7.73,6.62,6.61); Calibrated: 2024-01-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2024-01-16

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: 2.4 GHz WIFI/ IEEE 802.11b, Antenna MIMO, 20 MHz Bandwidth,

Exp: Tablet| Right Edge, Ch. 11, 1Mbps

Area Scan (60.0 x 320.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=4.0 mm, dy=4.0 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.37 W/kg; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.75 W/kg

SAR(1 g) = 0.527 W/kg

Smallest distance from peaks to all points 3 dB below is 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 68.9 %

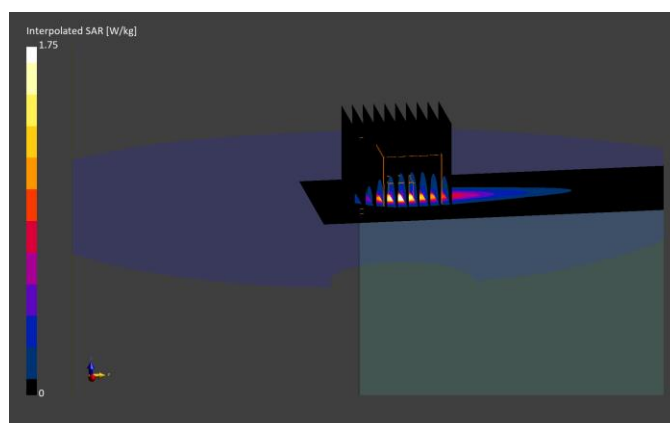

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 218 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0237M

Communication System: UID:10415 - AAA, WLAN; MAIA: Y; Frequency: 2462.000 MHz

Medium: 2450 Head; Medium parameters used:

f = 2462.000 MHz; cond = 1.82 S/m; perm = 37.5; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/03/2024; Ambient Temp: 19.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7565; ConvF:(7.73,6.62,6.61); Calibrated: 2024-01-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2024-01-16

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: 2.4 GHz WIFI/ IEEE 802.11b, Antenna MIMO, 20 MHz Bandwidth,

Exp: Laptop Variant 2| Bottom Edge, Ch. 11, 1Mbps

Area Scan (60.0 x 340.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: dx=3.8 mm, dy=3.8 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.12 W/kg; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.699 W/kg

SAR(1 g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below is 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.5 %

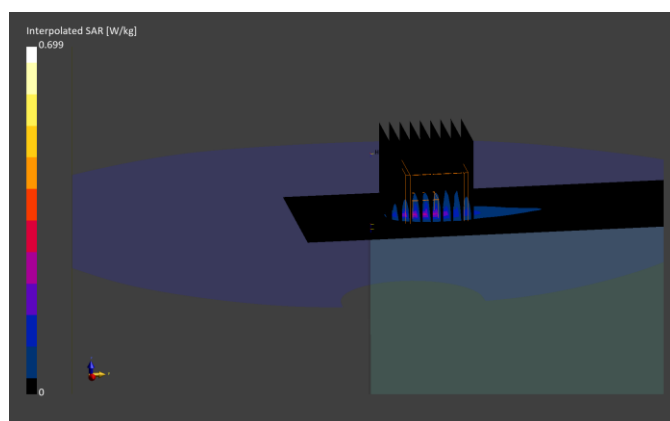

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 219 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0228M

Communication System: UID:10626 - AAD, WLAN; MAIA: Y; Frequency: 5610.000 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5610.000 MHz; cond = 4.93 S/m; perm = 34.2; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/08/2024; Ambient Temp: 21.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7547; ConvF:(4.78,4.78,4.78); Calibrated: 2023-10-23

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1322; Calibrated: 2023-10-18

Phantom: Twin-SAM V8.0; Serial: 1937

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: 5 GHz WIFI/ IEEE 802.11ac, Antenna WIFI Ant0, 80 MHz Bandwidth, U-NII-2C,

Exp: Tablet| Back Side, Ch. 122, 58.5 Mbps

Area Scan (220.0 x 320.0): Measurement grid: dx=10.0 mm, dy=10.0 mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: dx=2.3 mm, dy=2.3 mm, dz=1.2 mm; Graded Ratio: 1.2


Reference Value = 0.31 W/kg; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 3.85 W/kg

SAR(1 g) = 0.605 W/kg

Smallest distance from peaks to all points 3 dB below is 3.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.2 %

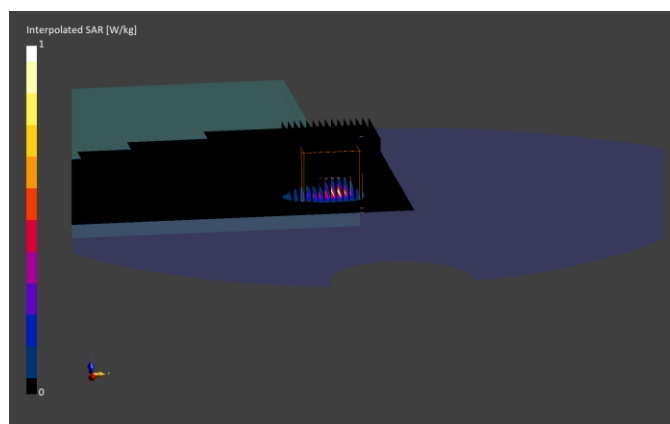

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 220 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 2285M

Communication System: UID:10626 - AAD, WLAN; MAIA: Y; Frequency: 5610.000 MHz

Medium: 5200-5800 Head; Medium parameters used:

f = 5610.000 MHz; cond = 4.91 S/m; perm = 35.7; density = 1000 kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/22/2024; Ambient Temp: 24.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7713; ConvF:(4.99,4.99,4.99); Calibrated: 2024-01-17

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1530; Calibrated: 2024-01-16

Phantom: Twin-SAM V5.0; Serial: 1757

Measurement SW: DASY Module SAR V16.2.4.2524

Mode: 5 GHz WIFI/ IEEE 802.11ac, Antenna WIFI ANT0, 80 MHz Bandwidth, U-NII-2C,

Exp: Laptop Variant 2| Bottom Edge, Ch. 122, 58.5 Mbps

Area Scan (40.0 x 320.0): Measurement grid: dx=5.0 mm, dy=10.0 mm

Zoom Scan (22.4 x 22.4 x 22.0): Measurement grid: dx=3.2 mm, dy=3.2 mm, dz=1.4 mm; Graded Ratio: 1.4


Reference Value = 0.21 W/kg; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 2.09 W/kg

SAR(1 g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below is 3.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.4 %

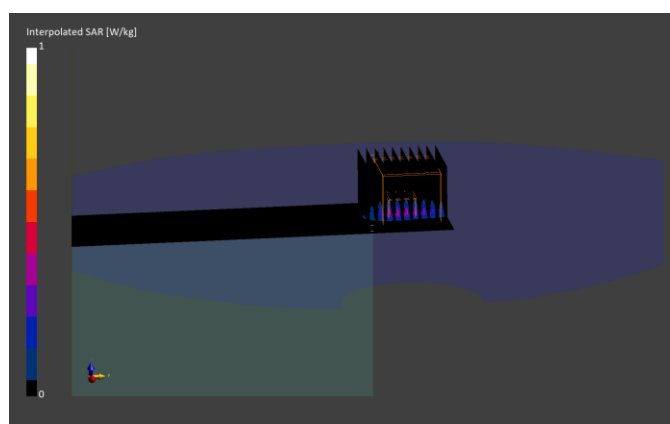

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 221 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0243M


Communication System: UID:10719 - AAC, WLAN; MAIA: Y; Frequency: 6465.000 MHz
Medium: 6000 Head; Medium parameters used:
 $f = 6465.000$ MHz; $\text{cond} = 5.82$ S/m; $\text{perm} = 35.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/30/2024; Ambient Temp: 21.9°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7410; ConvF:(5.55,5.55,5.55); Calibrated: 2023-07-07
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4ip Sn1638; Calibrated: 2023-10-18
Phantom: Twin-SAM V8.0; Serial: 1979
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna MIMO Peak #1, 80 MHz Bandwidth, U-NII-6,
Exp: Tablet| Back Side, Ch. 103, 68.1 Mbps

Area Scan (221.0 x 323.0): Measurement grid: $dx=8.5$ mm, $dy=8.5$ mm
Zoom Scan (23.4 x 23.4 x 22.0): Measurement grid: $dx=2.6$ mm, $dy=2.6$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
Reference Value = 0.29 W/kg; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 4.95 W/kg
SAR(1 g) = 0.676 W/kg
Smallest distance from peaks to all points 3 dB below is 3.1 mm
Ratio of SAR at M2 to SAR at M1 = 44.6 %

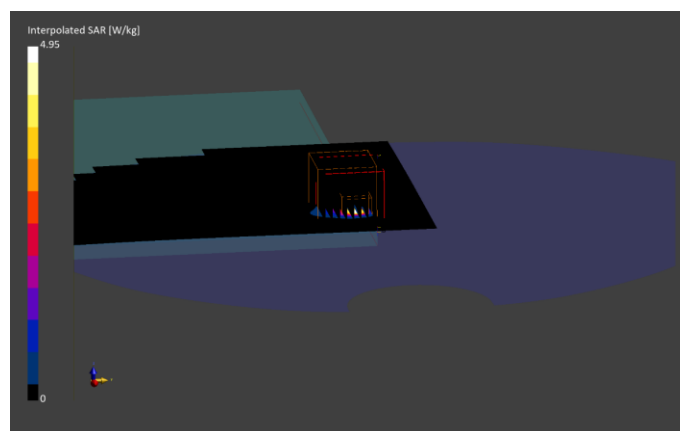

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 222 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0243M

Communication System: UID:10719 - AAC, WLAN; MAIA: Y; Frequency: 6305.000 MHz
Medium: 6000 Head; Medium parameters used:
 $f = 6305.000$ MHz; $\text{cond} = 5.82$ S/m; $\text{perm} = 33.6$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/01/2024; Ambient Temp: 21.9°C; Tissue Temp: 21.9°C

Probe: EX3DV4 - SN7659; ConvF:(5.95,5.95,5.95); Calibrated: 2024-04-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; Calibrated: 2024-04-18
Phantom: Twin-SAM V8.0; Serial: 2064
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna MIMO Peak #1, 80 MHz Bandwidth, U-NII-5, Exp: Tablet| Back Side, Ch. 71, 68.1 Mbps

Area Scan (221.0 x 323.0): Measurement grid: $dx=8.5$ mm, $dy=8.5$ mm

Zoom Scan (23.4 x 23.4 x 22.0): Measurement grid: $dx=2.6$ mm, $dy=2.6$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.44 W/kg; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 4.24 W/kg

APD(4cm²) = 3.15 W/m²

Smallest distance from peaks to all points 3 dB below is 3.8 mm

Ratio of SAR at M2 to SAR at M1 = 50.0 %

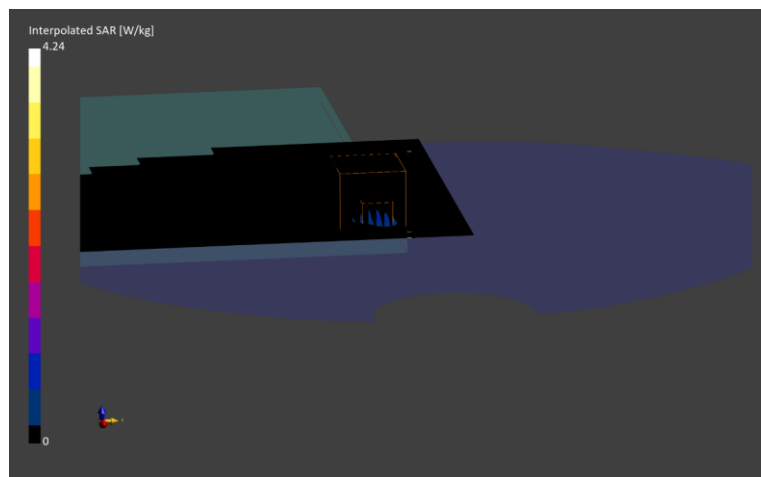

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 223 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0263M


Communication System: UID:10719 - AAC, WLAN; MAIA: Y; Frequency: 6305.000 MHz
Medium: 6000 Head; Medium parameters used:
 $f = 6305.000$ MHz; $\text{cond} = 5.83$ S/m; $\text{perm} = 34.2$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 06/24/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7659; ConvF:(5.95,5.95,5.95); Calibrated: 2024-04-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; Calibrated: 2024-04-18
Phantom: Twin-SAM V8.0; Serial: 2064
Measurement SW: DASY Module SAR V16.2.4.2524

**Mode: 6 GHz WIFI/ IEEE 802.11ax, Antenna MIMO, 80 MHz Bandwidth, U-NII-5,
Exp: Laptop Variant 2| Bottom Edge, Ch. 71, 68.1 Mbps**

Area Scan (40.0 x 323.0): Measurement grid: $dx=5.0$ mm, $dy=8.5$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=3.4$ mm, $dy=3.4$ mm, $dz=1.4$ mm; Graded Ratio:
1.4
Reference Value = 0.25 W/kg; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 0.311 W/kg; APD(4cm²) = 2.04 W/m²
Smallest distance from peaks to all points 3 dB below is 5.2 mm
Ratio of SAR at M2 to SAR at M1 = 50.9 %

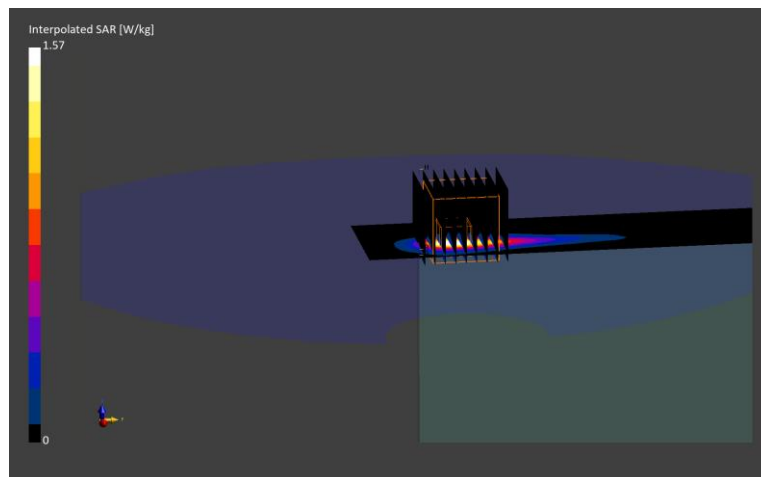

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 224 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0237M

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2441.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2441.000$ MHz; $\text{cond} = 1.80$ S/m; $\text{perm} = 38.5$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/10/2024; Ambient Temp: 20.6°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7565; ConvF:(7.73,6.62,6.61); Calibrated: 2024-01-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; Calibrated: 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1868
Measurement SW: DASY Module SAR V16.2.4.2524

Mode: 2.4 GHz Bluetooth, Antenna WIFI ANT0, Exp: Tablet| Back Side, Ch. 39, 1 Mbps

Area Scan (240.0 x 340.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=3.8$ mm, $dy=3.8$ mm, $dz=1.4$ mm; Graded Ratio: 1.4


Reference Value = 0.07 W/kg; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.421 W/kg

SAR(1 g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below is 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.3 %

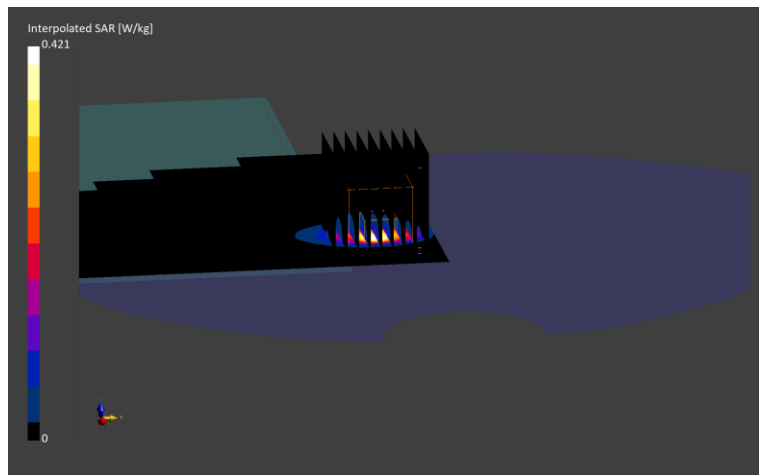

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 225 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: A3LSMX828U; Type: Portable Computing Device; Serial: 0237M

Communication System: UID:10032 - CAA, Bluetooth; MAIA: Y; Frequency: 2441.000 MHz

Medium: 2450 Head; Medium parameters used:

$f = 2441.000$ MHz; $\text{cond} = 1.80$ S/m; $\text{perm} = 37.8$; $\text{density} = 1000$ kg/m³

Phantom Section: Flat; Space: 0.00 mm

Test Date: 07/01/2024; Ambient Temp: 21.7°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7565; ConvF:(7.73,6.62,6.61); Calibrated: 2024-01-16

Sensor-Surface: 1.4mm (VMS + 6p)

Electronics: DAE4 Sn1466; Calibrated: 2024-01-16

Phantom: Twin-SAM V5.0; Serial: 1868

Measurement SW: DASY Module SAR V16.2.0.1425

**Mode: 2.4 GHz Bluetooth, Antenna WIFI ANT0, Exp: Laptop Variant 2| Bottom Edge,
Ch. 39, 1 Mbps**

Area Scan (60.0 x 340.0): Measurement grid: $dx=5.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio:
1.5


Reference Value = 0.05 W/kg; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.069 W/kg

Smallest distance from peaks to all points 3 dB below is 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 71.2 %

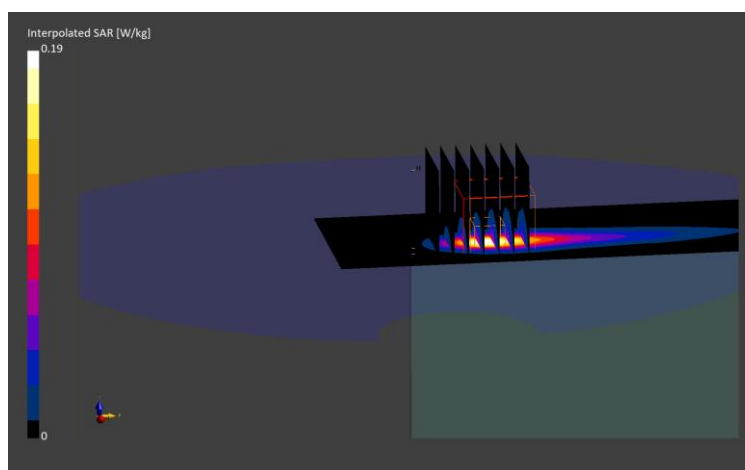

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 226 of 298

REV 22.0
03/30/2022

Element

Date: 06-18-2024

MIMO Channel 7

Device Under Test Properties

DUT	Serial Number	DUT Type
A3LSMX828U	1993M	Portable Computing Device

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Frequency [MHz]
5G Air	Back	2.00	IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle)	5985.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV4 - SN9622_F1-55GHz, 2024-02-02	DAE4ip Sn1639, 2023-11-15

Software Setup


Software	Software Version
cDasy6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0 x 0.0
Grid Steps [lambda]	0.125 x 0.125 x 0.0
Sensor Surface [mm]	2.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pStot avg [W/m²]	1.88
pSn avg [W/m²]	1.73
Epeak [V/m]	60.1
Power Drift [dB]	-0.14

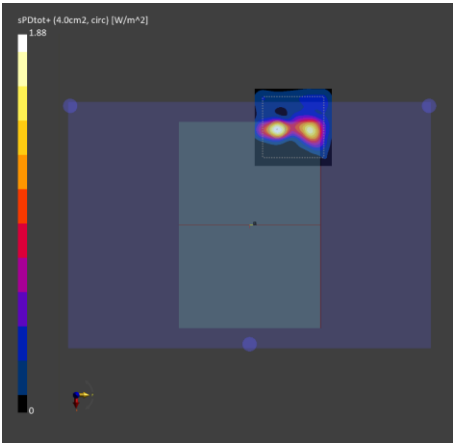

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 227 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Element

Date: 06-18-2024

MIMO Channel 7

Device Under Test Properties

DUT	Serial Number	DUT Type
A3LSMX828U	1993M	Portable Computing Device

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Frequency [MHz]
5G Air	Bottom	2.00	IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle)	5985.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUmmWV4 - SN9622_F1-55GHz, 2024-02-02	DAE4ip Sn1639, 2023-11-15

Software Setup


Software	Software Version
cDasy6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	100.0 x 100.0 x 0.0
Grid Steps [lambda]	0.125 x 0.125 x 0.0
Sensor Surface [mm]	2.00

Measurement Results

Scan Type	5G Scan
Avg. Area [cm ²]	4.00
pS _{tot} avg [W/m ²]	1.04
pS _n avg [W/m ²]	0.748
E _{peak} [V/m]	30.4
Power Drift [dB]	-0.14

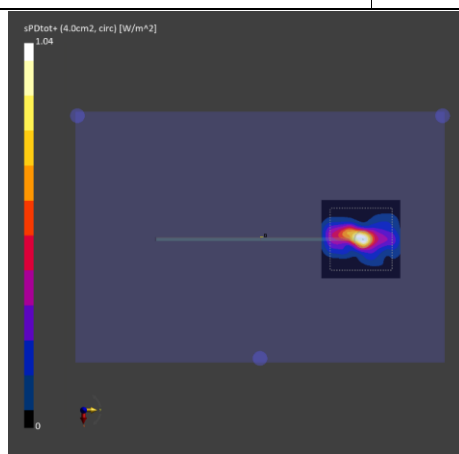

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 228 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

APPENDIX B: SAR DIPOLE VERIFICATION PLOTS

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 229 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: Dipole 750.000 MHz; Type: D750V3 - SN1161

Communication System: UID: 0, CW; Frequency: 750.000 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.000 \text{ MHz}$; $\text{cond} = 0.868 \text{ S/m}$; $\text{perm} = 40.7$; $\text{density} = 1000 \text{ kg/m}^3$
Phantom Section: Flat; Space: 15 mm

Test Date: 06/12/2024; Ambient Temp: 24.9°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7539; ConvF:(10.16,10.16,10.16); 2023-10-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4ip Sn1639; 2023-11-15
Phantom: Twin-SAM V8.0; Serial: 1980
Measurement SW: DASY Module SAR V16.2.4.2524

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0 \text{ mm}$, $dy=15.0 \text{ mm}$

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0 \text{ mm}$, $dy=6.0 \text{ mm}$, $dz=1.5 \text{ mm}$; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.68 W/kg

SAR(1 g) = 1.68 W/kg; SAR(10 g) = 1.09 W/kg

Deviation (1 g) = -0.47%; Deviation (10 g) = -1.09%

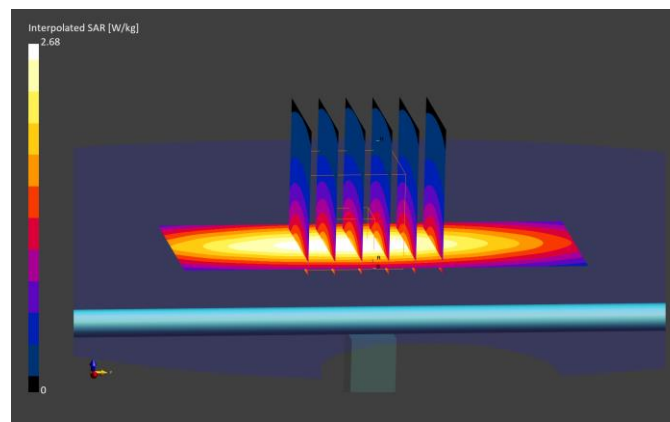

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 230 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: Dipole 750.000 MHz; Type: D750V3 - SN1054

Communication System: UID: 0, CW; Frequency: 750.000 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.000$ MHz; $\text{cond} = 0.888$ S/m; $\text{perm} = 41.4$; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 06/17/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7670; ConvF:(9.94,9.94,9.94); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

750.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.70 W/kg

SAR(1 g) = 1.68 W/kg; SAR(10 g) = 1.10 W/kg

Deviation (1 g) = -1.41%; Deviation (10 g) = -1.79%

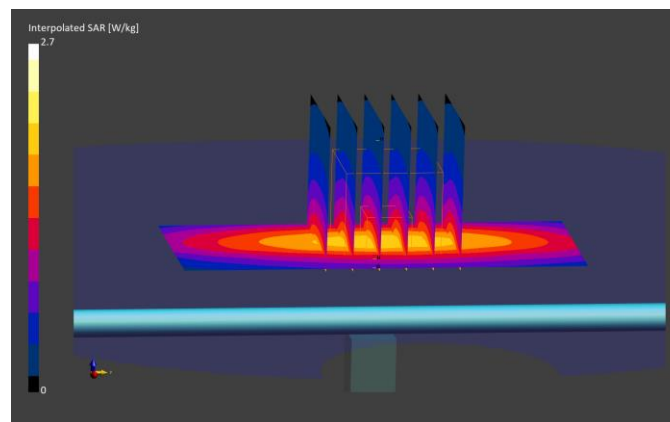

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 231 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 750.000 MHz; Type: D750V3 - SN1161

Communication System: UID: 0, CW; Frequency: 750.000 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.000$ MHz; $\text{cond} = 0.886$ S/m; $\text{perm} = 42.2$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/04/2024; Ambient Temp: 22.2°C; Tissue Temp: 20.9°C


Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

750.0 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.74 W/kg
SAR(1 g) = 1.82 W/kg; SAR(10 g) = 1.20 W/kg
Deviation (1 g) = 7.82%; Deviation (10 g) = 8.89%

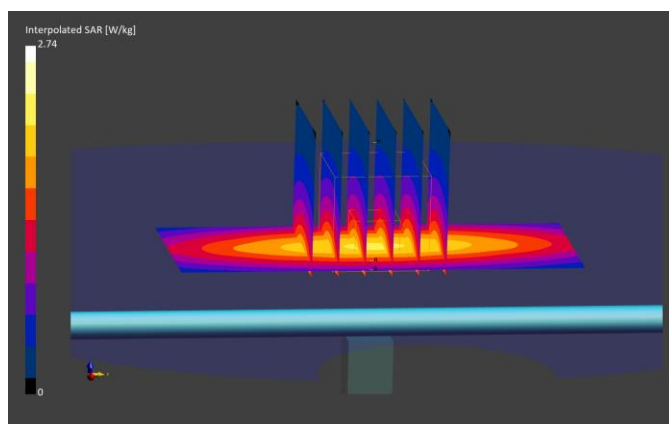

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 232 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 750.000 MHz; Type: D750V3 - SN1054

Communication System: UID: 0, CW; Frequency: 750.000 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.000$ MHz; $\text{cond} = 0.900$ S/m; $\text{perm} = 40.4$; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/08/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.4°C


Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

750.0 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.72 W/kg
SAR(1 g) = 1.79 W/kg; SAR(10 g) = 1.18 W/kg
Deviation (1 g) = 5.05%; Deviation (10 g) = 5.36%

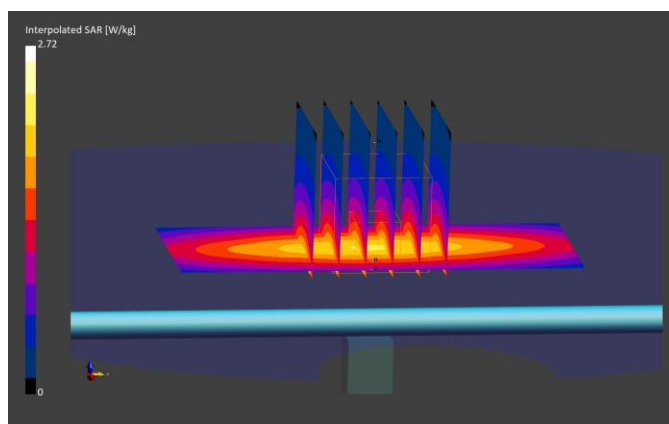

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 233 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 750.000 MHz; Type: D750V3 - SN1054

Communication System: UID: 0, CW; Frequency: 750.000 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.000$ MHz; $\text{cond} = 0.874$ S/m; $\text{perm} = 41.6$; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/10/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.7°C


Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

750.0 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.69 W/kg
SAR(1 g) = 1.77 W/kg; SAR(10 g) = 1.17 W/kg
Deviation (1 g) = 3.87%; Deviation (10 g) = 4.46%

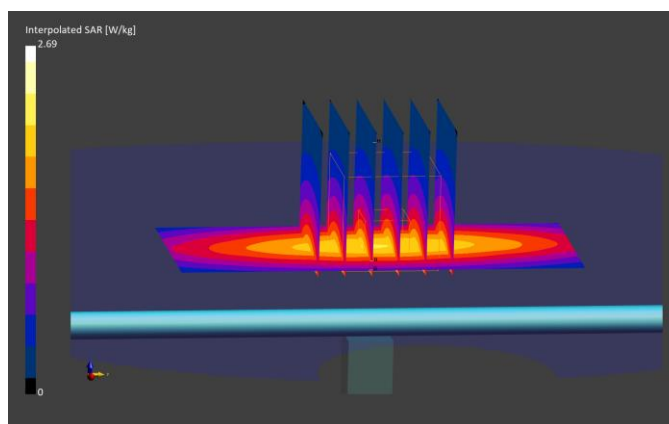

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 234 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 750.000 MHz; Type: D750V3 - SN1054

Communication System: UID: 0, CW; Frequency: 750.000 MHz
Medium: 750 Head; Medium parameters used:
 $f = 750.000$ MHz; $\text{cond} = 0.870$ S/m; $\text{perm} = 41.0$; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/15/2024; Ambient Temp: 21.3°C; Tissue Temp: 20.3°C


Probe: EX3DV4 - SN3914; ConvF:(9.61,8.68,8.83); 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

750.0 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 2.68 W/kg
SAR(1 g) = 1.78 W/kg; SAR(10 g) = 1.18 W/kg
Deviation (1 g) = 4.46%; Deviation (10 g) = 5.36%

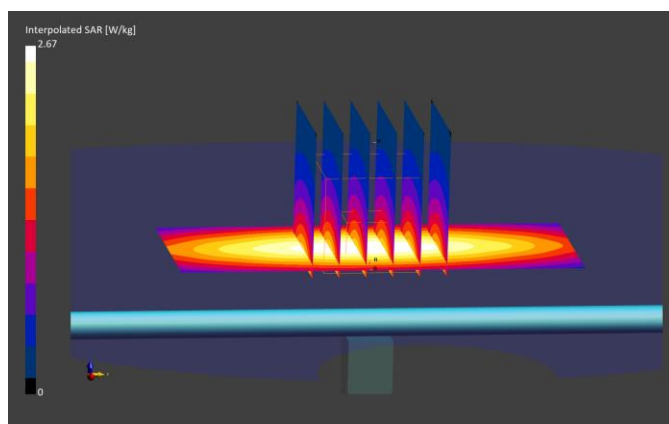

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 235 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: Dipole 835.000 MHz; Type: D835V2 - SN4d133

Communication System: UID: 0, CW; Frequency: 835.000 MHz
Medium: 835 Head; Medium parameters used:
 $f = 835.000$ MHz; $\text{cond} = 0.897$ S/m; $\text{perm} = 40.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 06/12/2024; Ambient Temp: 24.9°C; Tissue Temp: 23.6°C

Probe: EX3DV4 - SN7539; ConvF:(9.79,9.79,9.79); 2023-10-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4ip Sn1639; 2023-11-15
Phantom: Twin-SAM V8.0; Serial: 1980
Measurement SW: DASY Module SAR V16.2.4.2524

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.28 W/kg

SAR(1 g) = 2.00 W/kg; SAR(10 g) = 1.28 W/kg

Deviation (1 g) = 0.60%; Deviation (10 g) = -1.39%

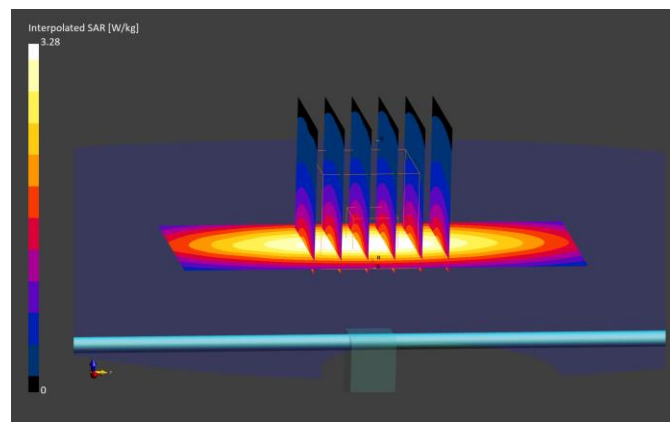

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 236 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 835.000 MHz; Type: D835V2 - SN4d133


Communication System: UID: 0, CW; Frequency: 835.000 MHz
Medium: 835 Head; Medium parameters used:
 $f = 835.000$ MHz; $\text{cond} = 0.918$ S/m; $\text{perm} = 41.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 06/17/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.6°C

Probe: EX3DV4 - SN7670; ConvF:(9.68,9.68,9.68); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

835.0 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 3.05 W/kg
SAR(1 g) = 1.86 W/kg; SAR(10 g) = 1.22 W/kg
Deviation (1 g) = -6.44%; Deviation (10 g) = -6.01%

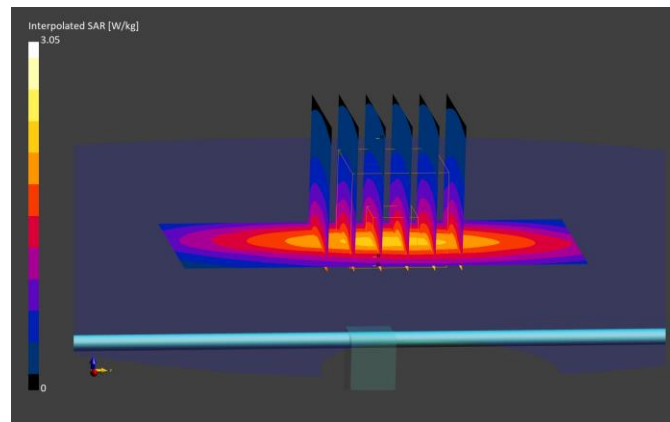

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 237 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 835.000 MHz; Type: D835V2 - SN4d133

Communication System: UID: 0, CW; Frequency: 835.000 MHz
Medium: 835 Head; Medium parameters used:
 $f = 835.000$ MHz; $\text{cond} = 0.901$ S/m; $\text{perm} = 41.0$; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 06/18/2024; Ambient Temp: 24.1°C; Tissue Temp: 22.2°C

Probe: EX3DV4 - SN7670; ConvF:(9.68,9.68,9.68); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.04 W/kg

SAR(1 g) = 1.92 W/kg; SAR(10 g) = 1.25 W/kg

Deviation (1 g) = -3.42%; Deviation (10 g) = -3.70%

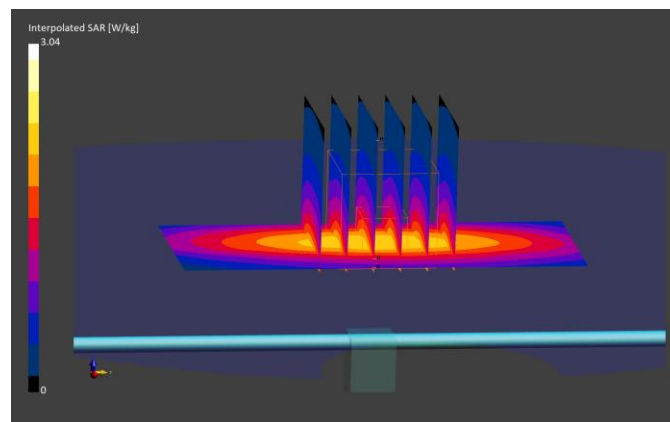

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 238 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 835.000 MHz; Type: D835V2 - SN4d132

Communication System: UID: 0, CW; Frequency: 835.000 MHz
Medium: 835 Head; Medium parameters used:
 $f = 835.000$ MHz; $\text{cond} = 0.905$ S/m; $\text{perm} = 41.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/10/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7670; ConvF:(9.68,9.68,9.68); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

835.0 MHz System Verification at 23.0 dBm (200 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.18 W/kg

SAR(1 g) = 1.96 W/kg; SAR(10 g) = 1.28 W/kg

Deviation (1 g) = -0.41%; Deviation (10 g) = 0.00%

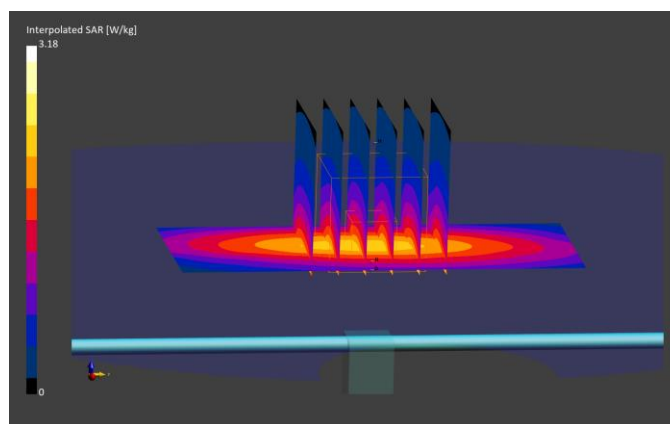

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 239 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 835.000 MHz; Type: D835V2 - SN4d047

Communication System: UID: 0, CW; Frequency: 835.000 MHz
Medium: 835 Head; Medium parameters used:
 $f = 835.000$ MHz; $\text{cond} = 0.905$ S/m; $\text{perm} = 41.3$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/10/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.7°C


Probe: EX3DV4 - SN3914; ConvF:(9.48,8.48,8.69); 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

835.0 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.15 W/kg
SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg
Deviation (1 g) = 8.29%; Deviation (10 g) = 8.56%

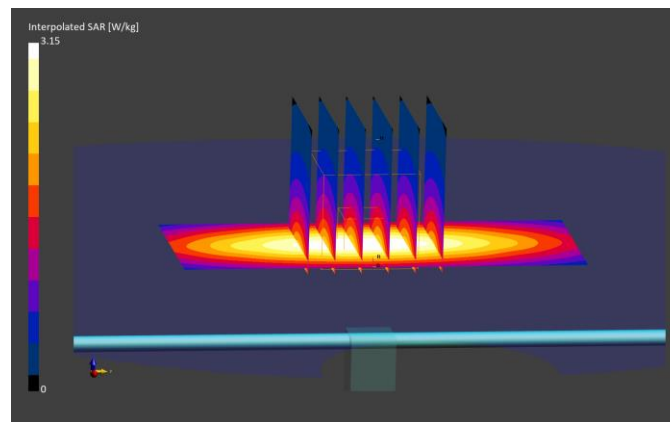

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 240 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 835.000 MHz; Type: D835V2 - SN4d047

Communication System: UID: 0, CW; Frequency: 835.000 MHz
Medium: 835 Head; Medium parameters used:
 $f = 835.000$ MHz; $\text{cond} = 0.900$ S/m; $\text{perm} = 40.7$; density = 1000 kg/m³
Phantom Section: Flat; Space: 15 mm

Test Date: 07/15/2024; Ambient Temp: 21.3°C; Tissue Temp: 20.3°C


Probe: EX3DV4 - SN3914; ConvF:(9.48,8.48,8.69); 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

835.0 MHz System Verification at 23.0 dBm (200 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 3.15 W/kg
SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.37 W/kg
Deviation (1 g) = 8.29%; Deviation (10 g) = 8.56%

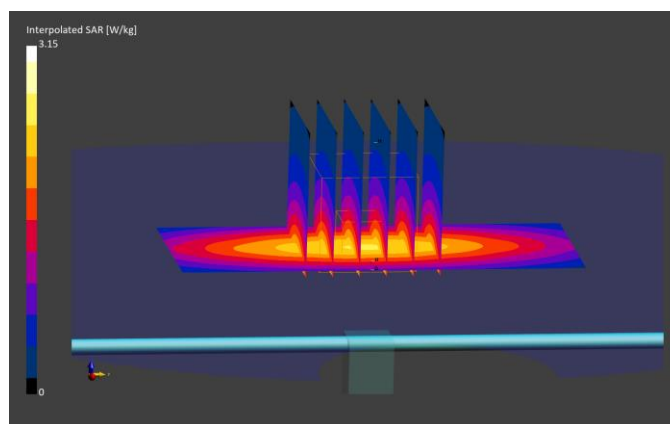

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 241 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 1750.000 MHz; Type: D1750V2 - SN1150

Communication System: UID: 0, CW; Frequency: 1750.000 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1750.000$ MHz; $\text{cond} = 1.36$ S/m; $\text{perm} = 39.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/19/2024; Ambient Temp: 20.1°C; Tissue Temp: 19.3°C


Probe: EX3DV4 - SN7718; ConvF:(7.81,7.9,8.22); 2024-04-17
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn665; 2024-03-01
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.4.2524

1750.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.85 W/kg
SAR(1 g) = 3.73 W/kg; SAR(10 g) = 2.00 W/kg
Deviation (1 g) = 1.08%; Deviation (10 g) = 3.09%

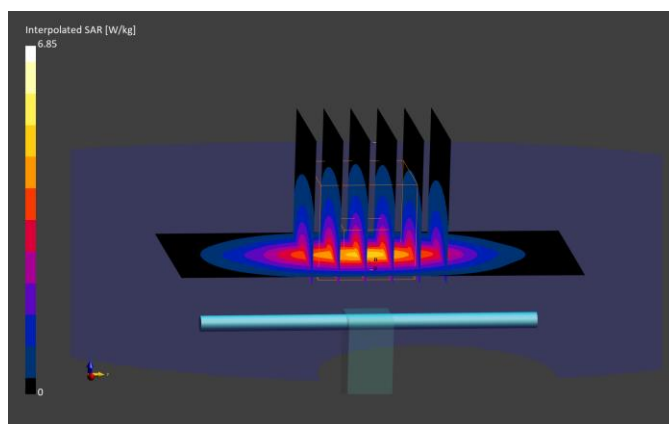

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 242 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 1750.000 MHz; Type: D1750V2 - SN1150

Communication System: UID: 0, CW; Frequency: 1750.000 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1750.000$ MHz; $\text{cond} = 1.31$ S/m; $\text{perm} = 40.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/27/2024; Ambient Temp: 22.7°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7670; ConvF:(8.47,8.47,8.47); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.84 W/kg

SAR(1 g) = 3.63 W/kg; SAR(10 g) = 1.95 W/kg

Deviation (1 g) = -1.63%; Deviation (10 g) = 0.52%

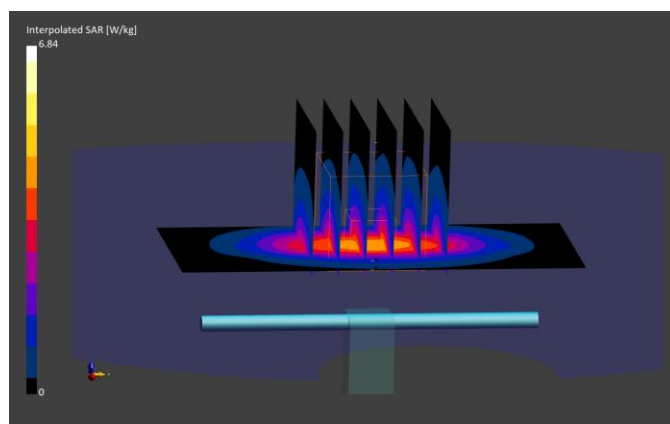

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 243 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 1750.000 MHz; Type: D1750V2 - SN1150

Communication System: UID: 0, CW; Frequency: 1750.000 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1750.000$ MHz; $\text{cond} = 1.31$ S/m; $\text{perm} = 39.4$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/01/2024; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7670; ConvF:(8.47,8.47,8.47); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

1750.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.90 W/kg

SAR(1 g) = 3.66 W/kg; SAR(10 g) = 1.95 W/kg

Deviation (1 g) = -0.81%; Deviation (10 g) = 0.52%

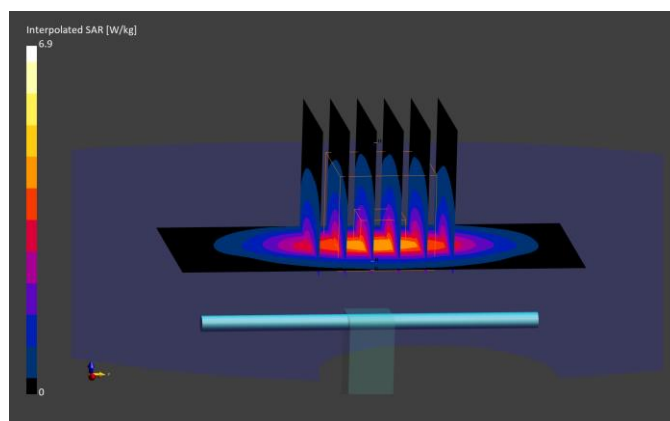

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 244 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 1750.000 MHz; Type: D1750V2 - SN1148


Communication System: UID: 0, CW; Frequency: 1750.000 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1750.000$ MHz; $\text{cond} = 1.32$ S/m; $\text{perm} = 40.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/10/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.9°C

Probe: EX3DV4 - SN7670; ConvF:(8.47,8.47,8.47); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

1750.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 7.12 W/kg
SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.98 W/kg
Deviation (1 g) = 0.27%; Deviation (10 g) = 2.06%

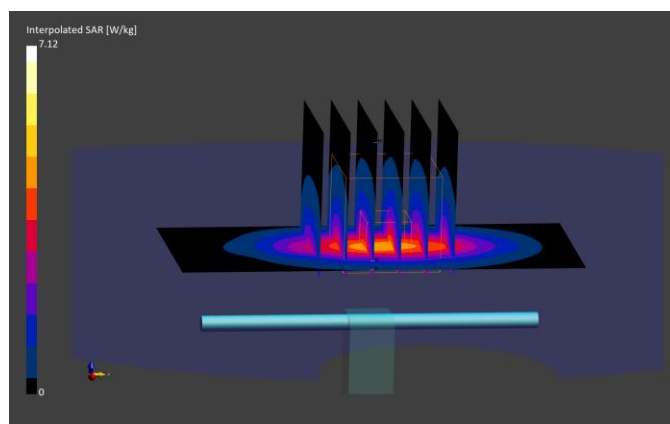

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 245 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 1750.000 MHz; Type: D1750V2 - SN1150


Communication System: UID: 0, CW; Frequency: 1750.000 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1750.000$ MHz; $\text{cond} = 1.36$ S/m; $\text{perm} = 41.6$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/10/2024; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7527; ConvF:(8.08,7.43,8.45); 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; 2024-03-12
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.4.2524

1750.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 6.78 W/kg
SAR(1 g) = 3.72 W/kg; SAR(10 g) = 2.00 W/kg
Deviation (1 g) = 0.81%; Deviation (10 g) = 3.09%

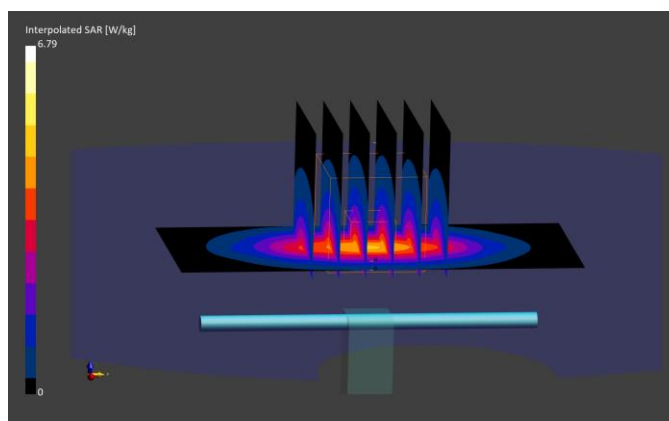

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 246 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: Dipole 1750.000 MHz; Type: D1750V2 - SN1150

Communication System: UID: 0, CW; Frequency: 1750.000 MHz
Medium: 1750 Head; Medium parameters used:
 $f = 1750.000$ MHz; $\text{cond} = 1.35$ S/m; $\text{perm} = 40.7$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/17/2024; Ambient Temp: 23.8°C; Tissue Temp: 22.7°C


Probe: EX3DV4 - SN7527; ConvF:(8.08,7.43,8.45); 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; 2024-03-12
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.4.2524

1750.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 6.76 W/kg
SAR(1 g) = 3.70 W/kg; SAR(10 g) = 1.99 W/kg
Deviation (1 g) = 0.27%; Deviation (10 g) = 2.58%

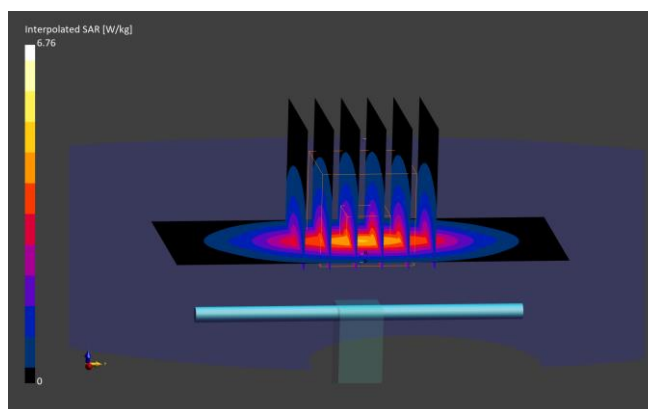

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 247 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 1900.000 MHz; Type: D1900V2 - SN5d080

Communication System: UID: 0, CW; Frequency: 1900.000 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1900.000$ MHz; $\text{cond} = 1.40$ S/m; $\text{perm} = 38.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/18/2024; Ambient Temp: 24.1°C; Tissue Temp: 22.2°C


Probe: EX3DV4 - SN7670; ConvF:(8.42,8.42,8.42); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

1900.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 8.17 W/kg
SAR(1 g) = 4.13 W/kg; SAR(10 g) = 2.14 W/kg
Deviation (1 g) = 4.29%; Deviation (10 g) = 3.38%

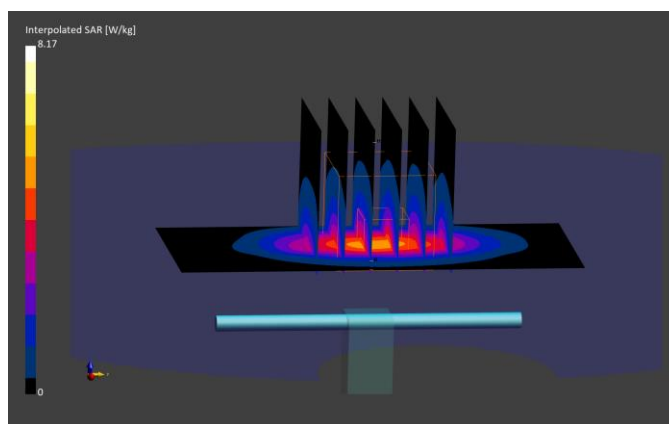

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 248 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: Dipole 1900.000 MHz; Type: D1900V2 - SN5d148

Communication System: UID: 0, CW; Frequency: 1900.000 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1900.000$ MHz; $\text{cond} = 1.45$ S/m; $\text{perm} = 39.7$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/19/2024; Ambient Temp: 20.1°C; Tissue Temp: 19.3°C

Probe: EX3DV4 - SN7718; ConvF:(7.55,7.58,7.86); 2024-04-17
Sensor-Surface: 1.4mm (All points)
Electronics: DAE4 Sn665; 2024-03-01
Phantom: Twin-SAM V5.0; Serial: 1792
Measurement SW: DASY Module SAR V16.2.4.2524

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.59 W/kg

SAR(1 g) = 3.98 W/kg; SAR(10 g) = 2.08 W/kg

Deviation (1 g) = -0.75%; Deviation (10 g) = -0.95%

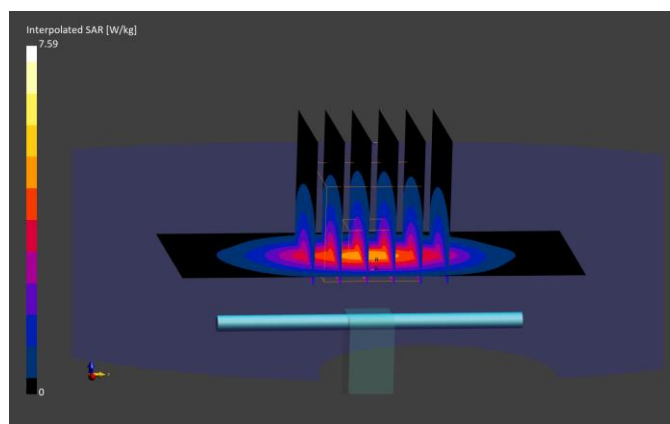

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 249 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: Dipole 1900.000 MHz; Type: D1900V2 - SN5d148

Communication System: UID: 0, CW; Frequency: 1900.000 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1900.000$ MHz; $\text{cond} = 1.40$ S/m; $\text{perm} = 39.2$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/01/2024; Ambient Temp: 22.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7670; ConvF:(8.42,8.42,8.42); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

1900.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.60 W/kg

SAR(1 g) = 3.99 W/kg; SAR(10 g) = 2.06 W/kg

Deviation (1 g) = -0.50%; Deviation (10 g) = -1.90%

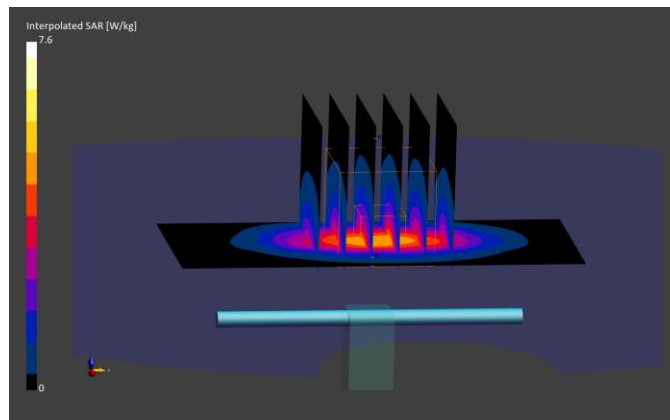

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 250 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 1900.000 MHz; Type: D1900V2 - SN5d080

Communication System: UID: 0, CW; Frequency: 1900.000 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1900.000$ MHz; $\text{cond} = 1.40$ S/m; $\text{perm} = 39.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/10/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.9°C


Probe: EX3DV4 - SN7670; ConvF:(8.42,8.42,8.42); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

1900.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 7.83 W/kg
SAR(1 g) = 4.09 W/kg; SAR(10 g) = 2.11 W/kg
Deviation (1 g) = 3.28%; Deviation (10 g) = 1.93%

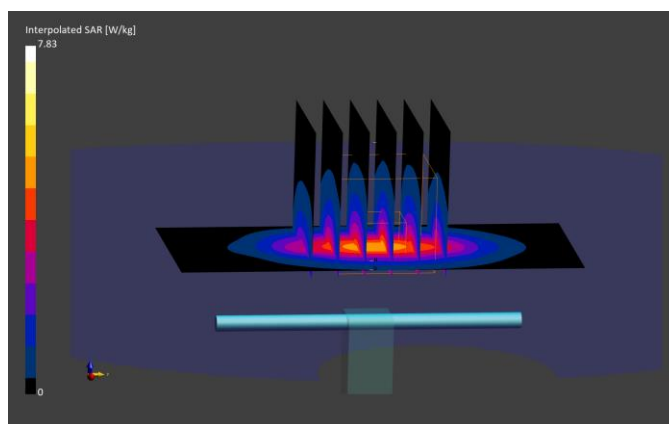

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 251 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 1900.000 MHz; Type: D1900V2 - SN5d148


Communication System: UID: 0, CW; Frequency: 1900.000 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1900.000$ MHz; $\text{cond} = 1.45$ S/m; $\text{perm} = 41.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/10/2024; Ambient Temp: 24.1°C; Tissue Temp: 23.0°C

Probe: EX3DV4 - SN7527; ConvF:(8.09,7.39,8.47); 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; 2024-03-12
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.4.2524

1900.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 8.00 W/kg
SAR(1 g) = 4.28 W/kg; SAR(10 g) = 2.23 W/kg
Deviation (1 g) = 6.73%; Deviation (10 g) = 6.19%

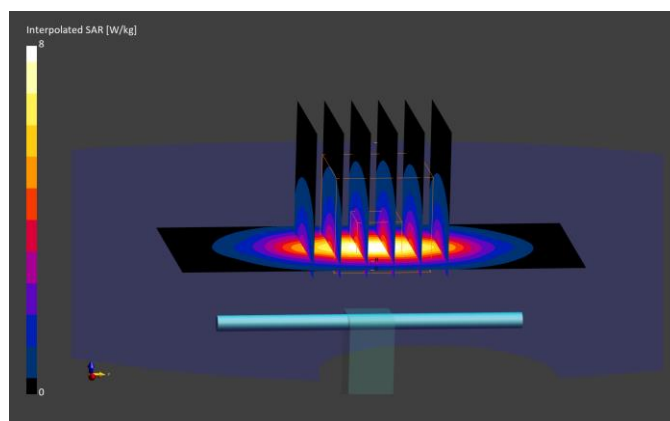

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 252 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 1900.000 MHz; Type: D1900V2 - SN5d148


Communication System: UID: 0, CW; Frequency: 1900.000 MHz
Medium: 1900 Head; Medium parameters used:
 $f = 1900.000$ MHz; $\text{cond} = 1.44$ S/m; $\text{perm} = 40.6$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/17/2024; Ambient Temp: 23.8°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7527; ConvF:(8.09,7.39,8.47); 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1272; 2024-03-12
Phantom: Twin-SAM V8.0; Serial: 2065
Measurement SW: DASY Module SAR V16.2.4.2524

1900.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 90.0): Measurement grid: $dx=10.0$ mm, $dy=15.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=6.0$ mm, $dy=6.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 7.80 W/kg
SAR(1 g) = 4.16 W/kg; SAR(10 g) = 2.17 W/kg
Deviation (1 g) = 3.74%; Deviation (10 g) = 3.33%

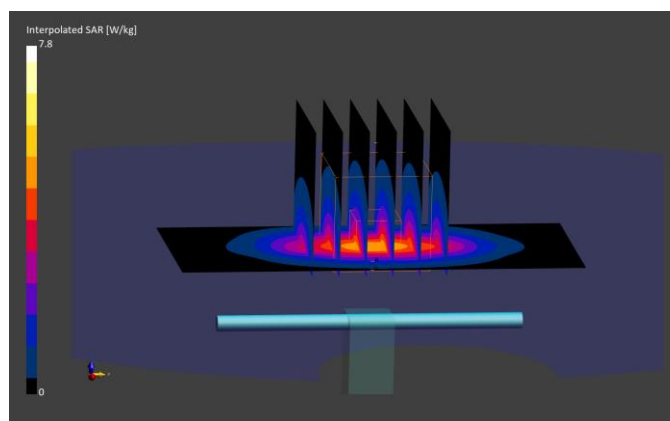

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 253 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2300.000 MHz; Type: D2300V2 - SN1073


Communication System: UID: 0, CW; Frequency: 2300.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2300.000$ MHz; $\text{cond} = 1.70$ S/m; $\text{perm} = 37.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/17/2024; Ambient Temp: 22.0°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN3914; ConvF:(7.58,6.92,6.98); 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

2300.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 9.74 W/kg
SAR(1 g) = 4.79 W/kg; SAR(10 g) = 2.32 W/kg
Deviation (1 g) = -1.44%; Deviation (10 g) = -2.11%

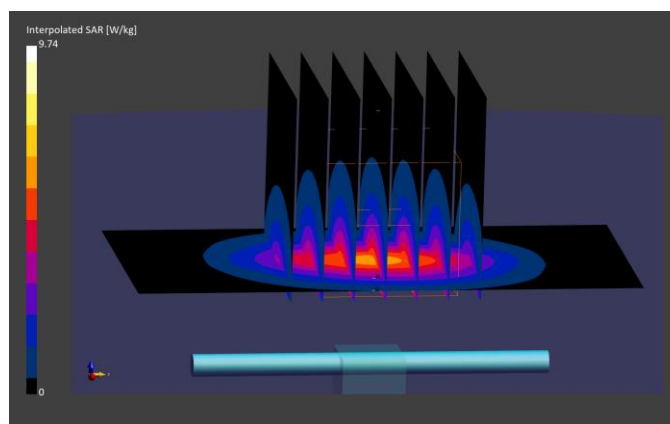

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 254 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2300.000 MHz; Type: D2300V2 - SN1073


Communication System: UID: 0, CW; Frequency: 2300.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2300.000$ MHz; $\text{cond} = 1.72$ S/m; $\text{perm} = 40.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/08/2024; Ambient Temp: 21.6°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7713; ConvF:(8.41,8.41,8.41); 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

2300.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 10.1 W/kg
SAR(1 g) = 4.73 W/kg; SAR(10 g) = 2.24 W/kg
Deviation (1 g) = -2.67%; Deviation (10 g) = -5.49%

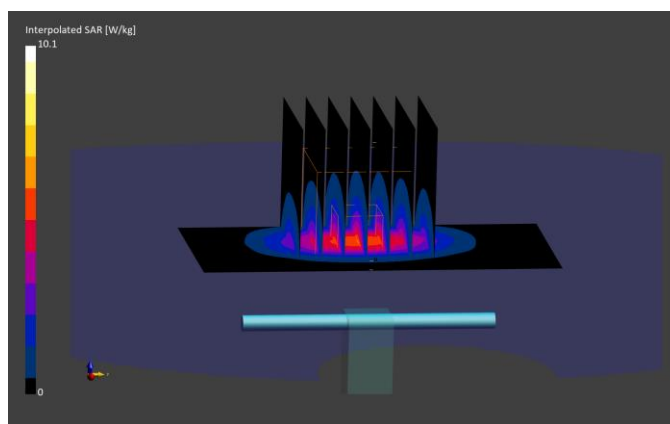

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 255 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2300.000 MHz; Type: D2300V2 - SN1073


Communication System: UID: 0, CW; Frequency: 2300.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2300.000$ MHz; $\text{cond} = 1.71$ S/m; $\text{perm} = 40.0$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/11/2024; Ambient Temp: 23.5°C; Tissue Temp: 23.5°C

Probe: EX3DV4 - SN7713; ConvF:(8.41,8.41,8.41); 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

2300.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 10.1 W/kg
SAR(1 g) = 4.69 W/kg; SAR(10 g) = 2.23 W/kg
Deviation (1 g) = -3.50%; Deviation (10 g) = -5.91%

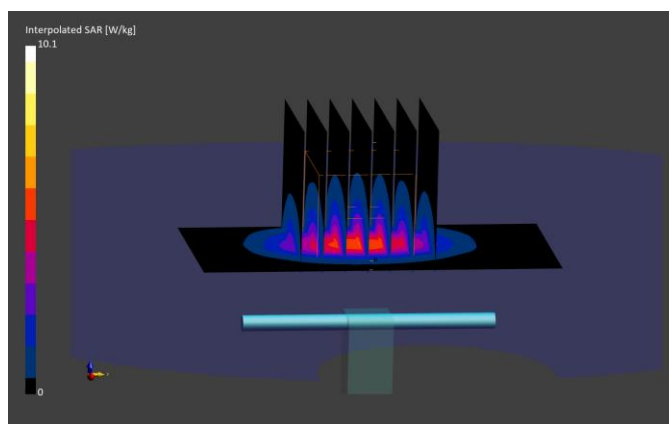

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 256 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2300.000 MHz; Type: D2300V2 - SN1073


Communication System: UID: 0, CW; Frequency: 2300.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2300.000$ MHz; $\text{cond} = 1.66$ S/m; $\text{perm} = 39.2$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/15/2024; Ambient Temp: 22.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7670; ConvF:(8.16,8.16,8.16); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

2300.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 10.1 W/kg
SAR(1 g) = 4.87 W/kg; SAR(10 g) = 2.35 W/kg
Deviation (1 g) = 0.21%; Deviation (10 g) = -0.84%

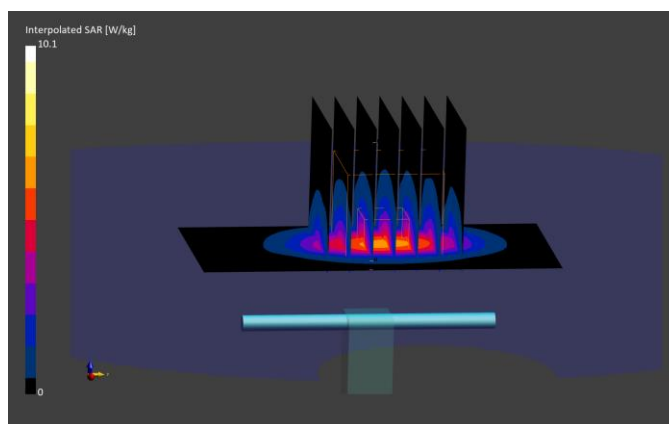

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 257 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN882


Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.000$ MHz; $\text{cond} = 1.81$ S/m; $\text{perm} = 37.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/10/2024; Ambient Temp: 20.0°C; Tissue Temp: 20.5°C

Probe: EX3DV4 - SN7565; ConvF:(7.73,6.62,6.61); 2024-01-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1868
Measurement SW: DASY Module SAR V16.2.4.2524

2450.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 11.0 W/kg
SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.41 W/kg
Deviation (1 g) = -1.51%; Deviation (10 g) = -3.21%

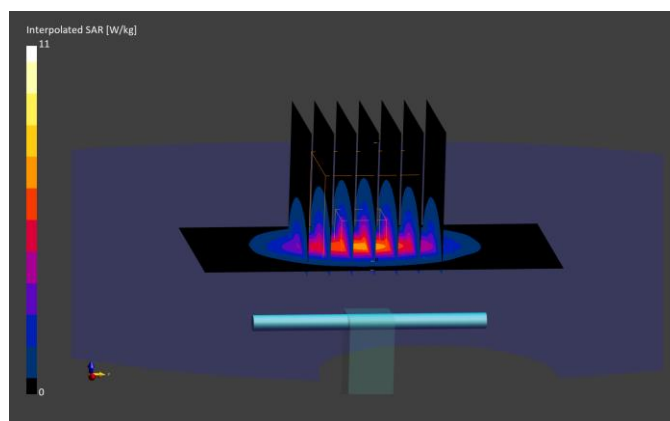

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 258 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN719


Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.000$ MHz; $\text{cond} = 1.81$ S/m; $\text{perm} = 37.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/19/2024; Ambient Temp: 22.2°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3914; ConvF:(7.52,6.84,6.89); 2024-05-10
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn728; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 2060
Measurement SW: DASY Module SAR V16.2.4.2524

2450.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 10.7 W/kg
SAR(1 g) = 5.20 W/kg; SAR(10 g) = 2.43 W/kg
Deviation (1 g) = -5.45%; Deviation (10 g) = -5.45%

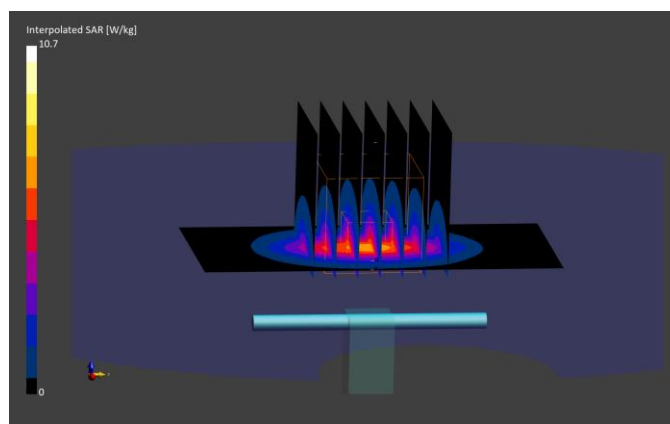

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 259 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN981


Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.000$ MHz; $\text{cond} = 1.80$ S/m; $\text{perm} = 37.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/20/2024; Ambient Temp: 23.7°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7488; ConvF:(7.79,7.73,7.46); 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1415; 2024-03-27
Phantom: Twin-SAM V5.0; Serial: 1759
Measurement SW: DASY Module SAR V16.2.4.2524

2450.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio:
1.5
Peak SAR (extrapolated) = 11.1 W/kg
SAR(1 g) = 5.40 W/kg; SAR(10 g) = 2.51 W/kg
Deviation (1 g) = 0.19%; Deviation (10 g) = -1.18%

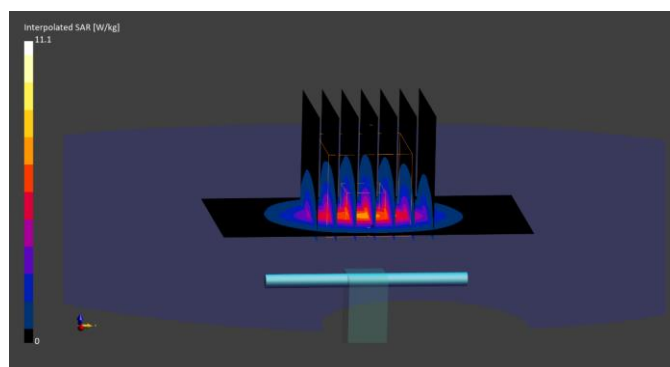

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 260 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2450.0 MHz; Type: D2450V2 - SN882

Communication System: UID: 0, CW; Frequency: 2450.0 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.0$ MHz; $\text{cond} = 1.80$ S/m; $\text{perm} = 37.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/01/2024; Ambient Temp: 21.7°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7565; ConvF:(7.73,6.62,6.61); 2024-01-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1868
Measurement SW: DASY Module SAR V16.2.0.1425

2450.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 11.0 W/kg

SAR(1 g) = 5.25 W/kg; SAR(10 g) = 2.43 W/kg

Deviation (1 g) = -0.94%; Deviation (10 g) = -2.41%

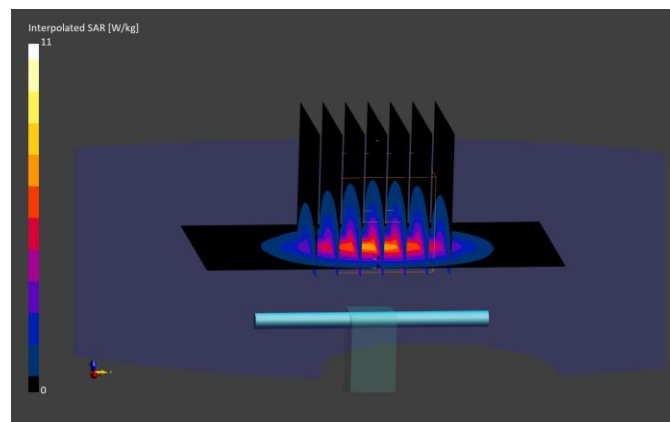

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 261 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN882


Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.000$ MHz; $\text{cond} = 1.81$ S/m; $\text{perm} = 37.5$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/03/2024; Ambient Temp: 19.6°C; Tissue Temp: 20.1°C

Probe: EX3DV4 - SN7565; ConvF:(7.73,6.62,6.61); 2024-01-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1868
Measurement SW: DASY Module SAR V16.2.4.2524

2450.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 11.2 W/kg
SAR(1 g) = 5.30 W/kg; SAR(10 g) = 2.45 W/kg
Deviation (1 g) = 0.00%; Deviation (10 g) = -1.61%

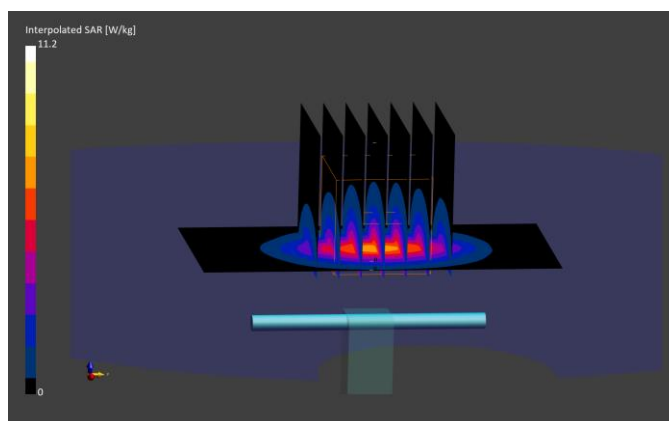

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 262 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN882


Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.000$ MHz; $\text{cond} = 1.81$ S/m; $\text{perm} = 38.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/10/2024; Ambient Temp: 20.6°C; Tissue Temp: 20.2°C

Probe: EX3DV4 - SN7565; ConvF:(7.73,6.62,6.61); 2024-01-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1868
Measurement SW: DASY Module SAR V16.2.4.2524

2450.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 11.3 W/kg
SAR(1 g) = 5.22 W/kg; SAR(10 g) = 2.42 W/kg
Deviation (1 g) = -1.51%; Deviation (10 g) = -2.81%

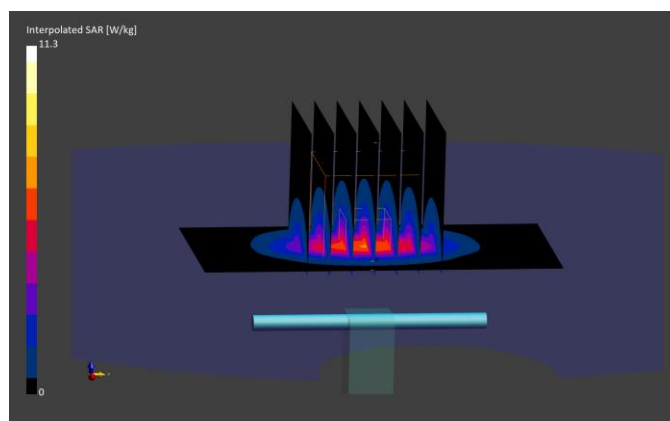

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 263 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2450.000 MHz; Type: D2450V2 - SN719


Communication System: UID: 0, CW; Frequency: 2450.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2450.000$ MHz; $\text{cond} = 1.86$ S/m; $\text{perm} = 40.0$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/15/2024; Ambient Temp: 22.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7713; ConvF:(8.29,8.29,8.29); 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

2450.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 11.2 W/kg
SAR(1 g) = 5.28 W/kg; SAR(10 g) = 2.44 W/kg
Deviation (1 g) = -4.00%; Deviation (10 g) = -5.06%

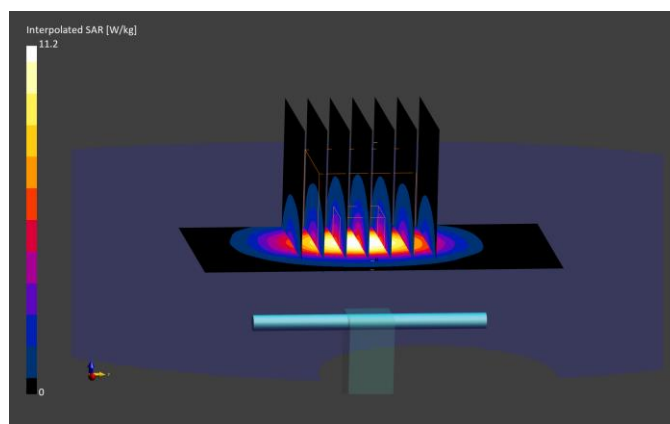

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 264 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1071


Communication System: UID: 0, CW; Frequency: 2600.000 MHz
 Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.93$ S/m; $\text{perm} = 37.6$; density = 1000 kg/m³
 Phantom Section: Flat; Space: 10 mm

Test Date: 06/19/2024; Ambient Temp: 22.2°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN3914; ConvF:(7.42,6.75,6.83); 2024-05-10
 Sensor-Surface: 1.4mm (VMS + 6p)
 Electronics: DAE4 Sn728; 2024-05-08
 Phantom: Twin-SAM V8.0; Serial: 2060
 Measurement SW: DASY Module SAR V16.2.4.2524

2600.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
 Peak SAR (extrapolated) = 11.9 W/kg
SAR(1 g) = 5.56 W/kg; SAR(10 g) = 2.51 W/kg
 Deviation (1 g) = -1.59%; Deviation (10 g) = -1.18%

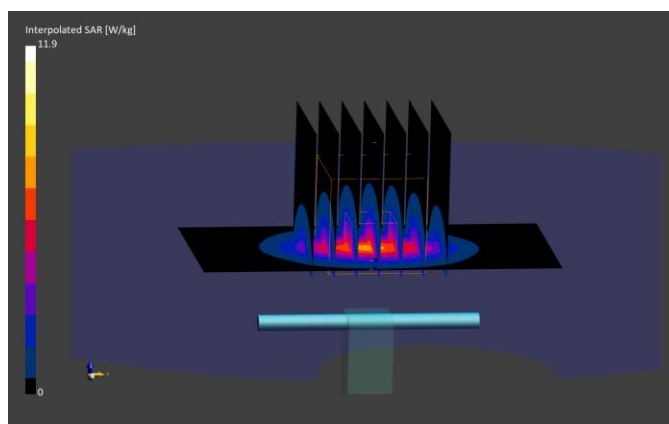

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 265 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1004


Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.91$ S/m; $\text{perm} = 37.2$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/20/2024; Ambient Temp: 23.7°C; Tissue Temp: 21.3°C

Probe: EX3DV4 - SN7488; ConvF:(7.65,7.57,7.31); 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1415; 2024-03-27
Phantom: Twin-SAM V5.0; Serial: 1759
Measurement SW: DASY Module SAR V16.2.4.2524

2600.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 12.3 W/kg
SAR(1 g) = 5.74 W/kg; SAR(10 g) = 2.58 W/kg
Deviation (1 g) = 1.95%; Deviation (10 g) = 2.38%

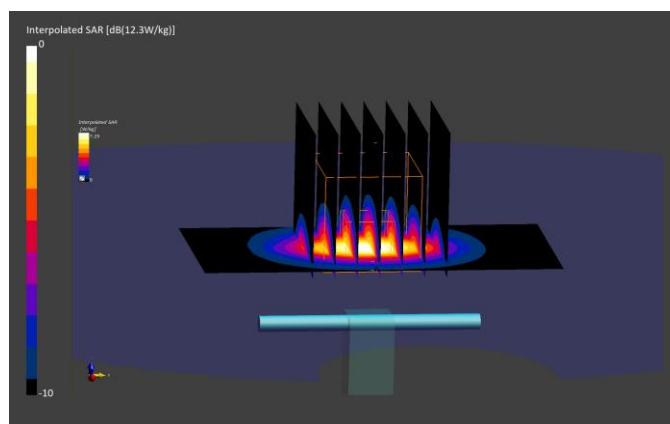

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 266 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1071


Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.89$ S/m; $\text{perm} = 39.9$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/01/2024; Ambient Temp: 22.5°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7713; ConvF:(8.08,8.08,8.08); 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

2600.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 12.1 W/kg
SAR(1 g) = 5.62 W/kg; SAR(10 g) = 2.53 W/kg
Deviation (1 g) = -0.53%; Deviation (10 g) = -0.39%

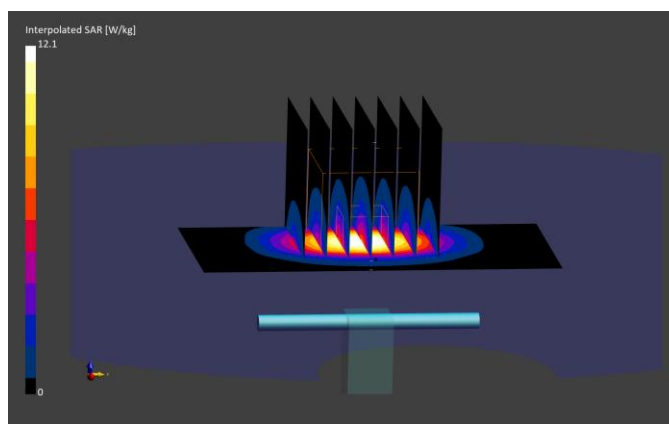

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 267 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1126


Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.97$ S/m; $\text{perm} = 39.9$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/08/2024; Ambient Temp: 21.3°C; Tissue Temp: 20.3°C

Probe: EX3DV4 - SN7558; ConvF:(7.42,7.42,7.42); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

2600.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 12.5 W/kg
SAR(1 g) = 5.72 W/kg; SAR(10 g) = 2.57 W/kg
Deviation (1 g) = 2.14%; Deviation (10 g) = 1.58%

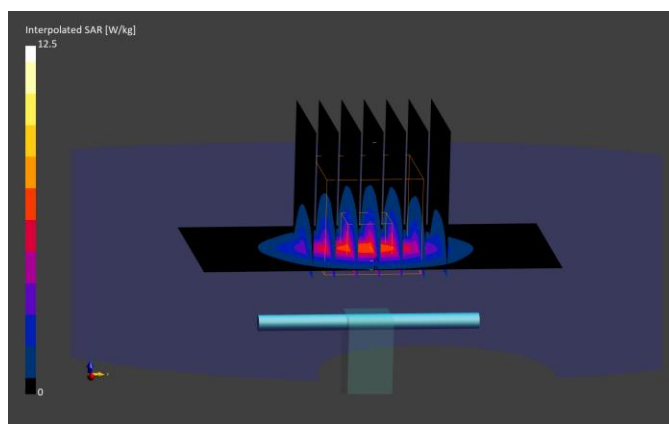

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 268 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1071


Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.98$ S/m; $\text{perm} = 39.7$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/15/2024; Ambient Temp: 22.5°C; Tissue Temp: 22.5°C

Probe: EX3DV4 - SN7713; ConvF:(8.08,8.08,8.08); 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

2600.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 12.7 W/kg
SAR(1 g) = 5.78 W/kg; SAR(10 g) = 2.59 W/kg
Deviation (1 g) = 2.30%; Deviation (10 g) = 1.97%

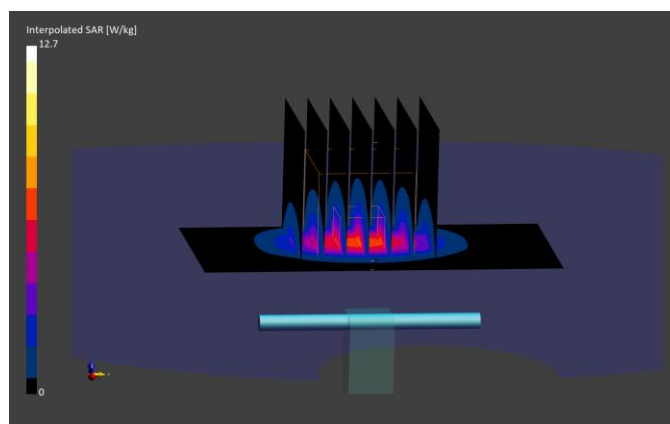

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 269 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1071


Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.90$ S/m; $\text{perm} = 38.7$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/15/2024; Ambient Temp: 22.0°C; Tissue Temp: 21.6°C

Probe: EX3DV4 - SN7670; ConvF:(7.73,7.73,7.73); 2023-09-22
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1449; 2023-09-12
Phantom: Twin-SAM V5.0; Serial: 1800
Measurement SW: DASY Module SAR V16.2.4.2524

2600.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 11.4 W/kg
SAR(1 g) = 5.33 W/kg; SAR(10 g) = 2.44 W/kg
Deviation (1 g) = -5.66%; Deviation (10 g) = -3.94%

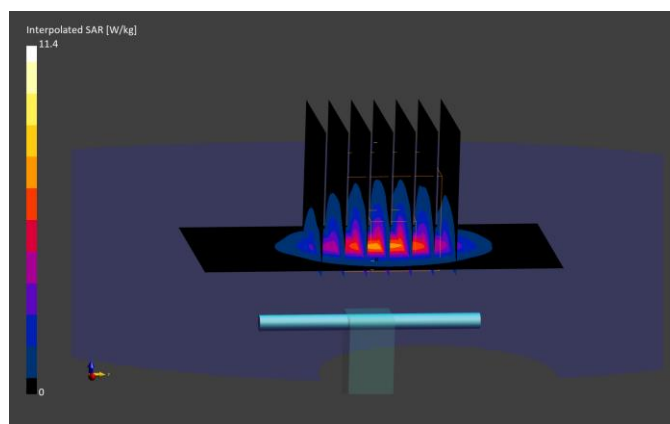

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 270 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 2600.000 MHz; Type: D2600V2 - SN1126


Communication System: UID: 0, CW; Frequency: 2600.000 MHz
Medium: 2450 Head; Medium parameters used:
 $f = 2600.000$ MHz; $\text{cond} = 1.92$ S/m; $\text{perm} = 39.2$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/17/2024; Ambient Temp: 20.3°C; Tissue Temp: 19.9°C

Probe: EX3DV4 - SN7558; ConvF:(7.42,7.42,7.42); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

2600.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (30.0 x 30.0 x 30.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.5$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 12.7 W/kg
SAR(1 g) = 5.80 W/kg; SAR(10 g) = 2.61 W/kg
Deviation (1 g) = 3.57%; Deviation (10 g) = 3.16%

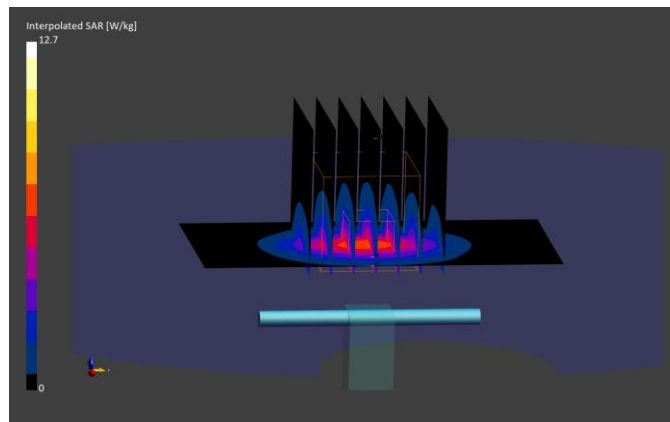

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 271 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3500.000 MHz; Type: D3500V2 - SN1068


Communication System: UID: 0, CW; Frequency: 3500.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3500.000$ MHz; $\text{cond} = 2.79$ S/m; $\text{perm} = 39.6$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/18/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7565; ConvF:(6.96,6.13,6.05); 2024-01-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1868
Measurement SW: DASY Module SAR V16.2.4.2524

3500.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 15.8 W/kg
SAR(1 g) = 6.00 W/kg; SAR(10 g) = 2.29 W/kg
Deviation (1 g) = -8.12%; Deviation (10 g) = -7.29%

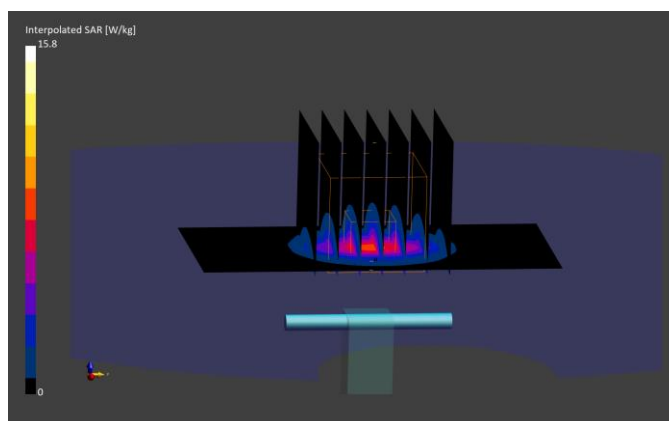

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 272 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3500.000 MHz; Type: D3500V2 - SN1097


Communication System: UID: 0, CW; Frequency: 3500.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3500.000$ MHz; $\text{cond} = 2.79$ S/m; $\text{perm} = 38.8$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/28/2024; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7488; ConvF:(7.02,6.98,6.72); 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1415; 2024-03-27
Phantom: Twin-SAM V5.0; Serial: 1759
Measurement SW: DASY Module SAR V16.2.4.2524

3500.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 16.1 W/kg
SAR(1 g) = 6.30 W/kg; SAR(10 g) = 2.45 W/kg
Deviation (1 g) = -3.67%; Deviation (10 g) = -0.81%

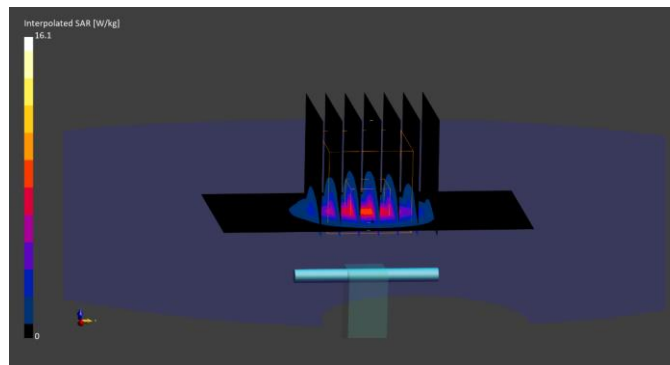

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 273 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3500.000 MHz; Type: D3500V2 - SN1068


Communication System: UID: 0, CW; Frequency: 3500.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3500.000$ MHz; $\text{cond} = 2.79$ S/m; $\text{perm} = 38.5$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/03/2024; Ambient Temp: 20.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7558; ConvF:(7.07,7.07,7.07); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

3500.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 17.4 W/kg
SAR(1 g) = 6.72 W/kg; SAR(10 g) = 2.56 W/kg
Deviation (1 g) = 2.91%; Deviation (10 g) = 3.64%

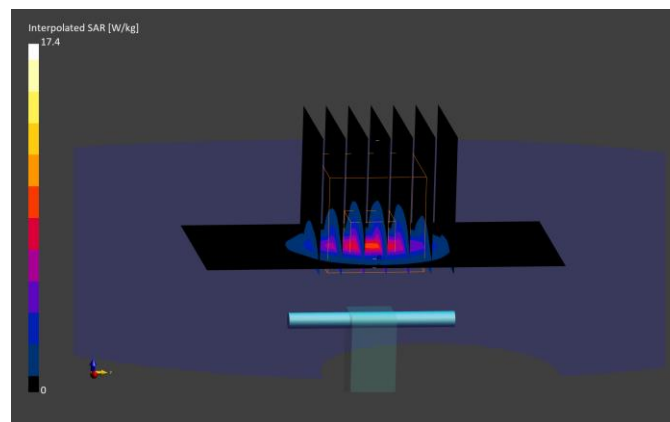

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 274 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3500.000 MHz; Type: D3500V2 - SN1068


Communication System: UID: 0, CW; Frequency: 3500.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3500.000$ MHz; $\text{cond} = 2.79$ S/m; $\text{perm} = 38.5$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/15/2024; Ambient Temp: 21.8°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7558; ConvF:(7.07,7.07,7.07); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

3500.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 17.7 W/kg
SAR(1 g) = 6.78 W/kg; SAR(10 g) = 2.58 W/kg
Deviation (1 g) = 3.83%; Deviation (10 g) = 4.45%

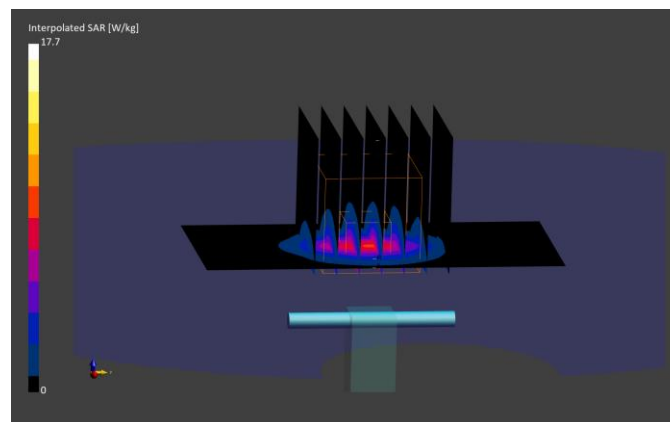

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 275 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3500.000 MHz; Type: D3500V2 - SN1097

Communication System: UID: 0, CW; Frequency: 3500.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3500.000$ MHz; $\text{cond} = 2.81$ S/m; $\text{perm} = 38.5$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/18/2024; Ambient Temp: 23.1°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7660; ConvF:(6.95,6.76,7.38); 2024-05-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1678; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 1966
Measurement SW: DASY Module SAR V16.2.4.2524

3500.0 MHz System Verification at 20.0 dBm (100 mW)


Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm

Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5

Peak SAR (extrapolated) = 16.7 W/kg

SAR(1 g) = 6.49 W/kg; SAR(10 g) = 2.48 W/kg

Deviation (1 g) = -0.76%; Deviation (10 g) = 0.40%

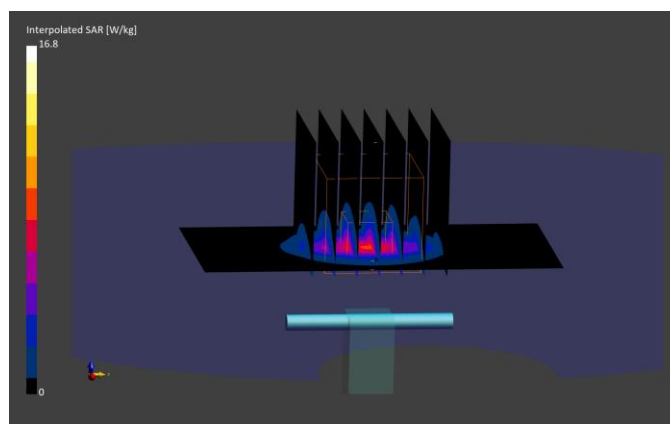

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 276 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3500.000 MHz; Type: D3500V2 - SN1068


Communication System: UID: 0, CW; Frequency: 3500.000 MHz
 Medium: 3600 Head; Medium parameters used:
 $f = 3500.000$ MHz; $\text{cond} = 2.79$ S/m; $\text{perm} = 38.7$; density = 1000 kg/m³
 Phantom Section: Flat; Space: 10 mm

Test Date: 07/18/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7558; ConvF:(7.07,7.07,7.07); 2023-09-12
 Sensor-Surface: 1.4mm (VMS + 6p)
 Electronics: DAE4 Sn1364; 2023-09-06
 Phantom: Twin-SAM V8.0; Serial: 1934
 Measurement SW: DASY Module SAR V16.2.4.2524

3500.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
 Peak SAR (extrapolated) = 16.9 W/kg
SAR(1 g) = 6.56 W/kg; SAR(10 g) = 2.50 W/kg
 Deviation (1 g) = 0.46%; Deviation (10 g) = 1.21%

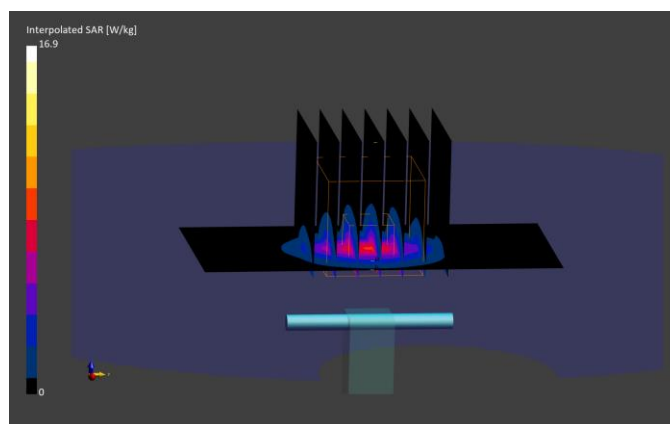

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 277 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

ELEMENT

DUT: Dipole 3700.000 MHz; Type: D3700V2 - SN1029


Communication System: UID: 0, CW; Frequency: 3700.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3700.000$ MHz; $\text{cond} = 2.98$ S/m; $\text{perm} = 39.3$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/18/2024; Ambient Temp: 21.5°C; Tissue Temp: 21.7°C

Probe: EX3DV4 - SN7565; ConvF:(6.82,5.99,5.94); 2024-01-16
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1466; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1868
Measurement SW: DASY Module SAR V16.2.4.2524

3700.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 18.2 W/kg
SAR(1 g) = 6.60 W/kg; SAR(10 g) = 2.45 W/kg
Deviation (1 g) = -1.93%; Deviation (10 g) = 0.00%

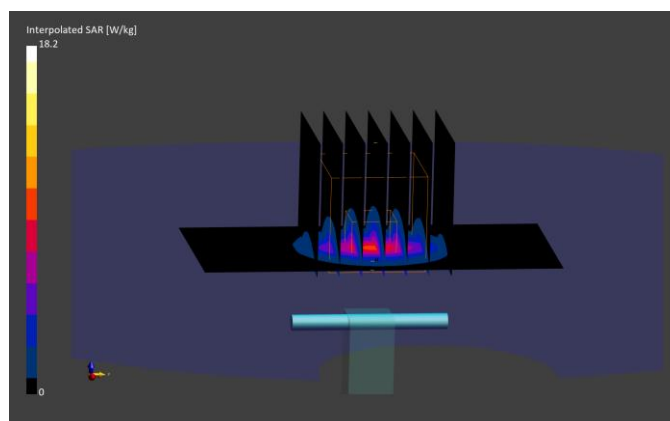

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 278 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3700.000 MHz; Type: D3700V2 - SN1067


Communication System: UID: 0, CW; Frequency: 3700.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3700.000$ MHz; $\text{cond} = 2.98$ S/m; $\text{perm} = 38.4$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/28/2024; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7488; ConvF:(6.83,6.82,6.57); 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1415; 2024-03-27
Phantom: Twin-SAM V5.0; Serial: 1759
Measurement SW: DASY Module SAR V16.2.4.2524

3700.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 17.8 W/kg
SAR(1 g) = 6.73 W/kg; SAR(10 g) = 2.50 W/kg
Deviation (1 g) = 0.60%; Deviation (10 g) = 2.88%

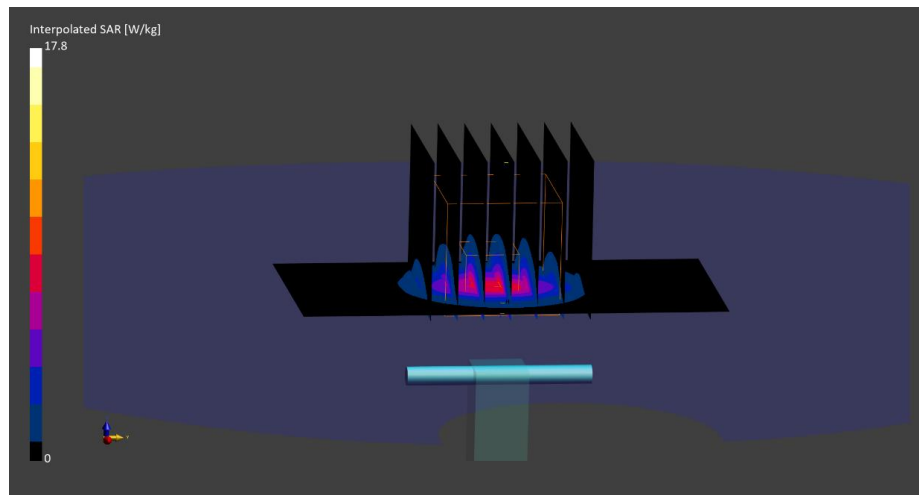

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 279 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3700.000 MHz; Type: D3700V2 - SN1029


Communication System: UID: 0, CW; Frequency: 3700.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3700.000$ MHz; $\text{cond} = 2.98$ S/m; $\text{perm} = 38.2$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/03/2024; Ambient Temp: 20.9°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7558; ConvF:(6.94,6.94,6.94); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

3700.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 16.8 W/kg
SAR(1 g) = 6.26 W/kg; SAR(10 g) = 2.34 W/kg
Deviation (1 g) = -6.98%; Deviation (10 g) = -4.49%

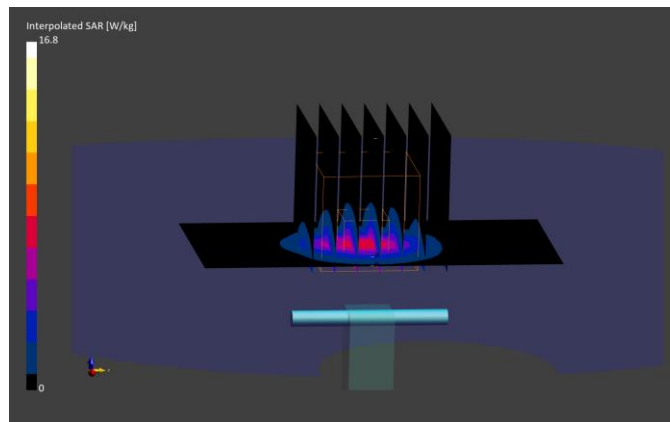

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 280 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3700.000 MHz; Type: D3700V2 - SN1029


Communication System: UID: 0, CW; Frequency: 3700.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3700.000$ MHz; $\text{cond} = 2.97$ S/m; $\text{perm} = 38.2$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/15/2024; Ambient Temp: 21.8°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7558; ConvF:(6.94,6.94,6.94); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

3700.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 18.4 W/kg
SAR(1 g) = 6.74 W/kg; SAR(10 g) = 2.49 W/kg
Deviation (1 g) = 0.15%; Deviation (10 g) = 1.63%

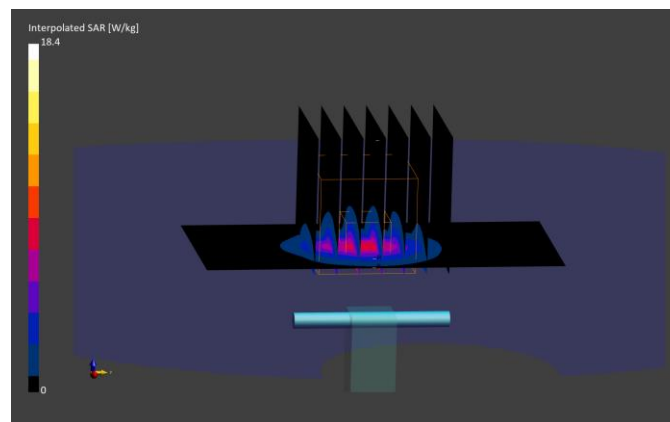

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 281 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3700.000 MHz; Type: D3700V2 - SN1067


Communication System: UID: 0, CW; Frequency: 3700.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3700.000$ MHz; $\text{cond} = 3.01$ S/m; $\text{perm} = 38.2$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/18/2024; Ambient Temp: 23.1°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7660; ConvF:(6.88,6.7,7.33); 2024-05-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1678; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 1966
Measurement SW: DASY Module SAR V16.2.4.2524

3700.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 18.3 W/kg
SAR(1 g) = 6.86 W/kg; SAR(10 g) = 2.54 W/kg
Deviation (1 g) = 2.54%; Deviation (10 g) = 4.53%

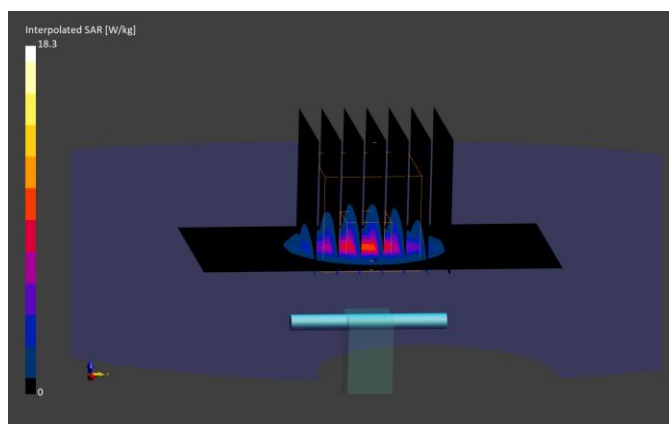

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 282 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3700.000 MHz; Type: D3700V2 - SN1029


Communication System: UID: 0, CW; Frequency: 3700.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3700.000$ MHz; $\text{cond} = 2.99$ S/m; $\text{perm} = 38.3$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/18/2024; Ambient Temp: 21.6°C; Tissue Temp: 20.6°C

Probe: EX3DV4 - SN7558; ConvF:(6.94,6.94,6.94); 2023-09-12
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1364; 2023-09-06
Phantom: Twin-SAM V8.0; Serial: 1934
Measurement SW: DASY Module SAR V16.2.4.2524

3700.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 18.3 W/kg
SAR(1 g) = 6.70 W/kg; SAR(10 g) = 2.48 W/kg
Deviation (1 g) = -0.45%; Deviation (10 g) = 1.22%

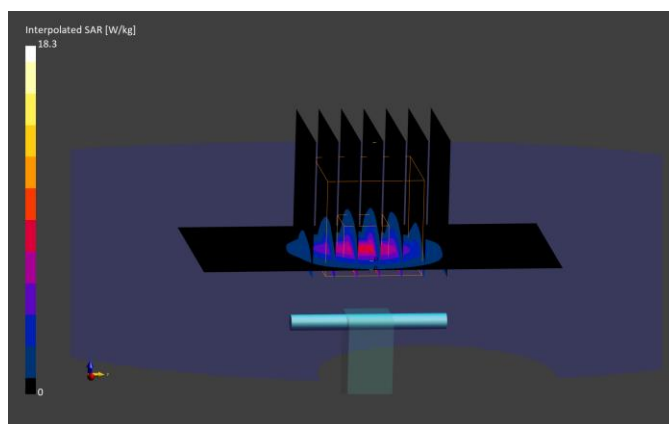

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 283 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3900.000 MHz; Type: D3900V2 - SN1056


Communication System: UID: 0, CW; Frequency: 3900.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3900.000$ MHz; $\text{cond} = 3.18$ S/m; $\text{perm} = 38.1$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 06/28/2024; Ambient Temp: 22.3°C; Tissue Temp: 22.0°C

Probe: EX3DV4 - SN7488; ConvF:(6.86,6.84,6.56); 2024-03-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1415; 2024-03-27
Phantom: Twin-SAM V5.0; Serial: 1759
Measurement SW: DASY Module SAR V16.2.4.2524

3900.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 19.9 W/kg
SAR(1 g) = 7.14 W/kg; SAR(10 g) = 2.53 W/kg
Deviation (1 g) = 4.69%; Deviation (10 g) = 6.30%

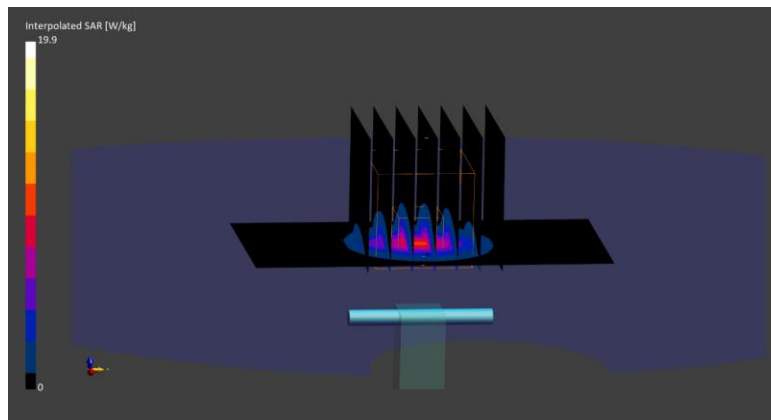

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 284 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 3900.000 MHz; Type: D3900V2 - SN1056


Communication System: UID: 0, CW; Frequency: 3900.000 MHz
Medium: 3600 Head; Medium parameters used:
 $f = 3900.000$ MHz; $\text{cond} = 3.21$ S/m; $\text{perm} = 37.8$; density = 1000 kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/18/2024; Ambient Temp: 23.1°C; Tissue Temp: 20.7°C

Probe: EX3DV4 - SN7660; ConvF:(6.75,6.57,7.19); 2024-05-08
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1678; 2024-05-08
Phantom: Twin-SAM V8.0; Serial: 1966
Measurement SW: DASY Module SAR V16.2.4.2524

3900.0 MHz System Verification at 20.0 dBm (100 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (28.0 x 28.0 x 28.0): Measurement grid: $dx=5.0$ mm, $dy=5.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.5
Peak SAR (extrapolated) = 20.1 W/kg
SAR(1 g) = 7.18 W/kg; SAR(10 g) = 2.53 W/kg
Deviation (1 g) = 5.28%; Deviation (10 g) = 6.30%

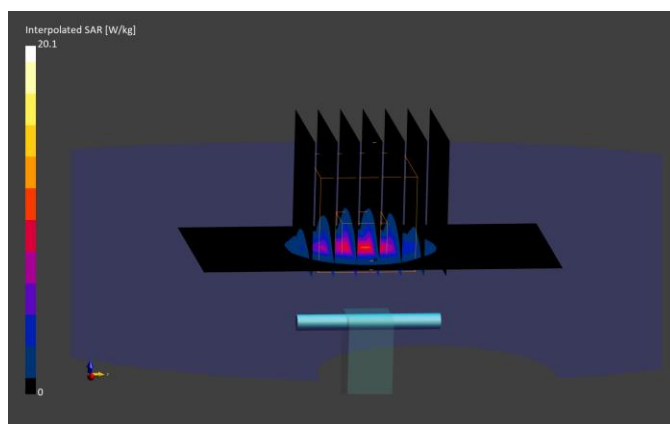

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 285 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 5250.000 MHz; Type: D5GHzV2 - SN1237


Communication System: UID: 0, CW; Frequency: 5250.000 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5250.000$ MHz; $\text{cond} = 4.55$ S/m; $\text{perm} = 34.9$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/08/2024; Ambient Temp: 21.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7547; ConvF:(5.32,5.32,5.32); 2023-10-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1322; 2023-10-18
Phantom: Twin-SAM V8.0; Serial: 1937
Measurement SW: DASY Module SAR V16.2.4.2524

5250.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
Peak SAR (extrapolated) = 14.1 W/kg
SAR(1 g) = 3.79 W/kg; SAR(10 g) = 1.09 W/kg
Deviation (1 g) = -5.37%; Deviation (10 g) = -4.80%

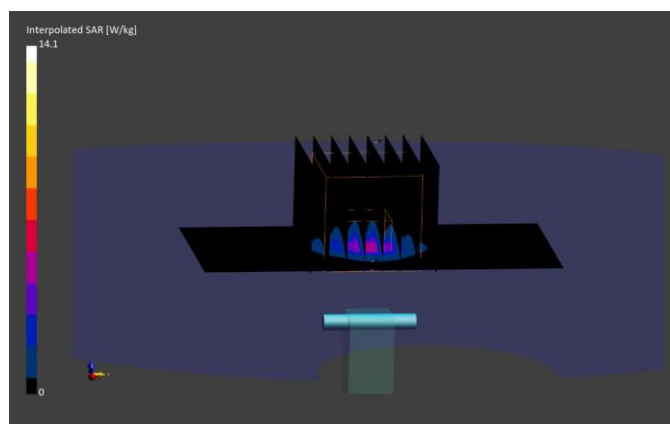

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 286 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 5250.000 MHz; Type: D5GHzV2 - SN1057


Communication System: UID: 0, CW; Frequency: 5250.000 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5250.000$ MHz; $\text{cond} = 4.51$ S/m; $\text{perm} = 36.3$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/22/2024; Ambient Temp: 24.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7713; ConvF:(5.54,5.54,5.54); 2024-01-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1530; 2024-01-16
Phantom: Twin-SAM V5.0; Serial: 1757
Measurement SW: DASY Module SAR V16.2.4.2524

5250.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
Peak SAR (extrapolated) = 14.8 W/kg
SAR(1 g) = 3.81 W/kg; SAR(10 g) = 1.09 W/kg
Deviation (1 g) = -4.03%; Deviation (10 g) = -3.96%

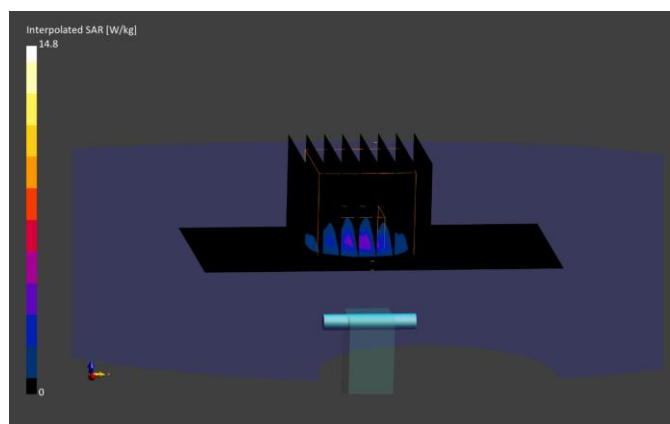

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 287 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 5600.000 MHz; Type: D5GHzV2 - SN1237


Communication System: UID: 0, CW; Frequency: 5600.000 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5600.000$ MHz; $\text{cond} = 4.92$ S/m; $\text{perm} = 34.2$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/08/2024; Ambient Temp: 21.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7547; ConvF:(4.78,4.78,4.78); 2023-10-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1322; 2023-10-18
Phantom: Twin-SAM V8.0; Serial: 1937
Measurement SW: DASY Module SAR V16.2.4.2524

5600.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
Peak SAR (extrapolated) = 15.8 W/kg
SAR(1 g) = 3.95 W/kg; SAR(10 g) = 1.13 W/kg
Deviation (1 g) = -3.66%; Deviation (10 g) = -3.00%

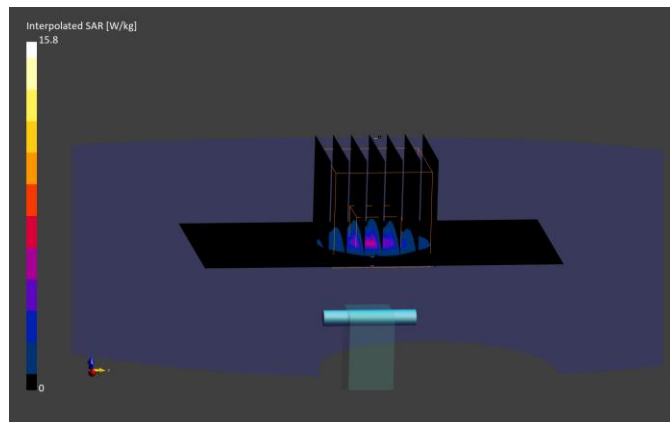

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 288 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 5600.000 MHz; Type: D5GHzV2 - SN1191


Communication System: UID: 0, CW; Frequency: 5600.000 MHz
 Medium: 5200-5800 Head; Medium parameters used:
 $f = 5600.000$ MHz; $\text{cond} = 4.90$ S/m; $\text{perm} = 35.7$; $\text{density} = 1000$ kg/m³
 Phantom Section: Flat; Space: 10 mm

Test Date: 07/22/2024; Ambient Temp: 24.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7713; ConvF:(4.99,4.99,4.99); 2024-01-17
 Sensor-Surface: 1.4mm (VMS + 6p)
 Electronics: DAE4 Sn1530; 2024-01-16
 Phantom: Twin-SAM V5.0; Serial: 1757
 Measurement SW: DASY Module SAR V16.2.4.2524

5600.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
 Peak SAR (extrapolated) = 16.9 W/kg
SAR(1 g) = 4.10 W/kg; SAR(10 g) = 1.15 W/kg
 Deviation (1 g) = -1.20%; Deviation (10 g) = -3.77%

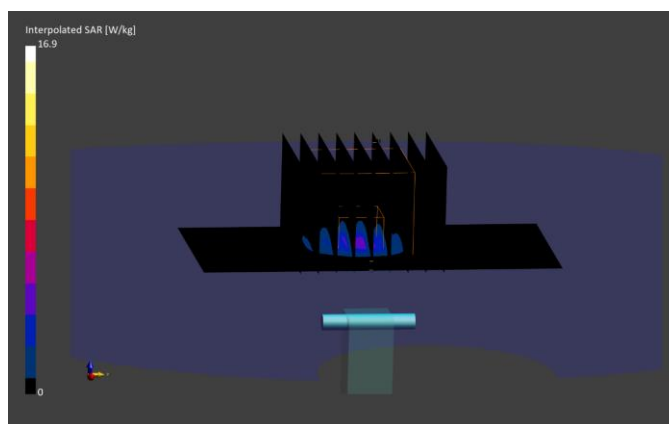

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 289 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 5750.000 MHz; Type: D5GHzV2 - SN1237

Communication System: UID: 0, CW; Frequency: 5750.000 MHz
 Medium: 5200-5800 Head; Medium parameters used:
 $f = 5750.000$ MHz; $\text{cond} = 5.11$ S/m; $\text{perm} = 34.0$; $\text{density} = 1000$ kg/m³
 Phantom Section: Flat; Space: 10 mm

Test Date: 07/08/2024; Ambient Temp: 21.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7547; ConvF:(4.85,4.85,4.85); 2023-10-23
 Sensor-Surface: 1.4mm (VMS + 6p)
 Electronics: DAE4 Sn1322; 2023-10-18
 Phantom: Twin-SAM V8.0; Serial: 1937
 Measurement SW: DASY Module SAR V16.2.4.2524

5750.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
 Peak SAR (extrapolated) = 15.4 W/kg
SAR(1 g) = 3.73 W/kg; SAR(10 g) = 1.07 W/kg
 Deviation (1 g) = -5.81%; Deviation (10 g) = -4.89%



FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 290 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 5750.000 MHz; Type: D5GHzV2 - SN1057

Communication System: UID: 0, CW; Frequency: 5750.000 MHz
 Medium: 5200-5800 Head; Medium parameters used:
 $f = 5750.000$ MHz; $\text{cond} = 5.07$ S/m; $\text{perm} = 35.4$; $\text{density} = 1000$ kg/m³
 Phantom Section: Flat; Space: 10 mm

Test Date: 07/22/2024; Ambient Temp: 24.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7713; ConvF:(5.08,5.08,5.08); 2024-01-17
 Sensor-Surface: 1.4mm (VMS + 6p)
 Electronics: DAE4 Sn1530; 2024-01-16
 Phantom: Twin-SAM V5.0; Serial: 1757
 Measurement SW: DASY Module SAR V16.2.4.2524

5750.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
 Peak SAR (extrapolated) = 17.2 W/kg
SAR(1 g) = 4.11 W/kg; SAR(10 g) = 1.17 W/kg
 Deviation (1 g) = 3.01%; Deviation (10 g) = 3.08%



FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 291 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 5850.000 MHz; Type: D5GHzV2 - SN1237


Communication System: UID: 0, CW; Frequency: 5850.000 MHz
Medium: 5200-5800 Head; Medium parameters used:
 $f = 5850.000$ MHz; $\text{cond} = 5.22$ S/m; $\text{perm} = 33.8$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 10 mm

Test Date: 07/08/2024; Ambient Temp: 21.3°C; Tissue Temp: 21.2°C

Probe: EX3DV4 - SN7547; ConvF:(4.75,4.75,4.75); 2023-10-23
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1322; 2023-10-18
Phantom: Twin-SAM V8.0; Serial: 1937
Measurement SW: DASY Module SAR V16.2.4.2524

5850.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
Peak SAR (extrapolated) = 15.6 W/kg
SAR(1 g) = 3.71 W/kg; SAR(10 g) = 1.05 W/kg
Deviation (1 g) = -7.71%; Deviation (10 g) = -7.89%

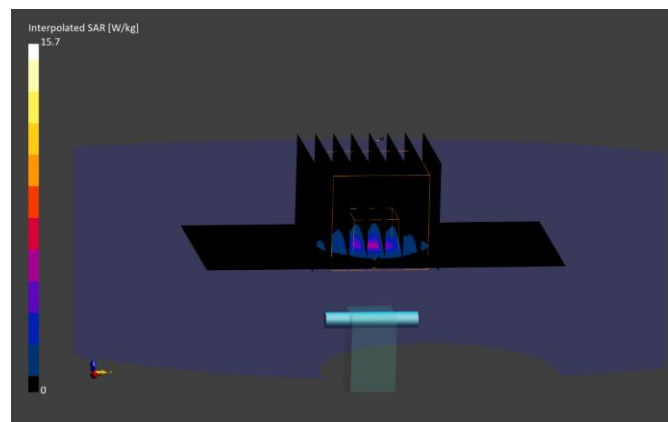

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 292 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 5850.000 MHz; Type: D5GHzV2 - SN1057


Communication System: UID: 0, CW; Frequency: 5850.000 MHz
 Medium: 5200-5800 Head; Medium parameters used:
 $f = 5850.000$ MHz; $\text{cond} = 5.19$ S/m; $\text{perm} = 35.3$; $\text{density} = 1000$ kg/m³
 Phantom Section: Flat; Space: 10 mm

Test Date: 07/22/2024; Ambient Temp: 24.1°C; Tissue Temp: 22.7°C

Probe: EX3DV4 - SN7713; ConvF:(4.98,4.98,4.98); 2024-01-17
 Sensor-Surface: 1.4mm (VMS + 6p)
 Electronics: DAE4 Sn1530; 2024-01-16
 Phantom: Twin-SAM V5.0; Serial: 1757
 Measurement SW: DASY Module SAR V16.2.4.2524

5850.0 MHz System Verification at 17.0 dBm (50 mW)

Area Scan (40.0 x 80.0): Measurement grid: $dx=10.0$ mm, $dy=10.0$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=4.0$ mm, $dy=4.0$ mm, $dz=1.4$ mm; Graded Ratio:
 1.4
 Peak SAR (extrapolated) = 16.2 W/kg
SAR(1 g) = 3.68 W/kg; SAR(10 g) = 1.05 W/kg
 Deviation (1 g) = -9.69%; Deviation (10 g) = -8.70%

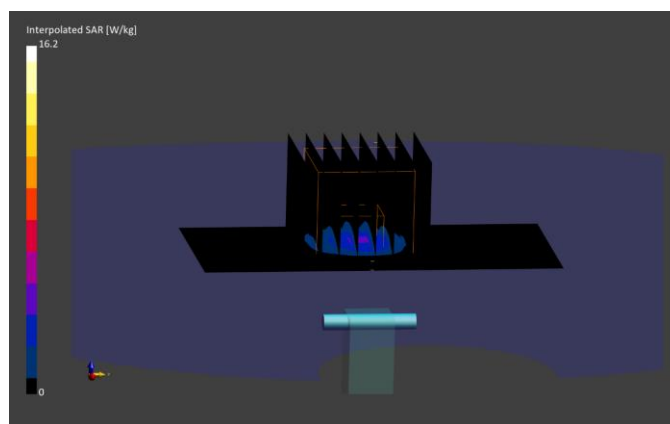

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 293 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 6500.000 MHz; Type: D6.5GHzV2 - SN1111

Communication System: UID: 0, CW; Frequency: 6500.000 MHz
 Medium: 6000 Head; Medium parameters used:
 $f = 6500.000$ MHz; $\text{cond} = 6.11$ S/m; $\text{perm} = 33.9$; $\text{density} = 1000$ kg/m³
 Phantom Section: Flat; Space: 5 mm

Test Date: 06/24/2024; Ambient Temp: 23.5°C; Tissue Temp: 22.3°C

Probe: EX3DV4 - SN7659; ConvF:(5.95,5.95,5.95); 2024-04-17
 Sensor-Surface: 1.4mm (VMS + 6p)
 Electronics: DAE4 Sn1407; 2024-04-18
 Phantom: Twin-SAM V8.0; Serial: 2064
 Measurement SW: DASY Module SAR V16.2.4.2524

6500.0 MHz System Verification at 14.0 dBm (25 mW)

Area Scan (51.0 x 85.0): Measurement grid: $dx=8.5$ mm, $dy=8.5$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=3.4$ mm, $dy=3.4$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
 Peak SAR (extrapolated) = 46.2 W/kg
SAR(1 g) = 7.40 W/kg; SAR(10 g) = 1.38 W/kg
 Deviation (1 g) = 1.72%; Deviation (10 g) = 3.18%



FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 294 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 6500.000 MHz; Type: D6.5GHzV2 - SN1018


Communication System: UID: 0, CW; Frequency: 6500.000 MHz
Medium: 6000 Head; Medium parameters used:
 $f = 6500.000$ MHz; $\text{cond} = 5.85$ S/m; $\text{perm} = 35.0$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5 mm

Test Date: 06/30/2024; Ambient Temp: 21.9°C; Tissue Temp: 21.0°C

Probe: EX3DV4 - SN7410; ConvF:(5.55,5.55,5.55); 2023-07-07
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4ip Sn1638; 2023-10-18
Phantom: Twin-SAM V8.0; Serial: 1979
Measurement SW: DASY Module SAR V16.2.4.2524

6500.0 MHz System Verification at 14.0 dBm (25 mW)

Area Scan (51.0 x 85.0): Measurement grid: $dx=8.5$ mm, $dy=8.5$ mm
Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=3.4$ mm, $dy=3.4$ mm, $dz=1.4$ mm; Graded Ratio: 1.4
Peak SAR (extrapolated) = 43.8 W/kg
SAR(1 g) = 6.85 W/kg; SAR(10 g) = 1.25 W/kg
Deviation (1 g) = -6.48%; Deviation (10 g) = -7.24%

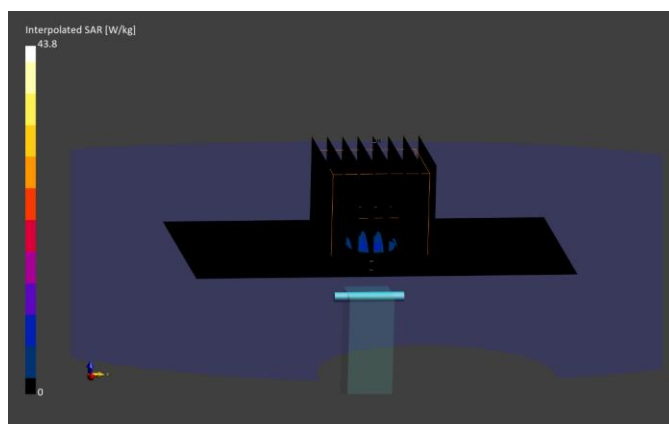

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 295 of 298

REV 22.0
03/30/2022

ELEMENT

DUT: Dipole 6500.000 MHz; Type: D6.5GHzV2 - SN1111

Communication System: UID: 0, CW; Frequency: 6500.000 MHz
Medium: 6000 Head; Medium parameters used:
 $f = 6500.000$ MHz; $\text{cond} = 6.08$ S/m; $\text{perm} = 33.3$; $\text{density} = 1000$ kg/m³
Phantom Section: Flat; Space: 5 mm

Test Date: 07/01/2024; Ambient Temp: 21.9°C; Tissue Temp: 21.9°C


Probe: EX3DV4 - SN7659; ConvF:(5.95,5.95,5.95); 2024-04-17
Sensor-Surface: 1.4mm (VMS + 6p)
Electronics: DAE4 Sn1407; 2024-04-18
Phantom: Twin-SAM V8.0; Serial: 2064
Measurement SW: DASY Module SAR V16.2.4.2524

6500.0 MHz System Verification at 14.0 dBm (25 mW)

Area Scan (51.0 x 85.0): Measurement grid: $dx=8.5$ mm, $dy=8.5$ mm

Zoom Scan (22.0 x 22.0 x 22.0): Measurement grid: $dx=3.4$ mm, $dy=3.4$ mm, $dz=1.4$ mm; Graded Ratio: 1.4

Peak SAR (extrapolated) = 46.1 W/kg
SAR(1 g) = 7.44 W/kg; SAR(10 g) = 1.38 W/kg
Deviation (1 g) = 2.27%; Deviation (10 g) = 3.18%

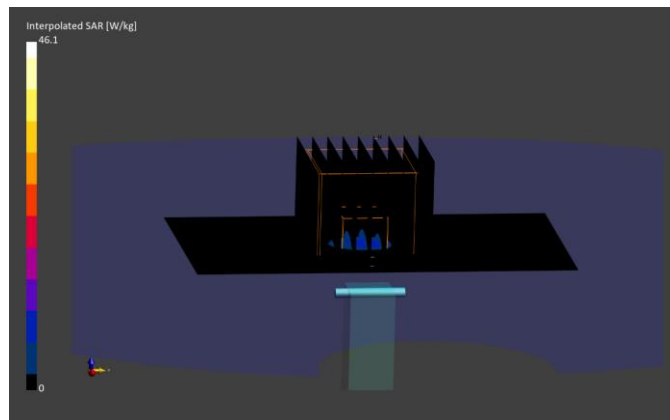

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 296 of 298

REV 22.0
03/30/2022



Element

Date: 2024-06-18, 08:56
Measurement Group

Device Under Test Properties

DUT	Serial Number	DUT Type
10 GHz Verification Source	1002	Phone

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Frequency [MHz]
5G	FRONT	10.00	Validation band	10000.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EUMmWV4 - SN9622_F1-55GHz, 2024-02-02	DAE4ip Sn1639, 2023-11-15

Software Setup


Software	Software Version
cDasy6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	60.2
pS _n avg [W/m²]	59.9
E _{peak} [V/m]	162
Power Drift [dB]	-0.01

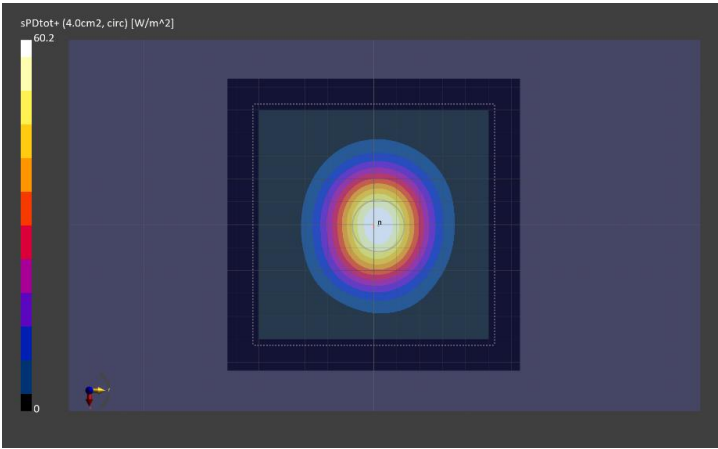

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 297 of 298

REV 22.0
03/30/2022

Unless otherwise specified, no part of this report may be reproduced or utilized in any part, form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from Element. If you have any questions or have an enquiry about obtaining additional rights to this report or assembly of contents thereof, please contact CT.INFO@ELEMENT.COM.

Element

Date: 2024-06-23, 08:05
Measurement Group

Device Under Test Properties

DUT	Serial Number	DUT Type
10 GHz Verification Source	1002	Phone

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Frequency [MHz]
5G	FRONT	10.00	Validation band	10000.0

Hardware Setup

Probe, Calibration Date	DAE, Calibration Date
EImmWV4 - SN9622_F1-55GHz, 2024-02-02	DAE4ip Sn1639, 2023-11-15

Software Setup


Software	Software Version
cDasy6 Module mmWave	3.2.0.1840

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.25 x 0.25
Sensor Surface [mm]	10.0

Measurement Results

Scan Type	5G Scan
Avg. Area [cm²]	4.00
pS _{tot} avg [W/m²]	60.3
pS _n avg [W/m²]	59.9
E _{peak} [V/m]	160
Power Drift [dB]	0.00

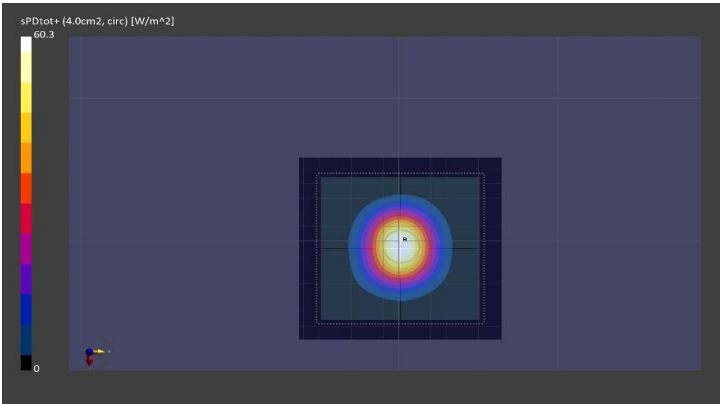

FCC ID: A3LSMX828U	SAR EVALUATION REPORT	Approved by: Technical Manager
Document S/N: 1M2405140039-20.A3L	DUT Type: Portable Computing Device	Page 298 of 298