





No. I21Z62362-SEM03

For

TCL Communication Ltd.

LinkKey

Model Name: IK42UC

With

Hardware Version: V01

Software Version: IK42_ZZ_02.00_02

FCC ID: 2ACCJB167

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S.Government.


Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel:+86(0)10-62304633-2512,Fax:+86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn

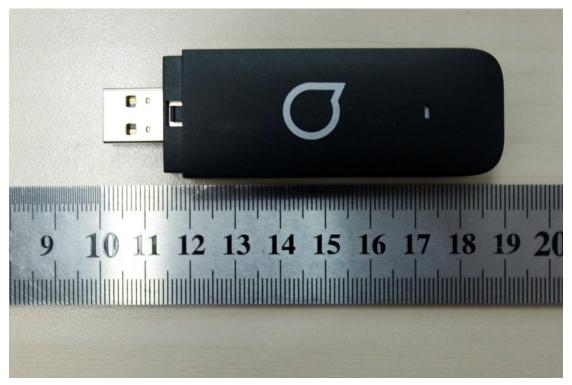


Picture 1: Constituents of the sample

Test positions for body:


The Body SAR is tested at the following 8 test positions all with the distance 5/9/14mm between the EUT and the phantom bottom:




Picture 2: Front 5mm

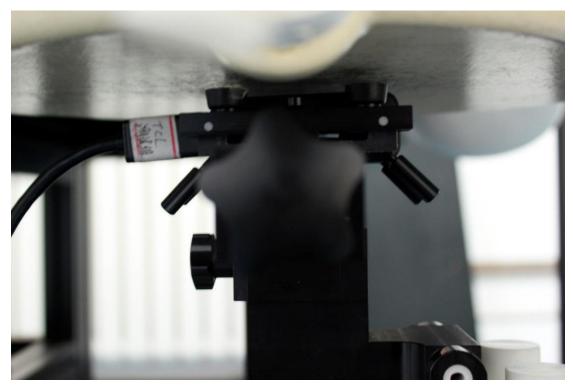

Picture 3: Rear 5mm

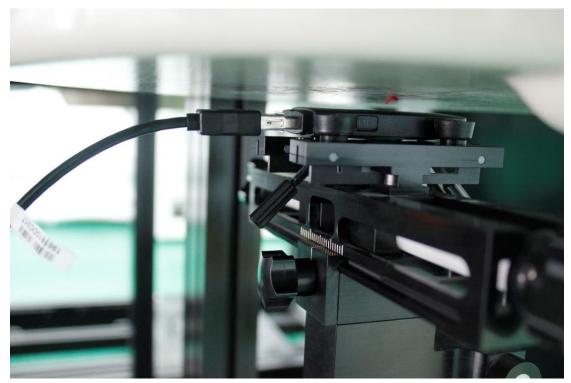

Picture 4: Top 5mm

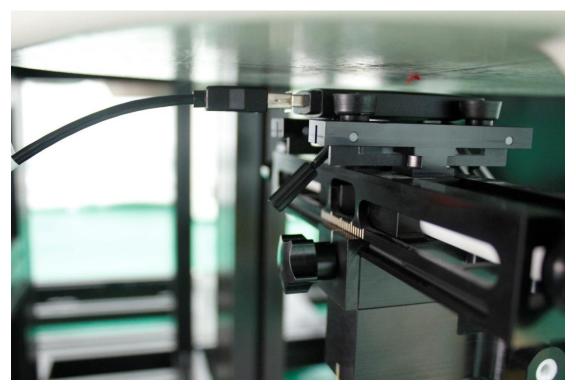


Picture 5: Bottom 5mm




Picture 6: Front 9mm



Picture 7: Rear 9mm

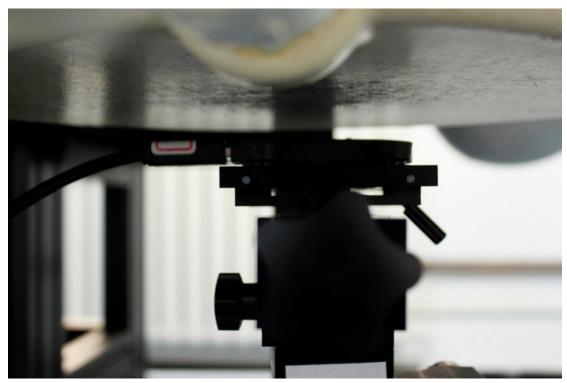

Picture 8: Top 14mm

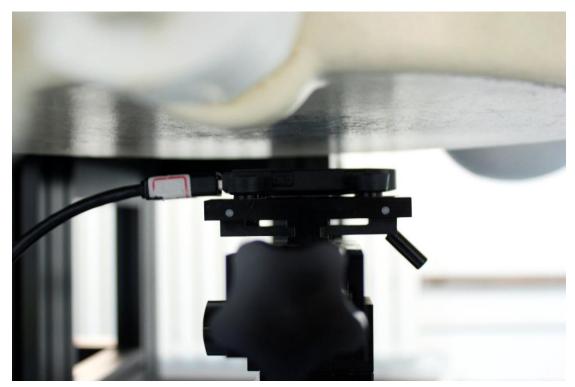

Picture 9: Bottom 14mm



Picture 10: The length of the cable for connected computer and DUT



Picture 11: P-sensor location